



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: August 01, 2013
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Report No.: HCTR1308FR03
	HCT FRN: 0005866421

FCC ID : ZNFD605

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D605
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)
Max. RF Output Power:	Wi-Fi 802.11b (19.34 dBm) / Wi-Fi 802.11g (19.01 dBm) / Wi-Fi 802.11n (2.4 GHz) (17.34 dBm) / Wi-Fi 802.11a (5.8 GHz) (17.51 dBm) / Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (16.59 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (17.02 dBm)
Frequency Range:	2412 MHz - 2462 MHz (2.4 GHz Band) 5745 MHz - 5825 MHz (5.8 GHz Band)_20 MHz BW, 5755 MHz - 5795 MHz (5.8 GHz Band)_40 MHz BW
Modulation type	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Kwang Il Yoon
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1308FR03	August 01, 2013	- First Approval Report

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605

Table of Contents

- 1. GENERAL INFORMATION 4
- 2. EUT DESCRIPTION 4
- 3. TEST METHODOLOGY 5
 - 3.1 EUT CONFIGURATION 5
 - 3.2 EUT EXERCISE 5
 - 3.3 GENERAL TEST PROCEDURES 5
 - 3.4 DESCRIPTION OF TEST MODES 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS 6
 - 5.1 FACILITIES 6
 - 5.2 EQUIPMENT 6
- 6. ANTENNA REQUIREMENTS 6
- 7. SUMMARY TEST OF RESULTS 7
- 8. TEST RESULT 8
 - 8.1 DUTY CYCLE(802.11a/b/g/n/ac) 8
 - 8.2 6dB BANDWIDTH (802.11a/b/g/n/ac) 1 0
 - 8.3 OUTPUT POWER (802.11a/b/g/n/ac)..... 2 2
 - 8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n/ac)..... 8 0
 - 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ... 8 5
 - 8.6 RADIATED MEASUREMENT..... 1 2 9
 - 8.6.1 RADIATED SPURIOUS EMISSIONS..... 1 2 9
 - 8.6.2 RADIATED RESTRICTED BAND EDGES 1 5 0
 - 8.7 POWERLINE CONDUCTED EMISSIONS 1 5 2
- 9. LIST OF TEST EQUIPMENT 1 5 7

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD605



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFD605
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)
Model name(s): LG-D605
Date(s) of Tests: June 20, 2013 ~ July 22, 2013
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	
FCC Model Name	LG-D605	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz RX: 2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz	
Max. RF Output Power	Peak	Wi-Fi 802.11b (19.34 dBm) / Wi-Fi 802.11g (19.01 dBm)/ Wi-Fi 802.11n (2.4 GHz) (17.34 dBm) / Wi-Fi 802.11a (5.8 GHz) (17.51 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (16.59 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (17.02 dBm)
	Average	Wi-Fi 802.11b (13.43 dBm) / Wi-Fi 802.11g (10.45 dBm)/ Wi-Fi 802.11n (2.4 GHz) (9.08 dBm) / Wi-Fi 802.11a (5.8 GHz) (9.91 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (8.92 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (9.52 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11a, 802.11g, 802.11n)	
Antenna Specification	Manufacturer: KOMATECH Co., Ltd Antenna type: PIFA Antenna Peak Gain : -0.49 dBi (2.4 GHz Band), 0.59 dBi (5.8 GHz Band)	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r01 dated April 09, 2013 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605

7. SUMMARY TEST OF RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

8. TEST RESULT

8.1 DUTY CYCLE(802.11a/b/g/n/ac)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST CONFIGURATION

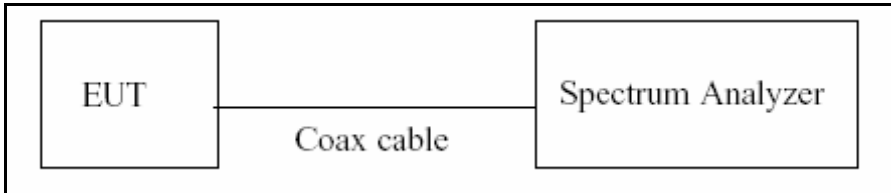

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 04/09/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD605

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
2.4 GHz Band 802.11b	1	12.410	12.510	0.99200639	0.035
	2	6.235	6.315	0.98733175	0.055
	5.5	2.318	2.423	0.95666529	0.192
	11	1.207	1.308	0.92278287	0.349
2.4 GHz Band 802.11g and 5.8 GHz Band 802.11a	6	2.070	2.167	0.95523766	0.199
	9	1.387	1.488	0.93212366	0.305
	12	1.042	1.143	0.91163605	0.402
	18	0.702	0.803	0.87395691	0.585
	24	0.533	0.632	0.84298829	0.742
	36	0.366	0.466	0.78617432	1.045
	48	0.277	0.377	0.73435843	1.341
	54	0.249	0.349	0.71334290	1.467
2.4 GHz Band 802.11n_20 MHz BW and 5.8 GHz Band 802.11n_20 MHz BW	6.5	1.919	2.017	0.95141299	0.216
	13	0.977	1.079	0.90574606	0.430
	19.5	0.665	0.766	0.86790236	0.615
	26	0.508	0.607	0.83662714	0.775
	39	0.352	0.452	0.77981854	1.080
	52	0.273	0.373	0.73129525	1.359
	58.5	0.248	0.349	0.71104735	1.481
	65	0.228	0.329	0.69345510	1.590
5.8 GHz Band 802.11n_40 MHz BW	13.5	0.943	1.043	0.90450623	0.436
	27	0.493	0.590	0.83553523	0.780
	40.5	0.342	0.440	0.77707006	1.095
	54	0.263	0.361	0.72840532	1.376
	81	0.188	0.286	0.65618449	1.830
	108	0.153	0.250	0.60991207	2.147
	121.5	0.141	0.239	0.58909853	2.298
	135	0.128	0.226	0.56637168	2.469


8.2 6dB BANDWIDTH (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNFD605

TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	8.113	0.500	Pass
2437	6	8.102	0.500	Pass
2462	11	7.614	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.14	0.500	Pass
2437	6	15.12	0.500	Pass
2462	11	15.12	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW(2.4 GHz Band)

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.11	0.500	Pass
2437	6	15.12	0.500	Pass
2462	11	15.13	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Frequency [MHz]			
5745	149	16.45	0.500	Pass
5785	157	16.43	0.500	Pass
5825	165	16.48	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_20 MHz BW (5.8 GHz Band)

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.72	0.500	Pass
5785	157	17.72	0.500	Pass
5825	165	17.67	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_40 MHz BW(5.8 GHz Band)


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.44	0.500	Pass
5795	159	36.45	0.500	Pass




RESULT PLOTS

2.4 GHz Band

6dB Bandwidth plot (802.11b-CH 1)

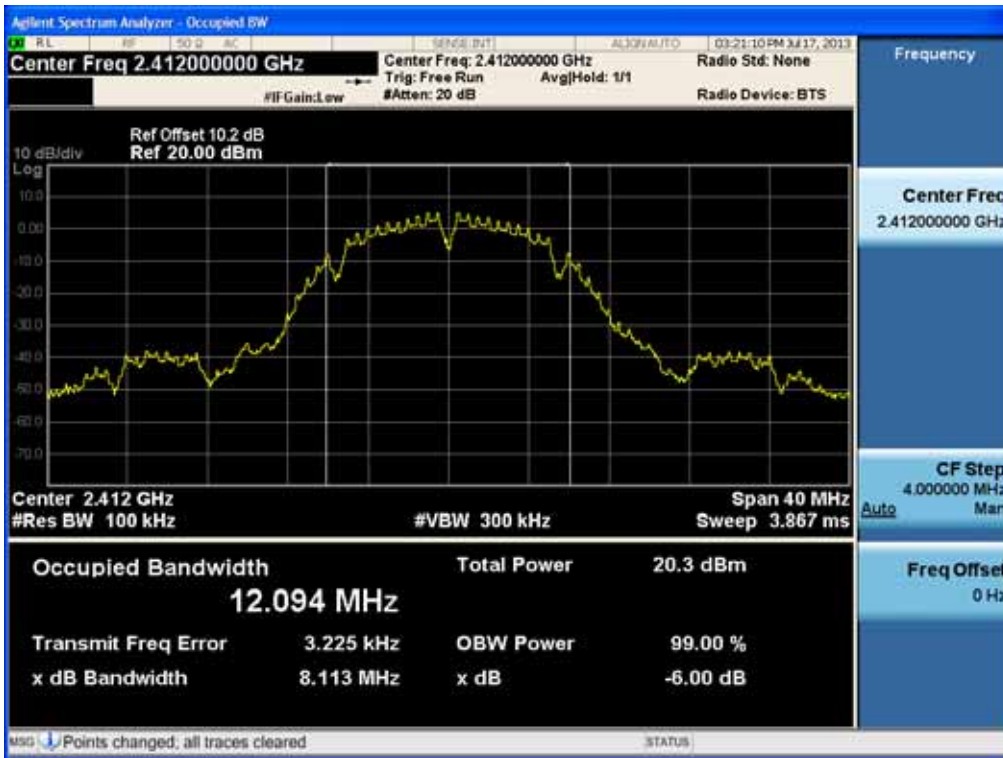


6dB Bandwidth plot (802.11b-CH 6)

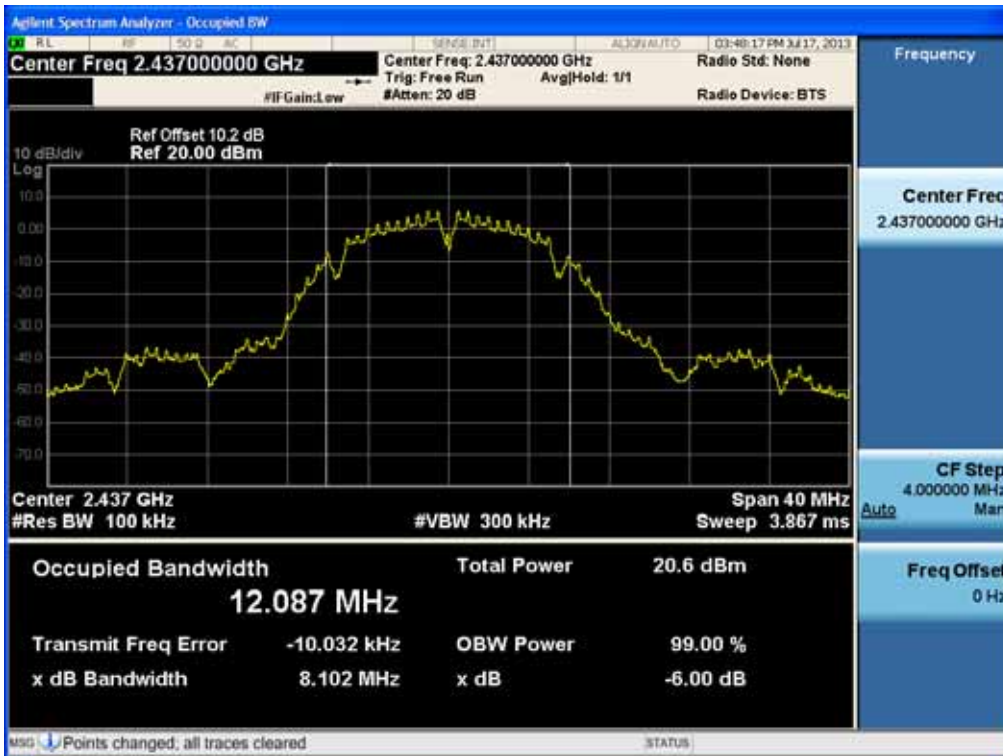


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNFD605


6dB Bandwidth plot (802.11b-CH 11)

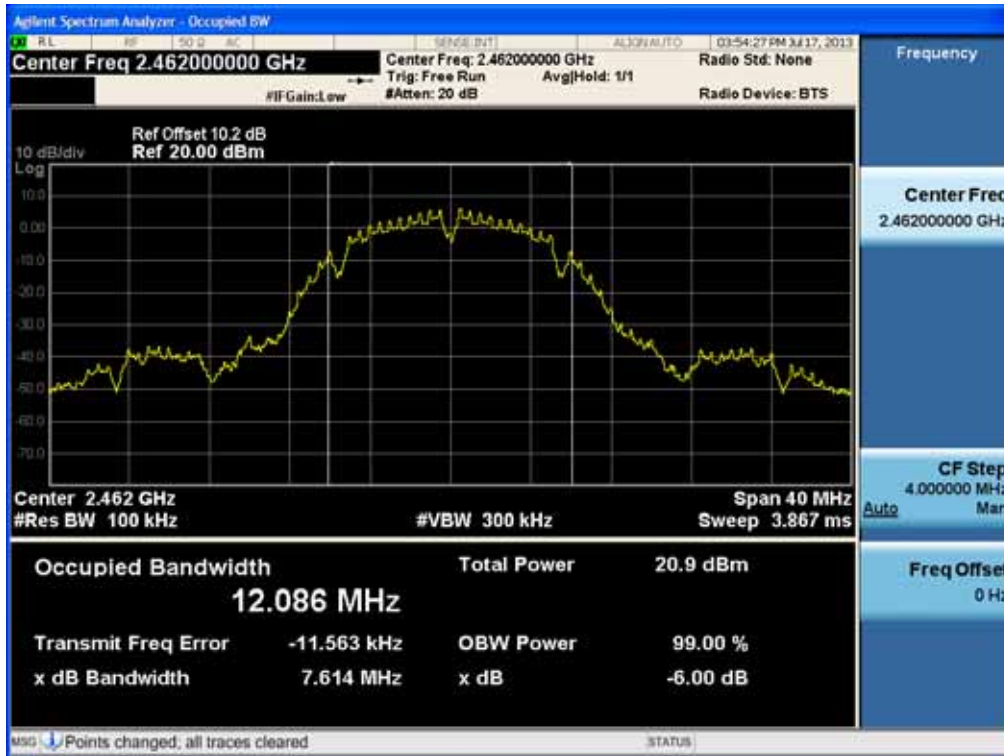


6dB Bandwidth plot (802.11g-CH 1)

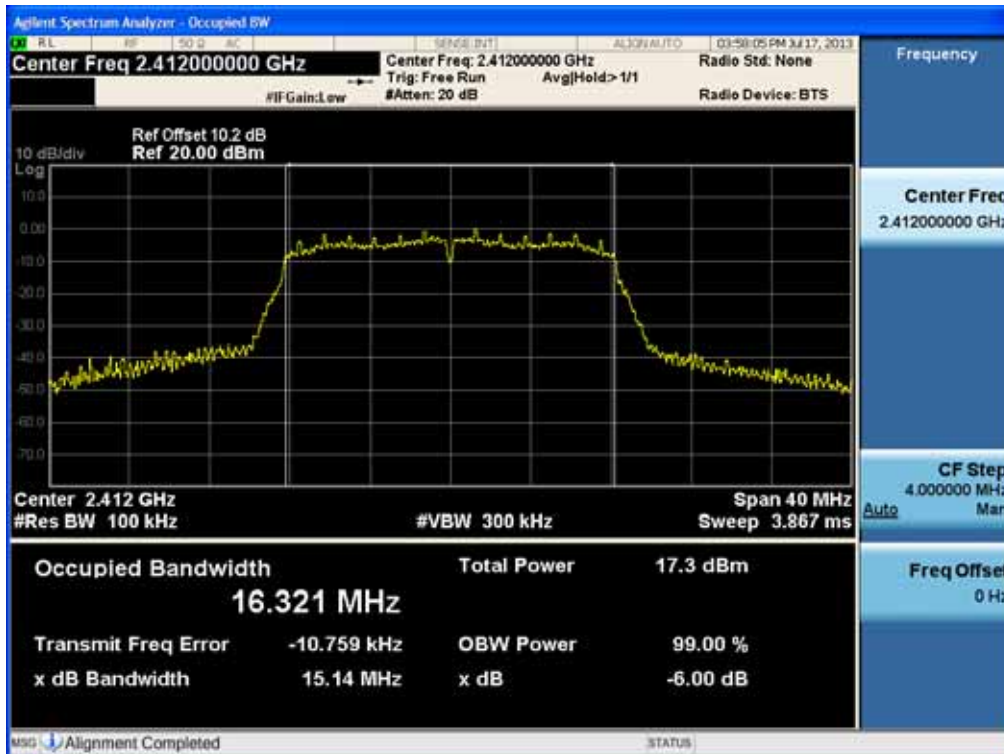


6dB Bandwidth plot (802.11g-CH 6)

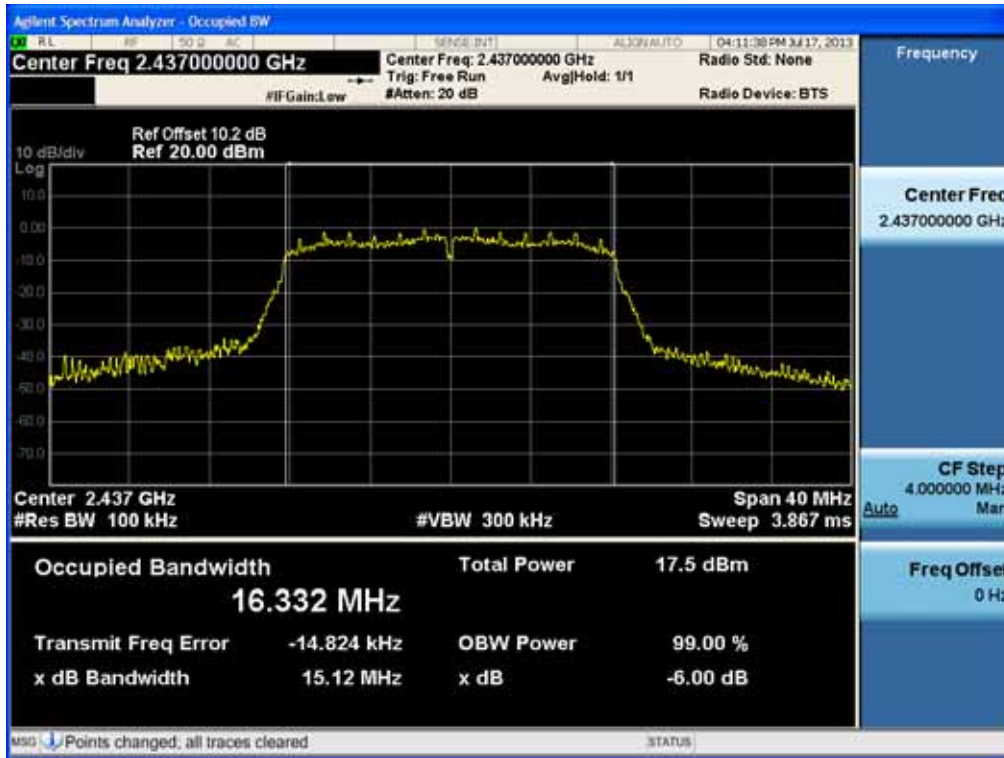


6dB Bandwidth plot (802.11g-CH 11)

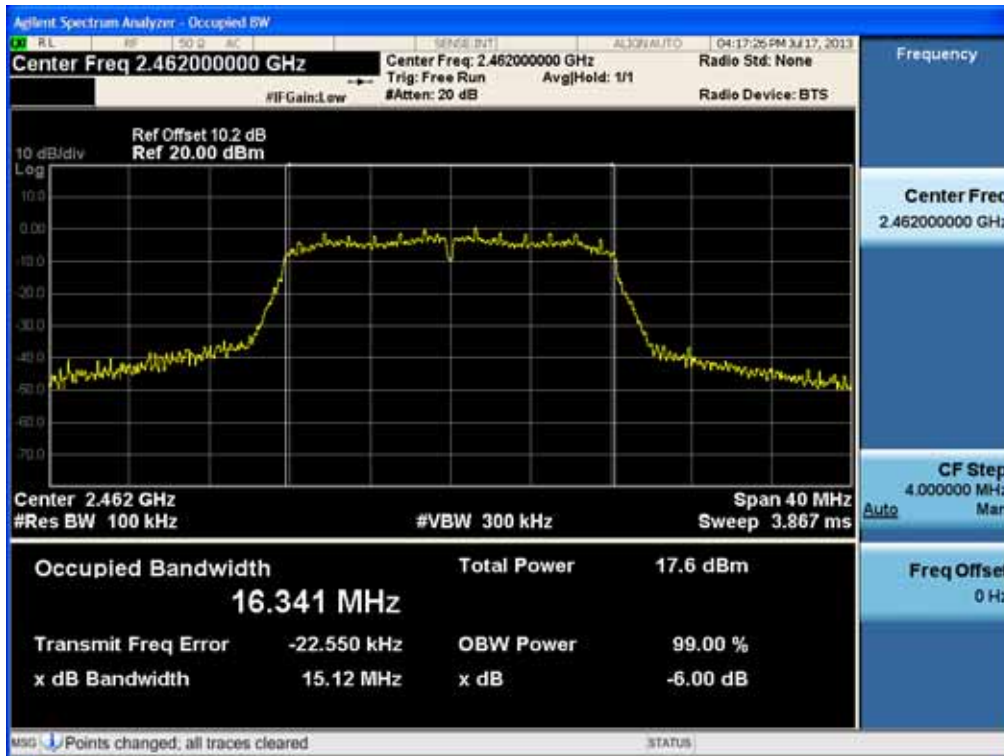


6dB Bandwidth plot (802.11n-CH 1)

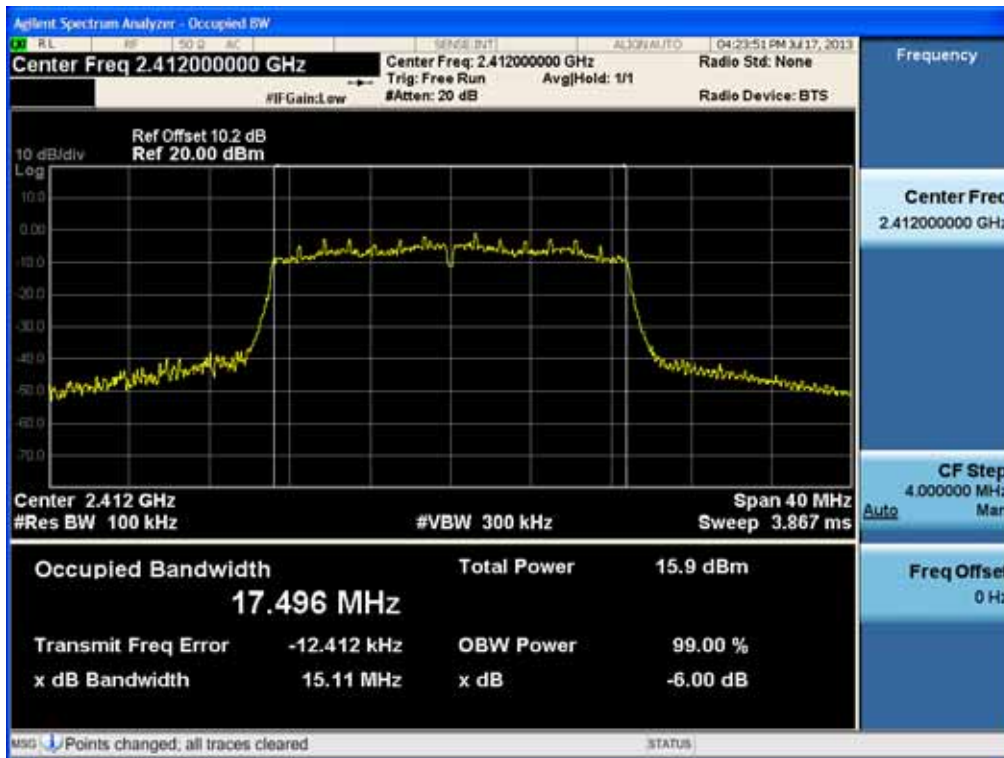

6dB Bandwidth plot (802.11n-CH 6)

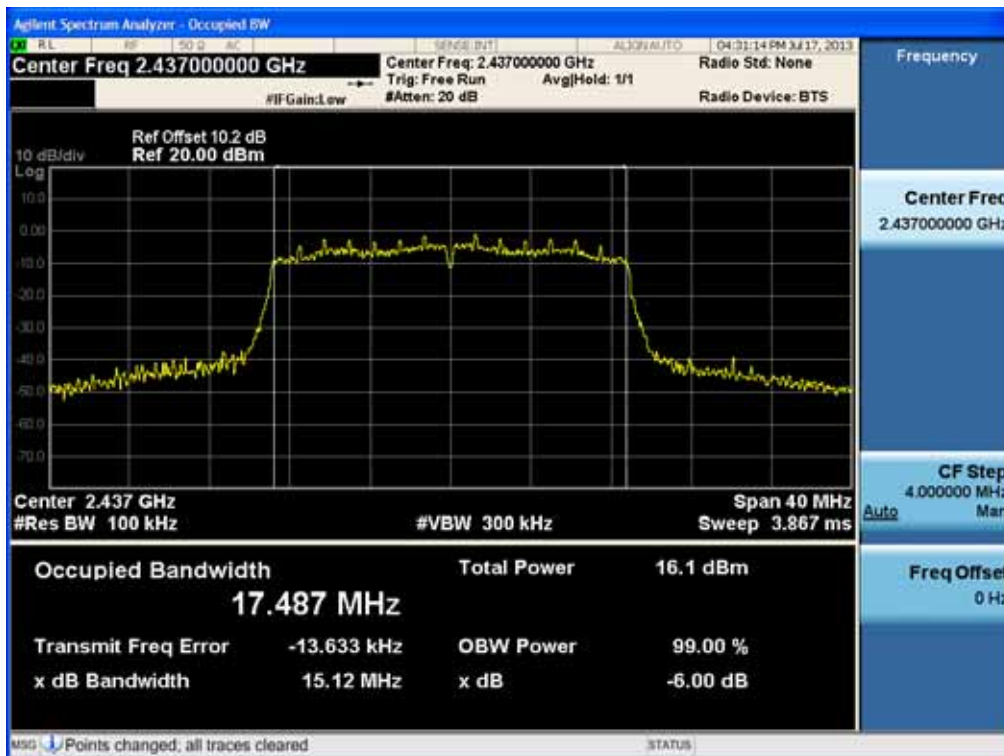


6dB Bandwidth plot (802.11n-CH 11)

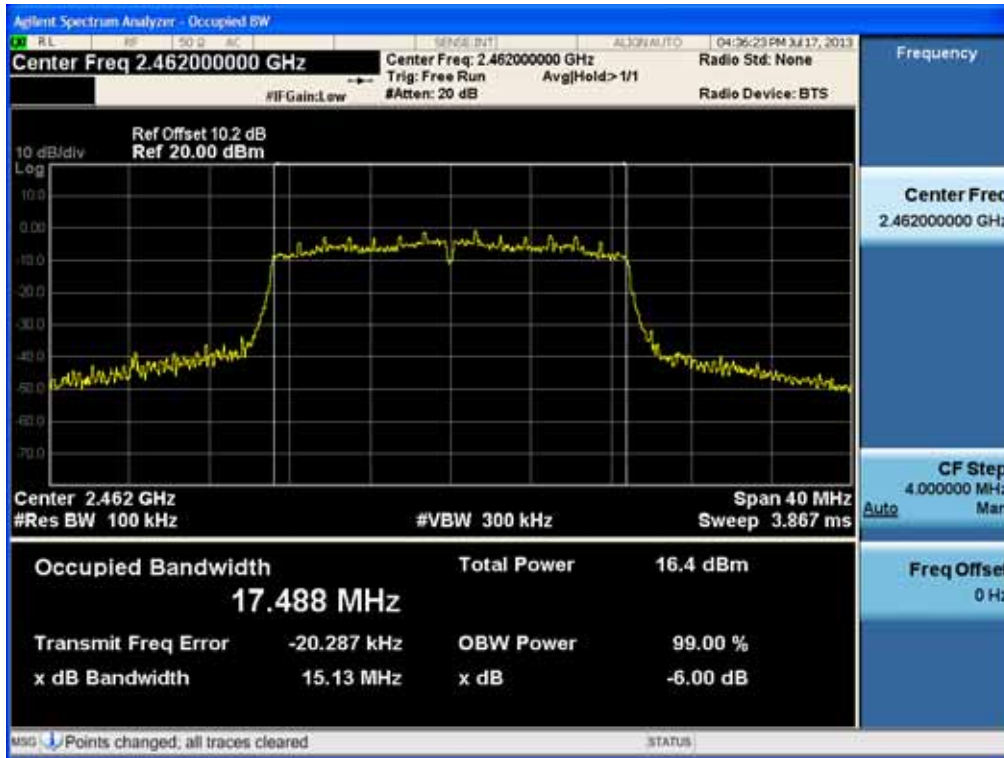


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

5.8 GHz Band


6dB Bandwidth plot (802.11a-CH 149)

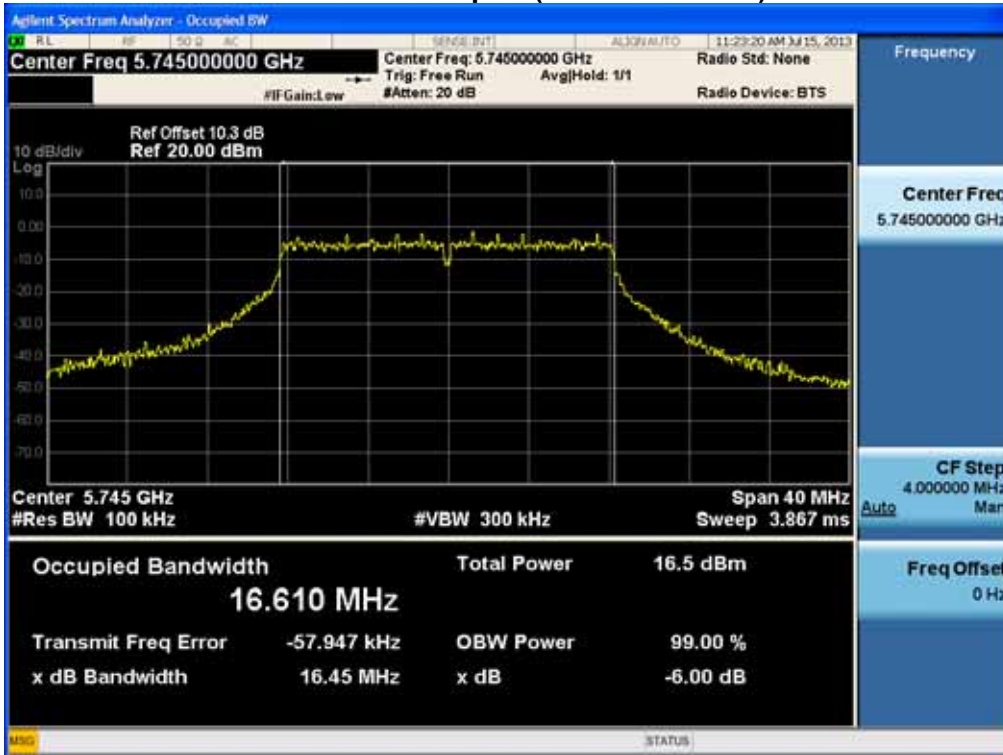

6dB Bandwidth plot (802.11a-CH 157)

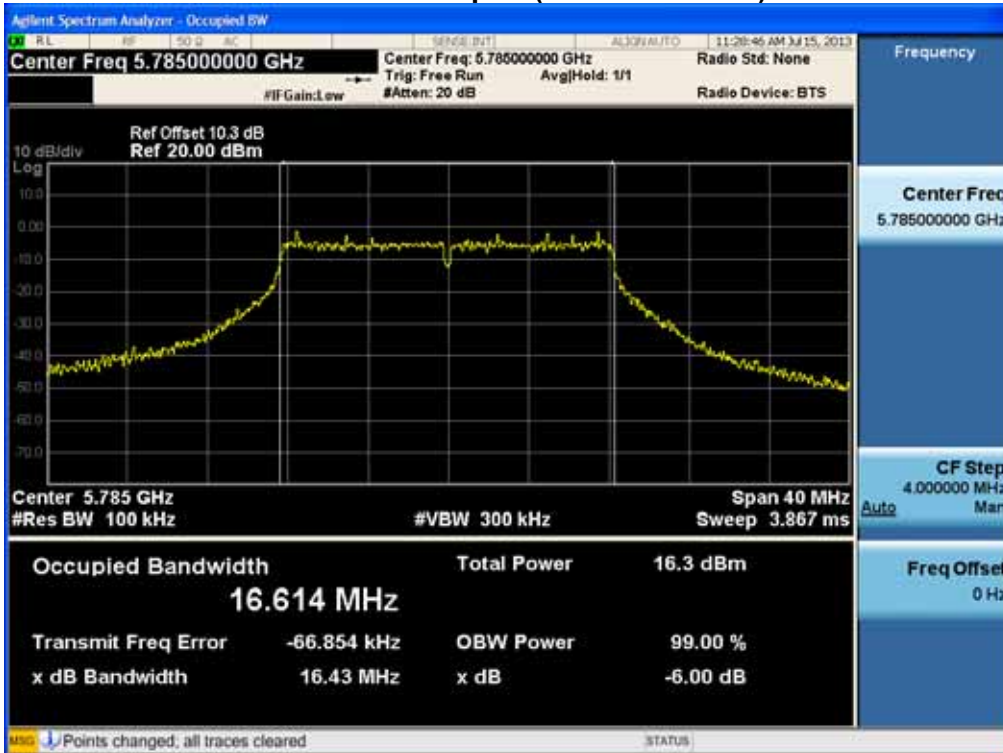

6dB Bandwidth plot (802.11a-CH 165)

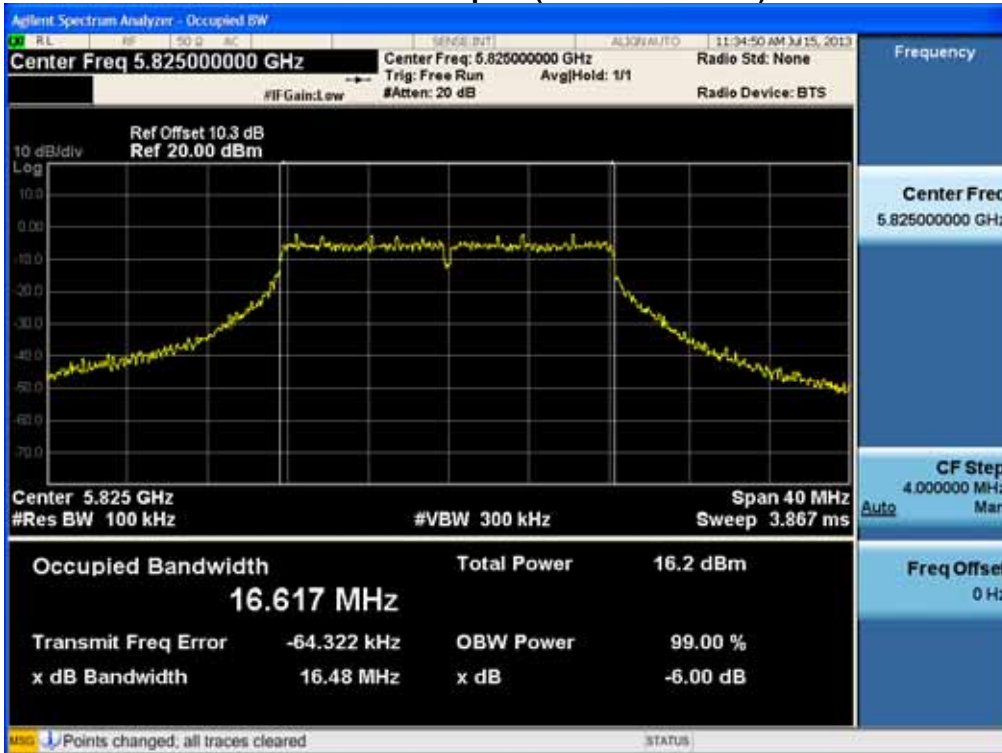

6dB Bandwidth plot (802.11n_20 MHz BW-CH 149)



6dB Bandwidth plot (802.11n_20 MHz BW-CH 157)




6dB Bandwidth plot (802.11n_20 MHz BW-CH 165)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica	FCC ID: ZNFD605

6dB Bandwidth plot (802.11n_40 MHz BW-CH 151)

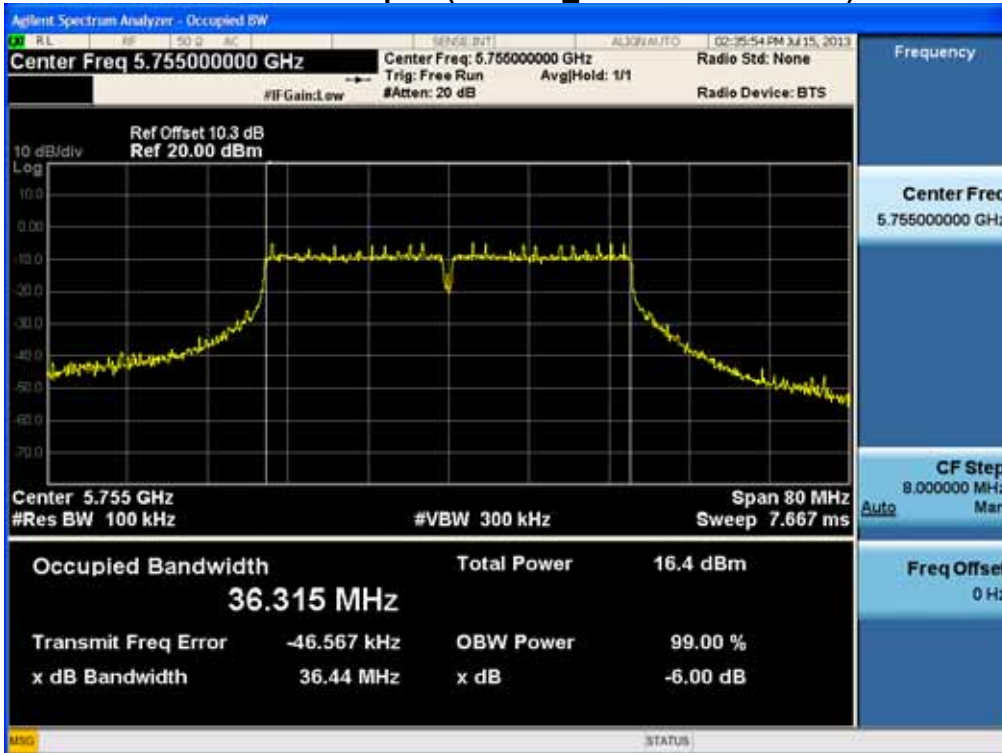

6dB Bandwidth plot (802.11n_40 MHz BW-CH 159)

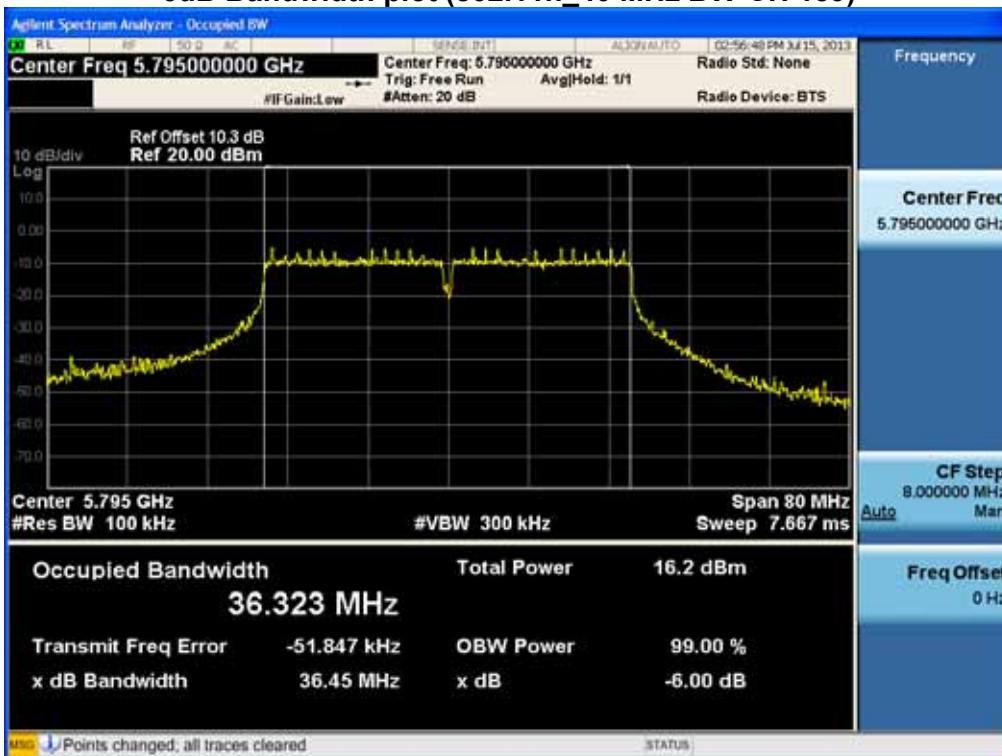

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica	FCC ID: ZNFD605


8.3 OUTPUT POWER (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 04/09/2013)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 04/09/2013)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD605



power measurement function with band limits set equal to the OBW band edges.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.
Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24
5.8 GHz	5745	10.31
	5755	10.30
	5785	10.29
	5795	10.26
	5825	10.28

(Actual value of loss for the attenuator and cable combination)



TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	15.32	30
		2 Mbps	15.77	30
		5.5 Mbps	17.06	30
		11 Mbps	18.81	30
2437	6	1 Mbps	15.61	30
		2 Mbps	15.98	30
		5.5 Mbps	17.28	30
		11 Mbps	19.16	30
2462	11	1 Mbps	15.84	30
		2 Mbps	16.10	30
		5.5 Mbps	17.49	30
		11 Mbps	19.34	30

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD605

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	18.05	30
		9 Mbps	17.98	30
		12 Mbps	18.10	30
		18 Mbps	18.03	30
		24 Mbps	18.34	30
		36 Mbps	18.43	30
		48 Mbps	18.60	30
		54 Mbps	18.54	30
2437	6	6 Mbps	18.31	30
		9 Mbps	18.33	30
		12 Mbps	18.40	30
		18 Mbps	18.15	30
		24 Mbps	18.57	30
		36 Mbps	18.66	30
		48 Mbps	18.79	30
		54 Mbps	18.78	30
2462	11	6 Mbps	18.49	30
		9 Mbps	18.49	30
		12 Mbps	18.49	30
		18 Mbps	18.35	30
		24 Mbps	18.79	30
		36 Mbps	18.82	30
		48 Mbps	18.97	30
		54 Mbps	19.01	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	16.42	30
		13 Mbps	16.50	30
		19.5 Mbps	16.56	30
		26 Mbps	16.93	30
		39 Mbps	16.90	30
		52 Mbps	16.84	30
		58.5 Mbps	16.88	30
		65 Mbps	16.85	30
2437	6	6.5 Mbps	16.66	30
		13 Mbps	16.63	30
		19.5 Mbps	16.72	30
		26 Mbps	17.12	30
		39 Mbps	17.04	30
		52 Mbps	17.08	30
		58.5 Mbps	17.09	30
		65 Mbps	17.00	30
2462	11	6.5 Mbps	16.86	30
		13 Mbps	16.95	30
		19.5 Mbps	16.88	30
		26 Mbps	17.34	30
		39 Mbps	17.25	30
		52 Mbps	17.25	30
		58.5 Mbps	17.31	30
		65 Mbps	17.23	30

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6 Mbps	17.38	30
		9 Mbps	17.34	30
		12 Mbps	17.02	30
		18 Mbps	17.00	30
		24 Mbps	17.46	30
		36 Mbps	17.44	30
		48 Mbps	17.51	30
		54 Mbps	17.40	30
5785	157	6 Mbps	17.30	30
		9 Mbps	17.22	30
		12 Mbps	16.91	30
		18 Mbps	16.78	30
		24 Mbps	17.37	30
		36 Mbps	17.21	30
		48 Mbps	17.26	30
		54 Mbps	17.22	30
5825	165	6 Mbps	17.14	30
		9 Mbps	17.14	30
		12 Mbps	16.74	30
		18 Mbps	16.70	30
		24 Mbps	17.24	30
		36 Mbps	17.22	30
		48 Mbps	17.13	30
		54 Mbps	17.17	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5 Mbps	16.46	30
		13 Mbps	16.16	30
		19.5 Mbps	16.10	30
		26 Mbps	16.57	30
		39 Mbps	16.59	30
		52 Mbps	16.44	30
		58.5 Mbps	16.55	30
		65 Mbps	16.45	30
5785	157	6.5 Mbps	16.33	30
		13 Mbps	15.94	30
		19.5 Mbps	15.94	30
		26 Mbps	16.37	30
		39 Mbps	16.21	30
		52 Mbps	16.18	30
		58.5 Mbps	16.25	30
		65 Mbps	16.21	30
5825	165	6.5 Mbps	16.22	30
		13 Mbps	15.79	30
		19.5 Mbps	15.75	30
		26 Mbps	16.25	30
		39 Mbps	16.18	30
		52 Mbps	16.21	30
		58.5 Mbps	16.10	30
		65 Mbps	16.16	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5 Mbps	17.02	30
		27 Mbps	16.57	30
		40.5 Mbps	16.54	30
		54 Mbps	16.89	30
		81 Mbps	16.78	30
		108 Mbps	16.83	30
		121.5 Mbps	16.63	30
		135 Mbps	16.77	30
5795	159	13.5 Mbps	16.79	30
		27 Mbps	16.38	30
		40.5 Mbps	16.36	30
		54 Mbps	16.74	30
		81 Mbps	16.50	30
		108 Mbps	16.53	30
		121.5 Mbps	16.48	30
		135 Mbps	16.36	30



TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	12.70	0.035	12.74	30
		2 Mbps	12.79	0.055	12.84	30
		5.5 Mbps	12.66	0.192	12.86	30
		11 Mbps	12.46	0.349	12.81	30
2437	6	1 Mbps	12.98	0.035	13.02	30
		2 Mbps	13.04	0.055	13.09	30
		5.5 Mbps	12.91	0.192	13.10	30
		11 Mbps	12.79	0.349	13.14	30
2462	11	1 Mbps	13.34	0.035	13.38	30
		2 Mbps	13.37	0.055	13.43	30
		5.5 Mbps	13.22	0.192	13.41	30
		11 Mbps	13.08	0.349	13.43	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	9.75	0.199	9.95	30
		9 Mbps	9.68	0.305	9.98	30
		12 Mbps	9.63	0.402	10.03	30
		18 Mbps	9.41	0.585	9.99	30
		24 Mbps	9.23	0.742	9.97	30
		36 Mbps	8.89	1.045	9.94	30
		48 Mbps	8.60	1.341	9.94	30
		54 Mbps	8.47	1.467	9.94	30
2437	6	6 Mbps	10.14	0.199	10.34	30
		9 Mbps	9.92	0.305	10.22	30
		12 Mbps	9.82	0.402	10.22	30
		18 Mbps	9.61	0.585	10.20	30
		24 Mbps	9.47	0.742	10.21	30
		36 Mbps	9.16	1.045	10.21	30
		48 Mbps	8.87	1.341	10.21	30
		54 Mbps	8.72	1.467	10.18	30
2462	11	6 Mbps	10.19	0.199	10.39	30
		9 Mbps	10.12	0.305	10.43	30
		12 Mbps	9.99	0.402	10.39	30
		18 Mbps	9.84	0.585	10.42	30
		24 Mbps	9.71	0.742	10.45	30
		36 Mbps	9.35	1.045	10.39	30
		48 Mbps	9.07	1.341	10.41	30
		54 Mbps	8.96	1.467	10.43	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5 Mbps	8.44	0.216	8.66	30
		13 Mbps	8.06	0.430	8.49	30
		19.5 Mbps	8.12	0.615	8.74	30
		26 Mbps	7.91	0.775	8.68	30
		39 Mbps	7.58	1.080	8.66	30
		52 Mbps	7.33	1.359	8.68	30
		58.5 Mbps	7.20	1.481	8.68	30
		65 Mbps	7.05	1.590	8.64	30
2437	6	6.5 Mbps	8.59	0.216	8.81	30
		13 Mbps	8.35	0.430	8.78	30
		19.5 Mbps	8.23	0.615	8.84	30
		26 Mbps	8.00	0.775	8.77	30
		39 Mbps	7.75	1.080	8.83	30
		52 Mbps	7.45	1.359	8.80	30
		58.5 Mbps	7.45	1.481	8.93	30
		65 Mbps	7.23	1.590	8.82	30
2462	11	6.5 Mbps	8.79	0.216	9.00	30
		13 Mbps	8.58	0.430	9.01	30
		19.5 Mbps	8.47	0.615	9.08	30
		26 Mbps	8.29	0.775	9.07	30
		39 Mbps	7.94	1.080	9.02	30
		52 Mbps	7.72	1.359	9.08	30
		58.5 Mbps	7.56	1.481	9.04	30
		65 Mbps	7.42	1.590	9.01	30



Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6 Mbps	9.64	0.199	9.84	30
		9 Mbps	9.52	0.305	9.82	30
		12 Mbps	9.49	0.402	9.89	30
		18 Mbps	9.33	0.585	9.91	30
		24 Mbps	9.11	0.742	9.85	30
		36 Mbps	8.75	1.045	9.80	30
		48 Mbps	8.45	1.341	9.79	30
		54 Mbps	8.26	1.467	9.73	30
5785	157	6 Mbps	9.60	0.199	9.80	30
		9 Mbps	9.37	0.305	9.67	30
		12 Mbps	9.31	0.402	9.71	30
		18 Mbps	9.07	0.585	9.65	30
		24 Mbps	8.99	0.742	9.73	30
		36 Mbps	8.59	1.045	9.63	30
		48 Mbps	8.20	1.341	9.54	30
		54 Mbps	8.08	1.467	9.55	30
5825	165	6 Mbps	9.41	0.199	9.61	30
		9 Mbps	9.26	0.305	9.57	30
		12 Mbps	9.21	0.402	9.62	30
		18 Mbps	9.01	0.585	9.59	30
		24 Mbps	8.76	0.742	9.51	30
		36 Mbps	8.53	1.045	9.58	30
		48 Mbps	8.12	1.341	9.46	30
		54 Mbps	8.03	1.467	9.50	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5 Mbps	8.68	0.216	8.89	30
		13 Mbps	8.48	0.430	8.91	30
		19.5 Mbps	8.30	0.615	8.92	30
		26 Mbps	8.13	0.775	8.91	30
		39 Mbps	7.81	1.080	8.89	30
		52 Mbps	7.48	1.359	8.84	30
		58.5 Mbps	7.30	1.481	8.78	30
		65 Mbps	7.23	1.590	8.82	30
5785	157	6.5 Mbps	8.54	0.216	8.75	30
		13 Mbps	8.38	0.430	8.81	30
		19.5 Mbps	8.15	0.615	8.77	30
		26 Mbps	7.96	0.775	8.74	30
		39 Mbps	7.52	1.080	8.60	30
		52 Mbps	7.16	1.359	8.52	30
		58.5 Mbps	7.16	1.481	8.64	30
		65 Mbps	7.00	1.590	8.59	30
5825	165	6.5 Mbps	8.46	0.216	8.68	30
		13 Mbps	8.18	0.430	8.61	30
		19.5 Mbps	7.92	0.615	8.54	30
		26 Mbps	7.81	0.775	8.58	30
		39 Mbps	7.50	1.080	8.58	30
		52 Mbps	7.20	1.359	8.56	30
		58.5 Mbps	7.03	1.481	8.51	30
		65 Mbps	7.05	1.590	8.64	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5 Mbps	9.09	0.436	9.52	30
		27 Mbps	8.53	0.780	9.31	30
		40.5 Mbps	8.23	1.095	9.33	30
		54 Mbps	7.93	1.376	9.30	30
		81 Mbps	7.40	1.830	9.23	30
		108 Mbps	7.03	2.147	9.18	30
		121.5 Mbps	6.87	2.298	9.17	30
		135 Mbps	6.74	2.469	9.21	30
5795	159	13.5 Mbps	8.82	0.436	9.25	30
		27 Mbps	8.30	0.780	9.08	30
		40.5 Mbps	8.07	1.095	9.17	30
		54 Mbps	7.72	1.376	9.10	30
		81 Mbps	7.30	1.830	9.13	30
		108 Mbps	6.74	2.147	8.88	30
		121.5 Mbps	6.63	2.298	8.93	30
		135 Mbps	6.32	2.469	8.79	30


Note : In order to simplify the report, attached plots were only the highest conducted power channel.

RESULT PLOTS-Peak


Conducted Output Power (802.11b-CH 11) 1Mbps



Conducted Output Power (802.11b-CH 11) 2Mbps

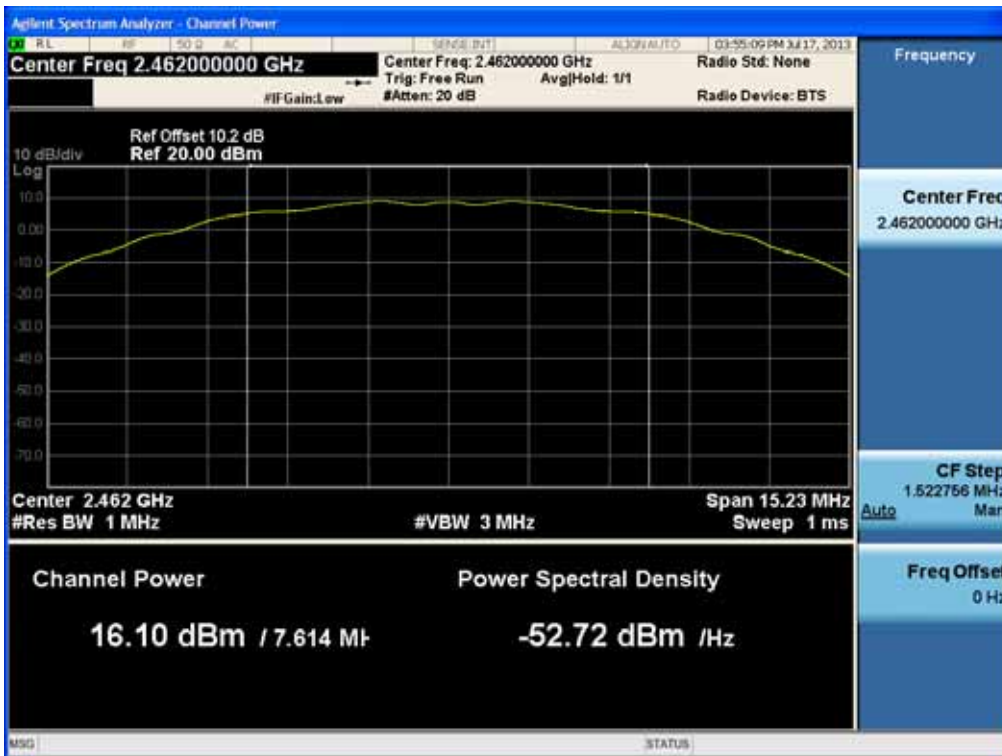


Conducted Output Power (802.11b-CH 11) 5.5Mbps

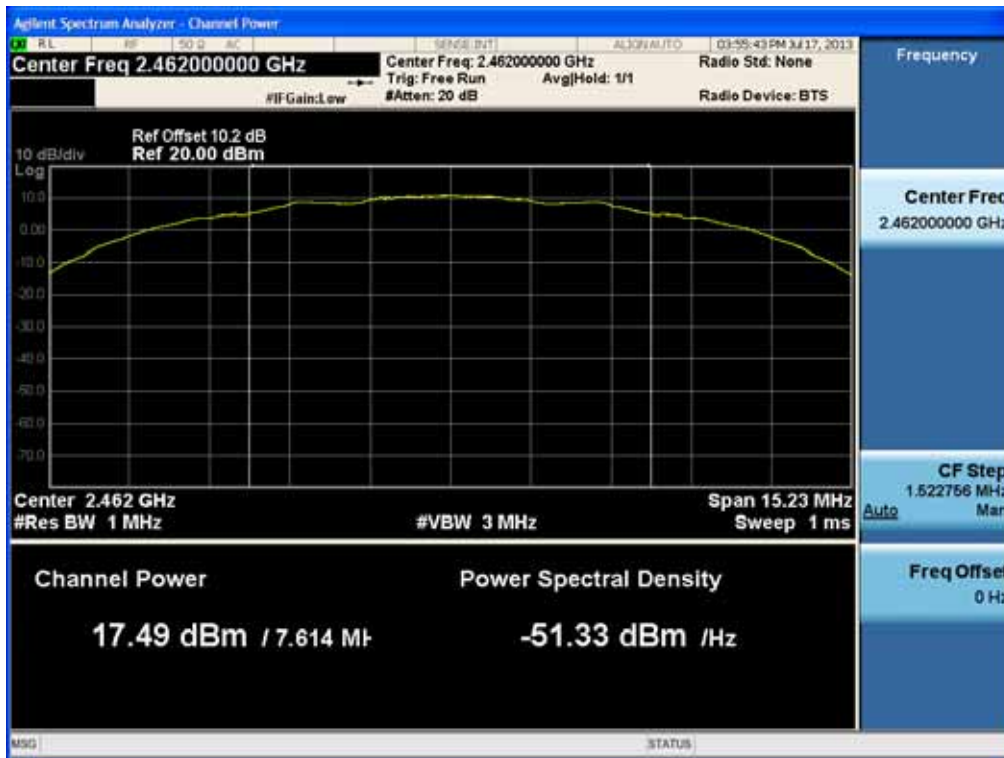

Conducted Output Power (802.11b-CH 11) 11Mbps



Conducted Output Power (802.11g-CH 11) 6Mbps

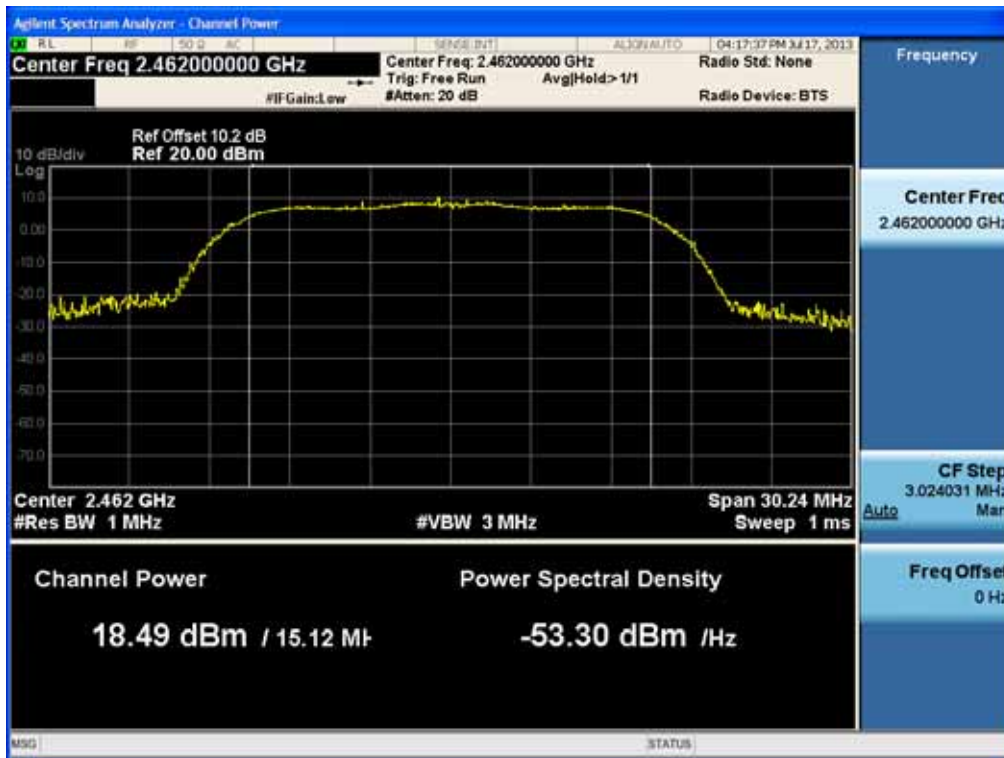

Conducted Output Power (802.11g-CH 11) 9Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11g-CH 11) 12Mbps




Conducted Output Power (802.11g-CH 11) 18Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11g-CH 11) 24Mbps

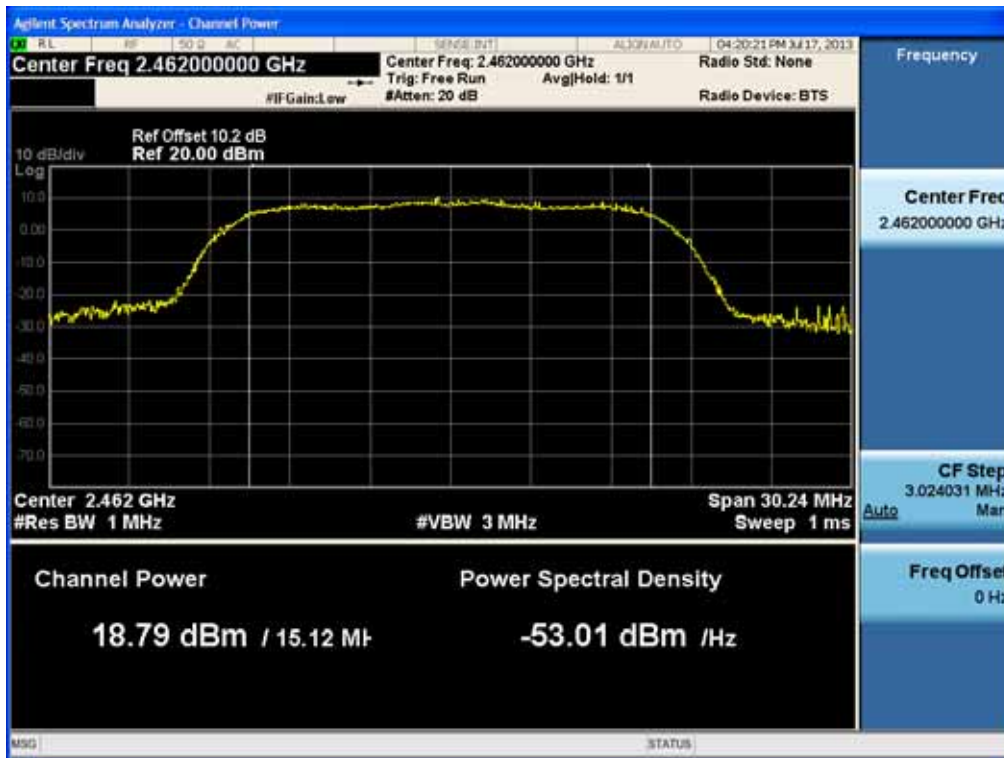

Conducted Output Power (802.11g-CH 11) 36Mbps



Conducted Output Power (802.11g-CH 11) 48Mbps



Conducted Output Power (802.11g-CH 11) 54Mbps



Conducted Output Power (802.11n-CH 11) 6.5Mbps




Conducted Output Power (802.11n-CH 11) 13Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNFD605

Conducted Output Power (802.11n-CH 11) 19.5Mbps

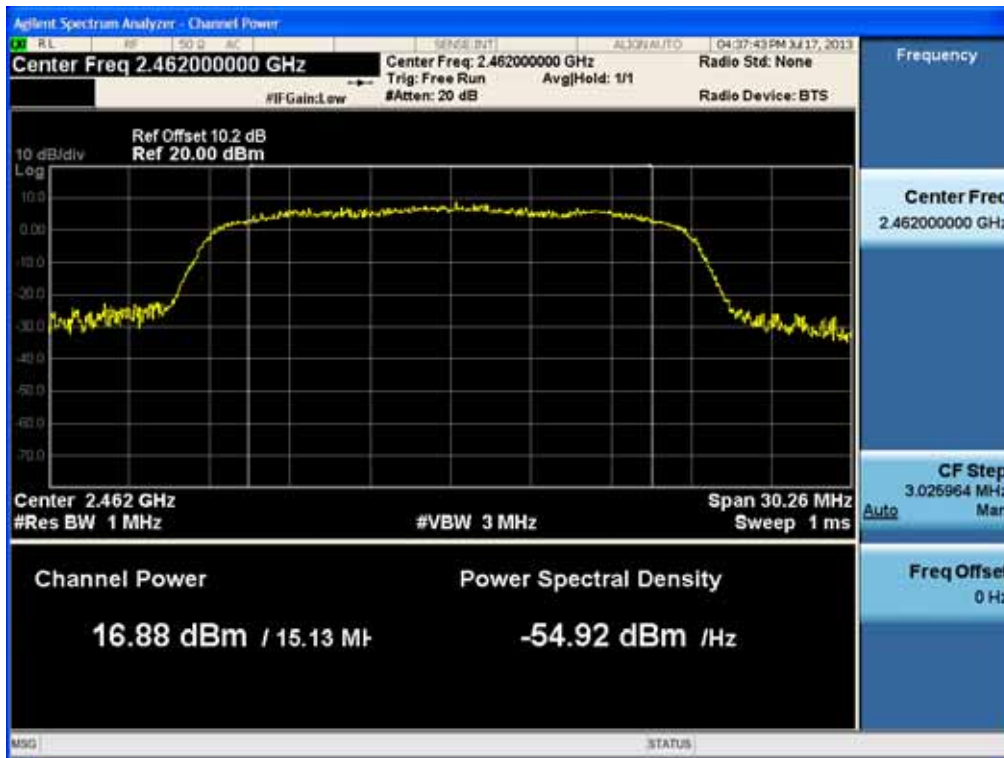

Conducted Output Power (802.11n-CH 11) 26Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11n-CH 11) 39Mbps



Conducted Output Power (802.11n-CH 11) 52Mbps

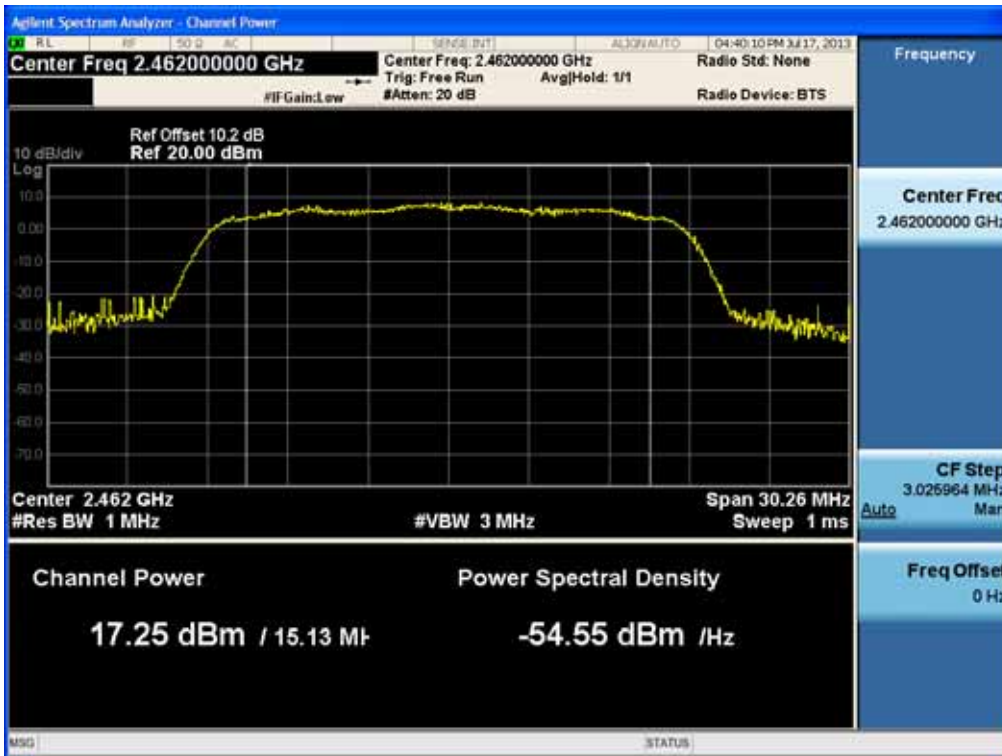

Conducted Output Power (802.11n-CH 11) 58.5Mbps



Conducted Output Power (802.11n-CH 11) 65Mbps



(5745 MHz ~5825 MHz)

Conducted Output Power (802.11a-CH 149) 6 Mbps



Conducted Output Power (802.11a-CH 149) 9 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF0605

Conducted Output Power (802.11a-CH 149) 12 Mbps



Conducted Output Power (802.11a-CH 149) 18 Mbps



Conducted Output Power (802.11a-CH 149) 24 Mbps



Conducted Output Power (802.11a-CH 149) 36 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11a-CH 149) 48 Mbps



Conducted Output Power (802.11a-CH 149) 54 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605



20 MHz BW
(5745 MHz ~5825 MHz)

Conducted Output Power (802.11n-CH 149) 6.5 Mbps



Conducted Output Power (802.11n-CH 149) 13 Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF0605

Conducted Output Power (802.11n-CH 149) 19.5 Mbps




Conducted Output Power (802.11n-CH 149) 26 Mbps

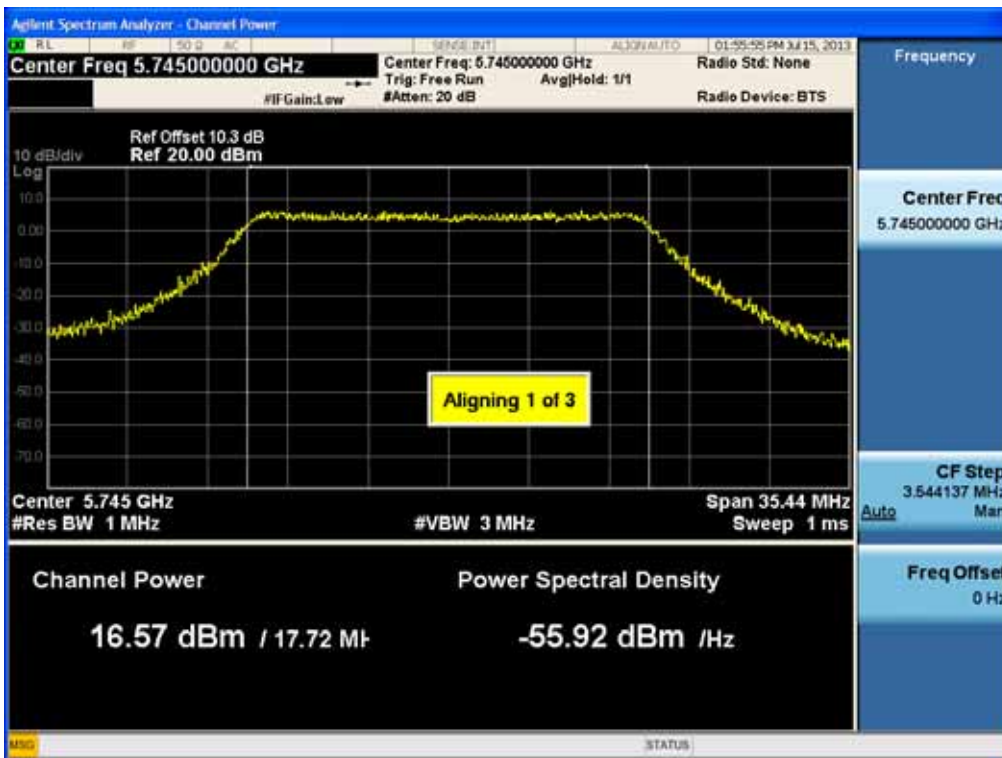

Conducted Output Power (802.11n-CH 149) 39 Mbps




Conducted Output Power (802.11n-CH 149) 52 Mbps

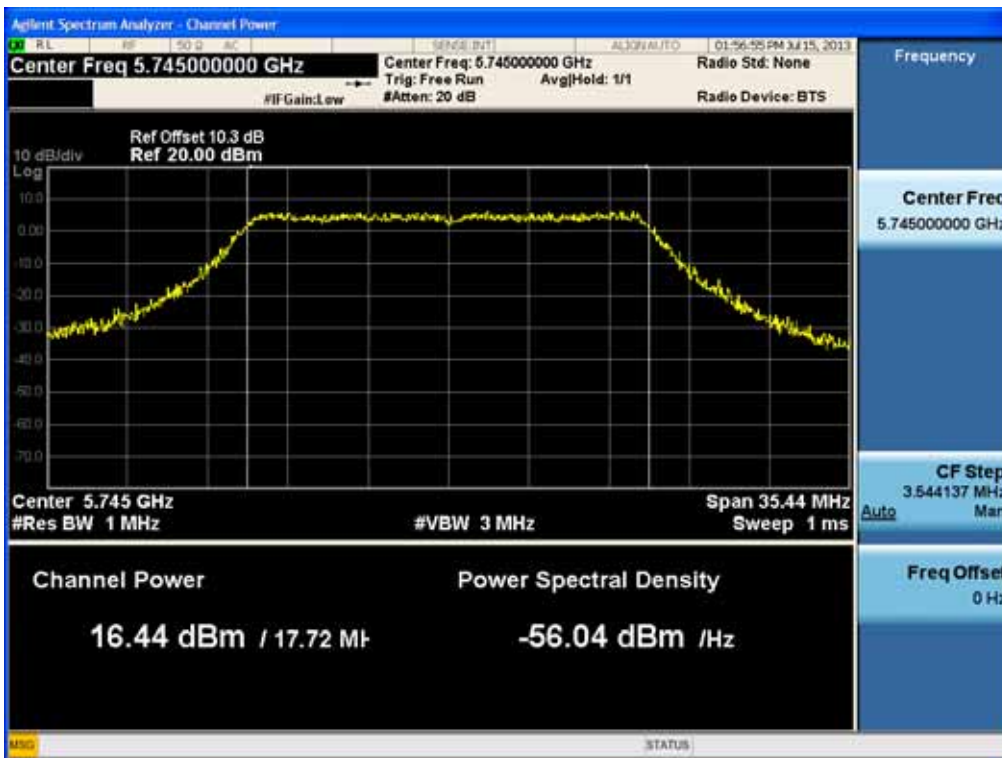

Conducted Output Power (802.11n-CH 149) 58.5 Mbps



Conducted Output Power (802.11n-CH 149) 65 Mbps

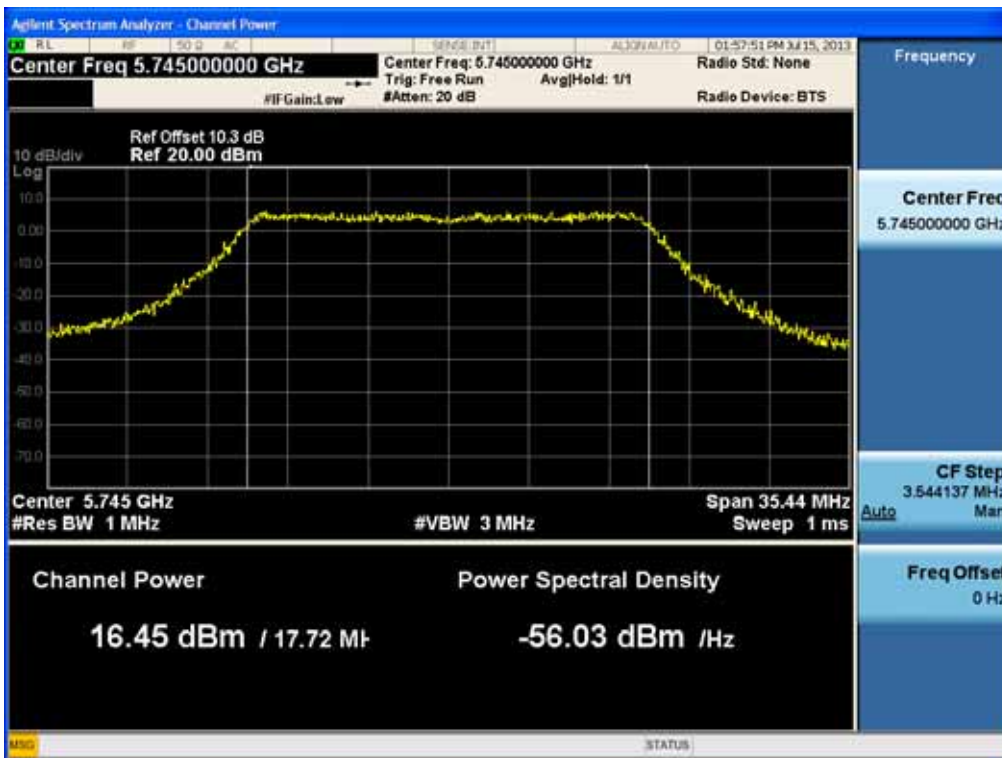

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605



40 MHz BW

(5755 MHz ~5795 MHz)

Conducted Output Power (802.11n-CH 151) 13.5 Mbps



Conducted Output Power (802.11n-CH 151) 27 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica	FCC ID: ZNF0605

Conducted Output Power (802.11n-CH 151) 40.5 Mbps



Conducted Output Power (802.11n-CH 151) 54 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11n-CH 151) 81 Mbps




Conducted Output Power (802.11n-CH 151) 108 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF605

Conducted Output Power (802.11n-CH 151) 121.5 Mbps

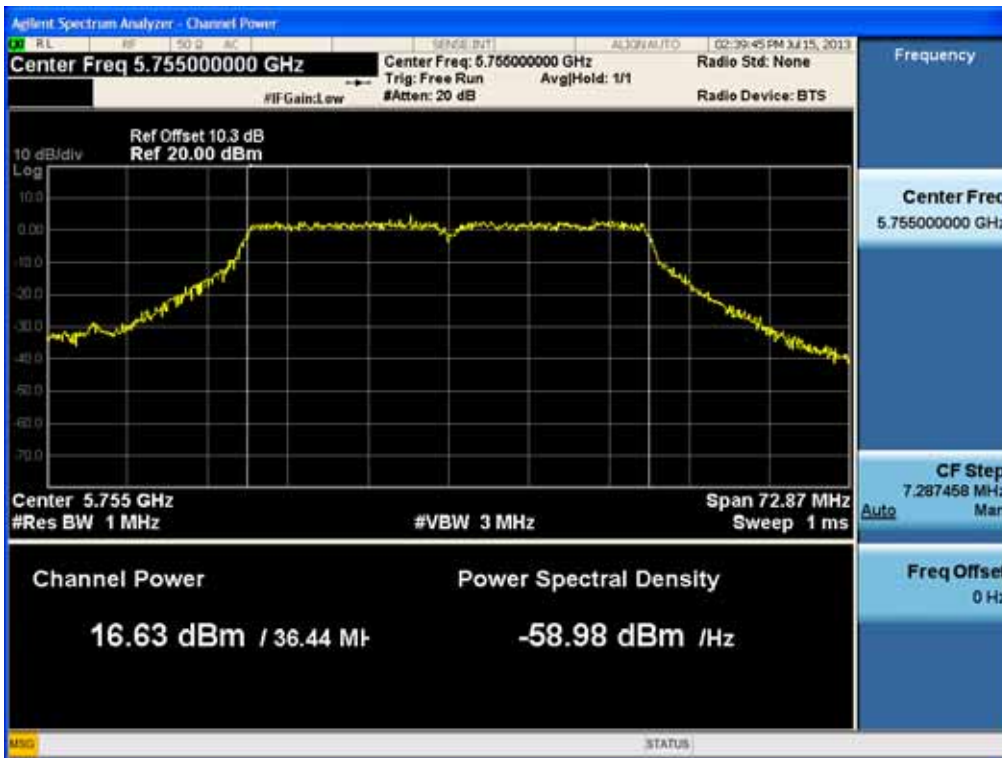


Conducted Output Power (802.11n-CH 151) 135 Mbps





RESULT PLOTS-Average

Conducted Output Power (802.11b-CH 11) 1Mbps

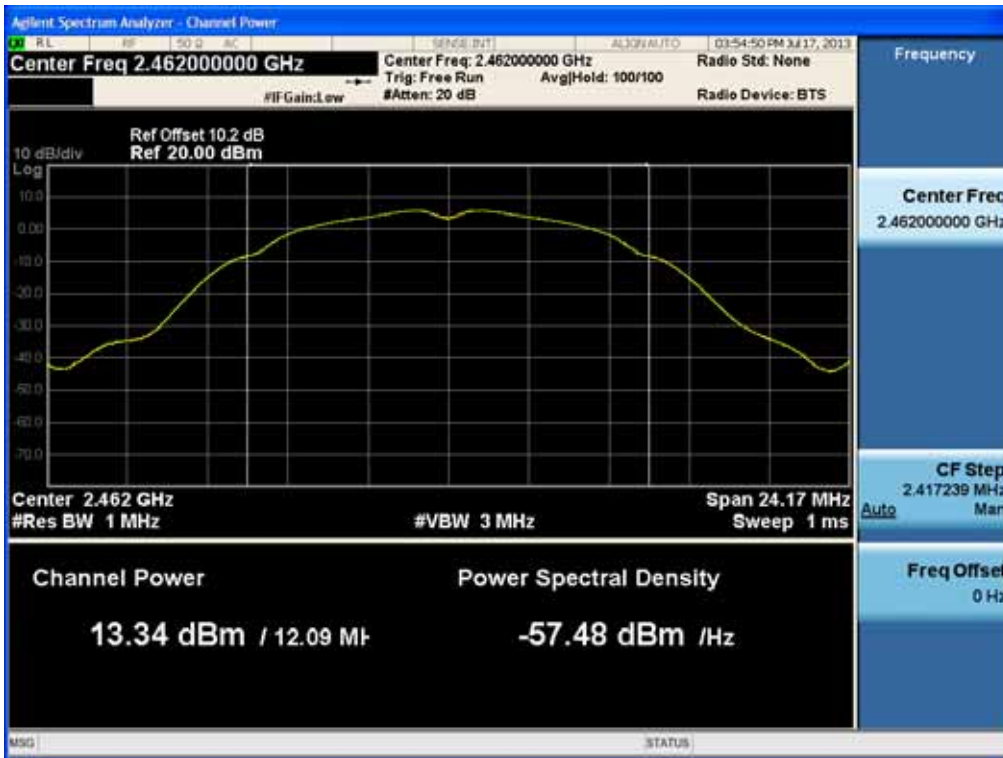


Conducted Output Power (802.11b-CH 11) 2Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1308FR03	Date of Issue: August 01, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNF0605


Conducted Output Power (802.11b-CH 11) 5.5Mbps

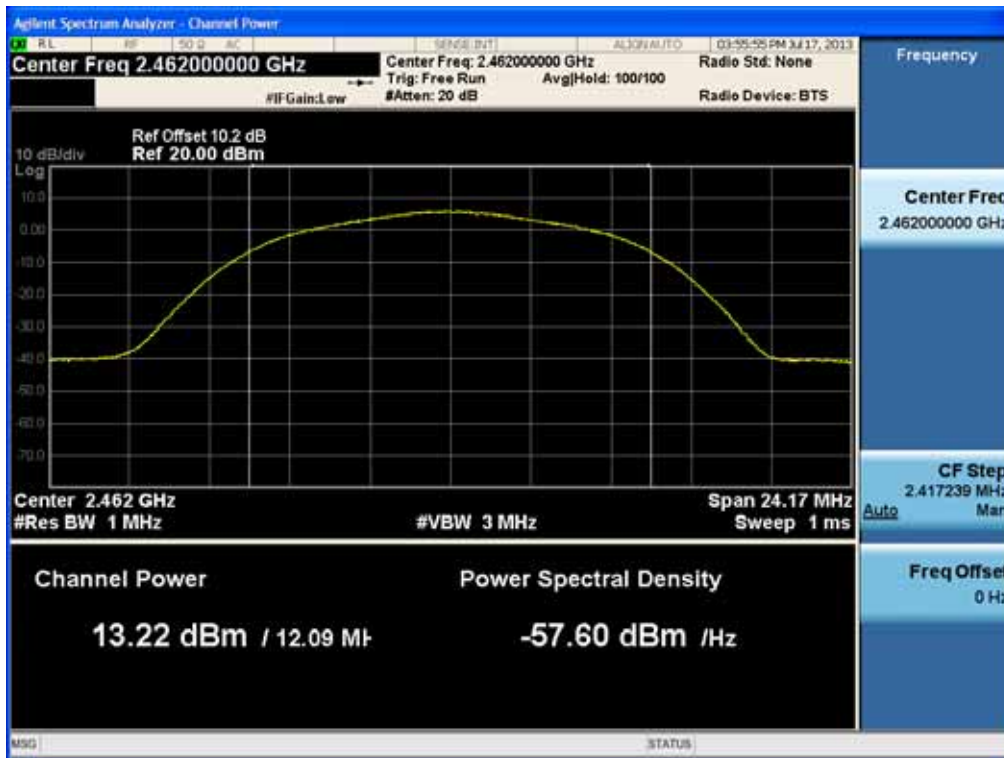


Conducted Output Power (802.11b-CH 11) 11Mbps

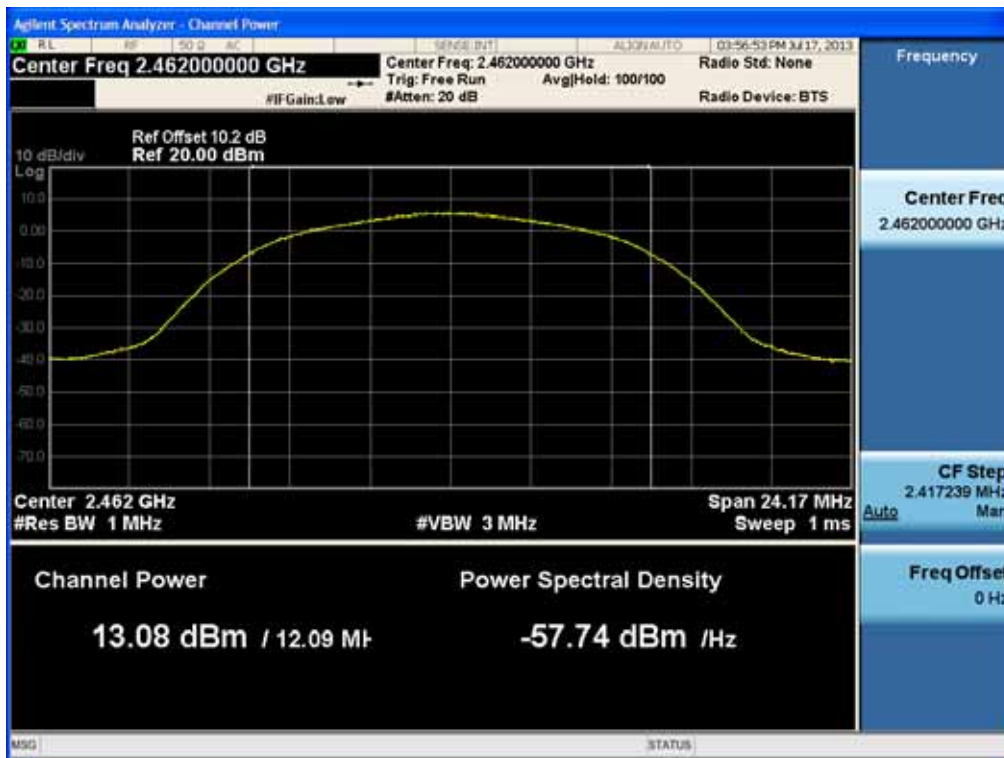


Conducted Output Power (802.11g-CH 11) 6Mbps

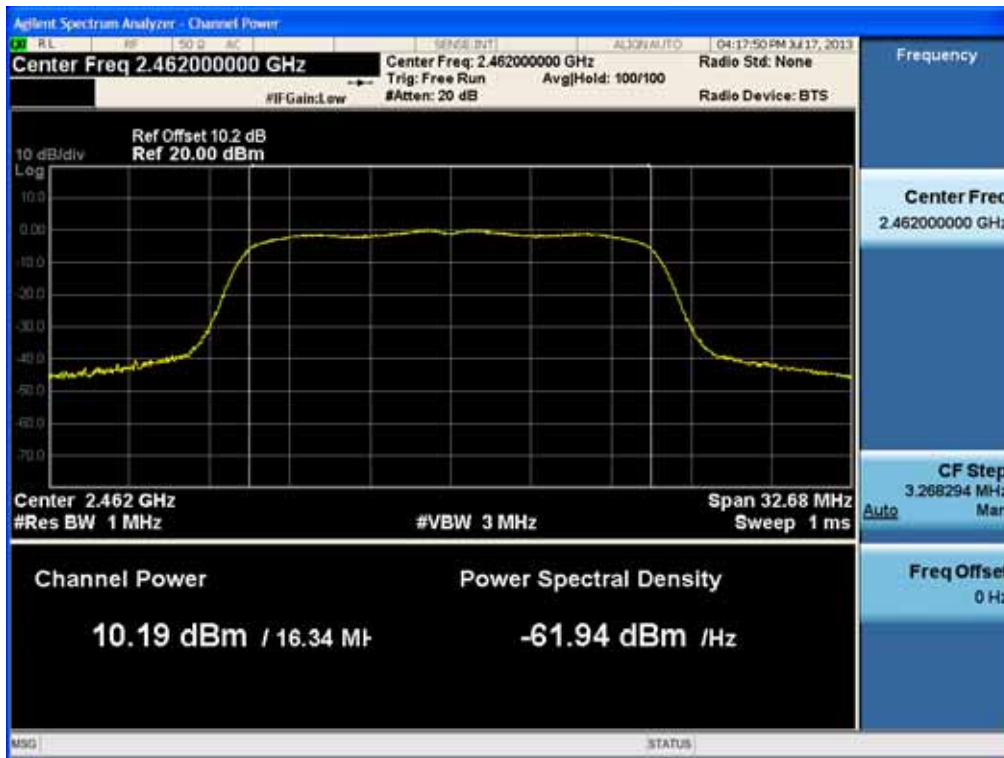


Conducted Output Power (802.11g-CH 11) 9Mbps

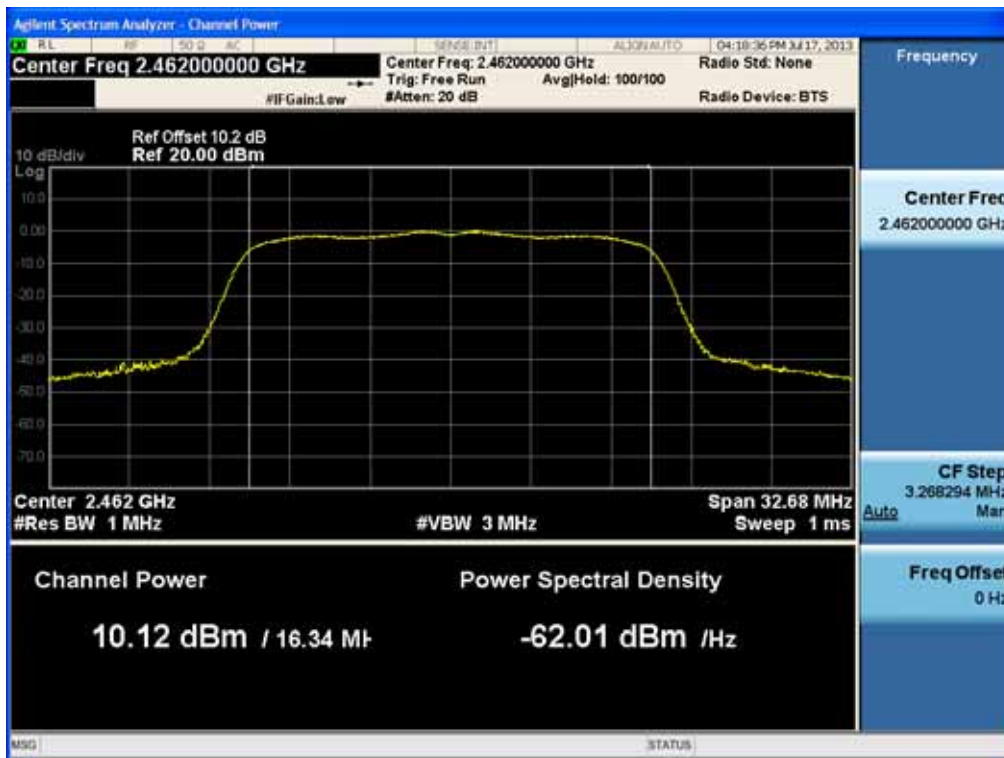


Conducted Output Power (802.11g-CH 11) 12Mbps

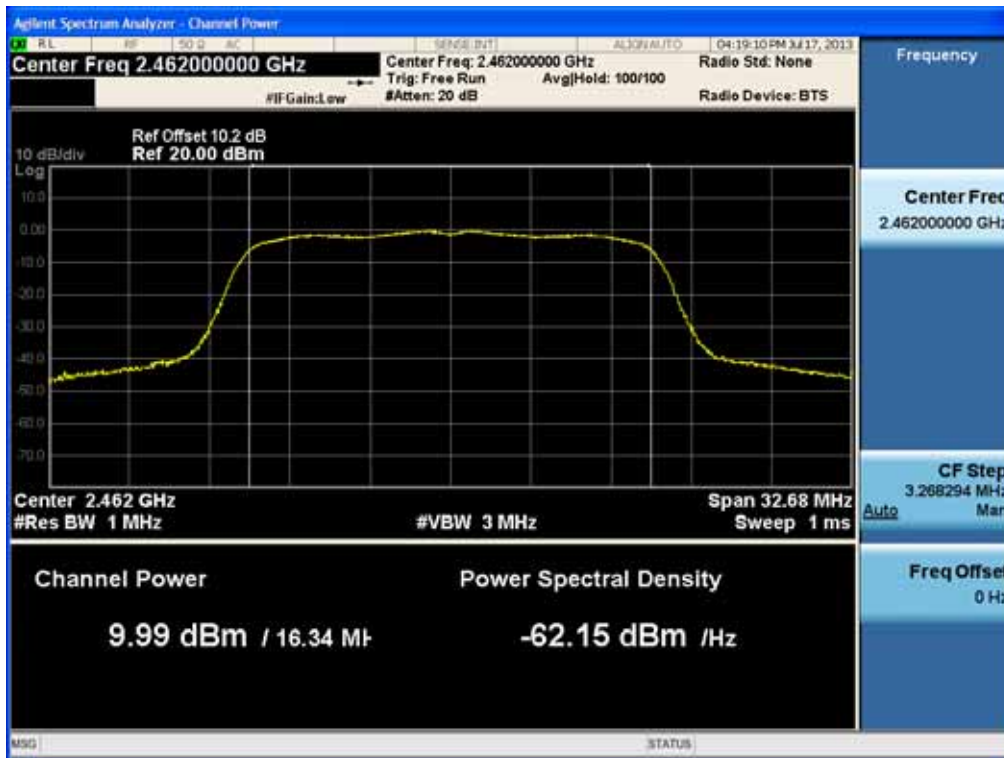

Conducted Output Power (802.11g-CH 11) 18Mbps

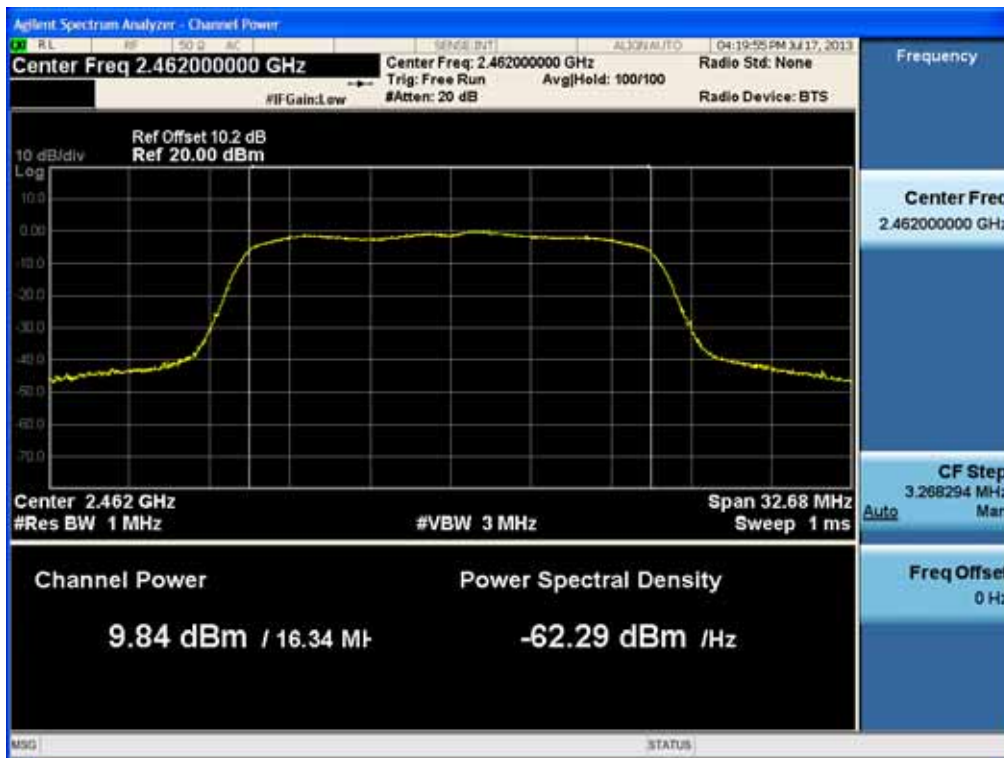


Conducted Output Power (802.11g-CH 11) 24Mbps

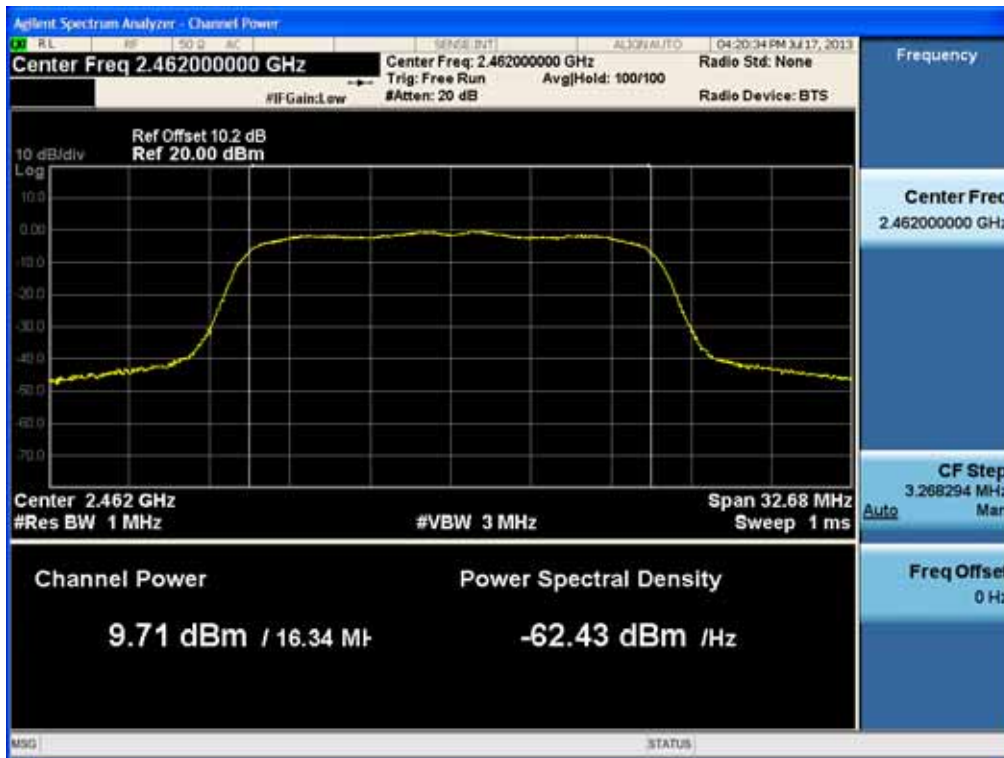

Conducted Output Power (802.11g-CH 11) 36Mbps



Conducted Output Power (802.11g-CH 11) 48Mbps

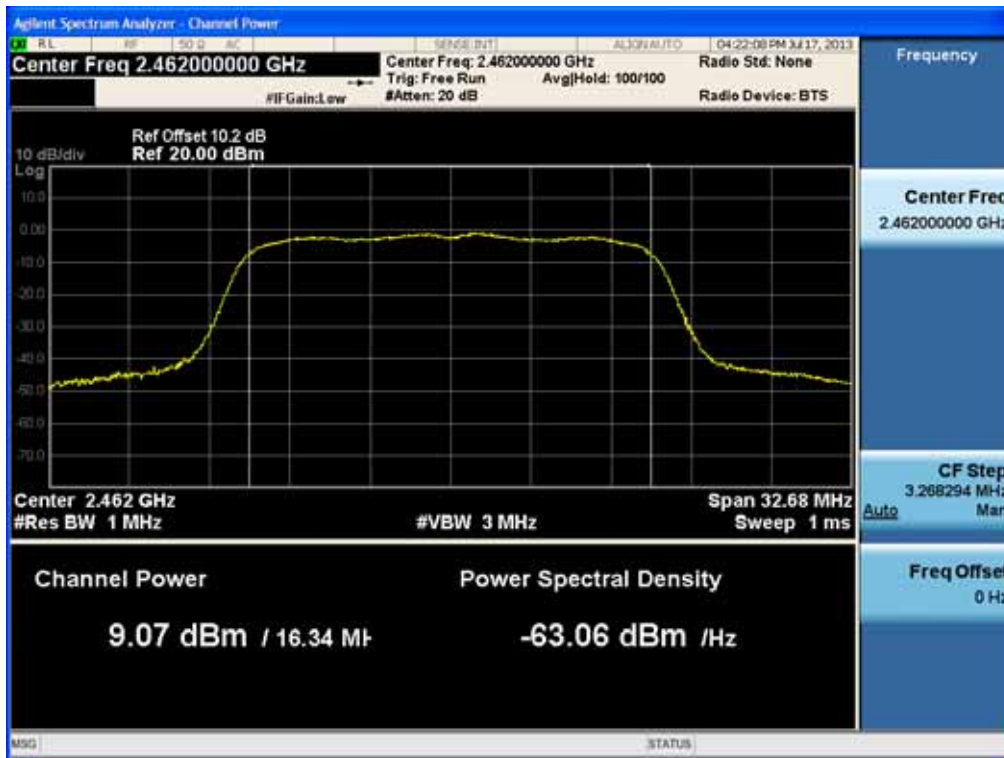

Conducted Output Power (802.11g-CH 11) 54Mbps

