

RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE, Cellular WCDMA/HSDPA /HSUPA with Bluetooth, WLAN, NFC
Model No. : LG-D722J, D722J, LGD722J
Order No. : DTNC1408-03706
Date of receipt : 2014-08-25
Test duration : 2014-08-26 ~ 2014-10-06
Date of issue : 2014-10-08
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : DT&C Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15.225
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by:



Engineer
HoonPyo Lee

Reviewed by:



Technical Manager
Geunki Son

Test Report Version

Test Report No.	Date	Description
DRTFCC1410-1278	Oct. 08, 2014	Initial issue

CONTENTS

1. Equipment information.....	4
1.1 Equipment description.....	4
1.2 Ancillary equipment	4
2. Information about test items.....	5
2.1 Test mode.....	5
2.2 Auxiliary equipment	5
2.3 Tested frequency	5
2.4 Tested environment	5
2.5 EMI Suppression Device(s)/Modifications	5
3. ANTENNA REQUIREMENTS.....	5
4. Test report	6
4.1 Summary of tests	6
4.2 Transmitter requirements.....	7
4.2.1 Occupied bandwidth.....	7
4.2.2 In-band emissions	8
4.2.3 Out-of-band emissions	9
4.2.4 Frequency Stability.....	11
4.2.5 AC Line Conducted Emissions	12
APPENDIX	15

1. Equipment information

1.1 Equipment description

FCC Equipment Class	Low Power Communications Device Transmitter(DXX)
Equipment type	Cellular/PCS GSM/GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA with Bluetooth, WLAN, NFC
Equipment model name	LG-D722J
Equipment add model name	D722J, LGD722J ※ 3 models are same mechanical, electrical and functional. ※ The only difference is the model name, which are changed for marketing purpose.
Equipment serial no.	Identical prototype
Frequency band	13.56MHz
Modulation type	ASK
Channel	1
Power	Li-ion Battery: DC 3.8V AC-DC Adaptor: AC 120V 60Hz
Antenna type	Loop Antenna

1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2. Information about test items

2.1 Test mode

Test mode1	Continuous transmitting mode
Test mode2	-

Note: For this test mode, a test program was supported by manufacturer.

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2.3 Tested frequency

	TX Frequency(MHz)	RX Frequency(MHz)
Lowest Channel	13.56	13.56
Middle Channel	-	-
Highest Channel	-	-

2.4 Tested environment

Temperature	: 21 ~ 25 °C
Relative humidity content	: 40 ~ 52 % R.H.
Details of power supply	: DC 3.8 V

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing

→ None

3. ANTENNA REQUIREMENTS

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna is attached to the battery cover, and antenna is coupled use the special tension. Therefore this E.U.T Complies with the requirement of §15.203

4. Test report

4.1 Summary of tests

FCC part section(s)	RSS section(s)	Parameter	Limit	Test condition	Status Note 1
2.1049	RSS-Gen [4.6.1]	Occupied bandwidth	NA	Radiated	C
15.225 (a)	RSS-210 [A2.6 (a)]	In-band emissions	15,848 μ V/m @ 30m 15.553 – 13.567 MHz		C
15.225 (b)	RSS-210 [A2.6 (b)]	In-band emissions	334 μ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		C
15.225 (c)	RSS-210 [A2.6 (c)]	In-band emissions	106 μ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		C
15.225 (d) 15.205 15.209	RSS-210 [A2.6 (d)] RSS-Gen [7.2.2 & 5]	Out-of band emissions	Emissions outside of the specified band (13.110-14.010 MHz) must meet the radiated limits detailed in 15.209		C
15.225 (e)	RSS-210 [A2.6]	Frequency stability	\pm 0.01% of operating frequency	Conducted	C
15.207	RSS-Gen [7.2.4]	AC conducted emissions	FCC Part 15.207	AC Line Conducted	C
15.203	-	Antenna requirements	FCC Part 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

The sample was tested according to the following specification:
ANSI C-63.10-2009


4.2 Transmitter requirements

4.2.1 Occupied bandwidth

- Procedure:

The 20dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

- Measurement Data: Comply

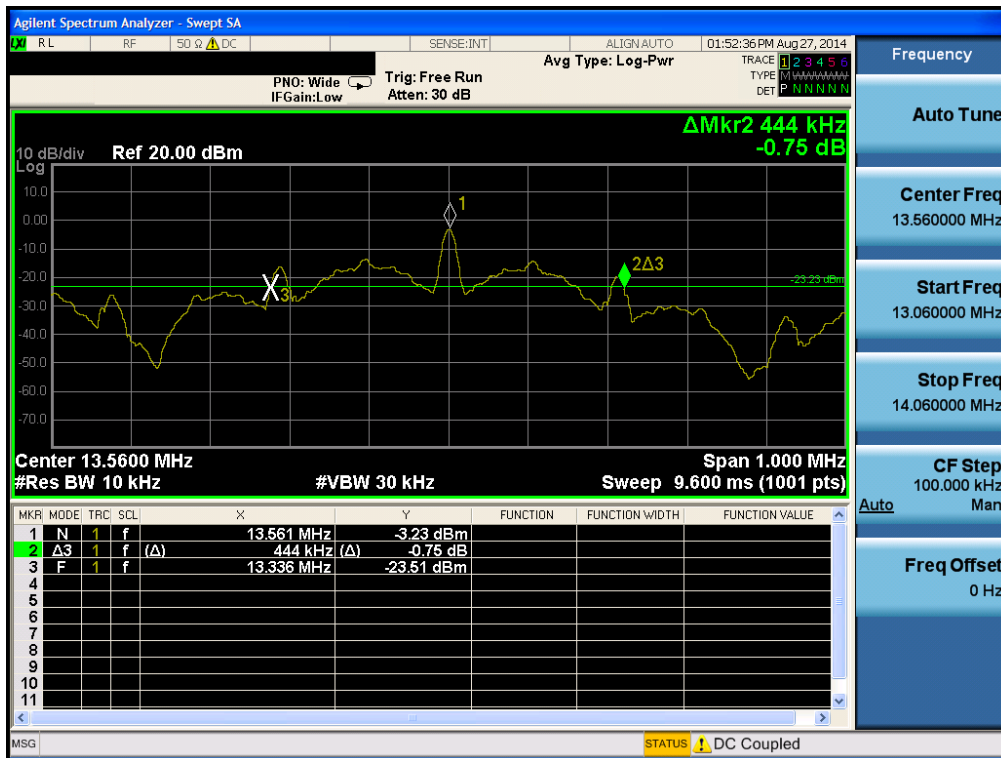

- Minimum Standard: NA

4.2.2 In-band emissions

- Procedure:

The EUT was placed on a 0.8m high non-conductive table inside a 10m semi anechoic chamber. An antenna was placed at 3 m distance from the EUT. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions. A loop antenna was used for this test item. And this test item was performed for both vertical and horizontal polarization.

- Measurement Data: **Comply**

Test Frequency Band [MHz]	Freq. [MHz]	EUT Posi.	Reading Level [dBuV]	T.F	Field Strength @3m [dBuV/m]	Field Strength @30m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.349	Y	18.20	19.10	37.30	-2.70	40.51	43.21
13.410 ~ 13.553	13.456	Y	19.80	19.10	38.90	-1.10	50.47	51.57
13.553 ~ 13.567	13.561	Y	31.10	19.10	50.20	10.20	84.00	73.80
13.567 ~ 13.710	13.666	Y	20.40	19.10	39.50	-0.50	50.47	50.97
13.710 ~ 14.010	13.771	Y	15.40	19.10	34.50	-5.50	40.51	46.01

Note 1. This test item was performed using a loop antenna.

Note 2. This test item was performed at 3m and the data were extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

• Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$

Note 3. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4. Sample Calculation.

Margin = Limit – Field Strength @ 30m / Field Strength @ 30m = Field Strength @ 3m – 40dB

Field Strength @ 3m = Reading + T.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

- Minimum Standard: Part 15.225(a), (b), (c)& RSS-210 A2.6(a), (b), (c)

Frequency Band [MHz]	Limit	
	[uV/m]	[dBuV/m]
13.553-13.567	15,848	84.00
13.410-13.553 13.567-13.710	334	50.47
13.110-13.410 13.710-14.010	106	40.51

4.2.3 Out-of-band emissions

- Procedure:

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010MHz. All measurements were recorded with spectrum analyzer employing a peak detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits §15.209. A loop antenna was used for searching for emissions below 30MHz.

- Measurement Data: **Comply** (refer to the next page)

- Minimum Standard: Part 15. 205, 209, 225(d) & RSS-210 A2.6 (d), RSS-Gen 7.2.2, RSS-Gen 7.2.5

▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3.6 ~ 4.4	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		

▪ FCC Part 15.205(b):

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ FCC Part 15.209(a):

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.209(b):

In the emission table above, the tighter limit applies at the band edges.

- Measurement Data:

Tested Frequency : 13.56MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Posi.	ANT Pol	Reading [dBUV]	T.F [dB/m]	Distance factor	Field Strength [dBUV/m]	Limit [dBUV/m]	Margin [dB]
0.567	Y	N/A	39.5	17.62	40	17.12	32.5	15.38
1.886	Z	N/A	12.6	17.77	40	-9.63	29.5	39.13
34.850	Z	V	26.8	-6.33	0	20.47	40	19.53
73.650	Z	V	30.1	-14.72	0	15.38	40	24.62
146.400	Z	V	32.2	-10.49	0	21.71	43.5	21.79
169.680	Z	V	23.8	-11.09	0	12.71	43.5	30.79
611.028	Z	V	25.6	-0.47	0	25.13	46	20.87

Note 1. All measurements were recorded using a spectrum analyzer employing a peak detector for below 30MHz and a Quasi-peak detector for above 30MHz.

Note 2. Both Vertical and Horizontal polarities of the receiver antenna were evaluated with the worst case emissions being reported. The worst-case emissions are reported.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Sample calculation

Margin = Limit – Field Strength

Field Strength = Reading + T.F – Distance factor

T.F = AF + CL – AG

Distance factor = $20\log(\text{Measurement distance} / \text{The measured distance})^2$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

4.2.4 Frequency Stability

- Procedure:

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

- Measurement Data: Comply

Operating Frequency : 13,560,000Hz

VOLTAGE (%)	POWER (V _{DC})	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.800	+25(ref)	13,560,294	294	0.002168
100%		-20	13,560,174	174	0.001283
100%		-10	13,560,296	296	0.002183
100%		0	13,560,325	325	0.002397
100%		+10	13,560,323	323	0.002382
100%		+20	13,560,305	305	0.002249
100%		+30	13,560,283	283	0.002087
100%		+40	13,560,264	264	0.001947
100%		+50	13,560,228	228	0.001681
85%		N/A	N/A	N/A	N/A
115%	4.370	+25	13,560,293	293	0.002161
BATT.ENDPOINT	3.400	+25	13,560,294	294	0.002168

- Minimum Standard: Part 15. 225(e) & RSS-210 A2.6

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

4.2.5 AC Line Conducted Emissions

- Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.21(m). Emissions closest to the limit are measured in the quasi-peak and average detector mode with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

- Measurement Data: Comply (refer to the next page)

- Minimum Standard: FCC Part 15.207(a) & RSS-Gen 7.2.4

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Measurement Data

Results of Conducted Emission



Date : 2014-09-25

Model No. : LG-D722J
Type :
Serial No. :
Test Condition : NFC

Reference No. :
Power Supply : 120V 60 Hz
Temp/Humi. : 23 °C 52 % R.H.
Operator : H.P LEE

Memo : FINAL

LIMIT : FCC P15.207 QP
FCC P15.207 AV

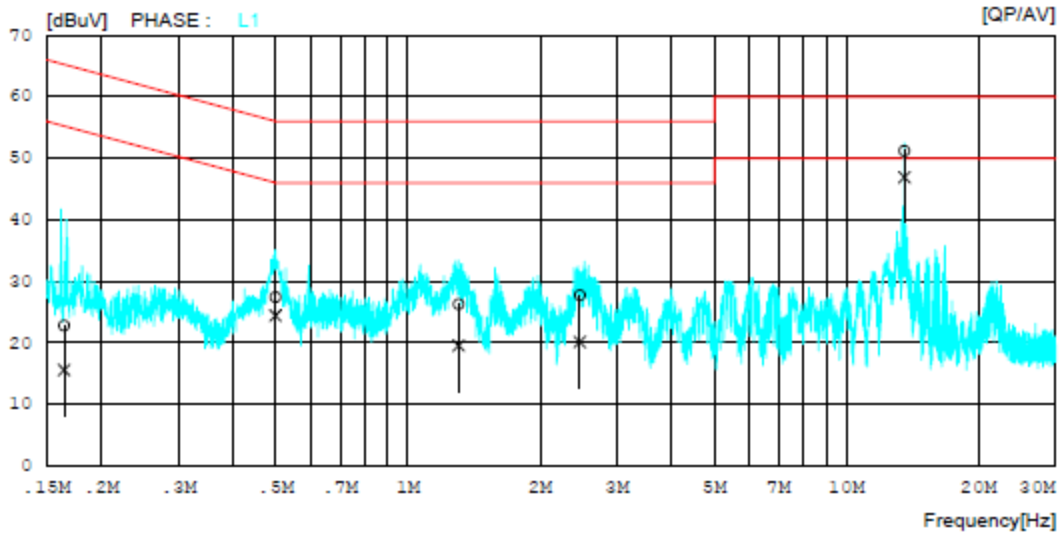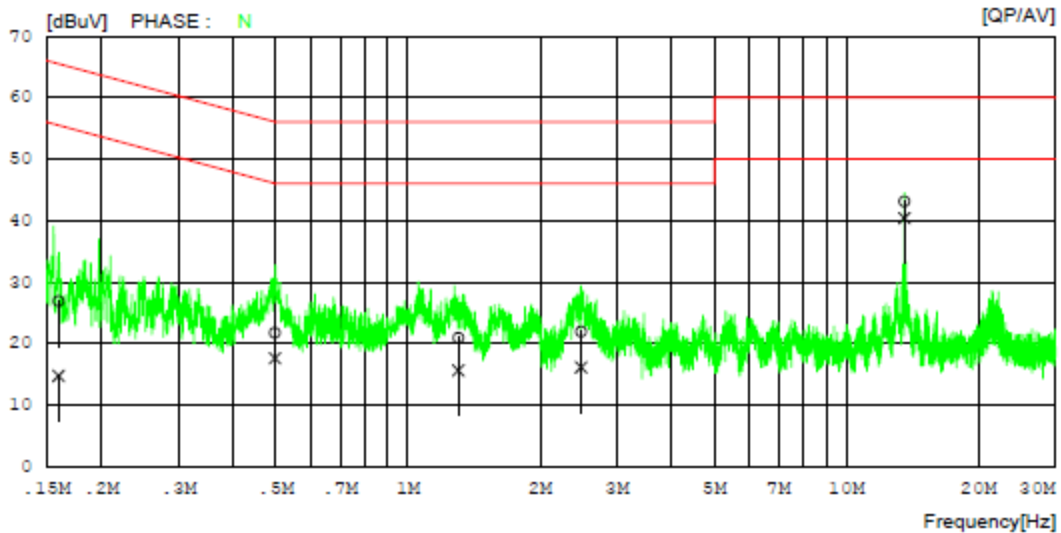

Measurement Data

Results of Conducted Emission

Date : 2014-09-25

Model No.	: LG-D722J	Reference No.	:
Type	:	Power Supply	: 120V 60 Hz
Serial No.	:	Temp/Humi.	: 23 °C 52 % R.H.
Test Condition	: NFC	Operator	: H.P LEE

Memo : FINAL

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15968	17.0	4.9	9.9	26.9	14.8	65.5	55.5	38.6	40.7	N
2	0.49720	11.8	7.7	9.9	21.7	17.6	56.0	46.0	34.3	28.4	N
3	1.30300	11.0	5.7	9.9	20.9	15.6	56.0	46.0	35.1	30.4	N
4	2.48400	11.9	6.1	10.0	21.9	16.1	56.0	46.0	34.1	29.9	N
5	13.55960	32.8	30.1	10.3	43.1	40.4	60.0	50.0	16.9	9.6	N
6	0.16433	12.9	5.7	9.9	22.8	15.6	65.2	55.2	42.4	39.6	L1
7	0.49875	17.5	14.5	9.9	27.4	24.4	56.0	46.0	28.6	21.6	L1
8	1.30540	16.4	9.6	9.9	26.3	19.5	56.0	46.0	29.7	26.5	L1
9	2.46680	17.7	10.1	10.0	27.7	20.1	56.0	46.0	28.3	25.9	L1
10	13.56080	41.0	36.7	10.2	51.2	46.9	60.0	50.0	8.8	3.1	L1

APPENDIX

TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent	N9020A	14/03/28	15/03/28	MY50510026
Digital Multimeter	H.P	34401A	14/02/27	15/02/27	3146A13475
Dynamic Measurement DC Source	Agilent	66332A	14/09/11	15/09/11	US37473627
Thermohygrometer	BODYCOM	BJ5478	14/03/03	15/03/03	1209
Vector Signal Generator	R&S	SMJ100A	14/01/07	15/01/07	100148
Temp &Humi Test Chamber	SJ Science	TEMI2500	13/10/22	14/10/22	SJ-TH-S50-130930
LOOP Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Amplifier (22dB)	H.P	8447E	14/01/07	15/01/07	2945A02865
EMI TEST RECEIVER	R&S	ESU	14/01/07	15/01/07	100014
EMI TEST RECEIVER	R&S	ESCI	14/02/27	15/02/27	100910
CVCF	EM TEST	NETWAVE 60-400	14/05/26	15/05/26	P1311115470
LISN	SCHWARZBECK	NNLK8121	14/08/18	15/08/18	NNLK8121-580
PULSE LIMITER	R&S	ESH3-Z2	14/01/08	15/01/08	101334