

Report Number: F690501/RF-RTL007647-2 Page: 119 of 155

# 7. Band Edge

### **7.1. Limit**

FCC §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10log(P) dB.


FCC §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

FCC  $\S27.53(g)$ , except as otherwise specified below, for operations in the 1710-1755 MHz, 2110-2155 MHz, 2000-2020 MHz, 2180-2200 MHz, 1915-1920 MHz, and 1995-2000 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least 43 + 10 log<sub>10</sub>(P) dR

FCC §27.53(h), when an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

#### 7.2. Test Procedure

- 1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
- 2. The center of the spectrum analyzer was set to block edge frequency.

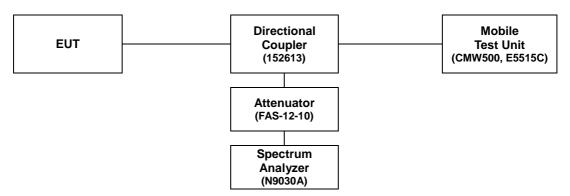

#### 7.2.1 Actual equipment used for Band edge

1211 Actual oquipmont accurrer band oago						
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due.
Signal Generator	Agilent	E8257d	MY51501169	Jul. 23, 2013	Annual	Jul. 23, 2014
Spectrum Analyzer	Agilent	N9030A	US51350132	Oct. 08, 2013	Annual	Oct. 08, 2014
Mobile Test Unit	Agilent	E5515C	GB43345198	Mar. 28, 2014	Annual	Mar. 28, 2015
Mobile Test Unit	R&S	CMW500	144035	Mar. 03, 2014	Annual	Mar. 03, 2015
Directional Coupler	KRYTAR	152613	140972	Jun. 07, 2013	Annual	Jun. 07, 2014
Attenuator	MCLI	FAS-12-10	1	Jun. 19, 2013	Annual	Jun. 19, 2014
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 27, 2014	Annual	Mar. 27, 2015

#### Note:

- Mobile test unit(E5515C) is used to test for GSM 850 & 1900
- Mobile test unit(CMW500) is used to test for WCDMA 850 & 1900 and LTE band 7



Report Number: F690501/RF-RTL007647-2 Page: 120 of 155


### 7.3. Test Results

Ambient temperature :  $(24 \pm 2)$  °C Relative humidity : 47 % R.H.


Please refer to the following plots.

### Bandedge\_GSM850

Low Channel

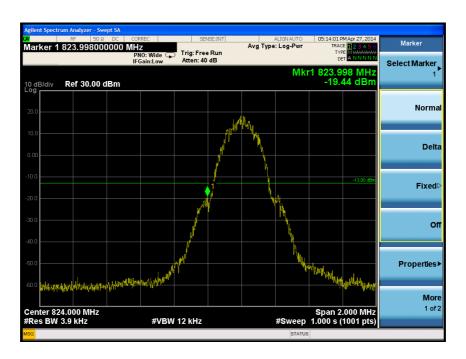

High Channel

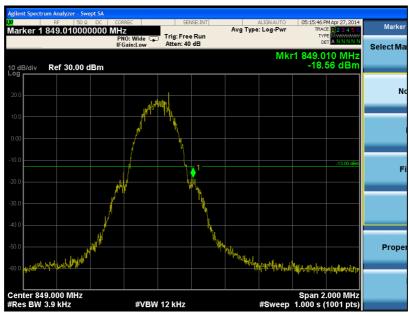

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040


http://www.sgsgroup.kr




Report Number: F690501/RF-RTL007647-2 Page: 121 of 155

### Bandedge\_GSM1900

Low Channel

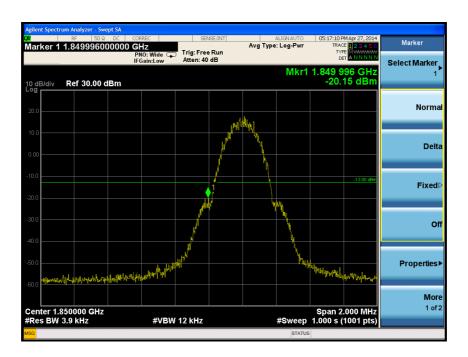

High Channel

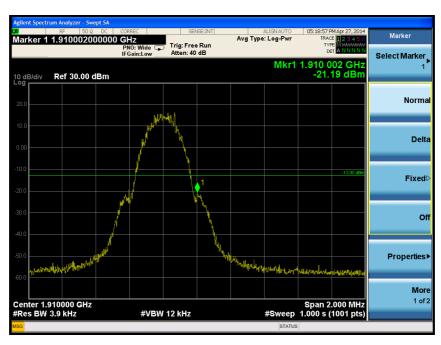



Report Number: F690501/RF-RTL007647-2 Page: 122 of 155

### Bandedge\_WDCMA850

#### Low Channel



#### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 123 of 155

### 4 MHz span plot\_WCDMA850

Low Channel



### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 124 of 155

# Bandedge\_WCDMA1900

Low Channel







Report Number: F690501/RF-RTL007647-2 Page: 125 of 155

### 4 MHz span plot\_WCDMA1900

Low Channel



### High Channel






Report Number: F690501/RF-RTL007647-2 Page: 126 of 155

### Bandedge\_LTE band 7 (5 ₩b - QPSK\_RB 25)

Low Channel



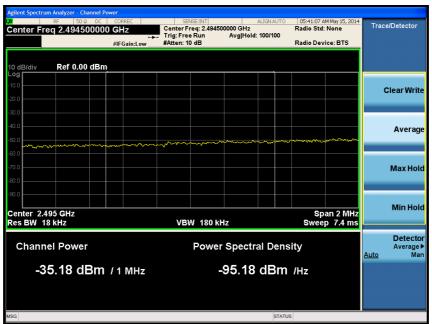



Report Number: F690501/RF-RTL007647-2 Page: 127 of 155







Report Number: F690501/RF-RTL007647-2 Page: 128 of 155

## 4 MHz span plot\_ LTE band 7 (5 MHz - QPSK\_RB 25)

Low Channel



#### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 129 of 155

### Bandedge\_LTE band 7 (10 M位 - QPSK\_RB 50)

Low Channel







Report Number: F690501/RF-RTL007647-2 Page: 130 of 155








Report Number: F690501/RF-RTL007647-2 Page: 131 of 155

## 4 MHz span plot\_ LTE band 7 (10 MHz - QPSK\_RB 50)

Low Channel

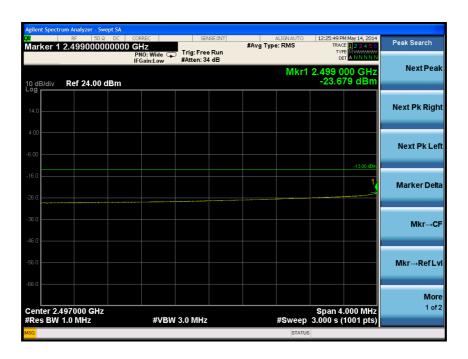

#### High Channel






Report Number: F690501/RF-RTL007647-2 Page: 132 of 155

### Bandedge\_LTE band 7 (15 M位 - QPSK\_RB 75)

Low Channel



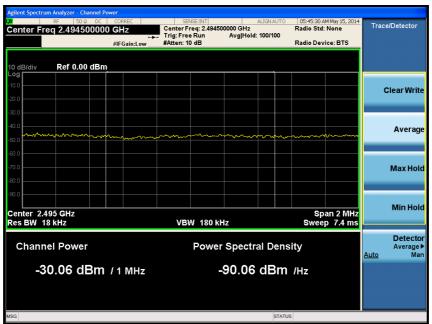



Report Number: F690501/RF-RTL007647-2 Page: 133 of 155







Report Number: F690501/RF-RTL007647-2 Page: 134 of 155

## 4 MHz span plot\_ LTE band 7 (15 MHz - QPSK\_RB 75)

Low Channel



#### High Channel






Report Number: F690501/RF-RTL007647-2 Page: 135 of 155

# Bandedge\_LTE band 7 (20 Mb - QPSK\_RB 100)

Low Channel




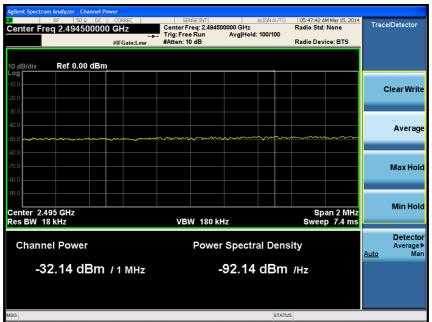



Report Number: F690501/RF-RTL007647-2 Page: 136 of 155



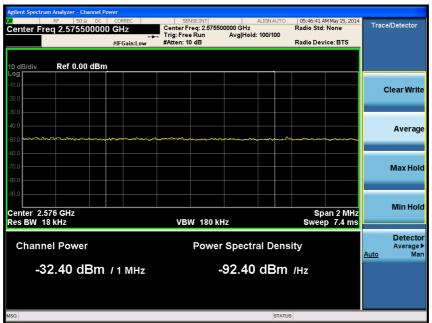



Report Number: F690501/RF-RTL007647-2 Page: 137 of 155

### 4 MHz span plot\_ LTE band 7 (20 MHz - QPSK\_RB 100)

Low Channel



#### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 138 155 of

### Bandedge\_LTE band 7 (5 ₩b - 16QAM\_RB 25)

Low Channel







Report Number: F690501/RF-RTL007647-2 Page: 139 of 155







Report Number: F690501/RF-RTL007647-2 Page: 140 of 155

## 4 MHz span plot\_ LTE band 7 (5 MHz - 16QAM\_RB 25)

Low Channel



### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 141 155 of

### Bandedge\_LTE band 7 (10 MHz - 16QAM\_RB 50)

Low Channel







Report Number: F690501/RF-RTL007647-2 Page: 142 of 155







Report Number: F690501/RF-RTL007647-2 Page: 143 of 155

### 4 MHz span plot\_ LTE band 7 (10 MHz - 16QAM\_RB 50)

Low Channel



#### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 144 of 155

### Bandedge\_LTE band 7 (15 MHz - 16QAM\_RB 75)

Low Channel





The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory)

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040



Report Number: F690501/RF-RTL007647-2 Page: 145 of 155



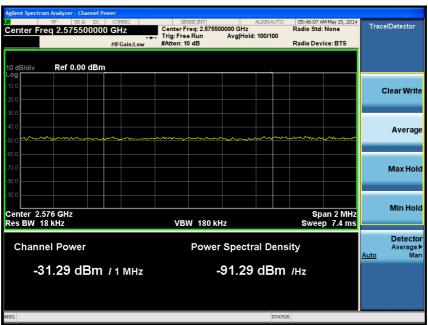



Report Number: F690501/RF-RTL007647-2 Page: 146 of 155

### 4 MHz span plot\_ LTE band 7 (15 MHz - 16QAM\_RB 75)

Low Channel



#### High Channel






Report Number: F690501/RF-RTL007647-2 Page: 147 of 155

### Bandedge\_LTE band 7 (20 ₩b - 16QAM\_RB 100)

Low Channel



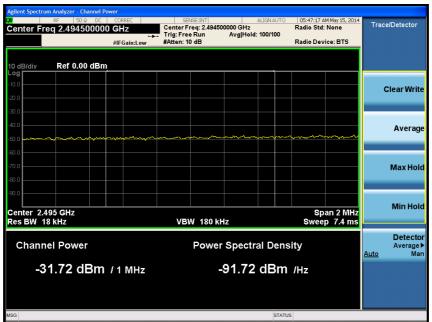



Report Number: F690501/RF-RTL007647-2 Page: 148 of 155







Report Number: F690501/RF-RTL007647-2 Page: 149 of 155

### 4 MHz span plot\_ LTE band 7 (20 MHz - 16QAM\_RB 100)

Low Channel



### High Channel





Report Number: F690501/RF-RTL007647-2 Page: 150 of 155

# 8. Frequency Stability

#### **8.1. Limit**

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:

FCC §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.


For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

FCC §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

#### 8.2. Test Procedure

- 1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
- 2. The EUT was placed inside the temperature chamber.
- 3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

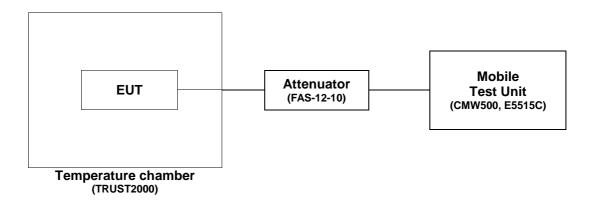

#### 8.2.1 Actual equipment used for Frequency Stability

6.2.1 Actual equipment used for Frequency Stability						
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due.
Mobile Test Unit	Agilent	E5515C	GB43345198	Mar. 28, 2014	Annual	Mar. 28, 2015
Mobile Test Unit	R&S	CMW500	144035	Mar. 03, 2014	Annual	Mar. 03, 2015
Attenuator	MCLI	FAS-12-10	1	Jun. 19, 2013	Annual	Jun. 19, 2014
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 27, 2014	Annual	Mar. 27, 2015
Temperature Chamber	ENEX	TRUST2000	980111	Dec. 26, 2013	Annual	Dec. 26, 2014

#### Note;

- Mobile test unit(E5515C) is used to test for GSM 850 & 1900
- Mobile test unit(CMW500) is used to test for WCDMA 850 & 1900 and LTE band 7



Report Number: F690501/RF-RTL007647-2 Page: 151 of 155

### 8.3. Test Results

Ambient temperature :  $(24 \pm 2)$  °C Relative humidity : 47 % R.H.

### GSM850 mode at middle channel

### Reference Frequency: 836.6 Mtz, Limit: 2.5 ppm

## **Frequency Stability versus Temperature**

Environment Temperature (℃)	Power	Frequency Measure	with Time Elapse
	Supplied (Vdc)	Frequency Error (Hz)	ppm
50		17	0.014 344
40	3.80	12	0.008 367
30		8	0.003 586
24		5	Ref.
10		12	0.008 367
0		18	0.015 539
-10		11	0.007 172
-20		28	0.027 492
-30		25	0.023 906

## Frequency Stability versus Power Supply

Environment	Power	Frequency Measure	with Time Elapse
Temperature (℃)	Supplied (Vdc)	Frequency Error (Hz)	ppm
24	4.37	13	0.009 563
	3.05(batt. End point)	18	0.015 539



Report Number: F690501/RF-RTL007647-2 Page: 152 of 155

#### GSM1900 mode at middle channel

Reference Frequency: 1 880.0 MHz, Limit: 2.5 ppm

# **Frequency Stability versus Temperature**

Environment Temperature (℃)	Power	Frequency Measure	with Time Elapse	
	Supplied (Vdc)	Frequency Error (Hz)	ppm	
50		51	-0.002 128	
40	3.80	45	-0.005 319	
30		49	-0.003 191	
24		55	Ref.	
10		63	0.004 255	
0		69	0.007 447	
-10		58	0.001 596	
-20		72	0.009 043	
-30		74	0.010 106	

### Frequency Stability versus Power Supply

Environment	Power	Frequency Measure with Time Elapse		
Temperature (℃)	Supplied (Vdc)	Frequency Error (Hz)	ppm	
24	4.37	65	0.005 319	
	3.05(batt. End point)	49	-0.003 191	



Report Number: F690501/RF-RTL007647-2 Page: 153 of 155

#### WCDMA850 mode at middle channel

Reference Frequency: 836.4 Mtz, Limit: 2.5 ppm

# **Frequency Stability versus Temperature**

Environment Temperature (℃)	Power	Frequency Measure w Frequency Error (Hz)	with Time Elapse	
	Supplied (Vdc)		ppm	
50		5	0.007 174	
40	3.80	3	0.004 782	
30		-2	-0.001 196	
24		-1	Ref.	
10		4	0.005 978	
0		2	0.003 587	
-10		-3	-0.002 391	
-20		3	0.004 782	
-30		-6	-0.005 978	

### Frequency Stability versus Power Supply

Environment	Power	Frequency Measure with Time Elapse		
Temperature (℃)	Supplied (Vdc)	Frequency Error (Hz)	Ppm	
24	4.37	-4	-0.003 587	
	3.05(batt. End point)	-2	-0.001 196	



Report Number: F690501/RF-RTL007647-2 Page: 154 of 155

### WCDMA1900 mode at middle channel

Reference Frequency: 1880.0 Mtz, Limit: 2.5 ppm

# **Frequency Stability versus Temperature**

Environment Temperature (℃)	Power	Frequency Measure with Time Elapse	
	Supplied (Vdc)	Frequency Error (Hz)	ppm
50		7	0.002 128
40	3.80	-4	-0.003 723
30		2	-0.000 532
24		3	Ref.
10		-1	-0.002 128
0		-4	-0.003 723
-10		7	0.002 128
-20		-3	-0.003 191
-30		5	0.001 064

### **Frequency Stability versus Power Supply**

Environment	Power	Frequency Measure with Time Elapse		
Temperature (℃)	Supplied (Vdc)	Frequency Error (Hz) ppm	ppm	
24	4.37	-3	-0.003 191	
	3.05(batt. End point)	2	-0.000 532	



Report Number: F690501/RF-RTL007647-2 Page: 155 of 155

#### LTE band 7 mode at middle channel

Reference Frequency: 2 535.0 Mtz, Limit: 2.5 ppm

# **Frequency Stability versus Temperature**

Environment Temperature (℃)	Power	Frequency Measure with Frequency Error (Hz)	with Time Elapse	
	Supplied (Vdc)		ppm	
50		13	0.011 440	
40	3.80	3	0.007 495	
30		-5	0.004 339	
24		-16	Ref.	
10		-18	-0.000 789	
0		-12	0.001 578	
-10		-23	-0.002 761	
-20		-28	-0.004 734	
-30		-39	-0.009 073	

### **Frequency Stability versus Power Supply**

Environment	Power	Frequency Measure with Time Elapse	
Temperature (℃)	Supplied (Vdc)	Frequency Error (Hz) pp	ppm
24	4.37	-24	-0.003 156
	3.05(batt. End point)	-19	-0.001 183