



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: May 29, 2014
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCT-R-1405-F011-1
	HCT FRN: 0005866421

FCC ID:	ZNFD855P
APPLICANT:	LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D855P	
Additional FCC Model(s):	LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar	
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)	
FCC Rule Part(s):	§2 , §27	
Tx Frequency:	706.5 MHz – 713.5 MHz (LTE – Band 17), 1710.7 MHz – 1754.3 MHz (LTE – Band 4)	
Max. RF Output Power Normal battery Charger:	Band 17 (5 MHz) :	0.076 W (QPSK) (18.81 dBm) 0.077 W (16-QAM) (18.85 dBm)
	Band 17 (10 MHz) :	0.083 W (QPSK) (19.20 dBm) 0.088 W (16-QAM) (19.45 dBm)
	Band 4 (1.4 MHz):	0.236 W (QPSK) (23.72 dBm) 0.240 W (16-QAM) (23.81 dBm)
	Band 4 (3 MHz):	0.236 W (QPSK) (23.73 dBm) 0.237 W (16-QAM) (23.74 dBm)
	Band 4 (5 MHz):	0.240 W (QPSK) (23.80 dBm) 0.236 W (16-QAM) (23.73 dBm)
	Band 4 (10 MHz):	0.251 W (QPSK) (23.99 dBm) 0.252 W (16-QAM) (24.02 dBm)
	Band 4 (15 MHz):	0.253 W (QPSK) (24.03 dBm) 0.251 W (16-QAM) (24.00 dBm)
	Band 4 (20 MHz):	0.233 W (QPSK) (23.68 dBm) 0.241 W (16-QAM) (23.82 dBm)
Max. RF Output Power Wireless battery Charger:	Band 17 (5 MHz) :	0.060 W (QPSK) (17.77 dBm) 0.062 W (16-QAM) (17.93 dBm)
	Band 17 (10 MHz) :	0.068 W (QPSK) (18.34 dBm) 0.075 W (16-QAM) (18.76 dBm)
	Band 4 (1.4 MHz):	0.299 W (QPSK) (24.76 dBm) 0.318 W (16-QAM) (25.02 dBm)
	Band 4 (3 MHz):	0.303 W (QPSK) (24.82 dBm) 0.307 W (16-QAM) (24.87 dBm)
	Band 4 (5 MHz):	0.307 W (QPSK) (24.87 dBm) 0.312 W (16-QAM) (24.94 dBm)
	Band 4 (10 MHz):	0.324 W (QPSK) (25.11 dBm) 0.333 W (16-QAM) (25.22 dBm)
	Band 4 (15 MHz):	0.320 W (QPSK) (25.05 dBm) 0.310 W (16-QAM) (24.92 dBm)
	Band 4 (20 MHz):	0.319 W (QPSK) (25.04 dBm) 0.343 W (16-QAM) (25.35 dBm)
Emission Designator(s):	Band 17 (5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
	Band 17 (10 MHz) :	8M95G7D (QPSK) / 8M93W7D (16-QAM)
	Band 4 (1.3 MHz) :	1M08G7D (QPSK) / 1M08W7D (16-QAM)
	Band 4 (4 MHz) :	2M69G7D (QPSK) / 2M69W7D (16-QAM)
	Band 4 (5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
	Band 4 (10 MHz) :	8M96G7D (QPSK) / 8M94W7D (16-QAM)
	Band 4 (15 MHz) :	13M4G7D (QPSK) / 13M4W7D (16-QAM)
	Band 4 (20 MHz) :	17M9G7D (QPSK) / 17M9W7D (16-QAM)

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--



The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

Report prepared by
: Jong Seok Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F011	May 20, 2014	- First Approval Report
HCT-R-1405-F011-1	May 29, 2014	<ul style="list-style-type: none"> - Insert the Information for WCP on Section 4 - Revise the Frequency Stability Limit on Section 3.8 and 5.0 - Delete the Requirement for 776 – 788 MHz Band - Revise the Emission Designator for 20 MHz 16-QAM of LTE Band 4. - Add the Additional Band Edge Plot

Table of Contents

1. GENERAL INFORMATION	5
2. INTRODUCTION	7
2.1. EUT DESCRIPTION.....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 CONDUCTED OUTPUT POWER	8
3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	9
3.3 PEAK-AVERAGE RATIO.	10
3.4 OCCUPIED BANDWIDTH.	12
3.5 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)	13
3.6 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....	13
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
4. LIST OF TEST EQUIPMENT	16
5. SUMMARY OF TEST RESULTS	17
6. SAMPLE CALCULATION	18
7. TEST DATA	19
7.1 EFFECTIVE RADIATED POWER OUTPUT_stand alone	19
7.2 EFFECTIVE RADIATED POWER OUTPUT_with wireless charging pad	21
7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_stand alone	23
7.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ with wireless charging pad	27
7.5 RADIATED SPURIOUS EMISSIONS_stand alone.....	31
7.5.1 RADIATED SPURIOUS EMISSIONS (Band 17)	31
7.5.2 RADIATED SPURIOUS EMISSIONS (Band 4)	33
7.6 RADIATED SPURIOUS EMISSIONS_ with wireless charging pad.....	39
7.6.1 RADIATED SPURIOUS EMISSIONS (Band 17)	39
7.6.2 RADIATED SPURIOUS EMISSIONS (Band 4)	41
7.7 PEAK-TO-AVERAGE RATIO	47
7.8 OCCUPIED BANDWIDTH	48
7.9 CONDUCTED SPURIOUS EMISSIONS	49
7.9.1 BAND EDGE.....	50
7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	51
7.10.1 FREQUENCY STABILITY (LTE Band 17).....	51
7.10.2 FREQUENCY STABILITY (LTE Band 4).....	53
8. TEST PLOTS.....	59



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFD855P

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Model(s): LG-D855P

Additional FCC Model(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar

Tx Frequency: 706.5 MHz – 713.5 MHz (LTE – Band 17),
1710.7 MHz – 1754.3 MHz (LTE – Band 4)

Max. RF Output Power Normal battery Charger:

Band 17 (5 MHz) :	0.076 W (QPSK) (18.81 dBm)
	0.077 W (16-QAM) (18.85 dBm)
Band 17 (10 MHz) :	0.083 W (QPSK) (19.20 dBm)
	0.088 W (16-QAM) (19.45 dBm)
Band 4 (1.4 MHz):	0.236 W (QPSK) (23.72 dBm)
	0.240 W (16-QAM) (23.81 dBm)
Band 4 (3 MHz):	0.236 W (QPSK) (23.73 dBm)
	0.237 W (16-QAM) (23.74 dBm)
Band 4 (5 MHz):	0.240 W (QPSK) (23.80 dBm)
	0.236 W (16-QAM) (23.73 dBm)
Band 4 (10 MHz):	0.251 W (QPSK) (23.99 dBm)
	0.252 W (16-QAM) (24.02 dBm)
Band 4 (15 MHz):	0.253 W (QPSK) (24.03 dBm)
	0.251 W (16-QAM) (24.00 dBm)
Band 4 (20 MHz):	0.233 W (QPSK) (23.68 dBm)
	0.241 W (16-QAM) (23.82 dBm)

Max. RF Output Power Wireless battery Charger:

Band 17 (5 MHz) :	0.060 W (QPSK) (17.77 dBm)
	0.062 W (16-QAM) (17.93 dBm)
Band 17 (10 MHz) :	0.068 W (QPSK) (18.34 dBm)
	0.075 W (16-QAM) (18.76 dBm)
Band 4 (1.4 MHz):	0.299 W (QPSK) (24.76 dBm)
	0.318 W (16-QAM) (25.02 dBm)
Band 4 (3 MHz):	0.303 W (QPSK) (24.82 dBm)
	0.307 W (16-QAM) (24.87 dBm)
Band 4 (5 MHz):	0.307 W (QPSK) (24.87 dBm)
	0.312 W (16-QAM) (24.94 dBm)
Band 4 (10 MHz):	0.324 W (QPSK) (25.11 dBm)
	0.333 W (16-QAM) (25.22 dBm)
Band 4 (15 MHz):	0.320 W (QPSK) (25.05 dBm)
	0.310 W (16-QAM) (24.92 dBm)
Band 4 (20 MHz):	0.319 W (QPSK) (25.04 dBm)
	0.343 W (16-QAM) (25.35 dBm)

Emission Designator(s):

Band 17 (5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 17 (10 MHz) :	8M95G7D (QPSK) / 8M93W7D (16-QAM)

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P
---	---------------------------------------	--	----------------------------



Band 4 (1.3 MHz) : 1M08G7D (QPSK) / 1M08W7D (16-QAM)
Band 4 (4 MHz) : 2M69G7D (QPSK) / 2M69W7D (16-QAM)
Band 4 (5 MHz) : 4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 4 (10 MHz) : 8M96G7D (QPSK) / 8M94W7D (16-QAM)
Band 4 (15 MHz) : 13M4G7D (QPSK) / 13M4W7D (16-QAM)
Band 4 (20 MHz) : 17M9G7D (QPSK) / 17M9W7D (16-QAM)

Date(s) of Tests: April 10, 2014 ~ May 19, 2014

Antenna Specification
Manufacturer: AT&C Co. LTD.
Antenna type: Internal Antenna
Peak Gain: Band 4: -5.22 dBi
Band 17: -12.61 dBi

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P
---	---------------------------------------	--	----------------------------



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-D855P Cellular/PCS

GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of LTE 4 and 17.

Note : All test performed with the battery cover already incorporate the NFC antenna and Wireless charging capability.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.



3. DESCRIPTION OF TESTS

3.1 CONDUCTED OUTPUT POWER

Test Procedure

Conducted Output Power is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.2.

5.2.1 Procedure for use with a spectrum/signal analyzer when EUT can be configured to transmit continuously or when sweep triggering/signal gating can be properly implemented

The EUT is considered to transmit continuously if it can be configured to transmit at a burst duty cycle of greater than or equal to 98% throughout the duration of the measurement. If this condition can be achieved, then the following procedure can be used to measure the average output power of the EUT.

This procedure can also be used when the EUT cannot be configured to transmit continuously, provided that the measurement instrument can be configured to trigger a sweep at the beginning of each full-power transmission burst, and the sweep time is less than or equal to the minimum transmission time during each burst (*i.e.*, no burst off-time is to be included in the measurement).

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (*i.e.*, burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (*i.e.*, burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



3.2 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

: Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

3.3 PEAK-AVERAGE RATIO.

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle

If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:


- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW ≥ 3 x RBW.
- d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

3.4 OCCUPIED BANDWIDTH.

Test set-up

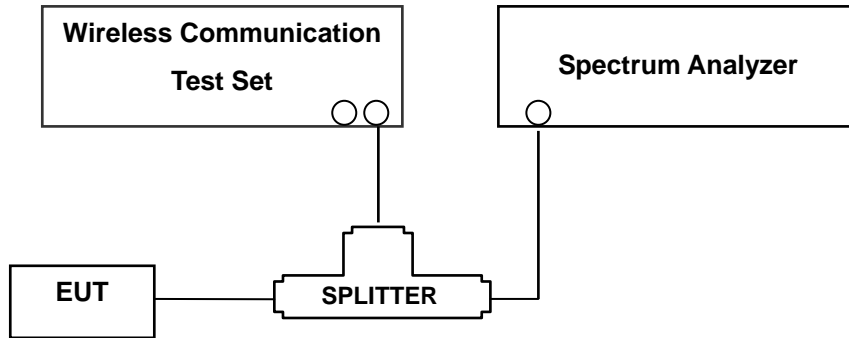

(Configuration of conducted Emission measurement)

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 4.2..

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.



3.5 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;


Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

3.6 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

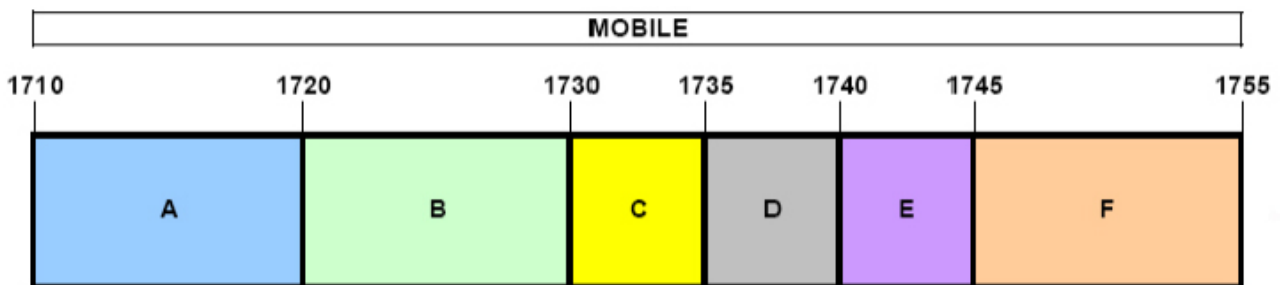

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---



3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency


NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 17, total offset 26.5 dBm = 20 dBm attenuator + 6 dBm Divider + 0.5 dBm RF cables.
- For LTE Band 4, total offset 27.2 dBm = 20 dBm attenuator + 6 dBm Divider + 1.2 dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

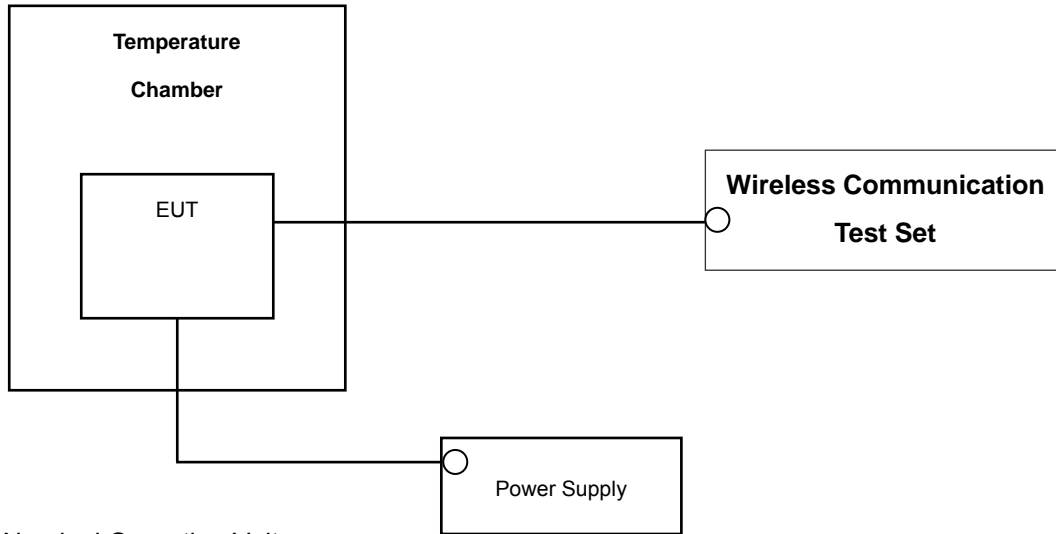

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(LTE Band4). The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency(LTE Band17).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
LG Electronics USA	WCP-300/WCP (FCC ID : BEJWCP300)	303HYR026898	-	-	-
Agilent	N1921A/ Power Sensor	MY45241059	07/11/2013	Annual	07/11/2014
Agilent	N1911A/ Power Meter	MY45100523	01/24/2014	Annual	01/24/2015
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	09/12/2013	Annual	09/12/2014
Wainwright	WHK1.2/15G-10EF/H.P.F	4	06/24/2013	Annual	06/24/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	2	06/24/2013	Annual	06/24/2014
Hewlett Packard	11667B / Power Splitter	10545	02/22/2014	Annual	02/22/2015
Digital	EP-3010/ Power Supply	3110117	10/29/2013	Annual	10/29/2014
Schwarzbeck	UHAP/ Dipole Antenna	557	03/05/2013	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	05/03/2013	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	10/30/2013	Annual	10/30/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	1191	12/03/2013	Biennial	12/03/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	10/05/2013	Biennial	10/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	04/09/2014	Annual	04/09/2015
WEINSCHL	ATTENUATOR	BR0592	10/28/2013	Annual	10/28/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/10/2013	Annual	06/10/2014
Agilent	8960 (E5515C)/ Base Station	GB45070669	08/31/2013	Annual	08/31/2014

FCC CERTIFICATION REPORT

www.hct.co.kr		
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
		FCC ID: ZNF0855P

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 27.53	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(g), 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all-of-band emissions		PASS
27.50(d)(5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS
2.1046	Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
27.50(c)(10)	Effective Radiated Power (Band 17)	$< 3 \text{ Watts max. ERP}$	RADIATED	PASS
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	$< 1 \text{ Watts max. EIRP}$		PASS
				PASS
2.1053, 27.53(g), 27.53(h)	Undesirable Out-of-Band Emissions	$< 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
LTE	23755	706.5	-28.75	29.60	-10.21	0.76	V	0.073	18.63

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT_stand alone

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-28.75	29.60	-10.21	0.76	V	0.073	18.63
		16-QAM	-28.66	29.69	-10.21	0.76	V	0.074	18.72
710.0		QPSK	-28.59	29.80	-10.22	0.77	V	0.076	18.81
		16-QAM	-28.55	29.84	-10.22	0.77	V	0.077	18.85
713.5		QPSK	-29.61	29.18	-10.24	0.78	V	0.065	18.16
		16-QAM	-29.55	29.24	-10.24	0.78	V	0.066	18.22

Effective Radiated Power Data (Band 17 – 5 MHz)

Note: Worst case is 1 resource block

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-28.58	29.78	-10.22	0.79	V	0.075	18.77
		16-QAM	-28.19	30.17	-10.22	0.79	V	0.082	19.16
710.0		QPSK	-28.42	29.97	-10.22	0.77	V	0.079	18.98
		16-QAM	-28.12	30.27	-10.22	0.77	V	0.085	19.28
711.0		QPSK	-28.37	30.20	-10.23	0.77	V	0.083	19.20
		16-QAM	-28.12	30.45	-10.23	0.77	V	0.088	19.45

Effective Radiated Power Data (Band 17 – 10 MHz)

Note: Worst case is 1 resource block.



NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--

7.2 EFFECTIVE RADIATED POWER OUTPUT_with wireless charging pad

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-29.68	28.67	-10.21	0.76	H	0.059	17.70
		16-QAM	-30.26	28.09	-10.21	0.76	H	0.052	17.12
710.0		QPSK	-29.63	28.76	-10.22	0.77	H	0.060	17.77
		16-QAM	-29.47	28.92	-10.22	0.77	H	0.062	17.93
713.5		QPSK	-30.22	28.57	-10.24	0.78	H	0.057	17.55
		16-QAM	-30.20	28.59	-10.24	0.78	H	0.057	17.57

Effective Radiated Power Data (Band 17 – 5 MHz)

Note: Worst case is 1 resource block

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-29.50	28.86	-10.22	0.79	H	0.061	17.85
		16-QAM	-29.11	29.25	-10.22	0.79	H	0.067	18.24
710.0		QPSK	-29.55	28.84	-10.22	0.77	H	0.061	17.85
		16-QAM	-29.02	29.37	-10.22	0.77	H	0.069	18.38
711.0		QPSK	-29.23	29.34	-10.23	0.77	H	0.068	18.34
		16-QAM	-28.81	29.76	-10.23	0.77	H	0.075	18.76

Effective Radiated Power Data (Band 17 – 10 MHz)

Note: Worst case is 1 resource block.



NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--

7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ stand alone

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-17.89	13.69	9.87	1.16	H	0.174	22.40
		16-QAM	-17.85	13.73	9.87	1.16	H	0.175	22.44
1732.5		QPSK	-16.58	14.98	9.90	1.16	H	0.236	23.72
		16-QAM	-16.49	15.07	9.90	1.16	H	0.240	23.81
1754.3		QPSK	-16.75	14.60	10.01	1.17	H	0.221	23.44
		16-QAM	-16.38	14.97	10.01	1.17	H	0.240	23.81

Effective Radiated Power Data (Band 4 – 1.4 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-17.67	13.90	9.87	1.16	H	0.182	22.61
		16-QAM	-17.61	13.96	9.87	1.16	H	0.185	22.67
17325		QPSK	-16.57	14.99	9.90	1.16	H	0.236	23.73
		16-QAM	-16.56	15.00	9.90	1.16	H	0.237	23.74
1753.5		QPSK	-16.76	14.54	10.01	1.17	H	0.218	23.38
		16-QAM	-16.68	14.62	10.01	1.17	H	0.222	23.46

Effective Radiated Power Data (Band 4 – 3 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-17.48	14.03	9.87	1.16	H	0.188	22.74
		16-QAM	-17.40	14.11	9.87	1.16	H	0.191	22.82
1732.5		QPSK	-16.50	15.06	9.90	1.16	H	0.240	23.80
		16-QAM	-16.57	14.99	9.90	1.16	H	0.236	23.73
1752.5		QPSK	-16.65	14.65	10.01	1.17	H	0.223	23.49
		16-QAM	-16.52	14.78	10.01	1.17	H	0.230	23.62

Effective Radiated Power Data (Band 4 – 5 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-16.81	14.84	9.87	1.16	H	0.226	23.55
		16-QAM	-16.76	14.89	9.87	1.16	H	0.229	23.60
1732.5		QPSK	-16.31	15.25	9.90	1.16	H	0.251	23.99
		16-QAM	-16.28	15.28	9.90	1.16	H	0.252	24.02
1750.0		QPSK	-16.53	14.77	10.01	1.17	H	0.230	23.61
		16-QAM	-16.40	14.90	10.01	1.17	H	0.237	23.74

Effective Radiated Power Data (Band 4 – 10 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-16.84	14.82	9.88	1.16	H	0.226	23.54
		16-QAM	-16.70	14.96	9.88	1.16	H	0.233	23.68
1732.5		QPSK	-16.27	15.29	9.90	1.16	H	0.253	24.03
		16-QAM	-16.30	15.26	9.90	1.16	H	0.251	24.00
1747.5		QPSK	-16.77	14.59	9.99	1.16	H	0.220	23.42
		16-QAM	-16.60	14.76	9.99	1.16	H	0.229	23.59

Effective Radiated Power Data (Band 4 – 15 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-16.79	14.77	9.88	1.16	H	0.223	23.49
		16-QAM	-16.60	14.96	9.88	1.16	H	0.233	23.68
1732.5		QPSK	-16.62	14.94	9.90	1.16	H	0.233	23.68
		16-QAM	-16.48	15.08	9.90	1.16	H	0.241	23.82
1745.0		QPSK	-16.69	14.72	9.96	1.16	H	0.225	23.52
		16-QAM	-16.71	14.70	9.96	1.16	H	0.224	23.50

Effective Radiated Power Data (Band 4 – 20 MHz)

Note: Worst case is 1 resource block.



NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--

7.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ with wireless charging pad

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-16.97	14.61	9.87	1.16	H	0.215	23.32
		16-QAM	-16.81	14.77	9.87	1.16	H	0.223	23.48
1732.5		QPSK	-15.54	16.02	9.90	1.16	H	0.299	24.76
		16-QAM	-15.28	16.28	9.90	1.16	H	0.318	25.02
1754.3		QPSK	-15.43	15.92	10.01	1.17	H	0.299	24.76
		16-QAM	-15.21	16.14	10.01	1.17	H	0.315	24.98

Effective Radiated Power Data (Band 4 – 1.4 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-16.81	14.76	9.87	1.16	H	0.222	23.47
		16-QAM	-16.60	14.97	9.87	1.16	H	0.233	23.68
17325		QPSK	-15.48	16.08	9.90	1.16	H	0.303	24.82
		16-QAM	-15.43	16.13	9.90	1.16	H	0.307	24.87
1753.5		QPSK	-15.60	15.70	10.01	1.17	H	0.284	24.54
		16-QAM	-15.29	16.01	10.01	1.17	H	0.305	24.85

Effective Radiated Power Data (Band 4 – 3 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-16.68	14.83	9.87	1.16	H	0.226	23.54
		16-QAM	-16.56	14.95	9.87	1.16	H	0.232	23.66
1732.5		QPSK	-15.43	16.13	9.90	1.16	H	0.307	24.87
		16-QAM	-15.37	16.19	9.90	1.16	H	0.311	24.93
1752.5		QPSK	-15.59	15.71	10.01	1.17	H	0.285	24.55
		16-QAM	-15.20	16.10	10.01	1.17	H	0.312	24.94

Effective Radiated Power Data (Band 4 – 5 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-16.06	15.59	9.87	1.16	H	0.269	24.30
		16-QAM	-15.87	15.78	9.87	1.16	H	0.281	24.49
1732.5		QPSK	-15.19	16.37	9.90	1.16	H	0.324	25.11
		16-QAM	-15.08	16.48	9.90	1.16	H	0.333	25.22
1750.0		QPSK	-15.42	15.88	10.01	1.17	H	0.296	24.72
		16-QAM	-15.15	16.15	10.01	1.17	H	0.316	24.99

Effective Radiated Power Data (Band 4 – 10 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-15.92	15.74	9.88	1.16	H	0.279	24.46
		16-QAM	-16.07	15.59	9.88	1.16	H	0.270	24.31
1732.5		QPSK	-15.25	16.31	9.90	1.16	H	0.320	25.05
		16-QAM	-15.38	16.18	9.90	1.16	H	0.310	24.92
1747.5		QPSK	-15.54	15.82	9.99	1.16	H	0.292	24.65
		16-QAM	-15.30	16.06	9.99	1.16	H	0.308	24.89

Effective Radiated Power Data (Band 4 – 15 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-15.82	15.74	9.88	1.16	H	0.279	24.46
		16-QAM	-15.70	15.86	9.88	1.16	H	0.287	24.58
1732.5		QPSK	-15.26	16.30	9.90	1.16	H	0.319	25.04
		16-QAM	-14.95	16.61	9.90	1.16	H	0.343	25.35
1745.0		QPSK	-15.48	15.93	9.96	1.16	H	0.297	24.73
		16-QAM	-15.30	16.11	9.96	1.16	H	0.310	24.91

Effective Radiated Power Data (Band 4 – 20 MHz)

Note: Worst case is 1 resource block.



NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--



7.5 RADIATED SPURIOUS EMISSIONS_stand alone

7.5.1 RADIATED SPURIOUS EMISSIONS (Band 17)

OPERATING FREQUENCY : 706.50 MHz
 MEASURED OUTPUT POWER: 18.85 dBm = 0.077W
 MODULATION SIGNAL: 5 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.85 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1413.0	-39.53	5.67	-43.60	1.05	V	-38.98	57.83
	2119.5	-49.82	7.40	-54.06	1.2	V	-47.86	66.71
	2826.0	-44.14	8.69	-47.61	1.46	V	-40.38	59.23
23790 (710.00)	1420.0	-37.87	5.71	-42.64	1.05	V	-37.98	56.83
	2130.0	-48.21	7.34	-52.33	1.24	V	-46.23	65.08
	2840.0	-42.82	8.75	-46.64	1.48	V	-39.37	58.22
23825 (713.50)	1427.0	-38.98	5.75	-43.59	1.04	V	-38.88	57.73
	2140.5	-42.88	7.27	-46.57	1.22	V	-40.52	59.37
	2854.0	-42.90	8.80	-46.60	1.46	V	-39.26	58.11

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



OPERATING FREQUENCY : 710.00 MHz
 MEASURED OUTPUT POWER: 19.45 dBm = 0.088W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.45 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1418.0	-39.01	5.70	-43.11	1.05	V	-38.46	57.91
	2127.0	-49.45	7.36	-53.60	1.23	V	-47.47	66.92
	2836.0	-42.71	8.69	-46.17	1.47	V	-38.95	58.40
23790 (710.00)	1420.0	-38.47	5.71	-43.24	1.05	V	-38.58	58.03
	2130.0	-49.64	7.34	-53.76	1.24	V	-47.66	67.11
	2840.0	-42.41	8.75	-46.23	1.48	V	-38.96	58.41
23800 (711.00)	1422.0	-37.70	5.72	-42.27	1.05	V	-37.60	57.05
	2133.0	-49.60	7.33	-53.69	1.24	V	-47.60	67.05
	2844.0	-42.14	8.77	-45.82	1.47	V	-38.52	57.97

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.5.2 RADIATED SPURIOUS EMISSIONS (Band 4)

OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 23.81 dBm = 0.240W
 MODULATION SIGNAL: 1.4 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.81 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-45.05	12.36	-51.89	1.64	H	-41.17	64.98
	5,132.10	-29.10	12.34	-29.30	2.01	H	-18.97	42.78
	6,842.80	-33.53	12.17	-27.92	2.35	H	-18.10	41.91
20175 (1732.5)	3,465.00	-44.35	12.27	-50.88	1.63	H	-40.24	64.05
	5,197.50	-33.89	12.63	-34.44	2.11	H	-23.92	47.73
	6,930.00	-40.54	11.87	-34.39	2.41	H	-24.93	48.74
20393 (1754.3)	3,508.60	-44.79	12.15	-50.55	1.67	H	-40.07	63.88
	5,262.90	-33.56	12.91	-35.10	2.03	H	-24.22	48.03
	7,017.20	-38.62	11.59	-31.75	2.38	H	-22.54	46.35

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 23.74 dBm = 0.237W
 MODULATION SIGNAL: 3 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.74 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-44.15	12.36	-50.99	1.64	H	-40.27	64.01
	5,134.50	-31.33	12.35	-31.55	2.00	H	-21.20	44.94
	6,846.00	-36.55	12.16	-30.92	2.36	H	-21.12	44.86
20175 (1732.5)	3,465.00	-44.55	12.27	-51.08	1.63	H	-40.44	64.18
	5,197.50	-32.76	12.63	-33.31	2.11	H	-22.79	46.53
	6,930.00	-39.95	11.87	-33.80	2.41	H	-24.34	48.08
20385 (1753.5)	3,507.00	-45.33	12.15	-51.09	1.67	H	-40.61	64.35
	5,260.50	-32.31	12.90	-33.85	2.02	H	-22.97	46.71
	7,014.00	-39.47	11.59	-32.65	2.33	H	-23.39	47.13

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



OPERATING FREQUENCY : _____ 1732.50 MHz
 MEASURED OUTPUT POWER: _____ 23.80 dBm = 0.240W
 MODULATION SIGNAL: _____ 5 MHz QPSK
 DISTANCE: _____ 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ _____ 36.80 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3425.0	-44.24	12.35	-51.08	1.63	H	-40.36	64.16
	5137.5	-32.52	12.36	-32.76	1.99	H	-22.39	46.19
	6850.0	-36.29	12.15	-30.65	2.36	H	-20.86	44.66
20175 (1732.5)	3465.0	-44.33	12.27	-50.86	1.63	H	-40.22	64.02
	5197.5	-31.94	12.63	-32.49	2.11	H	-21.97	45.77
	6930.0	-40.36	11.87	-34.21	2.41	H	-24.75	48.55
20375 (1752.5)	3505.0	-45.22	12.15	-50.98	1.67	H	-40.50	64.30
	5257.5	-32.40	12.90	-33.85	2.02	H	-22.97	46.77
	7010.0	-39.05	11.61	-32.45	2.36	H	-23.20	47.00

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 24.02 dBm = 0.252W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3430.0	-44.17	12.34	-51.26	1.63	H	-40.55	64.57
	5145.0	-32.38	12.38	-32.54	1.97	H	-22.13	46.15
	6860.0	-38.62	12.11	-33.18	2.38	H	-23.45	47.47
20175 (1732.5)	3465.0	-45.30	12.27	-51.83	1.63	H	-41.19	65.21
	5197.5	-33.20	12.63	-33.75	2.11	H	-23.23	47.25
	6930.0	-40.43	11.87	-34.28	2.41	H	-24.82	48.84
20350 (1750.0)	3500.0	-45.29	12.15	-51.30	1.66	H	-40.81	64.83
	5250.0	-32.85	12.87	-34.26	2.03	H	-23.42	47.44
	7000.0	-39.20	11.65	-32.52	2.39	H	-23.26	47.28

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 24.03 dBm = 0.253W
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.03 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3435.0	-44.42	12.34	-51.23	1.63	H	-40.52	64.55
	5152.5	-32.44	12.40	-32.63	1.96	H	-22.19	46.22
	6870.0	-37.21	12.08	-32.01	2.36	H	-22.29	46.32
20175 (1732.5)	3465.0	-44.80	12.27	-51.33	1.63	H	-40.69	64.72
	5197.5	-32.67	12.63	-33.22	2.11	H	-22.70	46.73
	6930.0	-39.80	11.87	-33.65	2.41	H	-24.19	48.22
20325 (1747.5)	3495.0	-45.74	12.17	-51.78	1.65	H	-41.26	65.29
	5242.5	-32.67	12.83	-33.86	1.99	H	-23.02	47.05
	6990.0	-39.08	11.68	-31.76	2.38	H	-22.46	46.49

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 23.82 dBm = 0.241W
 MODULATION SIGNAL: 20 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.82 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3440.0	-44.00	12.33	-50.79	1.64	H	-40.10	63.92
	5160.0	-32.08	12.44	-32.42	1.98	H	-21.96	45.78
	6880.0	-41.21	12.04	-36.12	2.37	H	-26.45	50.27
20175 (1732.5)	3465.0	-44.11	12.27	-50.64	1.63	H	-40.00	63.82
	5197.5	-31.92	12.63	-32.47	2.11	H	-21.95	45.77
	6930.0	-39.86	11.87	-33.71	2.41	H	-24.25	48.07
20300 (1745.0)	3490.0	-45.63	12.18	-51.82	1.65	H	-41.29	65.11
	5235.0	-33.46	12.81	-34.63	1.99	H	-23.81	47.63
	6980.0	-38.70	11.71	-31.83	2.37	H	-22.49	46.31

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.6 RADIATED SPURIOUS EMISSIONS_ with wireless charging pad

7.6.1 RADIATED SPURIOUS EMISSIONS (Band 17)

OPERATING FREQUENCY : _____ 706.50 MHz
 MEASURED OUTPUT POWER: _____ 17.93 dBm = 0.062W
 MODULATION SIGNAL: _____ 5 MHz 16-QAM
 DISTANCE: _____ 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ _____ 30.93 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1413.0	-40.58	5.67	-44.65	1.05	H	-40.03	57.96
	2119.5	-49.58	7.40	-53.82	1.2	H	-47.62	65.55
	2826.0	-45.95	8.69	-49.42	1.46	H	-42.19	60.12
23790 (710.00)	1420.0	-38.13	5.71	-42.90	1.05	H	-38.24	56.17
	2130.0	-46.88	7.34	-51.00	1.24	H	-44.90	62.83
	2840.0	-46.10	8.75	-49.92	1.48	H	-42.65	60.58
23825 (713.50)	1427.0	-38.73	5.75	-43.34	1.04	H	-38.63	56.56
	2140.5	-43.33	7.27	-47.02	1.22	H	-40.97	58.90
	2854.0	-46.12	8.80	-49.82	1.46	H	-42.48	60.41

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



OPERATING FREQUENCY : 710.00 MHz
 MEASURED OUTPUT POWER: 18.76 dBm = 0.075W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1418.0	-38.70	5.70	-42.80	1.05	H	-38.15	56.91
	2127.0	-44.54	7.36	-48.69	1.23	H	-42.56	61.32
	2836.0	-45.83	8.69	-49.29	1.47	H	-42.07	60.83
23790 (710.00)	1420.0	-38.58	5.71	-43.35	1.05	H	-38.69	57.45
	2130.0	-42.83	7.34	-46.95	1.24	H	-40.85	59.61
	2840.0	-46.52	8.75	-50.34	1.48	H	-43.07	61.83
23800 (711.00)	1422.0	-38.61	5.72	-43.18	1.05	H	-38.51	57.27
	2133.0	-43.50	7.33	-47.59	1.24	H	-41.50	60.26
	2844.0	-46.70	8.77	-50.38	1.47	H	-43.08	61.84

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

7.6.2 RADIATED SPURIOUS EMISSIONS (Band 4)

OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 25.02 dBm = 0.318W
 MODULATION SIGNAL: 1.4 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-46.09	12.36	-52.93	1.64	H	-42.21	67.23
	5,132.10	-37.12	12.34	-37.32	2.01	H	-26.99	52.01
	6,842.80	-35.51	12.17	-29.90	2.35	H	-20.08	45.10
20175 (1732.5)	3,465.00	-45.96	12.27	-52.49	1.63	H	-41.85	66.87
	5,197.50	-38.86	12.63	-39.41	2.11	H	-28.89	53.91
	6,930.00	-38.37	11.87	-32.22	2.41	H	-22.76	47.78
20393 (1754.3)	3,508.60	-45.85	12.15	-51.61	1.67	H	-41.13	66.15
	5,262.90	-35.86	12.91	-37.40	2.03	H	-26.52	51.54
	7,017.20	-39.71	11.59	-32.84	2.38	H	-23.63	48.65

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 24.87 dBm = 0.307W
 MODULATION SIGNAL: 3 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.87 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-45.48	12.36	-52.32	1.64	H	-41.60	66.47
	5,134.50	-35.96	12.35	-36.18	2.00	H	-25.83	50.70
	6,846.00	-36.14	12.16	-30.51	2.36	H	-20.71	45.58
20175 (1732.5)	3,465.00	-45.87	12.27	-52.40	1.63	H	-41.76	66.63
	5,197.50	-37.39	12.63	-37.94	2.11	H	-27.42	52.29
	6,930.00	-38.20	11.87	-32.05	2.41	H	-22.59	47.46
20385 (1753.5)	3,507.00	-45.91	12.15	-51.67	1.67	H	-41.19	66.06
	5,260.50	-36.13	12.90	-37.67	2.02	H	-26.79	51.66
	7,014.00	-40.00	11.59	-33.18	2.33	H	-23.92	48.79

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 24.94 dBm = 0.312W
 MODULATION SIGNAL: 5 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.94 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3425.0	-46.51	12.35	-53.35	1.63	H	-42.63	67.57
	5137.5	-36.51	12.36	-36.75	1.99	H	-26.38	51.32
	6850.0	-38.08	12.15	-32.44	2.36	H	-22.65	47.59
20175 (1732.5)	3465.0	-45.80	12.27	-52.33	1.63	H	-41.69	66.63
	5197.5	-30.33	12.63	-30.88	2.11	H	-20.36	45.30
	6930.0	-36.94	11.87	-30.79	2.41	H	-21.33	46.27
20375 (1752.5)	3505.0	-45.26	12.15	-51.02	1.67	H	-40.54	65.48
	5257.5	-37.30	12.90	-38.75	2.02	H	-27.87	52.81
	7010.0	-41.62	11.61	-35.02	2.36	H	-25.77	50.71

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 25.22 dBm = 0.333W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.22 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3430.0	-46.70	12.34	-53.79	1.63	H	-43.08	68.30
	5145.0	-36.27	12.38	-36.43	1.97	H	-26.02	51.24
	6860.0	-36.47	12.11	-31.03	2.38	H	-21.30	46.52
20175 (1732.5)	3465.0	-45.60	12.27	-52.13	1.63	H	-41.49	66.71
	5197.5	-36.37	12.63	-36.92	2.11	H	-26.40	51.62
	6930.0	-38.18	11.87	-32.03	2.41	H	-22.57	47.79
20350 (1750.0)	3500.0	-45.90	12.15	-51.91	1.66	H	-41.42	66.64
	5250.0	-37.02	12.87	-38.43	2.03	H	-27.59	52.81
	7000.0	-39.49	11.65	-32.81	2.39	H	-23.55	48.77

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 25.05 dBm = 0.320W
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3435.0	-47.13	12.34	-53.94	1.63	H	-43.23	68.28
	5152.5	-36.33	12.40	-36.52	1.96	H	-26.08	51.13
	6870.0	-35.87	12.08	-30.67	2.36	H	-20.95	46.00
20175 (1732.5)	3465.0	-44.92	12.27	-51.45	1.63	H	-40.81	65.86
	5197.5	-37.38	12.63	-37.93	2.11	H	-27.41	52.46
	6930.0	-38.36	11.87	-32.21	2.41	H	-22.75	47.80
20325 (1747.5)	3495.0	-45.93	12.17	-51.97	1.65	H	-41.45	66.50
	5242.5	-37.16	12.83	-38.35	1.99	H	-27.51	52.56
	6990.0	-41.48	11.68	-34.16	2.38	H	-24.86	49.91

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 25.35 dBm = 0.343W
 MODULATION SIGNAL: 20 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 38.35 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3440.0	-43.64	12.33	-50.43	1.64	H	-39.74	65.09
	5160.0	-34.76	12.44	-35.10	1.98	H	-24.64	49.99
	6880.0	-38.98	12.04	-33.89	2.37	H	-24.22	49.57
20175 (1732.5)	3465.0	-42.86	12.27	-49.39	1.63	H	-38.75	64.10
	5197.5	-35.17	12.63	-35.72	2.11	H	-25.20	50.55
	6930.0	-39.94	11.87	-33.79	2.41	H	-24.33	49.68
20300 (1745.0)	3490.0	-43.66	12.18	-49.85	1.65	H	-39.32	64.67
	5235.0	-35.63	12.81	-36.80	1.99	H	-25.98	51.33
	6980.0	-40.22	11.71	-33.35	2.37	H	-24.01	49.36

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

7.7 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 17	5 MHz	710.0	QPSK	25	0	5.05
			16-QAM	25	0	5.77
	10 MHz	710.0	QPSK	50	0	5.82
			16-QAM	50	0	5.08

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 4	1.4 MHz	1732.5	QPSK	6	0	5.90
			16-QAM	6	0	6.73
	3 MHz	1732.5	QPSK	15	0	5.84
			16-QAM	15	0	6.65
	5 MHz	1732.5	QPSK	25	0	5.76
			16-QAM	25	0	6.44
	10 MHz	1732.5	QPSK	50	0	5.75
			16-QAM	50	0	6.43
	15 MHz	1732.5	QPSK	75	0	5.60
			16-QAM	75	0	6.36
	20 MHz	1732.5	QPSK	100	0	5.57
			16-QAM	100	0	6.39

- Plots of the EUT's Peak- to- Average Ratio are shown Page 68 ~ 75

7.8 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 17	5	710.0	QPSK	25	0	4.4967
			16-QAM	25	0	4.4986
	10	710.0	QPSK	50	0	8.9535
			16-QAM	50	0	8.9300

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 4	1.4	1732.5	QPSK	6	0	1.0848
			16-QAM	6	0	1.0828
	3	1732.5	QPSK	15	0	2.6901
			16-QAM	15	0	2.6915
	5	1732.5	QPSK	25	0	4.4997
			16-QAM	25	0	4.4974
	10	1732.5	QPSK	50	0	8.9624
			16-QAM	50	0	8.9398
	15	1732.5	QPSK	75	0	13.411
			16-QAM	75	0	13.448
	20	1732.5	QPSK	100	0	17.867
			16-QAM	100	0	17.852

- Plots of the EUT's Occupied Bandwidth are shown Page 60 ~ 67.

7.9 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 17	5	706.5	QPSK	1	0	6.974750	-26.46
		710.0		1	0	6.941750	-26.86
		713.5		1	0	6.999750	-26.01
	10	709.0		1	0	6.980250	-27.06
		710.0		1	0	6.969750	-26.85
		711.0		1	0	6.976750	-26.20

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 4	1.4	1710.7	QPSK	1	0	6.989740	-25.79
		1732.5		1	0	6.997440	-26.62
		1754.3		1	0	6.961190	-26.70
	3	1711.5		1	0	6.994720	-26.37
		1732.5		1	0	6.981130	-26.14
		1753.5		1	0	6.980680	-26.39
	5	1712.5		1	0	6.999260	-26.17
		1732.5		1	0	6.986570	-26.38
		1752.5		1	0	6.960740	-25.96
	10	1715.0		1	0	6.603180	-26.46
		1732.5		1	0	6.971160	-26.33
		1750.0		1	0	6.916780	-25.62
	15	1717.5		1	0	6.980680	-26.34
		1732.5		1	0	6.987470	-25.49
		1747.5		1	0	4.791350	-26.66
	20	1720.0		1	0	6.917680	-26.02
		1732.5		1	0	6.982940	-25.32
		1745.0		1	0	6.986110	-25.97

- Plots of the EUT's Conducted Spurious Emissions are shown Page 92~ 115.

7.9.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 76 ~ 91

7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.10.1 FREQUENCY STABILITY (LTE Band 17)

OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23790 (5 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	709 999 999	0	0.000 000	0.000
100%		-30	709 999 993	-5.60	-0.000 001	-0.008
100%		-20	710 000 001	2.30	0.000 000	0.003
100%		-10	709 999 996	-2.50	0.000 000	-0.004
100%		0	709 999 994	-4.50	-0.000 001	-0.006
100%		+10	709 999 994	-4.10	-0.000 001	-0.006
100%		+30	709 999 995	-3.30	0.000 000	-0.005
100%		+40	709 999 995	-3.50	0.000 000	-0.005
100%		+50	709 999 995	-3.60	-0.000 001	-0.005
115%	4.37	+20	710 000 001	2.40	0.000 000	0.003
Batt. Endpoint	3.23	+20	709 999 995	-3.50	0.000 000	-0.005

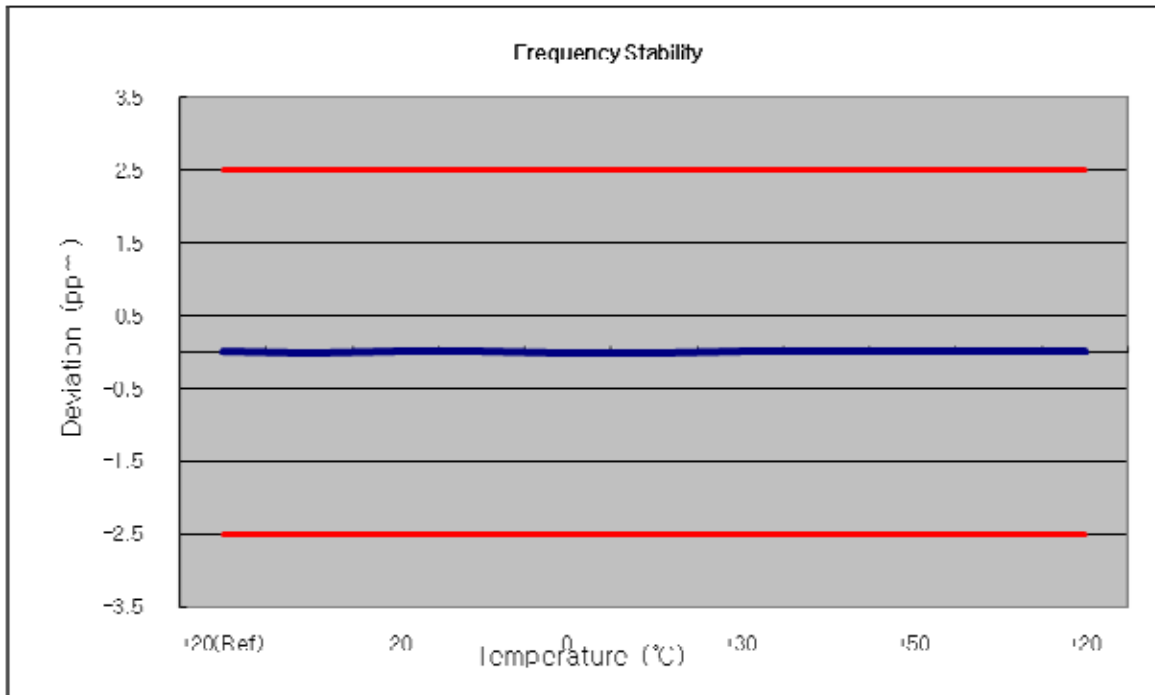


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23790 (10 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	710 000 004	0	0.000 000	0.000
100%		-30	710 000 001	-2.70	0.000 000	-0.004
100%		-20	710 000 000	-4.20	-0.000 001	-0.006
100%		-10	710 000 002	-2.20	0.000 000	-0.003
100%		0	710 000 001	-3.60	-0.000 001	-0.005
100%		+10	710 000 000	-4.10	-0.000 001	-0.006
100%		+30	710 000 000	-3.90	-0.000 001	-0.005
100%		+40	710 000 006	2.00	0.000 000	0.003
100%		+50	710 000 000	-3.70	-0.000 001	-0.005
115%		4.37	+20	710 000 000	-3.80	-0.000 001
Batt. Endpoint	3.23	+20	710 000 007	2.90	0.000 000	0.004

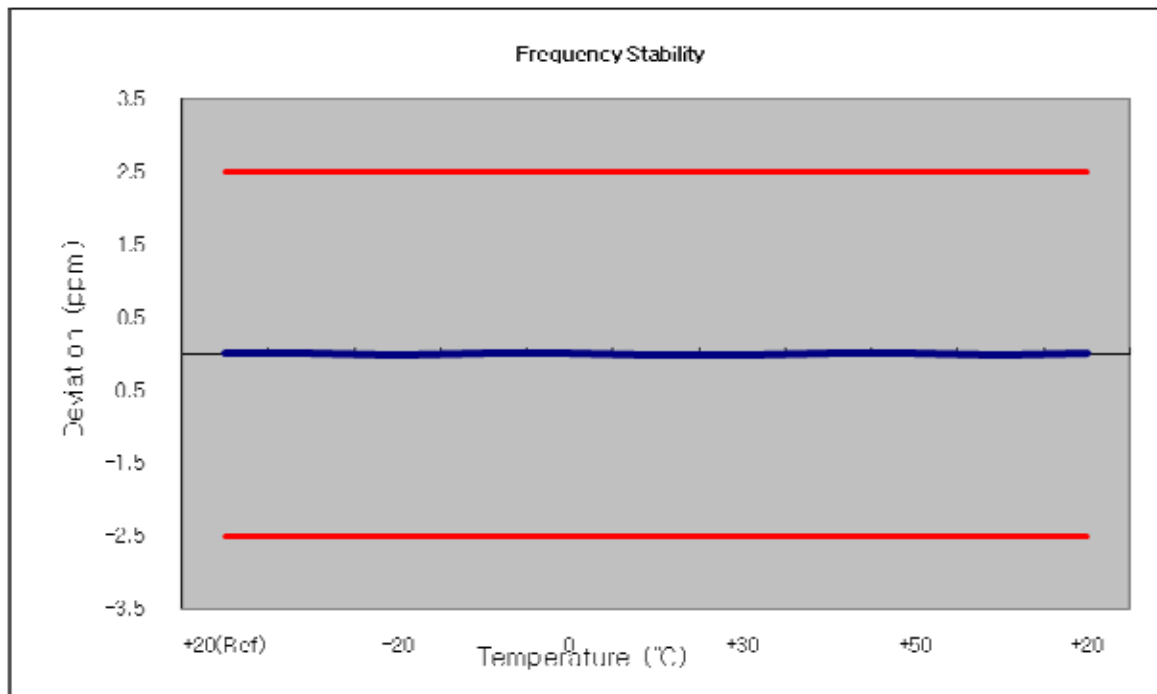


FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

7.10.2 FREQUENCY STABILITY (LTE Band 4)

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (1.4 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 499 993	0	0.000 000	0.000
100%		-30	1732 499 987	-6.70	0.000 000	-0.004
100%		-20	1732 499 984	-9.10	-0.000 001	-0.005
100%		-10	1732 499 982	-11.60	-0.000 001	-0.007
100%		0	1732 500 001	8.10	0.000 000	0.005
100%		+10	1732 499 999	5.70	0.000 000	0.003
100%		+30	1732 500 000	7.10	0.000 000	0.004
100%		+40	1732 499 984	-9.10	-0.000 001	-0.005
100%		+50	1732 499 981	-12.70	-0.000 001	-0.007
115%		4.37	+20	1732 499 998	4.70	0.000 000
Batt. Endpoint	3.23	+20	1732 499 986	-7.00	0.000 000	-0.004

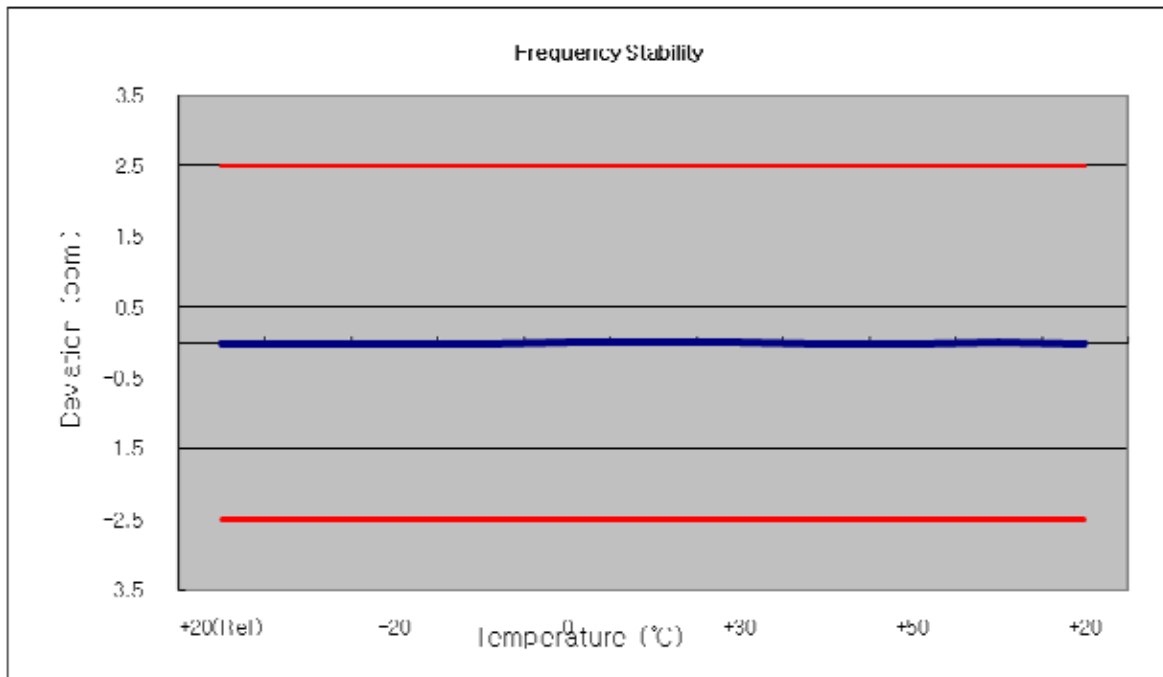


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (3 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 499 994	0	0.000 000	0.000
100%		-30	1732 499 987	-7.90	0.000 000	-0.005
100%		-20	1732 499 988	-6.00	0.000 000	-0.003
100%		-10	1732 500 004	9.20	0.000 001	0.005
100%		0	1732 500 002	7.30	0.000 000	0.004
100%		+10	1732 499 989	-5.90	0.000 000	-0.003
100%		+30	1732 500 003	8.80	0.000 001	0.005
100%		+40	1732 499 990	-4.90	0.000 000	-0.003
100%		+50	1732 499 989	-5.70	0.000 000	-0.003
115%		4.37	+20	1732 500 002	7.60	0.000 000
Batt. Endpoint	3.23	+20	1732 499 987	-7.40	0.000 000	-0.004

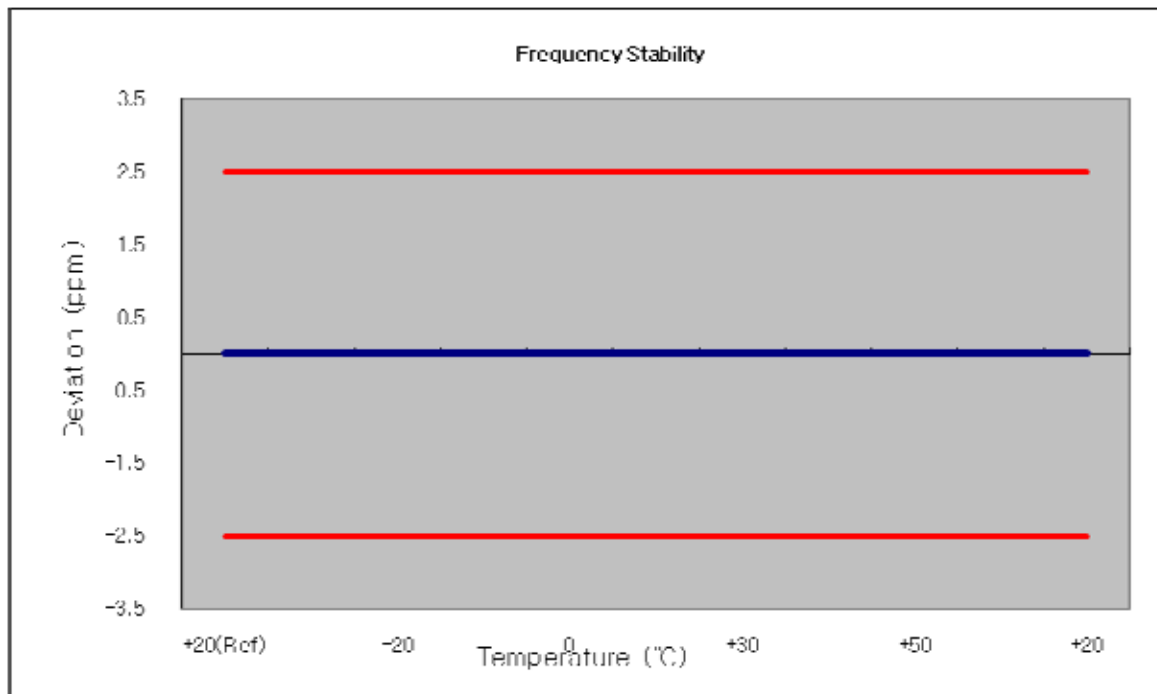


FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (5 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 499 993	0	0.000 000	0.000
100%		-30	1732 499 988	-4.30	0.000 000	-0.002
100%		-20	1732 499 998	5.40	0.000 000	0.003
100%		-10	1732 500 003	10.30	0.000 001	0.006
100%		0	1732 499 999	6.70	0.000 000	0.004
100%		+10	1732 499 986	-6.50	0.000 000	-0.004
100%		+30	1732 500 000	7.20	0.000 000	0.004
100%		+40	1732 499 997	4.70	0.000 000	0.003
100%		+50	1732 499 998	5.00	0.000 000	0.003
115%		4.37	+20	1732 499 985	-7.80	0.000 000
Batt. Endpoint	3.23	+20	1732 500 000	6.80	0.000 000	0.004

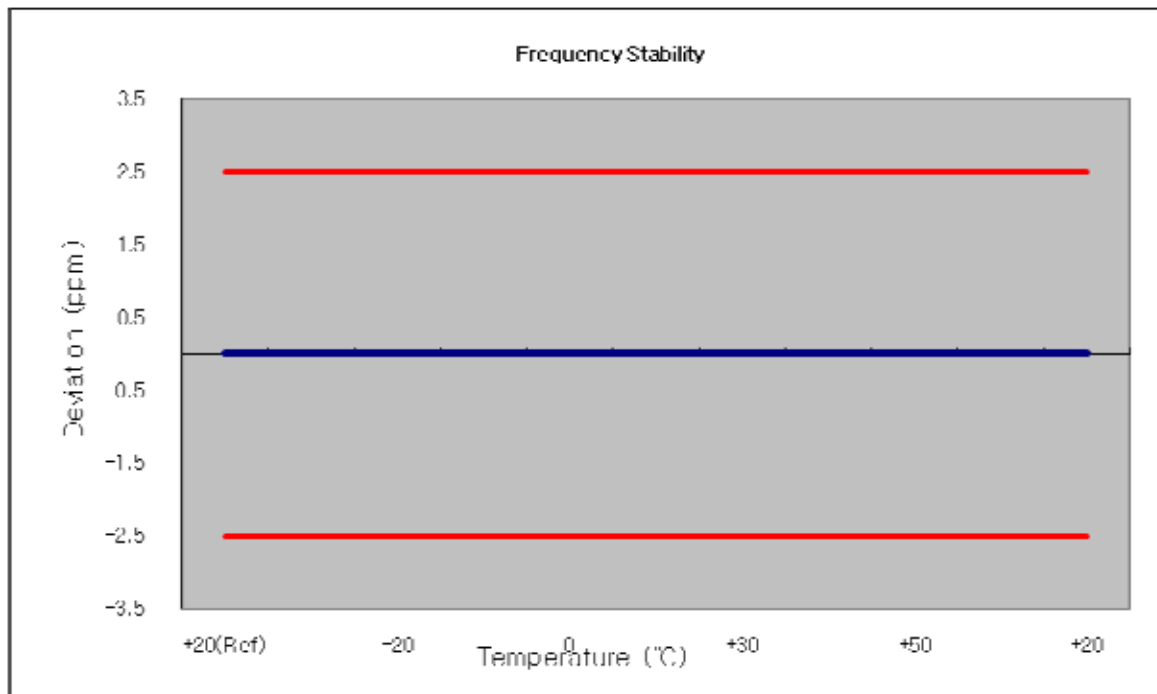


FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (10 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 500 005	0	0.000 000	0.000
100%		-30	1732 500 012	6.30	0.000 000	0.004
100%		-20	1732 500 001	-4.40	0.000 000	-0.003
100%		-10	1732 500 000	-5.00	0.000 000	-0.003
100%		0	1732 500 012	7.00	0.000 000	0.004
100%		+10	1732 500 000	-5.30	0.000 000	-0.003
100%		+30	1732 500 012	6.30	0.000 000	0.004
100%		+40	1732 500 000	-5.70	0.000 000	-0.003
100%		+50	1732 500 000	-5.10	0.000 000	-0.003
115%		4.37	+20	1732 500 014	9.10	0.000 001
Batt. Endpoint	3.23	+20	1732 500 000	-5.20	0.000 000	-0.003

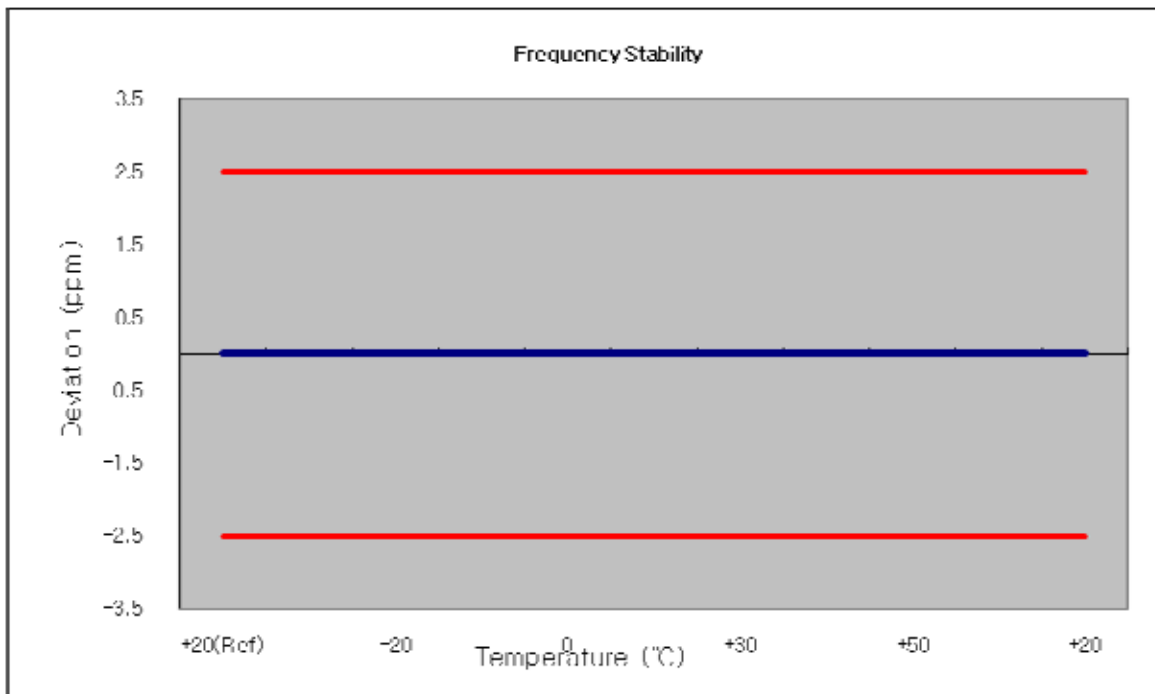


FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (15 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 500 008	0	0.000 000	0.000
100%		-30	1732 500 014	5.70	0.000 000	0.003
100%		-20	1732 500 011	2.50	0.000 000	0.001
100%		-10	1732 500 017	8.80	0.000 001	0.005
100%		0	1732 500 013	4.50	0.000 000	0.003
100%		+10	1732 500 012	3.70	0.000 000	0.002
100%		+30	1732 500 003	-5.00	0.000 000	-0.003
100%		+40	1732 500 014	5.40	0.000 000	0.003
100%		+50	1732 500 016	7.30	0.000 000	0.004
115%		4.37	+20	1732 500 003	-5.50	0.000 000
Batt. Endpoint	3.23	+20	1732 500 011	2.70	0.000 000	0.002

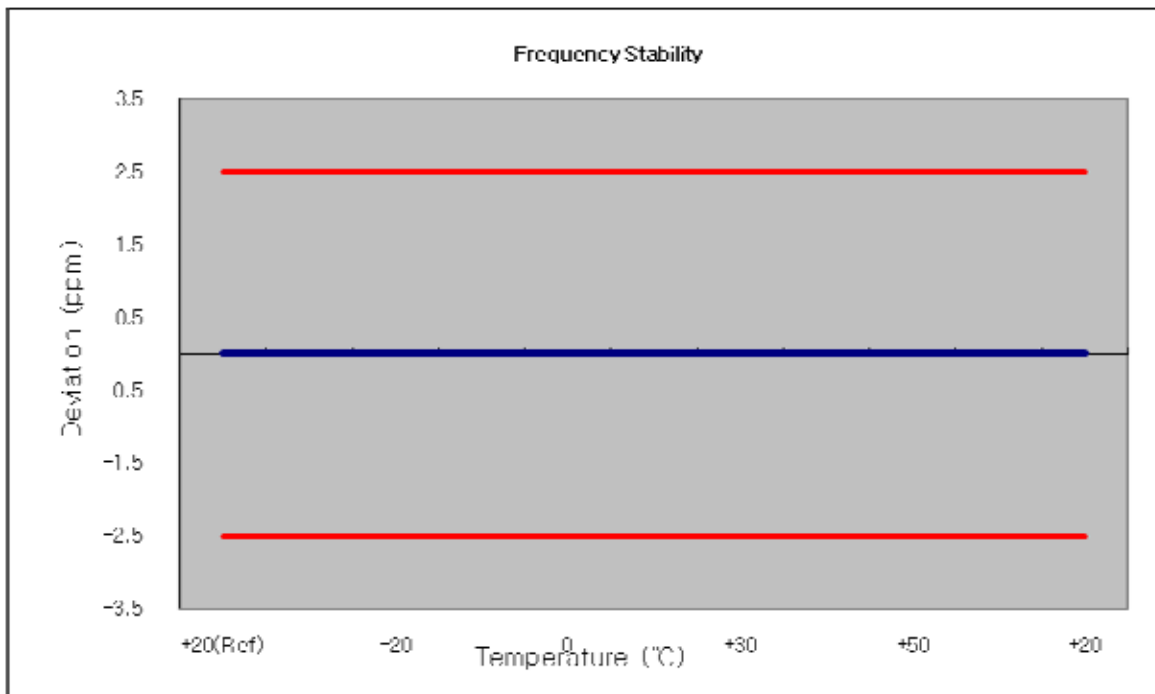


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (20 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1732 500 003	0	0.000 000	0.000
100%		-30	1732 500 007	4.20	0.000 000	0.002
100%		-20	1732 499 998	-4.50	0.000 000	-0.003
100%		-10	1732 499 998	-4.70	0.000 000	-0.003
100%		0	1732 500 008	4.90	0.000 000	0.003
100%		+10	1732 499 998	-5.00	0.000 000	-0.003
100%		+30	1732 500 009	6.40	0.000 000	0.004
100%		+40	1732 499 998	-4.90	0.000 000	-0.003
100%		+50	1732 500 011	7.60	0.000 000	0.004
115%		4.37	+20	1732 500 008	4.80	0.000 000
Batt. Endpoint	3.23	+20	1732 499 998	-4.60	0.000 000	-0.003

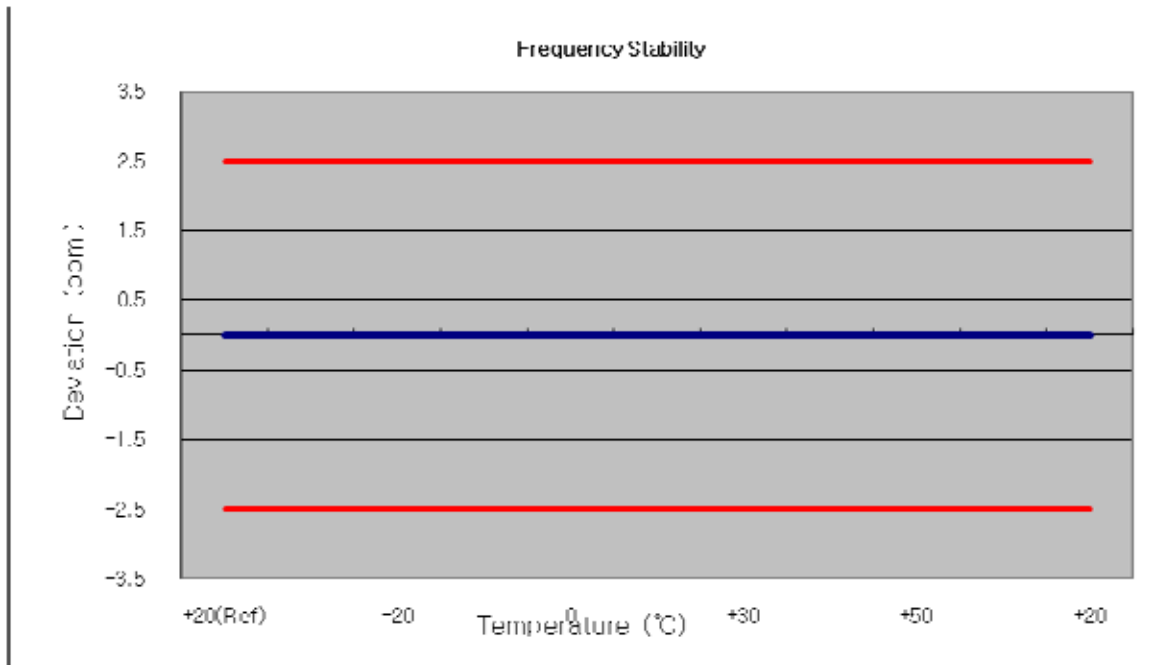




8. TEST PLOTS

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 17. Occupied Bandwidth Plot (23790ch_5MHz_QPSK_RB 25)




BAND 17. Occupied Bandwidth Plot (23790ch_5MHz_16-QAM_RB 25)

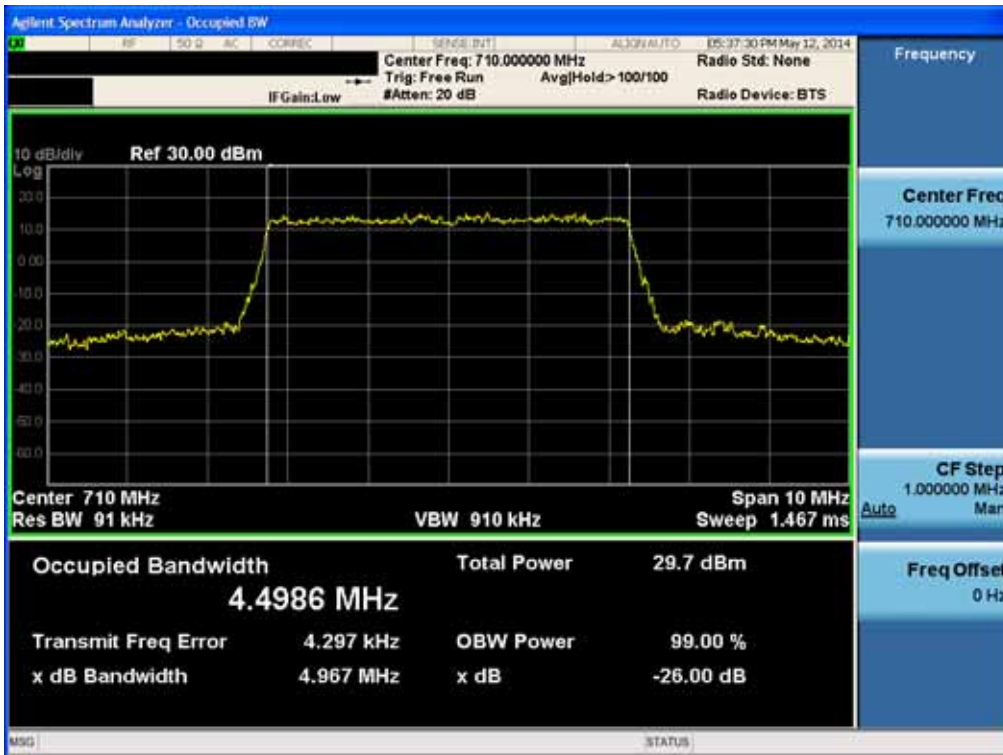

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. Occupied Bandwidth Plot (23790ch_10MHz_QPSK_RB 50)

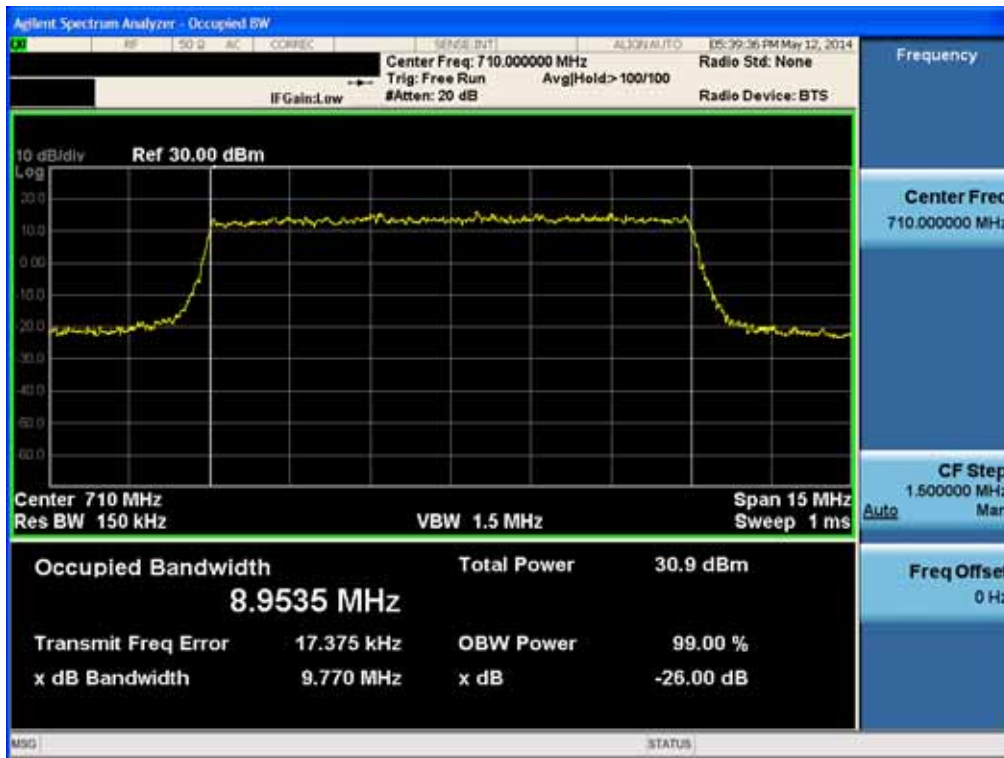


BAND 17. Occupied Bandwidth Plot (23790ch_10MHz_16-QAM_RB 50)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

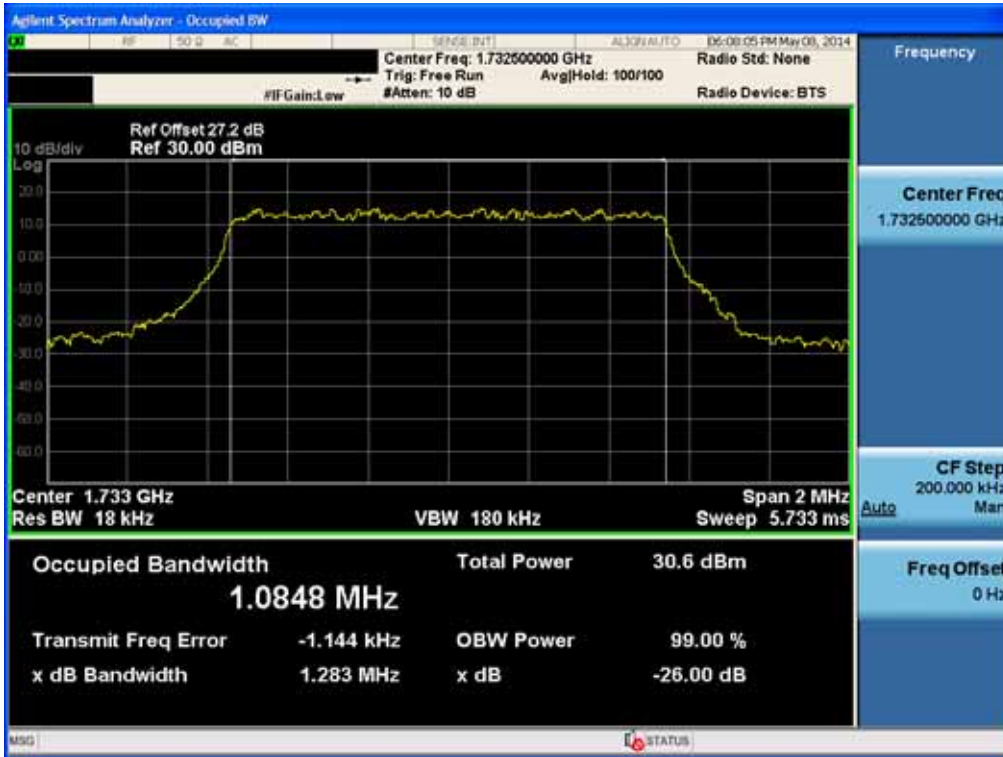

BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)




BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)

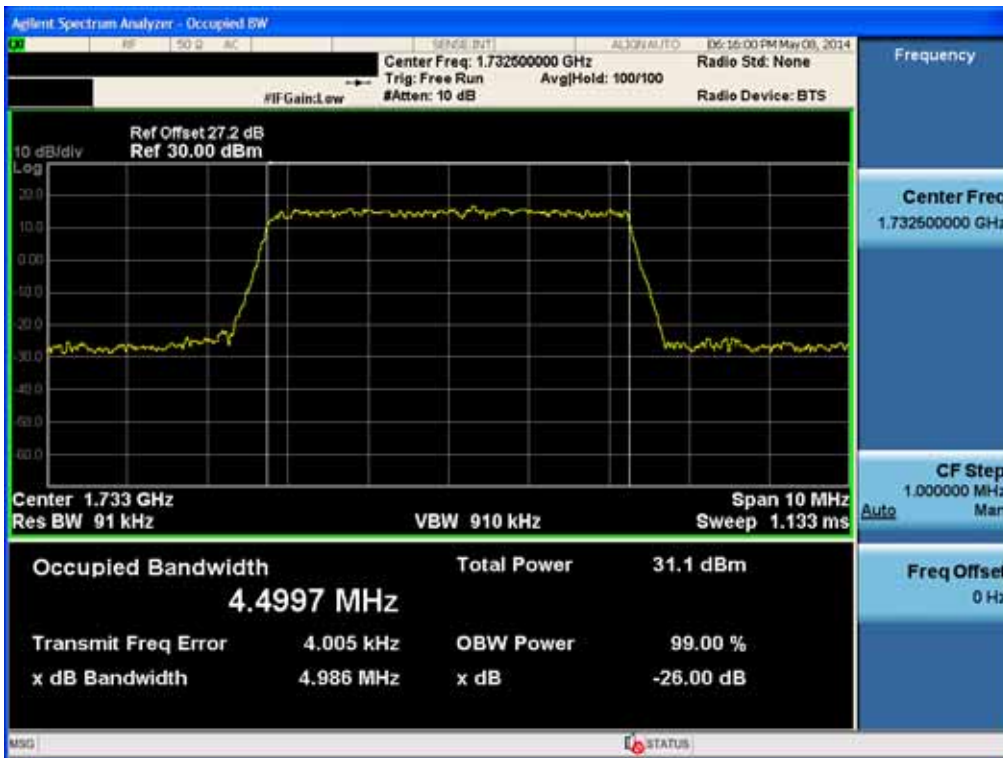


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

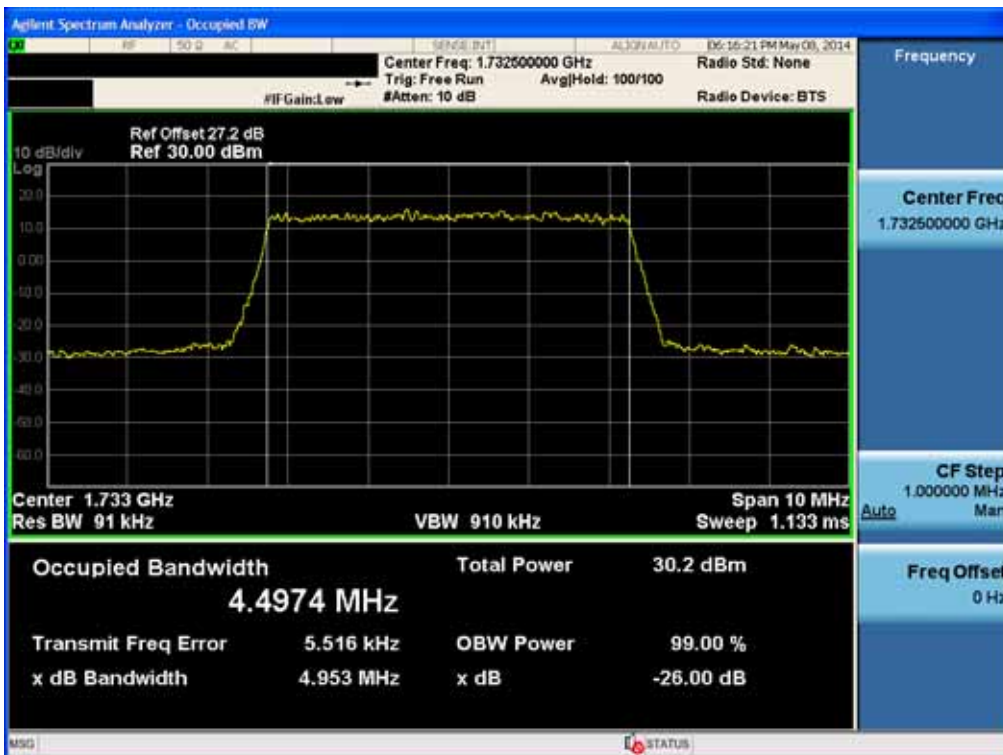


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

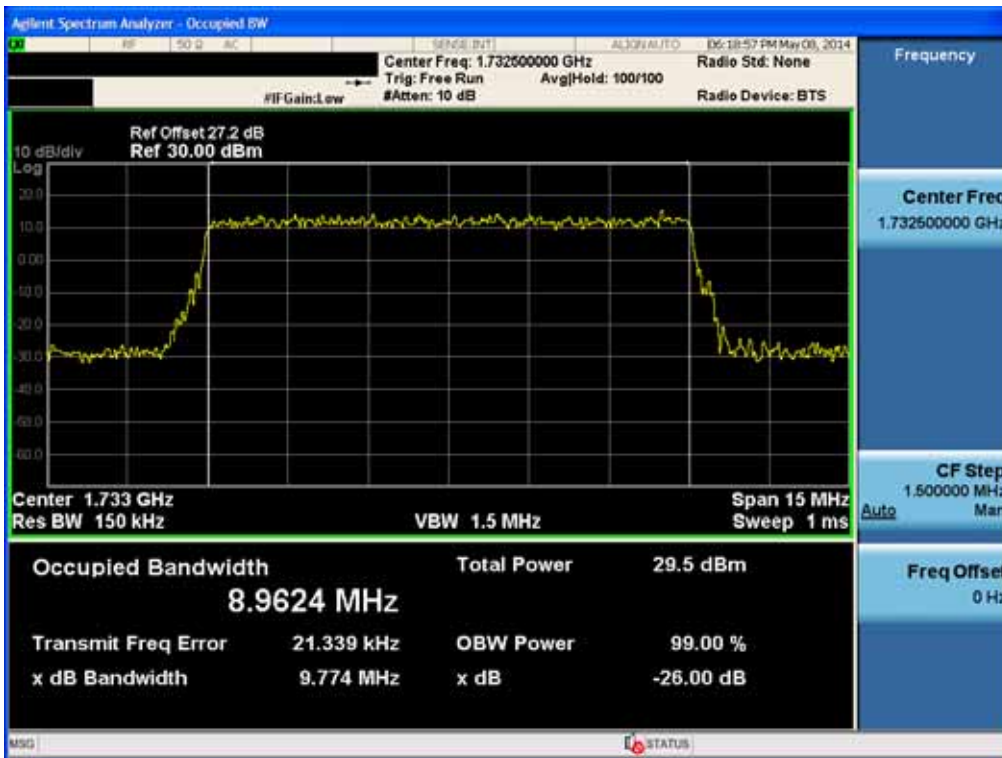


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

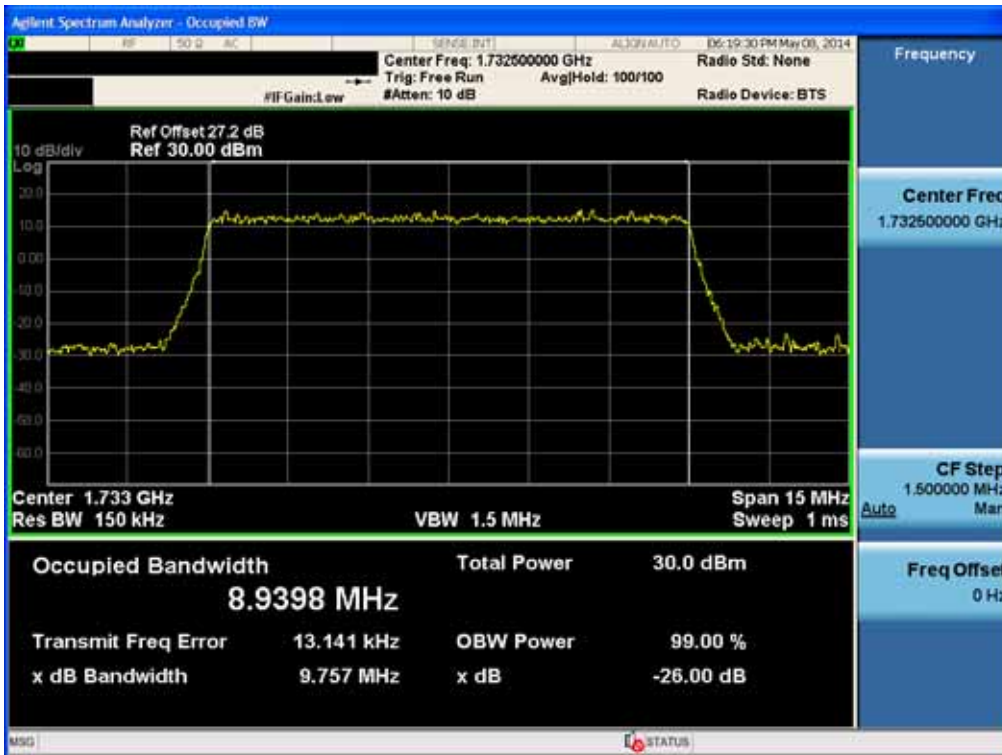


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)

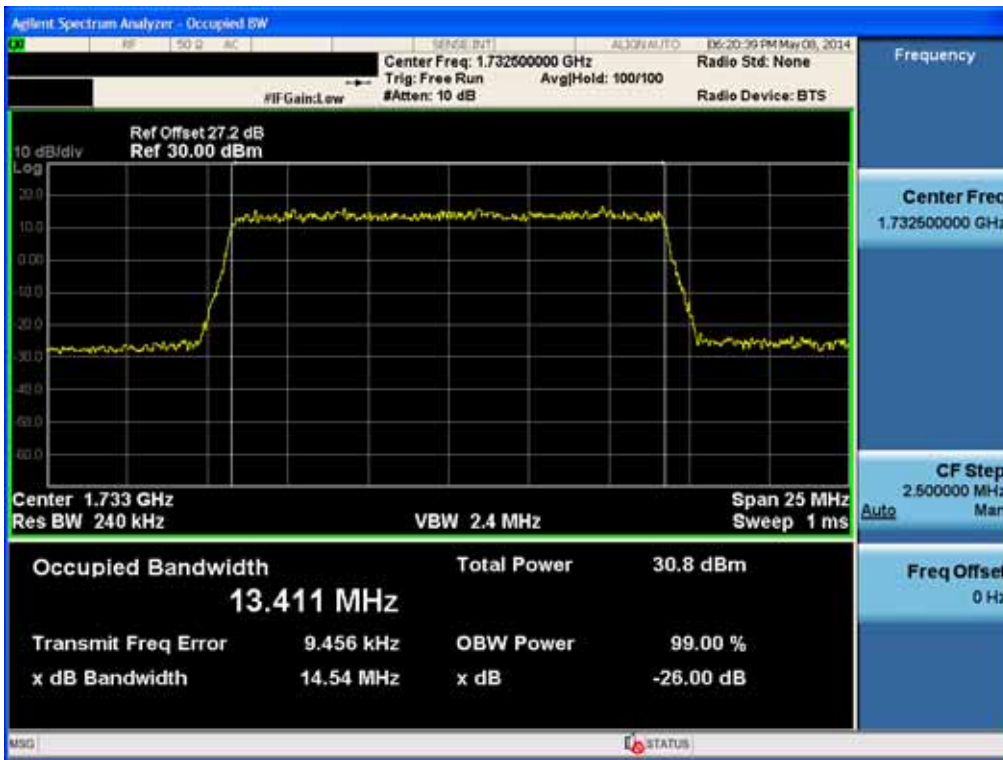

BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)

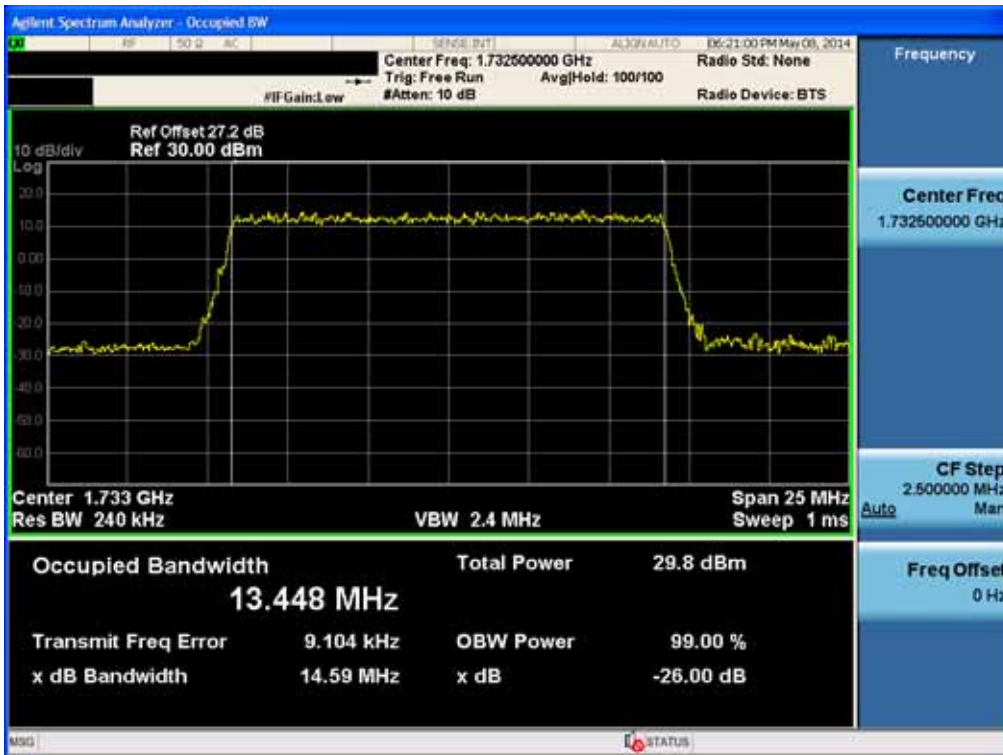

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)




BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. PAR Plot (23790ch_5MHz_QPSK_RB 25)

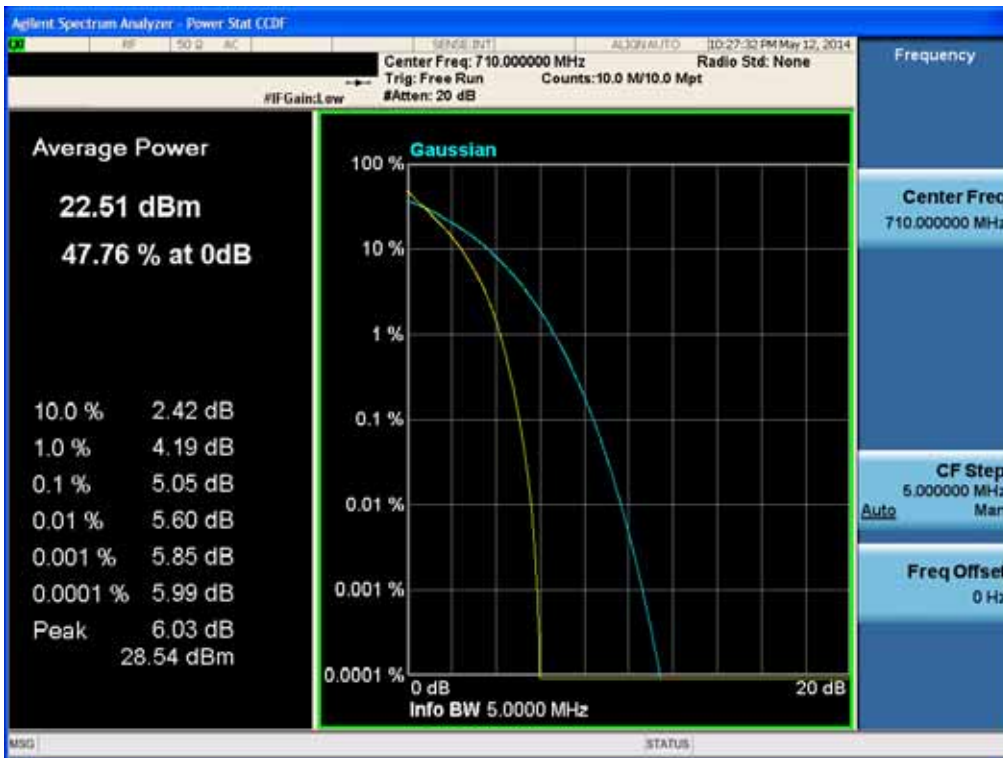


BAND 17. PAR Plot (23790ch_5MHz_16-QAM_RB 25)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. PAR Plot (23790ch_10MHz_QPSK_RB 50)

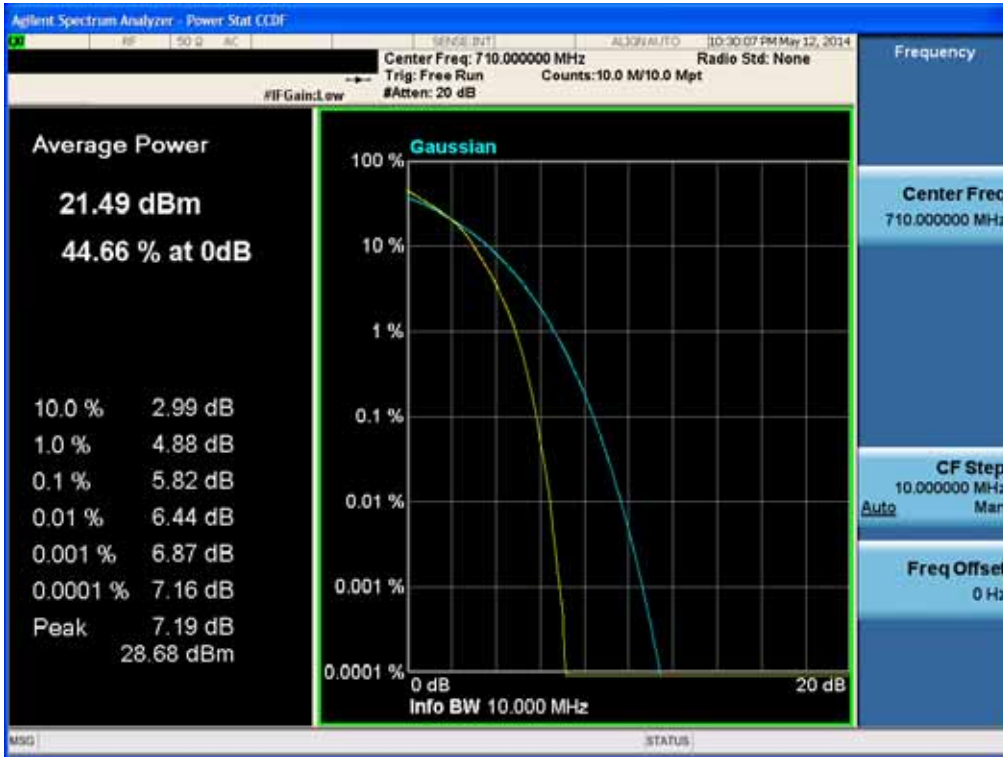


BAND 17. PAR Plot (23790ch_10MHz_16-QAM_RB 50)

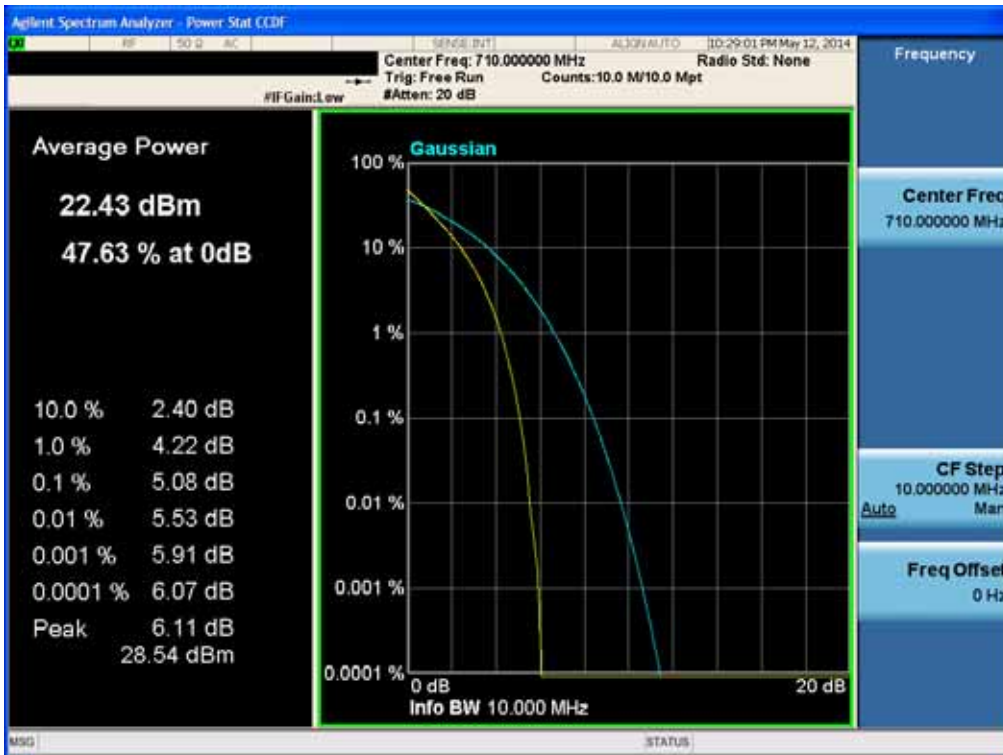


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (1.4M BW Ch.20175 QPSK RB 6)

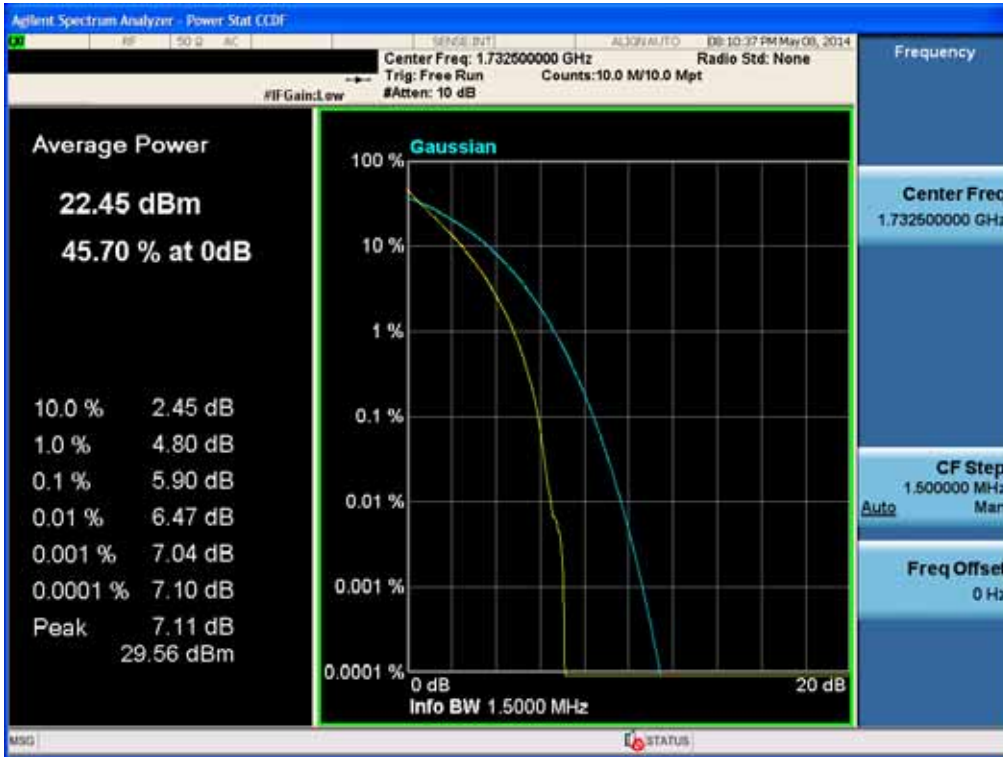


BAND 4. PAR Plot (1.4M BW Ch.20175 16QAM RB 6)

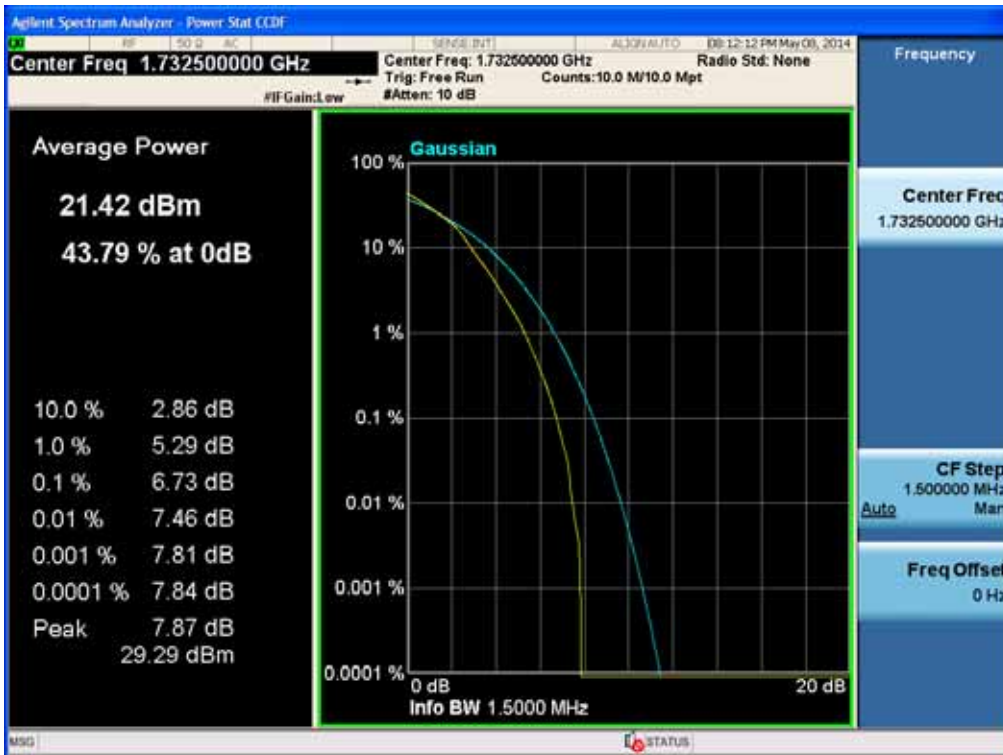

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (3M BW Ch.20175 QPSK RB 15)

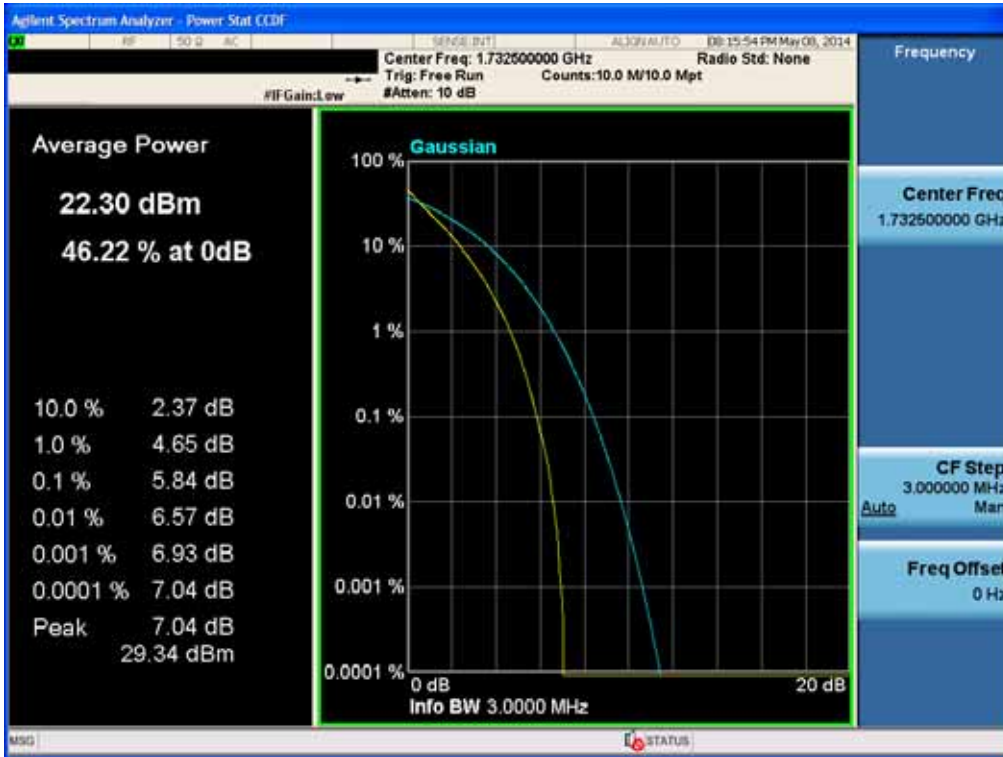

BAND 4. PAR Plot (3M BW Ch.20175 16QAM RB 15)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (5M BW Ch.20175 QPSK RB 25)




BAND 4. PAR Plot (5M BW Ch.20175 16QAM RB 25)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (10M BW Ch.20175 QPSK RB 50)

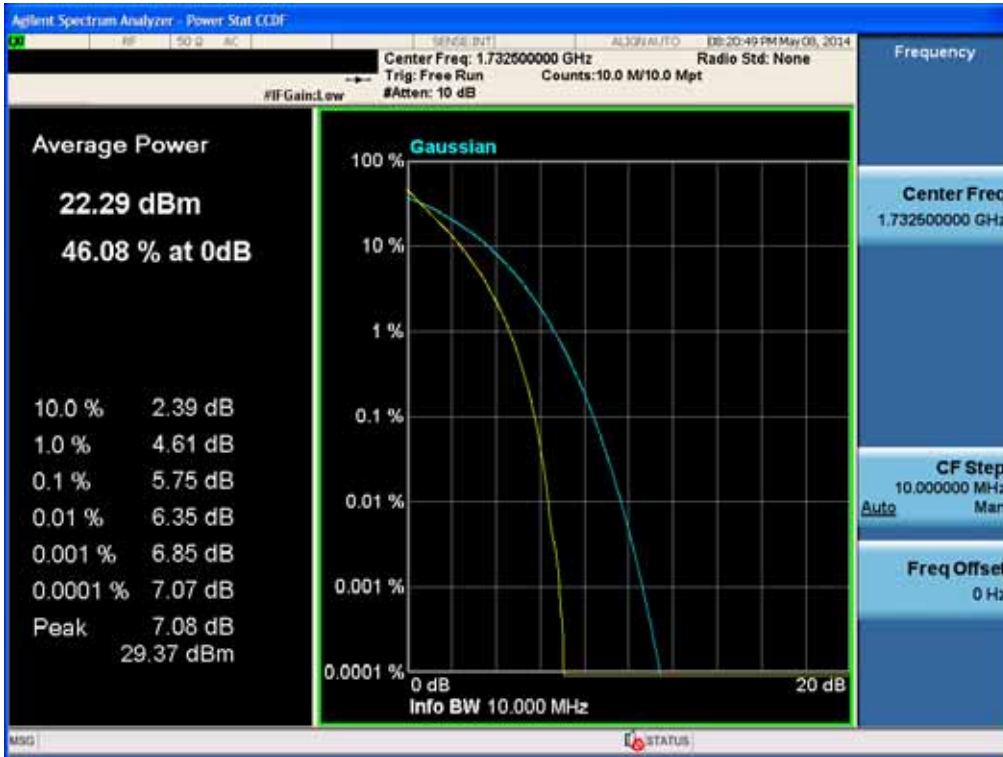


BAND 4. PAR Plot (10M BW Ch.20175 16QAM RB 50)

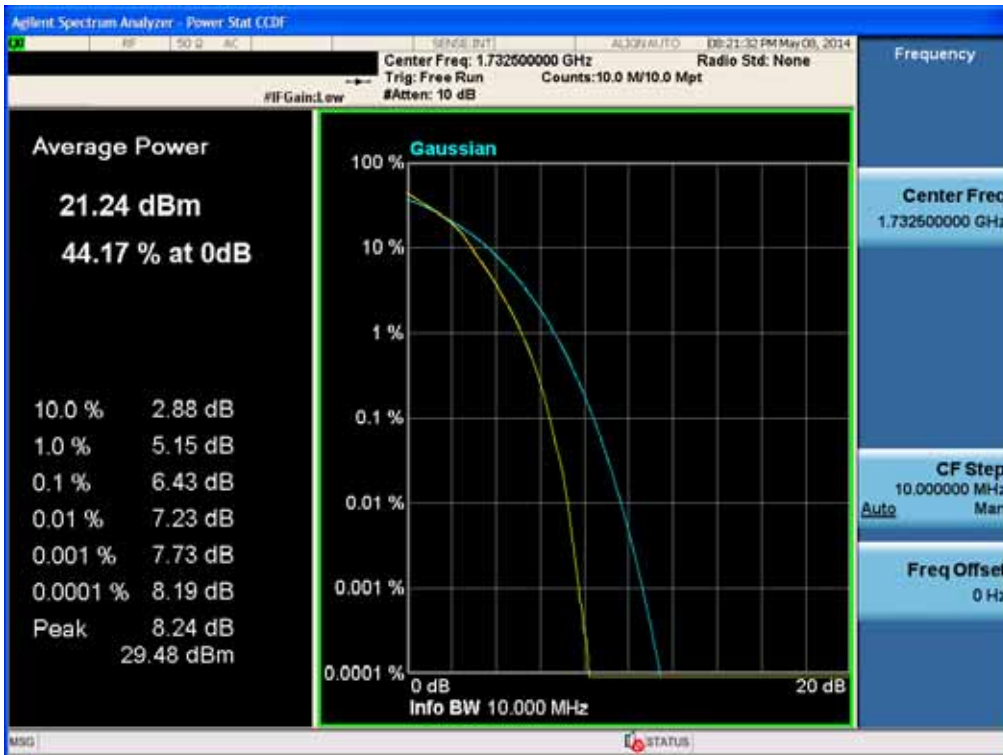


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (15M BW Ch.20175 QPSK RB 75)

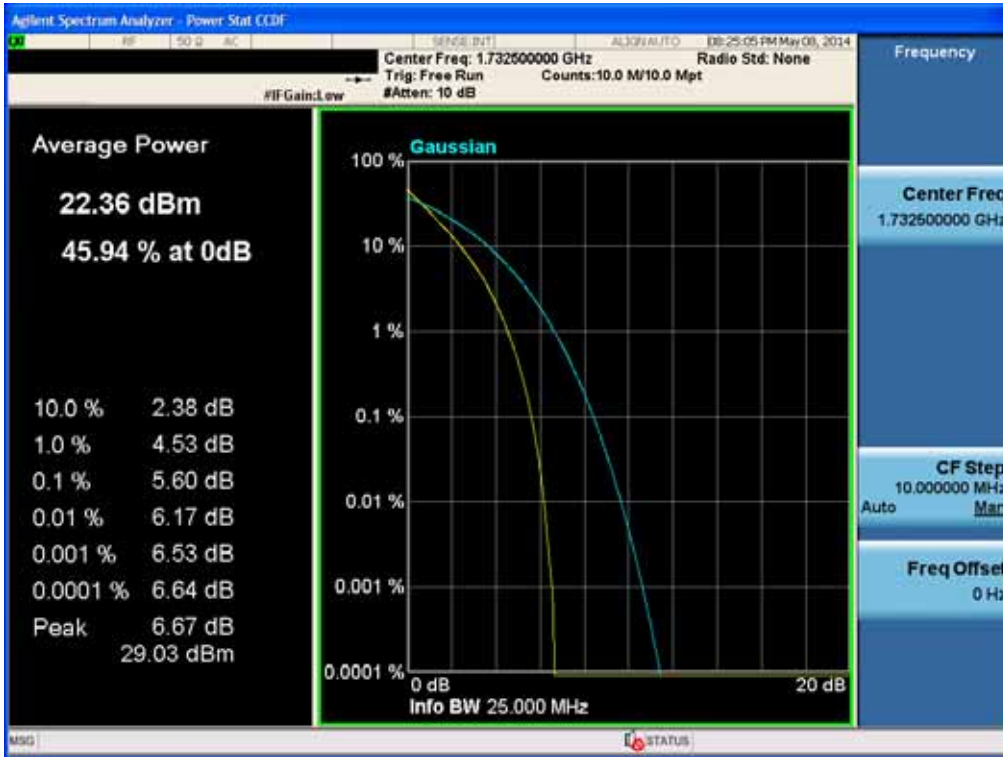


BAND 4. PAR Plot (15M BW Ch.20175 16QAM RB 75)

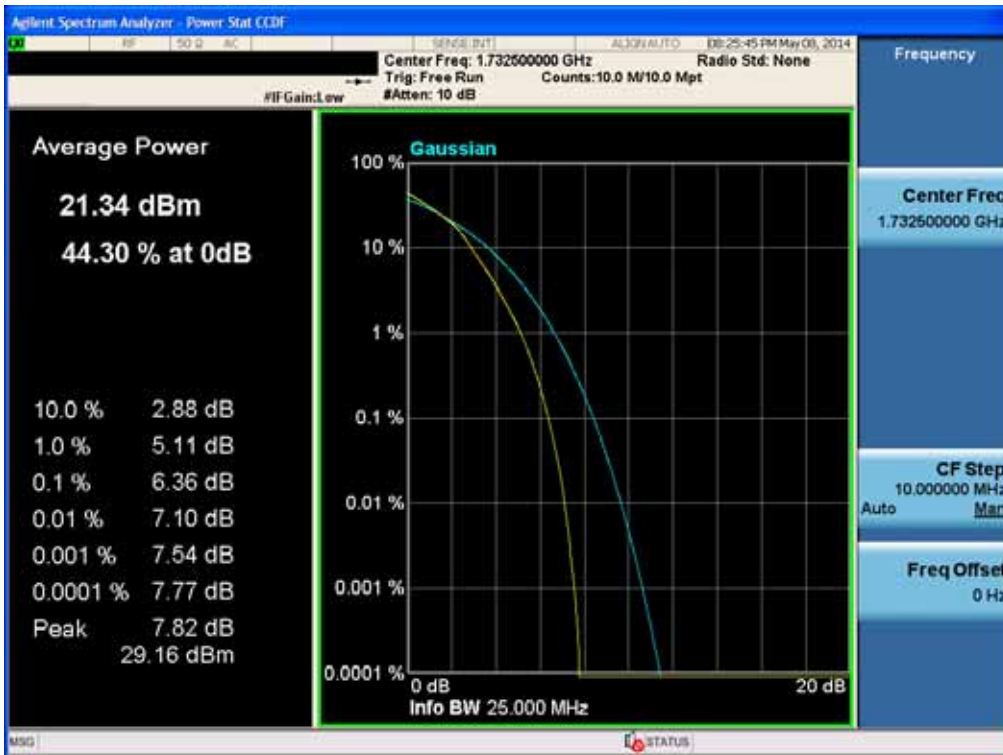


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. PAR Plot (20M BW Ch.20175 QPSK RB 100)

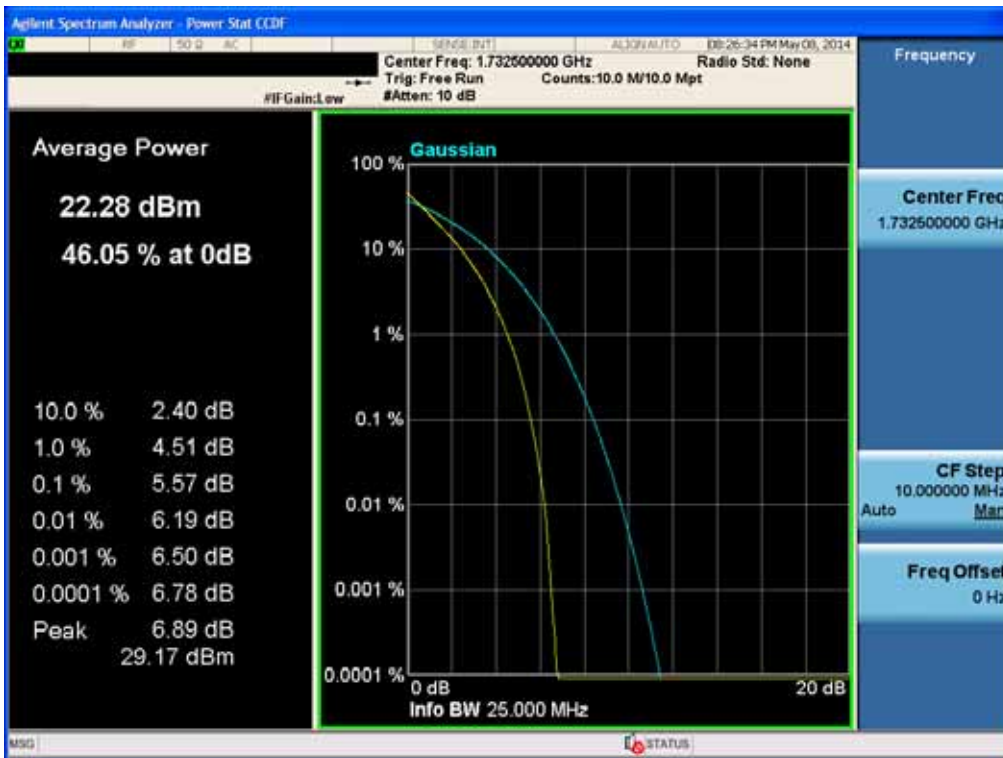


BAND 4. PAR Plot (20M BW Ch.20175 16QAM RB 100)

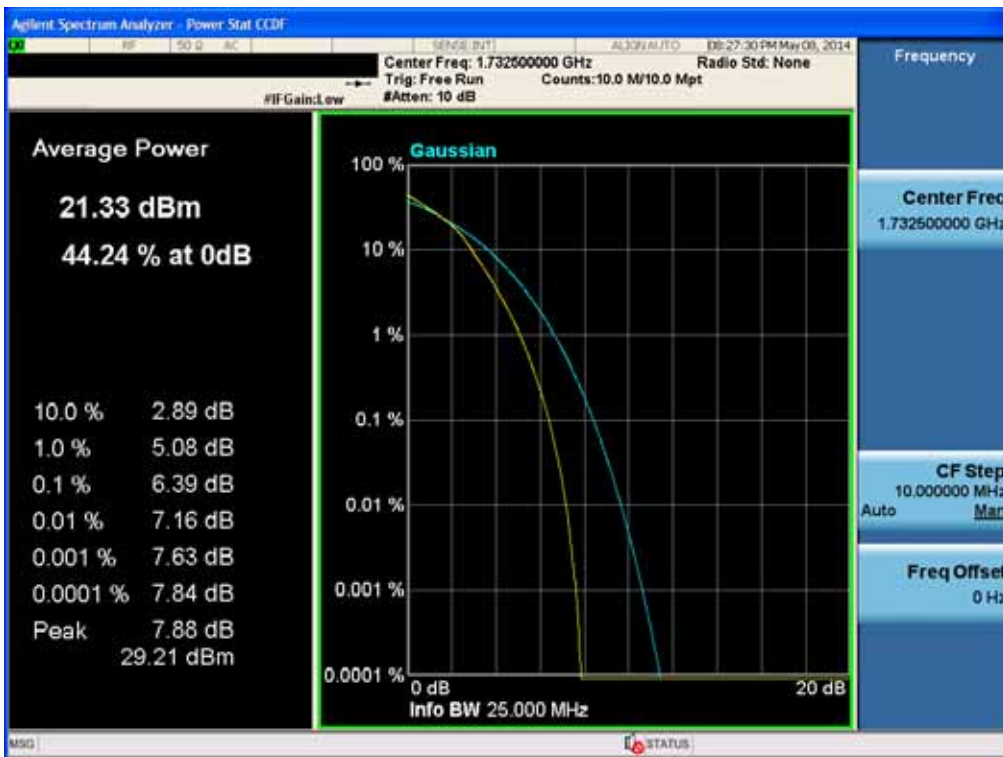

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. Low Band Edge Plot (5M BW Ch.23755 QPSK RB 1, Offset 0) -1

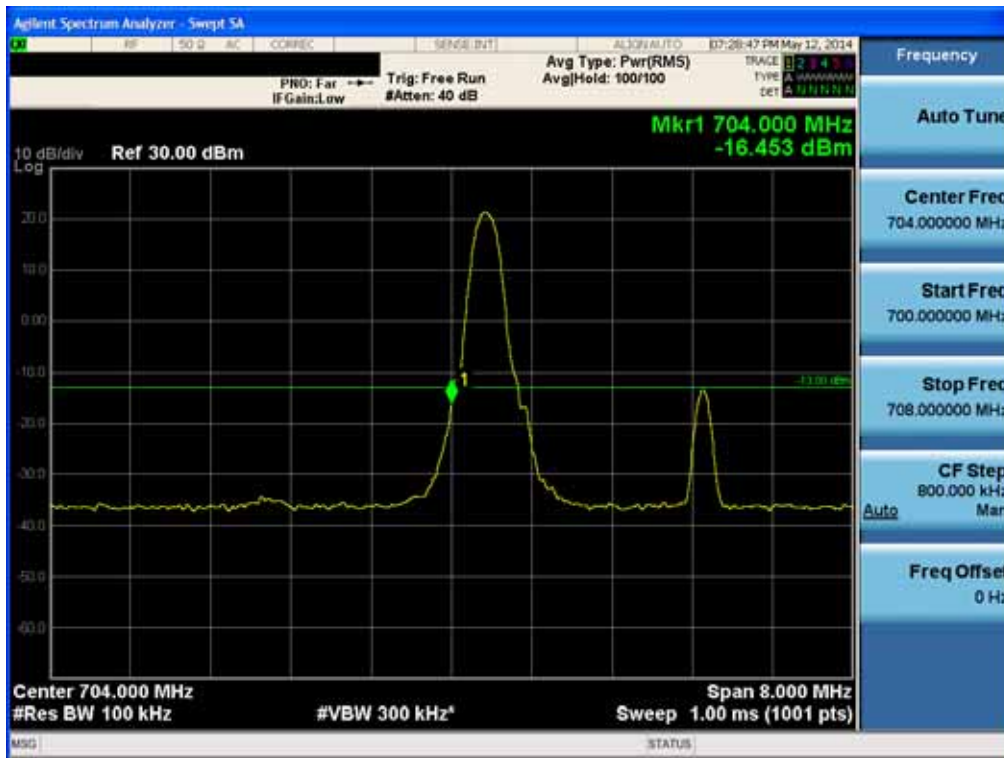


BAND 17. Low Band Edge Plot (5M BW Ch.23755 QPSK RB 25) -2




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 17. Low Band Edge Plot (10M BW Ch.23780 QPSK RB 1, Offset 0) -1

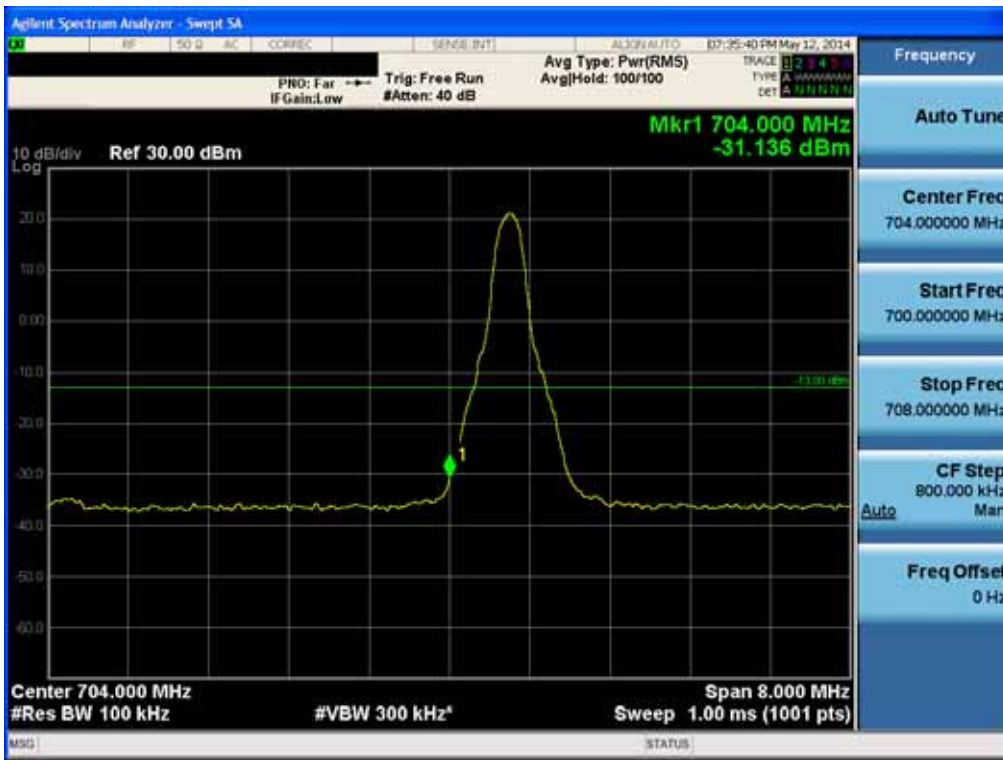


BAND 17. Low Band Edge Plot (10M BW Ch.23780 QPSK RB 50) -2

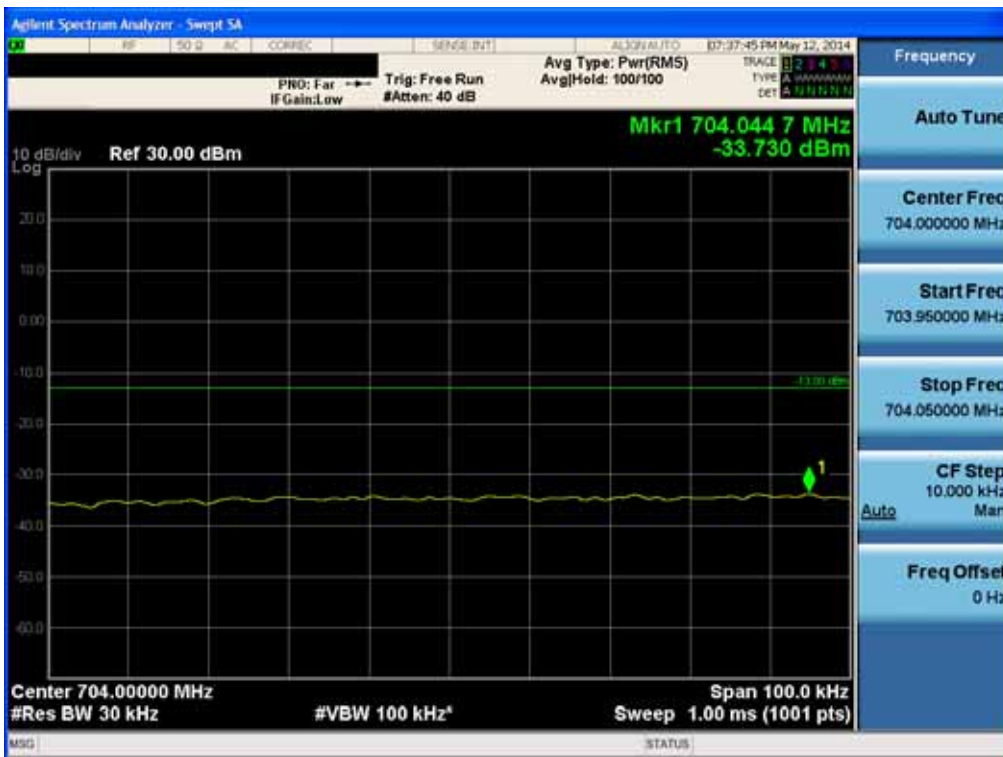


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. High Band Edge Plot (5M BW Ch.23825 QPSK RB 1, Offset 24) -1

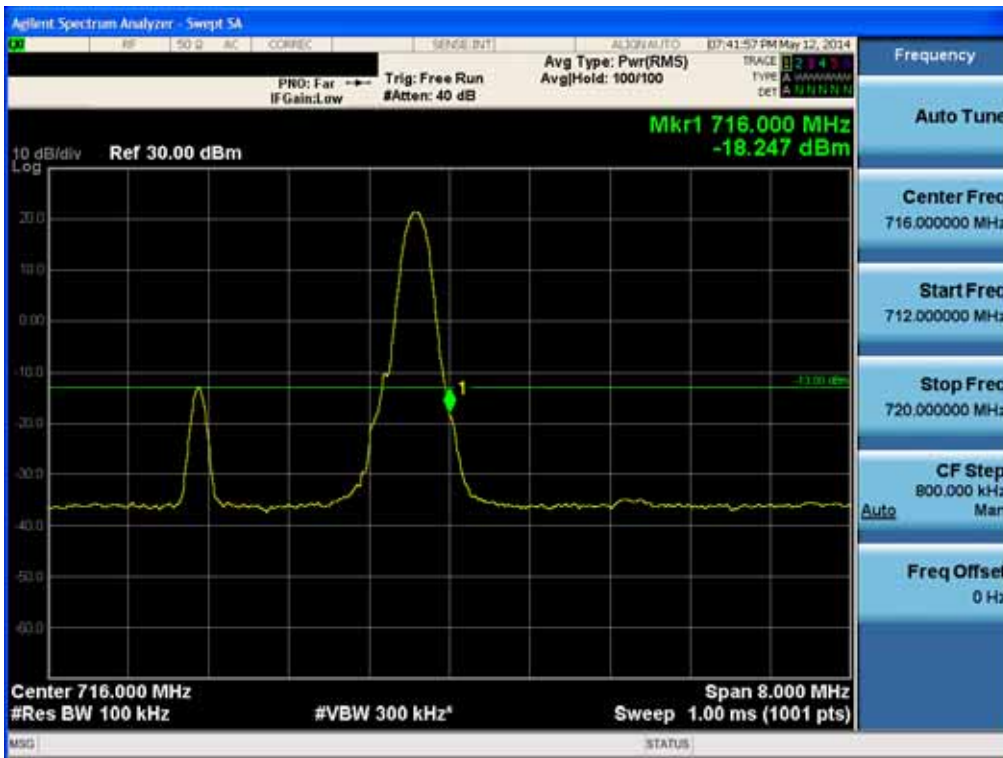


BAND 17. High Band Edge Plot (5M BW Ch.23825 QPSK RB 25) -2

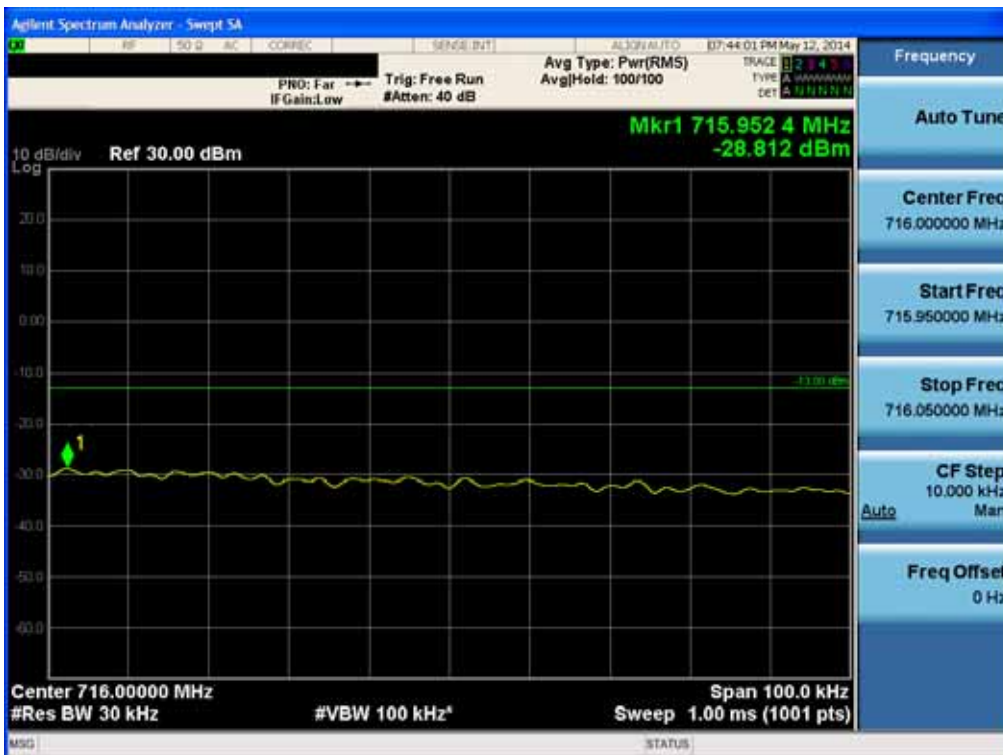


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. High Band Edge Plot (10M BW Ch.23800 QPSK RB 1, Offset 49) -1

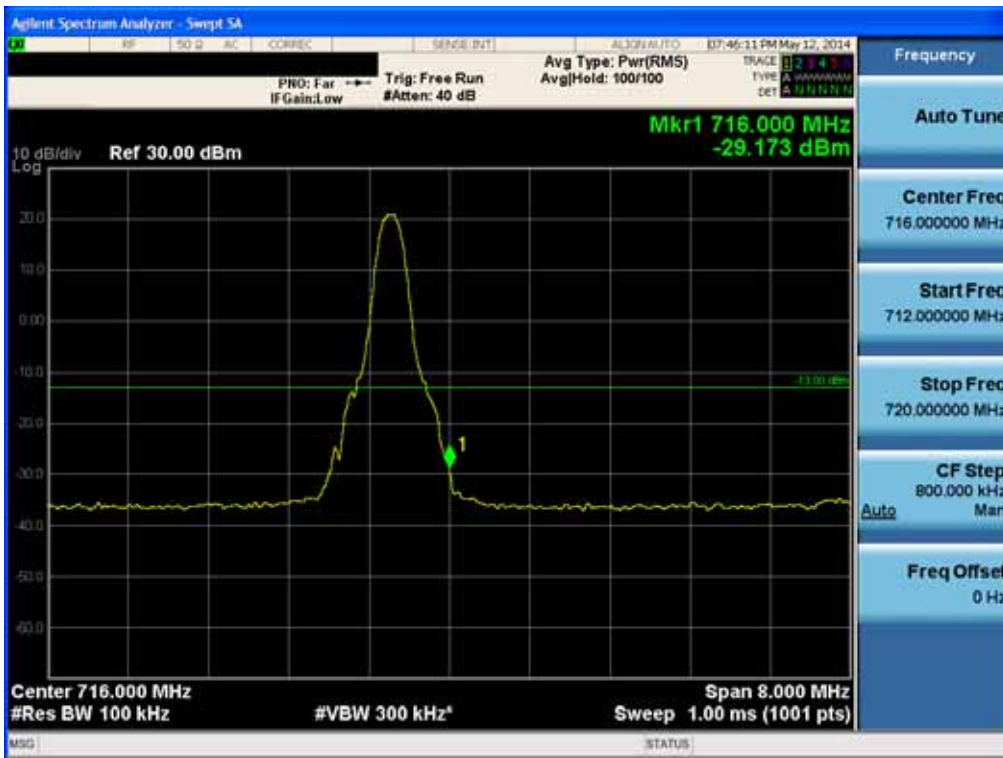

BAND 17. High Band Edge Plot (10M BW Ch.23800 QPSK RB 50) -2

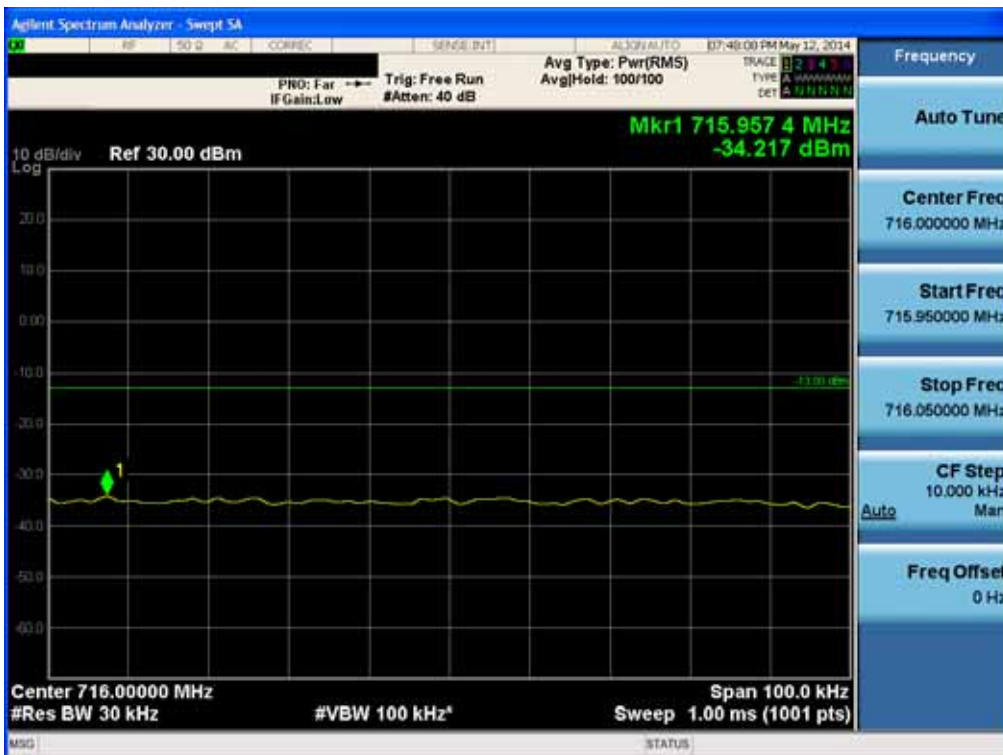


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 1, Offset 0) -1



BAND 4. Lower Band Edge Plot (1.4M BW Ch.19957 QPSK RB 6) -2

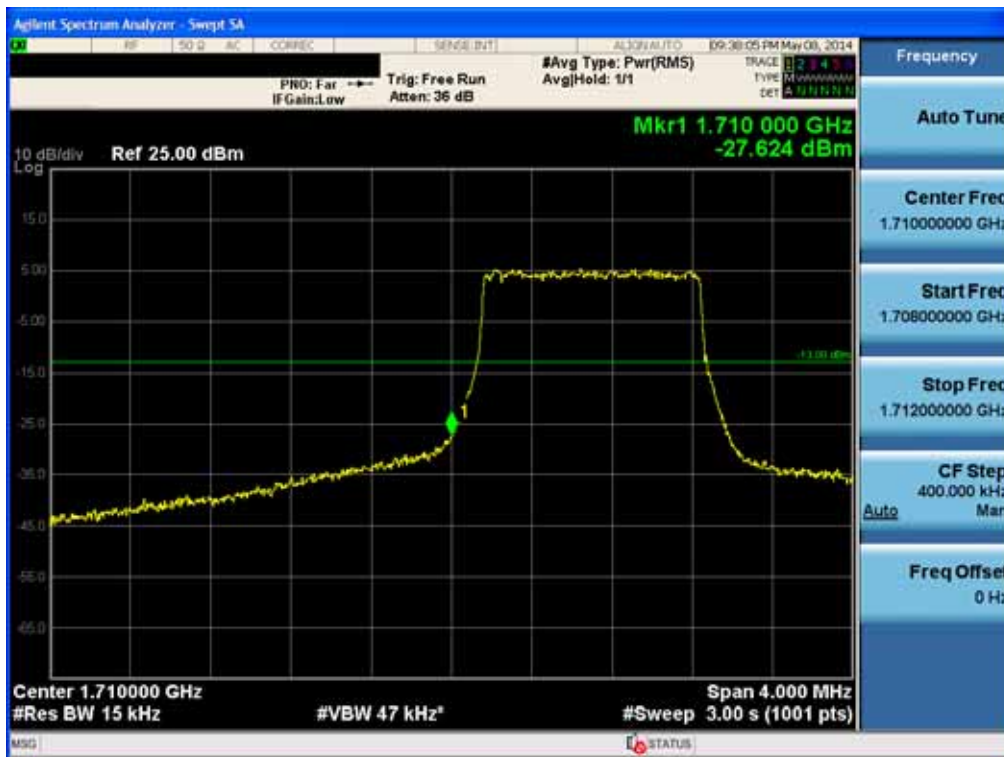


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 4. Lower Extended Band Edge Plot (1.4M BW Ch.19957 QPSK RB 6) -3



BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 1, Offset 0) -1

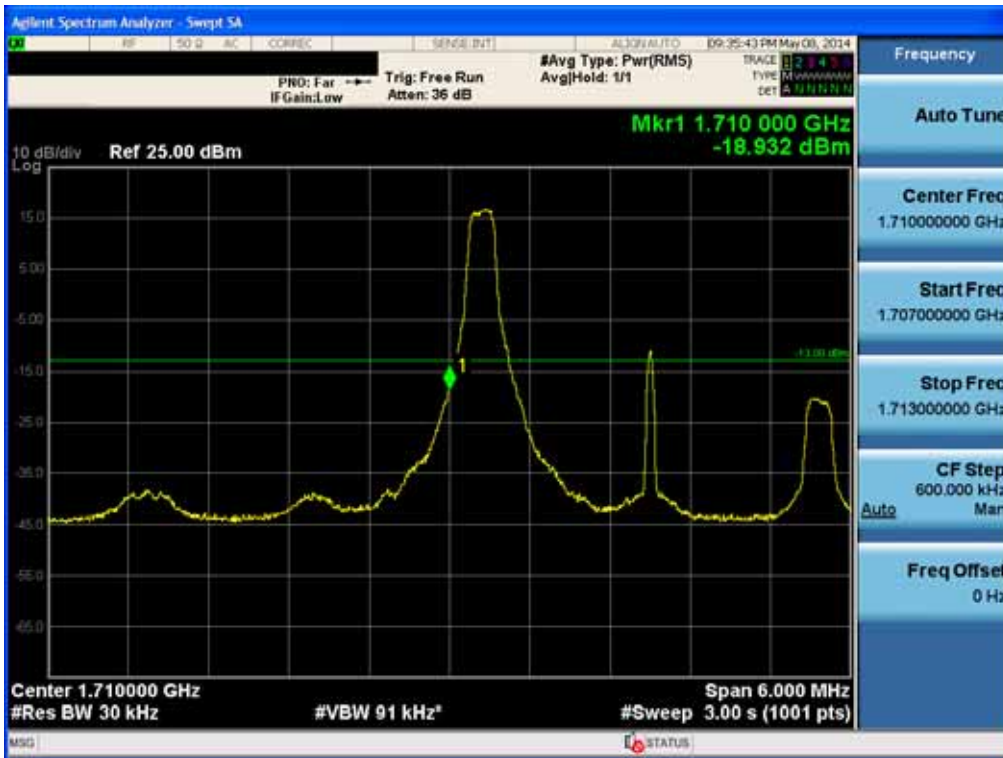

BAND 4. Lower Band Edge Plot (3M BW Ch.19965 QPSK RB 15) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Lower Extended Band Edge Plot (3M BW Ch.19965 QPSK RB 15) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 1, Offset 0) -1

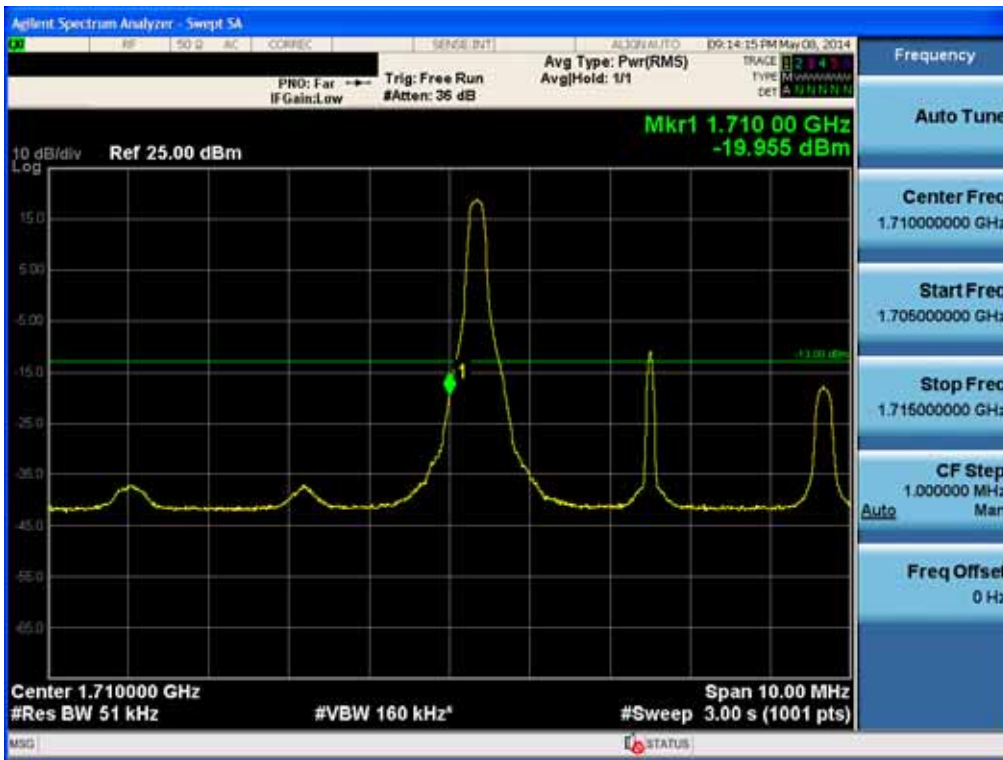

BAND 4. Lower Band Edge Plot (5M BW Ch.19975 QPSK RB 25) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---


BAND 4. Lower Extended Band Edge Plot (5M BW Ch.19975 QPSK RB 25) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 1, Offset 0) -1

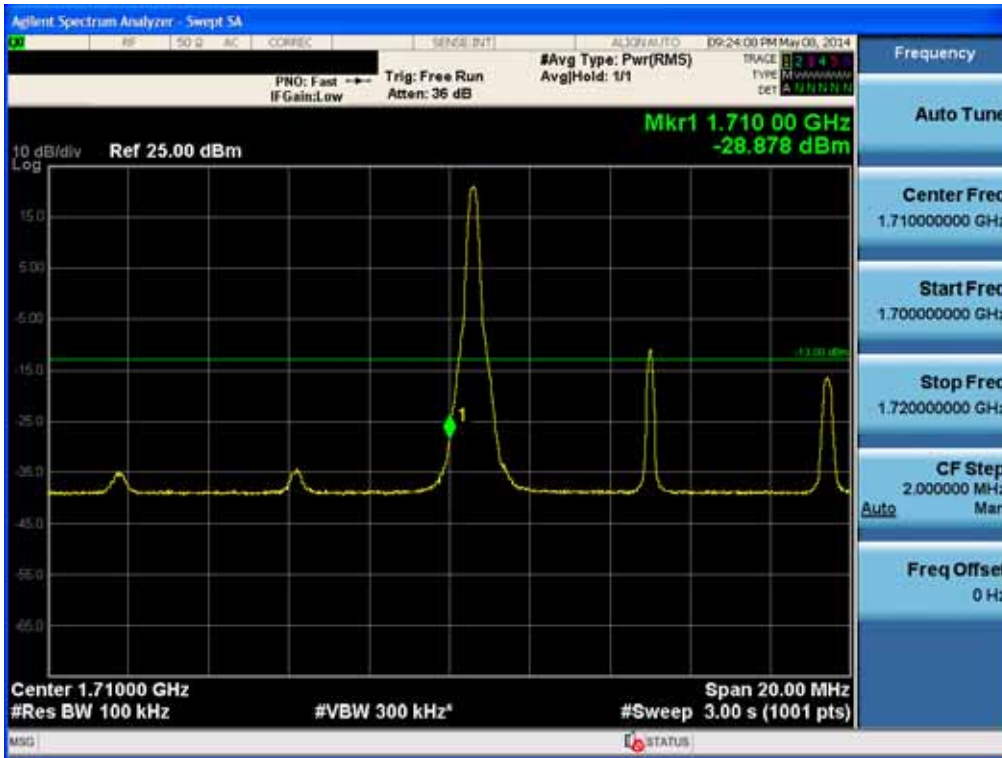

BAND 4. Lower Band Edge Plot (10M BW Ch.20000 QPSK RB 50) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--


BAND 4. Lower Extended Band Edge Plot (10M BW Ch.20000 QPSK RB 50) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 1, Offset 0) -1

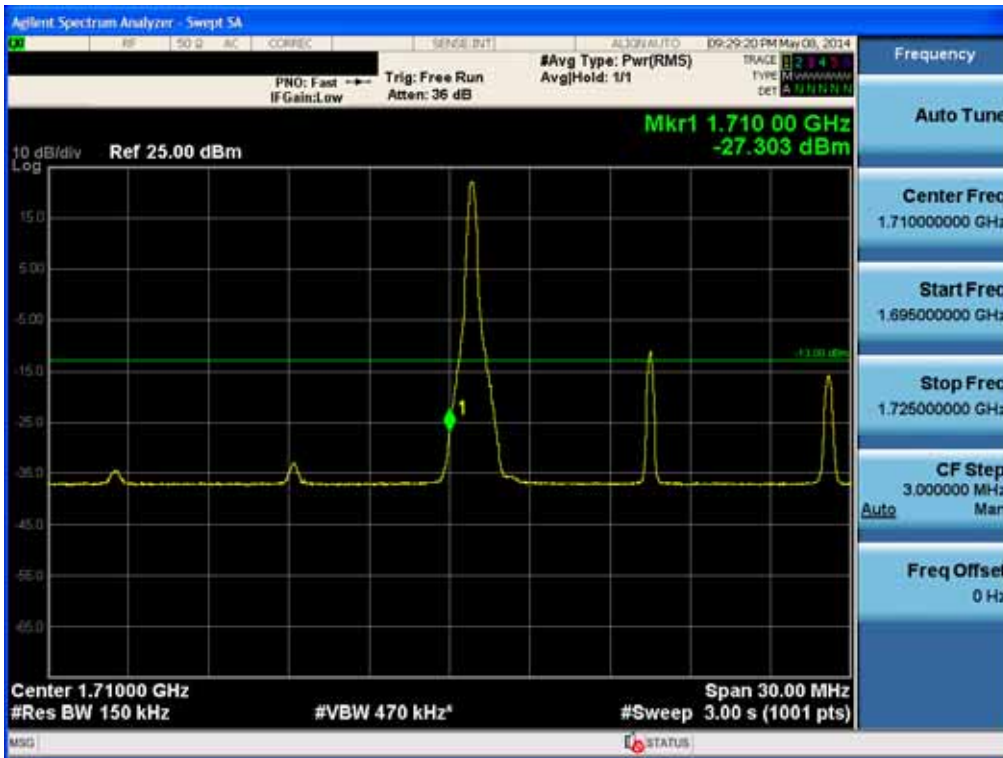

BAND 4. Lower Band Edge Plot (15M BW Ch.20025 QPSK RB 75) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Lower Extended Band Edge Plot (15M BW Ch.20025 QPSK RB 75) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 1, Offset 0) -1

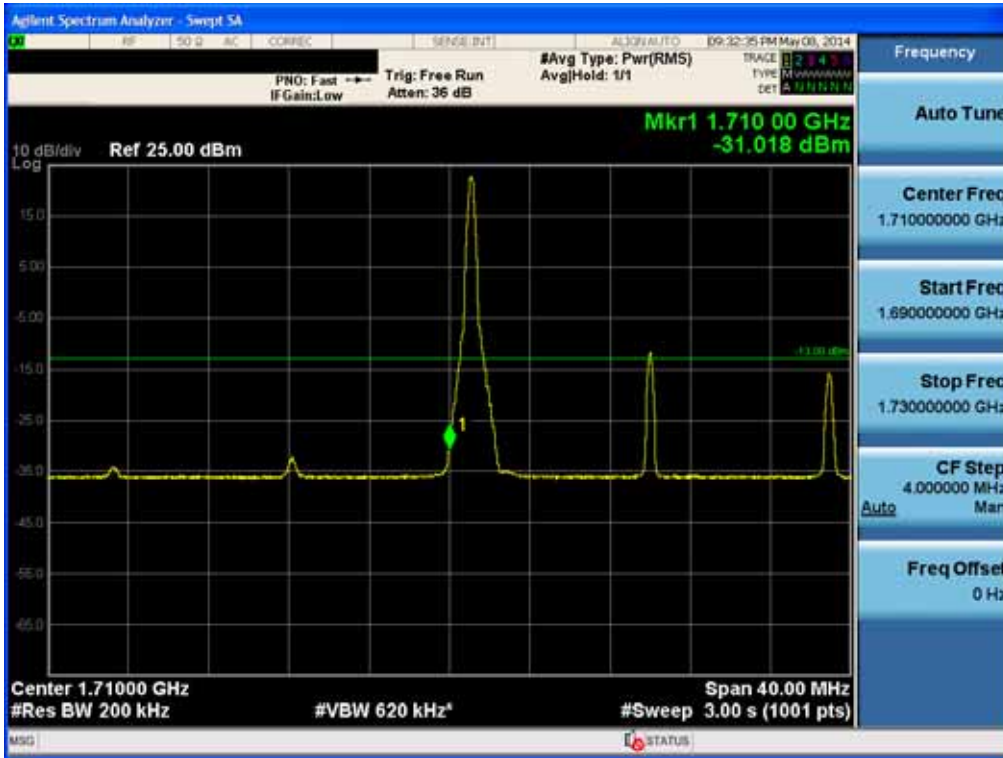

BAND 4. Lower Band Edge Plot (20M BW Ch.20050 QPSK RB 100) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Lower Extended Band Edge Plot (20M BW Ch.20050 QPSK RB 100) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK RB 1, Offset 5) -1



BAND 4. Upper Band Edge Plot (1.4M BW Ch.20393 QPSK RB 6) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Upper Extended Band Edge Plot (1.4M BW Ch.20393 QPSK RB 6) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK RB 1, Offset 14) -1

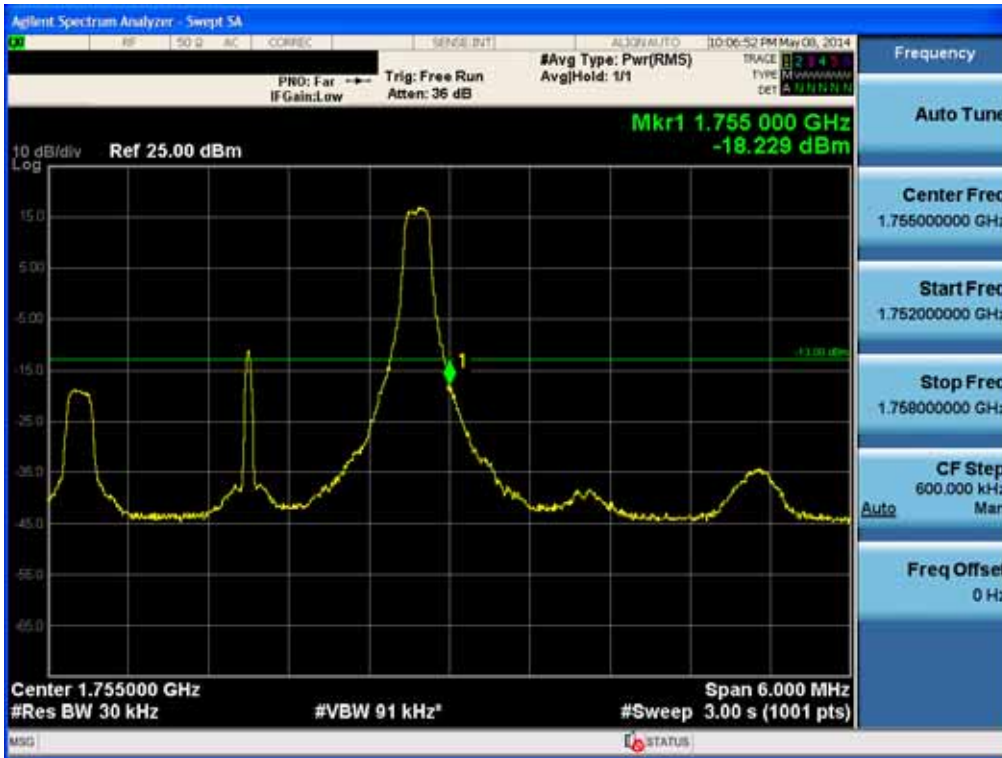


BAND 4. Upper Band Edge Plot (3M BW Ch.20385 QPSK RB 15) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--


BAND 4. Upper Extended Band Edge Plot (3M BW Ch.20385 QPSK RB 15) -3

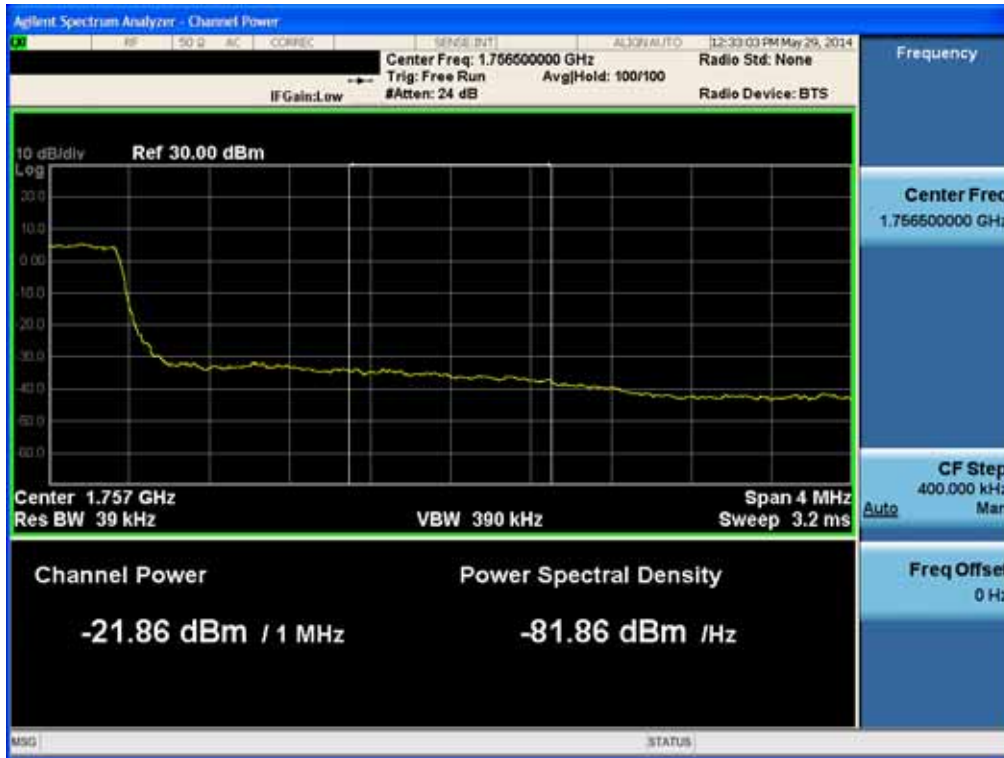

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK RB 1, Offset 24) -1

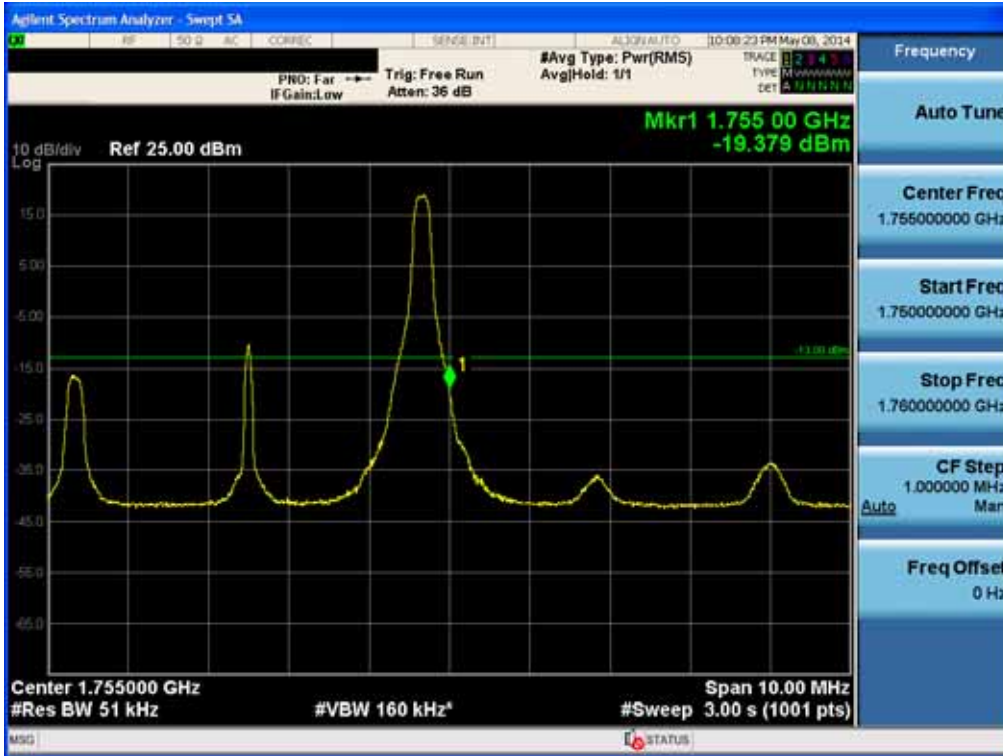

BAND 4. Upper Band Edge Plot (5M BW Ch.20375 QPSK RB 25) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Upper Extended Band Edge Plot (5M BW Ch.20375 QPSK RB 25) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK RB 1, Offset 49) -1

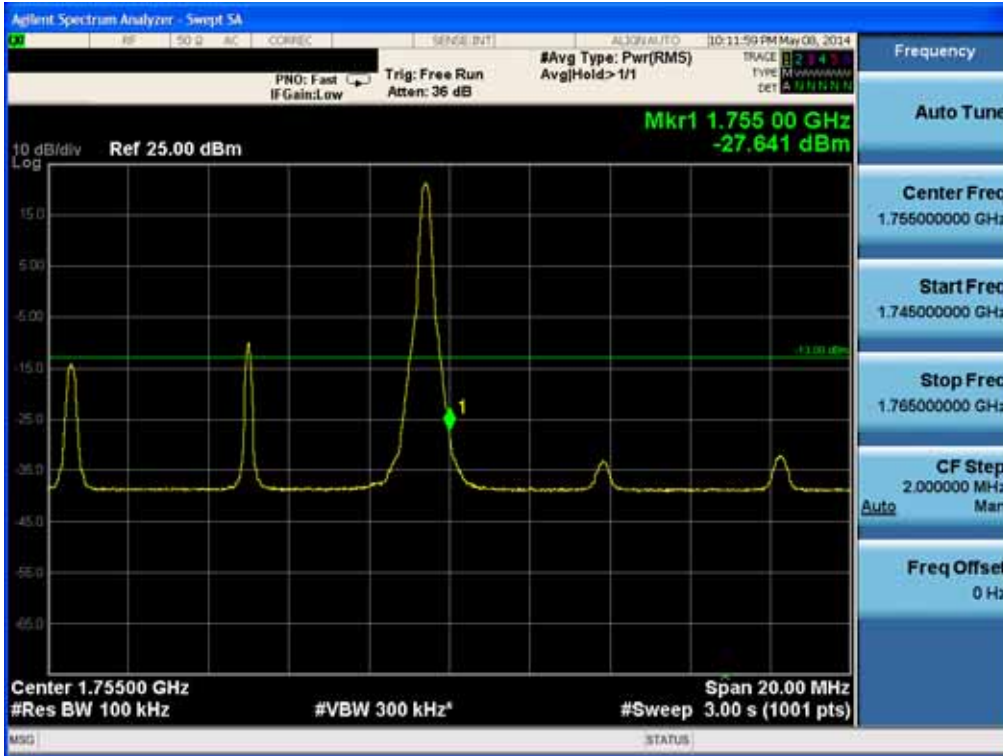

BAND 4. Upper Band Edge Plot (10M BW Ch.20350 QPSK RB 50) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Upper Extended Band Edge Plot (10M BW Ch.20350 QPSK RB 50) -3



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK RB 1, Offset 74) -1

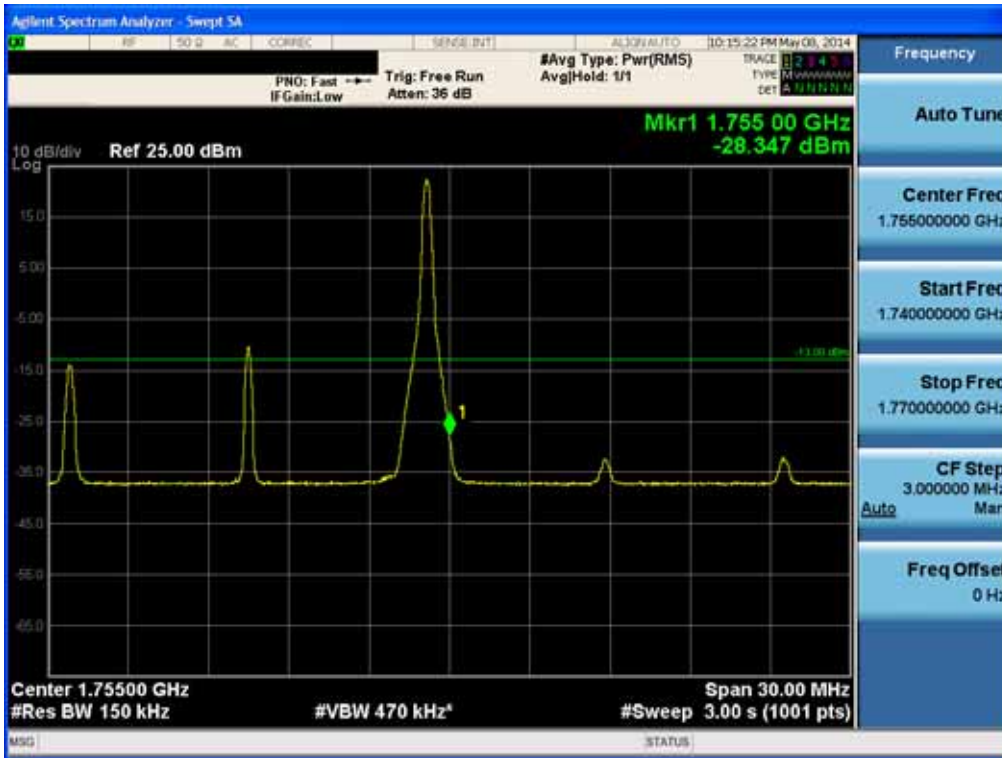


BAND 4. Upper Band Edge Plot (15M BW Ch.20325 QPSK RB 75) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---


BAND 4. Upper Extended Band Edge Plot (15M BW Ch.20325 QPSK RB 75) -3

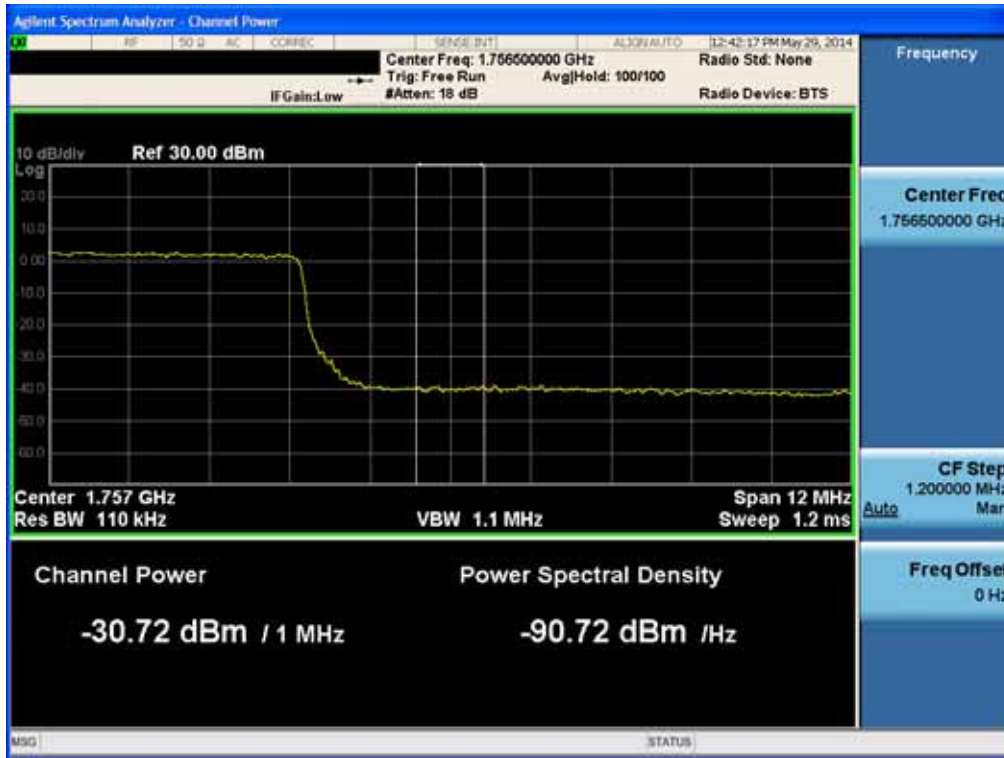

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK RB 1, Offset 99) -1

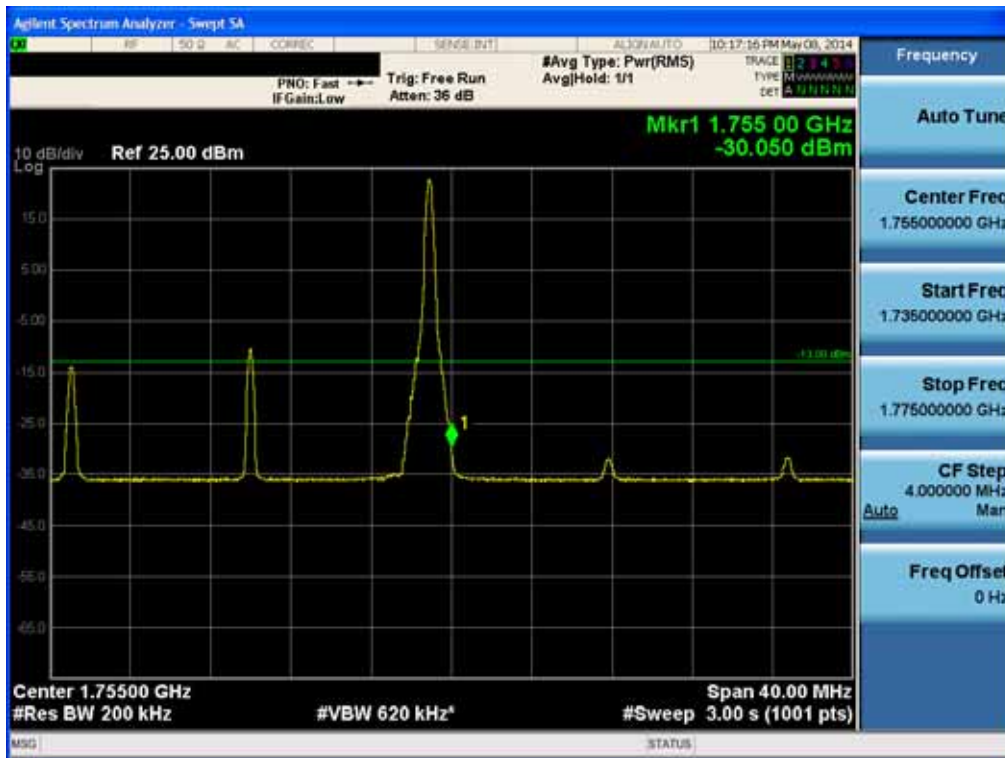

BAND 4. Upper Band Edge Plot (20M BW Ch.20300 QPSK RB 100) -2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--


BAND 4. Upper Extended Band Edge Plot (20M BW Ch.20300 QPSK RB 100) -3




FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

BAND 17. Conducted Spurious Plot_1 (23755ch_5MHz_QPSK_RB 1_0)

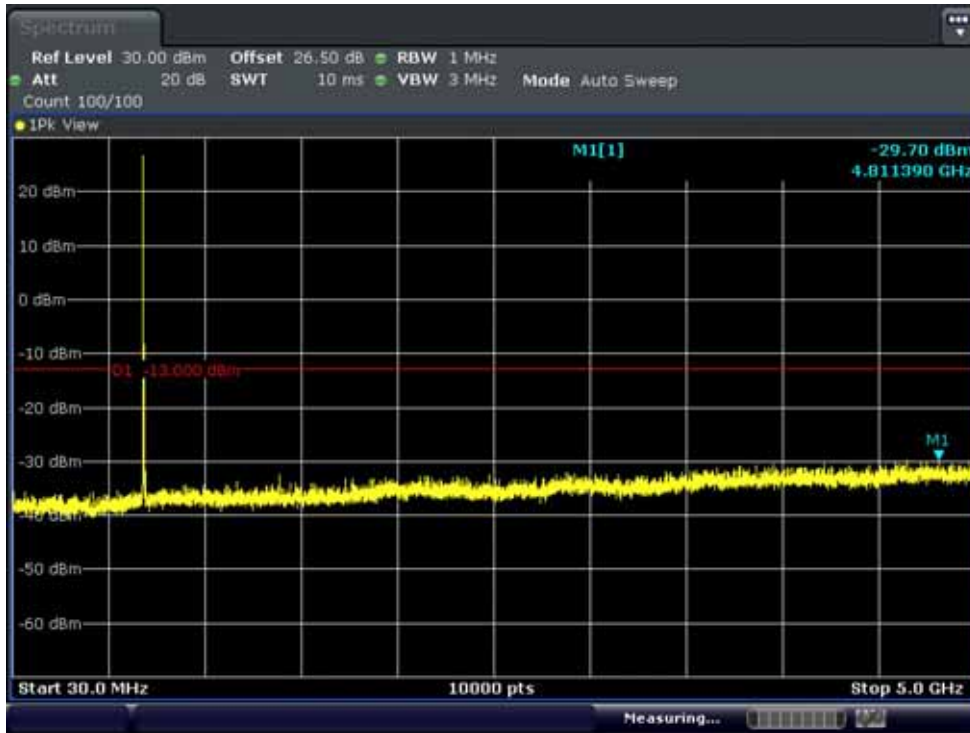


BAND 17. Conducted Spurious Plot_2 (23755ch_5MHz_QPSK_RB 1_0)

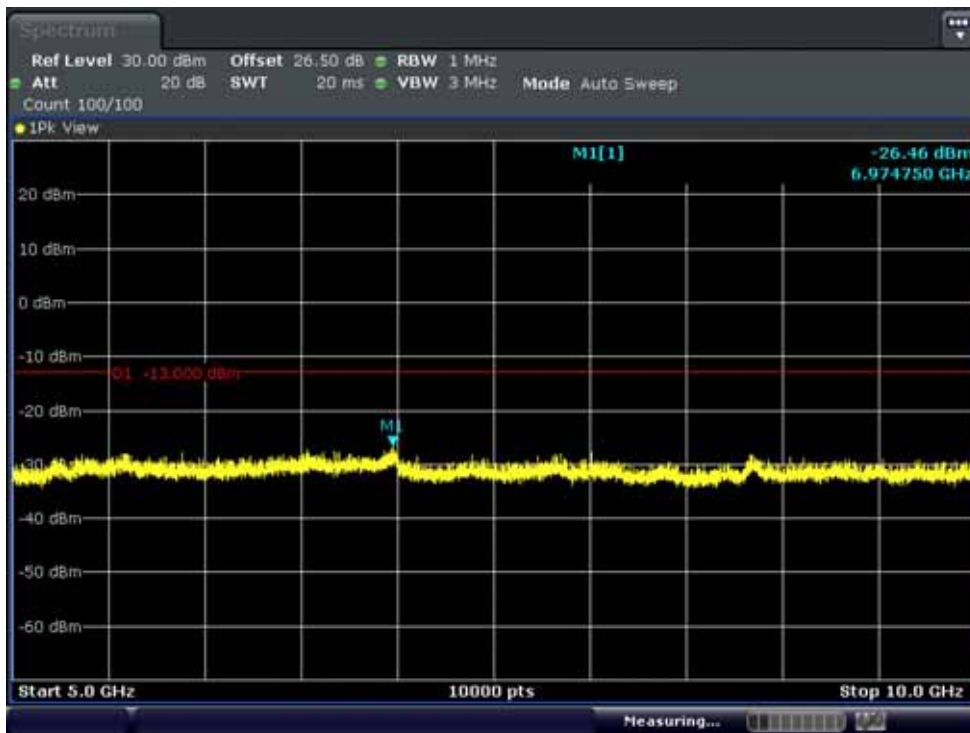

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. Conducted Spurious Plot_1 (23790ch_5MHz_QPSK_RB 1_0)

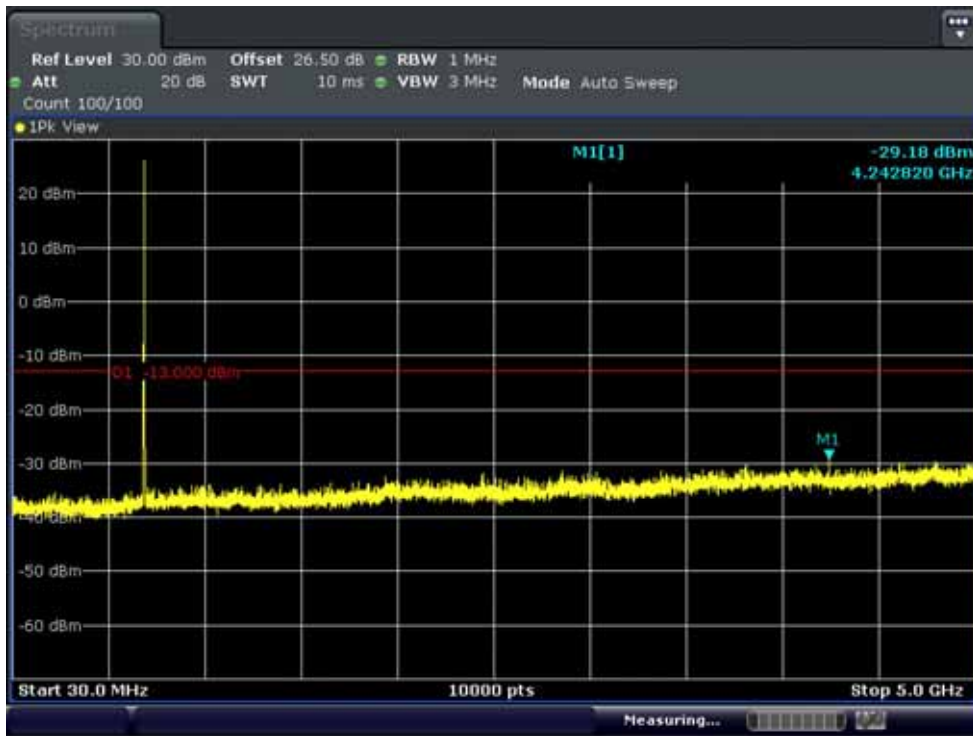


BAND 17. Conducted Spurious Plot_2 (23790ch_5MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 17. Conducted Spurious Plot_1 (23825ch_5MHz_QPSK_RB 1_0)

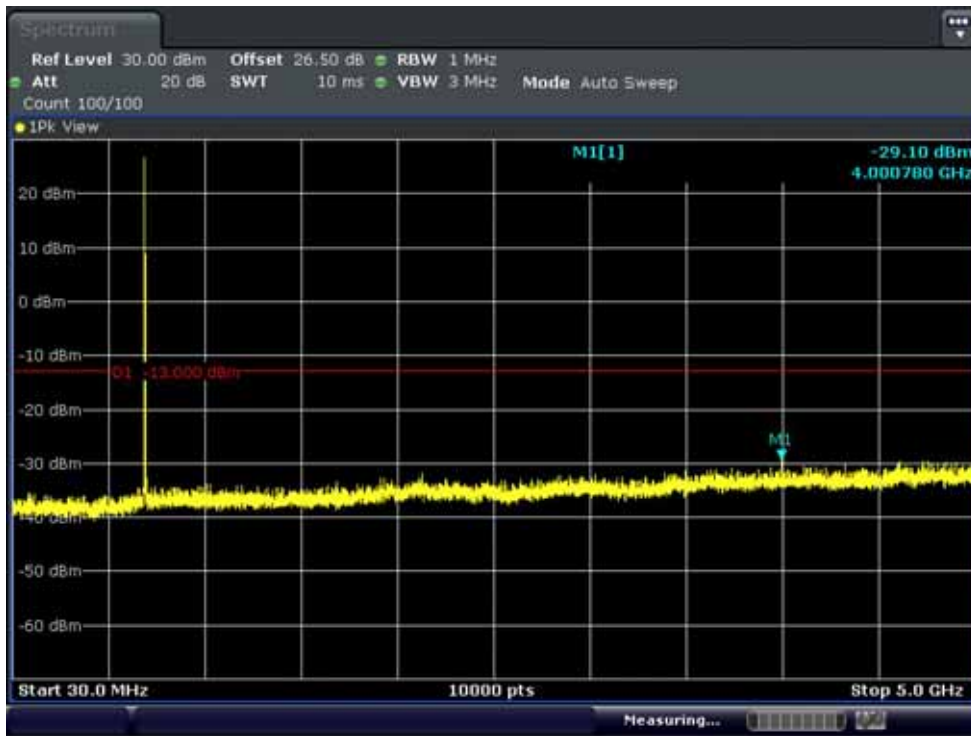


BAND 17. Conducted Spurious Plot_2 (23825ch_5MHz_QPSK_RB 1_0)

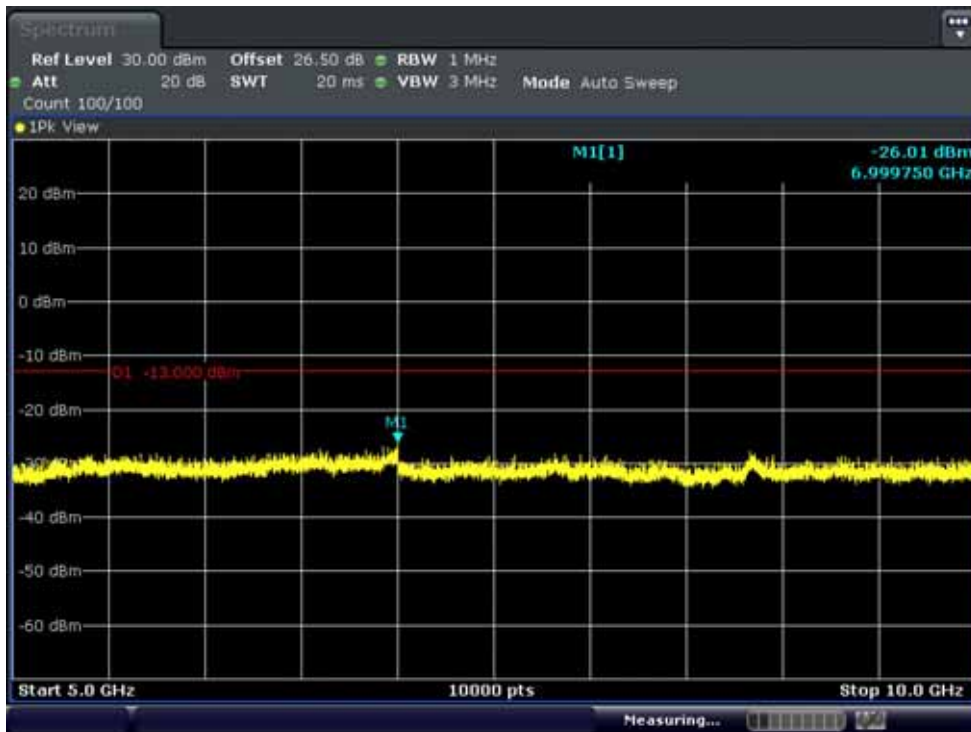


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 17. Conducted Spurious Plot_1 (23780ch_10MHz_QPSK_RB 1_0)

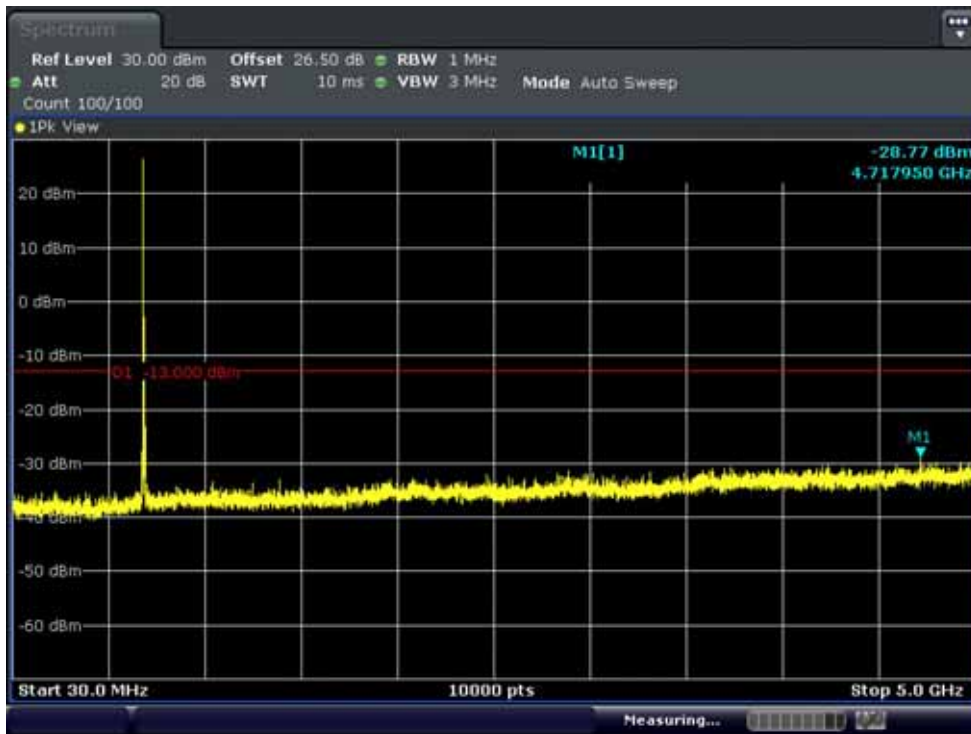


BAND 17. Conducted Spurious Plot_2 (23780ch_10MHz_QPSK_RB 1_0)

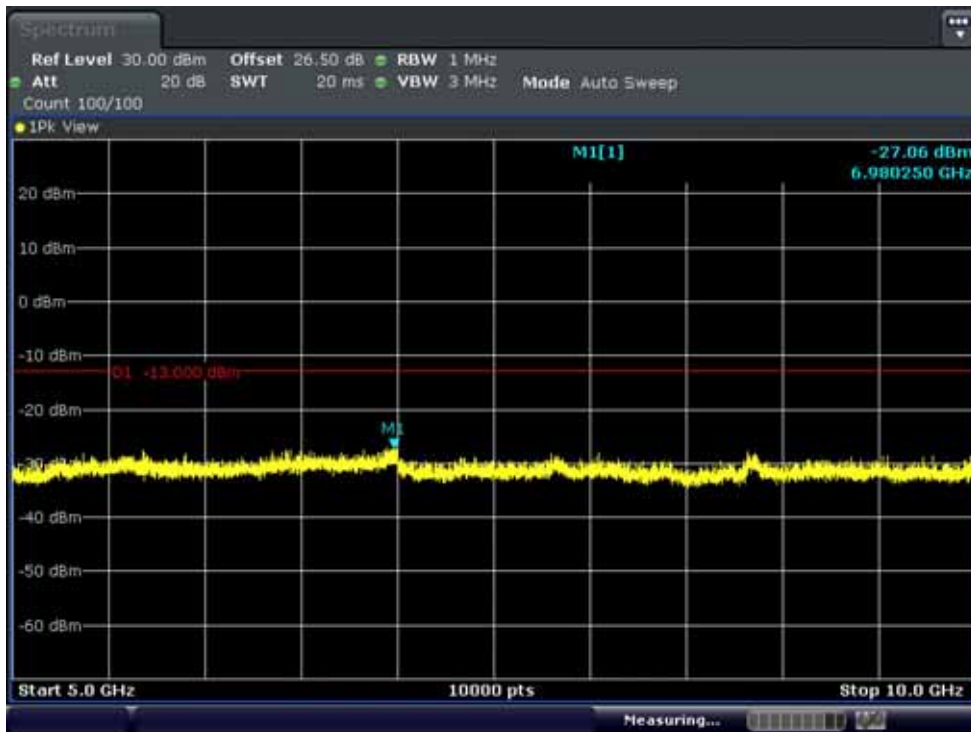

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. Conducted Spurious Plot_1 (23790ch_10MHz_QPSK_RB 1_0)

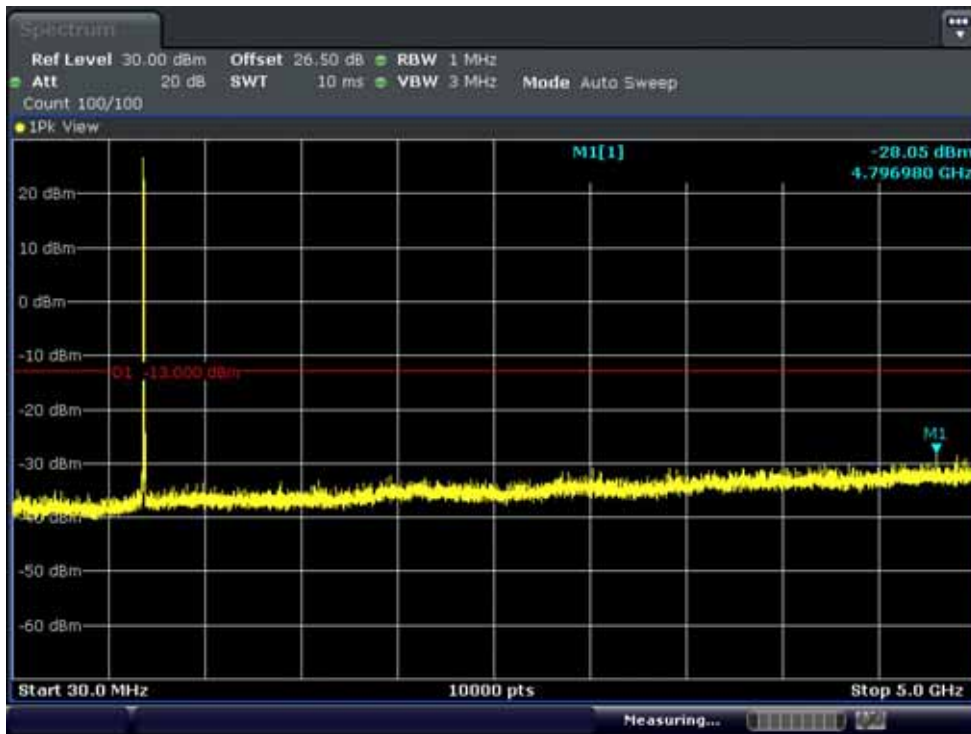


BAND 17. Conducted Spurious Plot_2 (23790ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 17. Conducted Spurious Plot_1 (23800ch_10MHz_QPSK_RB 1_0)

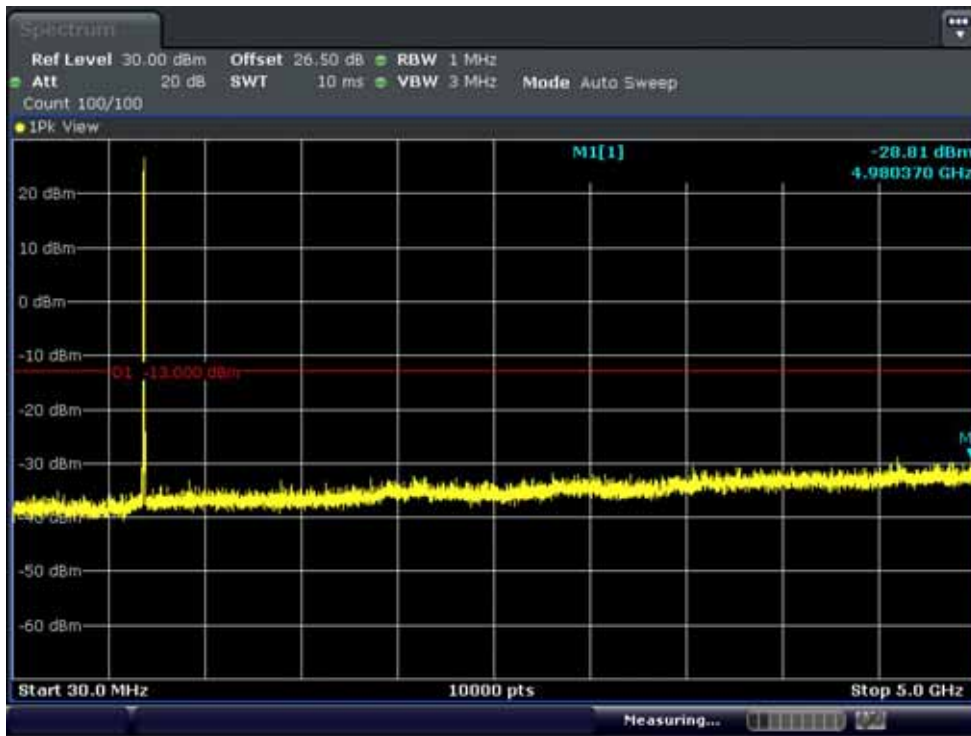


BAND 17. Conducted Spurious Plot_2 (23800ch_10MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (19956ch_1.4MHz_QPSK_RB 1_0)

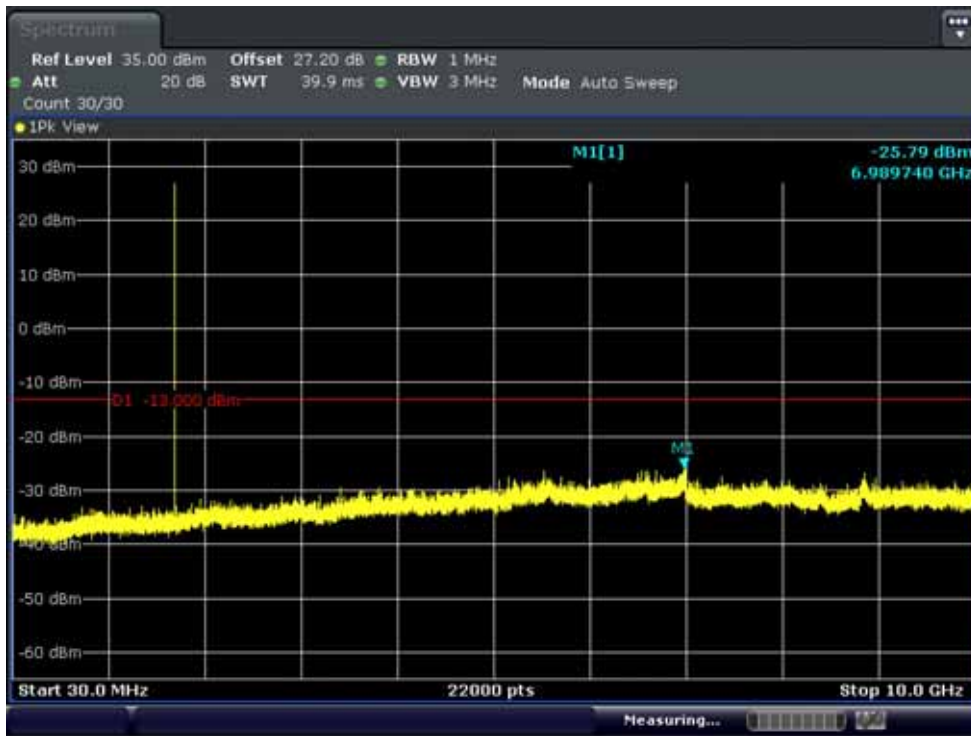


BAND 4. Conducted Spurious Plot_2 (19956ch_1.4MHz_QPSK_RB 1_0)

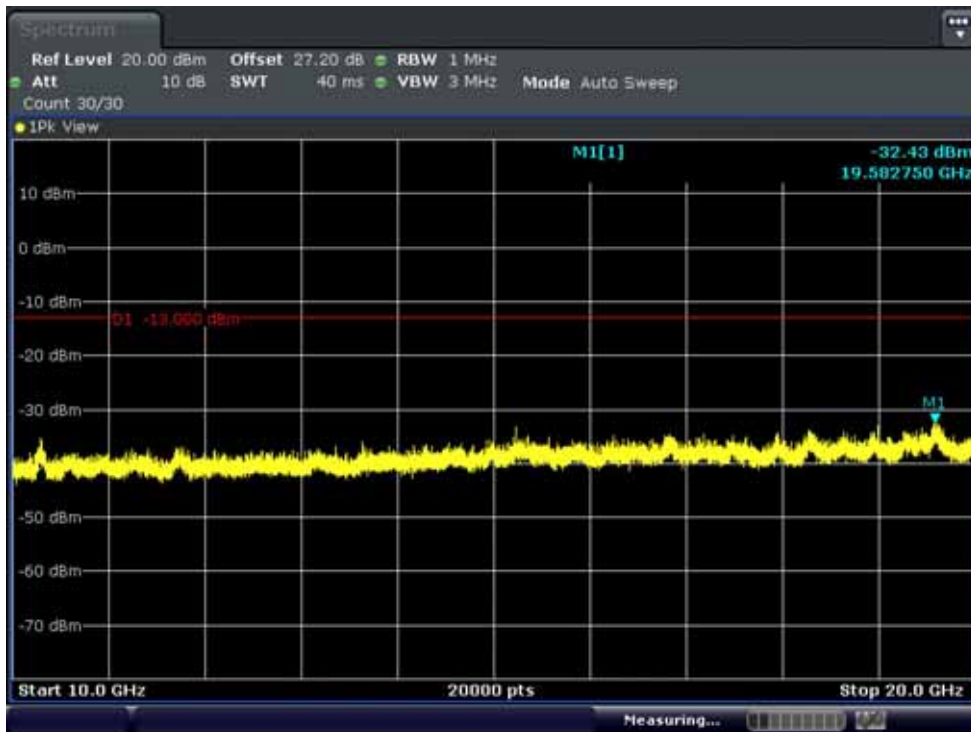


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 4. Conducted Spurious Plot_1 (20175ch_1.4MHz_QPSK_RB 1_24)

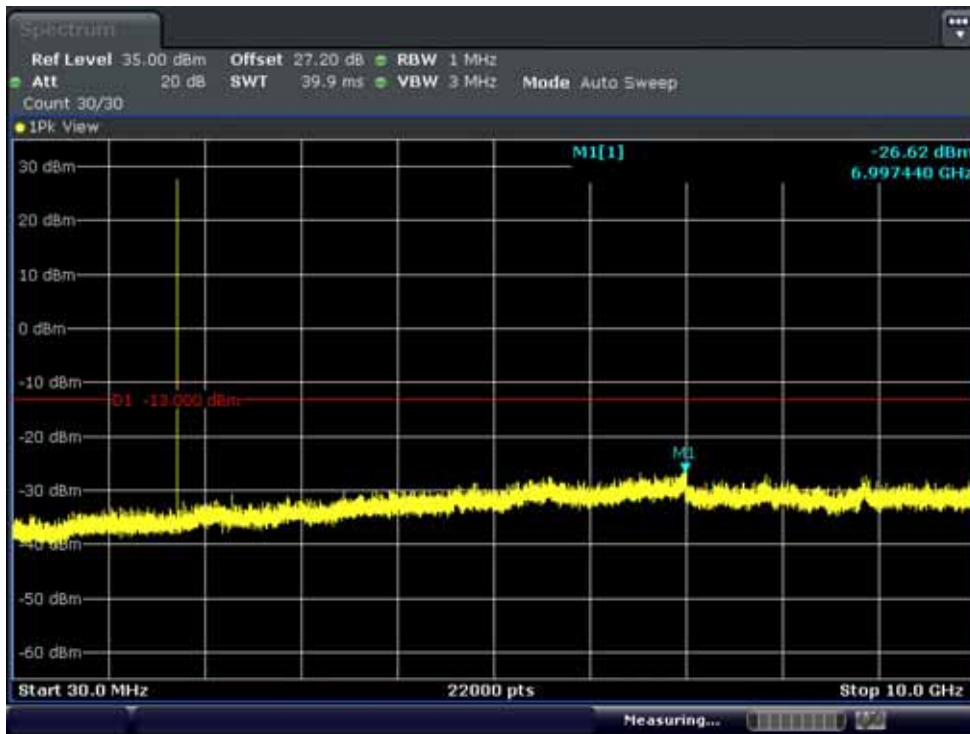


BAND 4. Conducted Spurious Plot_2 (20175ch_1.4MHz_QPSK_RB 1_24)

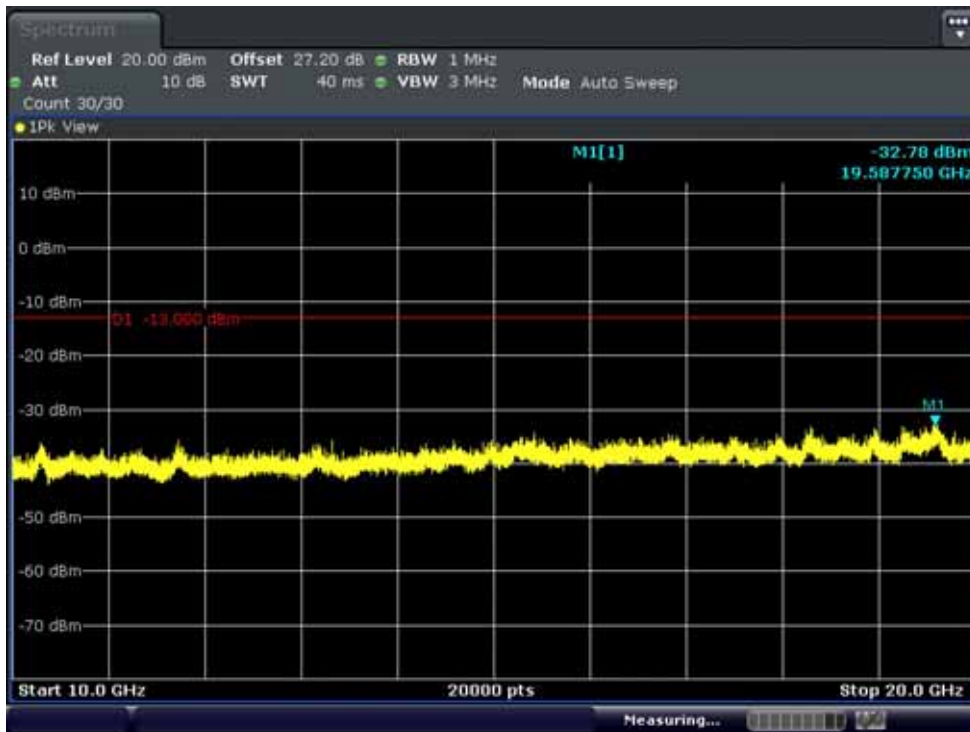

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20394ch_1.4MHz_QPSK_RB 1_24)

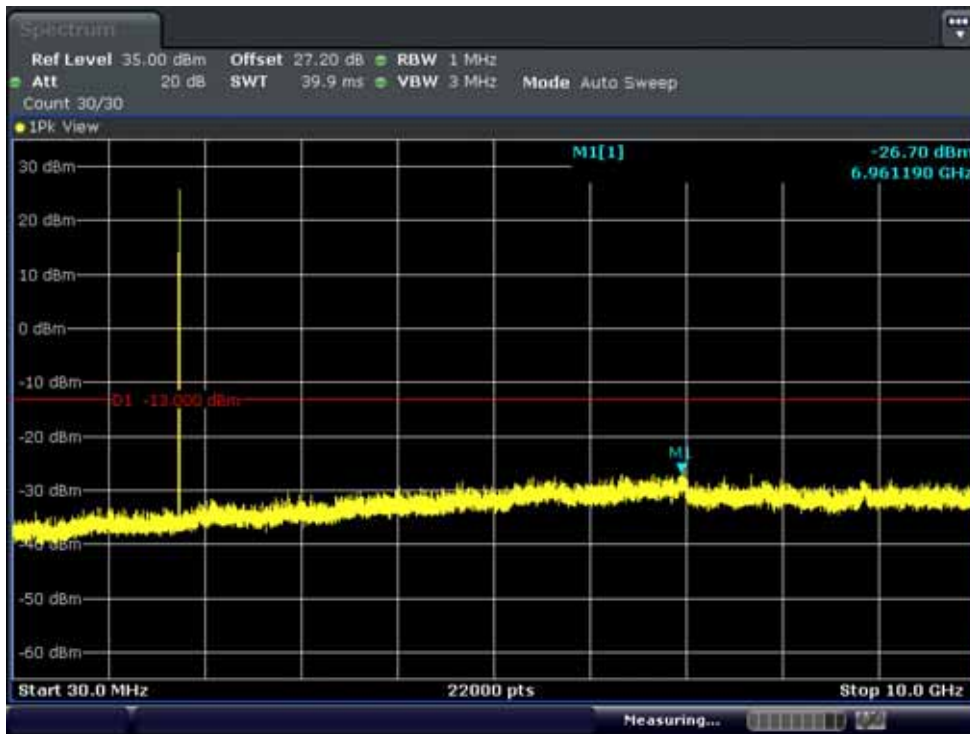


BAND 4 . Conducted Spurious Plot_2 (20394ch_1.4MHz_QPSK_RB 1_24)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 4. Conducted Spurious Plot_1 (19965ch_3MHz_QPSK_RB 1_0)

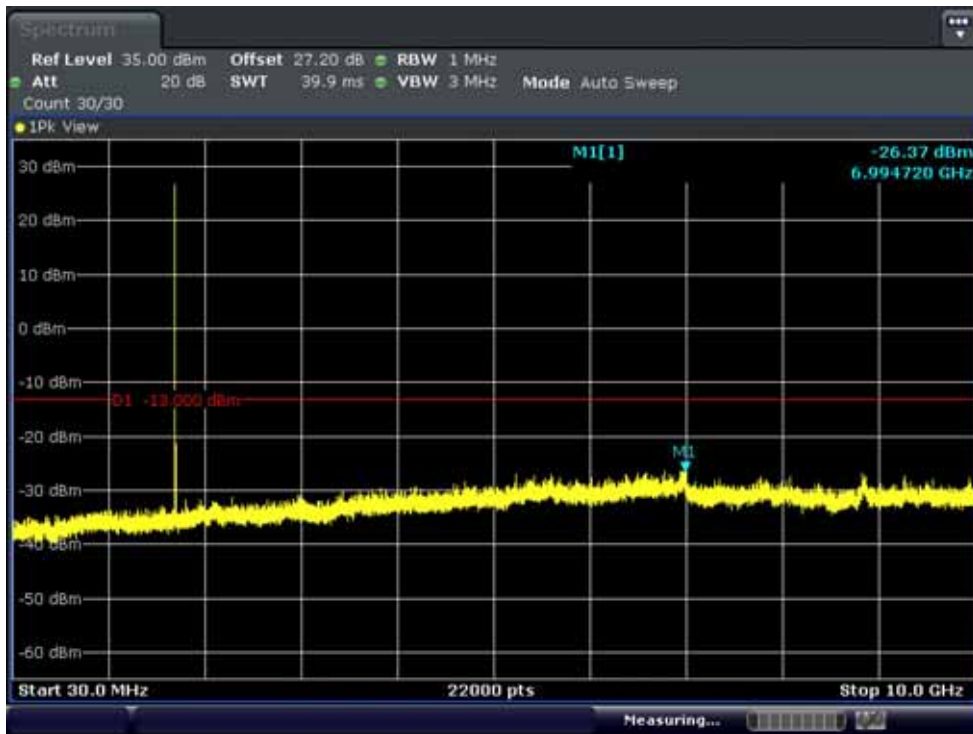


BAND 4. Conducted Spurious Plot_2 (19965ch_3MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20175ch_3MHz_QPSK_RB 1_0)

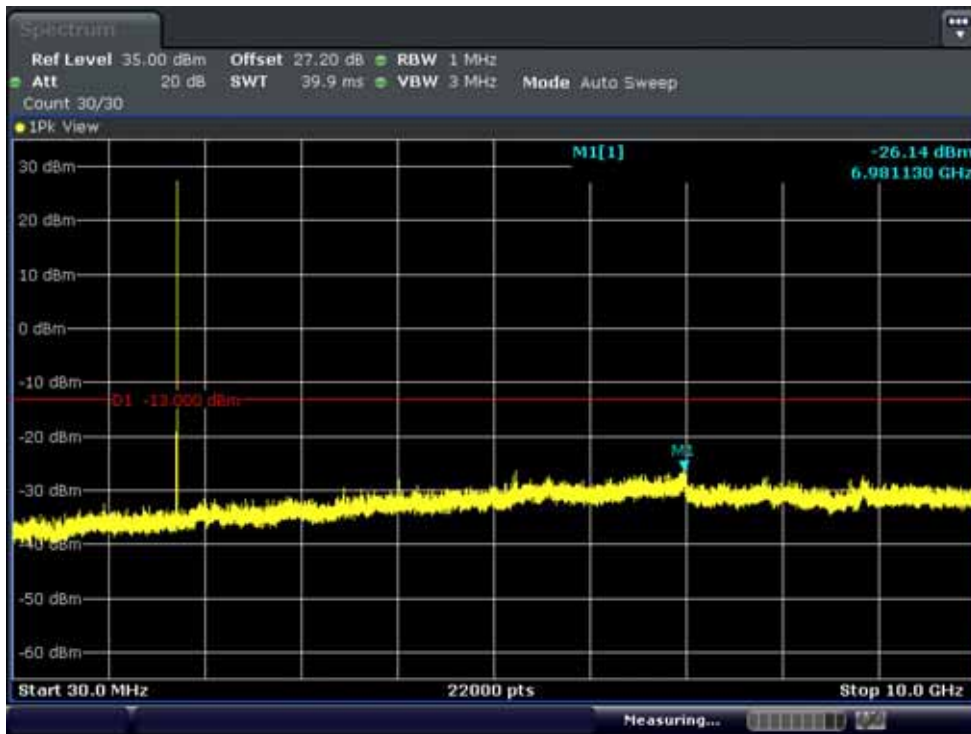


BAND 4. Conducted Spurious Plot_2 (20175ch_3MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20385ch_3MHz_QPSK_RB 1_0)

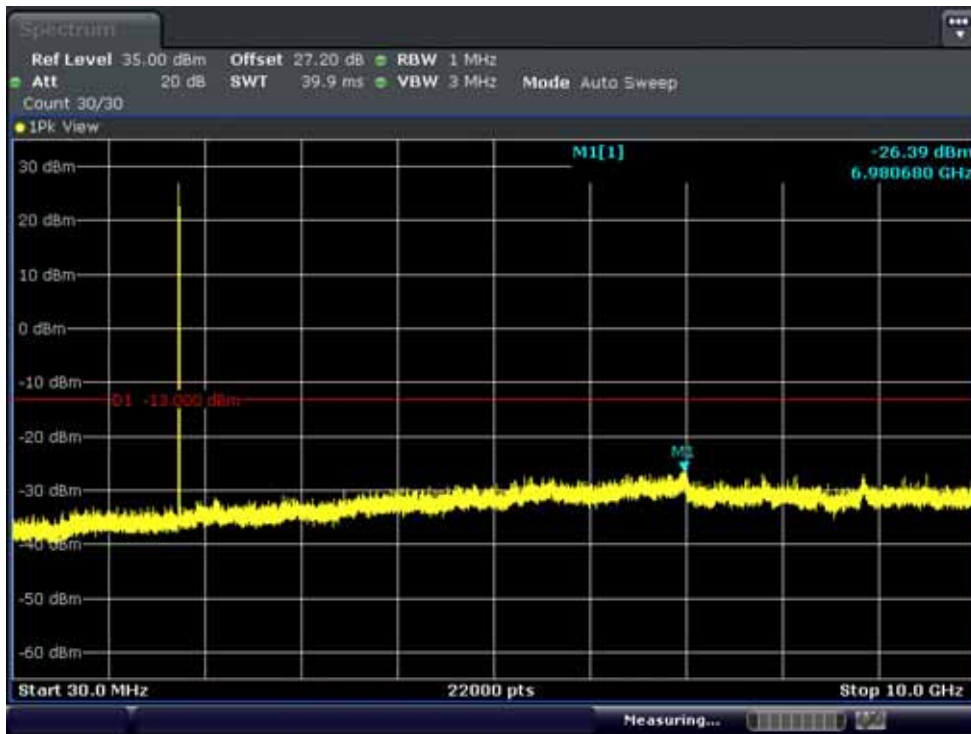


BAND 4. Conducted Spurious Plot_2 (20385ch_3MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (19975ch_5MHz_QPSK_RB 1_0)

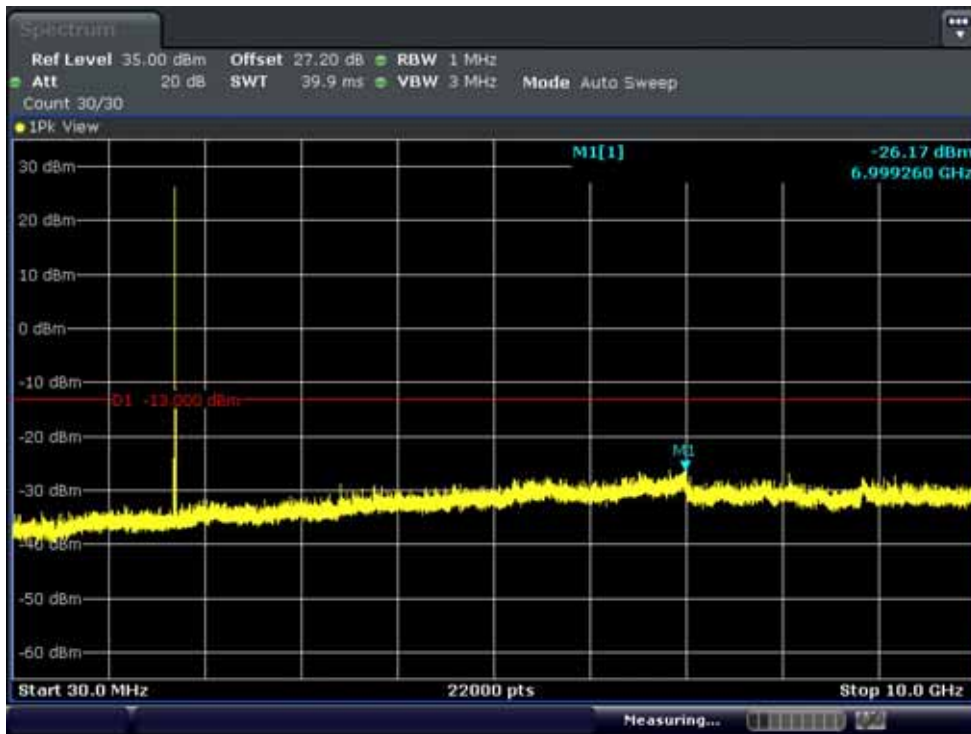


BAND 4. Conducted Spurious Plot_2 (19975ch_5MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20175ch_5MHz_QPSK_RB 1_24)

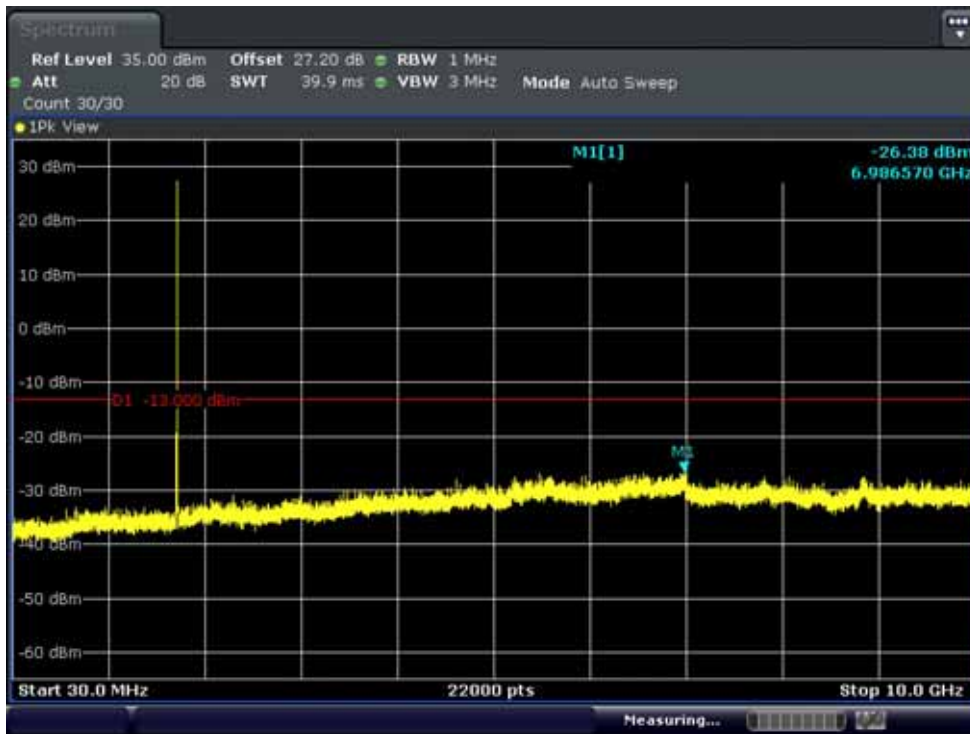


BAND 4. Conducted Spurious Plot_2 (20175ch_5MHz_QPSK_RB 1_24)

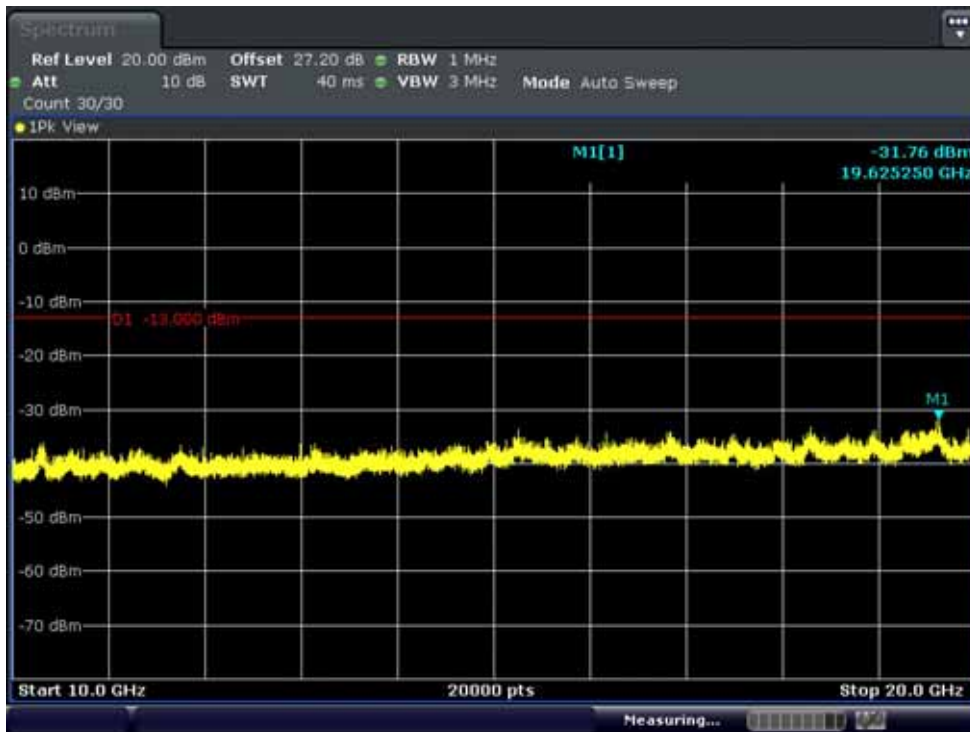


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20375ch_5MHz_QPSK_RB 1_24)

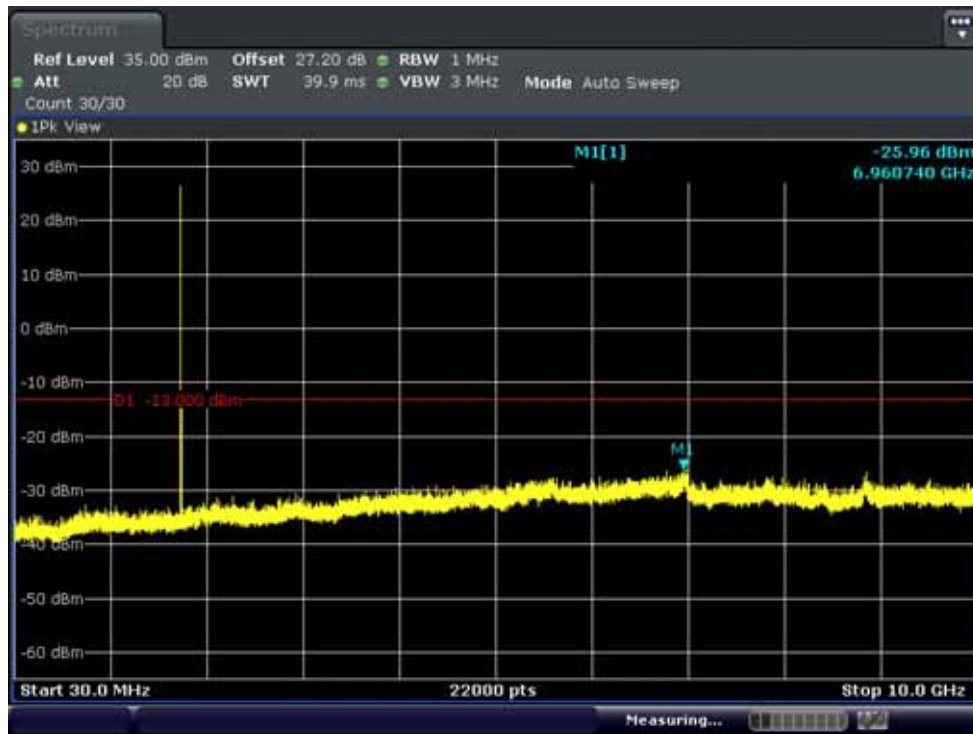


BAND 4 . Conducted Spurious Plot_2 (20375ch_5MHz_QPSK_RB 1_24)

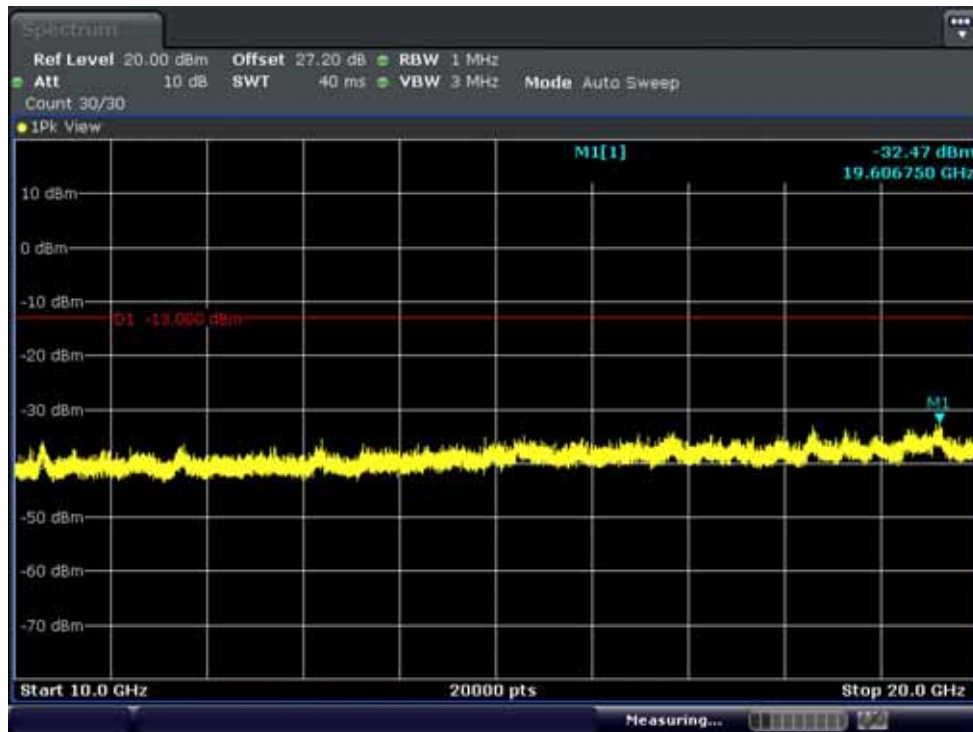

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20000ch_10MHz_QPSK_RB 1_0)

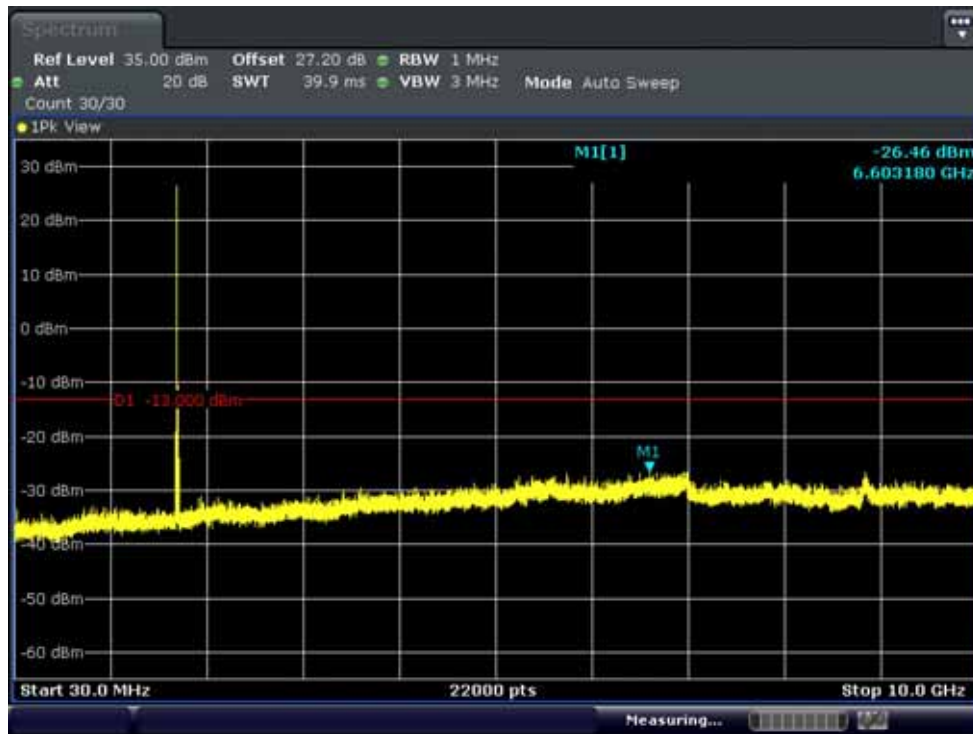


BAND 4. Conducted Spurious Plot_2 (20000ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20175ch_10MHz_QPSK_RB 1_0)

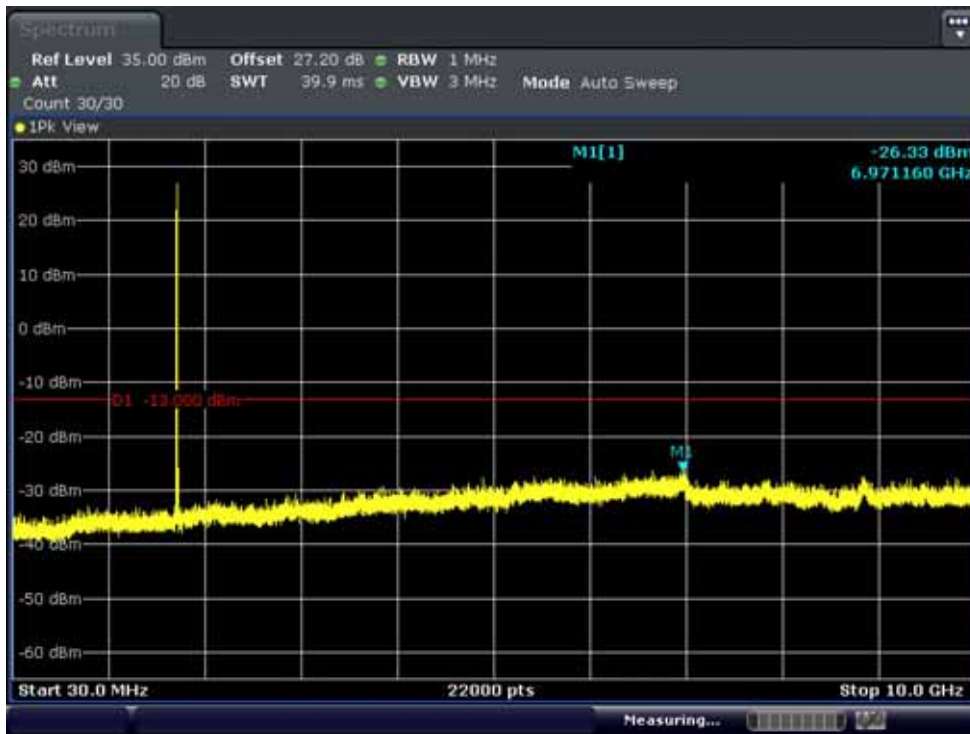


BAND 4. Conducted Spurious Plot_2 (20175ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20350ch_10MHz_QPSK_RB 1_0)

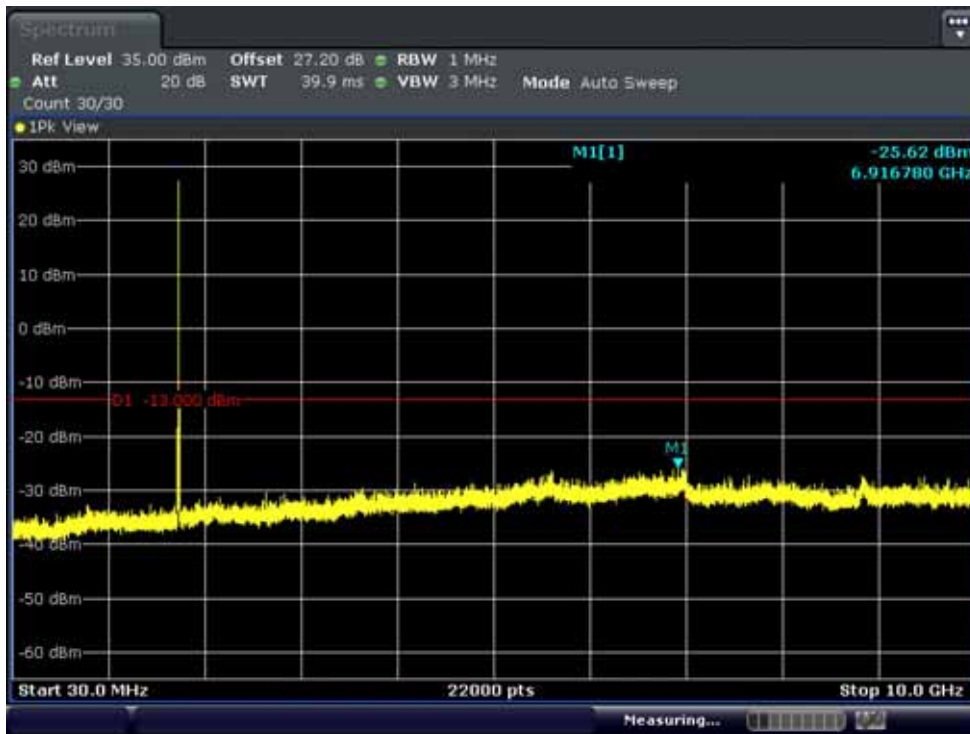


BAND 4. Conducted Spurious Plot_2 (20350ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20025ch_15MHz_QPSK_RB 1_0)

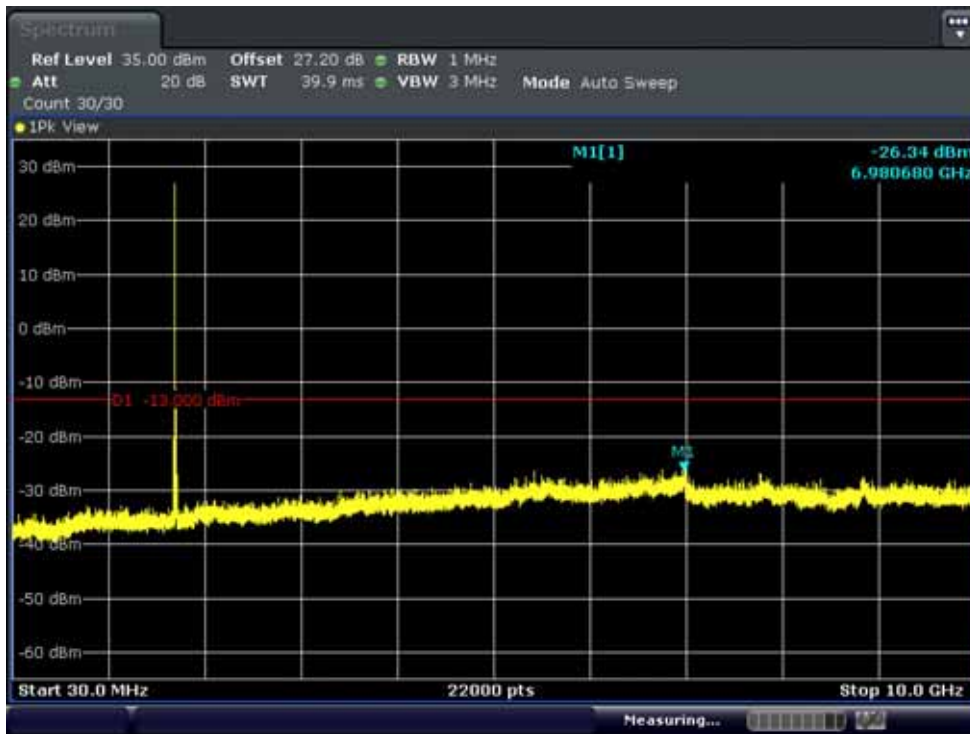


BAND 4. Conducted Spurious Plot_2 (20025ch_15MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

BAND 4. Conducted Spurious Plot_1 (20175ch_15MHz_QPSK_RB 1_24)

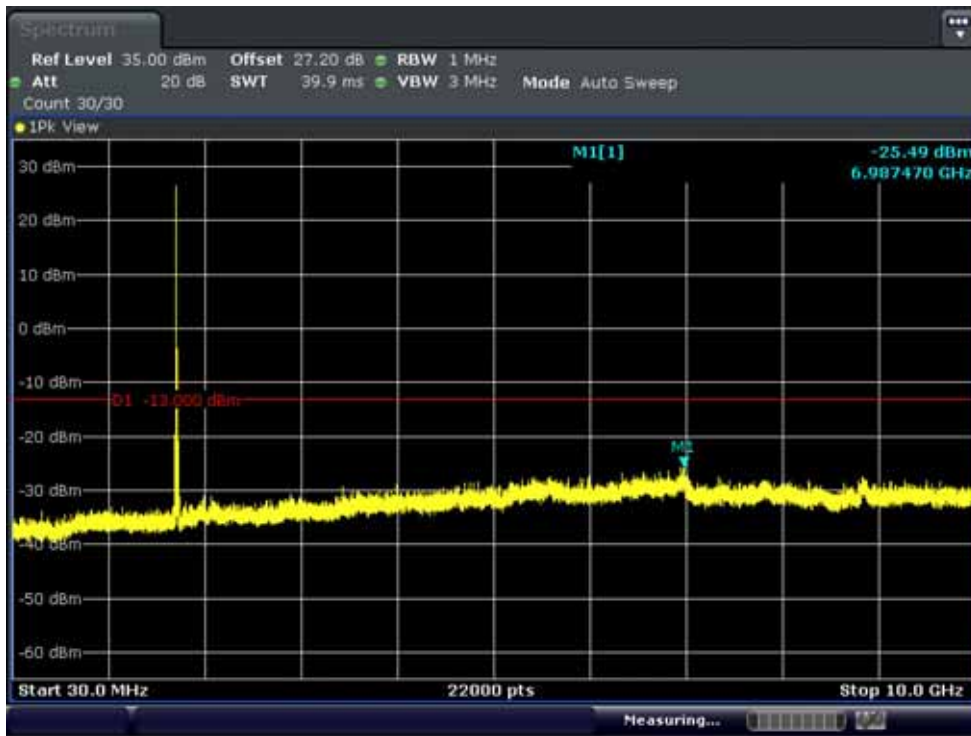


BAND 4. Conducted Spurious Plot_2 (20175ch_15MHz_QPSK_RB 1_24)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20325ch_15MHz_QPSK_RB 1_24)

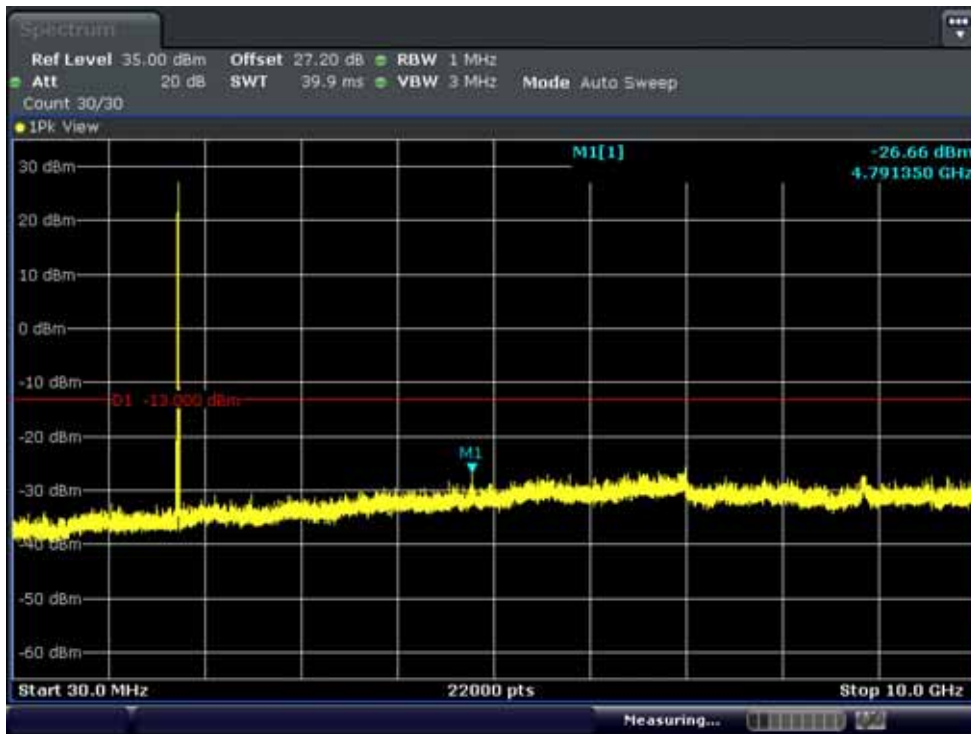


BAND 4 . Conducted Spurious Plot_2 (20325ch_15MHz_QPSK_RB 1_24)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20500ch_20MHz_QPSK_RB 1_0)

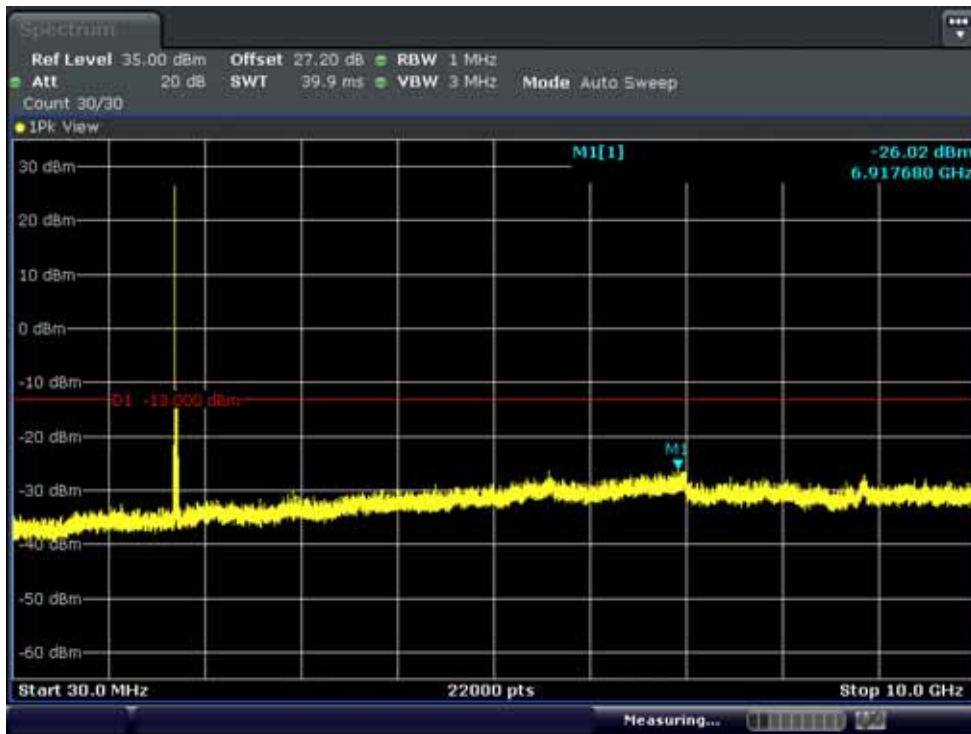


BAND 4. Conducted Spurious Plot_2 (20500ch_20MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

BAND 4. Conducted Spurious Plot_1 (20175ch_20MHz_QPSK_RB 1_0)

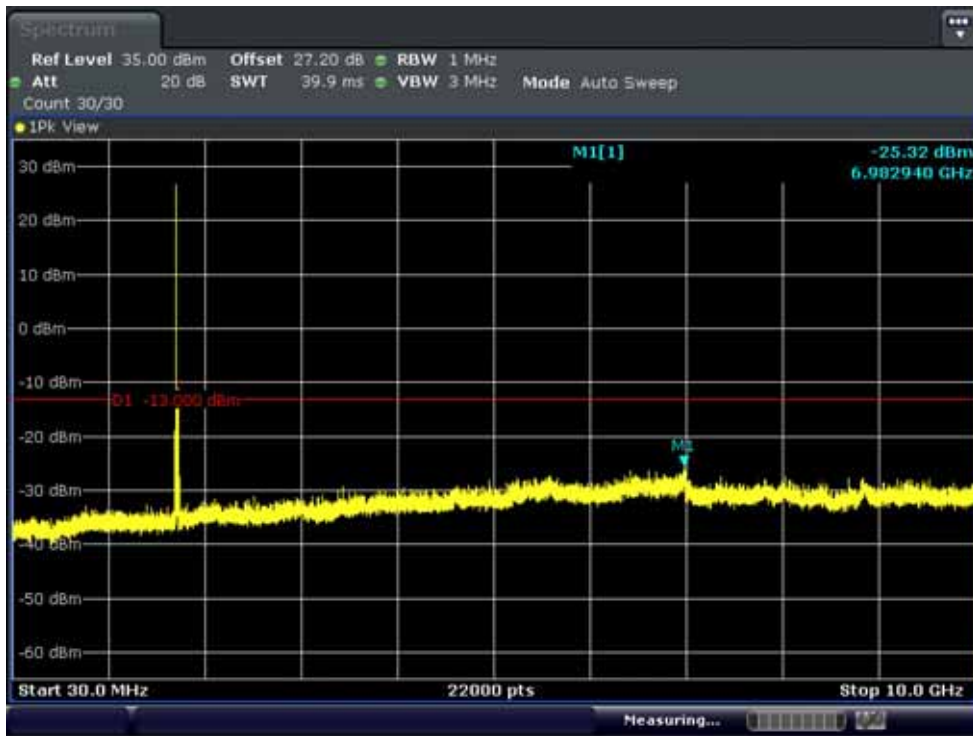


BAND 4. Conducted Spurious Plot_2 (20175ch_20MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

BAND 4. Conducted Spurious Plot_1 (20300ch_20MHz_QPSK_RB 1_0)

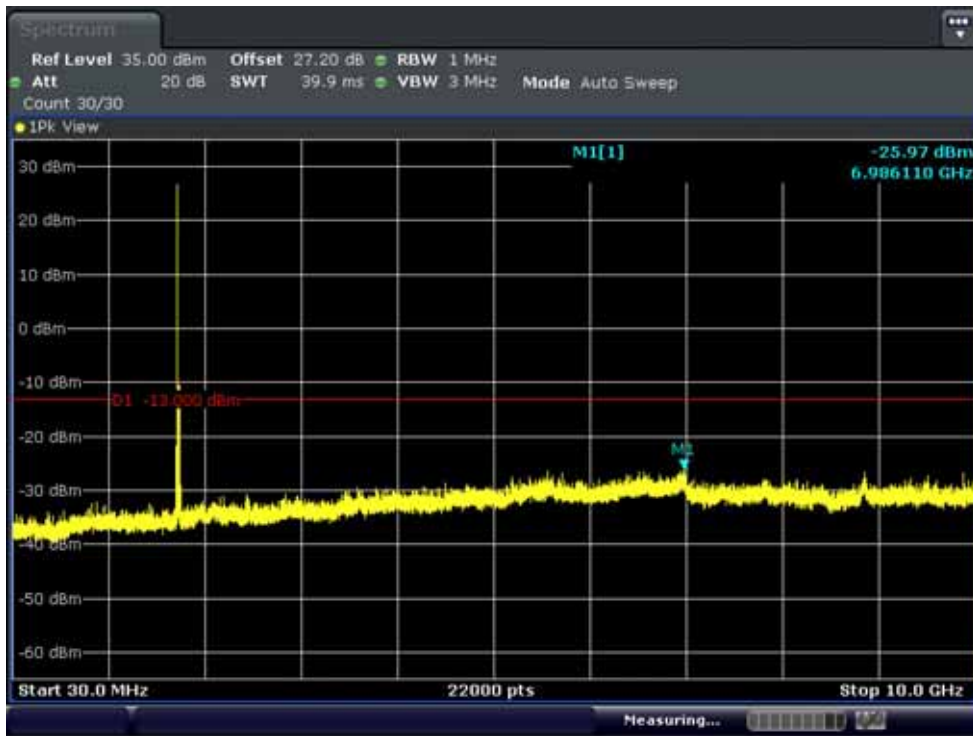

BAND 4. Conducted Spurious Plot_2 (20300ch_20MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F011-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---