



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 22, 24, 27 LTE


Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
12/05 - 12/13/13
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1312022314.A3L



| | |
|-------------------|--|
| FCC ID : | ZNFD950 |
| APPLICANT: | LG ELECTRONICS MOBILECOMM U.S.A |

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §22; §24; §27
EUT Type: Portable Handset
Model(s): LG-D950, D950, LGD950
Test Device Serial No.: *identical prototype* [S/N: WLAN]
Class II Permissive Change: Please see FCC change documents.
Original Grant Date: 11/22/2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




 Randy Ortanez
 President




| | | | | |
|---|---|---|---|--|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 1 of 27 | |

T A B L E O F C O N T E N T S

| | | |
|---|--|----|
| FCC PART 22, 24, 27 MEASUREMENT REPORT | | 3 |
| 1.0 INTRODUCTION | | 4 |
| 1.1 SCOPE | | 4 |
| 1.2 TESTING FACILITY | | 4 |
| 2.0 PRODUCT INFORMATION..... | | 5 |
| 2.1 EQUIPMENT DESCRIPTION | | 5 |
| 2.2 DEVICE CAPABILITIES..... | | 5 |
| 2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS | | 5 |
| 2.4 LABELING REQUIREMENTS..... | | 5 |
| 3.0 DESCRIPTION OF TESTS | | 6 |
| 3.1 MEASUREMENT PROCEDURE | | 6 |
| 3.2 BLOCK A FREQUENCY RANGE | | 6 |
| 3.3 CELLULAR - BASE FREQUENCY BLOCKS..... | | 6 |
| 3.4 CELLULAR - MOBILE FREQUENCY BLOCKS..... | | 6 |
| 3.5 PCS - BASE FREQUENCY BLOCKS | | 7 |
| 3.6 PCS - MOBILE FREQUENCY BLOCKS..... | | 7 |
| 3.7 AWS - BASE FREQUENCY BLOCKS | | 7 |
| 3.8 AWS - MOBILE FREQUENCY BLOCKS | | 7 |
| 3.9 RADIATED SPURIOUS EMISSIONS | | 8 |
| 4.0 TEST EQUIPMENT CALIBRATION DATA | | 9 |
| 5.0 SAMPLE CALCULATIONS | | 10 |
| 6.0 TEST RESULTS..... | | 11 |
| 6.1 SUMMARY..... | | 11 |
| 6.2 BAND 17 RADIATED SPURIOUS EMISSIONS | | 12 |
| 6.3 BAND 5 RADIATED SPURIOUS EMISSIONS | | 15 |
| 6.4 BAND 4 RADIATED SPURIOUS EMISSIONS | | 18 |
| 6.5 BAND 2 RADIATED SPURIOUS EMISSIONS | | 21 |
| 6.6 BAND 7 RADIATED SPURIOUS EMISSIONS | | 24 |
| 7.0 CONCLUSION..... | | 27 |

| | | | | |
|---|---|---|---|--|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 2 of 27 | |



MEASUREMENT REPORT

FCC Part 22, 24, 27




§2.1033 General Information



APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22; §24; §27
BASE MODEL: LG-D950
FCC ID: ZNFD950
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: WLAN Production Pre-Production Engineering
DATE(S) OF TEST: 12/05 - 12/13/13
TEST REPORT S/N: 0Y1312022314.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 3 of 27 | |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

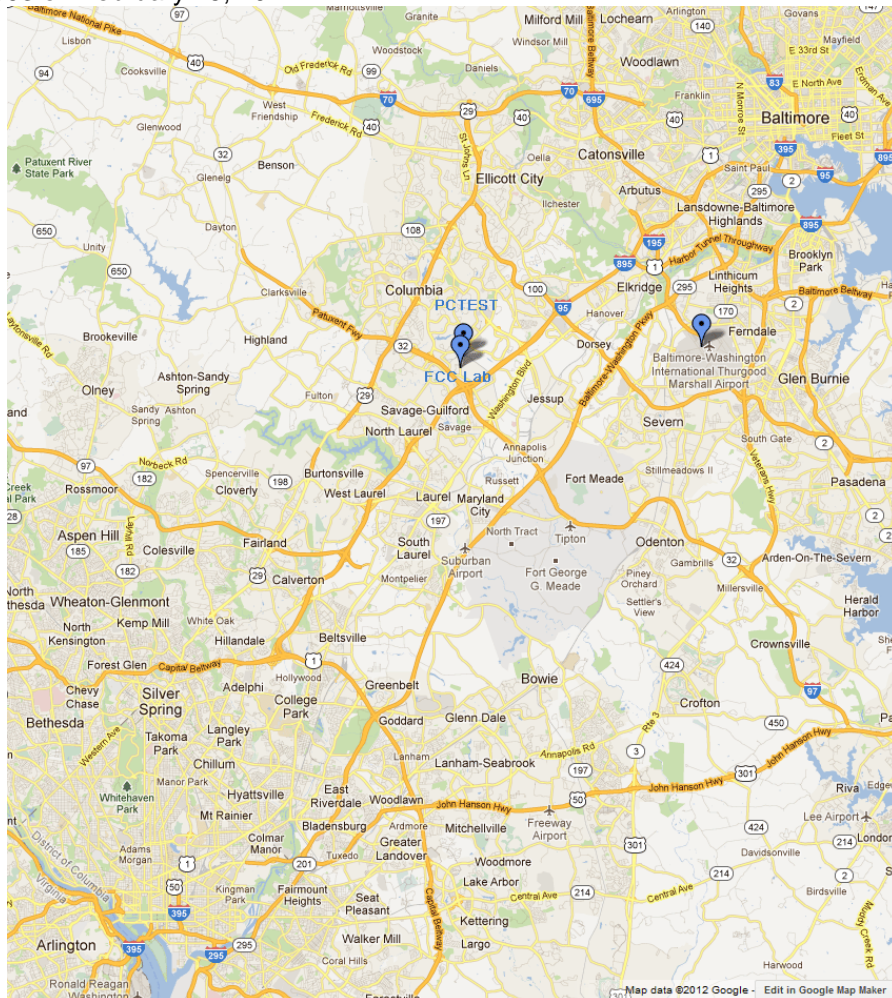


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

| | | | | |
|--------------------------------------|---------------------------------|---|--|---------------------------------|
| FCC ID: ZNFD950 | | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | | Page 4 of 27 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFD950**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 2, 4, 5, 17 (5/10MHz BW), 7 (5/10/15/20MHz BW) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC



2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | | Page 5 of 27 |

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **LG Portable Handset FCC ID: ZNFD950**.

3.2 Block A Frequency Range


§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

3.3 Cellular - Base Frequency Blocks

§24.905

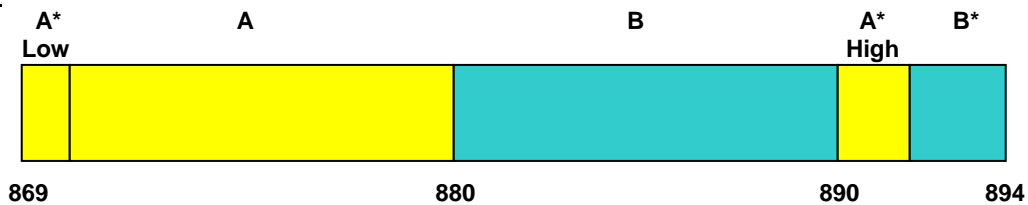


BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)



3.4 Cellular - Mobile Frequency Blocks

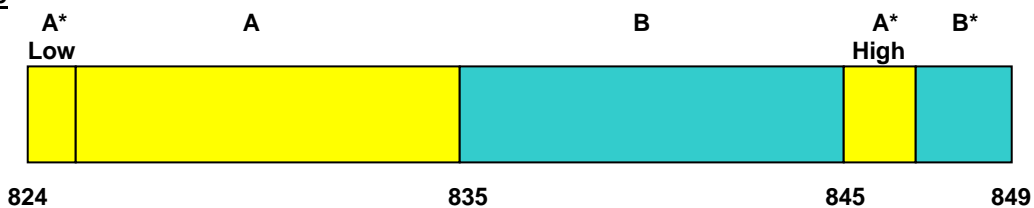§24.905




BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | | Page 6 of 27 |

3.5 PCS - Base Frequency Blocks


§24.229

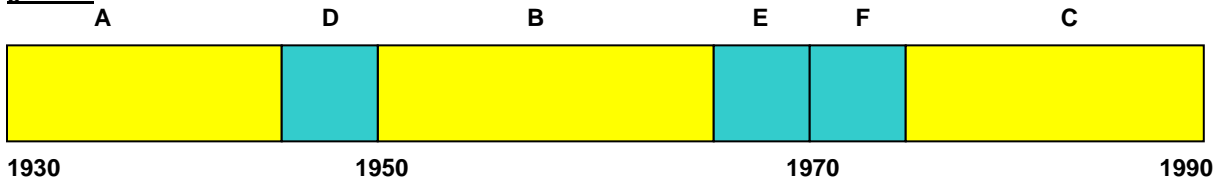

- BLOCK 1: 1930 – 1945 MHz (A)
- BLOCK 2: 1945 – 1950 MHz (D)
- BLOCK 3: 1950 – 1965 MHz (B)
- BLOCK 4: 1965 – 1970 MHz (E)
- BLOCK 5: 1970 – 1975 MHz (F)
- BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks


§24.229

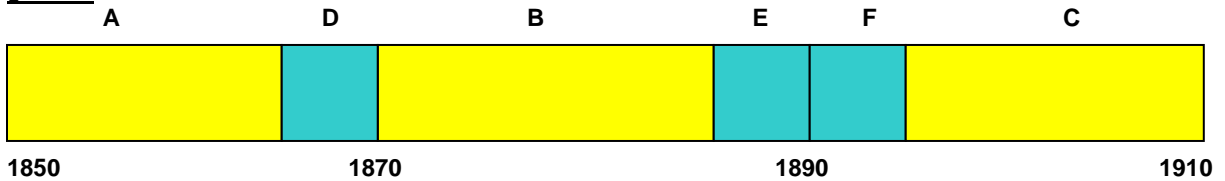

- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks


§27.5(h)

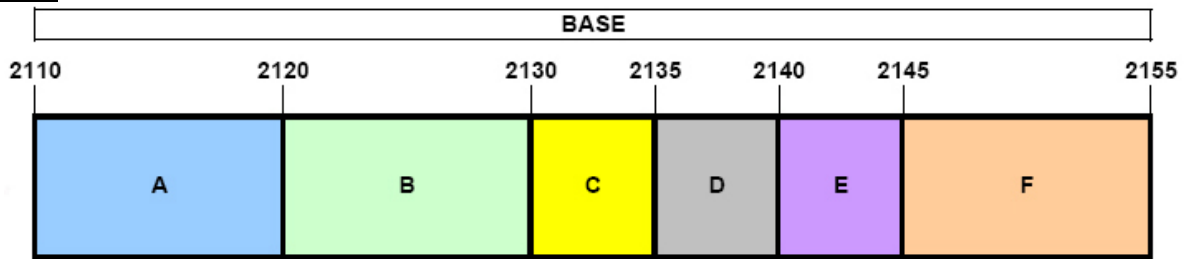

- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (E)

3.8 AWS - Mobile Frequency Blocks

§27.5(h)

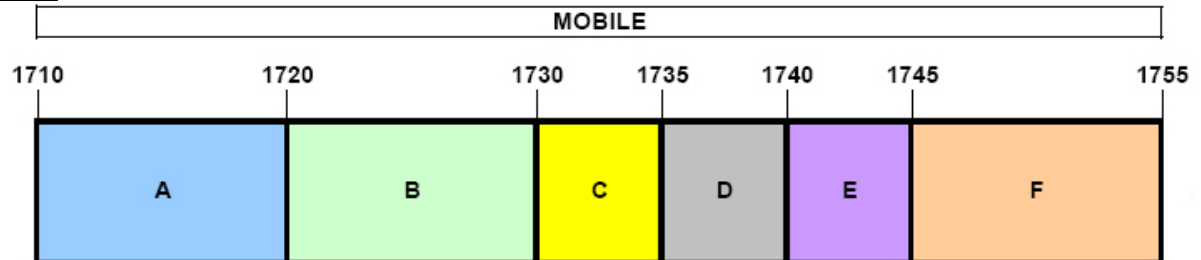

- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 3: 1730 – 1735 MHz (C)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)
- BLOCK 6: 1745 – 1755 MHz (F)

| | | | | |
|--------------------------------------|---------------------------------|---|--|---------------------------------|
| FCC ID: ZNFD950 | | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | | Page 7 of 27 |

3.9 Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) §27.53(h) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} [Watts])$ specified in 22.917(a) and 24.238(a).



| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 8 of 27 | |

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------|-----------|--|------------|--------------|------------|---------------|
| - | LTx1 | Licensed Transmitter Cable Set | 1/17/2013 | Annual | 1/17/2014 | N/A |
| - | RE1 | Radiated Emissions Cable Set (UHF/EHF) | 3/29/2013 | Annual | 3/29/2014 | N/A |
| Agilent | 8447D | Broadband Amplifier | 5/31/2013 | Annual | 5/31/2014 | 2443A01900 |
| Agilent | N9020A | MXA Signal Analyzer | 10/29/2013 | Annual | 10/29/2014 | US46470561 |
| Espec | ESX-2CA | Environmental Chamber | 4/16/2013 | Annual | 4/16/2014 | 17620 |
| ETS Lindgren | 3117 | 1-18 GHz DRG Horn (Medium) | 7/24/2013 | Biennial | 7/24/2015 | 125518 |
| ETS Lindgren | 3160-09 | 18-26.5 GHz Standard Gain Horn | 5/30/2012 | Biennial | 5/30/2014 | 135427 |
| ETS Lindgren | 3164-08 | Quad Ridge Horn Antenna | 11/7/2012 | Biennial | 11/7/2014 | 128338 |
| Mini-Circuits | VHF-1300+ | High Pass Filter | 1/21/2013 | Annual | 1/21/2014 | 30716 |
| Mini-Circuits | VHF-3100+ | High Pass Filter | 1/17/2013 | Annual | 1/17/2014 | 30841 |
| Rohde & Schwarz | CMW500 | LTE Radio Communication Tester | 10/4/2013 | Biennial | 10/4/2015 | 103962 |
| Rohde & Schwarz | TS-PR18 | 1-18 GHz Pre-Amplifier | 5/31/2013 | Annual | 5/31/2014 | 100071 |
| Rohde & Schwarz | TS-PR26 | 18-26.5 GHz Pre-Amplifier | 5/31/2013 | Annual | 5/31/2014 | 100040 |
| Rohde & Schwarz | ESU26 | EMI Test Receiver | 2/25/2013 | Annual | 2/25/2014 | 100342 |
| Schwarzbeck | UHA 9105 | Dipole Antenna (400 - 1GHz) Rx | 11/21/2013 | Biennial | 11/21/2015 | 9105-2404 |
| Seekonk | NC-100 | Torque Wrench (8" lb) | 3/5/2012 | Triennial | 3/5/2015 | N/A |
| Sunol | JB5 | Bi-Log Antenna (30M - 5GHz) | 1/26/2012 | Biennial | 1/26/2014 | A051107 |

Table 4-1. Test Equipment



| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 9 of 27 | |

5.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80)$.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 10 of 27 | |

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFD950
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Result | Reference |
|--|-----------------------|--|----------------|--------|---------------------------------|
| TRANSMITTER MODE (TX) | | | | | |
| 2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h) 27.53(m) | Undesirable Emissions | $> 43 + 10\log_{10}$ (P[Watts]) for all out-of-band emissions | | PASS | Section 6.2, 6.3, 6.4, 6.5, 6.6 |

Table 6-1. Summary of Test Results

Note:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 11 of 27 | |

6.2 Band 17 Radiated Spurious Emissions

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 706.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1413.00 | -49.38 | 2.41 | -46.98 | H | -33.98 |
| 2119.50 | -80.76 | 3.24 | -77.52 | H | -64.52 |
| 2826.00 | -80.44 | 4.60 | -75.84 | H | -62.84 |
| 3532.50 | -81.02 | 6.14 | -74.88 | H | -61.88 |
| 4239.00 | -80.29 | 7.15 | -73.14 | H | -60.14 |
| 4945.50 | -79.07 | 7.78 | -71.30 | H | -58.30 |

Table 6-2. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 12 of 27 | |

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 710.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1420.00 | -50.19 | 2.48 | -47.71 | H | -34.71 |
| 2130.00 | -80.80 | 3.28 | -77.51 | H | -64.51 |
| 2840.00 | -80.43 | 4.62 | -75.81 | H | -62.81 |
| 3550.00 | -80.92 | 6.12 | -74.80 | H | -61.80 |
| 4260.00 | -80.26 | 7.18 | -73.08 | H | -60.08 |
| 4970.00 | -79.10 | 7.83 | -71.27 | H | -58.27 |

Table 6-3. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 13 of 27 | |

Band 17 Radiated Spurious Measurements (continued)
§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 713.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1427.00 | -51.27 | 2.56 | -48.71 | H | -35.71 |
| 2140.50 | -80.83 | 3.33 | -77.51 | H | -64.51 |
| 2854.00 | -80.43 | 4.64 | -75.78 | H | -62.78 |
| 3567.50 | -80.82 | 6.09 | -74.73 | H | -61.73 |
| 4281.00 | -80.24 | 7.22 | -73.02 | H | -60.02 |
| 4994.50 | -79.12 | 7.88 | -71.24 | H | -58.24 |

Table 6-4. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 14 of 27 | |

6.3 Band 5 Radiated Spurious Emissions §2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 829.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1658.00 | -53.28 | 3.72 | -49.56 | H | -36.56 |
| 2487.00 | -49.42 | 3.61 | -45.80 | H | -32.80 |
| 3316.00 | -80.72 | 5.64 | -75.08 | H | -62.08 |
| 4145.00 | -80.39 | 6.94 | -73.45 | H | -60.45 |
| 4974.00 | -79.10 | 7.84 | -71.26 | H | -58.26 |
| 5803.00 | -77.09 | 8.55 | -68.54 | H | -55.54 |

Table 6-5. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 15 of 27 | |

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1673.00 | -52.85 | 3.67 | -49.18 | H | -36.18 |
| 2509.50 | -47.80 | 3.65 | -44.15 | H | -31.15 |
| 3346.00 | -80.82 | 5.74 | -75.08 | H | -62.08 |
| 4182.50 | -80.36 | 7.04 | -73.32 | H | -60.32 |
| 5019.00 | -79.07 | 7.90 | -71.16 | H | -58.16 |
| 5855.50 | -76.69 | 8.51 | -68.18 | H | -55.18 |

Table 6-6. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 16 of 27 | |

Band 5 Radiated Spurious Measurements (continued)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 844.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 1688.00 | -53.37 | 3.62 | -49.75 | H | -36.75 |
| 2532.00 | -49.39 | 3.72 | -45.67 | H | -32.67 |
| 3376.00 | -80.92 | 5.83 | -75.09 | H | -62.09 |
| 4220.00 | -80.32 | 7.11 | -73.20 | H | -60.20 |
| 5064.00 | -78.92 | 7.93 | -70.99 | H | -57.99 |
| 5908.00 | -76.29 | 8.46 | -67.83 | H | -54.83 |

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 17 of 27 | |

6.4 Band 4 Radiated Spurious Emissions

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1715.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3430.00 | -52.32 | 8.11 | -44.21 | H | -31.21 |
| 5145.00 | -82.21 | 10.13 | -72.08 | H | -59.08 |
| 6860.00 | -79.47 | 11.31 | -68.16 | H | -55.16 |
| 8575.00 | -80.81 | 12.98 | -67.83 | H | -54.83 |
| 10290.00 | -78.01 | 13.22 | -64.80 | H | -51.80 |
| 12005.00 | -74.84 | 13.01 | -61.83 | H | -48.83 |

Table 6-8. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 18 of 27 | |

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3465.00 | -51.59 | 8.23 | -43.35 | H | -30.35 |
| 5197.50 | -82.15 | 10.18 | -71.97 | H | -58.97 |
| 6930.00 | -79.62 | 11.41 | -68.21 | H | -55.21 |
| 8662.50 | -80.69 | 13.00 | -67.69 | H | -54.69 |
| 10395.00 | -77.43 | 13.15 | -64.28 | H | -51.28 |
| 12127.50 | -74.32 | 13.00 | -61.32 | H | -48.32 |

Table 6-9. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 19 of 27 | |

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1750.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3500.00 | -53.50 | 8.32 | -45.18 | H | -32.18 |
| 5250.00 | -82.06 | 10.20 | -71.86 | H | -58.86 |
| 7000.00 | -79.70 | 11.48 | -68.22 | H | -55.22 |
| 8750.00 | -80.38 | 12.97 | -67.41 | H | -54.41 |
| 10500.00 | -77.31 | 13.04 | -64.27 | H | -51.27 |
| 12250.00 | -74.20 | 13.03 | -61.17 | H | -48.17 |

Table 6-10. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 20 of 27 | |

6.5 Band 2 Radiated Spurious Emissions

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1855.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3710.00 | -53.66 | 8.30 | -45.37 | H | -32.37 |
| 5565.00 | -82.16 | 10.59 | -71.57 | H | -58.57 |
| 7420.00 | -55.53 | 11.96 | -43.57 | H | -30.57 |
| 9275.00 | -79.65 | 13.16 | -66.49 | H | -53.49 |
| 11130.00 | -77.17 | 13.25 | -63.92 | H | -50.92 |
| 12985.00 | -74.10 | 13.29 | -60.81 | H | -47.81 |

Table 6-11. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 21 of 27 | |

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3760.00 | -51.92 | 8.32 | -43.60 | H | -30.60 |
| 5640.00 | -82.15 | 10.67 | -71.47 | H | -58.47 |
| 7520.00 | -55.57 | 12.05 | -43.52 | H | -30.52 |
| 9400.00 | -79.17 | 13.16 | -66.02 | H | -53.02 |
| 11280.00 | -76.89 | 13.32 | -63.56 | H | -50.56 |
| 13160.00 | -74.07 | 13.47 | -60.59 | H | -47.59 |

Table 6-12. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 22 of 27 | |

Band 2 Radiated Spurious Measurements (continued)
§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1905.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 3810.00 | -51.46 | 8.36 | -43.10 | H | -30.10 |
| 5715.00 | -82.08 | 10.73 | -71.35 | H | -58.35 |
| 7620.00 | -55.29 | 12.12 | -43.17 | H | -30.17 |
| 9525.00 | -79.40 | 13.14 | -66.26 | H | -53.26 |
| 11430.00 | -76.74 | 13.36 | -63.39 | H | -50.39 |
| 13335.00 | -73.74 | 13.47 | -60.28 | H | -47.28 |

Table 6-13. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 23 of 27 | |

6.6 Band 7 Radiated Spurious Emissions

§2.1053 §27.53(m)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 2502.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 5005.00 | -56.82 | 10.05 | -46.77 | H | -33.77 |
| 7507.50 | -80.47 | 12.05 | -68.41 | H | -55.41 |
| 10010.00 | -77.83 | 13.13 | -64.70 | H | -51.70 |
| 12512.50 | -74.23 | 13.09 | -61.15 | H | -48.15 |
| 15015.00 | -72.04 | 13.91 | -58.14 | H | -45.14 |
| 17517.50 | -69.04 | 13.74 | -55.30 | H | -42.30 |

Table 6-14. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 24 of 27 | |

Band 7 Radiated Spurious Measurements (continued)
§2.1053 §27.53(m)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 2535.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 5070.00 | -56.47 | 10.05 | -46.42 | H | -33.42 |
| 7605.00 | -80.47 | 12.05 | -68.41 | H | -55.41 |
| 10140.00 | -77.83 | 13.13 | -64.70 | H | -51.70 |
| 12675.00 | -74.23 | 13.09 | -61.15 | H | -48.15 |
| 15210.00 | -72.04 | 13.91 | -58.14 | H | -45.14 |
| 17745.00 | -69.04 | 13.74 | -55.30 | H | -42.30 |

Table 6-15. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 25 of 27 | |

Band 7 Radiated Spurious Measurements (continued)
§2.1053 §27.53(m)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 2567.50 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | Margin (dB) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------------|
| 5135.00 | -57.32 | 10.05 | -47.27 | H | -34.27 |
| 7702.50 | -80.47 | 12.05 | -68.41 | H | -55.41 |
| 10270.00 | -77.83 | 13.13 | -64.70 | H | -51.70 |
| 12837.50 | -74.23 | 13.09 | -61.15 | H | -48.15 |
| 15405.00 | -72.04 | 13.91 | -58.14 | H | -45.14 |
| 17972.50 | -69.04 | 13.74 | -55.30 | H | -42.30 |

Table 6-16. Radiated Spurious Data



NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW 1RB/12 Offset for B17, 10MHz BW 1RB/0 Offset for B5, 10MHz BW 1RB/25 Offset for B4, 10MHz BW 1RB/0 Offset for B2, and 5MHz BW 1RB/0 Offset for B7.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning for B17/B5 and in the H2 positioning for B4, B2, and B7. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|---|---|---------------------------------|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | Page 26 of 27 | |

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFD950** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

| | | | | |
|---|---|---|---|--|
| FCC ID: ZNFD950 |  | FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1312022314.A3L | Test Dates: 12/05 - 12/13/13 | EUT Type: Portable Handset | | Page 27 of 27 |