

SAR Test Plots – Head SAR Plots

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.090 dB
Peak SAR (extrapolated) = 0.570 W/kg
SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.331 W/kg

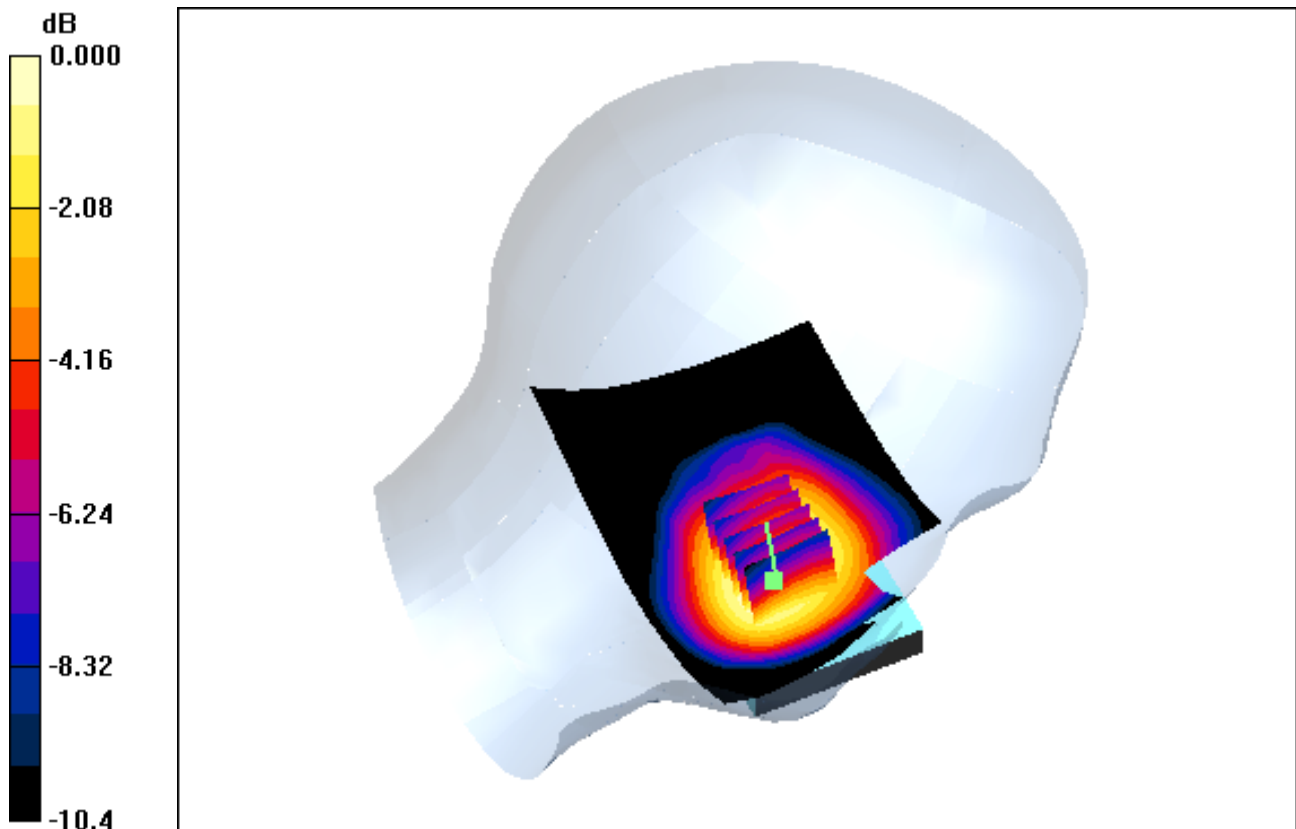

0 dB = 0.512mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.090 dB
Peak SAR (extrapolated) = 0.570 W/kg
SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.331 W/kg

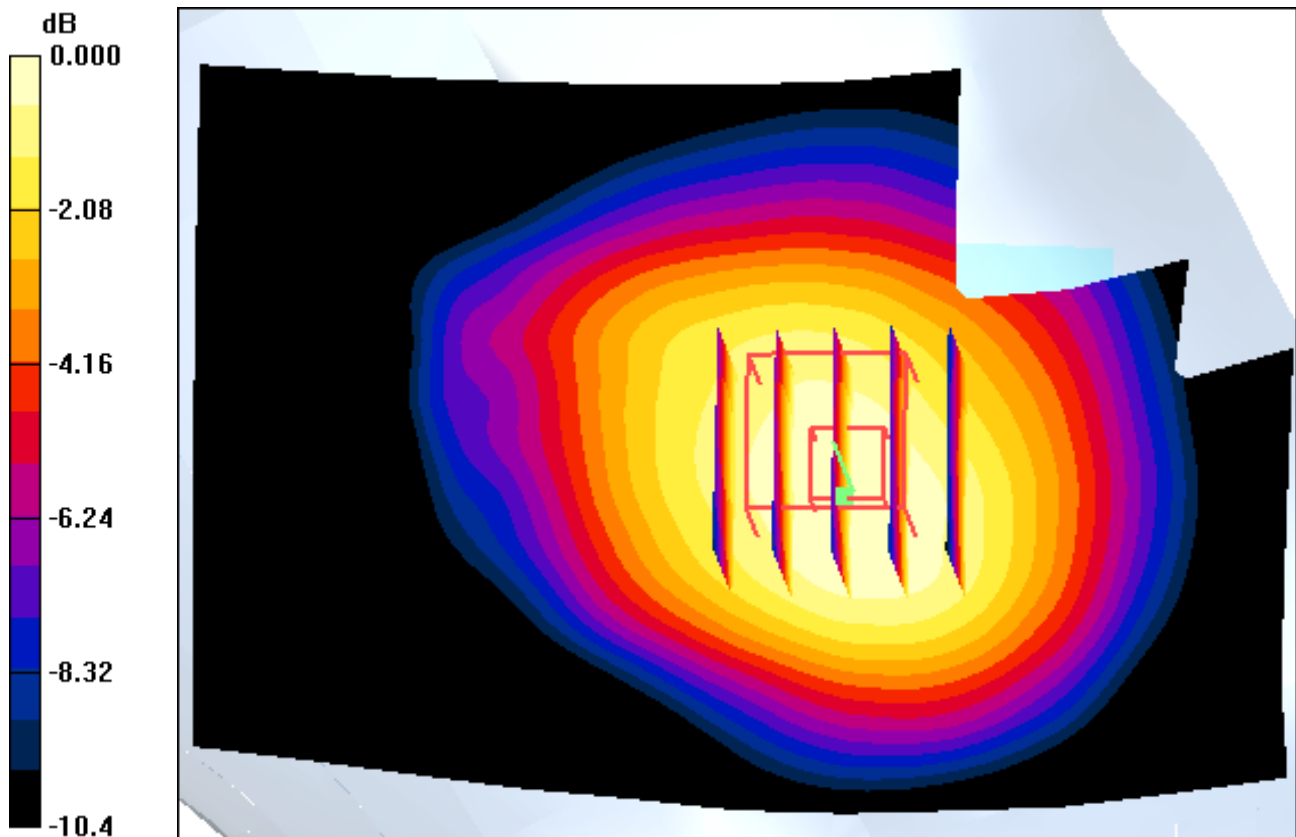

0 dB = 0.512mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.067 dB
Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.268 W/kg

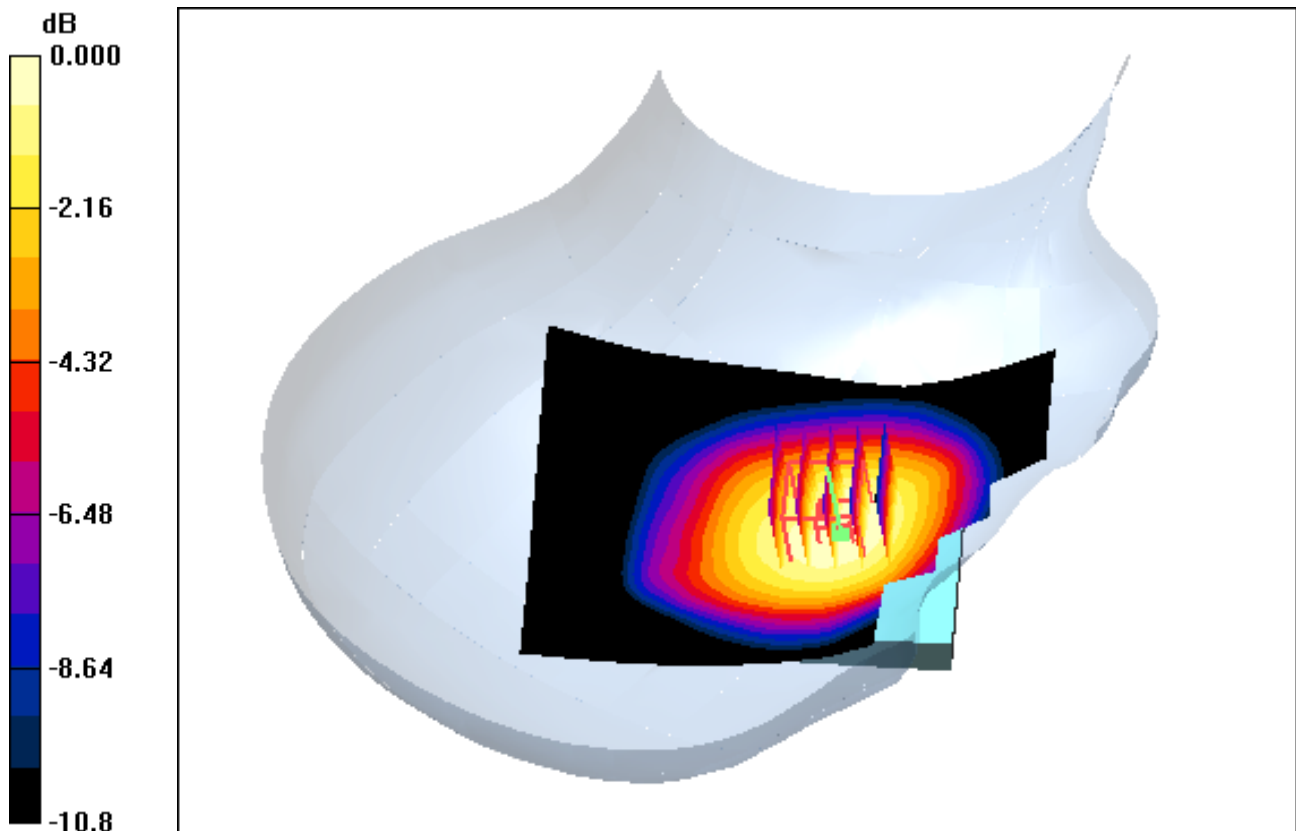

0 dB = 0.412mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.067 dB
Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.268 W/kg

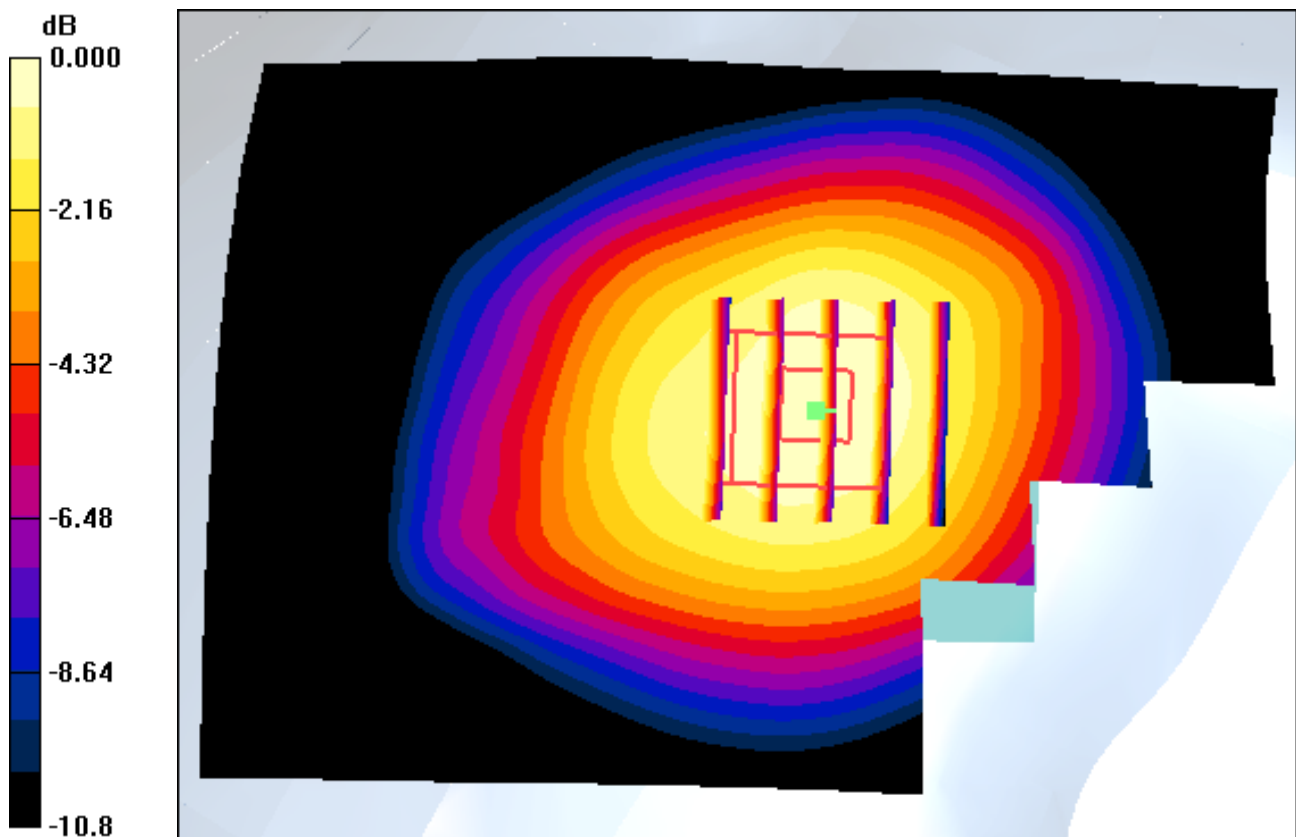

0 dB = 0.412mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.170 W/kg

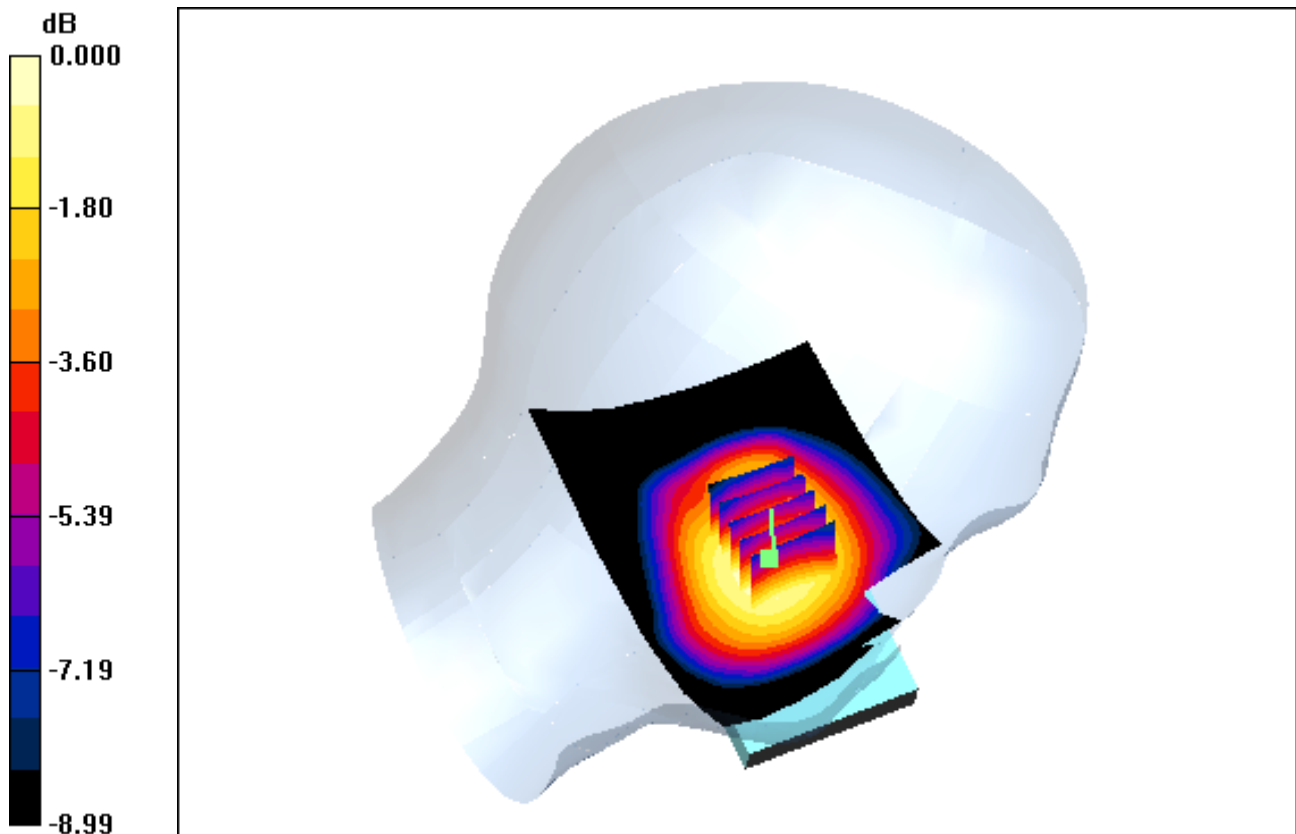

0 dB = 0.256mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.038 dB
Peak SAR (extrapolated) = 0.278 W/kg
SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.170 W/kg

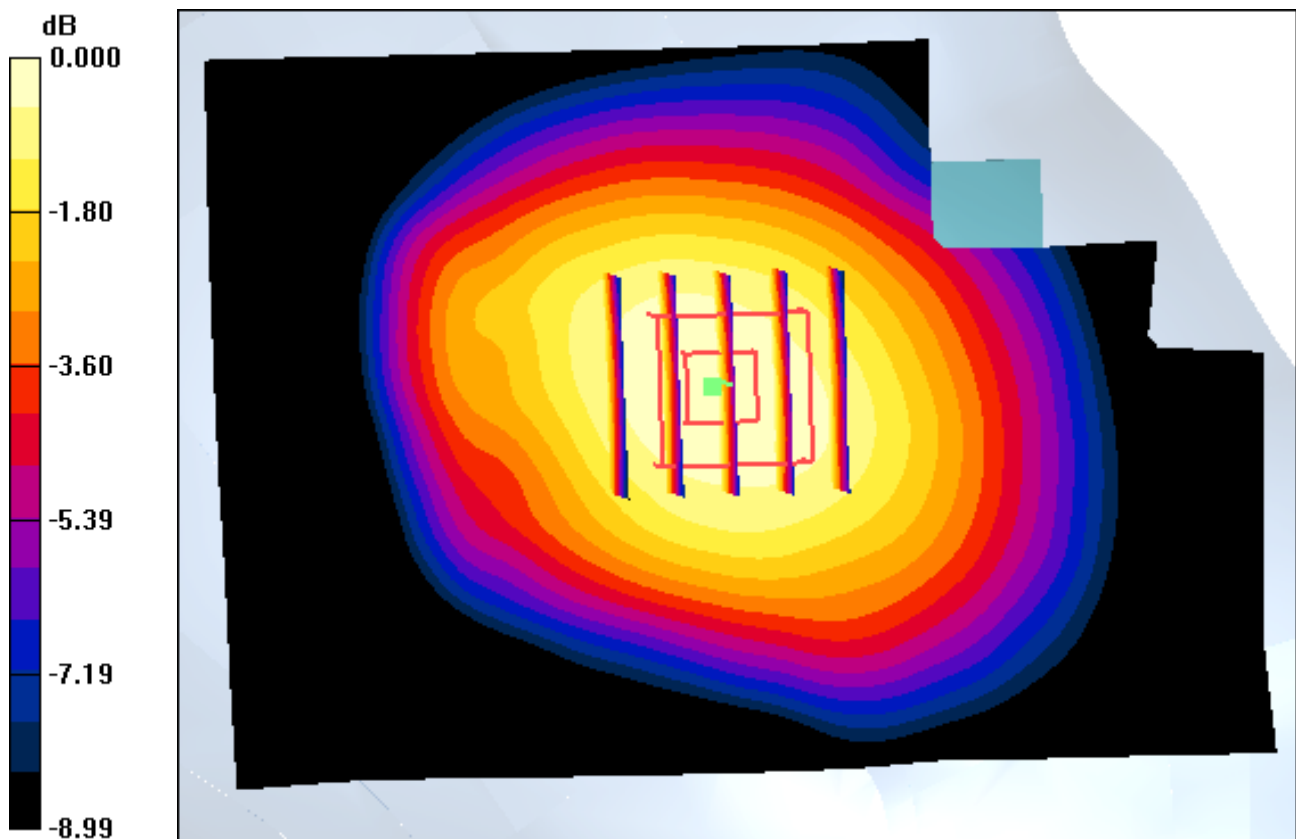

0 dB = 0.256mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.065 dB
Peak SAR (extrapolated) = 0.231 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.138 W/kg

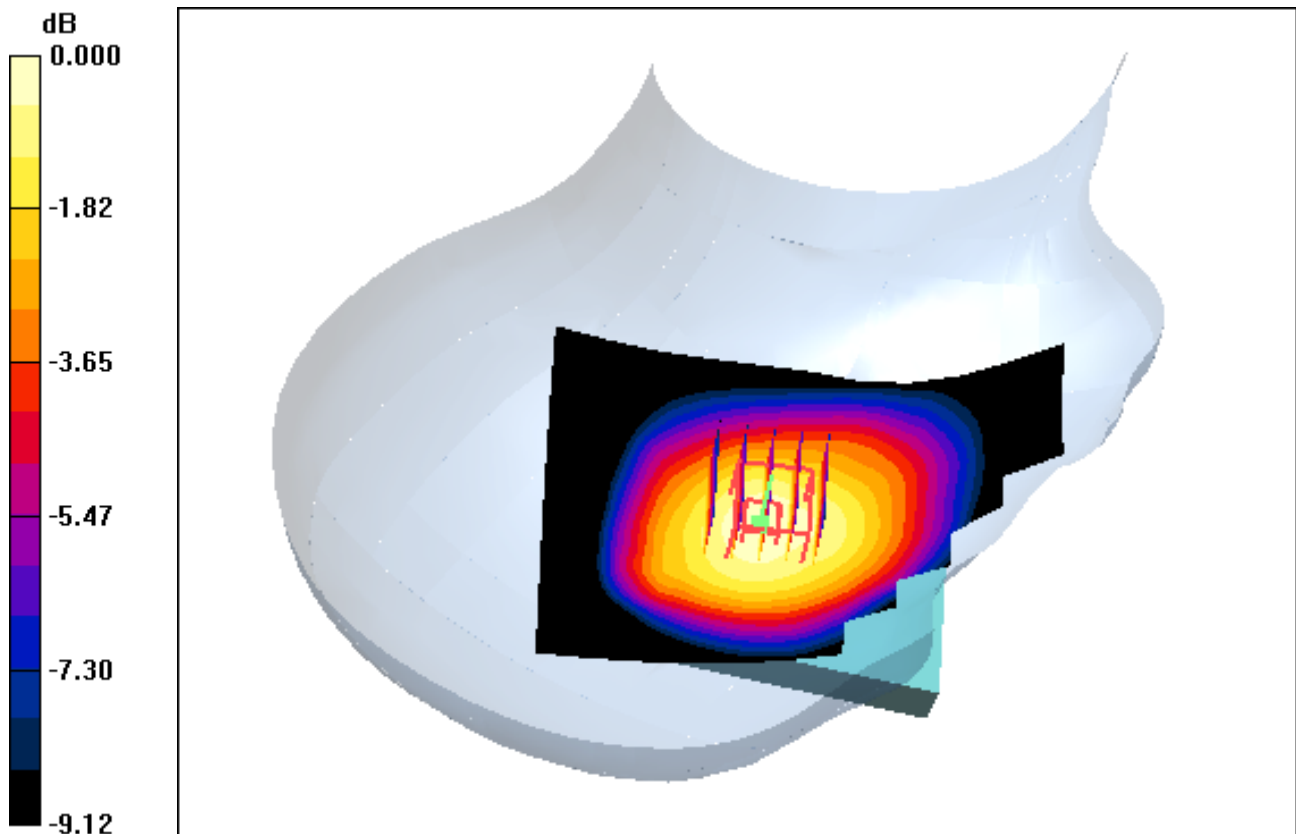

0 dB = 0.212mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.065 dB
Peak SAR (extrapolated) = 0.231 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.138 W/kg

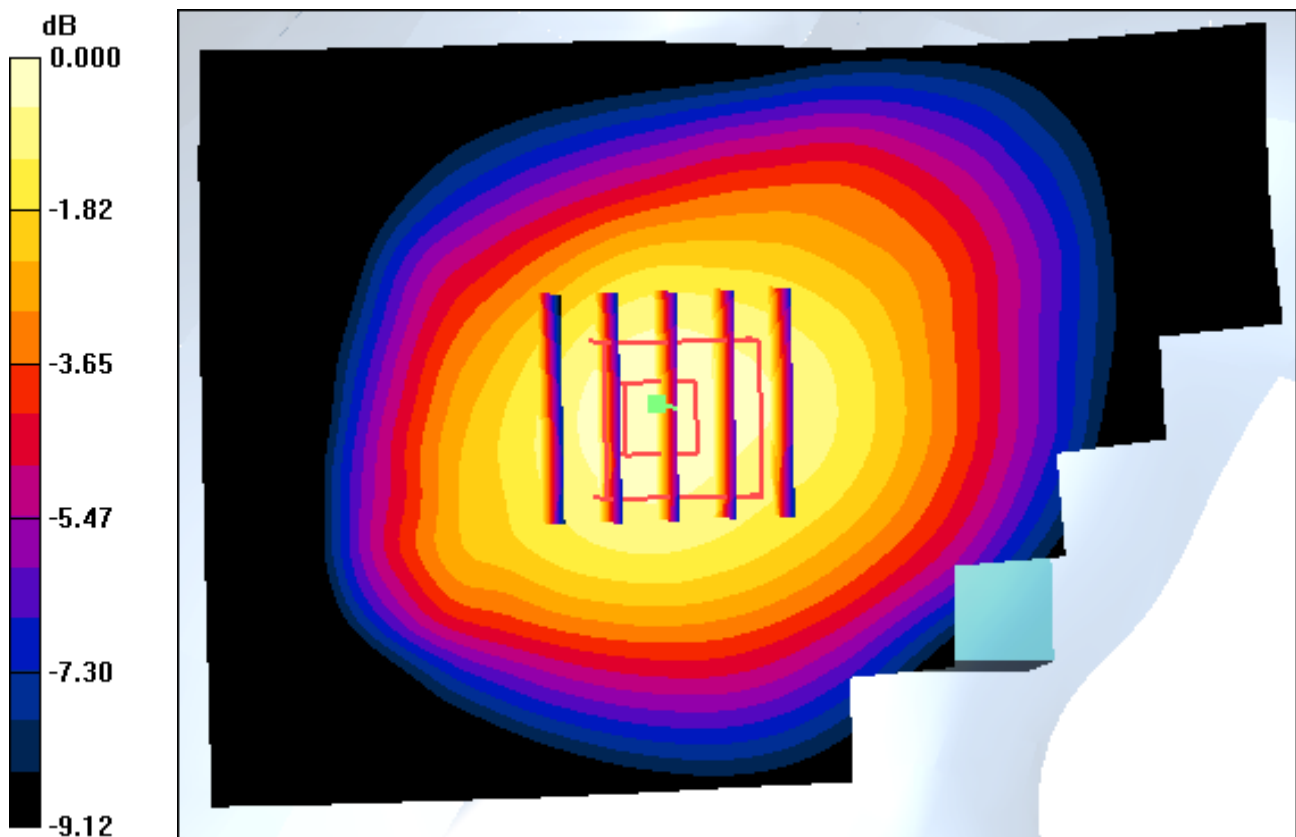

0 dB = 0.212mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, Sim2, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.078 dB
Peak SAR (extrapolated) = 0.500 W/kg
SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.299 W/kg

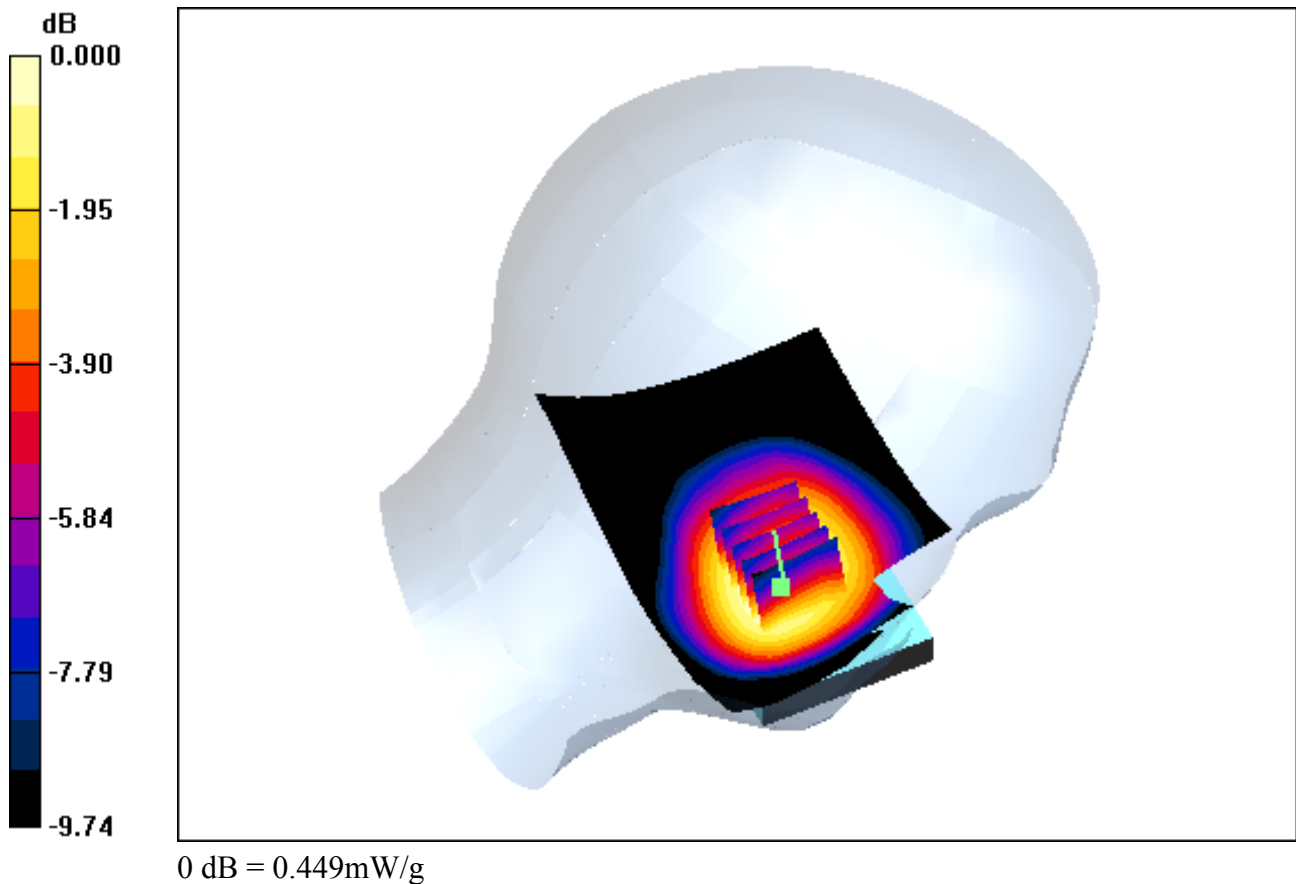

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, Sim2, GSM850 Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.078 dB
Peak SAR (extrapolated) = 0.500 W/kg
SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.299 W/kg

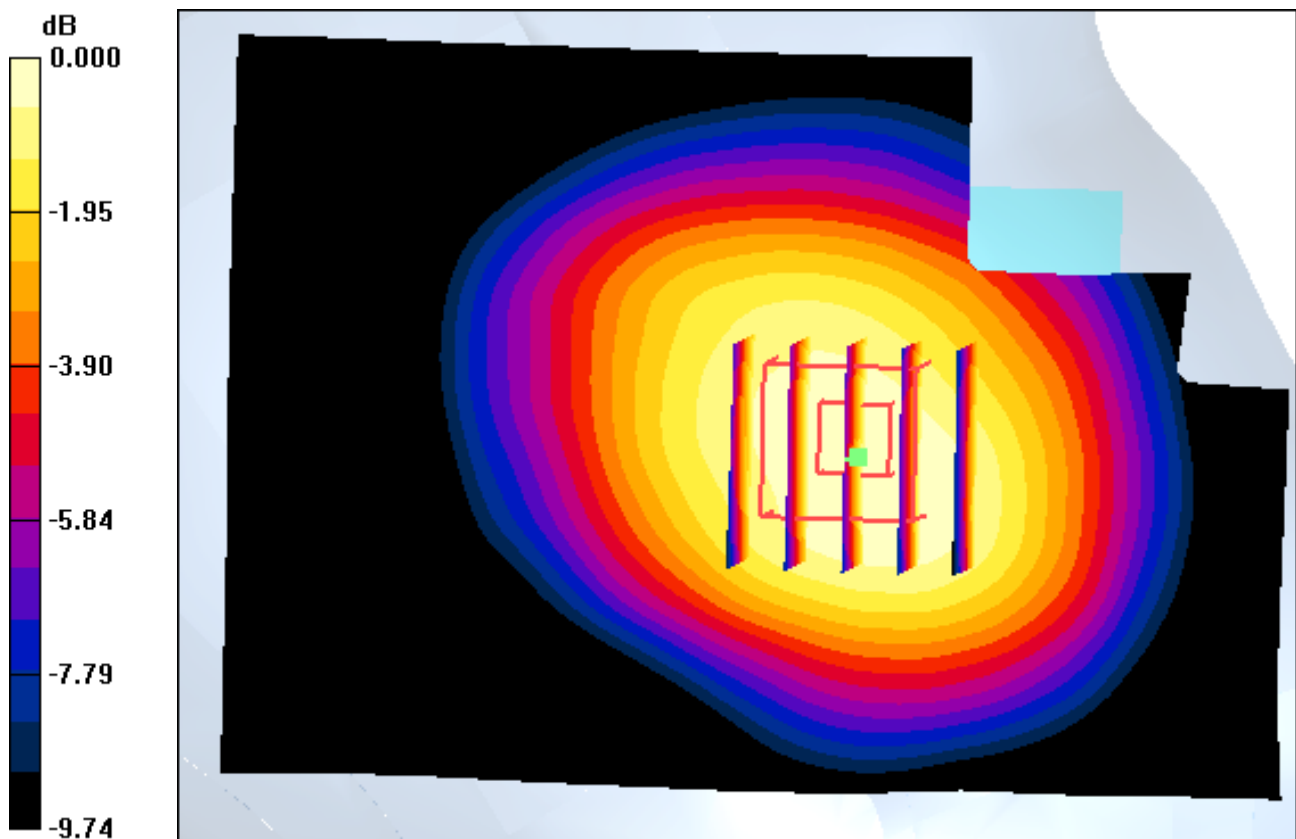

0 dB = 0.449mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.090 dB
Peak SAR (extrapolated) = 0.570 W/kg
SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.331 W/kg

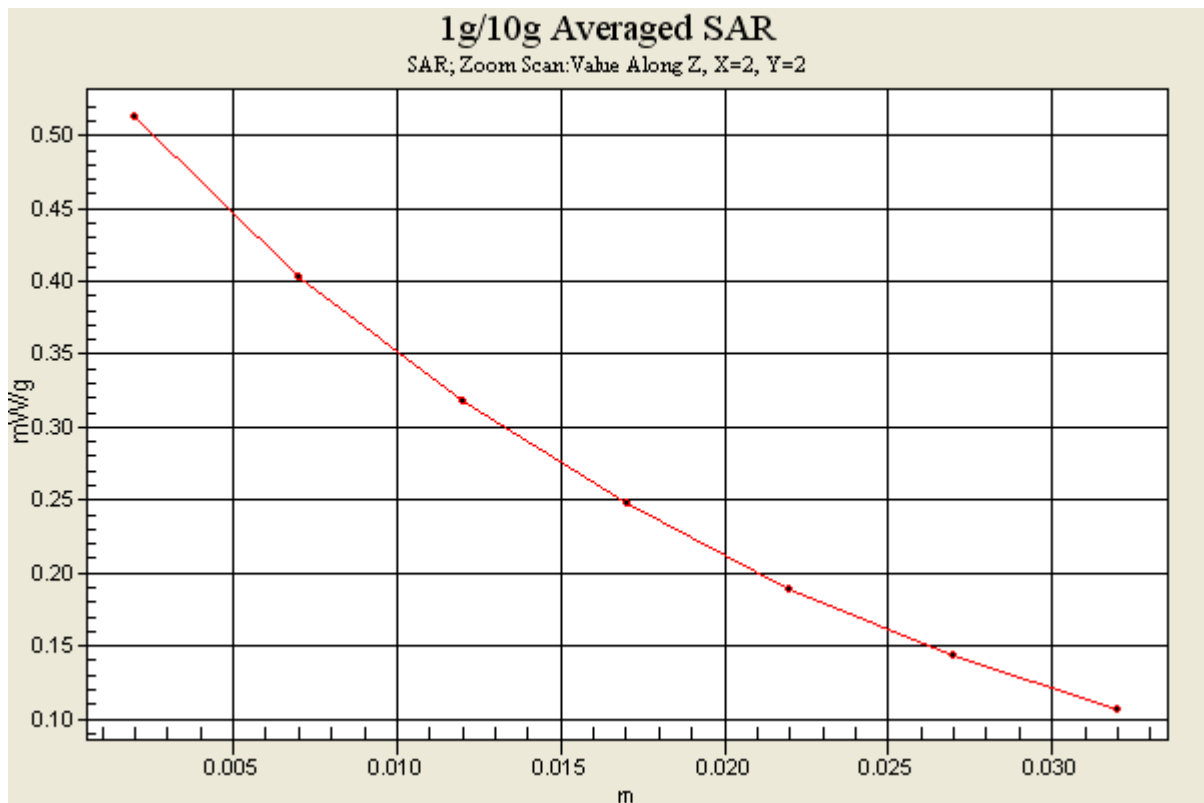

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 1 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.331 W/kg

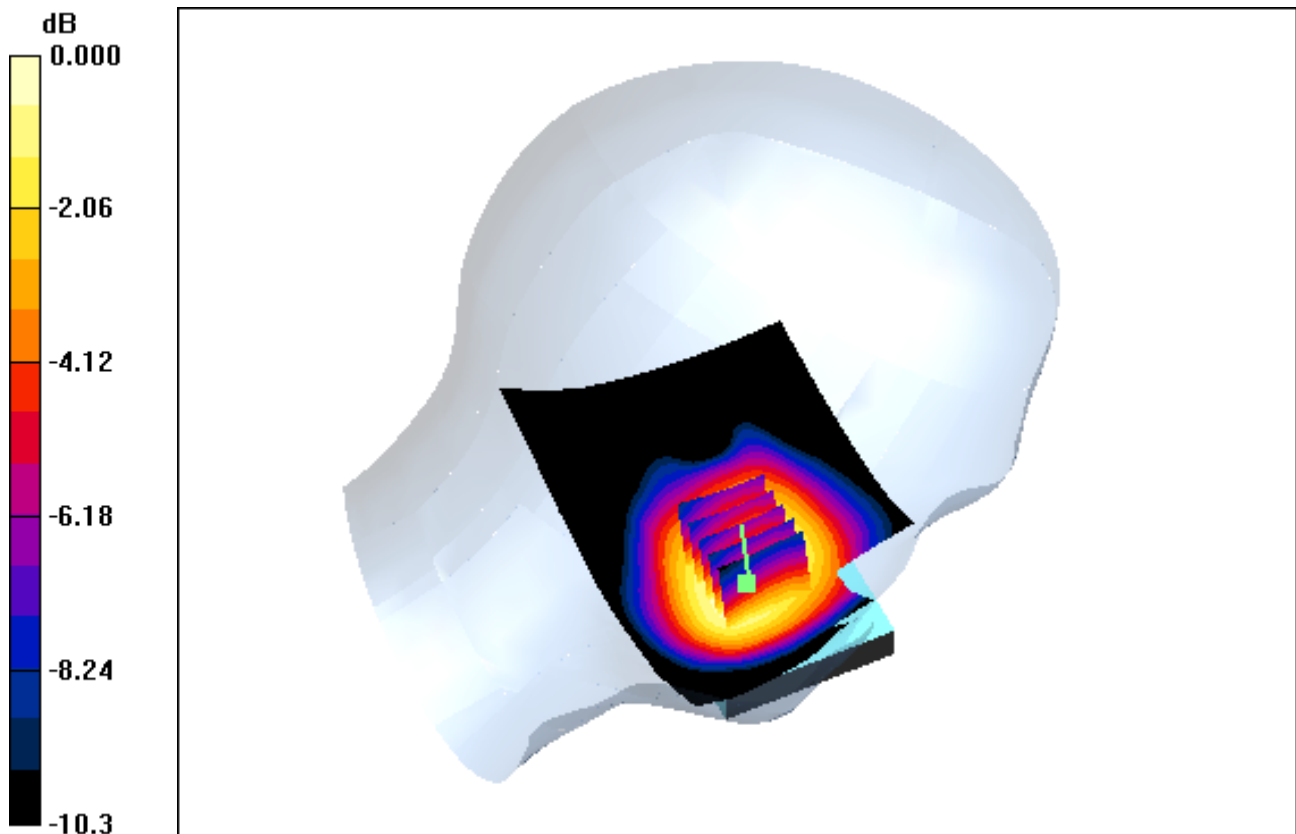

0 dB = 0.513mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 1 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.070 dB
Peak SAR (extrapolated) = 0.563 W/kg
SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.331 W/kg

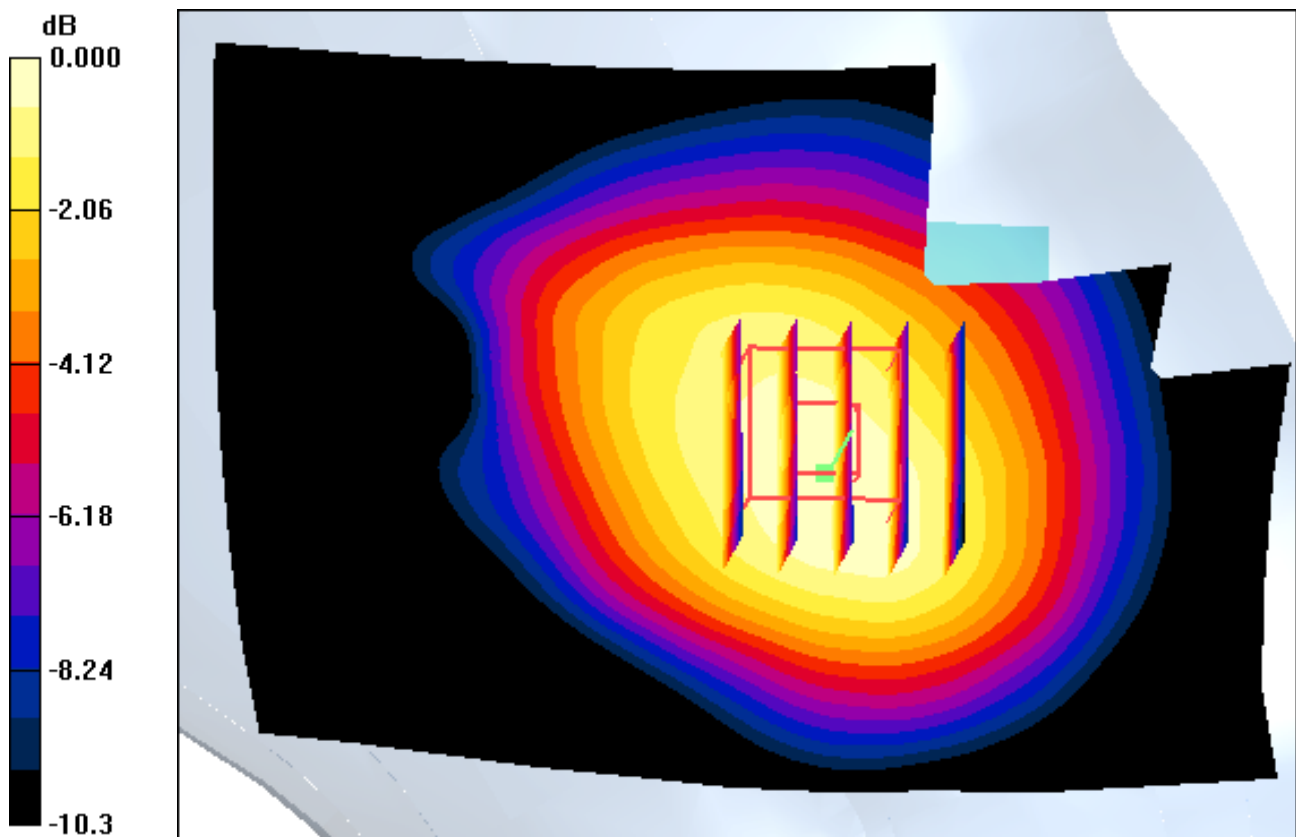

0 dB = 0.513mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 2 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.326 W/kg

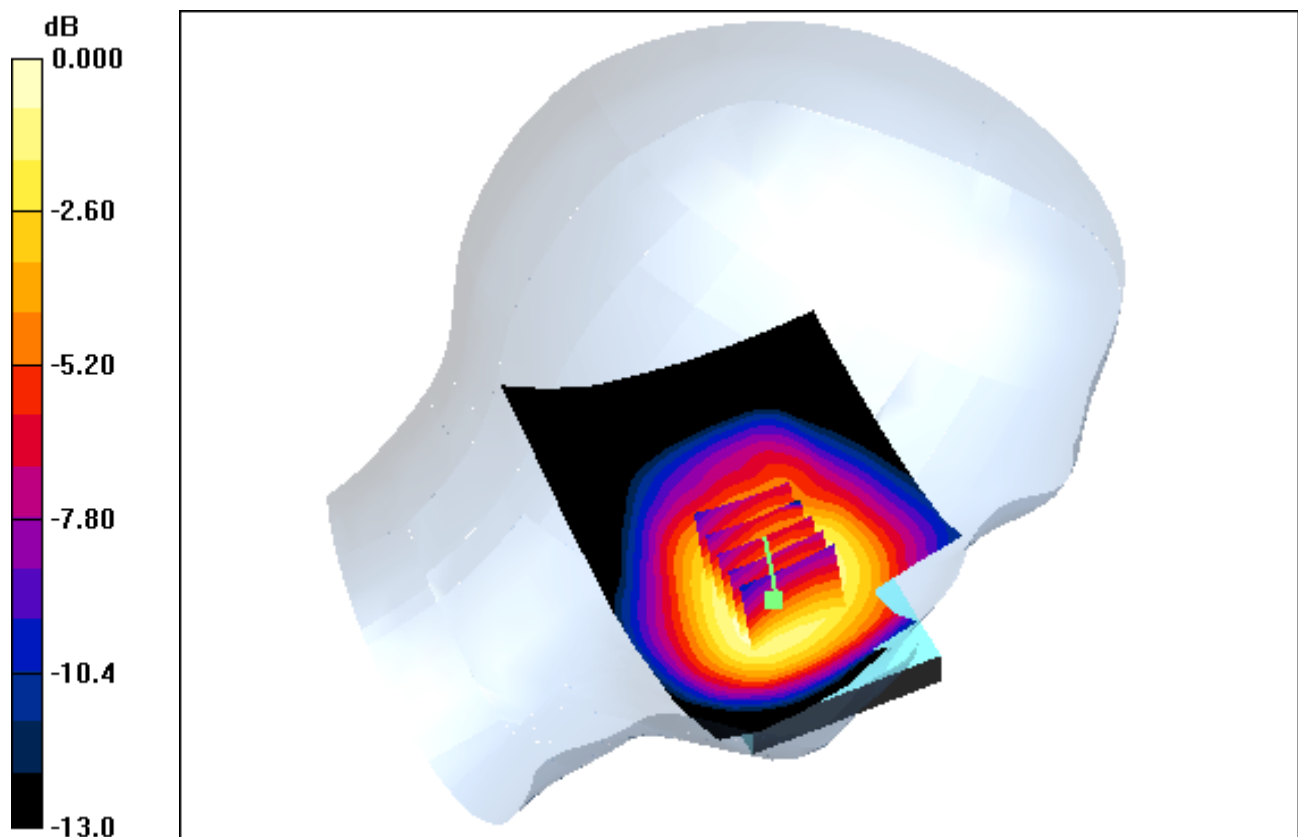

0 dB = 0.509mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 2 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.326 W/kg

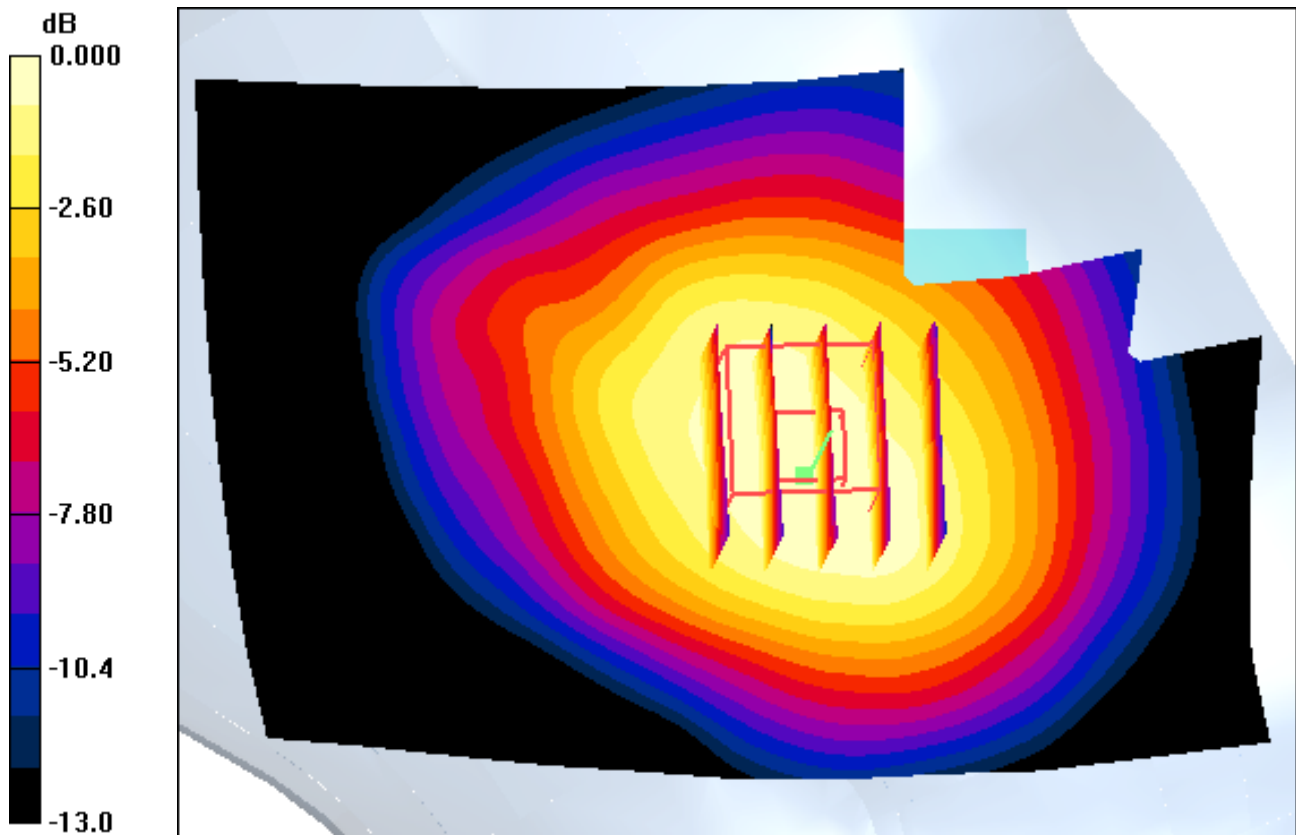

0 dB = 0.509mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.343 W/kg

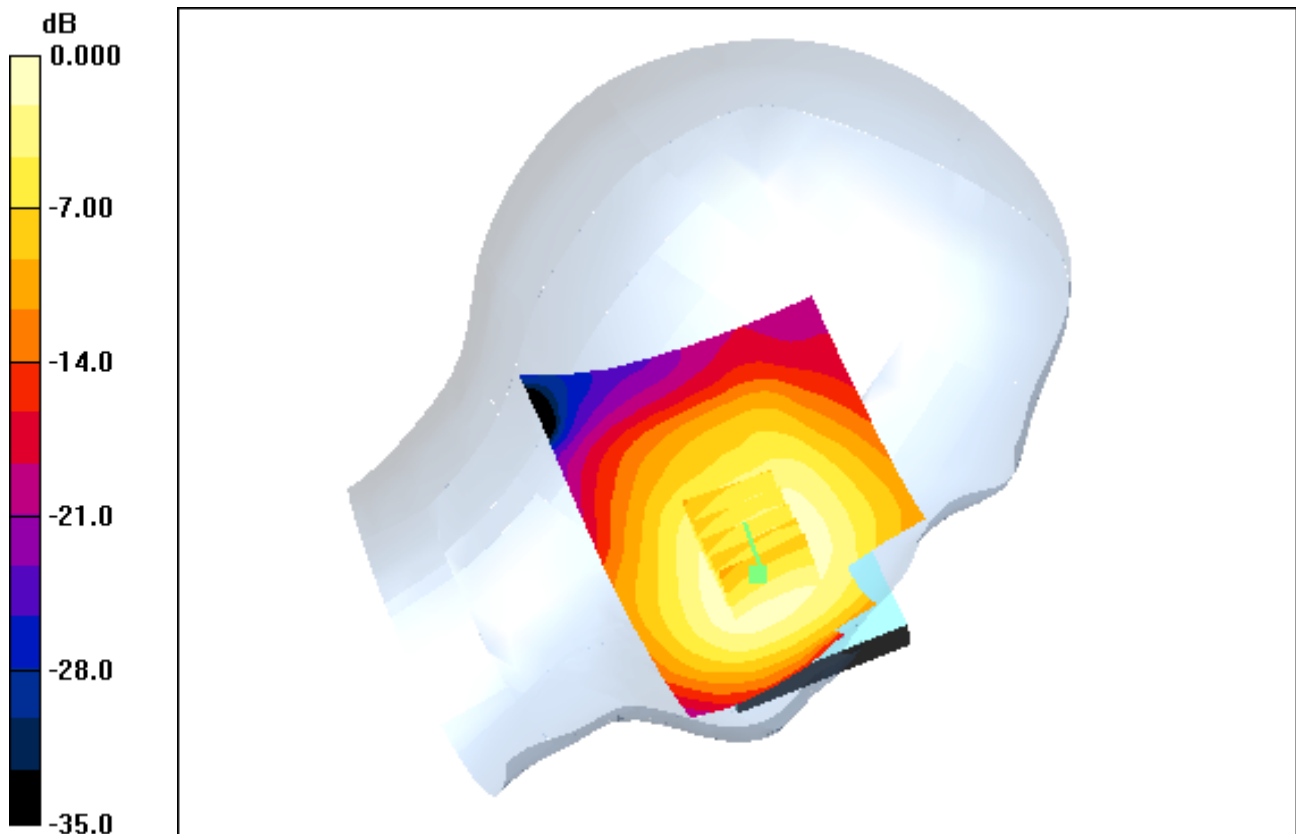

0 dB = 0.547mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.022 dB
Peak SAR (extrapolated) = 0.637 W/kg
SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.343 W/kg

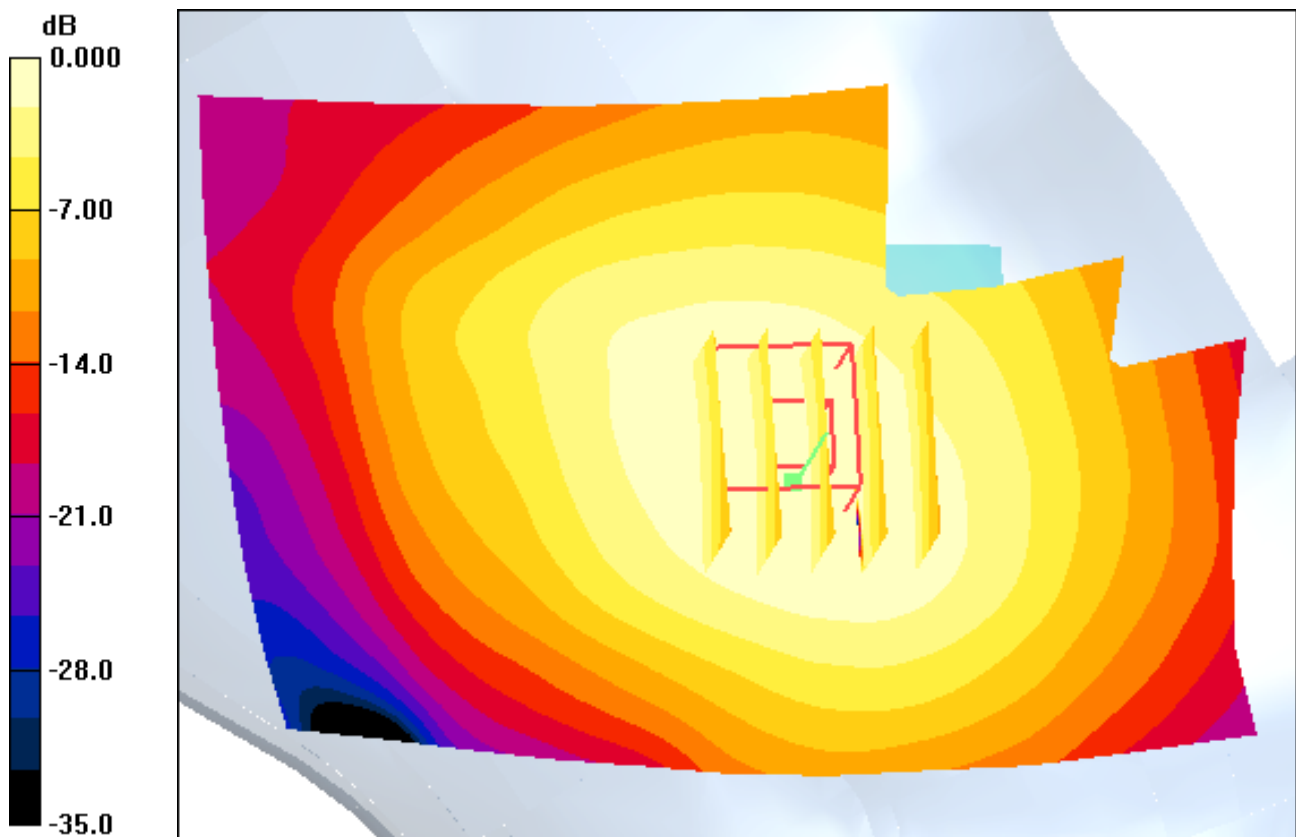

0 dB = 0.547mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 4 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.350 W/kg

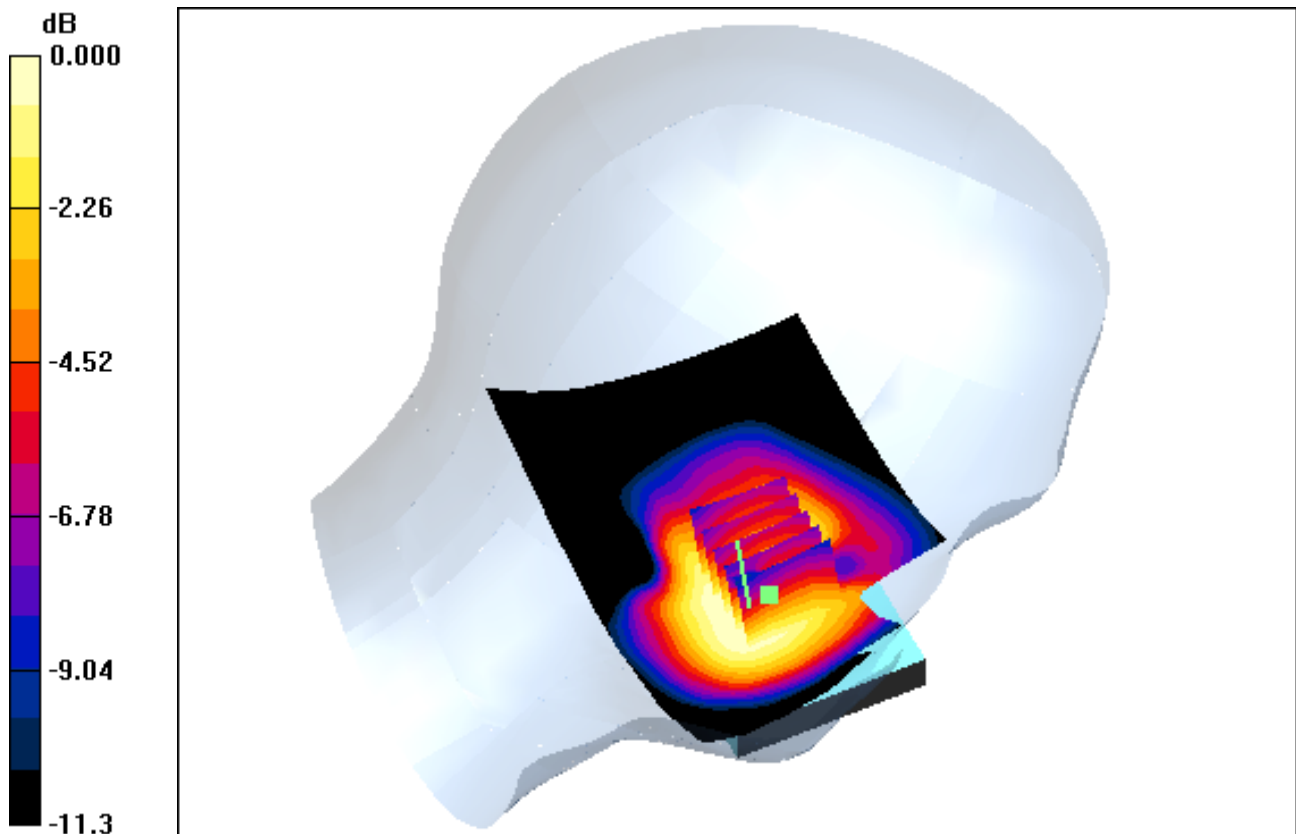

0 dB = 0.531mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 4 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.172 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.350 W/kg

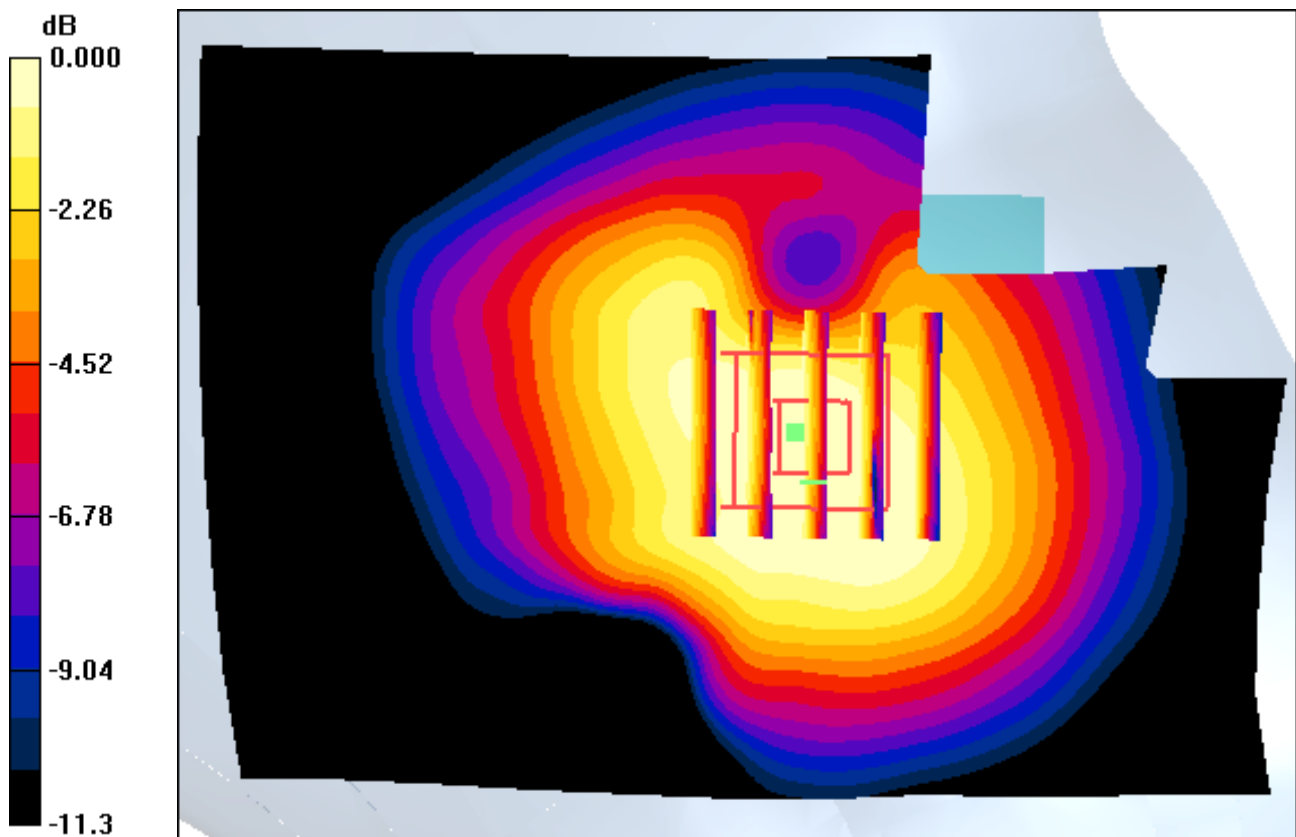

0 dB = 0.531mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Touch, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.178 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.356 W/kg

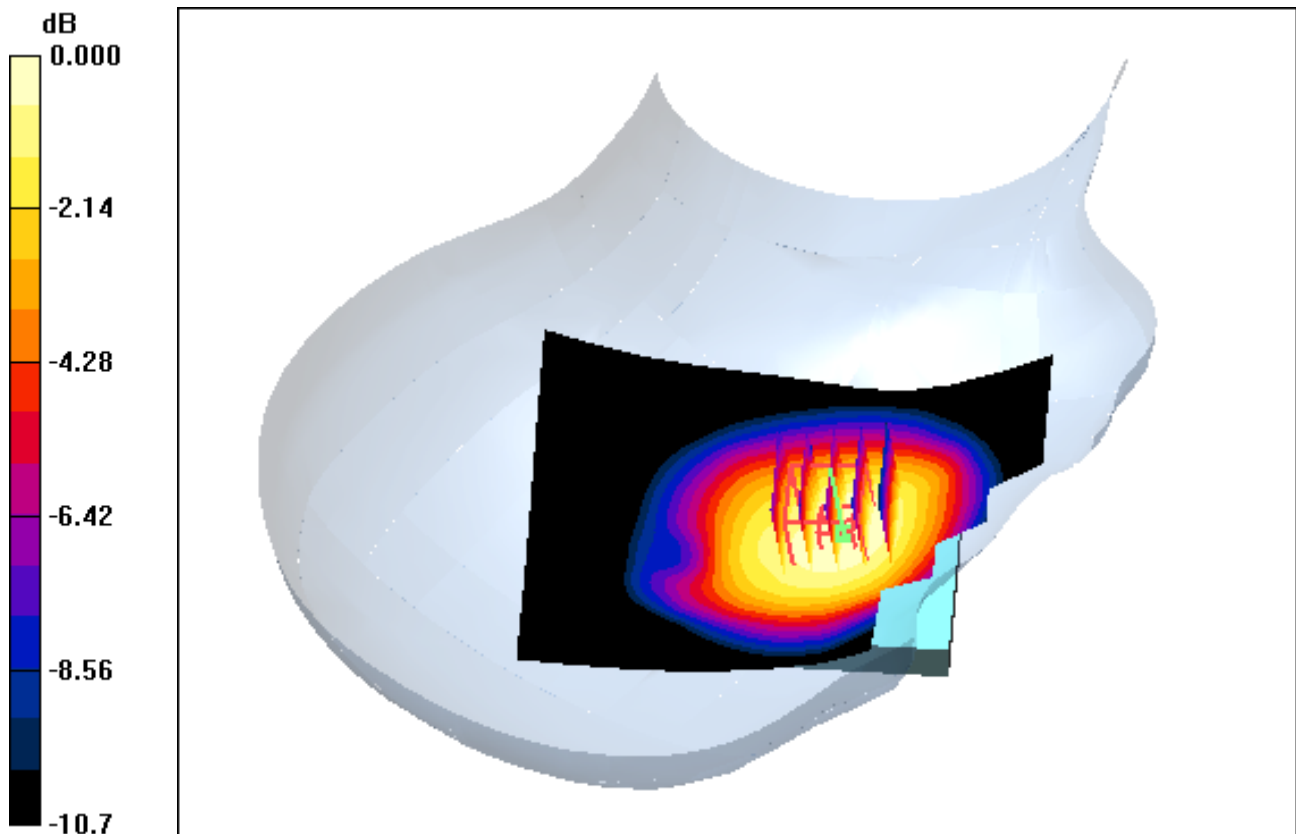

0 dB = 0.545mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Touch, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.178 dB
Peak SAR (extrapolated) = 0.591 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.356 W/kg

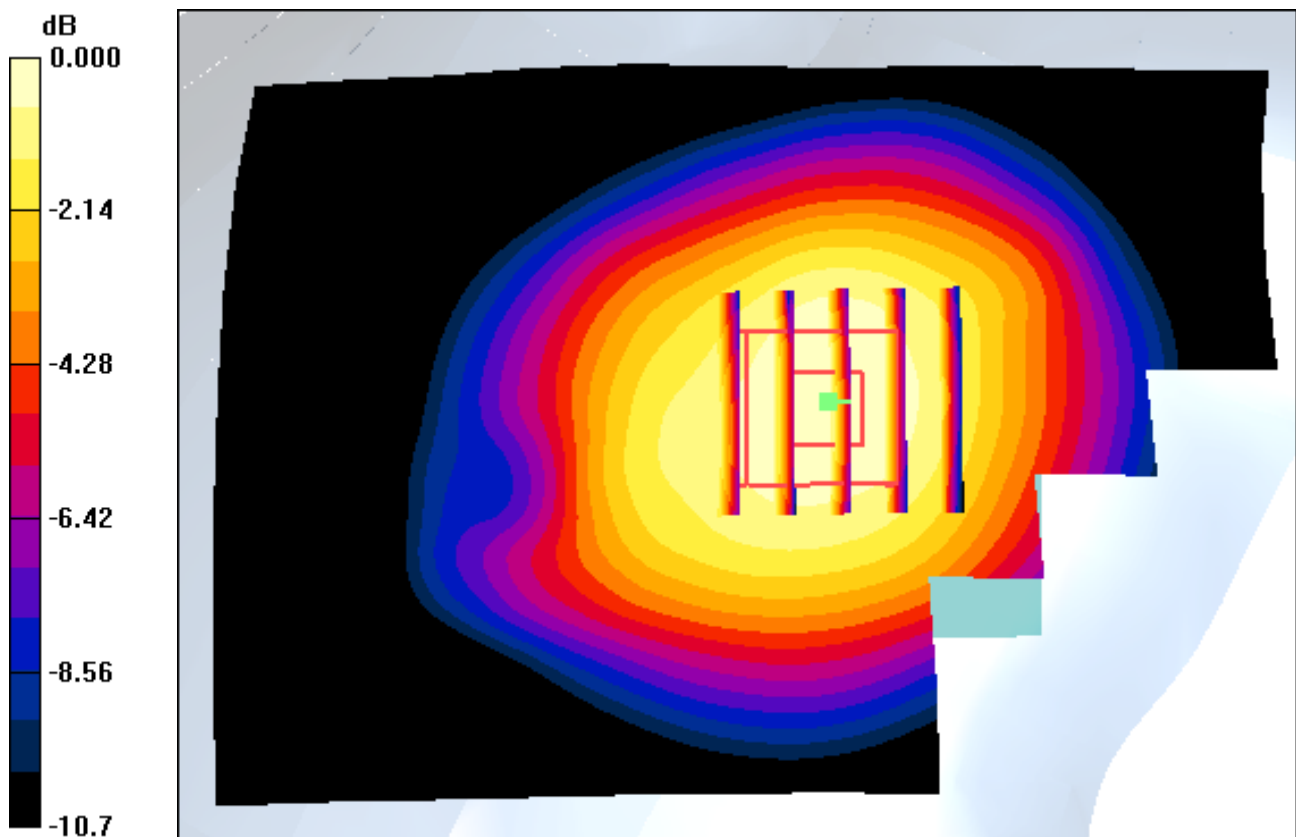

0 dB = 0.545mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Tilt, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.202 W/kg

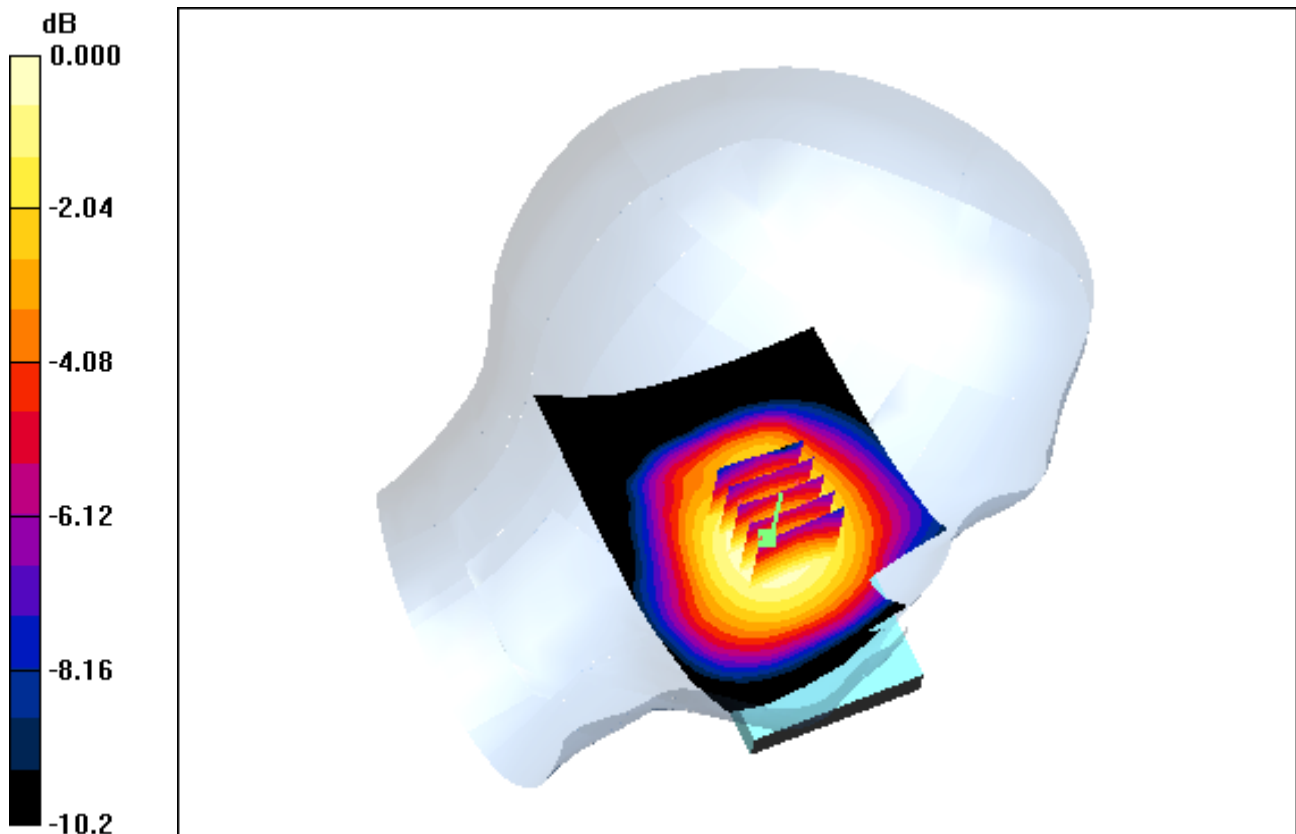

0 dB = 0.298mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Tilt, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.065 dB
Peak SAR (extrapolated) = 0.327 W/kg
SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.202 W/kg

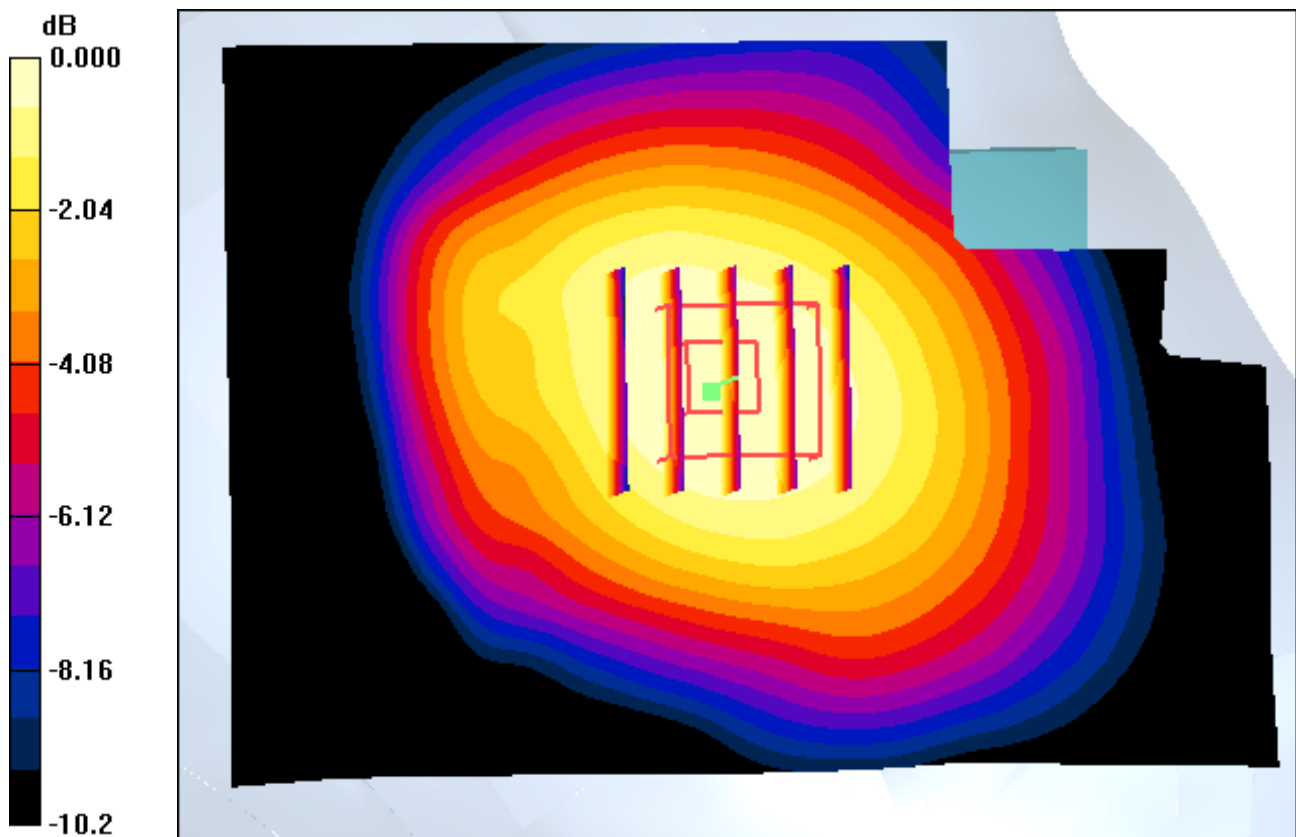

0 dB = 0.298mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Tilt, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.178 W/kg

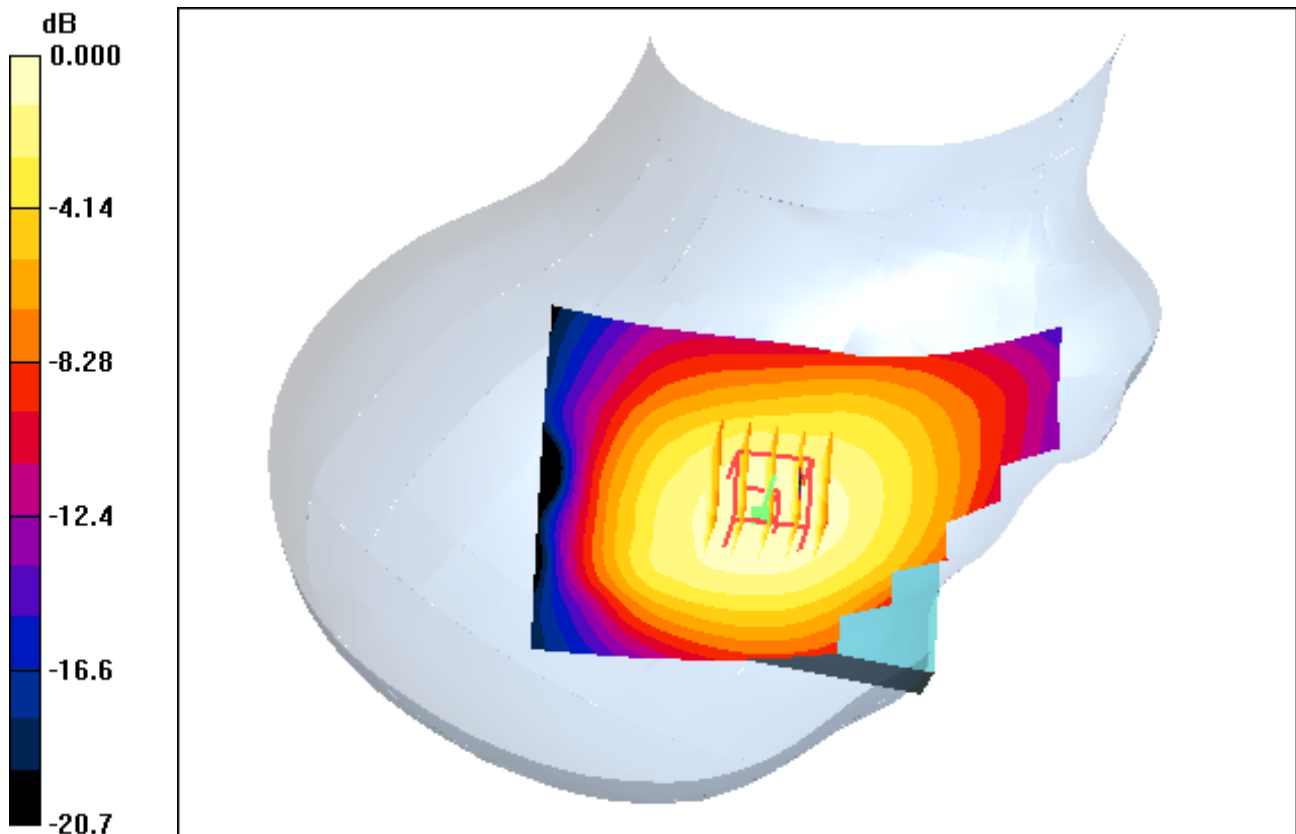

0 dB = 0.270mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Right Tilt, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.178 W/kg

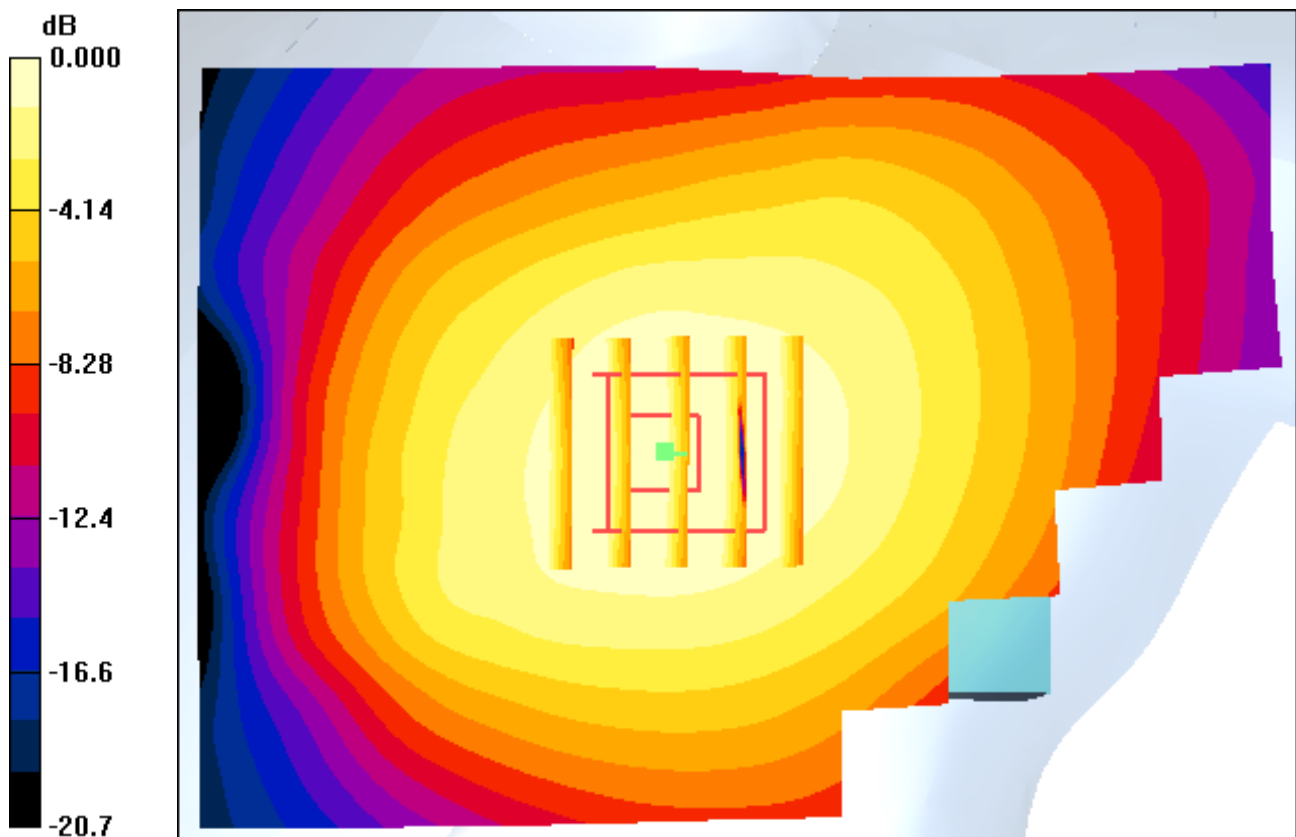

0 dB = 0.270mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, Sim2, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.360 W/kg

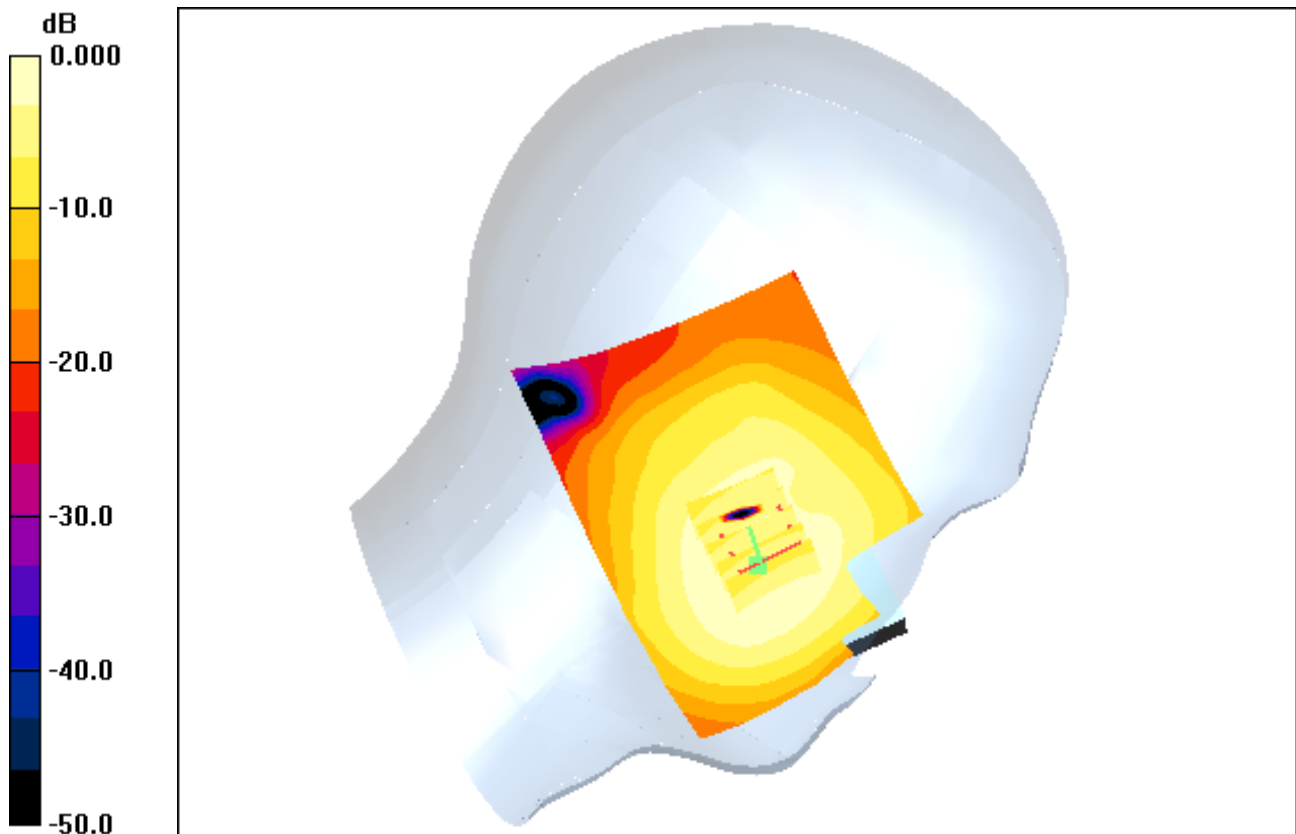

0 dB = 0.552mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, Sim2, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.360 W/kg

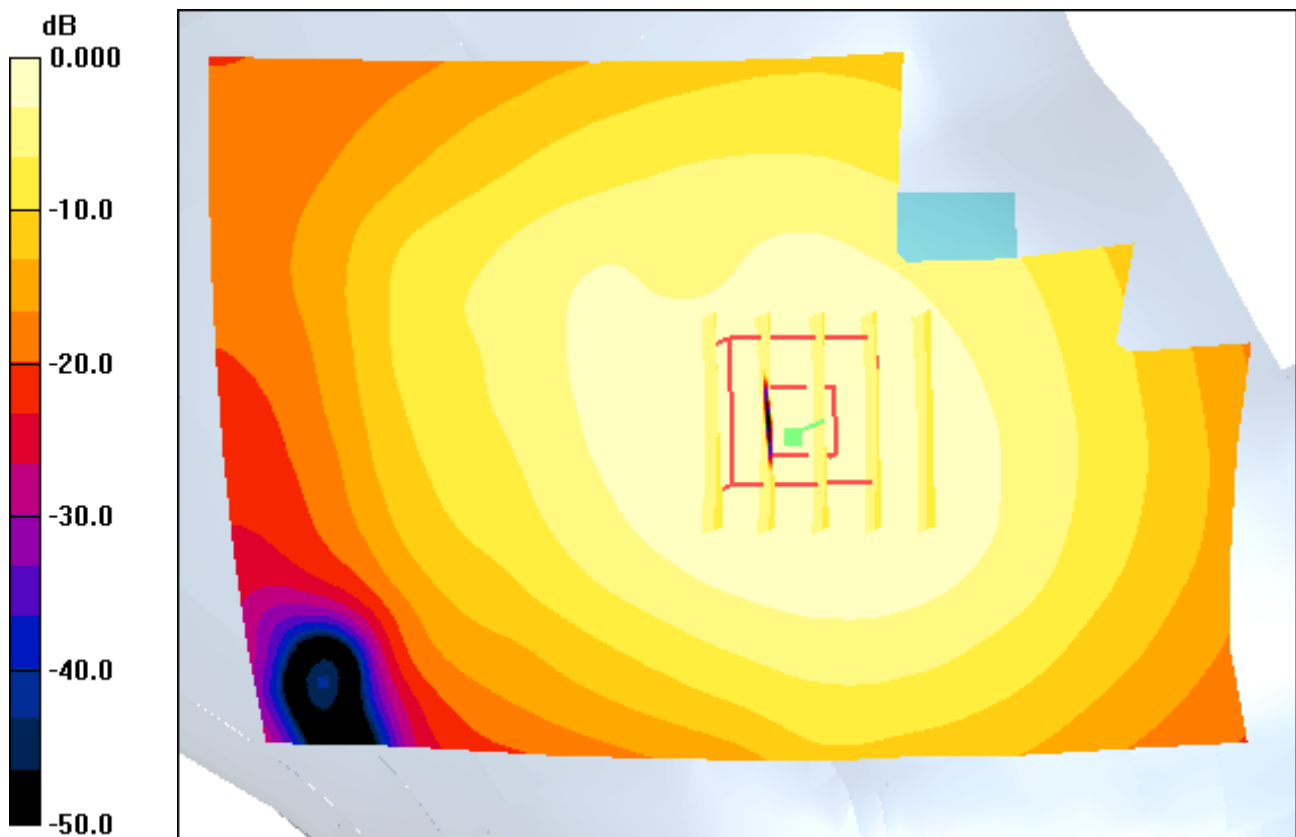

0 dB = 0.552mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-24; Ambient Temp: 21.2; Tissue Temp: 21.5

Left Touch, GSM850 GPRS 3 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.343 W/kg

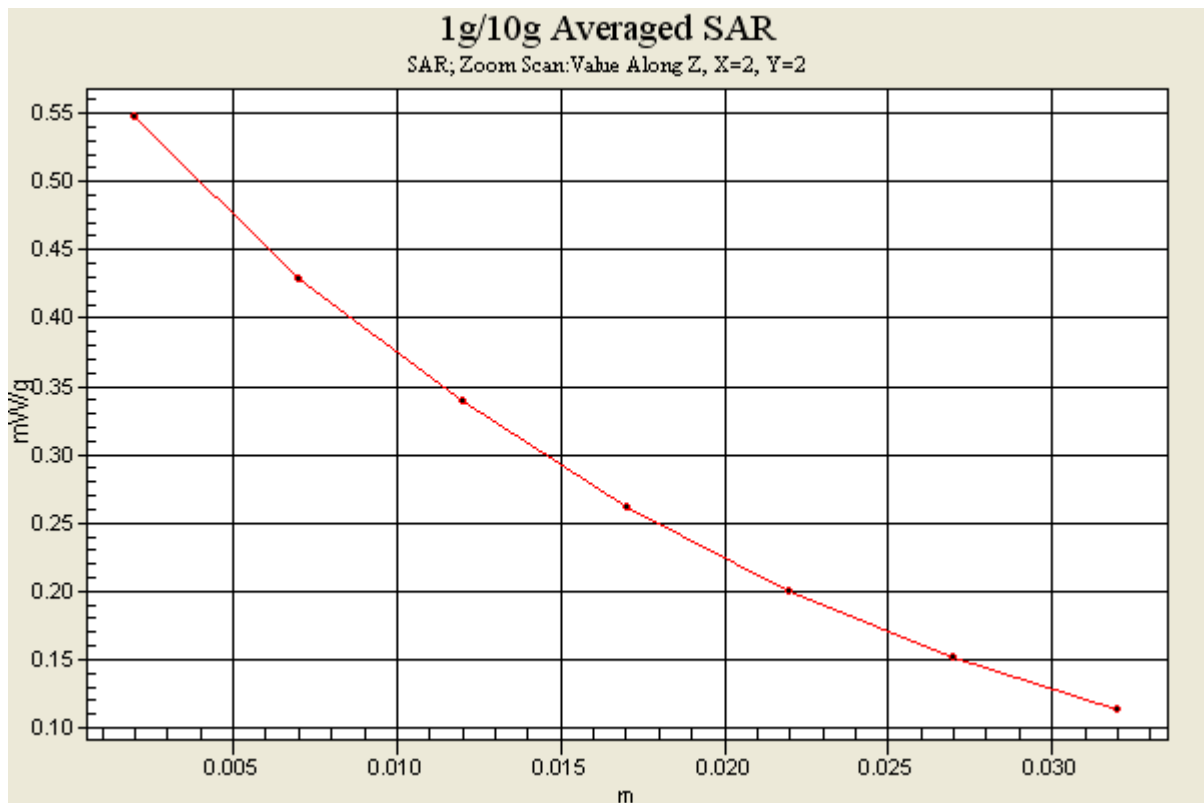

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Left Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.269 W/kg

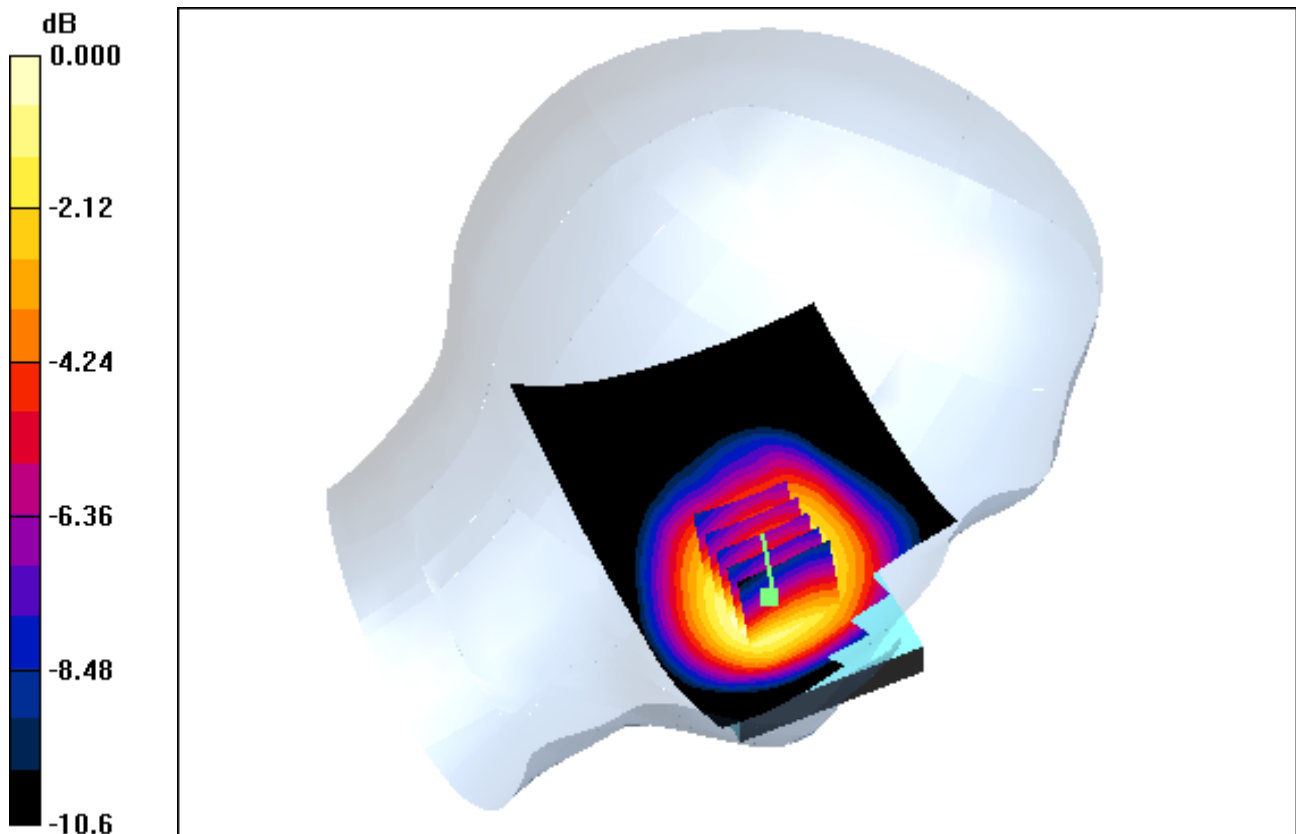

0 dB = 0.420mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Left Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.041 dB
Peak SAR (extrapolated) = 0.467 W/kg
SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.269 W/kg

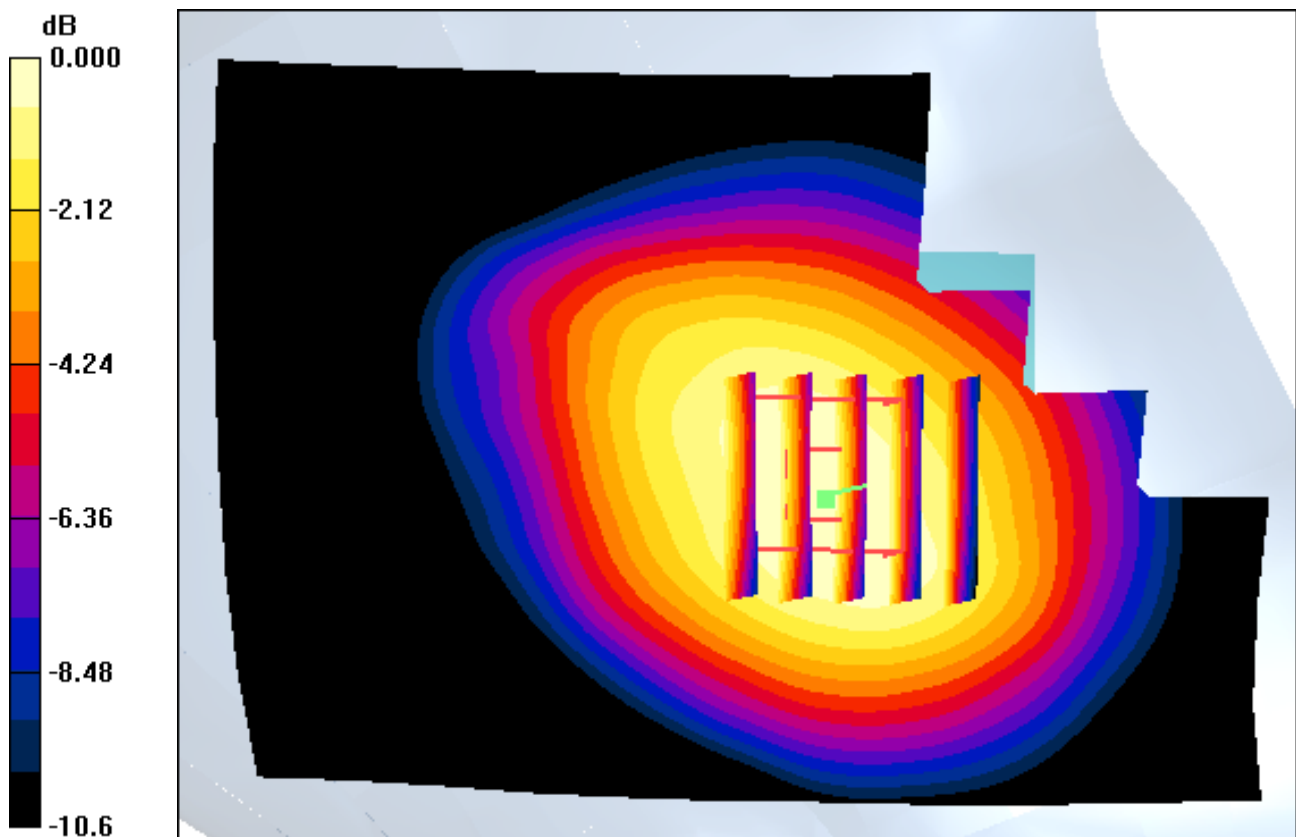

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.369 W/kg

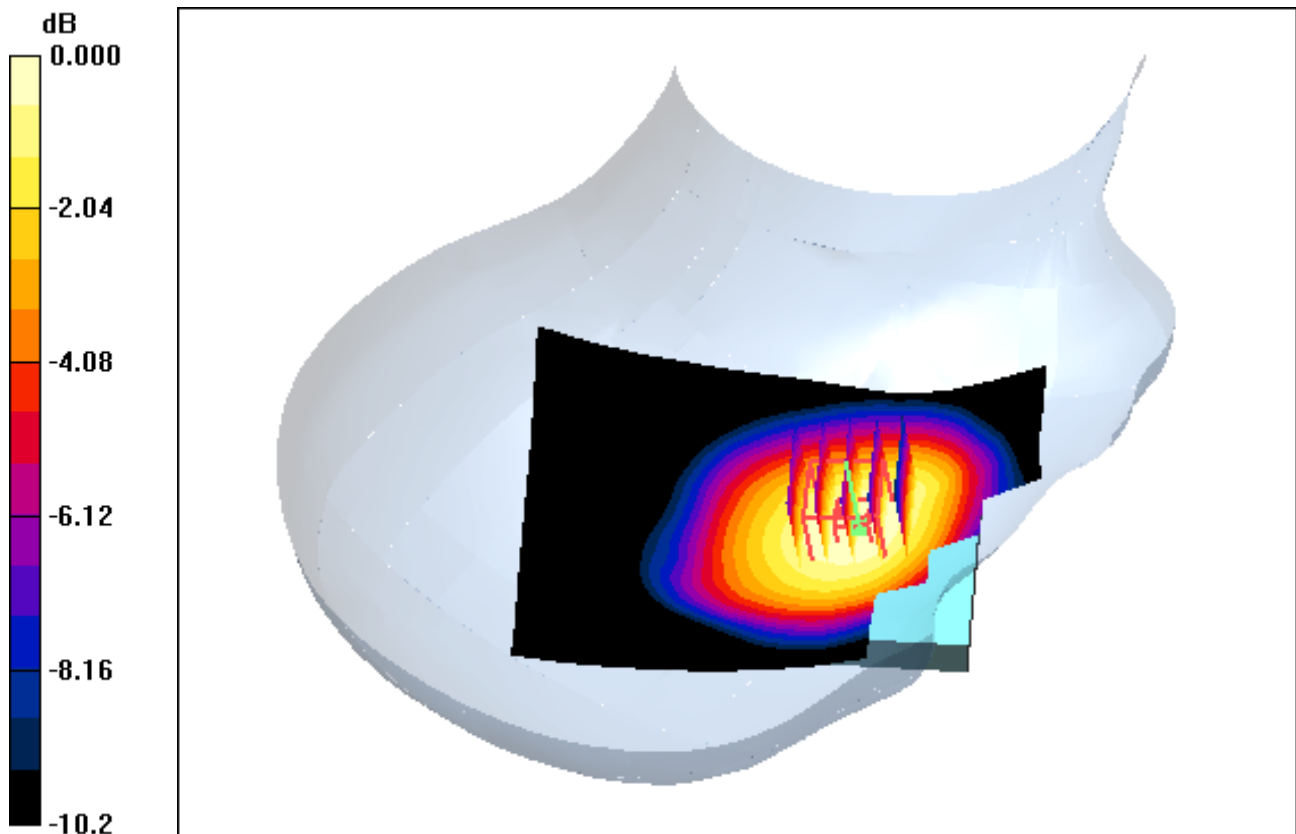

0 dB = 0.564mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.072 dB
Peak SAR (extrapolated) = 0.614 W/kg
SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.369 W/kg

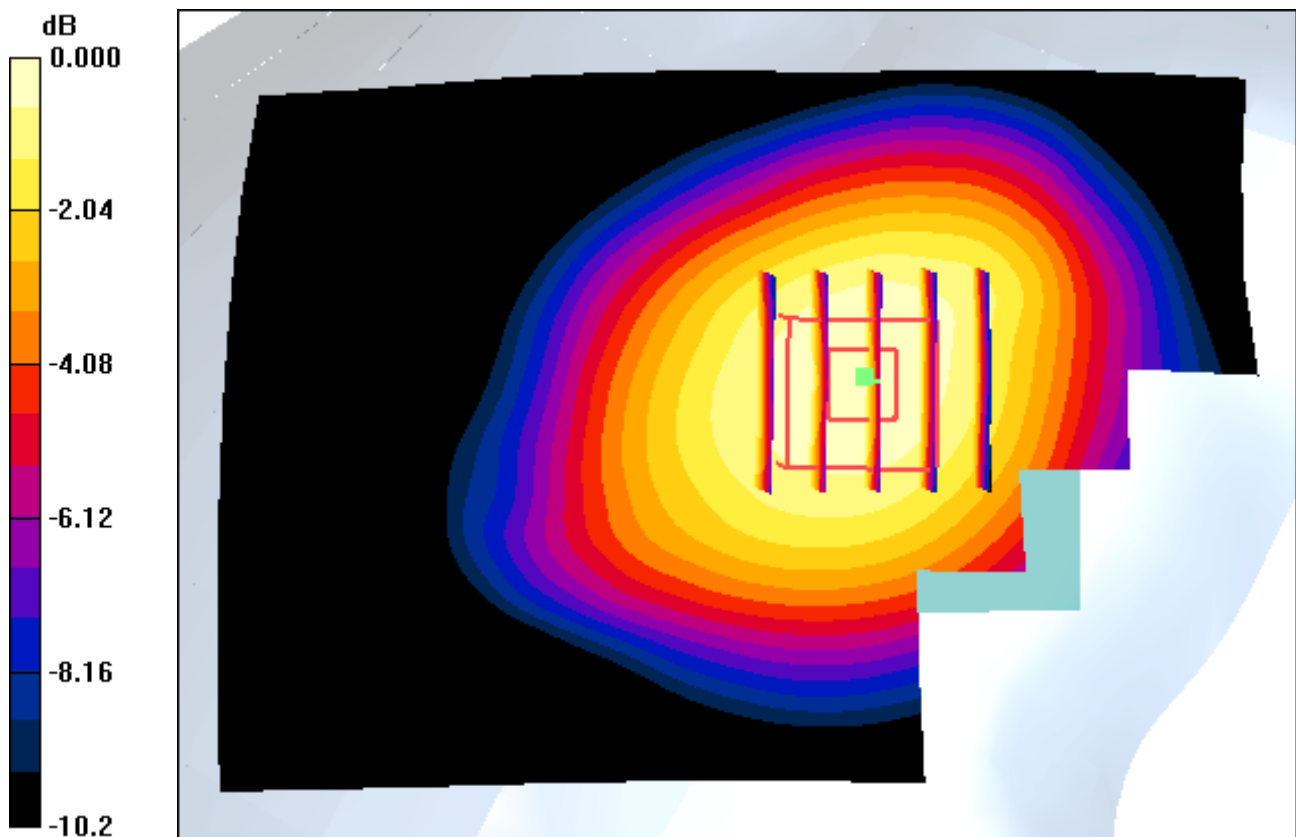

0 dB = 0.564mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Left Tilt, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.063 dB
Peak SAR (extrapolated) = 0.266 W/kg
SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.164 W/kg

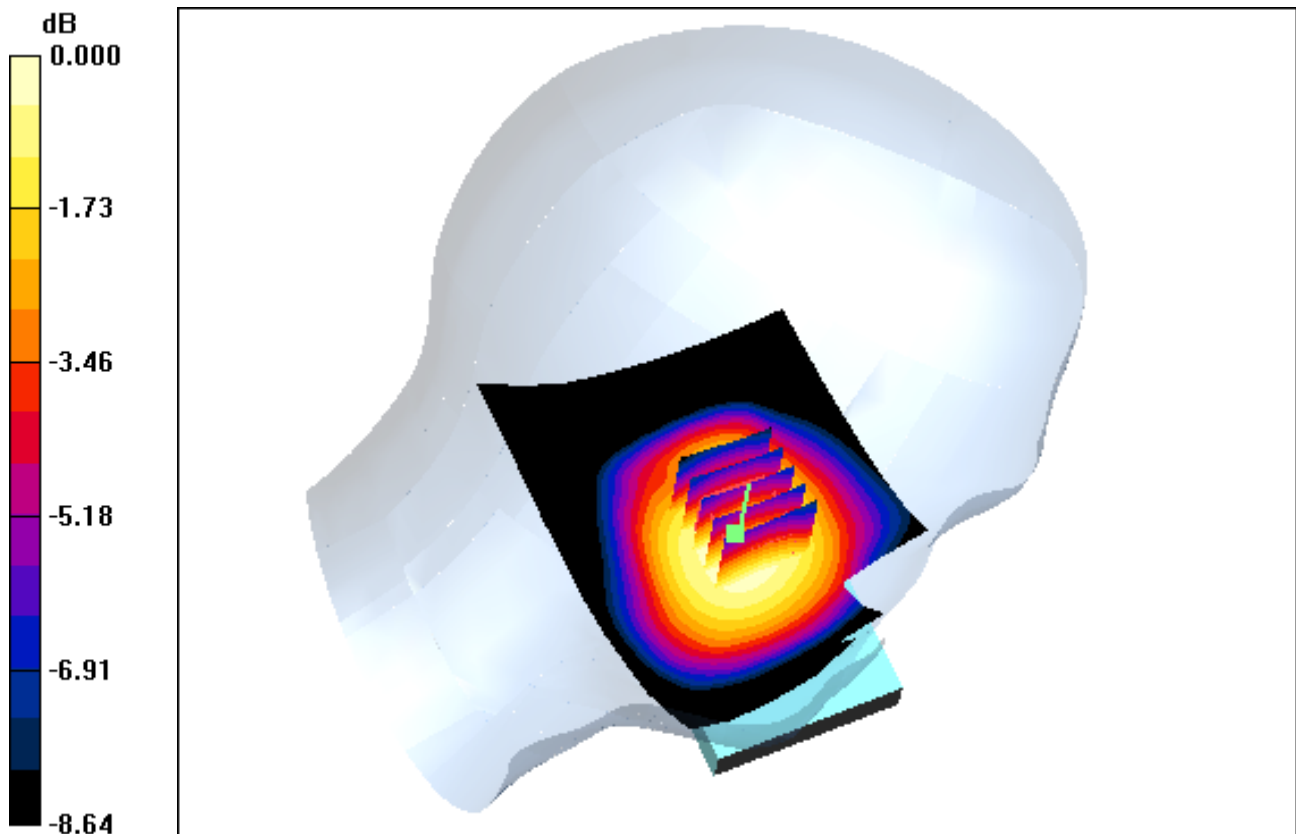

0 dB = 0.243mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Left Tilt, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.063 dB
Peak SAR (extrapolated) = 0.266 W/kg
SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.164 W/kg

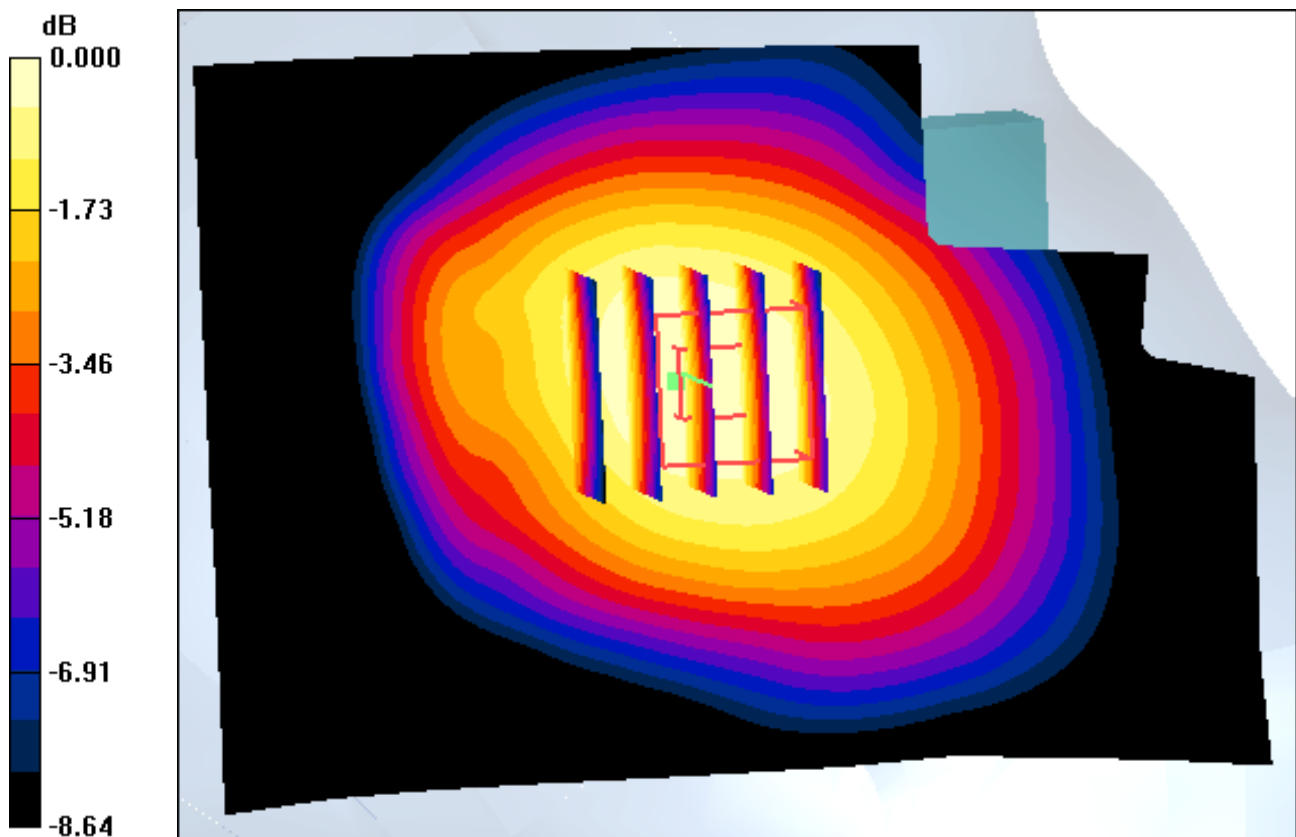

0 dB = 0.243mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Tilt, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.194 dB
Peak SAR (extrapolated) = 0.232 W/kg
SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.140 W/kg

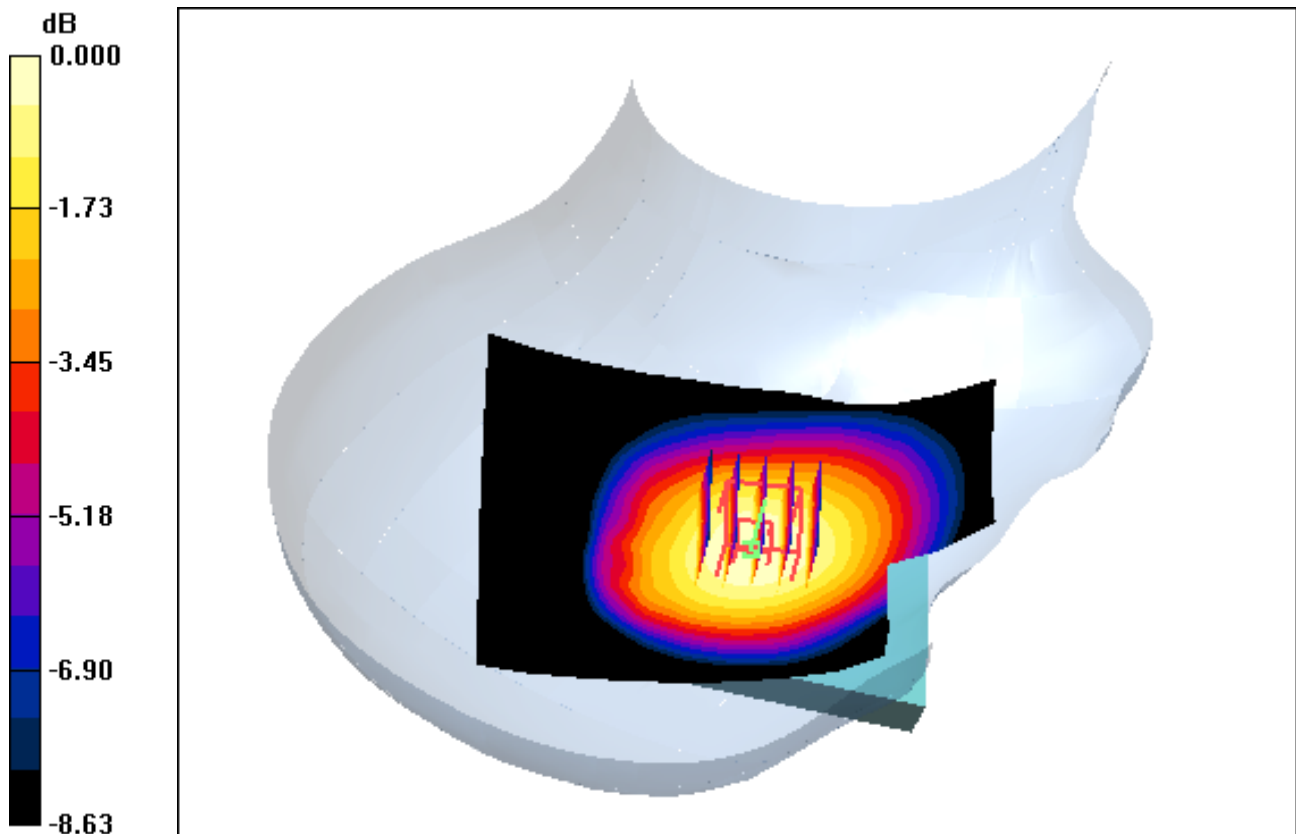

0 dB = 0.212mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Tilt, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.194 dB
Peak SAR (extrapolated) = 0.232 W/kg
SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.140 W/kg

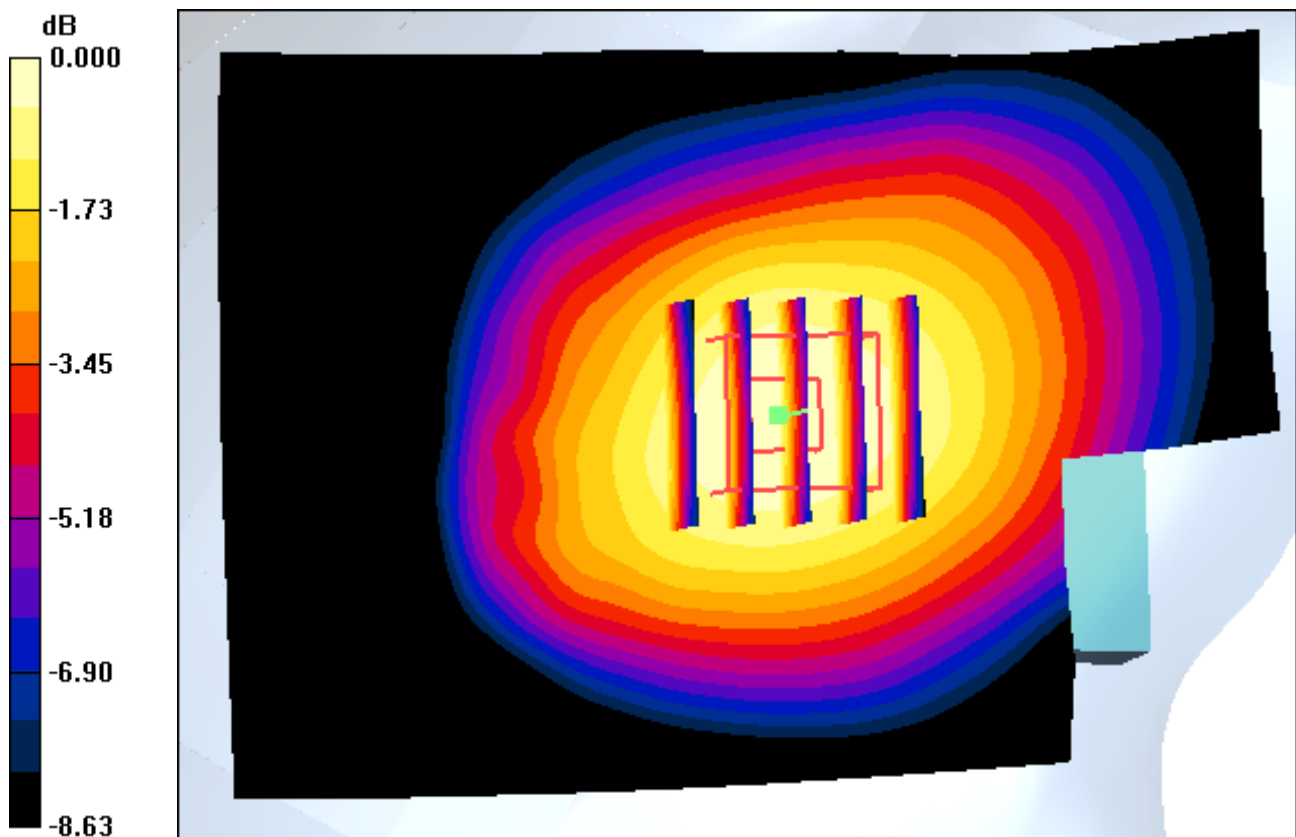

0 dB = 0.212mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Touch, Sim2, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.565 W/kg
SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.347 W/kg

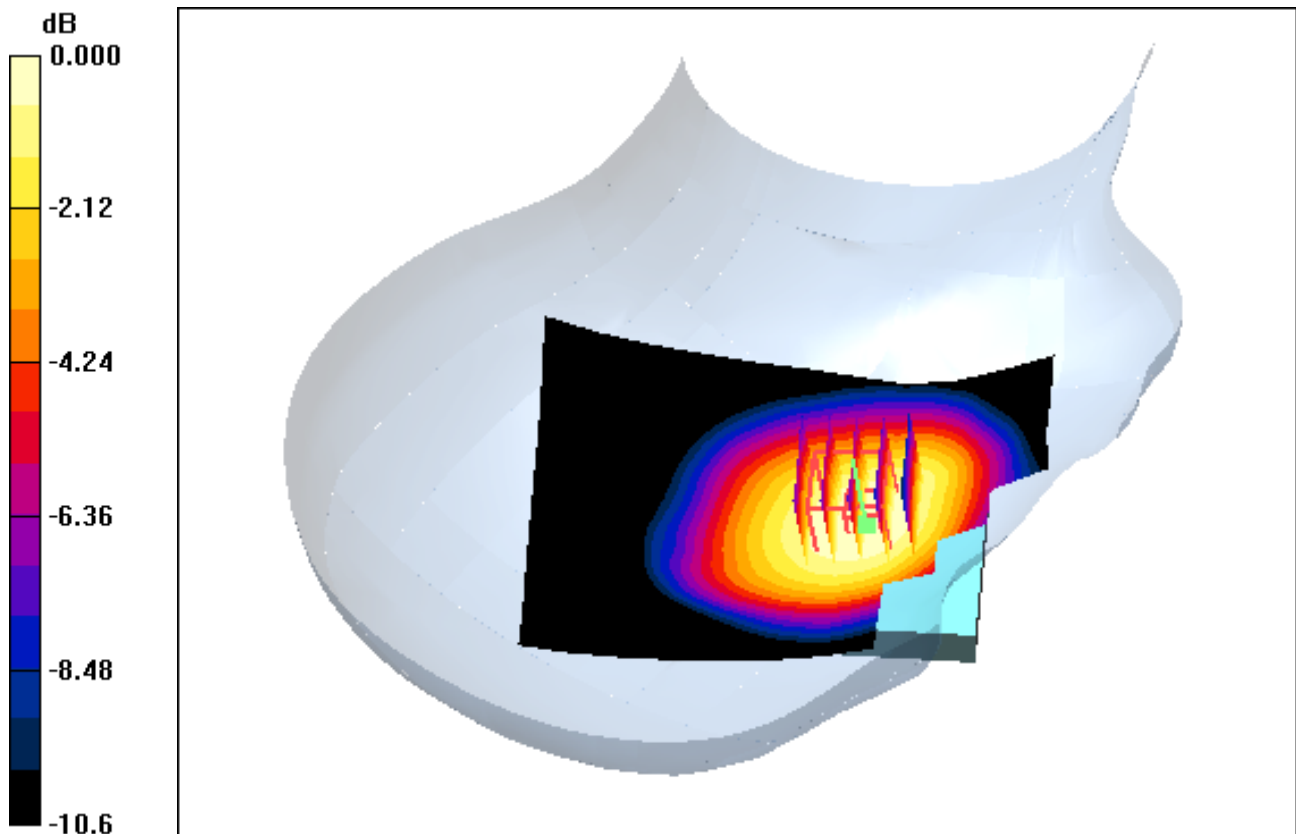

0 dB = 0.522mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Touch, Sim2, WCDMA850 Ch. 4183, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.565 W/kg
SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.347 W/kg

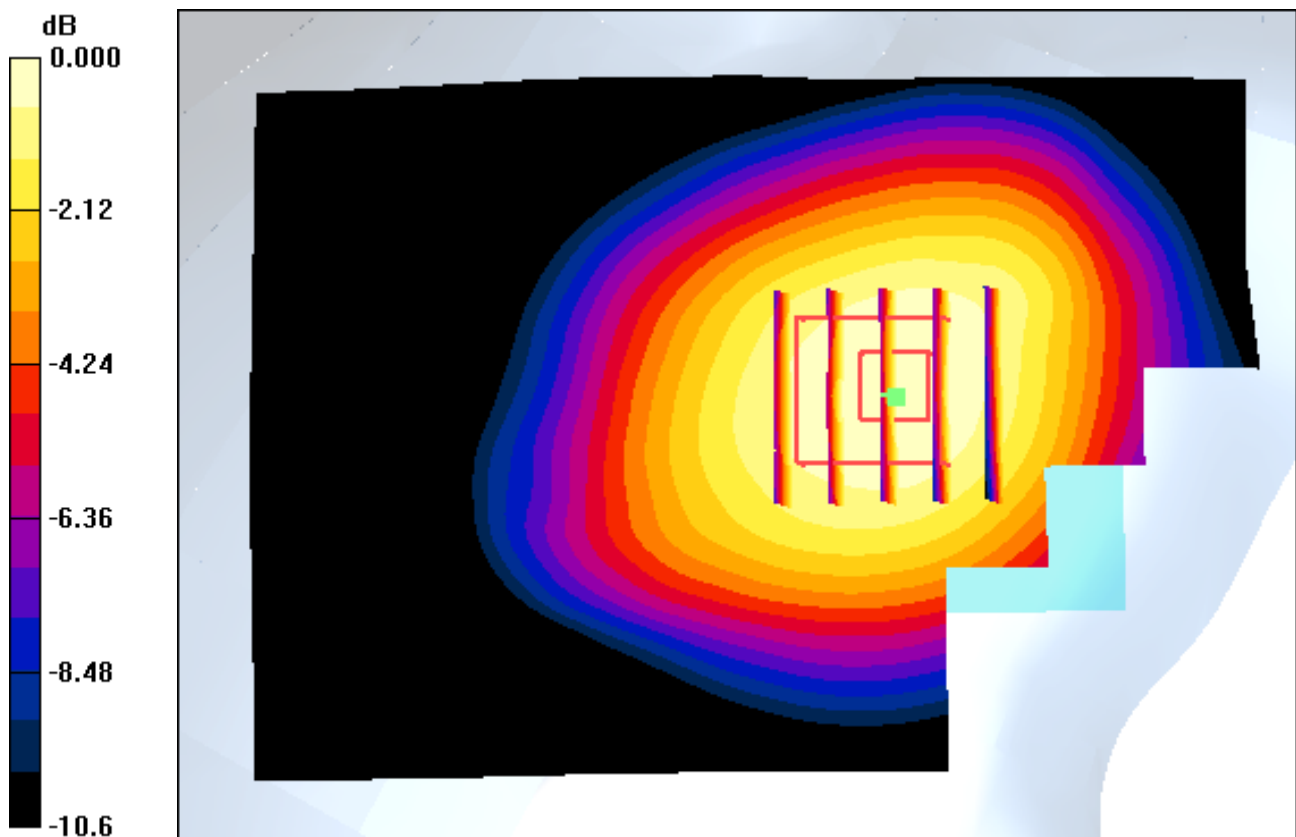

0 dB = 0.522mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.94, 8.94, 8.94); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-29; Ambient Temp: 21.6; Tissue Temp: 21.9

Right Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.369 W/kg

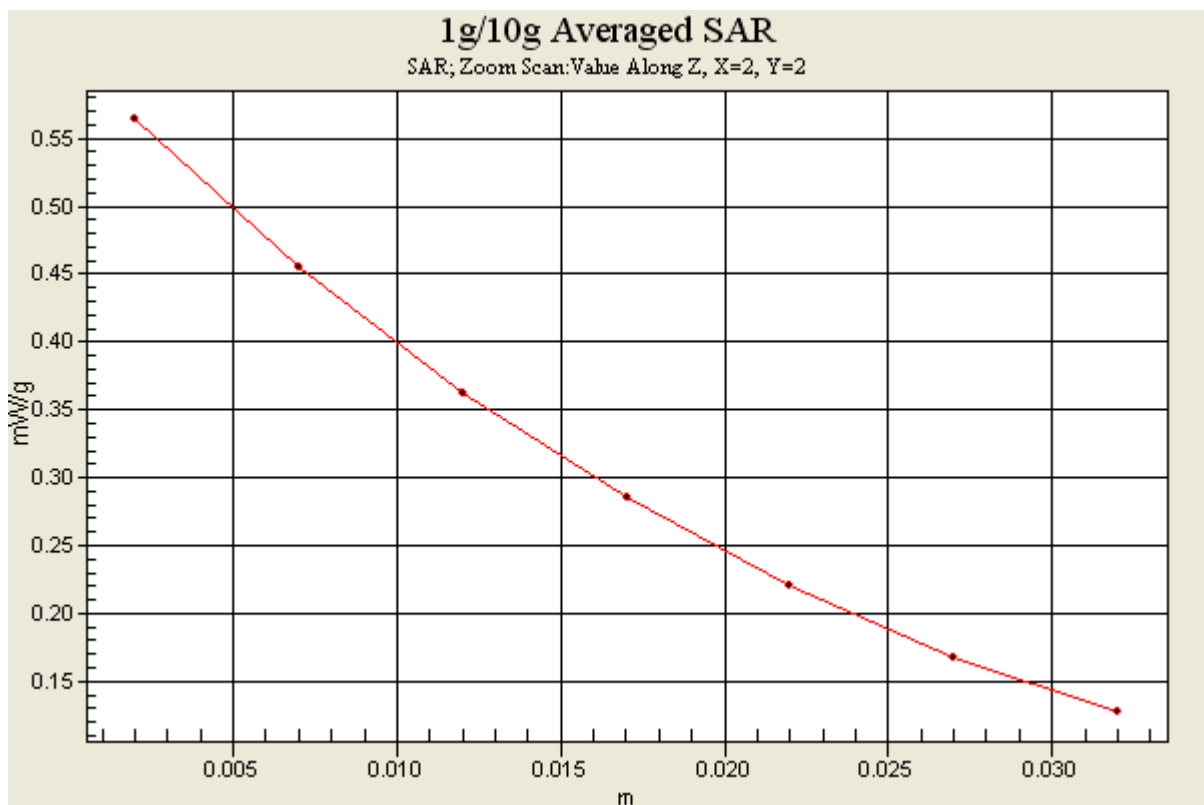

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.049 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.384 W/kg

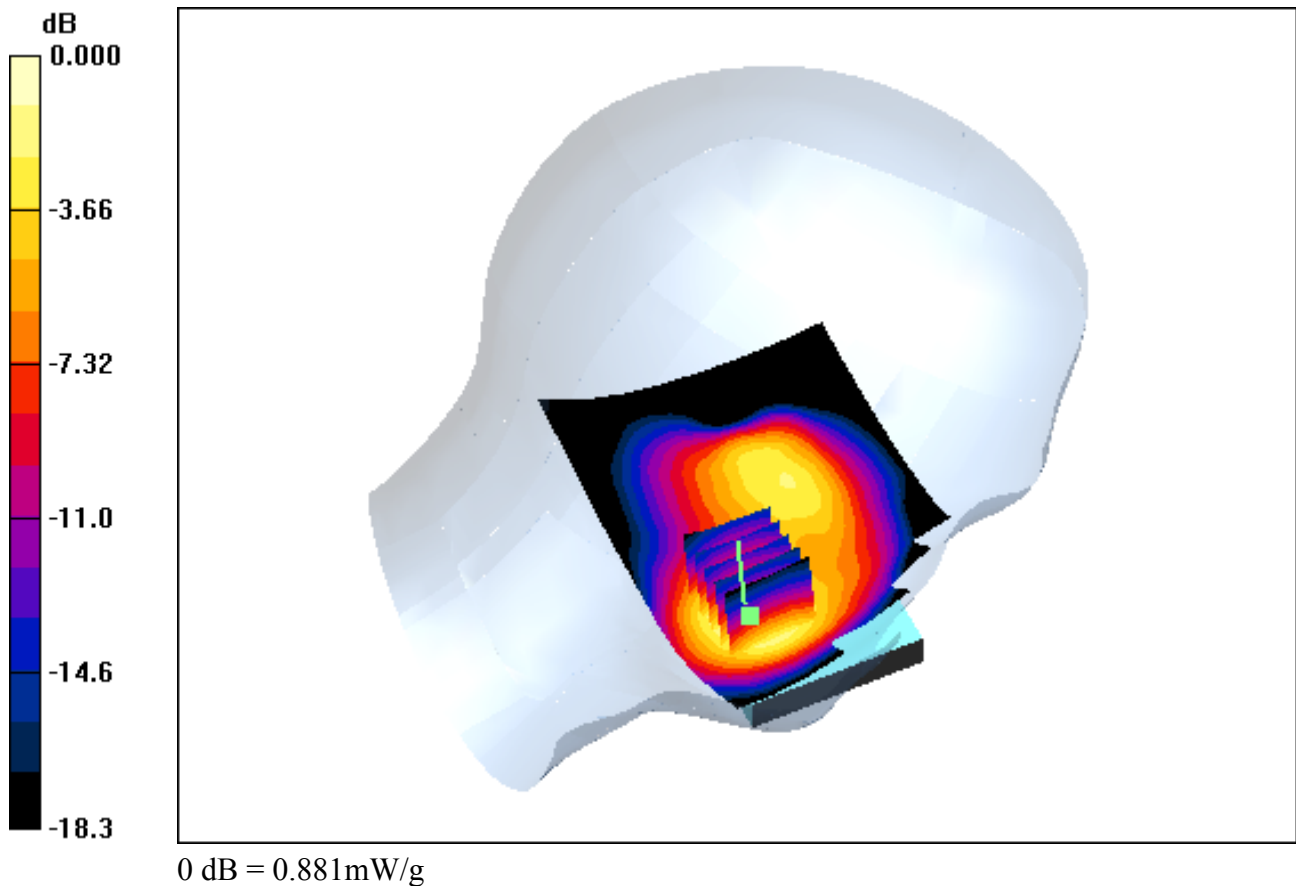

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.049 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.384 W/kg

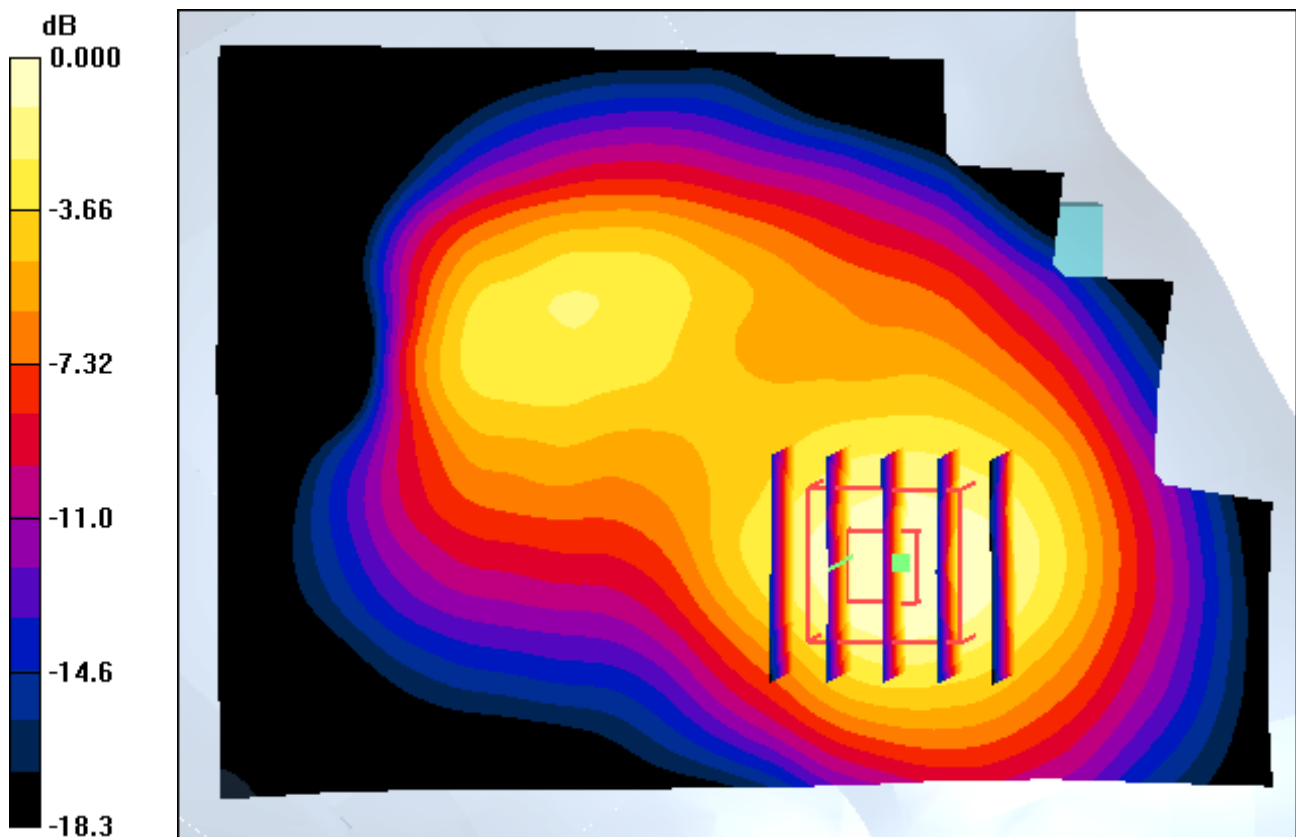

0 dB = 0.881mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.281 W/kg

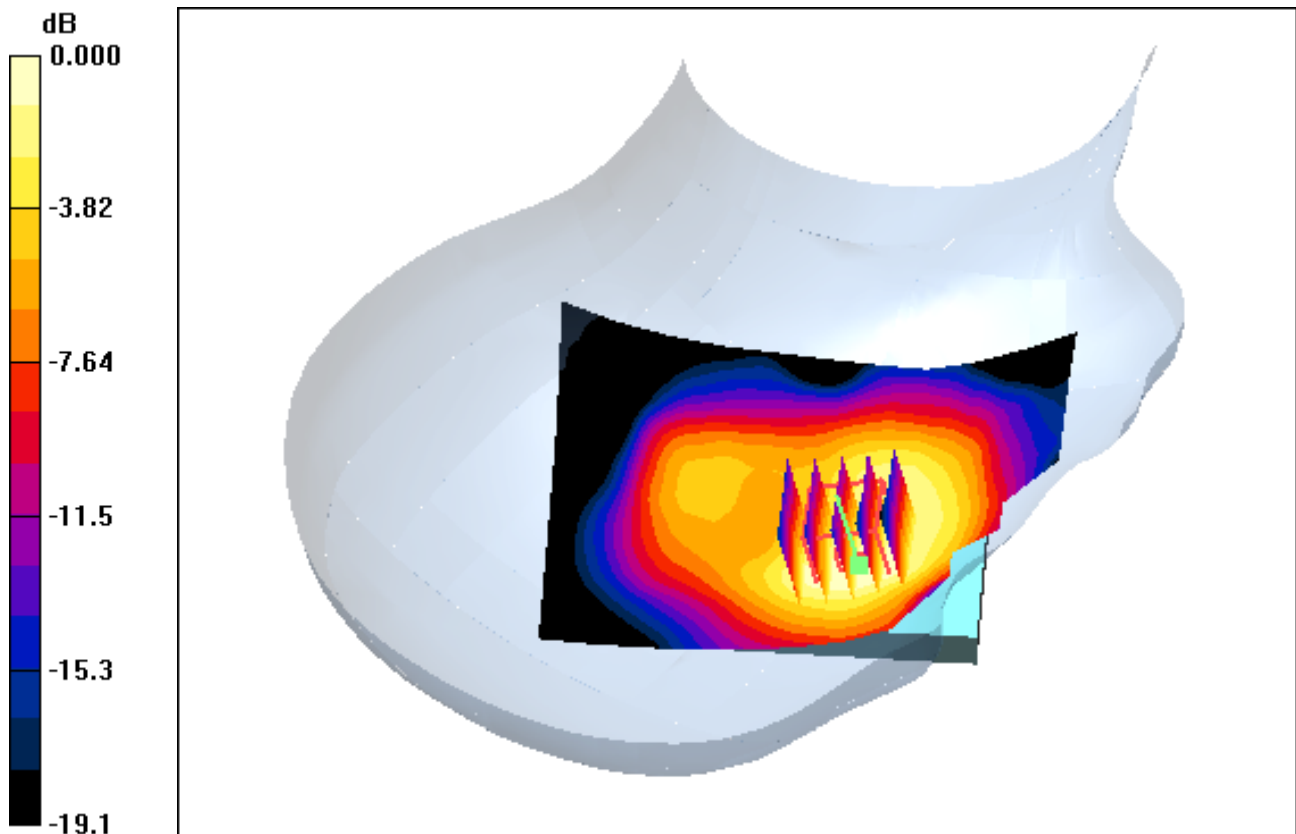

0 dB = 0.602mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.044 dB
Peak SAR (extrapolated) = 0.730 W/kg
SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.281 W/kg

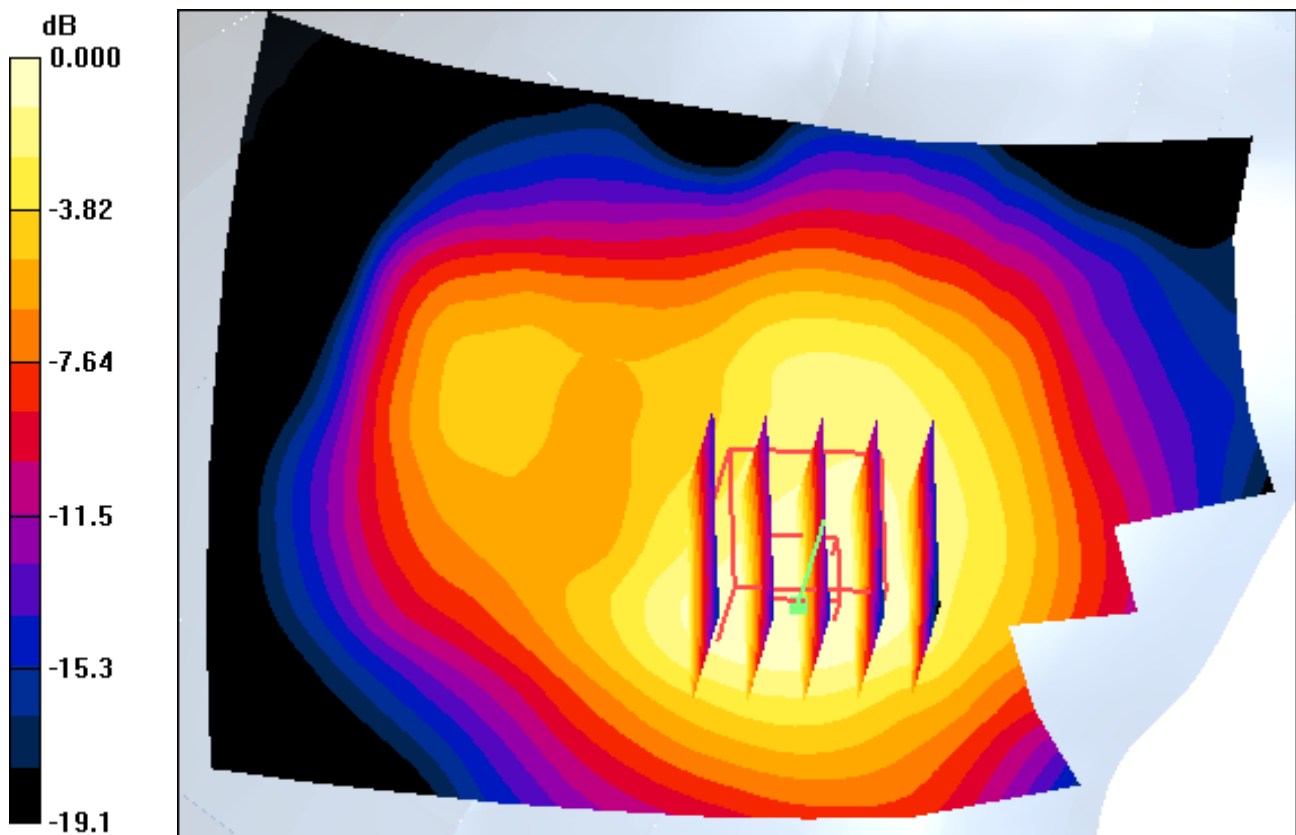

0 dB = 0.602mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.029 dB
Peak SAR (extrapolated) = 0.286 W/kg
SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.124 W/kg

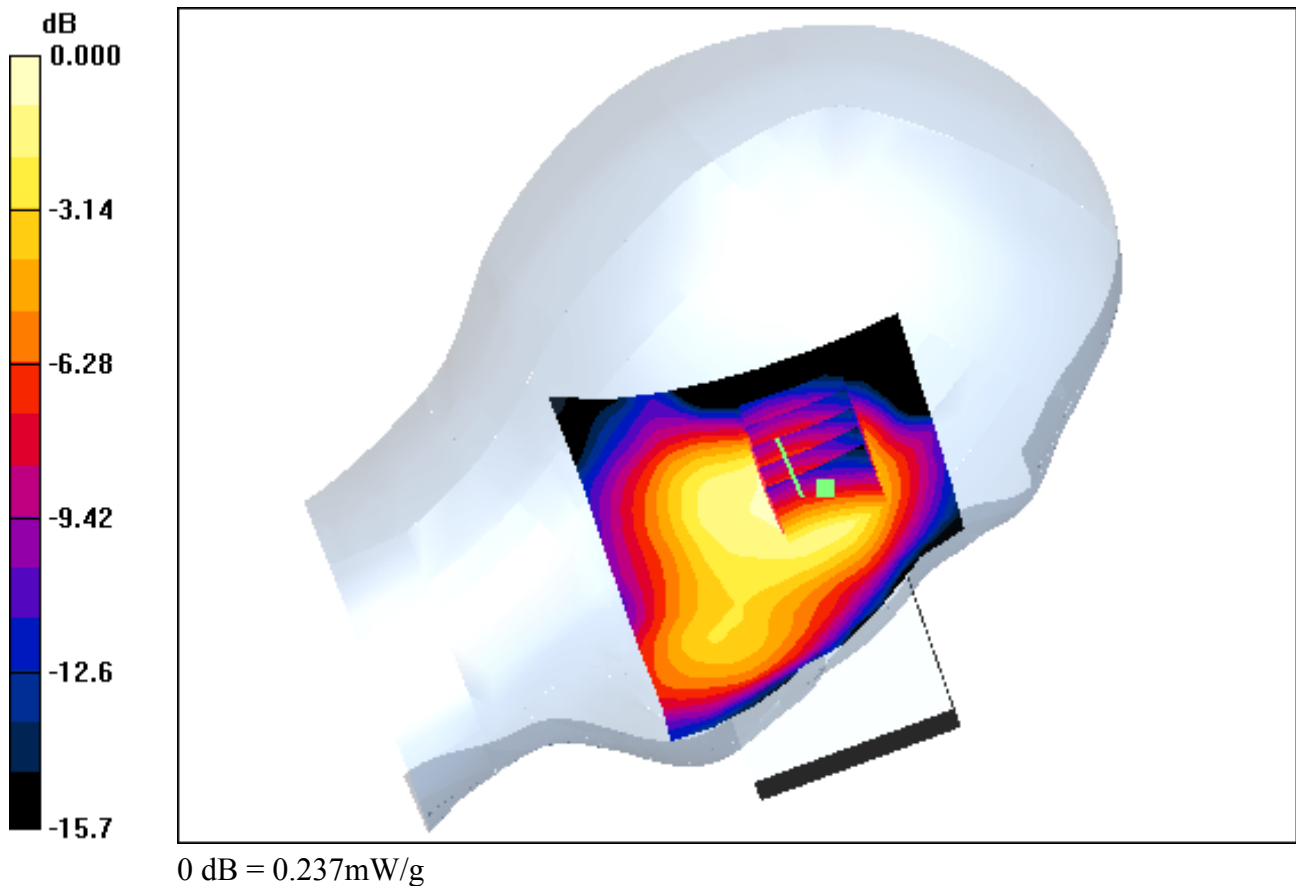

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.029 dB
Peak SAR (extrapolated) = 0.286 W/kg
SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.124 W/kg

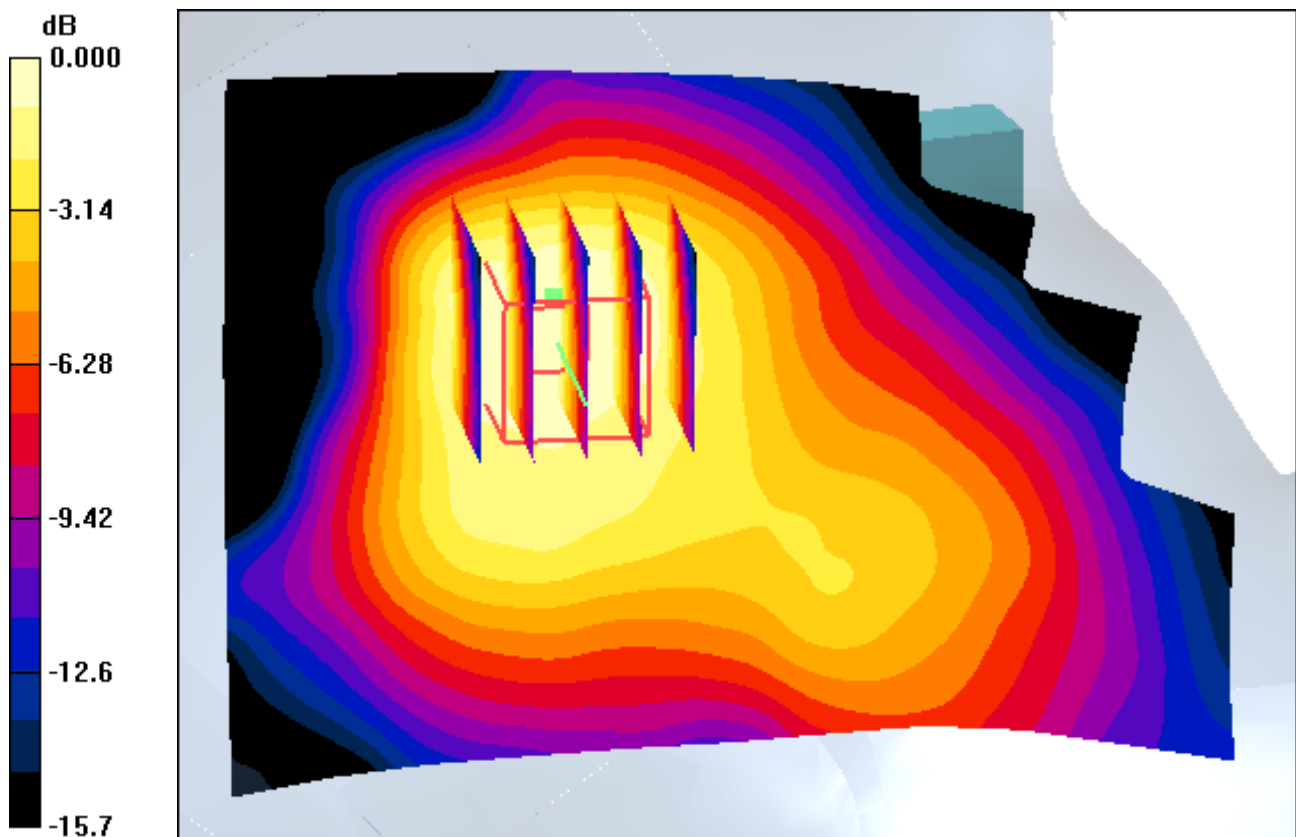

0 dB = 0.237mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.009 dB
Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.140 W/kg

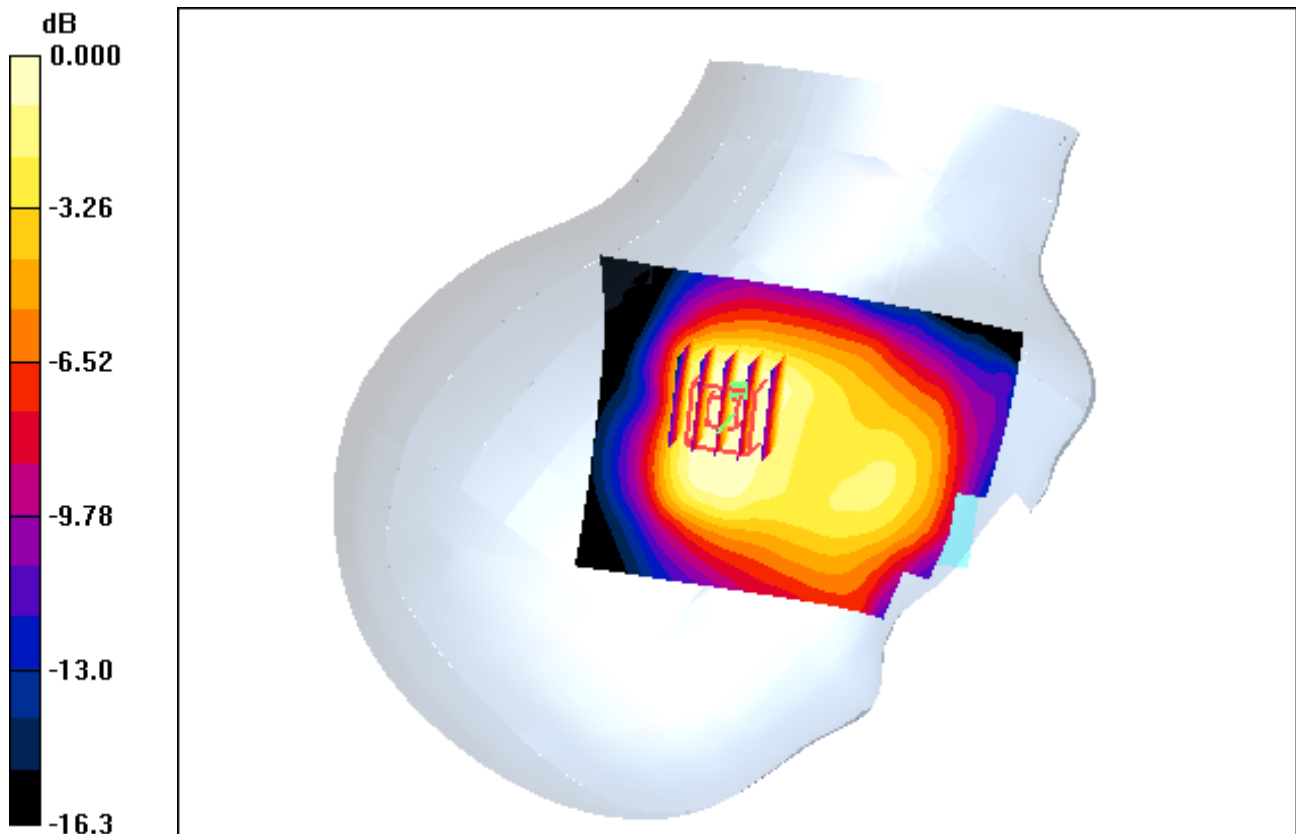

0 dB = 0.254mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Tilt, PCS1900Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.009 dB
Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.140 W/kg

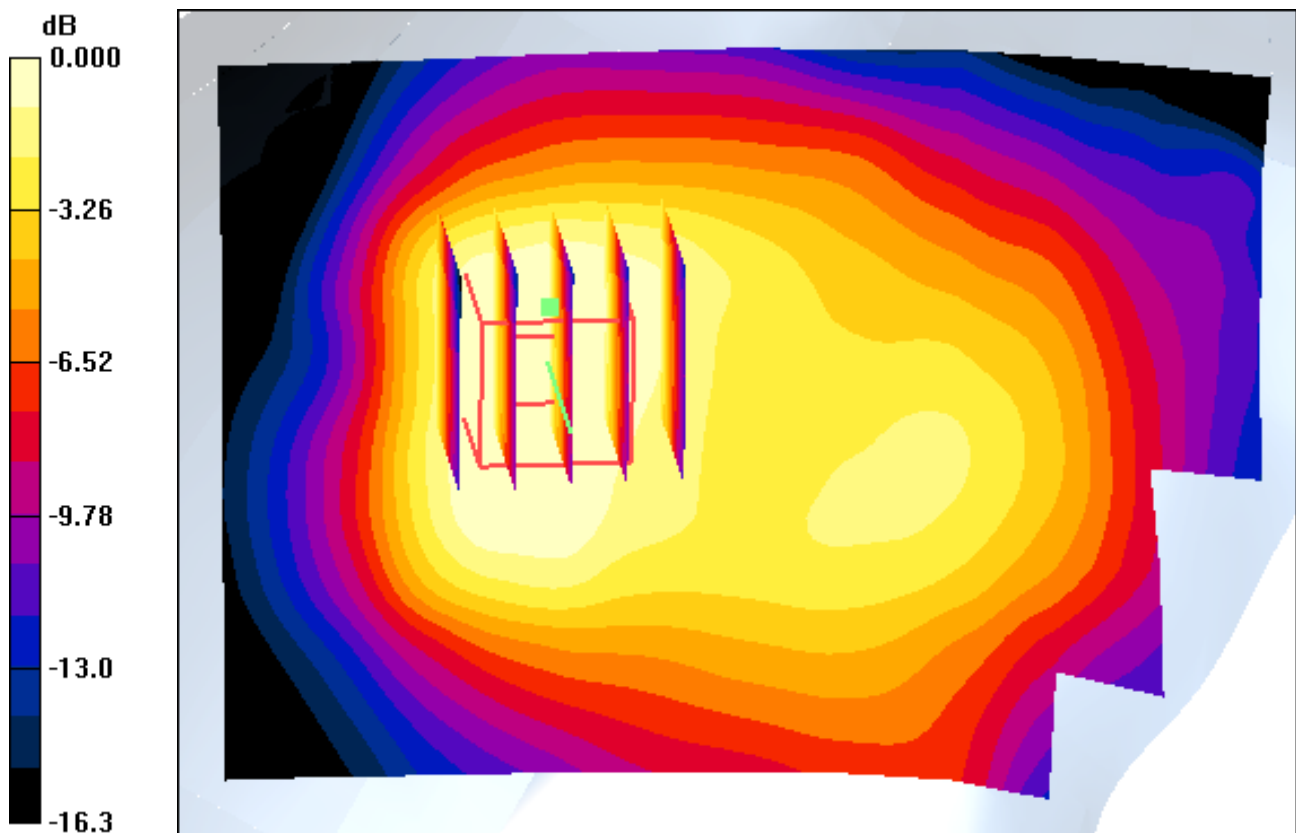

0 dB = 0.254mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.364 W/kg

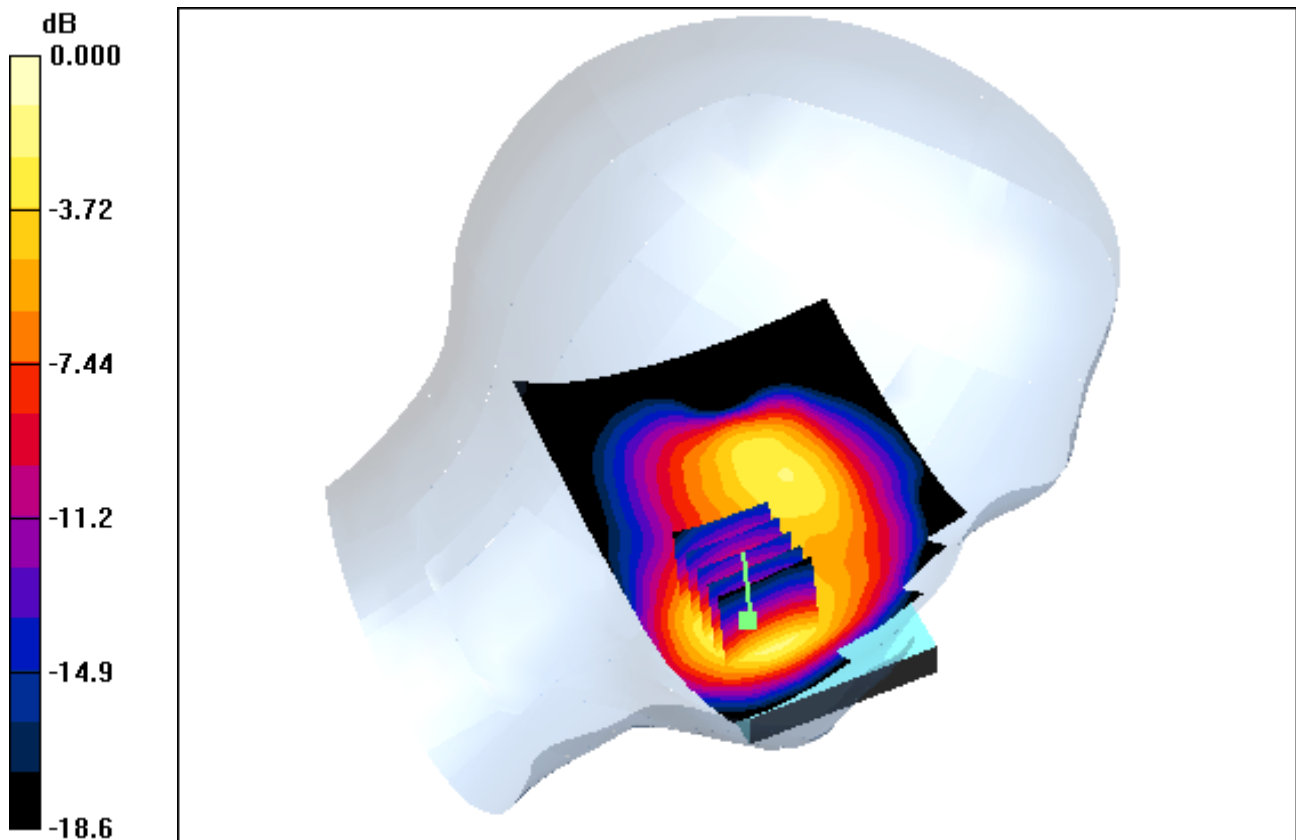

0 dB = 0.877mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.032 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.364 W/kg

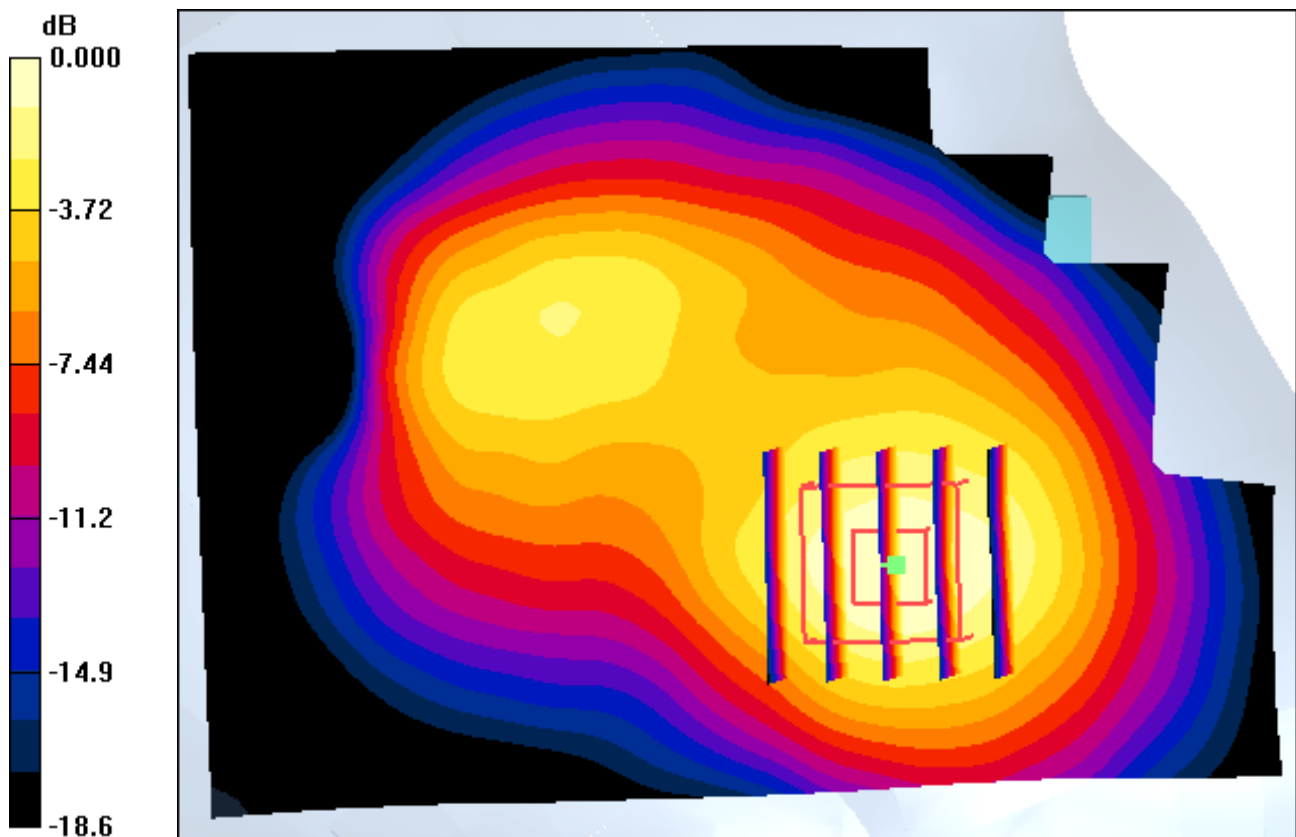

0 dB = 0.877mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.049 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.384 W/kg

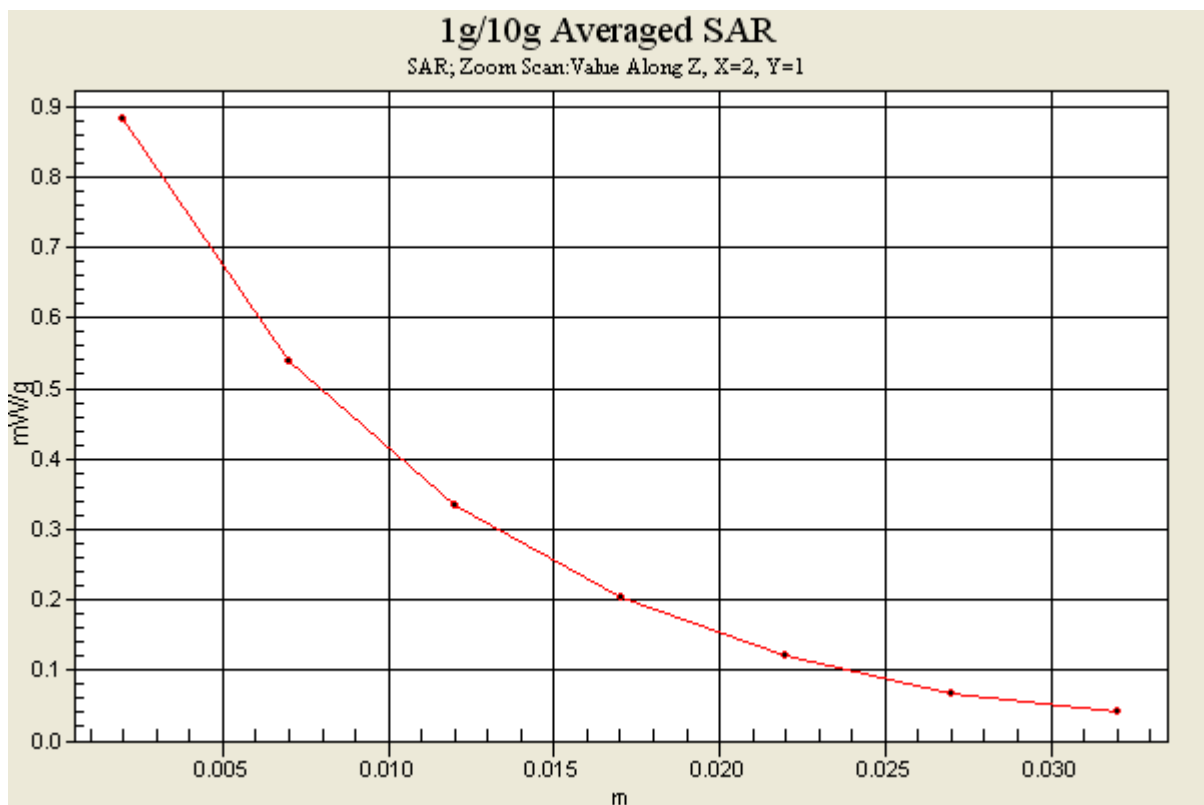

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 1 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.401 W/kg

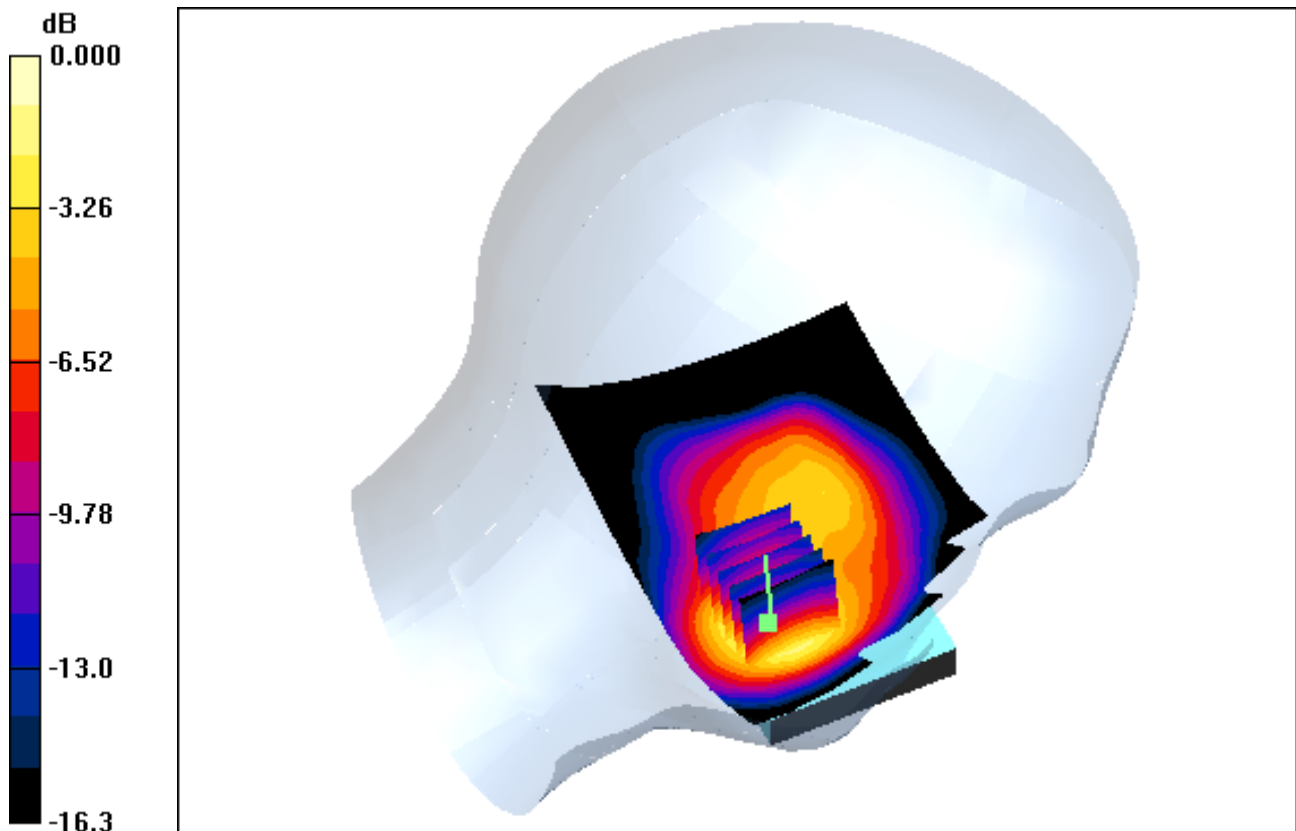

0 dB = 0.889mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 1 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.401 W/kg

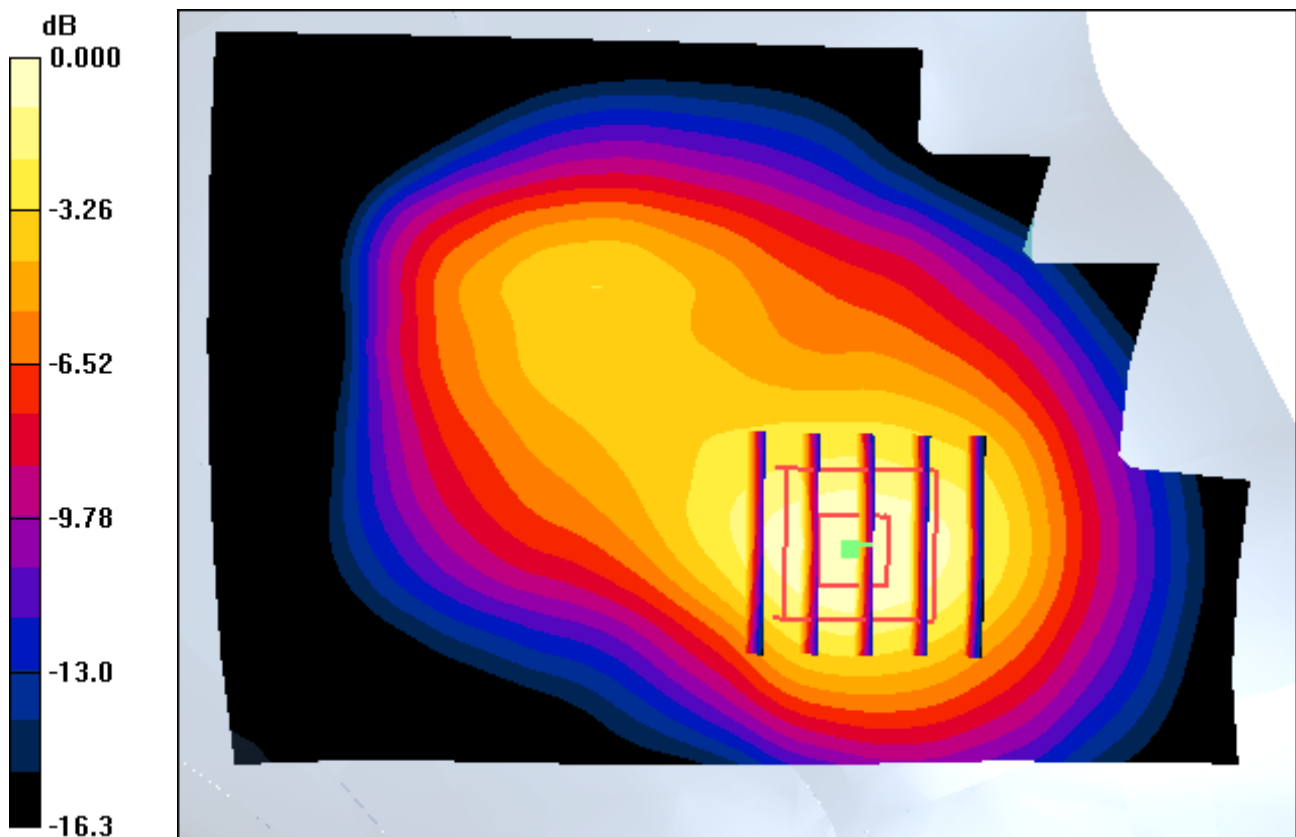

0 dB = 0.889mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 2 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.163 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.438 W/kg

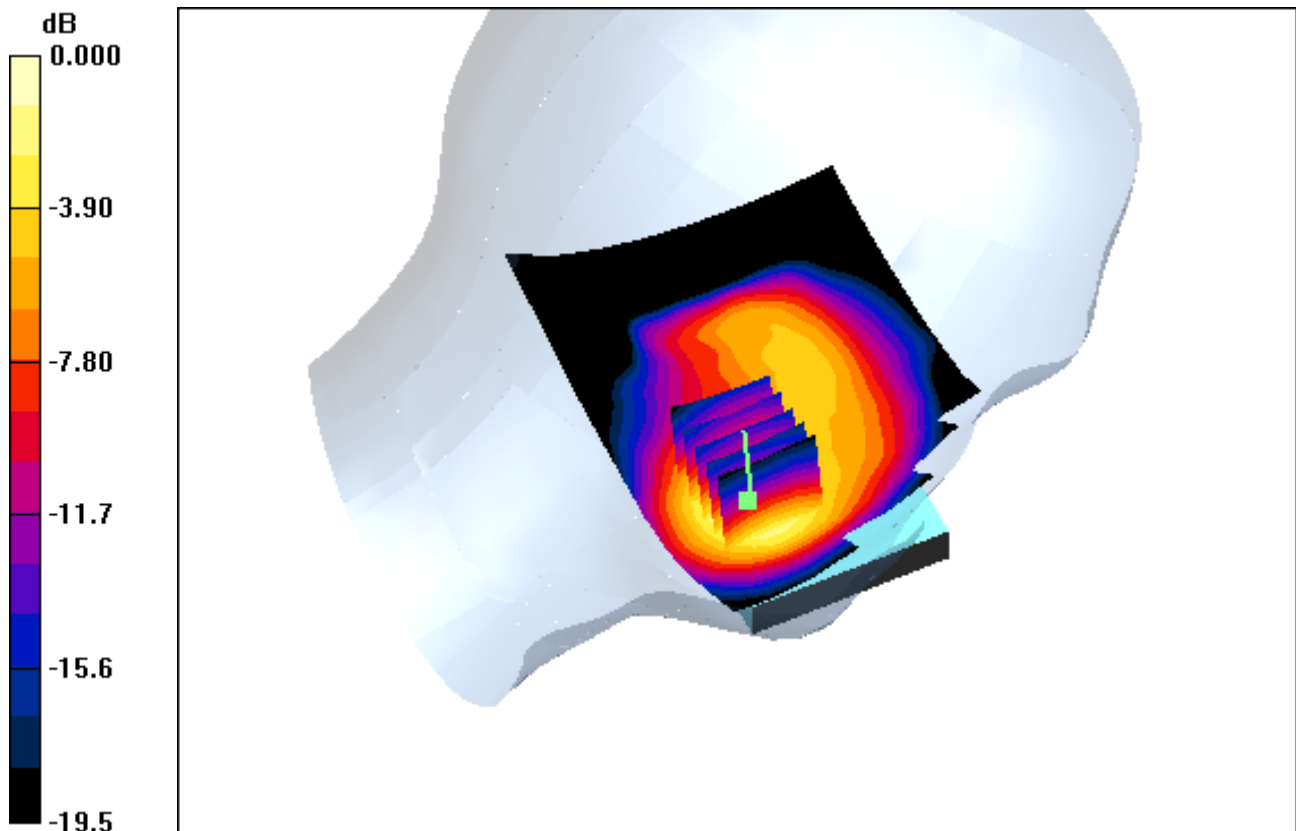

0 dB = 1.08mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 2 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.163 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.438 W/kg

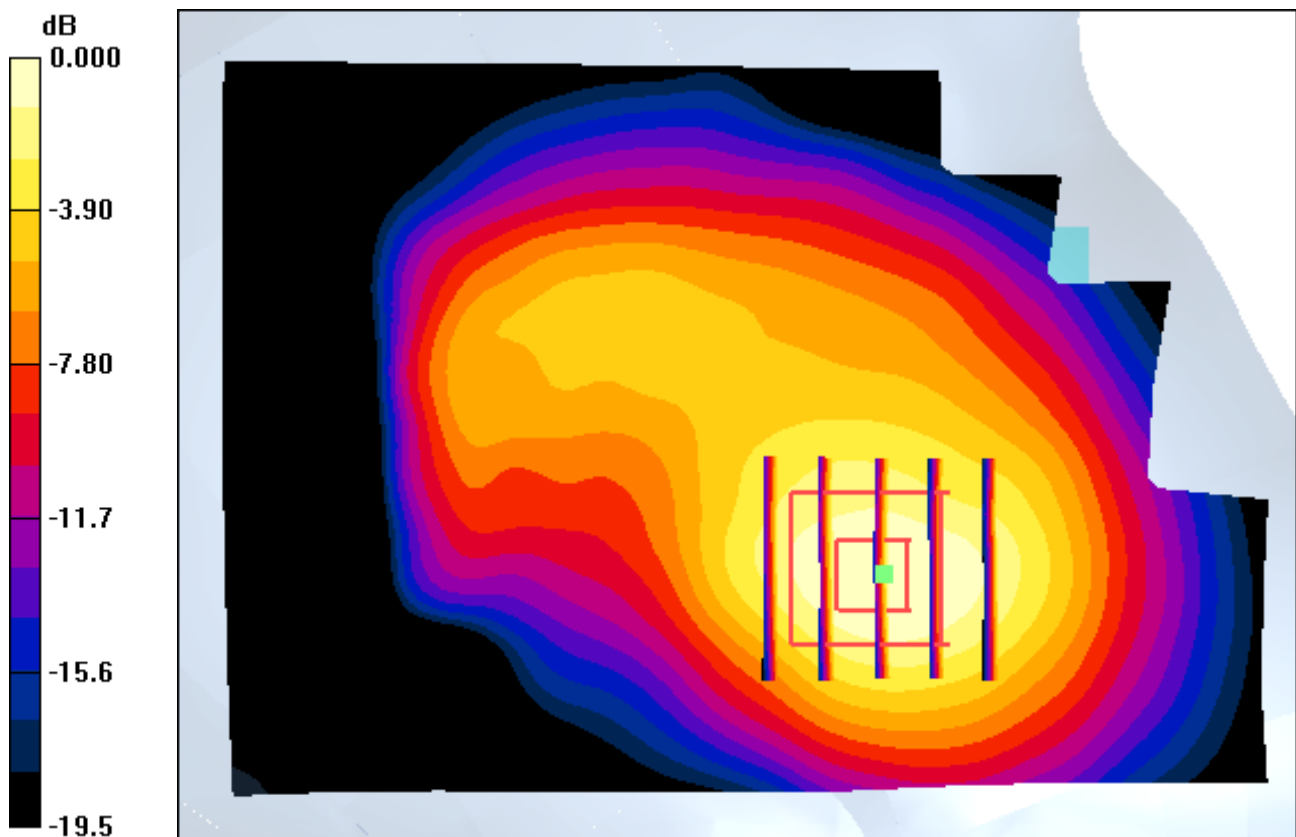

0 dB = 1.08mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 512, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.051 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.436 W/kg

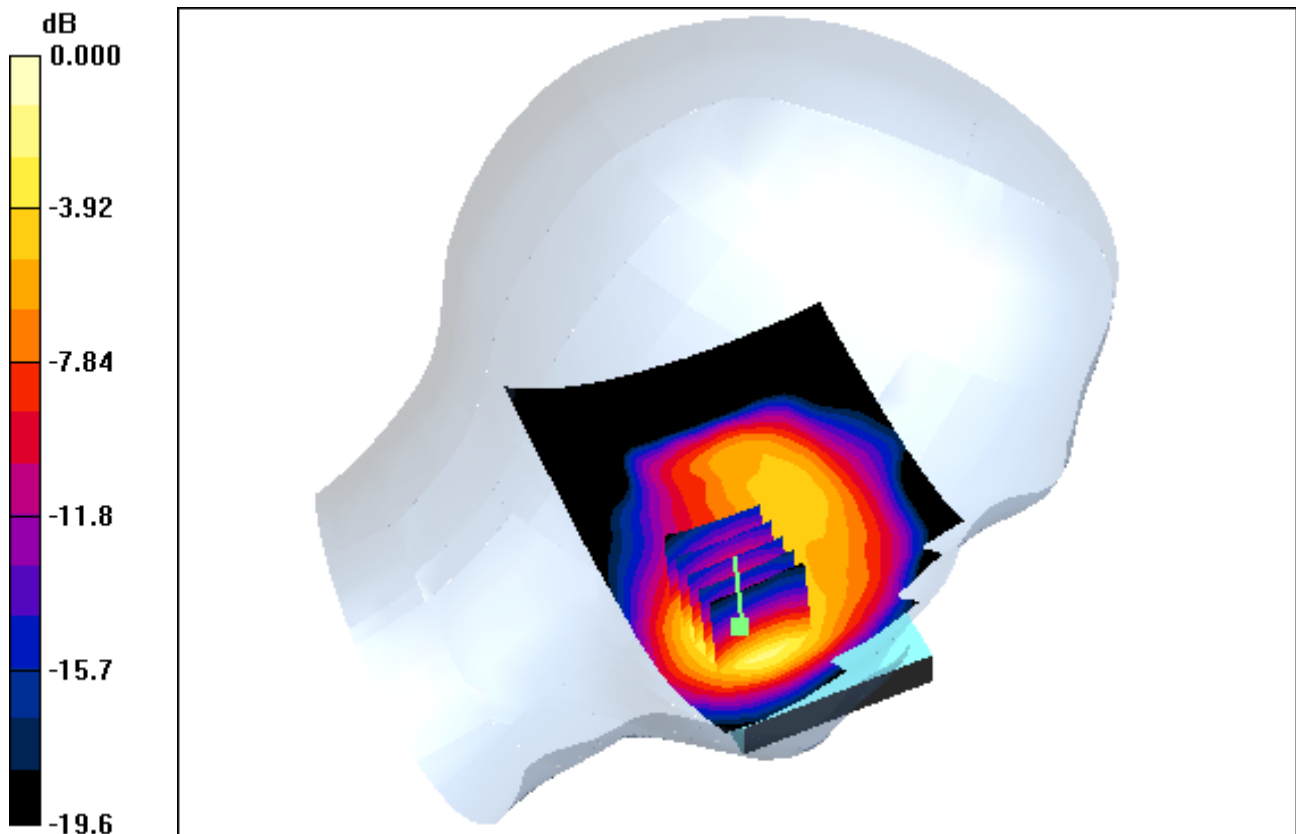

0 dB = 1.09mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 512, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.051 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.436 W/kg

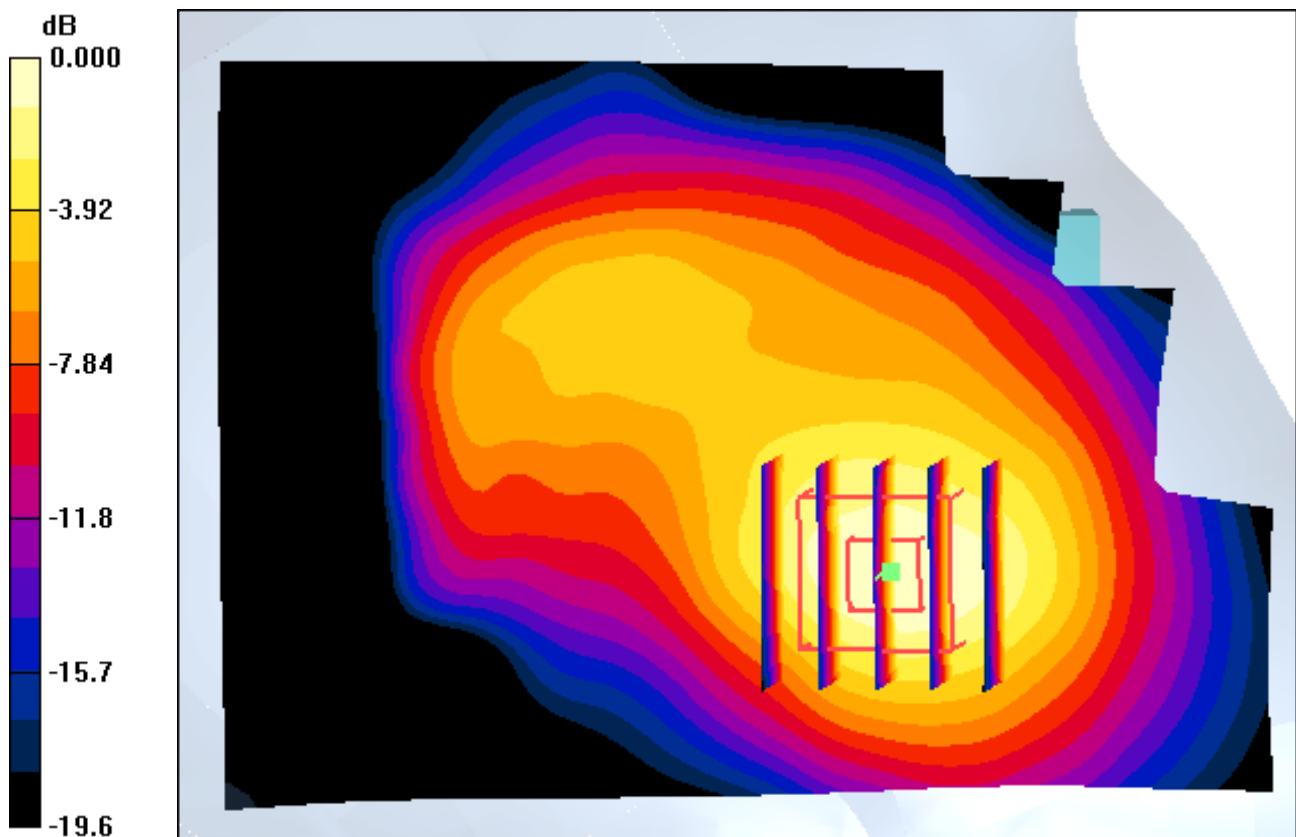

0 dB = 1.09mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.076 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.448 W/kg

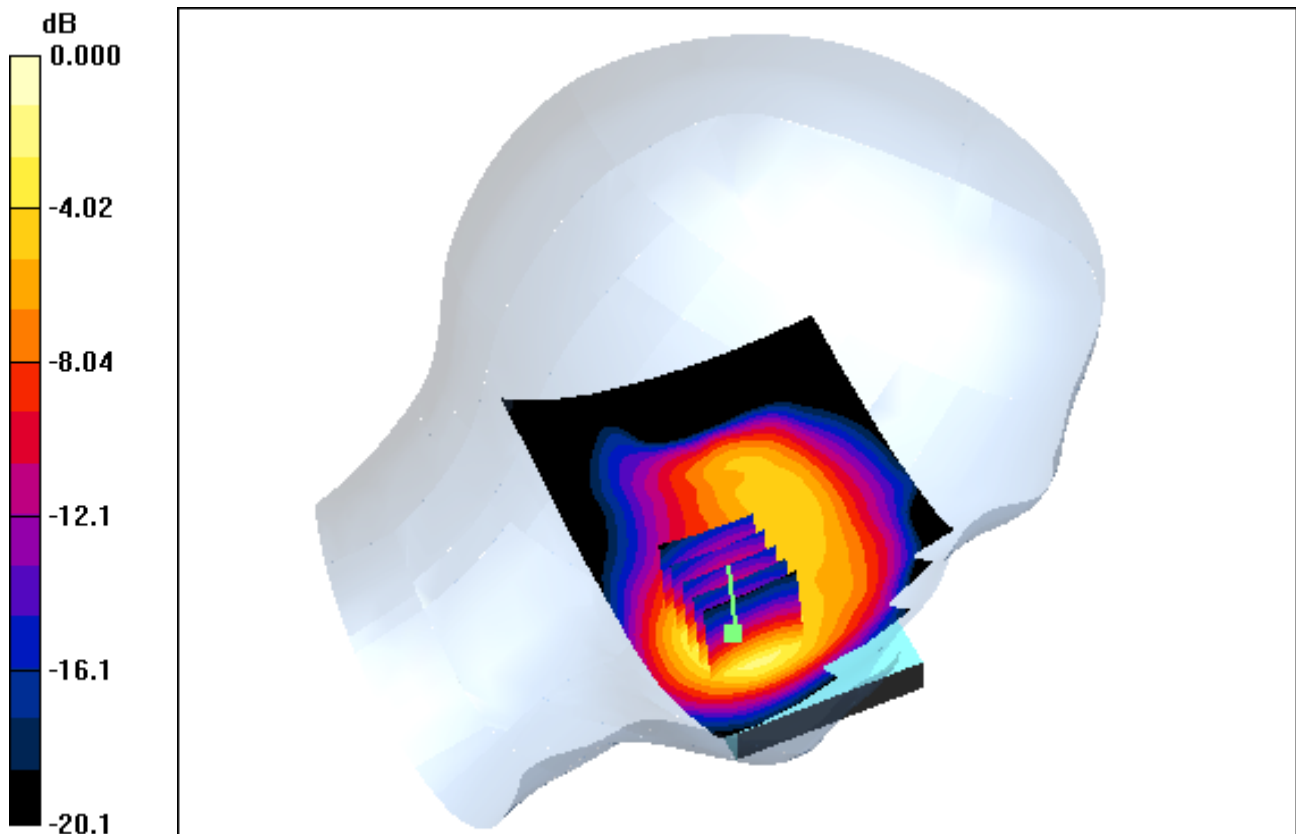

0 dB = 1.13mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.076 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.448 W/kg

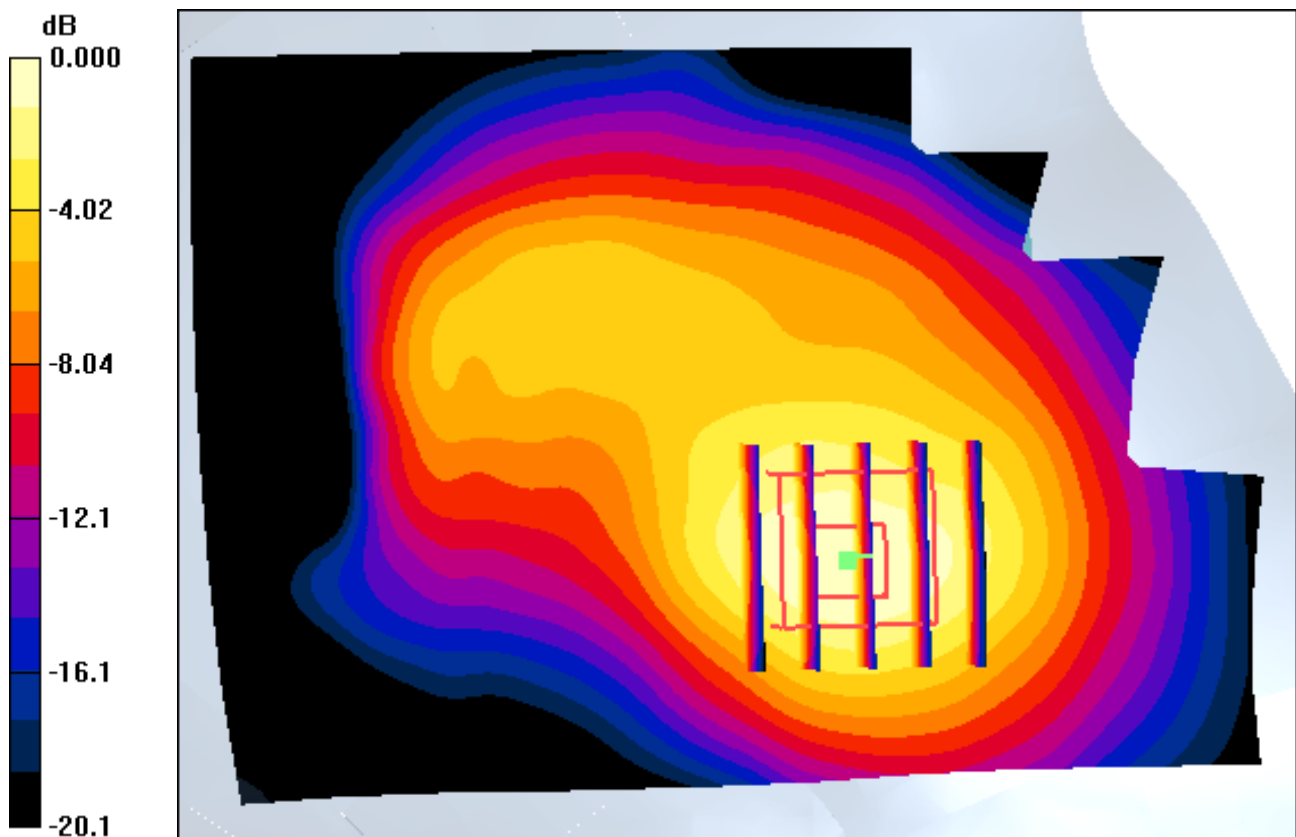

0 dB = 1.13mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.152 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.468 W/kg

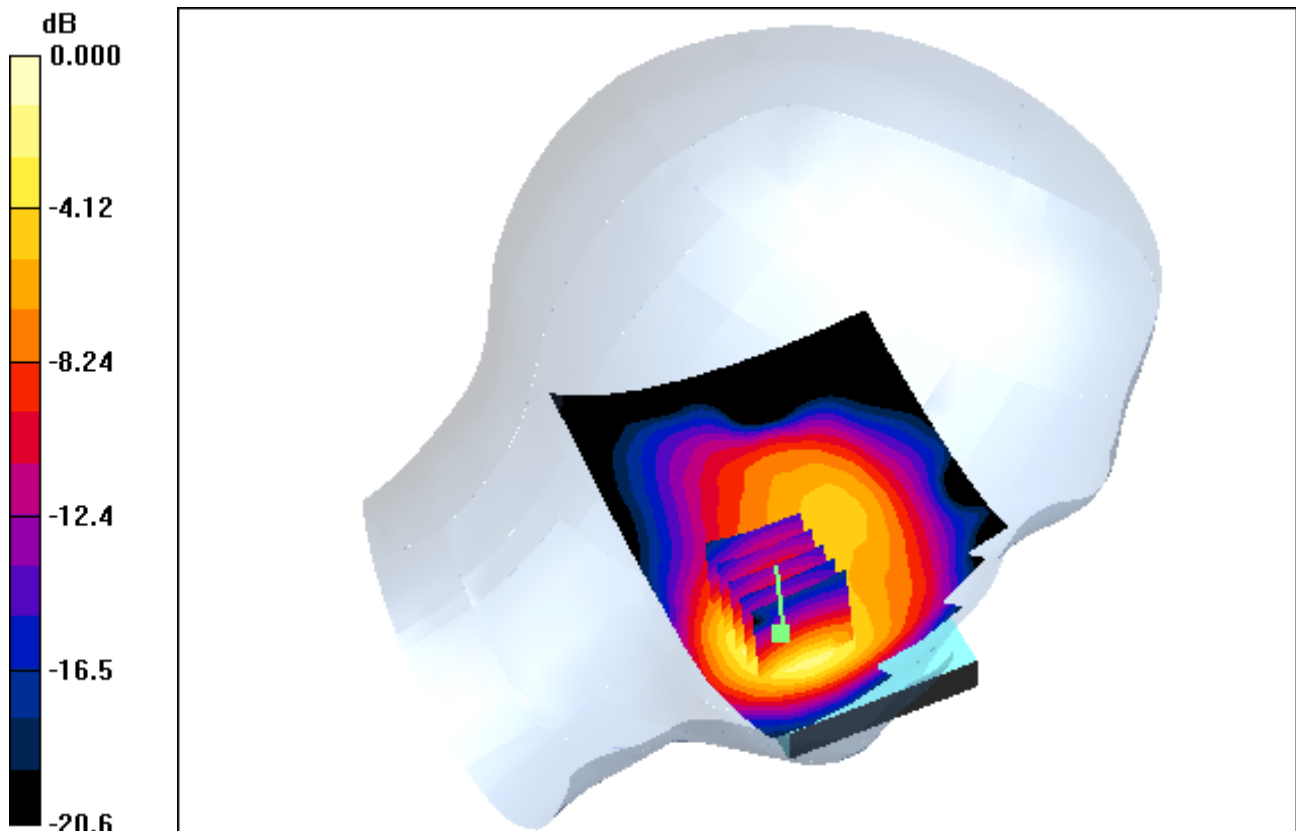

0 dB = 1.15mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.152 dB
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.468 W/kg

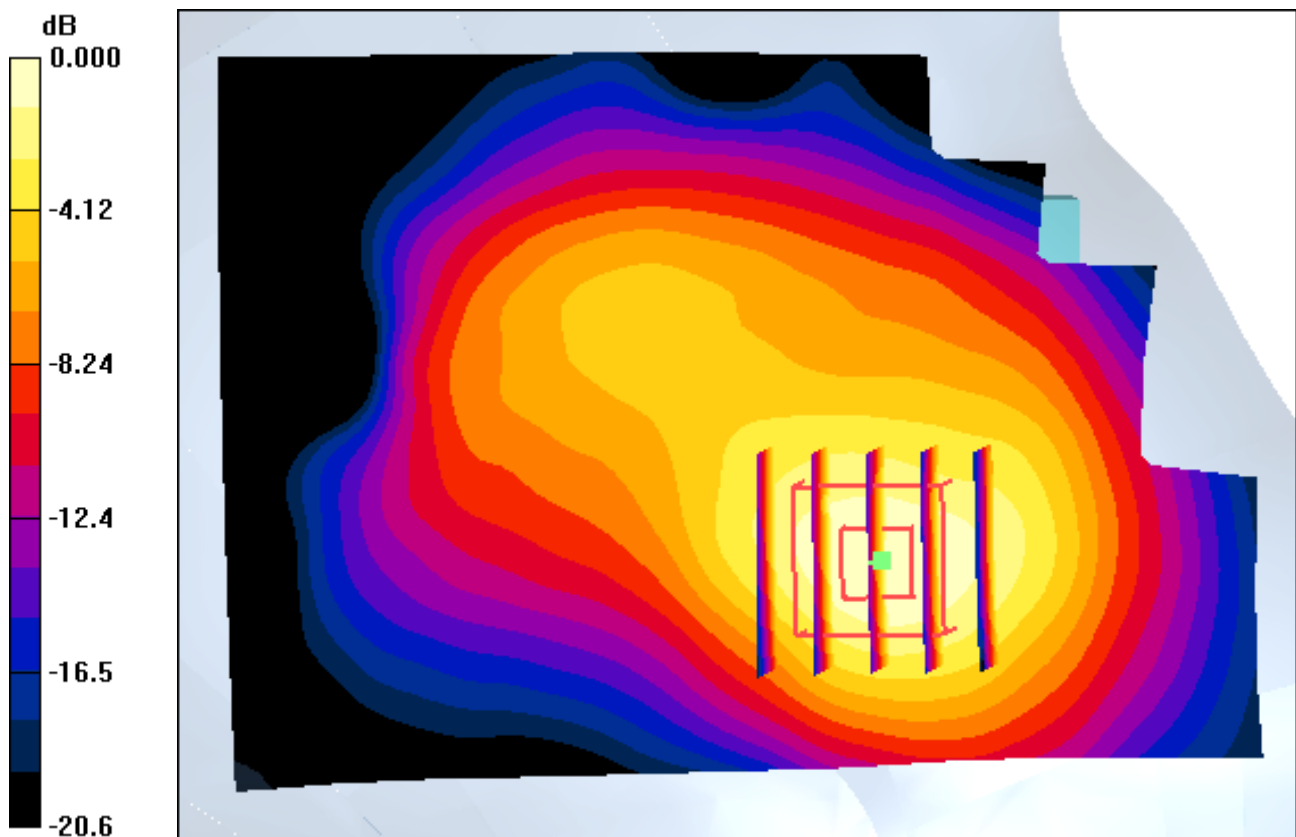

0 dB = 1.15mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 4 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.087 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.424 W/kg

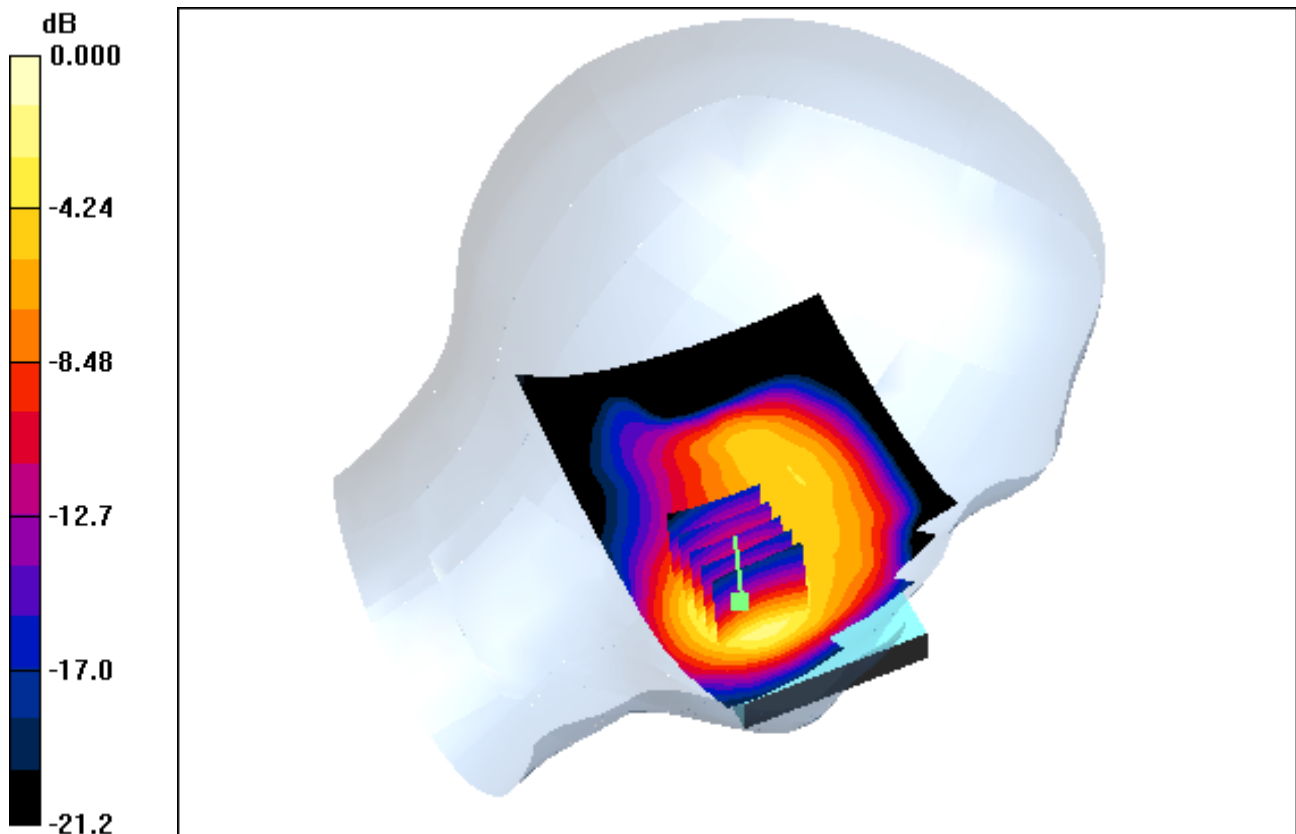

0 dB = 1.08mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 4 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.087 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.424 W/kg

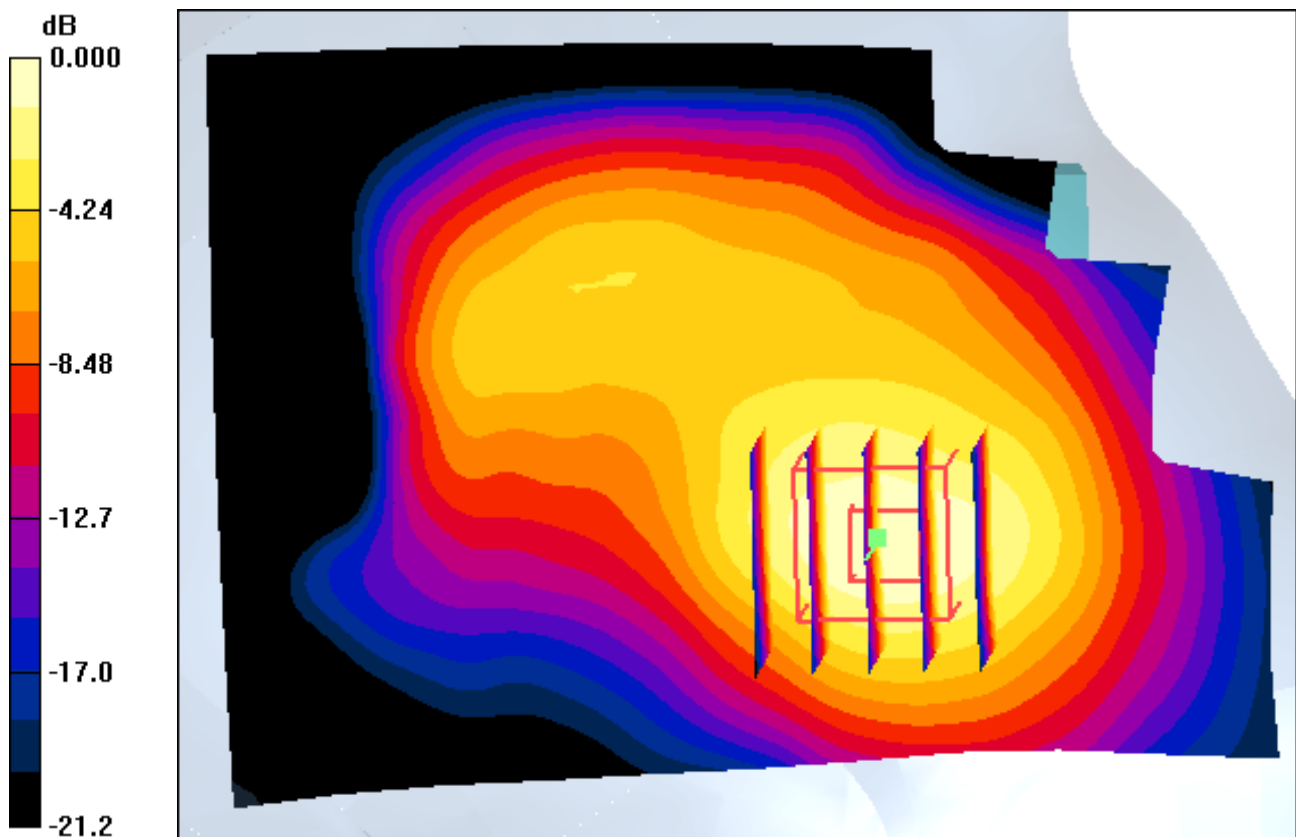

0 dB = 1.08mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Touch, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.287 W/kg

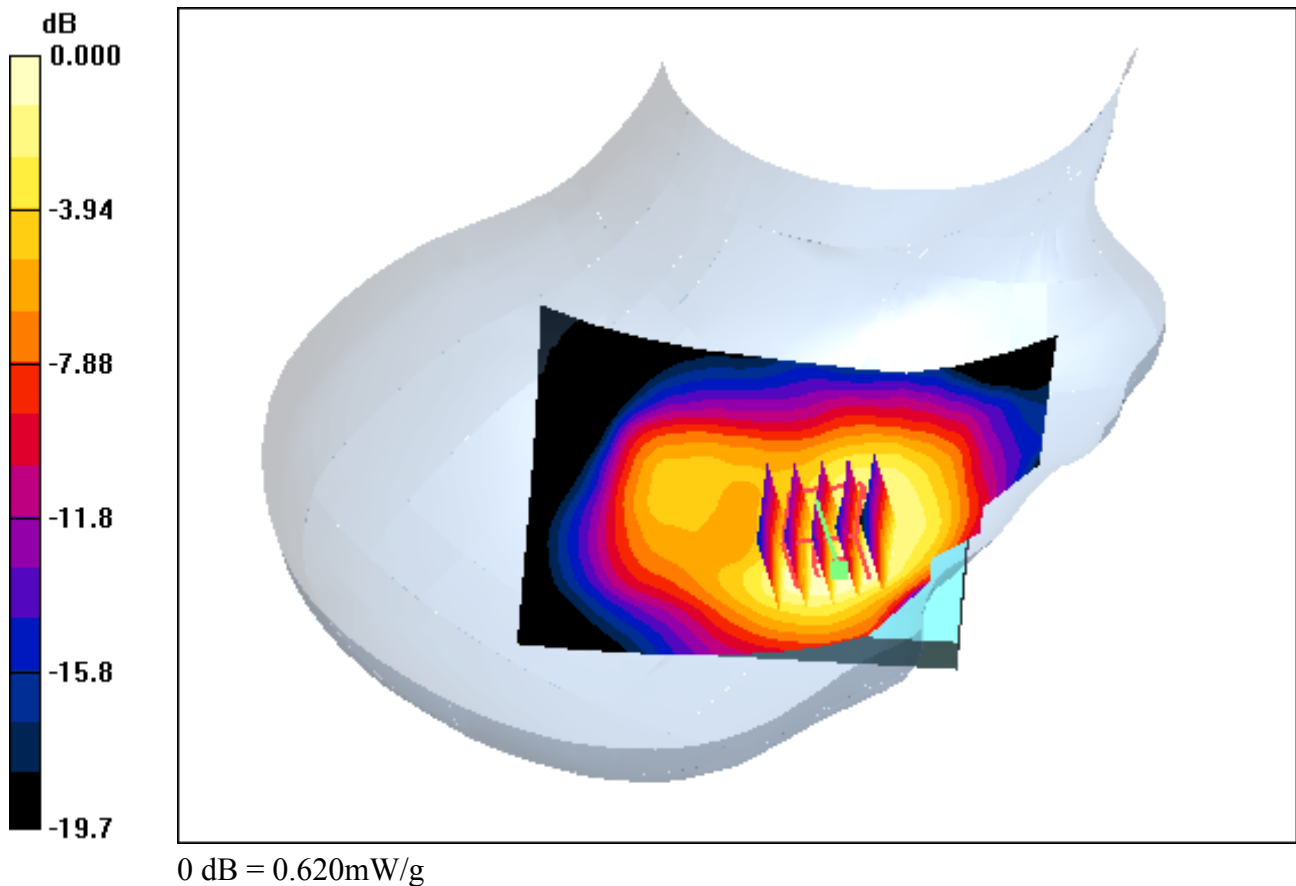

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Touch, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.093 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.287 W/kg

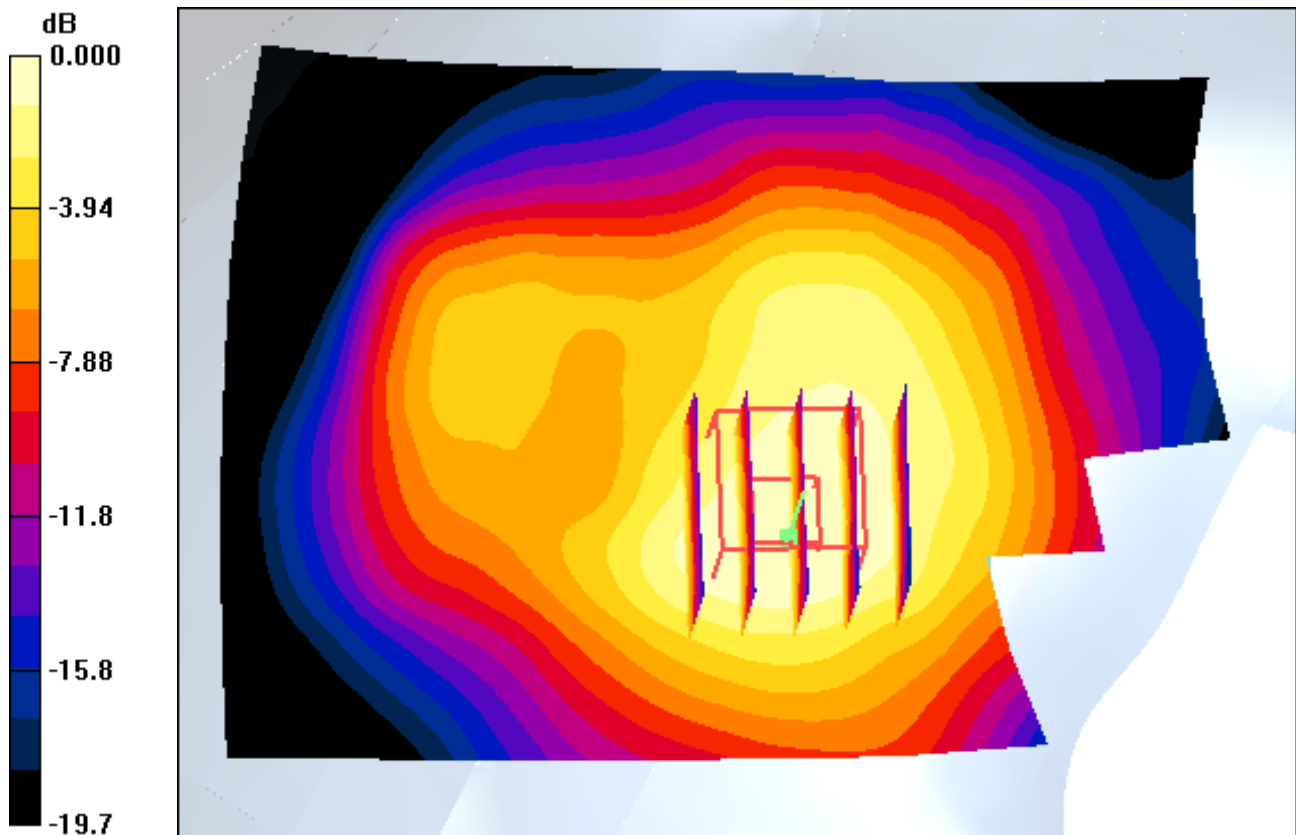

0 dB = 0.620mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Tilt, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.168 W/kg

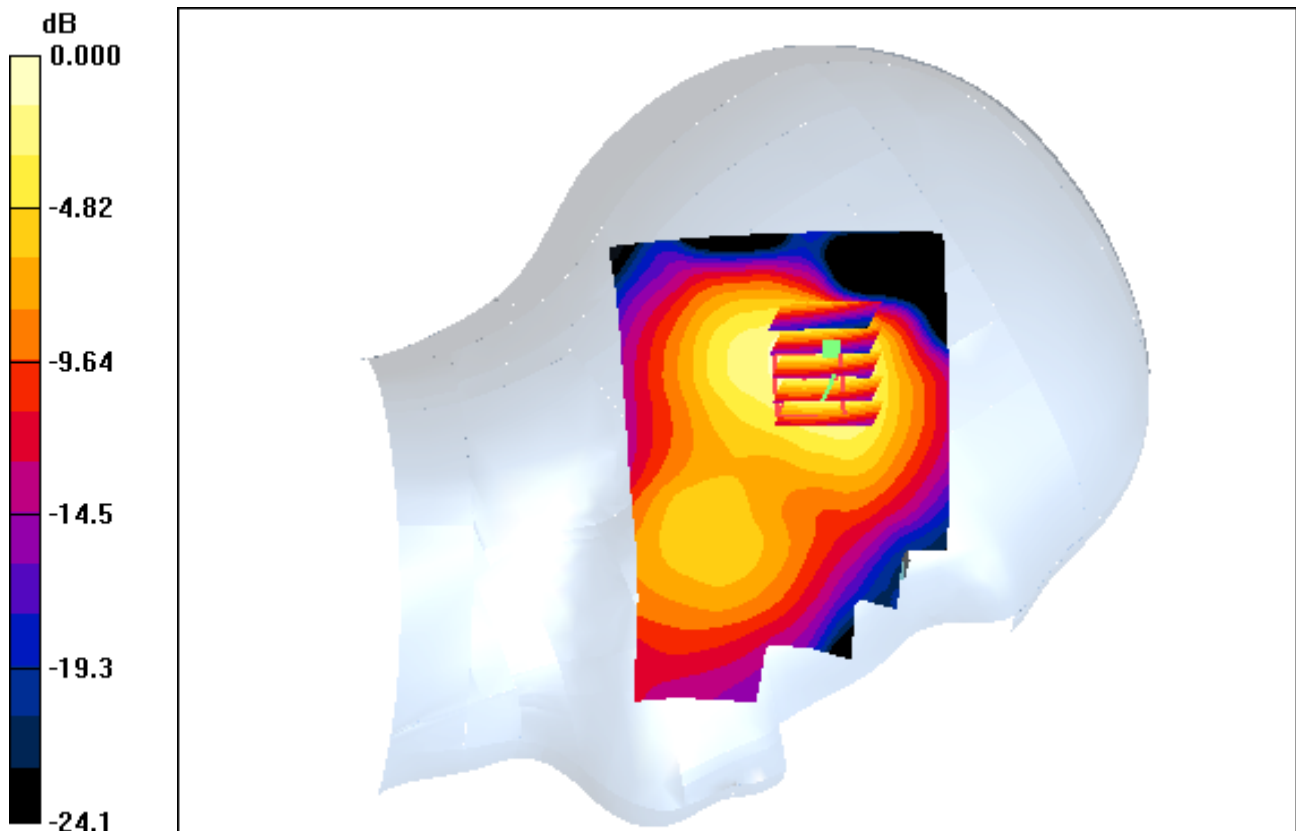

0 dB = 0.373mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Tilt, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.168 W/kg

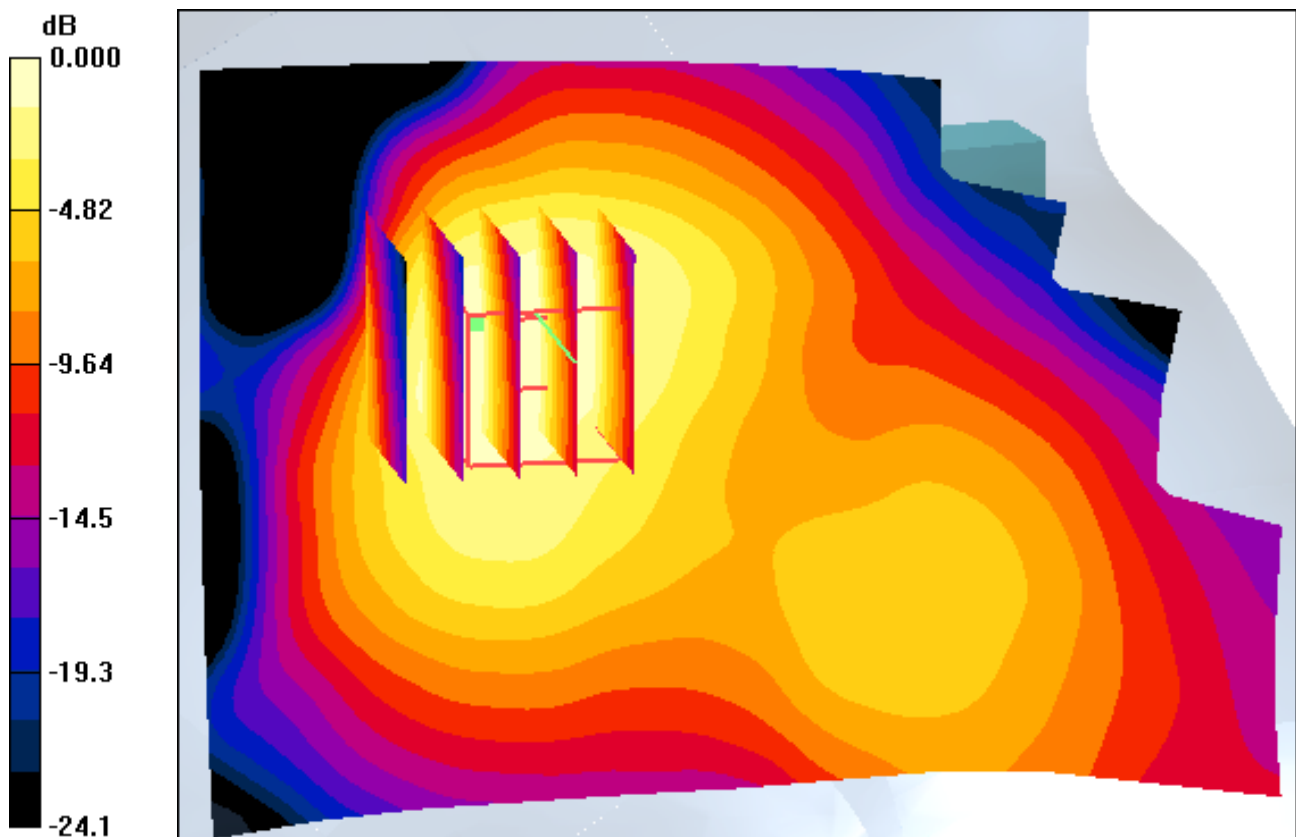

0 dB = 0.373mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Tilt, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.138 W/kg

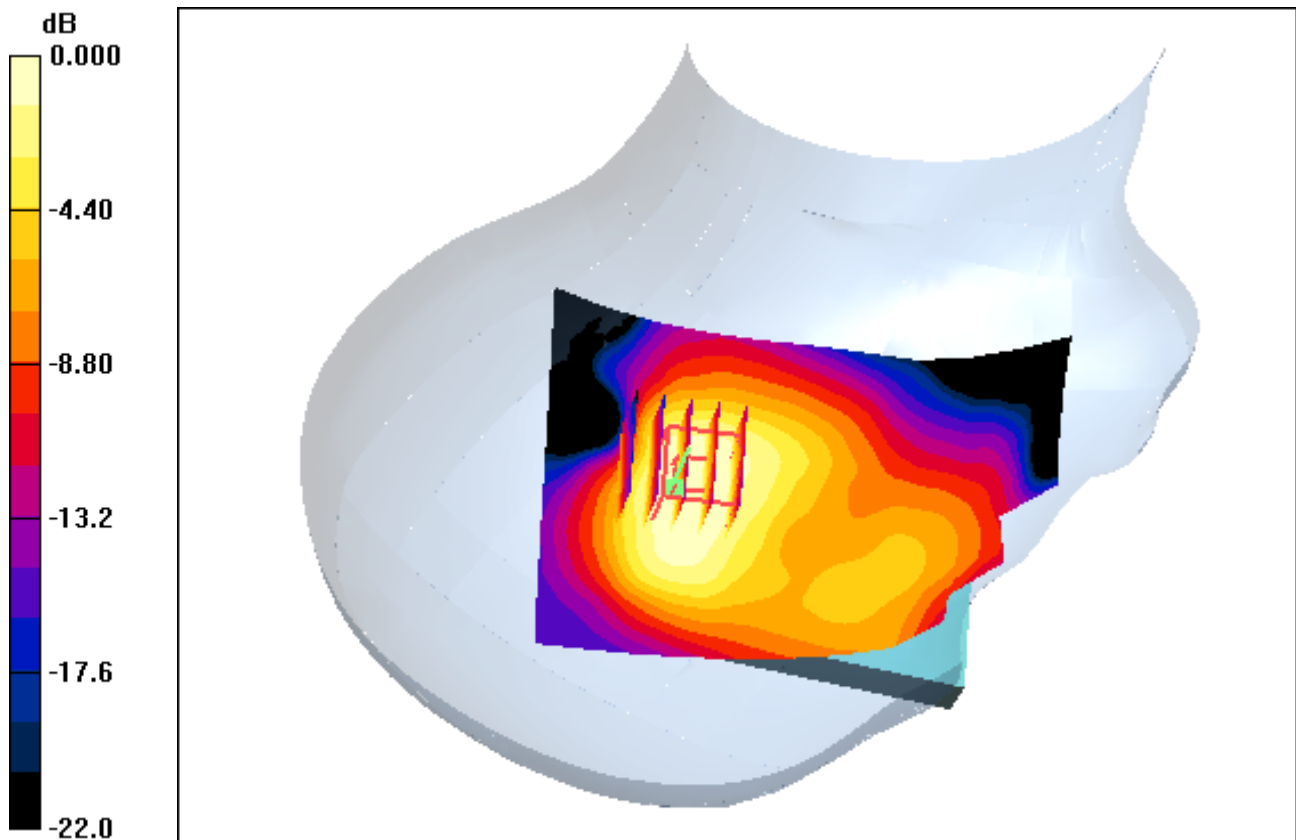

0 dB = 0.285mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Right Tilt, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.138 W/kg

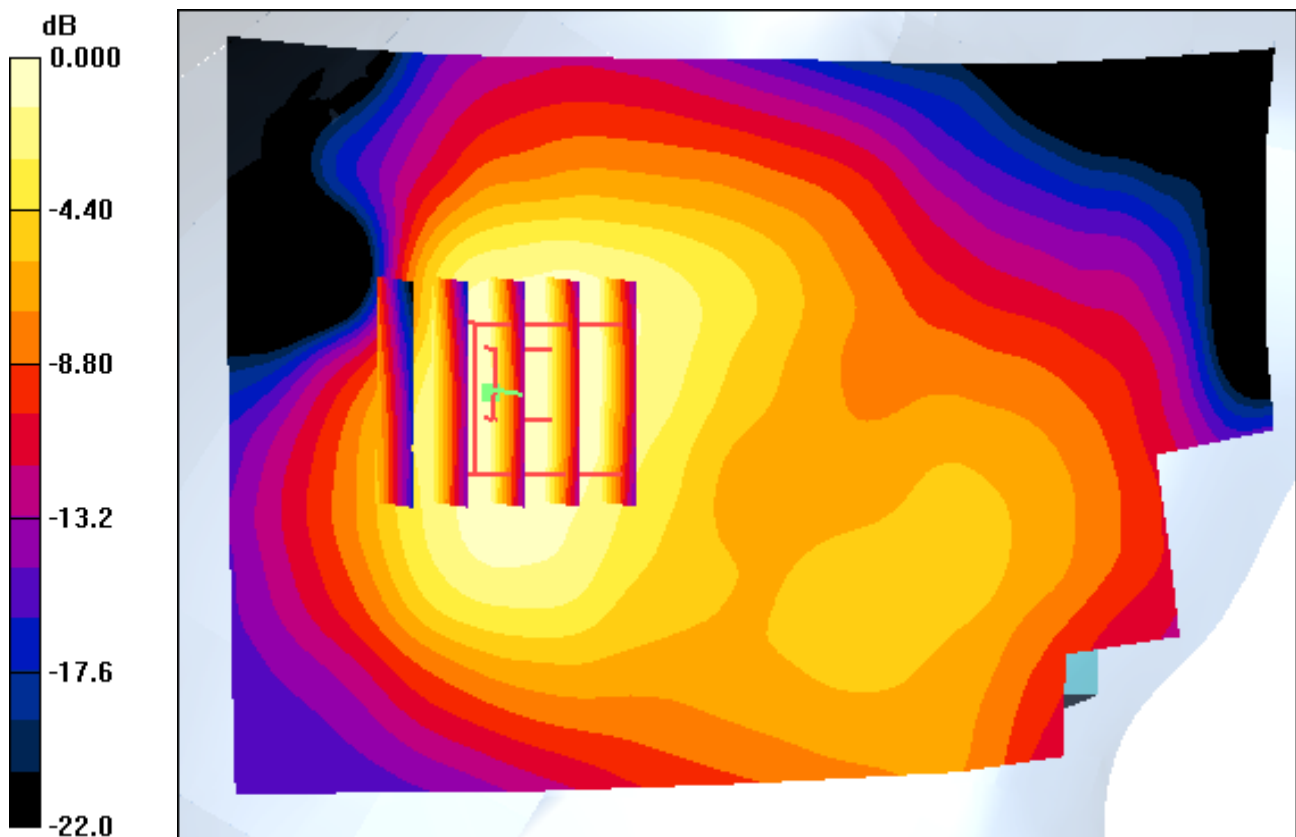

0 dB = 0.285mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 512, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.092 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.414 W/kg

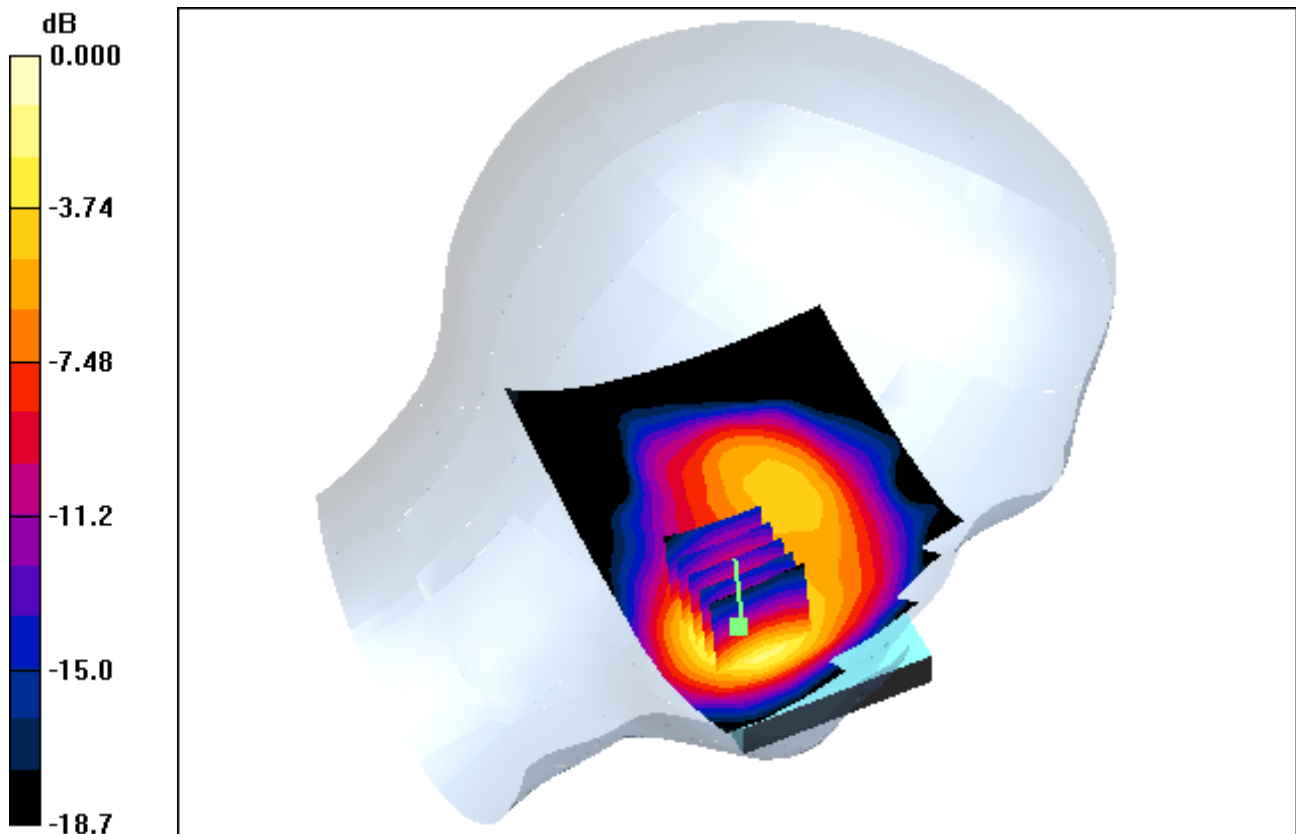

0 dB = 0.989mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 512, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.092 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.414 W/kg

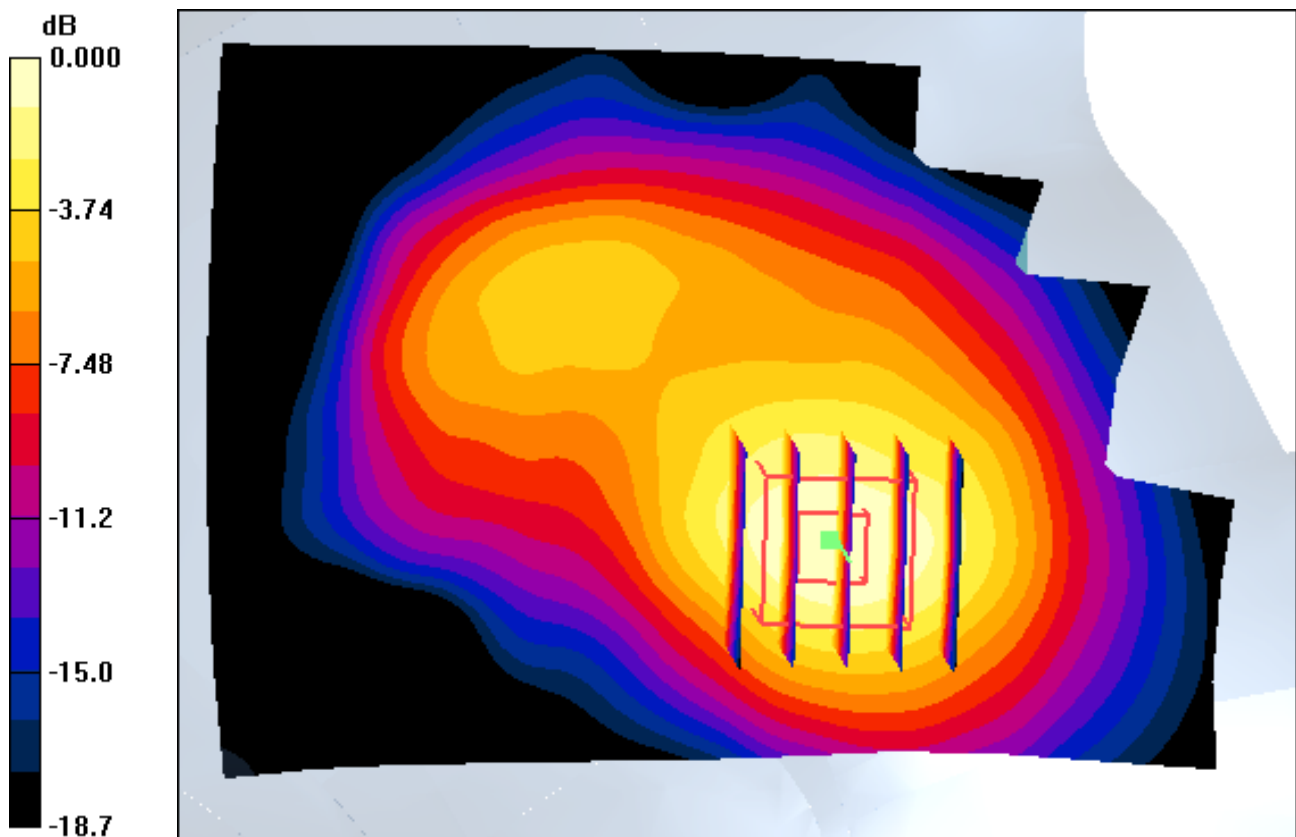

0 dB = 0.989mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.450 W/kg

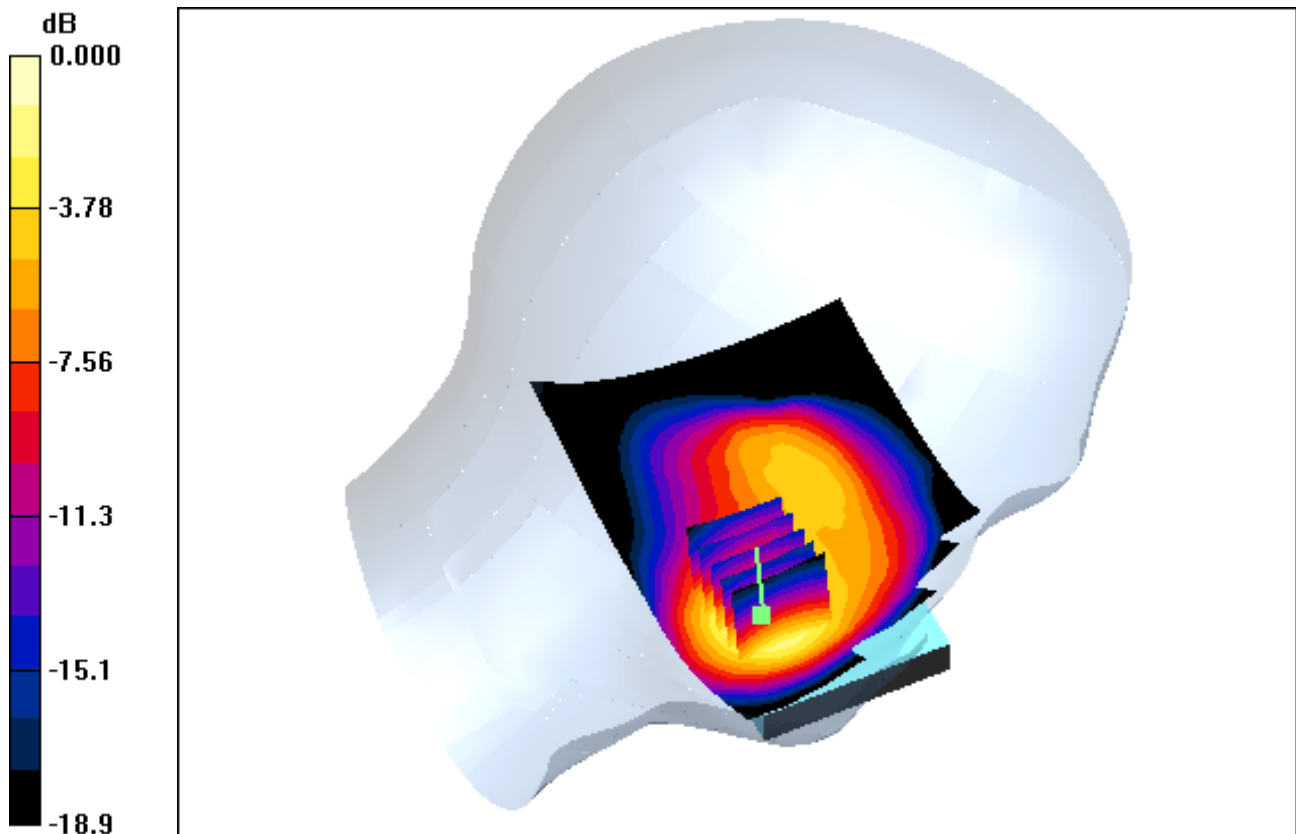

0 dB = 1.06mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.016 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.450 W/kg

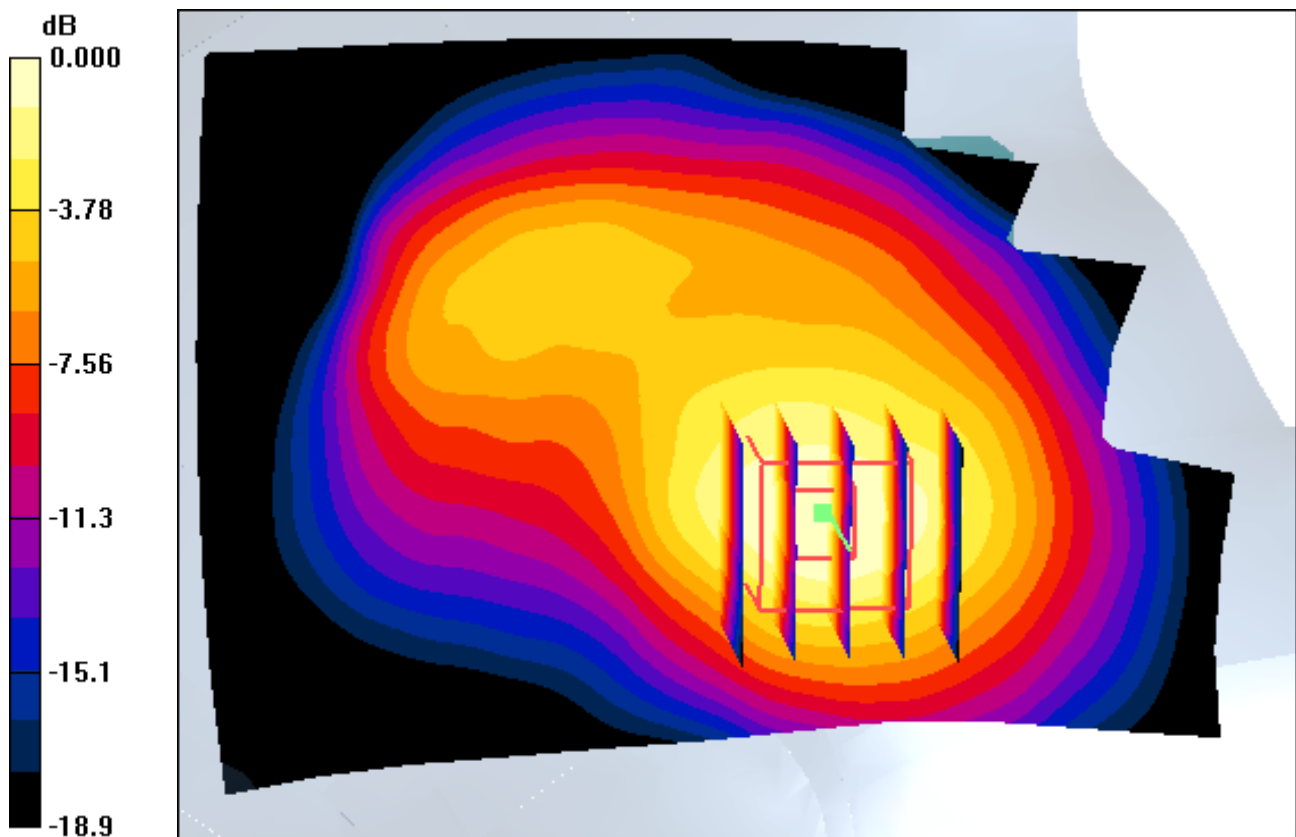

0 dB = 1.06mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.456 W/kg

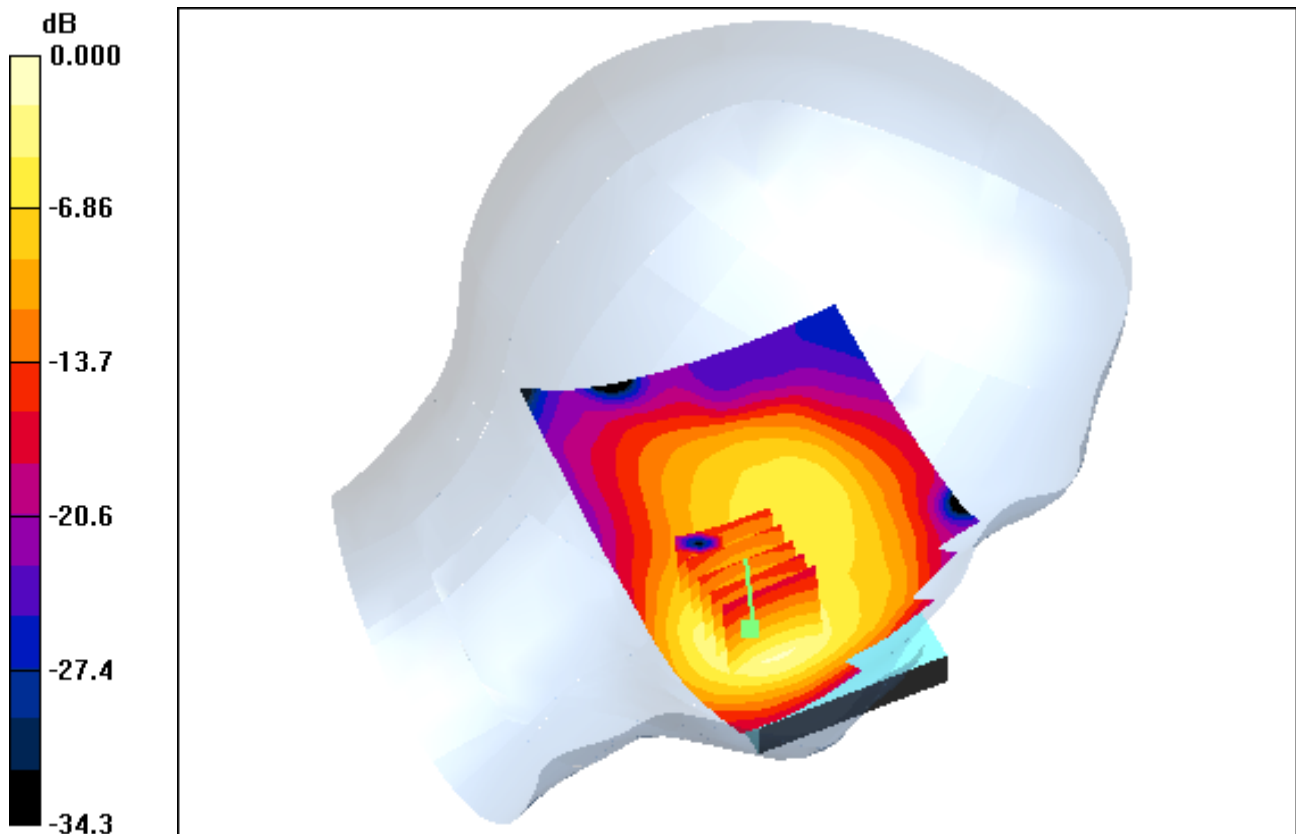

0 dB = 1.11mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.026 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.456 W/kg

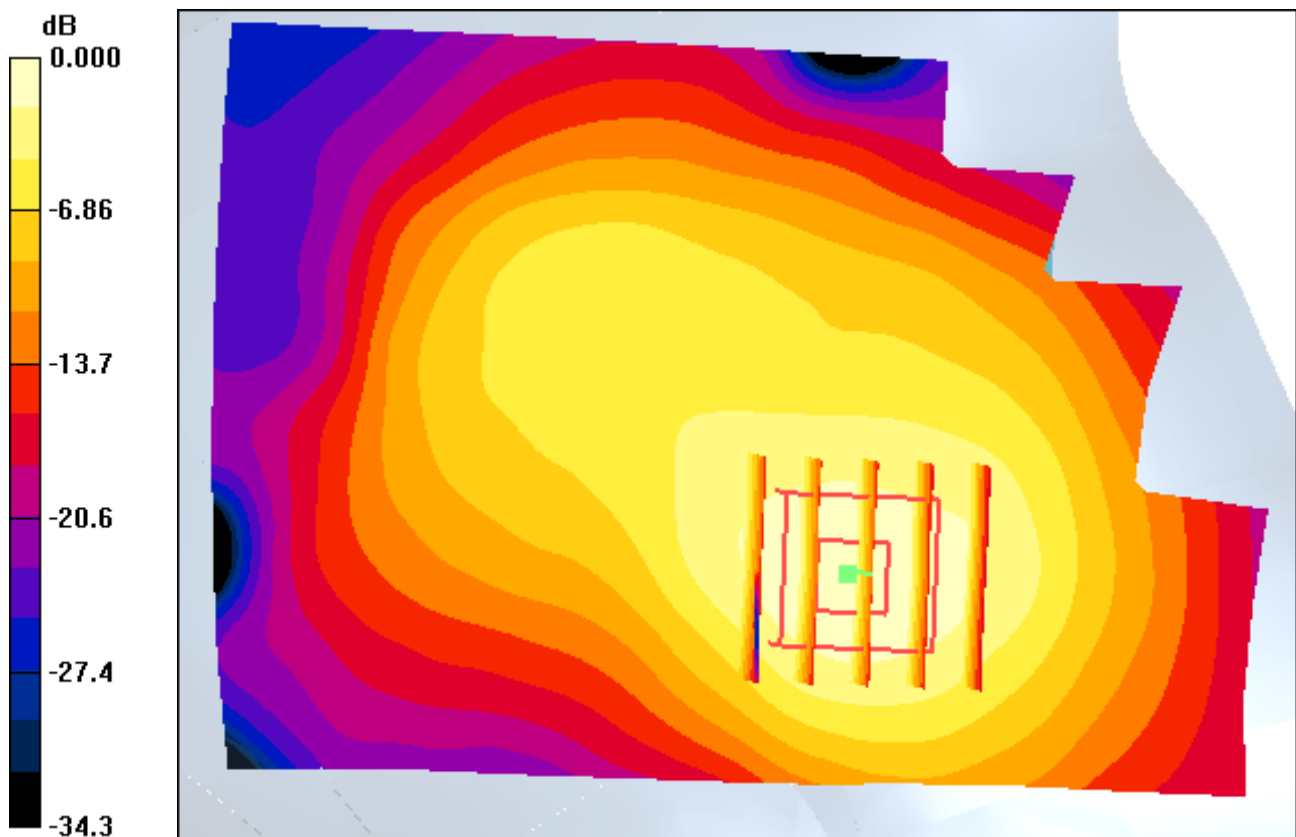

0 dB = 1.11mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

SAR Variability Result


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.461 W/kg

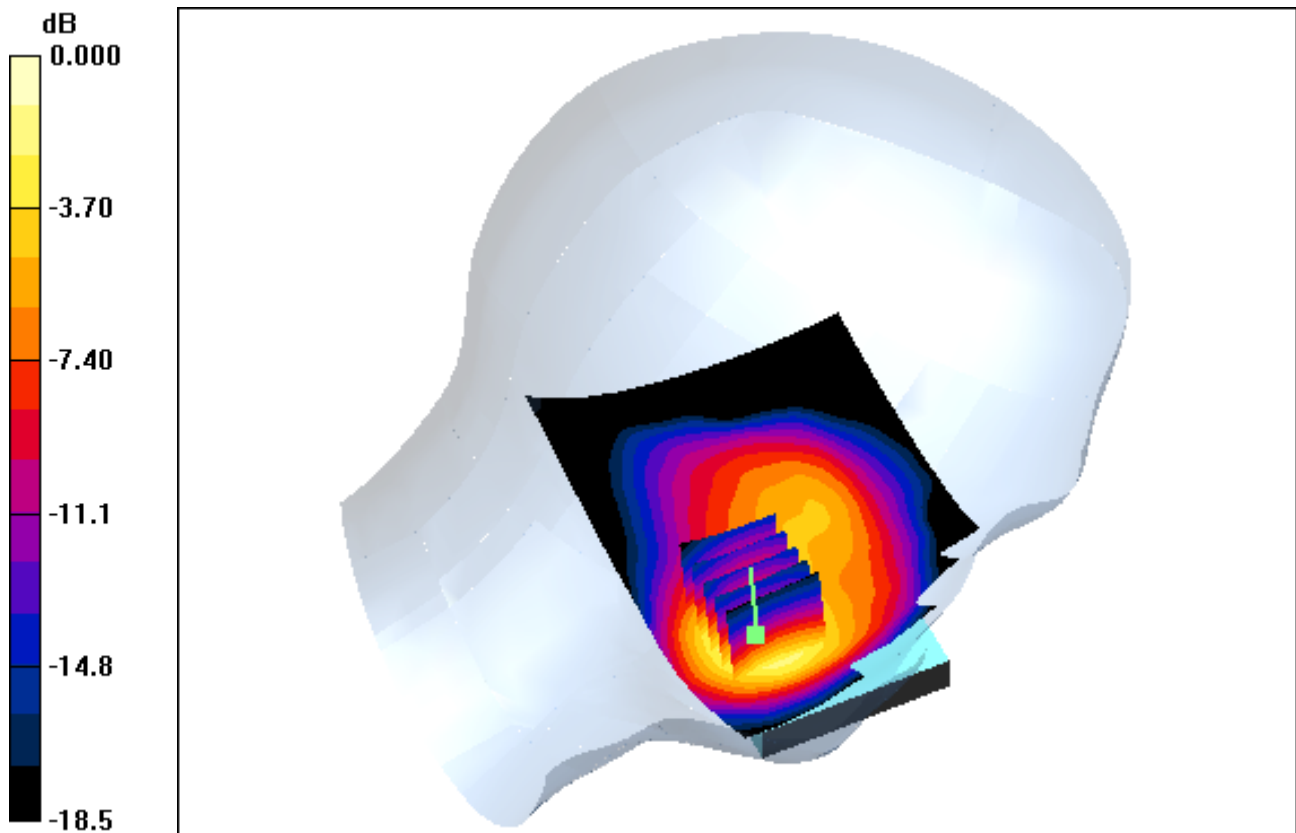

0 dB = 1.12mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

SAR Variability Result, With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.461 W/kg

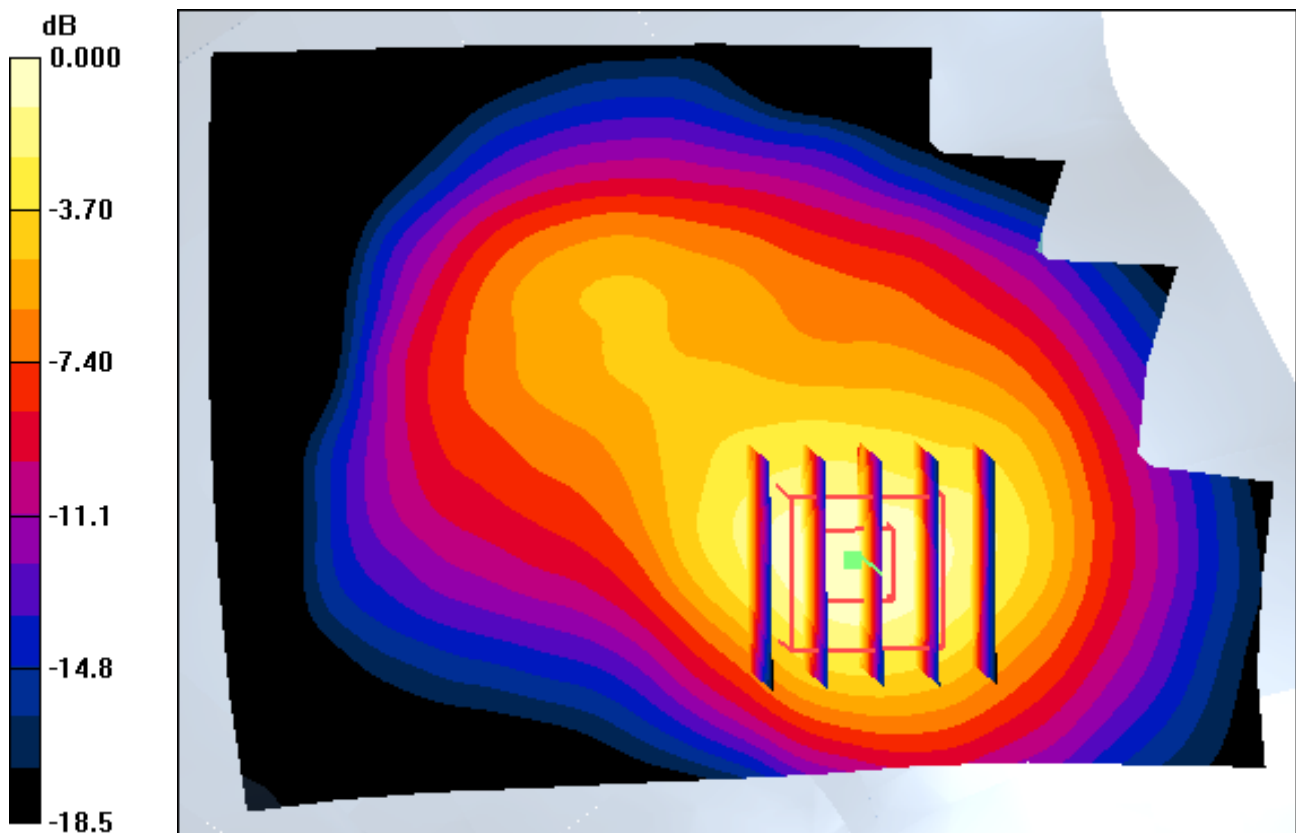

0 dB = 1.12mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

SAR Variability Result


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.450 W/kg

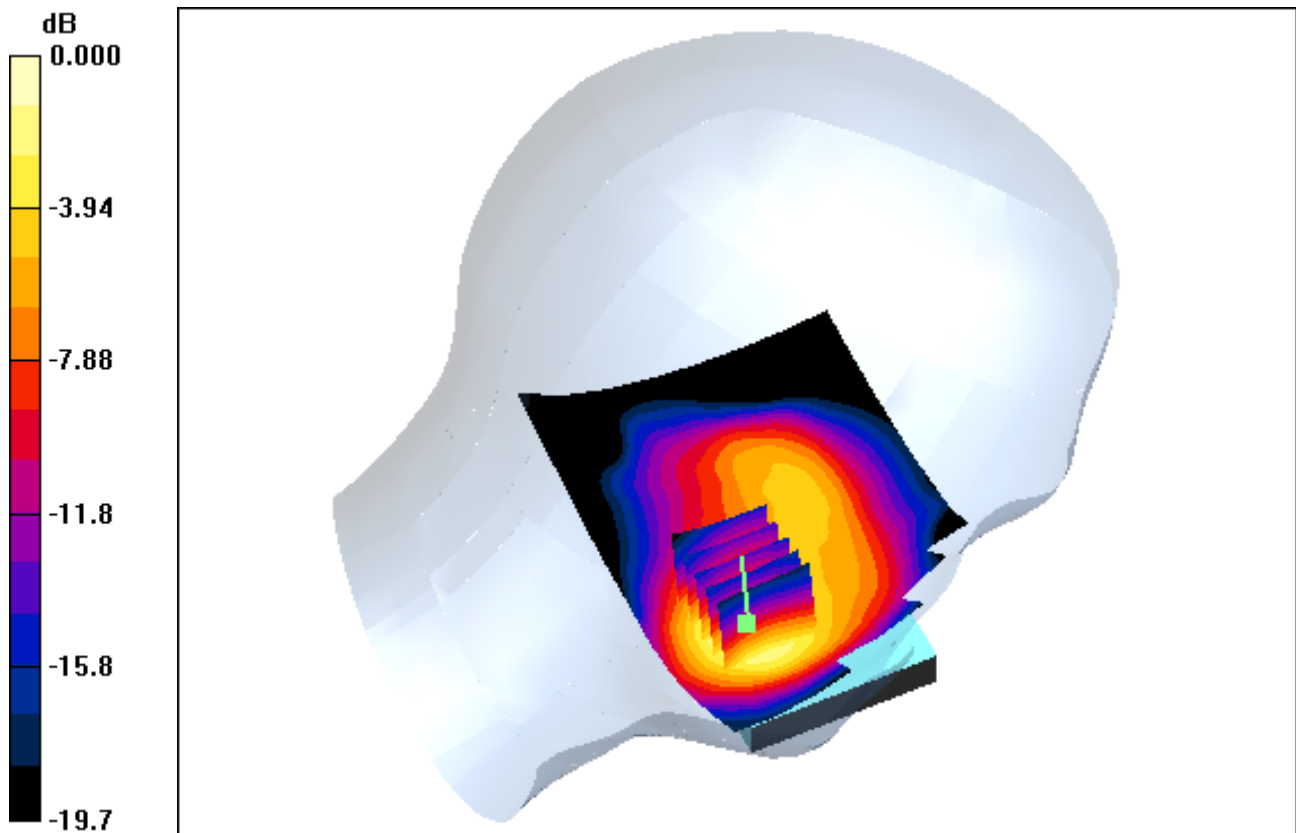

0 dB = 1.09mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, Sim2, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery

SAR Variability Result, With Enlarge plot image

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.023 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.450 W/kg

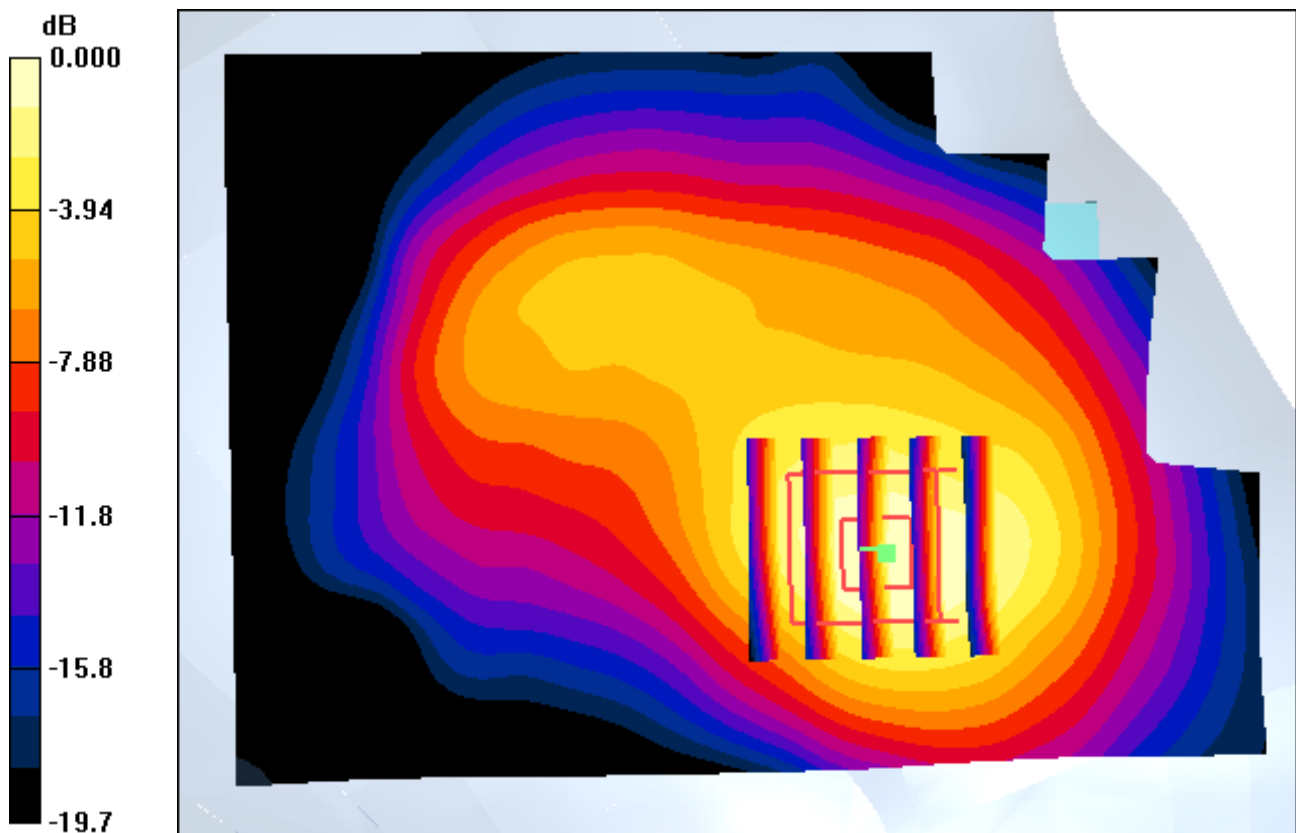

0 dB = 1.09mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.97, 7.97, 7.97); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-26; Ambient Temp: 21.4; Tissue Temp: 21.8

Left Touch, PCS1900 GPRS 3 Tx Ch. 810, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.152 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.468 W/kg

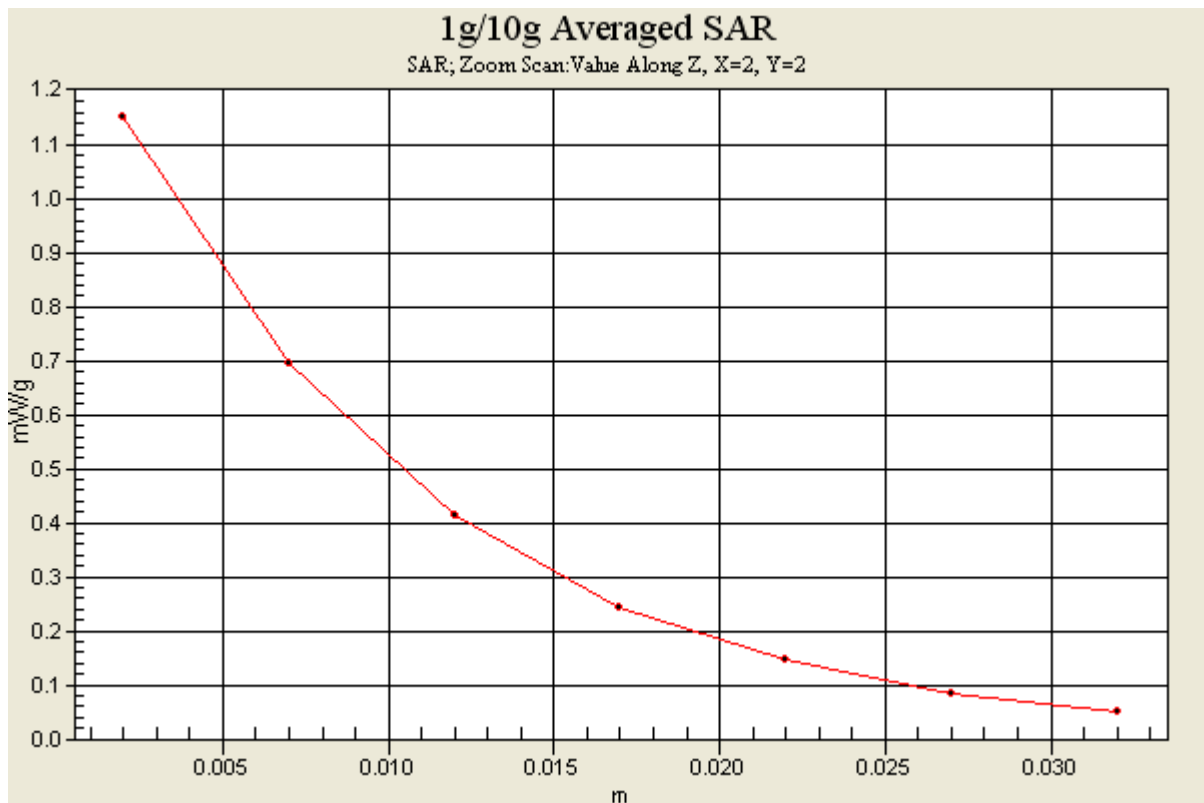

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Left Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.135 dB
Peak SAR (extrapolated) = 0.165 W/kg
SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.042 W/kg

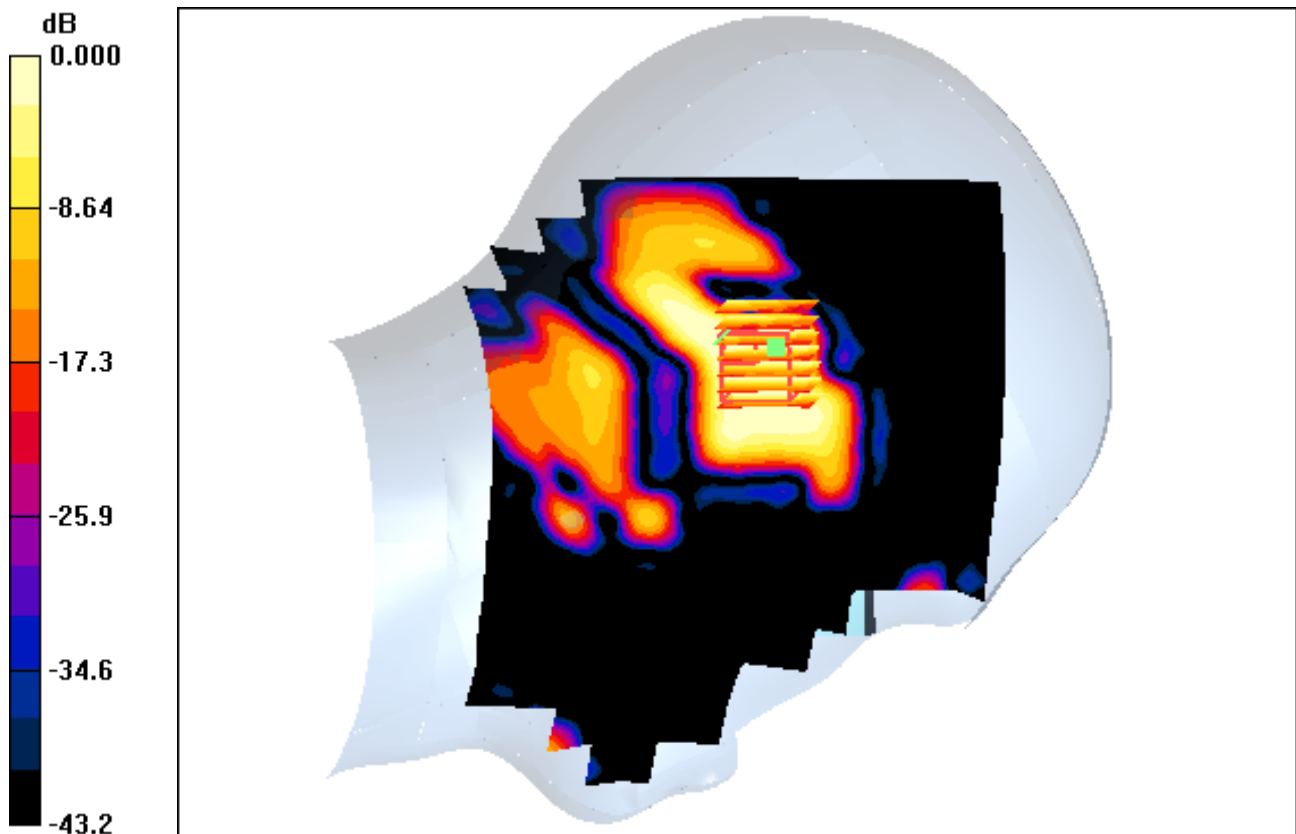

0 dB = 0.120mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Left Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.042 W/kg

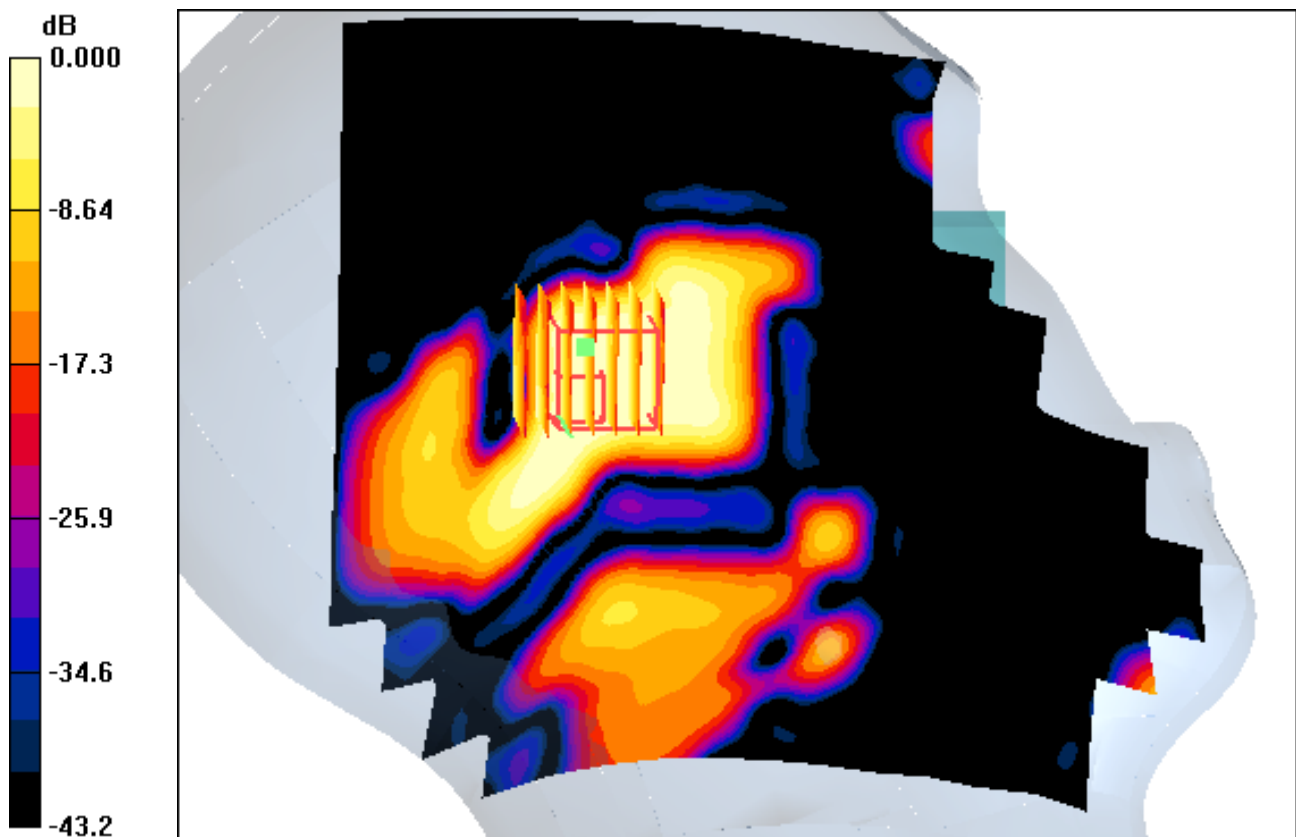

0 dB = 0.120mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.048 W/kg

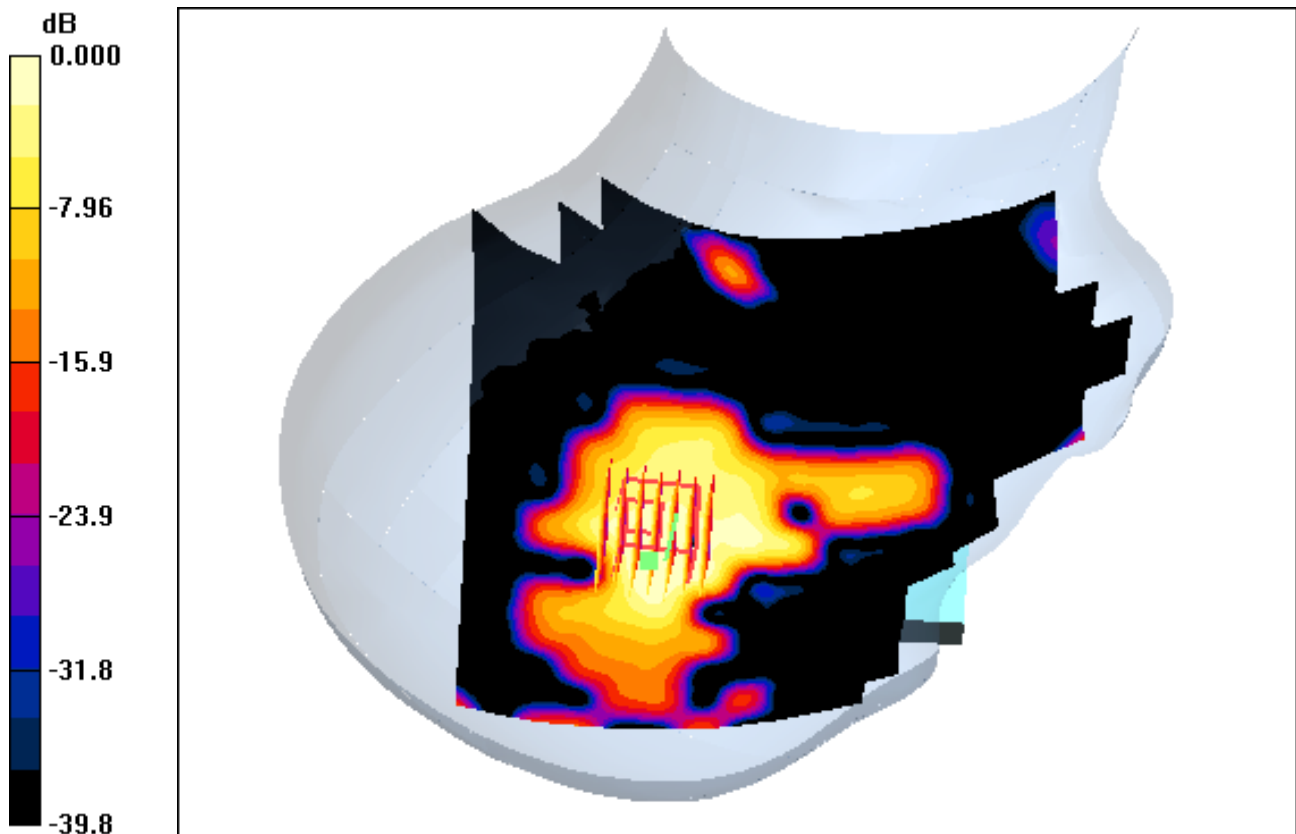

0 dB = 0.160mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.084 dB
Peak SAR (extrapolated) = 0.254 W/kg
SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.048 W/kg

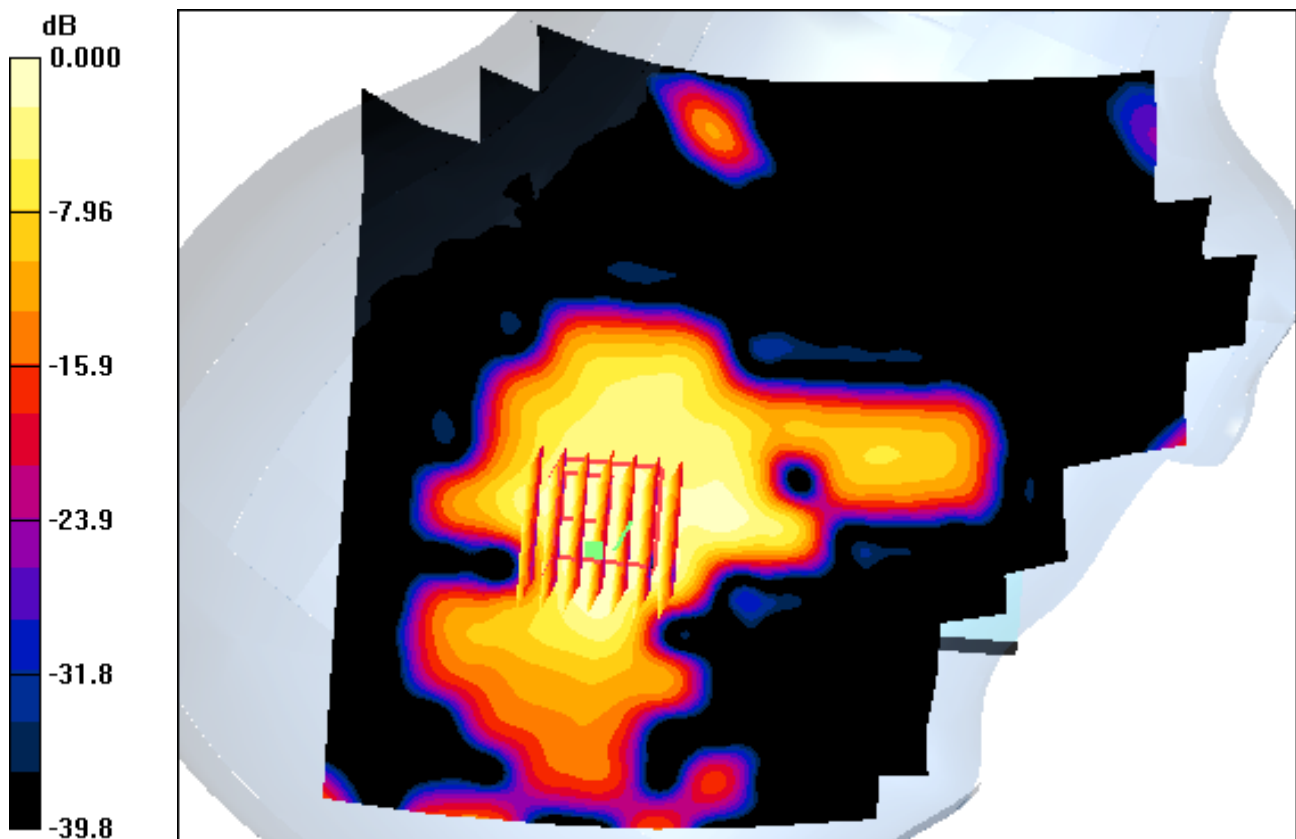

0 dB = 0.160mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.029 W/kg

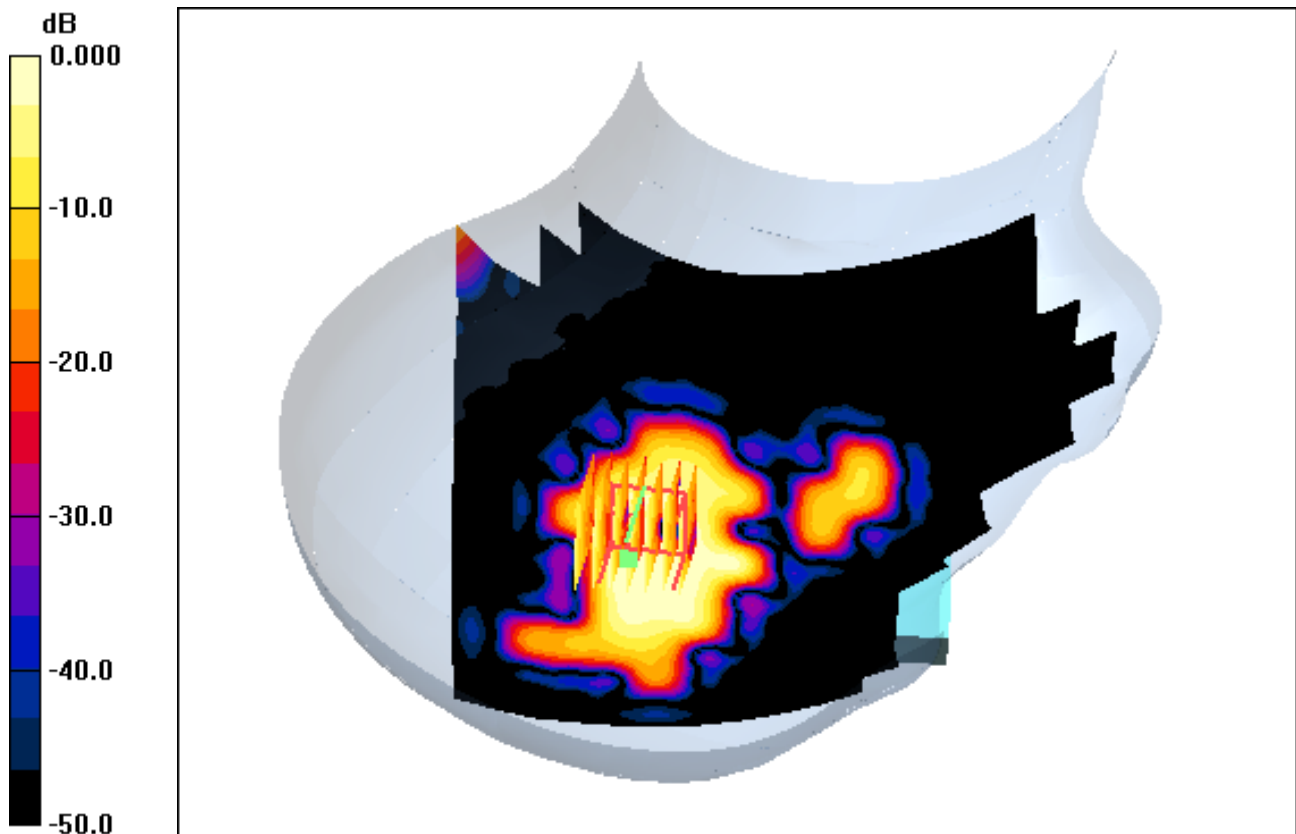

0 dB = 0.095mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.130 dB
Peak SAR (extrapolated) = 0.161 W/kg
SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.029 W/kg

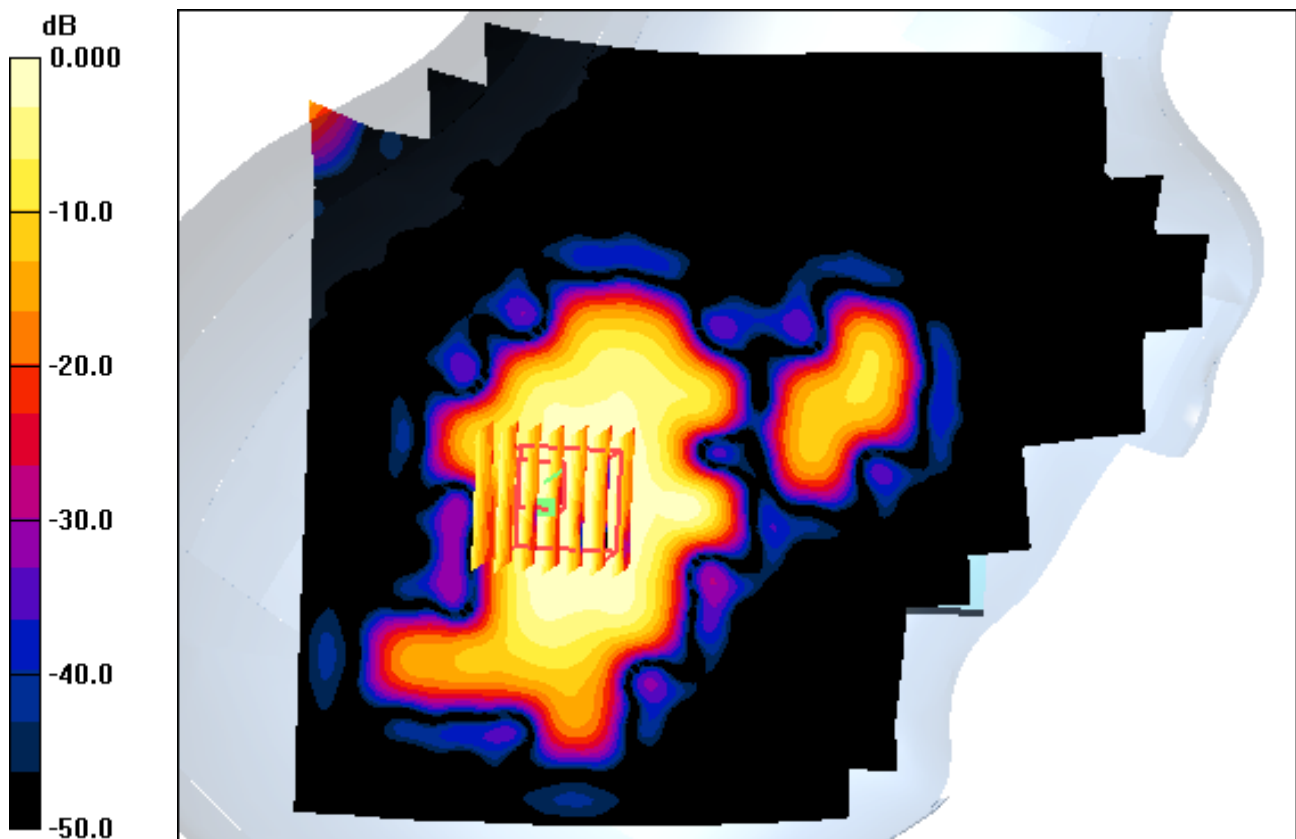

0 dB = 0.095mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery


Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.020 W/kg

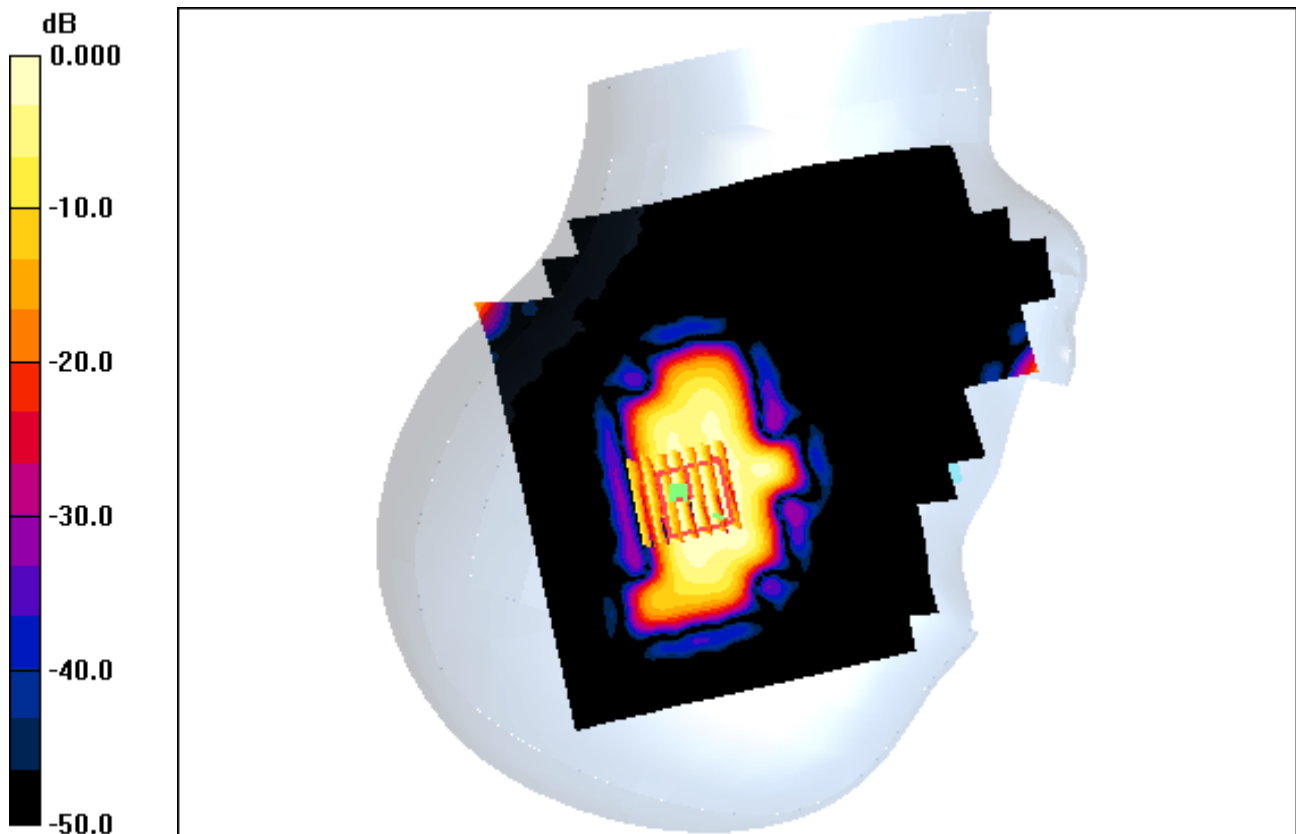

0 dB = 0.074mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.020 W/kg

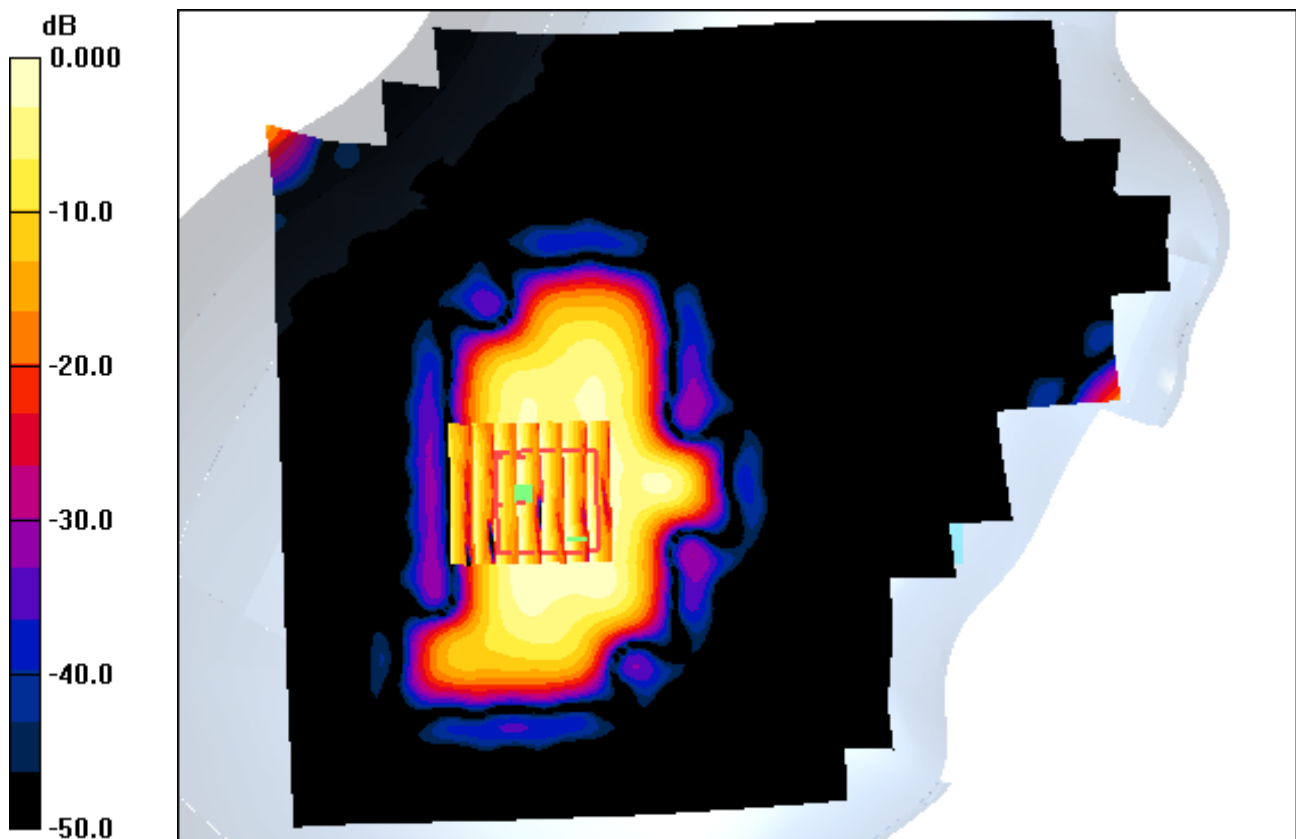

0 dB = 0.074mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Left Tilt, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.052 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.037 W/kg

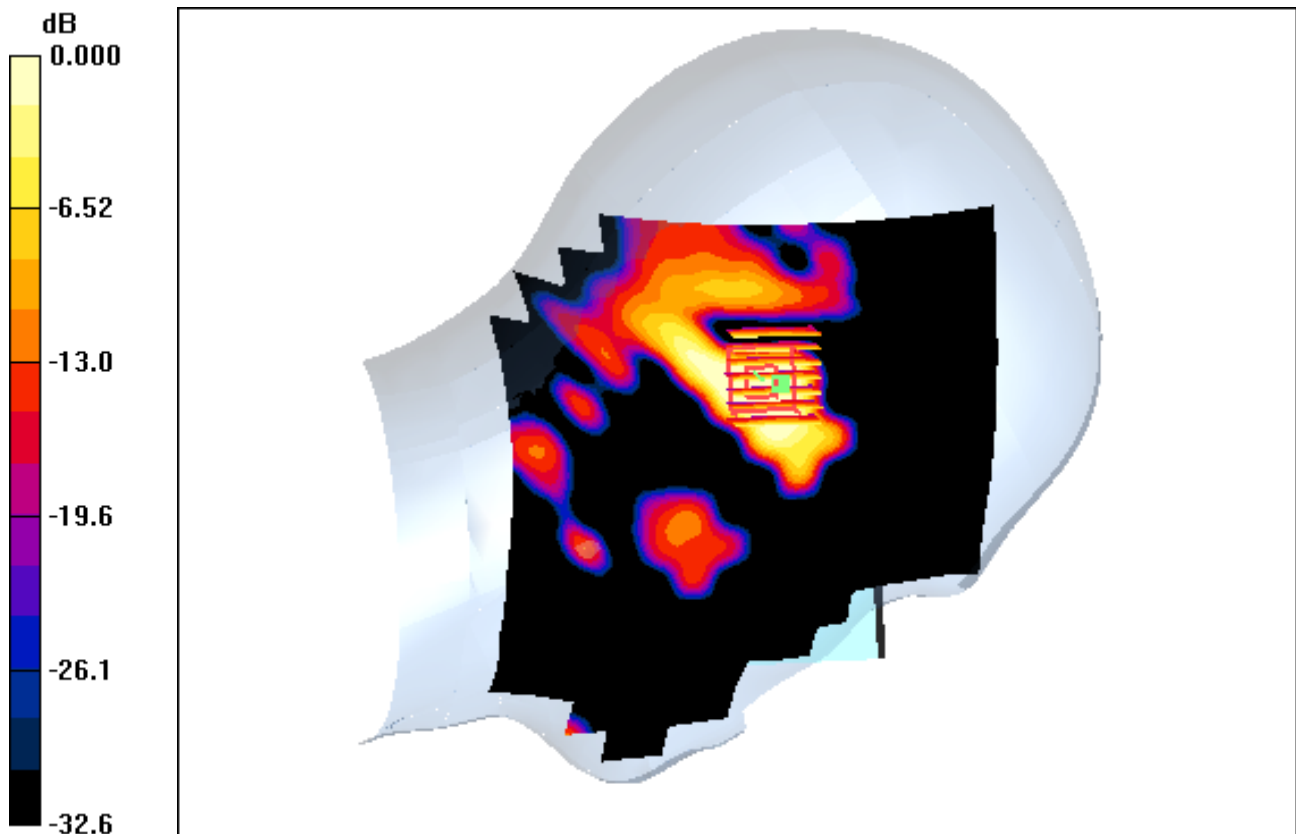

0 dB = 0.106mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Left Tilt, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.052 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.037 W/kg

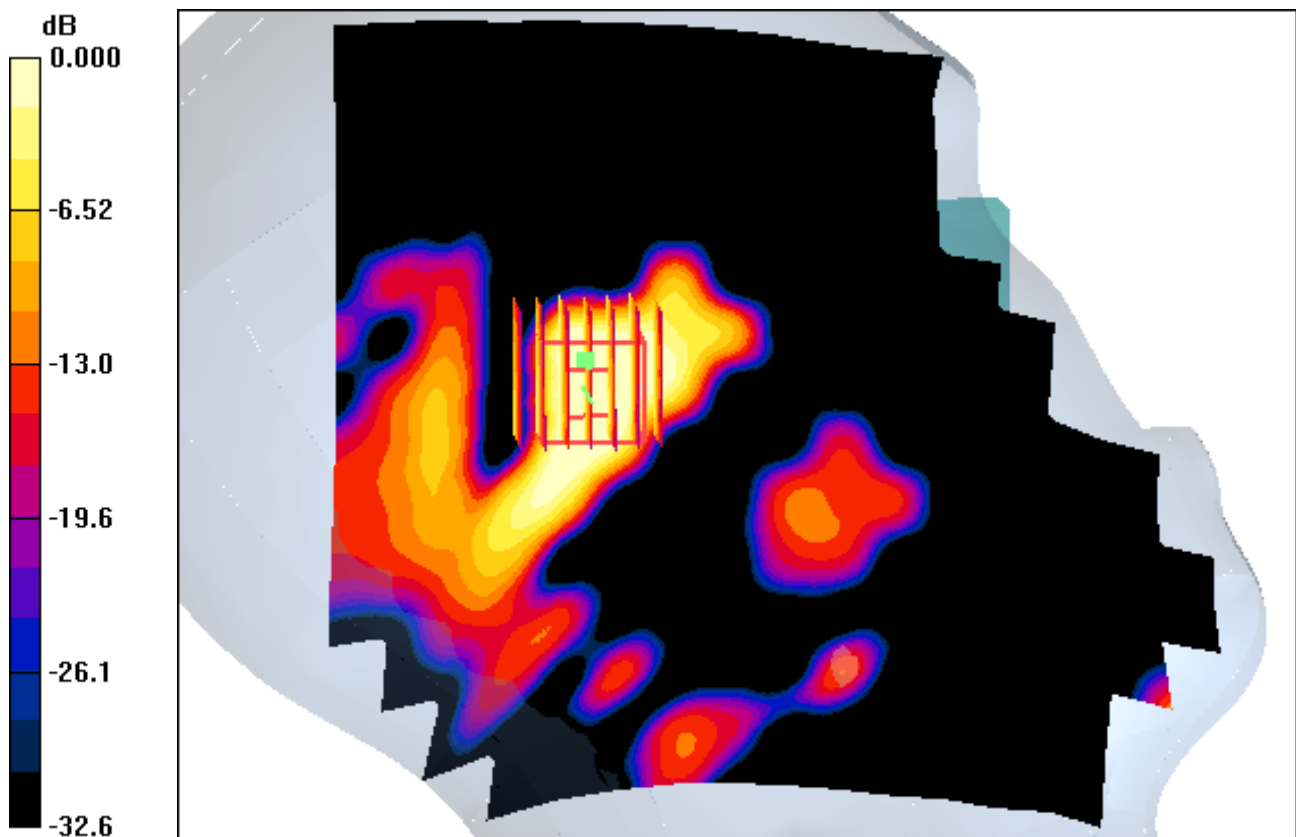

0 dB = 0.106mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Tilt, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.142 dB
Peak SAR (extrapolated) = 0.136 W/kg
SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.029 W/kg

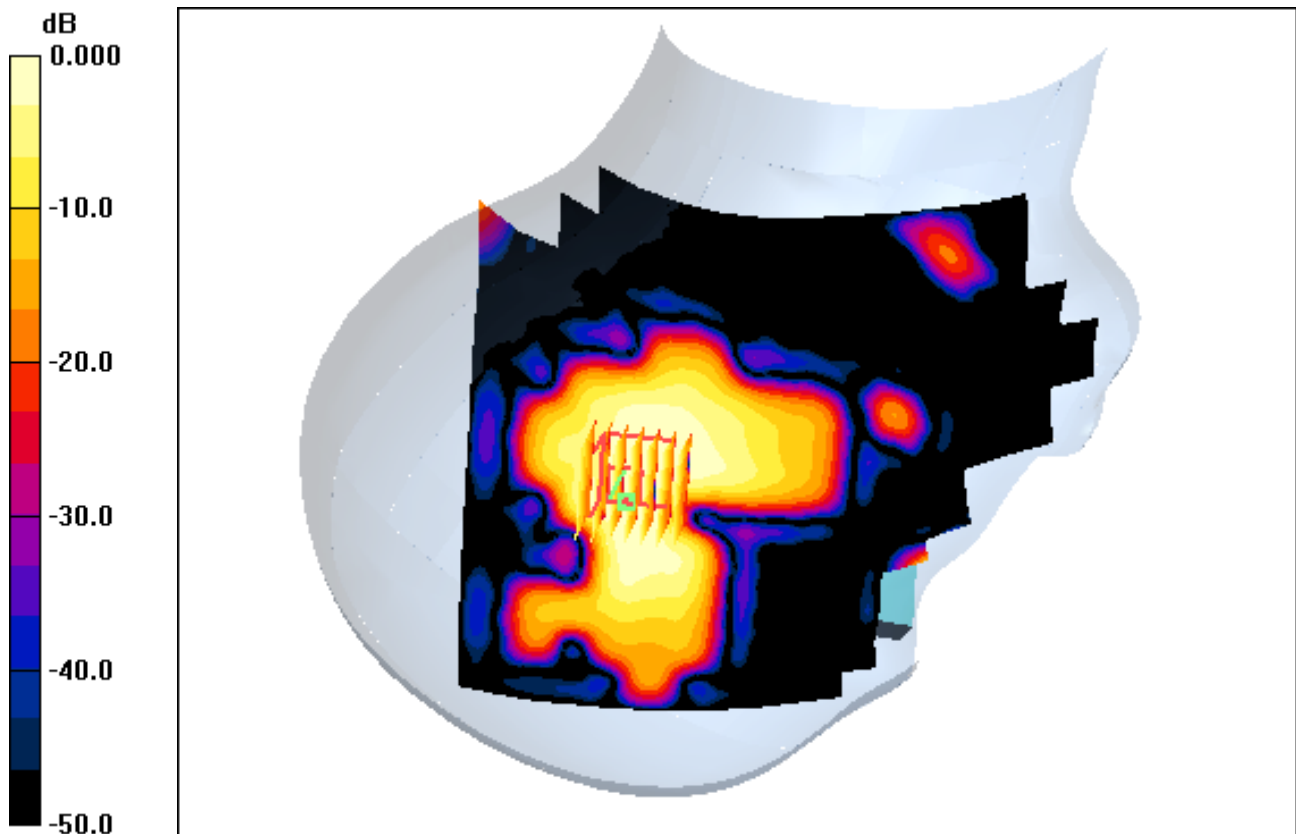

0 dB = 0.095mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:


Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Tilt, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

With Enlarge plot image

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.142 dB
Peak SAR (extrapolated) = 0.136 W/kg
SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.029 mW/g

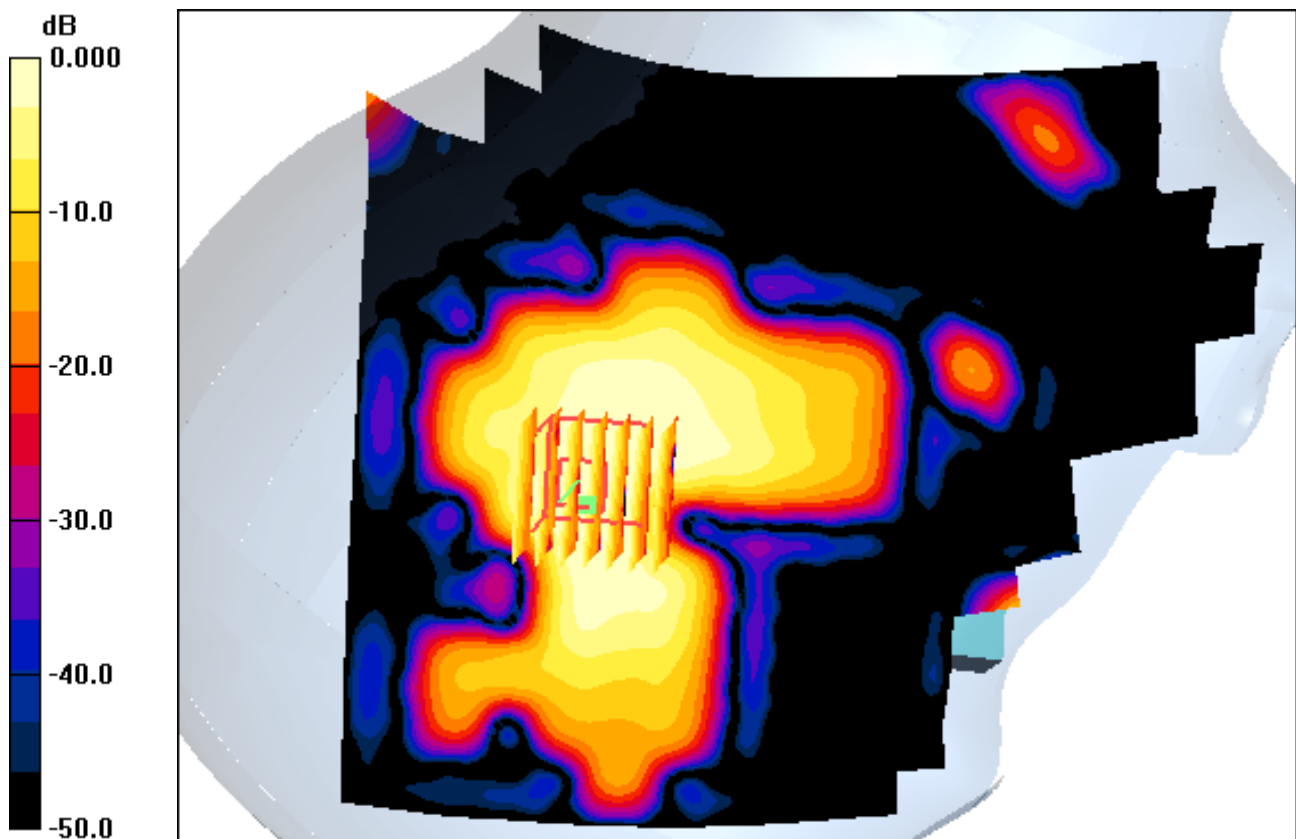

0 dB = 0.095mW/g

DIGITAL EMC CO., LTD

DUT: LG-E435f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.12, 7.12, 7.12); Calibrated: 2012-01-27; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2012-12-30; Ambient Temp: 21.3; Tissue Temp: 21.7

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery

Area Scan (141x161x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = -0.084 dB
Peak SAR (extrapolated) = 0.254 W/kg
SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.048 W/kg

