



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

**CELLULAR/PCS GSM/GPRS/EDGE AND AWS WCDMA/HSPA PHONE WITH
BLUETOOTH AND WLAN**

MODEL NUMBERS: E739, LG-E739*

FCC ID: ZNFE739

REPORT NUMBER: 11U13937-2

ISSUE DATE: AUGUST 02, 2011

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC.
10101 OLD GROVE ROAD
SAN DIEGO, CA 92131

Prepared by
COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

*The two models covered by this report are identical



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	08/02/11	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....5

2. TEST METHODOLOGY 6

3. FACILITIES AND ACCREDITATION..... 6

4. CALIBRATION AND UNCERTAINTY 6

 4.1. *MEASURING INSTRUMENT CALIBRATION* 6

 4.2. *SAMPLE CALCULATION*..... 6

 4.3. *MEASUREMENT UNCERTAINTY* 6

5. EQUIPMENT UNDER TEST7

 5.1. *DESCRIPTION OF EUT*..... 7

 5.2. *MAXIMUM OUTPUT POWER*..... 7

 5.3. *DESCRIPTION OF AVAILABLE ANTENNAS* 7

 5.1. *SOFTWARE AND FIRMWARE* 7

 5.2. *WORST-CASE CONFIGURATION AND MODE*..... 8

 5.1. *DESCRIPTION OF TEST SETUP*..... 9

6. TEST AND MEASUREMENT EQUIPMENT 11

7. ANTENNA PORT TEST RESULTS 12

 7.1. *BASIC DATA RATE GFSK MODULATION*..... 12

 7.1.1. 20 dB BANDWIDTH 12

 7.1.2. HOPPING FREQUENCY SEPARATION 15

 7.1.3. NUMBER OF HOPPING CHANNELS..... 17

 7.1.4. AVERAGE TIME OF OCCUPANCY 20

 7.1.5. OUTPUT POWER 27

 7.1.6. AVERAGE POWER 30

 7.1.7. CONDUCTED SPURIOUS EMISSIONS..... 31

 7.2. *ENHANCED DATA RATE 8PSK MODULATION* 36

 7.2.1. 20 dB BANDWIDTH 36

 7.2.2. HOPPING FREQUENCY SEPARATION 39

 7.2.3. NUMBER OF HOPPING CHANNELS..... 41

 7.2.4. AVERAGE TIME OF OCCUPANCY 44

 7.2.4. OUTPUT POWER 51

 7.2.5. AVERAGE POWER 54

 7.2.6. CONDUCTED SPURIOUS EMISSIONS..... 55

8. RADIATED TEST RESULTS 60

 8.1. *LIMITS AND PROCEDURE* 60

 8.2. *TRANSMITTER ABOVE 1 GHz* 61

 8.2.1. BASIC DATA RATE GFSK MODULATION..... 61

 8.2.1. ENHANCED DATA RATE 8PSK MODULATION 66

8.1. WORST-CASE BELOW 1 GHz.....	71
9. AC POWER LINE CONDUCTED EMISSIONS.....	74
10. SETUP PHOTOS.....	78

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
 10101 OLD GROVE ROAD
 SAN DIEGO, CA 92131

EUT DESCRIPTION: Cellular/PCS GSM/GPRS/EDGE and AWS WCDMA/HSPA Phone with Bluetooth and WLAN

MODEL: LG-E739

SERIAL NUMBER: 106KPPB038184 for conducted sample &
 106KPDT033074 for radiated sample

DATE TESTED: JULY 19 to 25, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:




FRANK IBRAHIM
 EMC SUPERVISOR
 UL CCS

VIEN TRAN
 EMC ENGINEER
 UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a smart-phone that features GSM/EGPRS/EDGE and WCDMA/HSPA with Bluetooth & WLAN

The radio module is manufactured by Broadcom Co.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.67	11.67
2402 - 2480	Enhanced 8PSK	10.93	12.39

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio uses a PIFA (Planar Inverted F Antenna) with a maximum peak gain of -2.19dBi.

5.1. SOFTWARE AND FIRMWARE

The EUT software installed during testing was LGE739-V08a-June 11, 2011.

The test utility software used during testing was BT Test.

5.2. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

Radiated emissions below 1 GHz and power line conducted emissions were performed with the EUT set to the channel with highest output power.

The EUT is a portable device that may be used in any orientation. The EUT may or may not be connected to its AC power adapter and earphones during use. The EUT was initially assessed in each of three axes of operation (X, Y and Z) with and without the AC adaptor and earphones connected to determine the worst-case condition. This was found to be with the EUT in the Y orientation with its AC power adapter and earphones connected. See the setup photographs for an indication of the EUT orientations.

Worst-case data rates used based on an input from the client were as follows:

GFSK mode: 1 Mbps

8PSK mode: 3 Mbps

5.1. DESCRIPTION OF TEST SETUP**SUPPORT EQUIPMENT**

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG Electronics	STA-U13WT	000000000032	N/A
Ear Phone	LG Electronics	N/A	N/A	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	#of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	MINI USB	Un-Shielded	1.0m	
2	AUDIO	1	MINI JACK	Un-Shielded	1.0m	Volume control on cable

TEST SETUP

The EUT is a stand-alone device and was tested with AC/USB adapter and earphone.

SETUP DIAGRAM FOR TESTS

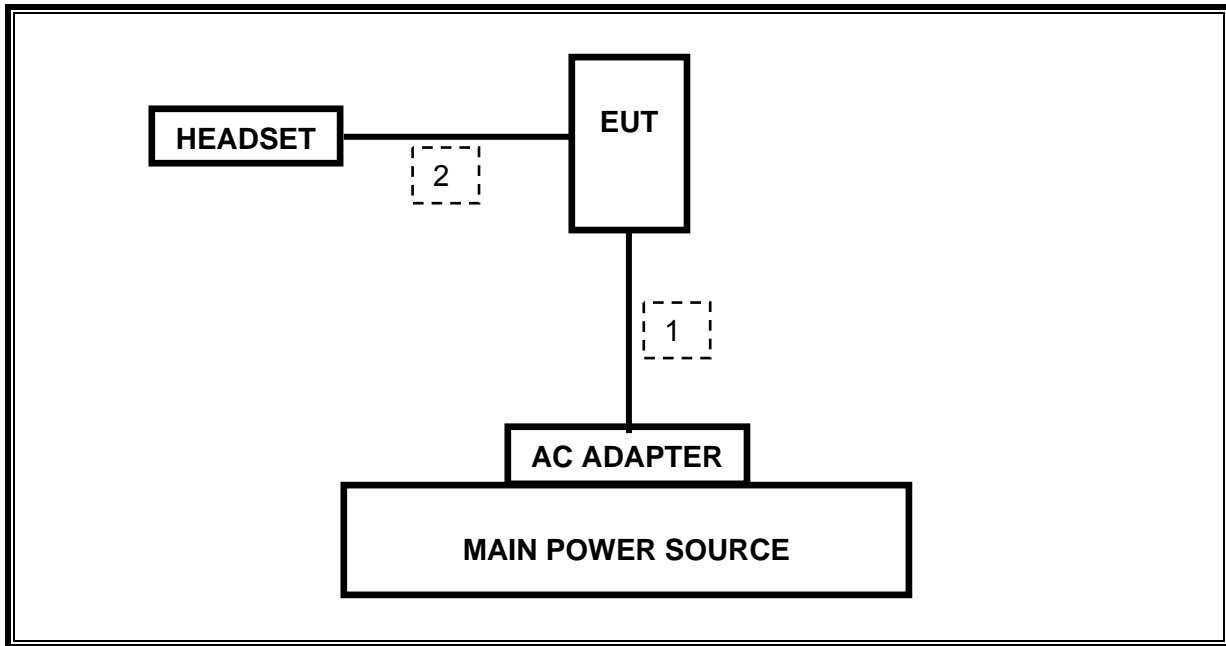

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/08/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/29/12
Antenna, Horn, 26.5 GHz	ARA	MMH-1826/B	C00980	07/29/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/16/12
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4407B	C01098	04/30/12
Power Meter	Agilent / HP	437B	N02778	08/11/12
Power Sensor, 18 GHz	Agilent / HP	8481A	N02784	07/28/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/11
Bluetooth Tester	R & S	1153.9000K35	N/A	04/22/12

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	948.776
Middle	2441	942.702
High	2480	934.121

20 dB BANDWIDTH

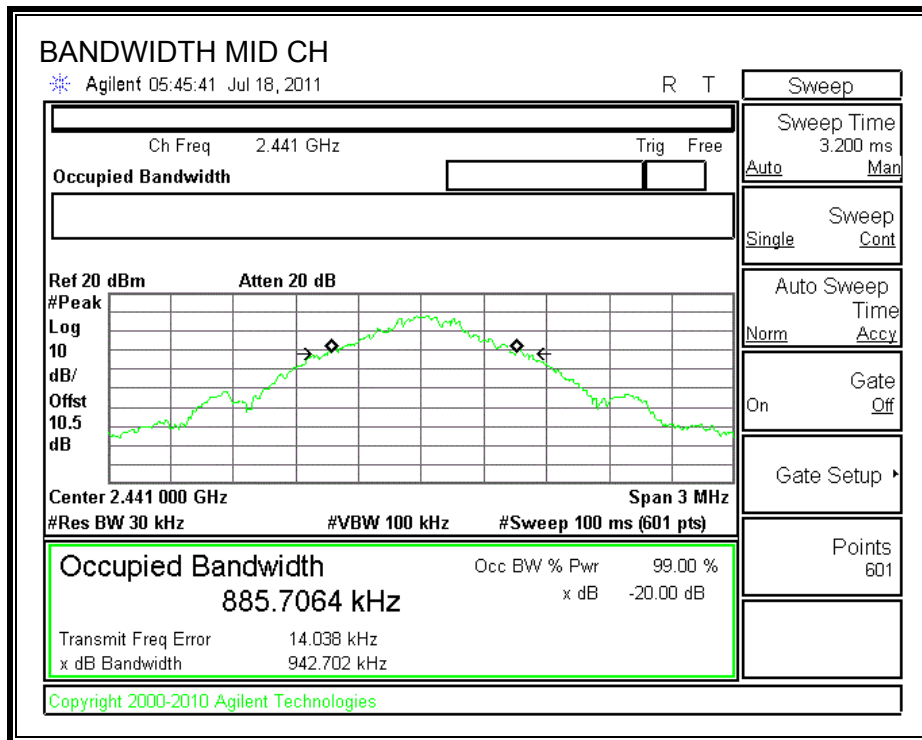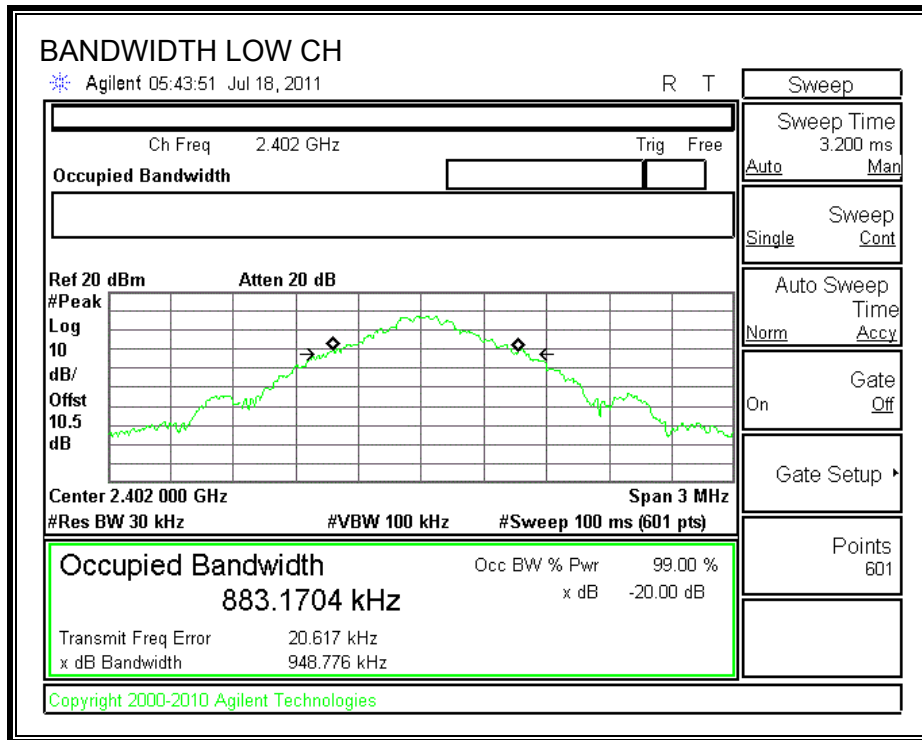

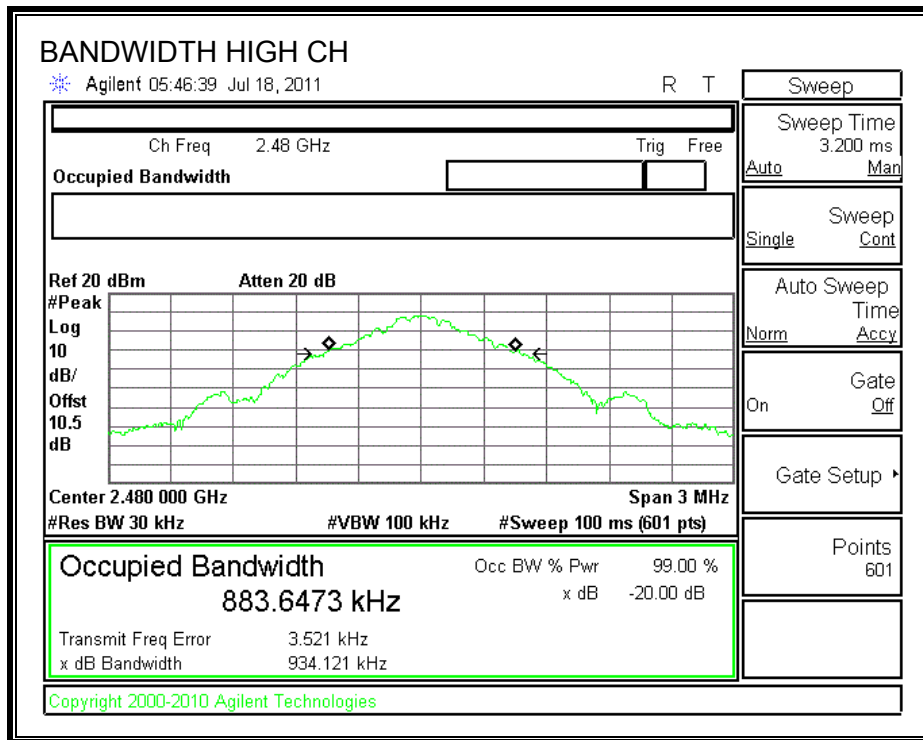

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

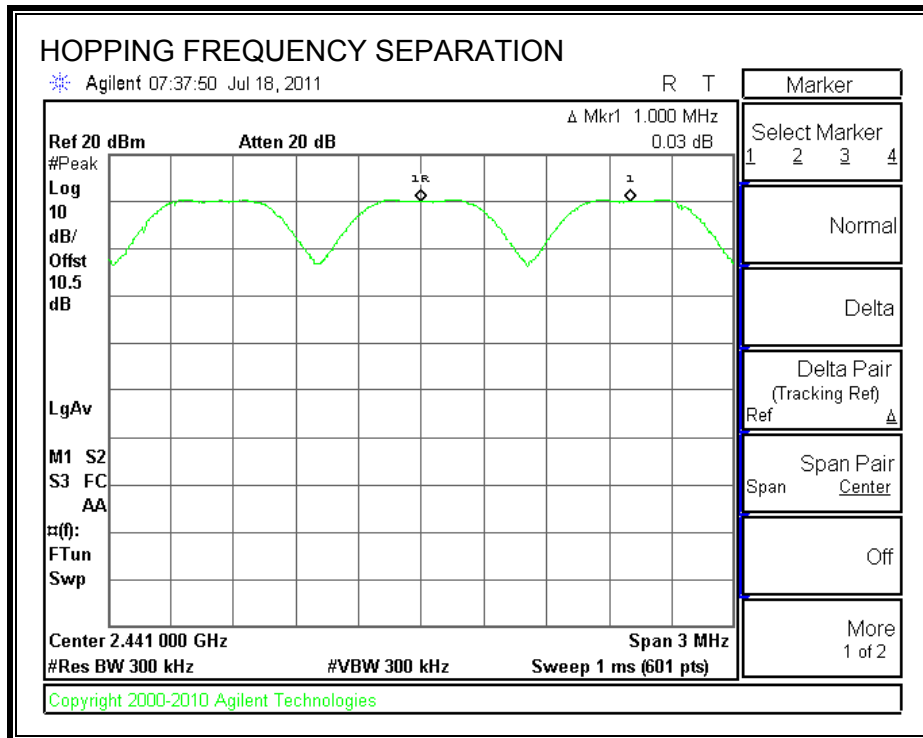

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

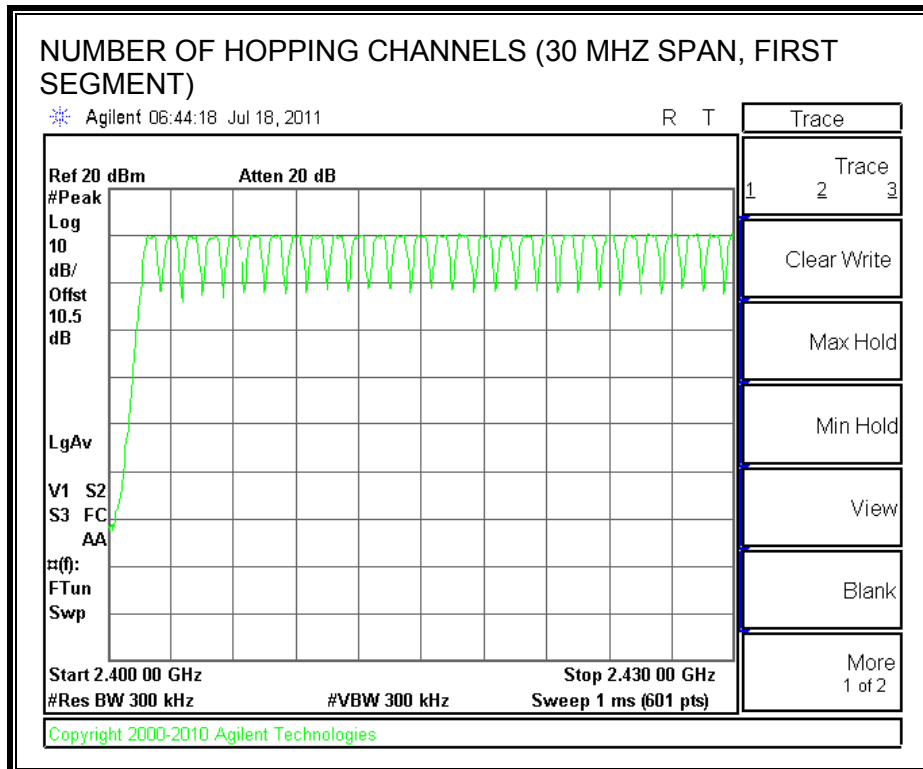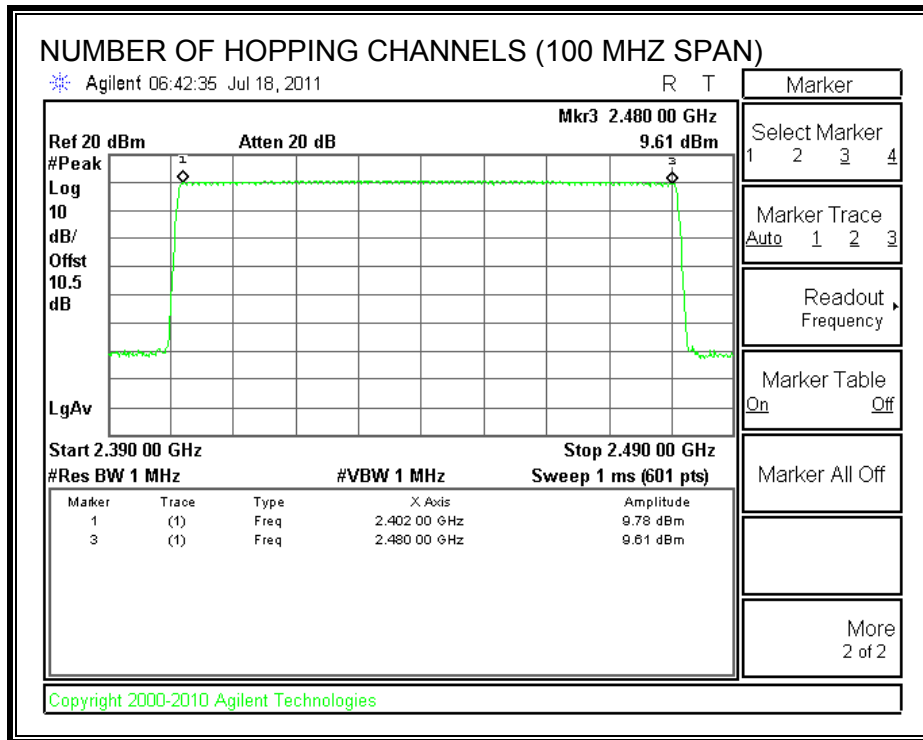

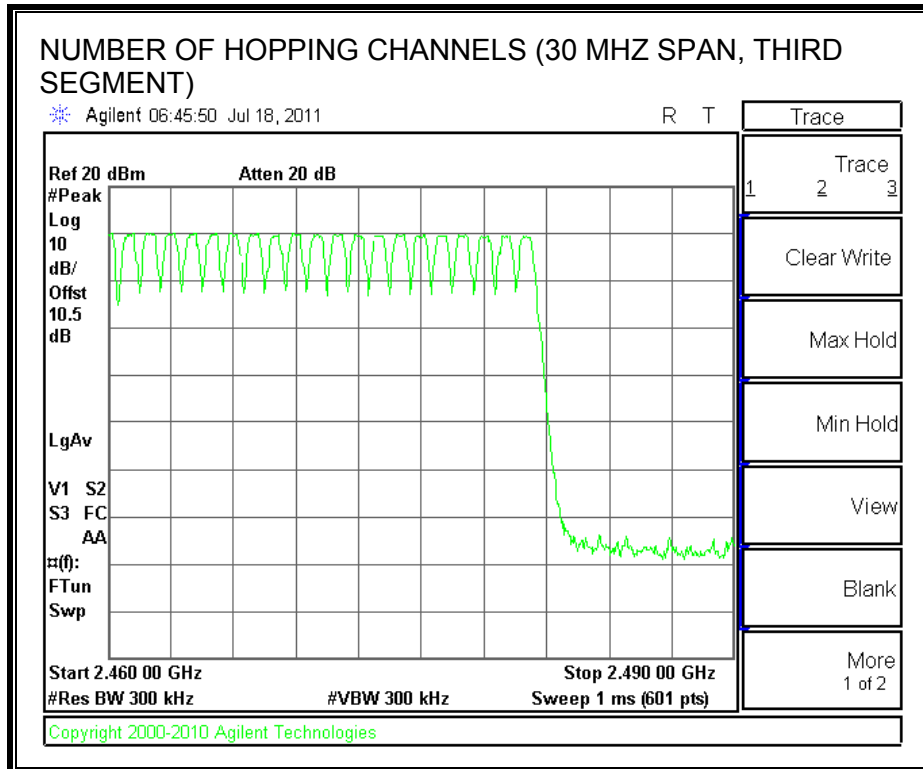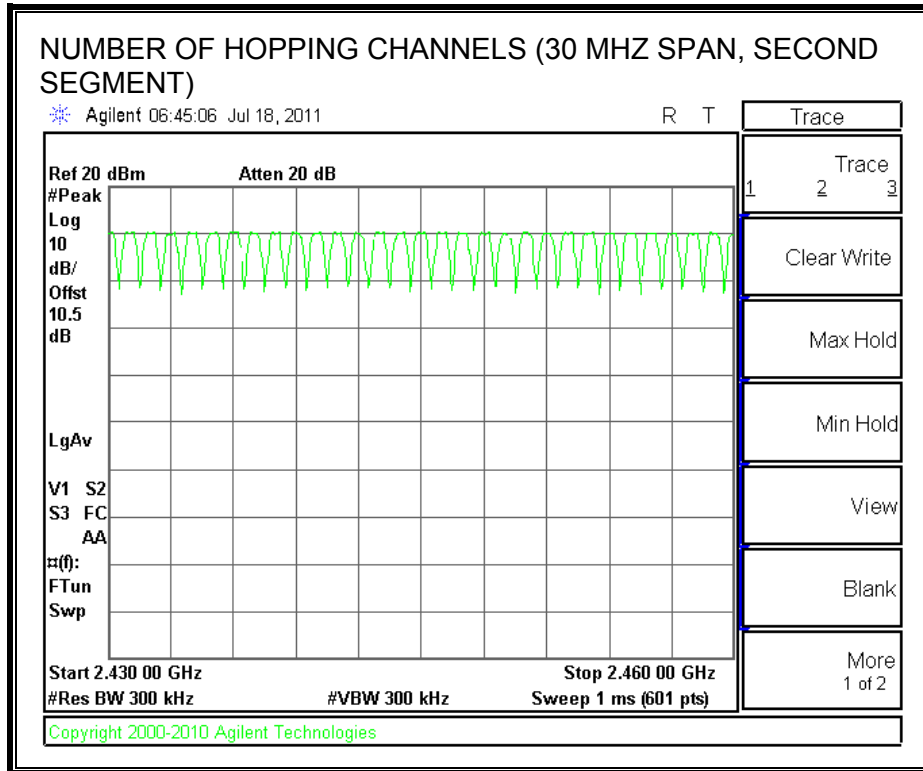

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy	Limit (sec)	Margin (sec)
DH1	0.3933	32	0.1259	0.4	-0.2741
DH3	1.6450	17	0.2797	0.4	-0.1204
DH5	2.8830	11	0.3171	0.4	-0.0829

DH1

PULSE WIDTH

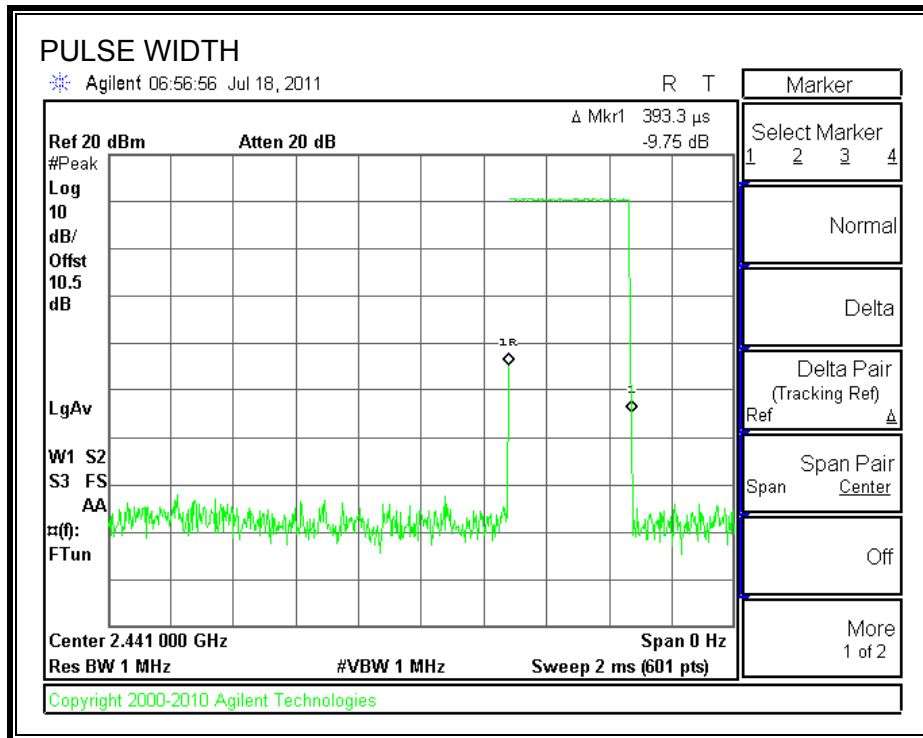


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

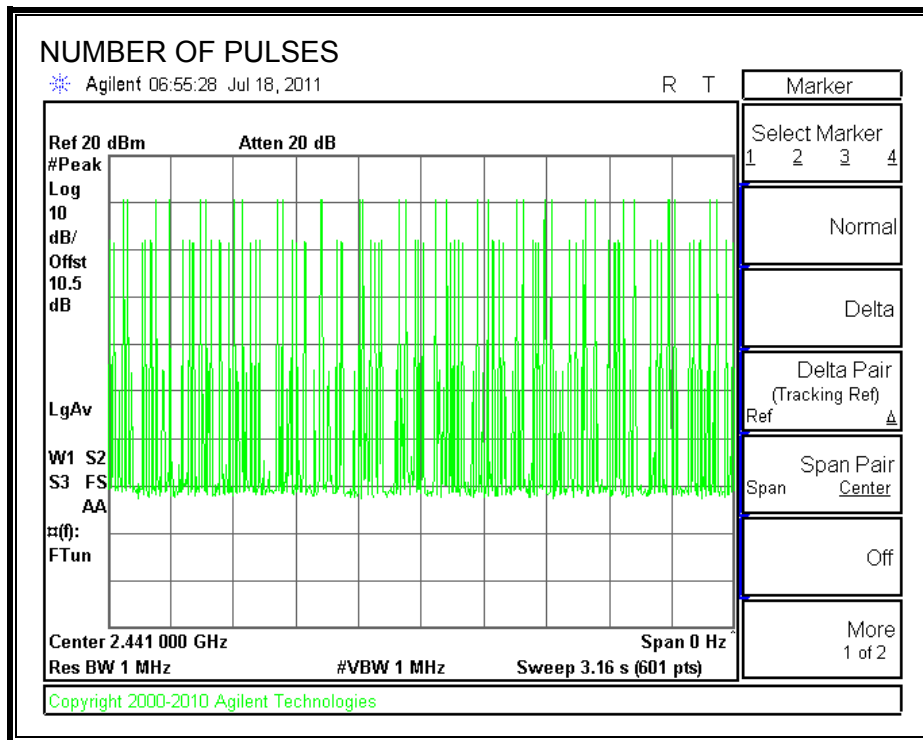


DH3

PULSE WIDTH

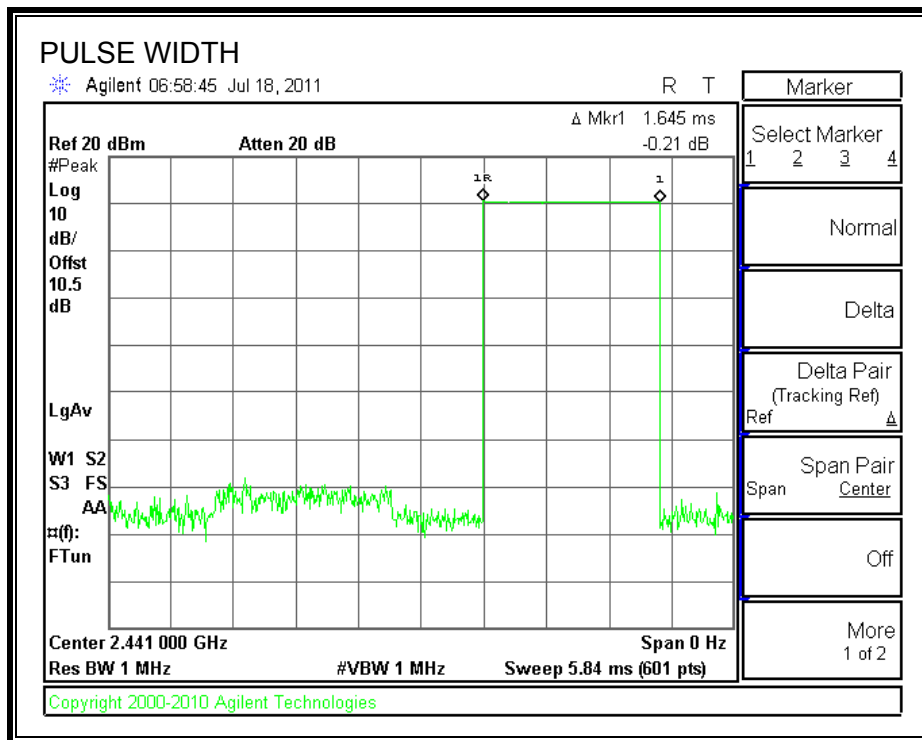


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

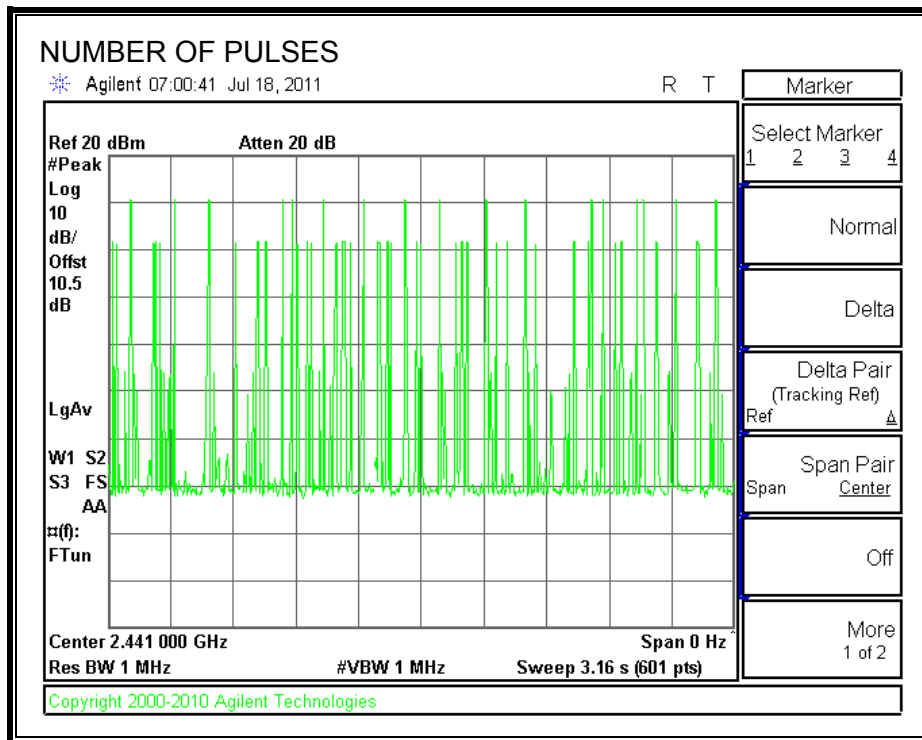


DH5

PULSE WIDTH

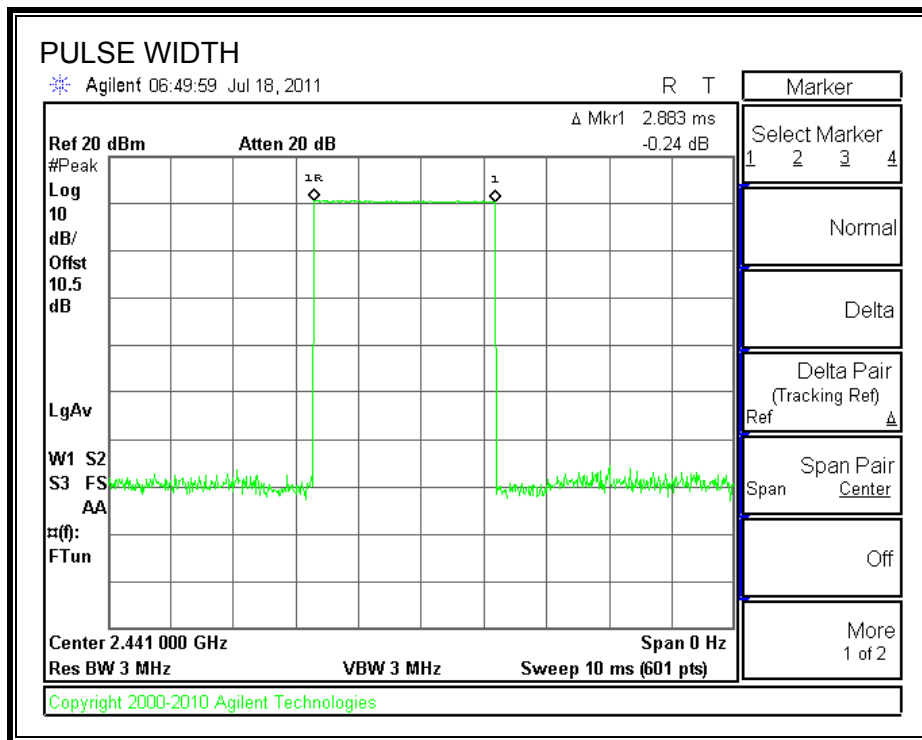

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

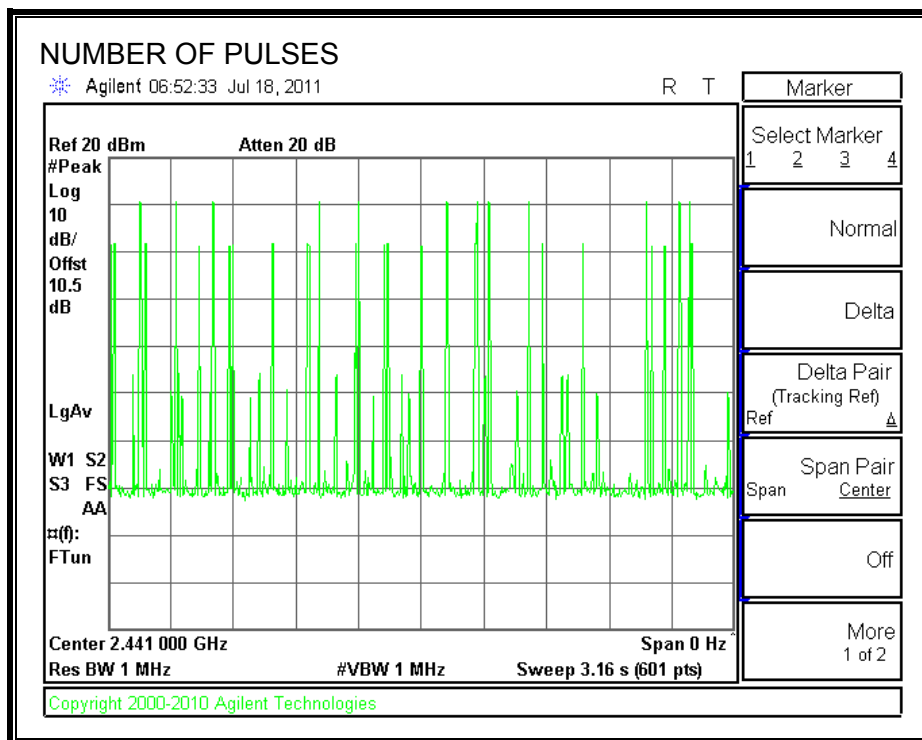

7.1.5. OUTPUT POWER**LIMIT**

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.15	30	-19.85
Middle	2441	10.67	30	-19.33
High	2480	9.78	30	-20.22

OUTPUT POWER

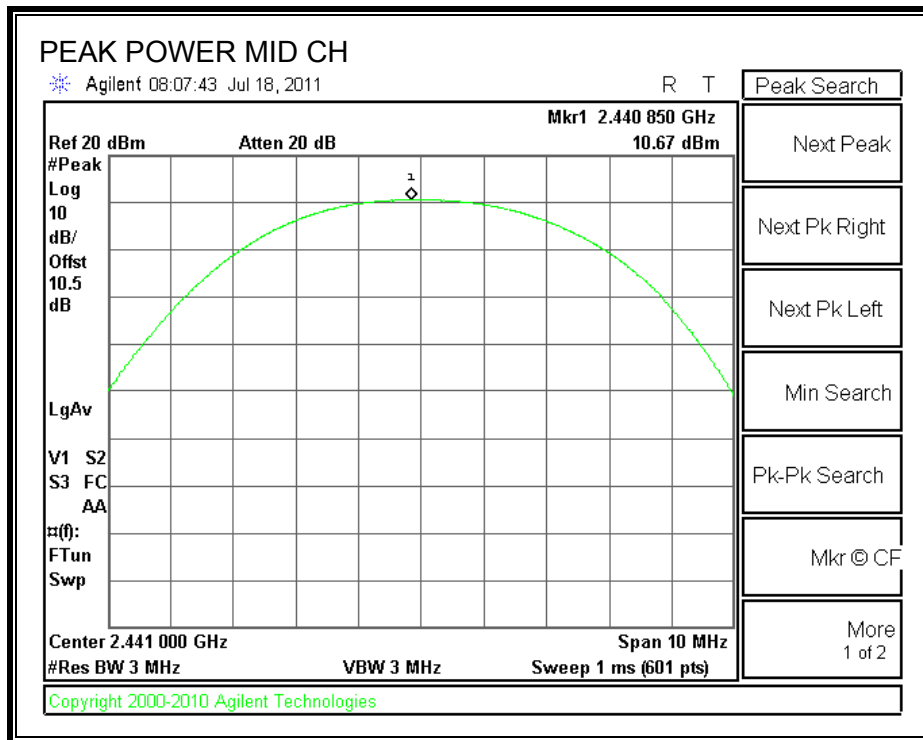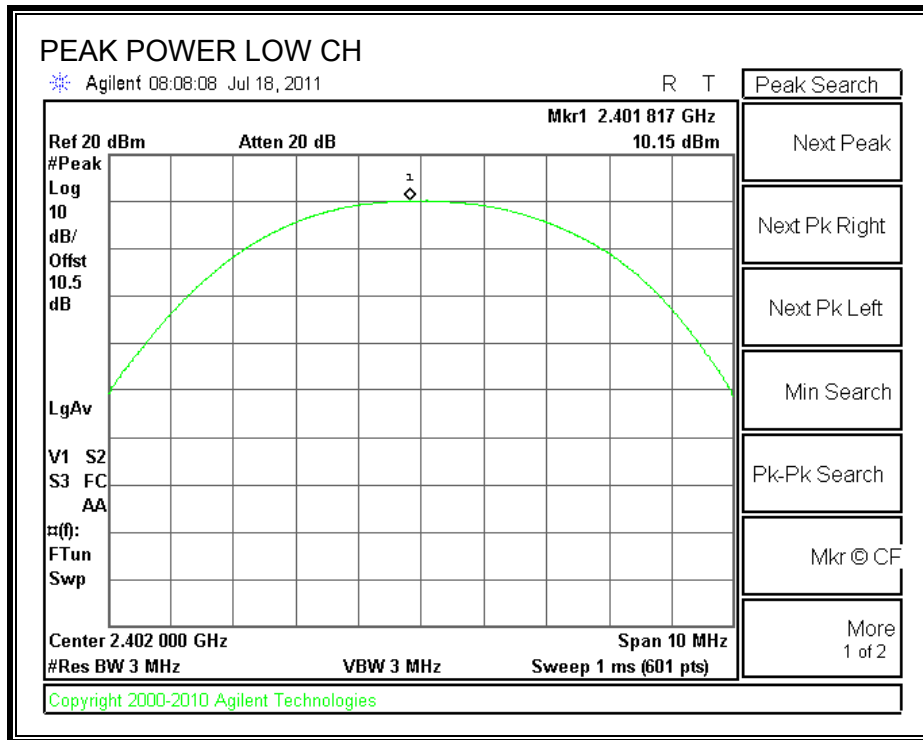

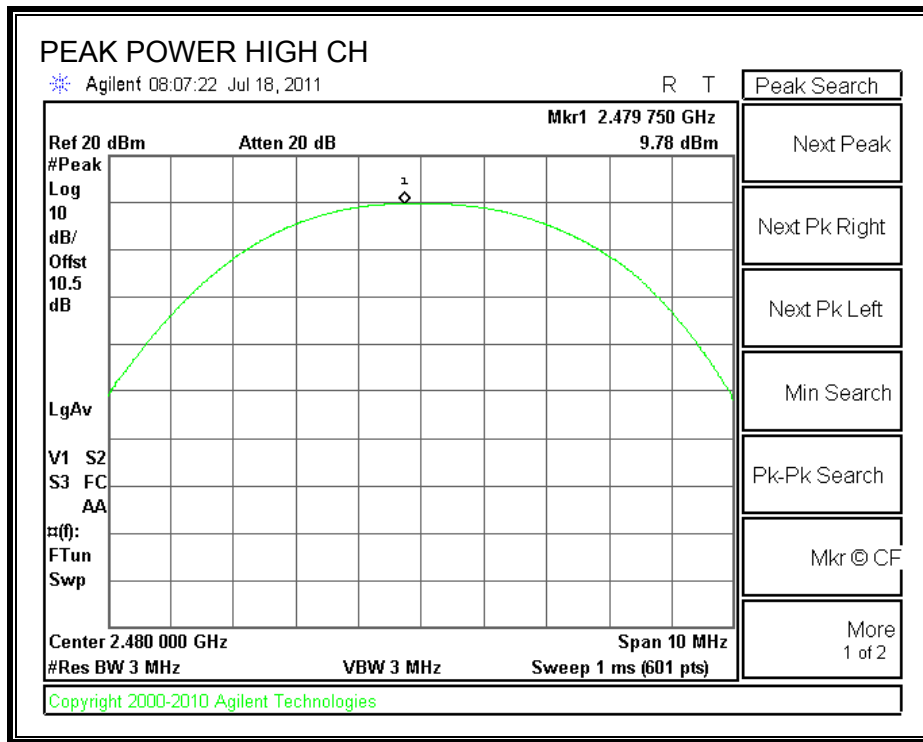

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.5 dB (including 9.40 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.50
Middle	2441	9.90
High	2480	9.40

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

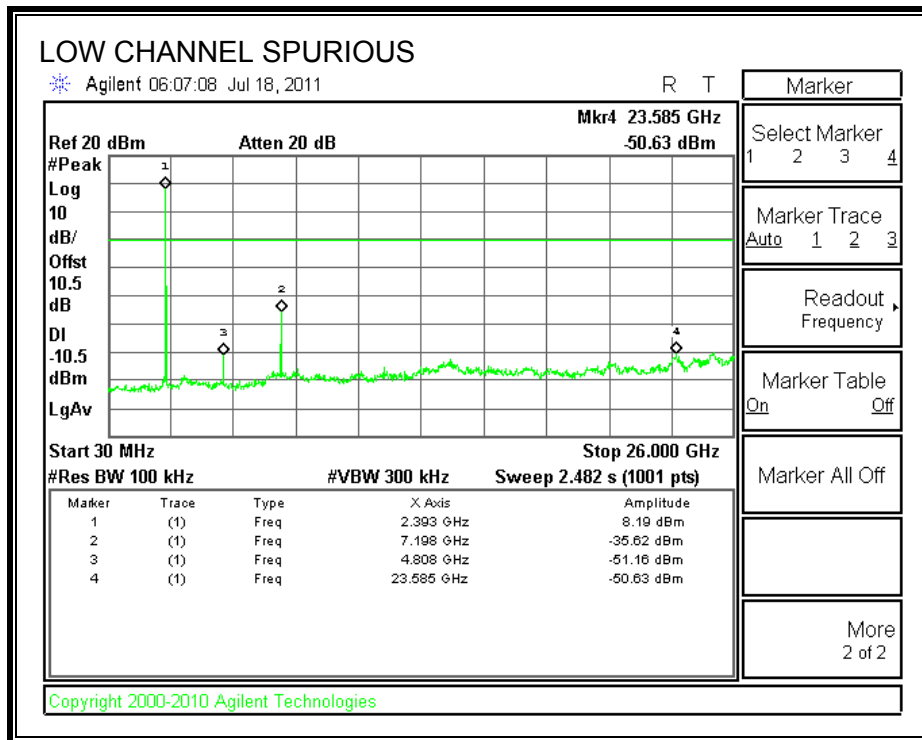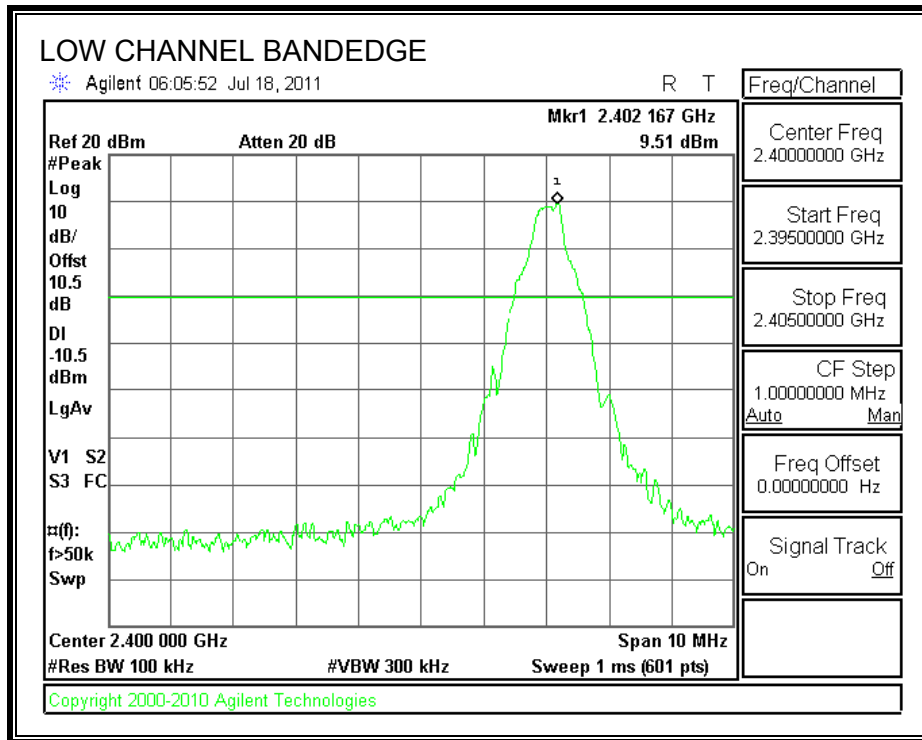



SPURIOUS EMISSIONS, MID CHANNEL

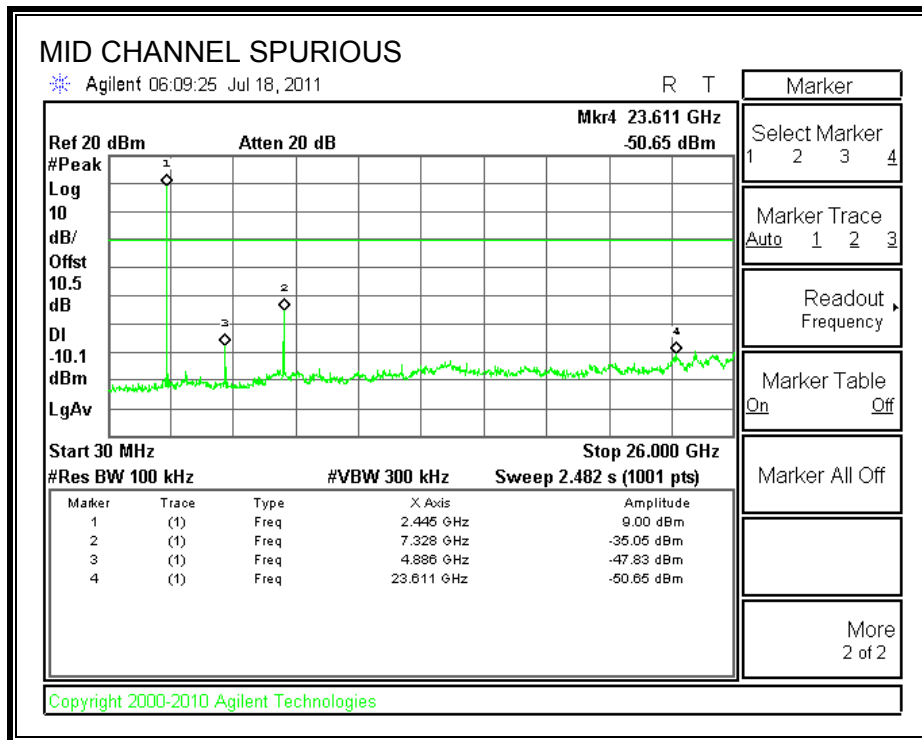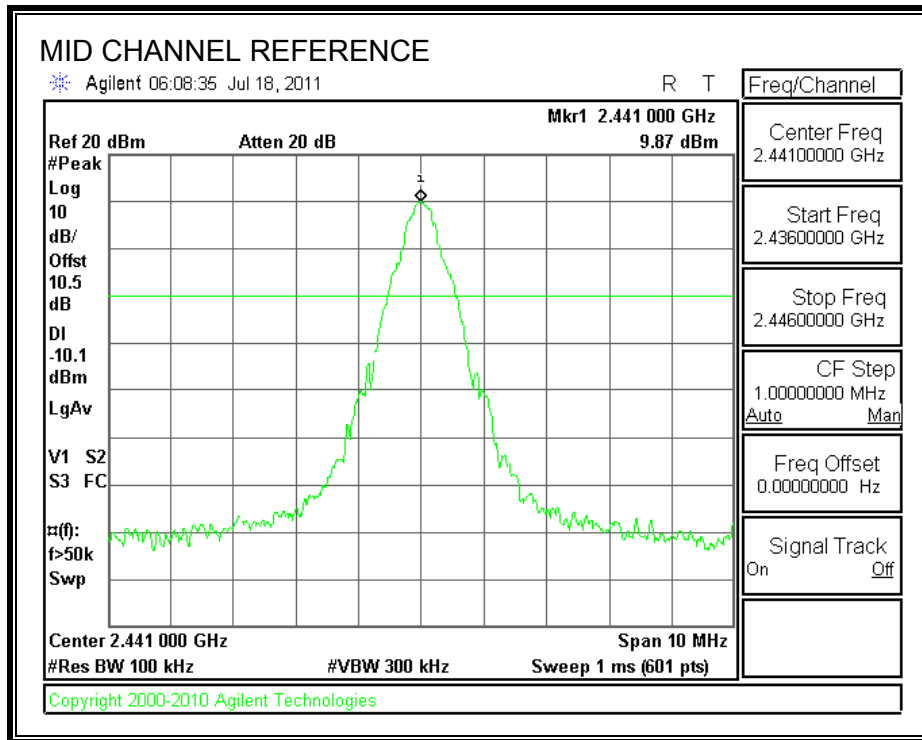

SPURIOUS EMISSIONS, HIGH CHANNEL

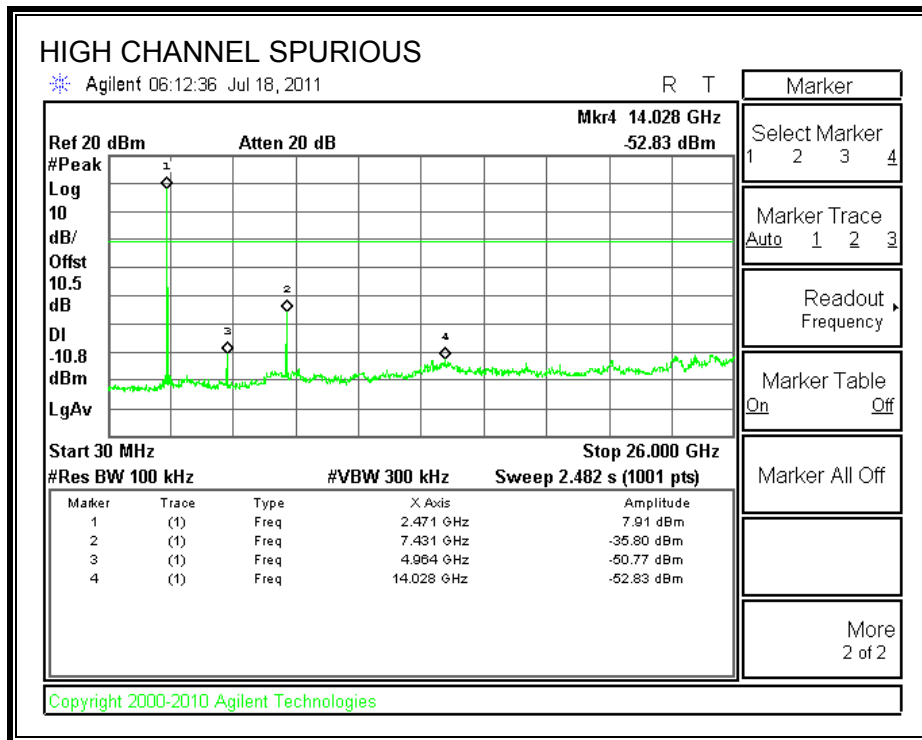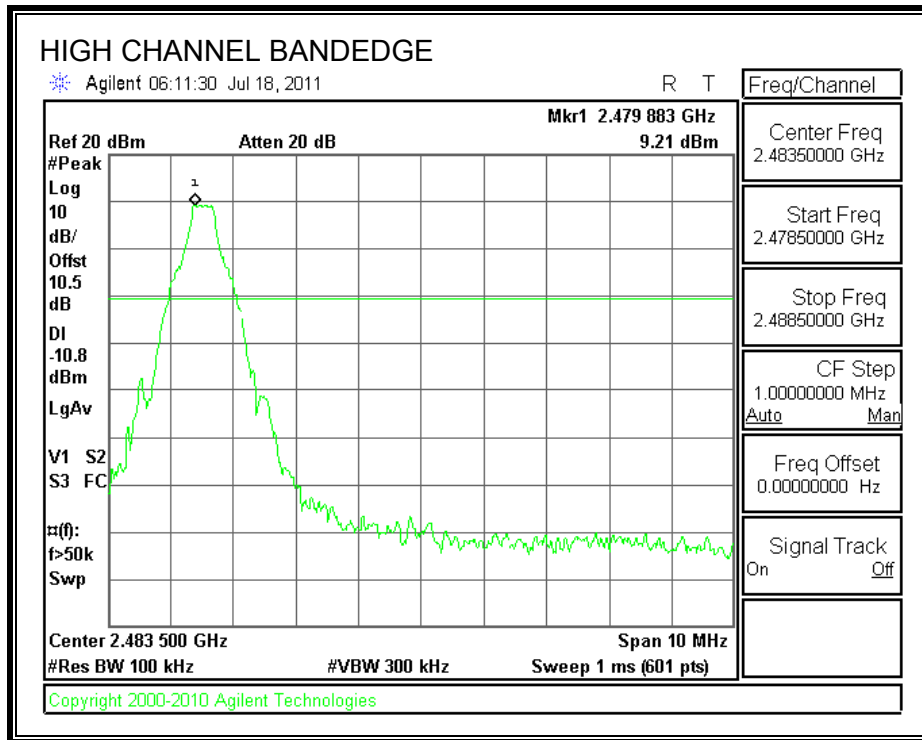

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

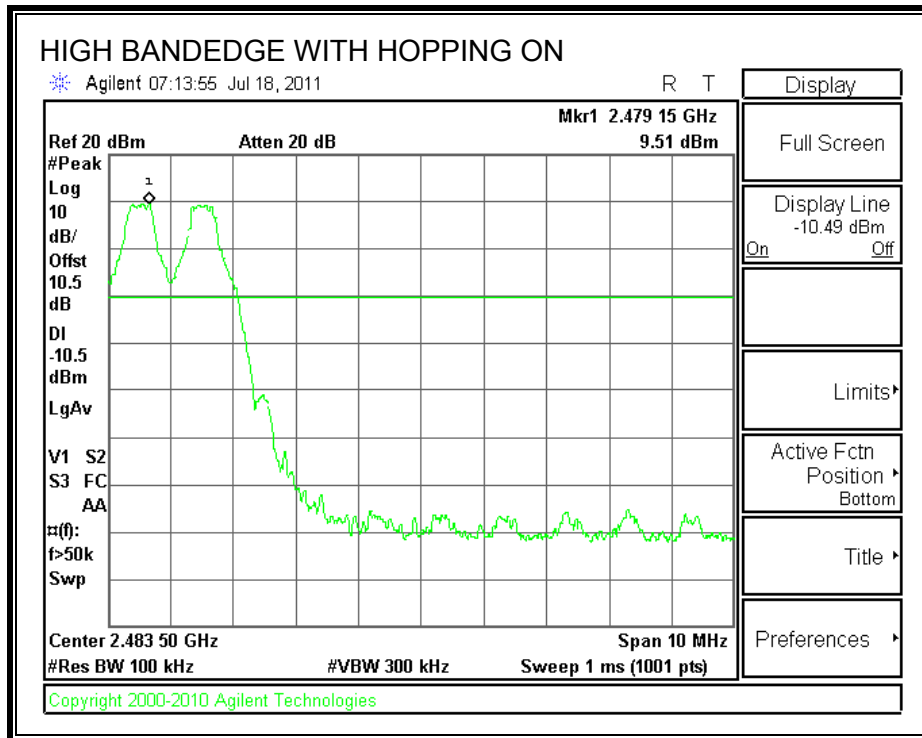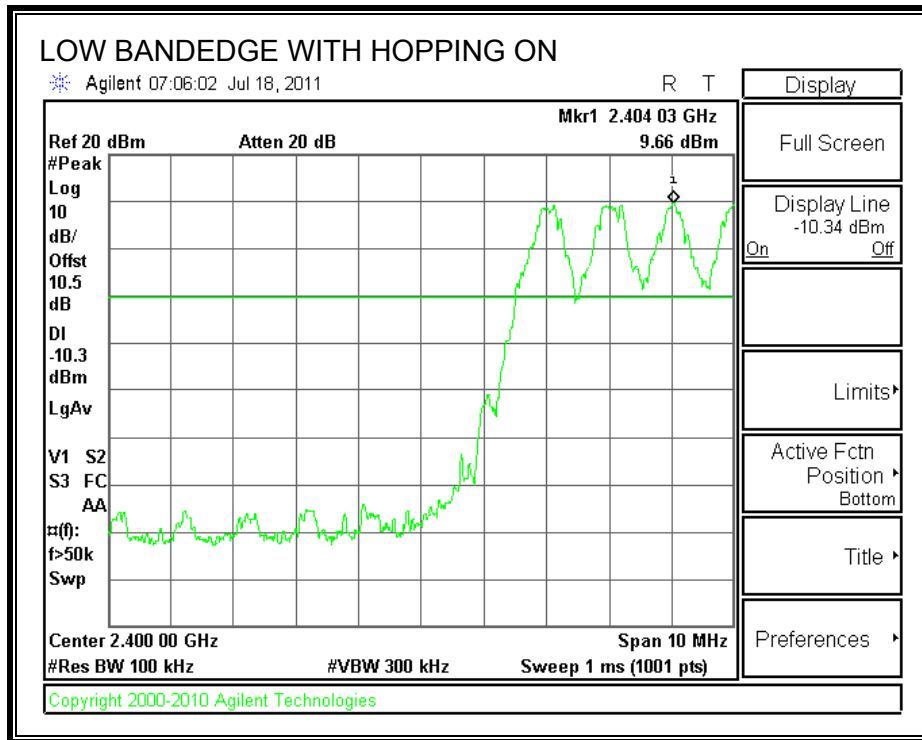

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	1337.0
Middle	2441	1353.0
High	2480	1340.0

20 dB BANDWIDTH

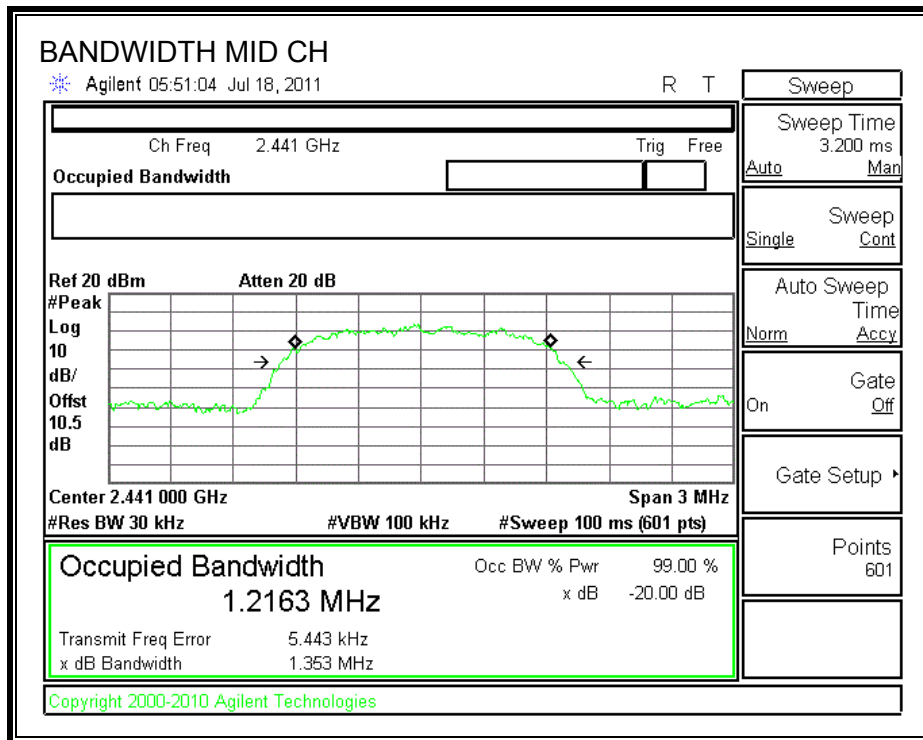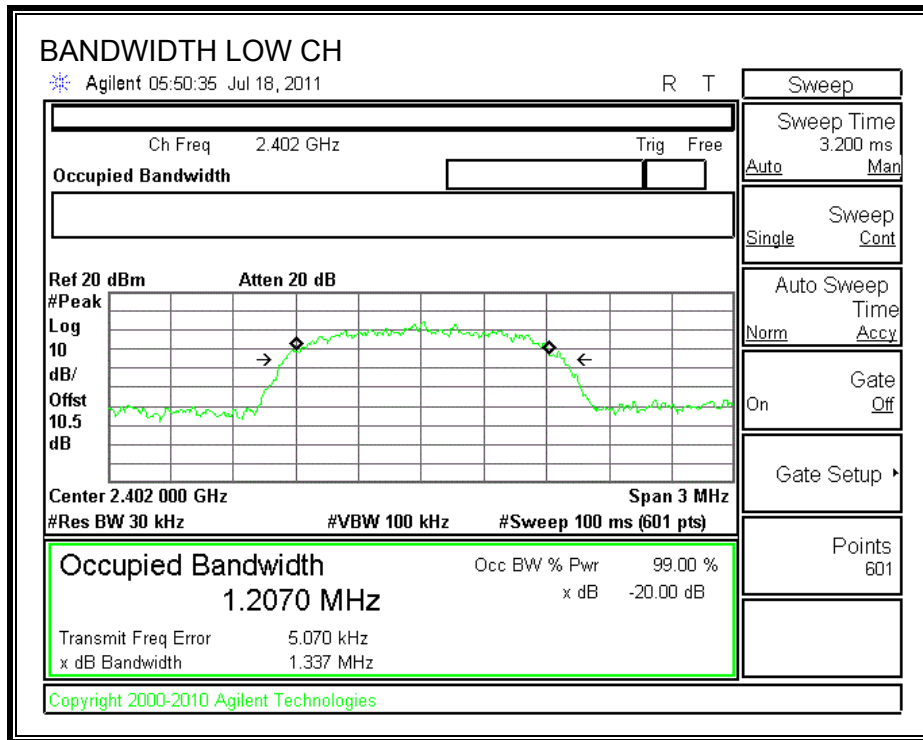

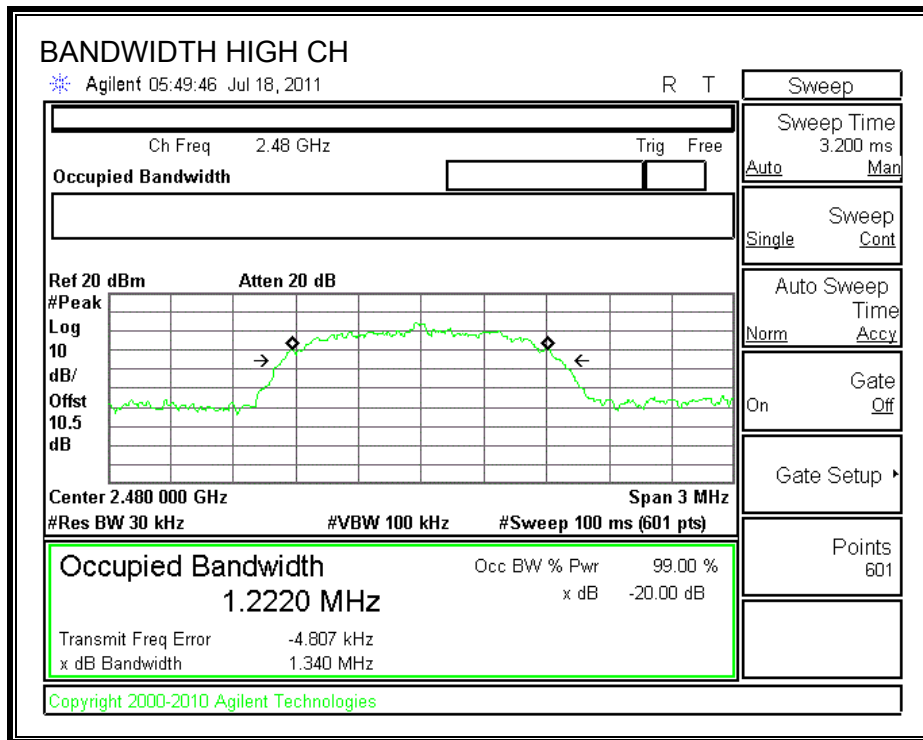

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

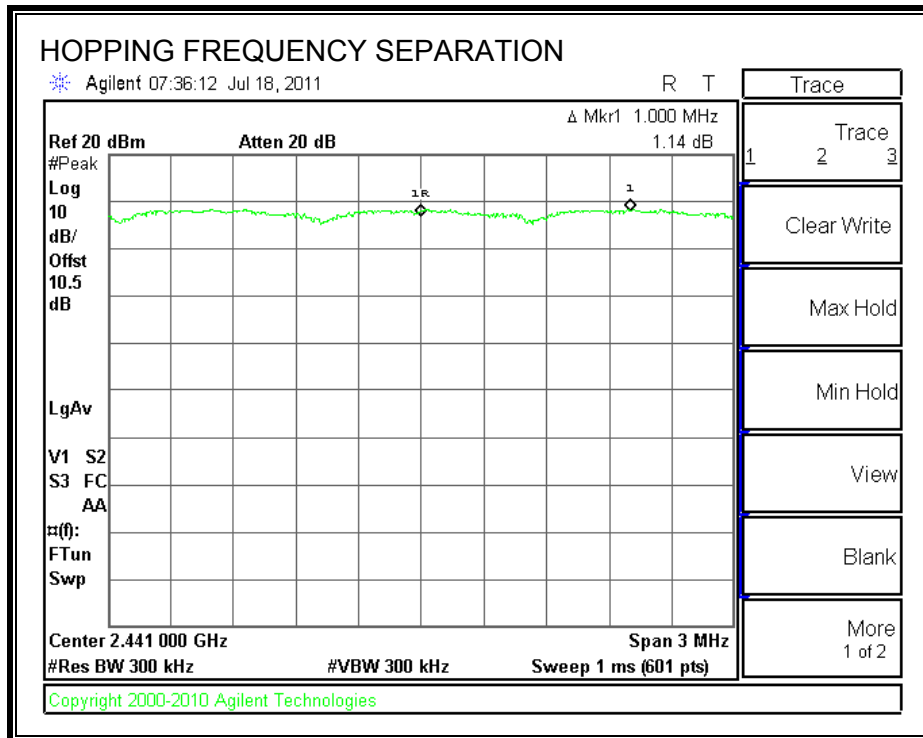

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

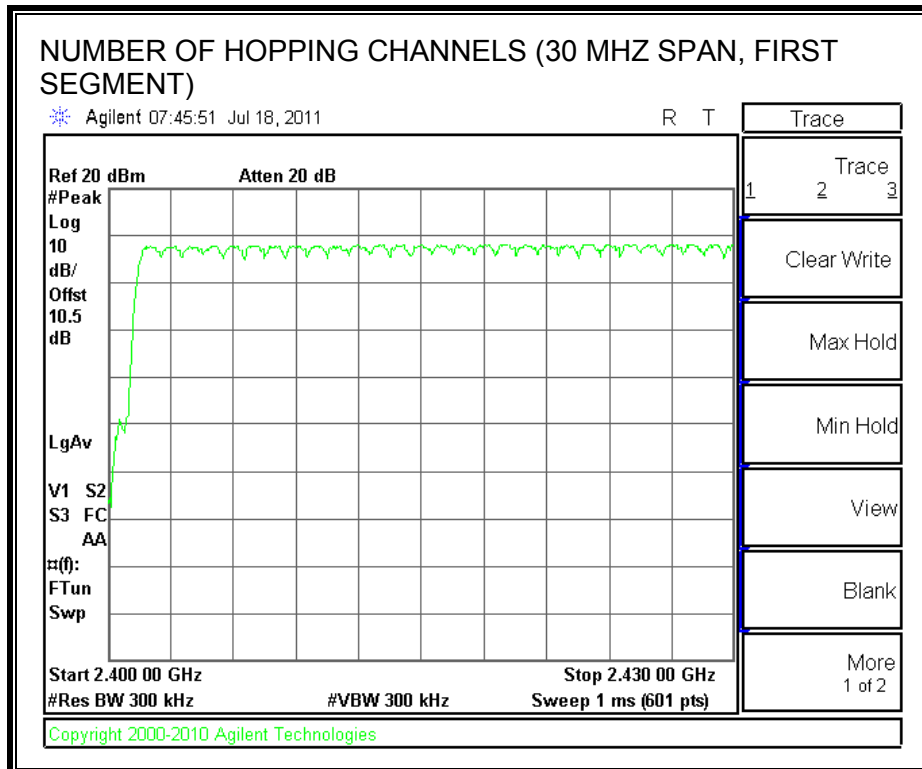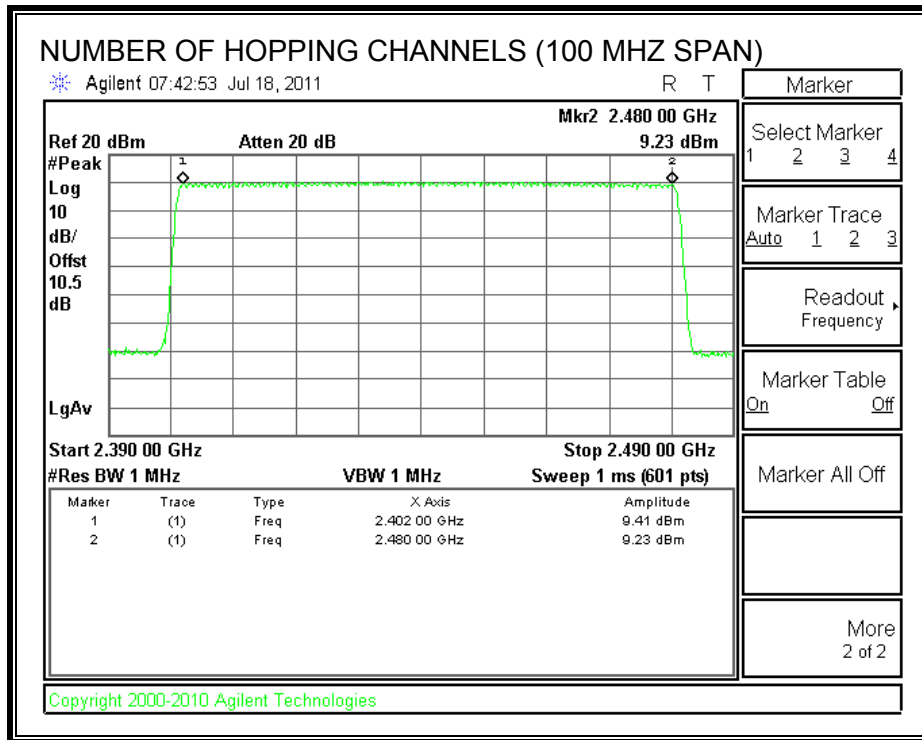

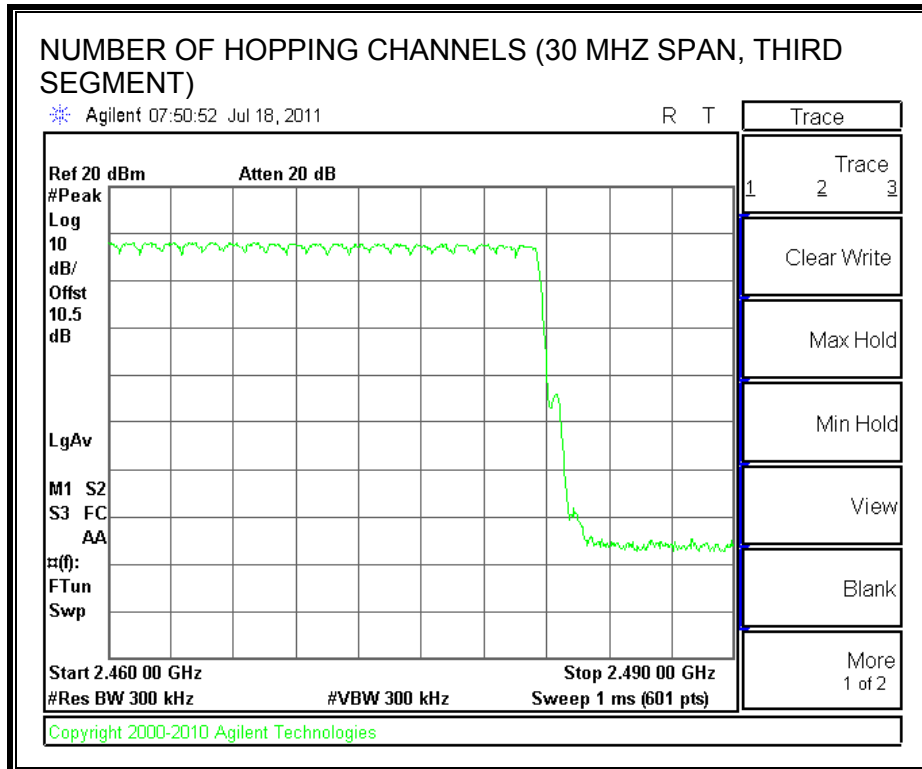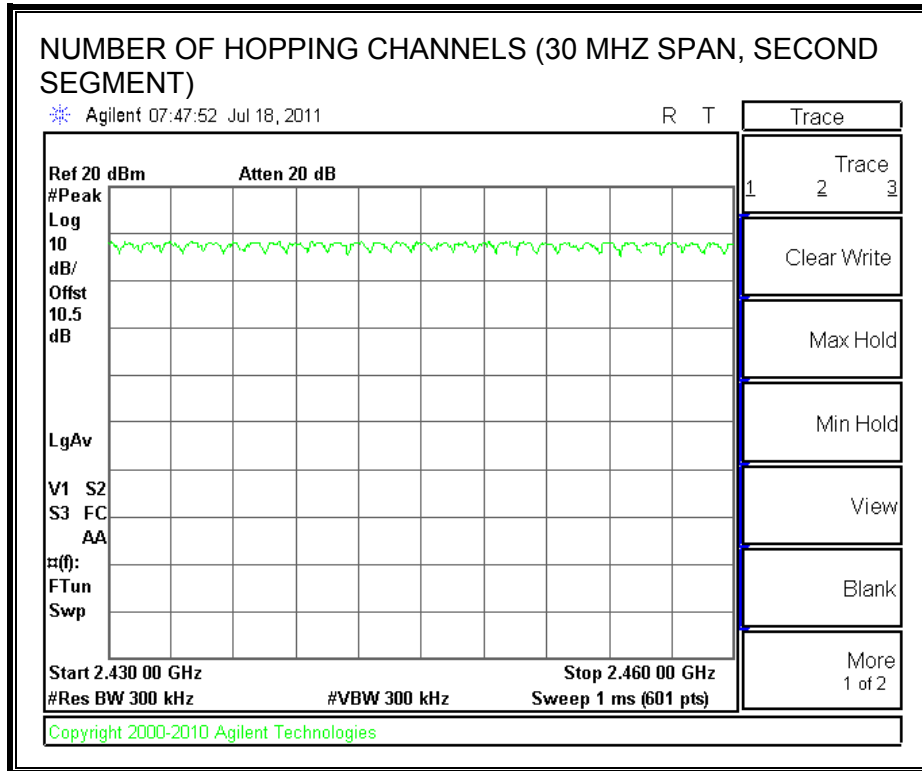

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
3-DH1	0.3967	36	0.1428	0.4	-0.2572
3-DH3	1.6500	18	0.2970	0.4	-0.1030
3-DH5	2.9000	12	0.3480	0.4	-0.0520

DH1

PULSE WIDTH

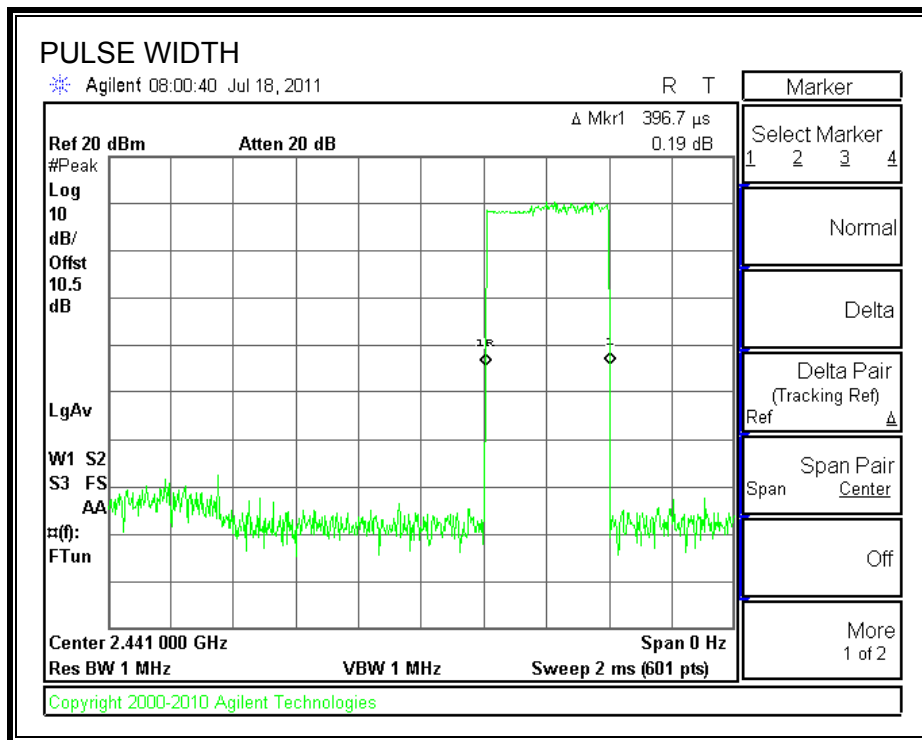


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

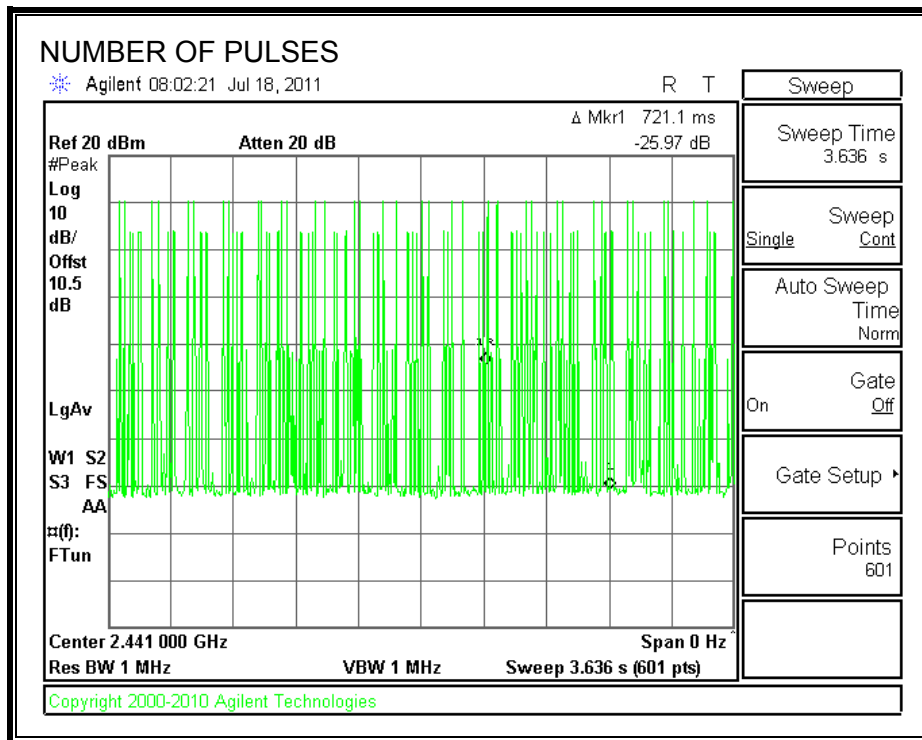


DH3

PULSE WIDTH

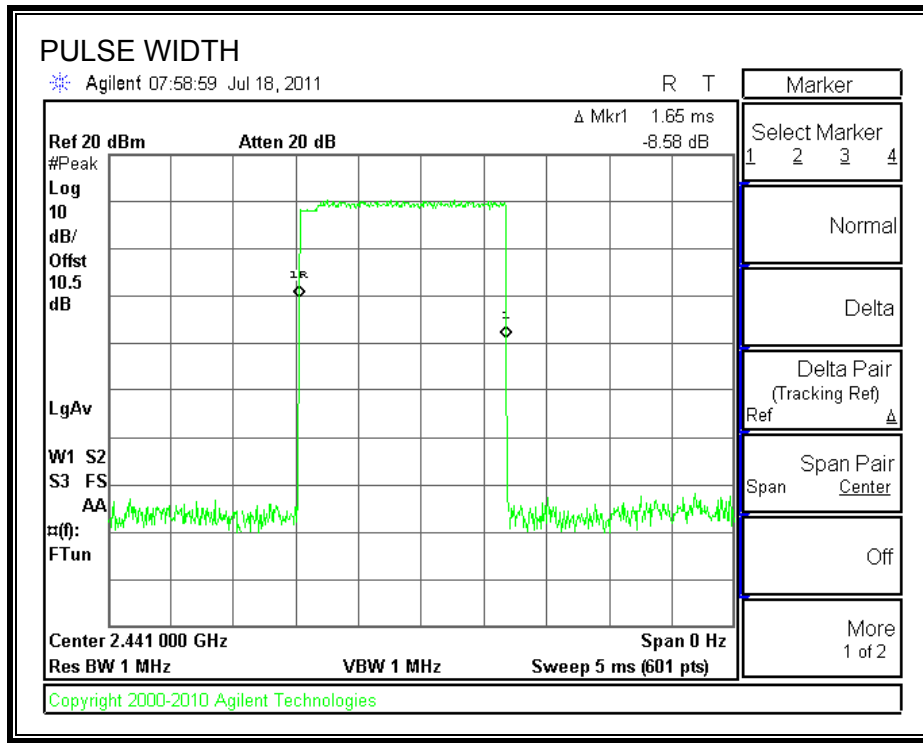


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

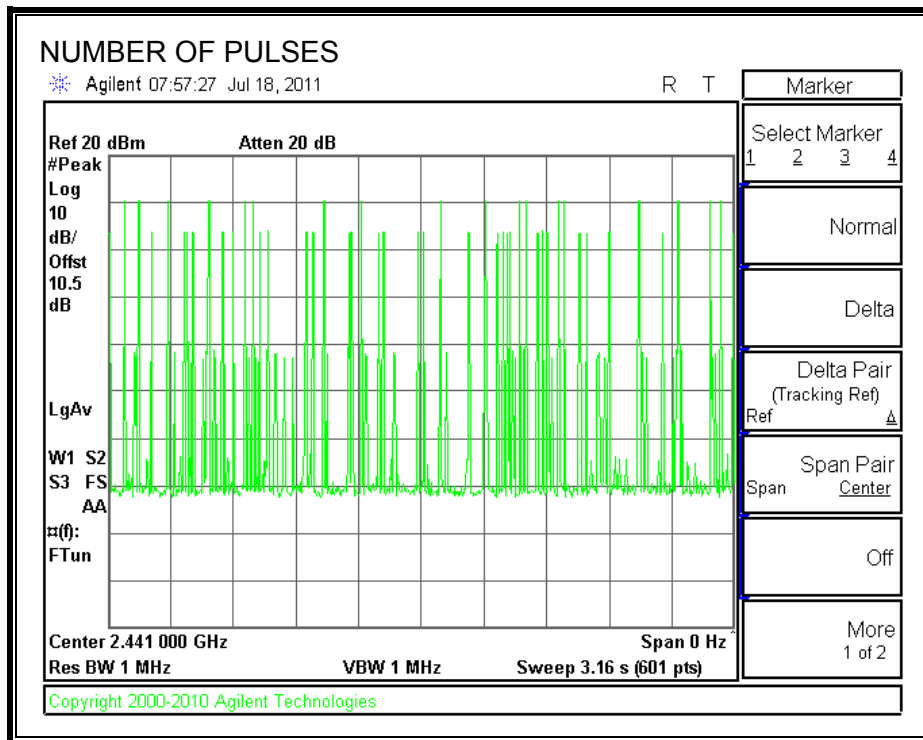


DH5

PULSE WIDTH

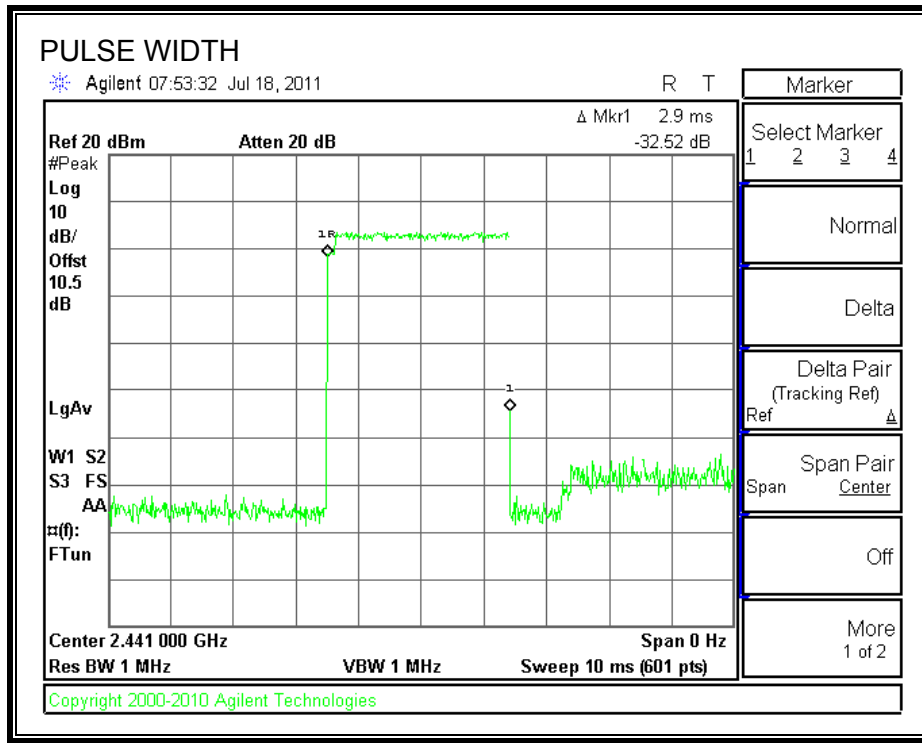

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

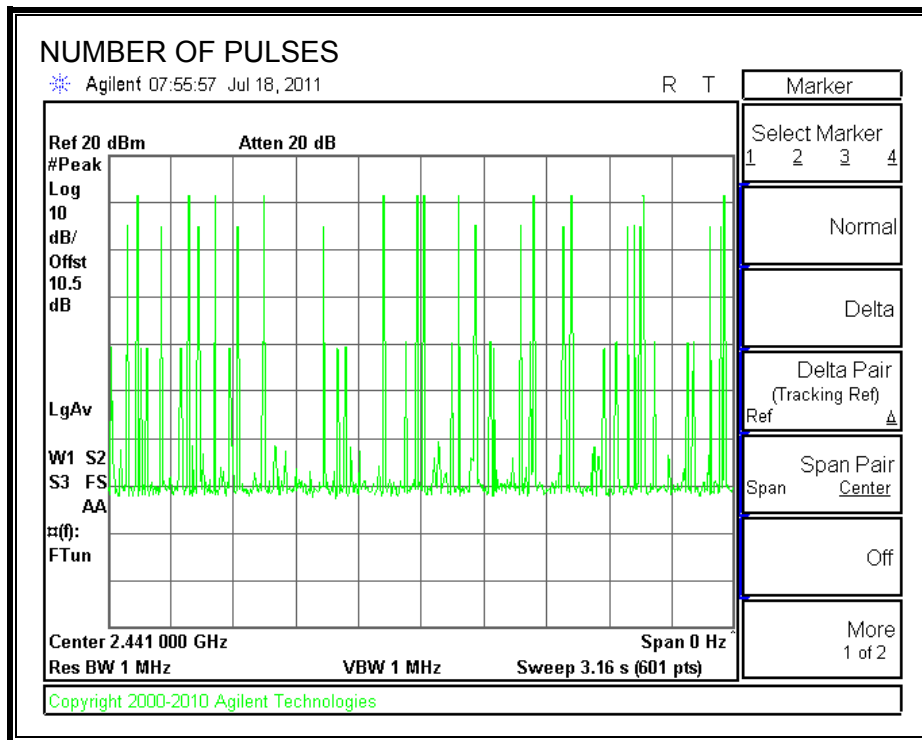

7.2.4 OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.50	30	-19.50
Middle	2441	10.93	30	-19.07
High	2480	10.16	30	-19.84

OUTPUT POWER

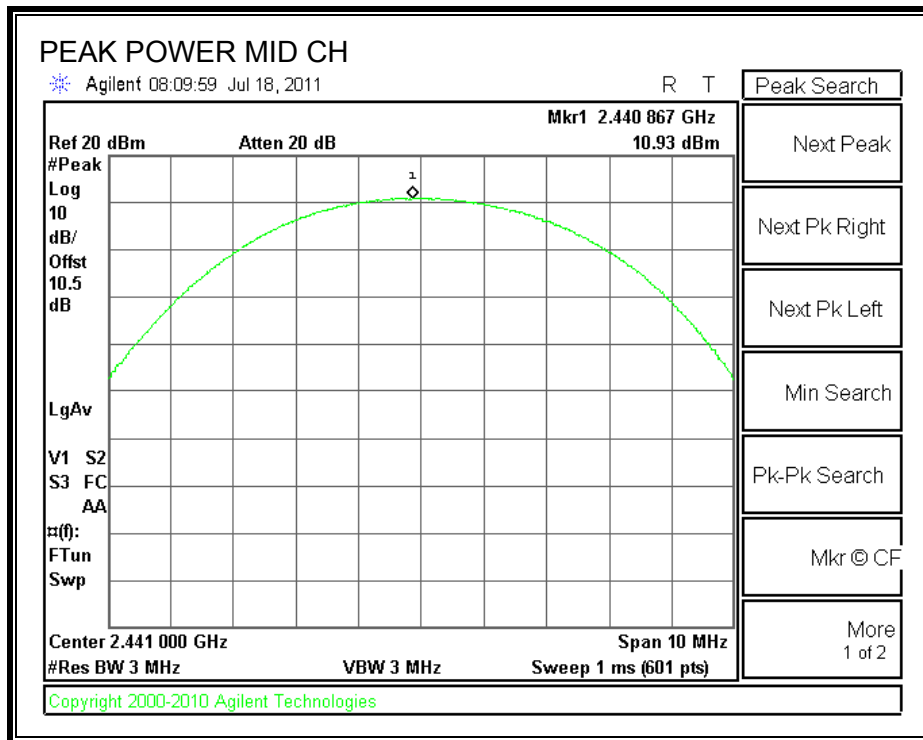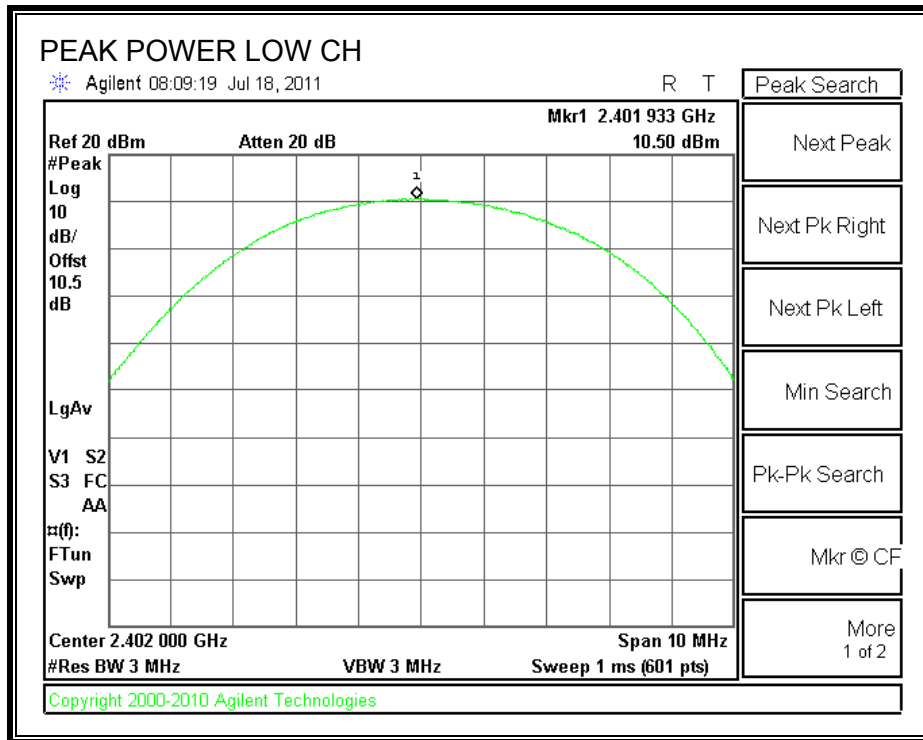

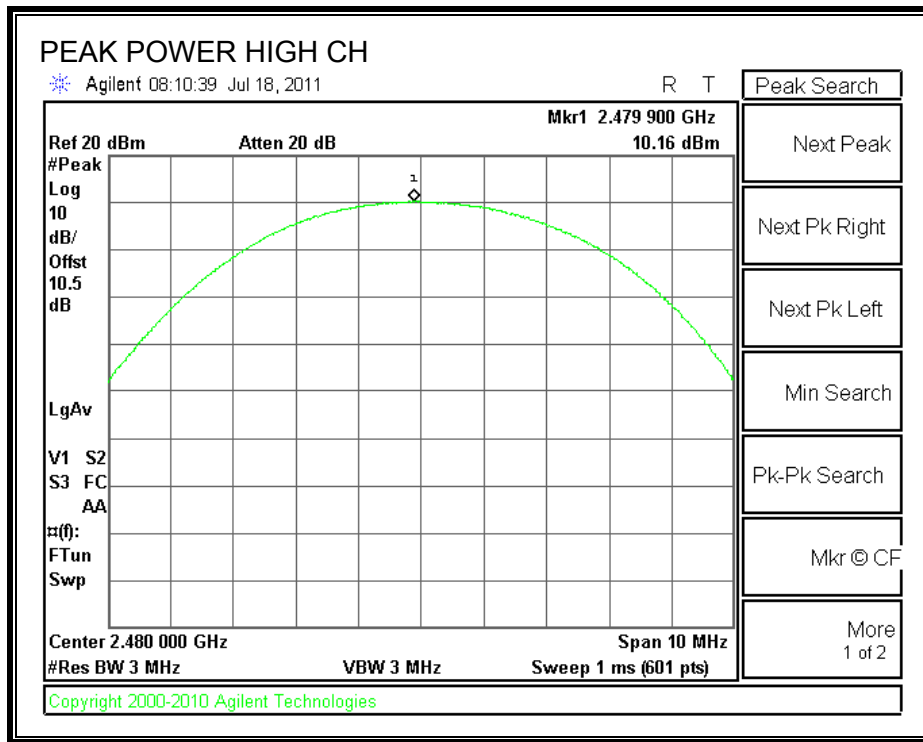

7.2.5. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.5 dB (including 9.40 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.40
Middle	2441	8.00
High	2480	7.40

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

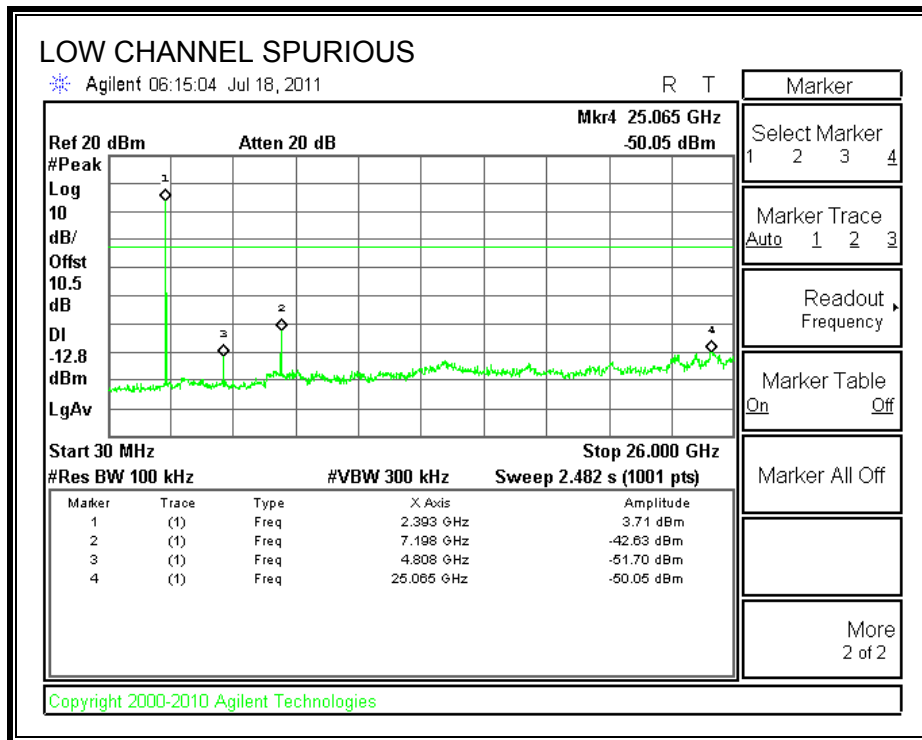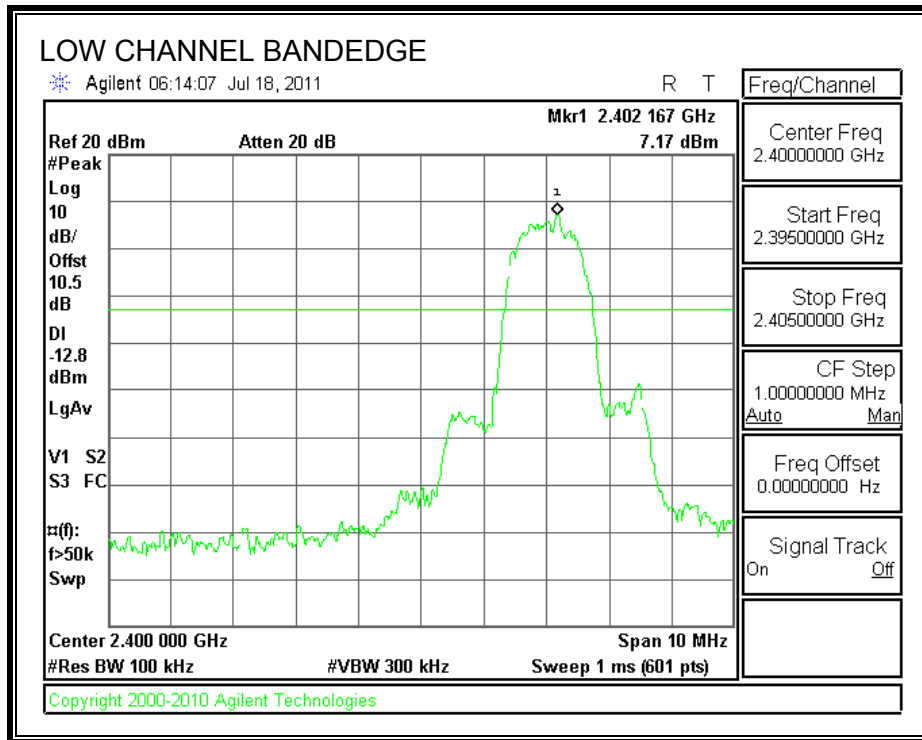



SPURIOUS EMISSIONS, MID CHANNEL

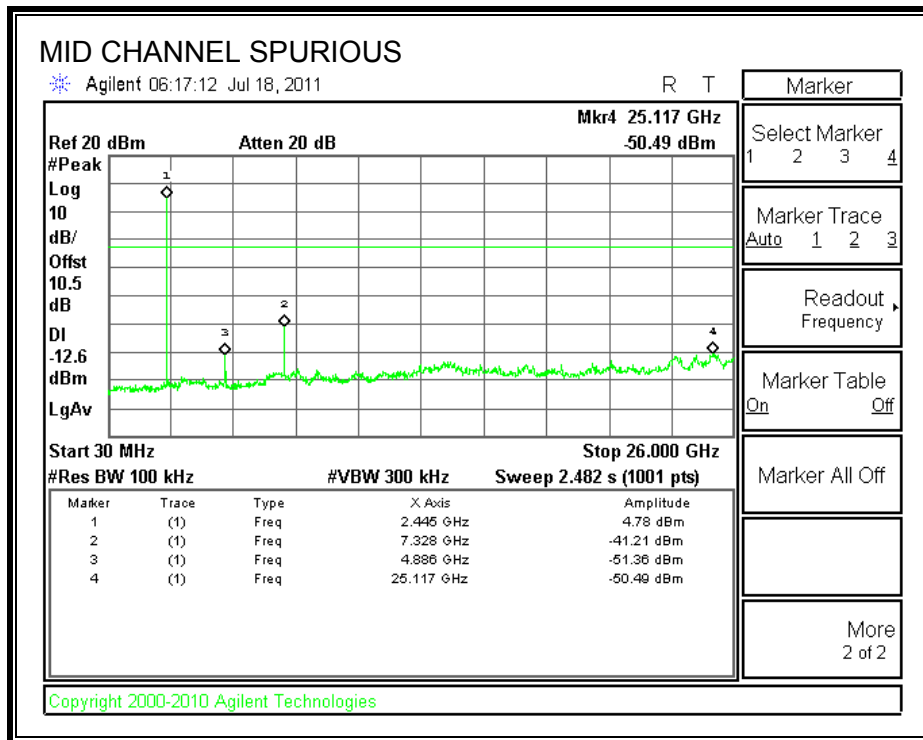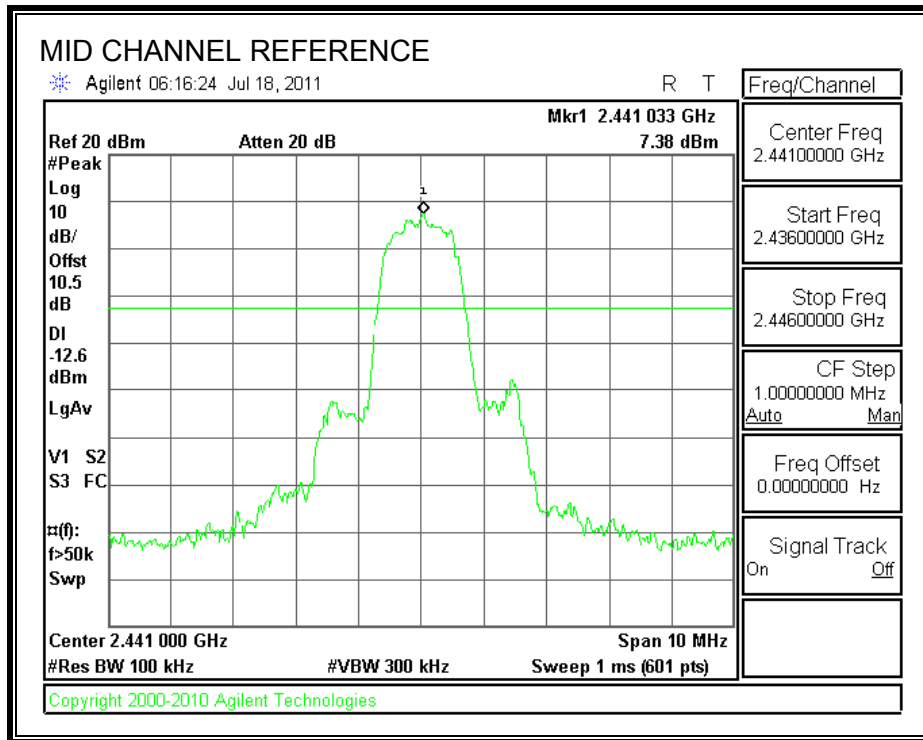

SPURIOUS EMISSIONS, HIGH CHANNEL

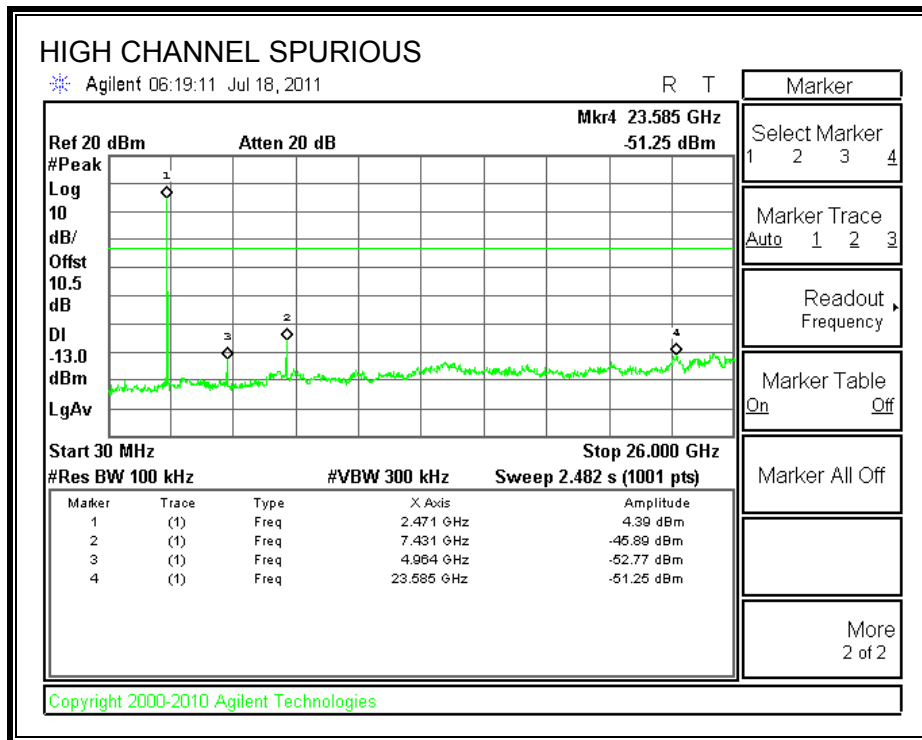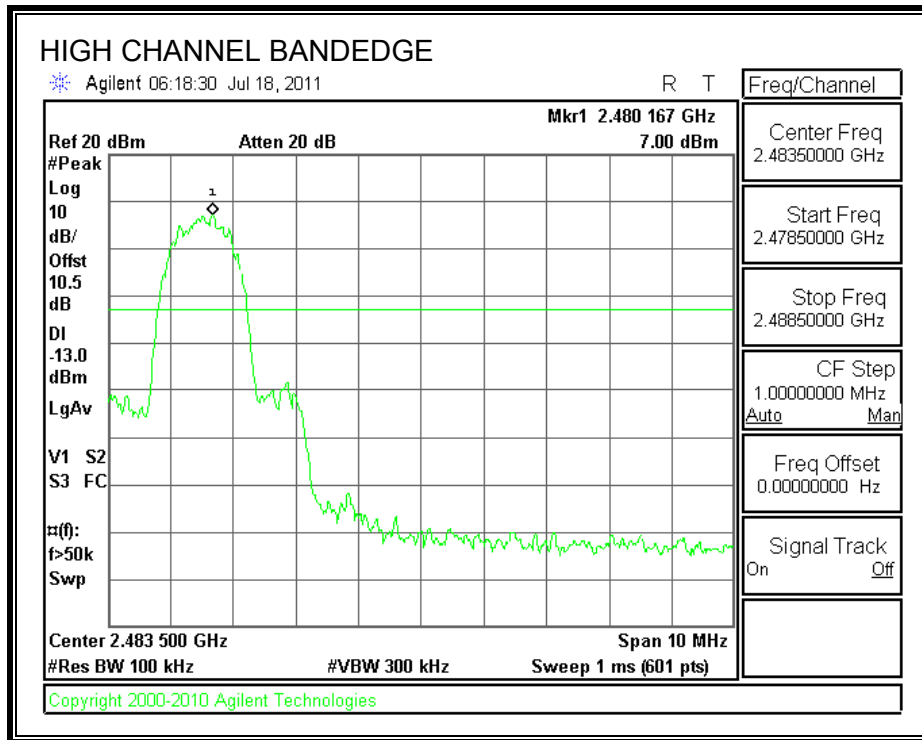

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

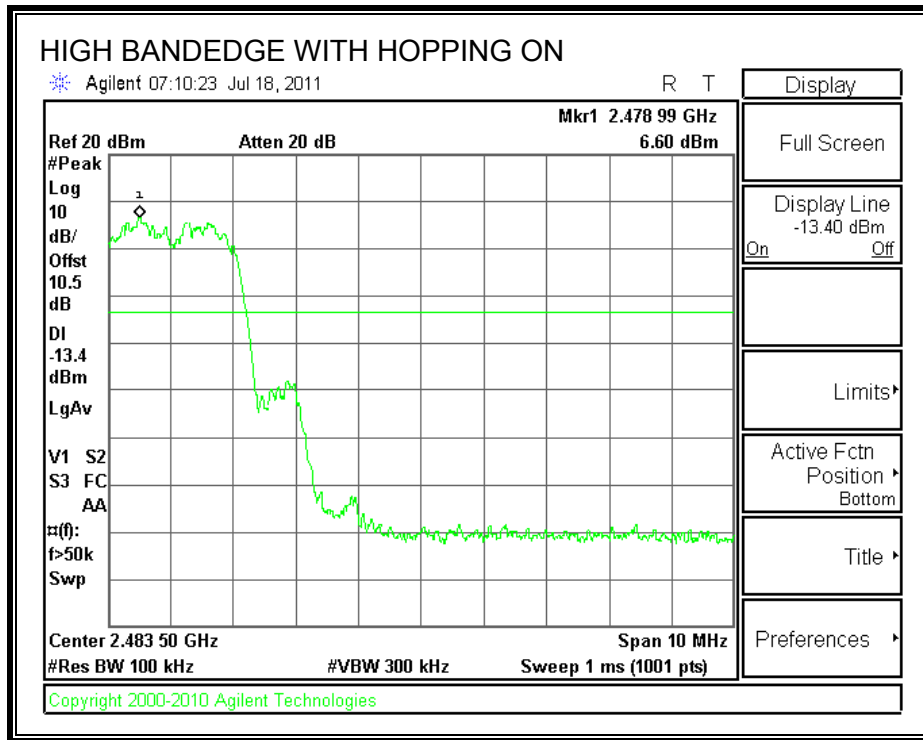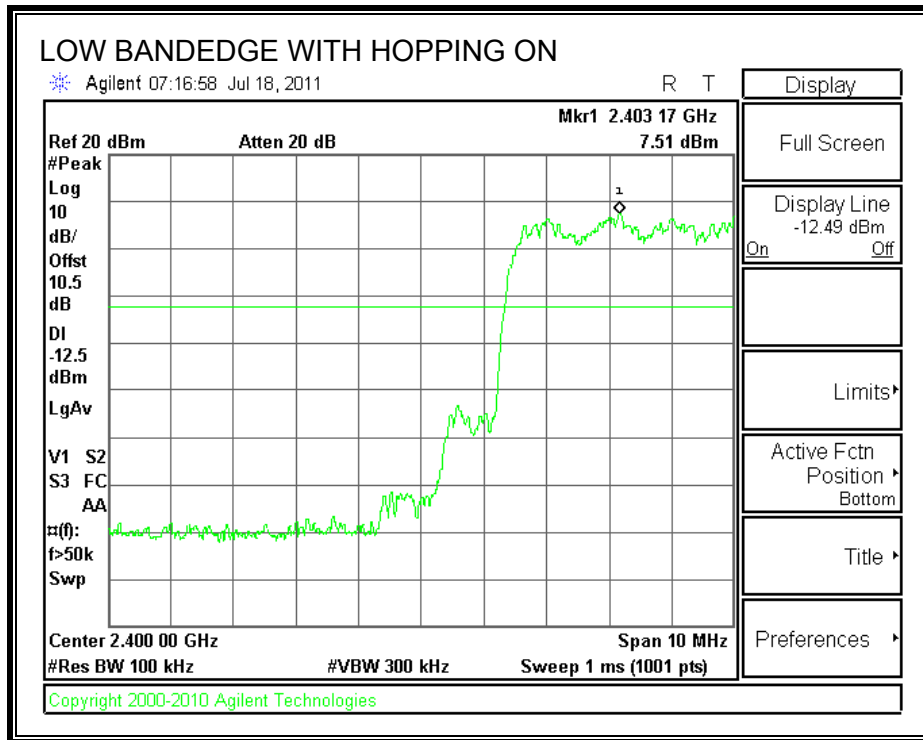

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

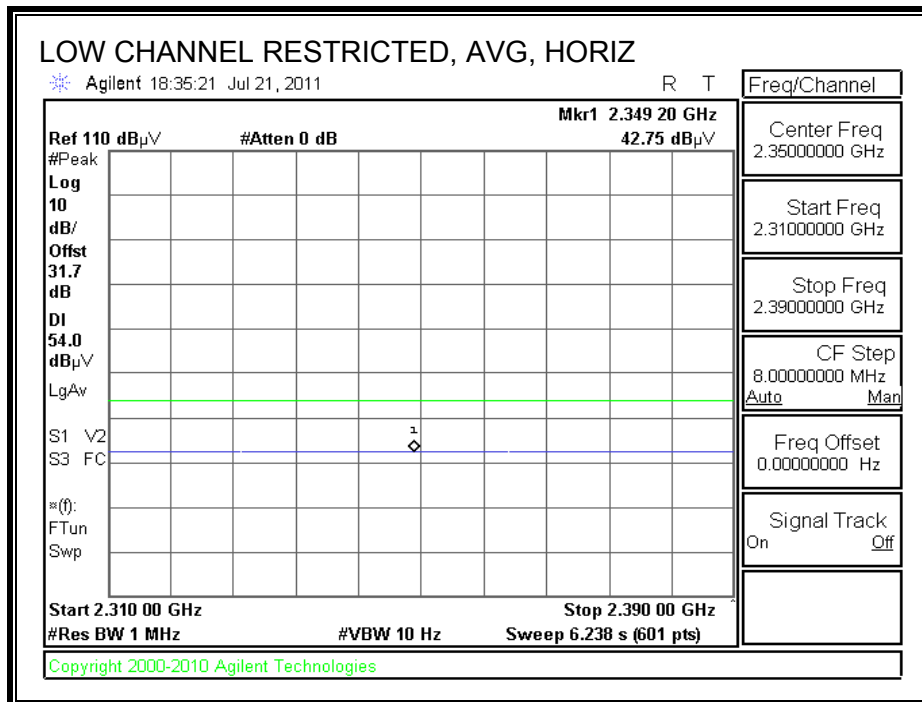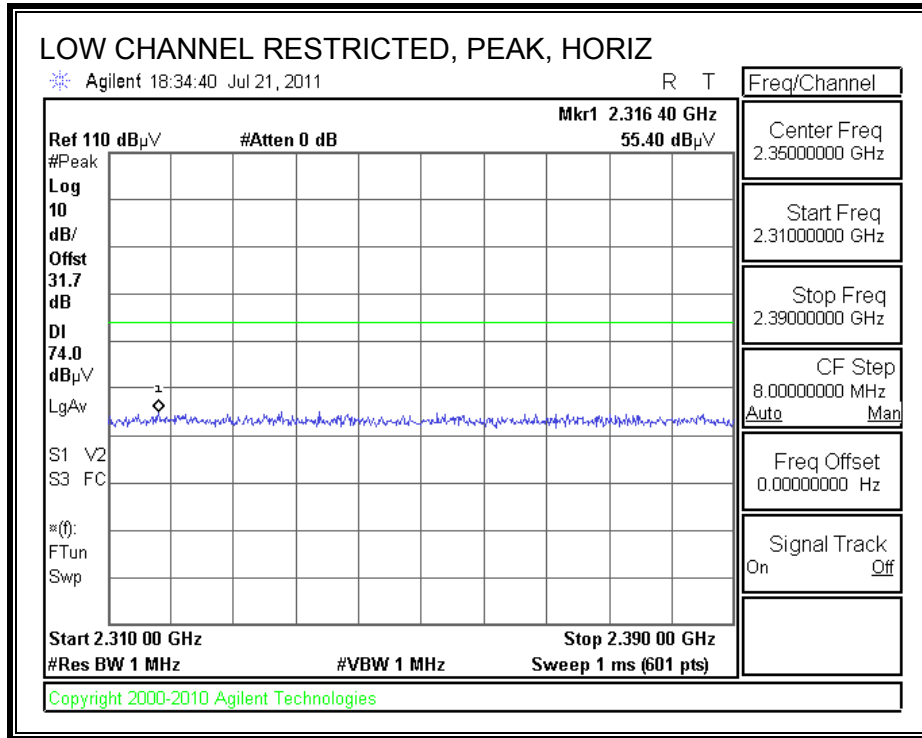



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

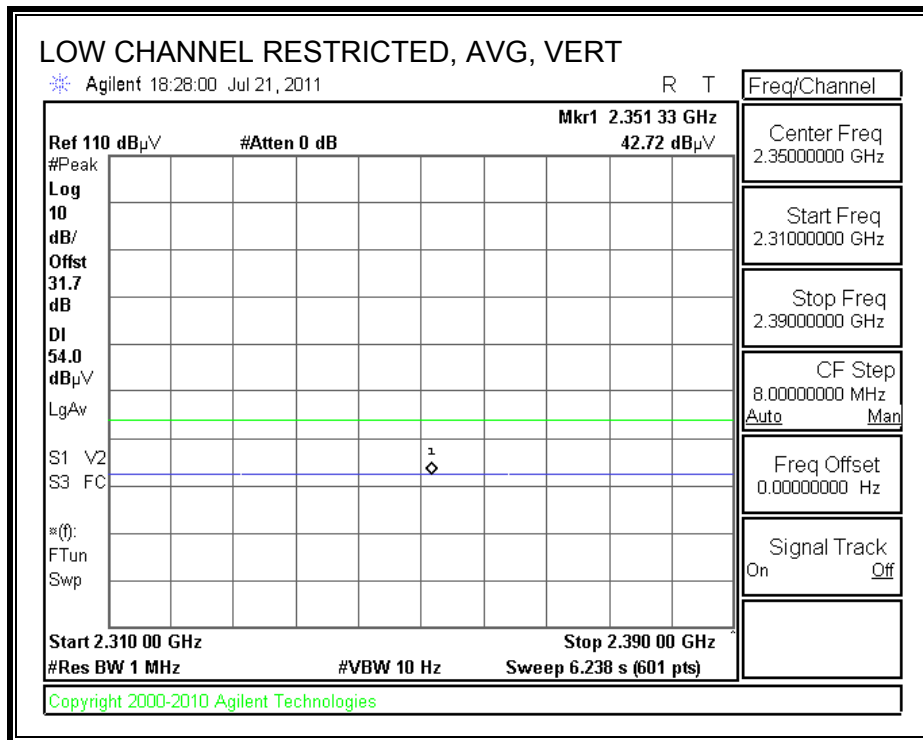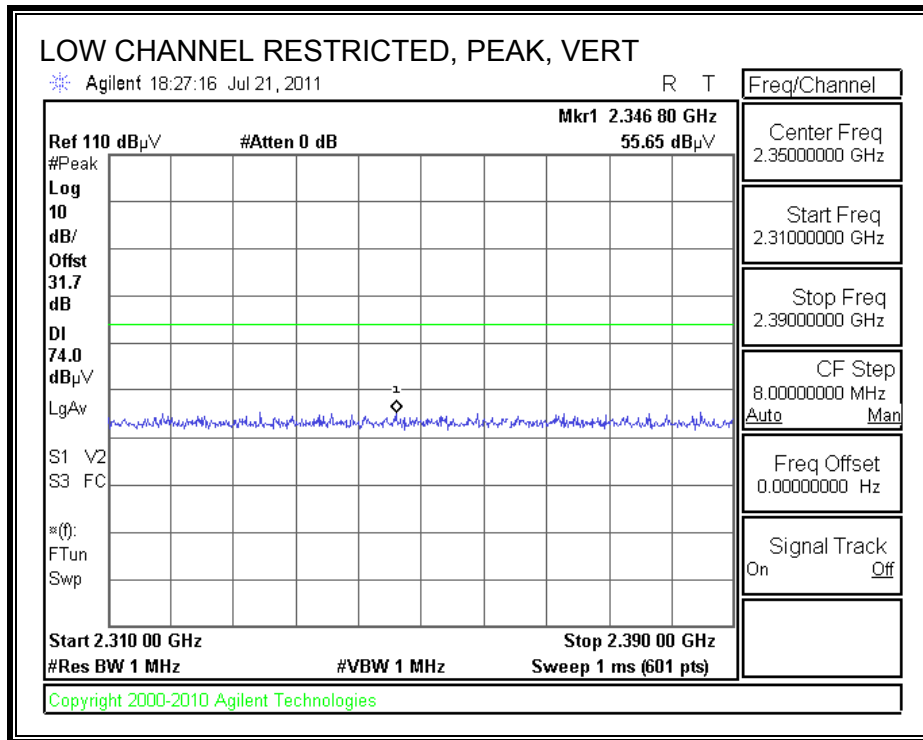

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

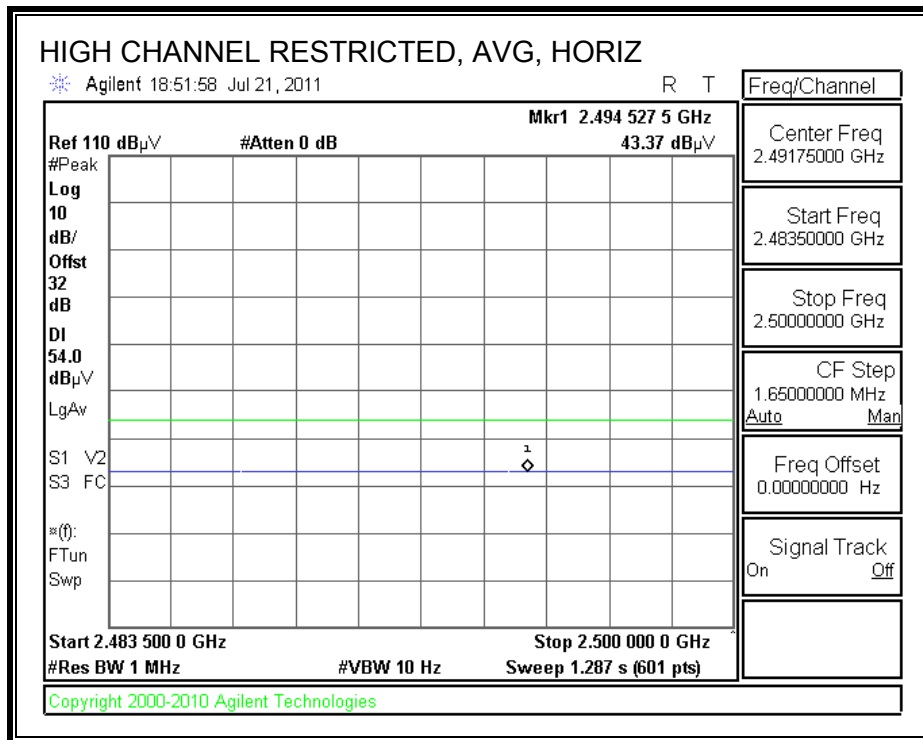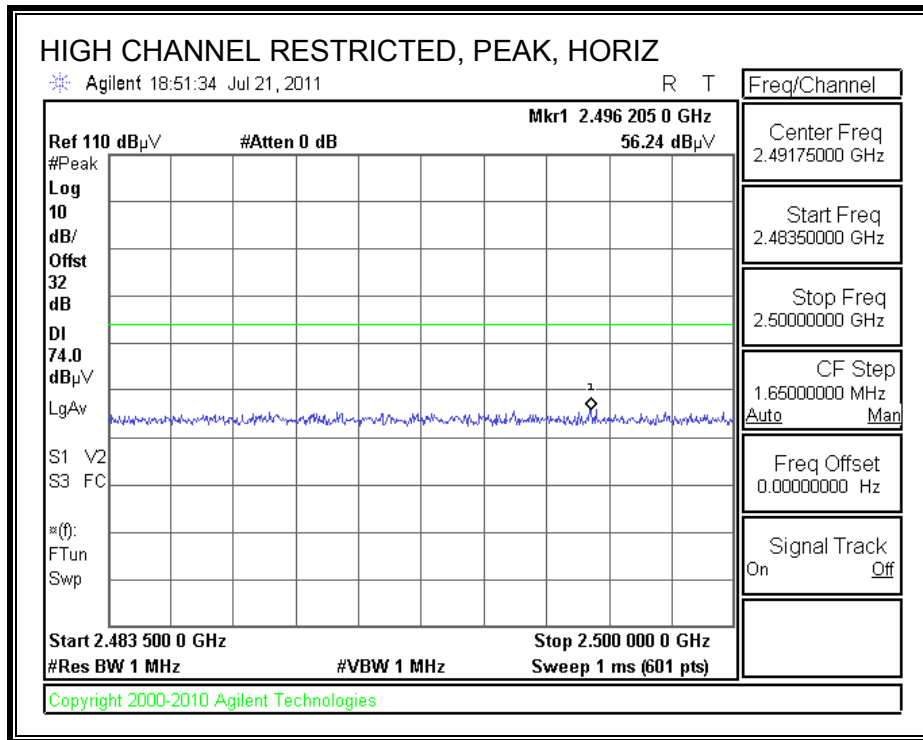

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

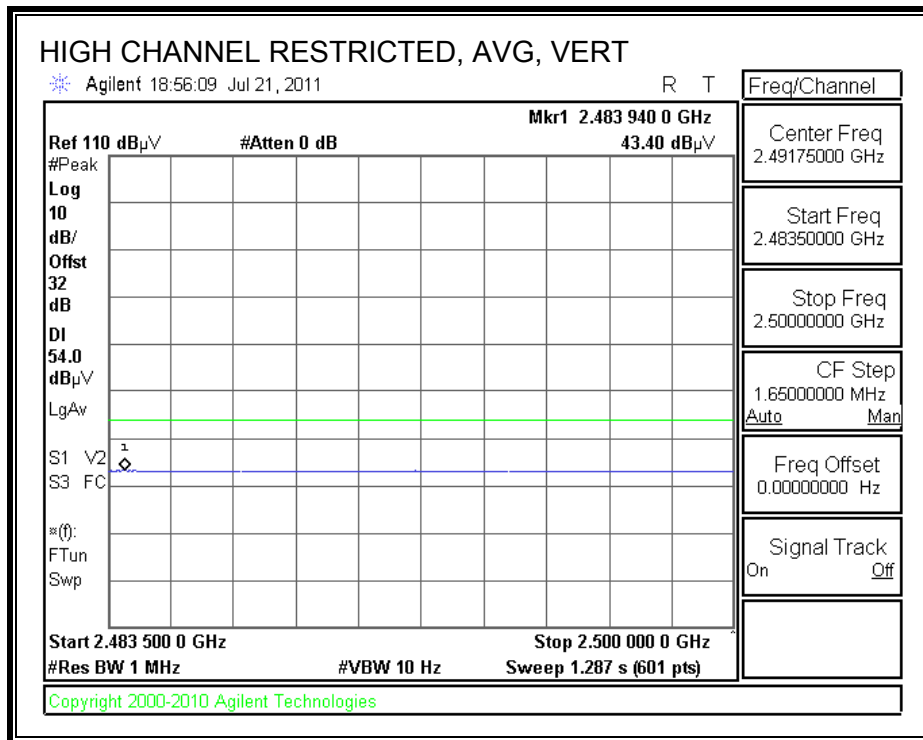
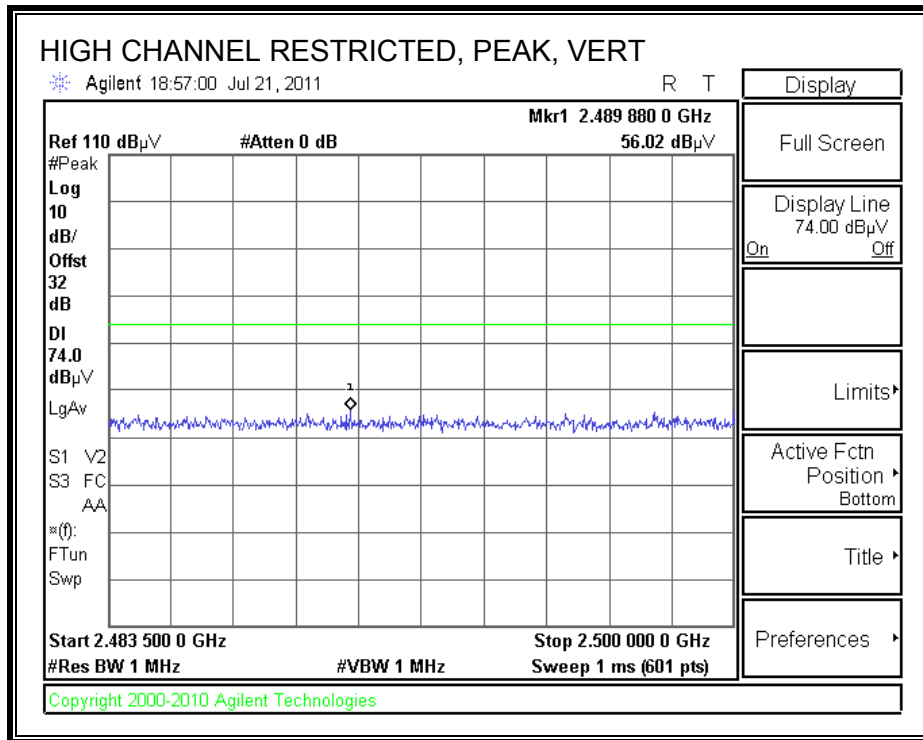


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement															
Compliance Certification Services, Fremont 3m Chamber															
Test Engr:		Vien Tran													
Date:		07/22/11													
Project #:		11U13739													
Company:		LG Electronics Inc.,													
Test Target:		FCC Class B													
Mode Oper:		Tx GFSK Mode													
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit											
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit											
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit											
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit											
CL	Cable Loss	HPF	High Pass Filter												
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
LOW CHANNEL, 2402MHz															
4.804	3.0	50.6	33.0	5.8	-36.5	0.0	0.0	52.9	74.0	-21.1	V	P	101.7	165.4	
4.804	3.0	43.5	33.0	5.8	-36.5	0.0	0.0	45.8	54.0	-8.2	V	A	101.7	165.4	
4.804	3.0	44.8	33.0	5.8	-36.5	0.0	0.0	47.2	74.0	-26.8	H	P	104.9	346.2	
4.804	3.0	37.3	33.0	5.8	-36.5	0.0	0.0	39.7	54.0	-14.3	H	A	104.9	346.2	
MID CHANNEL, 2441MHz															
4.882	3.0	51.0	33.1	5.8	-36.5	0.0	0.0	53.5	74.0	-20.5	V	P	101.1	180.4	
4.882	3.0	43.7	33.1	5.8	-36.5	0.0	0.0	46.2	54.0	-7.8	V	A	101.1	180.4	
7.323	3.0	39.3	35.3	7.3	-36.2	0.0	0.0	45.7	74.0	-28.3	V	P	100.5	247.8	
7.323	3.0	29.5	35.3	7.3	-36.2	0.0	0.0	35.9	54.0	-18.1	V	A	100.5	247.8	
12.205	3.0	34.9	39.0	9.8	-35.4	0.0	0.0	48.3	74.0	-25.7	V	P	166.4	201.8	
12.205	3.0	22.8	39.0	9.8	-35.4	0.0	0.0	36.2	54.0	-17.8	V	A	166.4	201.8	
4.882	3.0	43.3	33.1	5.8	-36.5	0.0	0.0	45.8	74.0	-28.2	H	P	120.6	62.5	
4.882	3.0	35.4	33.1	5.8	-36.5	0.0	0.0	37.9	54.0	-16.1	H	A	120.6	62.5	
7.323	3.0	36.9	35.3	7.3	-36.2	0.0	0.0	43.3	74.0	-30.7	H	P	100.9	92.9	
7.323	3.0	26.4	35.3	7.3	-36.2	0.0	0.0	32.8	54.0	-21.2	H	A	100.9	92.9	
HIGH CHANNEL, 2480MHz															
4.960	3.0	50.1	33.2	5.9	-36.5	0.0	0.0	52.7	74.0	-21.3	V	P	100.0	182.1	
4.960	3.0	42.9	33.2	5.9	-36.5	0.0	0.0	45.5	54.0	-8.5	V	A	100.0	182.1	
7.440	3.0	40.9	35.5	7.3	-36.2	0.0	0.0	47.5	74.0	-26.5	V	P	100.1	243.4	
7.440	3.0	31.1	35.5	7.3	-36.2	0.0	0.0	37.7	54.0	-16.3	V	A	100.1	243.4	
12.400	3.0	34.8	39.0	9.9	-35.4	0.0	0.0	48.3	74.0	-25.7	V	P	107.3	50.3	
12.400	3.0	22.6	39.0	9.9	-35.4	0.0	0.0	36.1	54.0	-17.9	V	A	107.3	50.3	
4.960	3.0	43.8	33.2	5.9	-36.5	0.0	0.0	46.4	74.0	-27.6	H	P	100.6	350.0	
4.960	3.0	36.7	33.2	5.9	-36.5	0.0	0.0	39.3	54.0	-14.7	H	A	100.6	350.0	
7.440	3.0	39.0	35.5	7.3	-36.2	0.0	0.0	45.6	74.0	-28.4	H	P	100.4	99.5	
7.440	3.0	29.0	35.5	7.3	-36.2	0.0	0.0	35.6	54.0	-18.4	H	A	100.4	99.5	
Rev. 4.1.2.7															
Note: No other emissions were detected above the system noise floor.															

8.2.1. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

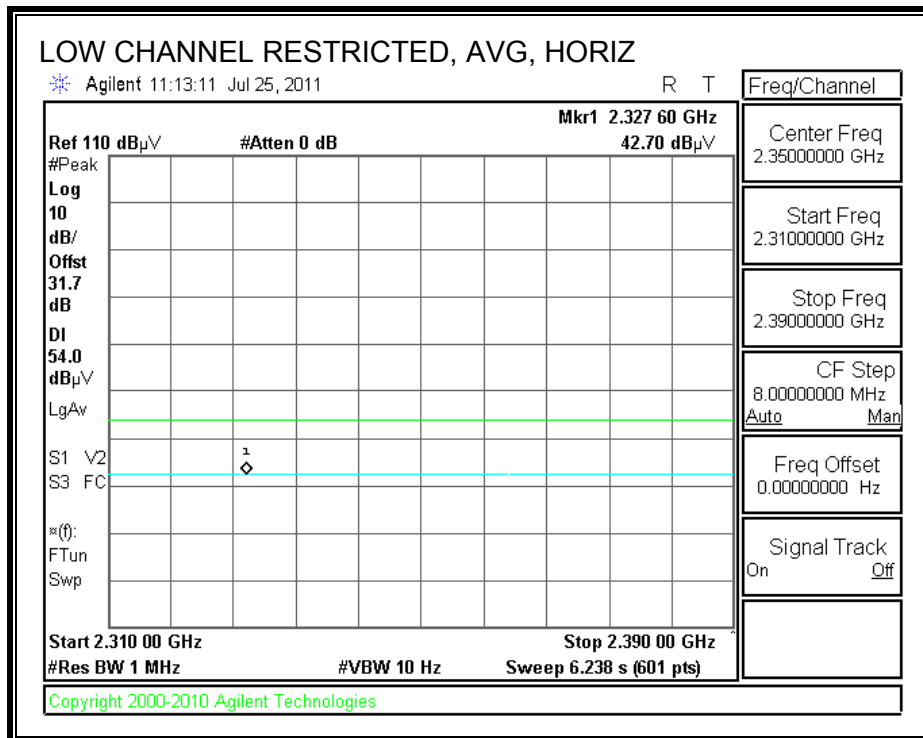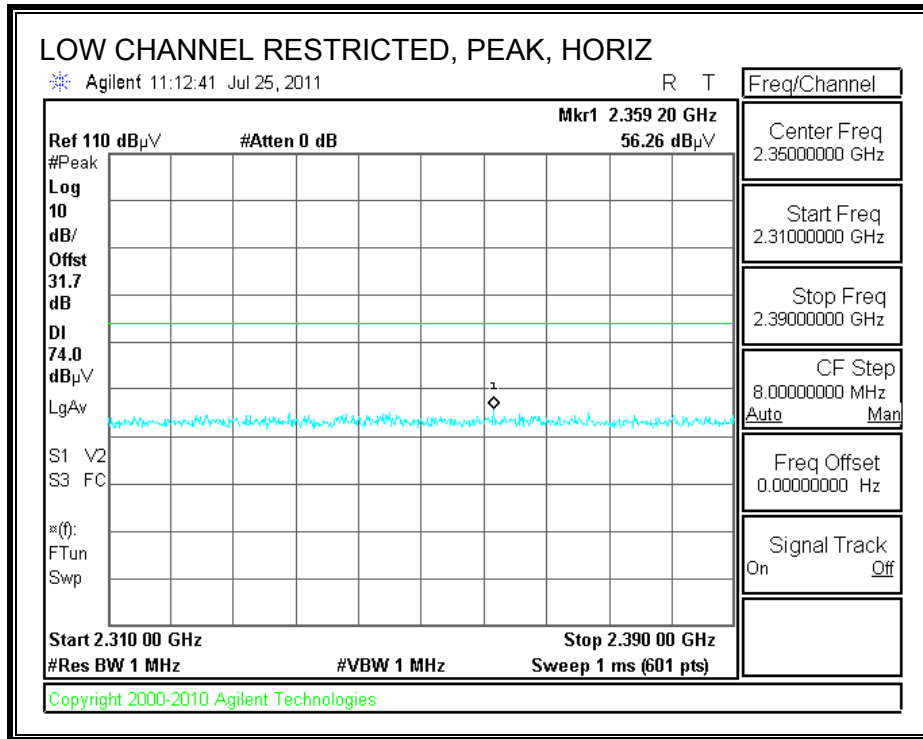



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

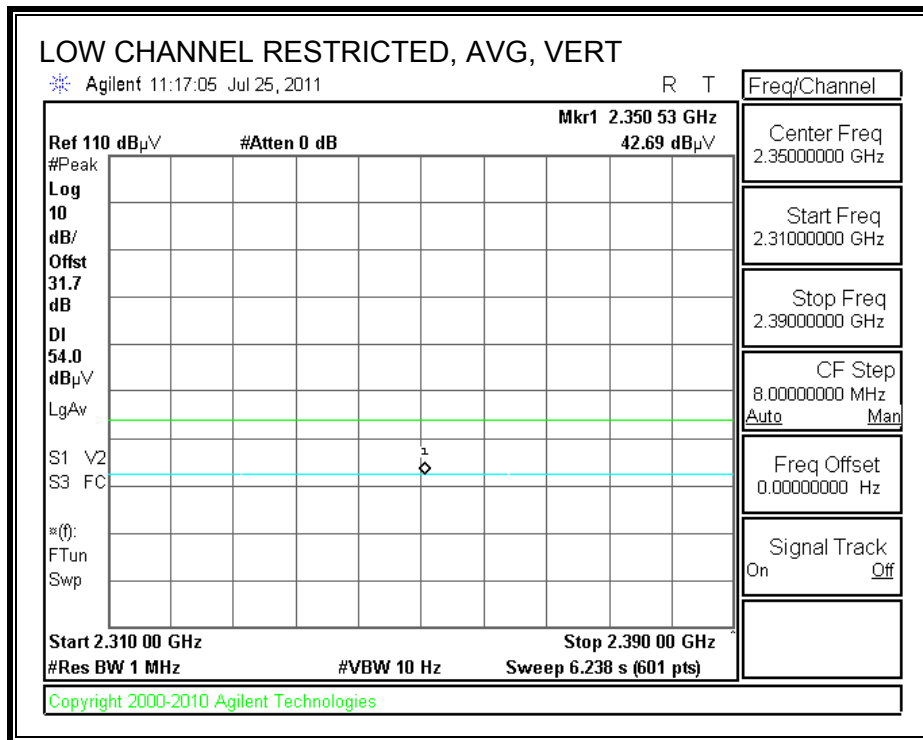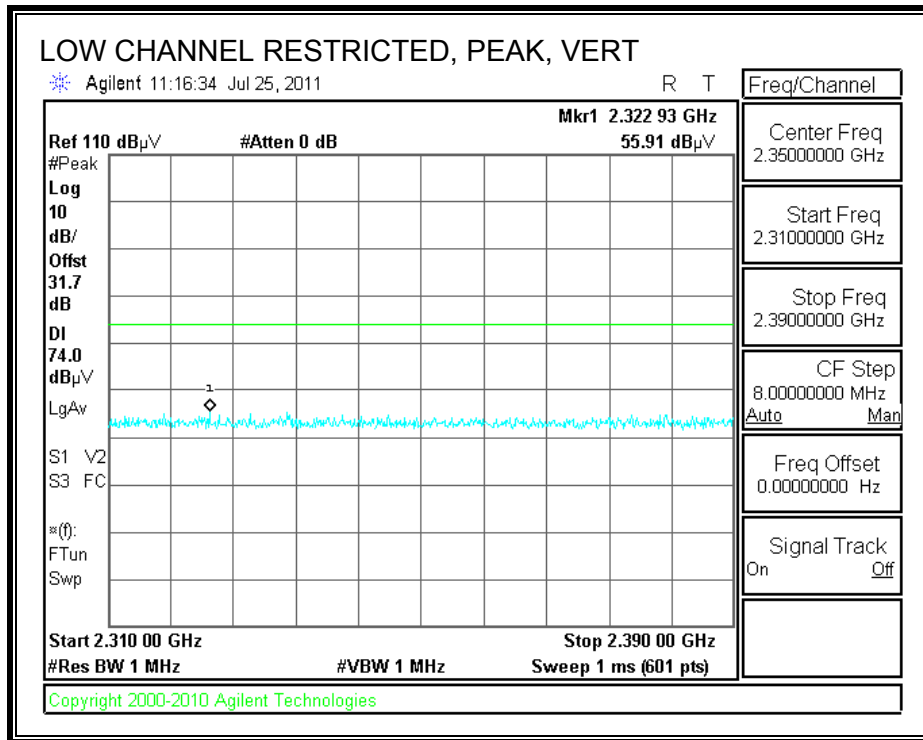

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

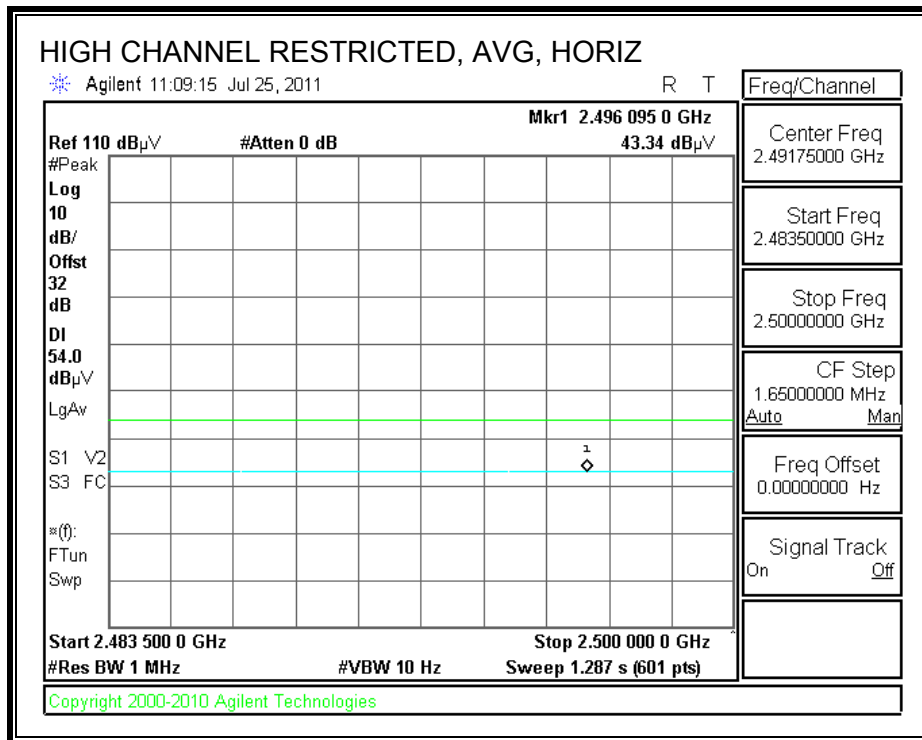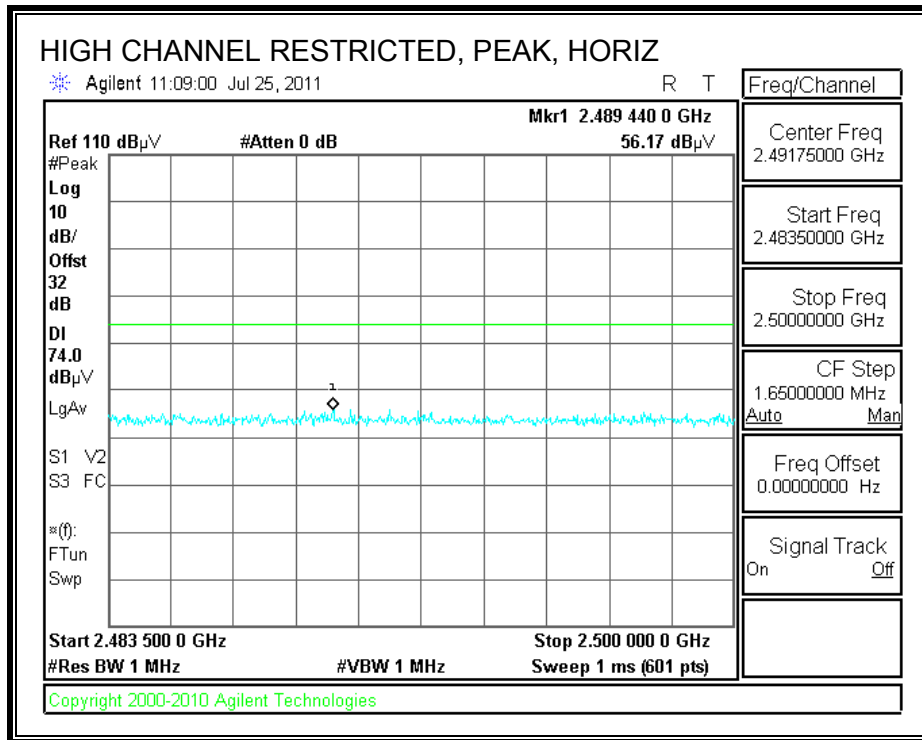

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

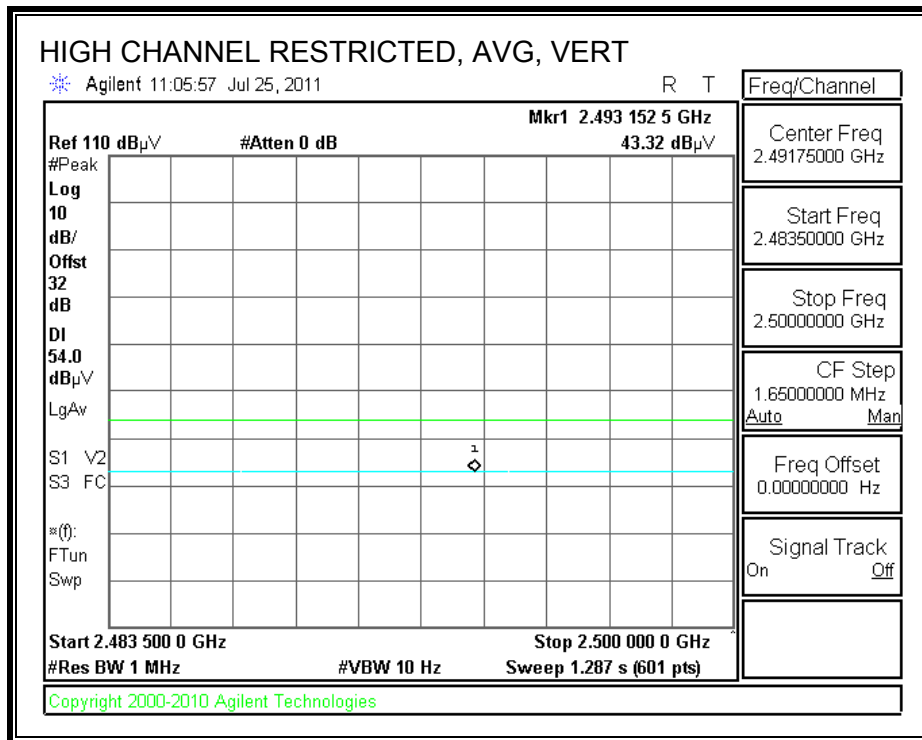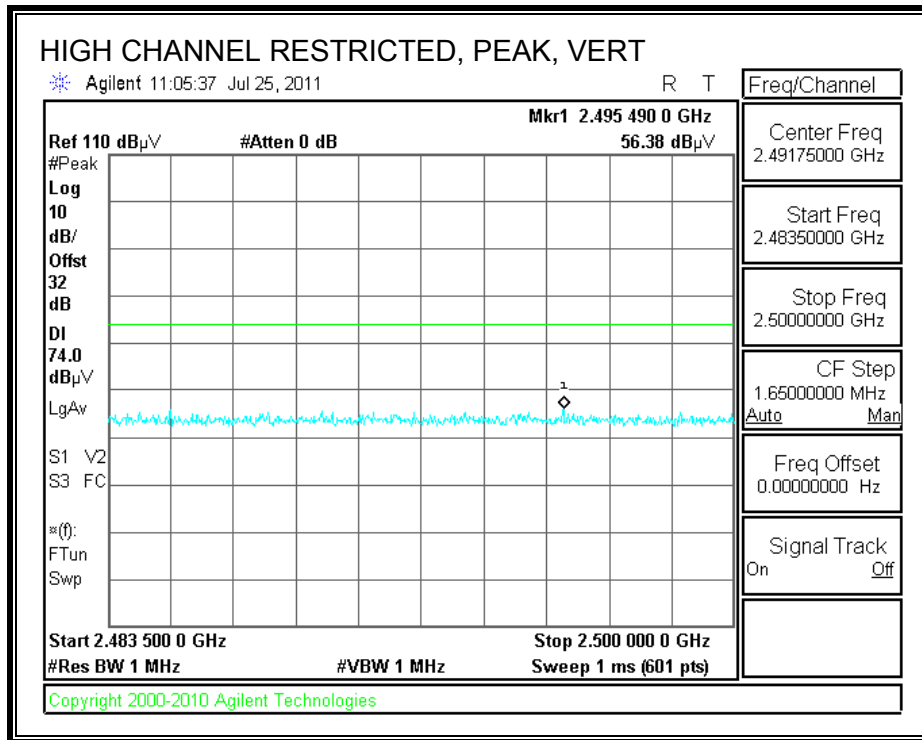


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Test Engr:		Vien Tran / William Zhuang														
Date:		07/25/11														
Project #:		11U13937														
Company:		LG Electronics														
Test Target:		FCC Class B														
Mode Oper:		Tx 8PSK Mode														
f	Measurement Frequency	Amp	Prsmp Gain	Average Field Strength Limit												
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit												
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit												
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit												
CL	Cable Loss	HPF	High Pass Filter													
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes	
LOW CHANNEL, 2402MHz																
4.804	3.0	50.8	34.6	6.2	-35.5	0.0	0.0	56.1	74.0	-17.9	V	P	103.9	183.5		
4.804	3.0	40.6	34.6	6.2	-35.5	0.0	0.0	45.9	54.0	-8.1	V	A	103.9	183.5		
4.804	3.0	42.9	34.6	6.2	-35.5	0.0	0.0	48.1	74.0	-25.9	H	P	123.2	345.8		
4.804	3.0	32.4	34.6	6.2	-35.5	0.0	0.0	37.7	54.0	-16.3	H	A	123.2	345.8		
MID CHANNEL, 2441MHz																
4.882	3.0	52.5	34.7	6.2	-35.5	0.0	0.0	57.9	74.0	-16.1	V	P	100.8	182.2		
4.882	3.0	42.2	34.7	6.2	-35.5	0.0	0.0	47.7	54.0	-6.3	V	A	100.8	182.2		
7.323	3.0	38.1	36.2	8.4	-35.4	0.0	0.0	47.2	74.0	-26.8	V	P	174.5	194.8		
7.323	3.0	26.4	36.2	8.4	-35.4	0.0	0.0	35.6	54.0	-18.4	V	A	174.5	194.8		
12.205	3.0	34.7	38.7	11.3	-35.3	0.0	0.0	49.4	74.0	-24.6	V	P	182.0	356.3		
12.205	3.0	23.0	38.7	11.3	-35.3	0.0	0.0	37.7	54.0	-16.3	V	A	182.0	356.3		
4.882	3.0	43.2	34.7	6.2	-35.5	0.0	0.0	48.7	74.0	-25.3	H	P	101.8	319.8		
4.882	3.0	33.3	34.7	6.2	-35.5	0.0	0.0	38.8	54.0	-15.2	H	A	101.8	319.8		
7.323	3.0	38.0	36.2	8.4	-35.4	0.0	0.0	47.1	74.0	-26.9	H	P	101.3	83.0		
7.323	3.0	25.5	36.2	8.4	-35.4	0.0	0.0	34.7	54.0	-19.3	H	A	101.3	83.0		
HIGH CHANNEL, 2480MHz																
4.960	3.0	41.1	34.8	6.3	-35.5	0.0	0.0	46.8	74.0	-27.3	H	P	100.6	181.3		
4.960	3.0	30.9	34.8	6.3	-35.5	0.0	0.0	36.5	54.0	-17.5	H	A	100.6	181.3		
4.960	3.0	49.5	34.8	6.3	-35.5	0.0	0.0	55.2	74.0	-18.8	V	P	101.8	184.4		
4.960	3.0	39.6	34.8	6.3	-35.5	0.0	0.0	45.2	54.0	-8.8	V	A	101.8	184.4		
7.440	3.0	38.8	36.4	8.4	-35.5	0.0	0.0	48.2	74.0	-25.8	V	P	123.9	255.0		
7.440	3.0	27.9	36.4	8.4	-35.5	0.0	0.0	37.3	54.0	-16.7	V	A	123.9	255.0		
7.440	3.0	38.3	36.4	8.4	-35.5	0.0	0.0	47.7	74.0	-26.3	H	P	102.6	295.1		
7.440	3.0	26.5	36.4	8.4	-35.5	0.0	0.0	35.9	54.0	-18.1	H	A	102.6	295.1		
12.400	3.0	34.3	38.6	11.4	-35.3	0.0	0.0	49.0	74.0	-25.0	H	P	111.3	330.3		
12.400	3.0	22.8	38.6	11.4	-35.3	0.0	0.0	37.6	54.0	-16.4	H	A	111.3	330.3		
12.400	3.0	35.0	38.6	11.4	-35.3	0.0	0.0	49.8	74.0	-24.2	V	P	140.8	299.6		
12.400	3.0	22.7	38.6	11.4	-35.3	0.0	0.0	37.5	54.0	-16.5	V	A	140.8	299.6		
Rev. 4.1.2.7																
Note: No other emissions were detected above the system noise floor.																

8.1. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

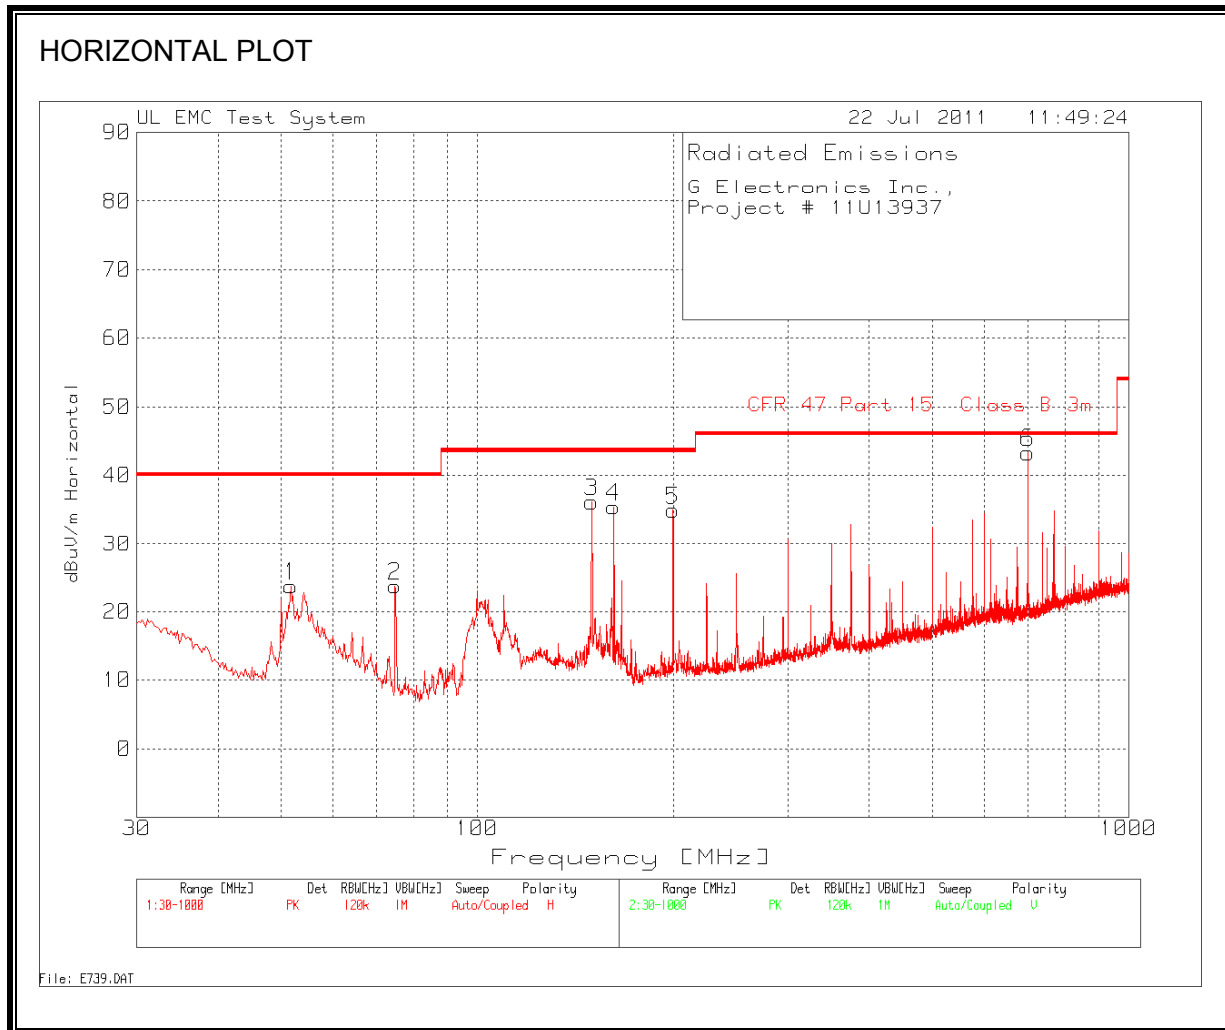

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

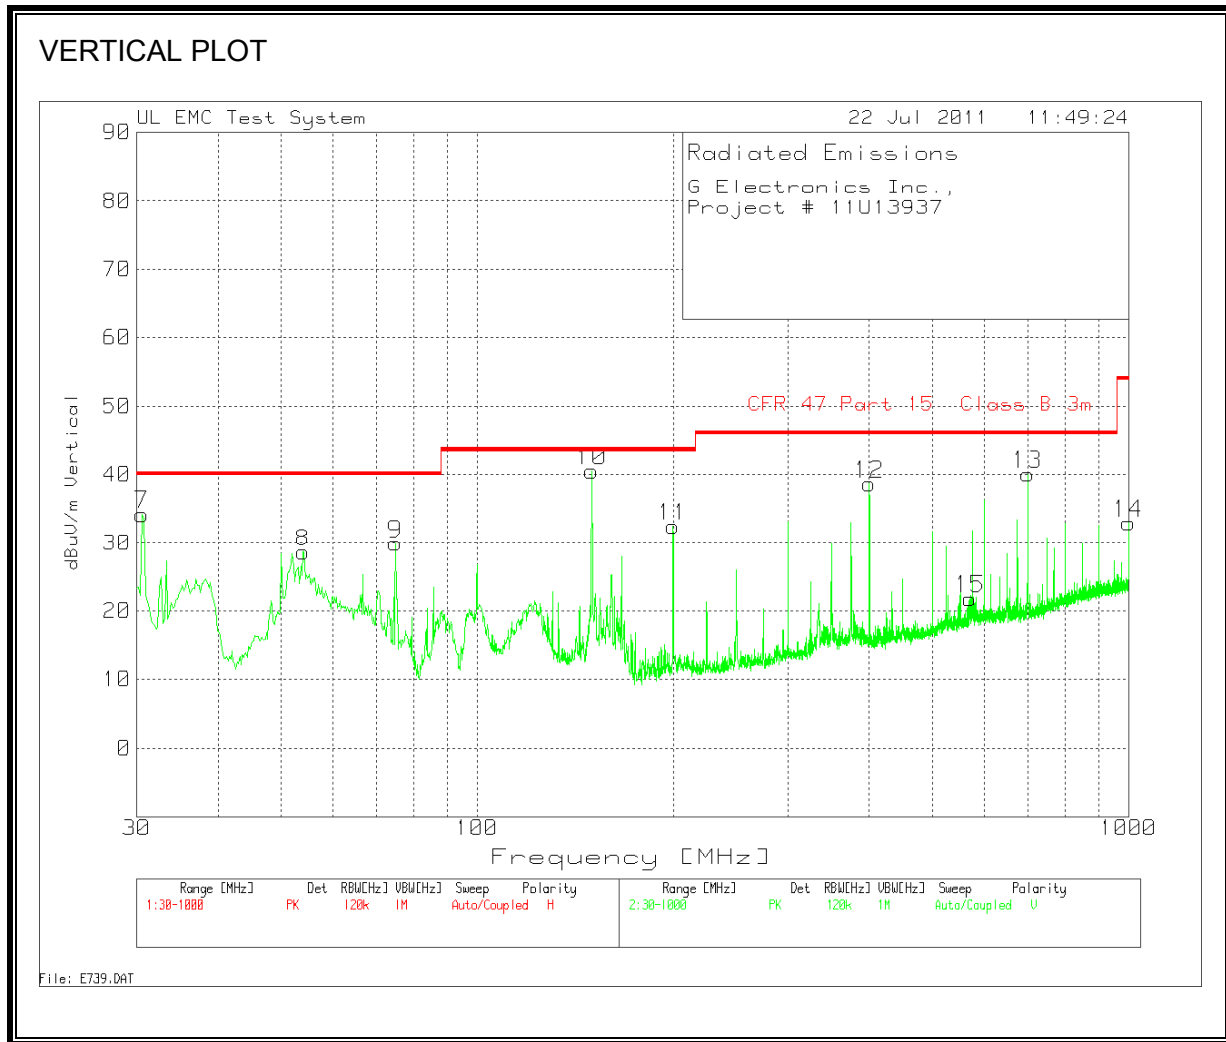

HORIZONTAL AND VERTICAL DATA

LG Electronics Inc.,	Test Engineer: Vien Tran
Project Number: 11U13937	Date: July 22, 2011
Model: E739_Bluetooth	

30 - 1000MHz - HORIZONTAL

Test Frequency	Meter Reading	Detector	3m below 1GHz Cable.TXT [dB]	3m T15 PreAmp below 1GHz.TXT [dB]	3m Bilog T185 below 1GHz.TXT [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]
51.7106	42.03	PK	0.8	-28.2	9.1	23.73	40.0	-16.27	250
74.7782	42.75	PK	1	-28.1	8.1	23.75	40.0	-16.25	250
149.99	50.16	PK	1.2	-27.9	12.7	36.16	43.5	-7.34	176
162.0084	49.12	PK	1.3	-27.8	12.8	35.42	43.5	-8.08	250
199.8082	49.32	PK	1.4	-27.7	11.9	34.92	43.5	-8.58	176
700.1219	49.95	PK	2.8	-28.3	18.9	43.35	46.0	-2.65	176

30 - 1000MHz - VERTICAL

Test Frequency	Meter Reading	Detector	3m below 1GHz Cable.TXT [dB]	3m T15 PreAmp below 1GHz.TXT [dB]	3m Bilog T185 below 1GHz.TXT [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]
30.5815	42.2	PK	0.6	-28.3	19.7	34.2	40.0	-5.8	176
54.0368	47.21	PK	0.8	-28.2	8.8	28.61	40.0	-11.39	251
74.97	48.88	PK	1.0	-28.1	8.1	29.88	40.0	-10.12	99
149.99	54.54	PK	1.2	-27.9	12.7	40.54	43.5	-2.96	99
199.8082	46.81	PK	1.4	-27.7	11.9	32.41	43.5	-11.09	99
399.8561	49.42	PK	2.1	-27.9	15.0	38.62	46.0	-7.38	176
700.1219	46.66	PK	2.8	-28.3	18.9	40.06	46.0	-5.94	251
1000	34.21	PK	3.3	-27.3	22.7	32.91	54.0	-21.09	176

PK - Peak detector
 QP - Quasi-Peak detector
 LnAv - Linear Average detector
 LgAv - Log Average detector
 Av - Average detector
 CAV - CISPR Average detector
 RMS - RMS detection
 CRMS - CISPR RMS detection
 Text File: Tx below 1GHz_EUT_Vert 1.TXT
 File: RE 30-1000 MHz 3m FCC Class B Full Scan.TST

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LG Electronics						Test Engineer: Vien Tran			
11U13937						Date: 07/22/11			
Bluetooth									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	LISN [dB]	Conducted Emission Cable [dB]	dB[uVolts]	Class B QP Limit	Margin	Class B Avg Limit	Margin
0.1995	41.40	PK	0	0	41.40	63.60	-22.20	53.60	-12.20
0.1995	22.18	Av	0	0	22.18	63.60	-41.42	53.60	-31.42
3.1515	37.01	PK	0	0	37.01	56.00	-18.99	46.00	-8.99
3.1515	27.09	Av	0	0	27.09	56.00	-28.91	46.00	-18.91
13.5105	34.01	PK	0	0	34.01	60.00	-25.99	50.00	-15.99
13.5105	20.10	Av	0	0	20.10	60.00	-39.90	50.00	-29.90
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	LISN [dB]	Conducted Emission Cable [dB]	dB[uVolts]	Class B QP Limit	Margin	Class B Avg Limit	Margin
0.177	43.01	PK	0	0	43.01	64.60	-21.59	54.60	-11.59
0.177	20.55	Av	0	0	20.55	64.60	-44.05	54.60	-34.05
3.03	35.07	PK	0	0	35.07	56.00	-20.93	46.00	-10.93
3.03	19.21	Av	0	0	19.21	56.00	-36.79	46.00	-26.79
17.6955	30.03	PK	0	0	30.03	60.00	-29.97	50.00	-19.97
17.6955	18.11	Av	0	0	18.11	60.00	-41.89	50.00	-31.89
PK - Peak detector									
QP - Quasi-Peak detector									
LnAv - Linear Average detector									
LgAv - Log Average detector									
Av - Average detector									
CAV - CISPR Average detector									
RMS - RMS detection									
CRMS - CISPR RMS detection									

LINE 1 RESULTS

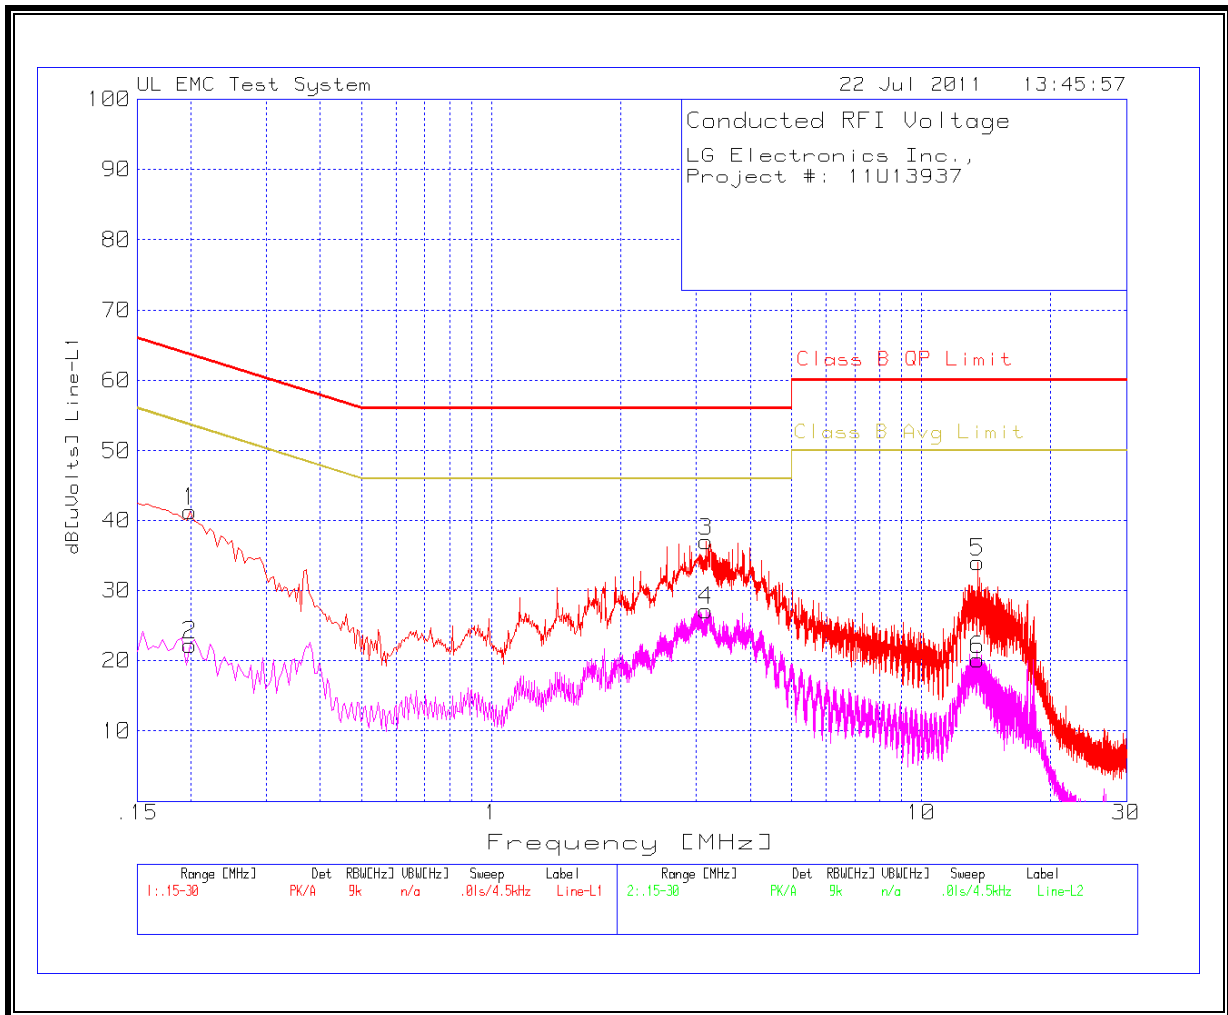

LINE 2 RESULTS

