



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22, 24 & 27

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
July 11 - 26, 2012  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1207050902.ZNF

**FCC ID :** ZNFE970  
**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A

**Application Type:** Certification  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §22; §24; §27  
**EUT Type:** Portable Handset  
**Model(s):** E970  
**Test Device Serial No.:** identical prototype [S/N: RF#1, RF#2]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Maximum Power (Watts)	Maximum Power (dBm)
LTE Band 17	706.5 - 713.5	4M51G7D	QPSK	0.199	22.99
LTE Band 17	706.5 - 713.5	4M51W7D	16QAM	0.155	21.91
LTE Band 17	709 - 711	8M96G7D	QPSK	0.170	22.31
LTE Band 17	709 - 711	8M94W7D	16QAM	0.127	21.04
LTE Band 5	826.5 - 846.5	4M51G7D	QPSK	0.095	19.76
LTE Band 5	826.5 - 846.5	4M51W7D	16QAM	0.072	18.57
LTE Band 5	829 - 844	8M96G7D	QPSK	0.100	20.01
LTE Band 5	829 - 844	8M94W7D	16QAM	0.074	18.70
LTE Band 4	1712.5 - 1752.5	4M51G7D	QPSK	0.231	23.64
LTE Band 4	1712.5 - 1752.5	4M52W7D	16QAM	0.169	22.29
LTE Band 4	1715 - 1750	8M97G7D	QPSK	0.243	23.85
LTE Band 4	1715 - 1750	8M95W7D	16QAM	0.179	22.53
LTE Band 2	1852.5 - 1907.5	4M52G7D	QPSK	0.190	22.78
LTE Band 2	1852.5 - 1907.5	4M52W7D	16QAM	0.147	21.69
LTE Band 2	1855 - 1905	8M96G7D	QPSK	0.237	23.75
LTE Band 2	1855 - 1905	8M95W7D	16QAM	0.175	22.44

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez  
President




FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 1 of 87

# T A B L E O F C O N T E N T S


	FCC PART 22, 24, 27 MEASUREMENT REPORT.....	3
1.0	INTRODUCTION .....	4
1.1	SCOPE.....	4
1.2	TESTING FACILITY .....	4
2.0	PRODUCT INFORMATION.....	5
2.1	EQUIPMENT DESCRIPTION.....	5
2.2	DEVICE CAPABILITIES .....	5
2.3	EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
2.4	LABELING REQUIREMENTS .....	5
3.0	DESCRIPTION OF TESTS.....	6
3.1	MEASUREMENT PROCEDURE .....	6
3.2	OCCUPIED BANDWIDTH.....	6
3.3	BLOCK A FREQUENCY RANGE .....	6
3.4	CELLULAR - BASE FREQUENCY BLOCKS.....	7
3.5	CELLULAR - MOBILE FREQUENCY BLOCKS.....	7
3.6	PCS - BASE FREQUENCY BLOCKS.....	7
3.7	PCS - MOBILE FREQUENCY BLOCKS.....	7
3.8	AWS - BASE FREQUENCY BLOCKS.....	8
3.9	AWS - MOBILE FREQUENCY BLOCKS.....	8
3.10	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	8
3.11	RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....	9
3.12	PEAK-AVERAGE RATIO .....	9
3.13	FREQUENCY STABILITY / TEMPERATURE VARIATION .....	9
4.0	TEST EQUIPMENT CALIBRATION DATA .....	10
5.0	SAMPLE CALCULATIONS .....	11
6.0	TEST RESULTS.....	12
6.1	SUMMARY .....	12
6.2	EFFECTIVE RADIATED POWER OUTPUT DATA .....	13
6.3	EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	14
6.4	BAND 17 RADIATED MEASUREMENTS.....	15
6.5	BAND 5 RADIATED MEASUREMENTS.....	18
6.6	BAND 4 RADIATED MEASUREMENTS.....	21
6.7	BAND 2 RADIATED MEASUREMENTS.....	24
6.8	BAND 17 FREQUENCY STABILITY MEASUREMENTS.....	27
6.9	BAND 5 FREQUENCY STABILITY MEASUREMENTS.....	29
6.10	BAND 4 FREQUENCY STABILITY MEASUREMENTS.....	31
6.11	BAND 2 FREQUENCY STABILITY MEASUREMENTS.....	33
7.0	PLOT(S) OF EMISSIONS – BAND 17 (5 MHZ) .....	35
	BAND 17 – 10 MHZ BW .....	41
	BAND 5 – 5 MHZ BW .....	47
	BAND 5 – 10 MHZ BW .....	53
	BAND 4 – 5 MHZ BW .....	59
	BAND 4 – 10 MHZ BW .....	66
	BAND 2 – 5 MHZ BW .....	73
	BAND 2 – 10 MHZ BW .....	80
8.0	CONCLUSION.....	87

<b>FCC ID:</b> ZNFE970		<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1207050902.ZNF	<b>Test Dates:</b> July 11 - 26, 2012	<b>EUT Type:</b> Portable Handset	Page 2 of 87	



# MEASUREMENT REPORT

## FCC Part 22, 24 & 27




### §2.1033 General Information



**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2; §22; §24; §27  
**BASE MODEL:** E970  
**FCC ID:** ZNFE970  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm) for Band 5, within frequency block for Bands 2, 5 and 17  
**Test Device Serial No.:** RF#1, RF#2       Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** July 11 - 26, 2012  
**TEST REPORT S/N:** 0Y1207050902.ZNF

### Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1207050902.ZNF	<b>Test Dates:</b> July 11 - 26, 2012	<b>EUT Type:</b> Portable Handset	Page 3 of 87

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See **Figure 1-1**).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003/2009 on February 15, 2012.

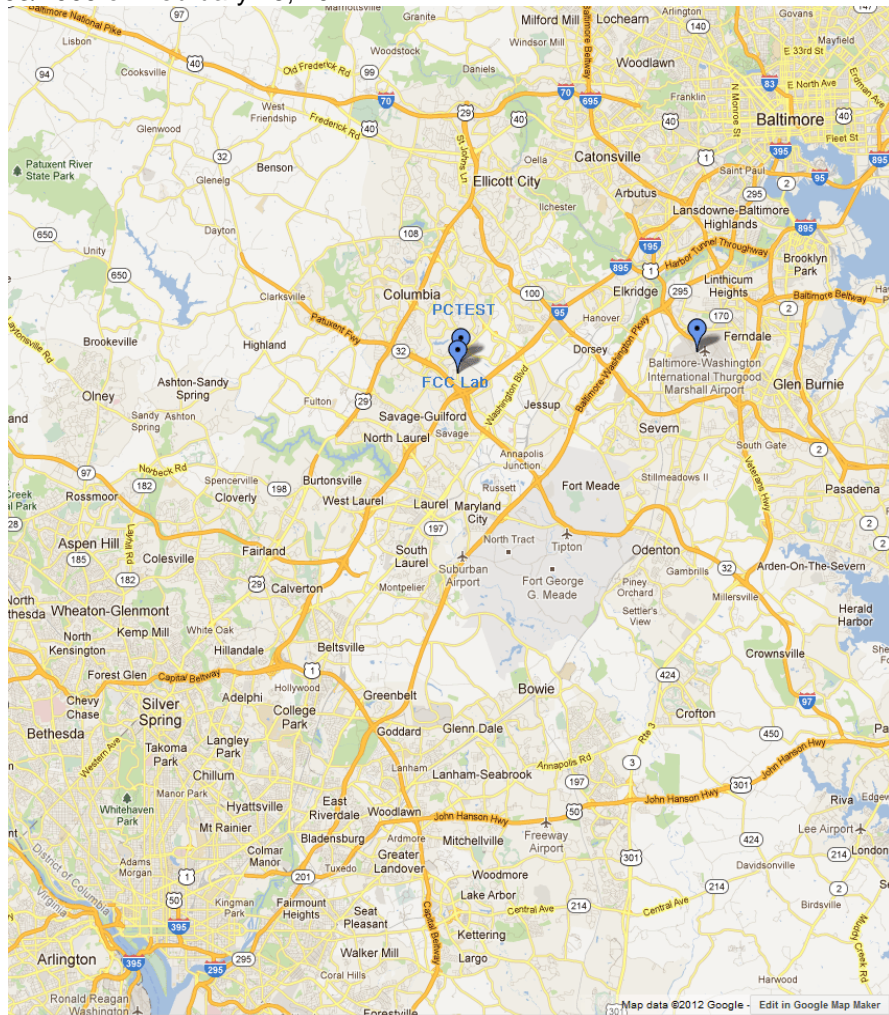

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 4 of 87

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Handset FCC ID: ZNFE970**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
LGE / Model: E970	ZNFE970	Portable Handset

Table 2-1. EUT Equipment Description

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 2, 4, 5, 17 LTE (5/10 MHz BW), 802.11a/b/g/n (DTS/NII), Bluetooth (1x, EDR, LE), NFC

### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase..



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).


Please see attachment for FCC ID label and label location.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 5 of 87	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

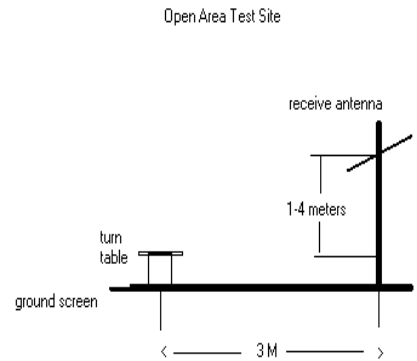

**Figure 3-1. Diagram of 3-meter outdoor test range**

**Deviation from Measurement Procedure.....None**

### 3.2 Occupied Bandwidth

**§2.1049, RSS-Gen (4.6.1)**



The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### 3.3 Block A Frequency Range


**§27.5(c)**

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

- Block A: 698-704 MHz and 728-734 MHz;
- Block B: 704-710 MHz and 734-740 MHz; and
- Block C: 710-716 MHz and 740-746 MHz.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 6 of 87	

### 3.4 Cellular - Base Frequency Blocks

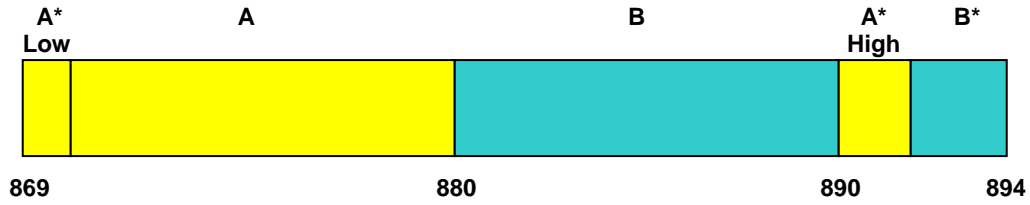


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.5 Cellular - Mobile Frequency Blocks

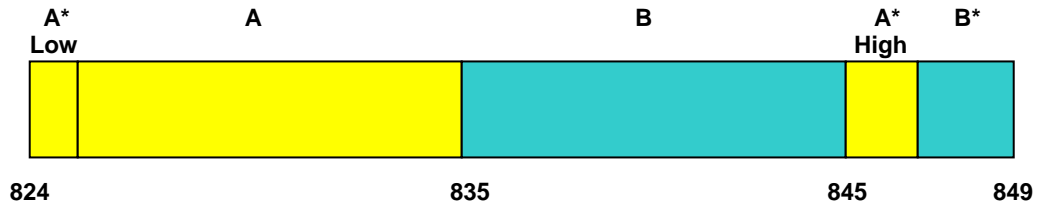


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)


### 3.6 PCS - Base Frequency Blocks

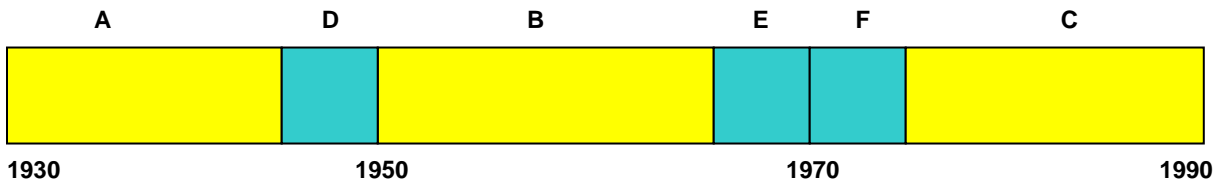

BLOCK 1: 1930 – 1945 MHz (A)  
 BLOCK 2: 1945 – 1950 MHz (D)  
 BLOCK 3: 1950 – 1965 MHz (B)



BLOCK 4: 1965 – 1970 MHz (E)  
 BLOCK 5: 1970 – 1975 MHz (F)  
 BLOCK 6: 1975 – 1990 MHz (C)
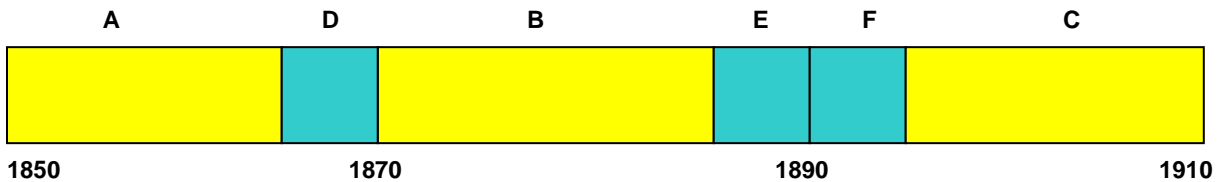
### 3.7 PCS - Mobile Frequency Blocks




BLOCK 1: 1850 – 1865 MHz (A)  
 BLOCK 2: 1865 – 1870 MHz (D)  
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)  
 BLOCK 5: 1890 – 1895 MHz (F)  
 BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 7 of 87	


### 3.8 AWS - Base Frequency Blocks

§27.5(h)

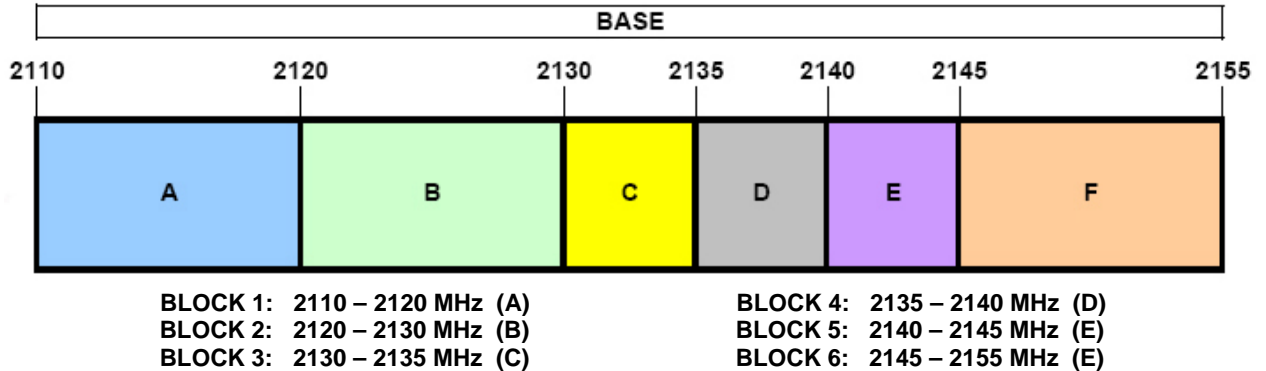

### 3.9 AWS - Mobile Frequency Blocks

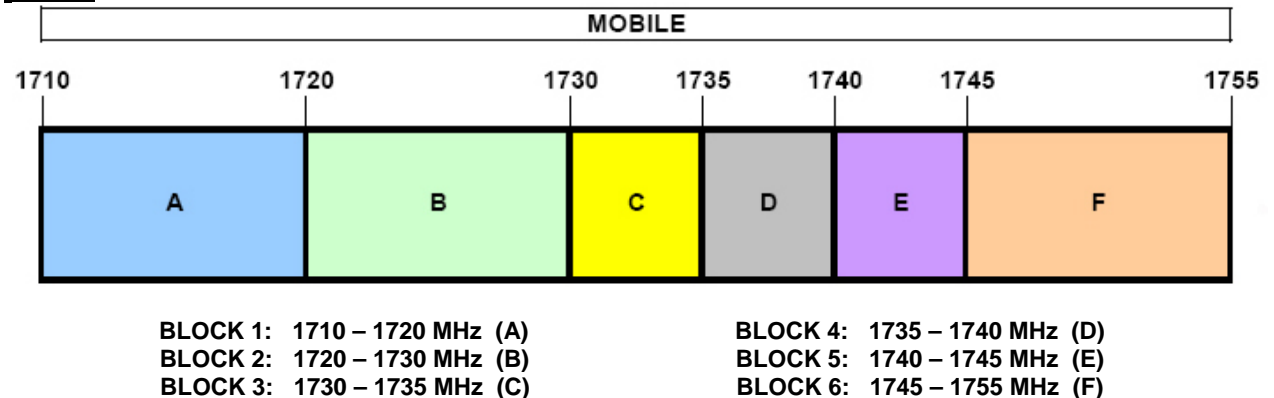

§27.5(h)



### 3.10 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a), §27.53(g), §27.53(h); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. For Bands 5 and 17, Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. For Bands 2 and 4, compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 8 of 87



### 3.11 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.917(a), 24.238(a), §27.53(g), §27.53(h); RSS-132(4.5.1.2), RSS-133 (6.5.1)

Radiated power and radiated spurious emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

### 3.12 Peak-Average Ratio

§24.232(d), §27.50(d)(5), RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### 3.13 Frequency Stability / Temperature Variation

§2.1055, §22.355, §24.235, §27.54, RSS-132 (4.3), RSS-133 (6.3)



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – For Band 5, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Bands 2, 4, and 17 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 9 of 87	



## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Annual	5/30/2013	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	100976
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	RS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 4-1. Test Equipment**

**Note: Rohde & Schwarz Model: CMW500 was used for signaling purposes only and not for calibrated measurements. Care was taken to ensure that testing occurred while test equipment was in calibration.**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 10 of 87	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation



**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average receive power meter reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFE970		<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 11 of 87	



## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFE970  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a), 27.53(g), 27.53(h)	RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d), 27.50(d)(5)	RSS-133 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	SAR Report
22.913(a)(2)	RSS-132 (4.4) [SRSP- 503(5.1.3)]	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c)(10)		Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d)(4)		Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a), 27.53(g), 27.53(h)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7
2.1055, 27.54, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Section 6.8, 6.9, 6.10, 6.11

**Table 6-1. Summary of Test Results**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 12 of 87	

## 6.2 Effective Radiated Power Output Data

§22.913(a)(2), §27.50(c)(10)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1 / 24	-18.17	19.95	2.12	V	22.07	0.161	-12.71
710.00	5	QPSK	Standard	1 / 24	-17.34	20.78	2.20	V	22.98	0.199	-11.79
713.50	5	QPSK	Standard	1 / 0	-17.98	20.14	2.29	V	22.43	0.175	-12.34
706.50	5	16-QAM	Standard	1 / 24	-19.35	18.77	2.12	V	20.89	0.123	-13.89
710.00	5	16-QAM	Standard	1 / 24	-18.42	19.70	2.20	V	21.90	0.155	-12.87
713.50	5	16-QAM	Standard	1 / 0	-19.10	19.02	2.29	V	21.31	0.135	-13.46
709.00	10	QPSK	Standard	1 / 49	-19.50	18.62	2.12	V	20.74	0.118	-14.04
710.00	10	QPSK	Standard	1 / 49	-18.02	20.10	2.20	V	22.30	0.170	-12.47
711.00	10	QPSK	Standard	1 / 49	-20.11	18.01	2.29	V	20.30	0.107	-14.47
709.00	10	16-QAM	Standard	1 / 49	-20.65	17.47	2.12	V	19.59	0.091	-15.19
710.00	10	16-QAM	Standard	1 / 49	-19.29	18.83	2.20	V	21.03	0.127	-13.74
711.00	10	16-QAM	Standard	1 / 49	-21.37	16.75	2.29	V	19.04	0.080	-15.73

**Table 6-2. Effective Radiated Power Output Data (Band 17)**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1 / 24	-17.43	15.05	4.71	H	19.76	0.095	-18.69
836.50	5	QPSK	Standard	1 / 0	-18.62	13.86	4.80	H	18.66	0.074	-19.79
846.50	5	QPSK	Standard	1 / 24	-17.98	14.50	4.90	H	19.40	0.087	-19.06
826.50	5	16-QAM	Standard	1 / 24	-18.62	13.86	4.71	H	18.57	0.072	-19.88
836.50	5	16-QAM	Standard	1 / 0	-19.80	12.68	4.80	H	17.48	0.056	-20.97
846.50	5	16-QAM	Standard	1 / 24	-19.31	13.17	4.90	H	18.07	0.064	-20.39
829.00	10	QPSK	Standard	1 / 0	-18.89	13.59	4.71	H	18.30	0.068	-20.15
836.50	10	QPSK	Standard	1 / 0	-17.28	15.20	4.80	H	20.00	0.100	-18.45
844.00	10	QPSK	Standard	1 / 0	-19.05	13.43	4.90	H	18.33	0.068	-20.13
829.00	10	16-QAM	Standard	1 / 0	-20.14	12.34	4.71	H	17.05	0.051	-21.40
836.50	10	16-QAM	Standard	1 / 0	-18.59	13.89	4.80	H	18.69	0.074	-19.76
844.00	10	16-QAM	Standard	1 / 0	-20.28	12.20	4.90	H	17.10	0.051	-21.36



**Table 6-3. Effective Radiated Power Output Data (Band 5)**

### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

The EUT was tested in three orthogonal planes and in all possible test configurations and modulations. The worst case test configuration was found in the vertical polarity for Band 17, and in the horizontal polarity for all other setups. All possible modulations, configurations, RB sizes and offsets were tested and the worst case settings are described in the table above. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 13 of 87		

### 6.3 Equivalent Isotropic Radiated Power Output Data §24.232(c); §27.50(d)(4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [HV]	ERP [dBm]	ERP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 0	-19.52	12.33	8.47	H	20.80	0.120	-9.20
1732.50	5	QPSK	Standard	1 / 0	-16.75	15.10	8.54	H	23.64	0.231	-6.36
1752.50	5	QPSK	Standard	1 / 0	-21.35	10.50	8.60	H	19.10	0.081	-10.90
1712.50	5	16-QAM	Standard	1 / 0	-20.68	11.17	8.47	H	19.64	0.092	-10.36
1732.50	5	16-QAM	Standard	1 / 0	-18.10	13.75	8.54	H	22.29	0.169	-7.71
1752.50	5	16-QAM	Standard	1 / 0	-22.64	9.21	8.60	H	17.81	0.060	-12.19
1715.00	10	QPSK	Standard	1 / 49	-19.11	12.74	8.47	H	21.21	0.132	-8.79
1732.50	10	QPSK	Standard	1 / 0	-16.54	15.31	8.54	H	23.85	0.243	-6.15
1750.00	10	QPSK	Standard	1 / 0	-21.13	10.72	8.60	H	19.32	0.085	-10.68
1715.00	10	16-QAM	Standard	1 / 49	-20.49	11.36	8.47	H	19.83	0.096	-10.17
1732.50	10	16-QAM	Standard	1 / 0	-17.86	13.99	8.54	H	22.53	0.179	-7.47
1750.00	10	16-QAM	Standard	1 / 0	-22.35	9.50	8.60	H	18.10	0.065	-11.90

**Table 6-4. Equivalent Isotropic Radiated Power Output Data (Band 4)**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [HV]	ERP [dBm]	ERP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1 / 0	-18.82	14.08	8.56	H	22.64	0.184	-10.37
1880.00	5	QPSK	Standard	1 / 0	-18.67	14.23	8.55	H	22.78	0.190	-10.23
1907.50	5	QPSK	Standard	1 / 0	-19.33	13.57	8.54	H	22.11	0.162	-10.90
1852.50	5	16-QAM	Standard	1 / 0	-20.09	12.81	8.56	H	21.37	0.137	-11.64
1880.00	5	16-QAM	Standard	1 / 0	-19.76	13.14	8.55	H	21.69	0.147	-11.32
1907.50	5	16-QAM	Standard	1 / 0	-20.58	12.32	8.54	H	20.86	0.122	-12.15
1855.00	10	QPSK	Standard	1 / 0	-17.71	15.19	8.56	H	23.75	0.237	-9.26
1880.00	10	QPSK	Standard	1 / 0	-19.13	13.77	8.55	H	22.32	0.170	-10.69
1905.00	10	QPSK	Standard	1 / 0	-18.98	13.92	8.54	H	22.46	0.176	-10.55
1855.00	10	16-QAM	Standard	1 / 0	-19.02	13.88	8.56	H	22.44	0.175	-10.57
1880.00	10	16-QAM	Standard	1 / 0	-20.27	12.63	8.55	H	21.18	0.131	-11.83
1905.00	10	16-QAM	Standard	1 / 0	-20.20	12.70	8.54	H	21.24	0.133	-11.77



**Table 6-5. Equivalent Isotropic Radiated Power Output Data (Band 2)**

**NOTES:**

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

The EUT was tested in three orthogonal planes and in all possible test configurations and modulations. The worst case test configuration was found in the vertical polarity for Band 17, and in the horizontal polarity for all other setups. All possible modulations, configurations, RB sizes and offsets were tested and the worst case settings are described in the table above. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 14 of 87		

## 6.4 Band 17 Radiated Measurements

§2.1053, §27.53(g)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 706.50 MHz  
 CHANNEL: 23755  
 MEASURED OUTPUT POWER: 22.07 dBm = 0.161 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1413.00	-55.44	3.63	-51.81	V	73.88
2119.50	-50.95	3.90	-47.06	V	69.12
2826.00	-88.80	5.01	-83.79	V	105.86
3532.50	-91.63	6.25	-85.38	V	107.45
4239.00	-90.66	7.23	-83.43	V	105.50
4945.50	-90.41	7.86	-82.54	V	104.61



Table 6-6. Radiated Spurious Data (Ch. 23755)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 15 of 87		

## Band 17 Radiated Measurements (cont'd)

§2.1053, §27.53(g)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 710.00 MHz  
 CHANNEL: 23790  
 MEASURED OUTPUT POWER: 22.98 dBm = 0.199 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-53.34	3.68	-49.66	V	72.65
2130.00	-46.53	3.92	-42.61	V	65.60
2840.00	-88.66	5.02	-83.63	V	106.62
3550.00	-91.51	6.25	-85.26	V	108.25
4260.00	-90.70	7.25	-83.45	V	106.43
4970.00	-90.41	7.90	-82.50	V	105.49



Table 6-7. Radiated Spurious Data (Ch. 23790)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 16 of 87	



**Band 17 Radiated Measurements (cont'd)**  
**§2.1053, §27.53(g)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 713.50 MHz  
 CHANNEL: 23825  
 MEASURED OUTPUT POWER: 22.43 dBm = 0.175 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.43 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1427.00	-53.94	3.73	-50.21	V	72.64
2140.50	-47.78	3.94	-43.84	V	66.27
2854.00	-88.51	5.04	-83.48	V	105.91
3567.50	-91.40	6.25	-85.15	V	107.58
4281.00	-90.70	7.25	-83.45	V	105.88
4994.50	-90.41	7.94	-82.47	V	104.90



**Table 6-8. Radiated Spurious Data (Ch. 23825)**

**NOTES:**

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 17 of 87		

## 6.5 Band 5 Radiated Measurements

§2.1053, §22.917(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 829.00 MHz  
 CHANNEL: 20450  
 MEASURED OUTPUT POWER: 18.30 dBm = 0.068 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1658.00	-42.95	2.50	-40.45	H	58.75
2487.00	-88.66	2.82	-85.84	H	104.15
3316.00	-90.74	5.52	-85.22	H	103.53
4145.00	-90.35	7.08	-83.27	H	101.57
4974.00	-90.41	7.91	-82.50	H	100.80
5803.00	-88.78	8.51	-80.27	H	98.58



Table 6-9. Radiated Spurious Data (Ch. 20450)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 18 of 87	

## Band 5 Radiated Measurements (cont'd)

§2.1053, §22.917(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 20525  
 MEASURED OUTPUT POWER: 20.00 dBm = 0.100 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  33.00 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-48.52	2.34	-46.18	H	66.18
2509.50	-88.51	2.84	-85.68	H	105.68
3346.00	-90.93	5.64	-85.29	H	105.29
4182.50	-90.48	7.14	-83.33	H	103.34
5019.00	-90.39	7.97	-82.42	H	102.43
5855.50	-88.48	8.46	-80.01	H	100.02



Table 6-10. Radiated Spurious Data (Ch. 20525)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 19 of 87	

**Band 5 Radiated Measurements (cont'd)**  
**§2.1053, §22.917(a)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 844.00 MHz  
 CHANNEL: 20600  
 MEASURED OUTPUT POWER: 18.33 dBm = 0.068 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.33 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1688.00	-47.64	2.18	-45.46	H	63.78
2532.00	-88.62	3.04	-85.58	H	103.90
3376.00	-91.11	5.76	-85.35	H	103.67
4220.00	-90.60	7.20	-83.40	H	101.72
5064.00	-90.34	8.00	-82.33	H	100.66
5908.00	-88.17	8.42	-79.75	H	98.08



**Table 6-11. Radiated Spurious Data (Ch. 20600)**

**NOTES:**

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 20 of 87		

## 6.6 Band 4 Radiated Measurements

§2.1053, §27.53(h)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1715.00 MHz  
 CHANNEL: 20000  
 MEASURED OUTPUT POWER: 21.21 dBm = 0.132 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.21 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3430.00	-44.12	8.09	-36.02	H	57.23
5145.00	-50.26	10.21	-40.05	H	61.26
6860.00	-43.13	11.31	-31.82	H	53.03
8575.00	-45.50	13.02	-32.48	H	53.69
10290.00	-43.00	13.01	-29.99	H	51.20
12005.00	-51.72	13.21	-38.51	H	59.72



Table 6-12. Radiated Spurious Data (Ch. 20000)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 21 of 87

## Band 4 Radiated Measurements (cont'd)

§2.1053, §27.53(h)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz  
 CHANNEL: 20175  
 MEASURED OUTPUT POWER: 23.85 dBm = 0.243 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.85 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-40.46	8.26	-32.20	H	56.05
5197.50	-47.12	10.26	-36.86	H	60.71
6930.00	-42.27	11.42	-30.85	H	54.70
8662.50	-47.95	13.07	-34.88	H	58.74
10395.00	-45.25	13.12	-32.14	H	55.99
12127.50	-85.55	13.25	-72.29	H	96.15



Table 6-13. Radiated Spurious Data (Ch. 20175)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 22 of 87		

**Band 4 Radiated Measurements (cont'd)**  
**§2.1053, §27.53(h)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1750.00 MHz  
 CHANNEL: 20350  
 MEASURED OUTPUT POWER: 19.32 dBm = 0.085 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3500.00	-44.99	8.40	-36.59	H	55.91
5250.00	-47.29	10.32	-36.97	H	56.29
7000.00	-40.52	11.51	-29.01	H	48.33
8750.00	-42.15	13.11	-29.04	H	48.36
10500.00	-48.06	13.20	-34.86	H	54.18
12250.00	-85.13	13.31	-71.82	H	91.14



**Table 6-14. Radiated Spurious Data (Ch. 20350)**

**NOTES:**

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 23 of 87		

## 6.7 Band 2 Radiated Measurements

§2.1053, §24.238(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1855.00 MHz  
 CHANNEL: 18650  
 MEASURED OUTPUT POWER: 23.75 dBm = 0.237 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.75 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3710.00	-36.49	8.40	-28.09	H	51.84
5565.00	-49.99	10.63	-39.36	H	63.11
7420.00	-47.27	11.84	-35.43	H	59.18
9275.00	-51.14	13.29	-37.86	H	61.60
11130.00	-36.53	13.50	-23.03	H	46.77
12985.00	-84.45	13.68	-70.78	H	94.52



Table 6-15. Radiated Spurious Data (Ch. 18650)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 24 of 87		



**Band 2 Radiated Measurements (cont'd)**  
**§2.1053, §24.238(a)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 18900  
 MEASURED OUTPUT POWER: 22.32 dBm = 0.170 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-33.99	8.42	-25.57	H	47.89
5640.00	-50.84	10.66	-40.19	H	62.50
7520.00	-46.75	11.92	-34.82	H	57.14
9400.00	-50.56	13.24	-37.32	H	59.63
11280.00	-48.29	13.49	-34.80	H	57.12
13160.00	-84.25	13.83	-70.42	H	92.74



**Table 6-16. Radiated Spurious Data (Ch. 18900)**

**NOTES:**

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 25 of 87		

## Band 2 Radiated Measurements (cont'd)

§2.1053, §24.238(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1905.00 MHz  
 CHANNEL: 19150  
 MEASURED OUTPUT POWER: 22.46 dBm = 0.176 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.46 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3810.00	-34.96	8.55	-26.41	H	48.87
5715.00	-53.16	10.69	-42.47	H	64.93
7620.00	-40.64	12.05	-28.60	H	51.05
9525.00	-49.77	13.20	-36.57	H	59.03
11430.00	-46.55	13.43	-33.12	H	55.58
13335.00	-84.07	14.00	-70.07	H	92.53



**Table 6-17. Radiated Spurious Data (Ch. 19150)**

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the horizontal setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 26 of 87		

## 6.8 Band 17 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)



OPERATING FREQUENCY: 710,000,000 Hz  
 CHANNEL: 23090  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,977	-23	-0.000003
100 %		- 30	707,500,022	22	0.000003
100 %		- 20	707,500,021	21	0.000003
100 %		- 10	707,499,981	-19	-0.000003
100 %		0	707,500,018	18	0.000003
100 %		+ 10	707,499,979	-21	-0.000003
100 %		+ 20	707,500,022	22	0.000003
100 %		+ 30	707,500,021	21	0.000003
100 %		+ 40	707,500,020	20	0.000003
100 %		+ 50	707,499,982	-18	-0.000003
115 %	4.37	+ 20	707,499,981	-19	-0.000003
85 %	3.23	+ 20	707,500,020	20	0.000003


**Table 6-18. Frequency Stability Data (Band 17)**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 27 of 87	

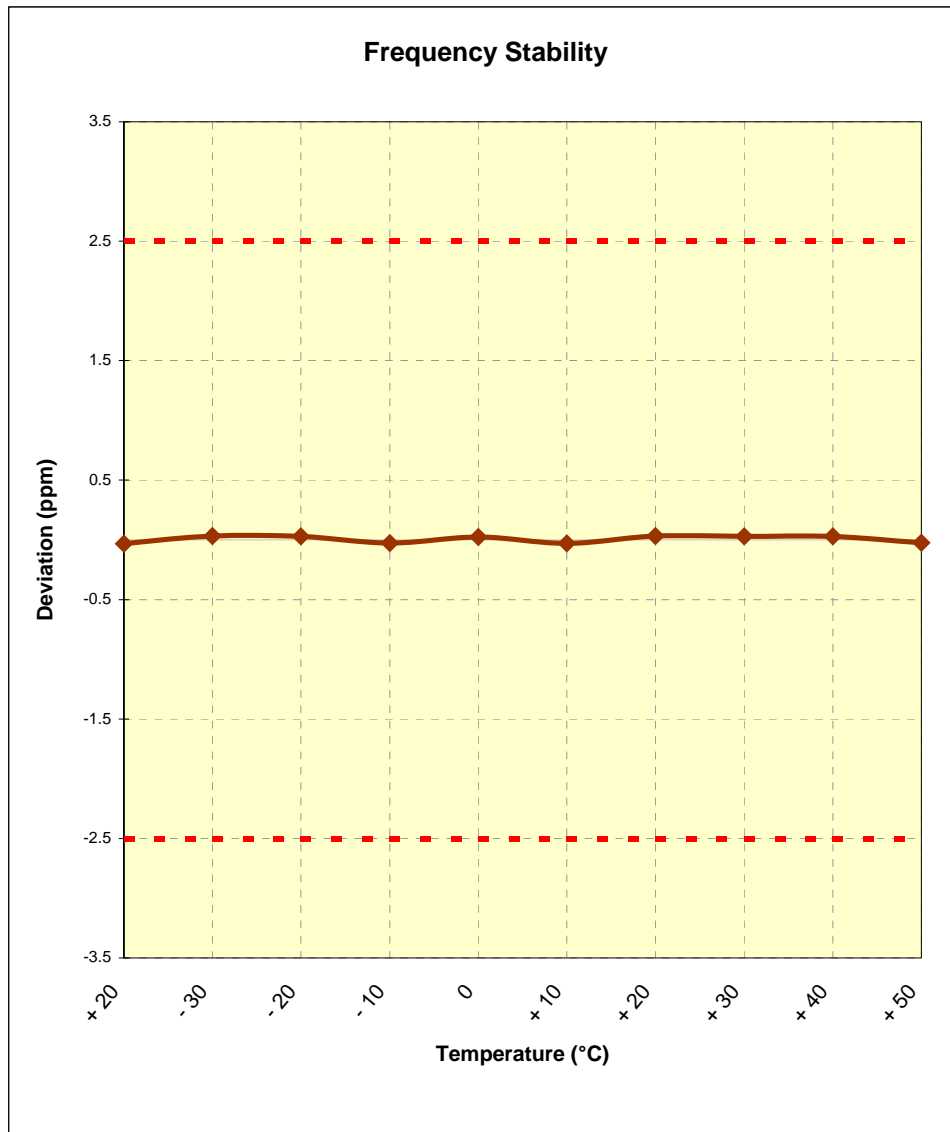

**Band 17 Frequency Stability Measurements (Cont'd)**  
§2.1055, §27.54, RSS-133 (6.3)



**Figure 6-1. Frequency Stability Graph (Band 17)**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 28 of 87

## 6.9 Band 5 Frequency Stability Measurements



\$2.1055, \$22.355

OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 20525  
 REFERENCE VOLTAGE: 3.8 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,980	-20	-0.000003
100 %		- 30	707,500,022	22	0.000003
100 %		- 20	707,499,977	-23	-0.000003
100 %		- 10	707,499,978	-22	-0.000003
100 %		0	707,500,021	21	0.000003
100 %		+ 10	707,500,018	18	0.000003
100 %		+ 20	707,499,981	-19	-0.000003
100 %		+ 30	707,500,021	21	0.000003
100 %		+ 40	707,500,020	20	0.000003
100 %		+ 50	707,499,982	-18	-0.000003
115 %		4.37	+ 20	707,500,022	22
85 %	3.23	+ 20	707,500,021	21	0.000003

**Table 6-19. Frequency Stability Data (Band 5)**

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004



FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 29 of 87	

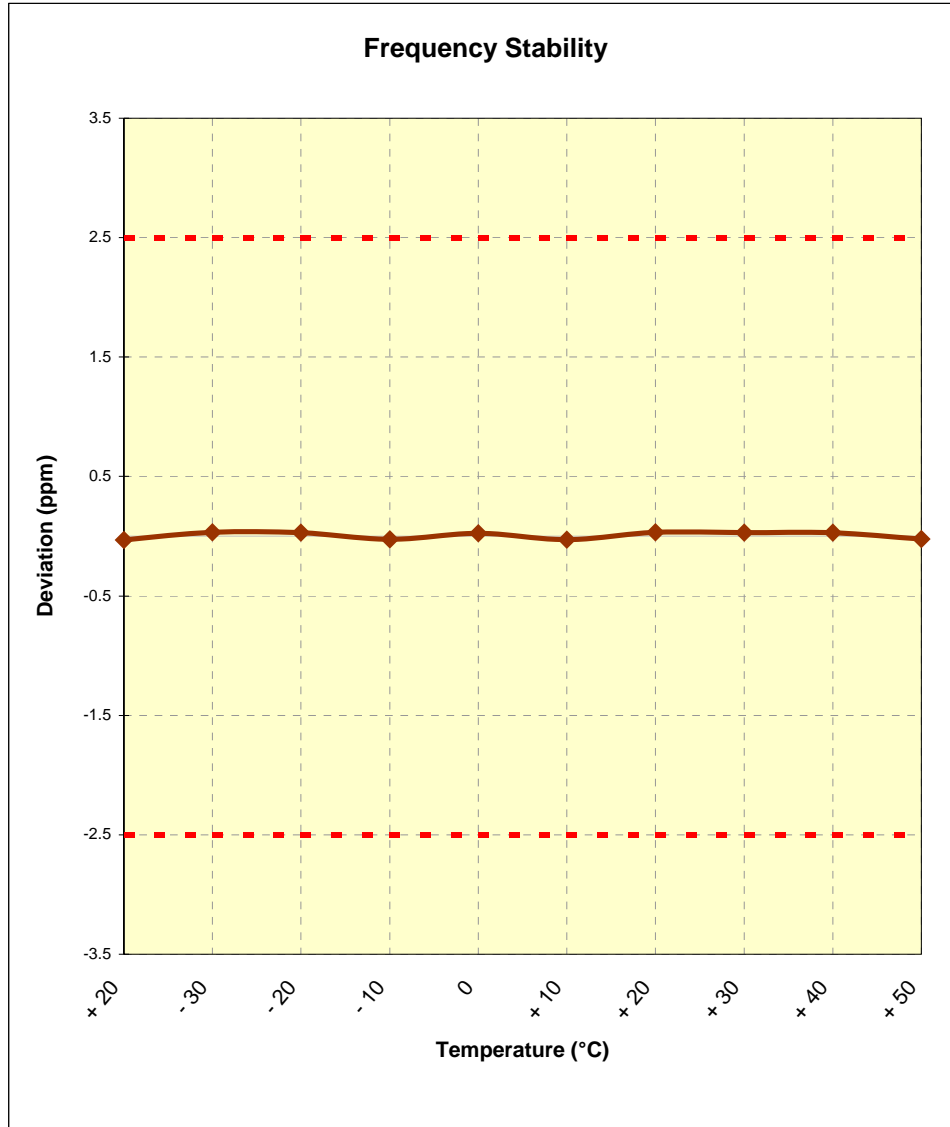**Band 5 Frequency Stability Measurements (Cont'd)**  
**§2.1055, §22.355**



**Figure 6-2. Frequency Stability Graph (Band 5)**

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 30 of 87

### 6.10 Band 4 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)



OPERATING FREQUENCY: 1,732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,978	-22	-0.000003
100 %		- 30	707,500,023	23	0.000003
100 %		- 20	707,500,021	21	0.000003
100 %		- 10	707,500,019	19	0.000003
100 %		0	707,500,021	21	0.000003
100 %		+ 10	707,499,978	-22	-0.000003
100 %		+ 20	707,500,023	23	0.000003
100 %		+ 30	707,500,022	22	0.000003
100 %		+ 40	707,499,981	-19	-0.000003
100 %		+ 50	707,499,982	-18	-0.000003
115 %	4.37	+ 20	707,500,021	21	0.000003
85 %	3.23	+ 20	707,500,020	20	0.000003


**Table 6-20. Frequency Stability Data (Band 4)**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004



FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 31 of 87

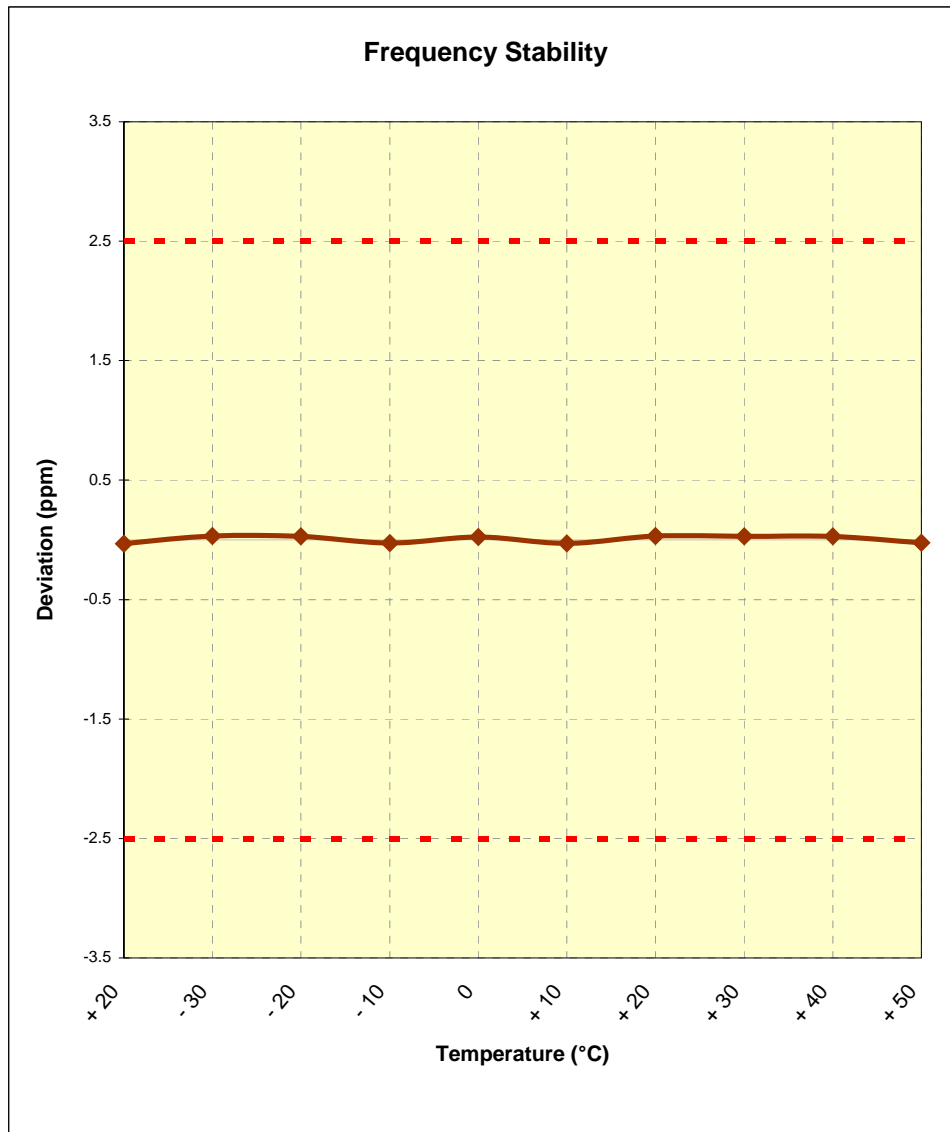**Band 4 Frequency Stability Measurements (Cont'd)**  
§2.1055, §27.54; RSS-133 (6.3)



The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		 <b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1207050902.ZNF	<b>Test Dates:</b> July 11 - 26, 2012	<b>EUT Type:</b> Portable Handset	Page 32 of 87



### 6.11 Band 2 Frequency Stability Measurements

§2.1055, §24.235



OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 18900  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,978	-22	-0.000003
100 %		- 30	707,500,023	23	0.000003
100 %		- 20	707,500,021	21	0.000003
100 %		- 10	707,500,019	19	0.000003
100 %		0	707,500,022	22	0.000003
100 %		+ 10	707,499,979	-21	-0.000003
100 %		+ 20	707,500,019	19	0.000003
100 %		+ 30	707,500,022	22	0.000003
100 %		+ 40	707,499,977	-23	-0.000003
100 %		+ 50	707,500,020	20	0.000003
115 %	4.37	+ 20	707,499,981	-19	-0.000003
85 %	3.23	+ 20	707,500,018	18	0.000003


**Table 6-21. Frequency Stability Data (Band 2)**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 33 of 87

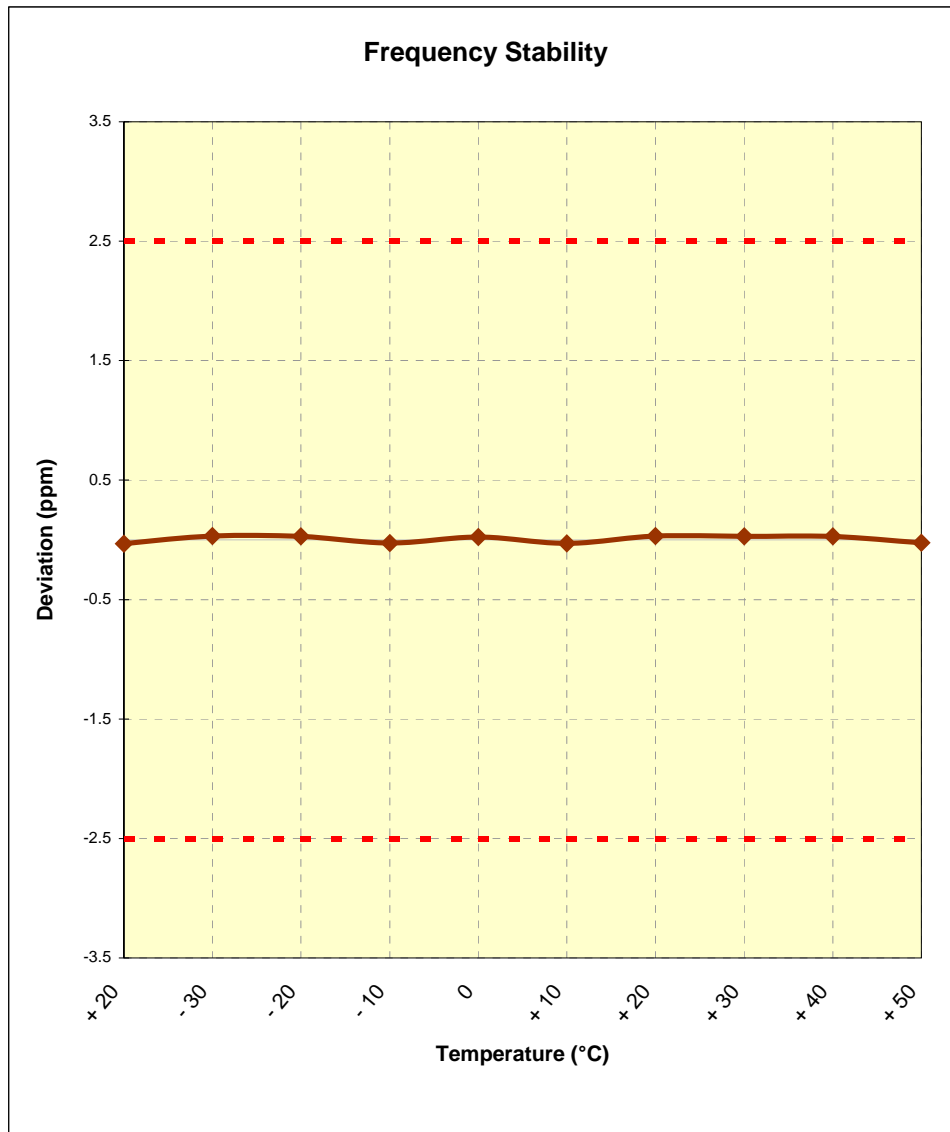

**Band 2 Frequency Stability Measurements (Cont'd)**  
§2.1055, §24.235



**Figure 6-3. Frequency Stability Graph (Band 2)**

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004


FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 34 of 87

## 7.0 PLOT(S) OF EMISSIONS – BAND 17 (5 MHz)

Note: For all out-of-band spurious emissions, the RB sizes and offsets that produced the worst case emissions are indicated in the plot captions.




**Plot 7-1. Lower Band Edge Plot (QPSK – RB Size 25)**

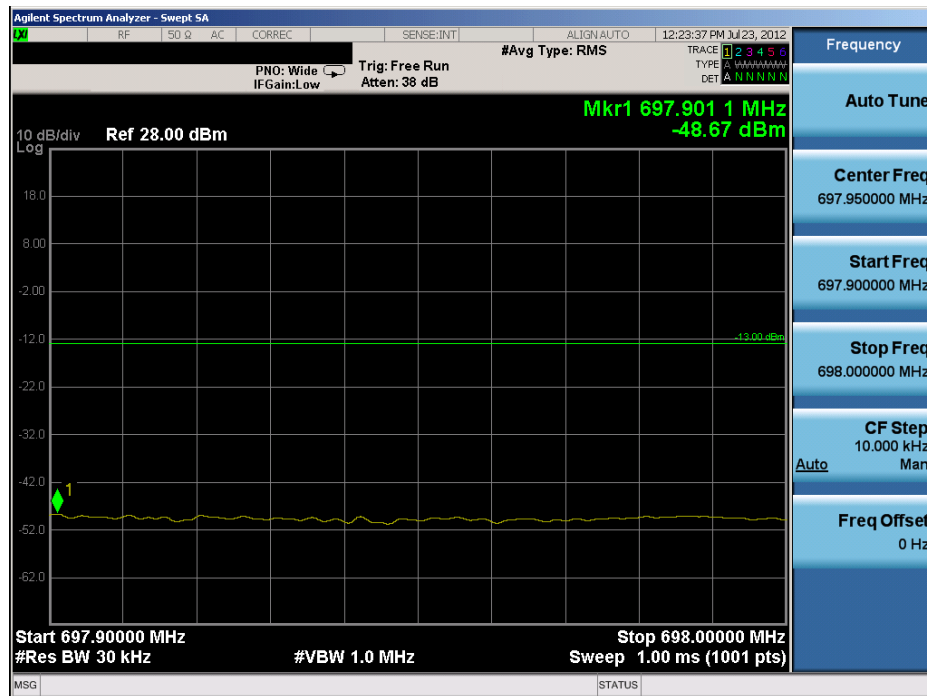


**Plot 7-2. Lower Band Edge Plot Plot (QPSK – RB Size 25)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 35 of 87	

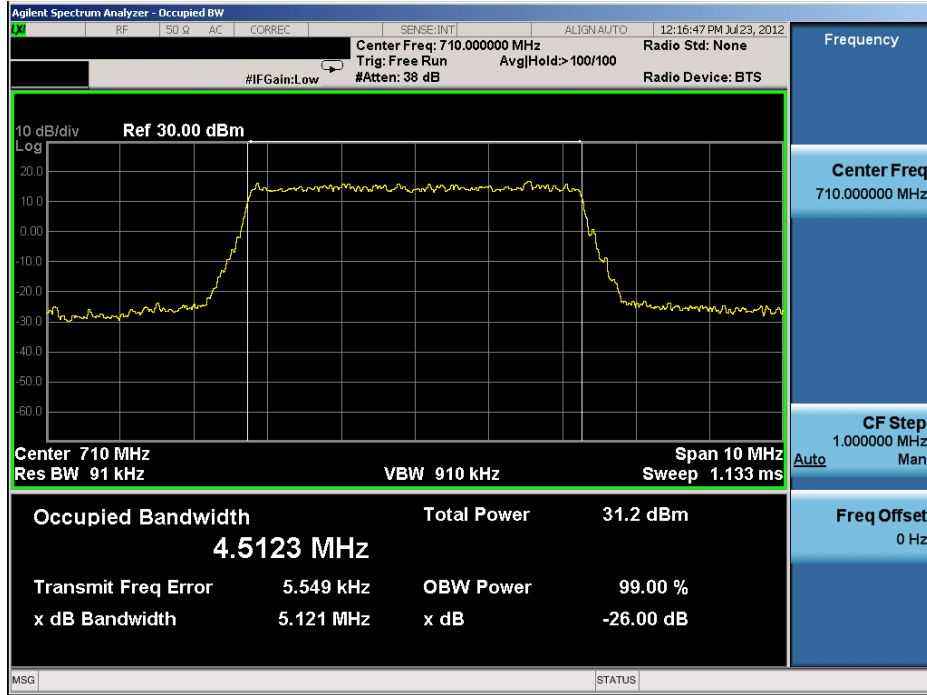


Plot 7-3. Occupied Bandwidth Plot (QPSK – RB Size 25)

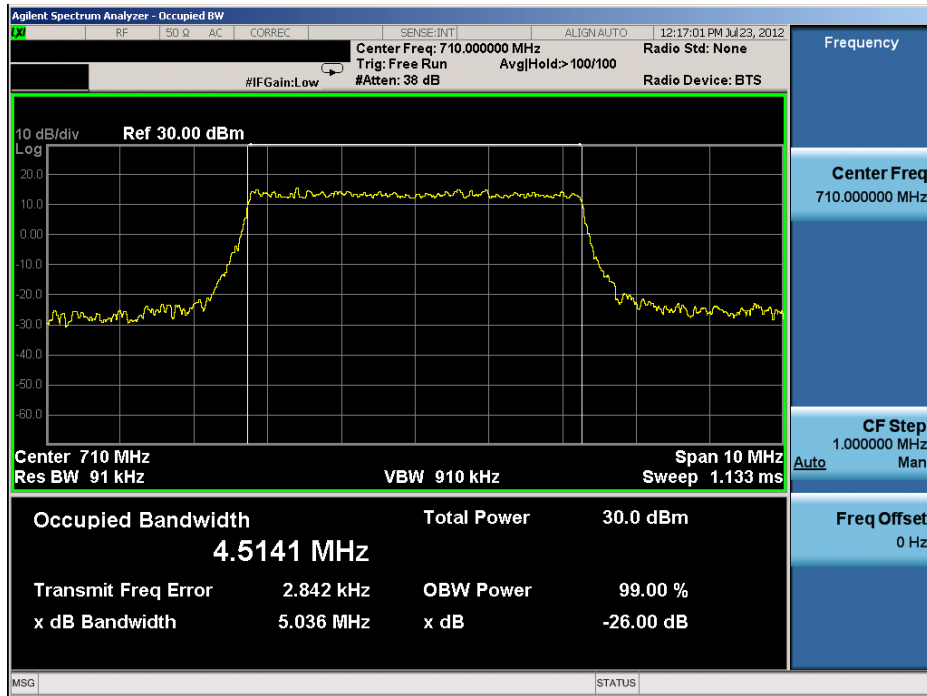


Plot 7-4. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 36 of 87

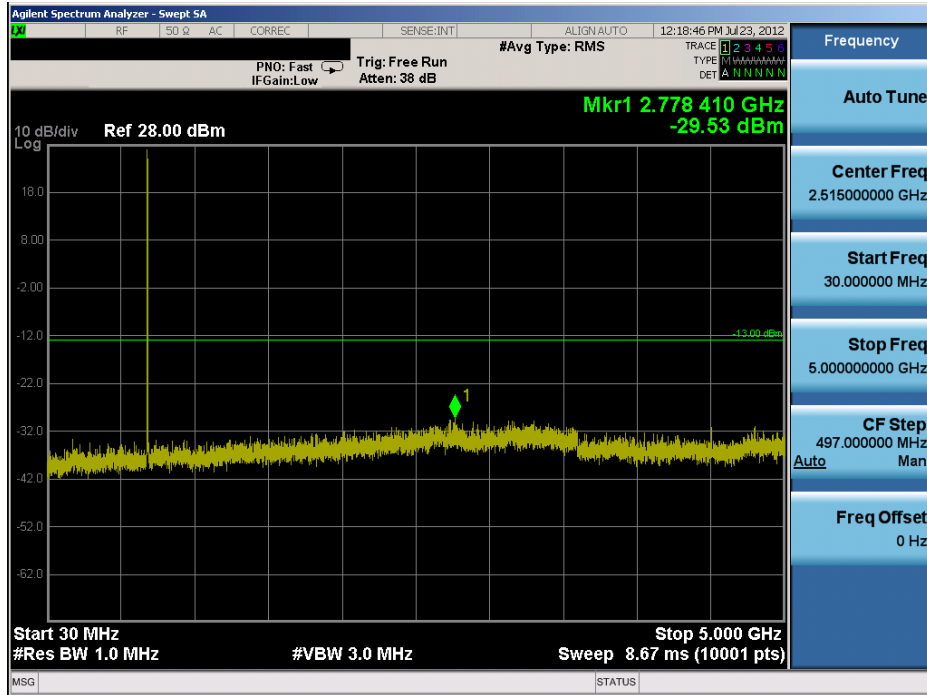


Plot 7-5. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

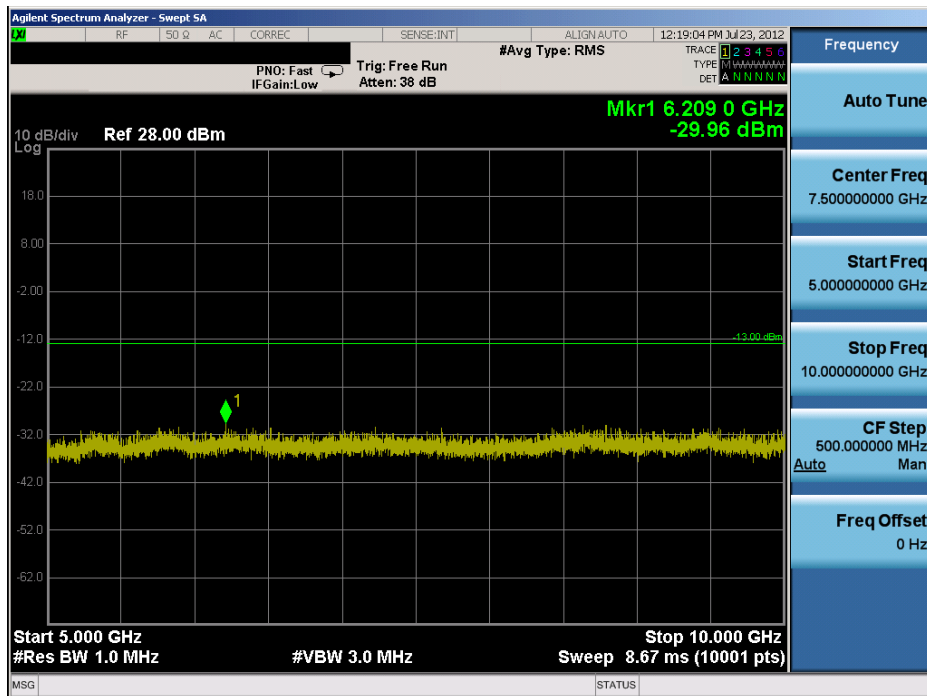


Plot 7-6. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 37 of 87

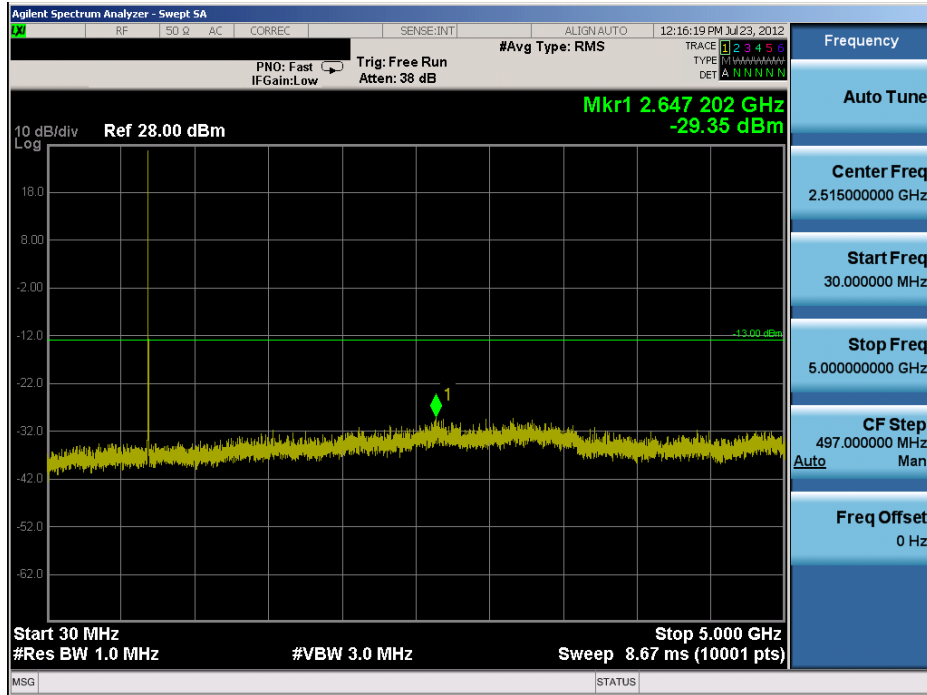


Plot 7-7. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

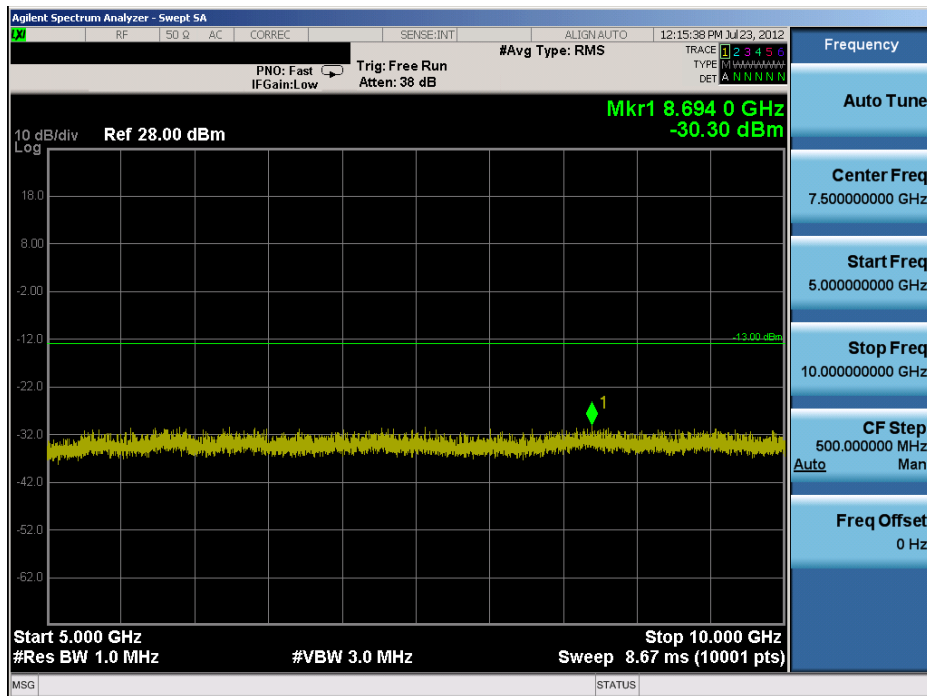


Plot 7-8. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 38 of 87

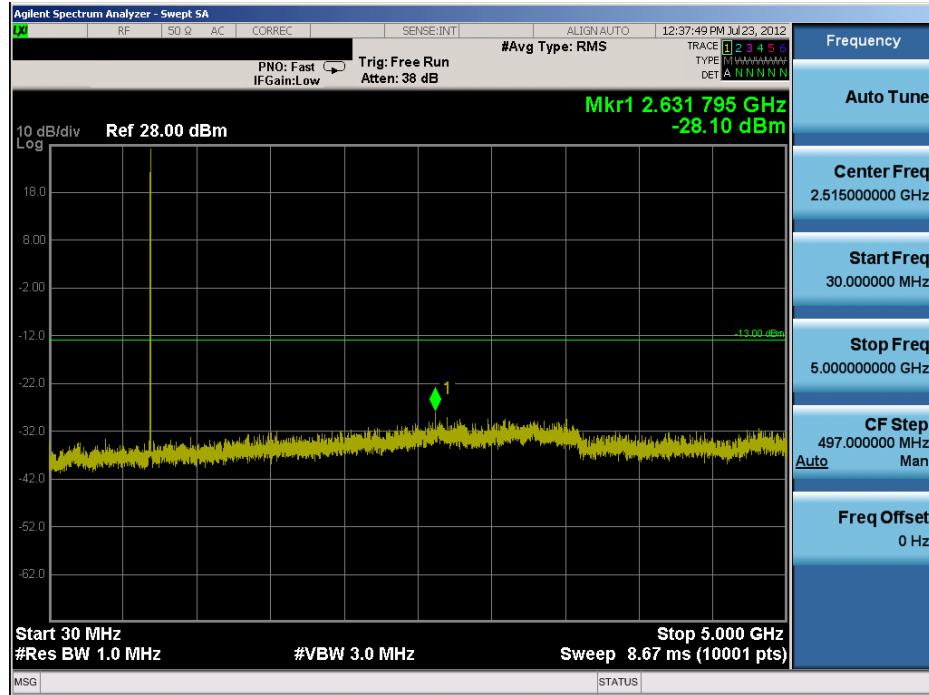


Plot 7-9. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

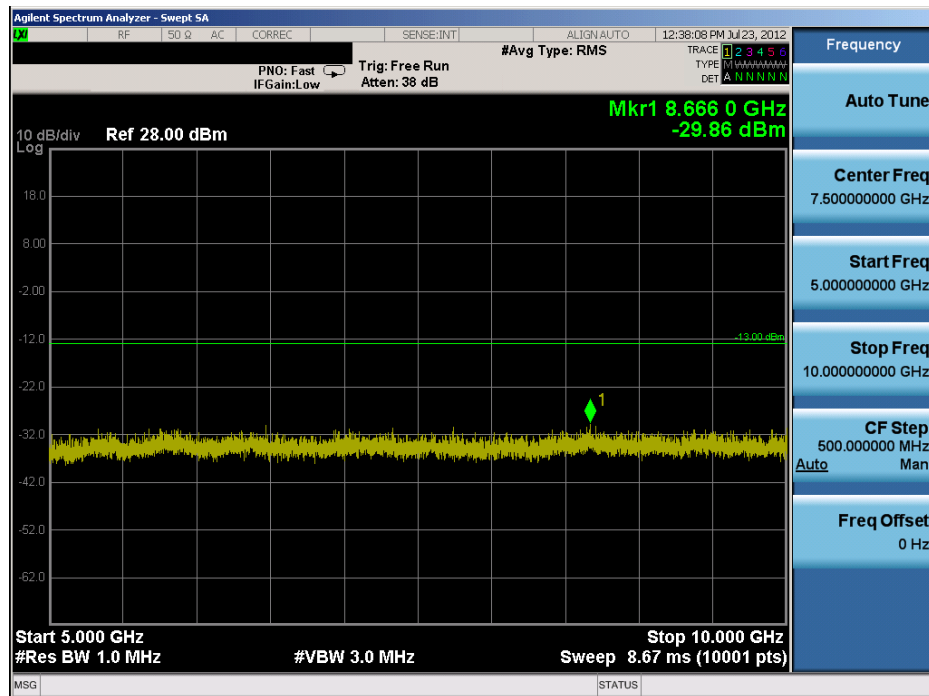


Plot 7-10. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset			Page 39 of 87

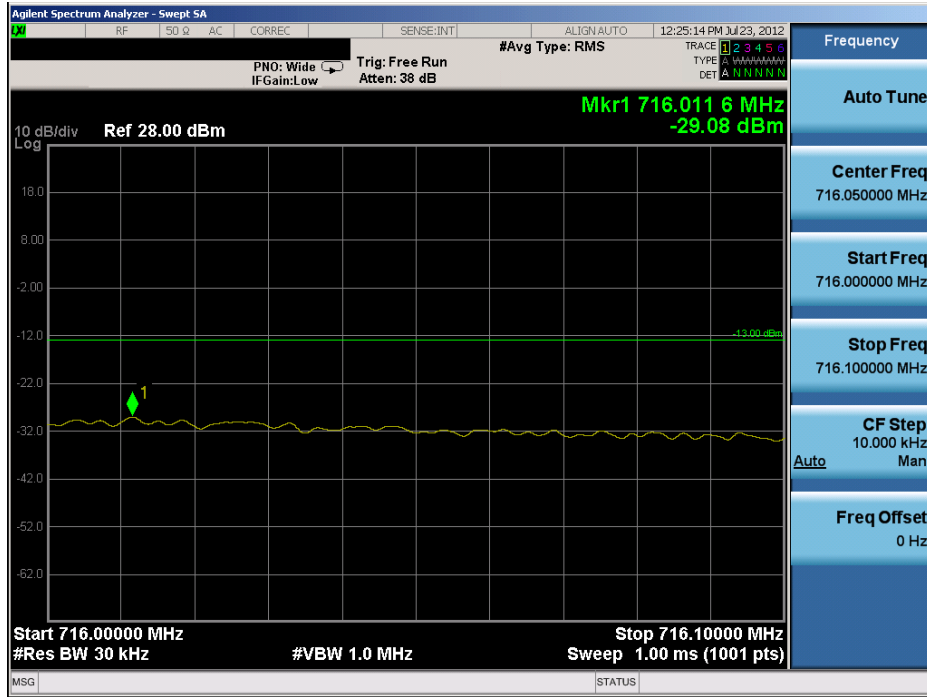

Plot 7-11. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

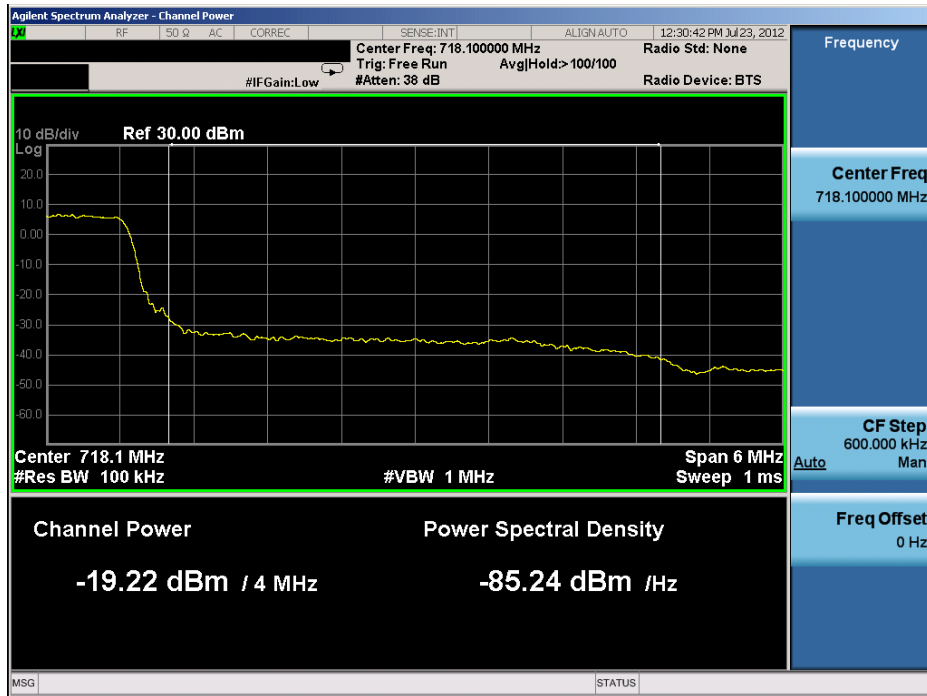

Plot 7-12. Upper Band Edge Plot (QPSK – RB Size 25)


FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 40 of 87



## BAND 17 – 10 MHz BW




**Plot 7-13. Lower Band Edge Plot (QPSK – RB Size 50)**

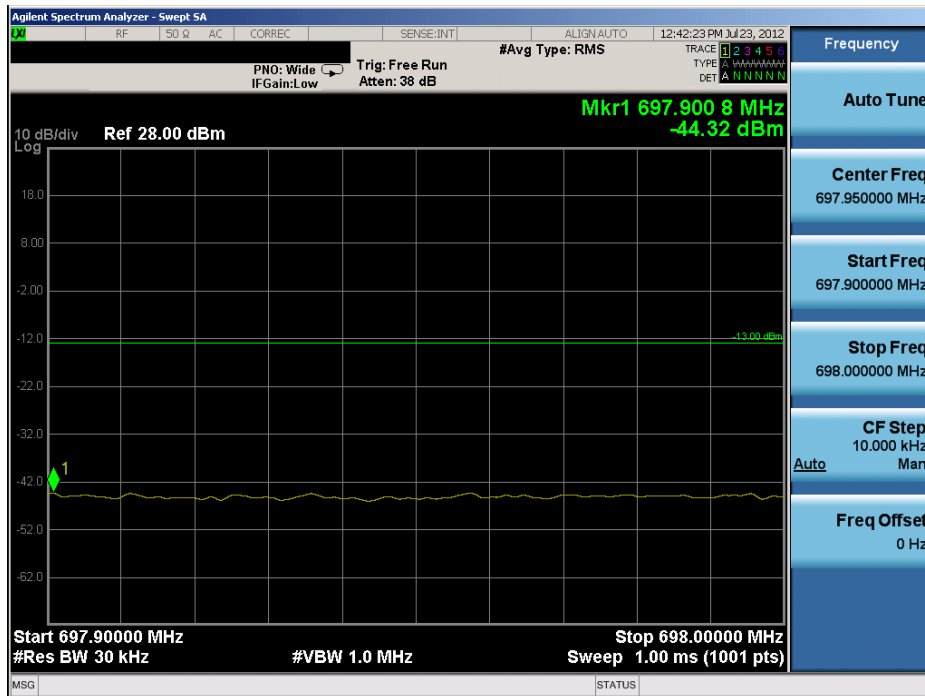


**Plot 7-14. Lower Band Edge Plot (QPSK – RB Size 50)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 41 of 87

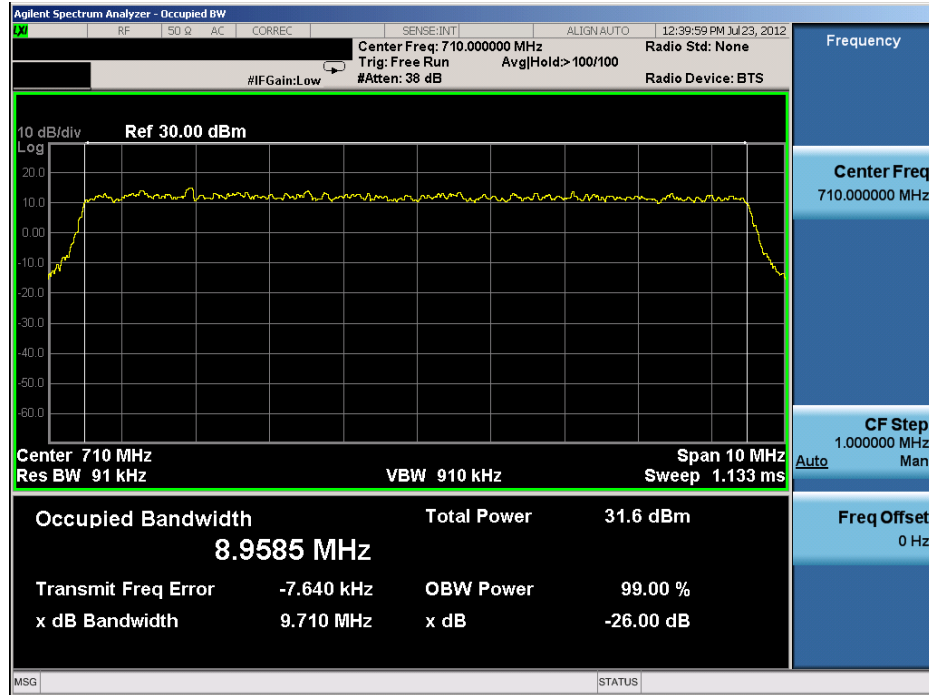


Plot 7-15. Occupied Bandwidth Plot (QPSK – RB Size 50)

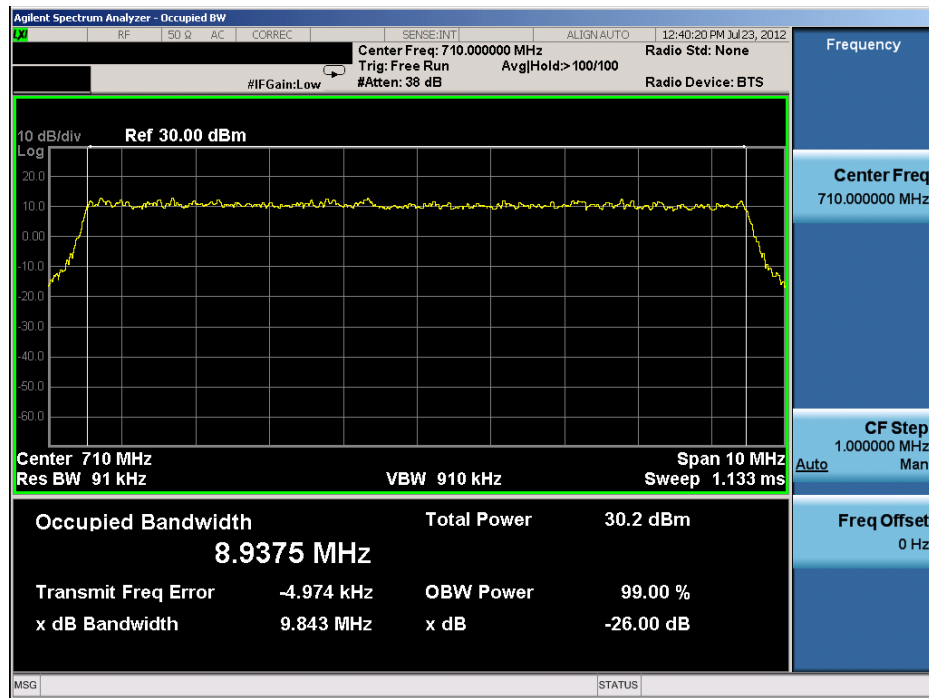


Plot 7-16. Occupied Bandwidth Plot (16-QAM – RB Size 50)

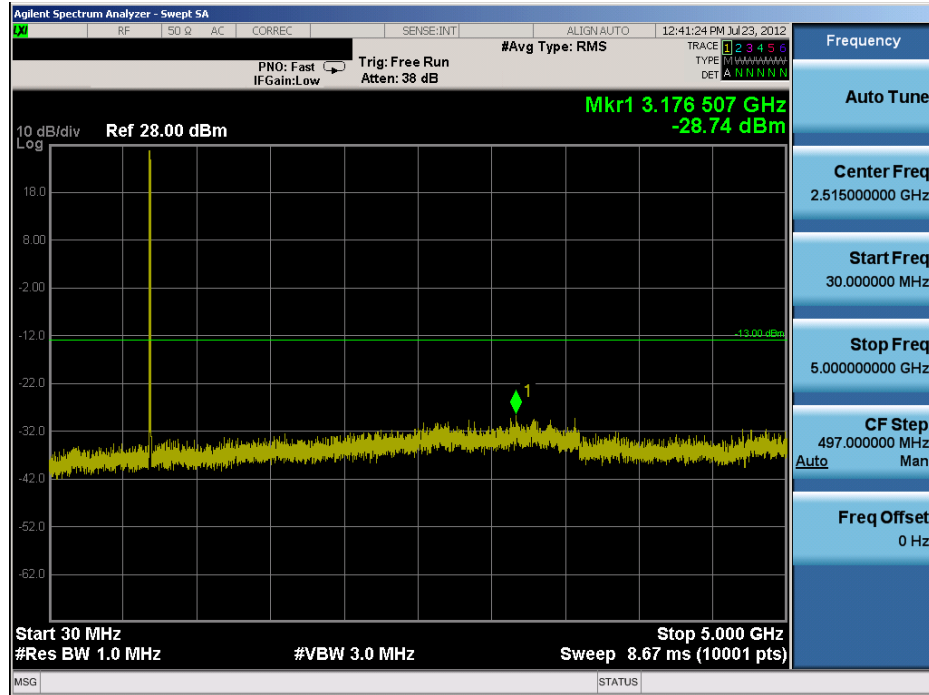

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 42 of 87

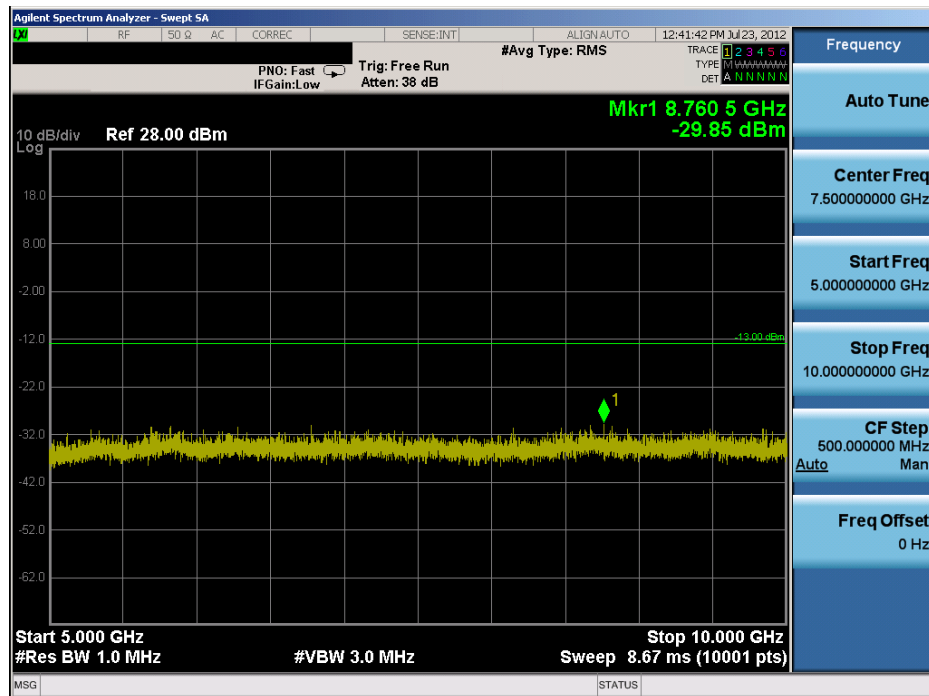


**Plot 7-17. Conducted Spurious Plot (QPSK – RB Size 1, RB 0 – Low Channel)**




**Plot 7-18. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)**

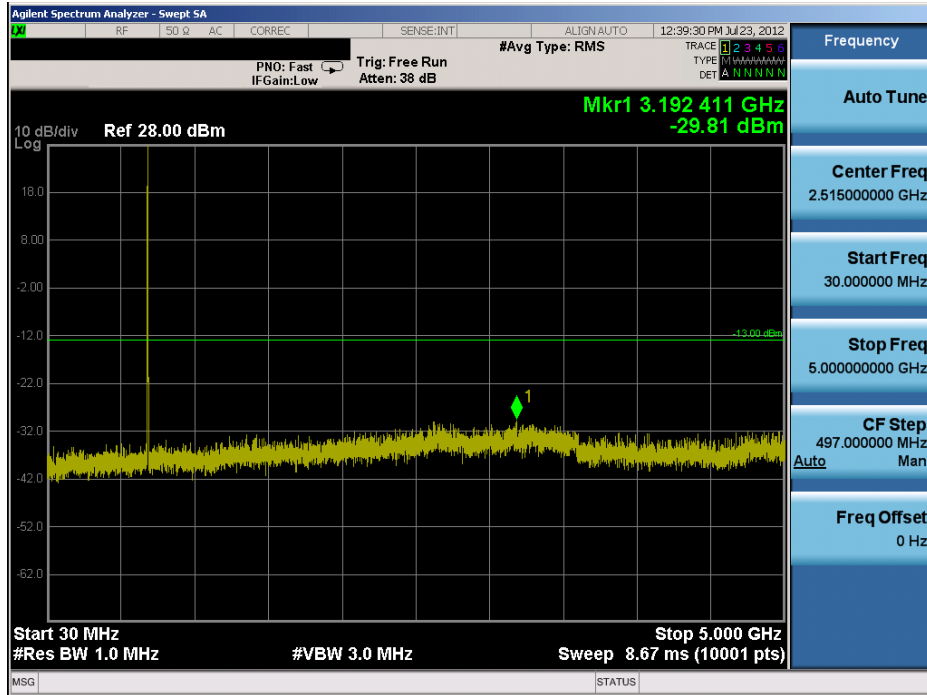

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 43 of 87

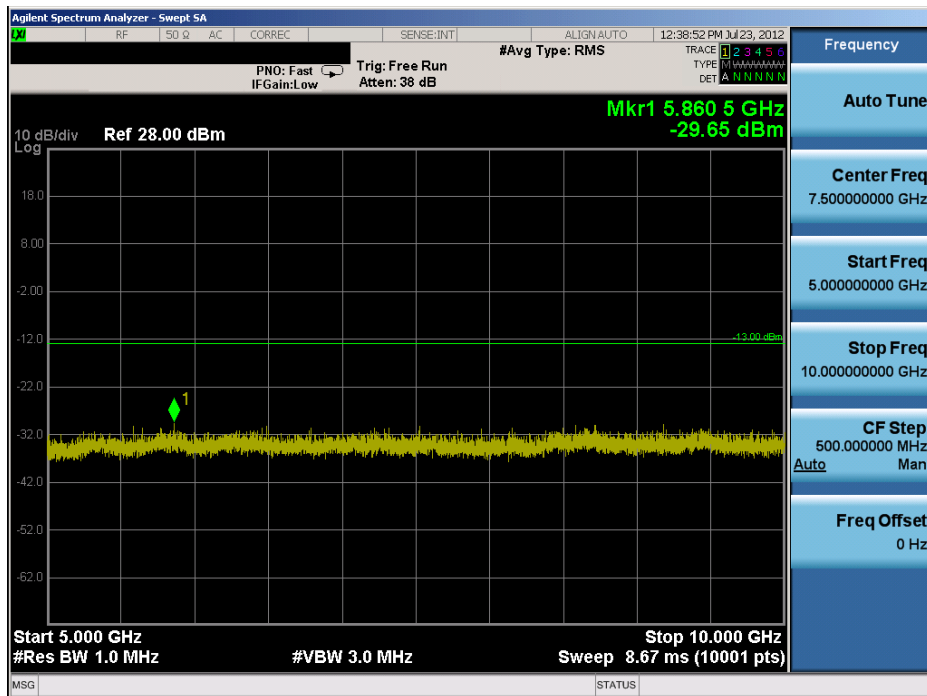


Plot 7-19. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)




Plot 7-20. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 44 of 87

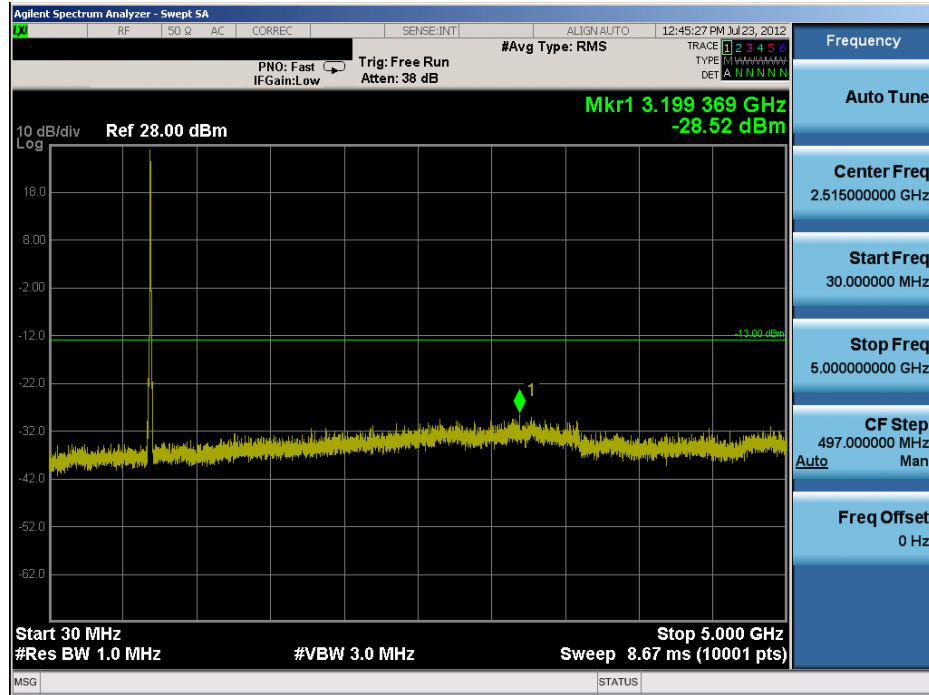


Plot 7-21. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

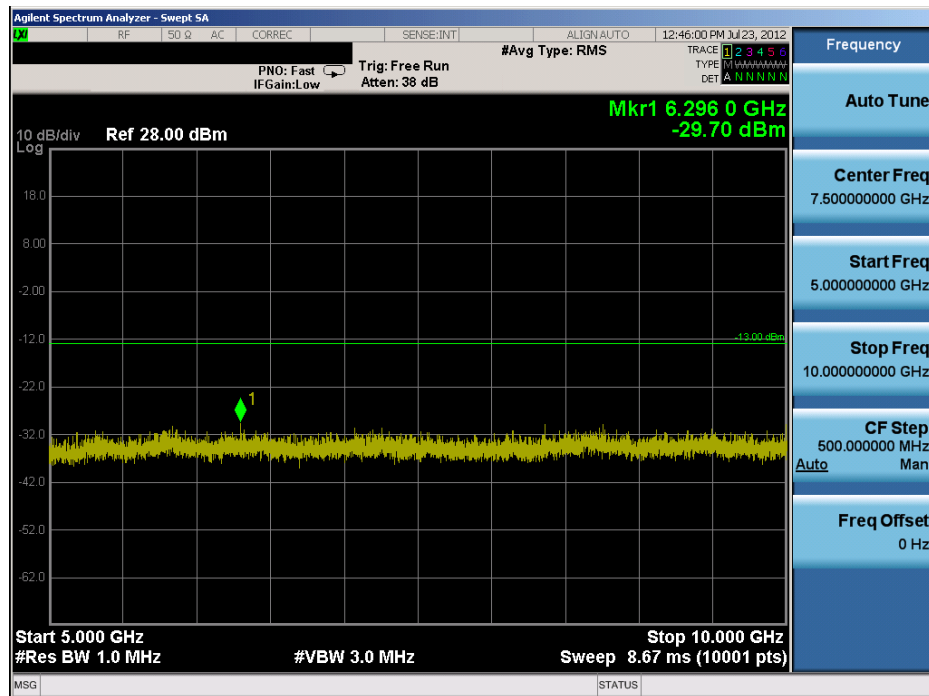

Plot 7-22. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 45 of 87

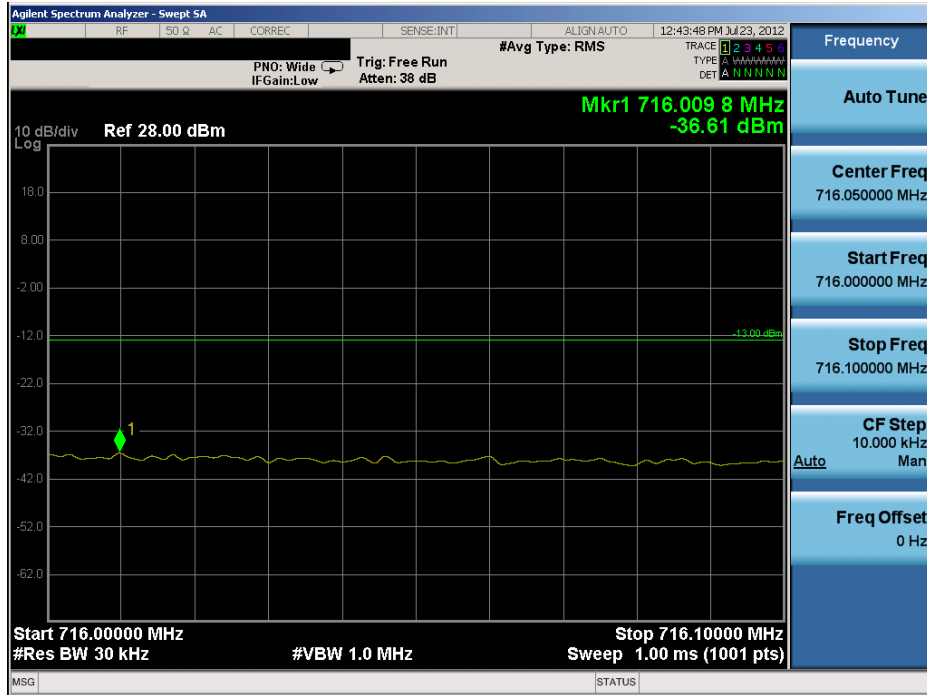


Plot 7-23. Upper Band Edge Plot (QPSK – RB Size 50)




Plot 7-24. Upper Band Edge Plot (QPSK – RB Size 50)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 46 of 87

## BAND 5 – 5 MHz BW

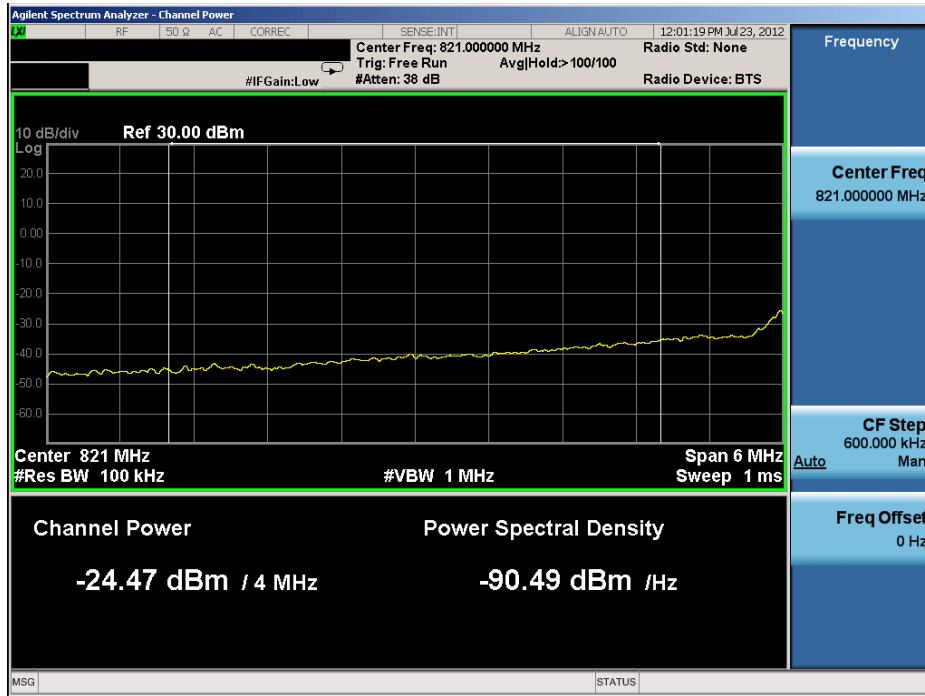


**Plot 7-25. Lower Band Edge Plot (QPSK – RB Size 25)**

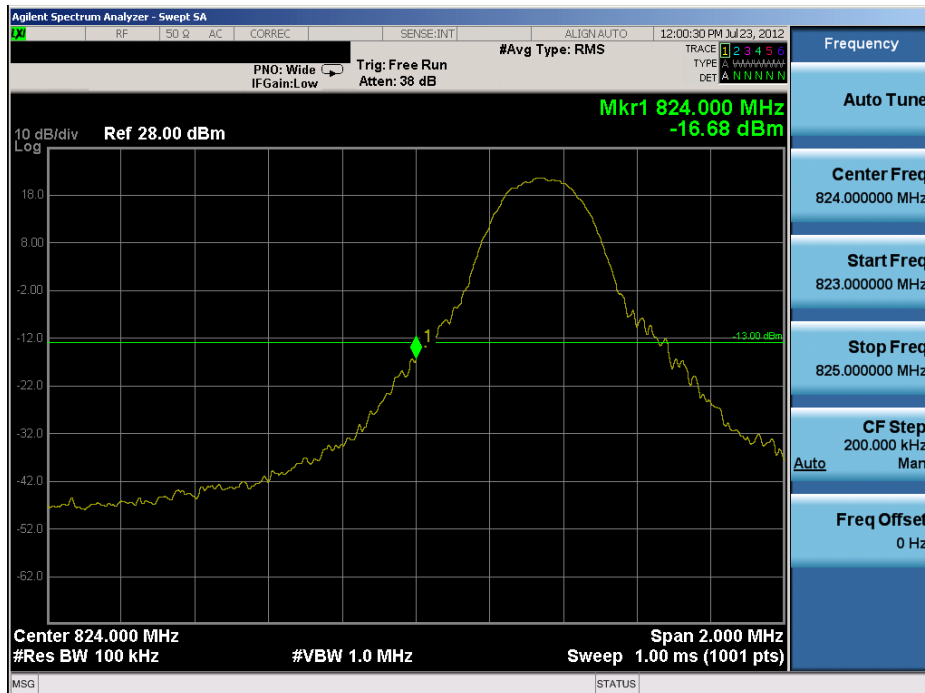


**Plot 7-26. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)**

FCC ID: ZNFE970		<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 47 of 87

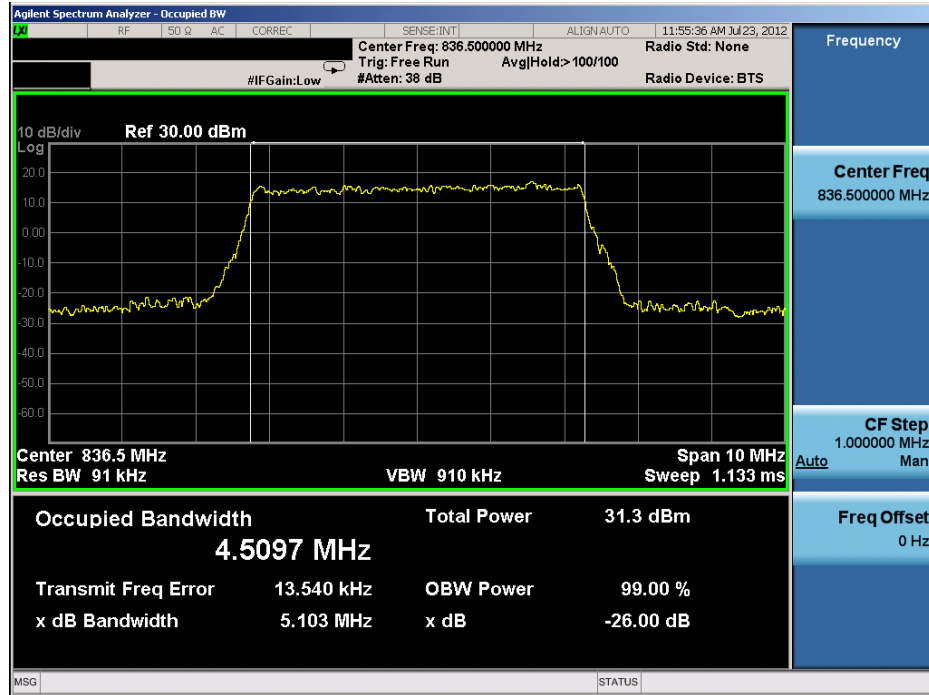


Plot 7-27. Occupied Bandwidth Plot (QPSK – RB Size 25)

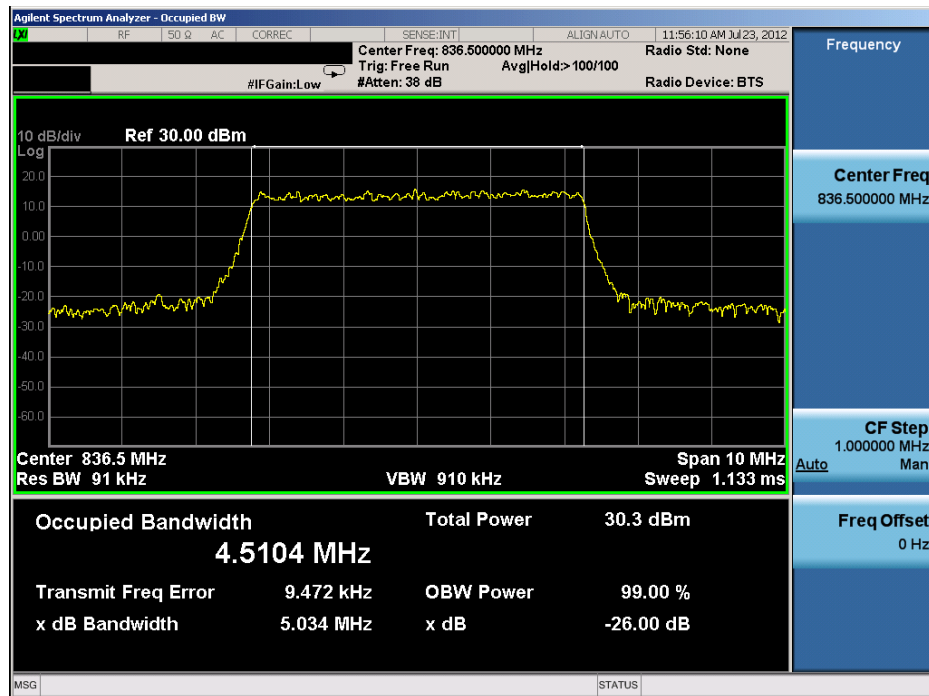


Plot 7-28. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 48 of 87



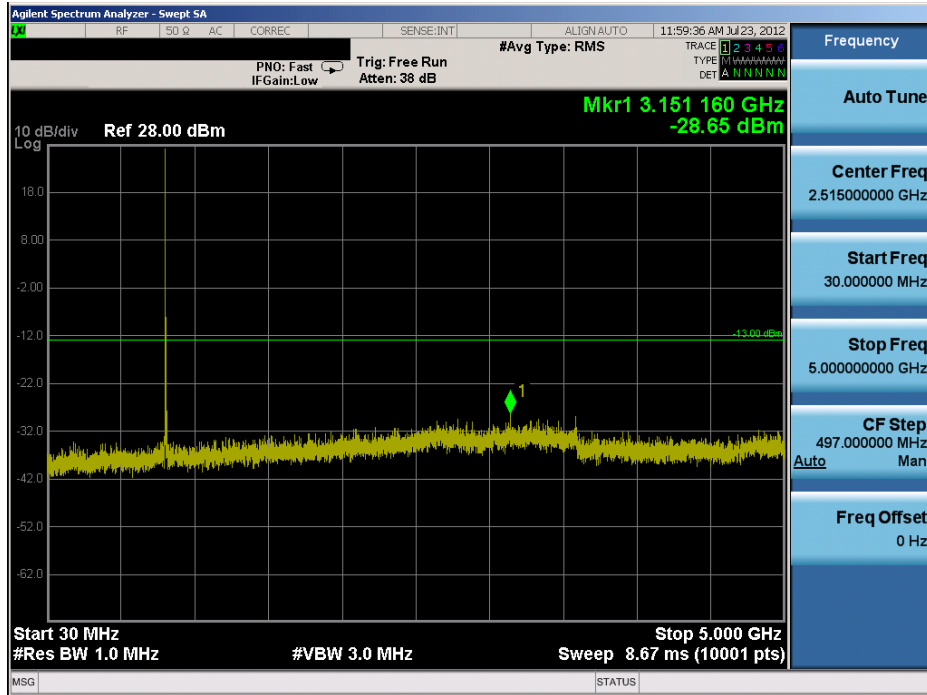


Plot 7-29. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

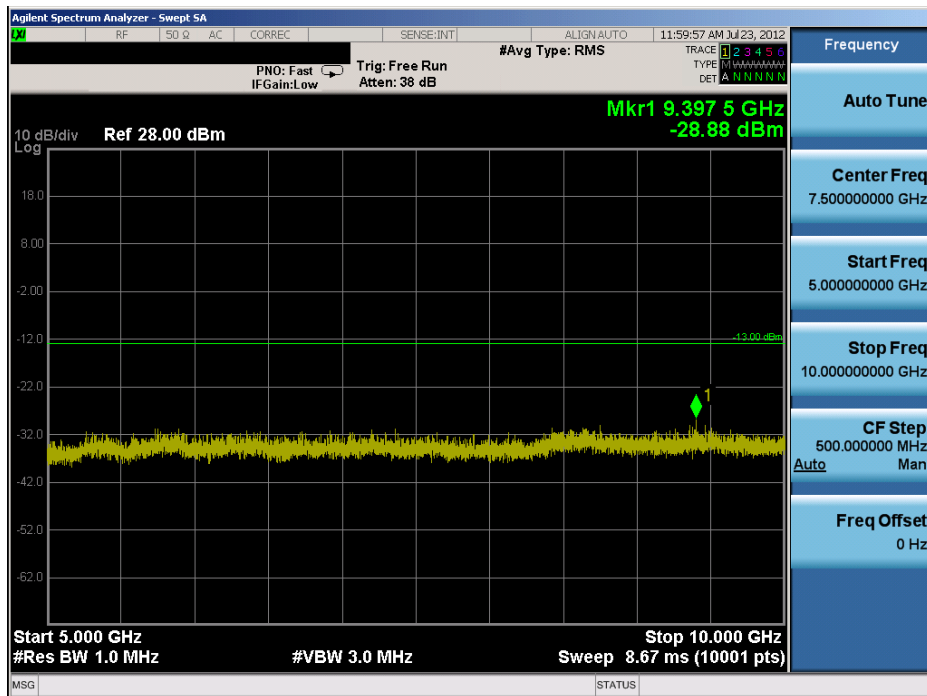


Plot 7-30. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

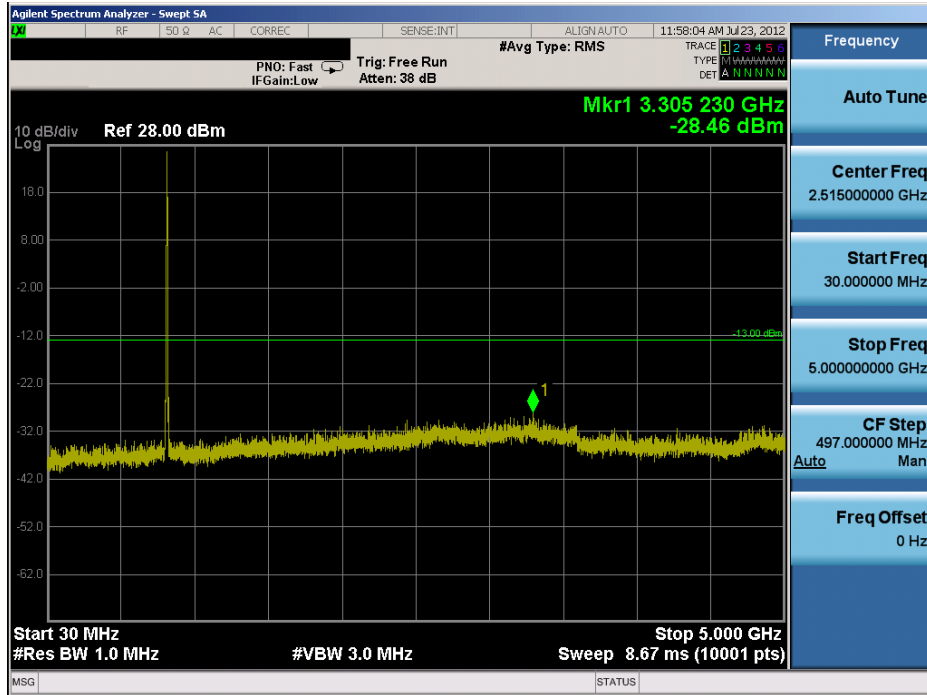

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 49 of 87

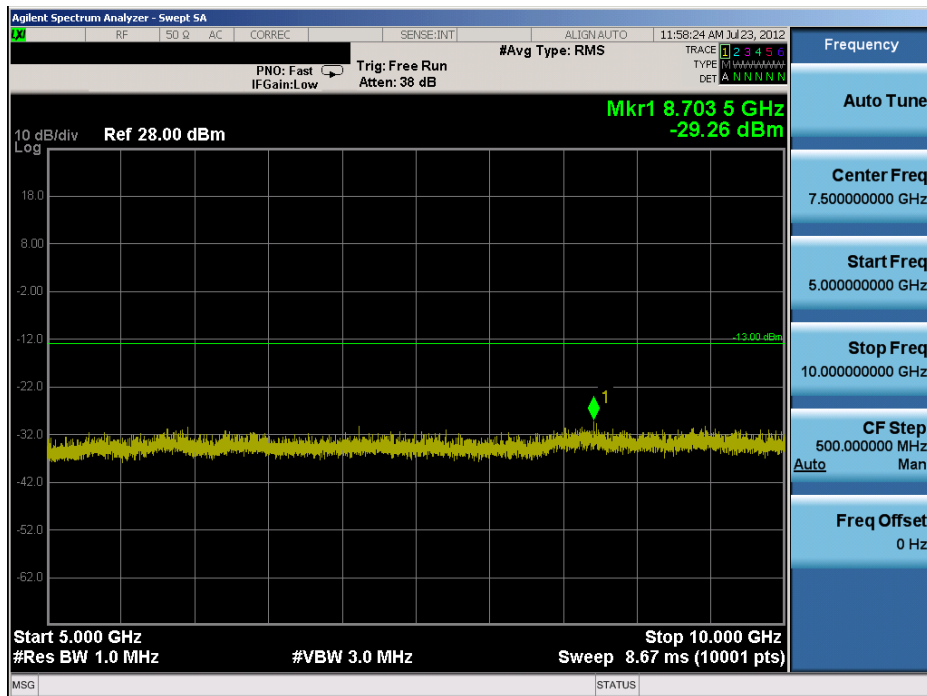


Plot 7-31. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)




Plot 7-32. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 50 of 87

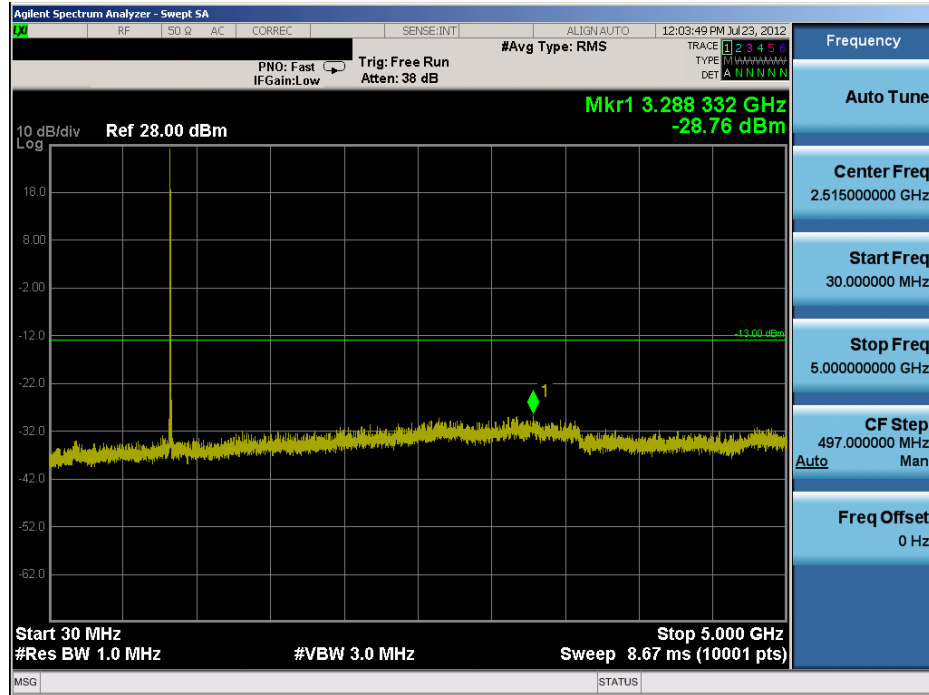


Plot 7-33. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

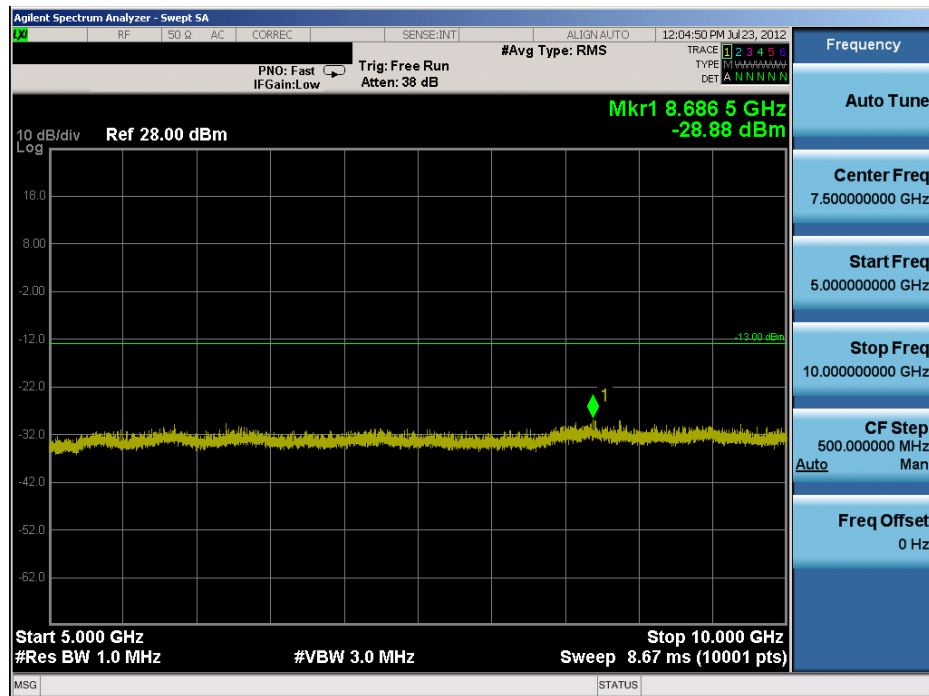


Plot 7-34. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 51 of 87		

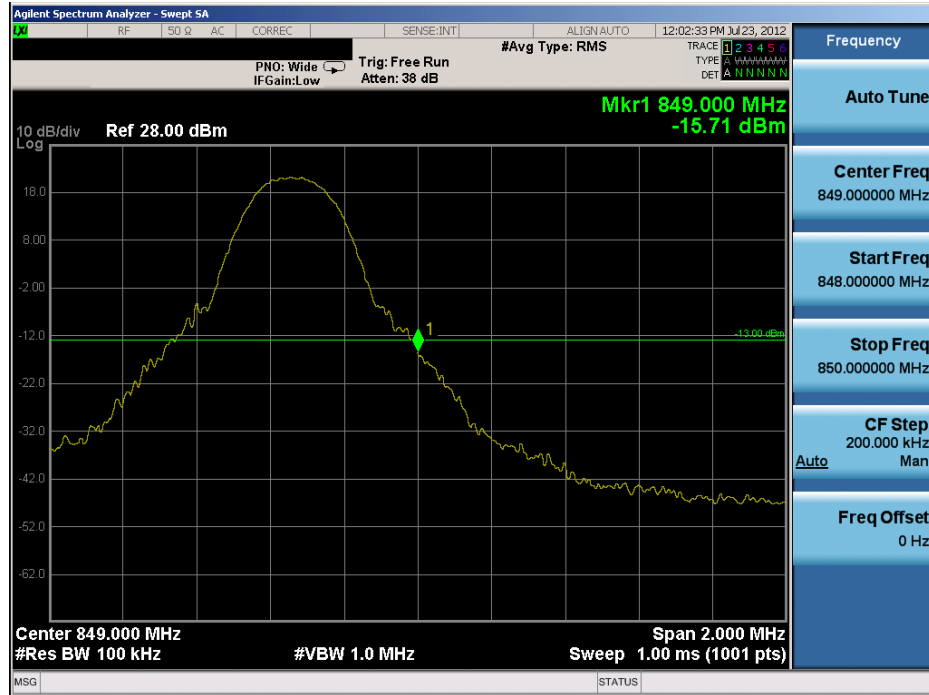


Plot 7-35. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

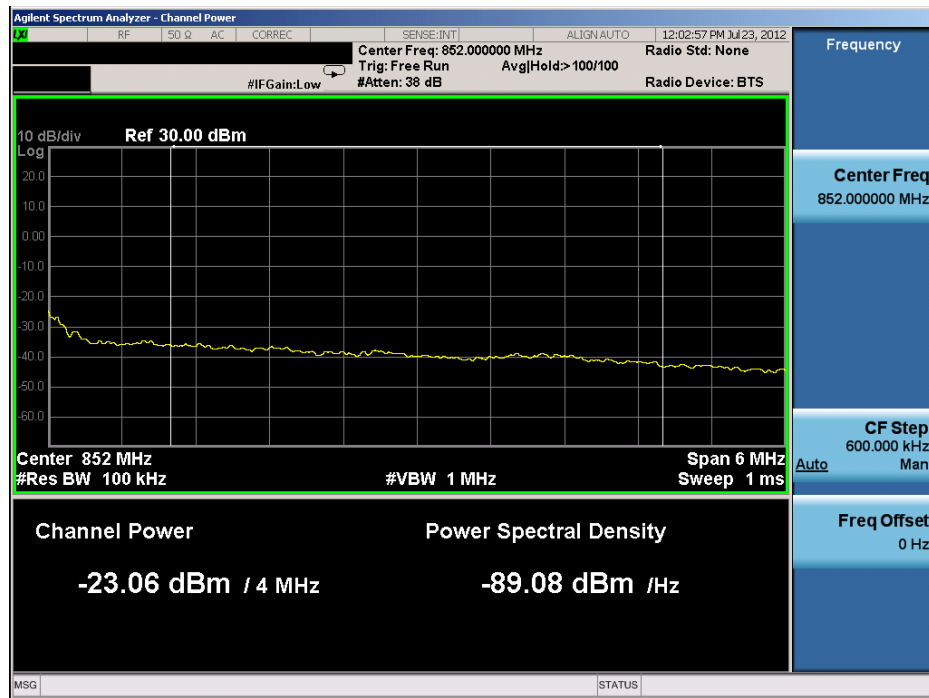


Plot 7-36. Upper Band Edge Plot (QPSK – RB Size 25)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 52 of 87

**BAND 5 – 10 MHz BW**

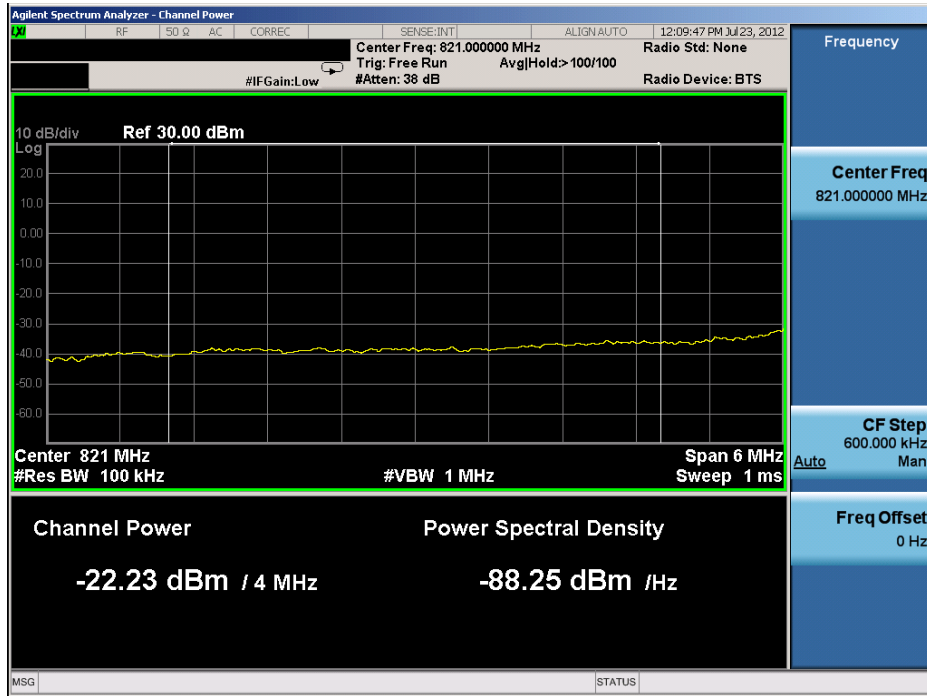


**Plot 7-37. Lower Band Edge Plot (QPSK – RB Size 50)**

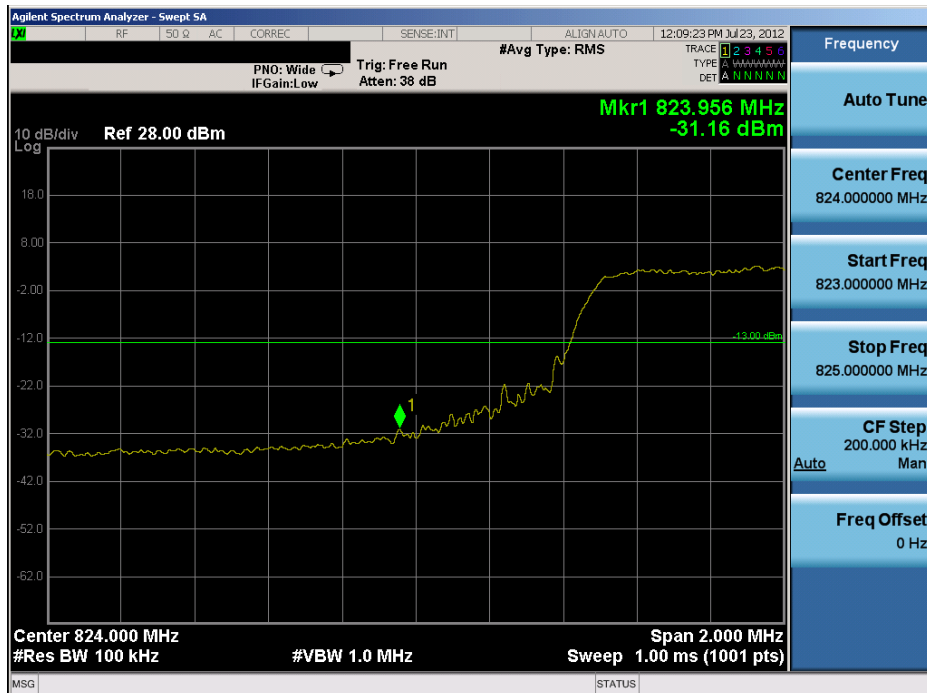


**Plot 7-38. Lower Band Edge Plot (QPSK – RB Size 50)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 53 of 87

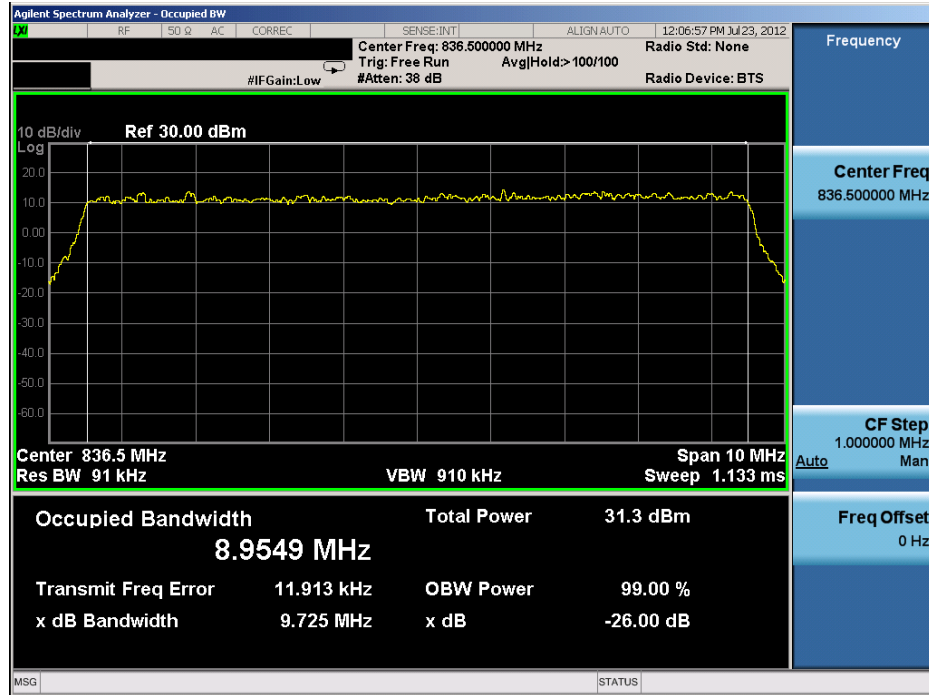


Plot 7-39. Occupied Bandwidth Plot (QPSK – RB Size 50)

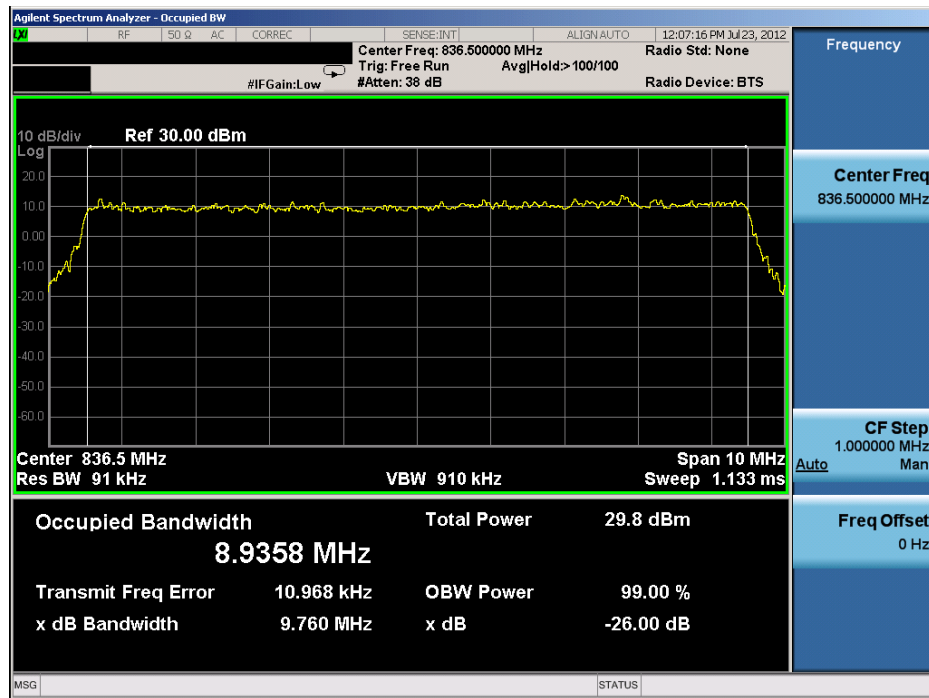


Plot 7-40. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 54 of 87

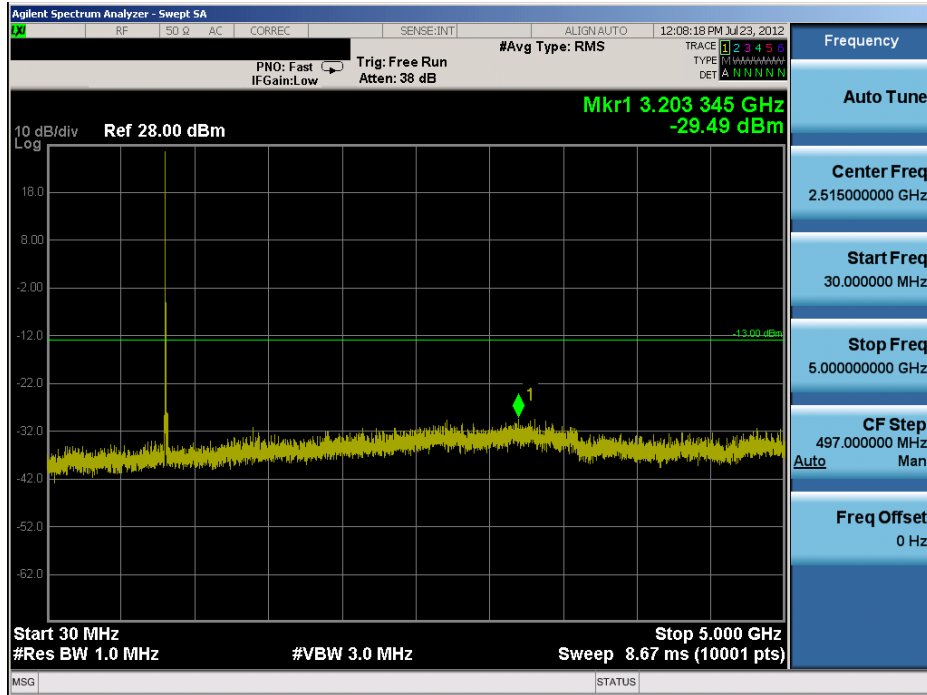


Plot 7-41. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

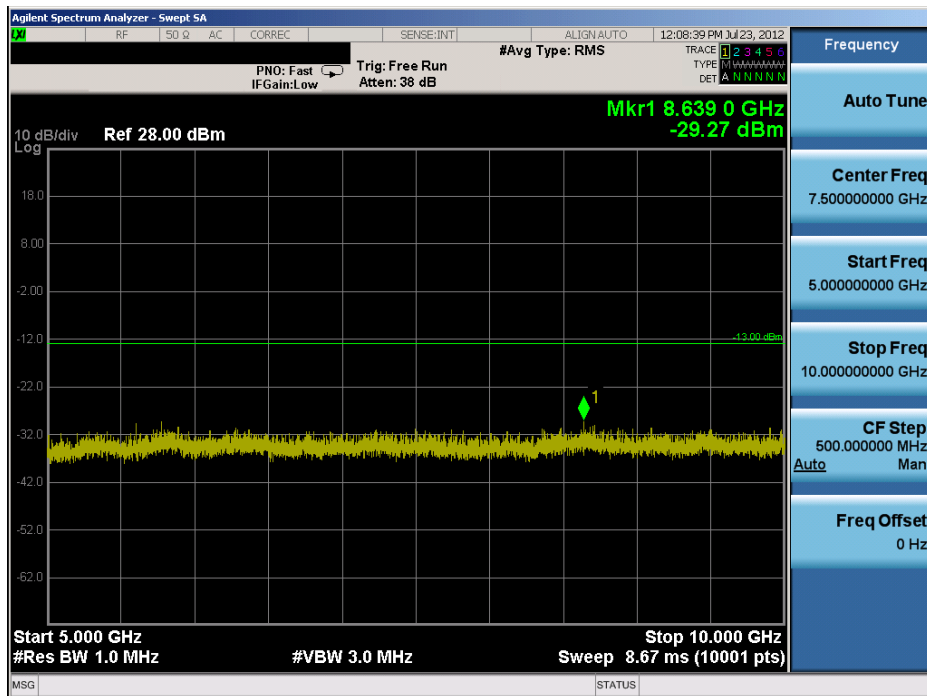


Plot 7-42. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFE970			<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 55 of 87	

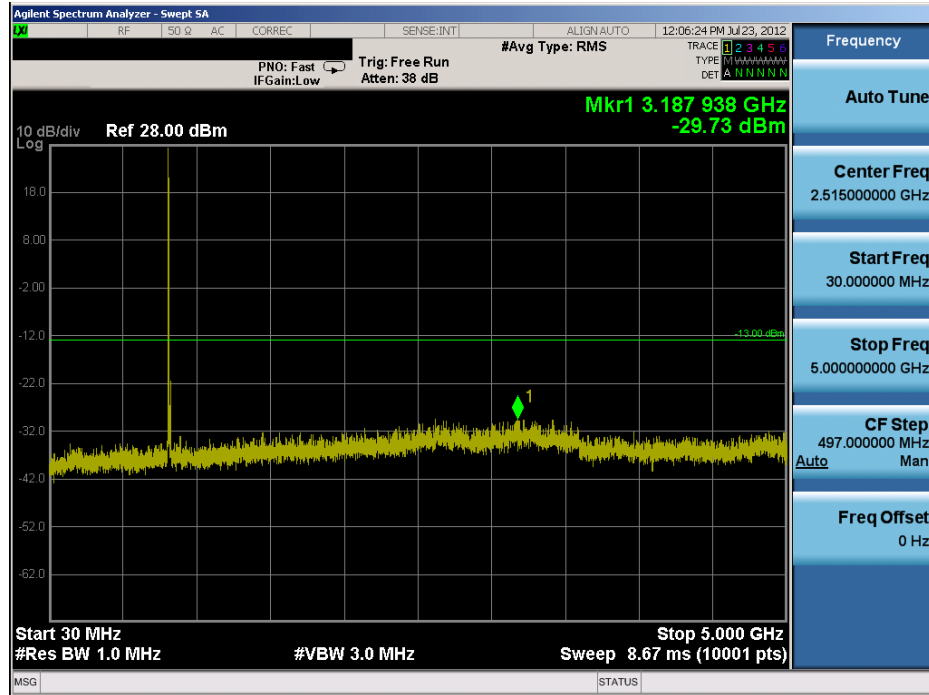


Plot 7-43. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

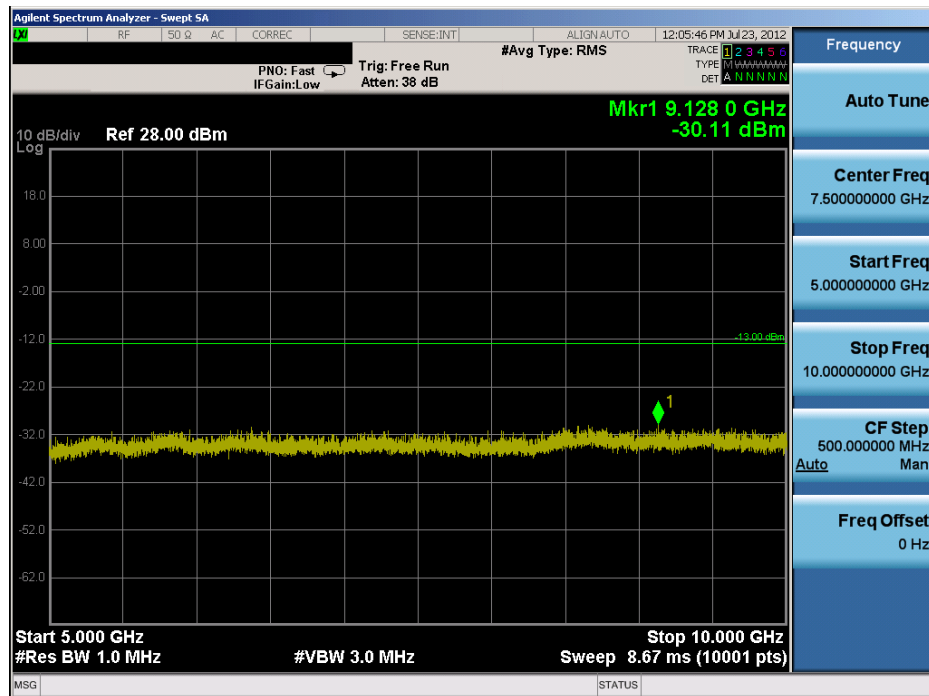


Plot 7-44. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 56 of 87



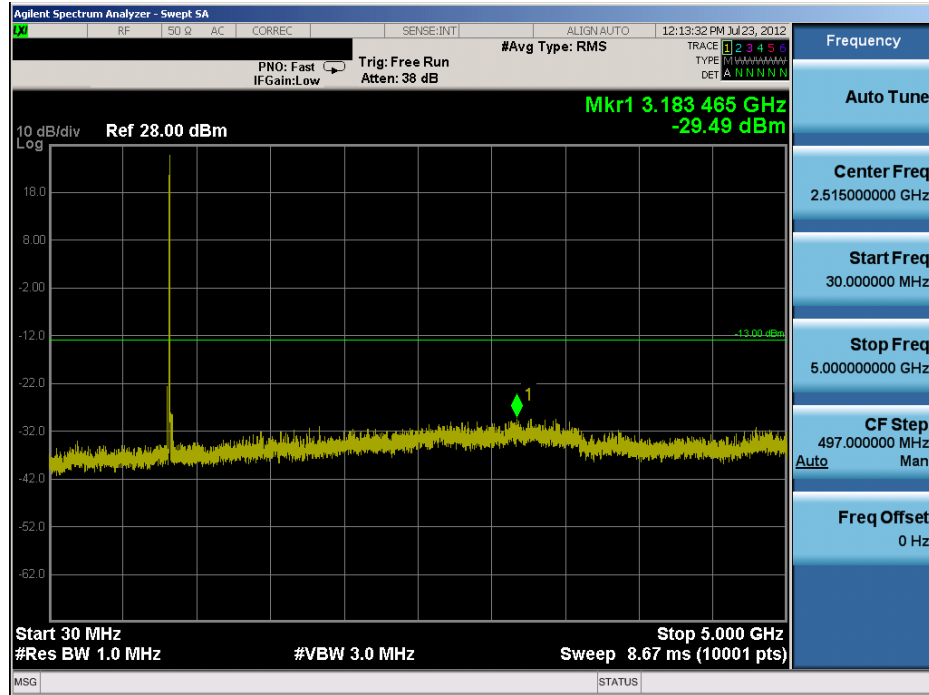


Plot 7-45. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

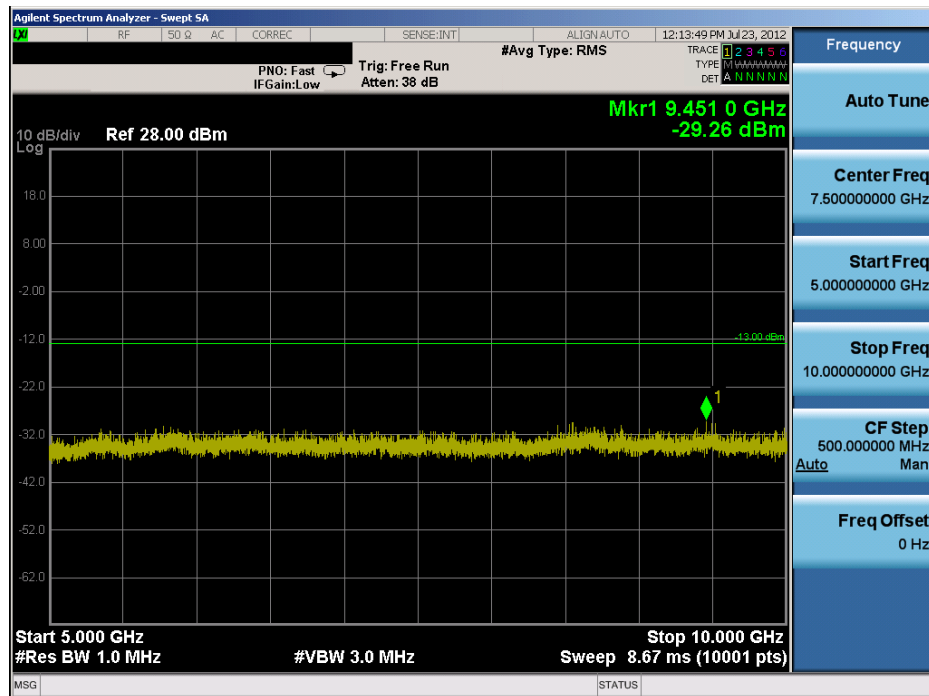


Plot 7-46. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 57 of 87

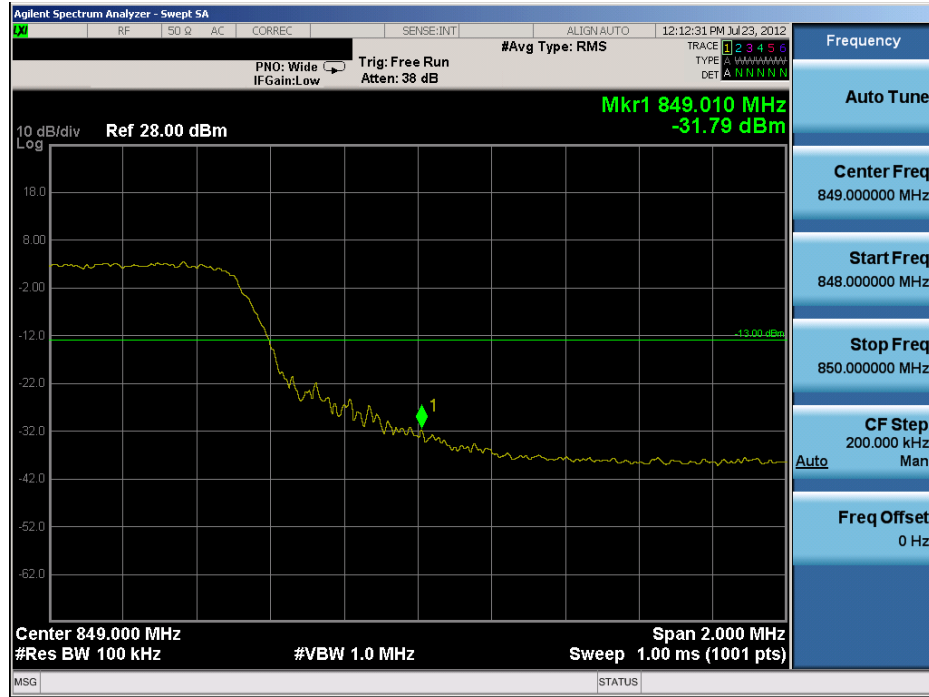


Plot 7-47. Upper Band Edge Plot (QPSK – RB Size 50)

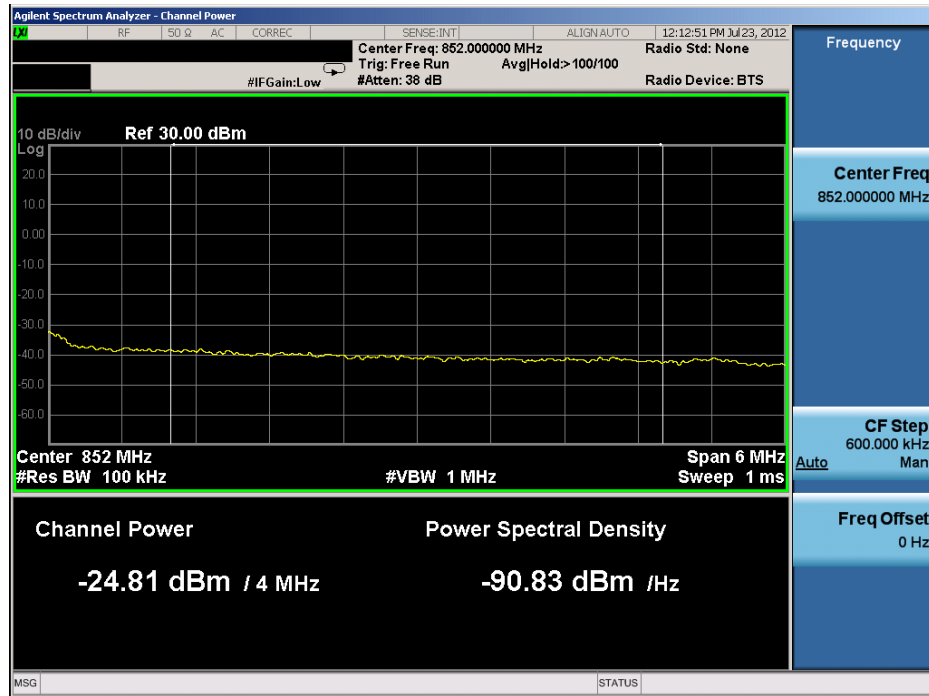


Plot 7-48. Upper Band Edge Plot (QPSK – RB Size 50)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 58 of 87

**BAND 4 – 5 MHz BW**

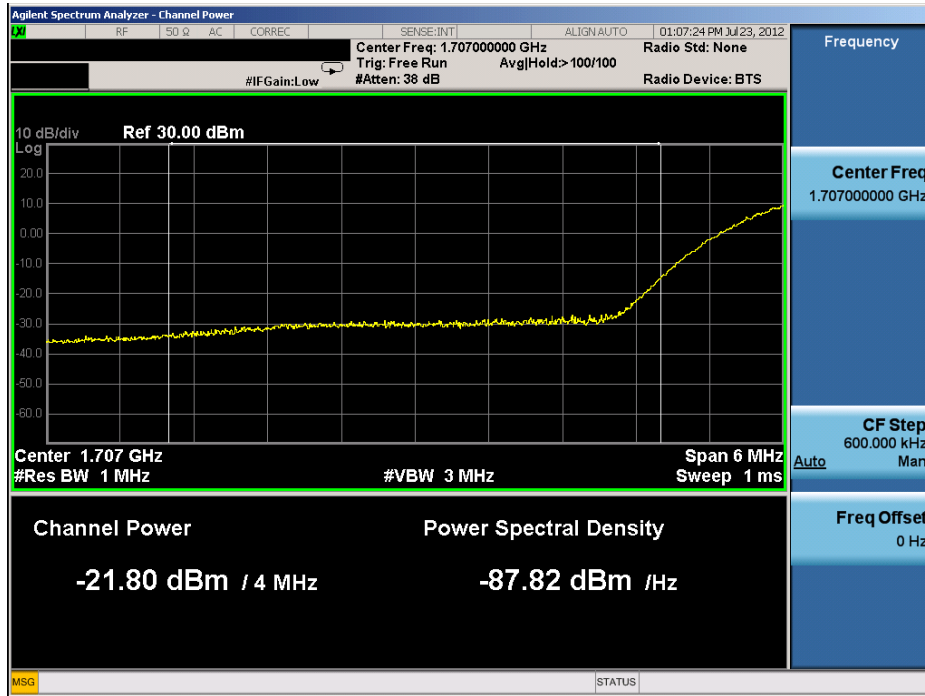


**Plot 7-49. Lower Band Edge Plot (QPSK – RB Size 25)**

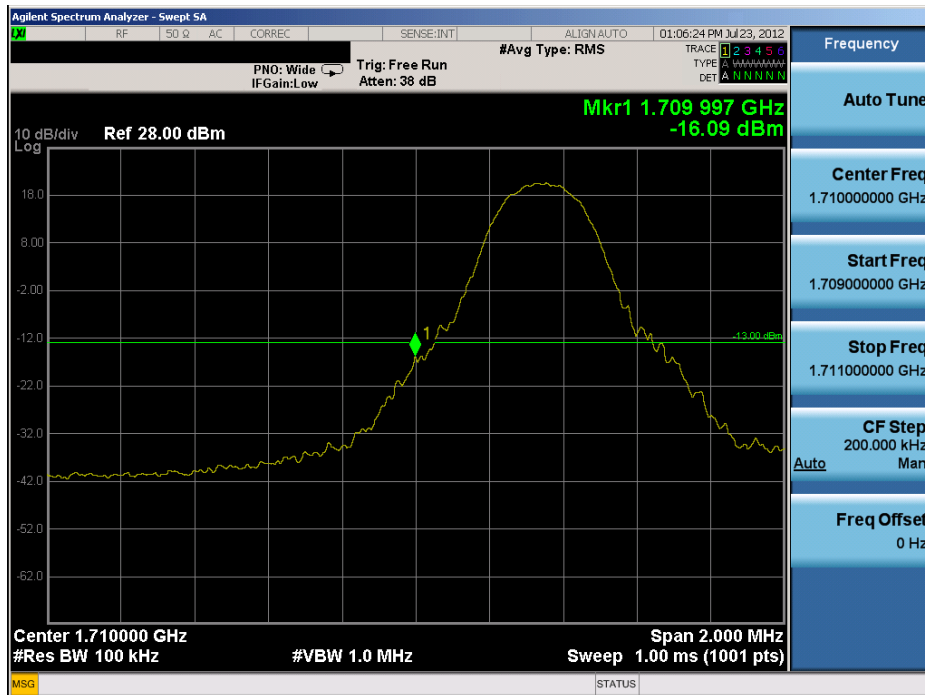


**Plot 7-50. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 59 of 87

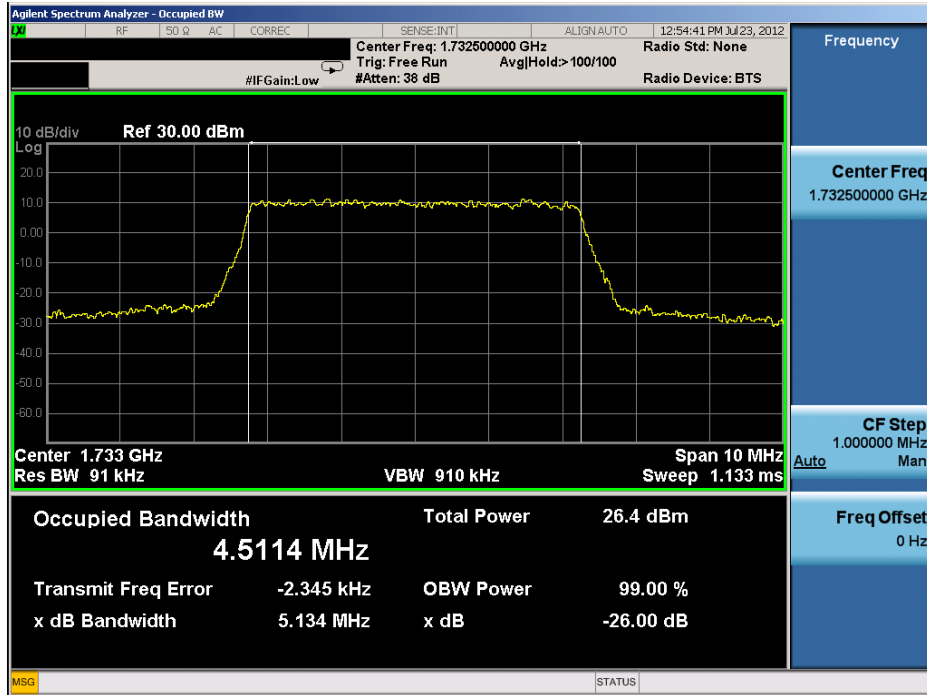


Plot 7-51. Occupied Bandwidth Plot (QPSK – RB Size 25)

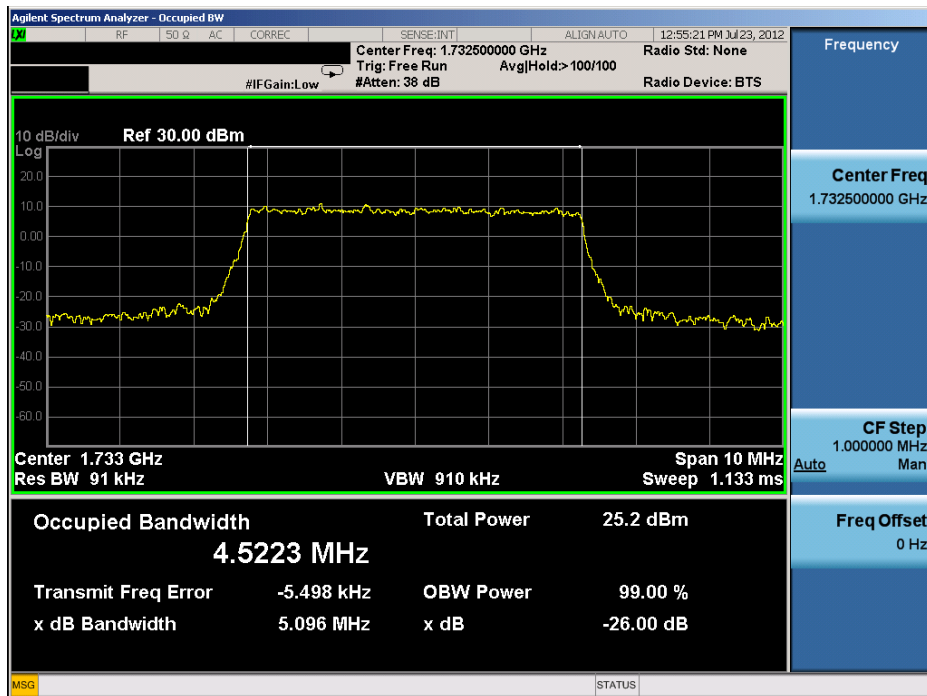


Plot 7-52. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 60 of 87

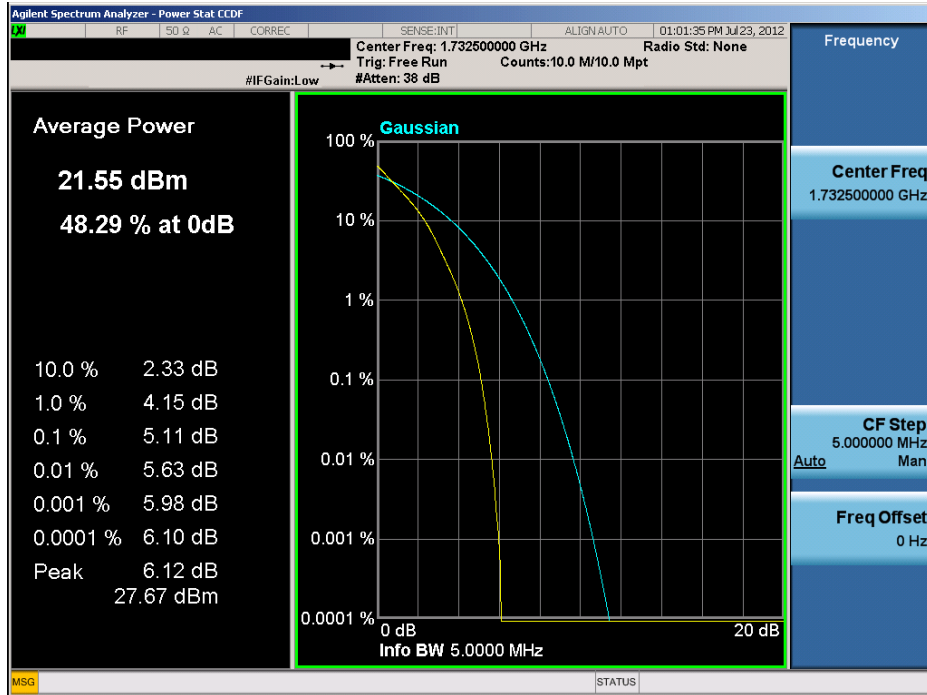


Plot 7-53. Peak to Average Ratio Plot (QPSK - RB Size 25)

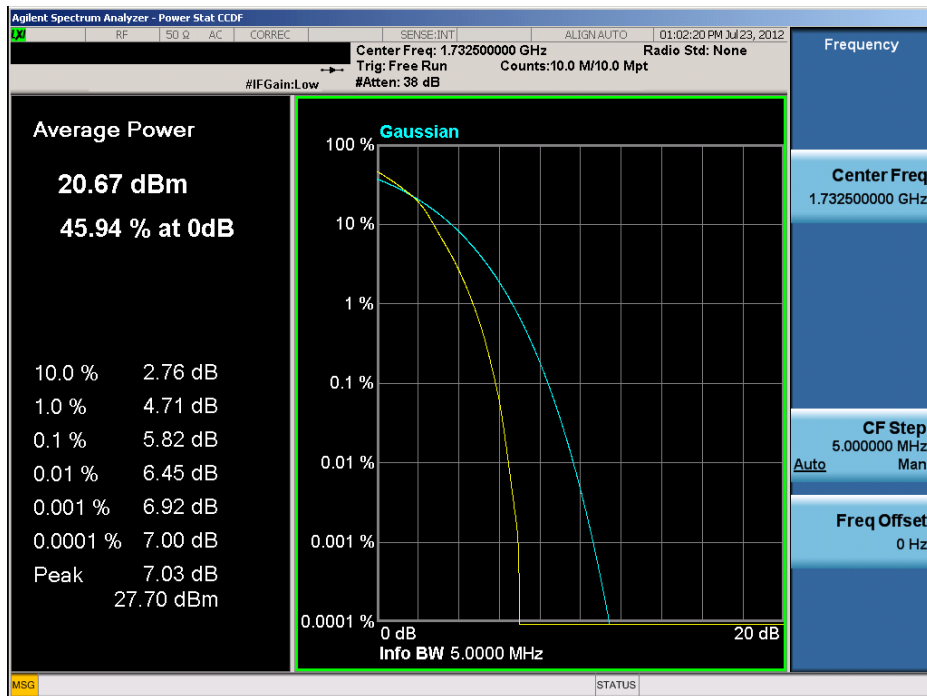


Plot 7-54. Peak to Average Ratio Plot (16QAM - RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 61 of 87

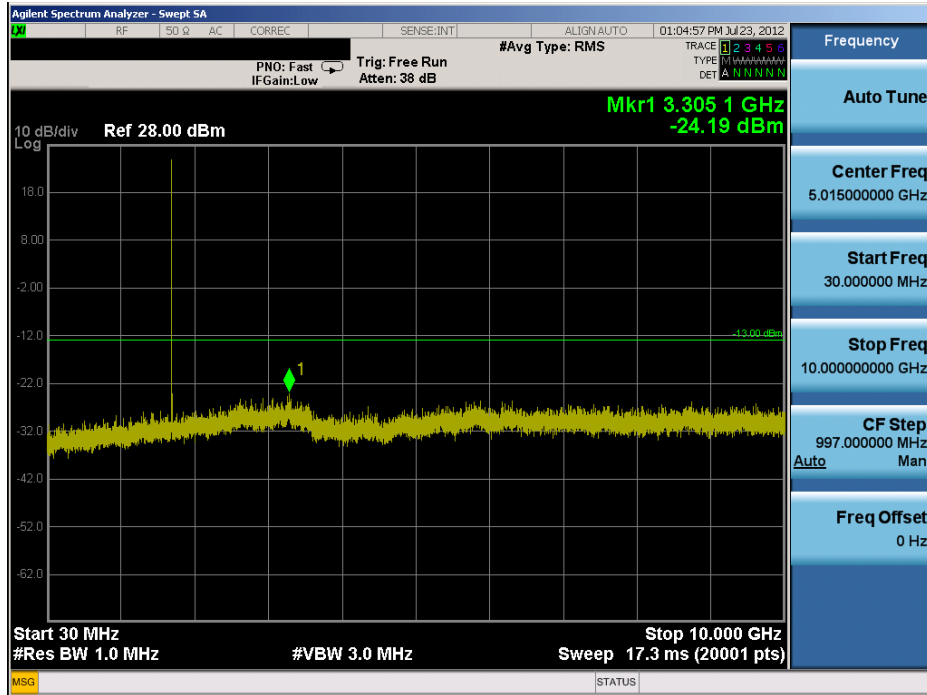


Plot 7-55. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

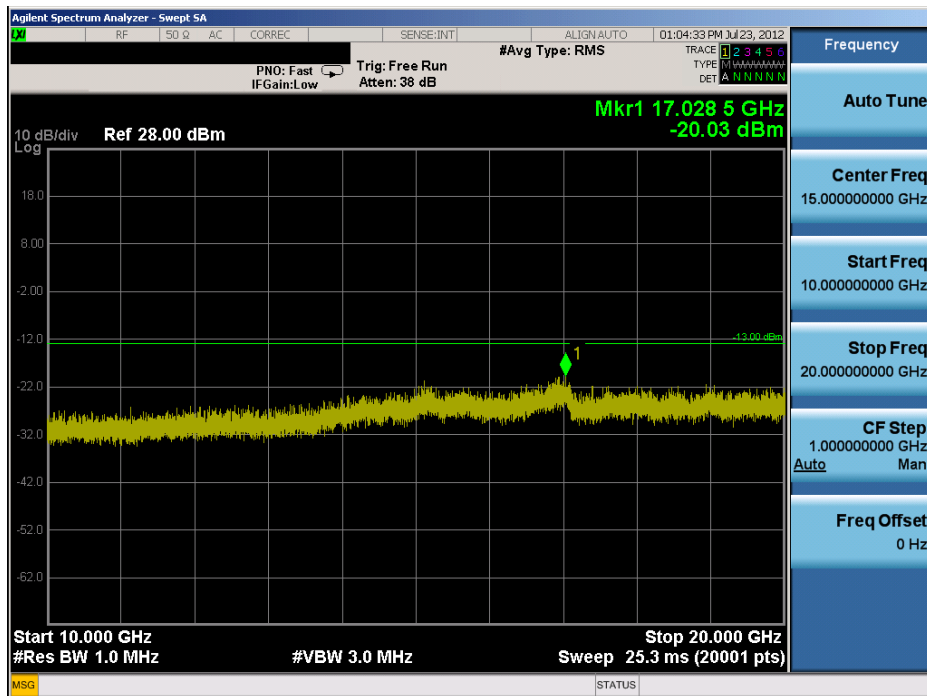


Plot 7-56. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 62 of 87

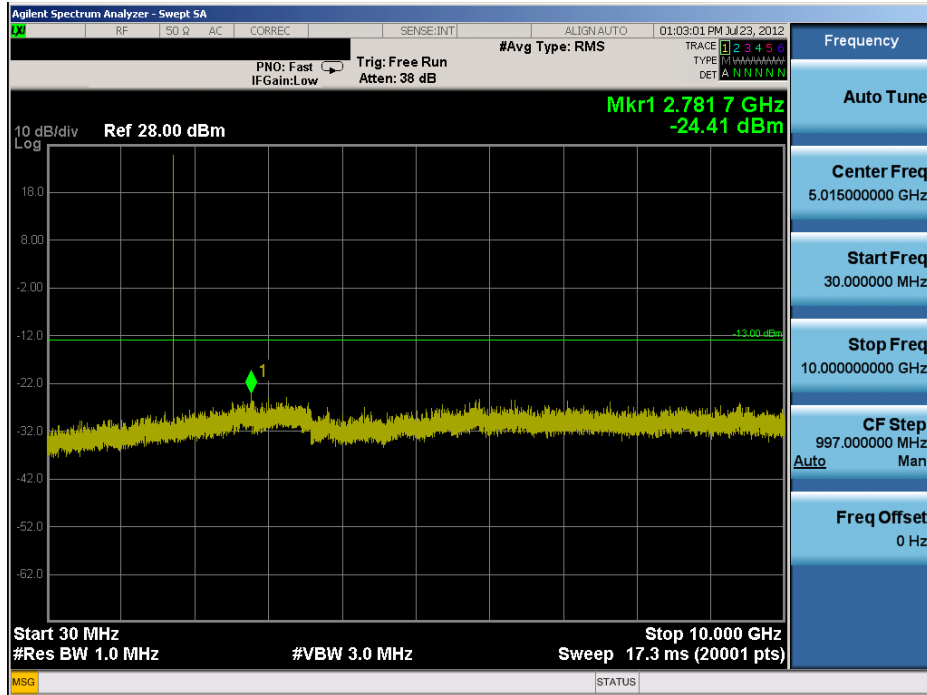


Plot 7-57. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

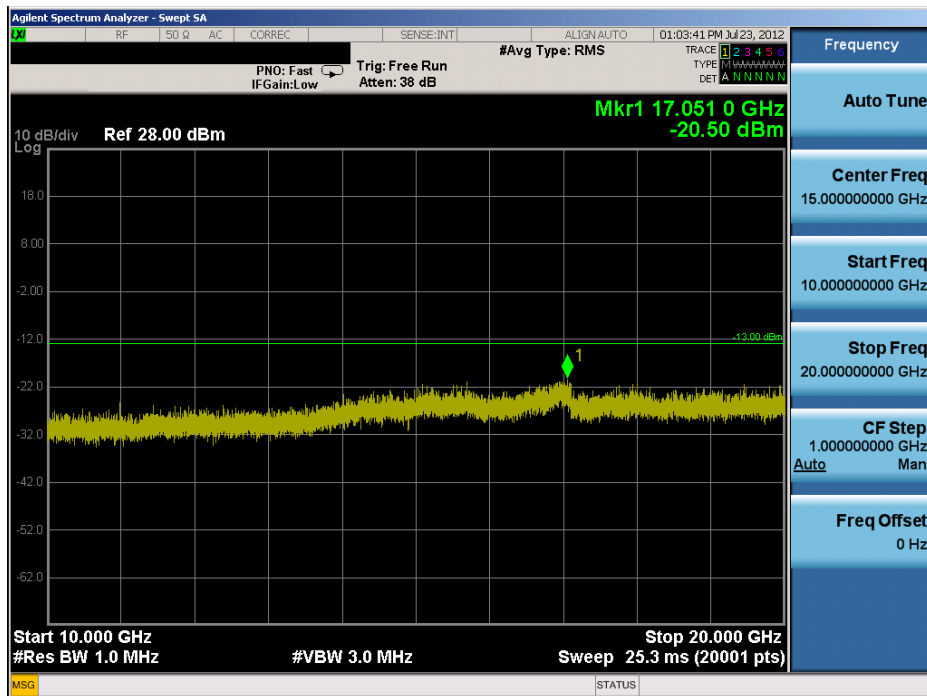


Plot 7-58. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 63 of 87		

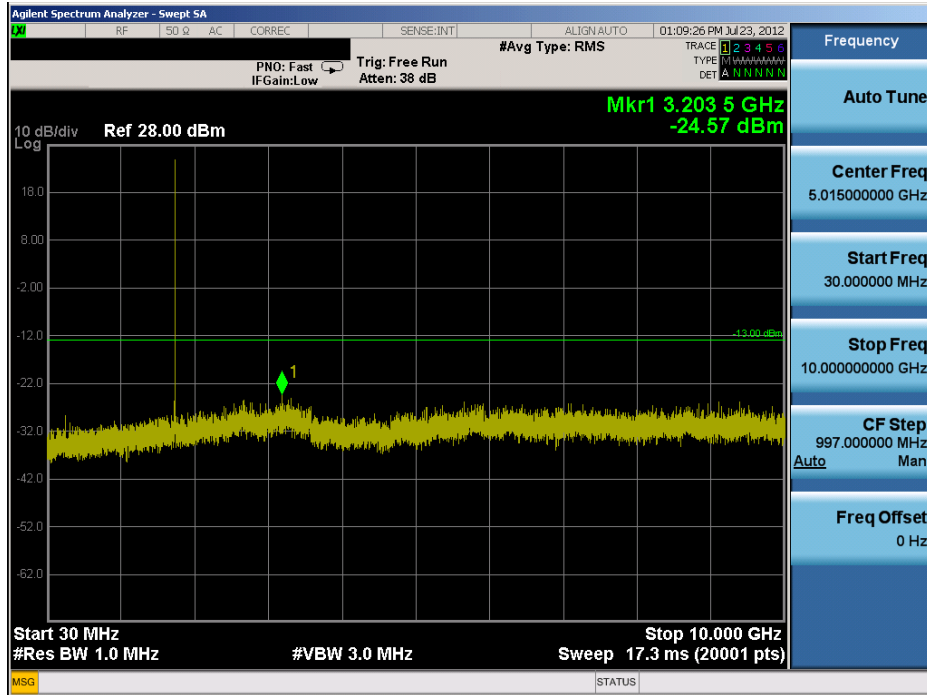


Plot 7-59. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

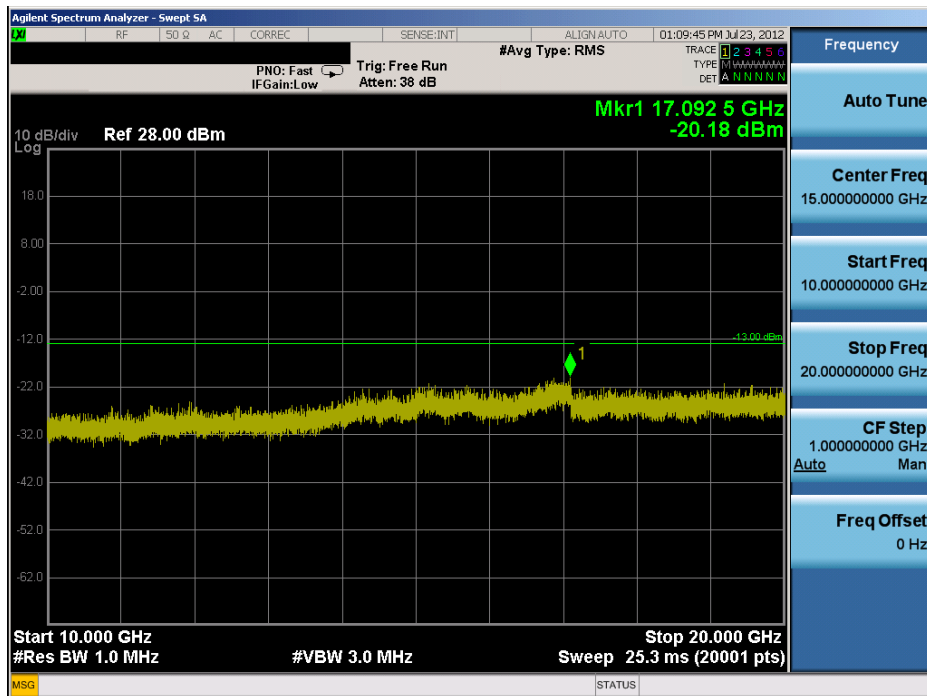


Plot 7-60. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 64 of 87



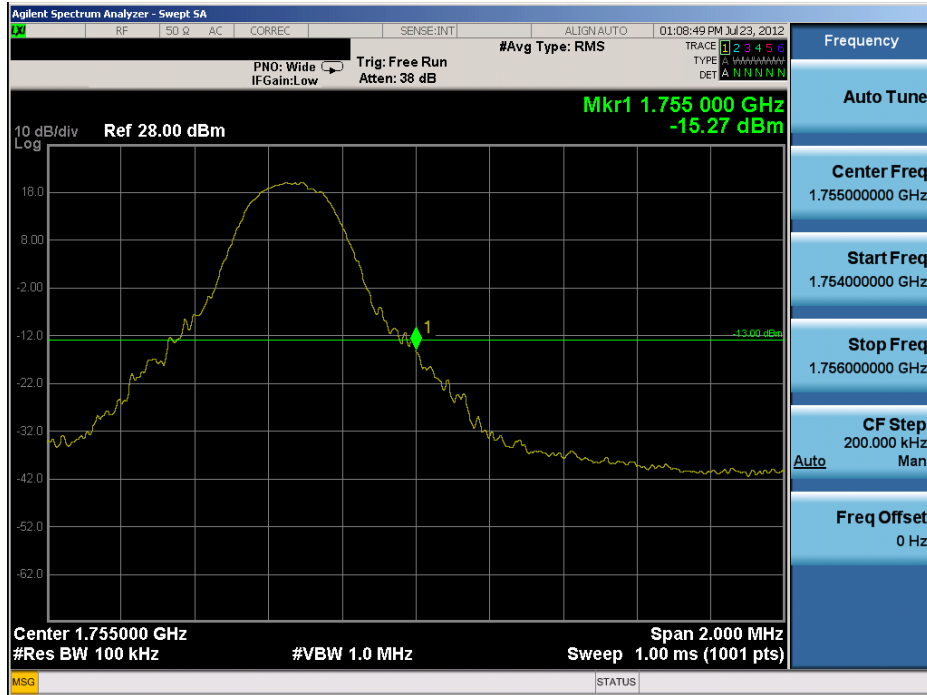


Plot 7-61. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

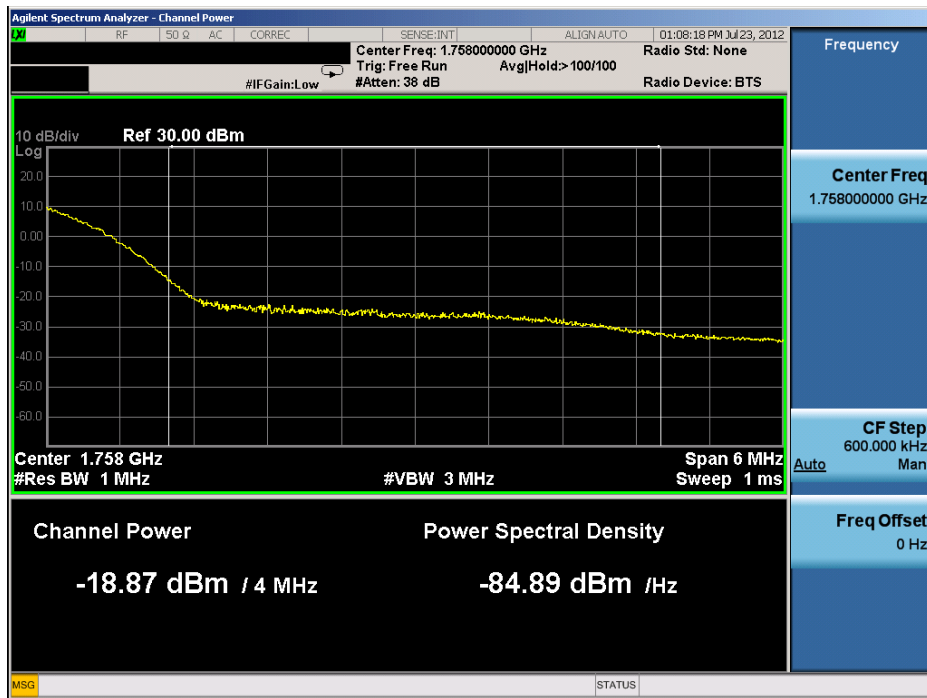


Plot 7-62. Upper Band Edge Plot (QPSK – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 65 of 87

## BAND 4 – 10 MHz BW

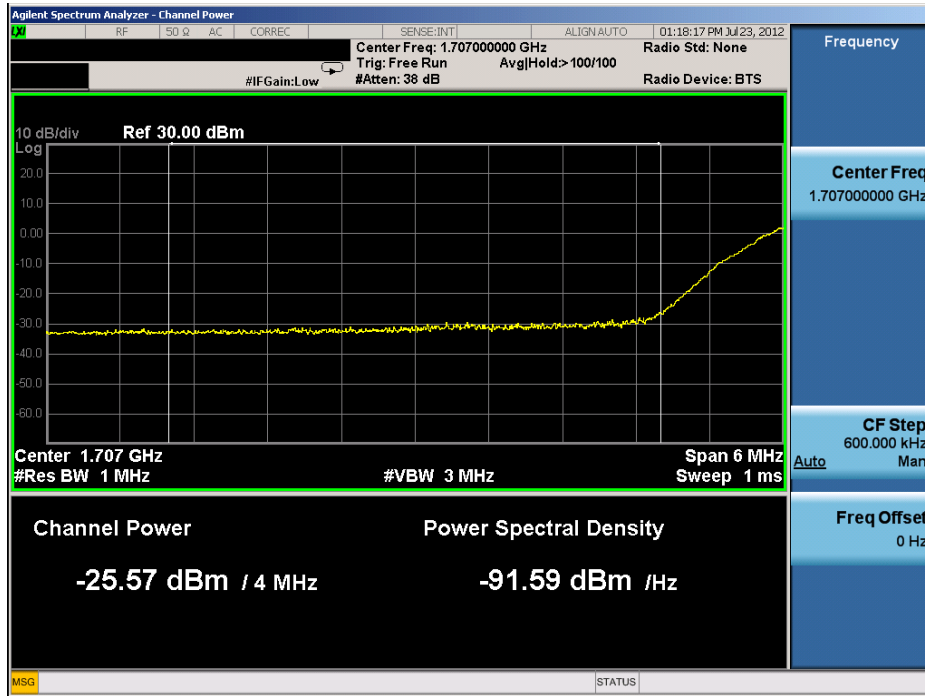


**Plot 7-63. Lower Band Edge Plot (QPSK – RB Size 50)**

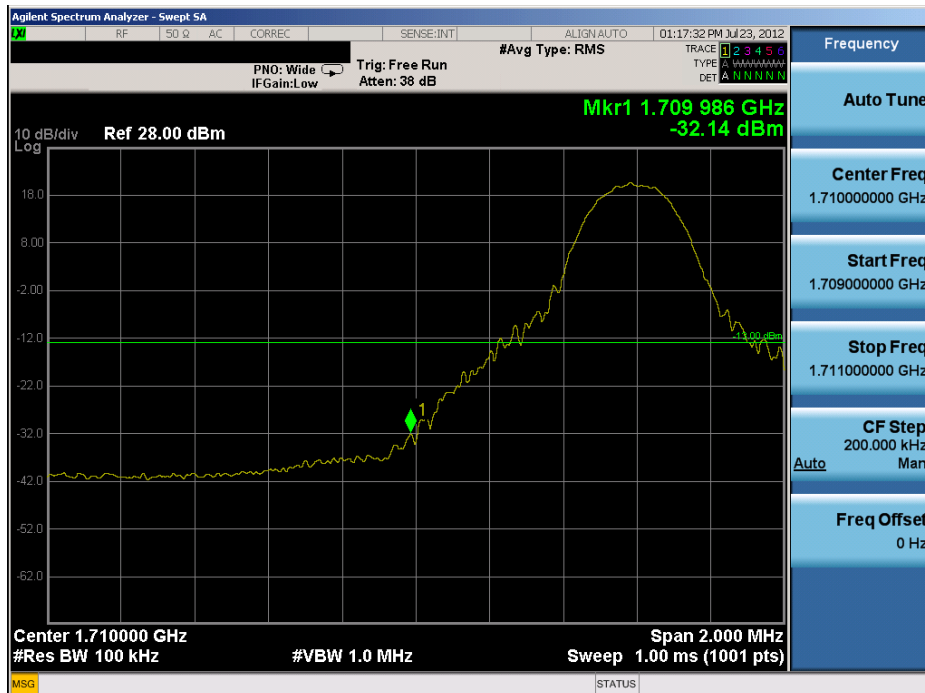


**Plot 7-64. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)**

FCC ID: ZNFE970			<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset			Page 66 of 87

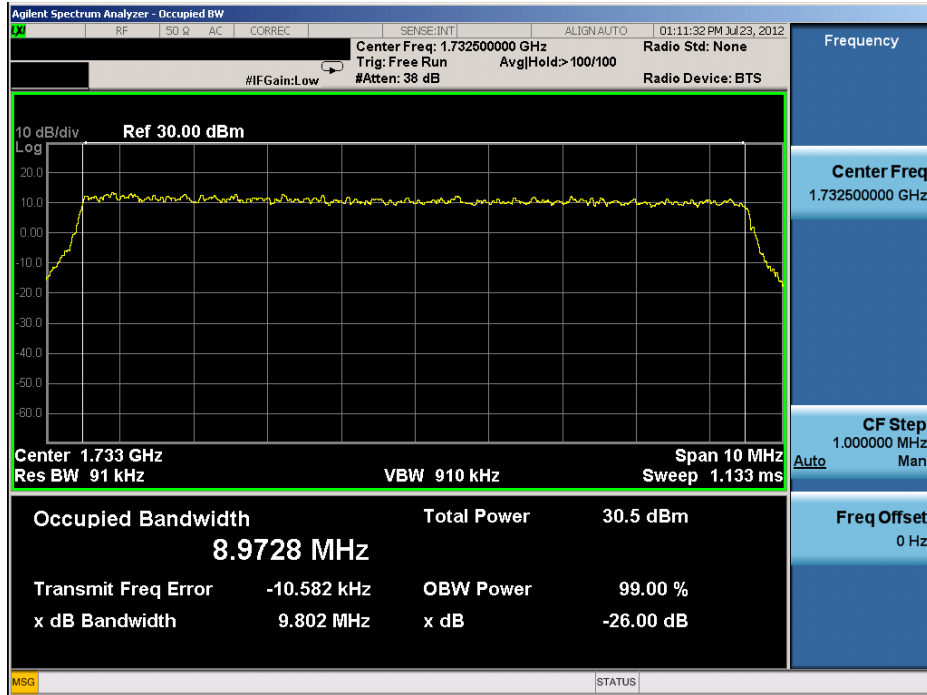


Plot 7-65. Occupied Bandwidth Plot (QPSK – RB Size 50)

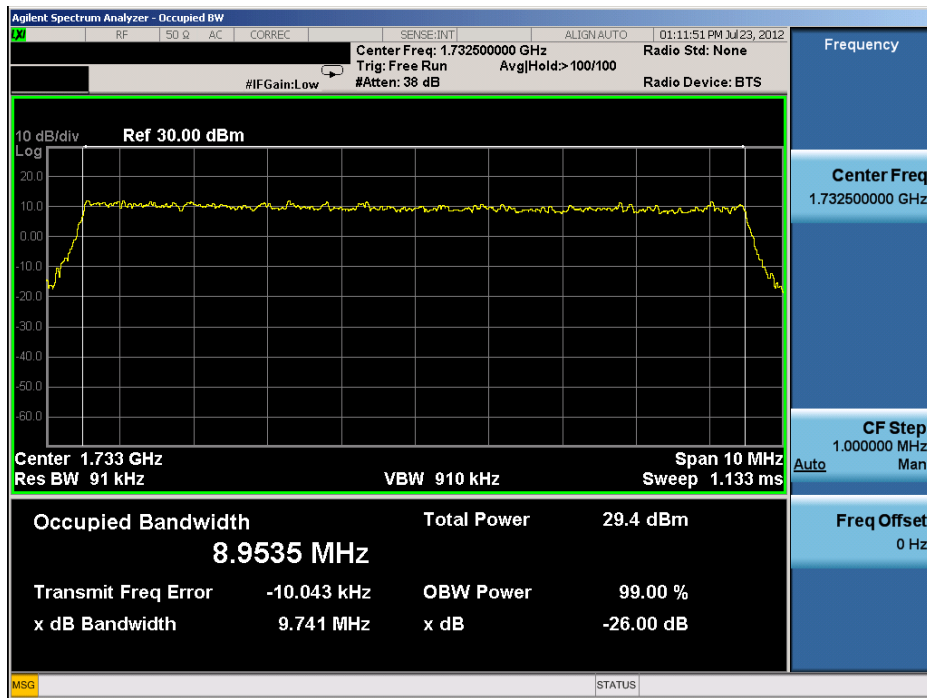


Plot 7-66. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 67 of 87

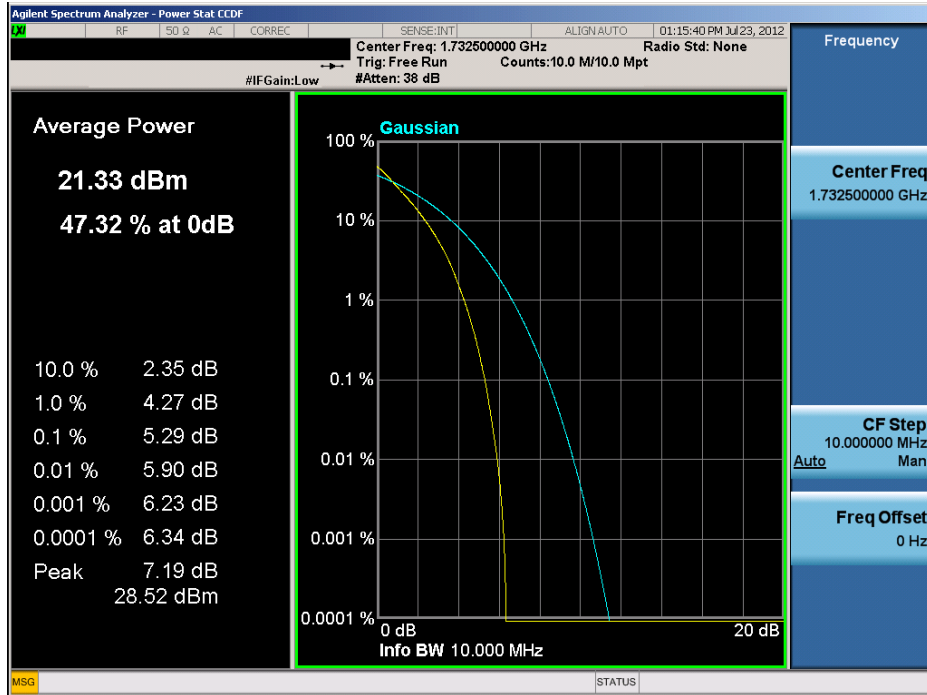


**Plot 7-67. Peak to Average Ratio Plot (QPSK - RB Size 50)**

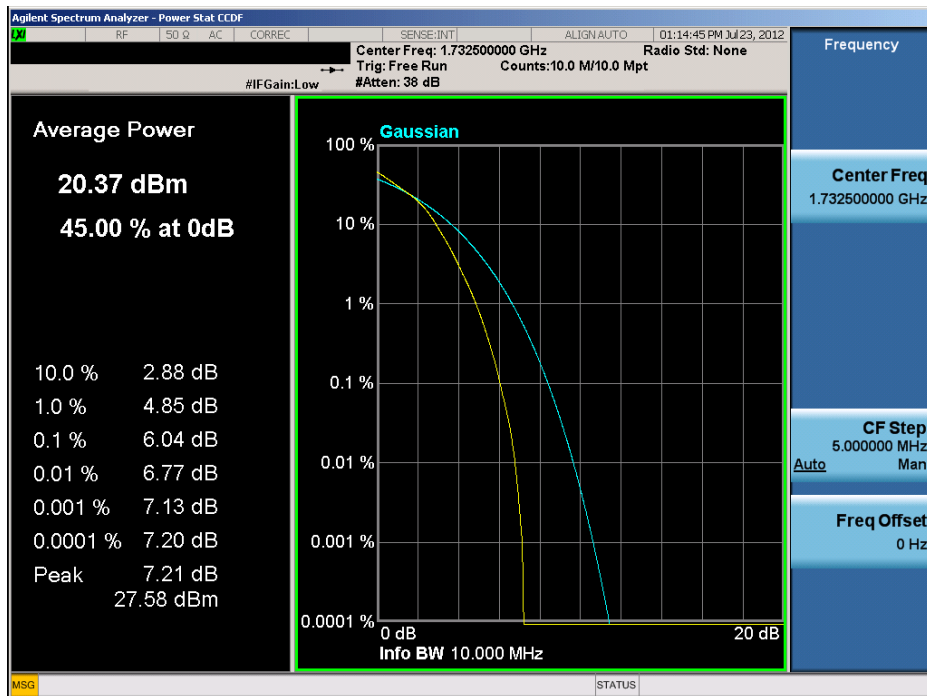


**Plot 7-68. Peak to Average Ratio Plot (16QAM - RB Size 50)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 68 of 87

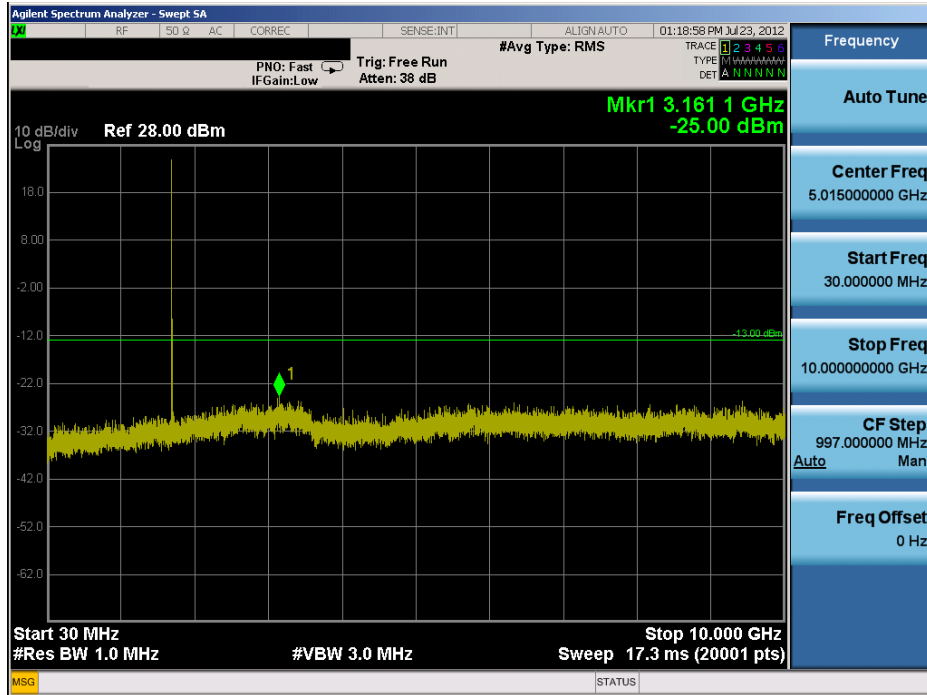


Plot 7-69. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0– Low Channel)

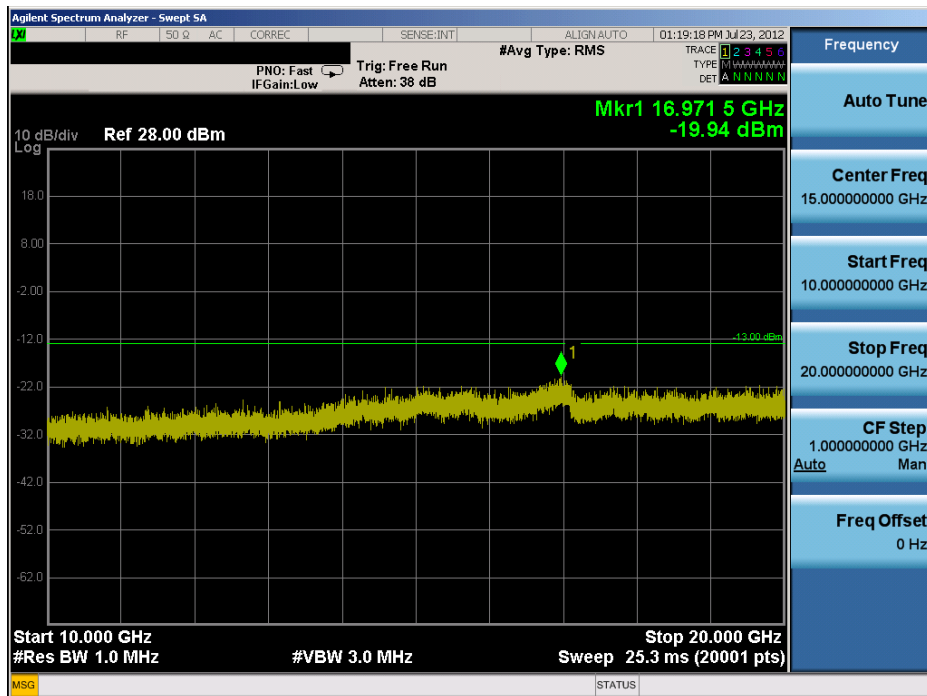


Plot 7-70. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

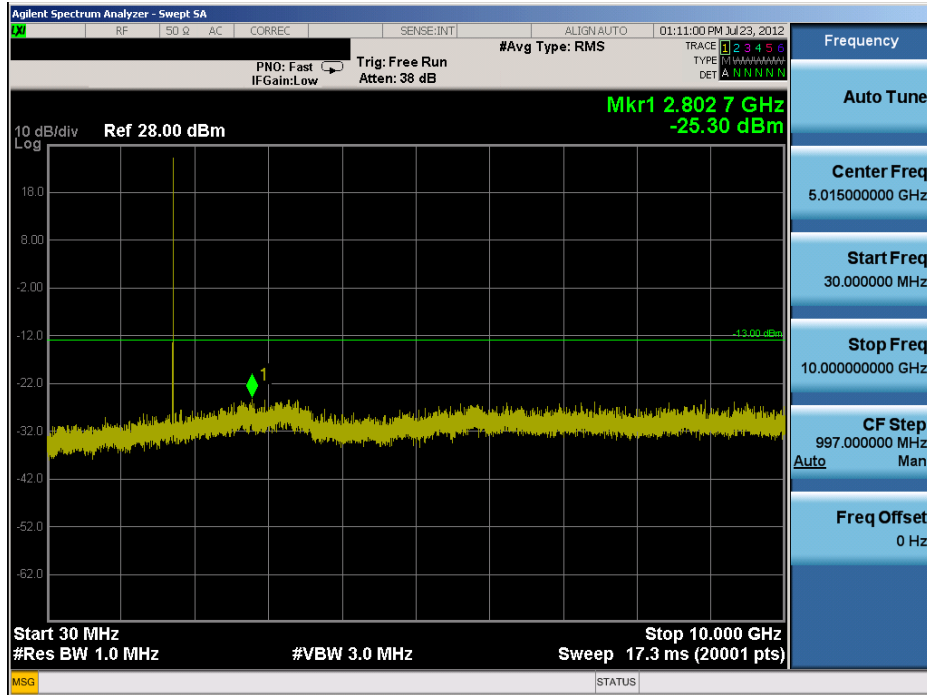

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset			Page 69 of 87

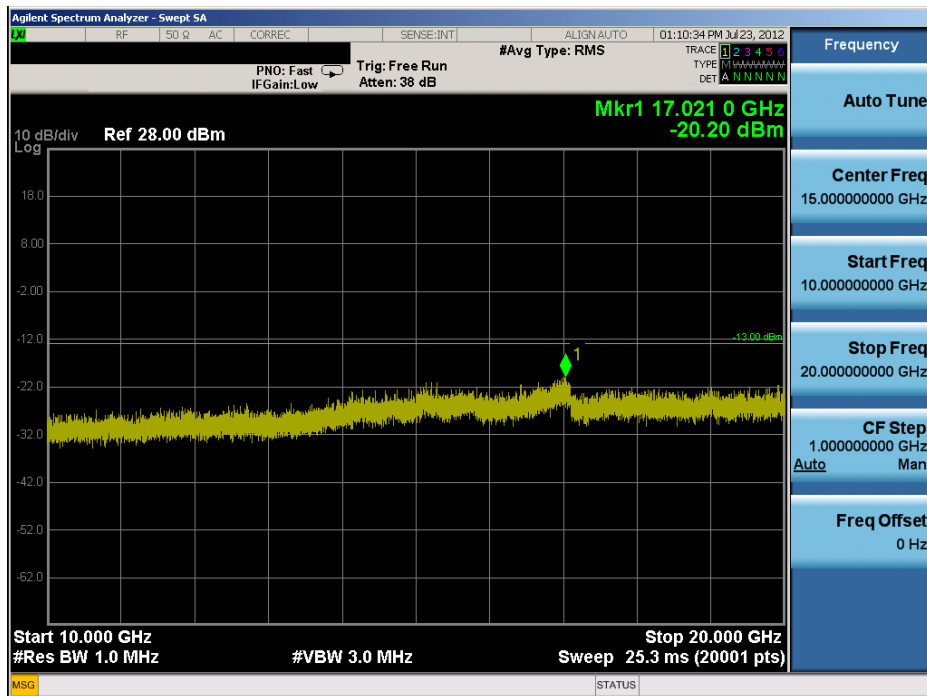


Plot 7-71. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)




Plot 7-72. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970	 <b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 70 of 87	

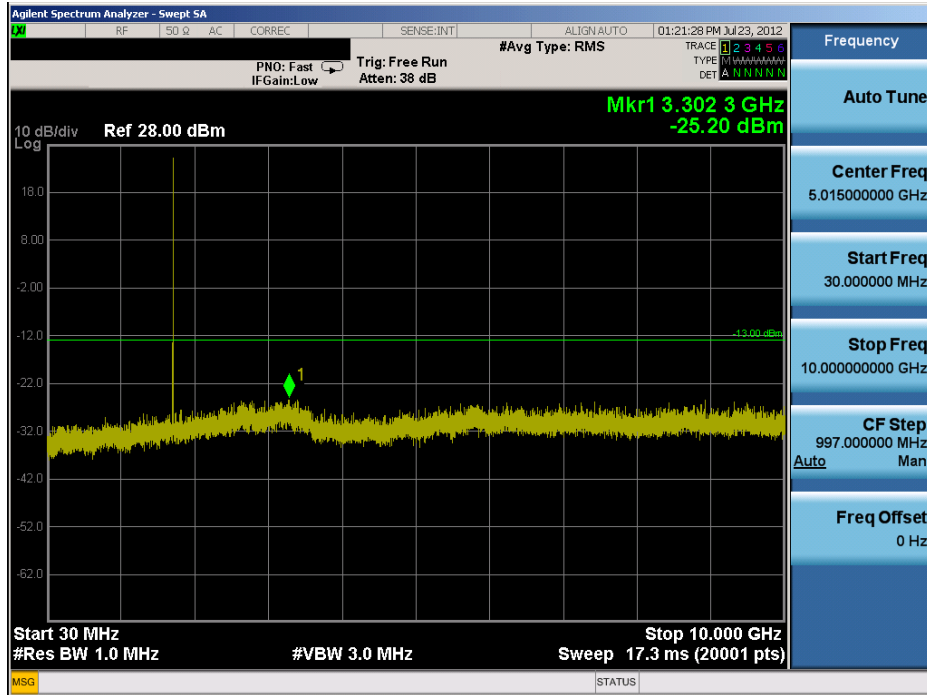


Plot 7-73. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

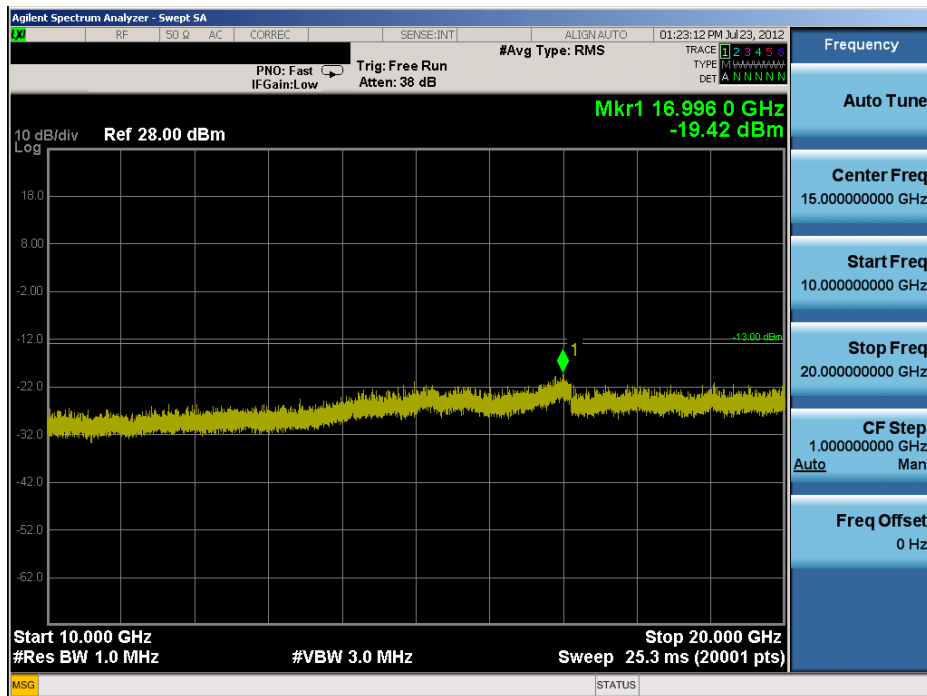


Plot 7-74. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 71 of 87		

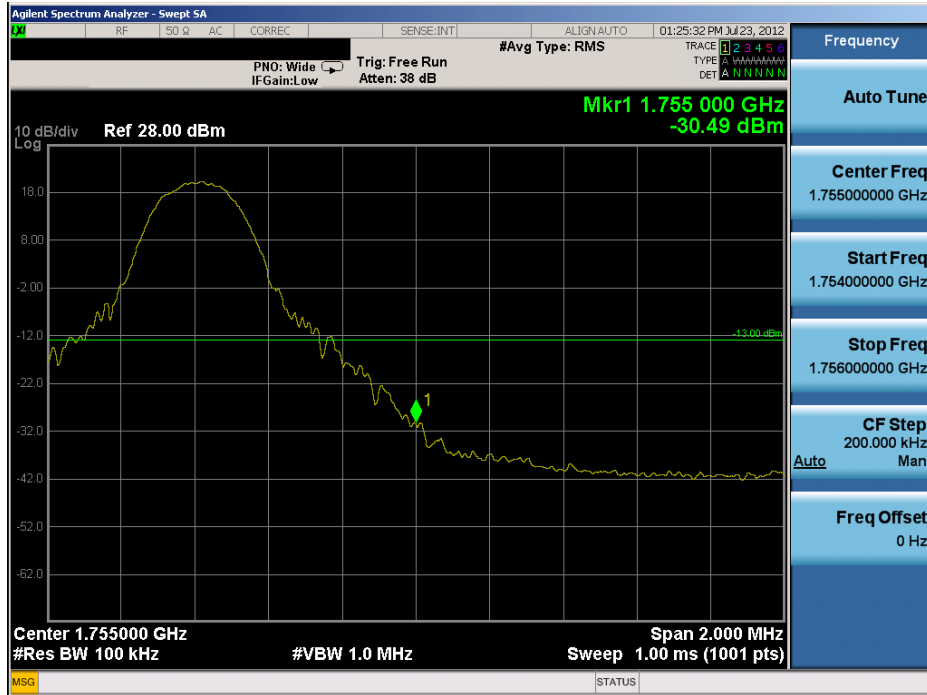

Plot 7-75. Upper Band Edge Plot (QPSK – RB Size 1, Offset 49)

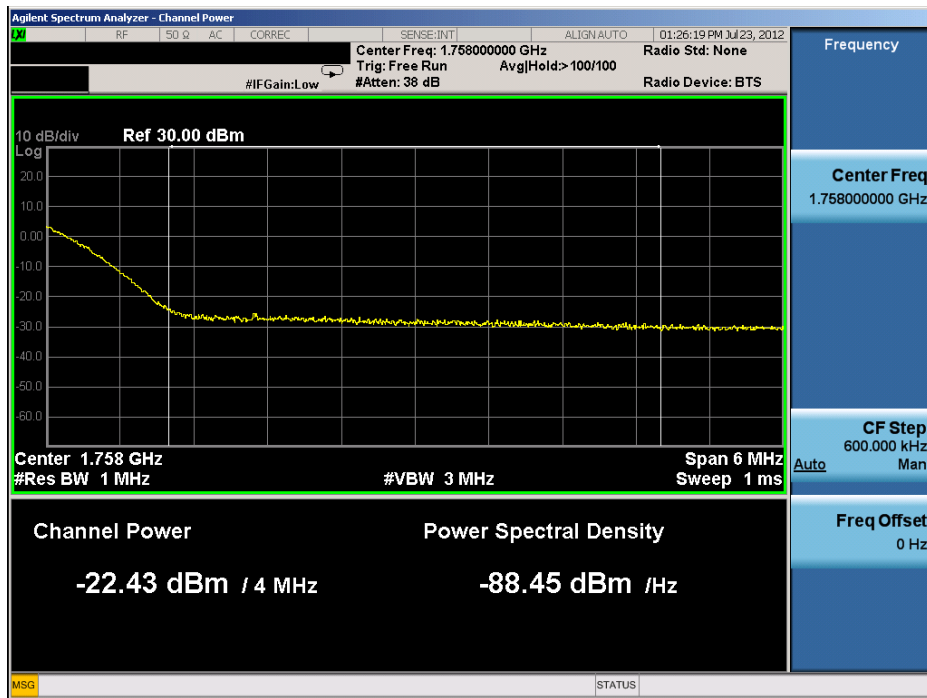


Plot 7-76. Upper Band Edge Plot (QPSK – RB Size 50)


FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 72 of 87



## BAND 2 – 5 MHz BW

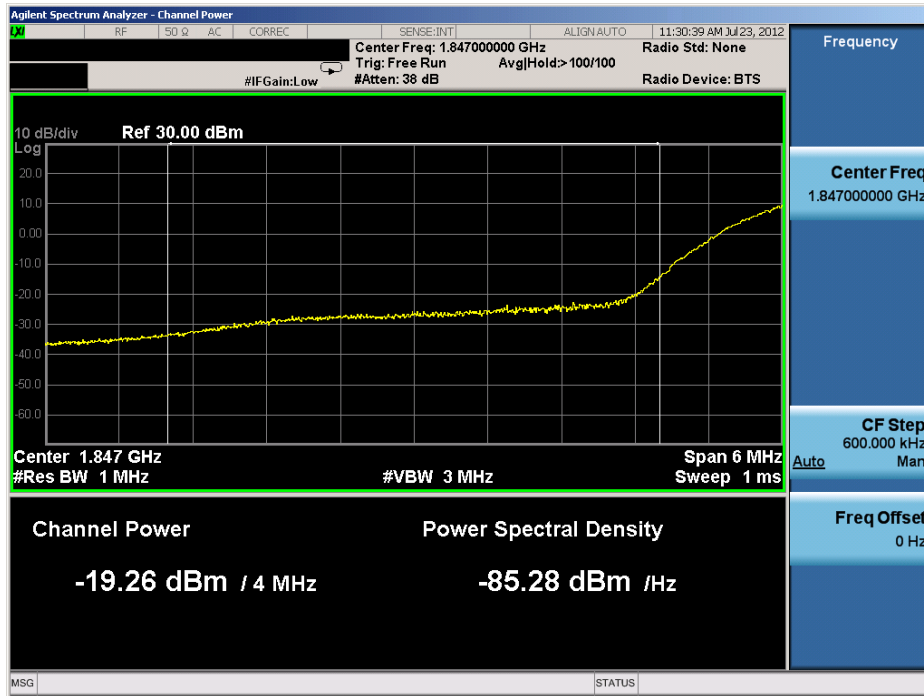


**Plot 7-77. Lower Band Edge Plot (QPSK – RB Size 25)**

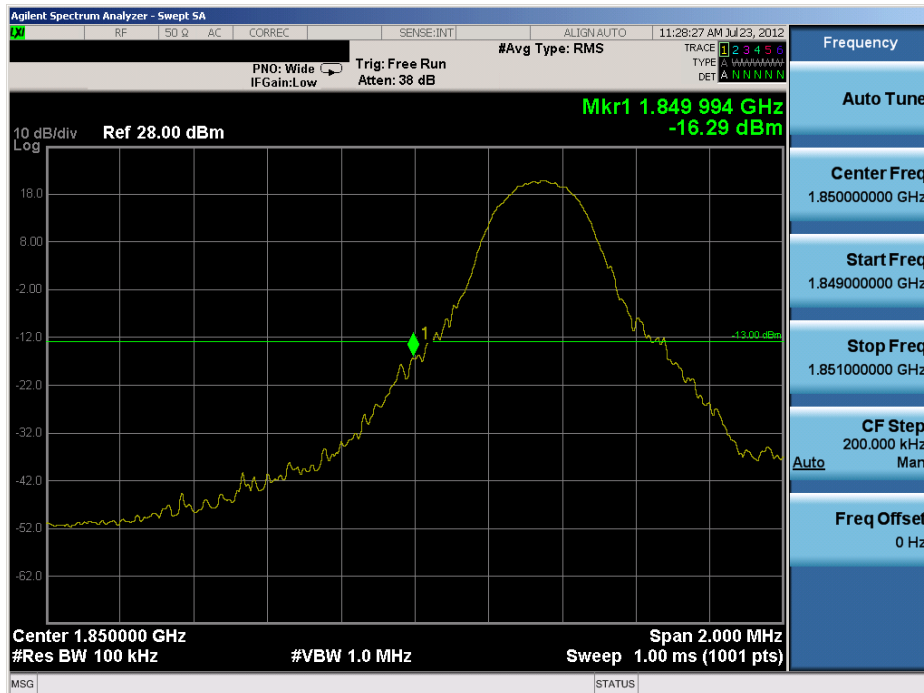


**Plot 7-78. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)**

FCC ID: ZNFE970		<b>FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 73 of 87

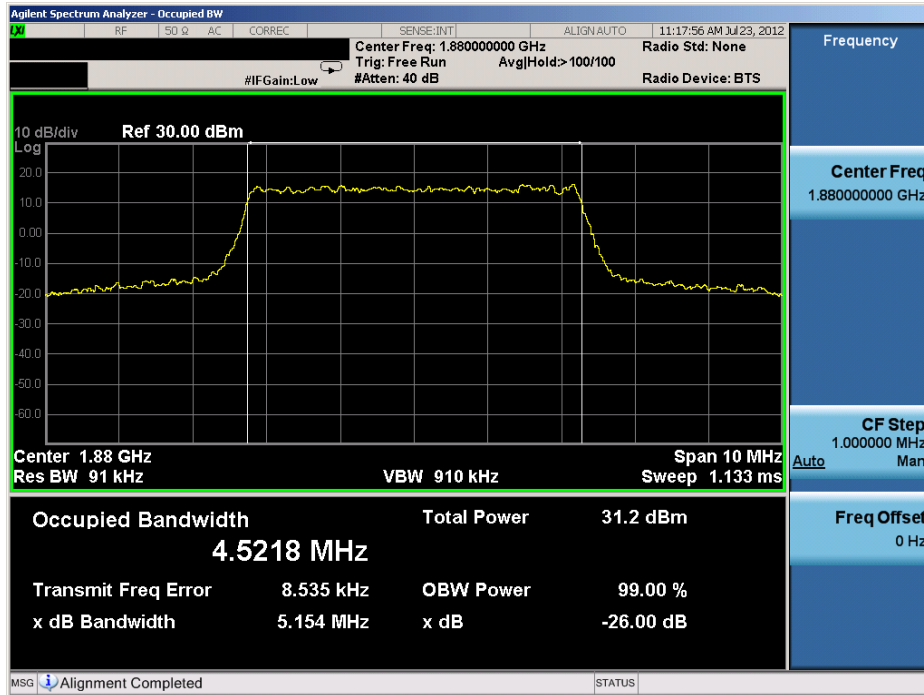


Plot 7-79. Occupied Bandwidth Plot (QPSK – RB Size 25)

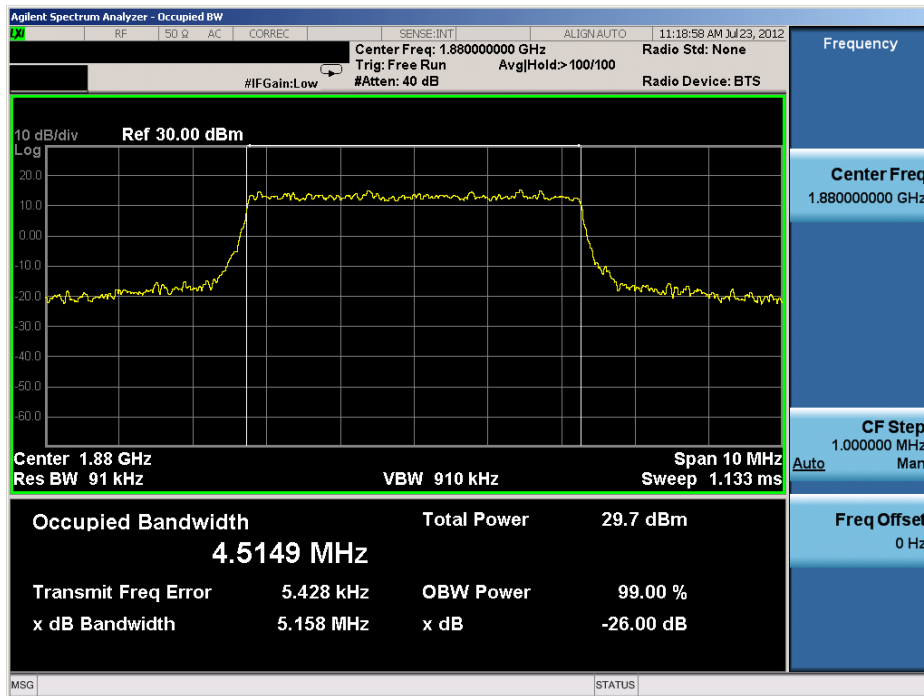


Plot 7-80. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 74 of 87

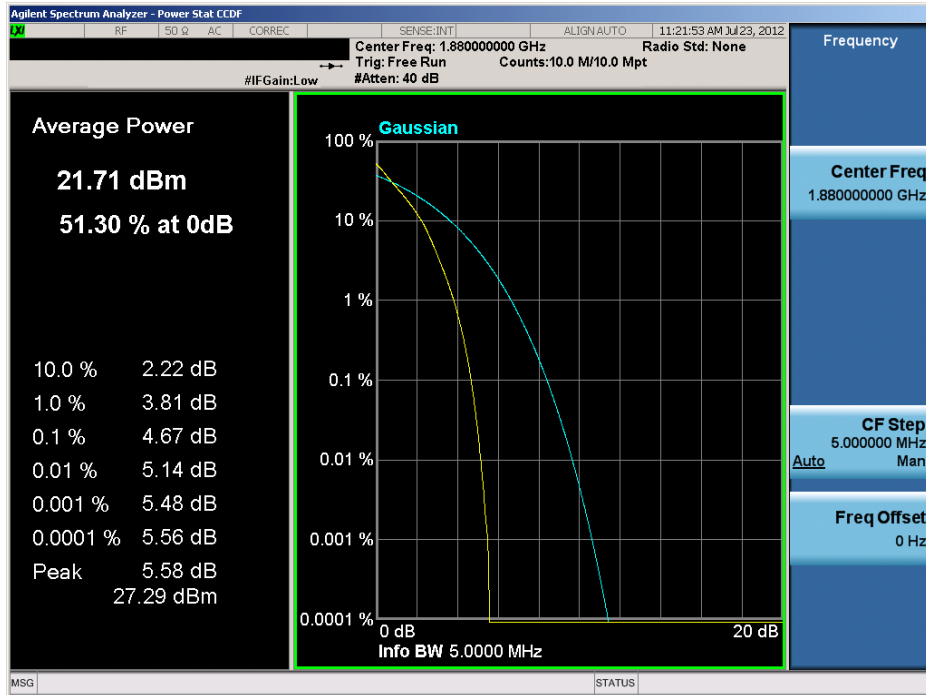


**Plot 7-82. Peak to Average Ratio Plot (QPSK – RB Size 25)**

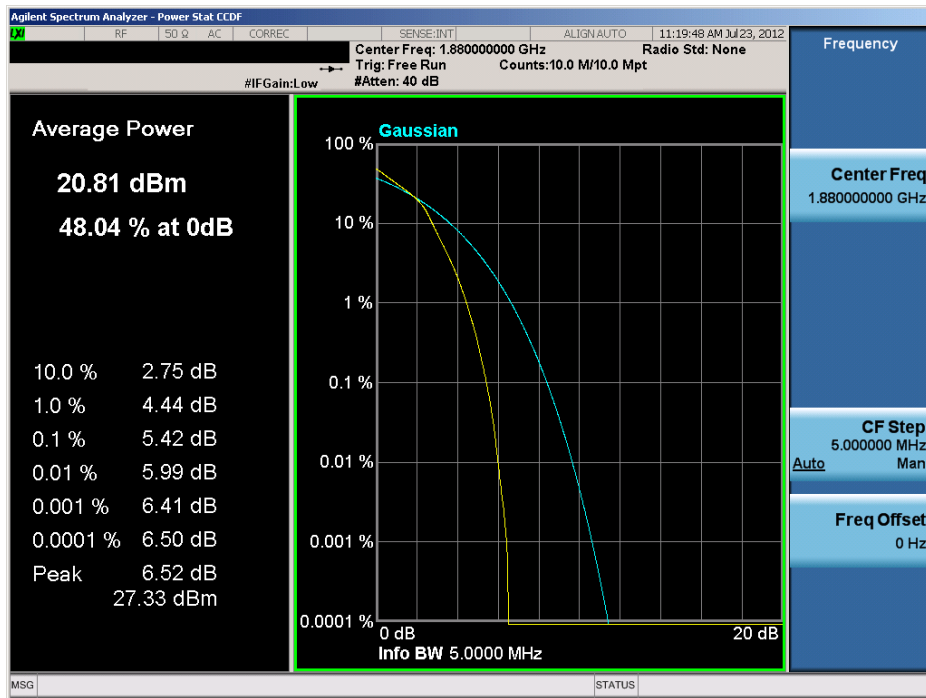


**Plot 7-83. Peak to Average Ratio Plot (16QAM – RB Size 25)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 75 of 87

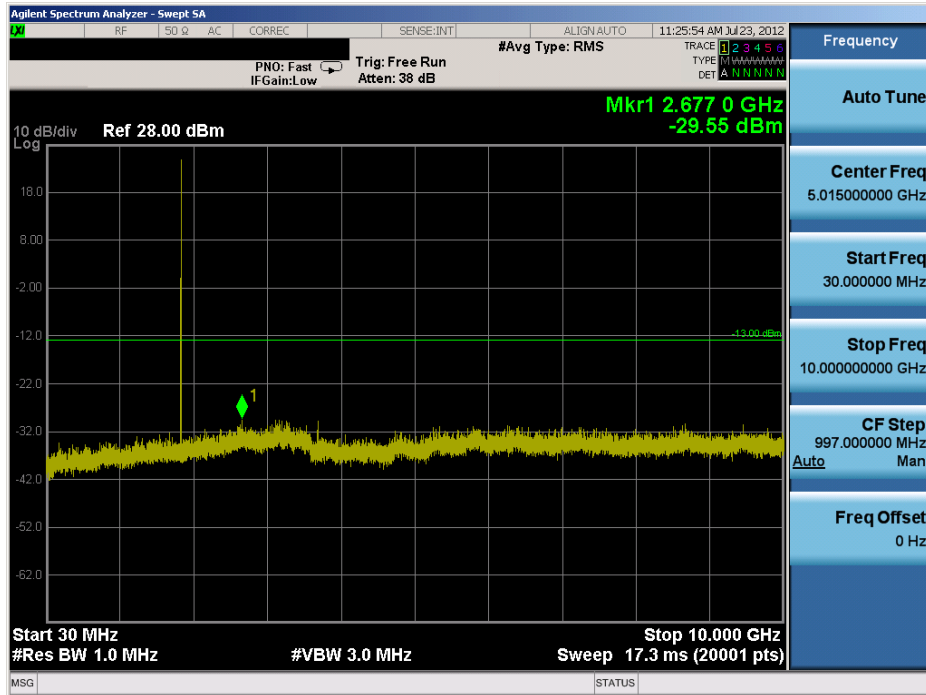


Plot 7-84. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

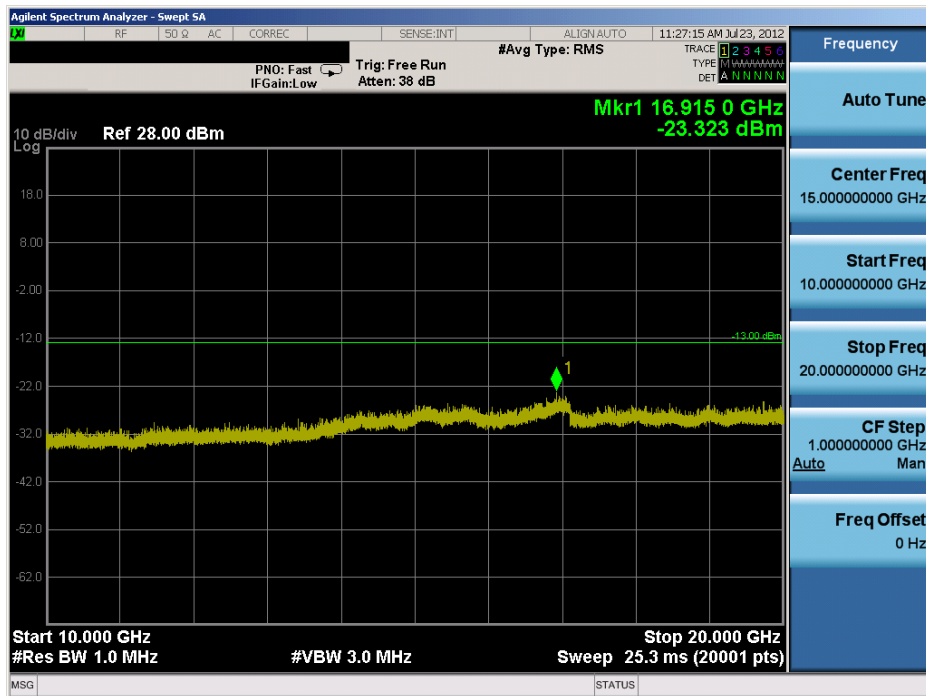


Plot 7-85. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 76 of 87

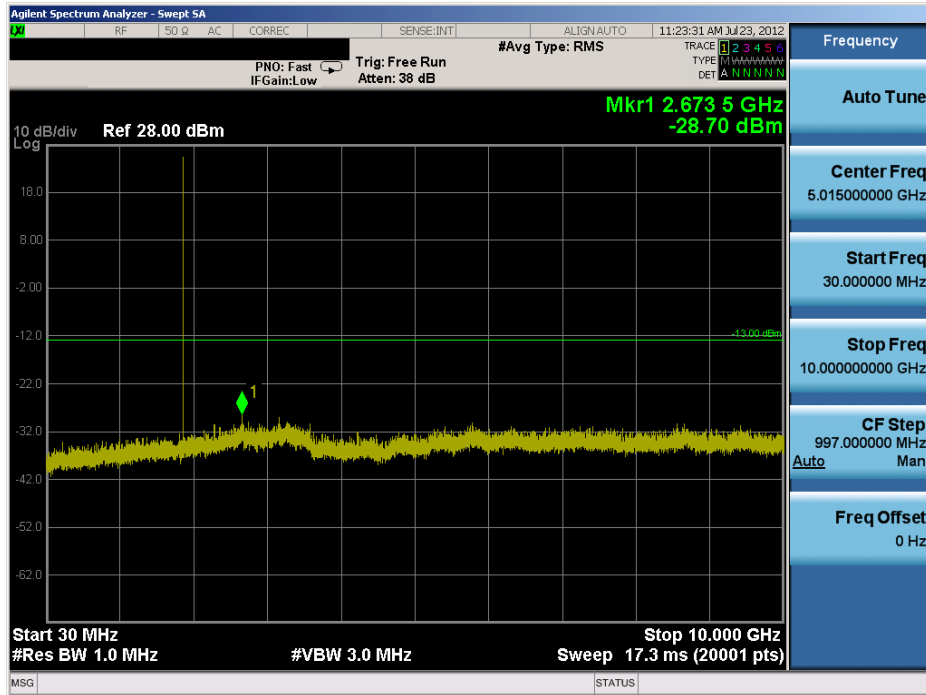


Plot 7-86. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

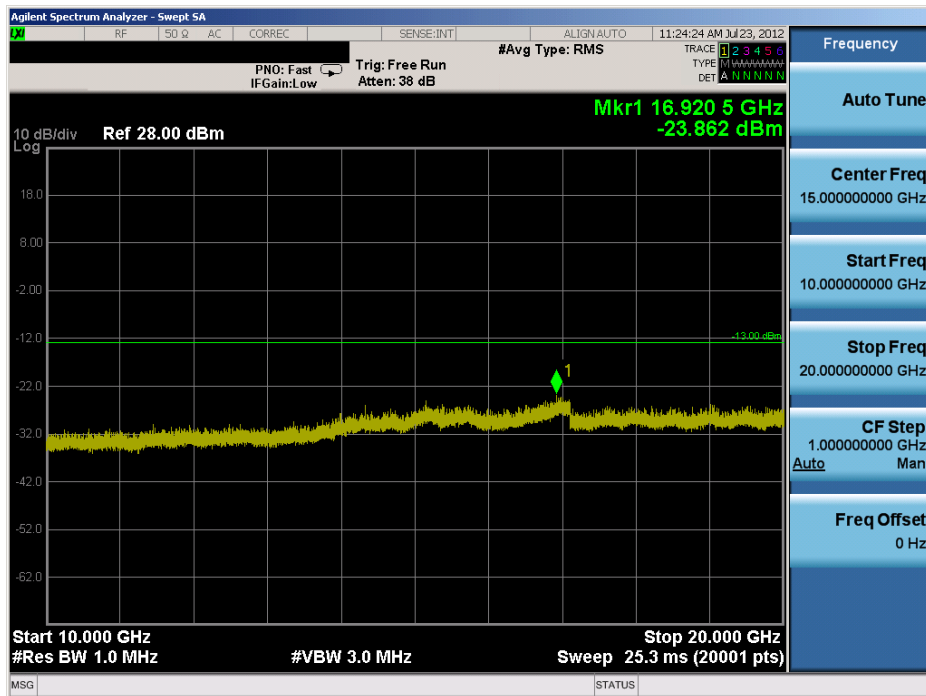


Plot 7-87. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset			Page 77 of 87

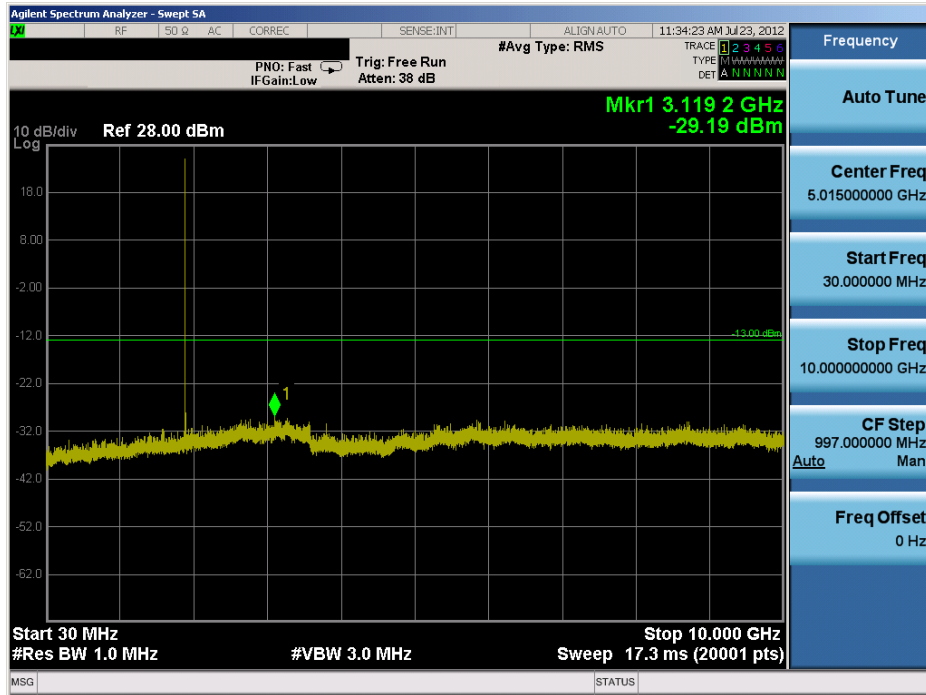


Plot 7-88. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

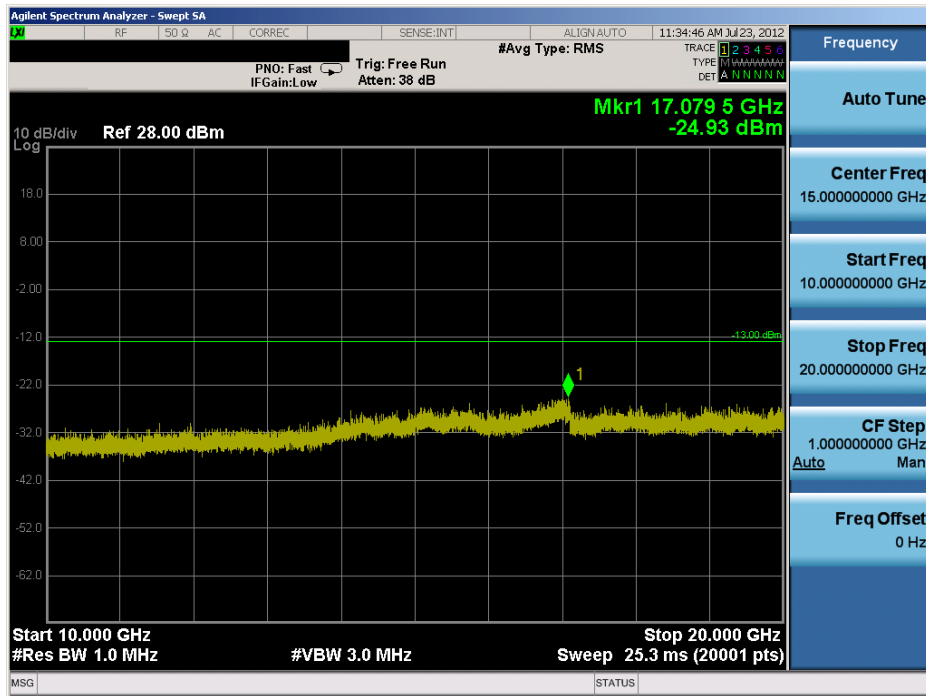


Plot 7-89. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 78 of 87		

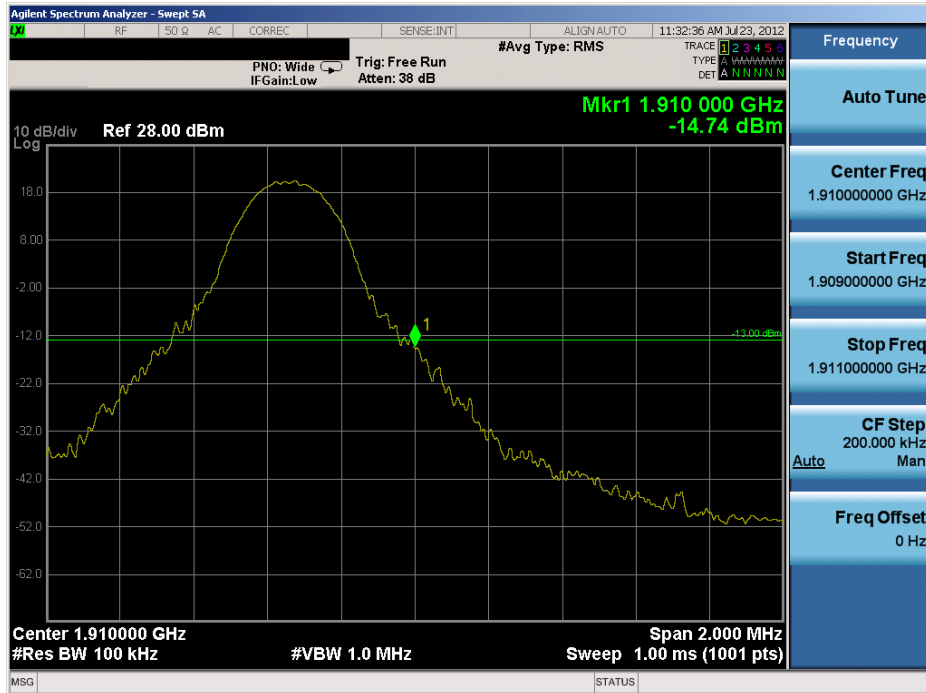


Plot 7-90. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

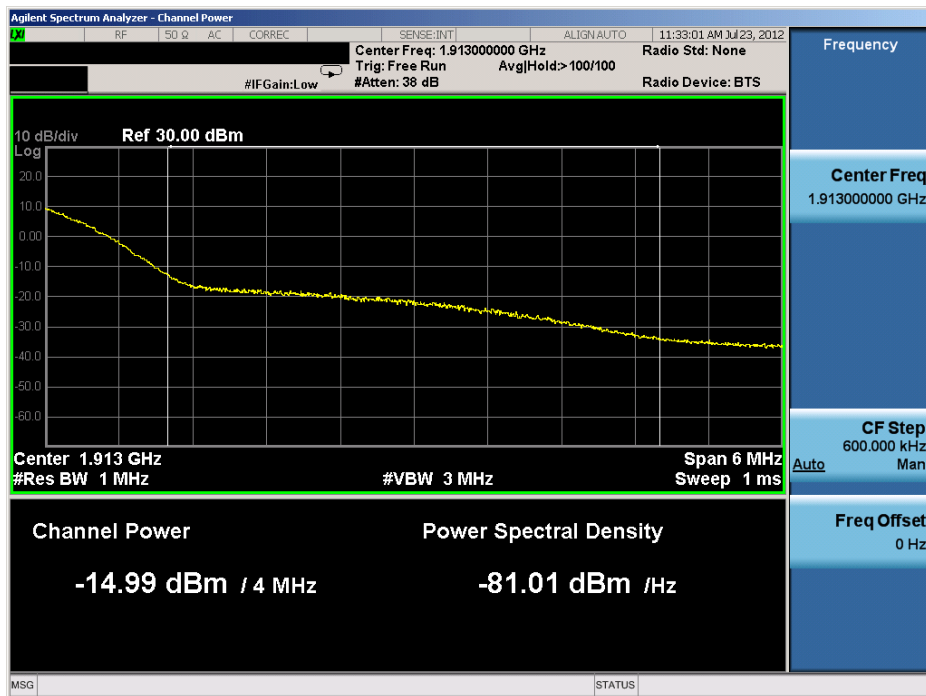


Plot 7-91. Upper Band Edge Plot (QPSK – RB Size 25)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 79 of 87

## BAND 2 – 10 MHz BW

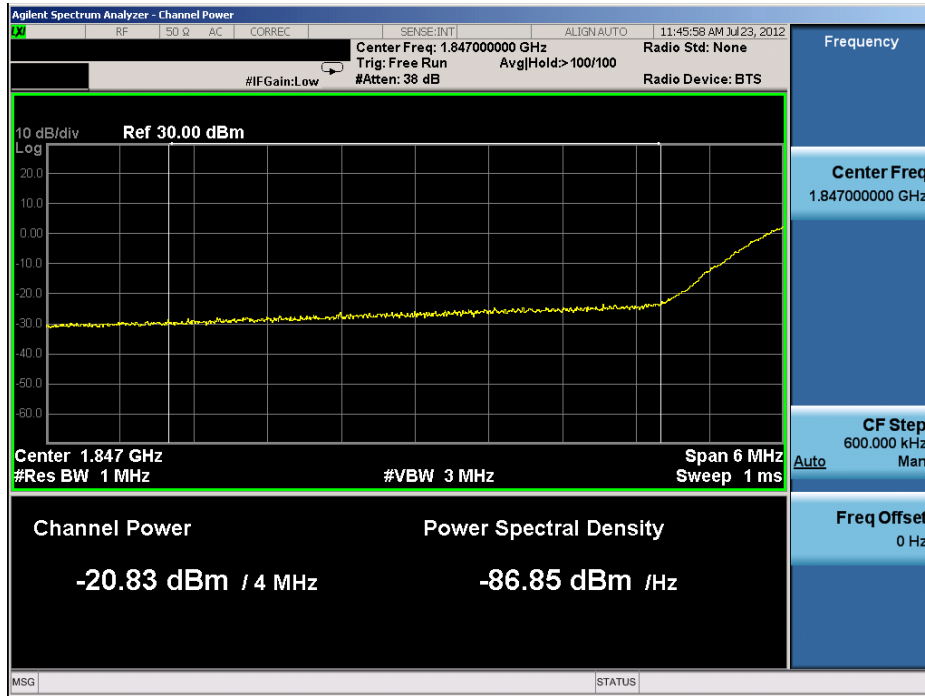


**Plot 7-92. Lower Band Edge Plot (QPSK – RB Size 50)**

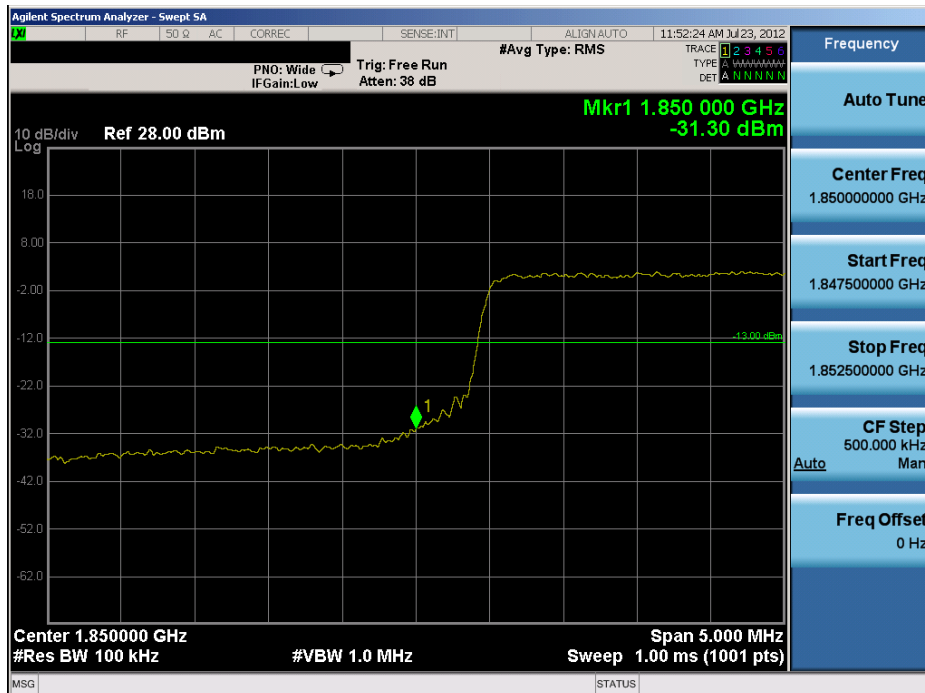


**Plot 7-93. Lower Band Edge Plot (QPSK – RB Size 50)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 80 of 87



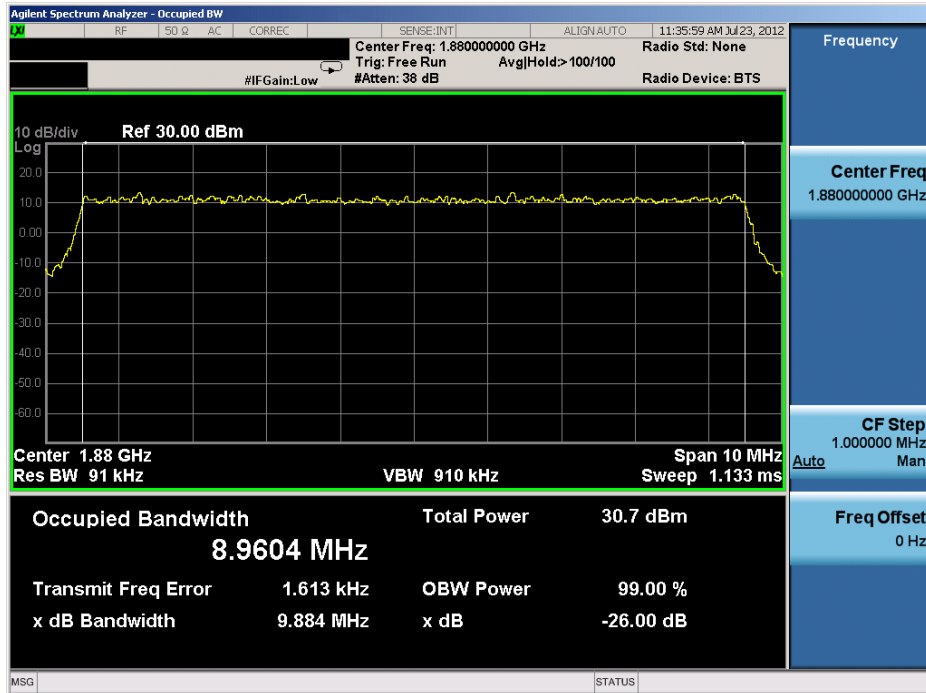


Plot 7-94. Occupied Bandwidth Plot (QPSK – RB Size 50)

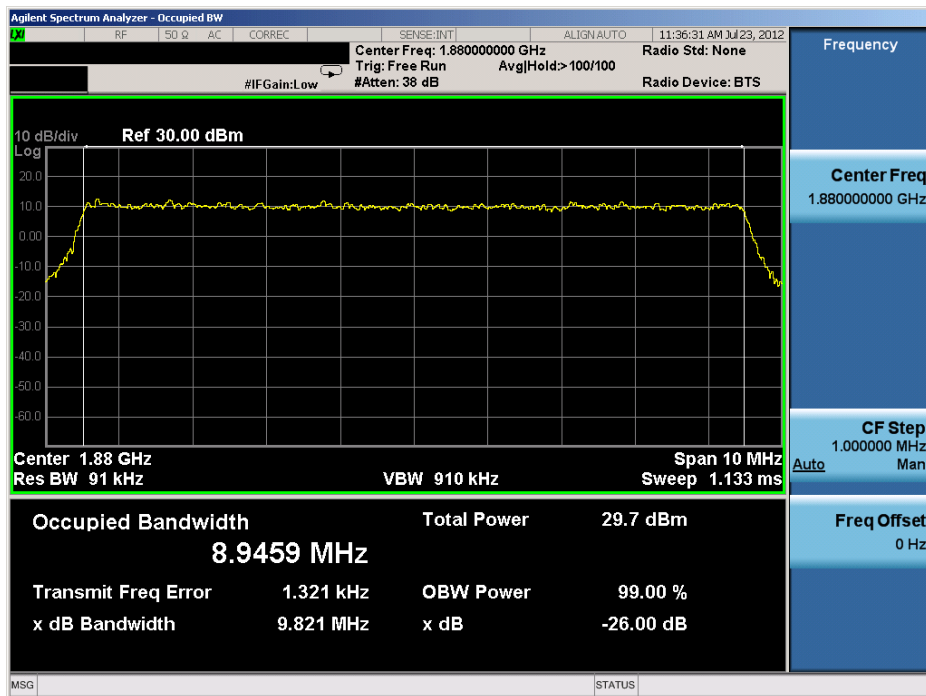


Plot 7-95. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 81 of 87

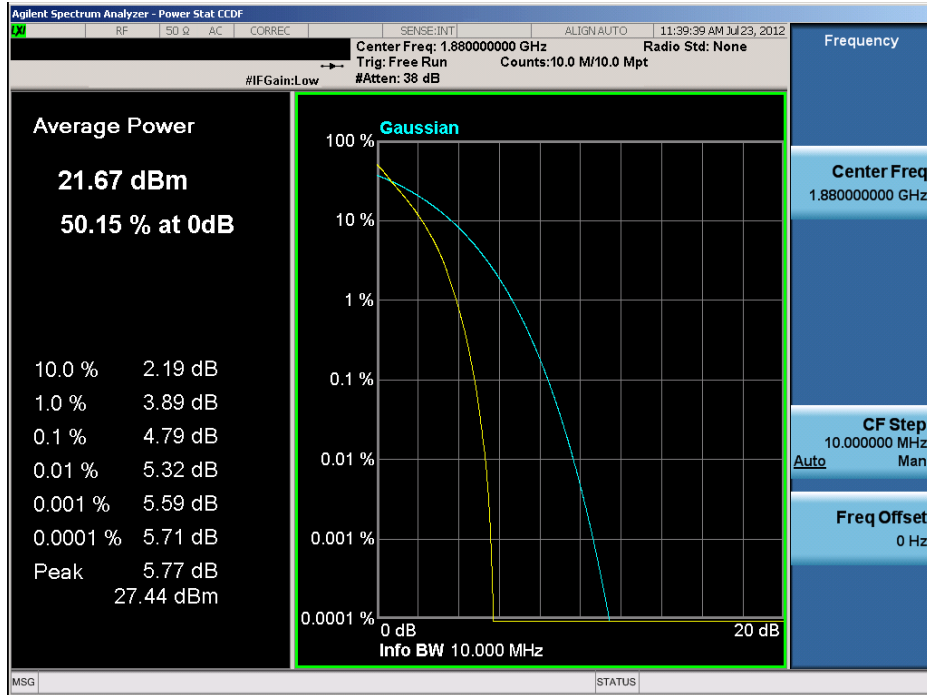


Plot 7-96. Peak to Average Ratio Plot (QPSK – RB Size 50)

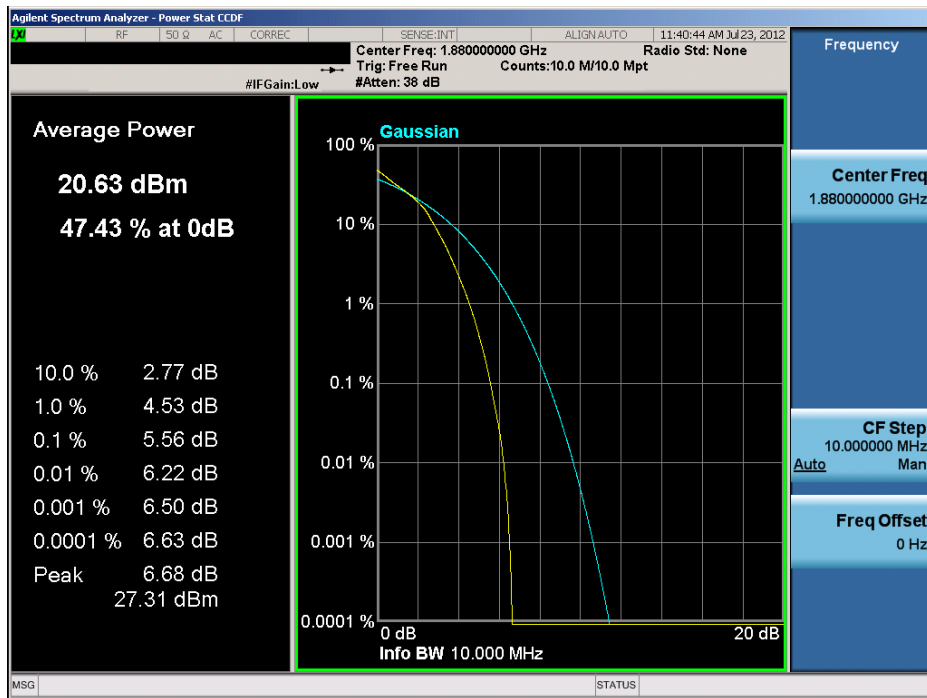


Plot 7-97. Peak to Average Ratio Plot (16QAM – RB Size 50)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 82 of 87

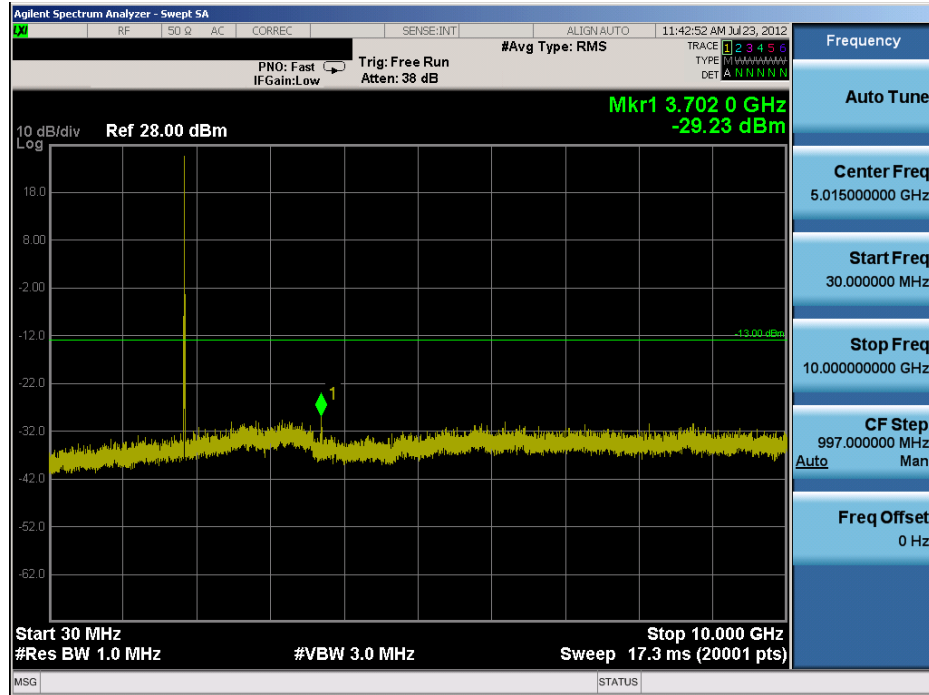


Plot 7-98. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

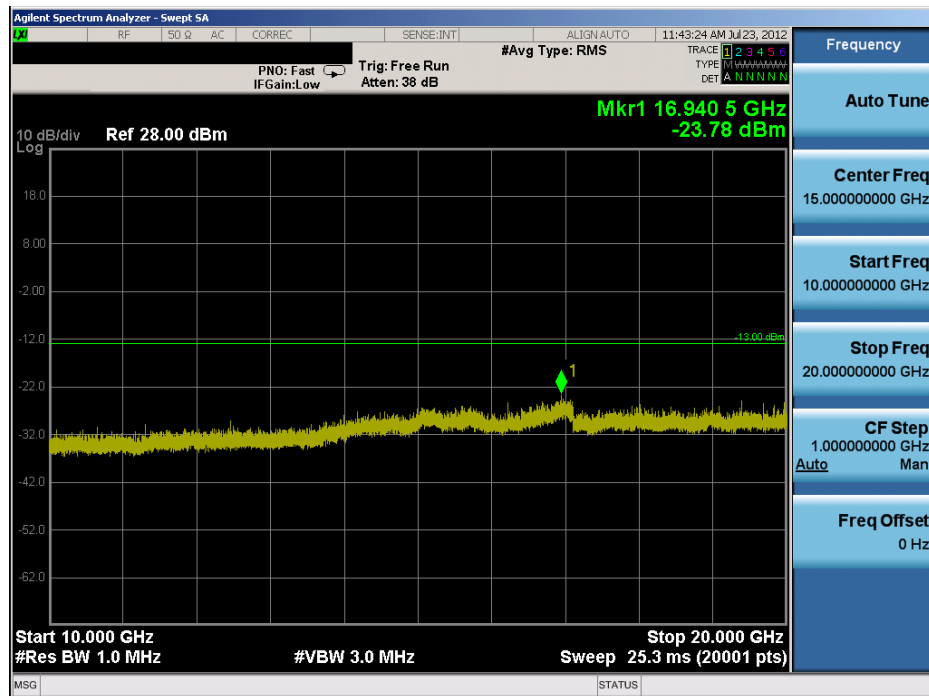


Plot 7-99. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 83 of 87

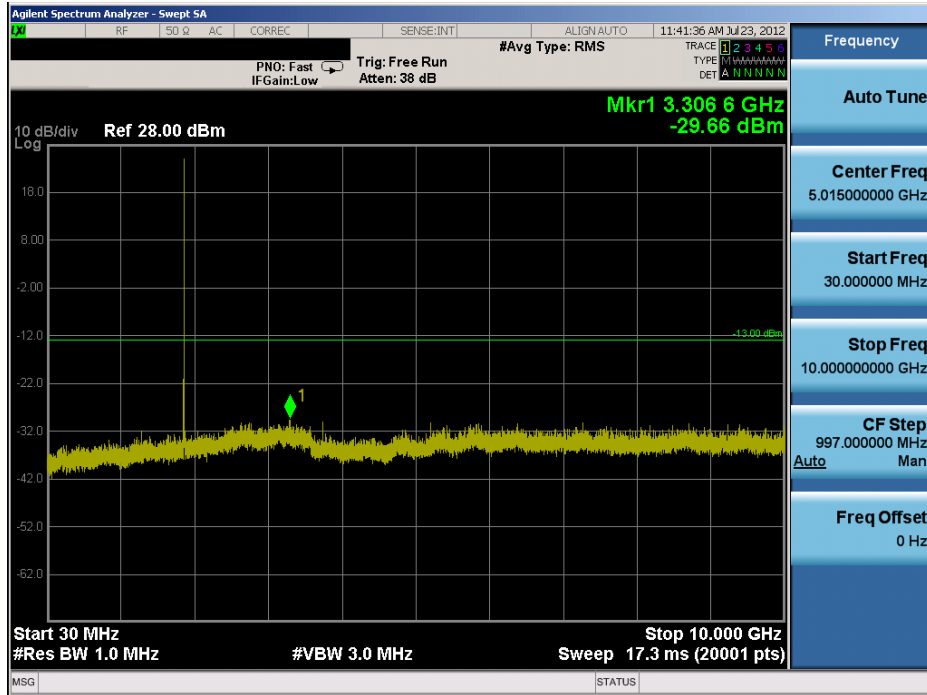


Plot 7-100. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

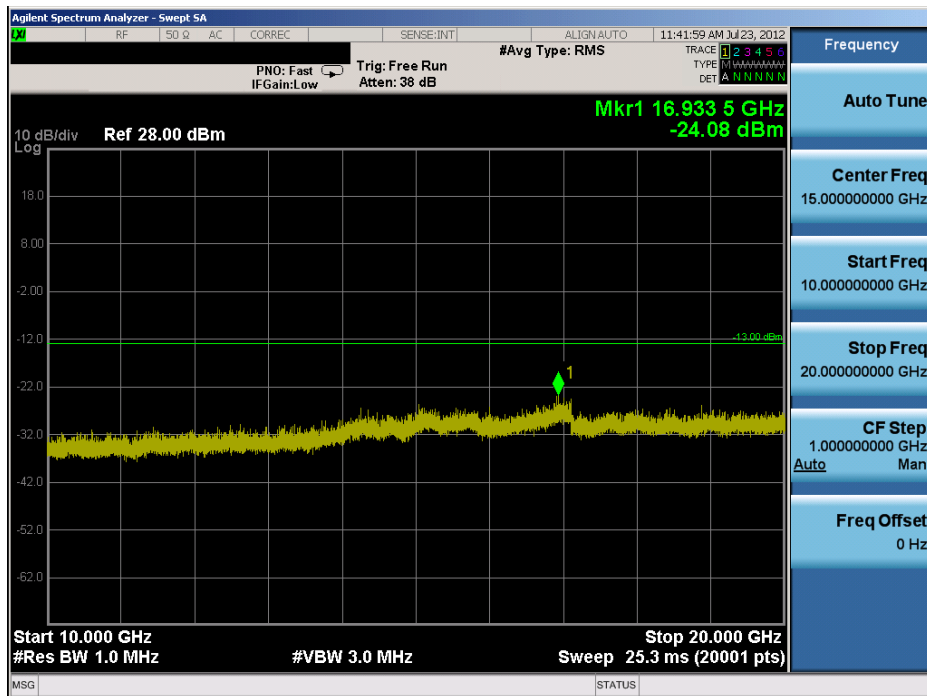


Plot 7-101. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 84 of 87

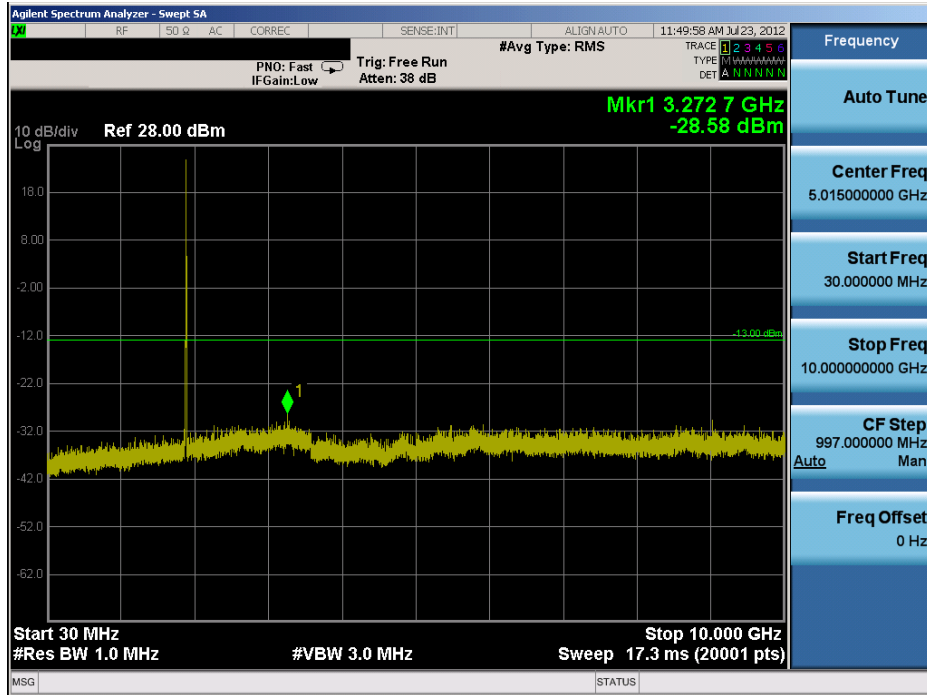


Plot 7-102. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

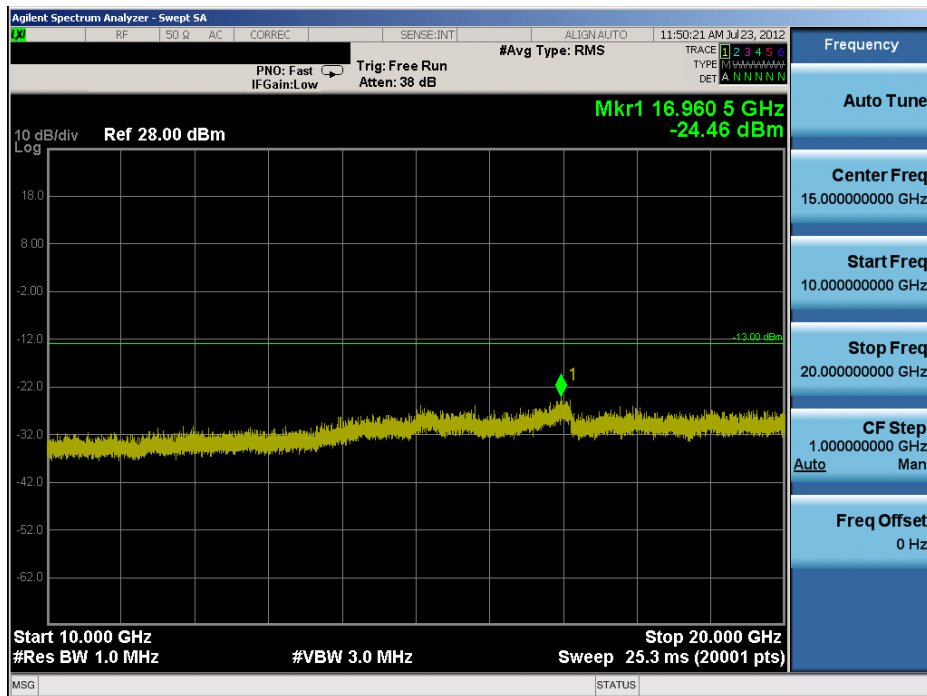


Plot 7-103. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 85 of 87

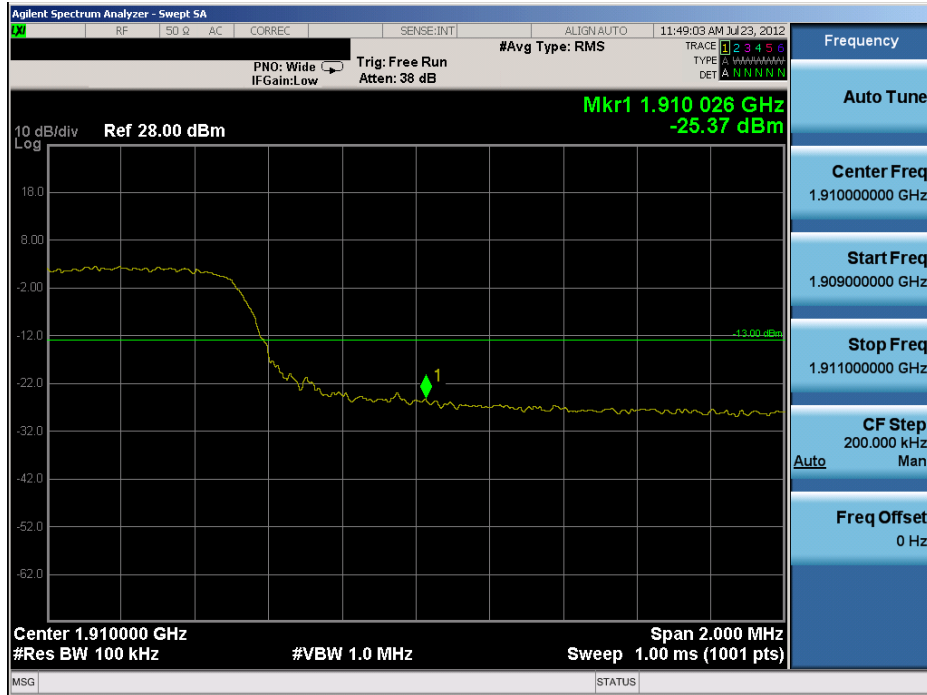

**Plot 7-104. Upper Band Edge Plot (QPSK – RB Size 50)**

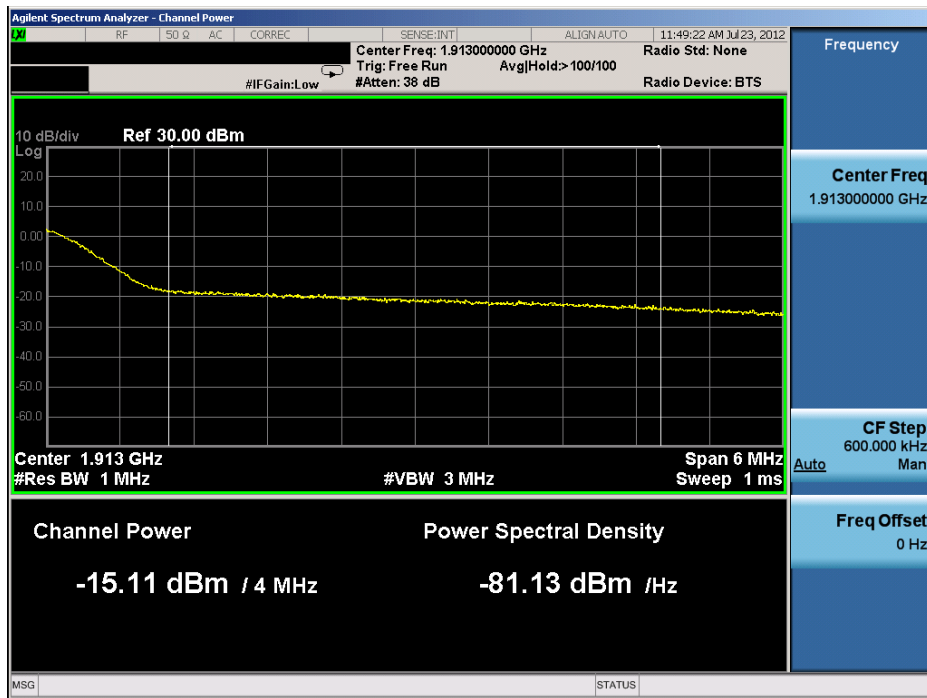



**Plot 7-105. Upper Band Edge Plot (QPSK – RB Size 50)**

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset		Page 86 of 87

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Handset** **FCC ID: ZNFE970** complies with all the requirements of Parts 2, 22, 24 and 27 of the FCC rules for LTE operation only.

FCC ID: ZNFE970		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207050902.ZNF	Test Dates: July 11 - 26, 2012	EUT Type: Portable Handset	Page 87 of 87	