PCTEST
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctest.com



MEASUREMENT REPORT
LTE / 5GNR Sub6

Applicant Name:
LG Electronics USA, Inc.
111 Sylvan Avenue, North Building
Englewood Cliffs, NJ 07632
United States

Date of Testing:
06/26/2020-08/18/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2006150096-03.ZNF

FCC ID:	**ZNFF100VM**
APPLICANT:	**LG Electronics USA, Inc.**

Application Type:	Certification
Model:	LM-F100VM
Additional Model(s):	LMF100VM, F100VM, LM-F101V, LMF101V, F101V
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	22, 24, & 27
Test Procedure(s):	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President

ACCREDITED
CERT #2041.01

TABLE OF CONTENTS



MEASUREMENT REPORT
FCC Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)		
LTE Band 12	27	699.7 - 715.3	0.056	17.48	0.092	19.63	1M10G7D	QPSK
LTE Band 12	27	699.7 - 715.3	0.037	15.70	0.061	17.85	1M11W7D	16QAM
LTE Band 12	27	699.7 - 715.3	0.033	15.15	0.054	17.30	1M09W7D	64QAM
LTE Band 12	27	700.5 - 714.5	0.056	17.45	0.091	19.60	2M71G7D	QPSK
LTE Band 12	27	700.5 - 714.5	0.040	16.01	0.065	18.16	2M72W7D	16QAM
LTE Band 12	27	700.5 - 714.5	0.030	14.80	0.050	16.95	2M72W7D	64QAM
LTE Band 12	27	701.5 - 713.5	0.056	17.52	0.093	19.67	4M57G7D	QPSK
LTE Band 12	27	701.5 - 713.5	0.039	15.92	0.064	18.07	4M52W7D	16QAM
LTE Band 12	27	701.5 - 713.5	0.031	14.98	0.052	17.13	4M52W7D	64QAM
LTE Band 12	27	704 - 711	0.059	17.69	0.096	19.84	9M01G7D	QPSK
LTE Band 12	27	704 - 711	0.040	16.07	0.066	18.22	8M96W7D	16QAM
LTE Band 13	27	779.5 - 784.5	0.056	17.48	0.092	19.63	4M53G7D	QPSK
LTE Band 13	27	779.5 - 784.5	0.034	15.33	0.056	17.48	4M51W7D	16QAM
LTE Band 13	27	779.5 - 784.5	0.026	14.21	0.043	16.36	4M51W7D	64QAM
LTE Band 13	27	782	0.057	17.54	0.093	19.69	9M02G7D	QPSK
LTE Band 13	27	782	0.036	15.56	0.059	17.71	9M01W7D	16QAM
LTE Band 13	27	782	0.027	14.29	0.044	16.44	8M98W7D	64QAM
LTE Band 5	22H	824.7 - 848.3	0.050	16.98	0.082	19.13	1M10G7D	QPSK
LTE Band 5	22H	824.7 - 848.3	0.030	14.79	0.049	16.94	1M11W7D	16QAM
LTE Band 5	22H	824.7 - 848.3	0.026	14.09	0.042	16.24	1M09W7D	64QAM
LTE Band 5	22H	825.5 - 847.5	0.050	16.99	0.082	19.14	2M71G7D	QPSK
LTE Band 5	22H	825.5 - 847.5	0.032	15.07	0.053	17.22	2M71W7D	16QAM
LTE Band 5	22H	825.5 - 847.5	0.026	14.11	0.042	16.26	2M72W7D	64QAM
LTE Band 5	22H	826.5 - 846.5	0.049	16.94	0.081	19.09	4M56G7D	QPSK
LTE Band 5	22H	826.5 - 846.5	0.032	15.02	0.052	17.17	4M52W7D	16QAM
LTE Band 5	22H	826.5 - 846.5	0.027	14.29	0.044	16.44	4M53W7D	64QAM
LTE Band 5	22H	829 - 844	0.050	17.00	0.082	19.15	9M02G7D	QPSK
LTE Band 5	22H	829 - 844	0.032	15.04	0.052	17.19	9M01W7D	16QAM
LTE Band 5	22H	829 - 844	0.027	14.35	0.045	16.50	9M00W7D	64QAM

EUT Overview (<1 GHz)

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
NR Band n5	20 MHz	π/2 BPSK	834.0 - 839.0	0.066	18.210	0.109	20.360	18M0G7D
		QPSK	834.0 - 839.0	0.063	17.970	0.103	20.120	18M9G7D
		16QAM	834.0 - 839.0	0.052	17.200	0.086	19.350	19M0W7D
		64QAM	834.0 - 839.0	0.042	16.250	0.069	18.400	19M0W7D
		256QAM	834.0 - 839.0	0.029	14.550	0.047	16.700	19M0W7D
	15 MHz	π/2 BPSK	831.5 - 841.5	0.066	18.200	0.108	20.350	13M4G7D
		QPSK	831.5 - 841.5	0.062	17.930	0.102	20.080	14M2G7D
		16QAM	831.5 - 841.5	0.051	17.070	0.084	19.220	14M2W7D
		64QAM	831.5 - 841.5	0.041	16.120	0.067	18.270	14M2W7D
		256QAM	831.5 - 841.5	0.028	14.420	0.045	16.570	14M2W7D
	10 MHz	π/2 BPSK	829.0 - 844.0	0.066	18.170	0.108	20.320	8M98G7D
		QPSK	829.0 - 844.0	0.062	17.930	0.102	20.080	9M35G7D
		16QAM	829.0 - 844.0	0.051	17.100	0.084	19.250	9M35W7D
		64QAM	829.0 - 844.0	0.041	16.150	0.068	18.300	9M31W7D
		256QAM	829.0 - 844.0	0.028	14.450	0.046	16.600	9M35W7D
	5 MHz	π/2 BPSK	826.5 - 846.5	0.065	18.130	0.107	20.280	4M55G7D
		QPSK	826.5 - 846.5	0.062	17.890	0.101	20.040	4M51G7D
		16QAM	826.5 - 846.5	0.051	17.080	0.084	19.230	4M54W7D
		64QAM	826.5 - 846.5	0.041	16.130	0.067	18.280	4M52W7D
		256QAM	826.5 - 846.5	0.028	14.430	0.045	16.580	4M51W7D

EUT Overview (<1 GHz)

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 66/4	27	1710.7 - 1779.3	0.160	22.03	1M08G7D	QPSK
LTE Band 66/4	27	1710.7 - 1779.3	0.101	20.03	1M09W7D	16QAM
LTE Band 66/4	27	1710.7 - 1779.3	0.084	19.25	1M09W7D	64QAM
LTE Band 66/4	27	1711.5 - 1778.5	0.159	22.02	2M70G7D	QPSK
LTE Band 66/4	27	1711.5 - 1778.5	0.104	20.19	2M71W7D	16QAM
LTE Band 66/4	27	1711.5 - 1778.5	0.076	18.80	2M71W7D	64QAM
LTE Band 66/4	27	1712.5 - 1777.5	0.160	22.03	4M51G7D	QPSK
LTE Band 66/4	27	1712.5 - 1777.5	0.102	20.10	4M53W7D	16QAM
LTE Band 66/4	27	1712.5 - 1777.5	0.079	18.99	4M52W7D	64QAM
LTE Band 66/4	27	1715 - 1775	0.157	21.97	9M02G7D	QPSK
LTE Band 66/4	27	1715 - 1775	0.103	20.11	9M02W7D	16QAM
LTE Band 66/4	27	1715 - 1775	0.078	18.91	9M02W7D	64QAM
LTE Band 66/4	27	1717.5 - 1772.5	0.158	21.98	13M5G7D	QPSK
LTE Band 66/4	27	1717.5 - 1772.5	0.103	20.14	13M5W7D	16QAM
LTE Band 66/4	27	1717.5 - 1772.5	0.076	18.81	13M5W7D	64QAM
LTE Band 66/4	27	1720 - 1770	0.161	22.07	18M0G7D	QPSK
LTE Band 66/4	27	1720 - 1770	0.109	20.39	18M0W7D	16QAM
LTE Band 66/4	27	1720 - 1770	0.086	19.37	18M0W7D	64QAM
LTE Band 2	24E	1850.7 - 1909.3	0.198	22.97	1M10G7D	QPSK
LTE Band 2	24E	1850.7 - 1909.3	0.141	21.49	1M11W7D	16QAM
LTE Band 2	24E	1850.7 - 1909.3	0.109	20.39	1M09W7D	64QAM
LTE Band 2	24E	1851.5 - 1908.5	0.196	22.93	2M72G7D	QPSK
LTE Band 2	24E	1851.5 - 1908.5	0.142	21.53	2M71W7D	16QAM
LTE Band 2	24E	1851.5 - 1908.5	0.109	20.37	2M71W7D	64QAM
LTE Band 2	24E	1852.5 - 1907.5	0.195	22.90	4M53G7D	QPSK
LTE Band 2	24E	1852.5 - 1907.5	0.138	21.40	4M53W7D	16QAM
LTE Band 2	24E	1852.5 - 1907.5	0.114	20.58	4M53W7D	64QAM
LTE Band 2	24E	1855 - 1905	0.196	22.93	9M00G7D	QPSK
LTE Band 2	24E	1855 - 1905	0.137	21.36	9M02W7D	16QAM
LTE Band 2	24E	1855 - 1905	0.114	20.58	8M97W7D	64QAM
LTE Band 2	24E	1857.5 - 1902.5	0.197	22.95	13M5G7D	QPSK
LTE Band 2	24E	1857.5 - 1902.5	0.131	21.17	13M5W7D	16QAM
LTE Band 2	24E	1857.5 - 1902.5	0.108	20.32	13M5W7D	64QAM
LTE Band 2	24E	1860 - 1900	0.203	23.08	18M0G7D	QPSK
LTE Band 2	24E	1860 - 1900	0.141	21.48	18M0W7D	16QAM
LTE Band 2	24E	1860 - 1900	0.109	20.36	17M9W7D	64QAM

EUT Overview (Mid Bands)

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n66	20 MHz	π/2 BPSK	1720.0 - 1770.0	0.139	21.44	17M9G7D
		QPSK	1720.0 - 1770.0	0.144	21.58	18M0G7D
		16QAM	1720.0 - 1770.0	0.104	20.17	17M9W7D
		64QAM	1720.0 - 1770.0	0.080	19.05	17M9W7D
		256QAM	1720.0 - 1770.0	0.047	16.71	18M0W7D
	15 MHz	π/2 BPSK	1717.5 - 1772.5	0.129	21.12	13M5G7D
		QPSK	1717.5 - 1772.5	0.139	21.44	13M5G7D
		16QAM	1717.5 - 1772.5	0.104	20.19	13M5W7D
		64QAM	1717.5 - 1772.5	0.081	19.07	13M5W7D
		256QAM	1717.5 - 1772.5	0.047	16.73	13M5W7D
	10 MHz	π/2 BPSK	1715.0 - 1775.0	0.125	20.98	8M98G7D
		QPSK	1715.0 - 1775.0	0.143	21.54	9M34G7D
		16QAM	1715.0 - 1775.0	0.100	20.00	9M34W7D
		64QAM	1715.0 - 1775.0	0.077	18.88	9M33W7D
		256QAM	1715.0 - 1775.0	0.045	16.54	9M34W7D
	5 MHz	π/2 BPSK	1712.5 - 1777.5	0.124	20.93	4M49G7D
		QPSK	1712.5 - 1777.5	0.138	21.41	4M49G7D
		16QAM	1712.5 - 1777.5	0.100	19.98	4M49W7D
		64QAM	1712.5 - 1777.5	0.077	18.86	4M50W7D
		256QAM	1712.5 - 1777.5	0.045	16.52	4M49W7D

EUT Overview (Mid Bands)

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n2	20 MHz	π/2 BPSK	1860 - 1905	0.217	23.36	18M0G7D
		QPSK	1860 - 1905	0.219	23.40	18M2G7D
		16QAM	1860 - 1905	0.156	21.93	18M1W7D
		64QAM	1860 - 1905	0.122	20.85	18M1W7D
		256QAM	1860 - 1905	0.071	18.48	18M1W7D
	15 MHz	π/2 BPSK	1857.5 - 1907.5	0.215	23.31	13M6G7D
		QPSK	1857.5 - 1907.5	0.220	23.41	14M3G7D
		16QAM	1857.5 - 1907.5	0.145	21.60	14M3W7D
		64QAM	1857.5 - 1907.5	0.113	20.53	14M3W7D
		256QAM	1857.5 - 1907.5	0.066	18.16	14M3W7D
	10 MHz	π/2 BPSK	1855 - 1910	0.209	23.20	8M95G7D
		QPSK	1855 - 1910	0.216	23.34	9M10G7D
		16QAM	1855 - 1910	0.150	21.76	9M11W7D
		64QAM	1855 - 1910	0.117	20.68	9M09W7D
		256QAM	1855 - 1910	0.068	18.31	9M09W7D
	5 MHz	π/2 BPSK	1852.5 - 1912.5	0.211	23.23	4M52G7D
		QPSK	1852.5 - 1912.5	0.216	23.34	4M55G7D
		16QAM	1852.5 - 1912.5	0.162	22.08	4M56W7D
		64QAM	1852.5 - 1912.5	0.126	21.00	4M55W7D
		256QAM	1852.5 - 1912.5	0.073	18.63	4M58W7D

EUT Overview (Mid Bands)

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 30	27	2307.5 - 2312.5	0.133	21.24	4M54G7D	QPSK
LTE Band 30	27	2307.5 - 2312.5	0.091	19.61	4M53W7D	16QAM
LTE Band 30	27	2307.5 - 2312.5	0.073	18.66	4M55W7D	64QAM
LTE Band 30	27	2310	0.135	21.31	9M04G7D	QPSK
LTE Band 30	27	2310	0.087	19.40	9M04W7D	16QAM
LTE Band 30	27	2310	0.072	18.59	9M01W7D	64QAM
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.116	20.63	4M53G7D	QPSK
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.088	19.43	4M51W7D	16QAM
LTE Band 41 (PC3)	27	2498.5 - 2687.5	0.075	18.75	4M51W7D	64QAM
LTE Band 41 (PC3)	27	2501 - 2685	0.115	20.60	8M94G7D	QPSK
LTE Band 41 (PC3)	27	2501 - 2685	0.088	19.44	9M01W7D	16QAM
LTE Band 41 (PC3)	27	2501 - 2685	0.069	18.37	8M98W7D	64QAM
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.115	20.61	13M5G7D	QPSK
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.088	19.45	13M4W7D	16QAM
LTE Band 41 (PC3)	27	2503.5 - 2682.5	0.067	18.29	13M5W7D	64QAM
LTE Band 41 (PC3)	27	2506 - 2680	0.116	20.64	18M0G7D	QPSK
LTE Band 41 (PC3)	27	2506 - 2680	0.083	19.20	18M0W7D	16QAM
LTE Band 41 (PC3)	27	2506 - 2680	0.065	18.11	17M9W7D	64QAM

EUT Overview (High Bands)

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).

- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFF100VM**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 00211, 00229, 00336, 00344, 00351, 00328, 00310

2.2 Device Capabilities

This device contains the following capabilities:

CDMA, GSM/GPRS/EDGE, WCDMA/HSPA, LTE, NR, WLAN, UNII, BT(1x, EDR, LE), NFC

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

The EUT is capable of operating in screen closed and screen open configurations. The worst-case configuration for radiated emissions was determined from open and closed configurations in X, Y, and Z orientations for horizontal and vertical antenna polarizations. The worst case radiated emissions data is shown in this report. Additionally, the EUT is support a camera that mechanically pops up from the device. The worst case configuration was investigated with the camera down and popped up and worst case radiated data is reported herein.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d\ [dBm]} = P_{g\ [dBm]} - \text{cable loss}_{\ [dB]} + \text{antenna gain}_{\ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g\ [dBm]}$ – cable loss $_{[dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10 $\log_{10}$(Power $_{[Watts]}$). All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
Agilent	8648D	(9kHz-4GHz) Signal Generator	6/23/2020	Annual	6/23/2021	3613A00315
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/13/2019	Annual	8/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			107826
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

2. Equipment with a calibration date of “N/A” shown in this list was not used to make direct calibrated measurements.

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analzyer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.

FCC ID: ZNFF100VM

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): LTE / 5GNR Sub6

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Out of Band Emissions	> 43 + 10 $\log_{10}$ (P[Watts]) at Band Edge and for all out-of-band emissions			Section 7.3, 7.4
27.53(m)	Out of Band Emissions	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.3, 7.4
27.53(a)	Out of Band Emissions	Undesirable emissions must meet the limits detailed in 27.53(a)			Section 7.3, 7.4
24.232(d) 27.50	Peak-Average Ratio	< 13 dB			Section 7.5
2.1046	Transmitter Conducted Output Power	N/A			See RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)			Section 7.10

Table 7-1. Summary of Conducted Test Results

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.7
27.50(b)(10) 27.50(c)(10)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 12, 13)	< 3 Watts max. ERP			Section 7.7
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP			Section 7.7
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4/66)	< 1 Watts max. EIRP			Section 7.7
27.50(a)(3)	Equivalent Isotropic Radiated Power (Band 30)	< 0.25 Watts max. EIRP			Section 7.7
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Undesirable Emissions (Band 12, 13, 5, 66/4, 2)	> 43 + 10 $\log_{10}$ (P[Watts]) for all out-of-band emissions			Section 7.8
27.53(f)	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz			Section 7.8
27.53(a)	Undesirable Emissions (Band 30)	> 70 + 10 $\log_{10}$ (P[Watts])			Section 7.8
27.53(m)	Undesirable Emissions (Band 41)	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.8
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) 27.53(m)	Uplink Carrier Aggregation	Undesirable emissions must meet the limits detailed in corresponding rule parts			Section 7.8

Table 7-2. Summary of Radiated Test Results

Notes:

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots (Sections 7.2, 7.3, 7.4, 7.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 5.3.

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

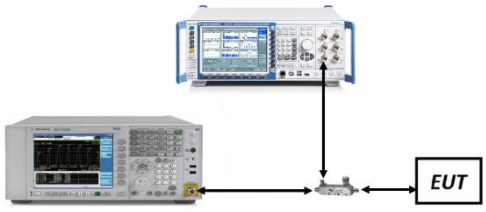

Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

Band 12

Plot 7-1. Occupied Bandwidth Plot (Band 12 - 1.4.0MHz QPSK - Full RB Configuration)

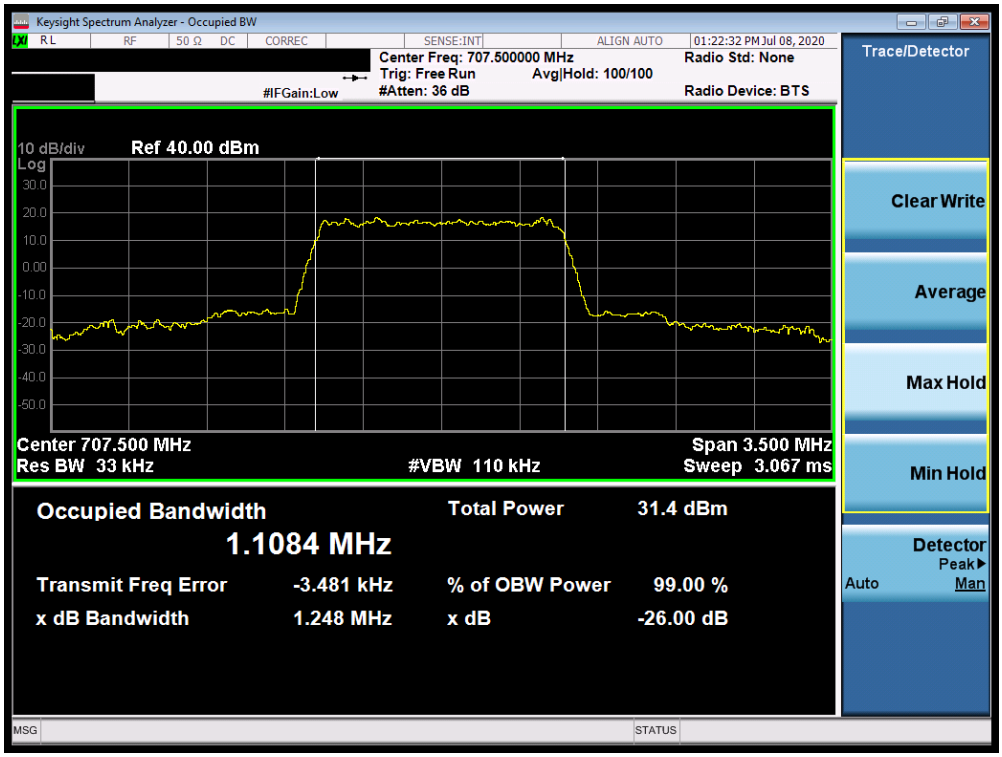

Plot 7-2. Occupied Bandwidth Plot (Band 12 - 1.4.0MHz 16-QAM - Full RB Configuration)

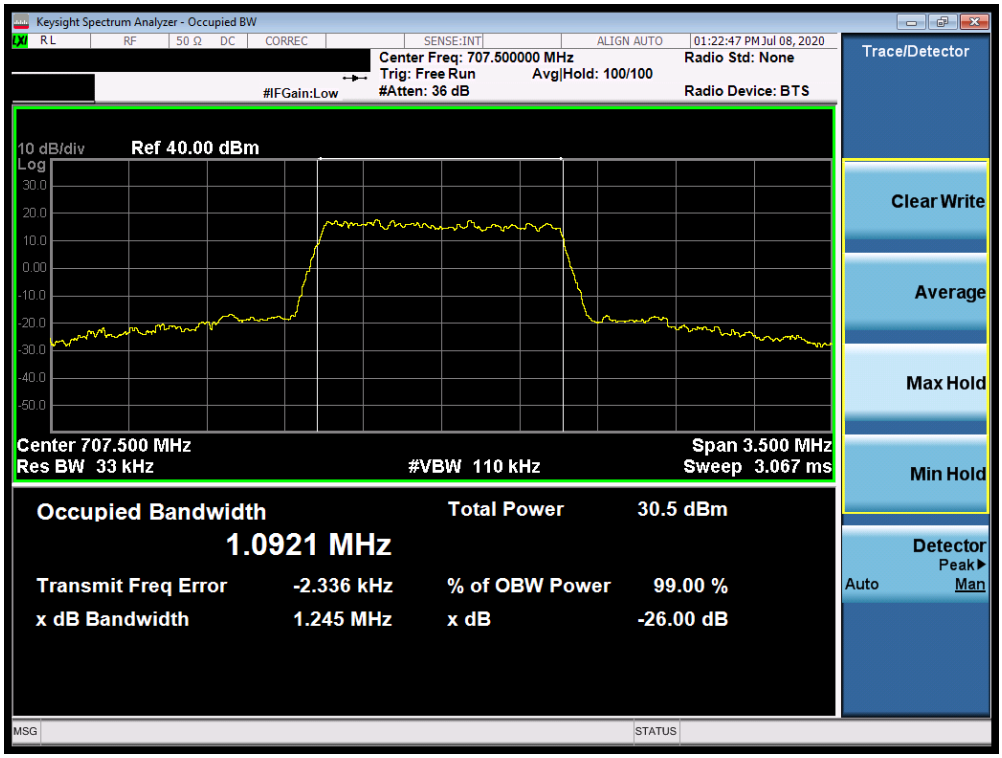

Plot 7-3. Occupied Bandwidth Plot (Band 12 - 1.4.0MHz 64-QAM - Full RB Configuration)

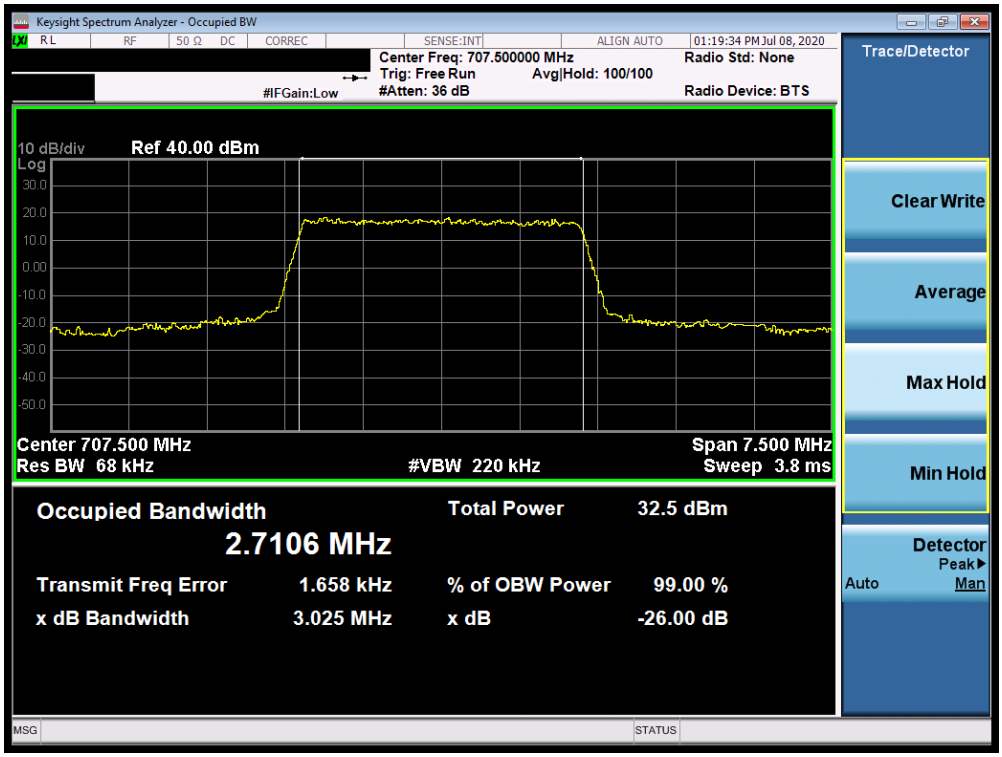

Plot 7-4. Occupied Bandwidth Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

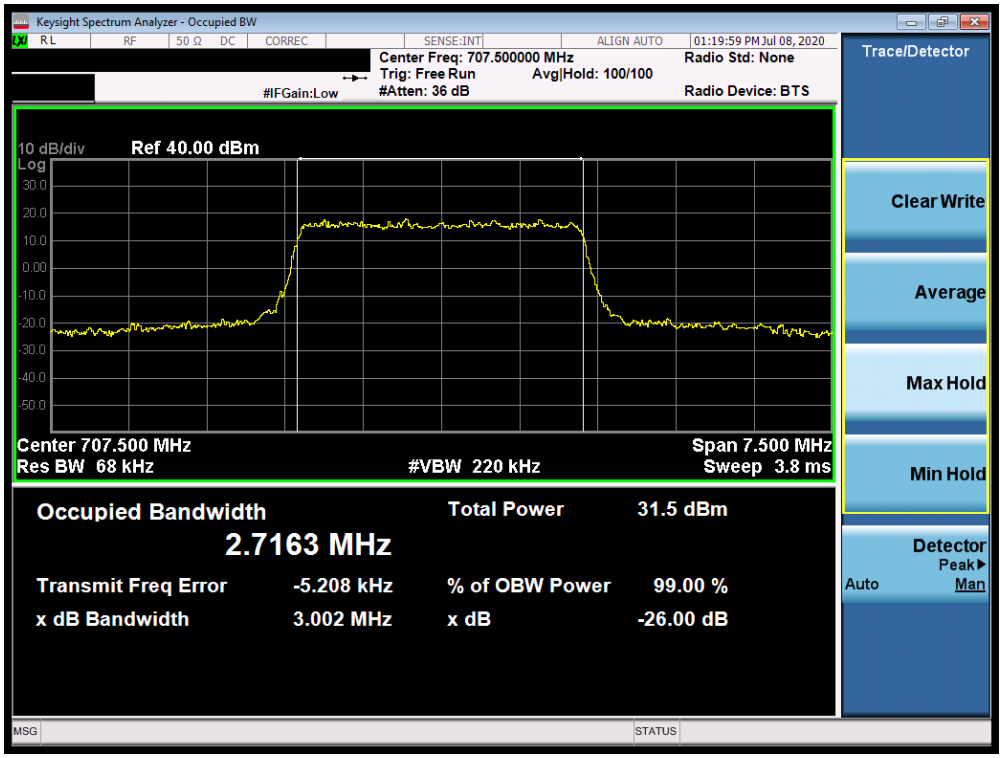

Plot 7-5. Occupied Bandwidth Plot (Band 12 - 3.0MHz 16-QAM - Full RB Configuration)

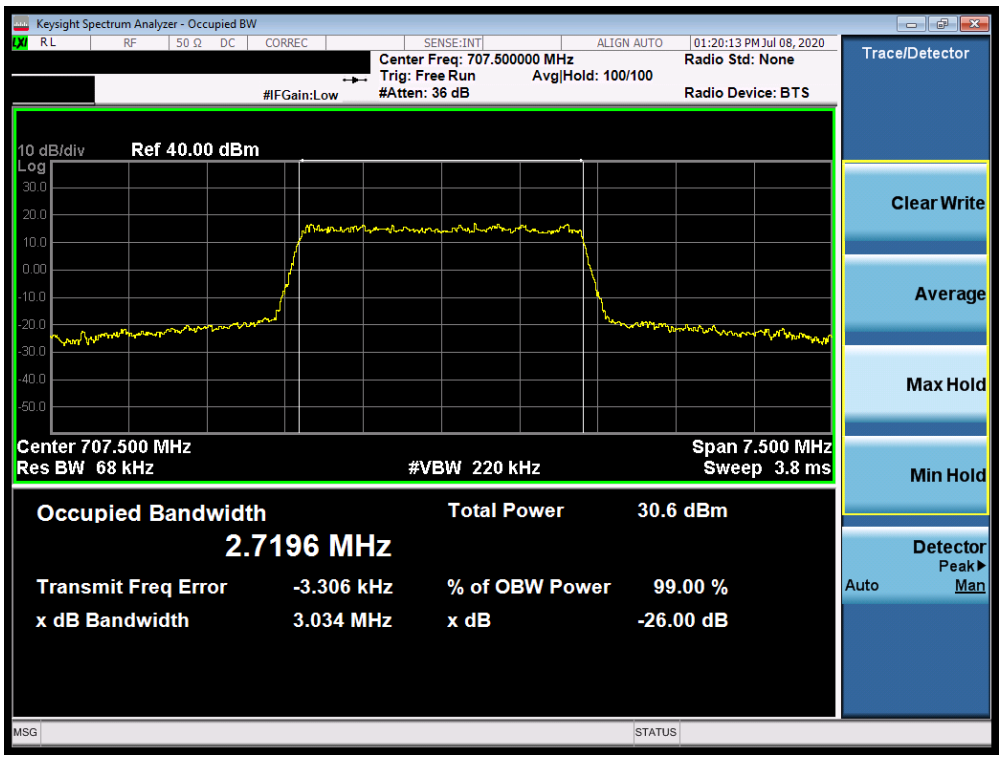

Plot 7-6. Occupied Bandwidth Plot (Band 12 - 3.0MHz 64-QAM - Full RB Configuration)

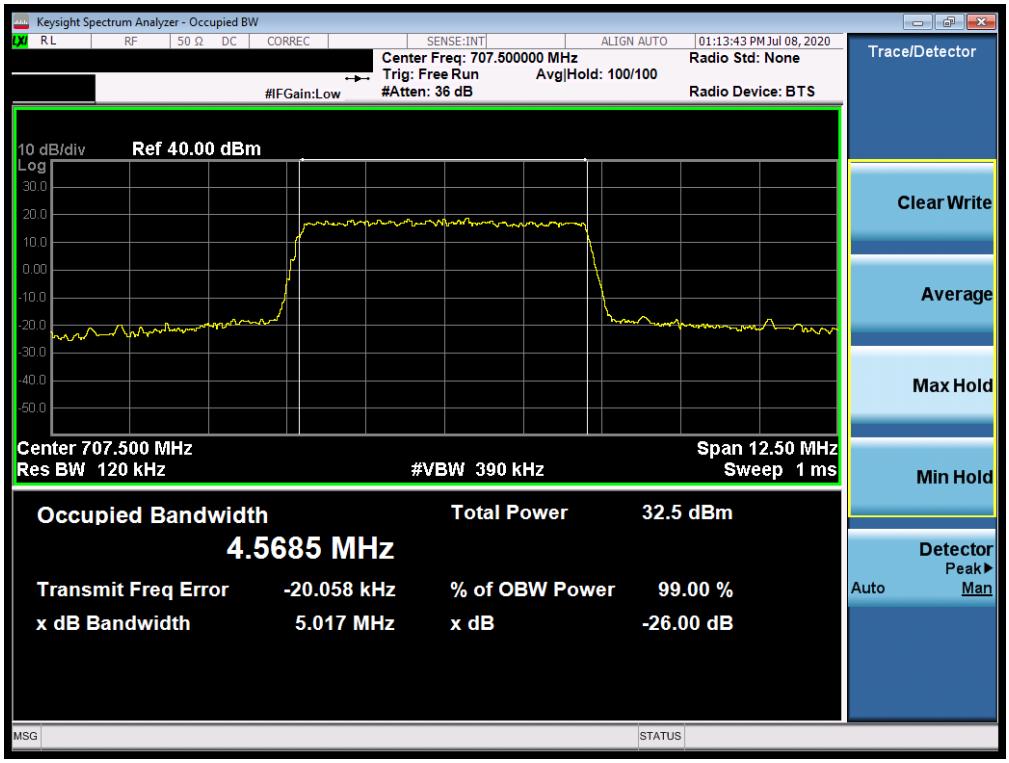

Plot 7-7. Occupied Bandwidth Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

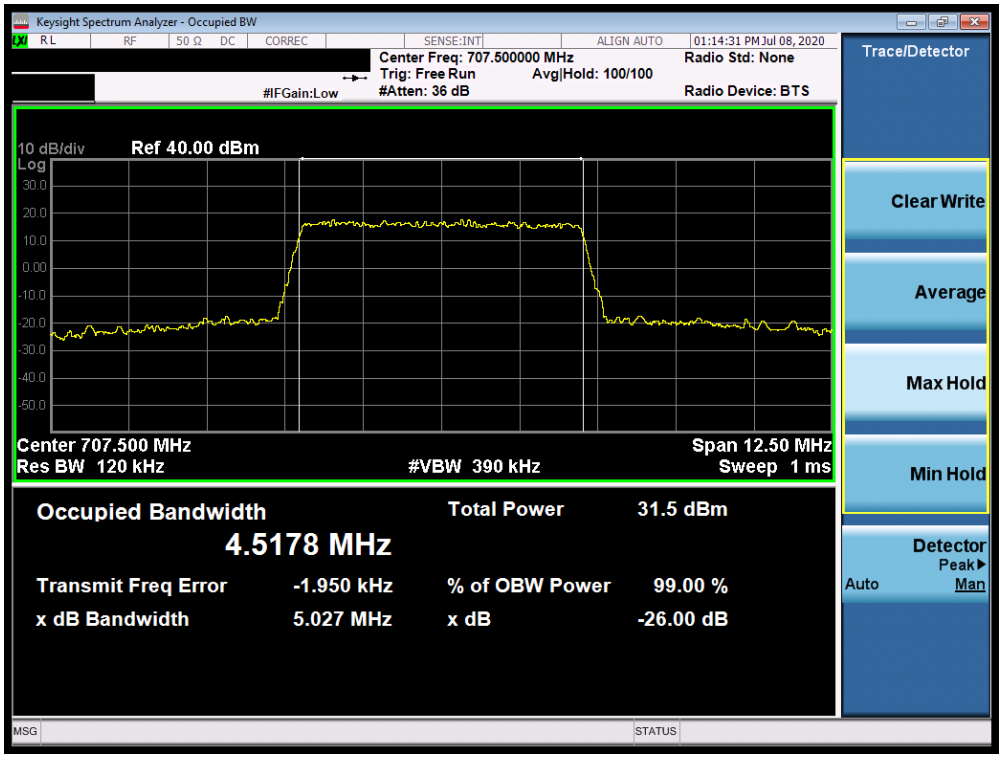

Plot 7-8. Occupied Bandwidth Plot (Band 12 - 5.0MHz 16-QAM - Full RB Configuration)

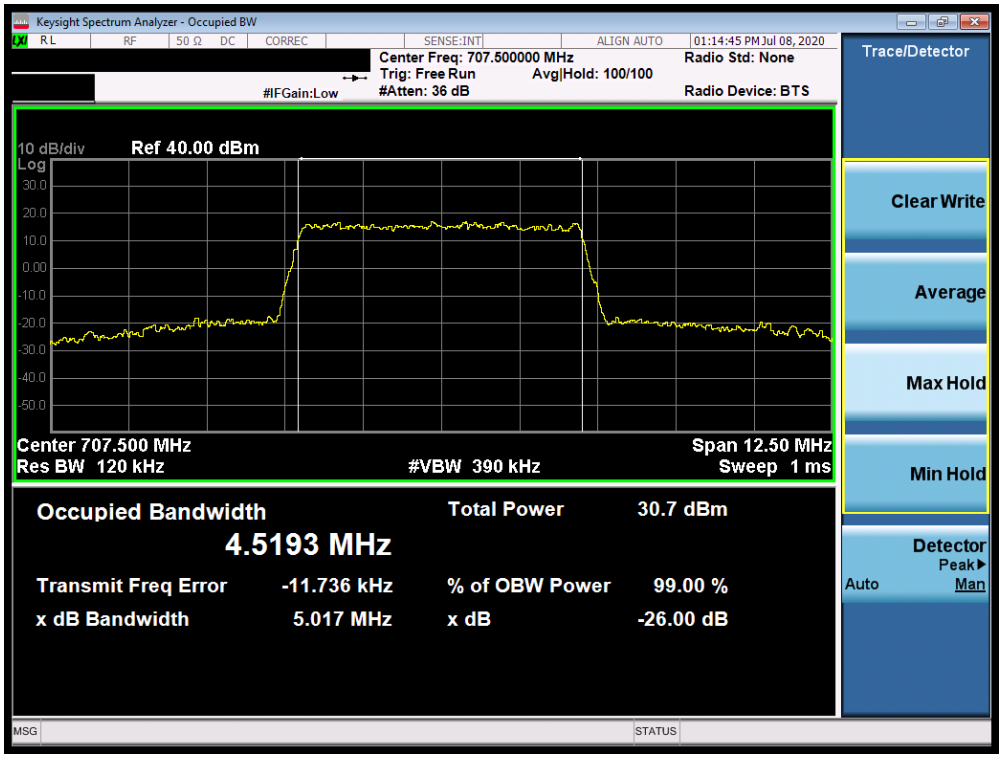

Plot 7-9. Occupied Bandwidth Plot (Band 12 - 5.0MHz 64-QAM - Full RB Configuration)

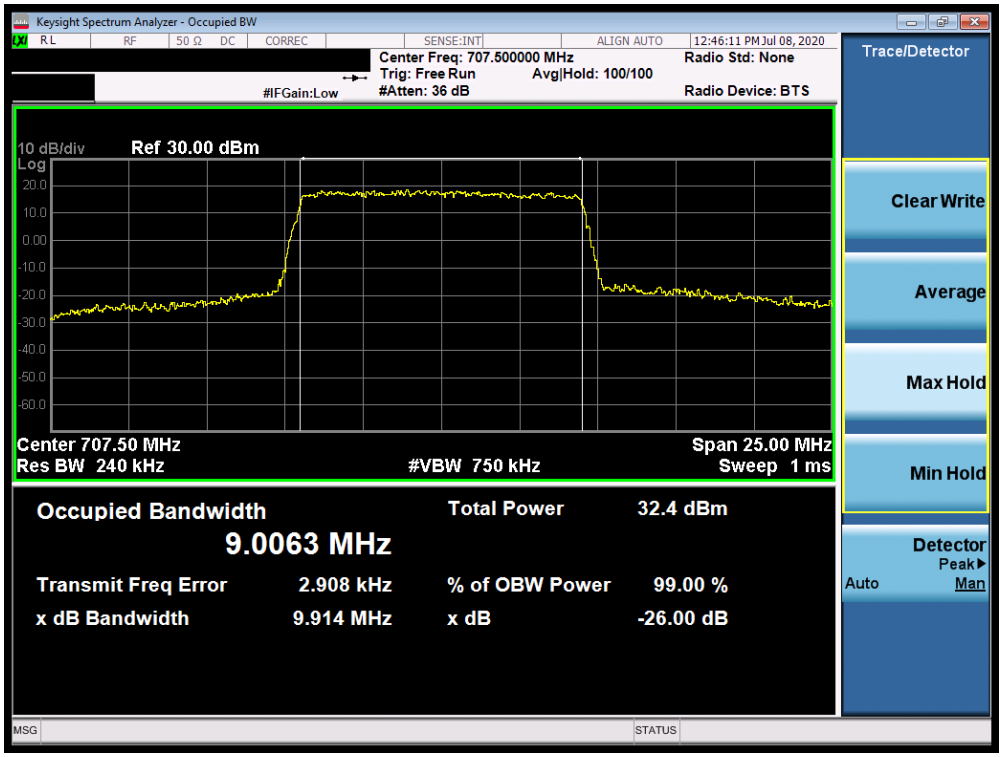

Plot 7-10. Occupied Bandwidth Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

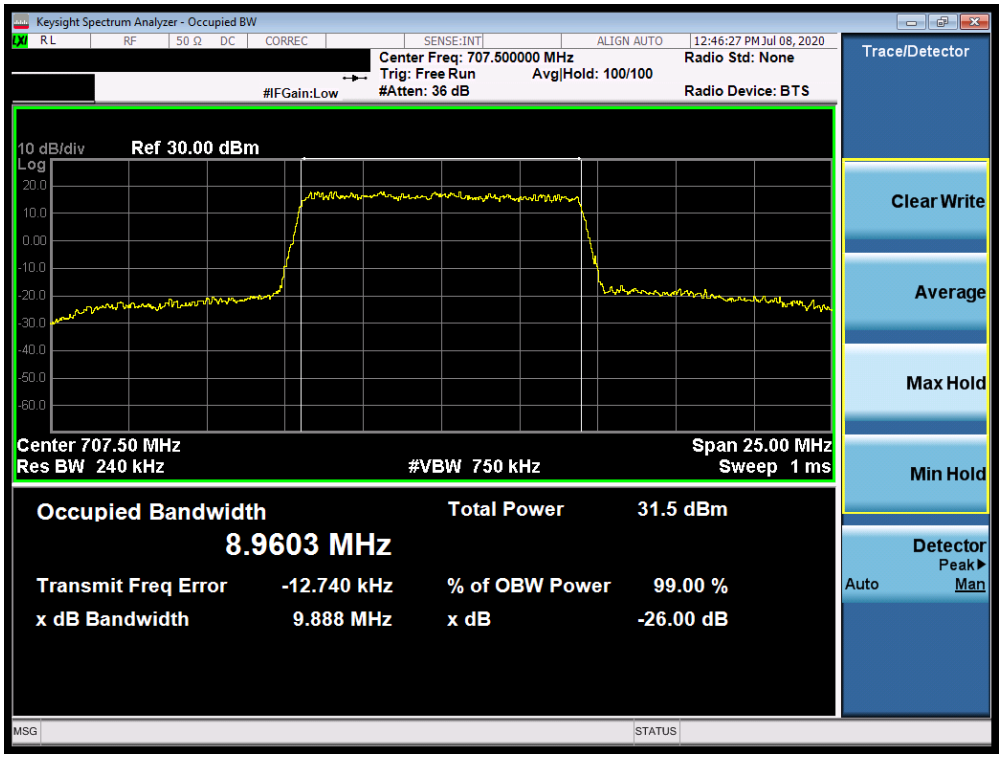

Plot 7-11. Occupied Bandwidth Plot (Band 12 - 10.0MHz 16-QAM - Full RB Configuration)

Plot 7-12. Occupied Bandwidth Plot (Band 12 - 10.0MHz 64-QAM - Full RB Configuration)

Band 13

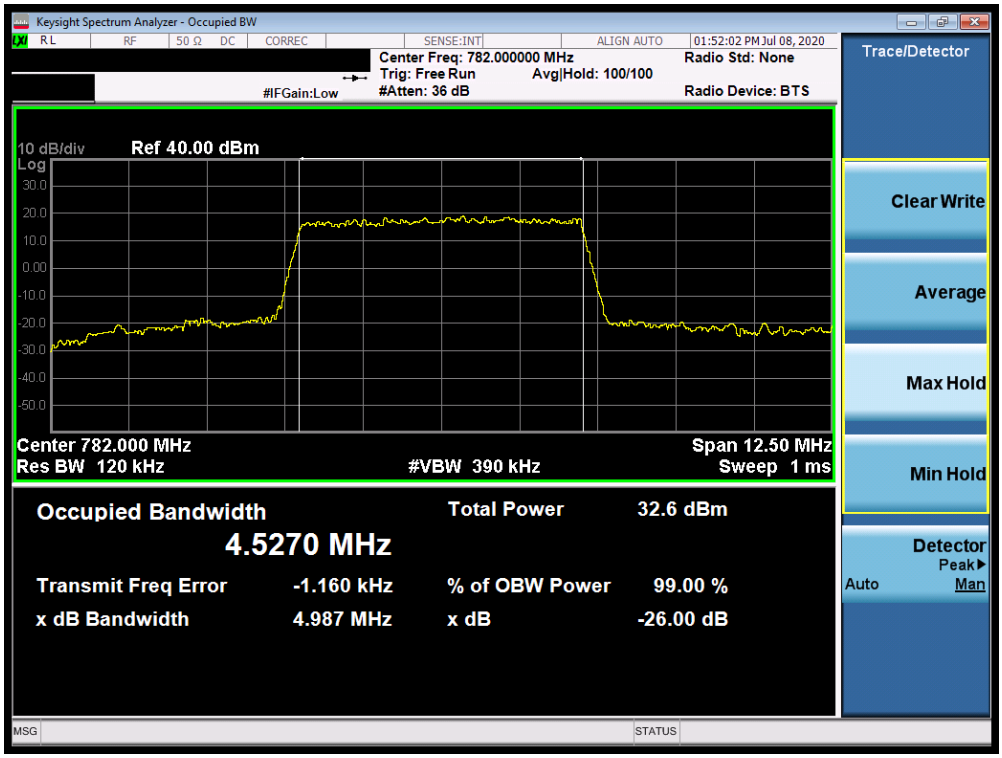

Plot 7-13. Occupied Bandwidth Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)

Plot 7-14. Occupied Bandwidth Plot (Band 13 - 5.0MHz 16-QAM - Full RB Configuration)

Plot 7-15. Occupied Bandwidth Plot (Band 13 - 5.0MHz 64-QAM - Full RB Configuration)

Plot 7-16. Occupied Bandwidth Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

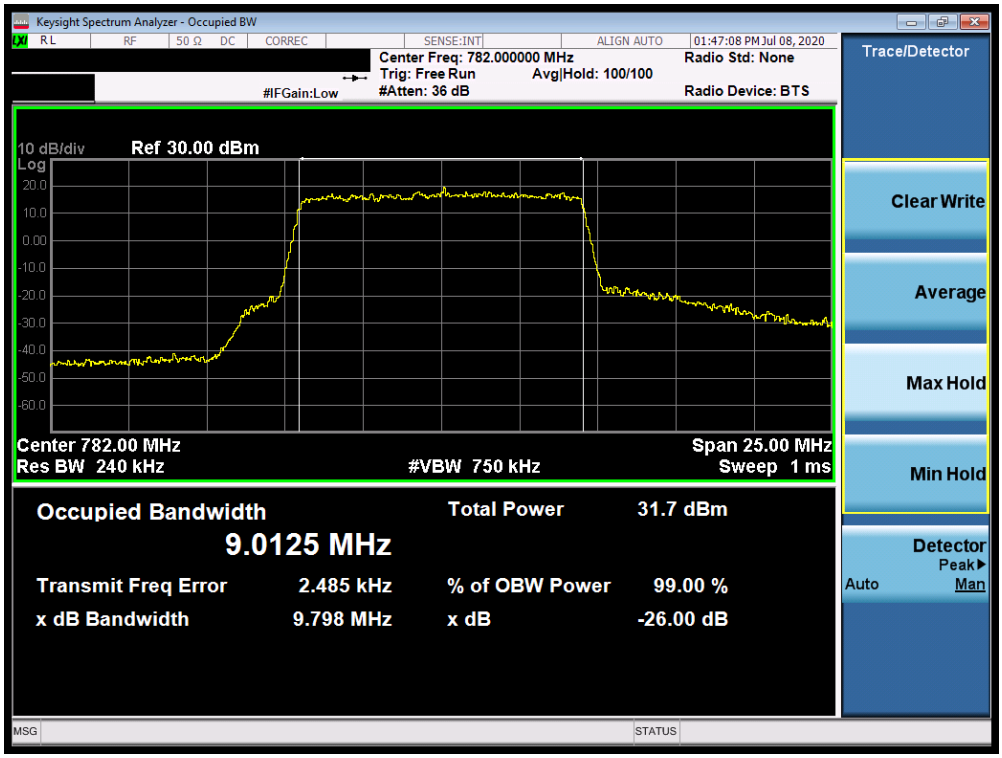

Plot 7-17. Occupied Bandwidth Plot (Band 13 - 10.0MHz 16-QAM - Full RB Configuration)

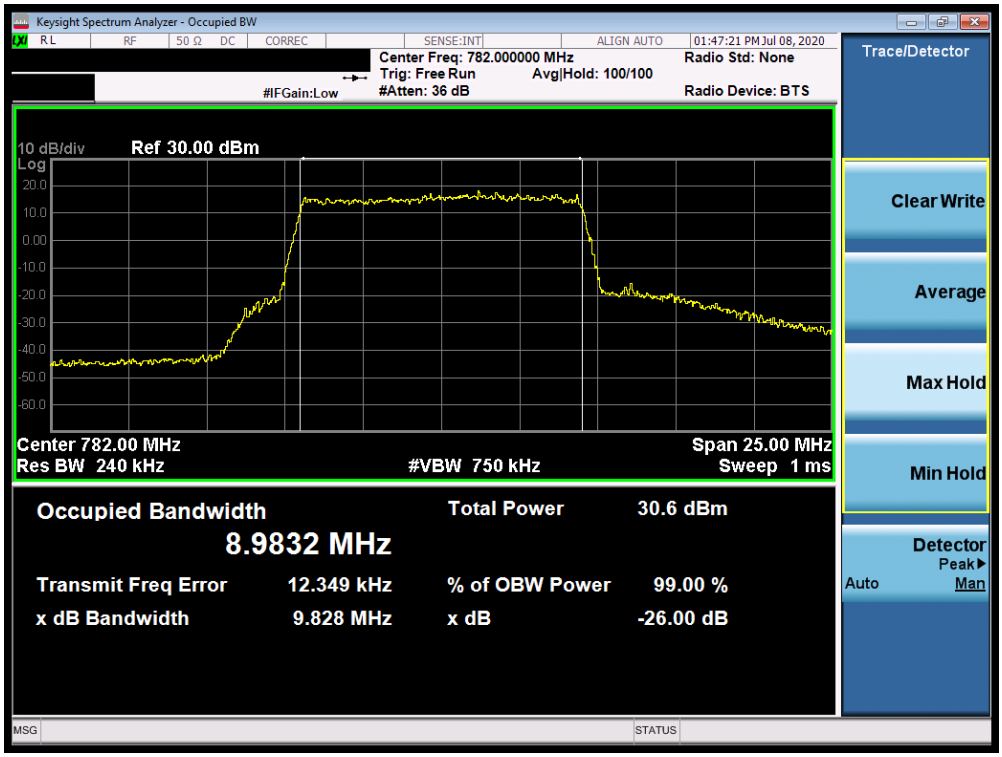

Plot 7-18. Occupied Bandwidth Plot (Band 13 - 10.0MHz 64-QAM - Full RB Configuration)

Band 5

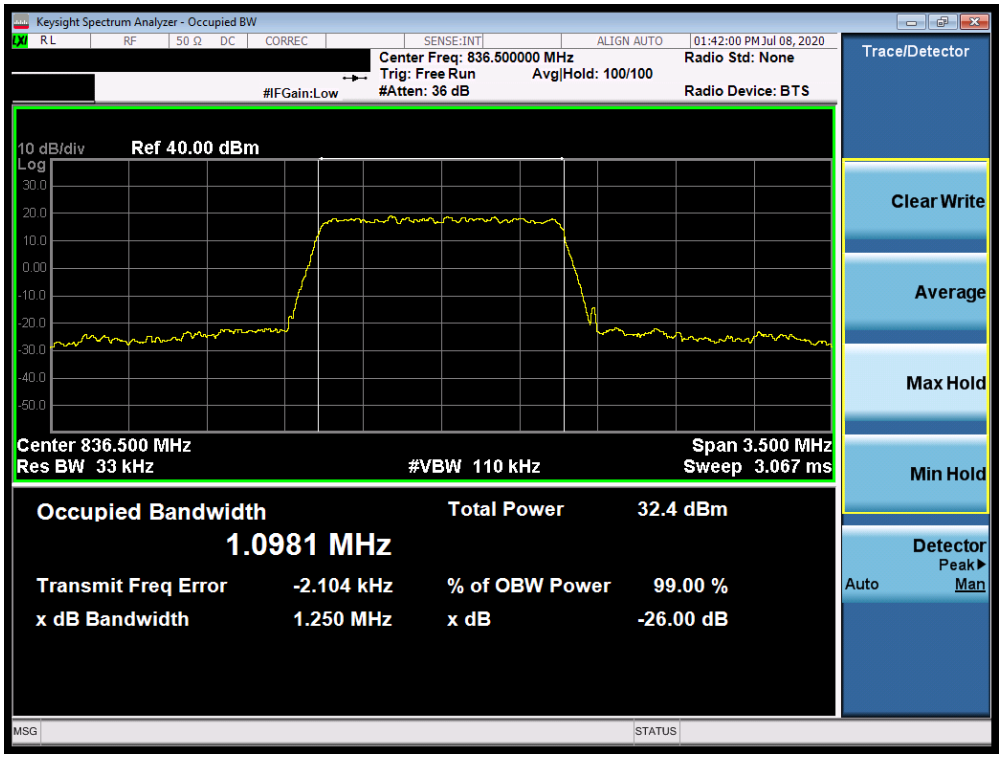

Plot 7-19. Occupied Bandwidth Plot (Band 5 - 1.4MHz QPSK - Full RB Configuration)

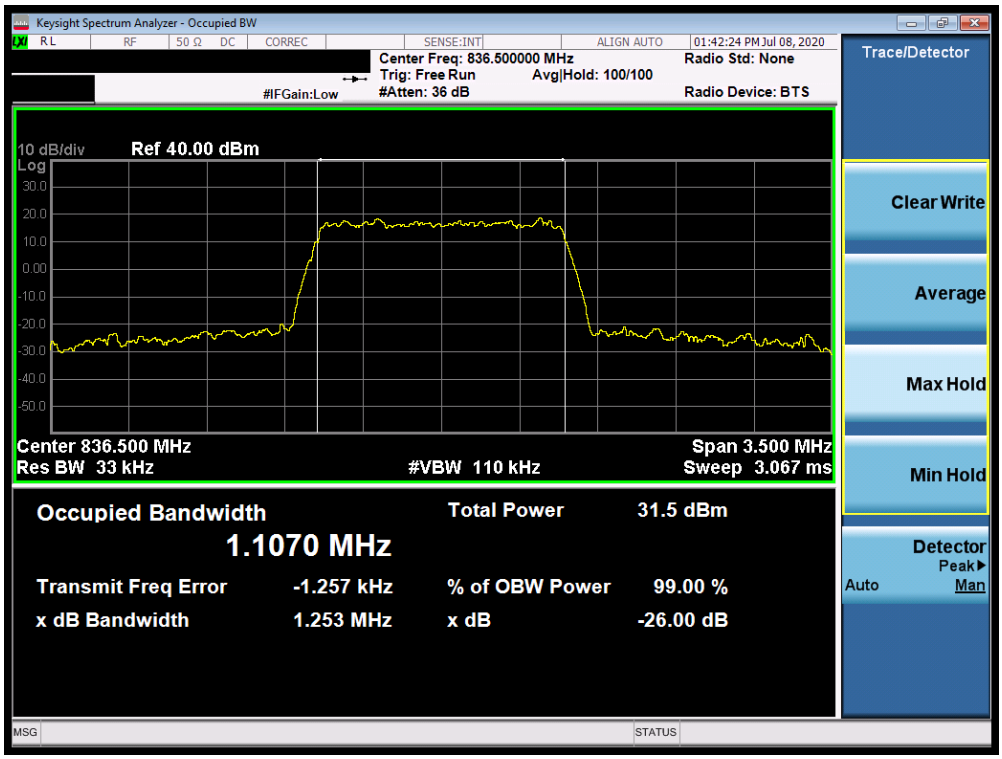

Plot 7-20. Occupied Bandwidth Plot (Band 5 - 1.4MHz 16-QAM - Full RB Configuration)

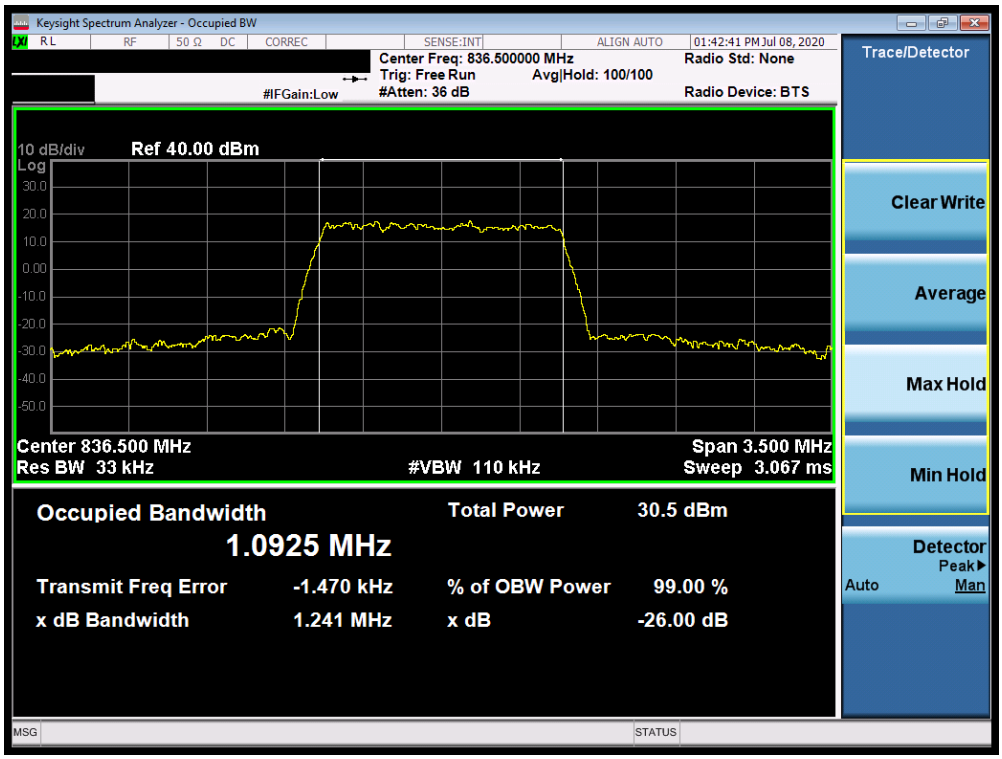

Plot 7-21. Occupied Bandwidth Plot (Band 5 - 1.4MHz 64-QAM - Full RB Configuration)

Plot 7-22. Occupied Bandwidth Plot (Band 5 - 3.0MHz QPSK - Full RB Configuration)

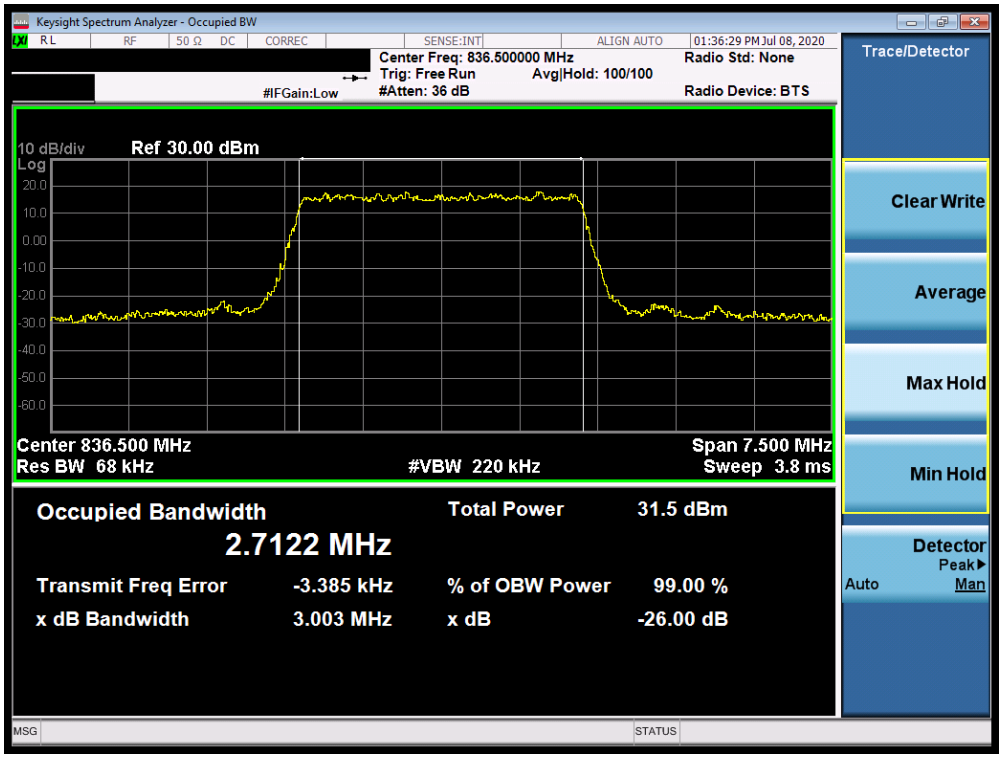

Plot 7-23. Occupied Bandwidth Plot (Band 5 - 3.0MHz 16-QAM - Full RB Configuration)

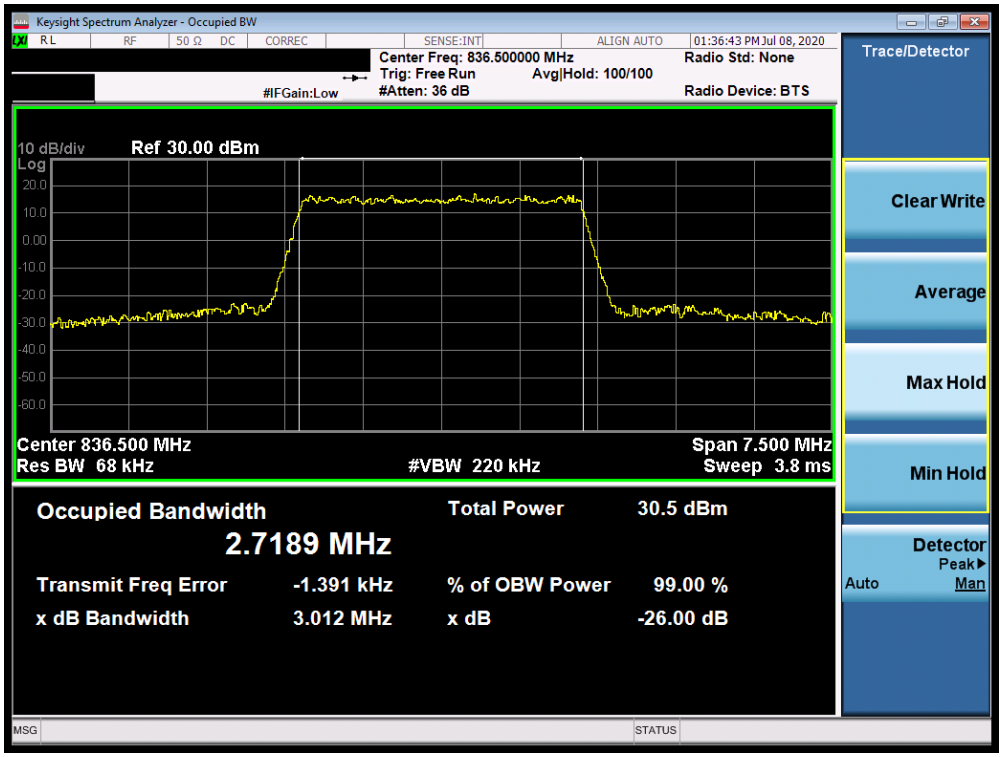

Plot 7-24. Occupied Bandwidth Plot (Band 5 - 3.0MHz 64-QAM - Full RB Configuration)

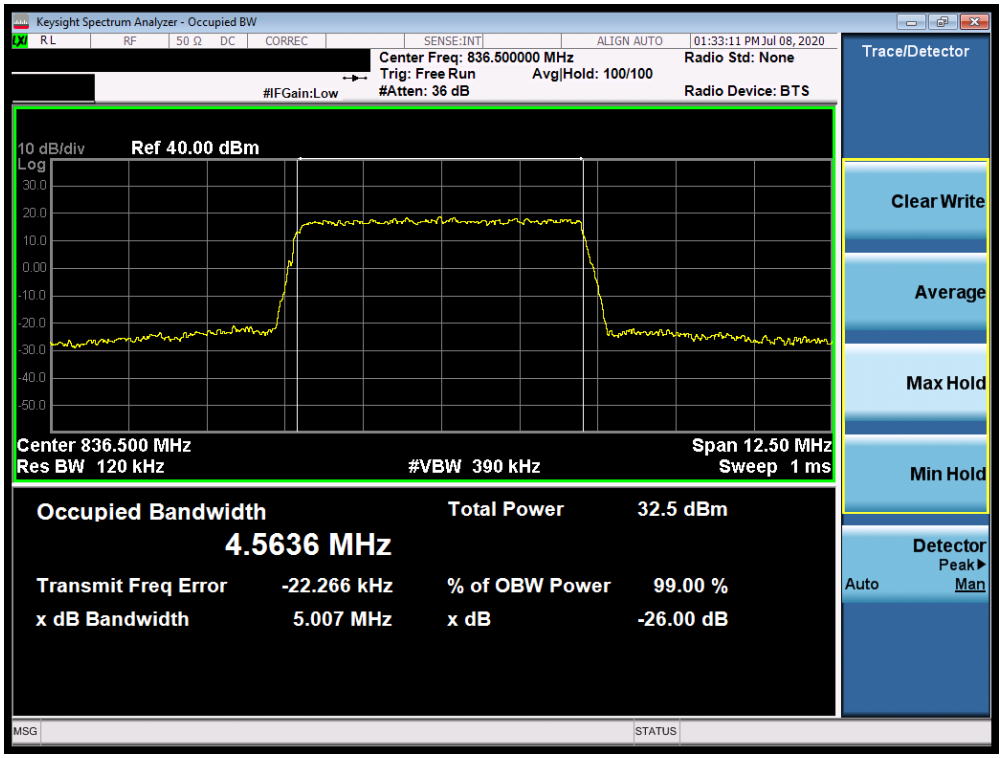

Plot 7-25. Occupied Bandwidth Plot (Band 5 - 5.0MHz QPSK - Full RB Configuration)

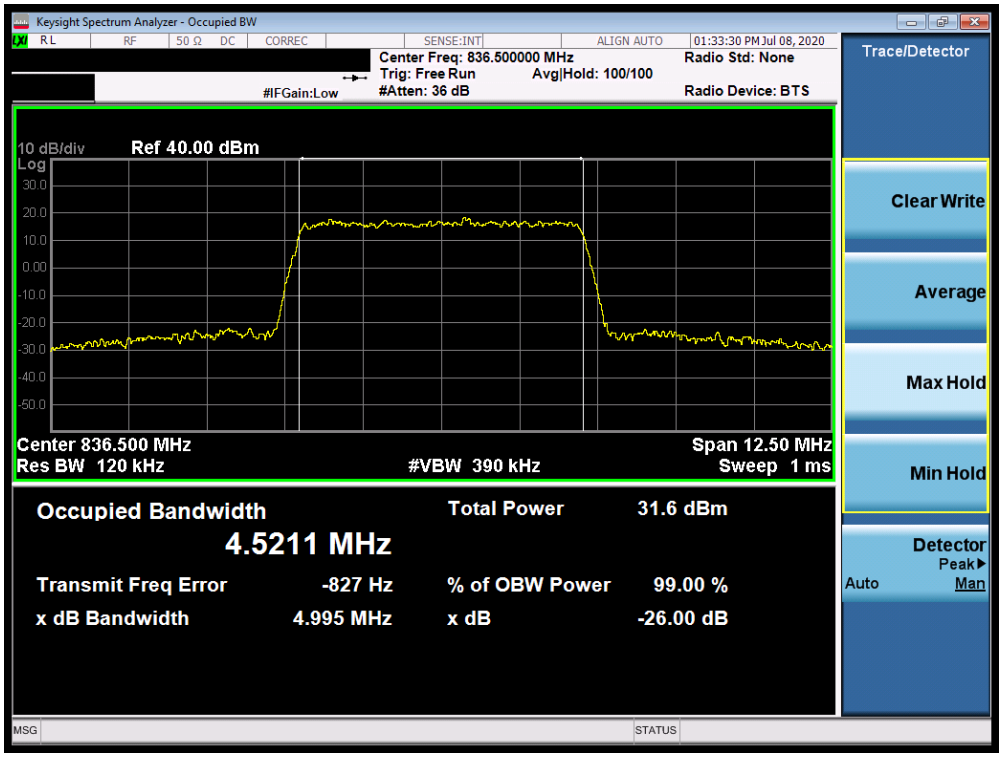

Plot 7-26. Occupied Bandwidth Plot (Band 5 - 5.0MHz 16-QAM - Full RB Configuration)

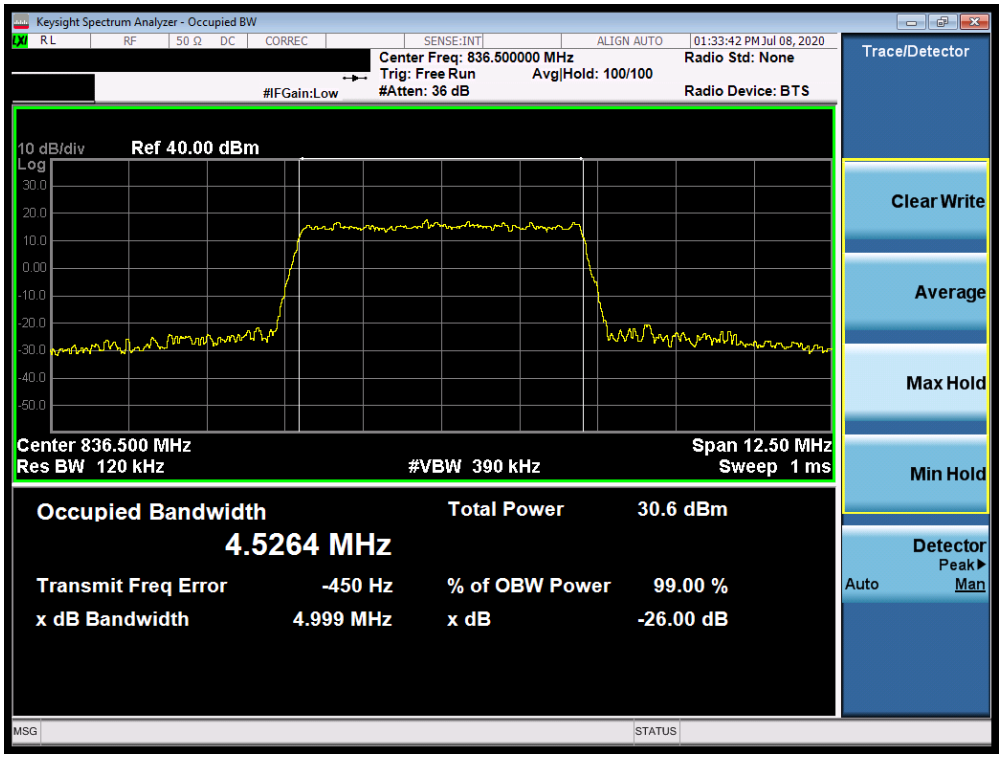

Plot 7-27. Occupied Bandwidth Plot (Band 5 - 5.0MHz 64-QAM - Full RB Configuration)

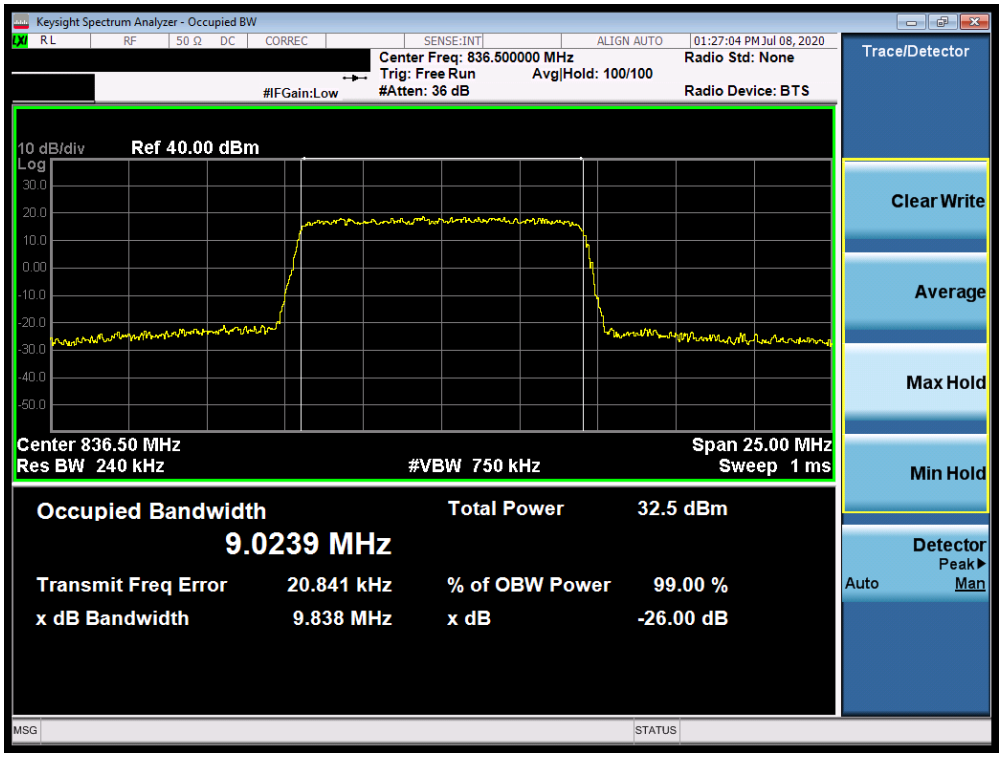

Plot 7-28. Occupied Bandwidth Plot (Band 5 - 10.0MHz QPSK - Full RB Configuration)

Plot 7-29. Occupied Bandwidth Plot (Band 5 - 10.0MHz 16-QAM - Full RB Configuration)

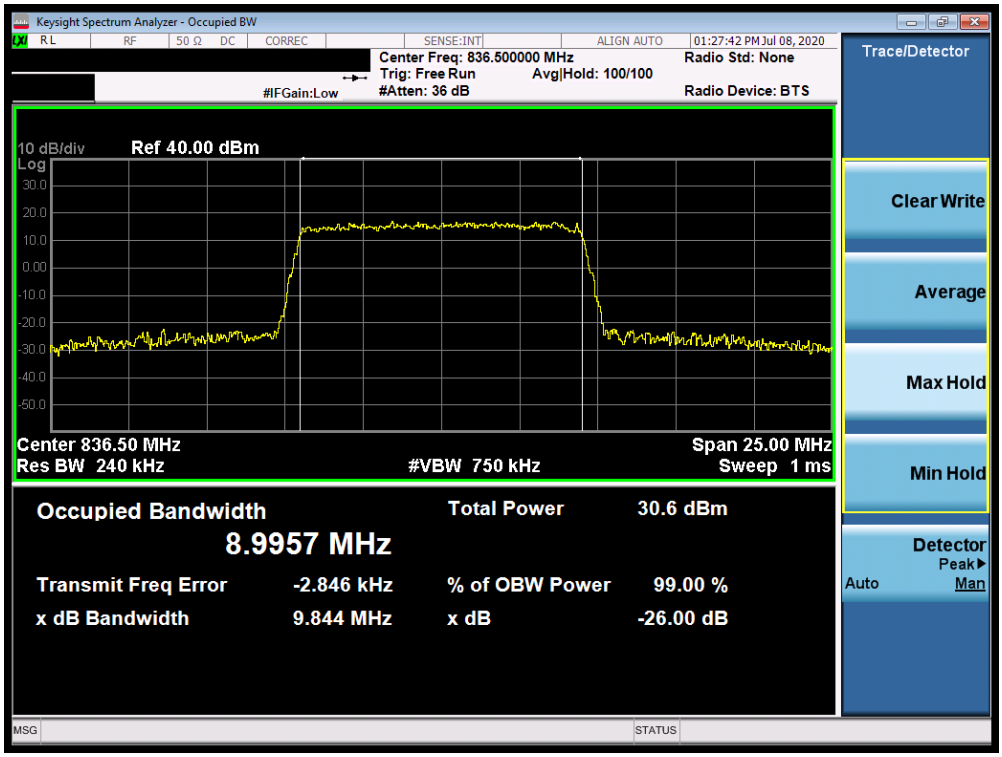

Plot 7-30. Occupied Bandwidth Plot (Band 5 - 10.0MHz 64-QAM - Full RB Configuration)

NR Band n5

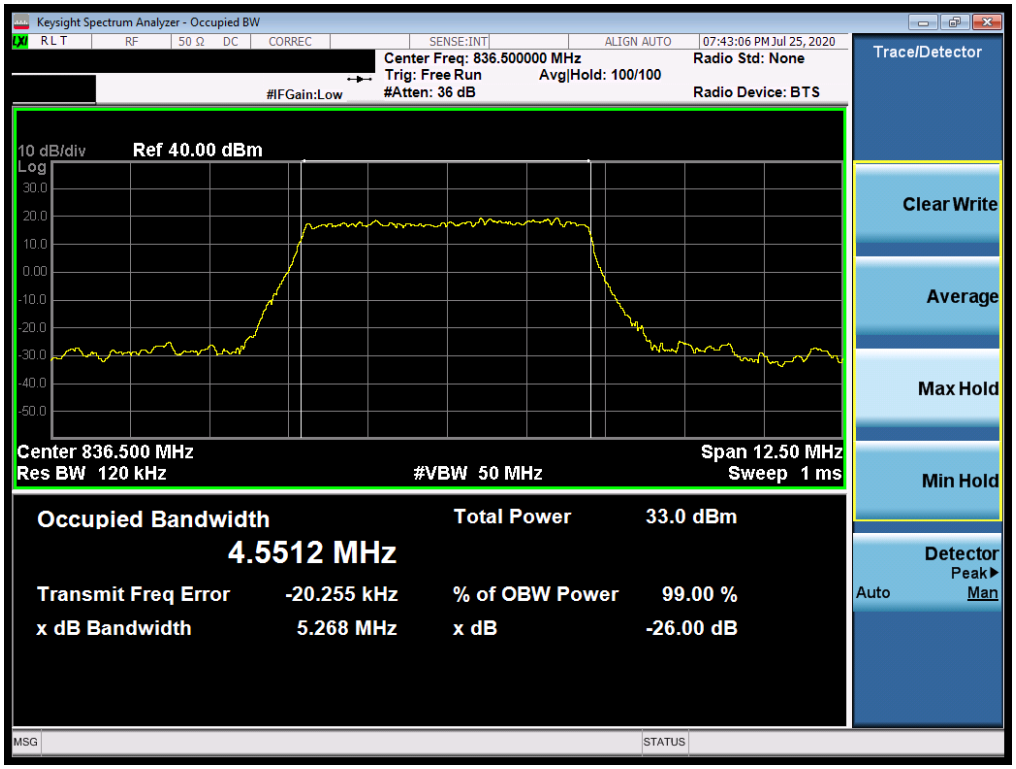

Plot 7-31. Occupied Bandwidth Plot (NR Band n5 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

Plot 7-32. Occupied Bandwidth Plot (NR Band n5 - 5.0MHz CP-OFDM QPSK - Full RB)

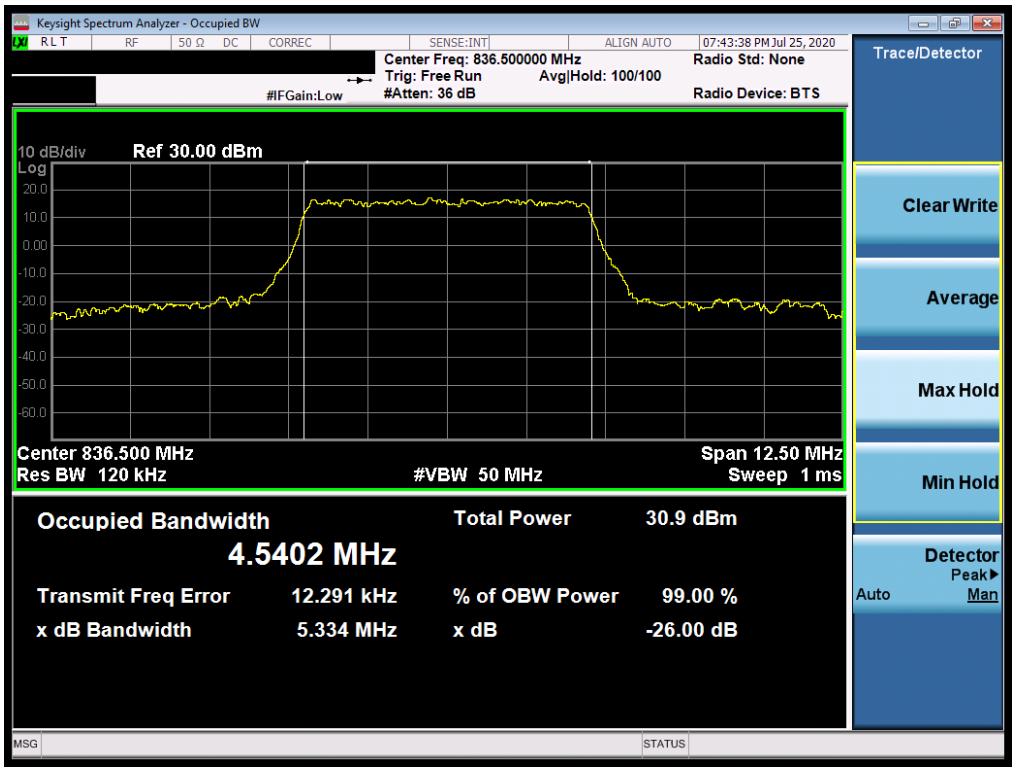

Plot 7-33. Occupied Bandwidth Plot (NR Band n5 - 5.0MHz CP-OFDM 16QAM - Full RB)

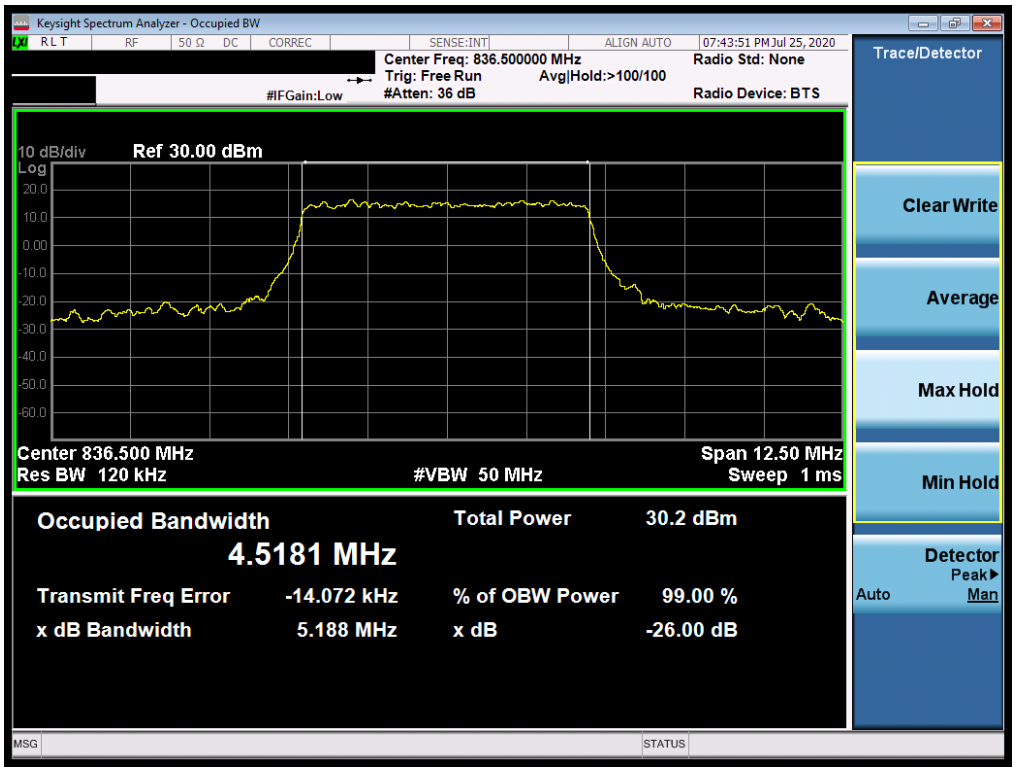

Plot 7-34. Occupied Bandwidth Plot (NR Band n5 - 5.0MHz CP-OFDM 64QAM - Full RB)

Plot 7-35. Occupied Bandwidth Plot (NR Band n5 - 5.0MHz CP-OFDM 256QAM - Full RB)

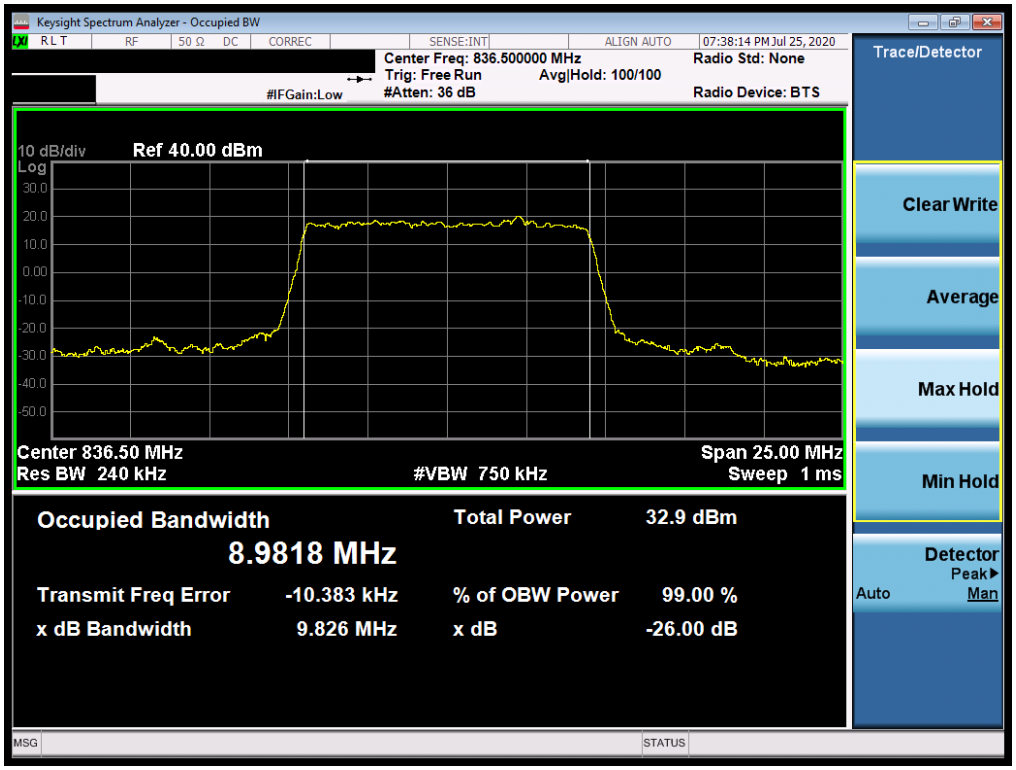

Plot 7-36. Occupied Bandwidth Plot (NR Band n5 - 10.0MHz DFT-s-OFDM BPSK - Full RB)

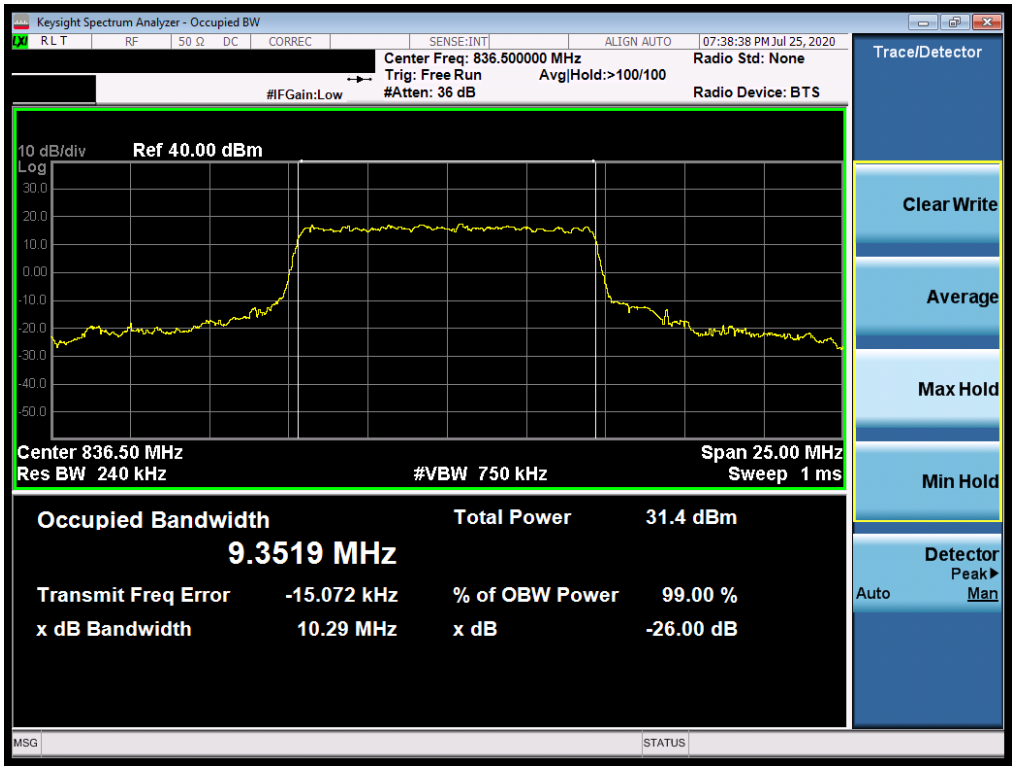

Plot 7-37. Occupied Bandwidth Plot (NR Band n5 - 10.0MHz CP-OFDM QPSK - Full RB)

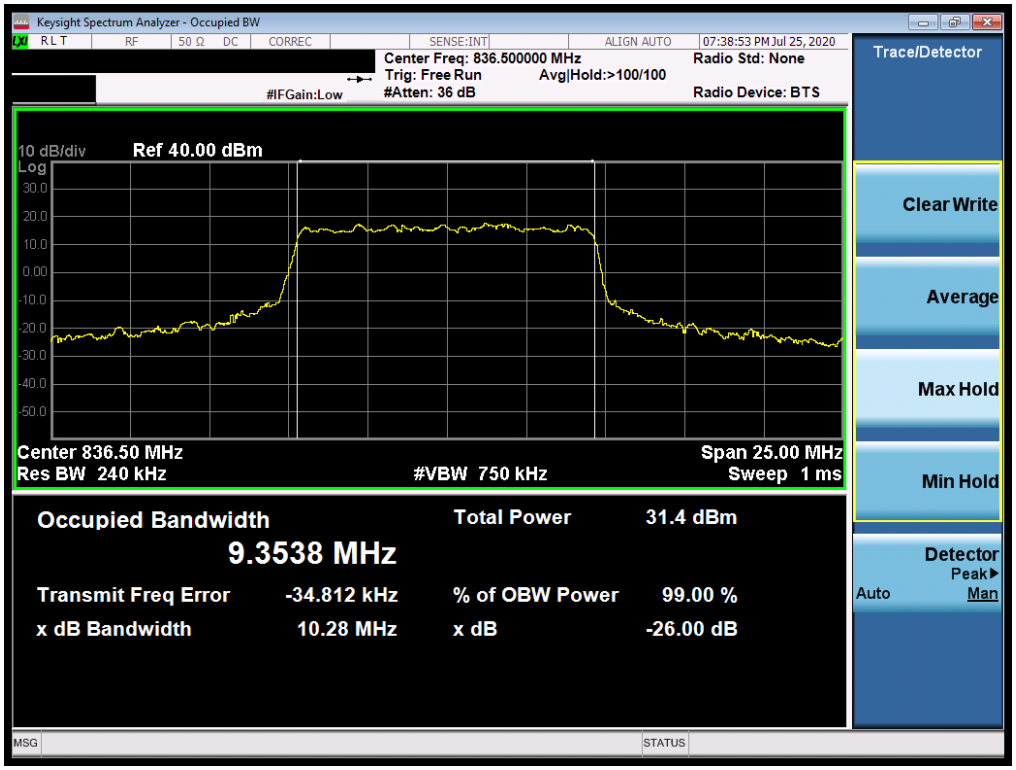

Plot 7-38. Occupied Bandwidth Plot (NR Band n5 - 10.0MHz CP-OFDM 16QAM - Full RB)

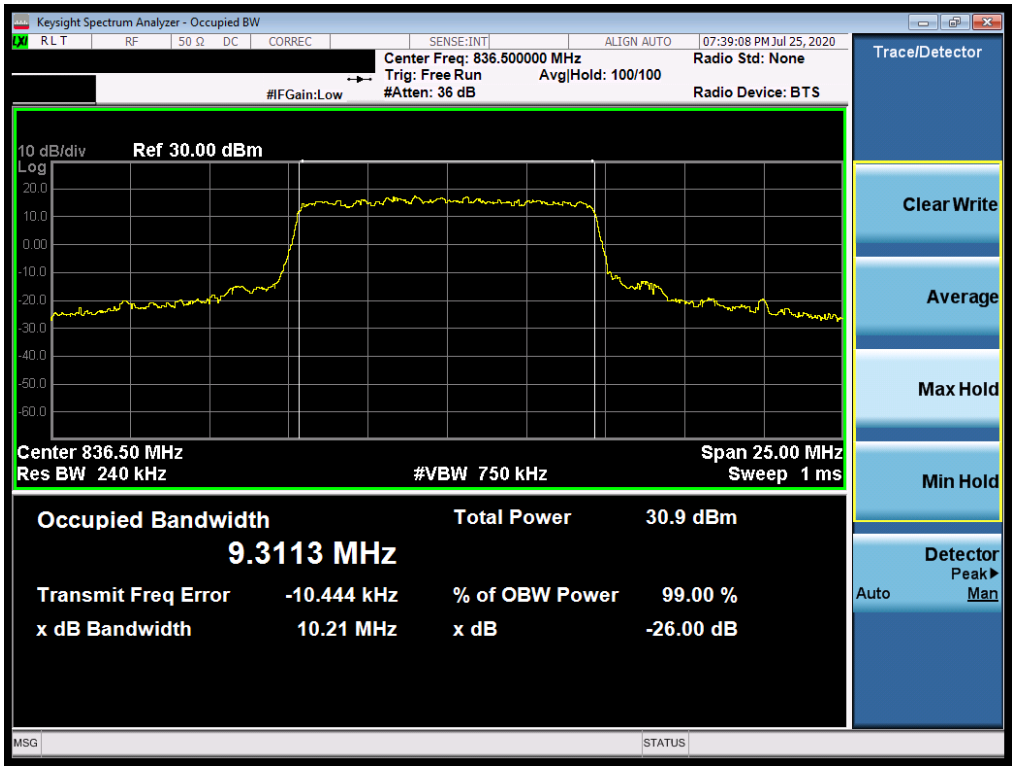

Plot 7-39. Occupied Bandwidth Plot (NR Band n5 - 10.0MHz CP-OFDM 64QAM - Full RB)

Plot 7-40. Occupied Bandwidth Plot (NR Band n5 - 10.0MHz CP-OFDM 256QAM - Full RB)

Plot 7-41. Occupied Bandwidth Plot (NR Band n5 - 15.0MHz DFT-s-OFDM BPSK - Full RB)

Plot 7-42. Occupied Bandwidth Plot (NR Band n5 - 15.0MHz CP-OFDM QPSK - Full RB)

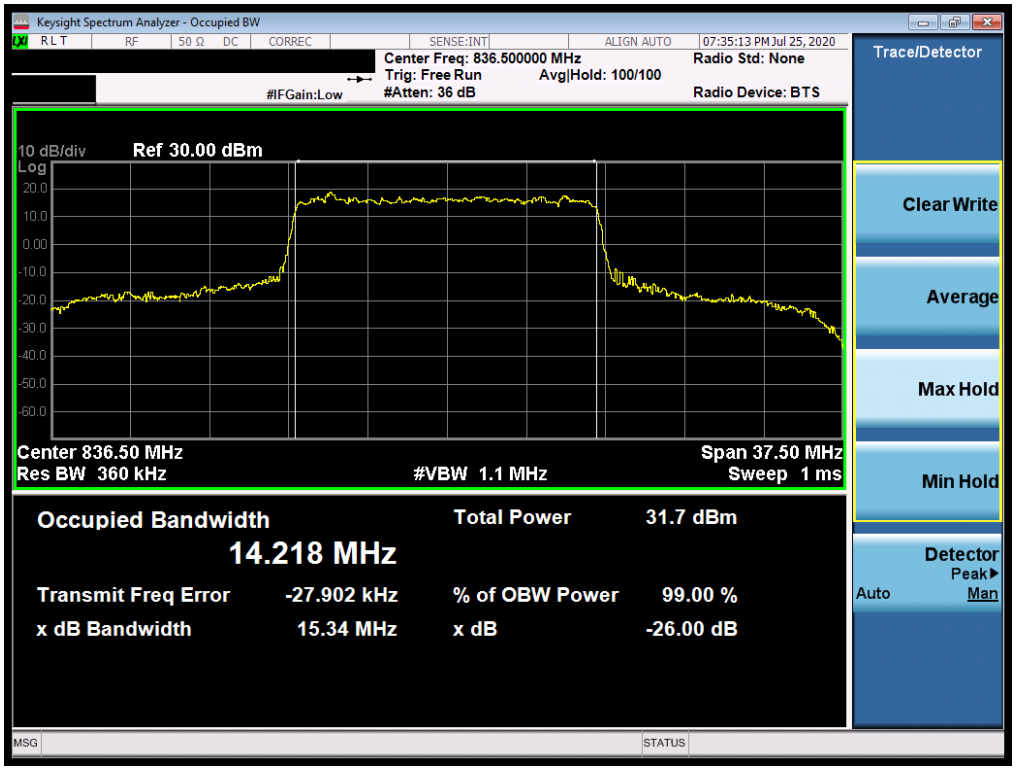

Plot 7-43. Occupied Bandwidth Plot (NR Band n5 - 15.0MHz CP-OFDM 16QAM - Full RB)

Plot 7-44. Occupied Bandwidth Plot (NR Band n5 - 15.0MHz CP-OFDM 64QAM - Full RB)

Plot 7-45. Occupied Bandwidth Plot (NR Band n5 - 15.0MHz CP-OFDM 256QAM - Full RB)

Plot 7-46. Occupied Bandwidth Plot (NR Band n5 - 20.0MHz DFT-s-OFDM BPSK - Full RB)

Plot 7-47. Occupied Bandwidth Plot (NR Band n5 - 20.0MHz CP-OFDM QPSK - Full RB)

Plot 7-48. Occupied Bandwidth Plot (NR Band n5 - 20.0MHz CP-OFDM 16QAM - Full RB)

Plot 7-49. Occupied Bandwidth Plot (NR Band n5 - 20.0MHz CP-OFDM 64QAM - Full RB)

Plot 7-50. Occupied Bandwidth Plot (NR Band n5 - 20.0MHz CP-OFDM 256QAM - Full RB)

Band 66/4

Plot 7-51. Occupied Bandwidth Plot (Band 66/4 - 1.4.0MHz QPSK - Full RB Configuration)

Plot 7-52. Occupied Bandwidth Plot (Band 66/4 - 1.4.0MHz 16-QAM - Full RB Configuration)

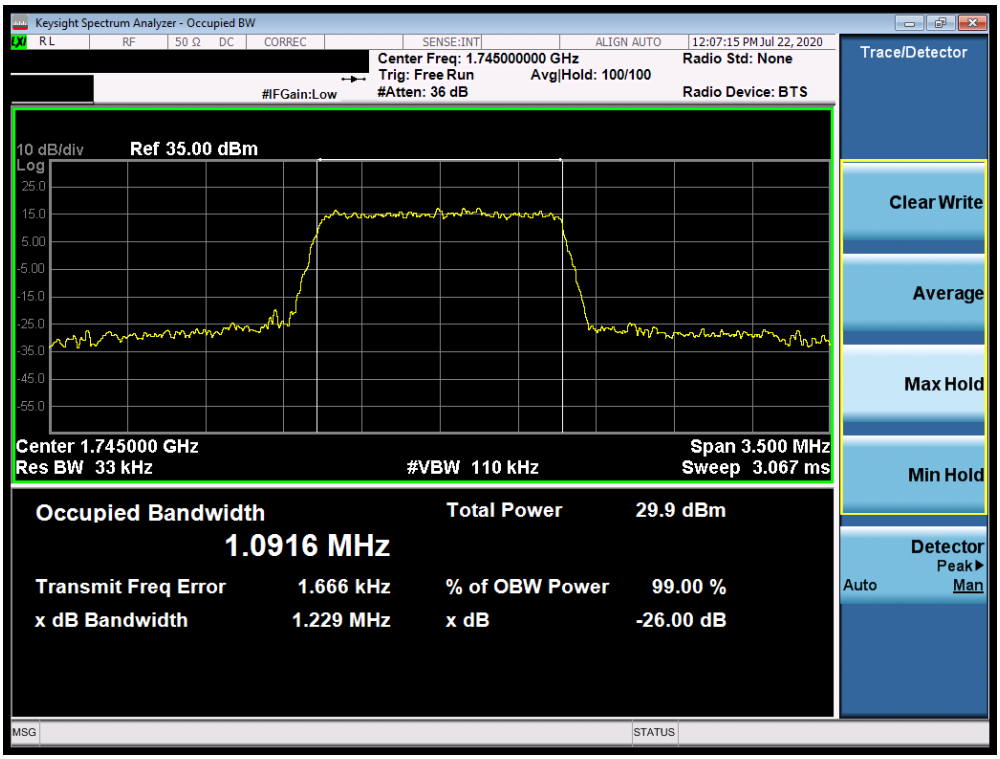

Plot 7-53. Occupied Bandwidth Plot (Band 66/4 - 1.4.0MHz 64-QAM - Full RB Configuration)

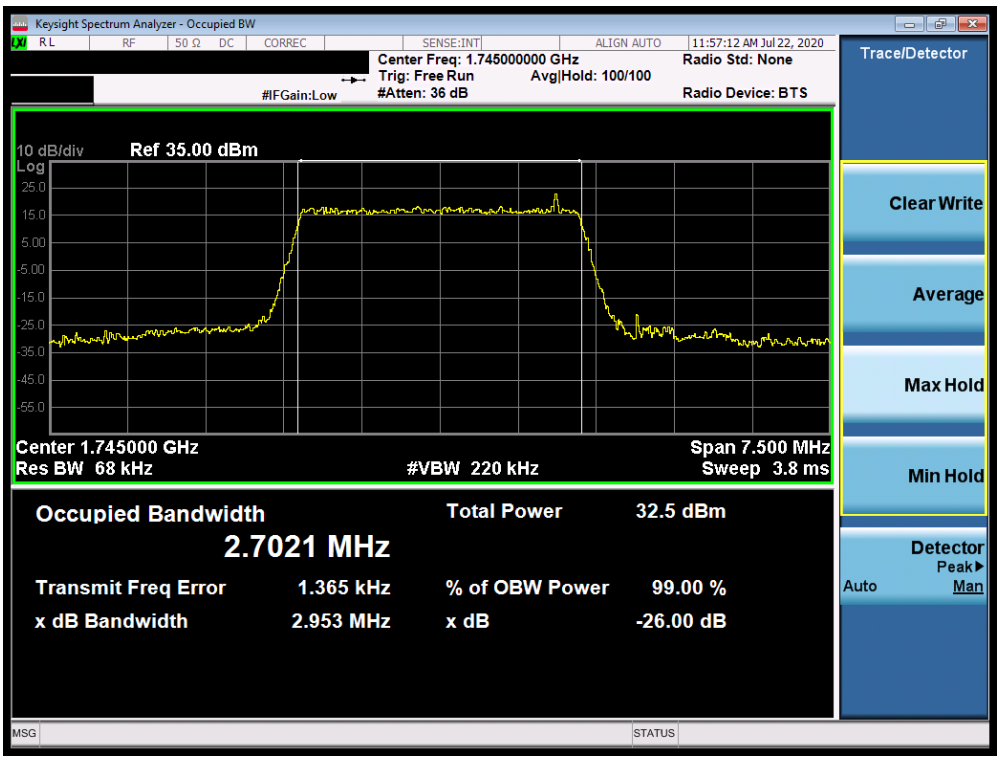

Plot 7-54. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz QPSK - Full RB Configuration)

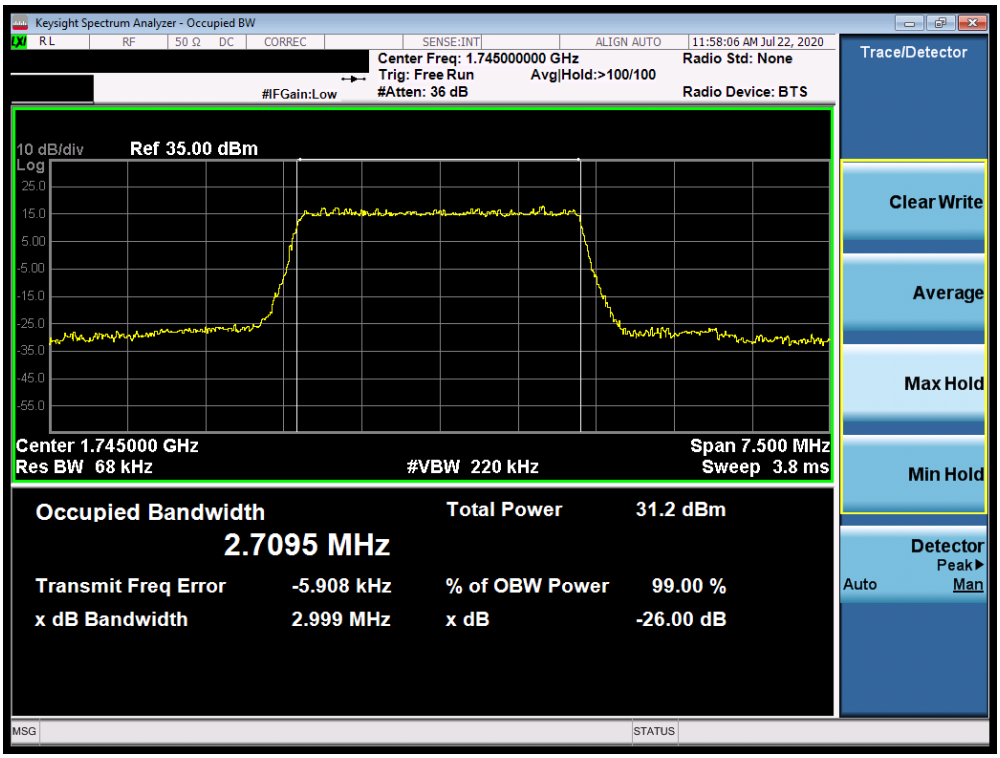

Plot 7-55. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz 16-QAM - Full RB Configuration)

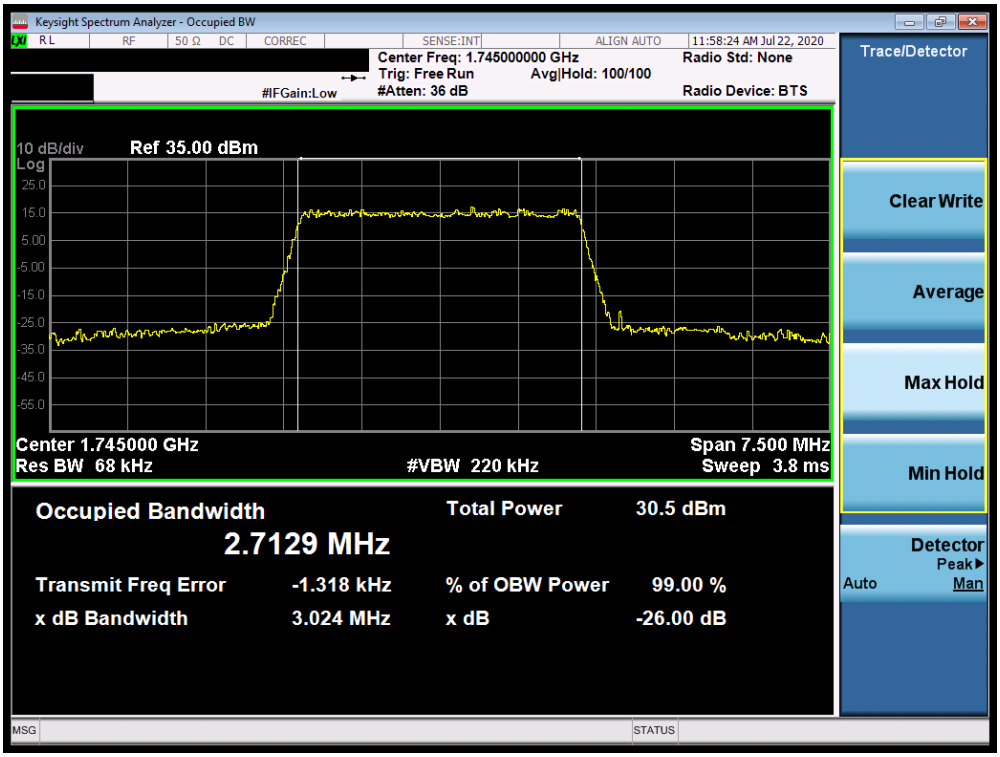

Plot 7-56. Occupied Bandwidth Plot (Band 66/4 - 3.0MHz 64-QAM - Full RB Configuration)

Plot 7-57. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz QPSK - Full RB Configuration)

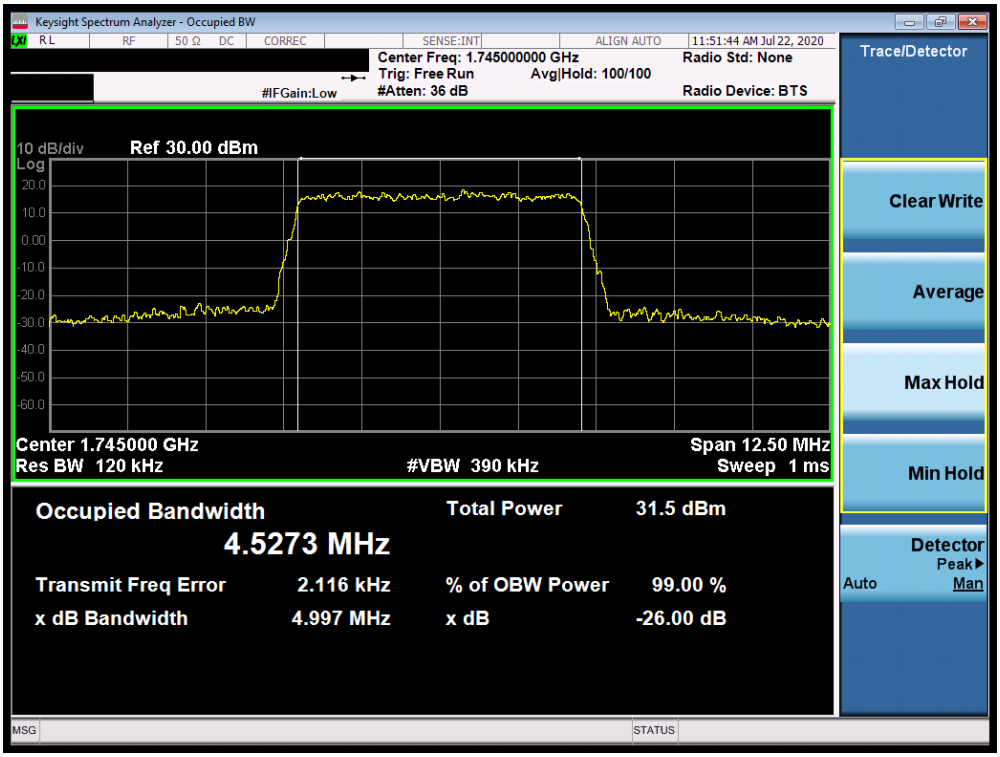

Plot 7-58. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz 16-QAM - Full RB Configuration)

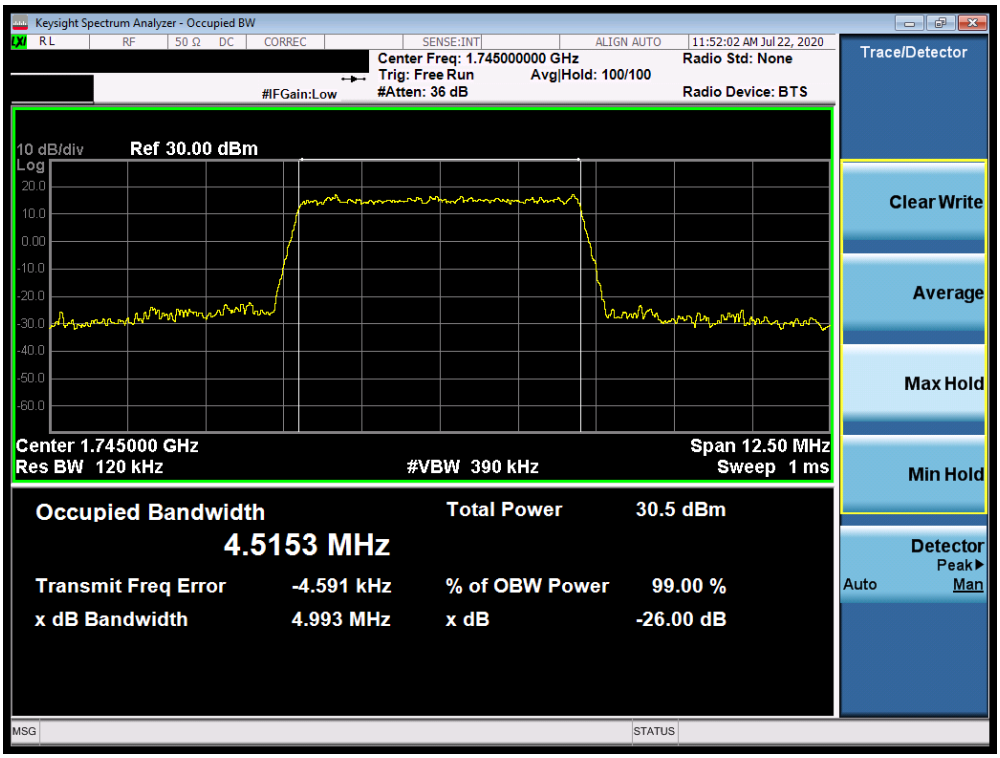

Plot 7-59. Occupied Bandwidth Plot (Band 66/4 - 5.0MHz 64-QAM - Full RB Configuration)

Plot 7-60. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz QPSK - Full RB Configuration)

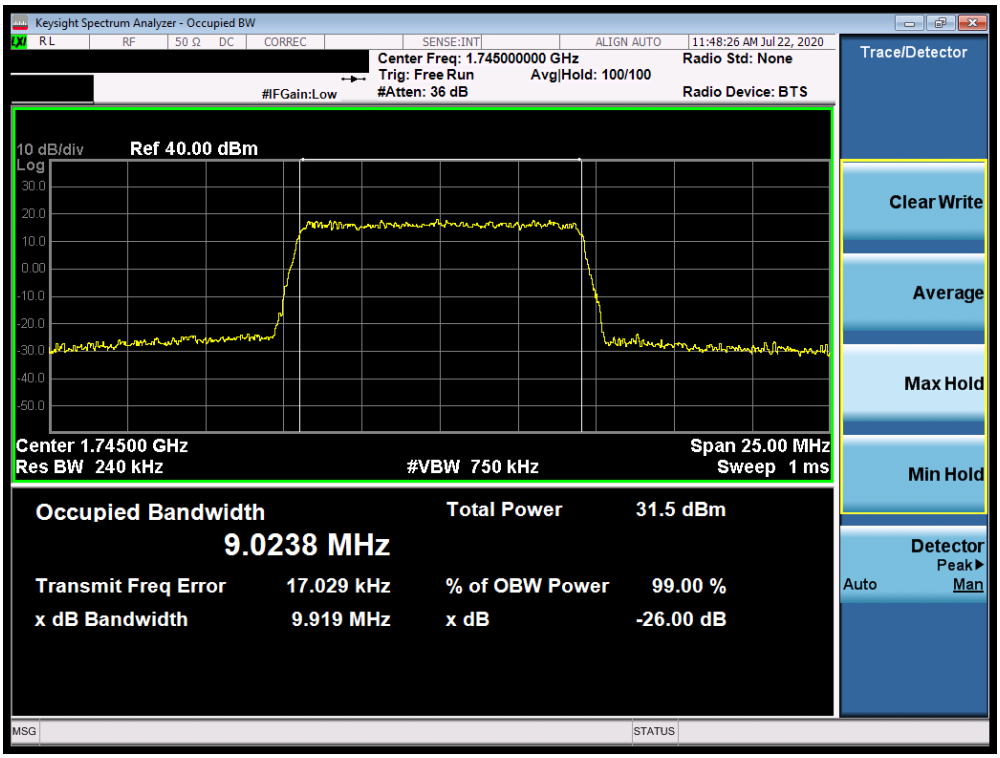

Plot 7-61. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz 16-QAM - Full RB Configuration)

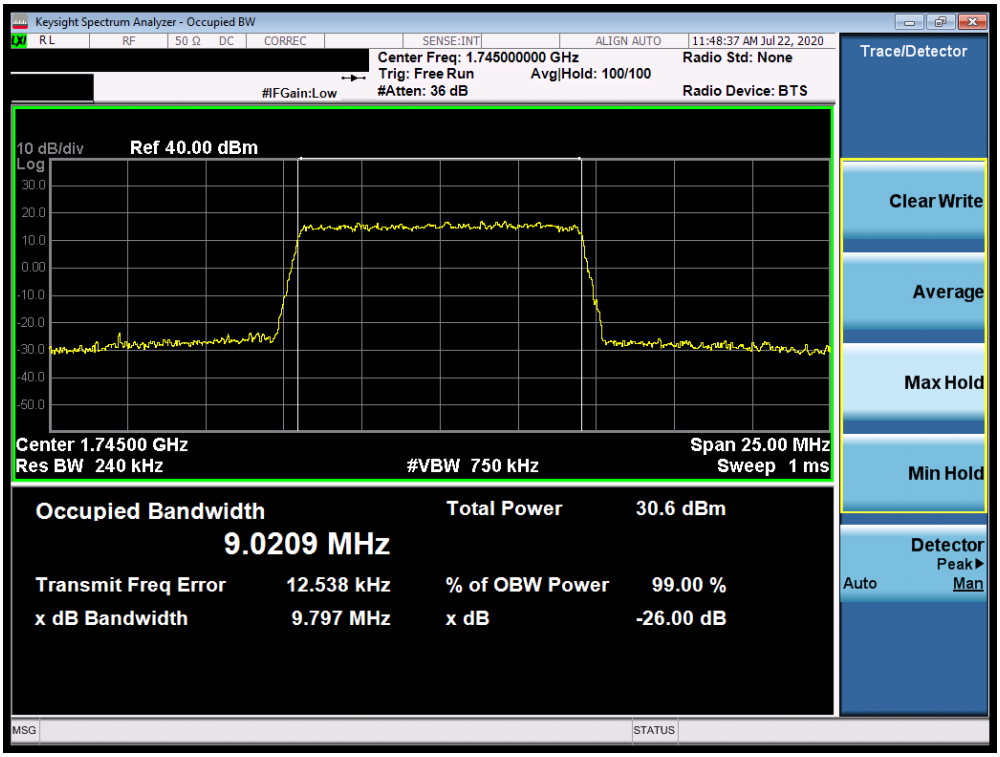

Plot 7-62. Occupied Bandwidth Plot (Band 66/4 - 10.0MHz 64-QAM - Full RB Configuration)

Plot 7-63. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz QPSK - Full RB Configuration)

Plot 7-64. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz 16-QAM - Full RB Configuration)

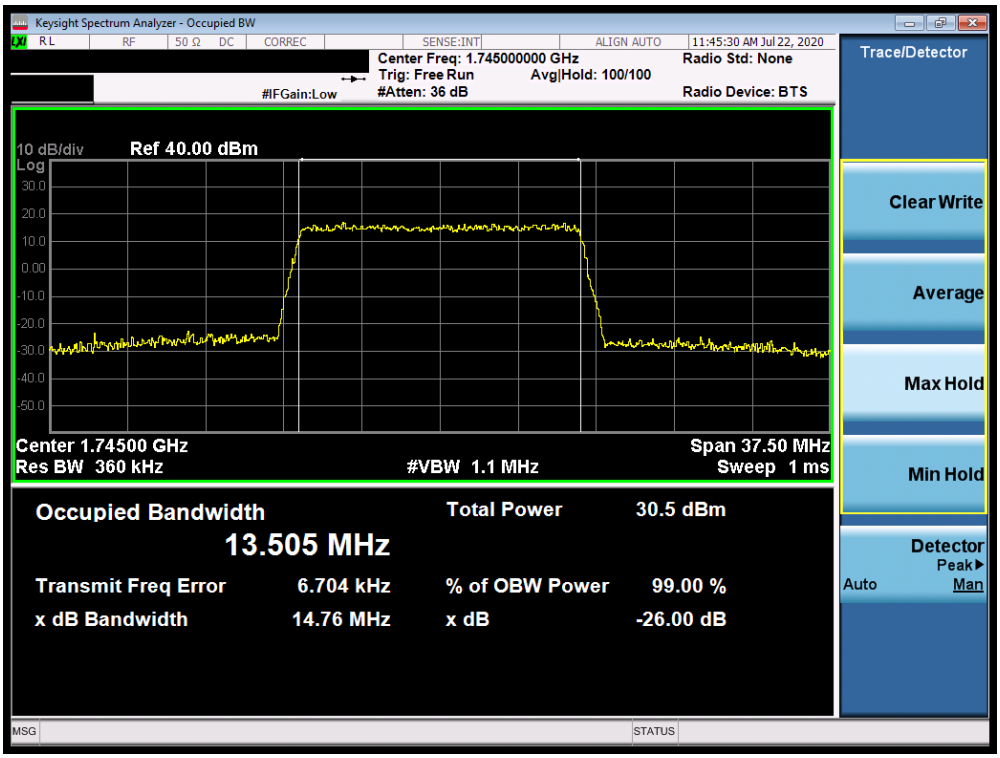

Plot 7-65. Occupied Bandwidth Plot (Band 66/4 - 15.0MHz 64-QAM - Full RB Configuration)

Plot 7-66. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz QPSK - Full RB Configuration)

Plot 7-67. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz 16-QAM - Full RB Configuration)

Plot 7-68. Occupied Bandwidth Plot (Band 66/4 - 20.0MHz 64-QAM - Full RB Configuration)

NR Band n66

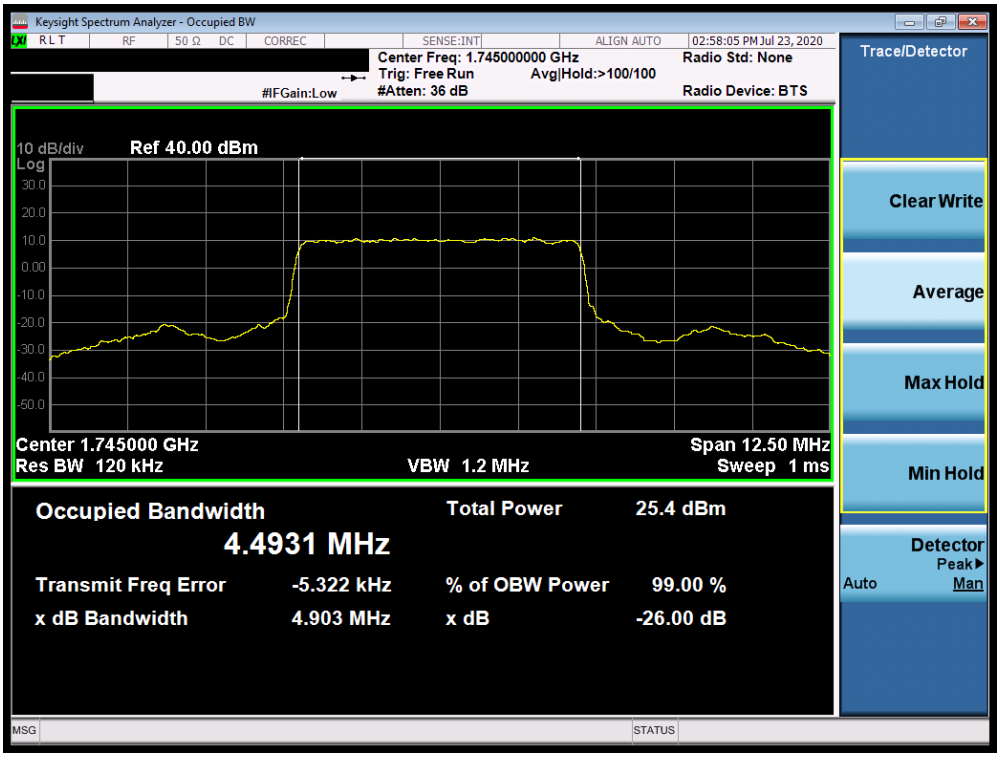

Plot 7-69. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

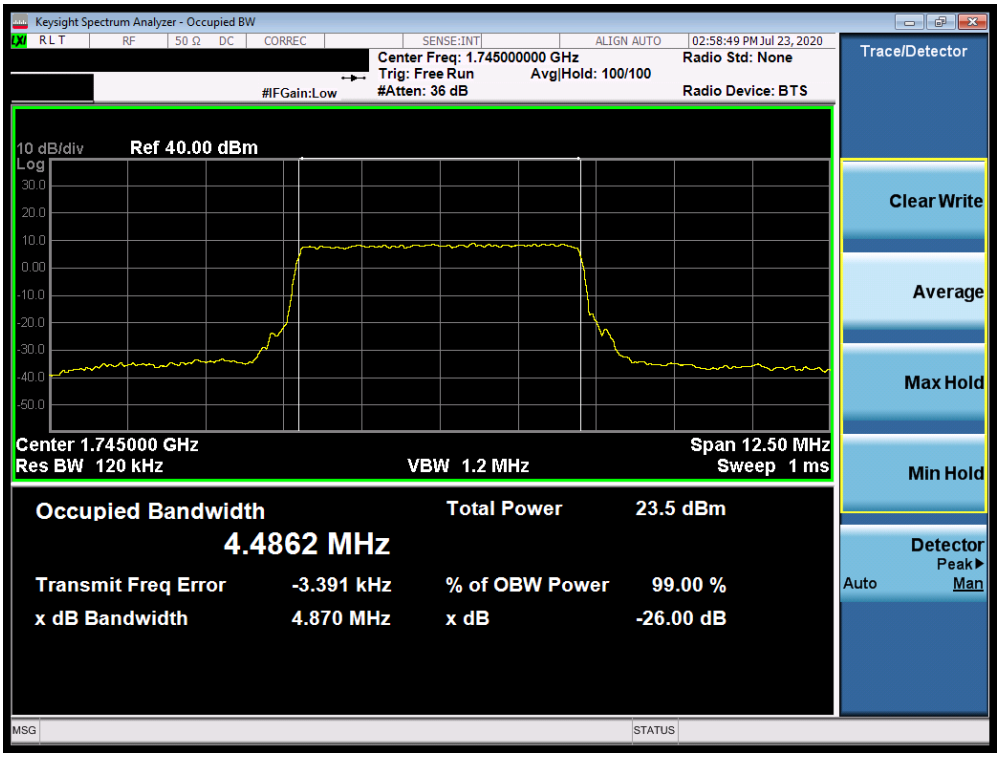

Plot 7-70. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM QPSK - Full RB)

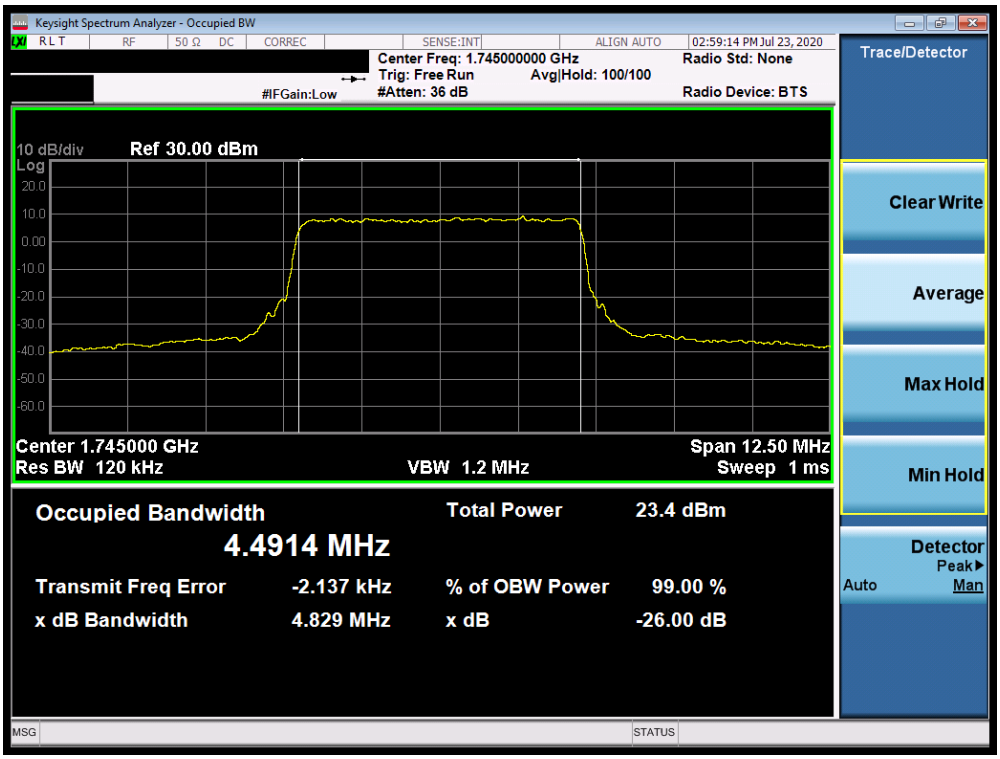

Plot 7-71. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 16QAM - Full RB)

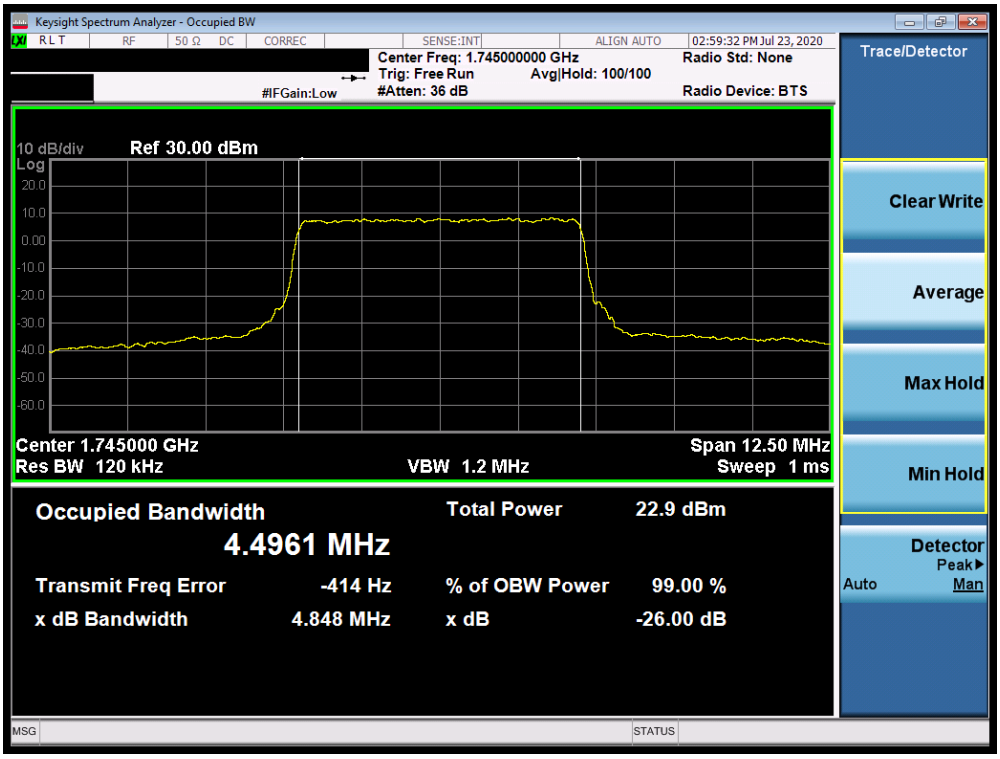

Plot 7-72. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 64QAM - Full RB)

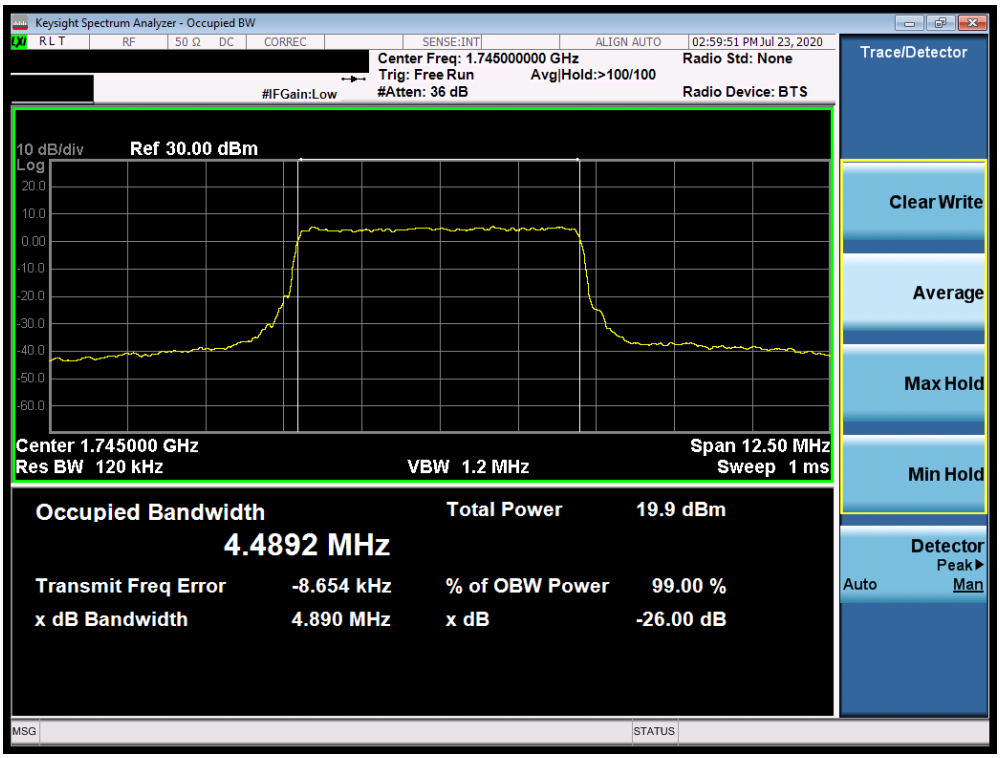

Plot 7-73. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 256QAM - Full RB)

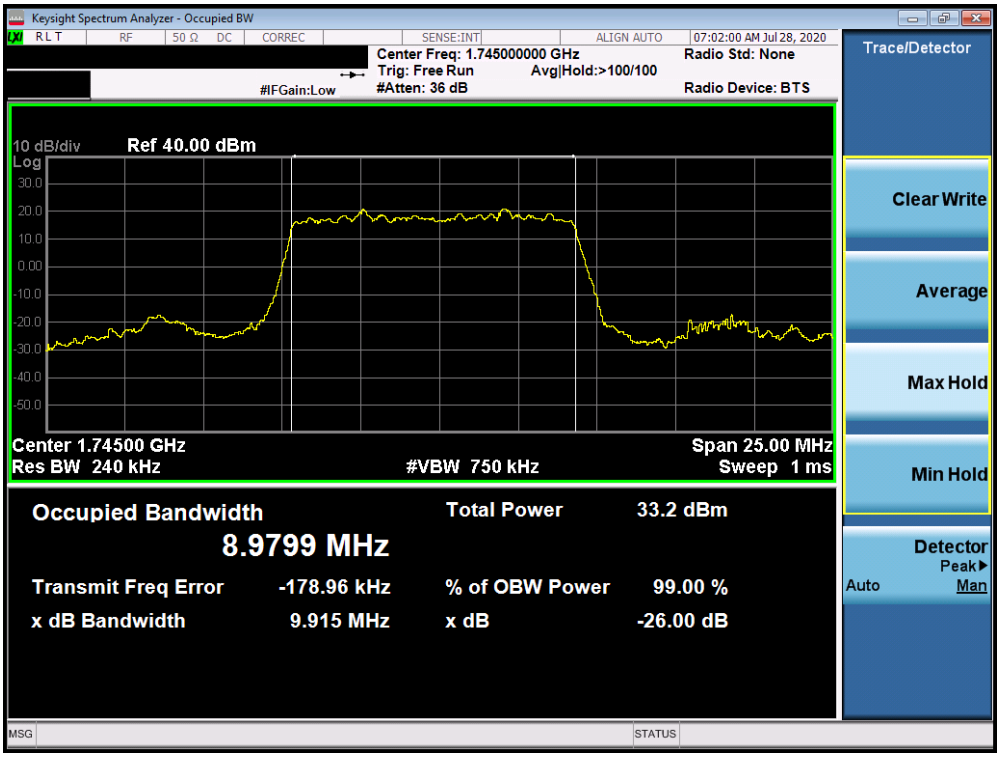

Plot 7-74. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz DFT-s-OFDM BPSK - Full RB)

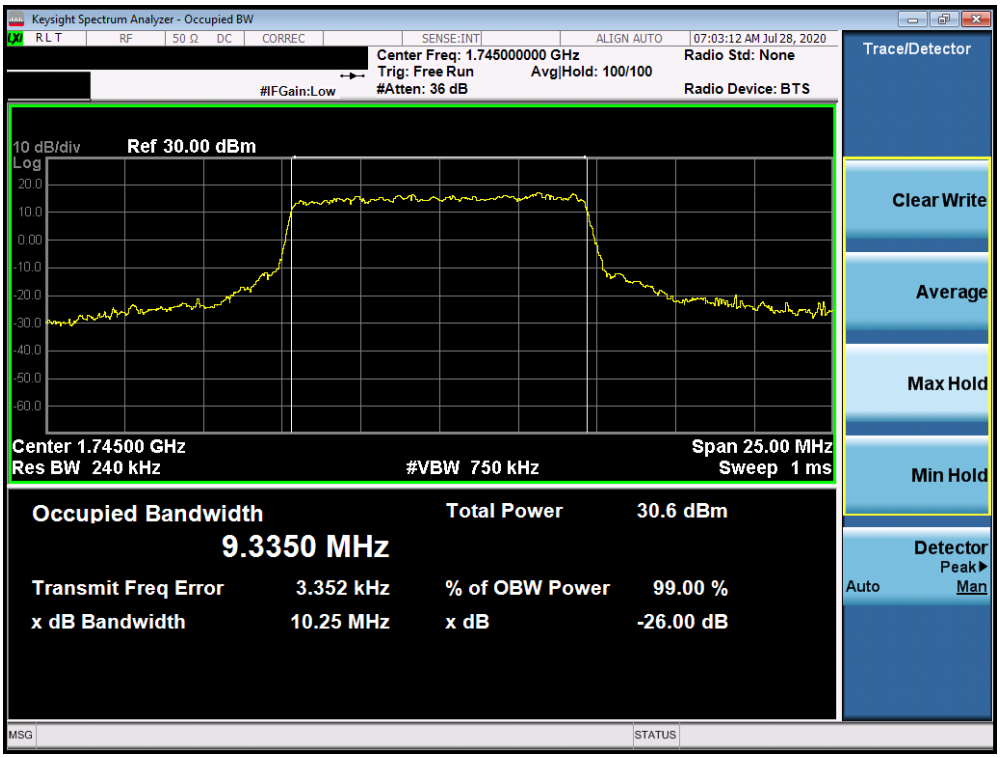

Plot 7-75. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM QPSK - Full RB)

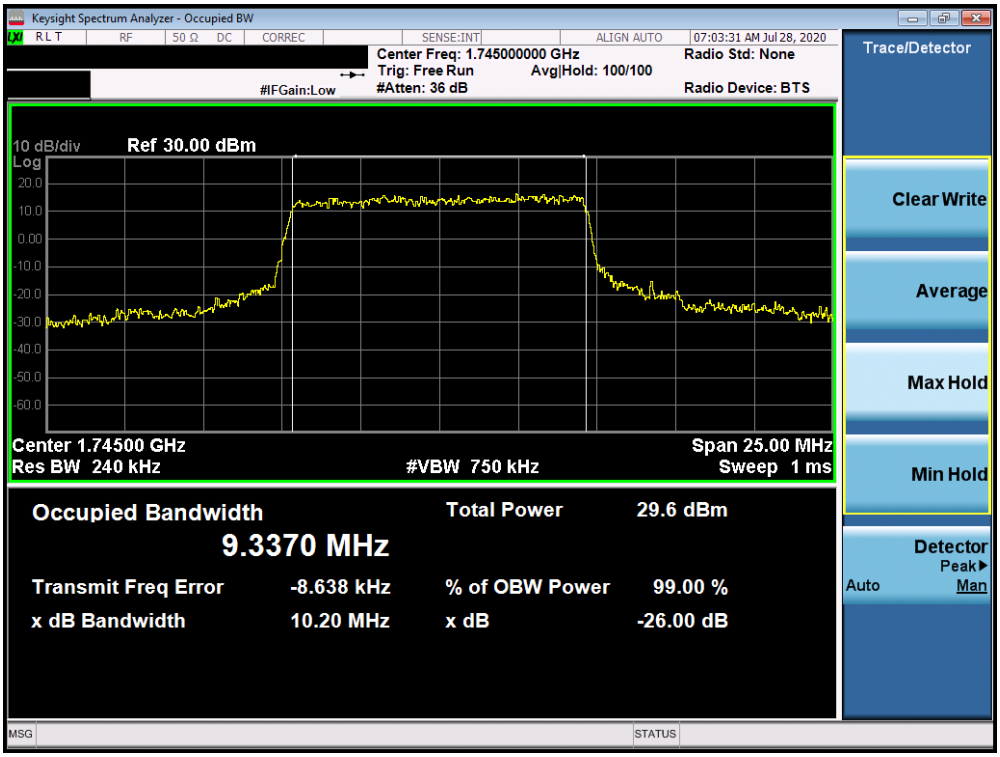

Plot 7-76. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 16QAM - Full RB)

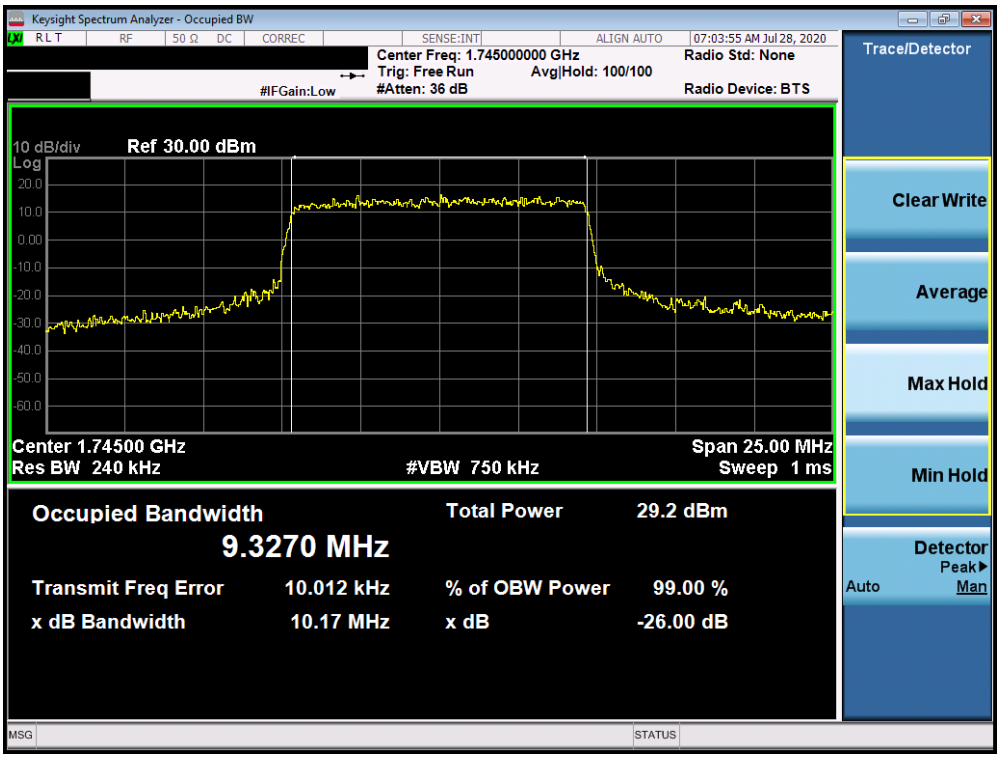

Plot 7-77. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 64QAM - Full RB)

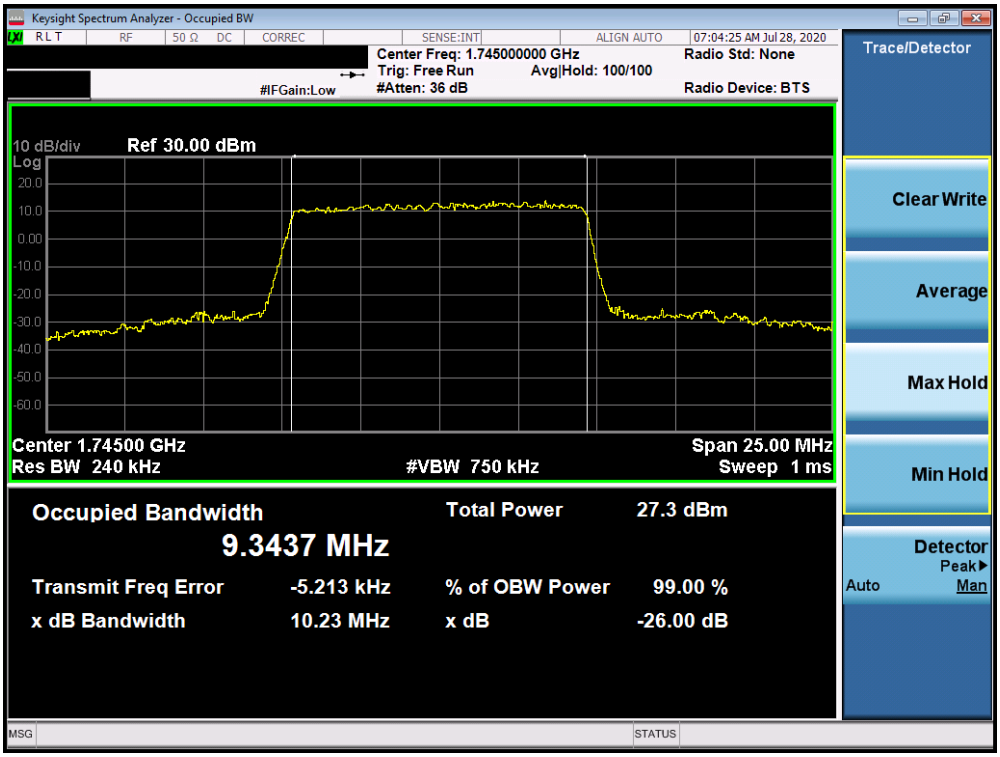

Plot 7-78. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 256QAM - Full RB)

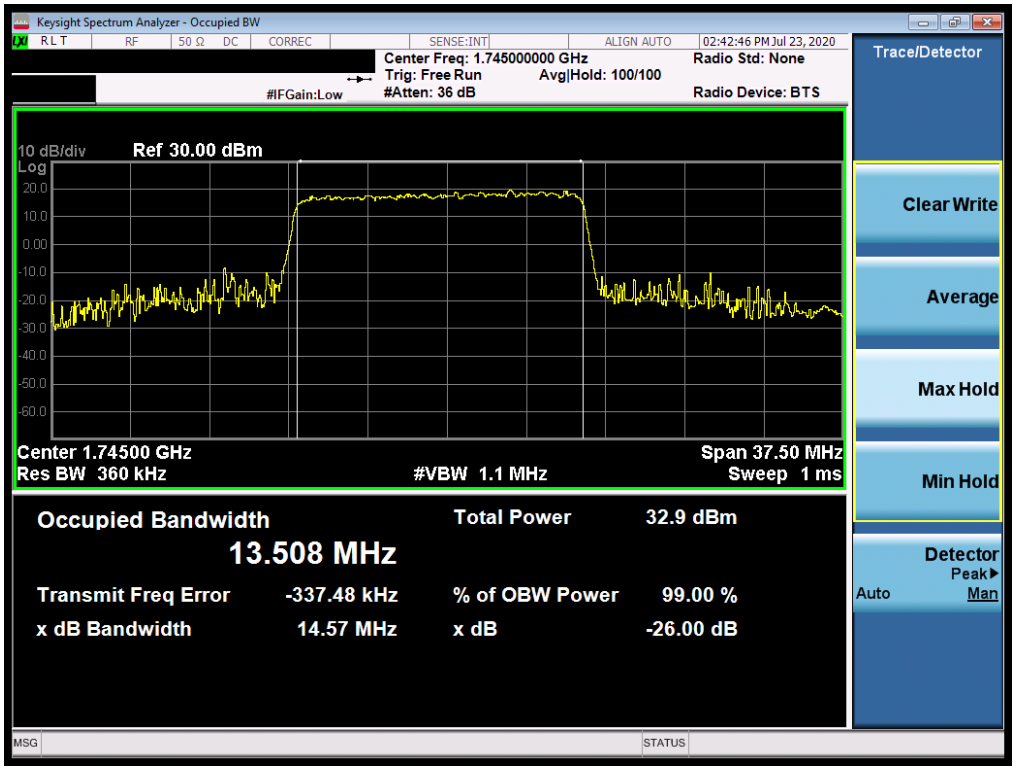

Plot 7-79. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz DFT-s-OFDM BPSK - Full RB)

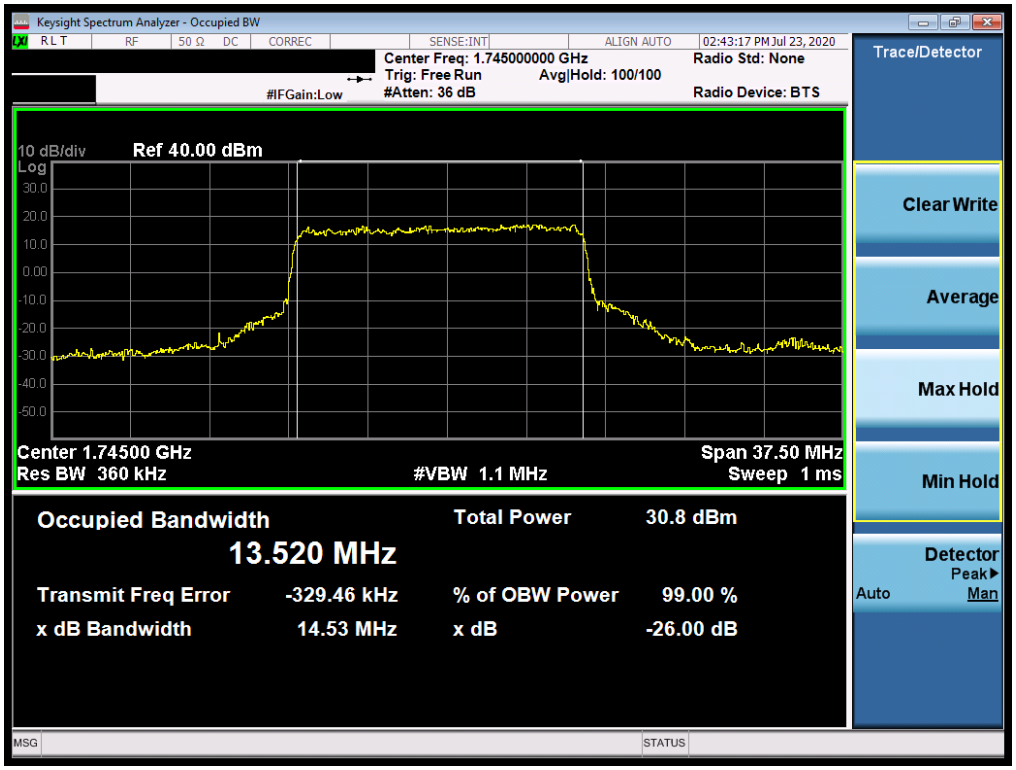

Plot 7-80. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM QPSK - Full RB)

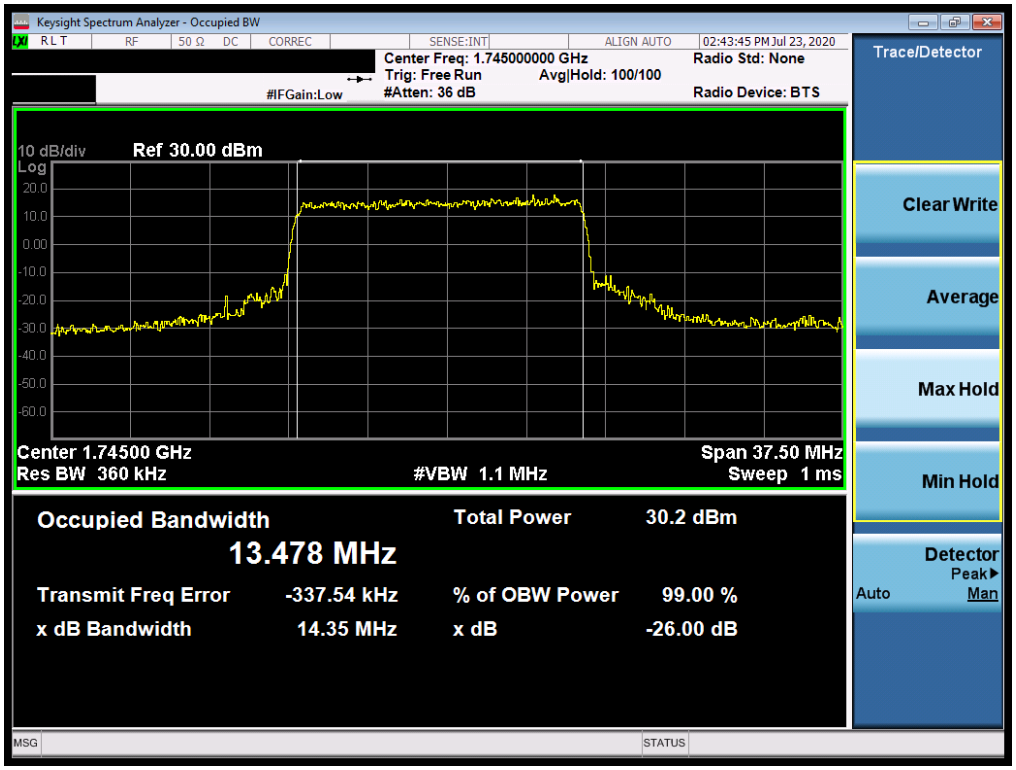

Plot 7-81. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 16QAM - Full RB)

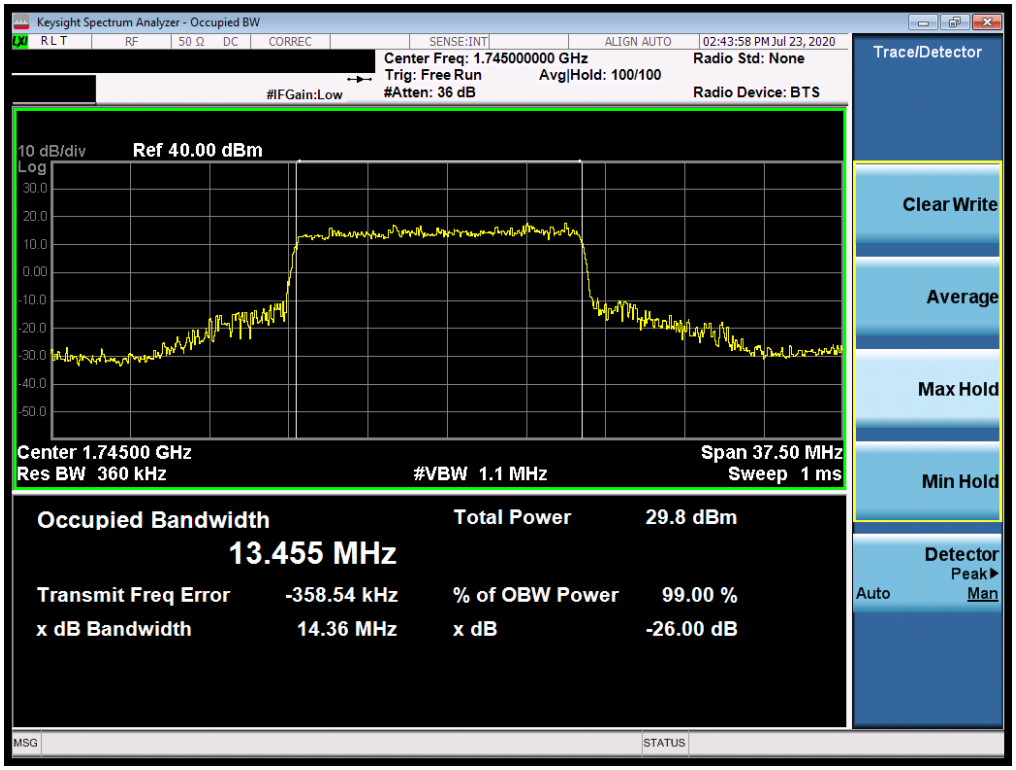

Plot 7-82. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 64QAM - Full RB)

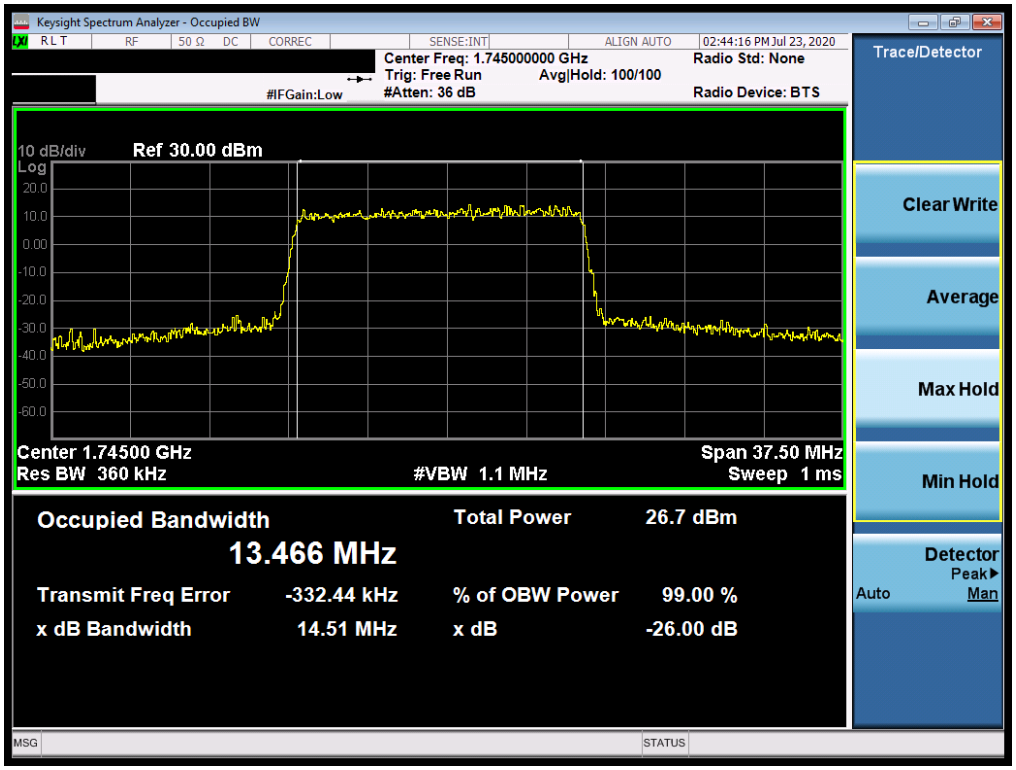

Plot 7-83. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 256QAM - Full RB)

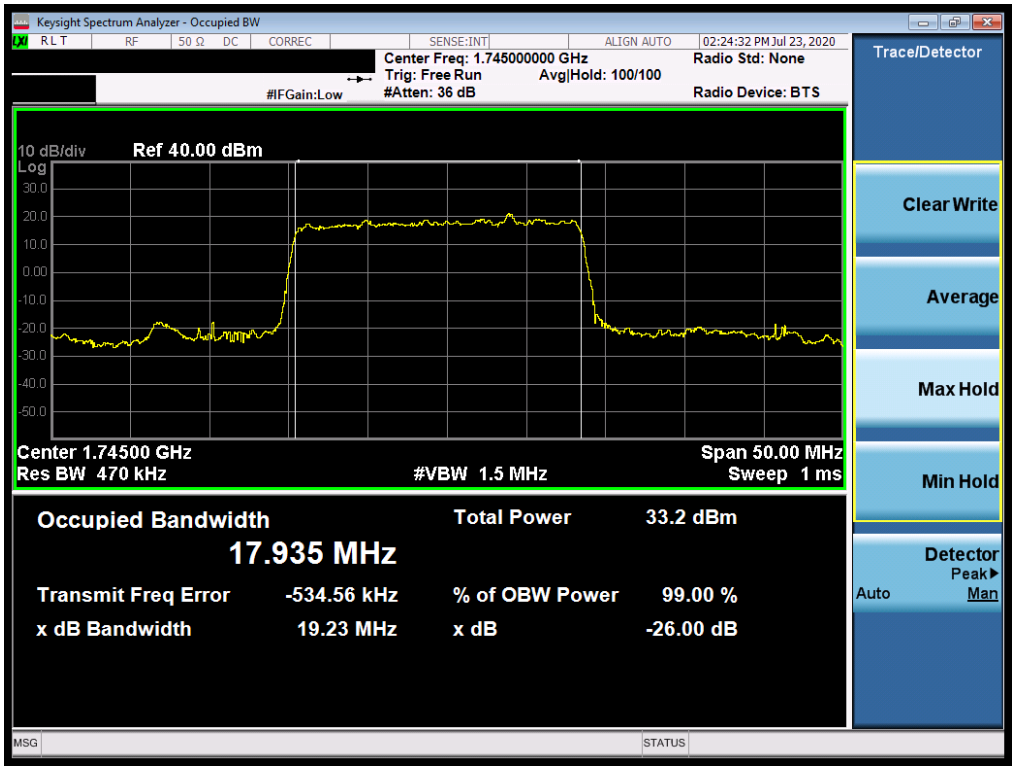

Plot 7-84. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz DFT-s-OFDM BPSK - Full RB)

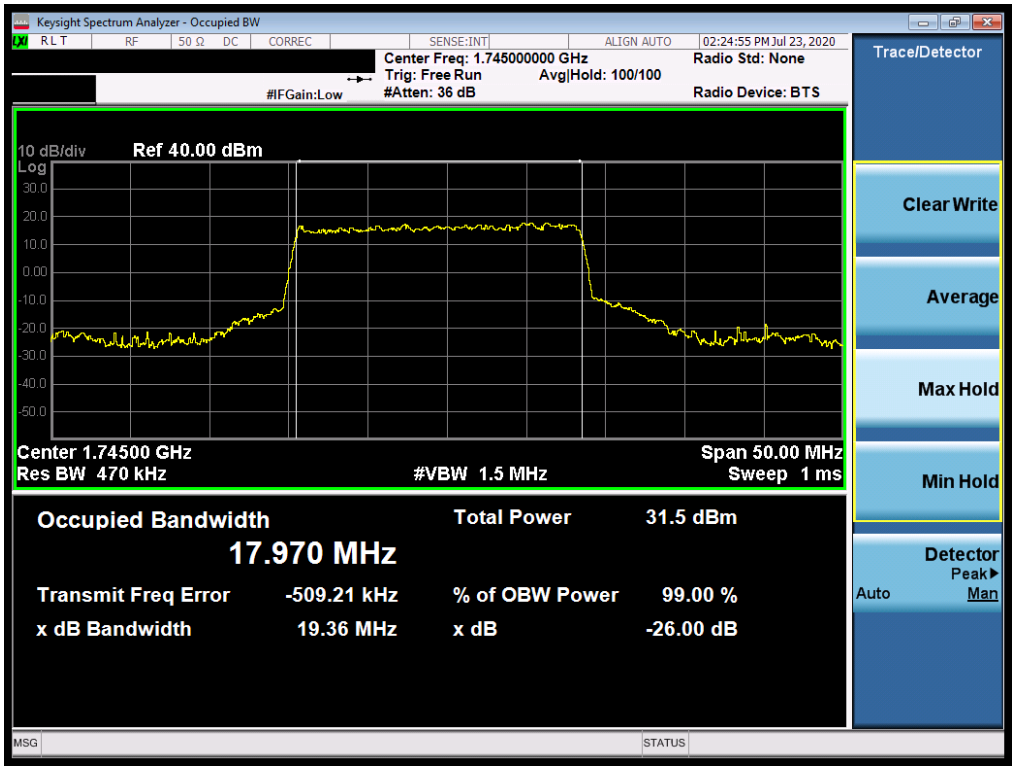

Plot 7-85. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM QPSK - Full RB)

Plot 7-86. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 16QAM - Full RB)

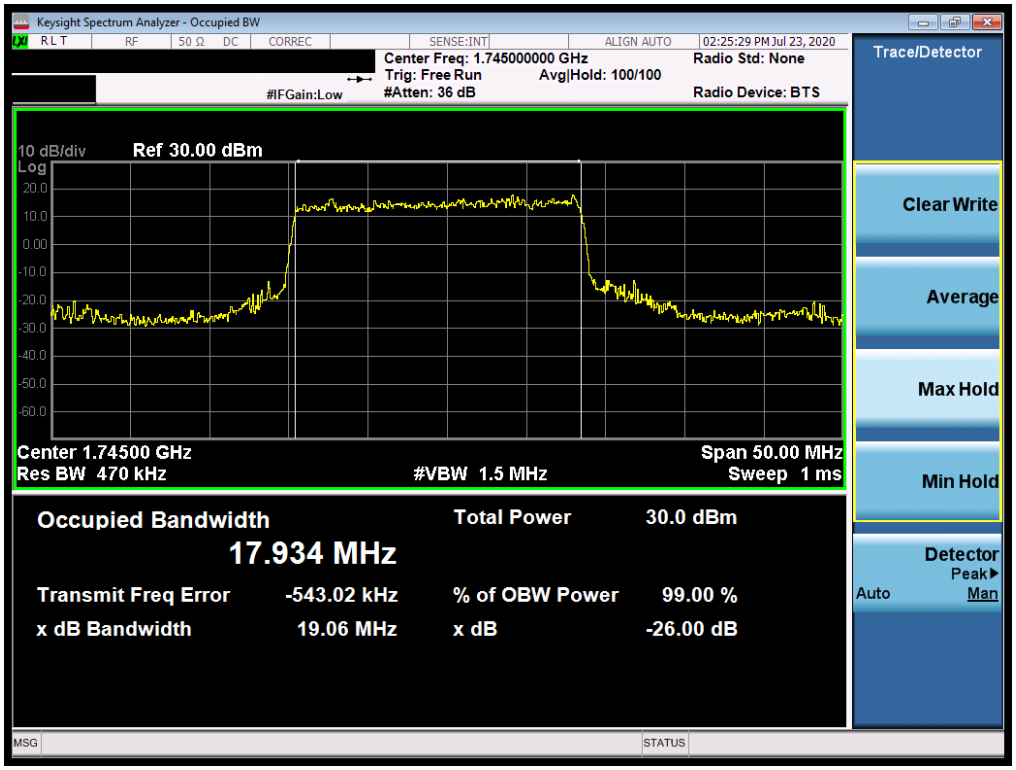

Plot 7-87. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 64QAM - Full RB)

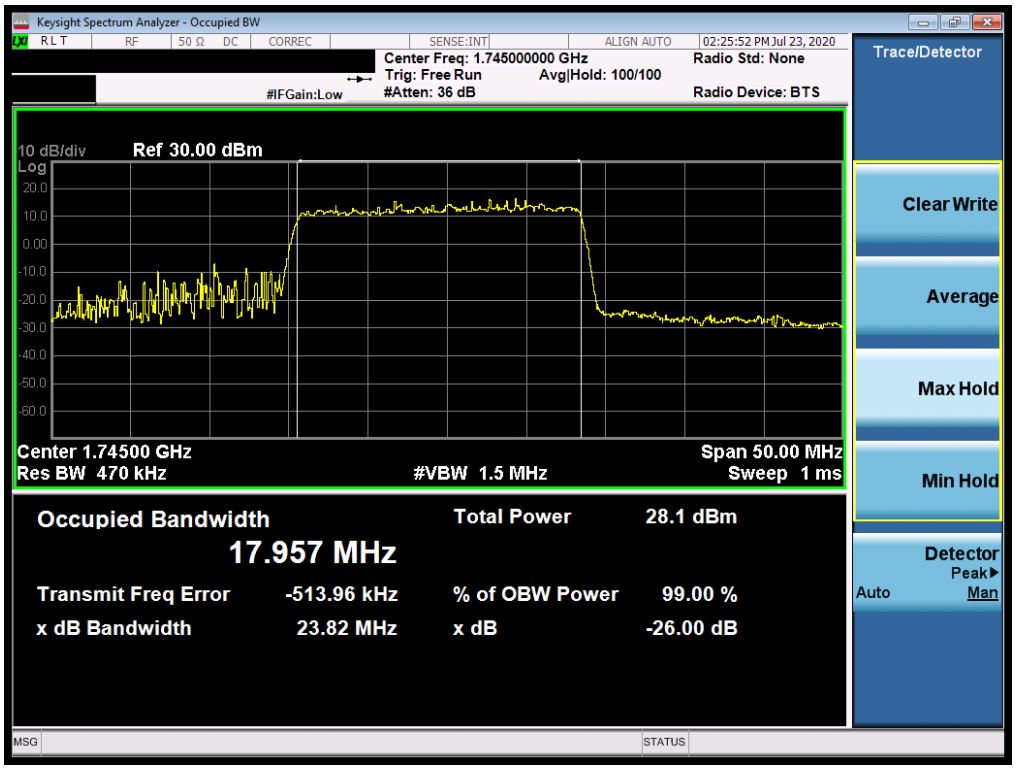

Plot 7-88. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 256QAM - Full RB)

Band 2

Plot 7-89. Occupied Bandwidth Plot (Band 2 - 1.4.0MHz QPSK - Full RB Configuration)

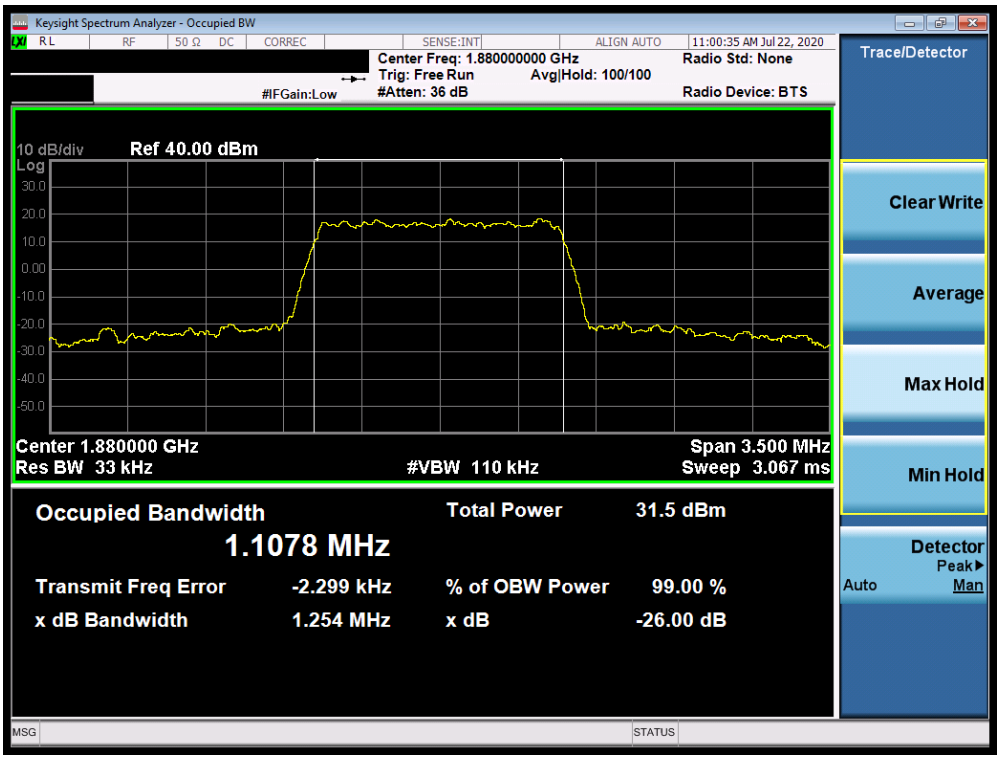

Plot 7-90. Occupied Bandwidth Plot (Band 2 - 1.4.0MHz 16-QAM - Full RB Configuration)

Plot 7-91. Occupied Bandwidth Plot (Band 2 - 1.4.0MHz 64-QAM - Full RB Configuration)

Plot 7-92. Occupied Bandwidth Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

Plot 7-93. Occupied Bandwidth Plot (Band 2 - 3.0MHz 16-QAM - Full RB Configuration)

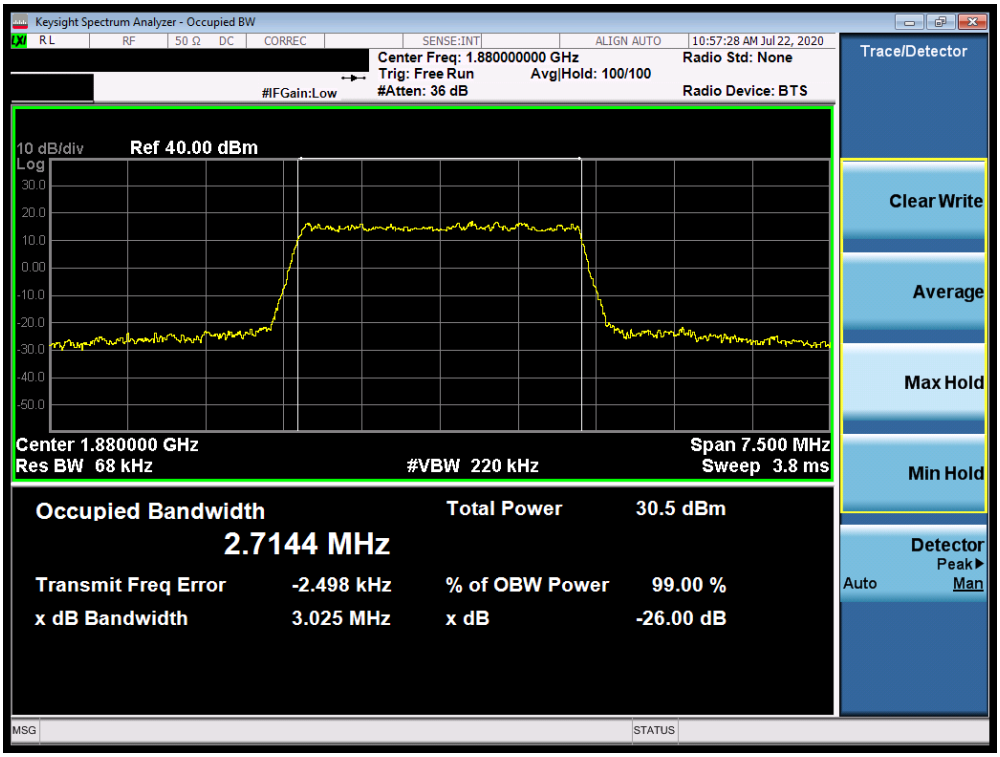

Plot 7-94. Occupied Bandwidth Plot (Band 2 - 3.0MHz 64-QAM - Full RB Configuration)

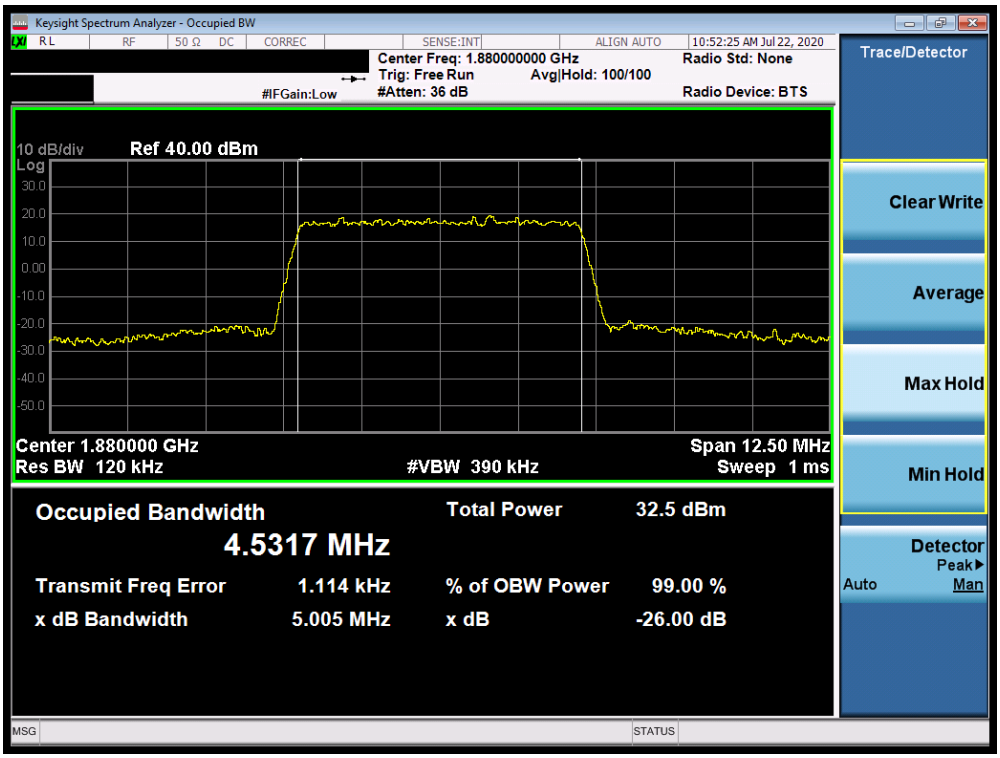

Plot 7-95. Occupied Bandwidth Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

Plot 7-96. Occupied Bandwidth Plot (Band 2 - 5.0MHz 16-QAM - Full RB Configuration)

Plot 7-97. Occupied Bandwidth Plot (Band 2 - 5.0MHz 64-QAM - Full RB Configuration)

Plot 7-98. Occupied Bandwidth Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

Plot 7-99. Occupied Bandwidth Plot (Band 2 - 10.0MHz 16-QAM - Full RB Configuration)

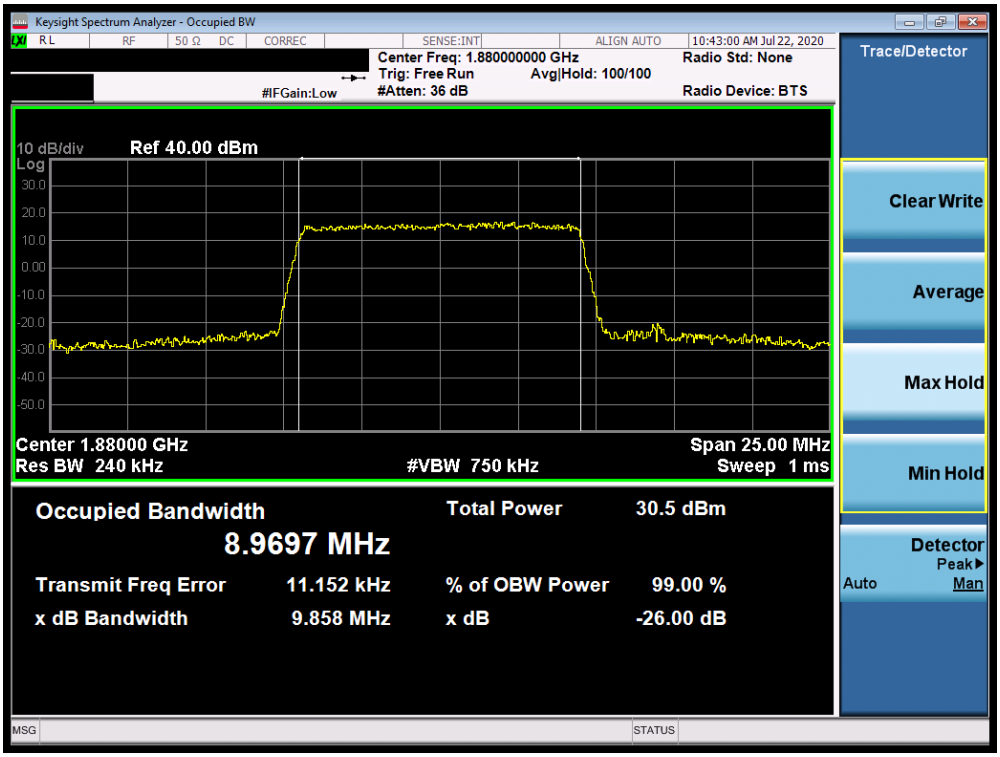

Plot 7-100. Occupied Bandwidth Plot (Band 2 - 10.0MHz 64-QAM - Full RB Configuration)

Plot 7-101. Occupied Bandwidth Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

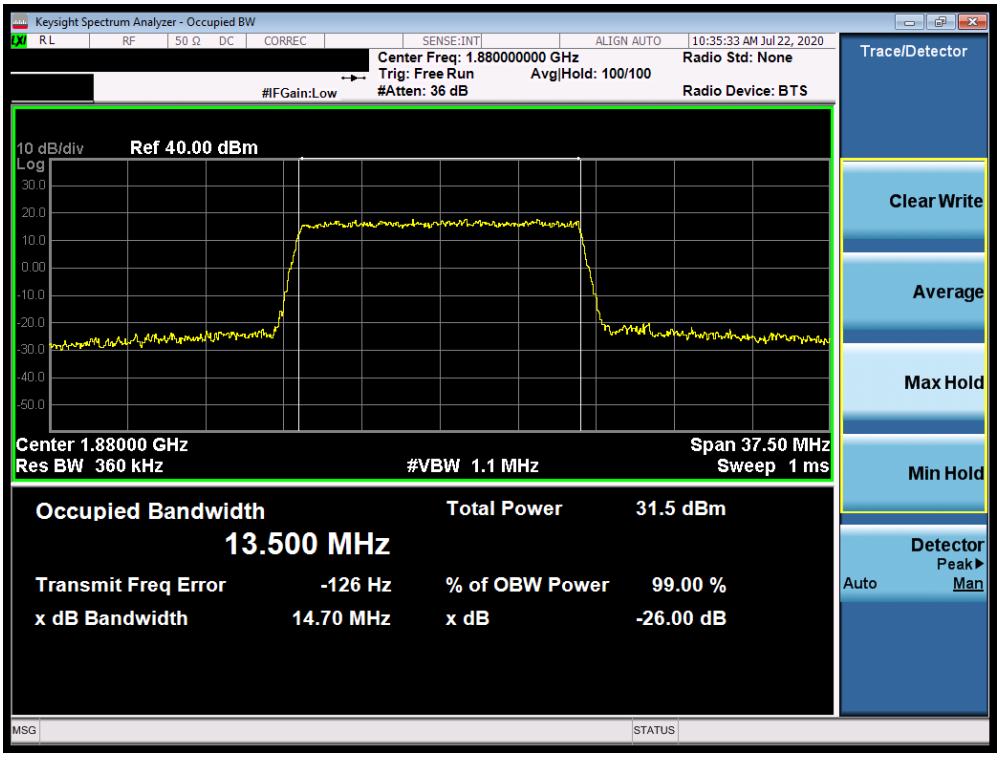

Plot 7-102. Occupied Bandwidth Plot (Band 2 - 15.0MHz 16-QAM - Full RB Configuration)

Plot 7-103. Occupied Bandwidth Plot (Band 2 - 15.0MHz 64-QAM - Full RB Configuration)

Plot 7-104. Occupied Bandwidth Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

Plot 7-105. Occupied Bandwidth Plot (Band 2 - 20.0MHz 16-QAM - Full RB Configuration)

Plot 7-106. Occupied Bandwidth Plot (Band 2 - 20.0MHz 64-QAM - Full RB Configuration)

NR Band n2

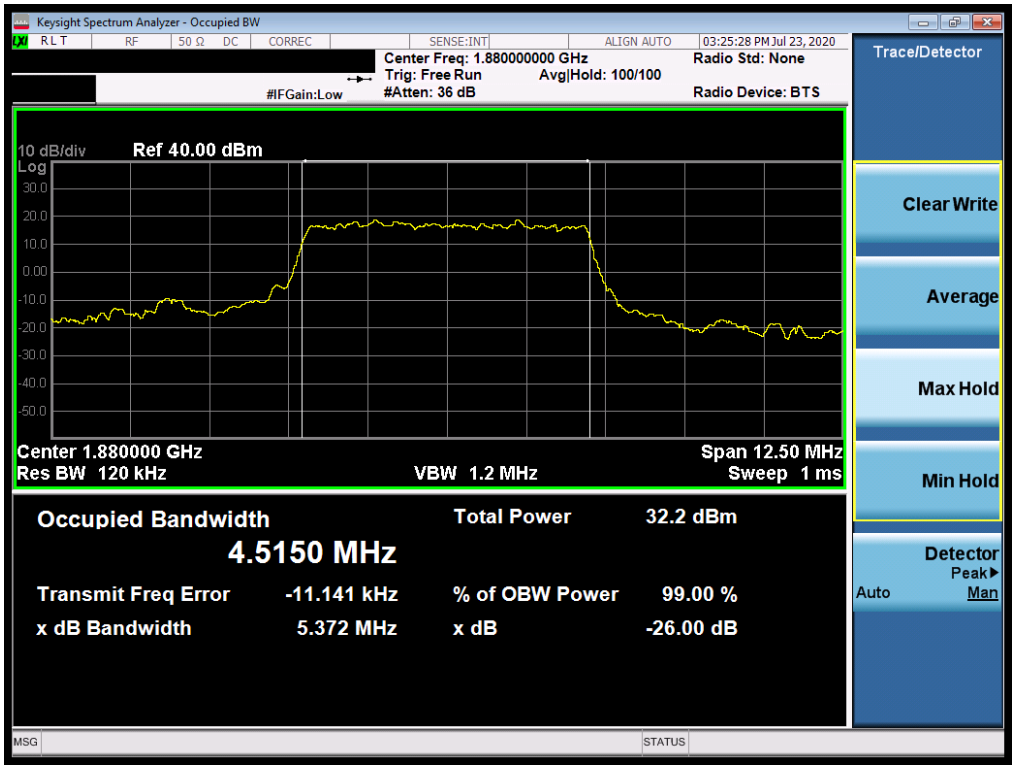

Plot 7-107. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

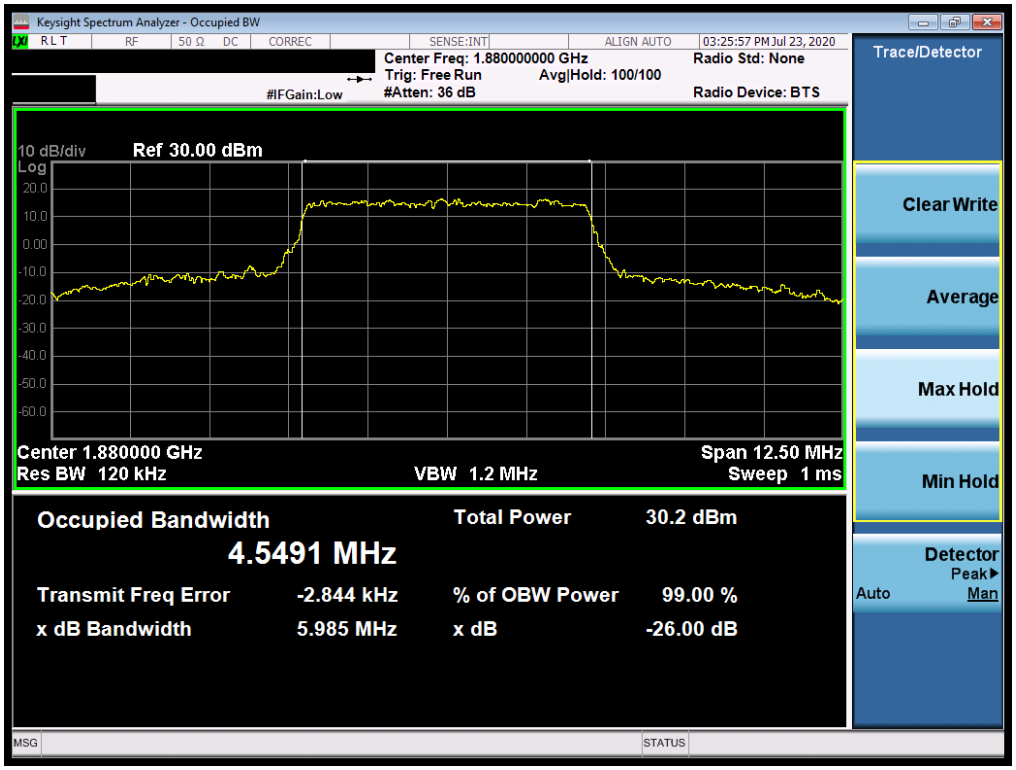

Plot 7-108. Occupied Bandwidth Plot (NR Band n2 - 5.0MHz CP-OFDM QPSK - Full RB)