

On your side

HCT

TEST REPORT

EMI Test for FCC Certification of LM-F100VM Model

APPLICANT

LG Electronics USA, Inc.

REPORT NO.

HCT-EM-2008-FC018

DATE OF ISSUE

August 26, 2020

Tested by
Ki-Min Lee


(signature)

Technical Manager
Kyoung-Hee Yoon


(signature)

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT EMI Test for FCC Certification	REPORT NO. HCT-EM-2008-FC018
	DATE OF ISSUE August 26, 2020
	FCC ID. ZNFF100VM

Applicant	LG Electronics USA, Inc. 111 Sylvan Avenue, North Building , Englewood Cliffs NJ 07632 United States
Product Name	Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID
Model Name	LM-F100VM
Series Model Name	Refer to the clause 1.1 Description of EUT
Travel Adaptor Information	Model name: MCS-P02WR Manufacturer: SUNLIN
Date of Test	August 06, 2020 to August 24, 2020
Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Test Results	Refer to the present document
Manufacturer	LG Electronics Inc.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 26, 2020	Initial Release

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)
I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.
HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. GENERAL INFORMATION	5
1.1 Description of EUT	5
1.2 Tested System Details	5
1.3 Cable Description	8
1.4 Noise Suppression Parts on Cable. (I/O Cable)	8
1.5 Test Facility	9
1.6 Calibration of Measuring Instrument	9
1.7 Measurement Uncertainty	9
2. DESCRIPTION OF TEST	10
2.1 Measurement of Conducted Emission	10
2.2 Measurement of Radiated Emission	11
2.3 Configuration of Tested System	13
3. PRELIMINARY TEST	14
3.1 Conducted Emission	14
3.2 Radiated Emission	14
4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY	15
4.1 Conducted Emission	15
4.2 Radiated Emission Below 1 GHz	29
4.3 Radiated Emission Above 1 GHz	33
5. CONCLUSION	36
6. APPENDIX A. TEST SETUP PHOTO	39

1. GENERAL INFORMATION

1.1 Description of EUT

FCC ID	ZNFF100VM
Model Name	LM-F100VM
Series Model Name	LMF100VM, F100VM, LM-F101V, LMF101V, F101V
Product Name	Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID
TX Frequency	<p>824.70 MHz to 848.31 MHz (CDMA BC0)</p> <p>1 851.25 MHz to 1 908.75 MHz (CDMA BC1)</p> <p>824.20 MHz to 848.80 MHz (GSM 850)</p> <p>1 850.20 MHz to 1 909.80 MHz (GSM 1 900)</p> <p>1 852.4 MHz to 1 907.6 MHz (WCDMA B2)</p> <p>1712.4 MHz to 1752.6 MHz (WCDMA B4)</p> <p>826.40 MHz to 846.60 MHz (WCDMA B5)</p> <p>1 850 MHz to 1 910 MHz (LTE B2)</p> <p>1 710 MHz to 1 755 MHz (LTE B4)</p> <p>824 MHz to 849 MHz (LTE B5)</p> <p>699 MHz to 716 MHz (LTE B12)</p> <p>777 MHz to 787 MHz (LTE B13)</p> <p>788 MHz to 798 MHz (LTE B14)</p> <p>2 305 MHz to 2 315 MHz (LTE B30)</p> <p>2 496 MHz to 2 690 MHz (LTE B41)</p> <p>3 550 MHz to 3 700 MHz (LTE B48)</p> <p>1 710 MHz to 1 780 MHz (LTE B66)</p> <p>2 402 MHz to 2 480 MHz (Bluetooth)</p> <p>2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)</p> <p>5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1)</p> <p>5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A)</p> <p>5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C)</p> <p>5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)</p> <p>13.56 MHz (NFC)</p> <p>1 850 MHz to 1 910 MHz (5G NR n2)</p> <p>824 MHz to 849 MHz (5G NR n5)</p> <p>1 710 MHz to 1 780 MHz (5G NR n66)</p> <p>37 000 MHz to 40 000 MHz (5G NR n260)</p> <p>27 500 MHz to 28 350 MHz (5G NR n261)</p>

RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 746 MHz to 756 MHz (LTE B13) 758 MHz to 768 MHz (LTE B14) 717 MHz to 728 MHz (LTE B29) 2 350 MHz to 2 360 MHz (LTE B30) 2 496 MHz to 2 690 MHz (LTE B41) 5 150 MHz to 5 925 MHz (LTE B46) 3 550 MHz to 3 700 MHz (LTE B48) 2 110 MHz to 2 200 MHz (LTE B66) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3) 13.56 MHz (NFC) 1 930 MHz to 1 990 MHz (5G NR n2) 869 MHz to 894 MHz (5G NR n5) 2 110 MHz to 2 200 MHz (5G NR n66) 37 000 MHz to 40 000 MHz (5G NR n260) 27 500 MHz to 28 350 MHz (5G NR n261)
--------------	--

1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
EUT	LM-F100VM	-	LG
LED monitor	34UC98	-	LG
Monitor adapter	ADS-110CL-19-3	-	SHENZHEN HONOR ELECTRONIC
DP cable	CDP2DPMM1MW	-	STARTECH
Wireless charger	F7U082	-	belkin
Micro USB cable	-	-	belkin
Wireless charger TA	DSA-18QFB	-	belkin
DATA cable	EAD65830101	-	LUXSHARE
Earphone	EAB63728251	-	CRESYN
Audio gender	EBX64331001	-	CRESYN
TA	MCS-P02WR	-	SUNLIN
Micro SD card	SAMSUNG EVO+ microSDXC CLASS10 UHS-I (256 GB)	-	SAMSUNG

1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C (Data Cable)	Y	N/A	(P) 1.0
	USB Type C (Display Cable)	N/A	Y	(D) 1.0
	USB Type C (Audio Gender)	N/A	N	(D) 0.1
Audio Gender	Earphone	N/A	N	(D) 1.2
LED Monitor	DC IN	N	N/A	(P) 1.8
	DP port	N/A	Y	(D) 1.2
Wireless Charger	Micro USB	Y	N/A	(P) 1.3

NOTE. The marked "(D)" means the data cable and "(P)" means the power cable.

1.4 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB Type C (Data Cable)	N	N/A	Y	Both End
	USB Type C (Display Cable)	N	N/A	Y	Both End
	USB Type C (Audio Gender)	N	N/A	Y	EUT End
Audio Gender	Earphone	N	N/A	Y	Audio Gender End
LED Monitor	DP port	N	N/A	Y	Both End
Wireless Charger	Micro USB	N	N/A	Y	Both End

1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Designation No.
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	KR0032
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #1	
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #2	

1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Conducted Emission (0.15 MHz to 30 MHz)	1.58 dB
3 m Radiated Emissions (30 MHz to 1 GHz)	4.86 dB
3 m Radiated Emissions (1 GHz to 18 GHz)	4.58 dB
3 m Radiated Emissions (18 GHz to 40 GHz)	5.54 dB

2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dBμV)	Average (dBμV)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
(1 GHz to 40 GHz)

Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}\mu\text{V}/\text{m}$)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}\mu\text{V}/\text{m}$)
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak ($\text{dB}\mu\text{V}/\text{m}$)	Average ($\text{dB}\mu\text{V}/\text{m}$)	Peak ($\text{dB}\mu\text{V}/\text{m}$)	Average ($\text{dB}\mu\text{V}/\text{m}$)	
Above 1 000	3	80	60	74	54	

2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System

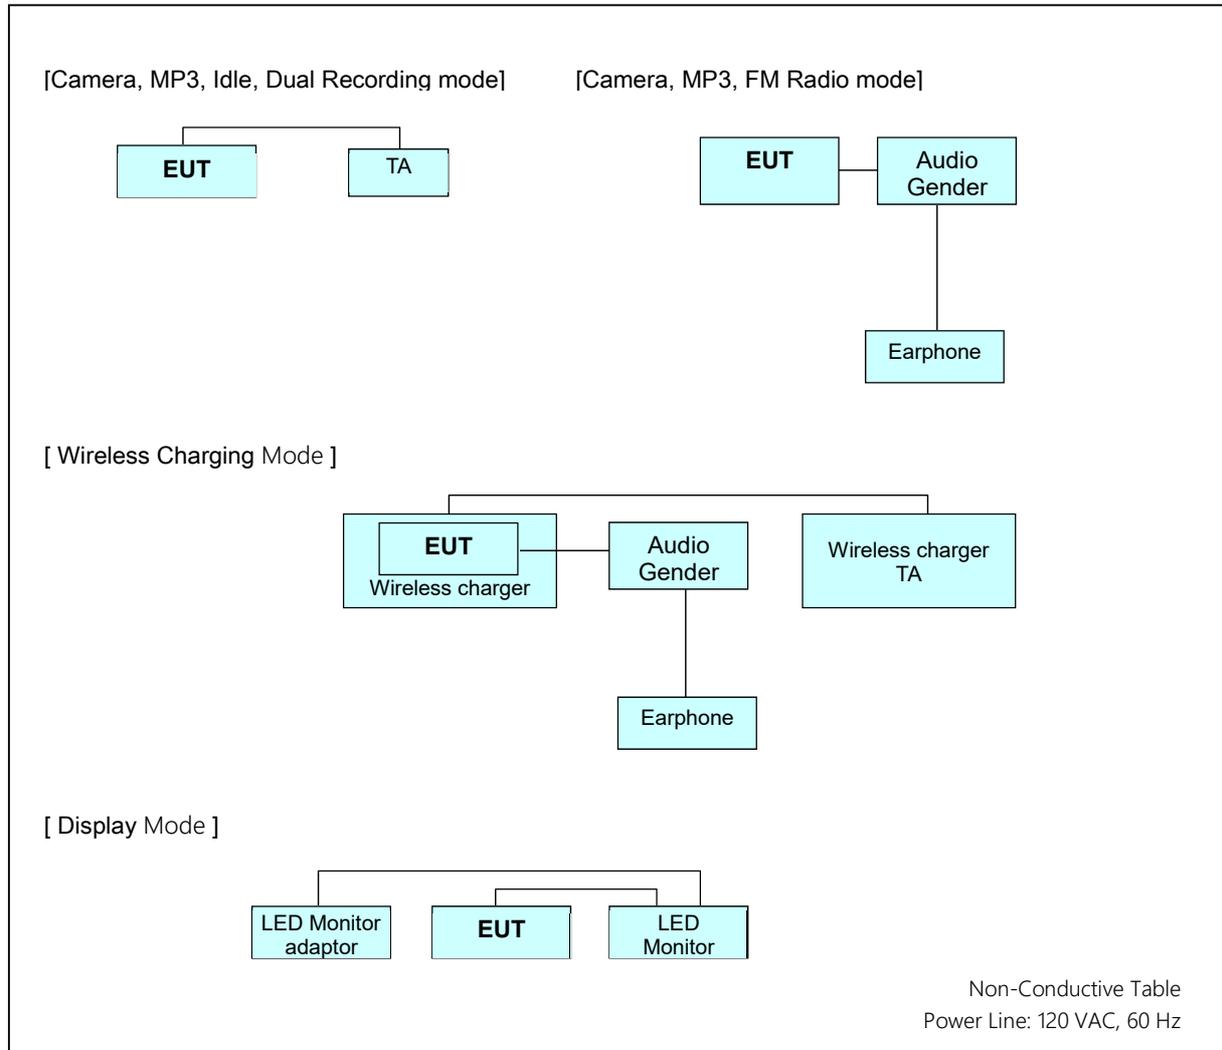

3. PRELIMINARY TEST

3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

Operating Modes:

[EUT +TA]

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

Dual Recording mode

NOTE. The worst-case emissions are reported.

3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

Operating Modes:

[EUT +TA]

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

Dual Recording mode

Display mode

[EUT +Earphone]

FRONT CAMERA & MP3 mode

REAR CAMERA & FM RADIO mode

WIRELESS CHARGING mode

NOTE. The worst-case emissions are reported.

4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission

4.1.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESCI	100584	1 year	06.10.2020
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	102245	1 year	09.11.2019
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.20.2019
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	ANTENNA (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-


4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:

Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Frequency Range	150 kHz to 30 MHz
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Worst Case of Operating Mode	FRONT CAMERA & MP3 mode Dual Recording mode
Kind of Test Site	EMI Shielded Room
Temperature	24.6 / 24.1 °C
Relative Humidity	47.8 / 48.6 %
Test Date	August 12 / August 20, 2020

4.1.3 Measuring Data

Figure 1: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA & MP3 mode, Line (L1)

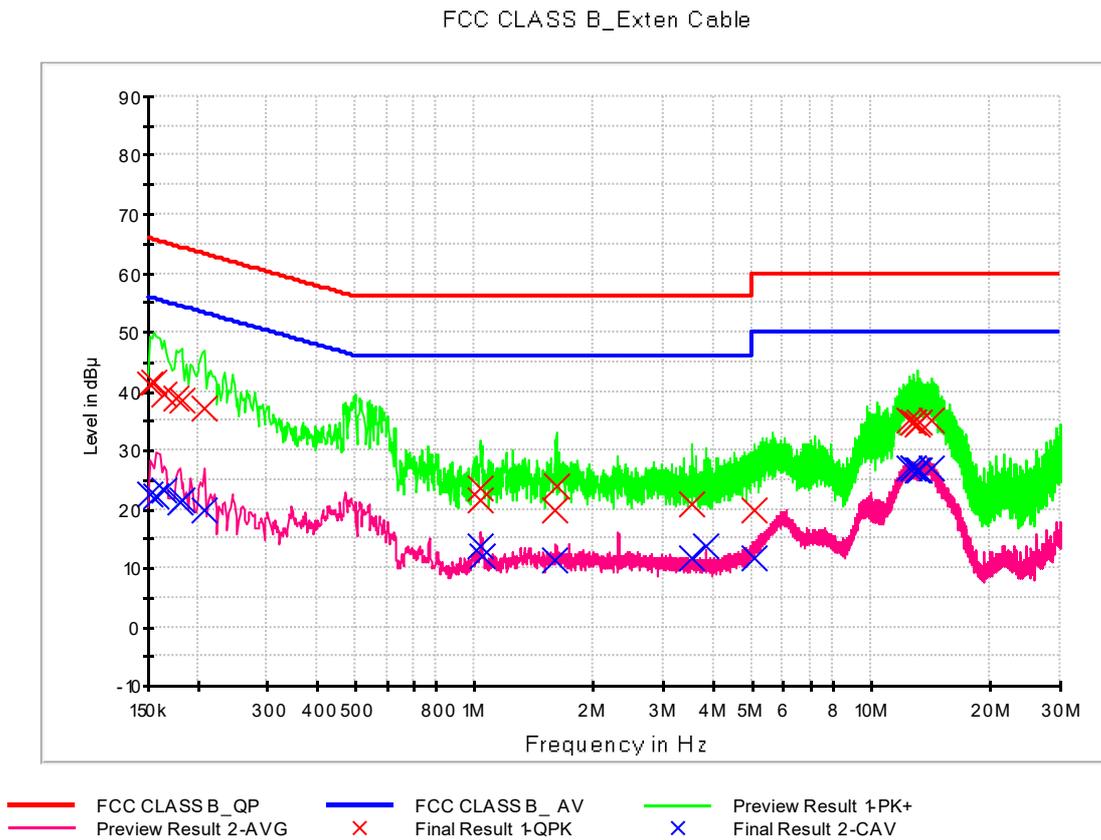

QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.152000	41.3	9.000	L1	9.8	24.6	65.9
0.156000	41.4	9.000	L1	9.8	24.2	65.7
0.164000	39.5	9.000	L1	9.8	25.8	65.3
0.176000	38.7	9.000	L1	9.8	25.9	64.7
0.182000	38.5	9.000	L1	9.8	25.9	64.4
0.208000	37.2	9.000	L1	9.8	26.1	63.3
1.034000	23.5	9.000	L1	9.8	32.5	56.0
1.038000	21.5	9.000	L1	9.8	34.5	56.0
1.600000	19.7	9.000	L1	9.9	36.3	56.0
1.604000	23.9	9.000	L1	9.9	32.1	56.0
3.546000	20.9	9.000	L1	9.9	35.1	56.0
5.092000	19.8	9.000	L1	10.0	40.2	60.0
12.514000	35.1	9.000	L1	10.3	24.9	60.0
12.748000	34.9	9.000	L1	10.3	25.1	60.0
12.784000	34.6	9.000	L1	10.3	25.4	60.0
13.112000	34.5	9.000	L1	10.3	25.5	60.0
13.210000	34.7	9.000	L1	10.3	25.3	60.0
14.112000	35.1	9.000	L1	10.3	24.9	60.0


Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.152000	22.5	9.000	L1	9.8	33.4	55.9
0.158000	22.3	9.000	L1	9.8	33.3	55.6
0.164000	23.2	9.000	L1	9.8	32.1	55.3
0.180000	21.3	9.000	L1	9.8	33.2	54.5
0.184000	21.5	9.000	L1	9.8	32.8	54.3
0.208000	19.7	9.000	L1	9.8	33.6	53.3
1.036000	13.6	9.000	L1	9.8	32.4	46.0
1.042000	12.1	9.000	L1	9.8	33.9	46.0
1.602000	11.2	9.000	L1	9.9	34.8	46.0
3.546000	11.6	9.000	L1	9.9	34.4	46.0
3.836000	13.7	9.000	L1	10.0	32.3	46.0
5.092000	11.8	9.000	L1	10.0	38.2	50.0
12.514000	27.0	9.000	L1	10.3	23.0	50.0
12.748000	26.9	9.000	L1	10.3	23.1	50.0
12.784000	26.9	9.000	L1	10.3	23.1	50.0
13.112000	26.7	9.000	L1	10.3	23.3	50.0
13.210000	26.7	9.000	L1	10.3	23.3	50.0
14.112000	26.9	9.000	L1	10.3	23.1	50.0

Figure 2: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA & MP3 mode, Line (N)

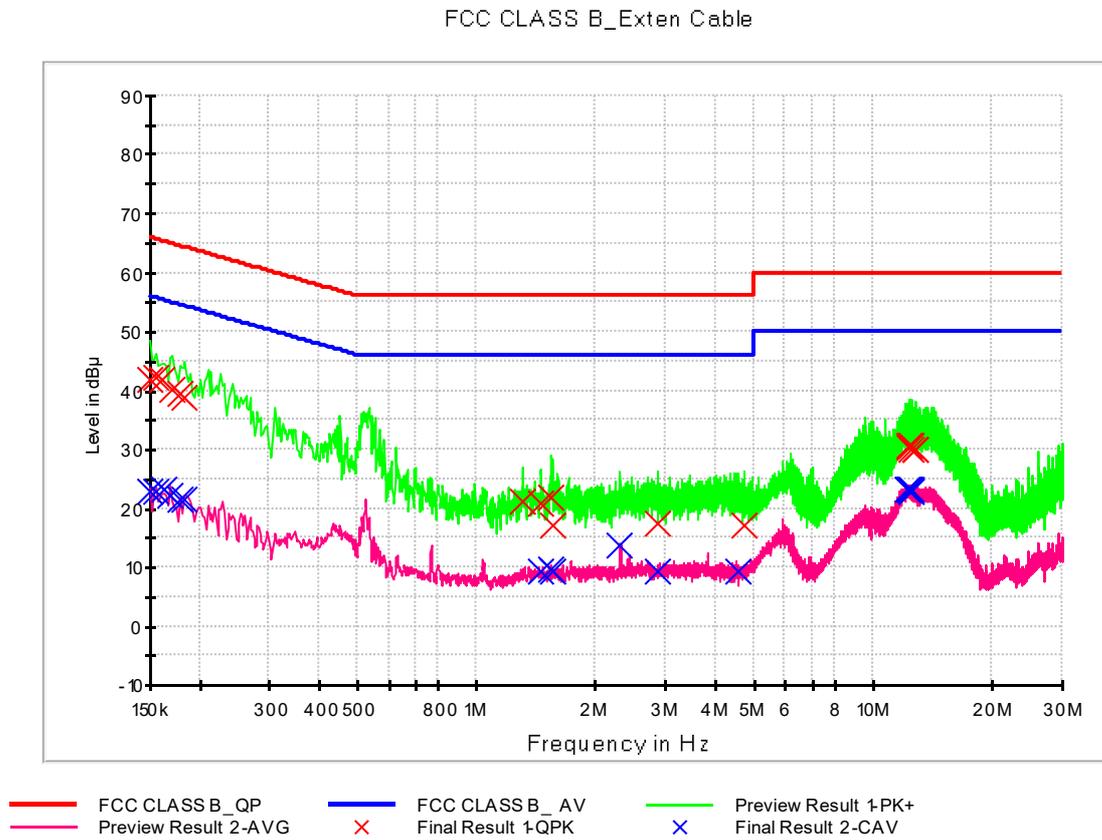


QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	42.0	9.000	N	9.8	24.0	66.0
0.156000	42.3	9.000	N	9.8	23.3	65.7
0.160000	41.8	9.000	N	9.8	23.7	65.5
0.170000	40.1	9.000	N	9.8	24.8	65.0
0.178000	39.3	9.000	N	9.8	25.2	64.6
0.184000	38.7	9.000	N	9.8	25.7	64.3
1.300000	21.1	9.000	N	9.8	34.9	56.0
1.456000	20.8	9.000	N	9.9	35.2	56.0
1.544000	21.7	9.000	N	9.9	34.3	56.0
1.552000	17.2	9.000	N	9.9	38.8	56.0
2.866000	17.4	9.000	N	9.9	38.6	56.0
4.710000	17.2	9.000	N	10.0	38.8	56.0
12.280000	30.6	9.000	N	10.3	29.4	60.0
12.384000	30.4	9.000	N	10.3	29.6	60.0
12.448000	30.7	9.000	N	10.3	29.3	60.0
12.550000	30.1	9.000	N	10.4	29.9	60.0
12.714000	30.1	9.000	N	10.4	29.9	60.0
12.838000	29.9	9.000	N	10.4	30.1	60.0

CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	23.0	9.000	N	9.8	33.0	56.0
0.156000	23.0	9.000	N	9.8	32.7	55.7
0.162000	23.2	9.000	N	9.8	32.2	55.4
0.168000	22.4	9.000	N	9.8	32.7	55.1
0.178000	21.4	9.000	N	9.8	33.2	54.6
0.184000	21.7	9.000	N	9.8	32.6	54.3
1.452000	9.4	9.000	N	9.9	36.6	46.0
1.544000	9.6	9.000	N	9.9	36.4	46.0
1.552000	9.3	9.000	N	9.9	36.7	46.0
2.302000	13.7	9.000	N	9.9	32.3	46.0
2.866000	9.4	9.000	N	9.9	36.6	46.0
4.572000	9.2	9.000	N	10.0	36.8	46.0
12.214000	23.2	9.000	N	10.3	26.8	50.0
12.280000	23.1	9.000	N	10.3	26.9	50.0
12.384000	23.4	9.000	N	10.3	26.6	50.0
12.410000	23.1	9.000	N	10.3	26.9	50.0
12.540000	22.8	9.000	N	10.4	27.2	50.0
12.550000	22.9	9.000	N	10.4	27.1	50.0

Figure 3: Conducted Emission (150 kHz to 30 MHz), Dual Recording mode, Line (L1)

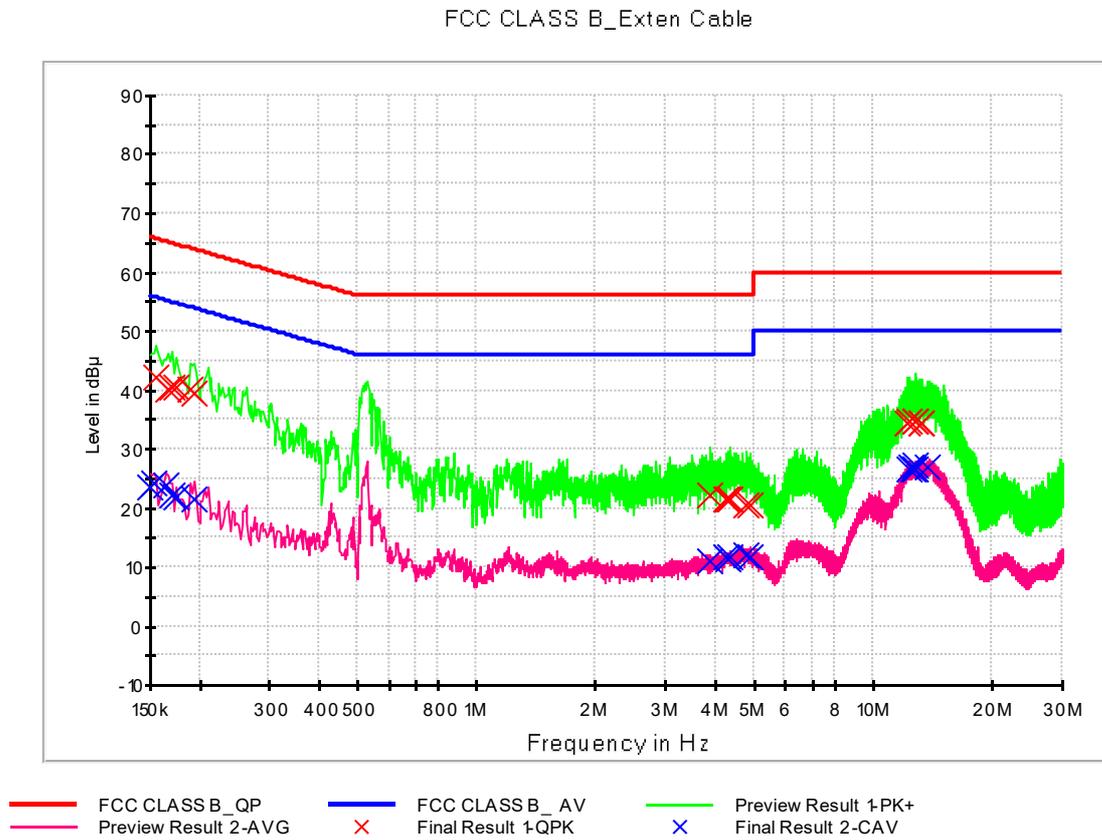


QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.156000	42.1	9.000	L1	9.8	23.6	65.7
0.166000	40.1	9.000	L1	9.8	25.1	65.2
0.170000	40.6	9.000	L1	9.8	24.3	65.0
0.174000	40.5	9.000	L1	9.8	24.3	64.8
0.190000	40.0	9.000	L1	9.8	24.0	64.0
0.194000	39.5	9.000	L1	9.8	24.4	63.9
3.892000	22.0	9.000	L1	10.0	34.0	56.0
4.244000	21.6	9.000	L1	10.0	34.4	56.0
4.318000	21.4	9.000	L1	10.0	34.6	56.0
4.378000	21.4	9.000	L1	10.0	34.6	56.0
4.772000	20.6	9.000	L1	10.0	35.4	56.0
4.918000	20.6	9.000	L1	10.0	35.4	56.0
12.140000	34.2	9.000	L1	10.3	25.8	60.0
12.294000	34.9	9.000	L1	10.3	25.1	60.0
12.718000	34.7	9.000	L1	10.3	25.3	60.0
12.756000	34.8	9.000	L1	10.3	25.2	60.0
13.214000	34.5	9.000	L1	10.3	25.5	60.0
13.254000	34.3	9.000	L1	10.3	25.7	60.0

CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	23.5	9.000	L1	9.8	32.5	56.0
0.154000	24.3	9.000	L1	9.8	31.5	55.8
0.164000	23.9	9.000	L1	9.8	31.3	55.3
0.170000	22.1	9.000	L1	9.8	32.9	55.0
0.174000	21.9	9.000	L1	9.8	32.9	54.8
0.194000	21.6	9.000	L1	9.8	32.2	53.9
3.892000	11.0	9.000	L1	10.0	35.0	46.0
4.244000	11.6	9.000	L1	10.0	34.4	46.0
4.318000	11.5	9.000	L1	10.0	34.5	46.0
4.378000	11.6	9.000	L1	10.0	34.4	46.0
4.772000	12.0	9.000	L1	10.0	34.0	46.0
4.918000	11.5	9.000	L1	10.0	34.5	46.0
12.294000	26.6	9.000	L1	10.3	23.4	50.0
12.508000	26.8	9.000	L1	10.3	23.2	50.0
12.680000	26.6	9.000	L1	10.3	23.4	50.0
12.718000	27.4	9.000	L1	10.3	22.6	50.0
12.756000	26.6	9.000	L1	10.3	23.4	50.0
13.708000	27.1	9.000	L1	10.3	22.9	50.0

Figure 4: Conducted Emission (150 kHz to 30 MHz), Dual Recording mode, Line (N)

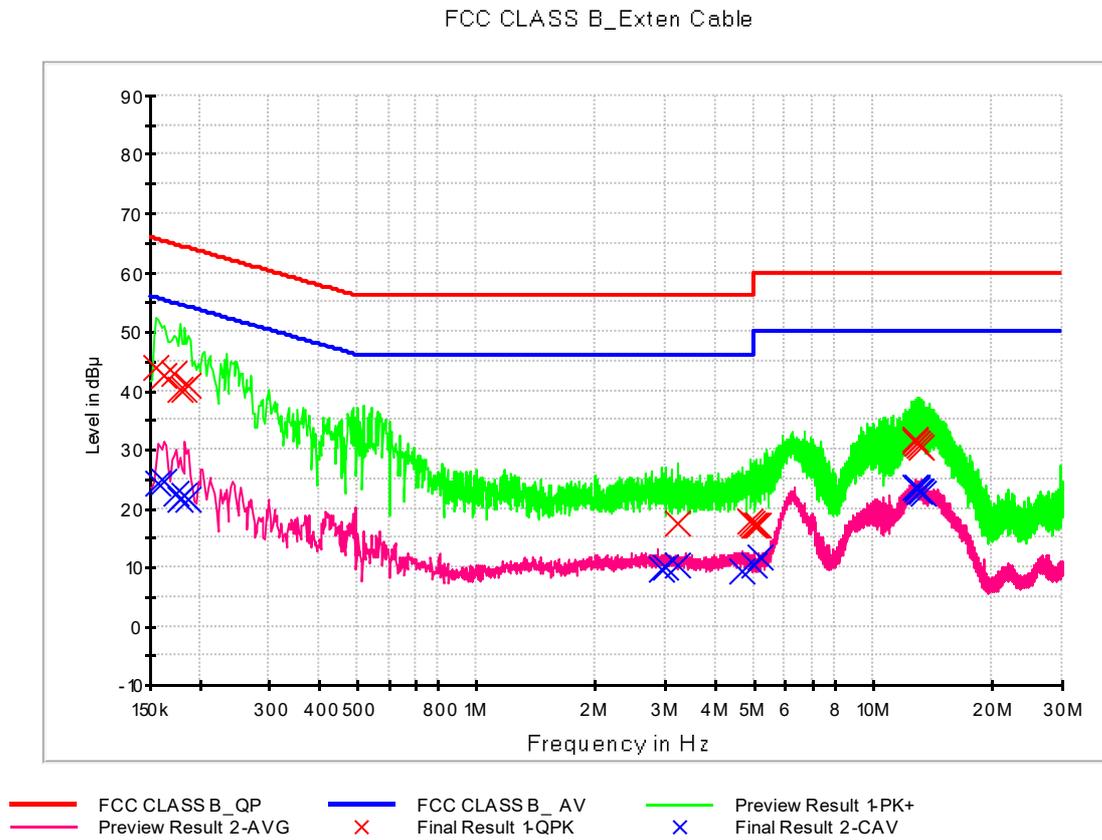

QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.156000	43.9	9.000	N	9.8	21.7	65.7
0.162000	42.4	9.000	N	9.8	23.0	65.4
0.172000	43.0	9.000	N	9.8	21.9	64.9
0.178000	40.1	9.000	N	9.8	24.5	64.6
0.184000	40.2	9.000	N	9.8	24.1	64.3
0.188000	41.0	9.000	N	9.8	23.1	64.1
3.228000	17.6	9.000	N	9.9	38.4	56.0
4.906000	17.9	9.000	N	10.0	38.1	56.0
4.958000	17.5	9.000	N	10.0	38.5	56.0
5.036000	17.0	9.000	N	10.0	43.0	60.0
5.044000	17.0	9.000	N	10.0	43.0	60.0
5.110000	17.1	9.000	N	10.0	42.9	60.0
12.770000	31.2	9.000	N	10.4	28.8	60.0
12.808000	31.5	9.000	N	10.4	28.5	60.0
12.912000	31.2	9.000	N	10.4	28.8	60.0
12.982000	31.1	9.000	N	10.4	28.9	60.0
13.082000	30.8	9.000	N	10.4	29.2	60.0
13.276000	30.3	9.000	N	10.4	29.7	60.0

CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.158000	24.3	9.000	N	9.8	31.3	55.6
0.162000	24.5	9.000	N	9.8	30.9	55.4
0.174000	22.5	9.000	N	9.8	32.3	54.8
0.178000	21.5	9.000	N	9.8	33.0	54.6
0.184000	22.3	9.000	N	9.8	32.0	54.3
0.188000	21.7	9.000	N	9.8	32.4	54.1
2.916000	9.7	9.000	N	9.9	36.3	46.0
2.986000	9.8	9.000	N	9.9	36.2	46.0
3.228000	10.2	9.000	N	9.9	35.8	46.0
4.686000	9.4	9.000	N	10.0	36.6	46.0
5.036000	10.5	9.000	N	10.0	39.5	50.0
5.204000	11.7	9.000	N	10.0	38.3	50.0
12.770000	23.7	9.000	N	10.4	26.3	50.0
12.912000	23.5	9.000	N	10.4	26.5	50.0
12.982000	23.2	9.000	N	10.4	26.8	50.0
13.082000	22.9	9.000	N	10.4	27.1	50.0
13.154000	22.8	9.000	N	10.4	27.2	50.0
13.336000	22.5	9.000	N	10.4	27.5	50.0

4.2 Radiated Emission Below 1 GHz

4.2.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.12.2020
<input checked="" type="checkbox"/>	Bi-Log antenna	Schwarzbeck	VULB 9168	255	2 year	03.26.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input type="checkbox"/>	Radio communication test station	ANRITSU	MT8000A	6262036812	1 year	01.06.2020
<input type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8821C	6262044720	1 year	01.06.2020
<input checked="" type="checkbox"/>	UXM 5G wireless test platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU40	100361	1 year	10.01.2019
<input checked="" type="checkbox"/>	Bi-Log Antenna	Schwarzbeck	VULB 9168	01156	2 year	05.30.2020
<input checked="" type="checkbox"/>	Antenna master	INNCO SYSTEM	MA4640-XP-ET	-	-	-
<input checked="" type="checkbox"/>	Antenna master / Turn Table controller	INNCO SYSTEM	CO3000	CO3000/1250/ 4892320/P	-	-
<input checked="" type="checkbox"/>	Turn Table	INNCO SYSTEM	DS2000-S	-	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

4.2.2 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Frequency Range	30 MHz to 1 000 MHz
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Worst Case of Operating Mode	<p>[EUT +TA] FRONT CAMERA & MP3 mode Display mode Dual Recording mode</p> <p>[EUT +Earphone] FRONT CAMERA & MP3 mode REAR CAMERA & FM RADIO mode WIRELESS CHARGING mode</p>
Kind of Test Site	3 m semi anechoic chamber
Temperature	21.6 - 23.7 °C
Relative Humidity	46.1 - 48.4 %
Test Date	August 06, 2020 to August 24, 2020

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

4.2.3 Measuring Data

[EUT +TA] FRONT CAMERA & MP3 mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)
34.541000	30.16	40.00	9.84	100.0	V	291.0	18.8
43.763000	26.51	40.00	13.49	100.0	V	249.0	19.8
83.989000	27.21	40.00	12.80	100.0	V	33.0	14.8
131.706000	20.47	43.50	23.03	118.1	V	293.0	18.6
188.697000	22.80	43.50	20.70	100.0	V	178.0	17.6
797.260000	26.94	46.00	19.06	405.9	V	331.0	29.9

[EUT +TA] DISPLAY mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
31.608000	26.7	100.0	V	112.0	18.4	13.3	40.0
52.122160	26.9	116.8	V	240.0	19.7	13.1	40.0
128.396360	27.4	100.0	V	68.0	18.1	16.1	43.5
172.823400	28.1	125.0	H	140.0	18.9	15.4	43.5
334.339600	36.6	100.0	V	143.0	21.3	9.4	46.0
669.721640	31.7	199.7	V	187.0	28.3	14.3	46.0

[EUT +TA] Dual Recording mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
41.574520	22.7	125.0	V	34.0	19.1	17.3	40.0
67.622400	21.6	100.0	V	263.0	18.4	18.4	40.0
110.073920	22.7	100.0	V	183.0	16.3	20.8	43.5
141.068080	25.4	100.0	V	166.0	19.0	18.1	43.5
170.683240	25.8	100.0	V	87.0	19.0	17.7	43.5
645.876120	28.9	174.8	V	88.0	28.0	17.1	46.0

[EUT +Earphone] FRONT CAMERA & MP3 mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)
73.001000	24.45	40.00	15.55	410.3	H	260.0	17.1
77.985000	22.66	40.00	17.34	225.0	H	250.0	15.7
82.022000	22.27	40.00	17.73	410.2	H	259.0	15.0
164.259000	20.72	43.50	22.78	125.1	H	242.0	19.5
272.962000	17.80	46.00	28.20	102.9	H	64.0	19.5
629.341000	24.08	46.00	21.92	377.5	H	19.0	27.4

[EUT +Earphone] REAR CAMERA & FM RADIO mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)
72.741000	20.00	40.00	20.00	396.1	H	99.0	17.1
76.138000	22.00	40.00	18.00	321.1	H	259.0	16.2
95.960000	21.00	43.50	22.50	410.1	H	260.0	14.8
164.054000	25.00	43.50	18.50	410.1	H	264.0	15.9
491.045000	21.61	46.00	24.39	225.2	H	250.0	24.8
703.672000	25.23	46.00	20.77	178.2	H	50.0	28.3

[EUT +Earphone] WIRELESS CHARGING mode

Frequency (MHz)	Quasi Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)
46.034000	19.69	40.00	20.31	100.0	V	221.0	19.9
53.320000	25.10	40.00	14.90	100.0	V	186.0	19.7
88.019000	21.81	43.50	21.69	379.1	H	84.0	14.3
160.020000	23.76	43.50	19.74	100.0	V	261.0	19.9
213.330000	28.98	43.50	14.52	100.0	V	-8.0	17.2
266.690000	25.28	46.00	20.72	274.7	H	189.0	19.3

4.3 Radiated Emission Above 1 GHz

4.3.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.12.2020
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Low noise amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.03.2020
<input checked="" type="checkbox"/>	Low noise amplifier	TESTEK	TK-PA1840H	170030-L	1 year	02.13.2020
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	UXM 5G wireless test platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9120D	01836	1 year	07.23.2020
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9170	BBHA9170#786	1 year	12.03.2019
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU40	100361	1 year	10.01.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO SYSTEM	MA4640-XP-ET	-	-	-
<input checked="" type="checkbox"/>	Antenna master / Turn Table controller	INNCO SYSTEM	CO3000	CO3000/1250/ 4892320/P	-	-
<input checked="" type="checkbox"/>	Turn Table	INNCO SYSTEM	DS2000-S	-	-	-
<input checked="" type="checkbox"/>	Low Noise Amplifier	TESTEK	TK-PA18H	170012-L	1 year	04.01.2020
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9120D	1641	1 year	06.24.2020
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

4.3.2 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Frequency	40 000 MHz
Tested Frequency Range	1 GHz to 40 GHz
Worst Case of Operating Mode	<p>[EUT +TA] FRONT CAMERA & MP3 mode Display mode Dual Recording mode</p> <p>[EUT +Earphone] FRONT CAMERA & MP3 mode REAR CAMERA & FM RADIO mode WIRELESS CHARGING mode</p>
Kind of Test Site	3 m semi anechoic chamber
Temperature	21.6 – 24.2 °C
Relative Humidity	45.4 – 48.4 %
Test Date	August 06, 2020 to August 24, 2020

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage

4.3.3 Measuring Data

[EUT +TA] FRONT CAMERA & MP3 mode

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1652.930000	---	18.07	54.00	35.93	400.0	H	91.0	-19.7
1692.475000	31.10	---	74.00	42.90	100.0	V	310.0	-19.6
3214.820000	---	20.72	54.00	33.28	100.0	V	25.0	-16.5
3225.885000	33.54	---	74.00	40.46	199.7	V	123.0	-16.5
4854.575000	---	24.21	54.00	29.79	199.9	V	330.0	-11.2
4859.420000	36.81	---	74.00	37.19	400.0	V	130.0	-11.1
11133.110000	---	31.69	54.00	22.31	299.9	V	108.0	2.8
11148.230000	45.02	---	74.00	28.98	299.7	V	80.0	2.8
14415.710000	---	35.48	54.00	18.52	400.0	V	82.0	7.4
14440.425000	48.11	---	74.00	25.89	100.0	H	45.0	7.4
17976.956460	54.80	---	74.00	19.20	400.0	H	101.0	15.6
17991.741690	---	41.27	54.00	12.73	299.9	V	61.0	15.8

[EUT +TA] DISPLAY mode

Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1045.105000	36.9	323.5	V	174.0	-29.1	37.1	74.0
1640.030000	38.3	204.5	V	181.0	-27.2	35.7	74.0
2485.190000	43.1	219.6	H	126.0	-24.1	30.9	74.0
5400.045000	46.4	190.6	H	176.0	-17.3	27.6	74.0
14252.185000	46.3	350.0	V	78.0	-1.1	27.7	74.0
17934.190000	54.9	277.4	H	267.0	8.7	19.1	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1045.105000	23.3	323.5	V	174.0	-29.1	30.8	54.0
1640.030000	25.9	204.5	V	181.0	-27.2	28.1	54.0
2485.190000	35.2	219.6	H	126.0	-24.1	18.8	54.0
5400.045000	42.7	190.6	H	176.0	-17.3	11.3	54.0
14252.185000	33.8	350.0	V	78.0	-1.1	20.2	54.0
17934.190000	42.4	277.4	H	267.0	8.7	11.6	54.0

[EUT +TA] Dual Recording mode

Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1788.250000	30.9	140.6	V	130.0	-26.9	43.1	74.0
3243.455000	33.0	219.6	V	348.0	-22.2	41.0	74.0
5142.900000	36.2	337.7	H	0.0	-17.6	37.8	74.0
9929.620000	43.9	204.5	V	0.0	-8.6	30.1	74.0
11266.150000	45.8	150.0	V	251.0	-4.6	28.2	74.0
17956.750000	55.2	249.9	V	149.0	9.0	18.8	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1788.250000	18.1	140.6	V	130.0	-26.9	35.9	54.0
3243.455000	20.2	219.6	V	348.0	-22.2	33.8	54.0
5142.900000	23.7	337.7	H	0.0	-17.6	30.3	54.0
9929.620000	30.9	204.5	V	0.0	-8.6	23.1	54.0
11266.150000	32.5	150.0	V	251.0	-4.6	21.5	54.0
17956.750000	42.7	249.9	V	149.0	9.0	11.4	54.0

[EUT +Earphone] FRONT CAMERA & MP3 mode

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1702.220000	---	18.01	54.00	35.99	299.9	V	303.0	-19.6
1736.050000	30.57	---	74.00	43.43	399.9	V	254.0	-19.6
2635.845000	33.26	---	74.00	40.74	100.0	V	281.0	-17.4
2654.120000	---	20.17	54.00	33.83	299.9	V	130.0	-17.4
4786.825000	---	23.16	54.00	30.84	199.5	H	40.0	-11.4
4841.620000	37.04	---	74.00	36.96	299.7	V	307.0	-11.2
8198.350000	41.58	---	74.00	32.43	100.0	V	282.0	-3.2
8249.215000	---	29.64	54.00	24.36	400.0	H	14.0	-3.2
14400.000000	48.31	---	74.00	25.69	299.7	V	190.0	7.4
14476.595000	---	35.24	54.00	18.76	100.0	V	23.0	7.5
17983.752360	54.95	---	74.00	19.05	399.9	V	122.0	15.7
17993.447820	---	41.94	54.00	12.06	199.9	V	-6.0	15.8

[EUT +Earphone] REAR CAMERA & FM RADIO mode

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1829.480000	30.45	---	74.00	43.55	100.0	V	25.0	-19.4
1837.375000	---	18.08	54.00	35.92	100.0	V	115.0	-19.4
2499.485000	34.81	---	74.00	39.19	100.0	V	274.0	-17.7
2519.385000	---	19.31	54.00	34.69	100.0	V	251.0	-17.7
4803.735000	---	23.36	54.00	30.64	200.0	V	133.0	-11.3
4823.770000	36.47	---	74.00	37.53	299.7	H	-23.0	-11.3
10351.040000	45.55	---	74.00	28.45	100.0	H	20.0	0.6
10364.860000	---	32.55	54.00	21.45	199.9	H	-11.0	0.7
14467.045000	47.63	---	74.00	26.37	200.0	H	188.0	7.5
14484.850000	---	35.48	54.00	18.52	199.9	H	69.0	7.5
17996.964210	---	41.53	54.00	12.47	100.0	H	25.0	15.8
17998.330080	54.24	---	74.00	19.76	299.7	H	281.0	15.8

[EUT +Earphone] WIRELESS CHARGING mode

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
3140.820000	33.54	---	74.00	40.46	299.9	V	85.0	-16.6
3148.115000	---	20.36	54.00	33.64	299.5	H	-25.0	-16.6
4834.925000	36.74	---	74.00	37.26	199.9	V	328.0	-11.2
4844.525000	---	24.11	54.00	29.89	399.7	V	107.0	-11.2
8238.075000	---	28.86	54.00	25.14	299.8	V	15.0	-3.2
8248.415000	42.50	---	74.00	31.50	199.9	H	84.0	-3.2
11005.320000	46.11	---	74.00	27.89	299.9	V	41.0	2.6
11051.565000	---	32.09	54.00	21.91	100.0	V	28.0	2.7
14380.100000	---	34.92	54.00	19.08	400.0	H	28.0	7.3
14508.765000	47.64	---	74.00	26.36	400.0	V	335.0	7.5
17987.697600	---	41.59	54.00	12.41	399.7	V	17.0	15.7
17998.625000	53.64	---	74.00	20.36	400.0	V	230.0	15.8

5. CONCLUSION

The data collected shows that the **Product Name: Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID / Model Name: LM-F100VM** complies with §15.107 and §15.109 of the FCC rules.

6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2008-FC018-P	August 26, 2020	Initial Release

End of report