

On your side

**HCT**

# TEST REPORT

EMI Test for FCC Certification of LM-F100VM Model

APPLICANT

LG Electronics USA, Inc.

REPORT NO.

HCT-EM-2008-FC019

DATE OF ISSUE

August 26, 2020

Tested by

Ki-Min Lee

(signature)

Technical Manager

Kyoung-Hee Yoon

(signature)

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

EMI Test for  
FCC Certification

REPORT NO.  
HCT-EM-2008-FC019

DATE OF ISSUE  
August 26, 2020

FCC ID.  
ZNFF100VM

**Applicant** **LG Electronics USA, Inc.**  
111 Sylvan Avenue, North Building , Englewood Cliffs NJ 07632 United States

**Product Name** Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID  
**Model Name** LM-F100VM  
**Series Model Name** Refer to the clause 1.1 Description of EUT

**Travel Adaptor Information** Model name: MCS-P02WA  
Manufacturer: AOHAJ

**Date of Test** August 09, 2020 to August 21, 2020

**Test Standard Used** FCC CFR 47 PART 15 Subpart B Class B  
ANSI C63.4-2014

**Test Results** Refer to the present document

**Manufacturer** LG Electronics Inc.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 26, 2020	Initial Release

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. GENERAL INFORMATION	5
1.1 Description of EUT	5
1.2 Tested System Details	5
1.3 Cable Description	7
1.4 Noise Suppression Parts on Cable. (I/O Cable)	7
1.5 Test Facility	8
1.6 Calibration of Measuring Instrument	8
1.7 Measurement Uncertainty	8
2. DESCRIPTION OF TEST	9
2.1 Measurement of Conducted Emission	9
2.2 Measurement of Radiated Emission	10
2.3 Configuration of Tested System	11
3. PRELIMINARY TEST	12
3.1 Conducted Emission	12
3.2 Radiated Emission	12
4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY	13
4.1 Conducted Emission	13
4.2 Radiated Emission Below 1 GHz	20
4.3 Radiated Emission Above 1 GHz	23
5. CONCLUSION	26
6. APPENDIX A. TEST SETUP PHOTO	27

## 1. GENERAL INFORMATION

### 1.1 Description of EUT

<b>FCC ID</b>	ZNFF100VM
<b>Model Name</b>	LM-F100VM
<b>Series Model Name</b>	LMF100VM, F100VM, LM-F101V, LMF101V, F101V
<b>Product Name</b>	Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID
<b>TX Frequency</b>	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 777 MHz to 787 MHz (LTE B13) 788 MHz to 798 MHz (LTE B14) 2 305 MHz to 2 315 MHz (LTE B30) 2 496 MHz to 2 690 MHz (LTE B41) 3 550 MHz to 3 700 MHz (LTE B48) 1 710 MHz to 1 780 MHz (LTE B66) 2 402 MHz to 2 480 MHz ( Bluetooth) 2 412 MHz to 2 462 MHz ( WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3) 13.56 MHz (NFC) 1 850 MHz to 1 910 MHz (5G NR n2) 824 MHz to 849 MHz (5G NR n5) 1 710 MHz to 1 780 MHz (5G NR n66) 37 000 MHz to 40 000 MHz (5G NR n260) 27 500 MHz to 28 350 MHz (5G NR n261)

RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 746 MHz to 756 MHz (LTE B13) 758 MHz to 768 MHz (LTE B14) 717 MHz to 728 MHz (LTE B29) 2 350 MHz to 2 360 MHz (LTE B30) 2 496 MHz to 2 690 MHz (LTE B41) 5 150 MHz to 5 925 MHz (LTE B46) 3 550 MHz to 3 700 MHz (LTE B48) 2 110 MHz to 2 200 MHz (LTE B66) 2 402 MHz to 2 480 MHz ( Bluetooth) 2 412 MHz to 2 462 MHz ( WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3) 13.56 MHz (NFC) 1 930 MHz to 1 990 MHz (5G NR n2) 869 MHz to 894 MHz (5G NR n5) 2 110 MHz to 2 200 MHz (5G NR n66) 37 000 MHz to 40 000 MHz (5G NR n260) 27 500 MHz to 28 350 MHz (5G NR n261)
--------------	--

## 1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
EUT	LM-F100VM	-	LG
DATA cable	EAD65830101	-	LUXSHARE
TA	MCS-P02WA	-	AOHAI
Micro SD card	SAMSUNG EVO+ microSDXC CLASS10 UHS-I(256 GB)	-	SAMSUNG

## 1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C (Data Cable)	Y	N/A	(P) 1.0

NOTE: The marked "(D)" means the data cable and "(P)" means the power cable.

## 1.4 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB Type C (Data Cable)	N	N/A	Y	Both End

### 1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Designation No.
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	KR0032
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #1	
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #2	

### 1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

### 1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Conducted Emission (0.15 MHz to 30 MHz)	1.58 dB
3 m Radiated Emissions (30 MHz to 1 GHz)	4.86 dB
3 m Radiated Emissions (1 GHz to 18 GHz)	4.58 dB
3 m Radiated Emissions (18 GHz to 40 GHz)	5.54 dB

## 2. DESCRIPTION OF TEST

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
 If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
 Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
(1 GHz to 40 GHz)

### Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ( $\mu\text{V}/\text{m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Antenna Distance (m)	Field Strength ( $\mu\text{V}/\text{m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V}/\text{m}$ )
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Average ( $\text{dB}\mu\text{V}/\text{m}$ )	Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Average ( $\text{dB}\mu\text{V}/\text{m}$ )	
Above 1 000	3	80	60	74	54	

### 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 2.3 Configuration of Tested System

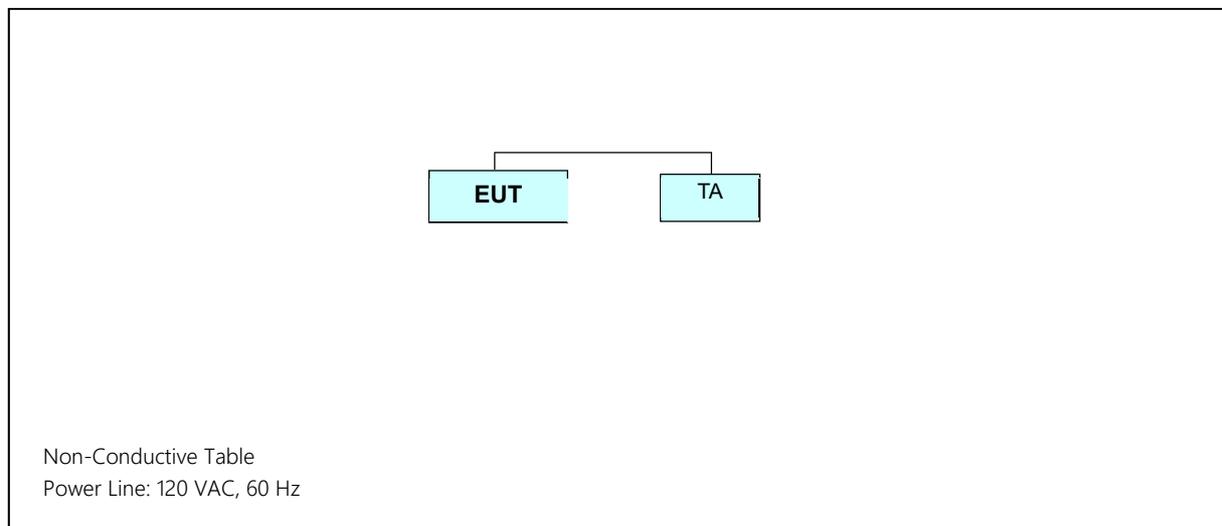

### 3. PRELIMINARY TEST

#### 3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

NOTE. The worst-case emissions are reported.

#### 3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

NOTE. The worst-case emissions are reported.

## 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission

#### 4.1.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESCI	100584	1 year	06.10.2020
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	102245	1 year	09.11.2019
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.20.2019
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	UXM 5G wireless test platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-


#### 4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:

Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Frequency Range	150 kHz to 30 MHz
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Worst Case of Operating Mode	FRONT CAMERA & MP3 mode
Kind of Test Site	EMI Shielded Room
Temperature	24.6 °C
Relative Humidity	47.8 %
Test Date	August 12, 2020

4.1.3 Measuring Data

Figure 1: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA & MP3 mode, Line (L1)

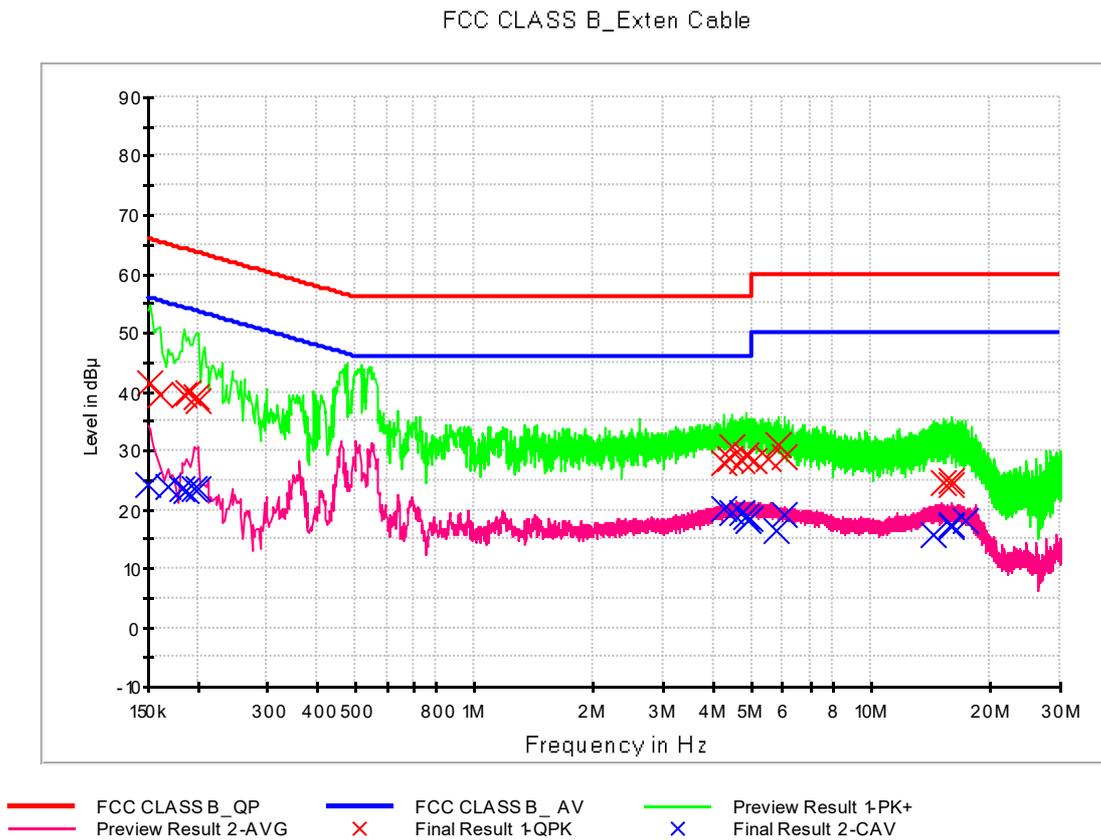

## QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.152000	41.5	9.000	L1	9.8	24.4	65.9
0.160000	39.6	9.000	L1	9.8	25.8	65.5
0.186000	39.6	9.000	L1	9.8	24.6	64.2
0.190000	39.9	9.000	L1	9.8	24.1	64.0
0.198000	39.1	9.000	L1	9.8	24.6	63.7
0.202000	38.6	9.000	L1	9.8	24.9	63.5
4.238000	27.9	9.000	L1	10.0	28.1	56.0
4.432000	28.7	9.000	L1	10.0	27.3	56.0
4.442000	30.8	9.000	L1	10.0	25.2	56.0
4.712000	28.3	9.000	L1	10.0	27.7	56.0
4.828000	29.5	9.000	L1	10.0	26.5	56.0
5.042000	28.4	9.000	L1	10.0	31.6	60.0
5.500000	28.6	9.000	L1	10.0	31.4	60.0
5.804000	31.1	9.000	L1	10.0	28.9	60.0
6.042000	29.0	9.000	L1	10.1	31.0	60.0
15.146000	24.5	9.000	L1	10.4	35.5	60.0
15.958000	24.8	9.000	L1	10.4	35.2	60.0
16.006000	24.3	9.000	L1	10.4	35.7	60.0


## Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

## CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	24.3	9.000	L1	9.8	31.7	56.0
0.168000	24.1	9.000	L1	9.8	31.0	55.1
0.184000	23.6	9.000	L1	9.8	30.7	54.3
0.188000	23.1	9.000	L1	9.8	31.0	54.1
0.196000	23.5	9.000	L1	9.8	30.2	53.8
0.200000	23.6	9.000	L1	9.8	30.0	53.6
4.238000	20.0	9.000	L1	10.0	26.0	46.0
4.442000	19.5	9.000	L1	10.0	26.5	46.0
4.712000	19.4	9.000	L1	10.0	26.6	46.0
4.828000	18.9	9.000	L1	10.0	27.1	46.0
4.870000	18.2	9.000	L1	10.0	27.8	46.0
4.946000	18.5	9.000	L1	10.0	27.5	46.0
5.738000	16.3	9.000	L1	10.0	33.7	50.0
6.042000	19.1	9.000	L1	10.1	30.9	50.0
14.326000	15.9	9.000	L1	10.3	34.1	50.0
15.958000	17.4	9.000	L1	10.4	32.6	50.0
16.006000	17.0	9.000	L1	10.4	33.0	50.0
17.300000	18.1	9.000	L1	10.4	31.9	50.0

Figure 2: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA &amp; MP3 mode, Line (N)

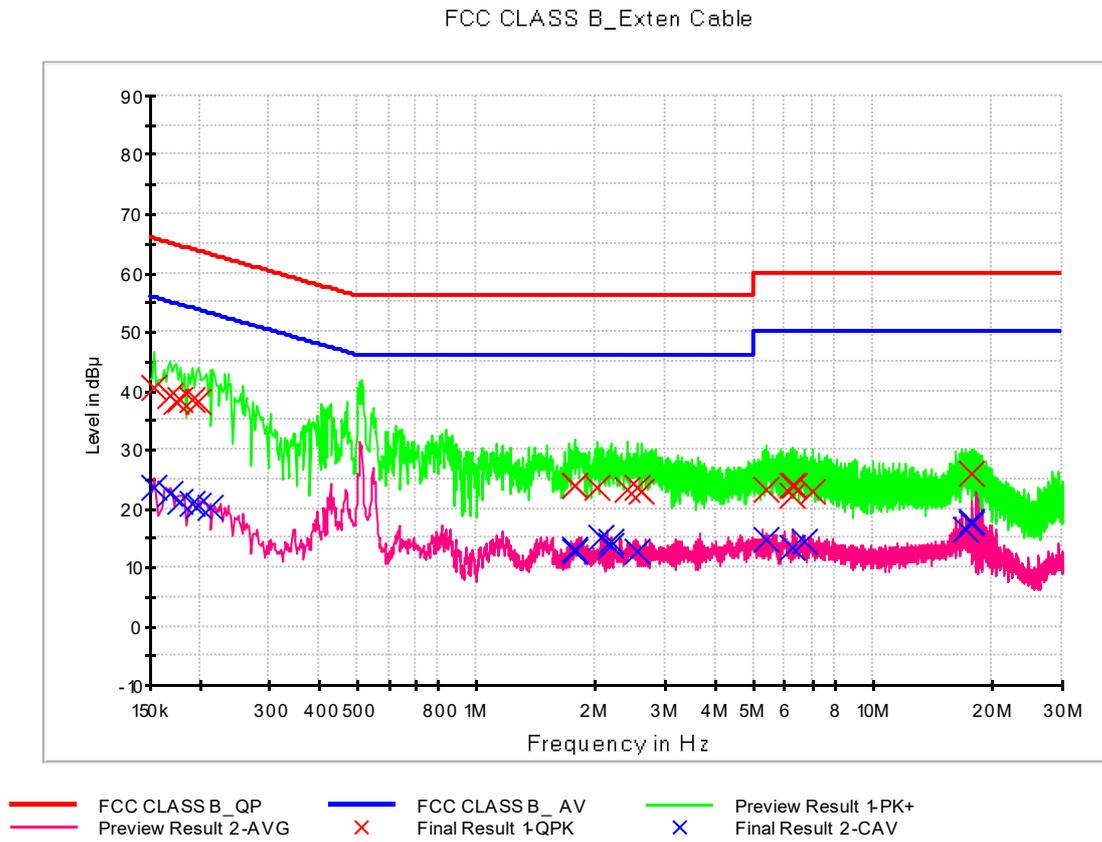

## QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.154000	40.6	9.000	N	9.8	25.2	65.8
0.168000	39.0	9.000	N	9.8	26.1	65.1
0.174000	38.1	9.000	N	9.8	26.7	64.8
0.178000	38.5	9.000	N	9.8	26.1	64.6
0.192000	38.6	9.000	N	9.8	25.4	63.9
0.198000	38.0	9.000	N	9.8	25.7	63.7
1.764000	24.0	9.000	N	9.9	32.0	56.0
1.776000	23.9	9.000	N	9.9	32.2	56.0
2.024000	23.4	9.000	N	9.9	32.6	56.0
2.394000	23.3	9.000	N	9.9	32.7	56.0
2.540000	23.5	9.000	N	9.9	32.5	56.0
2.596000	22.9	9.000	N	9.9	33.1	56.0
5.382000	23.4	9.000	N	10.0	36.6	60.0
6.240000	22.3	9.000	N	10.1	37.7	60.0
6.256000	24.0	9.000	N	10.1	36.0	60.0
6.296000	23.8	9.000	N	10.1	36.2	60.0
7.002000	22.9	9.000	N	10.1	37.1	60.0
17.772000	26.1	9.000	N	10.6	33.9	60.0

CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.154000	23.4	9.000	N	9.8	32.4	55.8
0.168000	22.6	9.000	N	9.8	32.5	55.1
0.178000	21.2	9.000	N	9.8	33.4	54.6
0.192000	20.9	9.000	N	9.8	33.1	53.9
0.198000	20.5	9.000	N	9.8	33.2	53.7
0.212000	20.0	9.000	N	9.8	33.1	53.1
1.760000	12.9	9.000	N	9.9	33.1	46.0
1.764000	13.0	9.000	N	9.9	33.0	46.0
2.054000	15.1	9.000	N	9.9	30.9	46.0
2.176000	14.5	9.000	N	9.9	31.5	46.0
2.188000	13.6	9.000	N	9.9	32.4	46.0
2.540000	12.7	9.000	N	9.9	33.3	46.0
5.382000	14.9	9.000	N	10.0	35.1	50.0
6.240000	13.5	9.000	N	10.1	36.5	50.0
6.698000	14.5	9.000	N	10.1	35.5	50.0
17.164000	16.4	9.000	N	10.5	33.6	50.0
17.772000	17.5	9.000	N	10.6	32.5	50.0
17.820000	17.6	9.000	N	10.6	32.4	50.0

## 4.2 Radiated Emission Below 1 GHz

### 4.2.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.12.2020
<input checked="" type="checkbox"/>	Bi-Log antenna	Schwarzbeck	VULB 9168	255	2 year	03.26.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	UXM 5G wireless test platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU40	100361	1 year	10.01.2019
<input checked="" type="checkbox"/>	Bi-Log Antenna	Schwarzbeck	VULB 9168	01156	2 year	05.30.2020
<input checked="" type="checkbox"/>	Antenna master	INNCO SYSTEM	MA4640-XP-ET	-	-	-
<input checked="" type="checkbox"/>	Antenna master / Turn Table controller	INNCO SYSTEM	CO3000	CO3000/1250/ 4892320/P	-	-
<input checked="" type="checkbox"/>	Turn Table	INNCO SYSTEM	DS2000-S	-	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.2.2 Operating Condition

The test results of radiated emission provide the following information:

<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Frequency Range</b>	30 MHz to 1 000 MHz
<b>Detector</b>	Quasi-Peak
<b>Bandwidth</b>	120 kHz (6 dB)
<b>Worst Case of Operating Mode</b>	FRONT CAMERA & MP3 mode
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	22.1 - 23.7 °C
<b>Relative Humidity</b>	47.9 – 48.4 %
<b>Test Date</b>	August 11 to August 21, 2020

**- Calculation Formula:**

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

## 4.2.3 Measuring Data

FRONT CAMERA &amp; MP3 mode

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.254000	26.34	40.00	13.66	100.0	V	93.0	18.5
33.783000	28.82	40.00	11.18	100.0	V	94.0	18.7
44.539000	26.23	40.00	13.77	100.0	V	71.0	19.9
52.988000	24.96	40.00	15.04	100.0	V	256.0	19.7
85.012000	27.52	40.00	12.48	100.0	V	20.0	14.6
157.616000	19.65	43.50	23.85	100.0	V	288.0	19.8

## 4.3 Radiated Emission Above 1 GHz

## 4.3.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.12.2020
<input checked="" type="checkbox"/>	Antenna master	INSCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INSCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INSCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INSCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Low noise amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.03.2020
<input checked="" type="checkbox"/>	Low noise amplifier	TESTEK	TK-PA1840H	170030-L	1 year	02.13.2020
<input checked="" type="checkbox"/>	Radio communication analyzer	ANRITSU	MT8820C	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	UXM 5G wireless test platform	KEYSIGHT	E7515B	MY58300756	1 year	01.07.2020
<input checked="" type="checkbox"/>	Antenna (for Communication)	Schwarzbeck	USLP9142	VSLP 9142-201	-	-
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9120D	01836	1 year	07.23.2020
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9170	BBHA9170#786	1 year	12.03.2019
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU40	100361	1 year	10.01.2019
<input checked="" type="checkbox"/>	Antenna master	INSCO SYSTEM	MA4640-XP-ET	-	-	-
<input checked="" type="checkbox"/>	Antenna master / Turn Table controller	INSCO SYSTEM	CO3000	CO3000/1250/ 4892320/P	-	-
<input checked="" type="checkbox"/>	Turn Table	INSCO SYSTEM	DS2000-S	-	-	-
<input checked="" type="checkbox"/>	Low Noise Amplifier	TESTEK	TK-PA18H	170012-L	1 year	04.01.2020
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9120D	1641	1 year	06.24.2020
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.3.2 Operating Condition

The test results of radiated emission provide the following information:

<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Detector</b>	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
<b>Highest Frequency</b>	40 000 MHz
<b>Tested Frequency Range</b>	1 GHz to 40 GHz
<b>Worst Case of Operating Mode</b>	FRONT CAMERA & MP3 mode
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	23.3 – 24.1 °C
<b>Relative Humidity</b>	45.4 – 48.2 %
<b>Test Date</b>	August 09, 2020 to August 21, 2020

**- Calculation Formula:**

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage

## 4.3.3 Measuring Data

FRONT CAMERA &amp; MP3 mode

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	CAverage (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2224.355000	31.45	---	74.00	42.55	399.9	V	-25.0	-18.5
2257.785000	---	18.77	54.00	35.23	399.9	H	79.0	-18.4
3678.020000	33.90	---	74.00	40.10	299.7	V	36.0	-15.5
3695.920000	---	21.26	54.00	32.74	100.0	V	282.0	-15.4
4836.320000	36.93	---	74.00	37.07	100.0	V	-24.0	-11.2
4848.970000	---	24.26	54.00	29.74	399.8	V	179.0	-11.2
11005.035000	45.29	---	74.00	28.71	199.7	V	188.0	2.6
11012.945000	---	32.33	54.00	21.67	199.9	V	142.0	2.7
14419.415000	---	35.22	54.00	18.78	100.0	V	122.0	7.4
14441.645000	48.22	---	74.00	25.78	200.0	H	25.0	7.4
17994.189360	55.65	---	74.00	18.35	299.7	V	43.0	15.8
17995.839360	---	41.99	54.00	12.01	199.9	V	16.0	15.8

## 5. CONCLUSION

The data collected shows that the **Product Name: Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID / Model Name: LM-F100VM** complies with §15.107 and §15.109 of the FCC rules.

## 6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2008-FC019-P	August 26, 2020	Initial Release

End of report