



Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.142

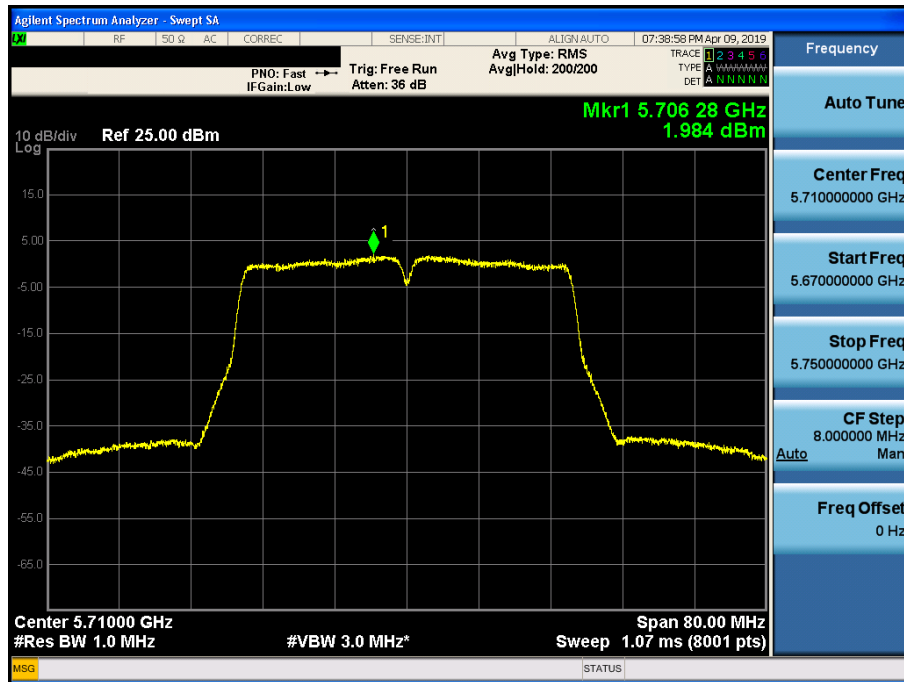


Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.151

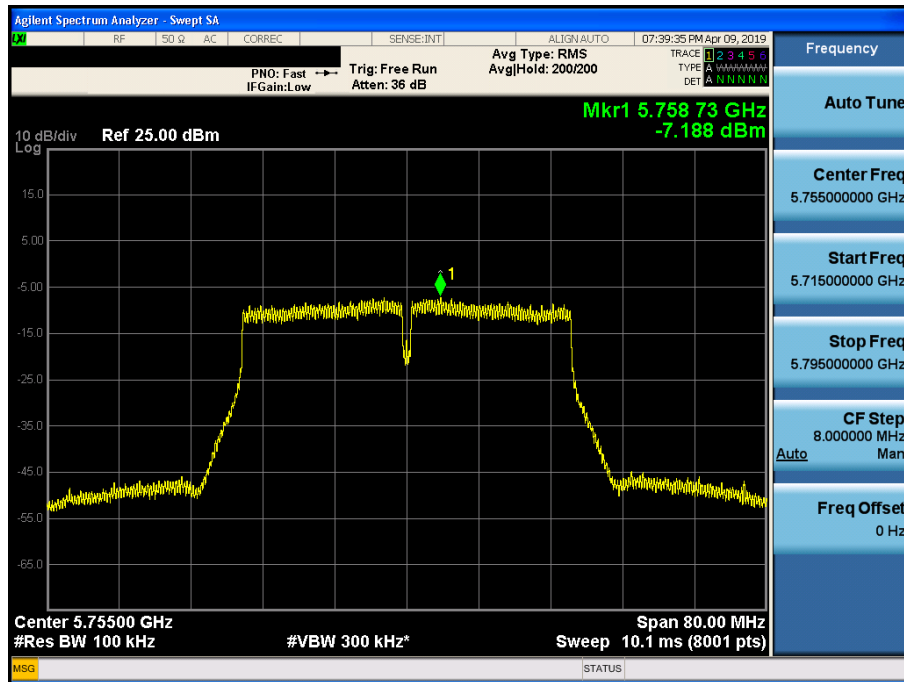


Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.159

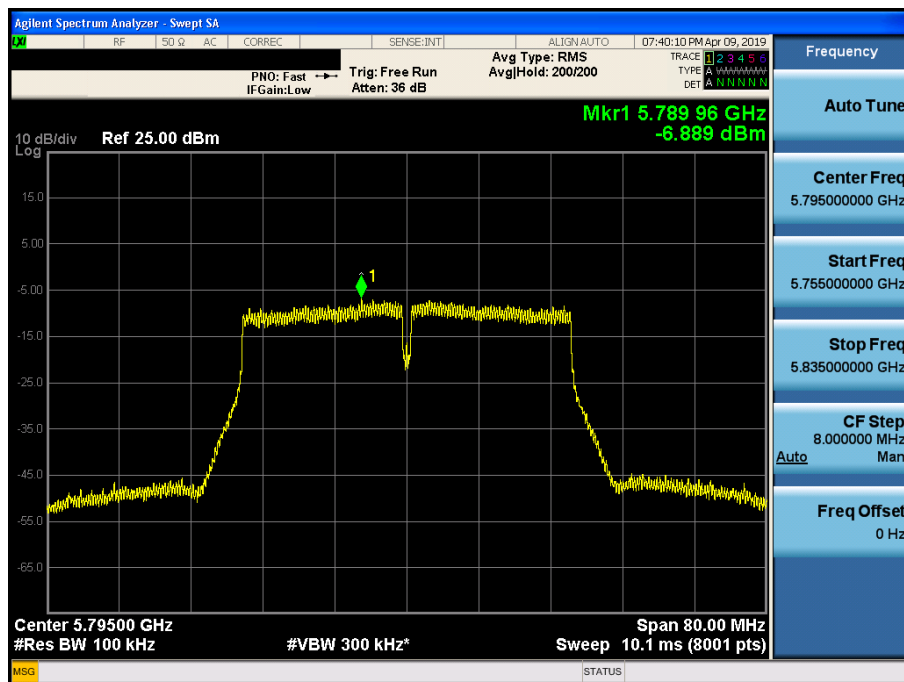


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.42

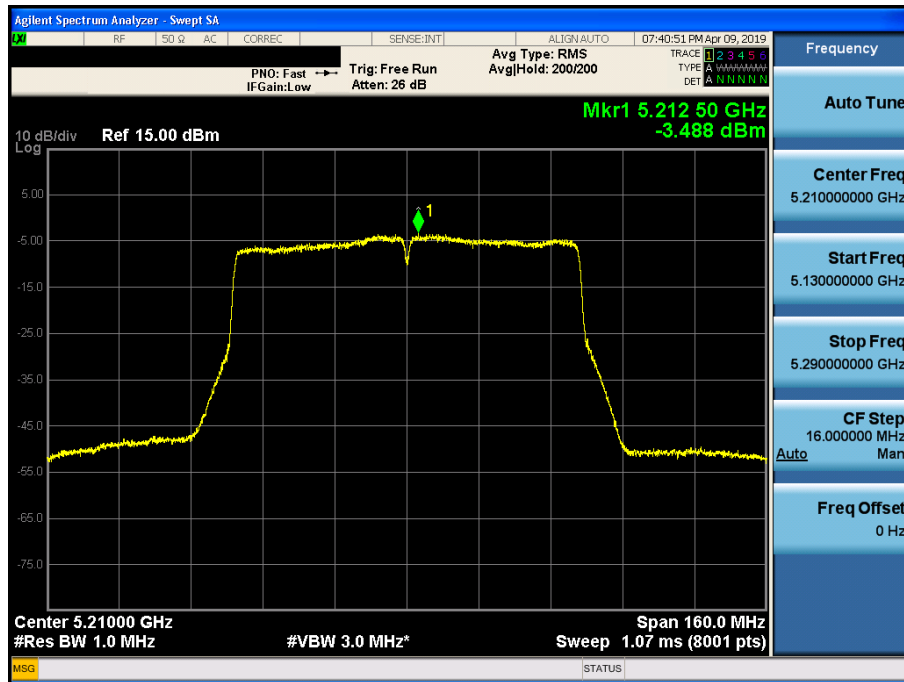


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.58

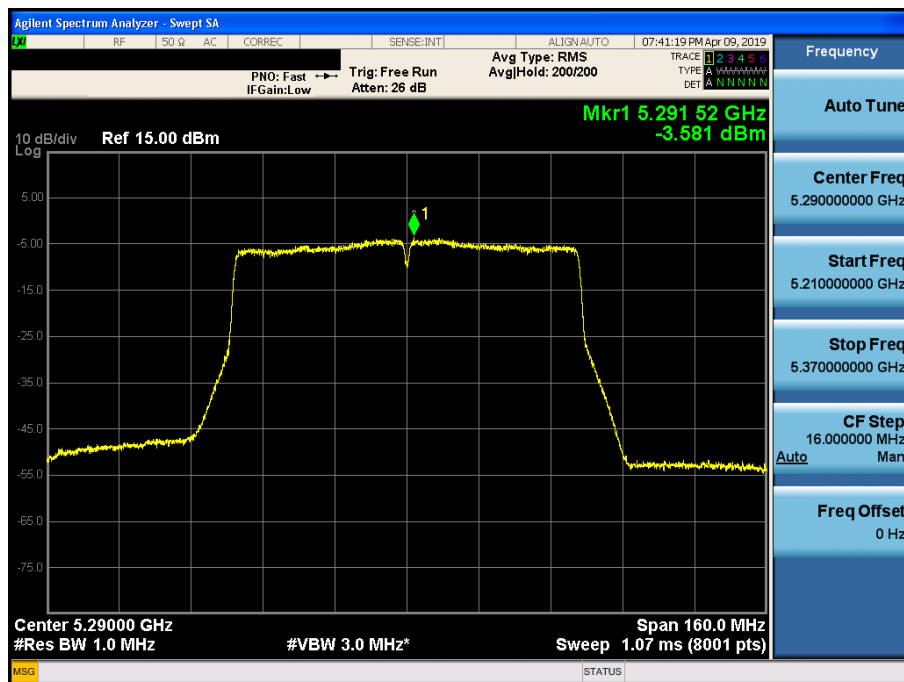


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.106

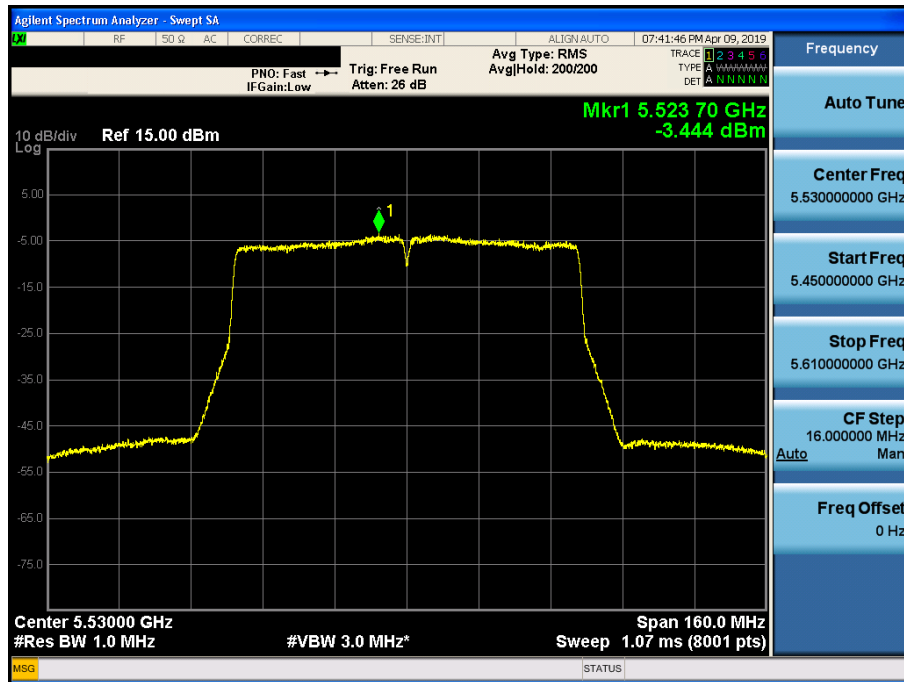


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.122

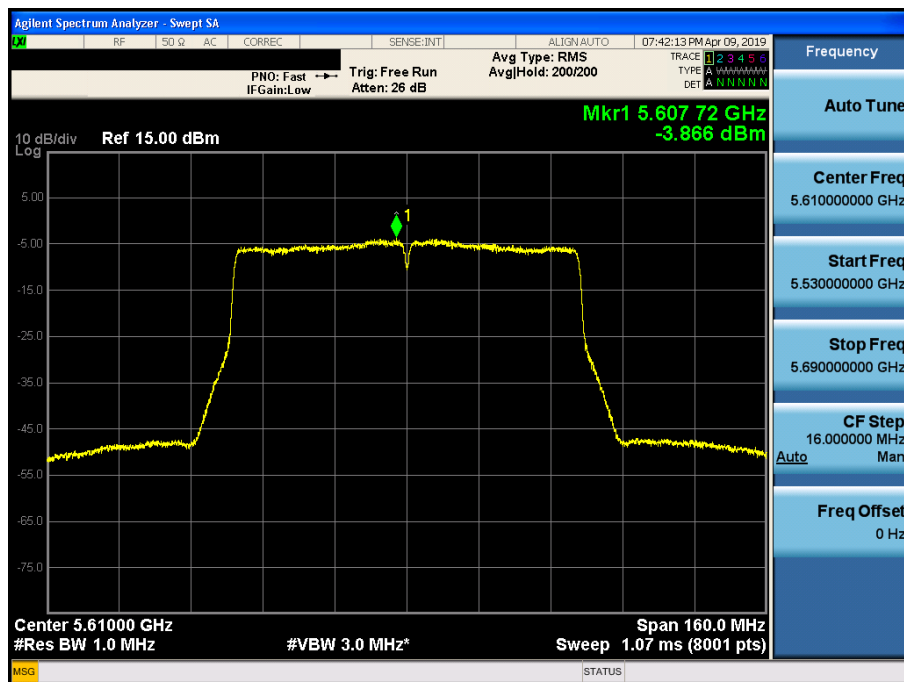


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.138

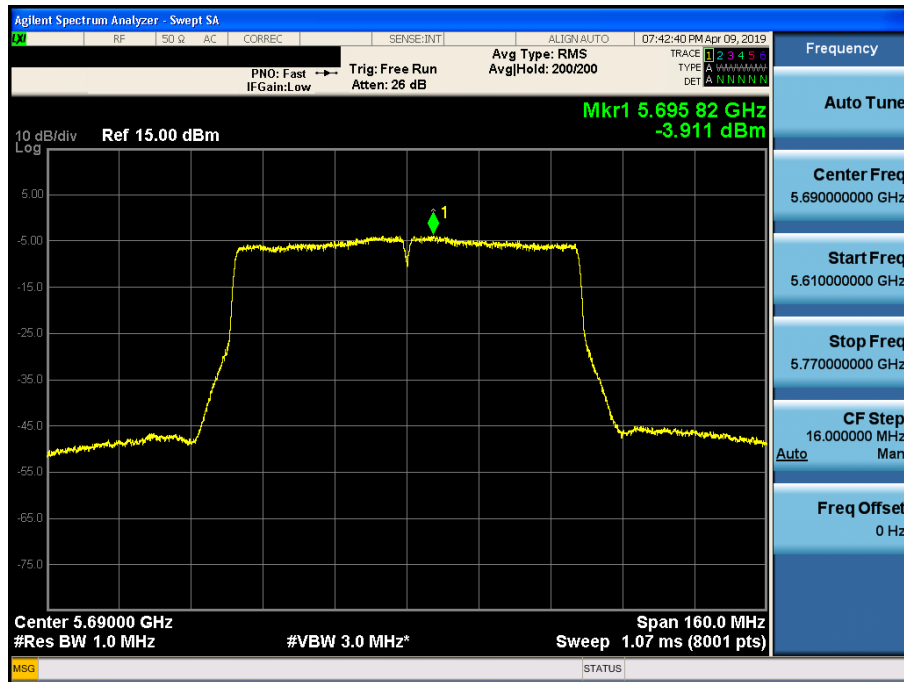

Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.155

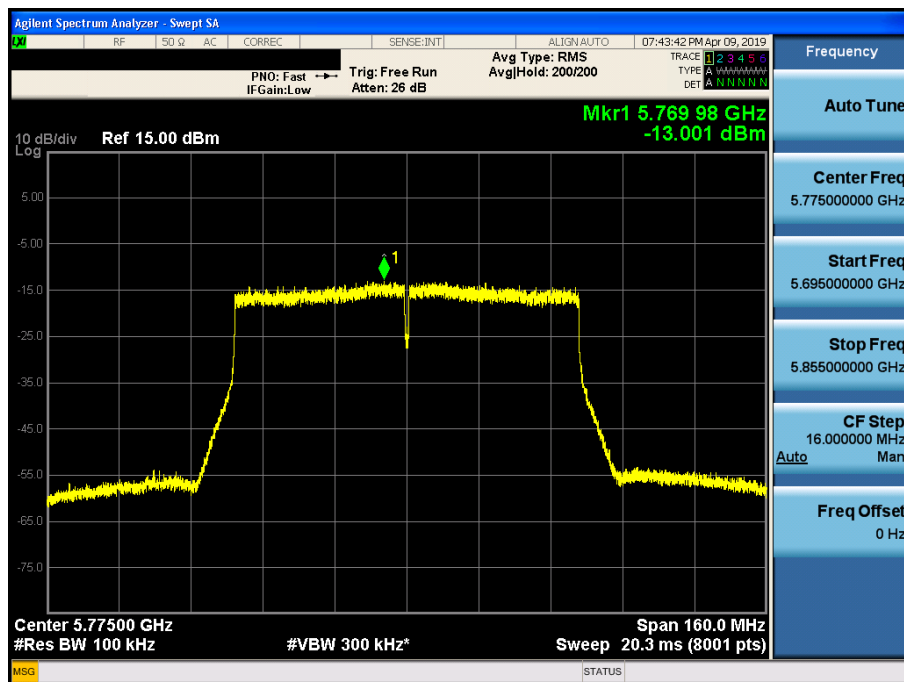

8.5 Frequency Stability

■ Test requirements

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

■ Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -20°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. And the edge point of EBW (26dB or 6dB bandwidth) was reported.

■ Test Results: **Comply**

U-NII 1 & U-NII 2A : (5150 MHz ~ 5350 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5190 MHz	5310 MHz
		26dBc low edge (Hz)	26dBc High edge(Hz)
4.0	+20(Ref)	5,169,339,000	5,330,642,000
	+50	5,169,335,000	5,330,638,000
	+40	5,169,324,000	5,330,629,000
	+30	5,169,329,000	5,330,622,000
	+20	5,169,339,000	5,330,642,000
	+10	5,169,318,000	5,330,645,000
	0	5,169,314,000	5,330,632,000
	-10	5,169,324,000	5,330,635,000
	-20	5,169,325,000	5,330,640,000
4.4	+20	5,169,319,000	5,330,628,000
3.0	+20	5,169,320,000	5,330,629,000

U-NII 2C : (5470 MHz ~ 5725 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5510 MHz	5710 MHz ^{Note1}
		26dBc low edge (Hz)	26dBc High edge(Hz)
4.0	+20(Ref)	5,488,869,000	-
	+50	5,488,877,000	-
	+40	5,488,879,000	-
	+30	5,488,863,000	-
	+20	5,488,869,000	-
	+10	5,488,858,000	-
	0	5,488,872,000	-
	-10	5,488,869,000	-
	-20	5,488,876,000	-
4.4	+20	5,488,861,000	-
3.0	+20	5,488,863,000	-

Note 1: This channel was not performed because operate in cross-band(U-NII 2C & 3).

U-NII 3 : (5725 MHz ~ 5850 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5755 MHz	5795 MHz
		6dBc low edge (Hz)	6dBc High edge(Hz)
4.0	+20(Ref)	5,736,961,000	5,812,941,000
	+50	5,736,952,000	5,812,935,000
	+40	5,736,949,000	5,812,926,000
	+30	5,736,968,000	5,812,938,000
	+20	5,736,961,000	5,812,941,000
	+10	5,736,965,000	5,812,944,000
	0	5,736,958,000	5,812,930,000
	-10	5,736,947,000	5,812,928,000
	-20	5,736,955,000	5,812,933,000
4.4	+20	5,736,951,000	5,812,939,000
3.0	+20	5,736,950,000	5,812,940,000

8.6 Radiated Spurious Emission Measurements

■ Test Requirements

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	160.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	160.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	160.7 ~ 160.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4000		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

• **FCC Part 15.407 (b):** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15-5.25 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25-5.35 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47-5.725 GHz band**: all emissions outside of the **5.47-5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725-5.85 GHz band**: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**. Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

■ Test Configuration

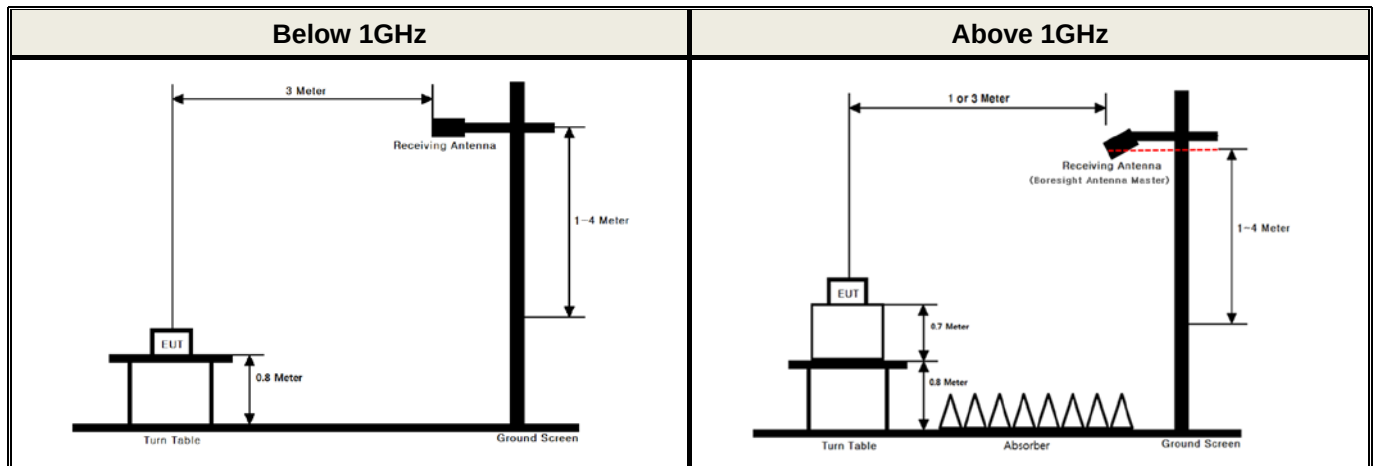

■ Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1m or 3 m away from the receiving antenna, which is varied from 1m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of **KDB789033 D02v02r01**

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

▪ EUT Duty Cycle

- (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If **continuous transmission (or at least 98 percent duty cycle) cannot be achieved** due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

► **Measurements below 1000 MHz**

- a) Follow the requirements in section II.G.3, “General Requirements for Unwanted Emissions Measurements”.
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► **Measurements Above 1000 MHz (Peak)**

- a) Follow the requirements in section II.G.3, “General Requirements for Unwanted Emissions Measurements”.
- b) Peak emission levels are measured by setting the analyzer as follows:
 - (i) **RBW = 1 MHz.**
 - (ii) **VBW ≥ 3 MHz.**
 - (iii) **Detector = Peak.**
 - (iv) Sweep time = Auto.
 - (v) Trace mode = Max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► **Measurements Above 1000 MHz (Method VB)**

- (i) **RBW = 1 MHz.**
- (ii) **VBW.**
 - If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
 - If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, (T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation).
- (iii) Video bandwidth mode or display mode
 - The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to rms and setting the Average-VBW Type to power averaging (rms).
 - As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode.
- (iv) Detector = Peak.
- (v) Sweep time = auto.
- (vi) Trace mode = max hold.
- (vii) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

Note: Please refer to Appendix II for actual VBW setting according to method VB.

Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.84	H	Y	PK	45.22	5.57	N/A	N/A	50.79	74.00	23.21
		5149.02	H	Y	AV	36.09	5.57	N/A	N/A	41.66	54.00	12.34
		10359.62	V	Y	PK	45.15	10.91	N/A	N/A	56.06	68.20	12.14
	40 (5200 MHz)	10400.64	V	Y	PK	44.54	10.99	N/A	N/A	55.53	68.20	12.67
	48 (5240 MHz)	10480.73	V	Y	PK	44.78	11.16	N/A	N/A	55.94	68.20	12.26
U-NII 2A	52 (5260 MHz)	10519.60	V	Y	PK	45.03	11.26	N/A	N/A	56.29	68.20	11.91
	60 (5300 MHz)	10600.36	V	Y	PK	44.41	11.52	N/A	N/A	55.93	74.00	18.07
		10600.11	V	Y	AV	34.24	11.52	N/A	N/A	45.76	54.00	8.24
	64 (5320 MHz)	5351.98	H	Y	PK	47.83	5.61	N/A	N/A	53.44	74.00	20.56
		5353.02	H	Y	AV	39.59	5.61	N/A	N/A	45.20	54.00	8.80
		10640.28	V	Y	PK	44.13	11.65	N/A	N/A	55.78	74.00	18.22
		10639.97	V	Y	AV	34.29	11.65	N/A	N/A	45.94	54.00	8.06
U-NII 2C	100 (5500 MHz)	5457.56	H	Y	PK	48.58	5.65	N/A	N/A	54.23	74.00	19.77
		5456.62	H	Y	AV	38.45	5.65	N/A	N/A	44.10	54.00	9.90
		5467.42	H	Y	PK	47.31	5.65	N/A	N/A	52.96	68.20	15.24
		11001.47	V	Y	PK	44.18	12.82	N/A	N/A	57.00	74.00	17.00
		11000.89	V	Y	AV	34.50	12.82	N/A	N/A	47.32	54.00	6.68
	120 (5600 MHz)	11198.36	V	Y	PK	44.23	12.86	N/A	N/A	57.09	74.00	16.91
		11197.90	V	Y	AV	34.69	12.86	N/A	N/A	47.55	54.00	6.45
	144 (5720 MHz)	11439.94	V	Y	PK	45.30	12.91	N/A	N/A	58.21	74.00	15.79
		11438.49	V	Y	AV	34.85	12.91	N/A	N/A	47.76	54.00	6.24
U-NII 3	149 (5745 MHz)	5714.44	H	Y	PK	47.43	6.05	N/A	N/A	53.48	68.20	14.72
		5724.68	H	Y	PK	56.75	6.09	N/A	N/A	62.84	78.20	15.36
		11489.30	V	Y	PK	44.40	12.92	N/A	N/A	57.32	74.00	16.68
		11489.98	V	Y	AV	34.97	12.92	N/A	N/A	47.89	54.00	6.11
	157 (5785 MHz)	11571.38	V	Y	PK	44.64	12.95	N/A	N/A	57.59	74.00	16.41
		11570.94	V	Y	AV	34.95	12.95	N/A	N/A	47.90	54.00	6.10
	165 (5825 MHz)	5851.56	H	Y	PK	48.07	6.47	N/A	N/A	54.54	78.20	23.66
		5862.00	H	Y	PK	46.52	6.51	N/A	N/A	53.03	68.20	15.17
		11649.96	V	Y	PK	44.46	12.99	N/A	N/A	57.45	74.00	16.55
		11649.45	V	Y	AV	34.93	12.99	N/A	N/A	47.92	54.00	6.08

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a & With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5148.66	H	X	PK	46.92	5.57	N/A	N/A	52.49	74.00	21.51
		5148.52	H	X	AV	37.53	5.57	N/A	N/A	43.10	54.00	10.90
		10360.53	H	X	PK	44.56	10.91	N/A	N/A	55.47	68.20	12.73
U-NII 2A	64 (5320 MHz)	5351.08	H	X	PK	46.63	5.61	N/A	N/A	52.24	74.00	21.76
		5350.90	H	X	AV	38.14	5.61	N/A	N/A	43.75	54.00	10.25
		10639.79	H	X	PK	43.76	11.65	N/A	N/A	55.41	74.00	18.59
		10639.94	H	X	AV	33.97	11.65	N/A	N/A	45.62	54.00	8.38
U-NII 2C	100 (5500 MHz)	5458.16	H	X	PK	44.30	5.65	N/A	N/A	49.95	74.00	24.05
		5457.88	H	X	AV	37.02	5.65	N/A	N/A	42.67	54.00	11.33
		5468.54	H	X	PK	46.29	5.65	N/A	N/A	51.94	68.20	16.26
		10997.85	H	X	PK	44.04	12.82	N/A	N/A	56.86	74.00	17.14
		10997.98	H	X	AV	34.17	12.82	N/A	N/A	46.99	54.00	7.01
U-NII 3	149 (5745 MHz)	5714.56	H	X	PK	46.32	6.05	N/A	N/A	52.37	68.20	15.83
		5724.50	H	X	PK	49.93	6.09	N/A	N/A	56.02	78.20	22.18
		11489.44	H	X	PK	43.86	12.92	N/A	N/A	56.78	74.00	17.22
		11489.24	H	X	AV	34.74	12.92	N/A	N/A	47.66	54.00	6.34

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT20) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5146.82	H	Y	PK	49.80	5.57	N/A	N/A	55.37	74.00	18.63
		5147.38	H	Y	AV	36.92	5.57	N/A	N/A	42.49	54.00	11.51
		10360.90	V	Y	PK	44.35	10.91	N/A	N/A	55.26	68.20	12.94
	40 (5200 MHz)	10400.92	V	Y	PK	44.97	10.99	N/A	N/A	55.96	68.20	12.24
	48 (5240 MHz)	10480.04	V	Y	PK	45.24	11.16	N/A	N/A	56.40	68.20	11.80
U-NII 2A	52 (5260 MHz)	10520.85	V	Y	PK	44.66	11.26	N/A	N/A	55.92	68.20	12.28
	60 (5300 MHz)	10600.87	V	Y	PK	44.19	11.52	N/A	N/A	55.71	74.00	18.29
		10600.95	V	Y	AV	33.92	11.52	N/A	N/A	45.44	54.00	8.56
	64 (5320 MHz)	5353.12	H	Y	PK	58.40	5.61	N/A	N/A	64.01	74.00	9.99
		5353.28	H	Y	AV	41.18	5.61	N/A	N/A	46.79	54.00	7.21
		10640.63	V	Y	PK	44.10	11.65	N/A	N/A	55.75	74.00	18.25
		10640.57	V	Y	AV	34.06	11.65	N/A	N/A	45.71	54.00	8.29
U-NII 2C	100 (5500 MHz)	5455.50	H	Y	PK	58.68	5.65	N/A	N/A	64.33	74.00	9.67
		5455.58	H	Y	AV	41.35	5.65	N/A	N/A	47.00	54.00	7.00
		5468.40	H	Y	PK	58.86	5.65	N/A	N/A	64.51	68.20	3.69
		10999.15	V	Y	PK	44.35	12.82	N/A	N/A	57.17	74.00	16.83
		10999.27	V	Y	AV	34.21	12.82	N/A	N/A	47.03	54.00	6.97
	120 (5600 MHz)	11200.73	V	Y	PK	44.41	12.86	N/A	N/A	57.27	74.00	16.73
		11200.91	V	Y	AV	34.92	12.86	N/A	N/A	47.78	54.00	6.22
	144 (5720 MHz)	11440.73	V	Y	PK	44.86	12.91	N/A	N/A	57.77	74.00	16.23
		11440.94	V	Y	AV	34.93	12.91	N/A	N/A	47.84	54.00	6.16
U-NII 3	149 (5745 MHz)	5713.12	H	Y	PK	58.64	6.05	N/A	N/A	64.69	68.20	3.51
		5718.56	H	Y	PK	60.73	6.09	N/A	N/A	66.82	78.20	11.38
		11489.48	V	Y	PK	43.93	12.92	N/A	N/A	56.85	74.00	17.15
		11489.41	V	Y	AV	34.72	12.92	N/A	N/A	47.64	54.00	6.36
	157 (5785 MHz)	11571.80	V	Y	PK	45.36	12.95	N/A	N/A	58.31	74.00	15.69
		11571.64	V	Y	AV	34.92	12.95	N/A	N/A	47.87	54.00	6.13
	165 (5825 MHz)	5850.24	H	Y	PK	53.68	6.47	N/A	N/A	60.15	78.20	18.05
		5866.16	H	Y	PK	51.54	6.51	N/A	N/A	58.05	68.20	10.15
		11650.98	V	Y	PK	45.26	12.99	N/A	N/A	58.25	74.00	15.75
		11650.69	V	Y	AV	34.97	12.99	N/A	N/A	47.96	54.00	6.04

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT20) & With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5148.62	H	X	PK	45.41	5.57	N/A	N/A	50.98	74.00	23.02
		5148.92	H	X	AV	37.48	5.57	N/A	N/A	43.05	54.00	10.95
		10360.89	H	X	PK	44.28	10.91	N/A	N/A	55.19	68.20	13.01
U-NII 2A	64 (5320 MHz)	5350.94	H	X	PK	45.39	5.61	N/A	N/A	51.00	74.00	23.00
		5350.50	H	X	AV	38.66	5.61	N/A	N/A	44.27	54.00	9.73
		10640.45	H	X	PK	44.03	11.65	N/A	N/A	55.68	74.00	18.32
		10639.89	H	X	AV	34.41	11.65	N/A	N/A	46.06	54.00	7.94
U-NII 2C	100 (5500 MHz)	5459.94	H	X	PK	53.96	5.65	N/A	N/A	59.61	74.00	14.39
		5459.28	H	X	AV	37.98	5.65	N/A	N/A	43.63	54.00	10.37
		5467.96	H	X	PK	53.81	5.65	N/A	N/A	59.46	68.20	8.74
		11000.55	H	X	PK	43.90	12.82	N/A	N/A	56.72	74.00	17.28
		11000.17	H	X	AV	34.17	12.82	N/A	N/A	46.99	54.00	7.01
U-NII 3	149 (5745 MHz)	5714.55	H	X	PK	48.66	6.05	N/A	N/A	54.71	68.20	13.49
		5722.36	H	X	PK	50.16	6.09	N/A	N/A	56.25	78.20	21.95
		11490.72	H	X	PK	44.37	12.92	N/A	N/A	57.29	74.00	16.71
		11490.84	H	X	AV	34.62	12.92	N/A	N/A	47.54	54.00	6.46

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT40) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.66	H	Y	PK	49.38	5.57	N/A	N/A	54.95	74.00	19.05
		5150.00	H	Y	AV	41.21	5.57	N/A	N/A	46.78	54.00	7.22
		10379.21	V	Y	PK	44.47	10.95	N/A	N/A	55.42	68.20	12.78
	46 (5230 MHz)	10459.75	V	Y	PK	45.20	11.12	N/A	N/A	56.32	68.20	11.88
U-NII 2A	54 (5270 MHz)	10540.03	V	Y	PK	44.75	11.33	N/A	N/A	56.08	68.20	12.12
	62 (5310 MHz)	5351.72	H	Y	PK	55.25	5.61	N/A	N/A	60.86	74.00	13.14
		5352.28	H	Y	AV	44.92	5.61	N/A	N/A	50.53	54.00	3.47
		10619.11	V	Y	PK	43.78	11.59	N/A	N/A	55.37	74.00	18.63
		10619.31	V	Y	AV	34.56	11.59	N/A	N/A	46.15	54.00	7.85
U-NII 2C	102 (5510 MHz)	5458.52	H	Y	PK	55.81	5.65	N/A	N/A	61.46	74.00	12.54
		5458.68	H	Y	AV	43.75	5.65	N/A	N/A	49.40	54.00	4.60
		5468.00	H	Y	PK	59.15	5.65	N/A	N/A	64.80	68.20	3.40
		11020.66	V	Y	PK	44.55	12.82	N/A	N/A	57.37	74.00	16.63
		11020.17	V	Y	AV	34.25	12.82	N/A	N/A	47.07	54.00	6.93
	118 (5590 MHz)	11180.14	V	Y	PK	44.72	12.86	N/A	N/A	57.58	74.00	16.42
		11179.49	V	Y	AV	34.77	12.86	N/A	N/A	47.63	54.00	6.37
	142 (5710 MHz)	11420.93	V	Y	PK	44.77	12.90	N/A	N/A	57.67	74.00	16.33
		11420.67	V	Y	AV	34.68	12.90	N/A	N/A	47.58	54.00	6.42
U-NII 3	151 (5755 MHz)	5713.31	H	Y	PK	57.51	6.05	N/A	N/A	63.56	68.20	4.64
		5724.61	H	Y	PK	57.83	6.09	N/A	N/A	63.92	78.20	14.28
		11508.94	V	Y	PK	44.75	12.92	N/A	N/A	57.67	74.00	16.33
		11508.93	V	Y	AV	34.99	12.92	N/A	N/A	47.91	54.00	6.09
	159 (5795 MHz)	5856.36	H	Y	PK	50.10	6.47	N/A	N/A	56.57	78.20	21.63
		5872.32	H	Y	PK	50.43	6.51	N/A	N/A	56.94	68.20	11.26
		11589.27	V	Y	PK	44.36	12.96	N/A	N/A	57.32	74.00	16.68
		11589.34	V	Y	AV	34.90	12.96	N/A	N/A	47.86	54.00	6.14

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT40) & With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.90	H	X	PK	55.73	5.57	N/A	N/A	61.30	74.00	12.70
		5149.14	H	X	AV	40.24	5.57	N/A	N/A	45.81	54.00	8.19
		10380.14	H	X	PK	44.43	10.95	N/A	N/A	55.38	68.20	12.82
U-NII 2A	62 (5310 MHz)	5352.50	H	X	PK	57.81	5.61	N/A	N/A	63.42	74.00	10.58
		5350.78	H	X	AV	38.29	5.61	N/A	N/A	43.90	54.00	10.10
		10621.61	H	X	PK	44.58	11.59	N/A	N/A	56.17	74.00	17.83
		10621.26	H	X	AV	34.45	11.59	N/A	N/A	46.04	54.00	7.96
U-NII 2C	102 (5510 MHz)	5458.26	H	X	PK	52.41	5.65	N/A	N/A	58.06	74.00	15.94
		5459.00	H	X	AV	39.43	5.65	N/A	N/A	45.08	54.00	8.92
		5468.40	H	X	PK	53.67	5.65	N/A	N/A	59.32	68.20	8.88
		11019.06	H	X	PK	44.47	12.82	N/A	N/A	57.29	74.00	16.71
		11019.52	H	X	AV	34.74	12.82	N/A	N/A	47.56	54.00	6.44
U-NII 3	151 (5755 MHz)	5713.47	H	X	PK	53.58	6.05	N/A	N/A	59.63	68.20	8.57
		5724.96	H	X	PK	53.36	6.09	N/A	N/A	59.45	78.20	18.75
		11508.98	H	X	PK	44.22	12.92	N/A	N/A	57.14	74.00	16.86
		11508.75	H	X	AV	34.63	12.92	N/A	N/A	47.55	54.00	6.45

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT80) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5140.88	H	Y	PK	45.58	5.55	N/A	N/A	51.13	74.00	22.87
		5141.12	H	Y	AV	37.45	5.55	N/A	N/A	43.00	54.00	11.00
		10420.24	V	Y	PK	44.22	11.03	N/A	N/A	55.25	68.20	12.95
U-NII 2A	58 (5290 MHz)	5351.10	H	Y	PK	50.82	5.61	N/A	N/A	56.43	74.00	17.57
		5350.38	H	Y	AV	43.84	5.61	N/A	N/A	49.45	54.00	4.55
		10580.47	V	Y	PK	44.83	11.46	N/A	N/A	56.29	68.20	11.91
U-NII 2C	106 (5530 MHz)	5454.48	H	Y	PK	52.54	5.65	N/A	N/A	58.19	74.00	15.81
		5455.24	H	Y	AV	43.60	5.65	N/A	N/A	49.25	54.00	4.75
		5467.88	H	Y	PK	53.56	5.65	N/A	N/A	59.21	68.20	8.99
		11059.71	V	Y	PK	45.45	12.83	N/A	N/A	58.28	74.00	15.72
		11059.40	V	Y	AV	35.24	12.83	N/A	N/A	48.07	54.00	5.93
	122 (5610 MHz)	11220.54	V	Y	PK	44.23	12.86	N/A	N/A	57.09	74.00	16.91
		11220.75	V	Y	AV	34.24	12.86	N/A	N/A	47.10	54.00	6.90
	138 (5690 MHz)	11380.03	V	Y	PK	44.17	12.90	N/A	N/A	57.07	74.00	16.93
		11380.30	V	Y	AV	34.78	12.90	N/A	N/A	47.68	54.00	6.32
U-NII 3	155 (5775 MHz)	5714.09	H	Y	PK	52.74	6.05	N/A	N/A	58.79	68.20	9.41
		5717.51	H	Y	PK	52.02	6.09	N/A	N/A	58.11	78.20	20.09
		5855.92	H	Y	PK	47.90	6.47	N/A	N/A	54.37	78.20	23.83
		5861.72	H	Y	PK	48.60	6.51	N/A	N/A	55.11	68.20	13.09
		11550.21	V	Y	PK	44.65	12.94	N/A	N/A	57.59	74.00	16.41
		11549.71	V	Y	AV	34.88	12.94	N/A	N/A	47.82	54.00	6.18

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : *MIMO(CDD) & 802.11ac(VHT80) & With Wireless charging pad*

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5147.40	H	X	PK	49.07	5.56	N/A	N/A	54.63	74.00	19.37
		5147.20	H	X	AV	37.55	5.56	N/A	N/A	43.11	54.00	10.89
		10420.87	H	X	PK	45.96	11.03	N/A	N/A	56.99	68.20	11.21
U-NII 2A	58 (5290 MHz)	5362.12	H	X	PK	47.69	5.61	N/A	N/A	53.30	74.00	20.70
		5362.52	H	X	AV	38.91	5.61	N/A	N/A	44.52	54.00	9.48
		10580.69	H	X	PK	43.97	11.46	N/A	N/A	55.43	68.20	12.77
U-NII 2C	106 (5530 MHz)	5455.16	H	X	PK	48.98	5.65	N/A	N/A	54.63	74.00	19.37
		5455.12	H	X	AV	39.93	5.65	N/A	N/A	45.58	54.00	8.42
		5466.10	H	X	PK	49.09	5.65	N/A	N/A	54.74	68.20	13.46
		11059.37	H	X	PK	44.74	12.83	N/A	N/A	57.57	74.00	16.43
		11059.11	H	X	AV	35.09	12.83	N/A	N/A	47.92	54.00	6.08
U-NII 3	155 (5775 MHz)	5701.43	H	X	PK	47.82	6.05	N/A	N/A	53.87	68.20	14.33
		5719.62	H	X	PK	50.53	6.09	N/A	N/A	56.62	78.20	21.58
		11549.36	H	X	PK	45.24	12.94	N/A	N/A	58.18	74.00	15.82
		11548.82	H	X	AV	34.90	12.94	N/A	N/A	47.84	54.00	6.16

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT20)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5146.96	H	Y	PK	55.59	5.57	N/A	N/A	61.16	74.00	12.84
		5147.18	H	Y	AV	36.82	5.57	N/A	N/A	42.39	54.00	11.61
		10359.40	V	Y	PK	44.48	10.91	N/A	N/A	55.39	68.20	12.81
	40 (5200 MHz)	10400.50	V	Y	PK	44.63	10.99	N/A	N/A	55.62	68.20	12.58
	48 (5240 MHz)	10480.52	V	Y	PK	45.00	11.16	N/A	N/A	56.16	68.20	12.04
U-NII 2A	52 (5260 MHz)	10519.87	V	Y	PK	44.69	11.26	N/A	N/A	55.95	68.20	12.25
	60 (5300 MHz)	10600.37	V	Y	PK	44.16	11.52	N/A	N/A	55.68	74.00	18.32
		10600.25	V	Y	AV	34.08	11.52	N/A	N/A	45.60	54.00	8.40
	64 (5320 MHz)	5352.60	H	Y	PK	57.89	5.61	N/A	N/A	63.50	74.00	10.50
		5352.42	H	Y	AV	40.44	5.61	N/A	N/A	46.05	54.00	7.95
		10639.63	V	Y	PK	45.02	11.65	N/A	N/A	56.67	74.00	17.33
		10639.88	V	Y	AV	34.10	11.65	N/A	N/A	45.75	54.00	8.25
U-NII 2C	100 (5500 MHz)	5457.38	H	Y	PK	55.89	5.65	N/A	N/A	61.54	74.00	12.46
		5457.54	H	Y	AV	39.04	5.65	N/A	N/A	44.69	54.00	9.31
		5466.88	H	Y	PK	56.30	5.65	N/A	N/A	61.95	68.20	6.25
		11000.93	V	Y	PK	43.87	12.82	N/A	N/A	56.69	74.00	17.31
		10999.90	V	Y	AV	34.36	12.82	N/A	N/A	47.18	54.00	6.82
	120 (5600 MHz)	11200.26	V	Y	PK	44.35	12.86	N/A	N/A	57.21	74.00	16.79
		11199.97	V	Y	AV	34.93	12.86	N/A	N/A	47.79	54.00	6.21
	144 (5720 MHz)	11439.58	V	Y	PK	44.37	12.91	N/A	N/A	57.28	74.00	16.72
		11439.23	V	Y	AV	34.91	12.91	N/A	N/A	47.82	54.00	6.18
U-NII 3	149 (5745 MHz)	5712.74	H	Y	PK	57.66	6.05	N/A	N/A	63.71	68.20	4.49
		5719.74	H	Y	PK	58.66	6.09	N/A	N/A	64.75	78.20	13.45
		11490.62	V	Y	PK	44.65	12.92	N/A	N/A	57.57	74.00	16.43
		11490.18	V	Y	AV	34.72	12.92	N/A	N/A	47.64	54.00	6.36
	157 (5785 MHz)	11570.72	V	Y	PK	44.73	12.95	N/A	N/A	57.68	74.00	16.32
		11570.33	V	Y	AV	34.74	12.95	N/A	N/A	47.69	54.00	6.31
	165 (5825 MHz)	5853.12	H	Y	PK	55.43	6.47	N/A	N/A	61.90	78.20	16.30
		5866.42	H	Y	PK	51.99	6.51	N/A	N/A	58.50	68.20	9.70
		11649.80	V	Y	PK	44.74	12.99	N/A	N/A	57.73	74.00	16.27
		11649.81	V	Y	AV	34.95	12.99	N/A	N/A	47.94	54.00	6.06

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT20)& With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5148.46	H	X	PK	47.31	5.57	N/A	N/A	52.88	74.00	21.12
		5147.98	H	X	AV	37.84	5.57	N/A	N/A	43.41	54.00	10.59
		10359.51	H	X	PK	44.81	10.91	N/A	N/A	55.72	68.20	12.48
U-NII 2A	64 (5320 MHz)	5350.50	H	X	PK	47.65	5.61	N/A	N/A	53.26	74.00	20.74
		5351.56	H	X	AV	37.74	5.61	N/A	N/A	43.35	54.00	10.65
		10639.32	H	X	PK	44.79	11.65	N/A	N/A	56.44	74.00	17.56
		10639.88	H	X	AV	34.14	11.65	N/A	N/A	45.79	54.00	8.21
U-NII 2C	100 (5500 MHz)	5457.90	H	X	PK	51.01	5.65	N/A	N/A	56.66	74.00	17.34
		5457.26	H	X	AV	37.68	5.65	N/A	N/A	43.33	54.00	10.67
		5469.22	H	X	PK	51.02	5.65	N/A	N/A	56.67	68.20	11.53
		11000.70	H	X	PK	43.84	12.82	N/A	N/A	56.66	74.00	17.34
		11000.62	H	X	AV	33.85	12.82	N/A	N/A	46.67	54.00	7.33
U-NII 3	149 (5745 MHz)	5713.59	H	X	PK	50.66	6.05	N/A	N/A	56.71	78.20	21.49
		5725.00	H	X	PK	49.48	6.09	N/A	N/A	55.57	68.20	12.63
		11492.08	H	X	PK	44.22	12.92	N/A	N/A	57.14	74.00	16.86
		11492.05	H	X	AV	34.59	12.92	N/A	N/A	47.51	54.00	6.49

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT40)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.94	H	Y	PK	49.59	5.57	N/A	N/A	55.16	74.00	18.84
		5149.68	H	Y	AV	40.75	5.57	N/A	N/A	46.32	54.00	7.68
		10379.78	V	Y	PK	44.04	10.95	N/A	N/A	54.99	68.20	13.21
	46 (5230 MHz)	10460.71	V	Y	PK	44.95	11.12	N/A	N/A	56.07	68.20	12.13
U-NII 2A	54 (5270 MHz)	10539.68	V	Y	PK	44.62	11.33	N/A	N/A	55.95	68.20	12.25
	62 (5310 MHz)	5350.70	H	Y	PK	54.08	5.61	N/A	N/A	59.69	74.00	14.31
		5350.06	H	Y	AV	44.17	5.61	N/A	N/A	49.78	54.00	4.22
		10620.13	V	Y	PK	43.71	11.59	N/A	N/A	55.30	74.00	18.70
		10620.44	V	Y	AV	34.04	11.59	N/A	N/A	45.63	54.00	8.37
U-NII 2C	102 (5510 MHz)	5459.24	H	Y	PK	57.48	5.65	N/A	N/A	63.13	74.00	10.87
		5458.66	H	Y	AV	43.22	5.65	N/A	N/A	48.87	54.00	5.13
		5469.86	H	Y	PK	57.24	5.65	N/A	N/A	62.89	68.20	5.31
		11020.82	V	Y	PK	43.86	12.82	N/A	N/A	56.68	74.00	17.32
		11020.00	V	Y	AV	34.72	12.82	N/A	N/A	47.54	54.00	6.46
	118 (5590 MHz)	11180.10	V	Y	PK	45.18	12.86	N/A	N/A	58.04	74.00	15.96
		11179.45	V	Y	AV	34.92	12.86	N/A	N/A	47.78	54.00	6.22
	142 (5710 MHz)	11420.77	V	Y	PK	44.80	12.90	N/A	N/A	57.70	74.00	16.30
		11420.00	V	Y	AV	34.84	12.90	N/A	N/A	47.74	54.00	6.26
U-NII 3	151 (5755 MHz)	5711.85	H	Y	PK	57.56	6.05	N/A	N/A	63.61	68.20	4.59
		5724.99	H	Y	PK	58.03	6.09	N/A	N/A	64.12	78.20	14.08
		11511.33	V	Y	PK	43.98	12.92	N/A	N/A	56.90	74.00	17.10
		11511.81	V	Y	AV	34.83	12.92	N/A	N/A	47.75	54.00	6.25
	159 (5795 MHz)	5852.92	H	Y	PK	48.04	6.47	N/A	N/A	54.51	78.20	23.69
		5861.84	H	Y	PK	45.89	6.51	N/A	N/A	52.40	68.20	15.80
		11589.04	V	Y	PK	44.45	12.96	N/A	N/A	57.41	74.00	16.59
		11588.08	V	Y	AV	34.82	12.96	N/A	N/A	47.78	54.00	6.22

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT40)& With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5148.88	H	X	PK	46.07	5.57	N/A	N/A	51.64	74.00	22.36
		5149.98	H	X	AV	38.50	5.57	N/A	N/A	44.07	54.00	9.93
		10379.87	H	X	PK	44.04	10.95	N/A	N/A	54.99	68.20	13.21
U-NII 2A	62 (5310 MHz)	5351.36	H	X	PK	56.20	5.61	N/A	N/A	61.81	74.00	12.19
		5350.68	H	X	AV	39.83	5.61	N/A	N/A	45.44	54.00	8.56
		10620.01	H	X	PK	44.12	11.59	N/A	N/A	55.71	74.00	18.29
		10619.80	H	X	AV	34.63	11.59	N/A	N/A	46.22	54.00	7.78
U-NII 2C	102 (5510 MHz)	5458.52	H	X	PK	54.06	5.65	N/A	N/A	59.71	74.00	14.29
		5459.48	H	X	AV	39.16	5.65	N/A	N/A	44.81	54.00	9.19
		5468.90	H	X	PK	54.60	5.65	N/A	N/A	60.25	68.20	7.95
		11019.84	H	X	PK	44.48	12.82	N/A	N/A	57.30	74.00	16.70
		11020.17	H	X	AV	34.39	12.82	N/A	N/A	47.21	54.00	6.79
U-NII 3	151 (5755 MHz)	5712.67	H	X	PK	53.59	6.05	N/A	N/A	59.64	68.20	8.56
		5723.90	H	X	PK	54.32	6.09	N/A	N/A	60.41	78.20	17.79
		11511.22	H	X	PK	44.85	12.92	N/A	N/A	57.77	74.00	16.23
		11511.85	H	X	AV	34.94	12.92	N/A	N/A	47.86	54.00	6.14

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT80)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5143.68	H	Y	PK	47.85	5.55	N/A	N/A	53.40	74.00	20.60
		5145.20	H	Y	AV	38.82	5.55	N/A	N/A	44.37	54.00	9.63
		10420.19	V	Y	PK	45.58	11.03	N/A	N/A	56.61	68.20	11.59
U-NII 2A	58 (5290 MHz)	5354.66	H	Y	PK	53.75	5.61	N/A	N/A	59.36	74.00	14.64
		5353.66	H	Y	AV	43.54	5.61	N/A	N/A	49.15	54.00	4.85
		10579.17	V	Y	PK	44.63	11.46	N/A	N/A	56.09	68.20	12.11
U-NII 2C	106 (5530 MHz)	5459.64	H	Y	PK	53.39	5.65	N/A	N/A	59.04	74.00	14.96
		5459.36	H	Y	AV	42.13	5.65	N/A	N/A	47.78	54.00	6.22
		5469.00	H	Y	PK	54.84	5.65	N/A	N/A	60.49	68.20	7.71
		11059.07	V	Y	PK	44.32	12.83	N/A	N/A	57.15	74.00	16.85
		11059.12	V	Y	AV	34.77	12.83	N/A	N/A	47.60	54.00	6.40
	122 (5610 MHz)	11220.30	V	Y	PK	44.62	12.86	N/A	N/A	57.48	74.00	16.52
		11220.62	V	Y	AV	34.21	12.86	N/A	N/A	47.07	54.00	6.93
	138 (5690 MHz)	11380.37	V	Y	PK	45.08	12.90	N/A	N/A	57.98	74.00	16.02
		11380.63	V	Y	AV	34.42	12.90	N/A	N/A	47.32	54.00	6.68
U-NII 3	155 (5775 MHz)	5705.69	H	Y	PK	51.59	6.05	N/A	N/A	57.64	68.20	10.56
		5722.63	H	Y	PK	51.75	6.09	N/A	N/A	57.84	78.20	20.36
		5852.04	H	Y	PK	47.85	6.47	N/A	N/A	54.32	78.20	23.88
		5866.52	H	Y	PK	48.71	6.51	N/A	N/A	55.22	68.20	12.98
		11549.71	V	Y	PK	44.58	12.94	N/A	N/A	57.52	74.00	16.48
		11550.74	V	Y	AV	34.96	12.94	N/A	N/A	47.90	54.00	6.10

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT80)& With Wireless charging pad)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5144.00	H	X	PK	47.91	5.56	N/A	N/A	53.47	74.00	20.53
		5143.96	H	X	AV	36.55	5.56	N/A	N/A	42.11	54.00	11.89
		10419.94	H	X	PK	45.05	11.03	N/A	N/A	56.08	68.20	12.12
U-NII 2A	58 (5290 MHz)	5350.24	H	X	PK	51.52	5.61	N/A	N/A	57.13	74.00	16.87
		5351.12	H	X	AV	38.86	5.61	N/A	N/A	44.47	54.00	9.53
		10580.36	H	X	PK	44.16	11.46	N/A	N/A	55.62	68.20	12.58
U-NII 2C	106 (5530 MHz)	5456.04	H	X	PK	49.14	5.65	N/A	N/A	54.79	74.00	19.21
		5458.60	H	X	AV	38.99	5.65	N/A	N/A	44.64	54.00	9.36
		5462.74	H	X	PK	49.32	5.65	N/A	N/A	54.97	68.20	13.23
		11059.78	H	X	PK	44.40	12.83	N/A	N/A	57.23	74.00	16.77
		11059.35	H	X	AV	34.72	12.83	N/A	N/A	47.55	54.00	6.45
U-NII 3	155 (5775 MHz)	5706.95	H	X	PK	48.72	6.05	N/A	N/A	54.77	68.20	13.43
		5722.74	H	X	PK	49.35	6.09	N/A	N/A	55.44	78.20	22.76
		11551.71	H	X	PK	44.80	12.94	N/A	N/A	57.74	74.00	16.26
		11551.20	H	X	AV	34.84	12.94	N/A	N/A	47.78	54.00	6.22

Note.

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

- Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

- The limit is converted to field strength.

$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.89	H	Y	PK	66.54	1.71	N/A	N/A	68.25	74.00	5.75
2389.73	H	Y	AV	48.32	1.71	0.44	N/A	50.47	54.00	3.53
4824.71	V	X	PK	44.70	5.50	N/A	N/A	50.20	74.00	23.80
4824.44	V	X	AV	34.00	5.50	0.44	N/A	39.94	54.00	14.06
5148.82	H	Y	PK	46.21	5.57	N/A	N/A	51.78	74.00	22.22
5149.12	H	Y	AV	36.72	5.57	N/A	N/A	42.29	54.00	11.71
10378.58	V	Y	PK	44.07	10.95	N/A	N/A	55.02	68.20	13.18

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 2A	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.96	H	Y	PK	66.81	1.71	N/A	N/A	68.52	74.00	5.48
2389.80	H	Y	AV	48.28	1.71	0.44	N/A	50.43	54.00	3.57
4823.71	V	X	PK	44.11	5.50	N/A	N/A	49.61	74.00	24.39
4823.84	V	X	AV	34.00	5.50	0.44	N/A	39.94	54.00	14.06
5350.22	H	Y	PK	48.00	5.61	N/A	N/A	53.61	74.00	20.39
5350.38	H	Y	AV	40.10	5.61	N/A	N/A	45.71	54.00	8.29
10620.41	V	Y	PK	43.78	11.59	N/A	N/A	55.37	74.00	18.63
10619.88	V	Y	AV	34.41	11.59	N/A	N/A	46.00	54.00	8.00

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $\text{E}[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 2C	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.70	H	Y	PK	66.33	1.71	N/A	N/A	68.04	74.00	5.96
2389.71	H	Y	AV	48.55	1.71	0.44	N/A	50.70	54.00	3.30
4822.65	V	X	PK	44.91	5.50	N/A	N/A	50.41	74.00	23.59
4823.02	V	X	AV	34.26	5.50	0.44	N/A	40.20	54.00	13.80
5458.16	H	Y	PK	51.19	5.65	N/A	N/A	56.84	74.00	17.16
5459.60	H	Y	AV	37.54	5.65	N/A	N/A	43.19	54.00	10.81
5465.26	H	Y	PK	49.73	5.65	N/A	N/A	55.38	68.20	12.82
11020.81	V	Y	PK	44.58	12.82	N/A	N/A	57.40	74.00	16.60
11020.39	V	Y	AV	34.57	12.82	N/A	N/A	47.39	54.00	6.61

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 3	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.47	H	Y	PK	68.34	1.71	N/A	N/A	70.05	74.00	3.95
2389.80	H	Y	AV	48.50	1.71	0.44	N/A	50.65	54.00	3.35
4824.35	V	X	PK	44.96	5.50	N/A	N/A	50.46	74.00	23.54
4824.56	V	X	AV	34.05	5.50	0.44	N/A	39.99	54.00	14.01
5711.98	H	Y	PK	50.54	6.05	N/A	N/A	56.59	68.20	11.61
5724.98	H	Y	PK	52.22	6.09	N/A	N/A	58.31	78.20	19.89
11509.15	V	Y	PK	44.33	12.92	N/A	N/A	57.25	74.00	16.75
11508.61	V	Y	AV	34.95	12.92	N/A	N/A	47.87	54.00	6.13

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $\text{E[dBuV/m]} = \text{EIRP[dBm]} + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.54	H	X	PK	65.34	1.71	N/A	N/A	67.05	74.00	6.95
2389.74	H	X	AV	46.78	1.71	0.44	N/A	48.93	54.00	5.07
4824.76	V	X	PK	44.64	5.50	N/A	N/A	50.14	74.00	23.86
4824.08	V	X	AV	34.02	5.50	0.44	N/A	39.96	54.00	14.04
5147.42	H	X	PK	47.00	5.57	N/A	N/A	52.57	74.00	21.43
5147.90	H	X	AV	36.27	5.57	N/A	N/A	41.84	54.00	12.16
10380.41	H	X	PK	44.79	10.95	N/A	N/A	55.74	68.20	12.46

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 2A	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.87	H	X	PK	65.92	1.71	N/A	N/A	67.63	74.00	6.37
2389.35	H	X	AV	46.86	1.71	0.44	N/A	49.01	54.00	4.99
4825.25	V	X	PK	44.85	5.50	N/A	N/A	50.35	74.00	23.65
4825.76	V	X	AV	34.14	5.50	0.44	N/A	40.08	54.00	13.92
5352.86	H	X	PK	44.48	5.61	N/A	N/A	50.09	74.00	23.91
5352.92	H	X	AV	35.33	5.61	N/A	N/A	40.94	54.00	13.06
10621.81	H	X	PK	44.32	11.59	N/A	N/A	55.91	74.00	18.09
10621.65	H	X	AV	34.37	11.59	N/A	N/A	45.96	54.00	8.04

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : *Simultaneously transmission With Wireless charging pad*

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 2C	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.35	H	X	PK	65.73	1.71	N/A	N/A	67.44	74.00	6.56
2389.66	H	X	AV	47.07	1.71	0.44	N/A	49.22	54.00	4.78
4825.01	V	X	PK	45.31	5.50	N/A	N/A	50.81	74.00	23.19
4825.38	V	X	AV	34.20	5.50	0.44	N/A	40.14	54.00	13.86
5459.50	H	X	PK	43.51	5.65	N/A	N/A	49.16	74.00	24.84
5459.12	H	X	AV	35.27	5.65	N/A	N/A	40.92	54.00	13.08
5466.44	H	X	PK	44.51	5.65	N/A	N/A	50.16	68.20	18.04
11021.87	H	X	PK	43.99	12.82	N/A	N/A	56.81	74.00	17.19
11021.64	H	X	AV	34.47	12.82	N/A	N/A	47.29	54.00	6.71

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : *Simultaneously transmission With Wireless charging pad*

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11g	2412 MHz
	2	U-NII 3	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.86	H	X	PK	65.60	1.71	N/A	N/A	67.31	74.00	6.69
2389.99	H	X	AV	47.50	1.71	0.44	N/A	49.65	54.00	4.35
4824.83	V	X	PK	44.52	5.50	N/A	N/A	50.02	74.00	23.98
4824.28	V	X	AV	34.11	5.50	0.44	N/A	40.05	54.00	13.95
5714.64	H	X	PK	46.24	6.05	N/A	N/A	52.29	68.20	15.91
5719.14	H	X	PK	49.26	6.09	N/A	N/A	55.35	78.20	22.85
11508.84	H	X	PK	44.52	12.92	N/A	N/A	57.44	74.00	16.56
11509.52	H	X	AV	34.98	12.92	N/A	N/A	47.90	54.00	6.10

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$\text{E[dBuV/m]} = \text{EIRP[dBm]} + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

8.7 AC Conducted Emissions

■ Test Requirements and limit, §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Configuration

See test photographs for the actual connections between EUT and support equipment.

■ Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

■ Test Results: **Comply**

Note 1: See next pages for actual measured spectrum plots and data for worst case result.

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 1 & 802.11a & MIMO(CDD) & 5240 MHz

Results of Conducted Emission

DTNC



Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.1G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

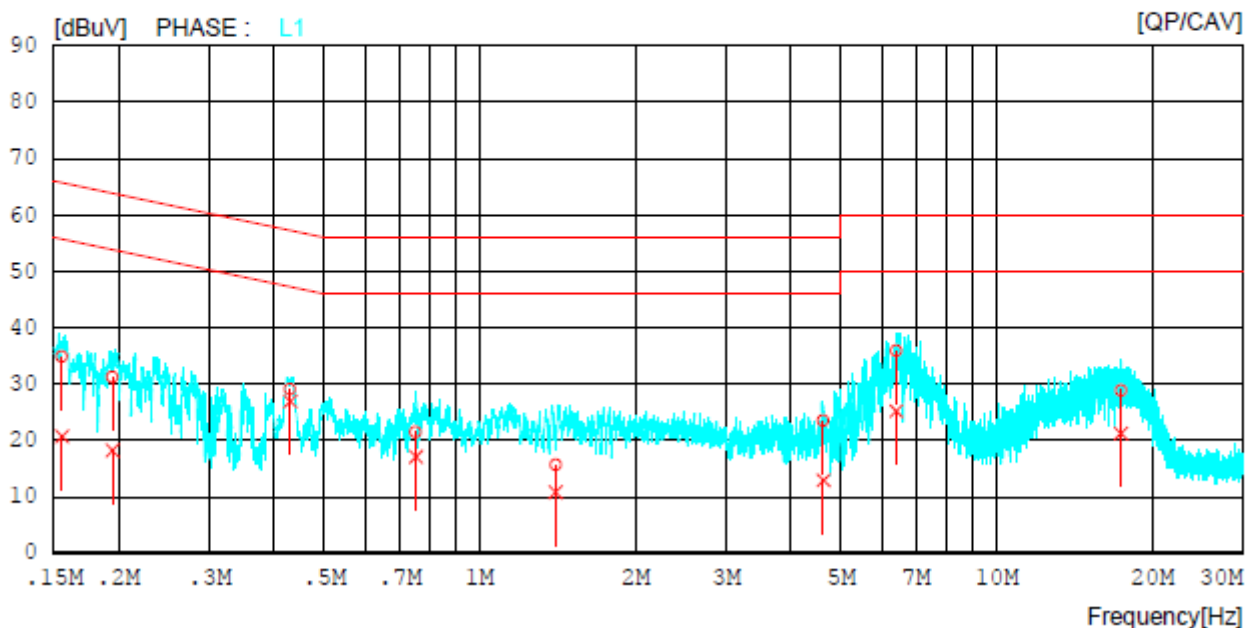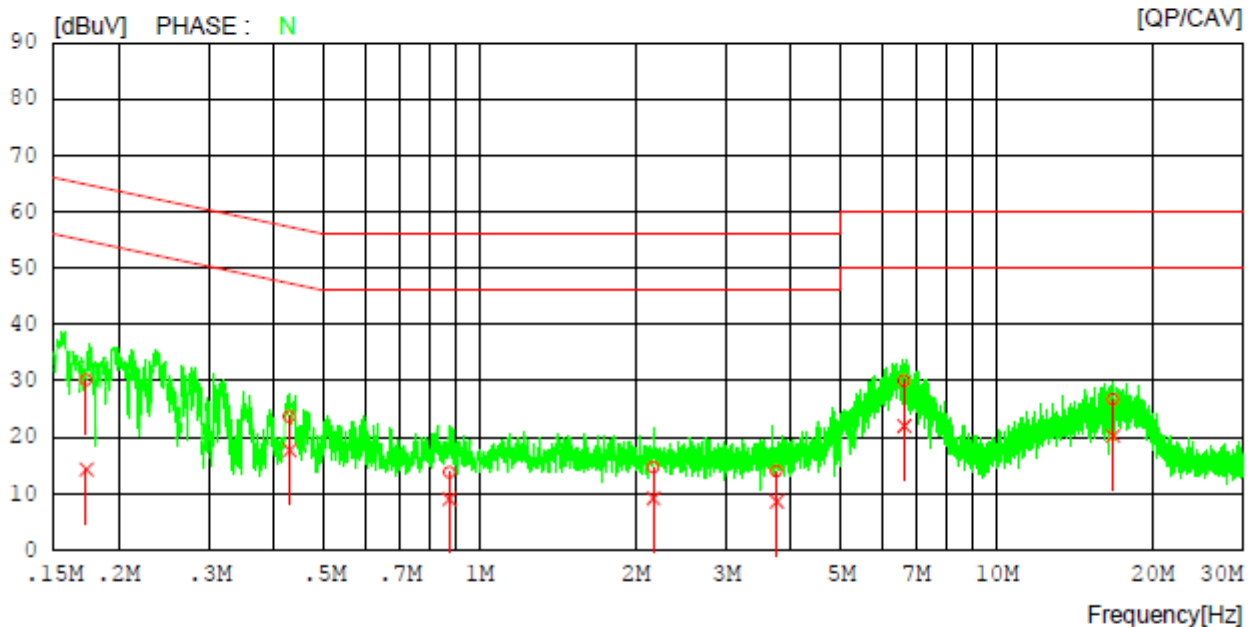

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 1 & 802.11a & MIMO(CDD) & 5240 MHz

Results of Conducted Emission

DTNC

Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.1G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.17308	20.14	4.27	9.99	30.13	14.26	64.81	54.81	34.68	40.55	N
2	0.42793	13.60	7.73	9.99	23.59	17.72	57.29	47.29	33.70	29.57	N
3	0.87350	3.78	-0.99	10.01	13.79	9.02	56.00	46.00	42.21	36.98	N
4	2.16680	4.55	-0.90	10.07	14.62	9.17	56.00	46.00	41.38	36.83	N
5	3.75120	3.85	-1.57	10.15	14.00	8.58	56.00	46.00	42.00	37.42	N
6	6.62420	19.73	11.79	10.24	29.97	22.03	60.00	50.00	30.03	27.97	N
7	16.81340	16.21	9.71	10.51	26.72	20.22	60.00	50.00	33.28	29.78	N
8	0.15527	24.83	10.77	9.96	34.79	20.73	65.71	55.71	30.92	34.98	L1
9	0.19455	21.25	8.26	9.96	31.21	18.22	63.84	53.84	32.63	35.62	L1
10	0.42954	19.06	16.93	9.96	29.02	26.89	57.26	47.26	28.24	20.37	L1
11	0.75189	11.43	7.09	9.97	21.40	17.06	56.00	46.00	34.60	28.94	L1
12	1.40180	5.62	0.84	10.00	15.62	10.84	56.00	46.00	40.38	35.16	L1
13	4.62160	13.29	2.77	10.15	23.44	12.92	56.00	46.00	32.56	33.08	L1
14	6.39680	25.65	14.98	10.20	35.85	25.18	60.00	50.00	24.15	24.82	L1
15	17.42320	18.39	10.73	10.47	28.86	21.20	60.00	50.00	31.14	28.80	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2A & 802.11a & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC



Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.3G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

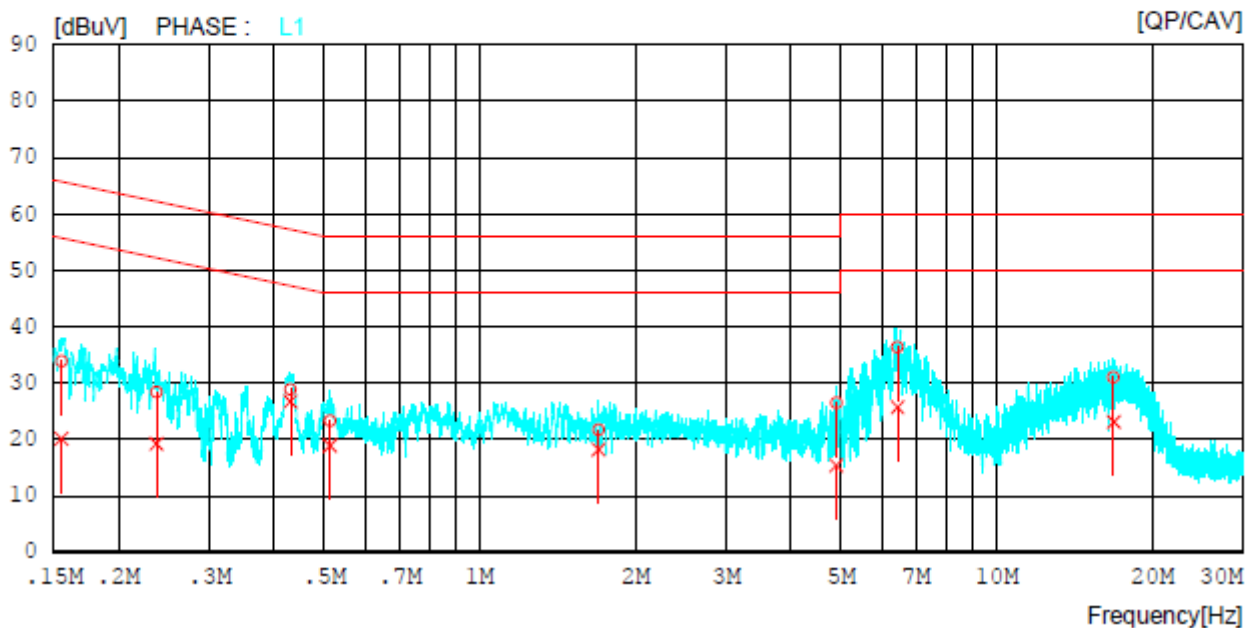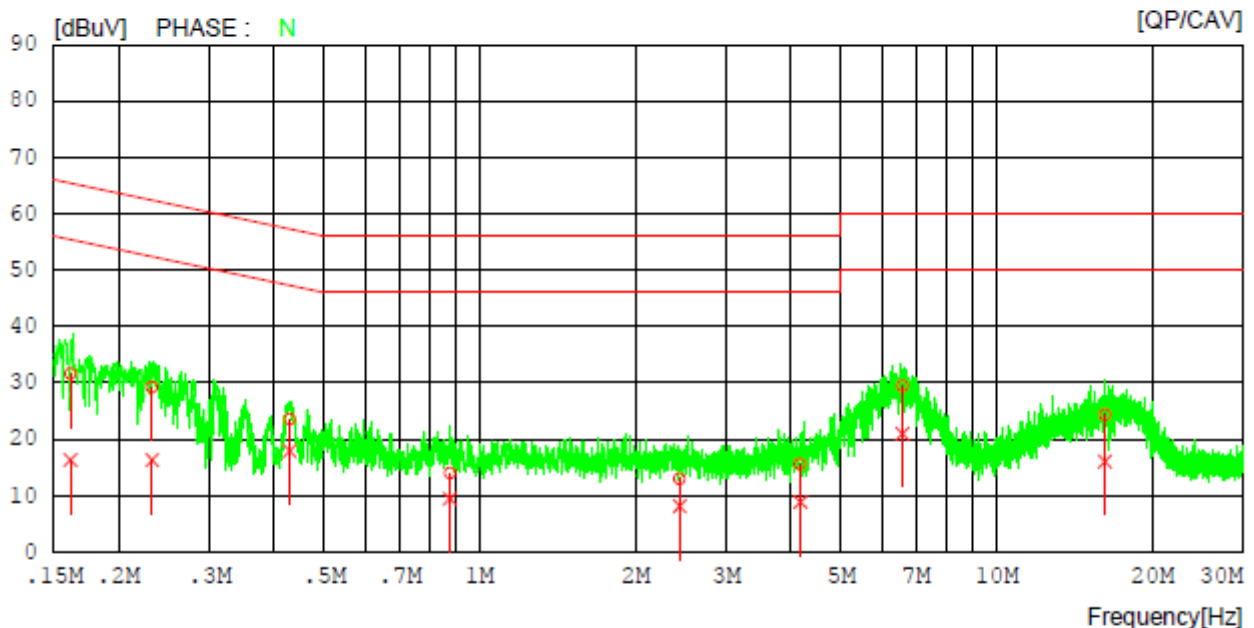

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2A & 802.11a & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC

Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.3G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.16149	21.58	6.34	9.99	31.57	16.33	65.39	55.39	33.82	39.06	N
2	0.23218	19.25	6.34	9.98	29.23	16.32	62.37	52.37	33.14	36.05	N
3	0.42876	13.49	7.95	9.99	23.48	17.94	57.28	47.28	33.80	29.34	N
4	0.87575	3.97	-0.58	10.01	13.98	9.43	56.00	46.00	42.02	36.57	N
5	2.43640	2.92	-1.95	10.09	13.01	8.14	56.00	46.00	42.99	37.86	N
6	4.16920	5.39	-1.30	10.15	15.54	8.85	56.00	46.00	40.46	37.15	N
7	6.57960	19.15	10.77	10.24	29.39	21.01	60.00	50.00	30.61	28.99	N
8	16.22260	13.88	5.59	10.50	24.38	16.09	60.00	50.00	35.62	33.91	N
9	0.15507	23.85	10.20	9.96	33.81	20.16	65.72	55.72	31.91	35.56	L1
10	0.23681	18.39	9.25	9.95	28.34	19.20	62.21	52.21	33.87	33.01	L1
11	0.43015	18.89	16.72	9.96	28.85	26.68	57.25	47.25	28.40	20.57	L1
12	0.51305	13.24	8.88	9.96	23.20	18.84	56.00	46.00	32.80	27.16	L1
13	1.69800	11.68	8.21	10.02	21.70	18.23	56.00	46.00	34.30	27.77	L1
14	4.90300	16.22	5.16	10.16	26.38	15.32	56.00	46.00	29.62	30.68	L1
15	6.43420	26.18	15.46	10.20	36.38	25.66	60.00	50.00	23.62	24.34	L1
16	16.85100	20.48	12.63	10.47	30.95	23.10	60.00	50.00	29.05	26.90	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC



Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.5G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 'C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

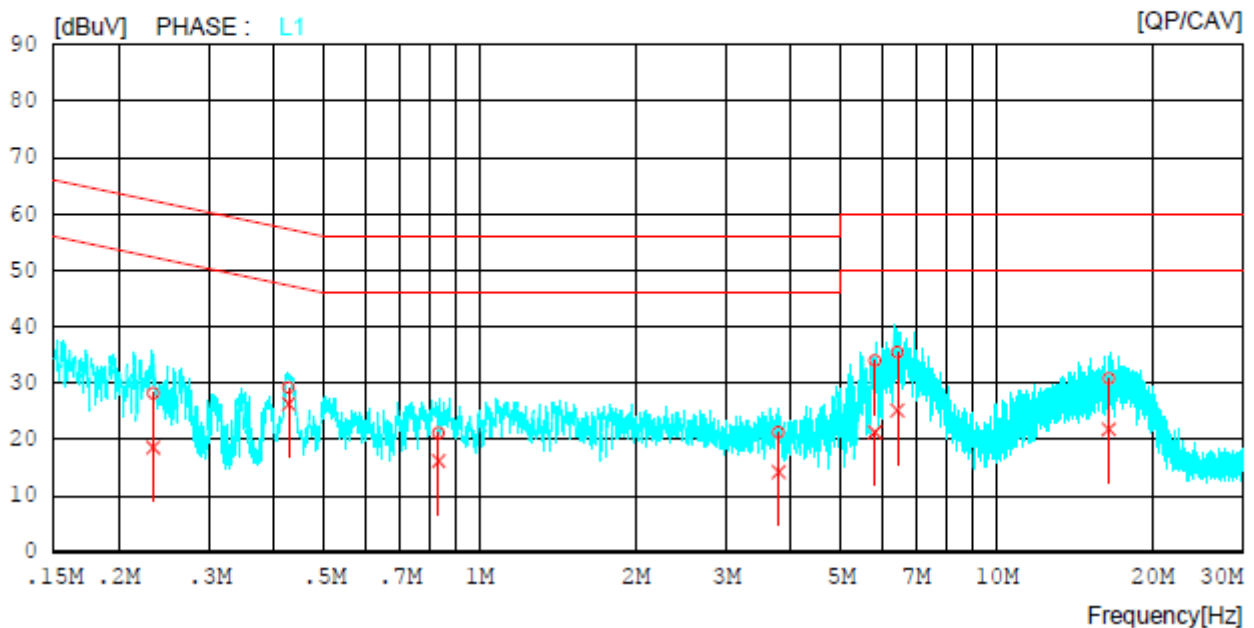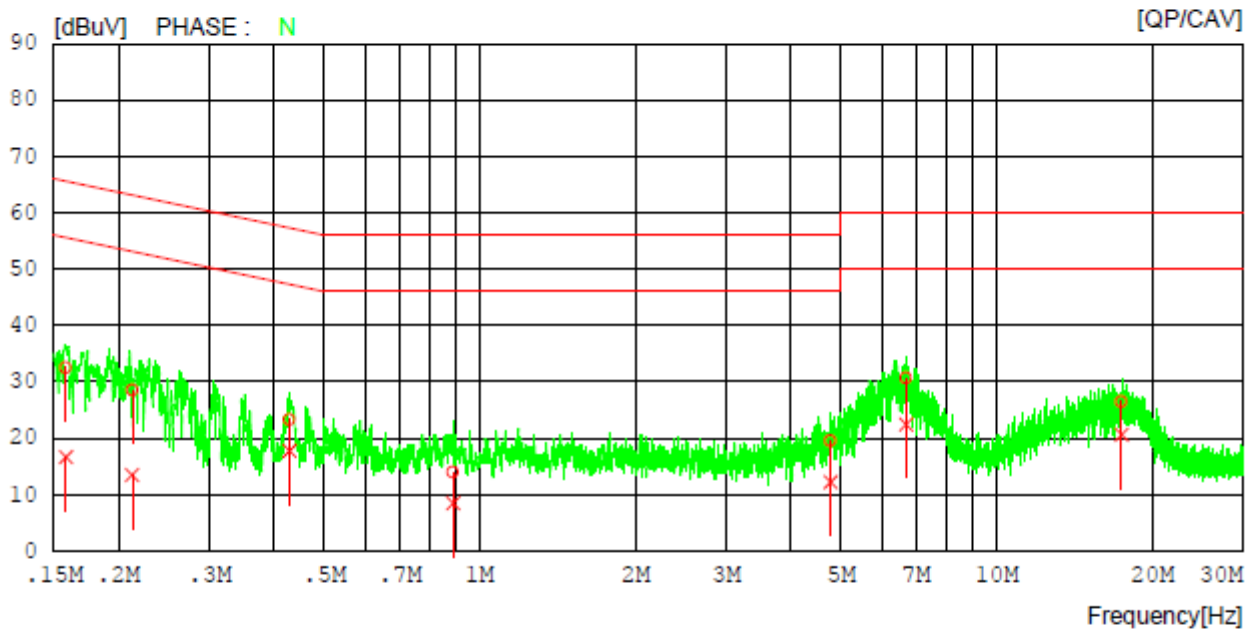

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC

Date 2019-03-15

Order No.		Reference No.	
Model No.	LM-G810EAW	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 45 %
Test Condition	5.5G WLAN	Operator	Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15793	22.50	6.62	9.99	32.49	16.61	65.57	55.57	33.08	38.96	N
2	0.21250	18.53	3.48	9.98	28.51	13.46	63.11	53.11	34.60	39.65	N
3	0.42816	13.32	7.76	9.99	23.31	17.75	57.29	47.29	33.98	29.54	N
4	0.88731	3.92	-1.52	10.01	13.93	8.49	56.00	46.00	42.07	37.51	N
5	4.77080	9.37	1.98	10.20	19.57	12.18	56.00	46.00	36.43	33.82	N
6	6.67980	20.39	12.20	10.26	30.65	22.46	60.00	50.00	29.35	27.54	N
7	17.46080	15.94	10.11	10.51	26.45	20.62	60.00	50.00	33.55	29.38	N
8	0.23339	18.13	8.54	9.95	28.08	18.49	62.33	52.33	34.25	33.84	L1
9	0.42675	19.17	16.29	9.96	29.13	26.25	57.32	47.32	28.19	21.07	L1
10	0.83256	11.17	6.14	9.97	21.14	16.11	56.00	46.00	34.86	29.89	L1
11	3.78520	11.02	4.06	10.12	21.14	14.18	56.00	46.00	34.86	31.82	L1
12	5.81980	23.79	11.12	10.18	33.97	21.30	60.00	50.00	26.03	28.70	L1
13	6.42680	25.15	14.90	10.20	35.35	25.10	60.00	50.00	24.65	24.90	L1
14	16.50360	20.30	11.29	10.47	30.77	21.76	60.00	50.00	29.23	28.24	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5785 MHz

Results of Conducted Emission

DTNC


Date 2019-03-15

Order No.
Model No. LM-G810EAW
Serial No.
Test Condition 5.7G WLAN

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 45 %
Operator Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

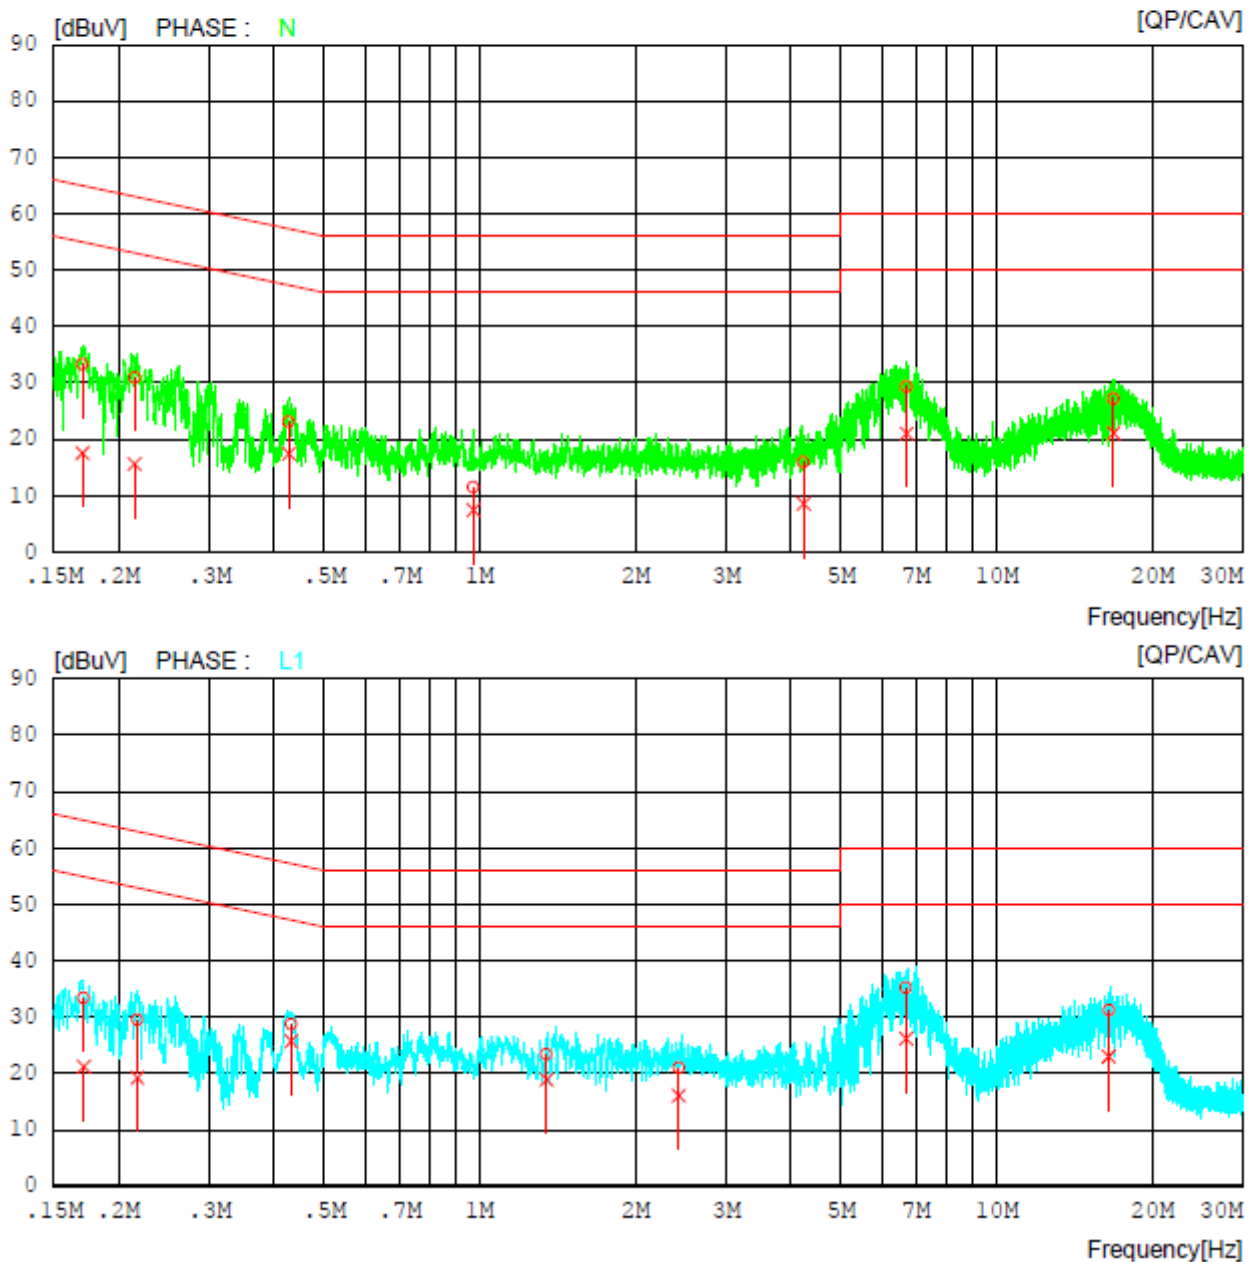

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5785 MHz

Results of Conducted Emission

DTNC

Date 2019-03-15

Order No.		Reference No.	
Model No.	LM-G810EAW	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 45 %
Test Condition	5.7G WLAN	Operator	Lee Sun Geun

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.17025	23.25	7.57	9.99	33.24	17.56	64.95	54.95	31.71	37.39	N
2	0.21485	20.94	5.68	9.98	30.92	15.66	63.02	53.02	32.10	37.36	N
3	0.42699	13.03	7.47	9.99	23.02	17.46	57.31	47.31	34.29	29.85	N
4	0.97153	1.44	-2.58	10.01	11.45	7.43	56.00	46.00	44.55	38.57	N
5	4.23300	5.82	-1.58	10.15	15.97	8.57	56.00	46.00	40.03	37.43	N
6	6.69840	19.02	10.76	10.26	29.28	21.02	60.00	50.00	30.72	28.98	N
7	16.83920	16.61	10.60	10.51	27.12	21.11	60.00	50.00	32.88	28.89	N
8	0.17117	23.44	11.14	9.96	33.40	21.10	64.90	54.90	31.50	33.80	L1
9	0.21746	19.51	9.23	9.96	29.47	19.19	62.92	52.92	33.45	33.73	L1
10	0.43150	18.73	15.73	9.96	28.69	25.69	57.22	47.22	28.53	21.53	L1
11	1.34560	13.38	8.86	10.00	23.38	18.86	56.00	46.00	32.62	27.14	L1
12	2.42880	10.97	6.01	10.06	21.03	16.07	56.00	46.00	34.97	29.93	L1
13	6.68500	24.99	15.94	10.22	35.21	26.16	60.00	50.00	24.79	23.84	L1
14	16.49560	20.69	12.47	10.47	31.16	22.94	60.00	50.00	28.84	27.06	L1

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/12/20	19/12/20	MY50200828
Spectrum Analyzer	Agilent Technologies	N9020A	18/07/09	19/07/09	MY46471251
Spectrum Analyzer	Agilent Technologies	N9030A	18/07/09	19/07/09	MY53310140
DC Power Supply	Agilent Technologies	66332A	18/07/02	19/07/02	MY43000211
Multimeter	FLUKE	17B	18/12/18	19/12/18	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Signal Generator	ANRITSU	MG3695C	18/12/10	19/12/10	173501
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-1
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-2
HYGROMETER	TESTO	608-H1	19/01/31	20/01/31	34862883
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	18/07/06	19/07/06	U5542113
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Horn Antenna	ETS-Lindgren	3117	18/05/10	20/05/10	00140394
Horn Antenna	A.H.Systems Inc.	SAS-574	17/07/31	19/07/31	155
PreAmplifier	Agilent Technologies	8449B	18/07/05	19/07/05	3008A02108
PreAmplifier	H.P	8447D	18/12/18	19/12/18	2944A07774
PreAmplifier	A.H.Systems Inc.	PAM-1840VH	18/07/06	19/07/06	163
Attenuator	Aeroflex/Weinschel	86-10-11	18/07/04	19/07/04	408
Attenuator	SMAJK	SMAJK-2-3	18/07/04	19/07/04	4
High Pass Filter	Wainwright Instruments	WHKX12-2580-3000-18000-80SS	18/07/05	19/07/05	3
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	18/07/03	19/07/03	3
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2411B	18/12/19	19/12/19	1338004 1306053
EMI Test Receiver	Rohde Schwarz	ESU40	18/12/18	19/12/18	100525
EMI Test Receiver	Rohde Schwarz	ESCi7	19/01/30	20/01/30	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	18/09/27	19/09/27	101333
LISN	SCHWARZBECK	NNLK 8121	18/03/20 19/03/19	19/03/20 20/03/19	06183
Cable	Radiall	TESTPRO3	18/07/06	19/07/06	M-01
Cable	Junkosha	MWX315	18/11/19	19/11/19	M-05
Cable	Junkosha	MWX221	18/11/19	19/11/19	M-06
Cable	HUBER+SUHNER	SUCOFLEX103	18/07/06	19/07/06	M-03
Cable	DT&C	Cable	18/07/05	19/07/05	RF-82
Cable	DT&C	Cable	18/07/05	19/07/05	RF-18


Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX I

Conducted Test set up Diagram

▪ Conducted Measurement

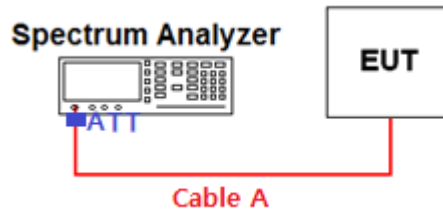

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle [X = On Time / (On + Off time)] is measured using Measurement Procedure of **KDB789033 D02v02r01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW $\geq$ RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(T = On time of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Duty cycle: Single

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			DCCF= $10 \log(1/x)$ [dB]	50/T [kHz]	VBW setting for Method VB	
			T=On Time [ms]	(On+Off) Time [ms]	x			VBW $\geq 1/T$	Actual VBW Setting
802.11a	6Mbps	5180	2.03	2.06	0.9825	0.08	24.67	VBW ≥ 0.49 kHz	10 kHz
802.11ac (VHT20)	MCS0	5180	1.90	1.94	0.9808	0.09	26.32	VBW ≥ 0.53 kHz	10 kHz
802.11ac (VHT40)	MCS0	5190	1.27	1.31	0.9725	0.13	39.31	VBW ≥ 0.79 kHz	10 kHz
802.11ac (VHT80)	MCS0	5210	1.17	1.21	0.9685	0.14	42.74	VBW ≥ 0.85 kHz	10 kHz

Duty cycle: SDM


Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			DCCF= $10 \log(1/x)$ [dB]	50/T [kHz]	VBW setting for Method VB	
			T=On Time [ms]	(On+Off) Time [ms]	x			VBW $\geq 1/T$	Actual VBW Setting
802.11ac (VHT20)	MCS0	5180	0.97	1.01	0.9622	0.17	51.30	VBW ≥ 1.03 kHz	10 kHz
802.11ac (VHT40)	MCS0	5190	0.66	0.70	0.9471	0.24	75.14	VBW ≥ 1.52 kHz	10 kHz
802.11ac (VHT80)	MCS0	5210	0.61	0.65	0.9429	0.26	81.83	VBW ≥ 1.64 kHz	10 kHz

■ Test Plot:

Single Transmit


Duty Cycle

Test Mode: 802.11a & Ch.36

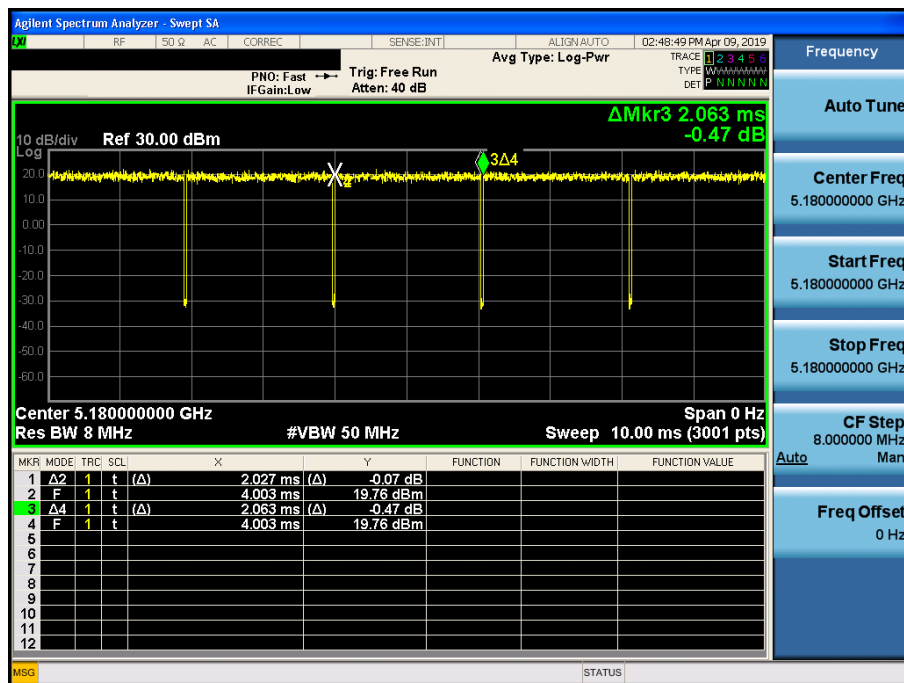


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

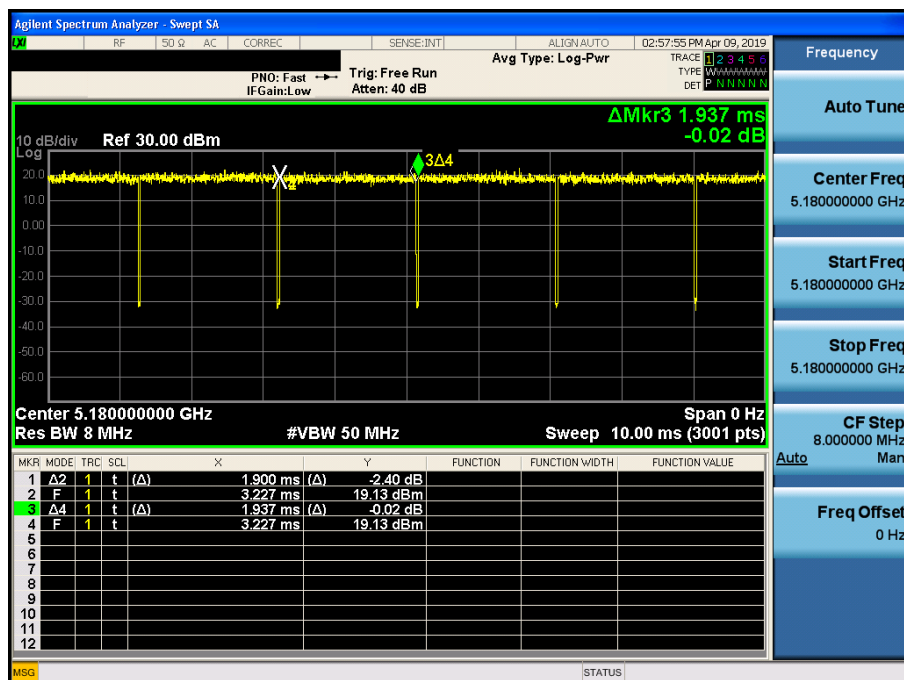


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

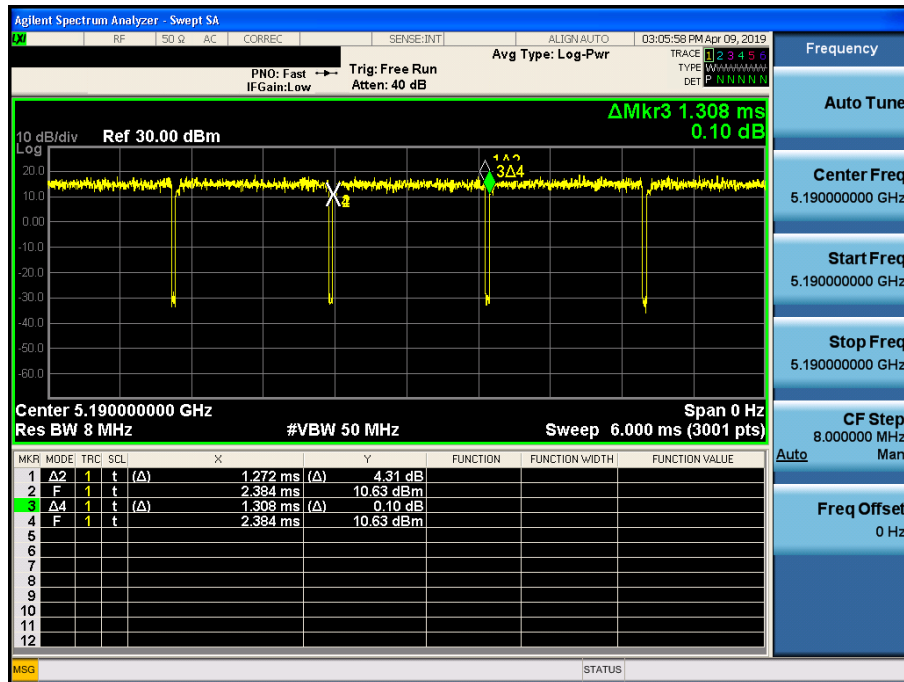

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

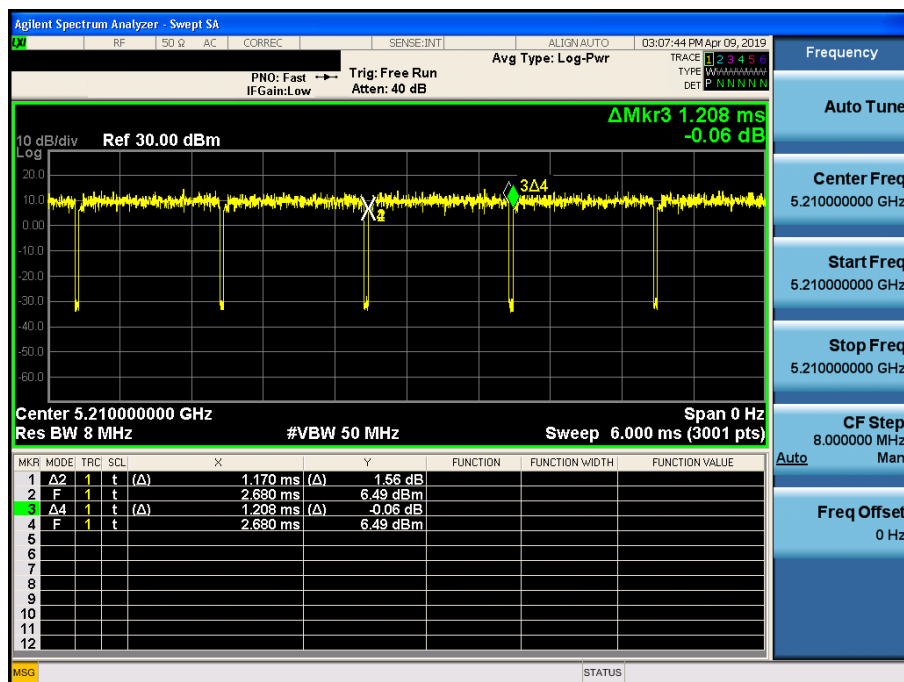

Multiple Transmit _ SDM


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

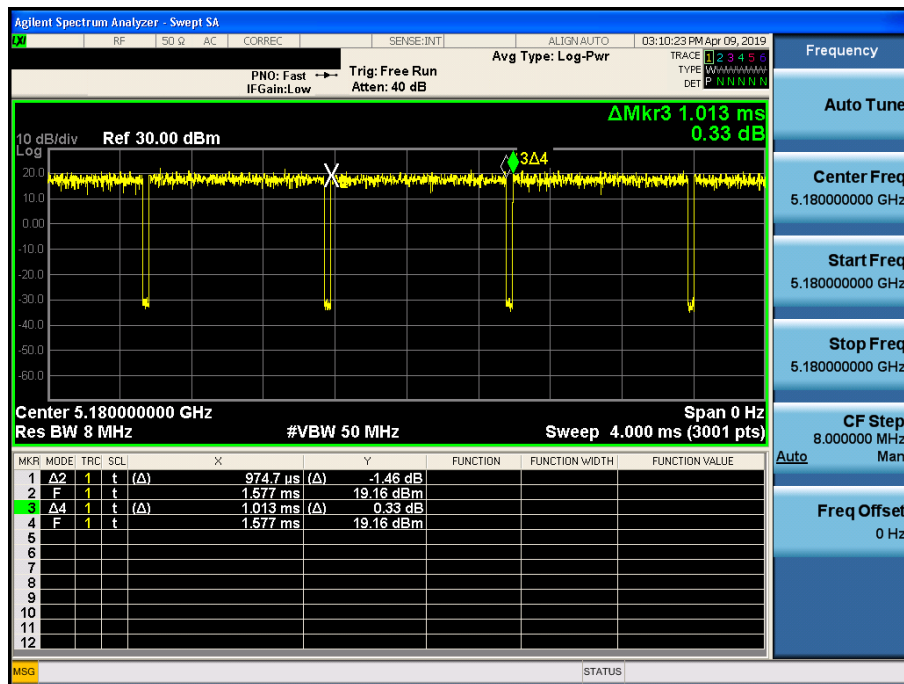


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

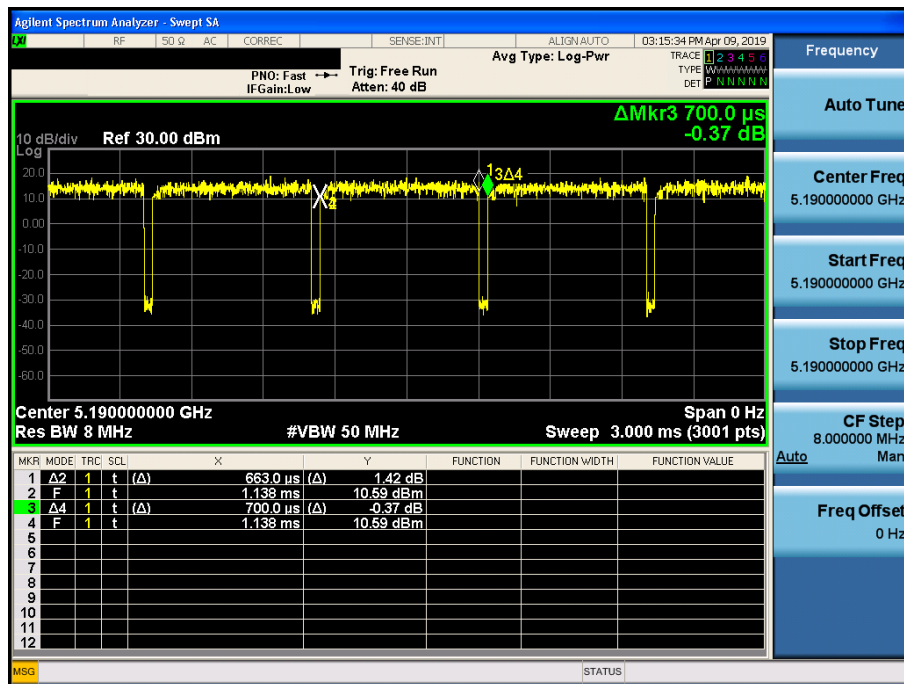

Duty Cycle

Test Mode: 802.11ac VHT80 & Ch.42

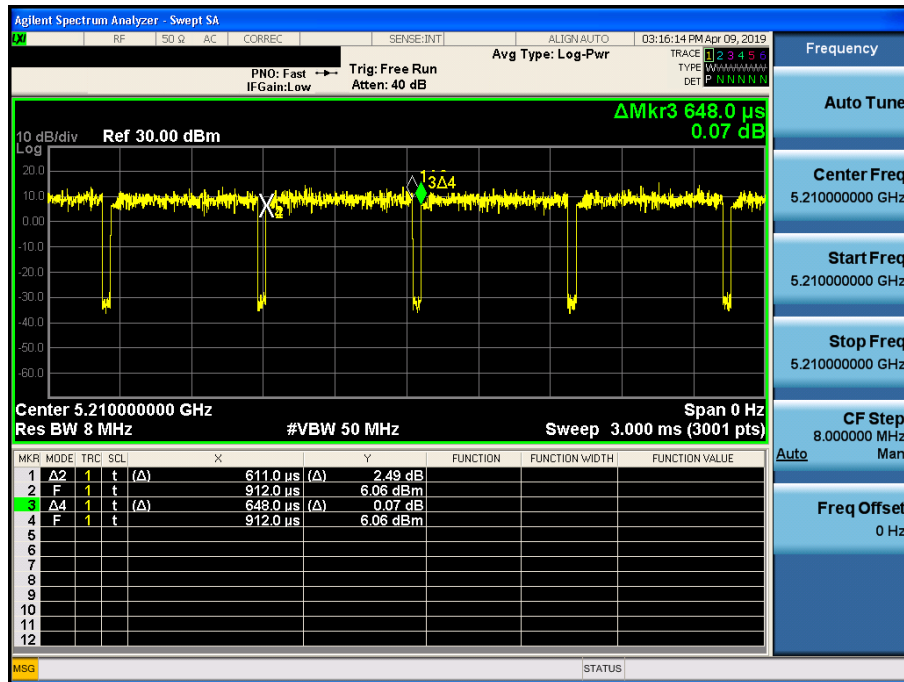


APPENDIX III

Unwanted Emissions (Radiated) Test Plot: MIMO(CDD)


802.11a & U-NII 1 & Ch.36 & Y axis & Hor

Detector Mode : PK

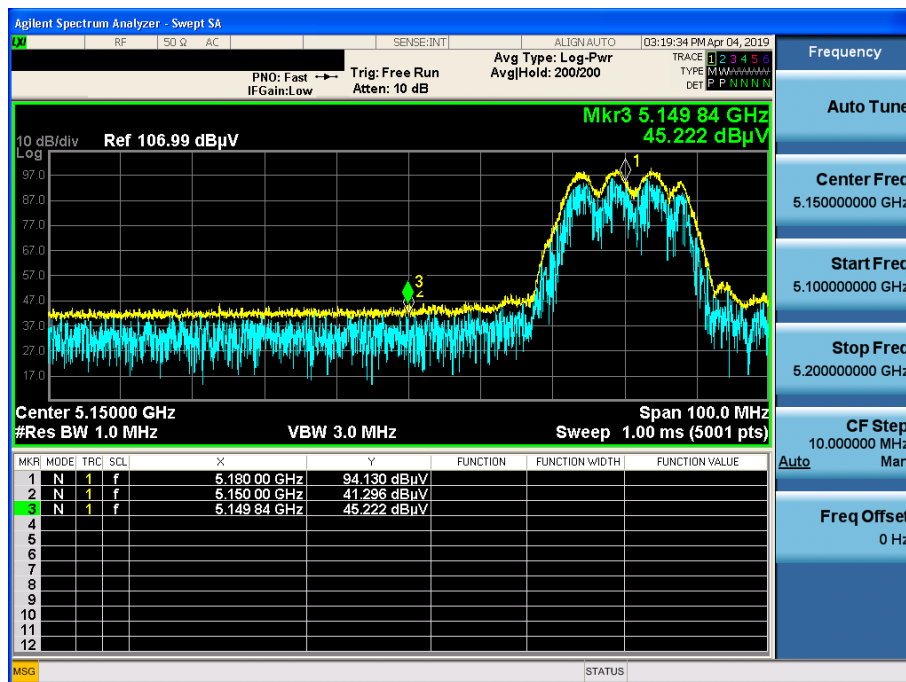


802.11a & U-NII 1 & Ch.36 & Y axis & Hor

Detector Mode : AV

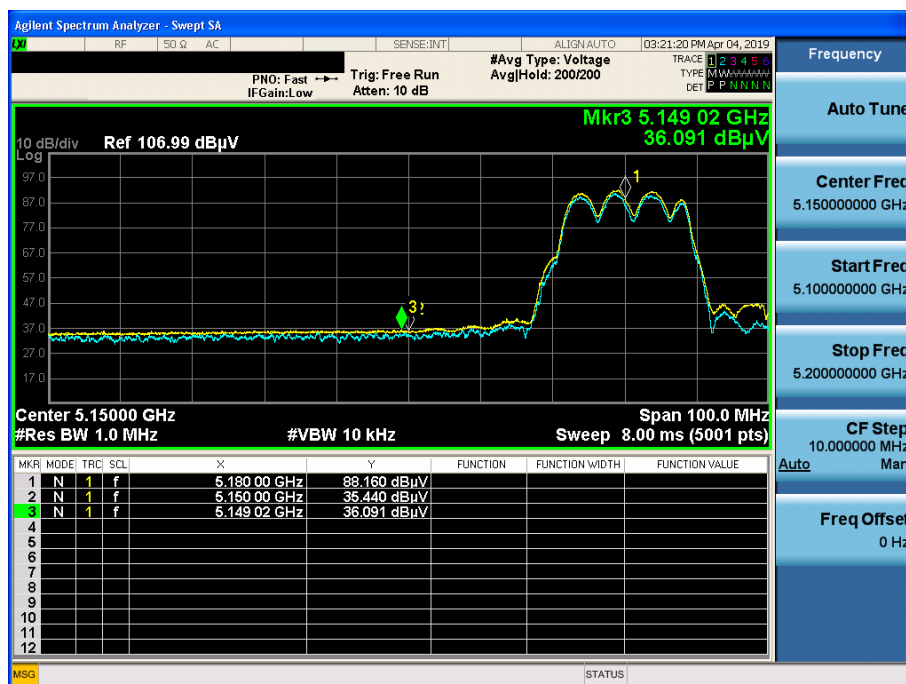


802.11a & U-NII 1 & Ch.36 & Y axis & Ver

Detector Mode : PK

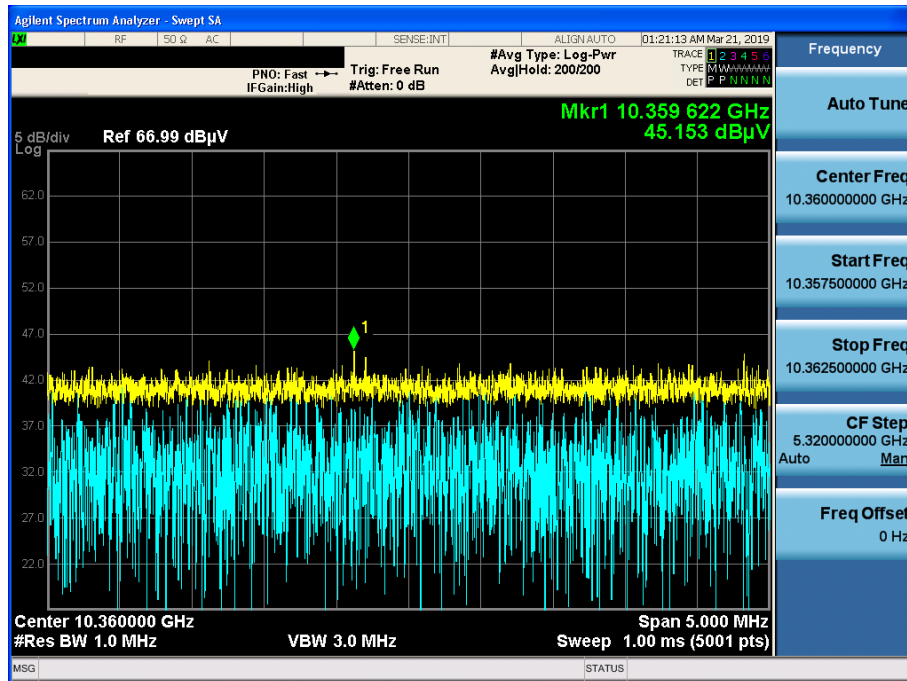


802.11a & U-NII 2A & Ch.64 & Y axis & Hor

Detector Mode : PK

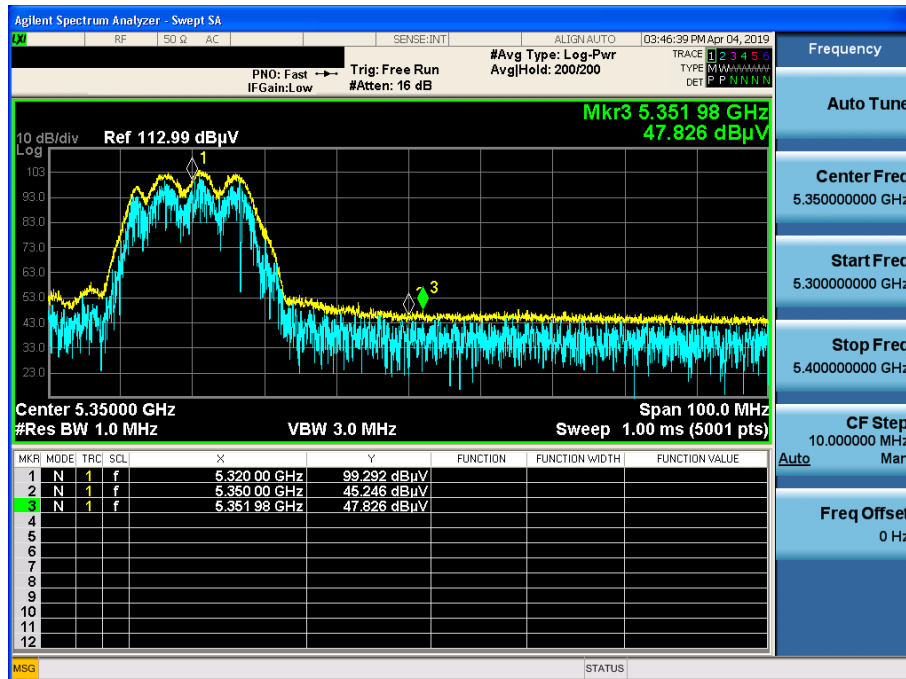


802.11a & U-NII 2A & Ch.64 & Y axis & Hor

Detector Mode : AV

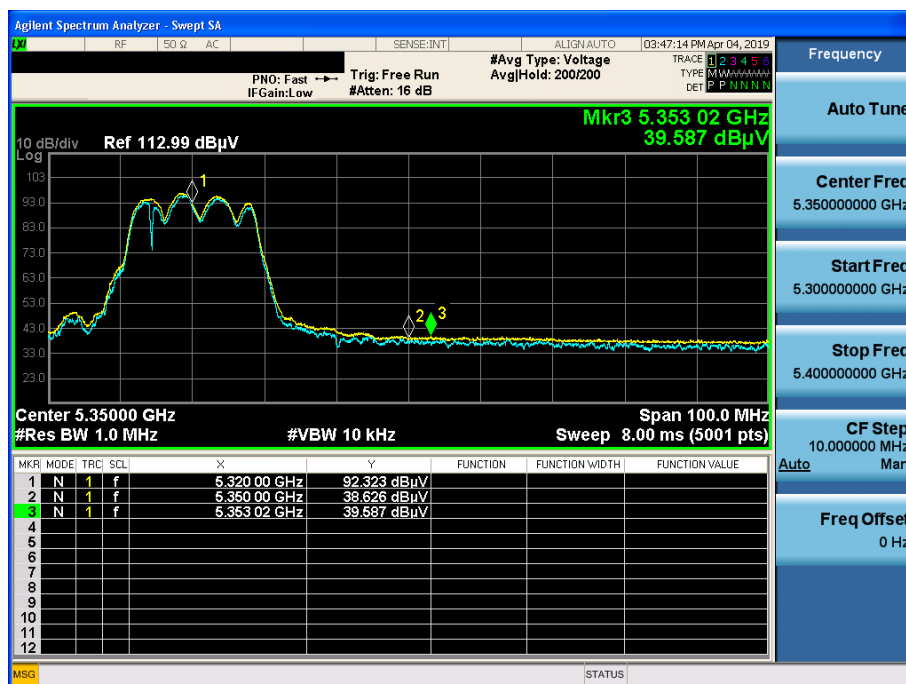


802.11a & U-NII 2A & Ch.64 & Y axis & Ver

Detector Mode : AV

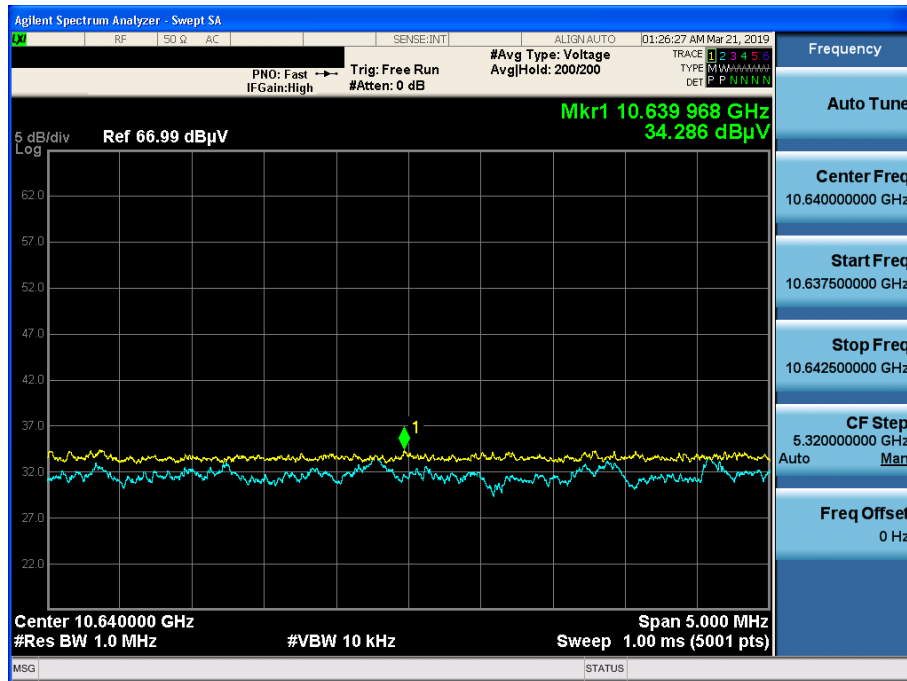


802.11a & U-NII 2C & Ch.100 & Y axis & Hor

Detector Mode : PK

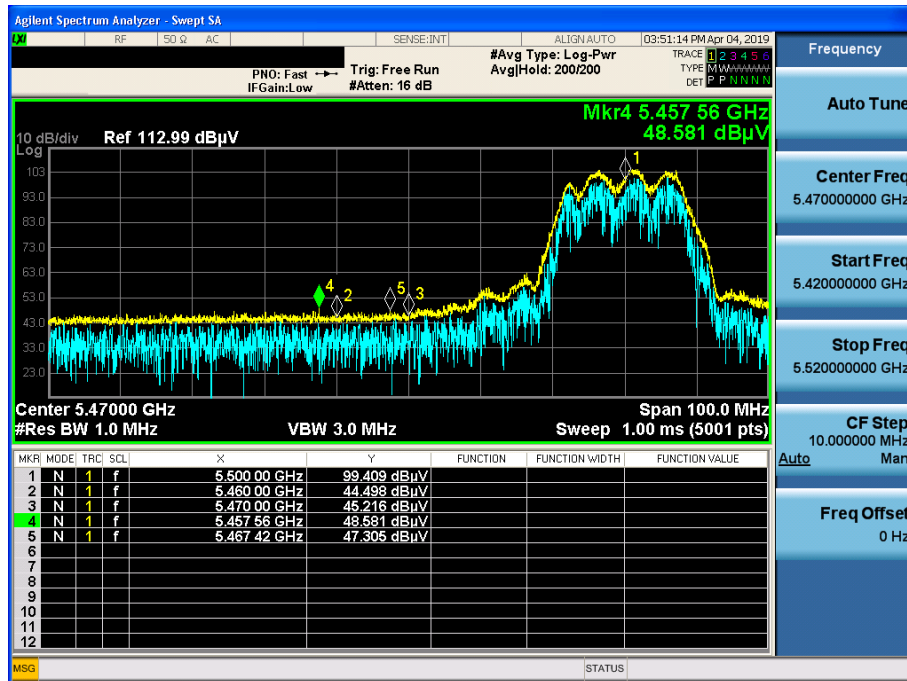


802.11a & U-NII 2C & Ch.100 & Y axis & Hor

Detector Mode : AV

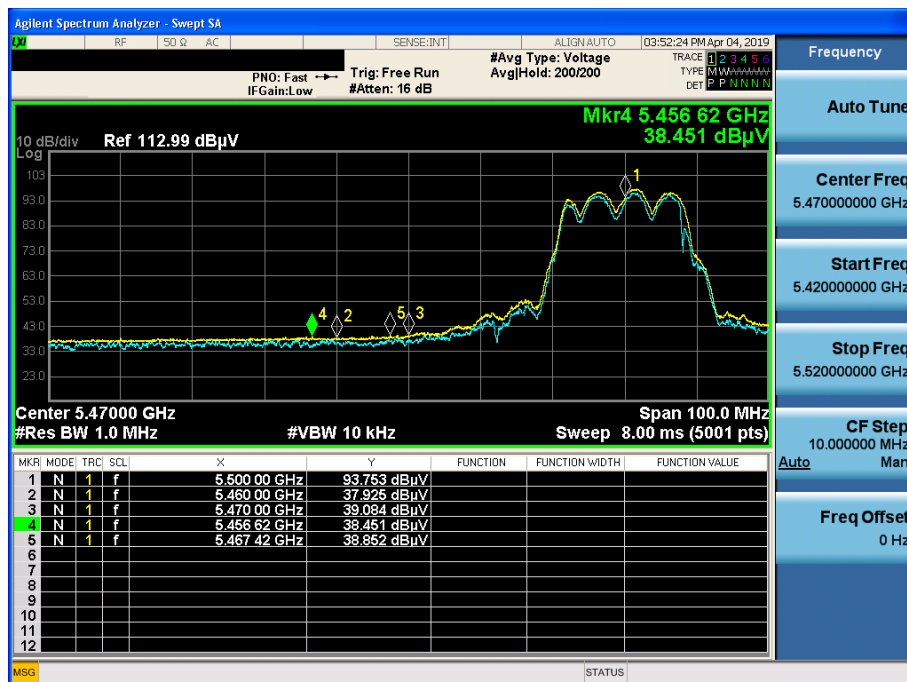


802.11a & U-NII 2C & Ch.144 & Y axis & Ver

Detector Mode : AV

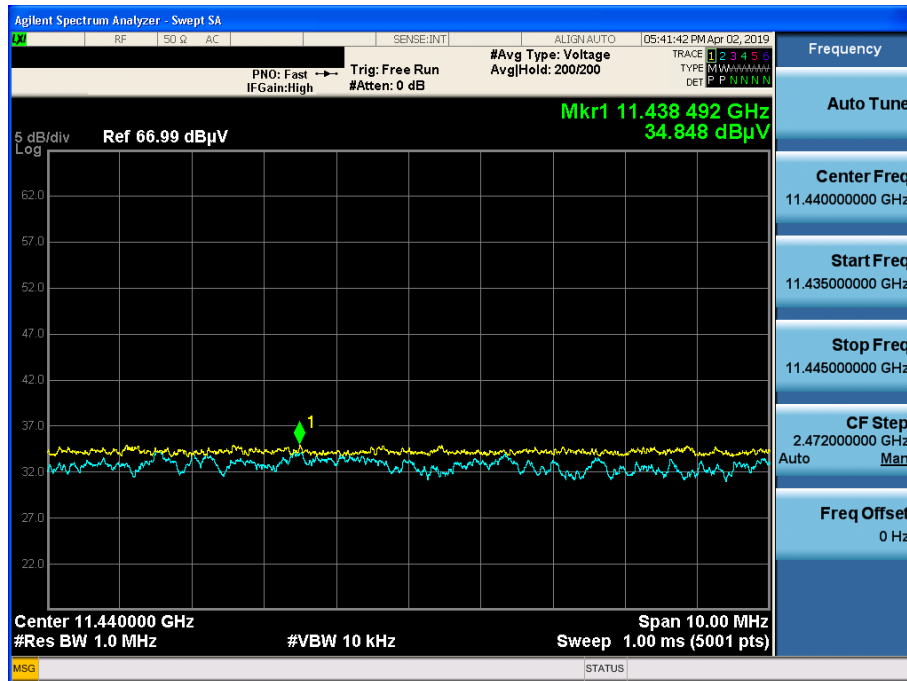


802.11a & U-NII 3 & Ch.149 & Y axis & Hor

Detector Mode : PK

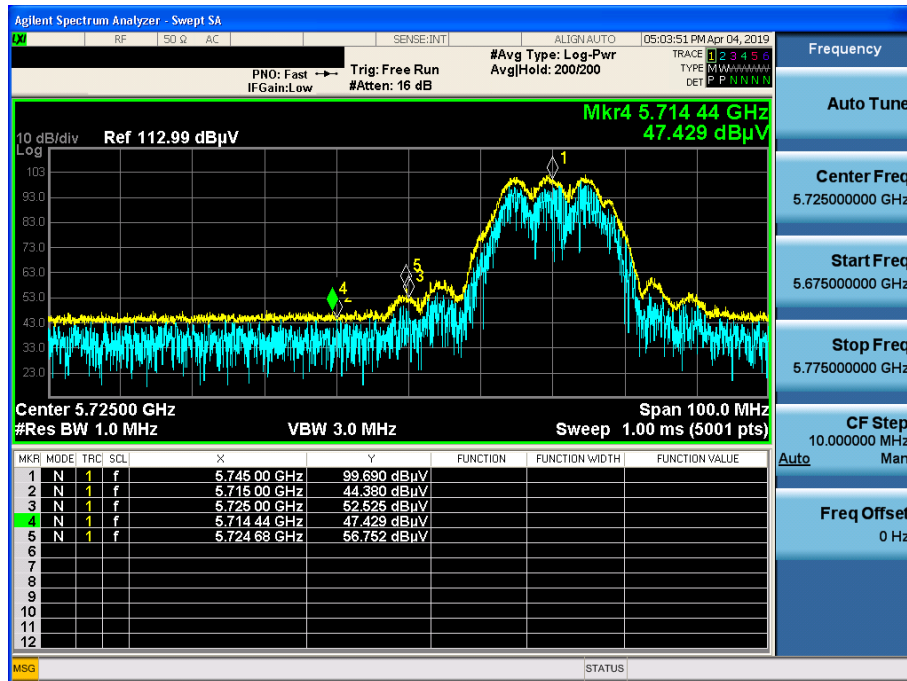


802.11a & U-NII 3 & Ch.165 & Y axis & Hor

Detector Mode : PK

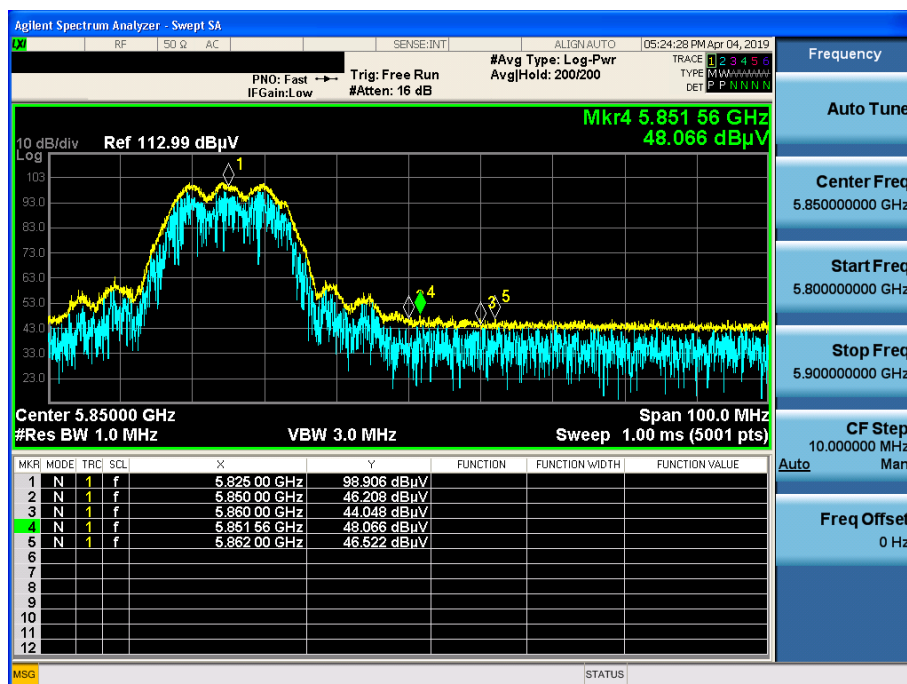


802.11a & U-NII 3 & Ch.165 & Y axis & Ver

Detector Mode : AV

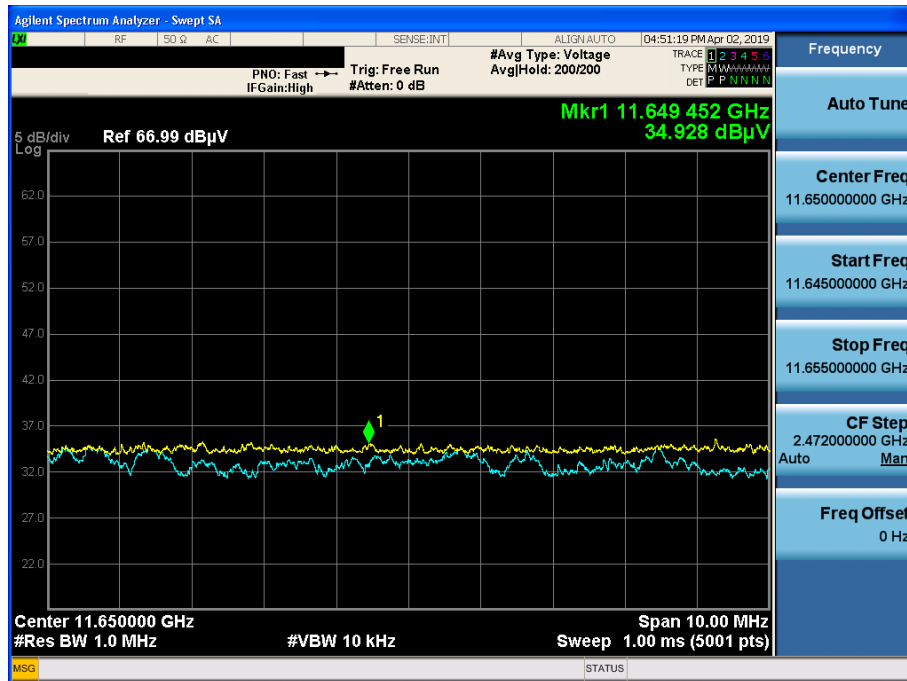


802.11ac(VHT20) & U-NII 1 & Ch.36 & Y axis & Hor

Detector Mode : PK

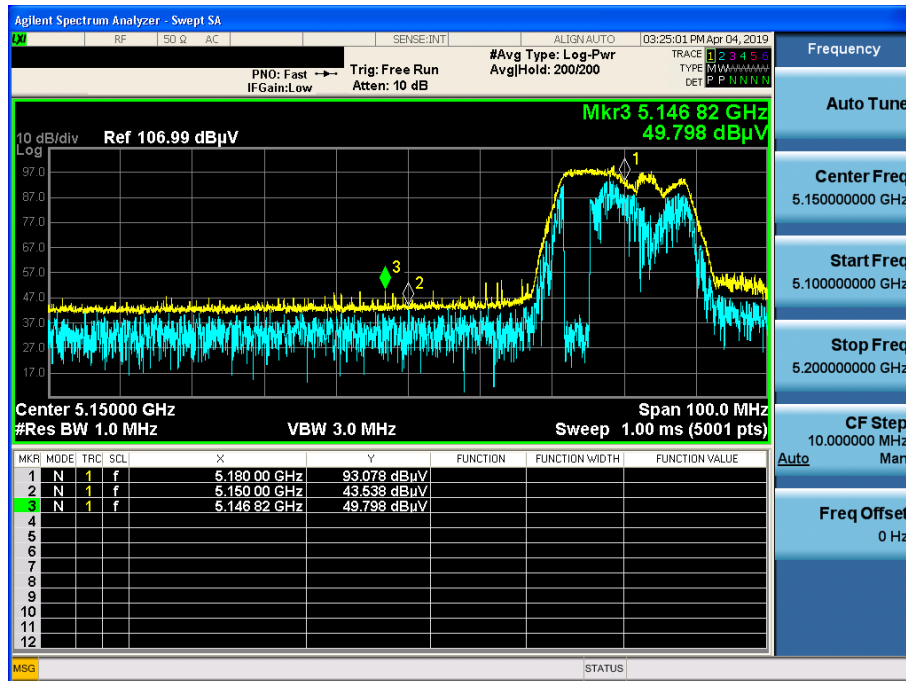


802.11ac(VHT20) & U-NII 1 & Ch.36 & Y axis & Hor


Detector Mode : AV

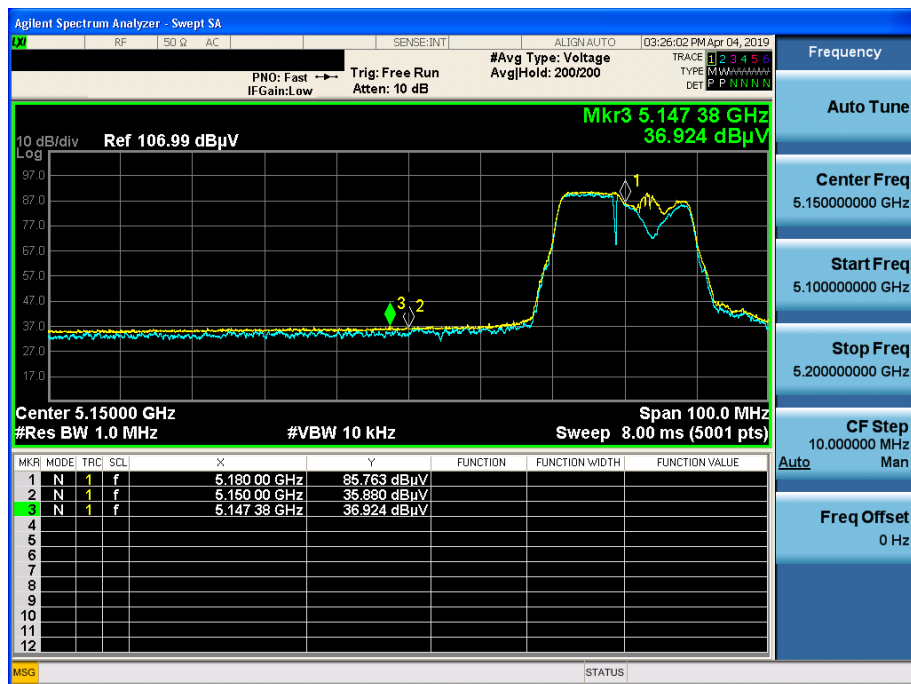


Detector Mode : PK

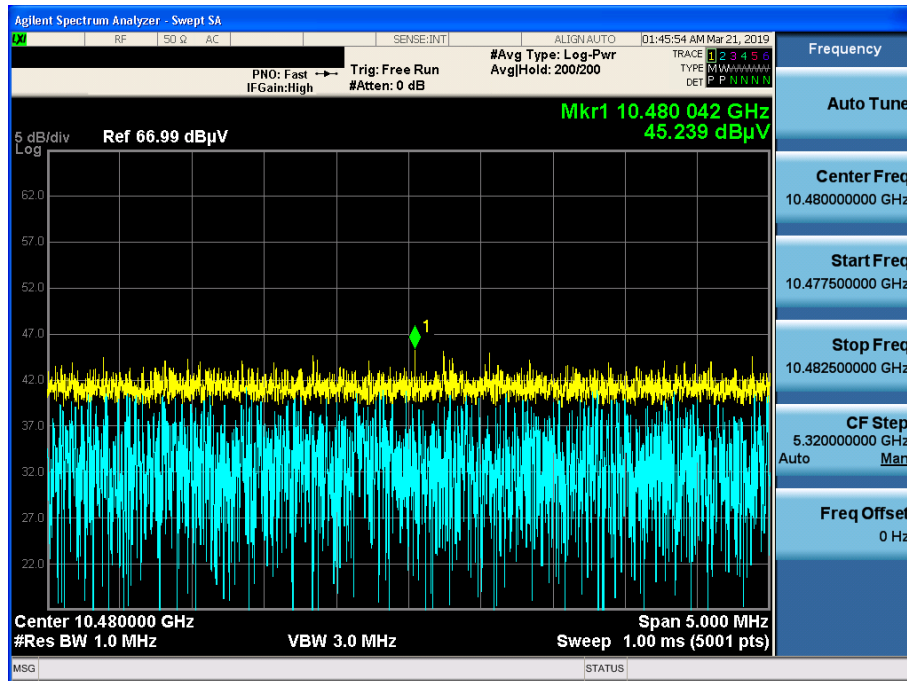

Detector Mode : PK

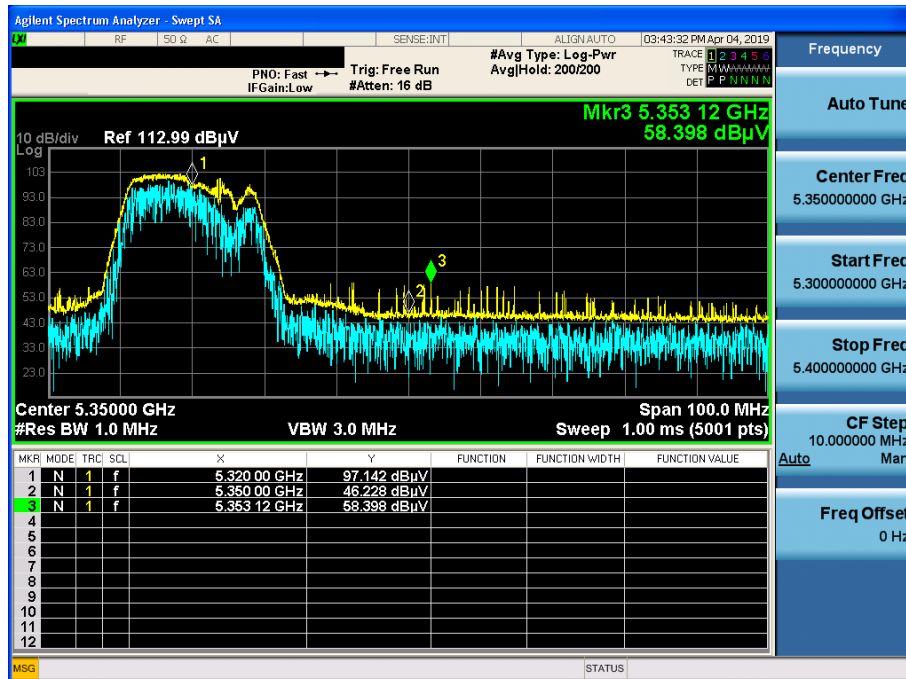


Detector Mode : AV

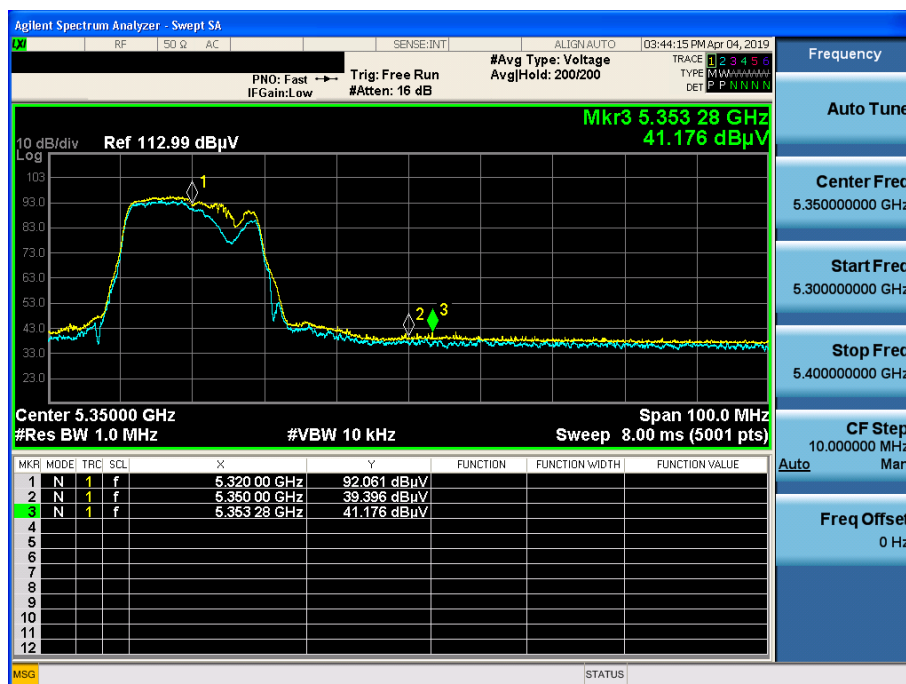


802.11ac(VHT20) & U-NII 2A & Ch.64 & Y axis & Ver


Detector Mode : AV

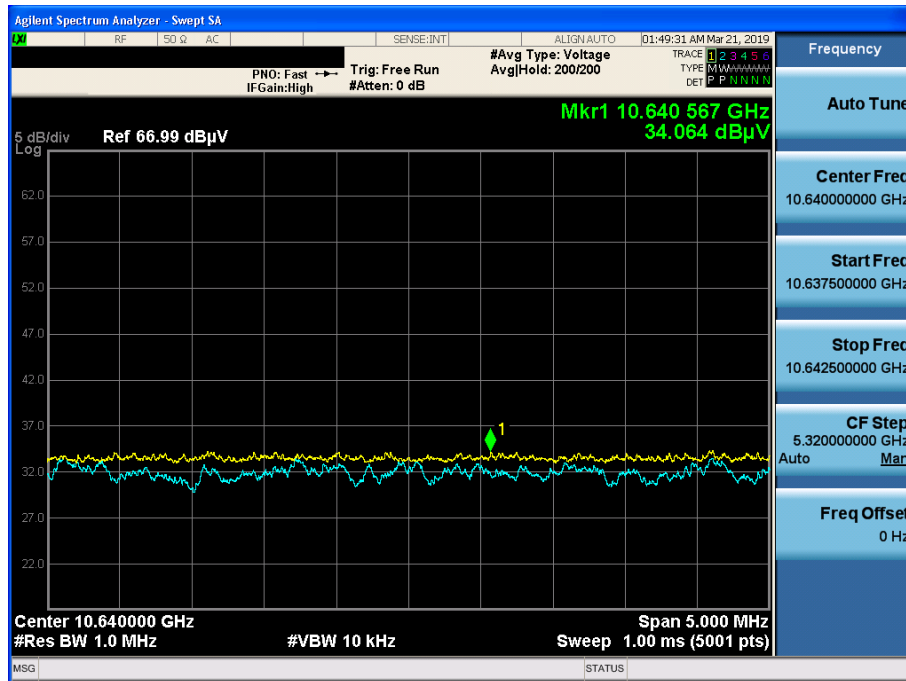

Detector Mode : PK

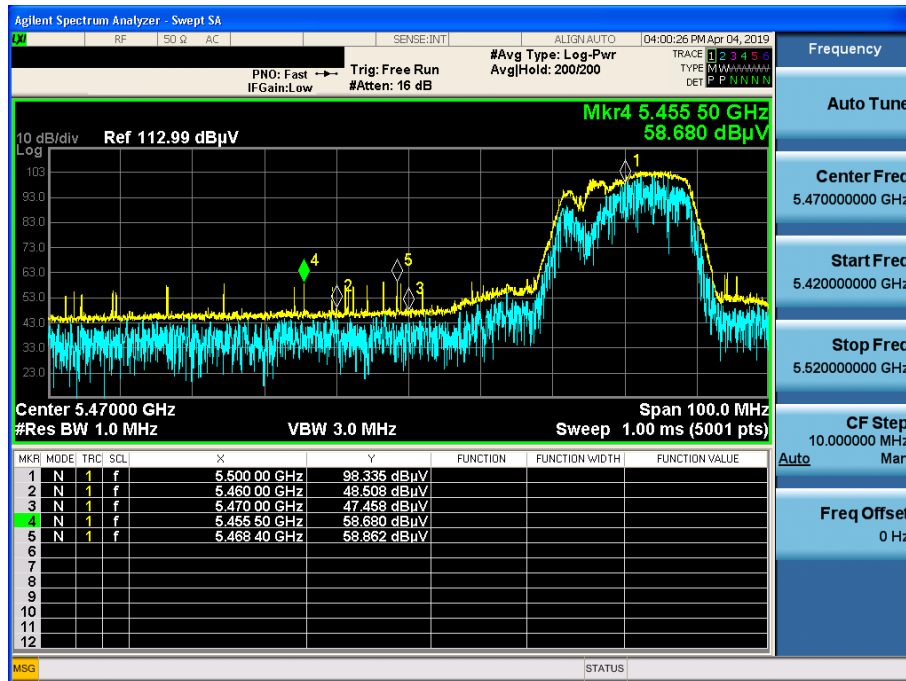


Detector Mode : AV

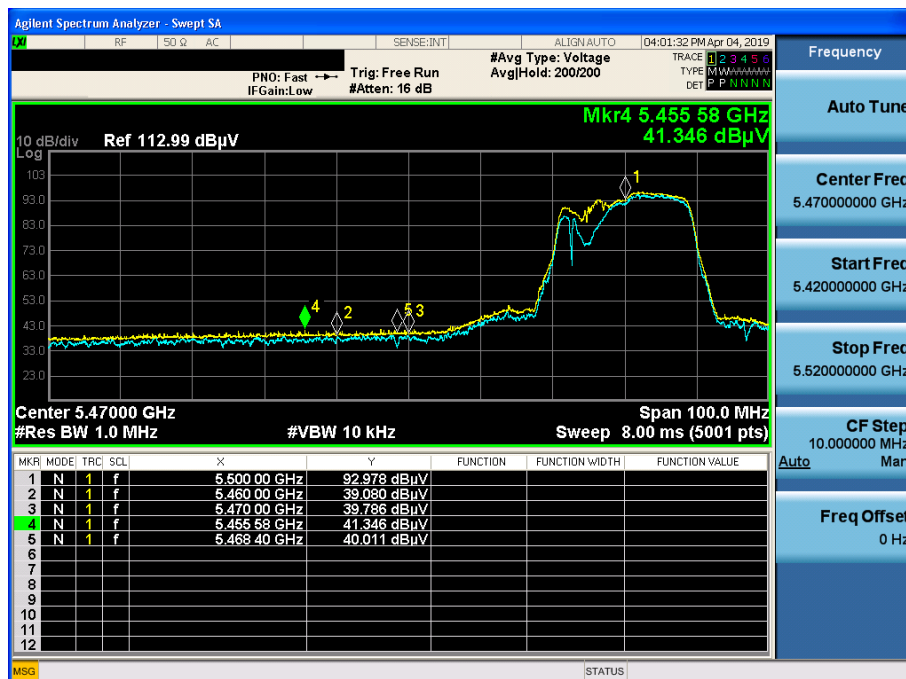


802.11ac(VHT20) & U-NII 2C & Ch.144 & Y axis & Ver

Detector Mode : AV

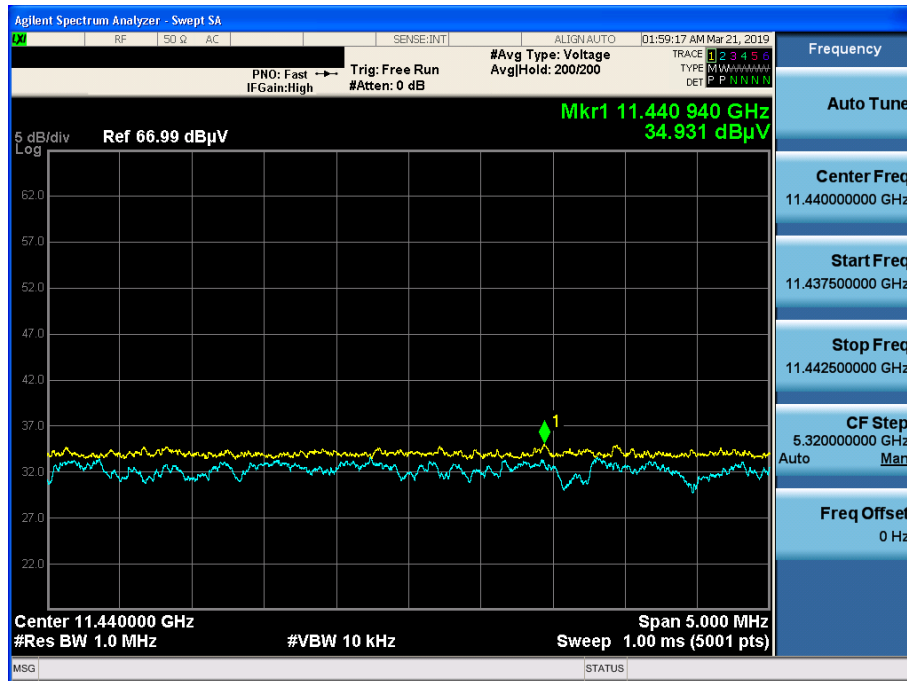


802.11ac(VHT20) & U-NII 3 & Ch.149 & Y axis & Hor

Detector Mode : PK

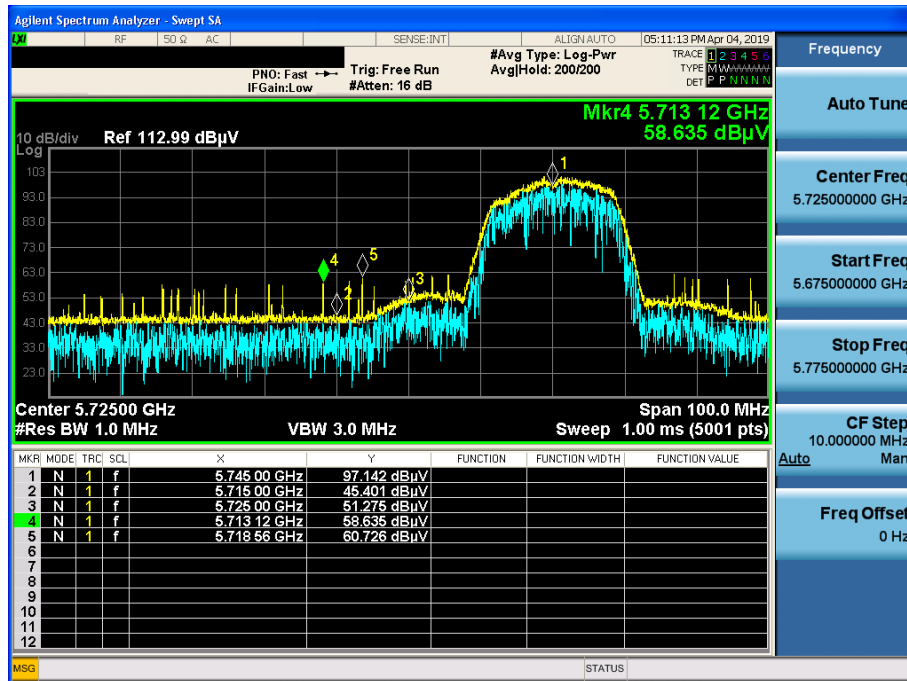


802.11ac(VHT20) & U-NII 3 & Ch.165 & Y axis & Hor

Detector Mode : PK

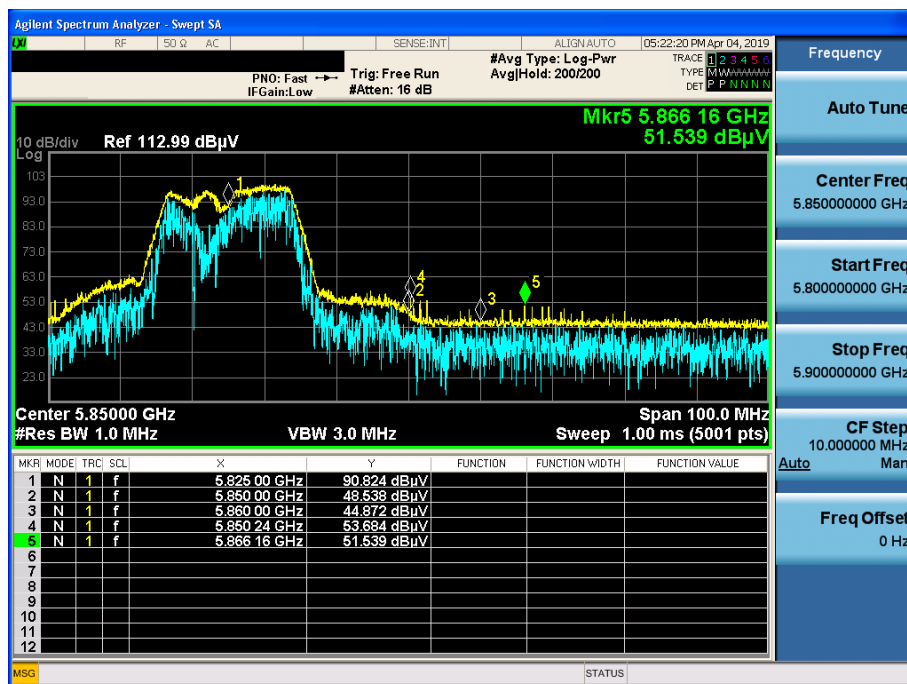


802.11ac(VHT20) & U-NII 3 & Ch.165 & Y axis & Ver

Detector Mode : AV

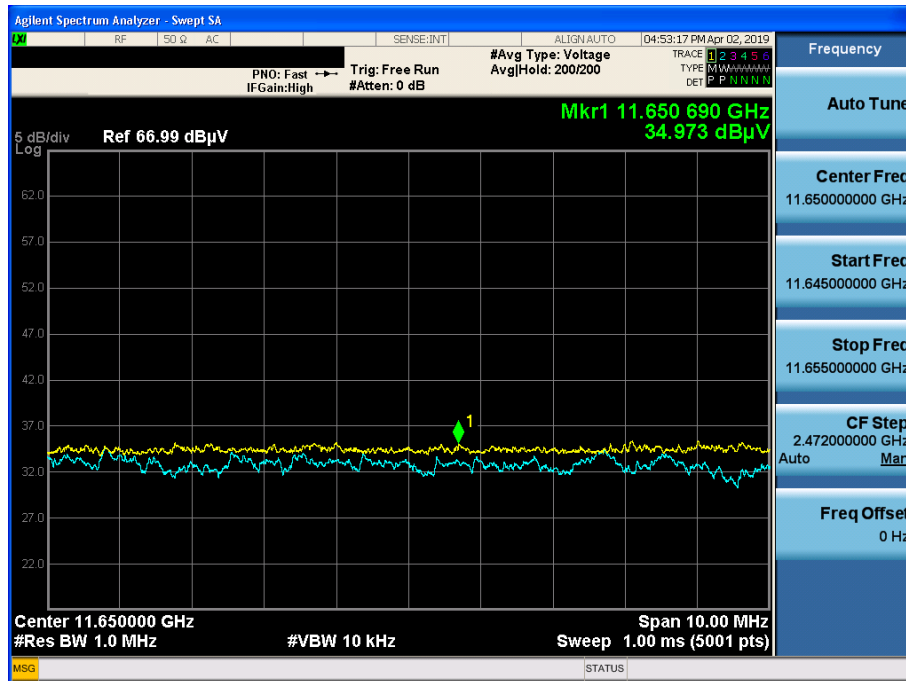


802.11ac(VHT40) & U-NII 1 & Ch.38 & Y axis & Hor

Detector Mode : PK

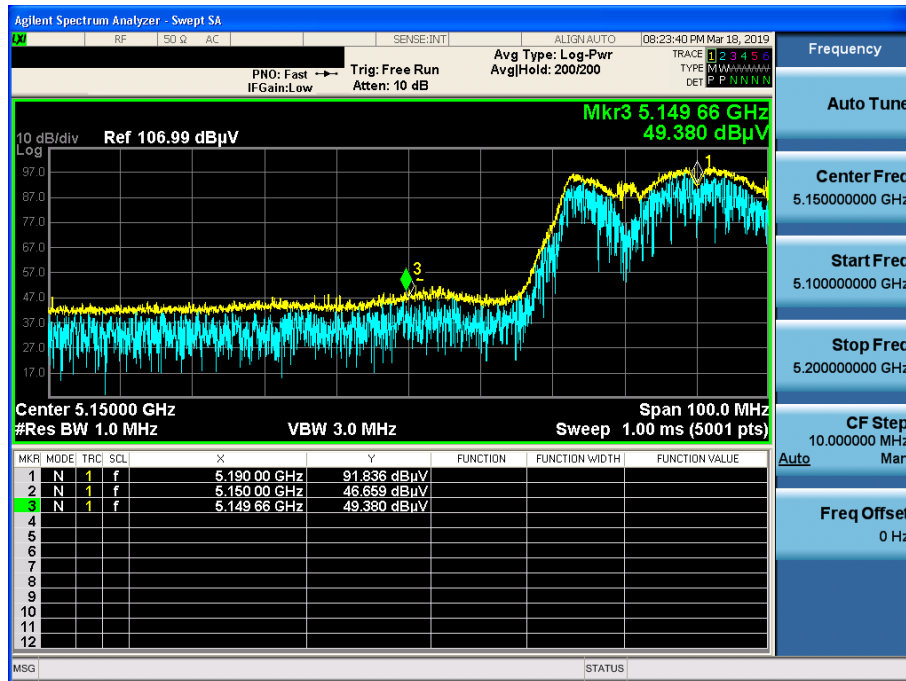


802.11ac(VHT40) & U-NII 1 & Ch.38 & Y axis & Hor

Detector Mode : AV

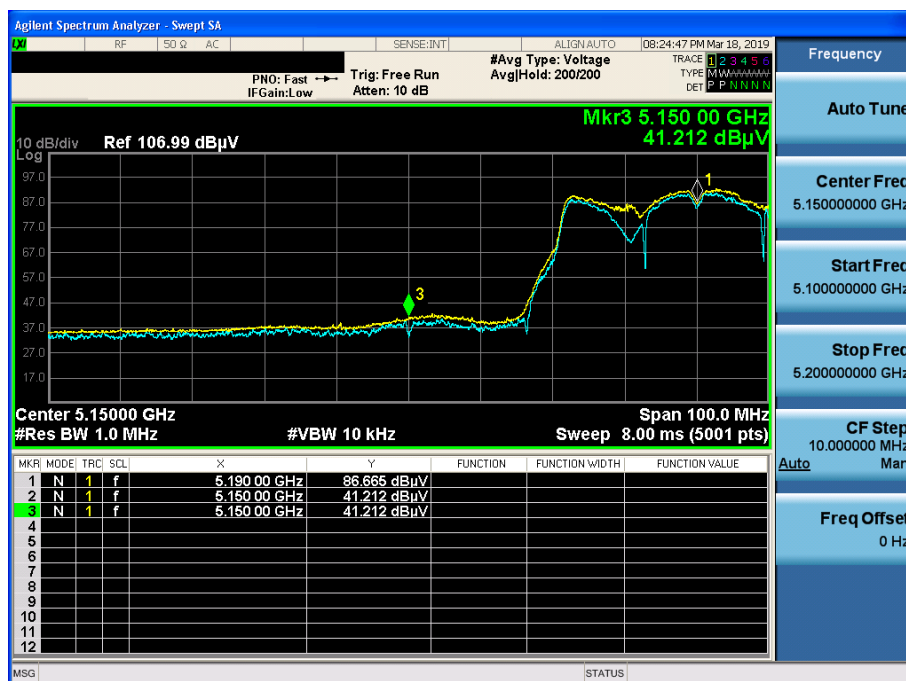


802.11ac(VHT40) & U-NII 1 & Ch.46 & Y axis & Ver

Detector Mode : PK

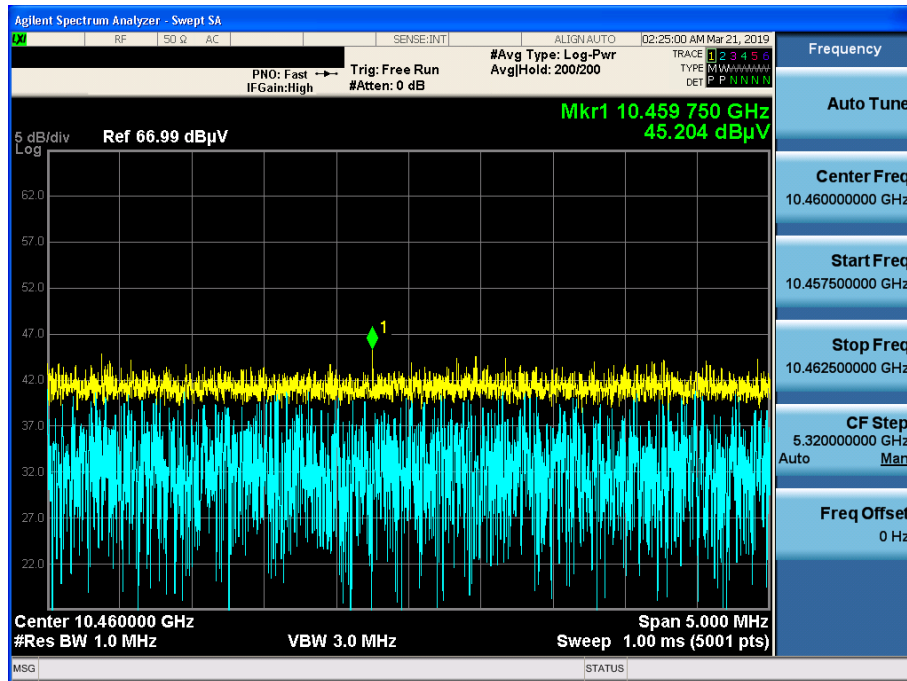


802.11ac(VHT40) & U-NII 2A & Ch.62 & Y axis & Hor

Detector Mode : PK

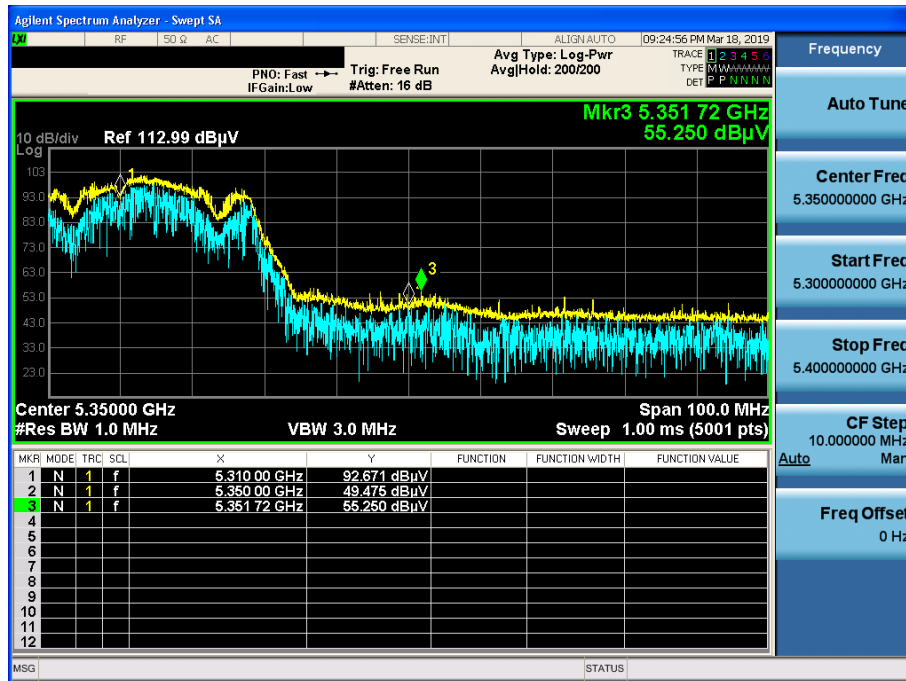


802.11ac(VHT40) & U-NII 2A & Ch.62 & Y axis & Hor

Detector Mode : AV

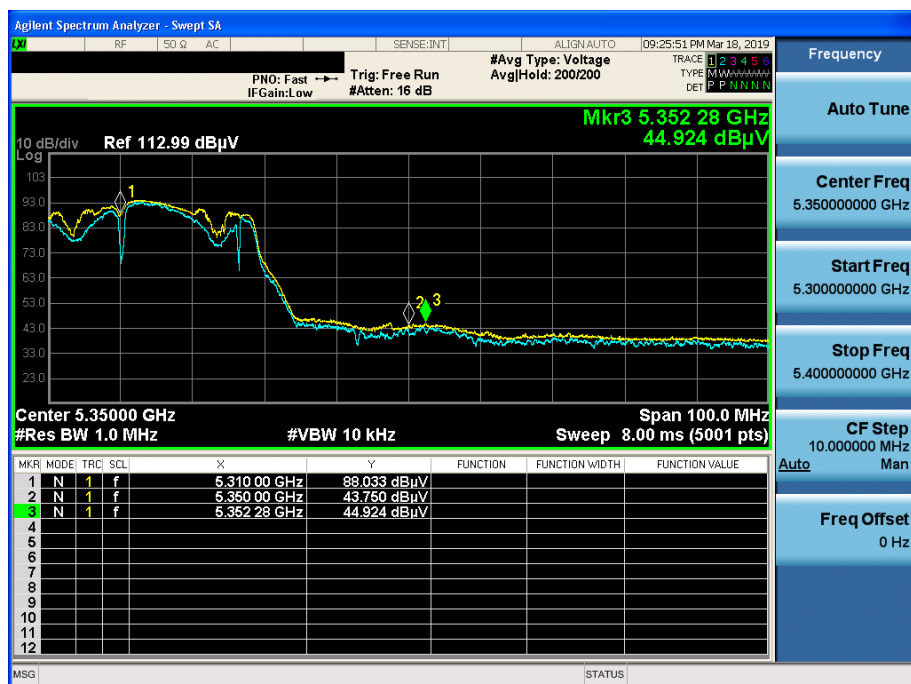


802.11ac(VHT40) & U-NII 2A & Ch.62 & Y axis & Ver


Detector Mode : AV

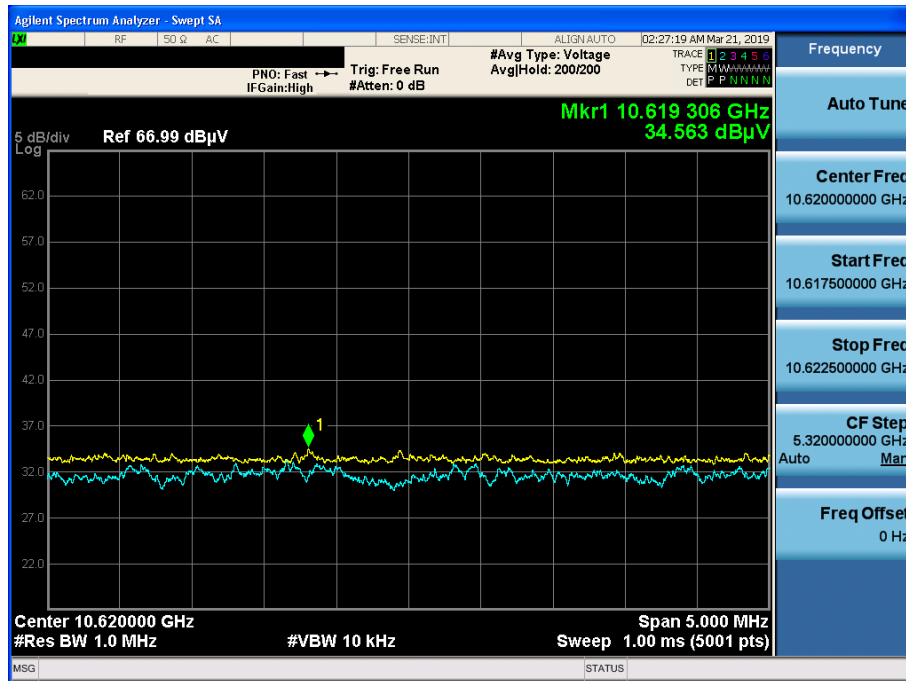

Detector Mode : PK

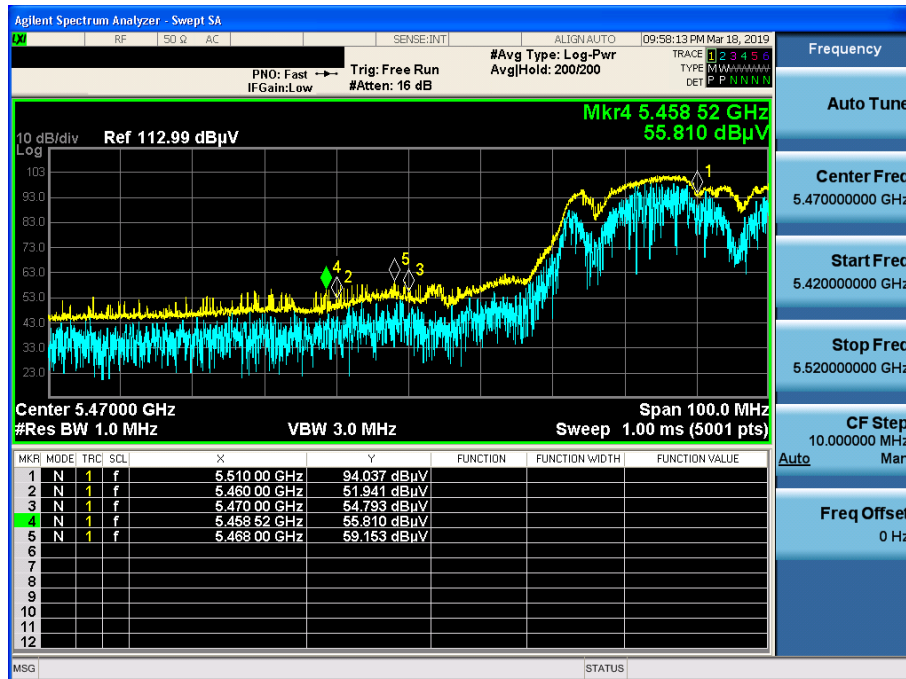


Detector Mode : AV

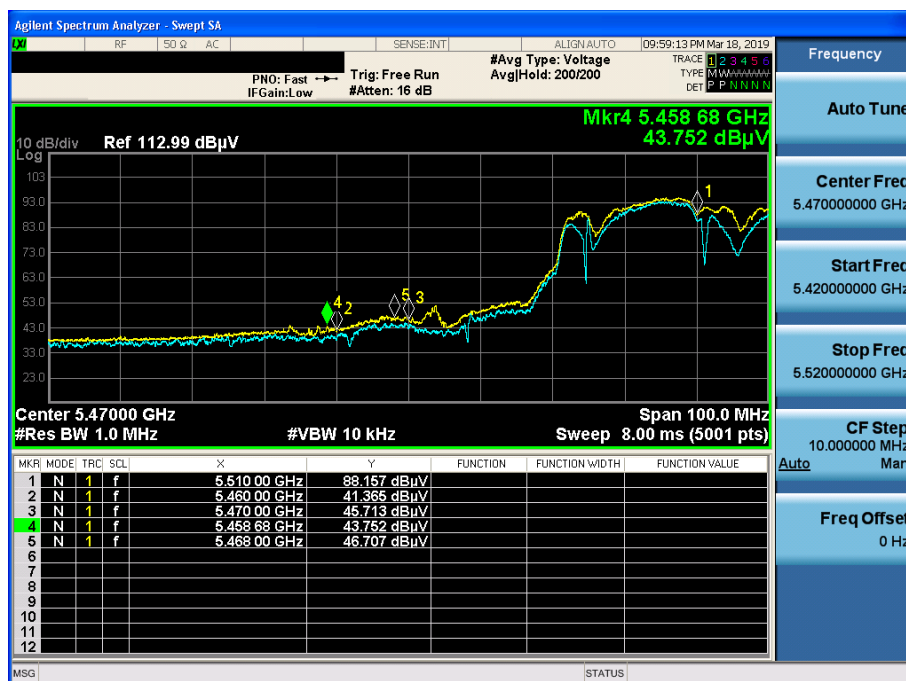


802.11ac(VHT40) & U-NII 2C & Ch.118 & Y axis & Ver


Detector Mode : AV

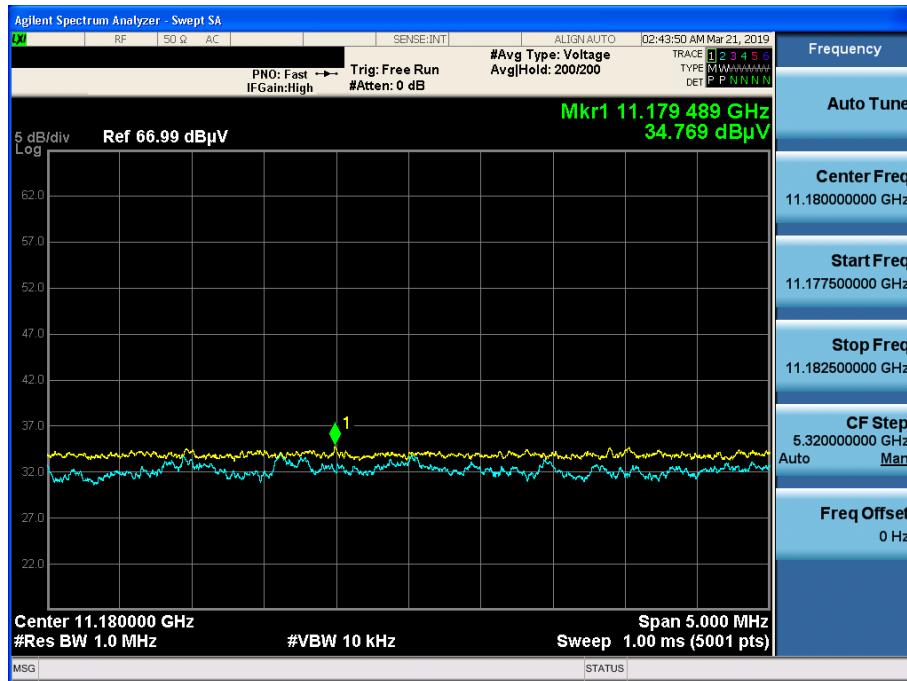

Detector Mode : PK

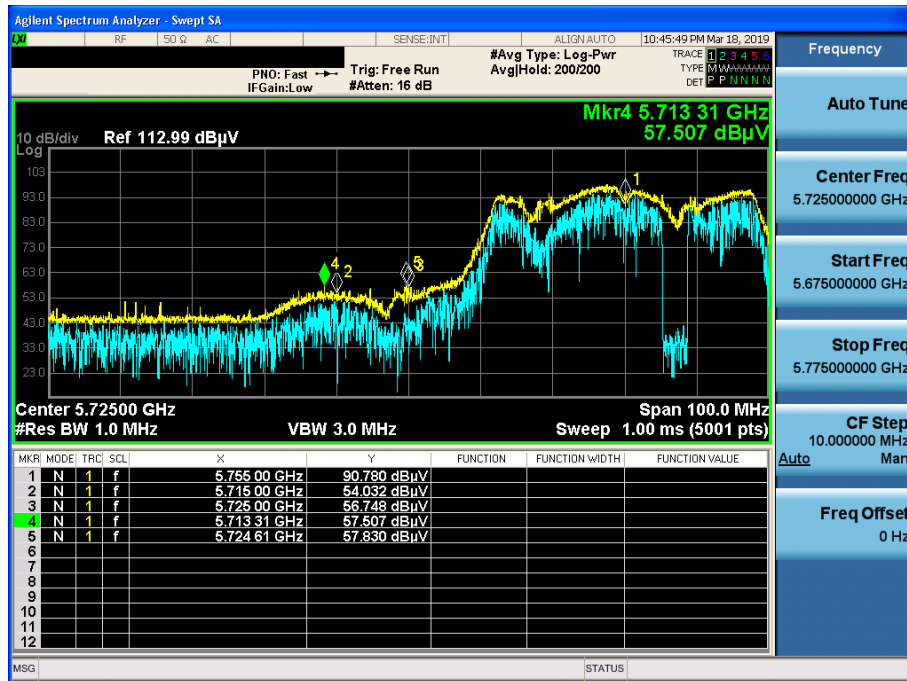


Detector Mode : PK

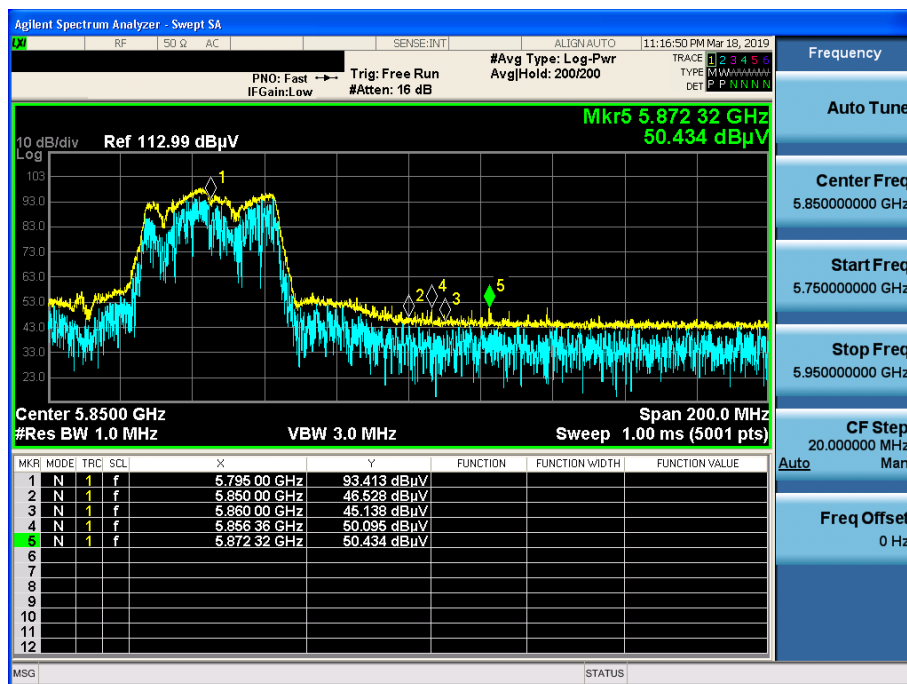


802.11ac(VHT40) & U-NII 3 & Ch.151 & Y axis & Ver

Detector Mode : AV

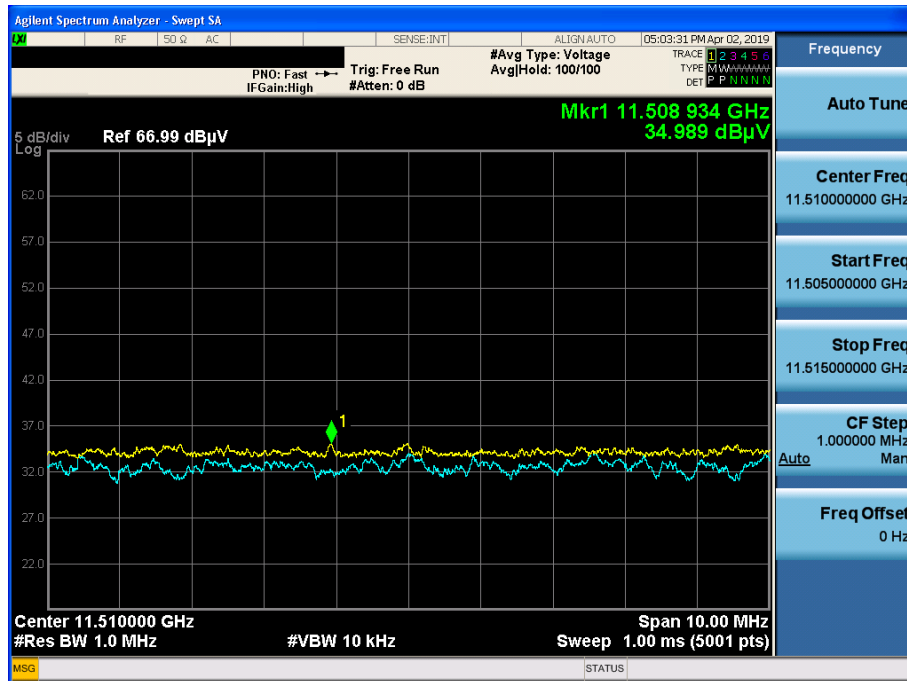


802.11ac(VHT80) & U-NII 1 & Ch.42 & Y axis & Hor

Detector Mode : PK

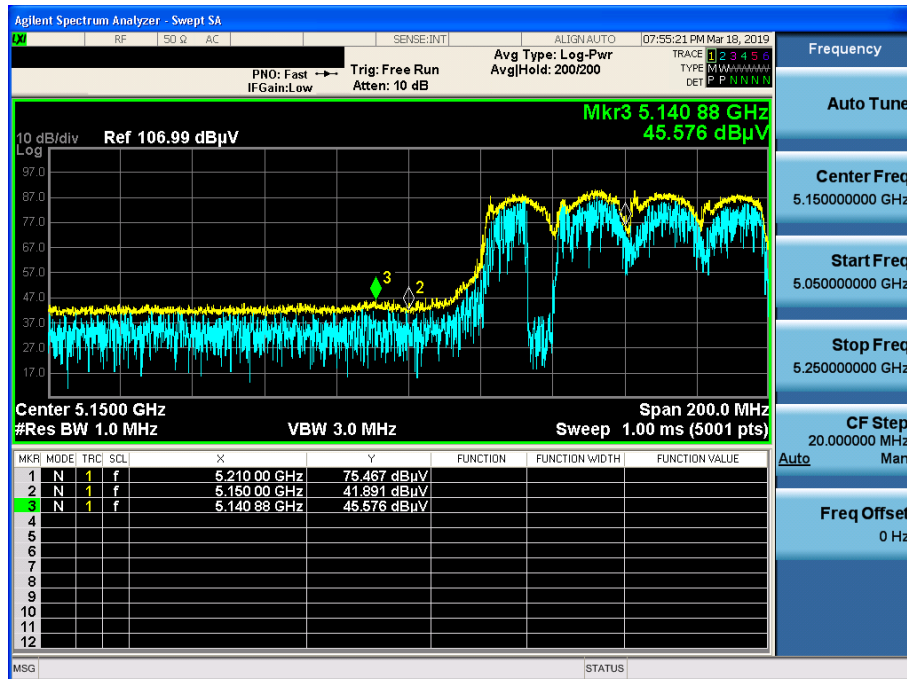


802.11ac(VHT80) & U-NII 1 & Ch.42 & Y axis & Hor

Detector Mode : AV

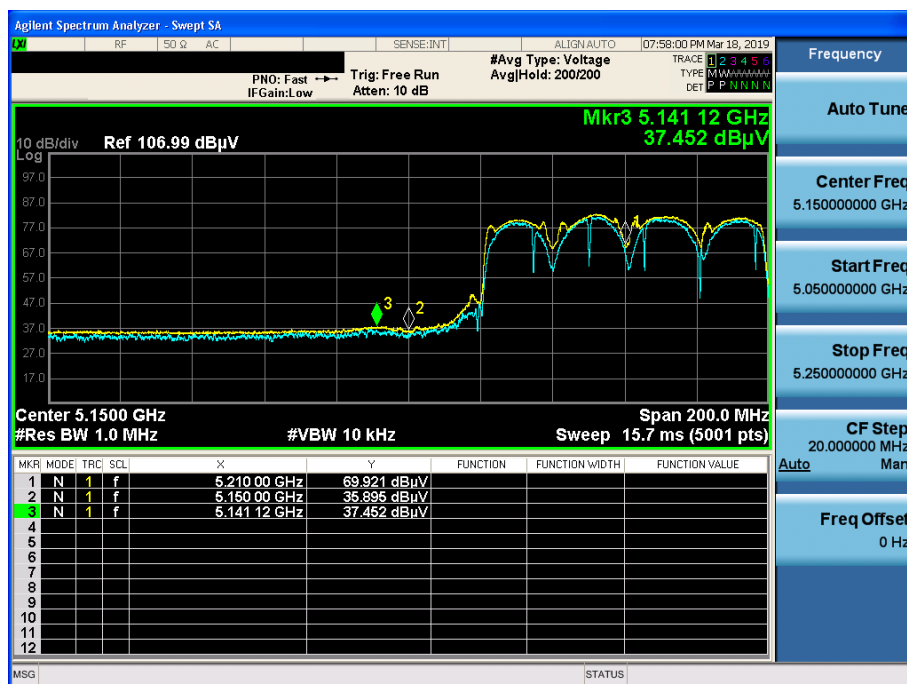


Detector Mode : PK

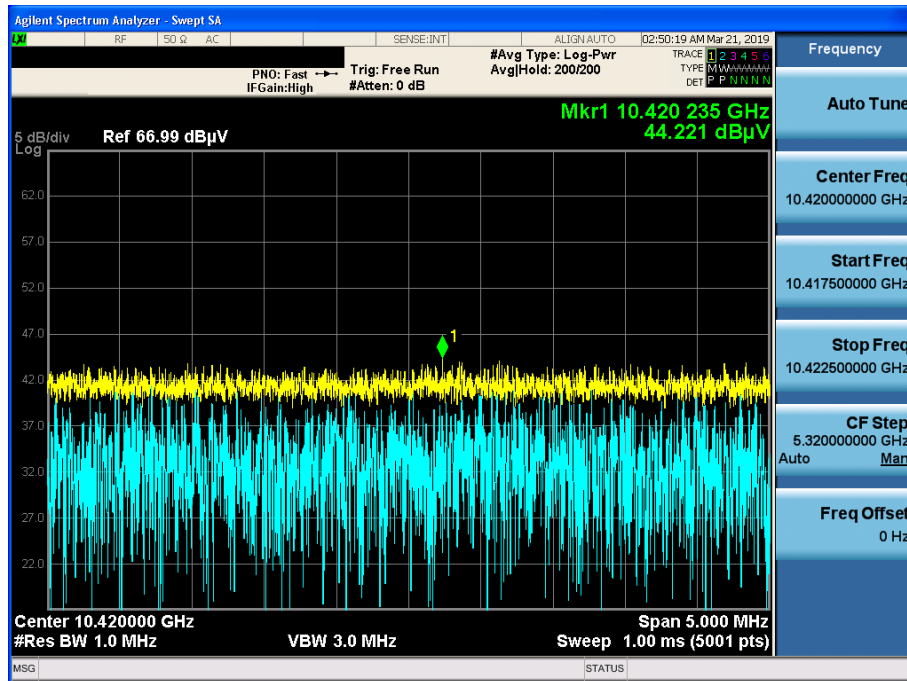


802.11ac(VHT80) & U-NII 3 & Ch.58 & Y axis & Hor

Detector Mode : PK

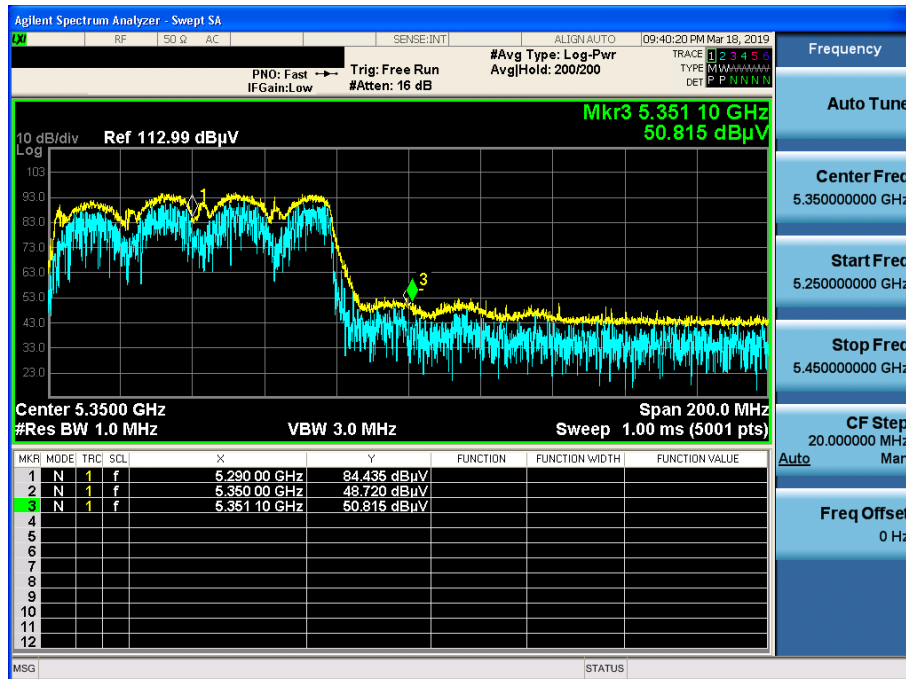


802.11ac(VHT80) & U-NII 3 & Ch.58 & Y axis & Hor

Detector Mode : PK

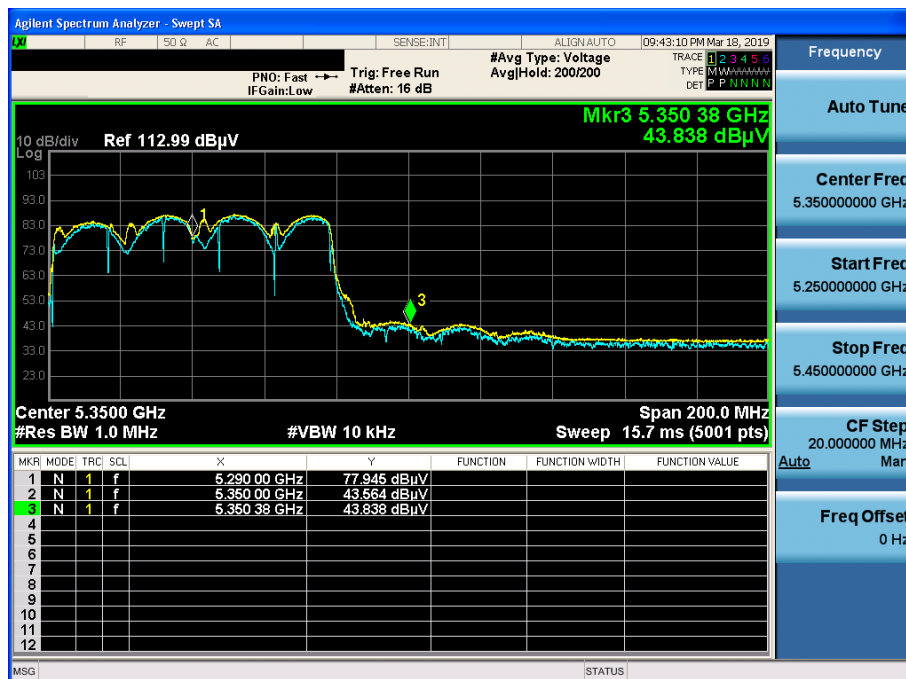


802.11ac(VHT80) & U-NII 3 & Ch.58 & Y axis & Ver

Detector Mode : PK

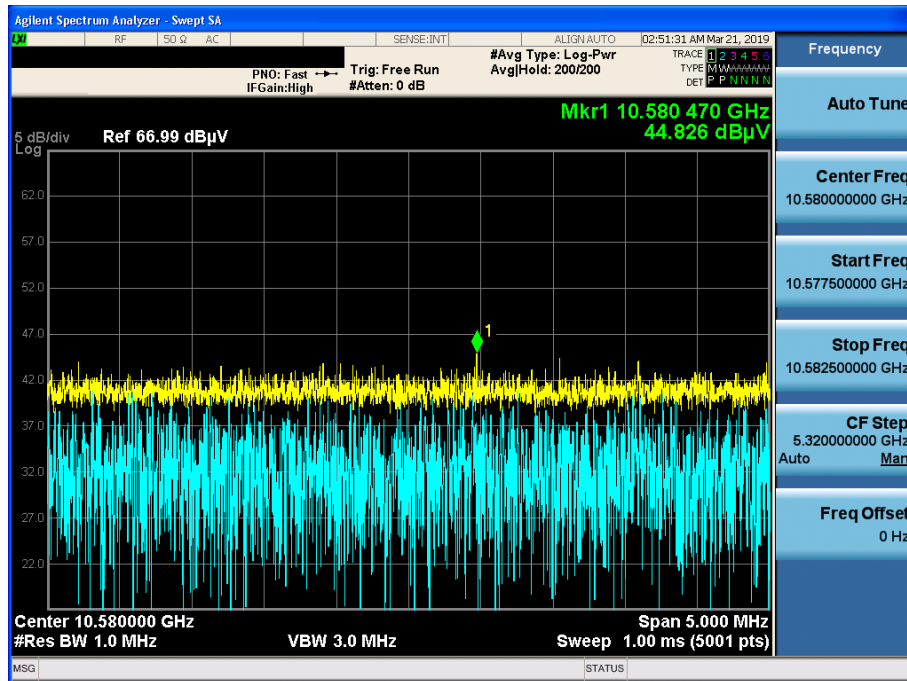


802.11ac(VHT80) & U-NII 2A & Ch.106 & Y axis & Hor

Detector Mode : PK

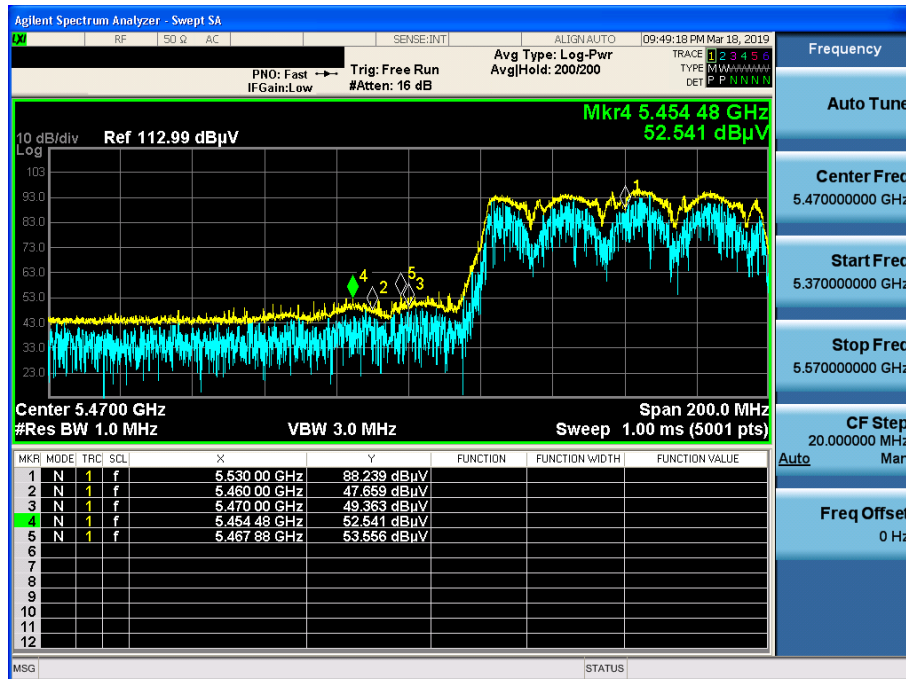


802.11ac(VHT80) & U-NII 2A & Ch.106 & Y axis & Hor

Detector Mode : AV

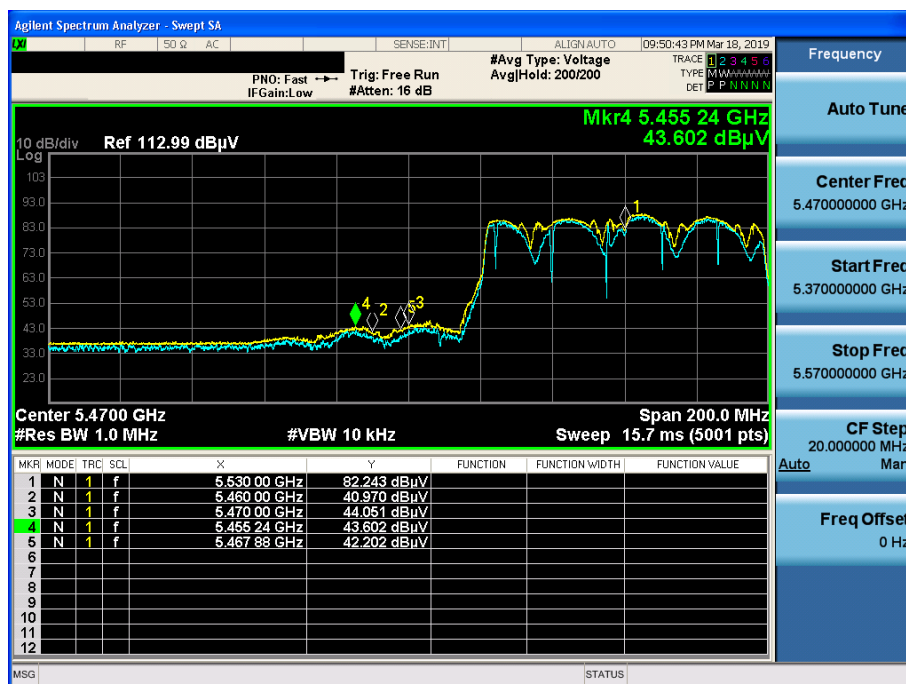


Detector Mode : AV

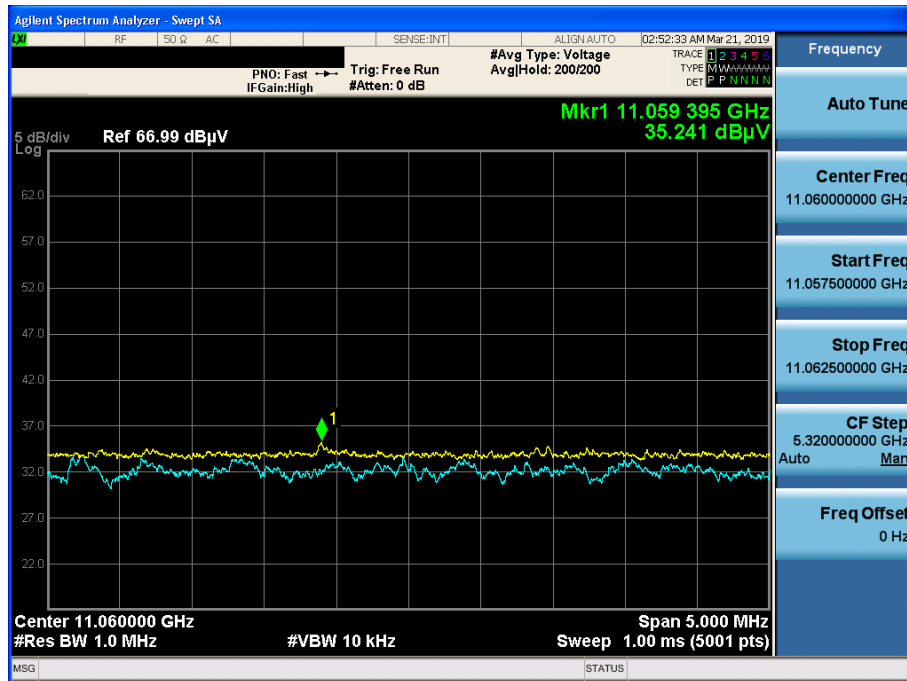


802.11ac(VHT80) & U-NII 2C & Ch.155 & Y axis & Hor

Detector Mode : PK

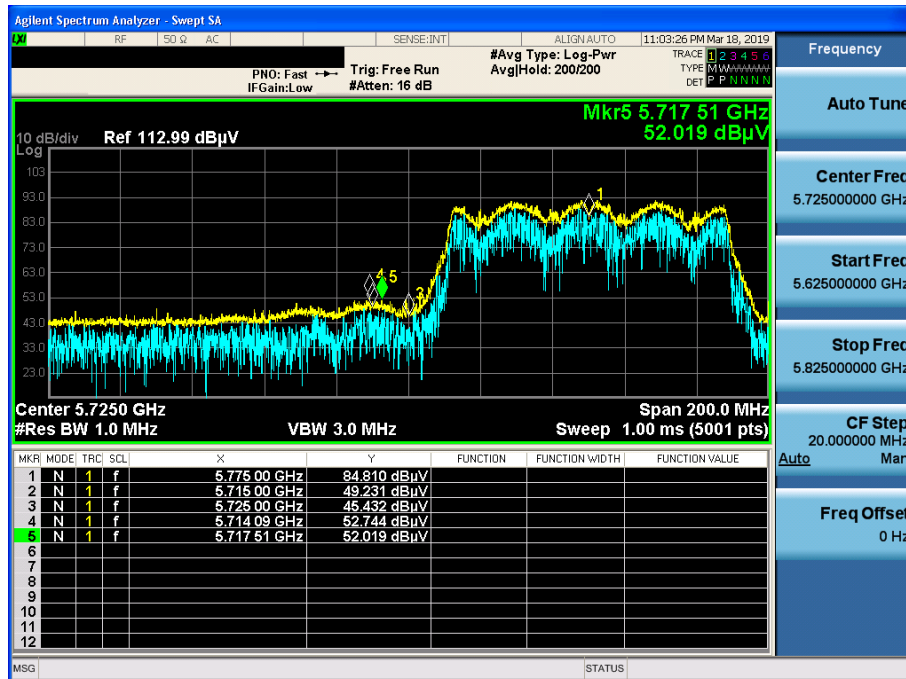


802.11ac(VHT80) & U-NII 2C & Ch.155 & Y axis & Hor

Detector Mode : PK

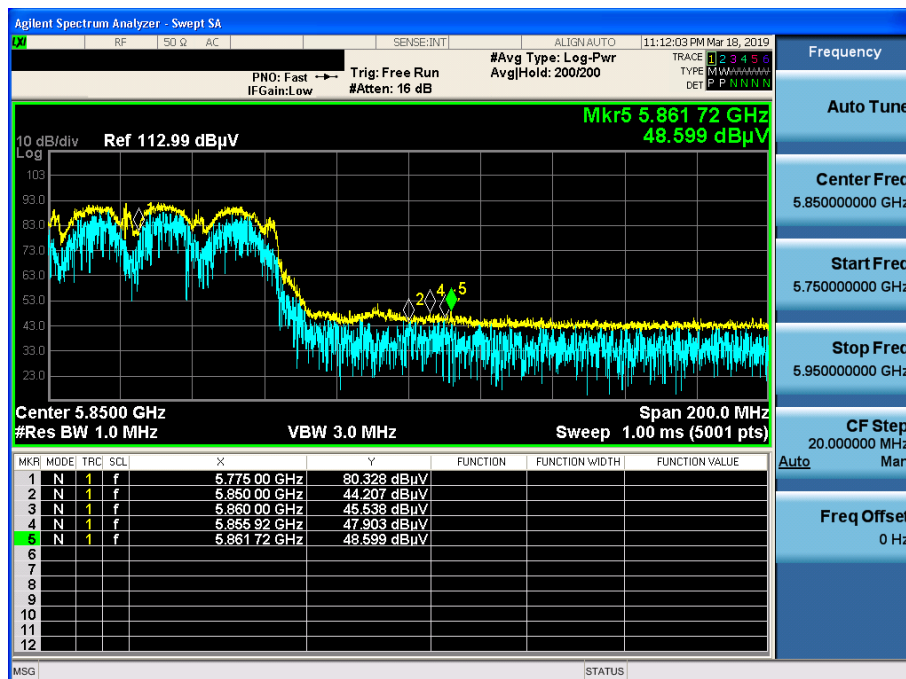

802.11ac(VHT80) & U-NII 2C & Ch.155 & Y axis & Ver


Detector Mode : AV

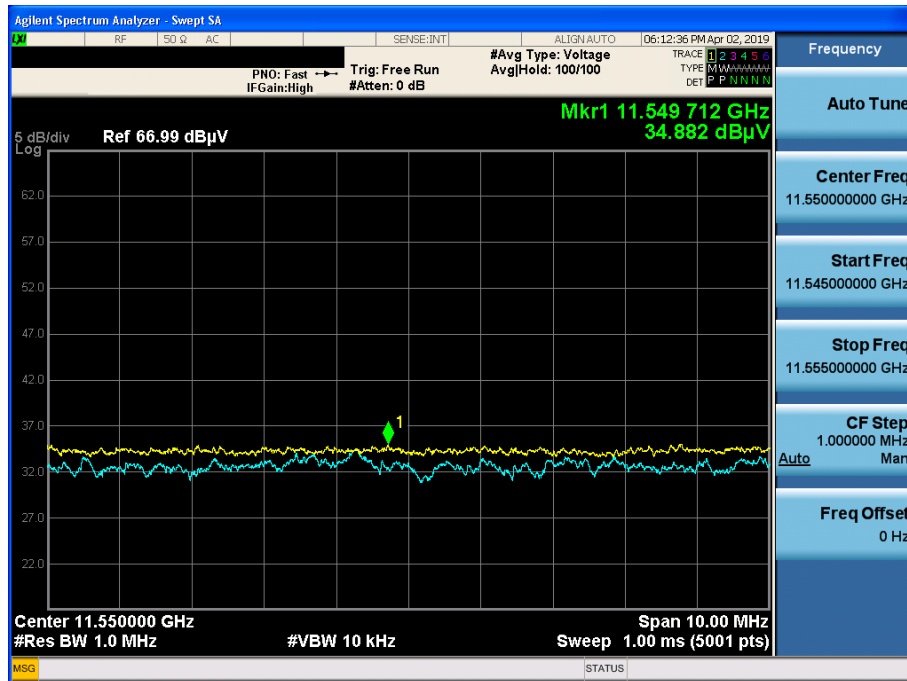

Unwanted Emissions (Radiated) Test Plot: MIMO(CDD)_ Wireless Charging


802.11a & U-NII 1 & Ch.36 & X axis & Hor

Detector Mode : PK

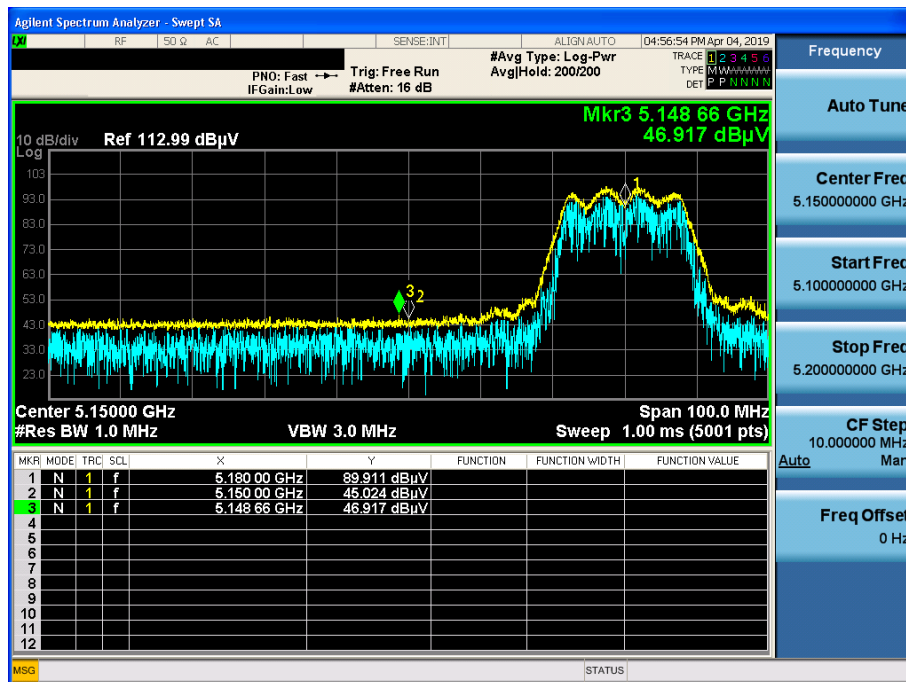


802.11a & U-NII 1 & Ch.36 & X axis & Hor

Detector Mode : AV

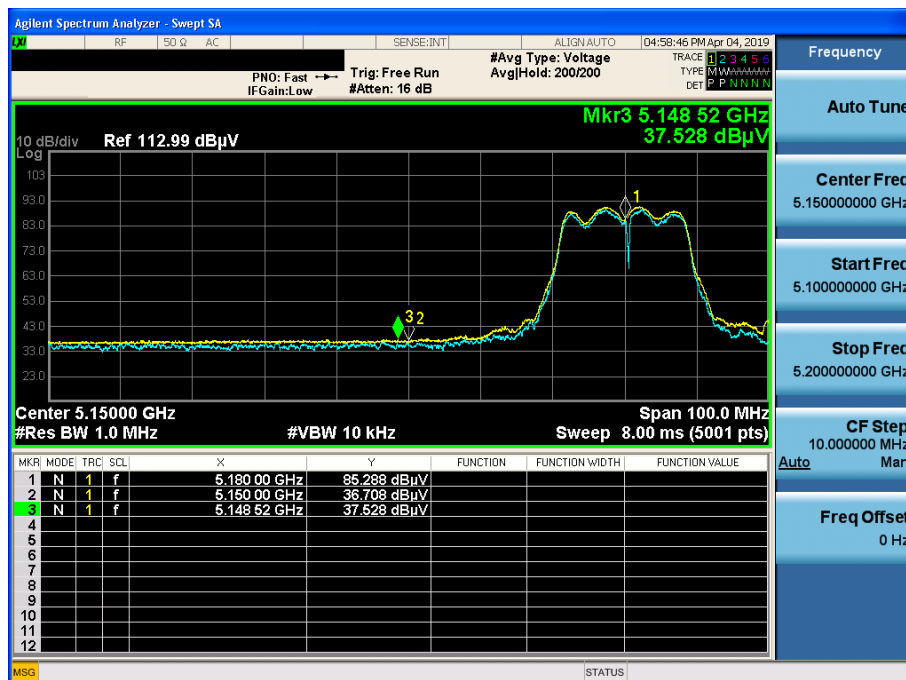


802.11a & U-NII 1 & Ch.36 & X axis & Hor

Detector Mode : PK

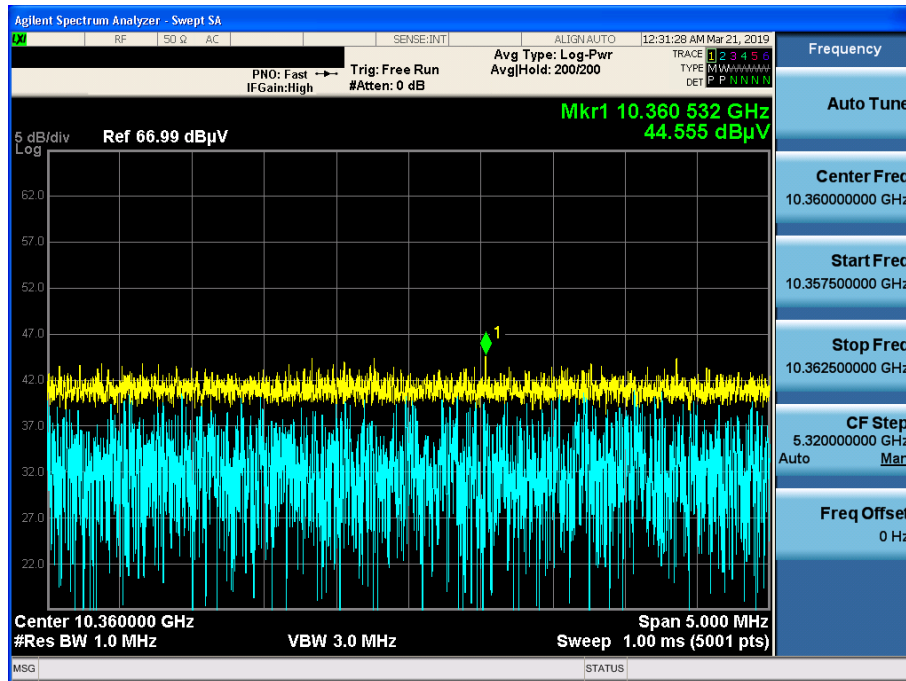


802.11a & U-NII 2A & Ch.64 & X axis & Hor

Detector Mode : PK

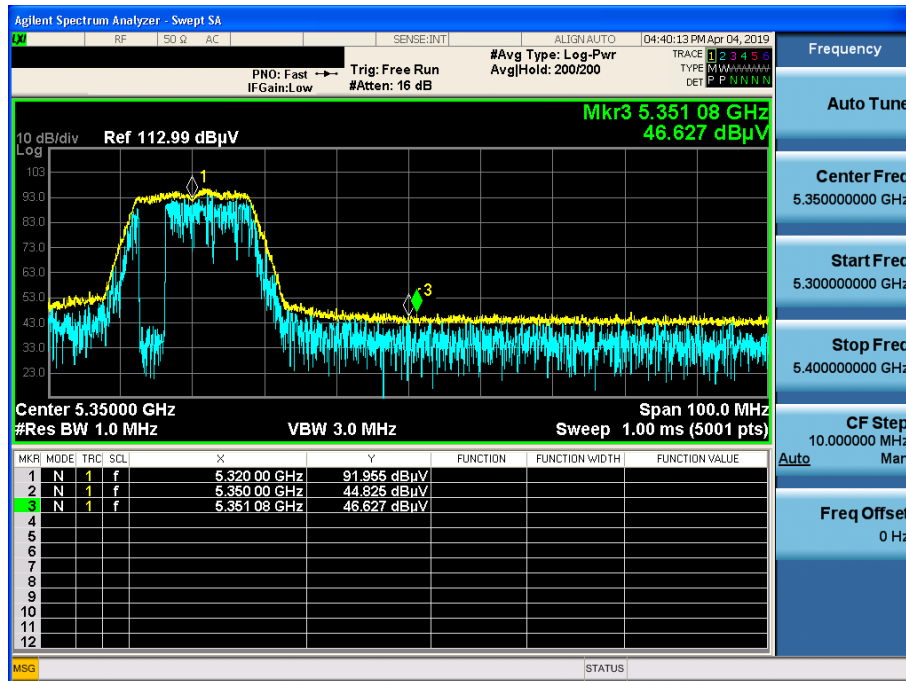

802.11a & U-NII 2A & Ch.64 & X axis & Hor

Detector Mode : AV

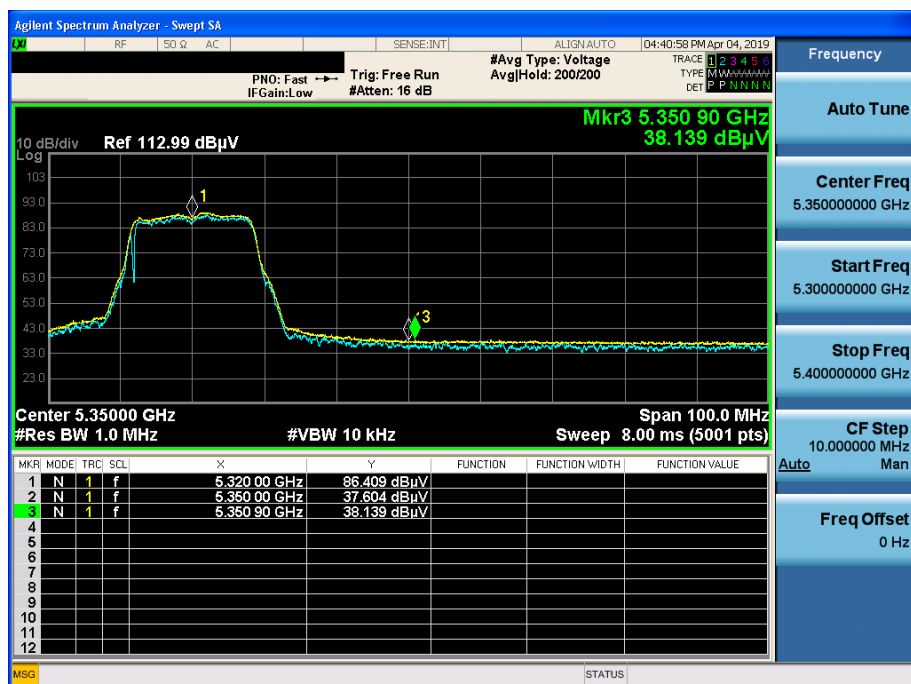

802.11a & U-NII 2A & Ch.64 & X axis & Hor

Detector Mode : AV

