




# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctest.com>



## MEASUREMENT REPORT GSM / GPRS / EDGE / CDMA / WCDMA

**Applicant Name:**  
LG Electronics USA, Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
8/19 - 9/4/2019  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M1908190143-02-R1.ZNF

<b>FCC ID:</b>	<b>ZNFG850UM</b>
<b>APPLICANT:</b>	<b>LG Electronics USA, Inc.</b>

**Application Type:** Class II Permissive Change  
**Model:** LM-G850UM  
**Additional Model(s):** LM-G850QM, LM-G850QM6, LM-G850V, LM-G850UM2, LM-G850UM2X, LMG850UM, LMG850QM, LMG850QM6, LMG850V, LMG850UM2, LMG850UM2X, G850UM, G850QM, G850QM6, G850V, G850UM2, G850UM2X  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** 22, 24, & 27  
**ISED Specification:** RSS-132, RSS-133, RSS-139  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 9/18/2019

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1908190143-02-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




<b>FCC ID:</b> ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 1 of 48	

# TABLE OF CONTENTS


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Cellular - Base Frequency Blocks .....	6
3.3	Cellular - Mobile Frequency Blocks .....	6
3.4	PCS - Base Frequency Blocks .....	6
3.5	PCS - Mobile Frequency Blocks.....	7
3.6	AWS - Base Frequency Blocks .....	7
3.7	AWS - Mobile Frequency Blocks.....	7
3.8	Radiated Measurements .....	8
4.0	MEASUREMENT UNCERTAINTY .....	9
5.0	TEST EQUIPMENT CALIBRATION DATA .....	10
6.0	SAMPLE CALCULATIONS .....	11
7.0	TEST RESULTS .....	12
7.1	Summary.....	12
7.2	Radiated Power (ERP/EIRP).....	13
7.3	Radiated Spurious Emissions Measurements.....	19
8.0	CONCLUSION.....	48

<b>FCC ID:</b> ZNFG850UM	 <small>ENGINEERING LABORATORY, INC.</small>	<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>	
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	<b>Approved by:</b> Quality Manager  Page 2 of 48



## MEASUREMENT REPORT

### GSM / GPRS / EDGE / CDMA / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP	
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
GPRS850	22H	824.2 - 848.8	0.402	26.04	0.659	28.19
EDGE850	22H	824.2 - 848.8	0.107	20.30	0.176	22.45
CDMA850	22H	824.70 - 848.31	0.060	17.75	0.098	19.90
WCDMA850	22H	826.4 - 846.6	0.059	17.73	0.097	19.88
WCDMA1700	27	1712.4 - 1752.6			0.183	22.62
GPRS1900	24E	1850.2 - 1909.8			1.270	31.04
EDGE1900	24E	1850.2 - 1909.8			0.417	26.21
CDMA1900	24E	1851.25 - 1908.75			0.259	24.14
WCDMA1900	24E	1852.4 - 1907.6			0.210	23.22

**EUT Overview**

<b>FCC ID:</b> ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 3 of 48	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 4 of 48	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFG850UM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** 03307, 03315, 03190, 02278, 02279

### 2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) FCC ID: A3LEPPN920 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

During testing the EUT was installed onto the dual display cover and was set to operate in normal operation. The worst case radiated emission data with the dual display cover is included in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 5 of 48	


### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

#### 3.2 Cellular - Base Frequency Blocks

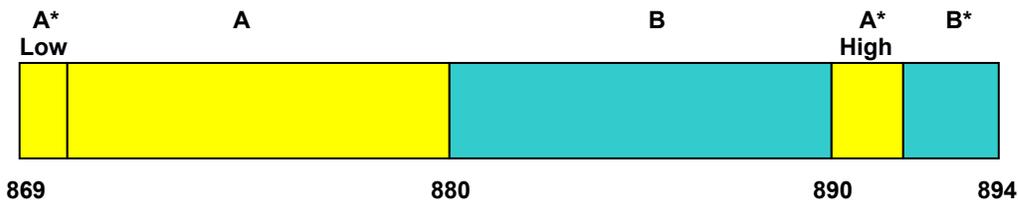


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

#### 3.3 Cellular - Mobile Frequency Blocks

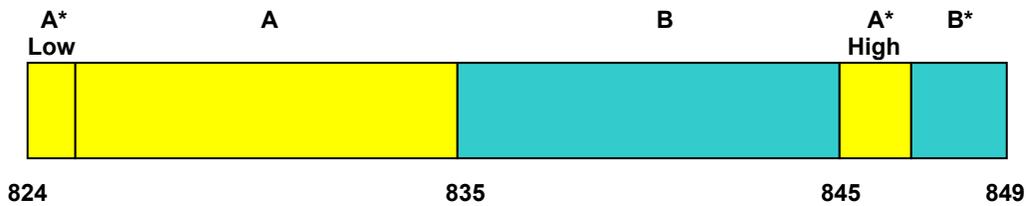


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

#### 3.4 PCS - Base Frequency Blocks

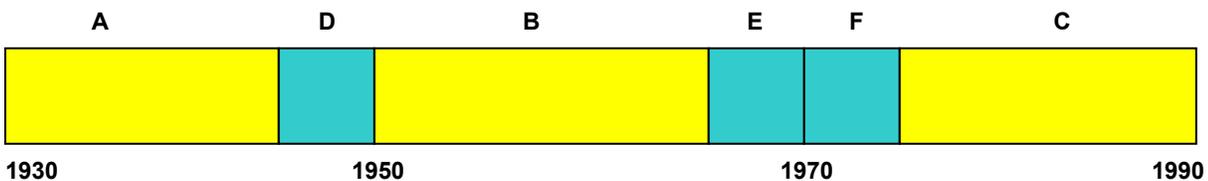

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)	
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Approved by: Quality Manager
			Page 6 of 48

### 3.5 PCS - Mobile Frequency Blocks

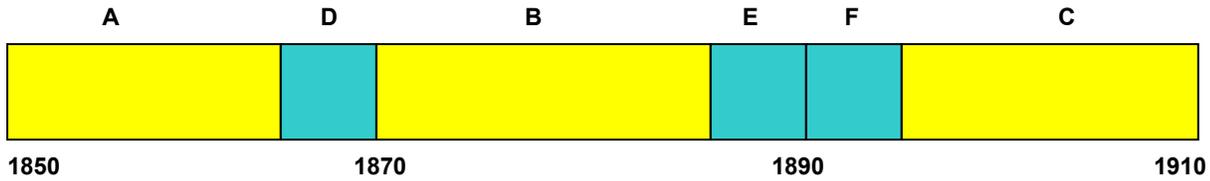

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)


BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks

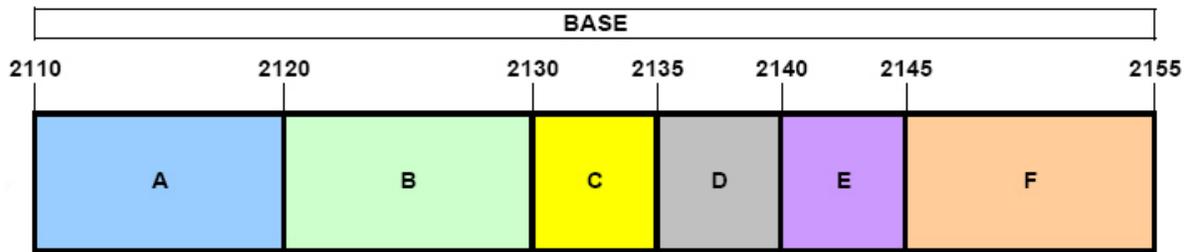

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

### 3.7 AWS - Mobile Frequency Blocks

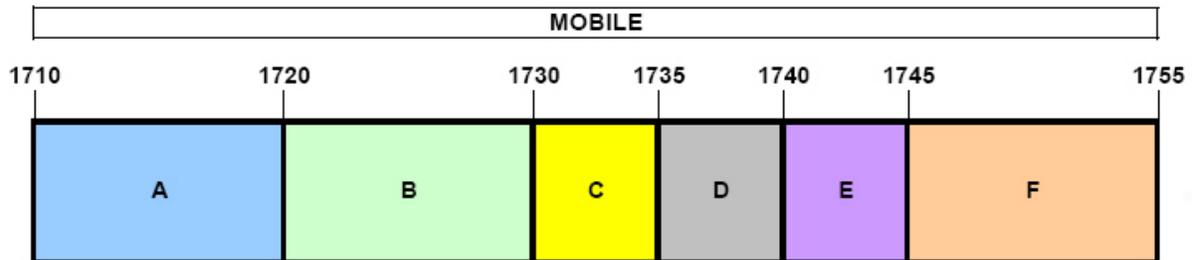

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 7 of 48

### 3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 8 of 48	

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 9 of 48	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	5/10/2019	Annual	5/10/2020	441112
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	4/19/2019	Annual	4/19/2020	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	4/20/2019	Annual	4/20/2020	11210140001
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 10 of 48	

## 6.0 SAMPLE CALCULATIONS

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 11 of 48	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFG850UM  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.2
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.2
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.2
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 7.3

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 12 of 48	

## 7.2 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 13 of 48

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

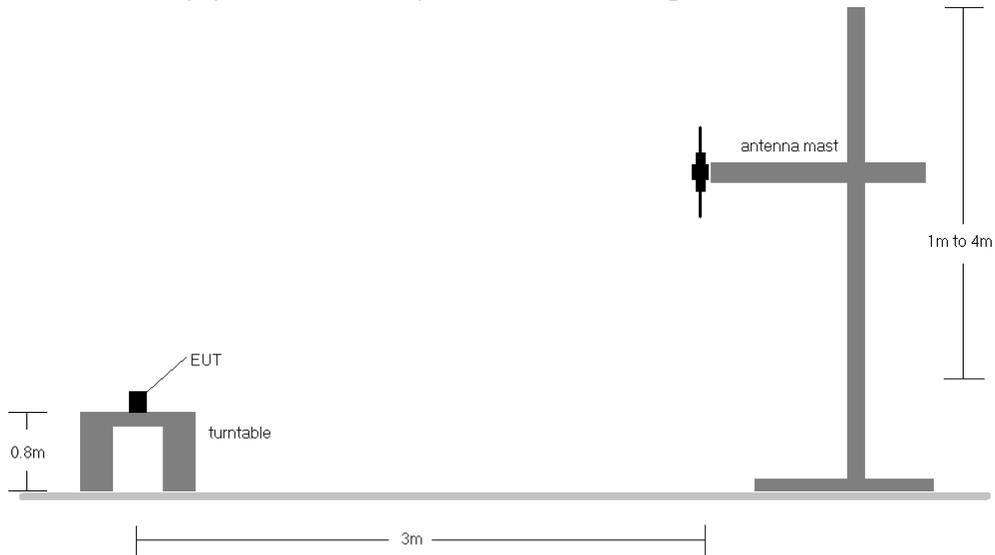

**Figure 7-1. Radiated Test Setup <1GHz**

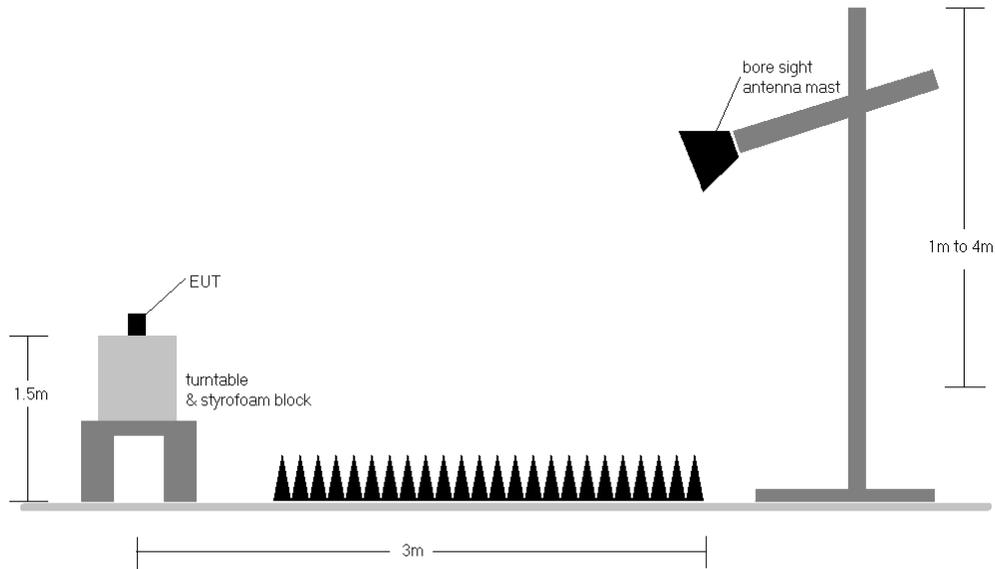

**Figure 7-2. Radiated Test Setup >1GHz**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 14 of 48

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFG850UM	 <b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 15 of 48	

### Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	135	75	21.52	6.30	25.67	0.369	38.45	-12.78	27.82	0.605	40.61	-12.79
836.60	GPRS850	V	130	74	21.79	6.40	<b>26.04</b>	<b>0.402</b>	38.45	-12.41	<b>28.19</b>	<b>0.659</b>	40.61	-12.42
848.80	GPRS850	V	124	79	21.06	6.50	25.41	0.348	38.45	-13.04	27.56	0.570	40.61	-13.05
836.60	GPRS850	H	130	339	19.61	6.70	24.16	0.261	38.45	-14.29	26.31	0.428	40.61	-14.30
836.60	EDGE850	V	130	74	16.05	6.40	<b>20.30</b>	0.107	38.45	-18.15	<b>22.45</b>	<b>0.176</b>	40.61	-18.16
836.60	GPRS850 (WCP)	H	119	118	19.68	6.70	24.23	0.265	38.45	-14.22	26.38	0.435	40.61	-14.23
836.60	GPRS850 (DD)	H	226	115	21.42	6.70	25.97	<b>0.395</b>	38.45	-12.48	28.12	0.649	40.61	-12.49
836.60	GPRS850 (WCP+DD)	H	100	108	21.31	6.70	25.86	<b>0.385</b>	38.45	-12.59	28.01	0.632	40.61	-12.60

**Table 7-2. ERP/EIRP (Cellular GPRS)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	CDMA850	V	160	286	12.36	6.70	16.91	0.049	38.45	-21.54	19.06	0.081	40.61	-21.55
836.52	CDMA850	V	138	287	13.20	6.70	<b>17.75</b>	<b>0.060</b>	38.45	-20.70	<b>19.90</b>	<b>0.098</b>	40.61	-20.71
848.31	CDMA850	V	146	298	11.87	6.70	16.42	0.044	38.45	-22.03	18.57	0.072	40.61	-22.04
836.52	CDMA850	H	226	102	11.43	6.70	15.98	0.040	38.45	-22.47	18.13	0.065	40.61	-22.48
836.52	CDMA850 (WCP)	H	198	110	12.47	6.70	17.02	0.050	38.45	-21.43	19.17	0.083	40.61	-21.44
836.52	CDMA850 (DD)	H	226	123	13.10	6.70	<b>17.65</b>	<b>0.058</b>	38.45	-20.80	<b>19.80</b>	<b>0.095</b>	40.61	-20.81
836.52	CDMA850 (DD+WCP)	H	223	100	13.06	6.70	<b>17.61</b>	<b>0.058</b>	38.45	-20.84	<b>19.76</b>	<b>0.095</b>	40.61	-20.85

**Table 7-3. ERP/EIRP (Cellular CDMA)**

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 16 of 48	

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	127	80	13.09	6.30	17.24	0.053	38.45	-21.21	19.39	0.087	40.61	-21.22
836.60	WCDMA850	V	122	115	13.48	6.40	<b>17.73</b>	<b>0.059</b>	38.45	-20.72	<b>19.88</b>	<b>0.097</b>	40.61	-20.73
846.60	WCDMA850	V	124	79	12.70	6.50	17.05	0.051	38.45	-21.40	19.20	0.083	40.61	-21.41
836.60	WCDMA850	H	108	109	10.79	6.70	15.34	0.034	38.45	-23.11	17.49	0.056	40.61	-23.12
836.60	WCDMA850 (WCP)	H	113	333	9.60	6.70	14.15	0.026	38.45	-24.30	16.30	0.043	40.61	-24.31
836.60	WCDMA850 (DD)	H	100	107	12.44	6.70	<b>16.99</b>	<b>0.050</b>	38.45	-21.46	<b>19.14</b>	<b>0.082</b>	40.61	-21.47
836.60	WCDMA850 (DD+WCP)	H	207	102	11.98	6.70	<b>16.53</b>	<b>0.045</b>	38.45	-21.92	<b>18.68</b>	<b>0.074</b>	40.61	-21.93

**Table 7-4. ERP/EIRP (Cellular WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	V	160	336	12.76	9.34	22.10	0.162	30.00	-7.90
1732.60	WCDMA1700	V	292	337	13.43	9.19	<b>22.62</b>	<b>0.183</b>	30.00	-7.38
1752.60	WCDMA1700	V	100	61	11.96	9.08	21.04	0.127	30.00	-8.96
1732.60	WCDMA1700	H	100	4	11.68	9.31	20.99	0.126	30.00	-9.01
1732.60	WCDMA1700 (WCP)	H	111	152	11.56	9.31	20.87	0.122	30.00	-9.13
1732.60	WCDMA1700 (DD)	H	138	222	12.98	9.31	<b>22.29</b>	<b>0.169</b>	30.00	-7.71
1732.60	WCDMA1700 (WCP+DD)	H	100	240	12.47	9.31	<b>21.78</b>	<b>0.151</b>	30.00	-8.22

**Table 7-5. EIRP (AWS WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	100	356	20.26	9.48	29.74	33.01	-3.27
1880.00	GPRS1900	H	113	351	19.95	9.90	29.85	33.01	-3.16
1909.80	GPRS1900	H	100	349	20.78	10.26	<b>31.04</b>	33.01	-1.97
1909.80	GPRS1900	V	194	262	18.77	10.31	29.08	33.01	-3.93
1909.80	EDGE1900	H	100	349	15.95	10.26	<b>26.21</b>	33.01	-6.80
1909.80	GPRS1900 (WCP)	H	100	189	20.30	10.26	30.56	33.01	-2.45
1909.80	GPRS1900 (DD)	H	195	182	18.88	10.26	29.14	33.01	-3.87
1909.80	GPRS1900 (WCP+DD)	H	117	185	17.94	10.26	28.20	33.01	-4.81

**Table 7-6. EIRP (PCS GPRS)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 17 of 48	

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	H	102	358	13.82	9.49	23.31	33.01	-9.70
1880.00	CDMA1900	H	119	355	13.47	9.90	23.37	33.01	-9.64
1908.75	CDMA1900	H	110	345	13.89	10.25	<b>24.14</b>	33.01	-8.87
1908.75	CDMA1900	V	127	279	13.09	10.25	23.34	33.01	-9.67
1908.75	CDMA1900 (WCP)	H	286	2	13.06	10.25	23.31	33.01	-9.70
1908.75	CDMA1900 (DD)	H	198	184	12.53	10.25	<b>22.78</b>	33.01	-10.23
1908.75	CDMA1900 (WCP+DD)	H	177	124	11.78	10.25	<b>22.03</b>	33.01	-10.98

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	102	356	12.43	9.51	21.94	0.156	33.01	-11.07
1880.00	WCDMA1900	H	102	357	12.14	9.90	22.04	0.160	33.01	-10.97
1907.60	WCDMA1900	H	100	349	12.98	10.24	<b>23.22</b>	<b>0.210</b>	33.01	-9.79
1907.60	WCDMA1900	V	206	132	9.46	10.30	19.76	0.095	33.01	-13.25
1907.60	WCDMA1900 (WCP)	H	100	182	12.53	10.24	22.77	0.189	33.01	-10.24
1907.60	WCDMA1900 (DD)	H	122	177	11.52	10.24	<b>21.76</b>	<b>0.150</b>	33.01	-11.25
1907.60	WCDMA1900 (WCP+DD)	H	149	184	12.97	10.24	<b>23.21</b>	<b>0.209</b>	33.01	-9.80

Table 7-8. EIRP (PCS WCDMA)

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 18 of 48	

## 7.3 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: ZNFG850UM	 <b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b> 		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 19 of 48

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

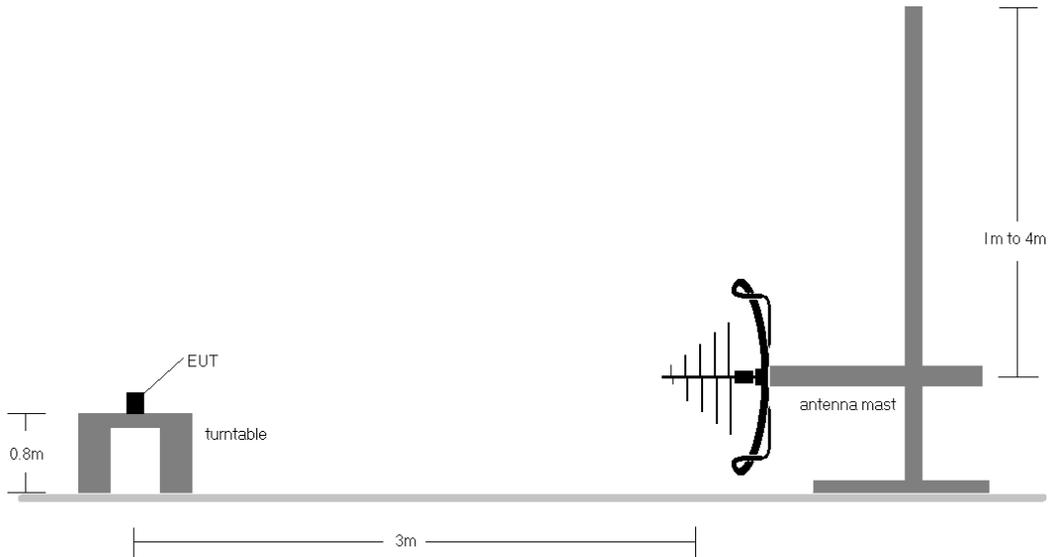

**Figure 7-3. Test Instrument & Measurement Setup < 1GHz**

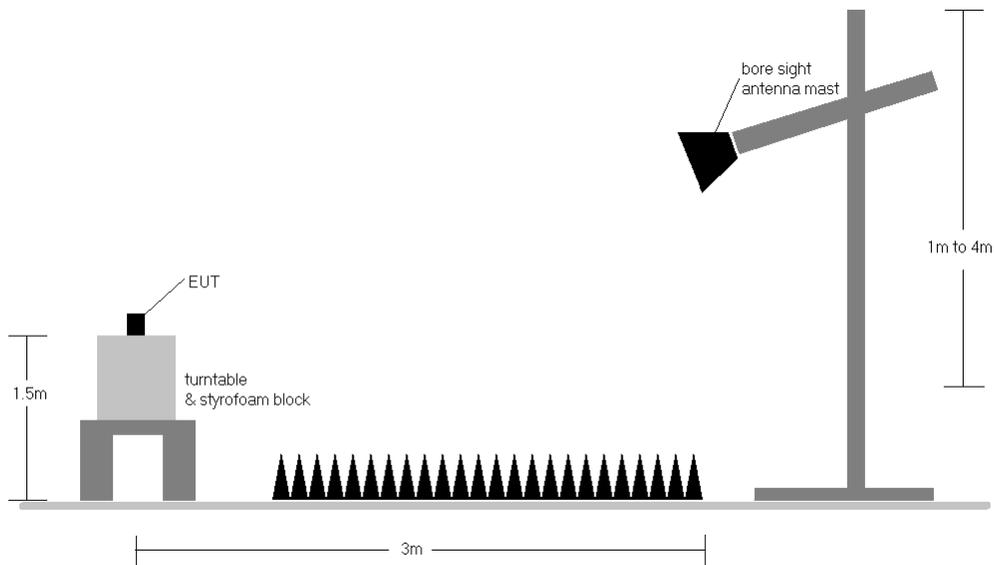

**Figure 7-4. Test Instrument & Measurement Setup >1 GHz**

**Test Notes**


- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."

FCC ID: ZNFG850UM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 20 of 48

- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

<b>FCC ID:</b> ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 21 of 48	

### Cellular GPRS Mode

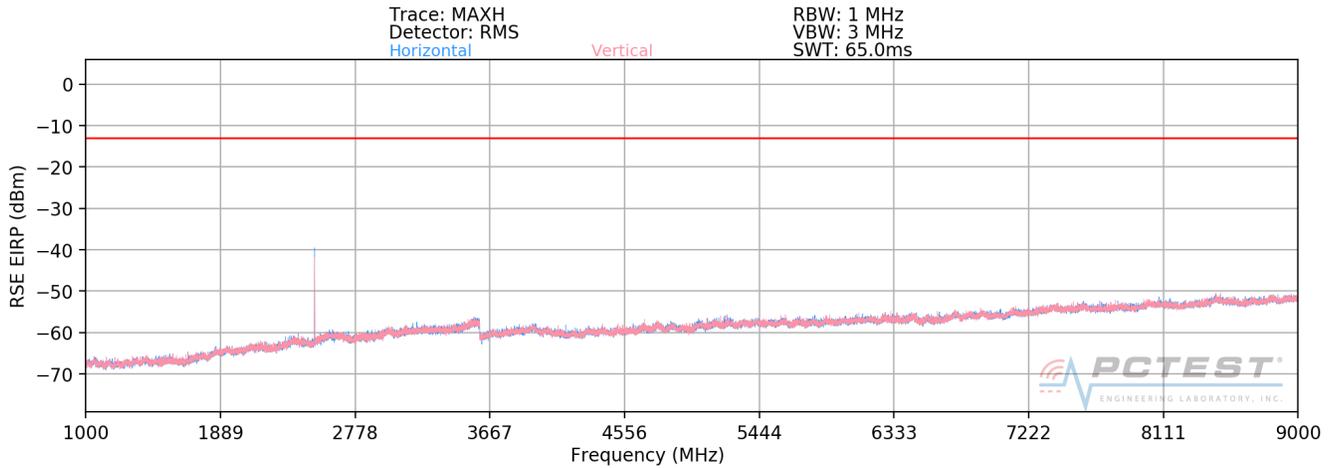

**Plot 7-1. Radiated Spurious Plot above 1GHz (Cellular GPRS Mode)**

OPERATING FREQUENCY: 824.20 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	144	218	-68.52	8.94	-59.58	-46.6
2472.60	H	122	42	-41.94	9.64	-32.29	-19.3
3296.80	H	-	-	-68.22	9.57	-58.65	-45.6
4121.00	H	192	354	-70.53	10.17	-60.36	-47.4
4945.20	H	-	-	-72.05	10.90	-61.15	-48.1
5769.40	H	-	-	-71.63	11.47	-60.17	-47.2

**Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 22 of 48	

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	142	153	-67.58	8.95	-58.63	-45.6
2509.80	H	114	35	-42.14	9.75	-32.39	-19.4
3346.40	H	-	-	-67.24	9.60	-57.64	-44.6
4183.00	H	121	232	-69.53	10.35	-59.19	-46.2
5019.60	H	-	-	-72.04	10.88	-61.16	-48.2
5856.20	H	-	-	-71.77	11.52	-60.25	-47.3

**Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)**

OPERATING FREQUENCY: 848.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	124	42	-71.55	8.95	-62.60	-49.6
2546.40	H	118	50	-42.22	9.74	-32.47	-19.5
3395.20	H	-	-	-68.64	9.78	-58.86	-45.9
4244.00	H	134	107	-70.42	10.58	-59.85	-46.8
5092.80	H	-	-	-72.24	10.69	-61.55	-48.6
5941.60	H	-	-	-71.45	11.45	-59.99	-47.0

**Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 23 of 48	

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	140	272	-49.54	8.95	-40.59	-27.6
2509.80	H	114	47	-41.55	9.75	-31.80	-18.8
3346.40	H	-	-	-67.72	9.60	-58.12	-45.1
4183.00	H	-	-	-73.53	10.35	-63.19	-50.2

Table 7-12. Radiated Spurious Data with WCP (Cellular GPRS Mode – Ch. 190)

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	152	221	-40.20	8.94	-31.26	-18.3
2509.80	H	157	239	-36.94	9.64	-27.29	-14.3
3346.40	H	124	223	-41.65	9.57	-32.08	-19.1
4183.00	H	132	192	-51.72	10.17	-41.55	-28.5
5019.60	H	127	326	-64.20	10.90	-53.30	-40.3
5856.20	H	146	322	-67.87	11.47	-56.41	-43.4
6692.80	H	111	244	-63.76	12.12	-51.64	-38.6
7529.40	H	126	91	-63.44	10.97	-52.47	-39.5
8366.00	H	-	-	-67.21	11.26	-55.95	-42.9

Table 7-13. Radiated Spurious Data with Dual Display (Cellular GPRS Mode - Ch. 190)

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 24 of 48


OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	362	197	-64.42	8.95	-55.47	-42.5
2509.80	H	118	170	-59.14	9.75	-49.39	-36.4
3346.40	H	327	220	-64.68	9.60	-55.08	-42.1
4183.00	H	-	-	-72.13	10.35	-61.79	-48.8

**Table 7-14. Radiated Spurious Data with Dual Display and WCP (Cellular GPRS Mode - Ch. 190)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 25 of 48	

### Cellular CDMA Mode

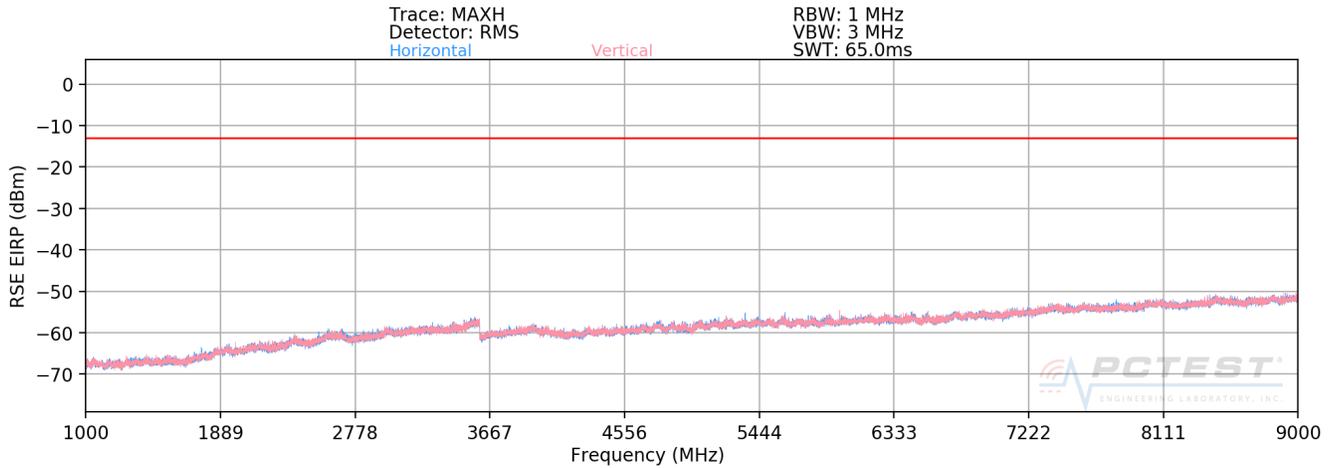

**Plot 7-2. Radiated Spurious Plot above 1GHz (Cellular CDMA Mode)**

OPERATING FREQUENCY: 824.70 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	H	-	-	-73.10	8.95	-64.15	-51.1
2474.10	H	-	-	-68.97	9.65	-59.32	-46.3

**Table 7-15. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)**

OPERATING FREQUENCY: 836.52 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	H	-	-	-72.69	8.95	-63.74	-50.7
2509.56	H	-	-	-69.12	9.75	-59.36	-46.4

**Table 7-16. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 26 of 48

OPERATING FREQUENCY: 848.31 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.62	H	-	-	-71.81	8.95	-62.86	-49.9
2544.93	H	-	-	-67.92	9.74	-58.18	-45.2

Table 7-17. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

OPERATING FREQUENCY: 836.52 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	H	-	-	-72.60	8.95	-63.65	-50.6
2509.56	H	-	-	-69.52	9.75	-59.76	-46.8

Table 7-18. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 384)

OPERATING FREQUENCY: 836.52 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	H	-	-	-42.63	8.95	-33.68	-20.7
2509.56	H	-	-	-69.41	9.75	-59.65	-46.7

Table 7-19. Radiated Spurious Data with Dual Display (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 27 of 48


OPERATING FREQUENCY: 836.52 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	H	-	-	-72.68	8.95	-63.73	-50.7
2509.56	H	-	-	-68.69	9.65	-59.04	-46.0

Table 7-20. Radiated Spurious Data with Dual Display and WCP (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 28 of 48

### Cellular WCDMA Mode

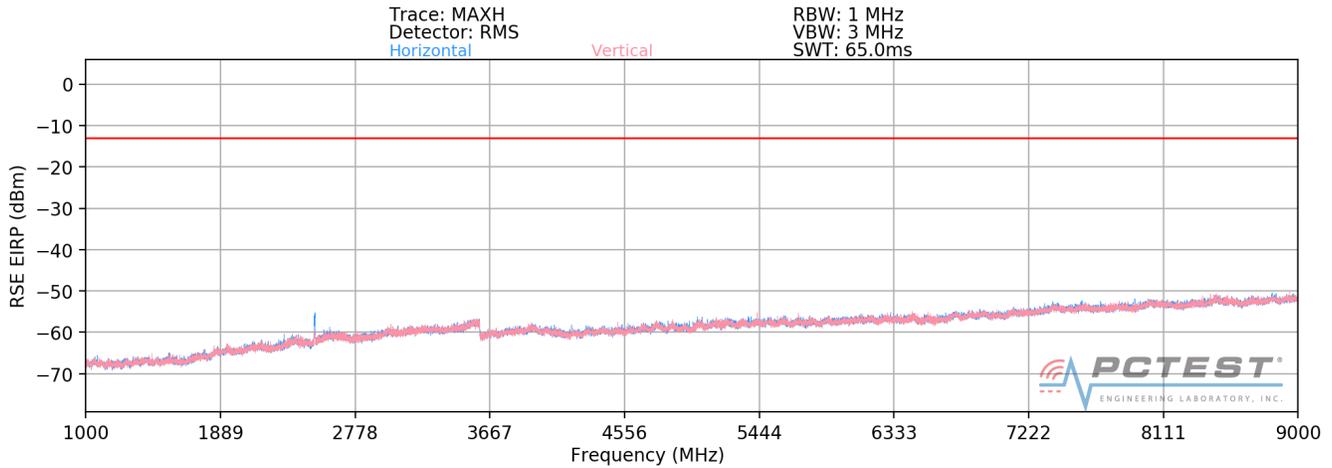

**Plot 7-3. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)**

OPERATING FREQUENCY: 826.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	153	217	-78.57	8.95	-69.63	-56.6
2479.20	H	120	43	-58.24	9.67	-48.57	-35.6
3305.60	H	-	-	-73.83	9.58	-64.25	-51.2
4132.00	H	-	-	-74.12	10.19	-63.93	-50.9

**Table 7-21. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 29 of 48	

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	140	220	-78.36	8.95	-69.41	-56.4
2509.80	H	116	43	-58.17	9.75	-48.42	-35.4
3346.40	H	-	-	-74.10	9.60	-64.50	-51.5
4183.00	H	-	-	-74.62	10.35	-64.28	-51.3

**Table 7-22. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

OPERATING FREQUENCY: 846.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	148	329	-78.92	8.95	-69.97	-57.0
2539.80	H	114	46	-58.07	9.74	-48.33	-35.3
3386.40	H	-	-	-74.39	9.75	-64.65	-51.6
4233.00	H	-	-	-74.60	10.53	-64.06	-51.1

**Table 7-23. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 30 of 48

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	147	78	-73.89	8.95	-64.94	-51.9
2509.80	H	176	279	-62.61	9.75	-52.86	-39.9
3346.40	H	-	-	-74.19	9.60	-64.59	-51.6
4183.00	H	-	-	-74.75	10.35	-64.41	-51.4

**Table 7-24. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4183)**

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	143	280	-77.10	8.95	-68.15	-55.2
2499.60	H	-	-	-76.88	9.75	-67.13	-54.1
3326.00	H	-	-	-74.14	9.60	-64.54	-51.5

**Table 7-25. Radiated Spurious Data with Dual Display (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 31 of 48


OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-78.55	8.95	-69.60	-56.6
2509.80	H	-	-	-76.58	9.75	-66.83	-53.8

**Table 7-26. Radiated Spurious Data with Dual Display and WCP (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 32 of 48

# AWS WCDMA Mode

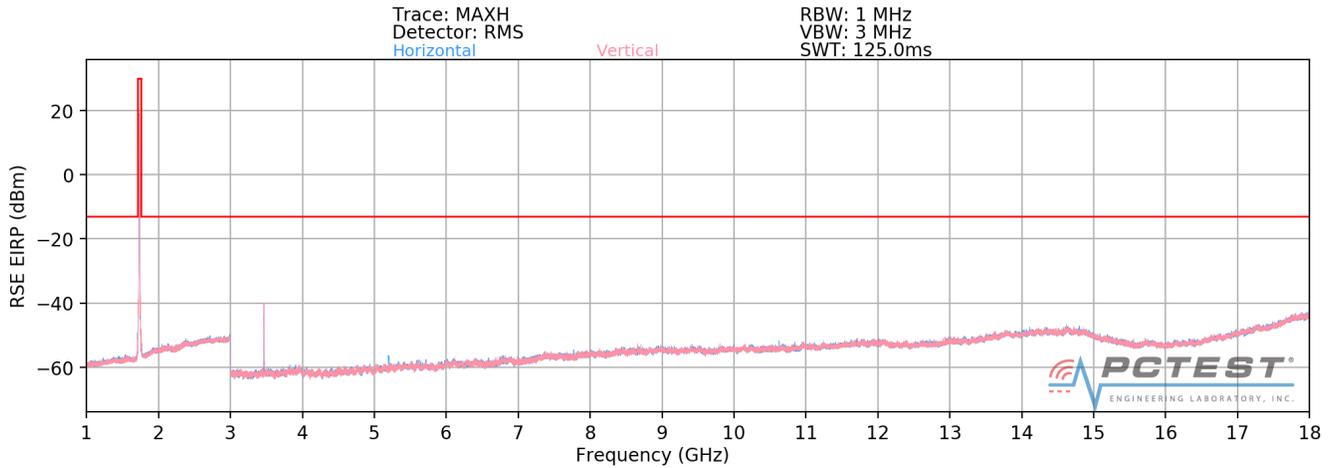

**Plot 7-4. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)**

OPERATING FREQUENCY: 1712.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	119	205	-42.75	9.83	-32.93	-19.9
5137.20	H	388	132	-57.55	10.69	-46.86	-33.9
6849.60	H	397	168	-58.75	11.64	-47.11	-34.1
8562.00	H	139	199	-62.79	11.14	-51.65	-38.6
10274.40	H	-	-	-67.68	12.21	-55.47	-42.5

**Table 7-27. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 33 of 48	

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	129	193	-48.29	9.88	-38.41	-25.4
5197.80	H	122	135	-65.87	10.76	-55.11	-42.1
6930.40	H	-	-	-71.45	11.74	-59.71	-46.7

**Table 7-28. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)**

OPERATING FREQUENCY: 1752.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	120	140	-48.92	9.92	-39.00	-26.0
5257.80	H	116	135	-69.21	10.72	-58.50	-45.5
7010.40	H	398	170	-71.13	11.86	-59.27	-46.3
8763.00	H	113	168	-66.06	10.98	-55.08	-42.1
10515.60	H	-	-	-68.04	12.60	-55.44	-42.4

**Table 7-29. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 34 of 48

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	395	196	-50.45	9.88	-40.57	-27.6
5197.80	H	169	73	-66.78	10.76	-56.02	-43.0
6930.40	H	-	-	-71.62	11.74	-59.88	-46.9

**Table 7-30. Radiated Spurious Data with WCP (AWS WCDMA Mode – Ch. 1413)**

OPERATING FREQUENCY: 1712.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	285	282	-44.18	9.83	-34.36	-21.4
5157.40	H	250	30	-48.06	10.69	-37.37	-24.4
6890.00	H	-	-	-61.73	11.64	-50.09	-37.1

**Table 7-31. Radiated Spurious Data with Dual Display (AWS WCDMA Mode – Ch. 1312)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 35 of 48	


OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	352	244	-51.06	9.88	-41.18	-28.2
5157.40	H	-	-	-53.42	10.76	-42.66	-29.7
6890.00	H	-	-	-62.53	11.74	-50.79	-37.8

**Table 7-32. Radiated Spurious Data with Dual Display and WCP (AWS WCDMA Mode – Ch. 1413)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 36 of 48

# PCS GPRS Mode

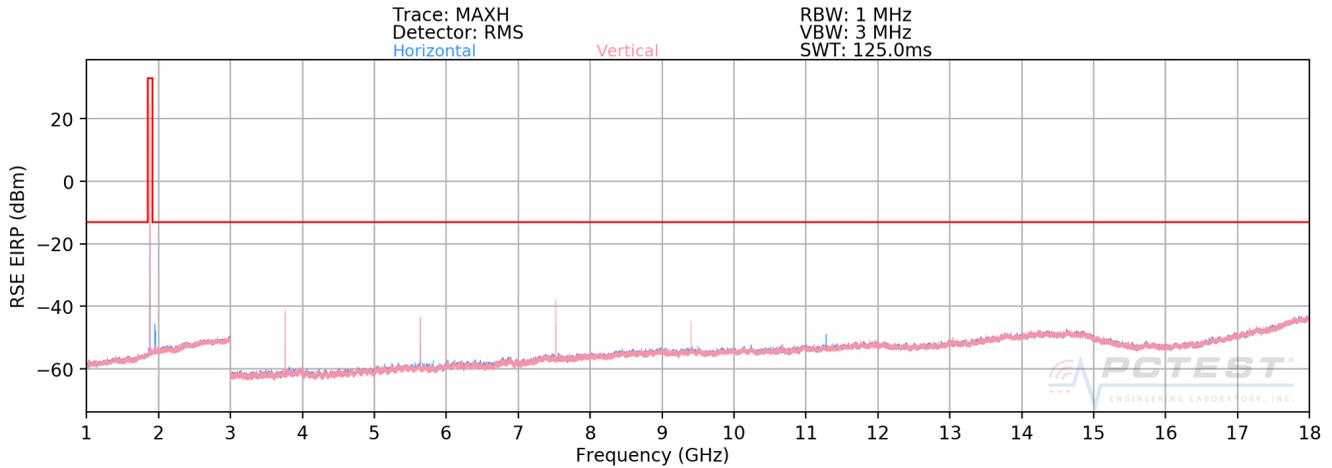

**Plot 7-5. Radiated Spurious Plot above 1GHz (PCS GPRS Mode)**

OPERATING FREQUENCY: 1850.20 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	V	329	363	-38.06	9.58	-28.47	-15.5
5550.60	V	319	350	-40.15	10.94	-29.21	-16.2
7400.80	V	327	33	-42.35	10.96	-31.39	-18.4
9251.00	V	309	346	-45.41	11.63	-33.77	-20.8
11101.20	V	156	357	-58.51	12.74	-45.77	-32.8
12951.40	V	196	348	-57.25	13.30	-43.95	-31.0
14801.60	V	395	355	-59.70	12.45	-47.25	-34.3
16651.80	V	-	-	-67.95	15.45	-52.50	-39.5

**Table 7-33. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset			Page 37 of 48

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	307	318	-38.37	9.37	-29.00	-16.0
5640.00	V	229	349	-38.54	11.17	-27.38	-14.4
7520.00	V	325	1	-40.01	11.11	-28.89	-15.9
9400.00	V	296	338	-46.74	11.57	-35.16	-22.2
11280.00	V	307	15	-59.21	12.72	-46.49	-33.5
13160.00	V	188	354	-63.59	13.15	-50.44	-37.4
15040.00	V	262	347	-63.93	13.52	-50.41	-37.4
16920.00	V	-	-	-66.63	14.36	-52.27	-39.3

**Table 7-34. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)**

OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	398	133	-37.77	9.30	-28.46	-15.5
5729.40	V	186	345	-39.45	11.39	-28.06	-15.1
7639.20	V	313	10	-40.15	11.33	-28.82	-15.8
9549.00	V	299	343	-51.71	11.79	-39.92	-26.9
11458.80	V	113	6	-60.36	12.82	-47.54	-34.5
13368.60	V	218	364	-60.81	12.78	-48.03	-35.0
15278.40	V	-	-	-68.97	14.90	-54.07	-41.1

**Table 7-35. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 38 of 48

OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	123	256	-38.14	9.30	-28.83	-15.8
5729.40	H	123	41	-40.99	11.39	-29.60	-16.6
7639.20	H	124	332	-46.03	11.33	-34.70	-21.7
9549.00	H	128	19	-58.89	11.79	-47.10	-34.1
11458.80	H	307	123	-60.35	12.82	-47.53	-34.5

**Table 7-36. Radiated Spurious Data with WCP (PCS GPRS Mode – Ch. 810)**

OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	168	232	-56.18	9.30	-46.87	-33.9
5729.40	H	115	96	-61.93	11.39	-50.54	-37.5
7639.20	H	-	-	-66.54	11.33	-55.21	-42.2

**Table 7-37. Radiated Spurious Data with Dual Display (PCS GPRS Mode – Ch. 810)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 39 of 48	


OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	113	203	-51.75	9.30	-42.44	-29.4
5729.40	H	102	90	-59.66	11.39	-48.27	-35.3
7639.20	H	-	-	-66.62	11.33	-55.29	-42.3

**Table 7-38. Radiated Spurious Data with Dual Display and WCP (PCS GPRS Mode – Ch. 810)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 40 of 48	

# PCS CDMA Mode

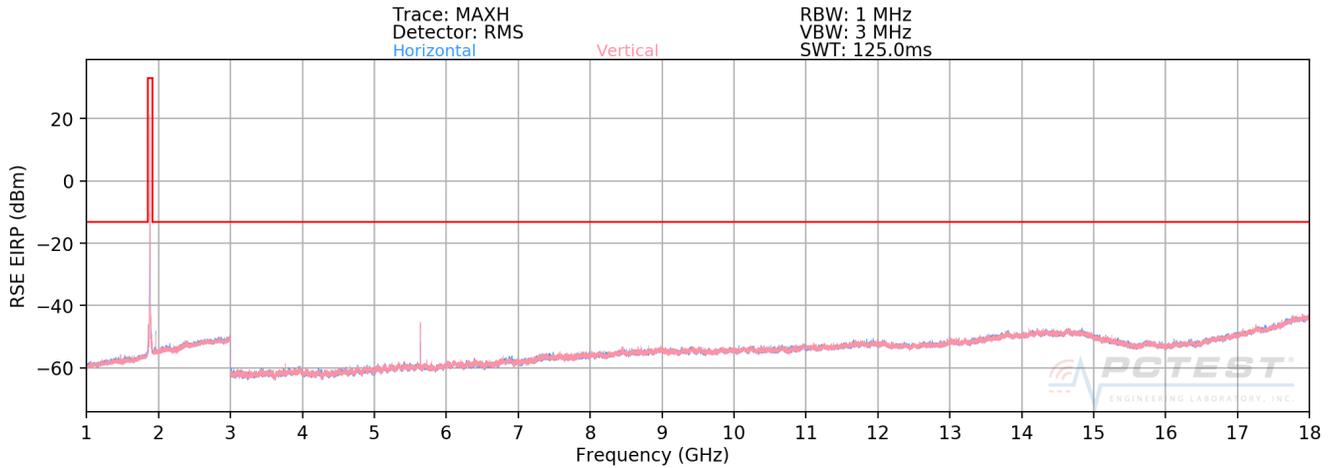

**Plot 7-6. Radiated Spurious Plot above 1GHz (PCS CDMA Mode)**

OPERATING FREQUENCY: 1851.25 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3702.50	V	300	149	-62.94	9.58	-53.36	-40.4
5553.75	V	293	158	-56.93	10.95	-45.98	-33.0
7405.00	V	-	-	-65.02	10.96	-54.06	-41.1
9256.25	V	-	-	-63.78	11.63	-52.15	-39.2

**Table 7-39. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 41 of 48	

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	290	145	-66.01	9.37	-56.64	-43.6
5640.00	V	282	156	-61.92	11.17	-50.76	-37.8
7520.00	V	-	-	-64.98	11.11	-53.86	-40.9
9400.00	V	-	-	-62.59	11.57	-51.01	-38.0

**Table 7-40. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)**

OPERATING FREQUENCY: 1908.75 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	V	341	133	-66.26	9.30	-56.96	-44.0
5726.25	V	341	148	-65.30	11.38	-53.93	-40.9
7635.00	V	-	-	-65.13	11.32	-53.81	-40.8
9543.75	V	-	-	-63.58	11.78	-51.80	-38.8

**Table 7-41. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 42 of 48

OPERATING FREQUENCY: 1908.75 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	123	37	-67.74	9.30	-58.44	-45.4
5726.25	H	120	41	-71.50	11.38	-60.13	-47.1
7635.00	H	-	-	-65.31	11.32	-53.99	-41.0
9543.75	H	-	-	-63.87	11.78	-52.09	-39.1

**Table 7-42. Radiated Spurious Data with WCP (PCS CDMA Mode – Ch. 1175)**

OPERATING FREQUENCY: 1908.75 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	V	380	173	-65.97	9.37	-56.60	-43.6
5668.75	V	395	172	-68.39	11.06	-57.33	-44.3
7520.00	V	-	-	-65.81	11.01	-54.79	-41.8
9371.25	V	-	-	-63.67	11.60	-52.07	-39.1

**Table 7-43. Radiated Spurious Data with Dual Display (PCS CDMA Mode – Ch. 1175)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 43 of 48	


OPERATING FREQUENCY: 1908.75 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	134	20	-68.07	9.58	-58.49	-45.5
5668.75	H	137	22	-68.08	10.95	-57.13	-44.1
7520.00	H	-	-	-65.11	10.96	-54.15	-41.2
9371.25	H	-	-	-64.51	11.63	-52.88	-39.9

**Table 7-44. Radiated Spurious Data with Dual Display and WCP (PCS CDMA Mode – Ch. 1175)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 44 of 48	

# PCS WCDMA Mode

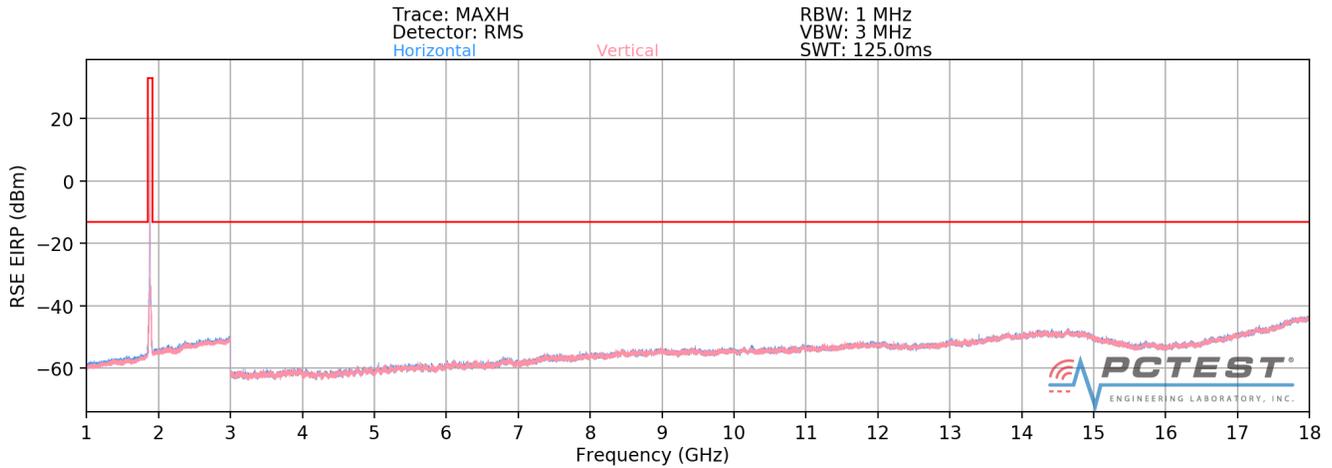

**Plot 7-7. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)**

OPERATING FREQUENCY: 1852.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	373	20	-68.95	9.57	-59.38	-46.4
5557.20	V	-	-	-72.18	10.95	-61.23	-48.2

**Table 7-45. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)**

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	312	327	-70.19	9.37	-60.82	-47.8
5640.00	V	-	-	-72.25	11.17	-61.09	-48.1

**Table 7-46. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset		Page 45 of 48

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	398	134	-69.98	9.30	-60.68	-47.7
5722.80	V	-	-	-72.10	11.37	-60.73	-47.7

**Table 7-47. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	135	302	-69.97	9.30	-60.67	-47.7
5722.80	H	-	-	-72.48	11.37	-61.11	-48.1
7630.40	H	-	-	-69.32	11.31	-58.01	-45.0

**Table 7-48. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9538)**

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	130	334	-64.72	9.57	-55.15	-42.2
5722.80	V	-	-	-64.73	10.95	-53.78	-40.8
7630.40	V	-	-	-60.24	10.96	-49.28	-36.3

**Table 7-49. Radiated Spurious Data with Dual Display (PCS WCDMA Mode – Ch. 9538)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 46 of 48	

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	166	117	-65.83	9.37	-56.46	-43.5
5722.80	H	-	-	-64.93	11.17	-53.77	-40.8
7630.40	H	-	-	-60.52	11.11	-49.40	-36.4

**Table 7-50. Radiated Spurious Data with Dual Display and WCP (PCS WCDMA Mode - Ch. 9538)**

FCC ID: ZNFG850UM		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1908190143-02-R1.ZNF	Test Dates: 8/19 - 9/4/2019	EUT Type: Portable Handset	Page 47 of 48	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFG850UM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: ZNFG850UM		<b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1908190143-02-R1.ZNF	<b>Test Dates:</b> 8/19 - 9/4/2019	<b>EUT Type:</b> Portable Handset	Page 48 of 48	