PCTEST
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctest.com



PART 27 MEASUREMENT REPORT

Applicant Name:
LG Electronics USA, Inc.
111 Sylvan Avenue, North Building
Englewood Cliffs, NJ 07632
United States

Date of Testing:
4/27 – 7/2/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2004230076-04.ZNF

FCC ID:	**ZNFG900VM**
APPLICANT:	**LG Electronics USA, Inc.**

Application Type:	Certification
Model:	LM-G900VM
Additional Model(s):	LMG900VM, G900VM, LM-G900QM6, LMG900QM6, G900QM6, LM-G902V, LMG902V, G902V
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part:	27
Test Procedure(s):	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President

ACCREDITED
CERT #2041.01

TABLE OF CONTENTS



MEASUREMENT REPORT
FCC Part 27



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
LTE Band 12	10 MHz	QPSK	704.0 - 711.0	0.343	25.35	0.209	23.20	9M03G7D
		16QAM	704.0 - 711.0	0.295	24.70	0.180	22.55	8M97W7D
		64QAM	704.0 - 711.0	0.223	23.48	0.136	21.33	8M99W7D
	5 MHz	QPSK	701.5 - 713.5	0.393	25.95	0.240	23.80	4M55G7D
		16QAM	701.5 - 713.5	0.325	25.12	0.198	22.97	4M52W7D
		64QAM	701.5 - 713.5	0.268	24.29	0.164	22.14	4M54W7D
	3 MHz	QPSK	700.5 - 714.5	0.335	25.25	0.204	23.10	2M71G7D
		16QAM	700.5 - 714.5	0.306	24.86	0.187	22.71	2M70W7D
		64QAM	700.5 - 714.5	0.245	23.88	0.149	21.73	2M70W7D
	1.4 MHz	QPSK	699.7 - 715.3	0.367	25.65	0.224	23.50	1M09G7D
		16QAM	699.7 - 715.3	0.327	25.15	0.200	23.00	1M10W7D
		64QAM	699.7 - 715.3	0.258	24.11	0.157	21.96	1M09W7D
LTE Band 13	10 MHz	QPSK	782.0	0.077	18.88	0.047	16.73	8M97G7D
		16QAM	782.0	0.067	18.27	0.041	16.12	8M96W7D
		64QAM	782.0	0.054	17.34	0.033	15.19	8M97W7D
	5 MHz	QPSK	779.5 - 784.5	0.079	18.97	0.048	16.82	4M52G7D
		16QAM	779.5 - 784.5	0.067	18.26	0.041	16.11	4M51W7D
		64QAM	779.5 - 784.5	0.052	17.19	0.032	15.04	4M53W7D

Overview Table (<1GHz Bands)

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.167	22.24	18M0G7D
		16QAM	1720.0 - 1770.0	0.152	21.83	18M0W7D
		64QAM	1720.0 - 1770.0	0.142	21.51	18M0W7D
	15 MHz	QPSK	1717.5 - 1772.5	0.163	22.12	13M5G7D
		16QAM	1717.5 - 1772.5	0.171	22.32	13M5W7D
		64QAM	1717.5 - 1772.5	0.152	21.82	13M5W7D
	10 MHz	QPSK	1715.0 - 1775.0	0.166	22.20	9M02G7D
		16QAM	1715.0 - 1775.0	0.148	21.71	9M01W7D
		64QAM	1715.0 - 1775.0	0.147	21.67	8M97W7D
	5 MHz	QPSK	1712.5 - 1777.5	0.165	22.17	4M56G7D
		16QAM	1712.5 - 1777.5	0.156	21.93	4M53W7D
		64QAM	1712.5 - 1777.5	0.138	21.40	4M56W7D
	3 MHz	QPSK	1711.5 - 1778.5	0.168	22.26	2M71G7D
		16QAM	1711.5 - 1778.5	0.159	22.01	2M71W7D
		64QAM	1711.5 - 1778.5	0.143	21.56	2M71W7D
	1.4 MHz	QPSK	1710.7 - 1779.3	0.165	22.17	1M08G7D
		16QAM	1710.7 - 1779.3	0.149	21.74	1M10W7D
		64QAM	1710.7 - 1779.3	0.143	21.55	1M10W7D
NR Band n66	20 MHz	π/2 BPSK	834.0 - 839.0	0.088	19.43	18M0G7D
		QPSK	834.0 - 839.0	0.087	19.42	18M0G7D
		16QAM	834.0 - 839.0	0.071	18.53	18M0W7D
		64QAM	834.0 - 839.0	0.052	17.14	18M0W7D
		256QAM	834.0 - 839.0	0.028	14.50	18M0W7D
	15 MHz	π/2 BPSK	831.5 - 841.5	0.090	19.55	13M5G7D
		QPSK	831.5 - 841.5	0.094	19.74	13M5G7D
		16QAM	831.5 - 841.5	0.075	18.75	13M5W7D
		64QAM	831.5 - 841.5	0.053	17.22	13M6W7D
		256QAM	831.5 - 841.5	0.028	14.53	13M6W7D
	10 MHz	π/2 BPSK	829.0 - 844.0	0.084	19.24	9M05G7D
		QPSK	829.0 - 844.0	0.090	19.55	9M00G7D
		16QAM	829.0 - 844.0	0.075	18.75	9M00W7D
		64QAM	829.0 - 844.0	0.055	17.42	8M99W7D
		256QAM	829.0 - 844.0	0.029	14.56	9M00W7D
	5 MHz	π/2 BPSK	826.5 - 846.5	0.086	19.36	4M48G7D
		QPSK	826.5 - 846.5	0.089	19.50	4M50G7D
		16QAM	826.5 - 846.5	0.072	18.60	4M50W7D
		64QAM	826.5 - 846.5	0.054	17.29	4M48W7D
		256QAM	826.5 - 846.5	0.028	14.52	4M48W7D

Overview Table (>1GHz Bands)

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).

- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFG900VM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 00367, 00375, 00458

2.2 Device Capabilities

This device contains the following capabilities:

CDMA, GSM/GPRS/EDGE, WCDMA/HSPA, LTE, NR, WLAN, UNII, BT (1x, EDR, LE), NFC

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT**.**

3.2 Block C Frequency Range

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.3 Block A Frequency Range

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz

3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a

signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d\ [dBm]} = P_{g\ [dBm]} - \text{cable loss}_{\ [dB]} + \text{antenna gain}_{\ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g\ [dBm]}$ – cable loss $_{[dB]}$.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx3	LIcensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx3
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Espec	ESX-2CA	Environmental Chamber	6/13/2019	Annual	6/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Keysight Technologies	N9020A	MXA Signal Analyzer	4/29/2019	Annual	4/29/2020	MY54500644
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	4/19/2019	Annual	4/19/2020	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	5/6/2019	Annual	5/6/2020	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	5/19/2018	Biennial	5/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/27/2019	Biennial	8/27/2021	A042511

Table 5-1. Equipment List

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

2. Equipment with a calibration date of “N/A” shown in this list was not used to make direct calibrated measurements.

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analzyer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.

FCC ID: ZNFG900VM

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): LTE / NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-139(2.3)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 27.53	RSS-139(6.6)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-139(4.1)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 27.54	RSS-139(6.4)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 12)	27.50(b)(10)	RSS-130(4.4)	< 3 Watts max. ERP < 5 Watts max. EIRP	PASS	Section 7.6
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 13)	27.50(c)(10)	RSS-130(4.4)	< 3 Watts max. ERP < 5 Watts max. EIRP	PASS	Section 7.6
	Equivalent Isotropic Radiated Power (NR Band n66)	27.50(d)(4)	RSS-139(6.5)	< 1 Watts max. EIRP	PASS	Section 7.6
	Equivalent Isotropic Radiated Power (LTE Band 4/66)				PASS	Section 7.6
	Radiated Spurious Emissions (LTE Band 13)	2.1053, 27.53(f)	RSS-139(6.6)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 - 1610 MHz	PASS	Section 7.7
	Radiated Spurious Emissions	2.1053, 27.53	RSS-139(6.6)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version v4.5, LTE Automation Version v5.3.

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

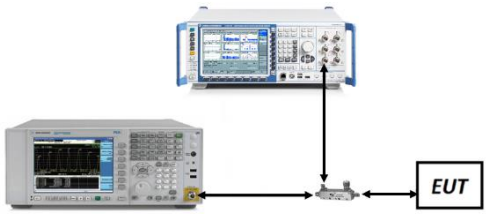

Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

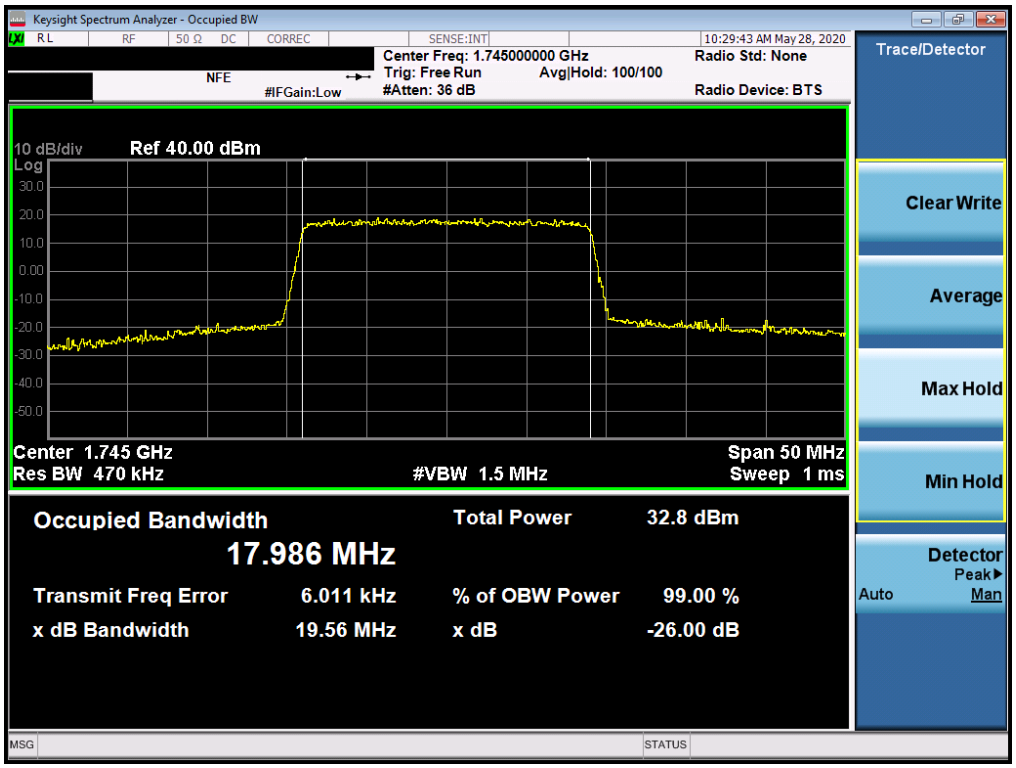

Plot 7-1. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz QPSK - Full RB Configuration)

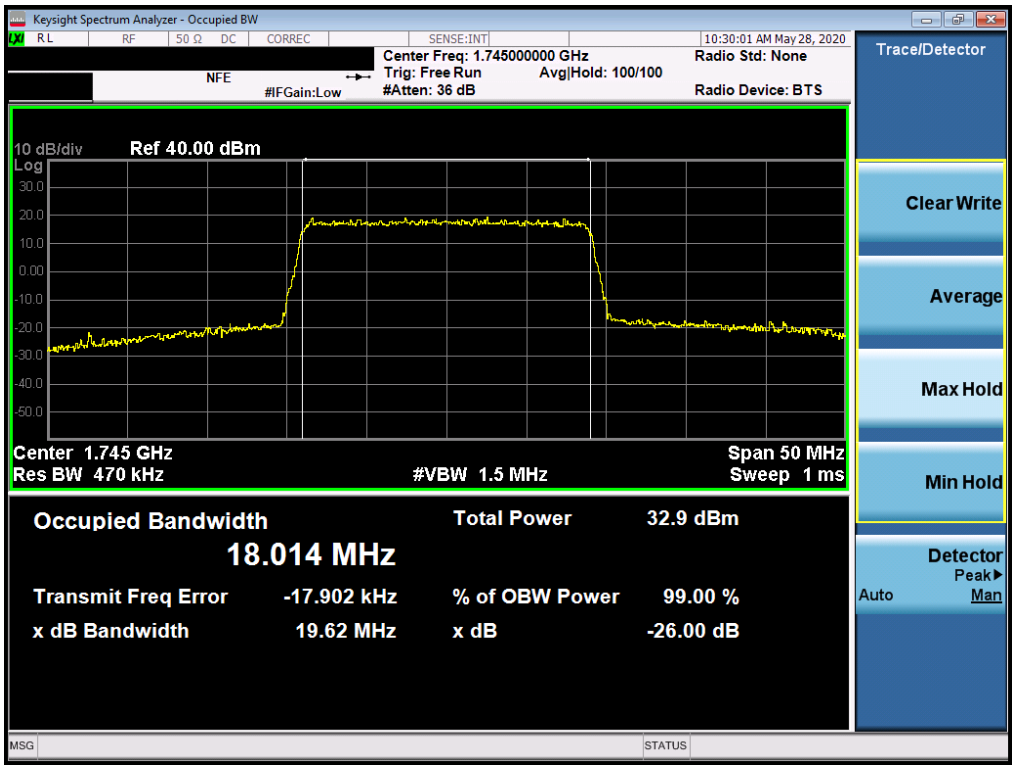

Plot 7-2. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz 16-QAM - Full RB Configuration)

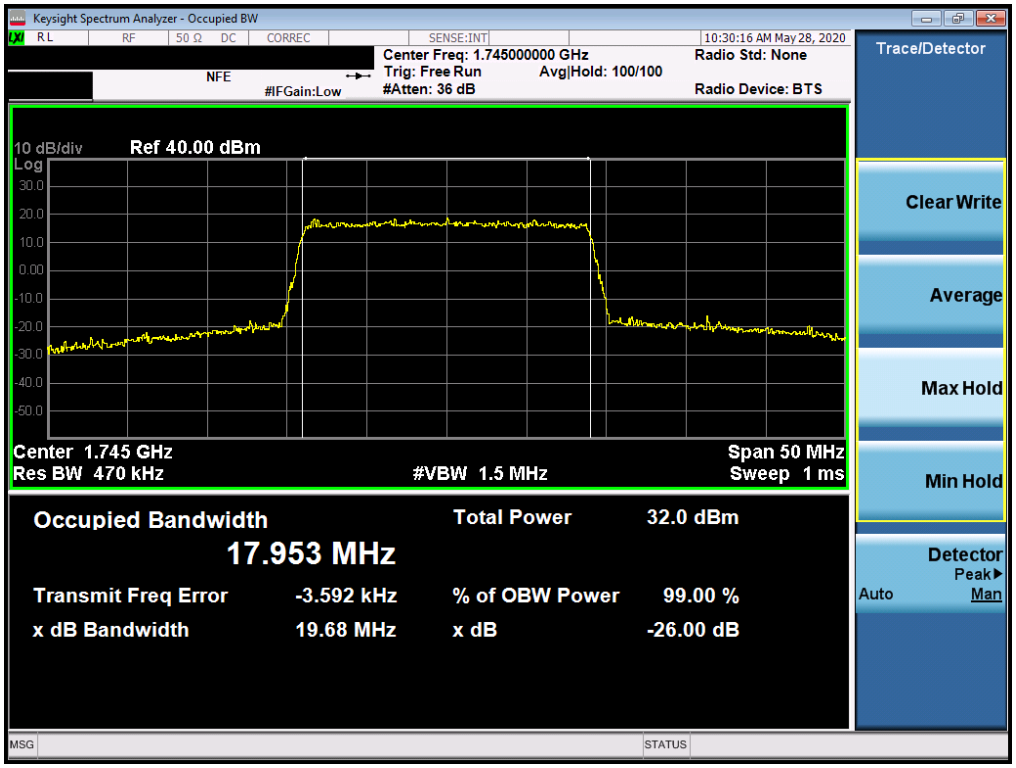

Plot 7-3. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz 64-QAM - Full RB Configuration)

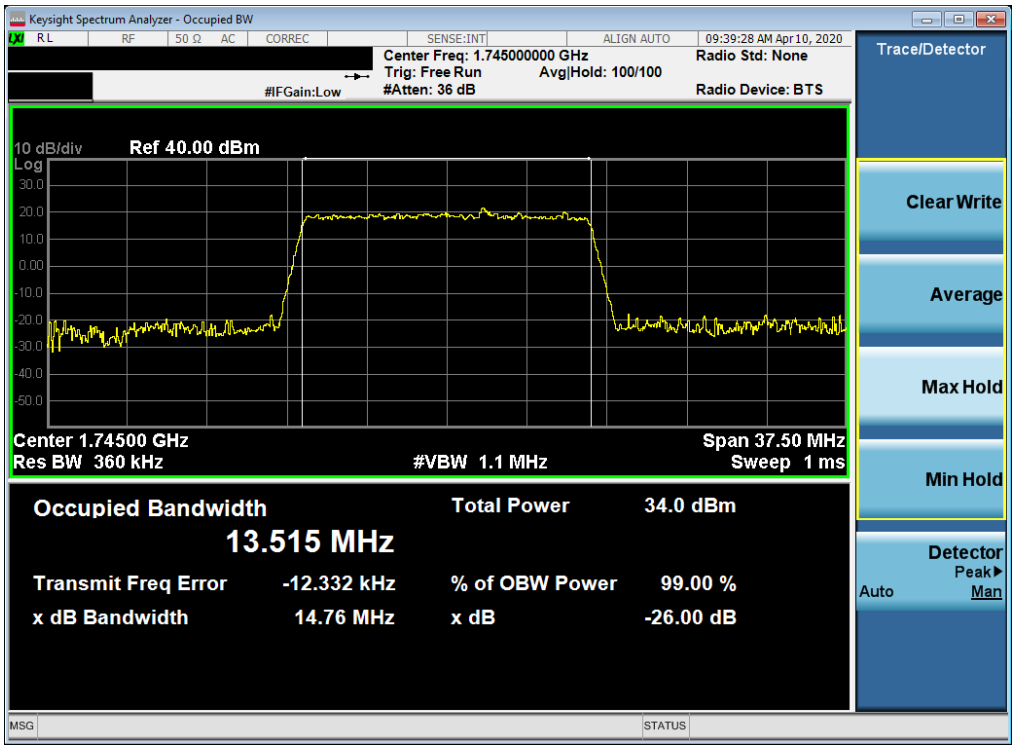

Plot 7-4. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz QPSK - Full RB Configuration)

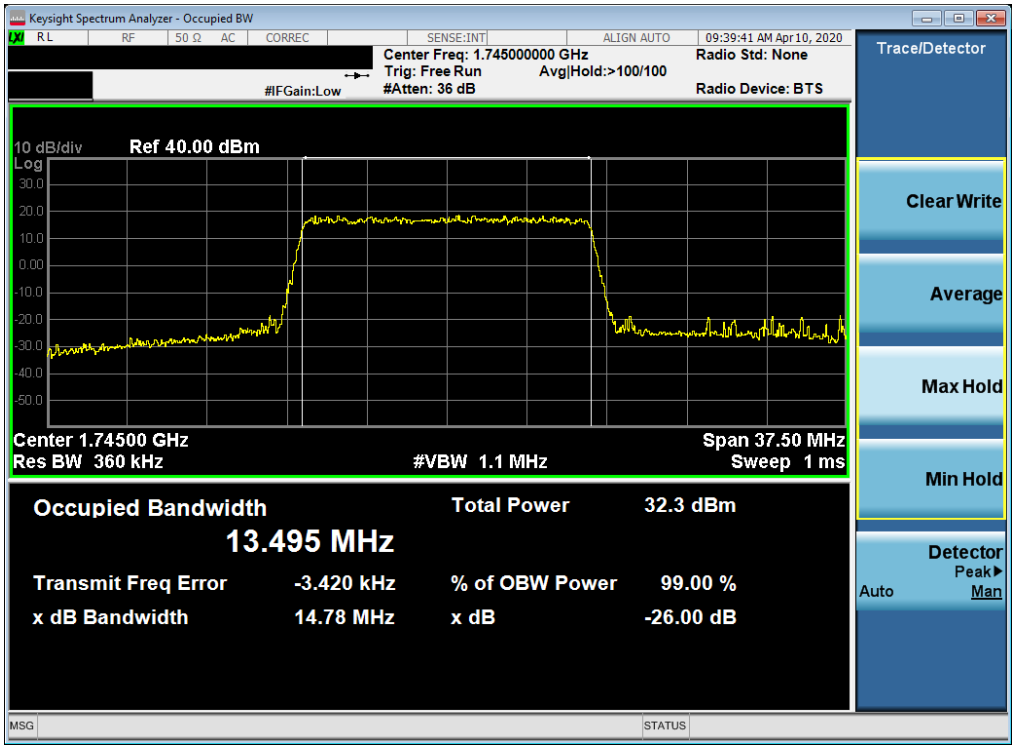

Plot 7-5. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz 16-QAM - Full RB Configuration)

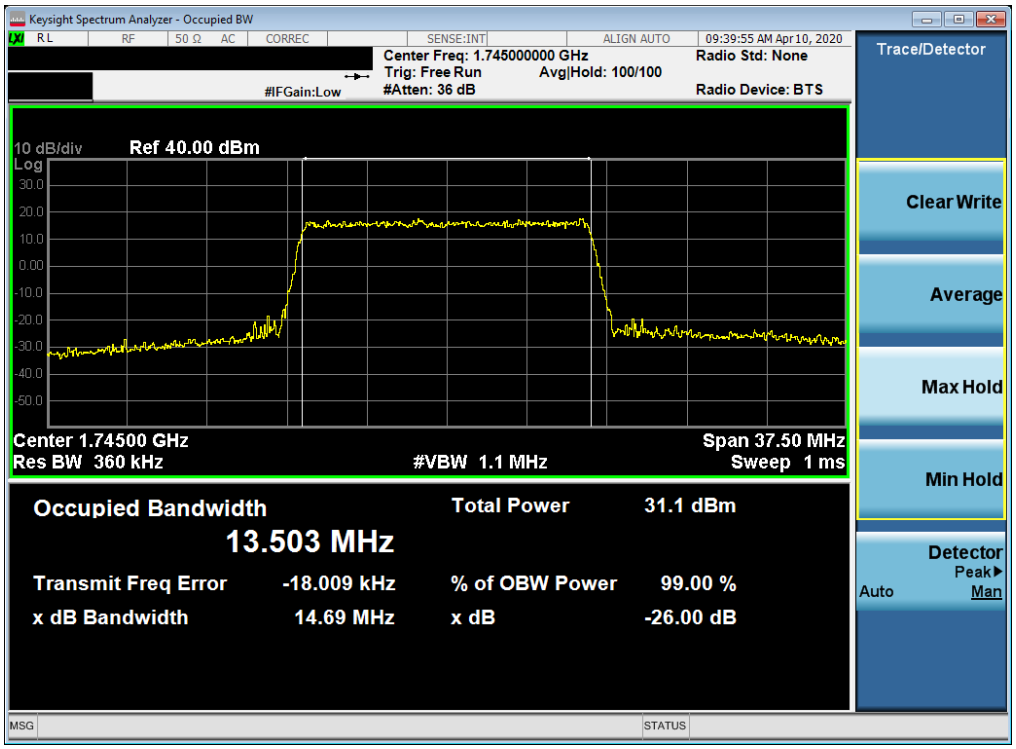

Plot 7-6. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz 64-QAM - Full RB Configuration)

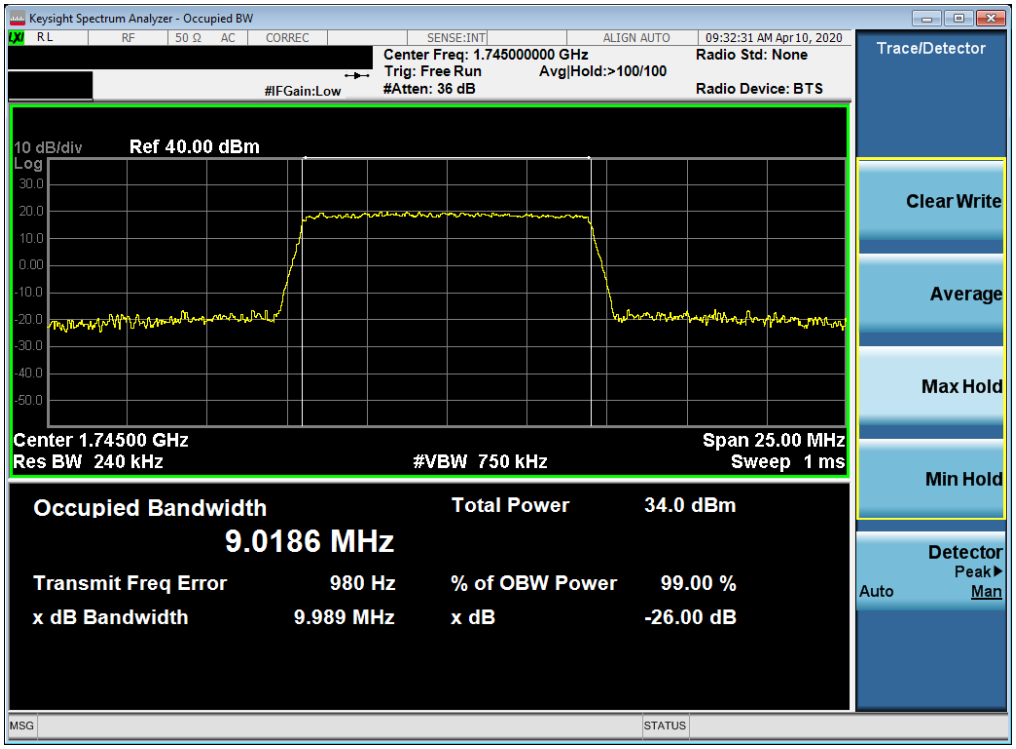

Plot 7-7. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz QPSK - Full RB Configuration)

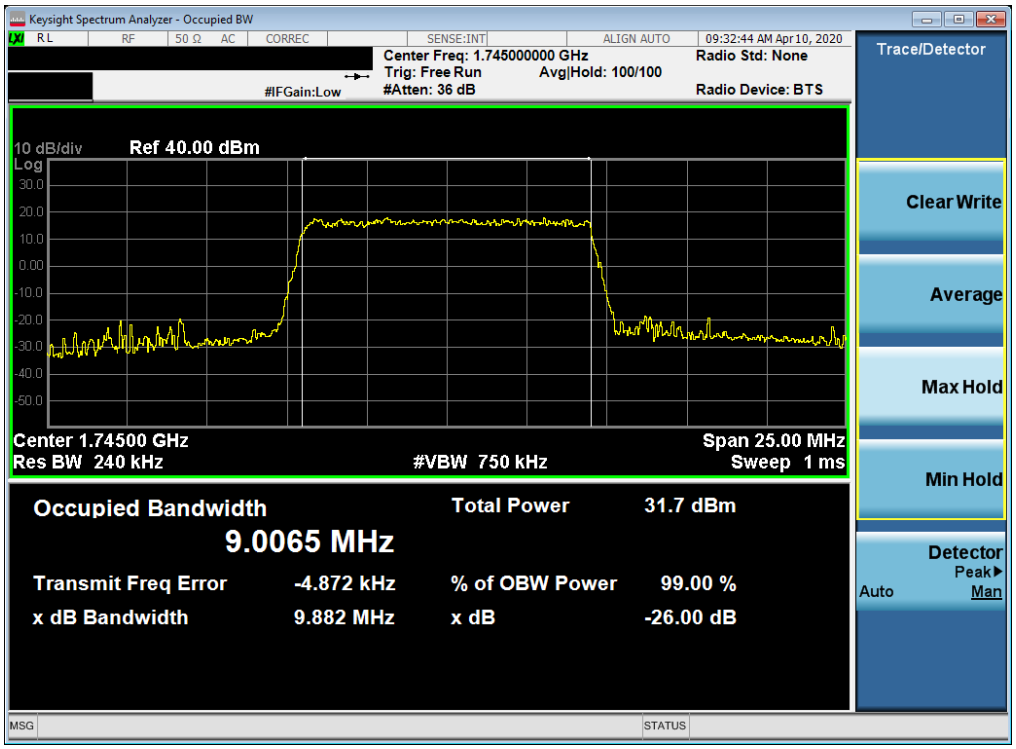

Plot 7-8. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz 16-QAM - Full RB Configuration)

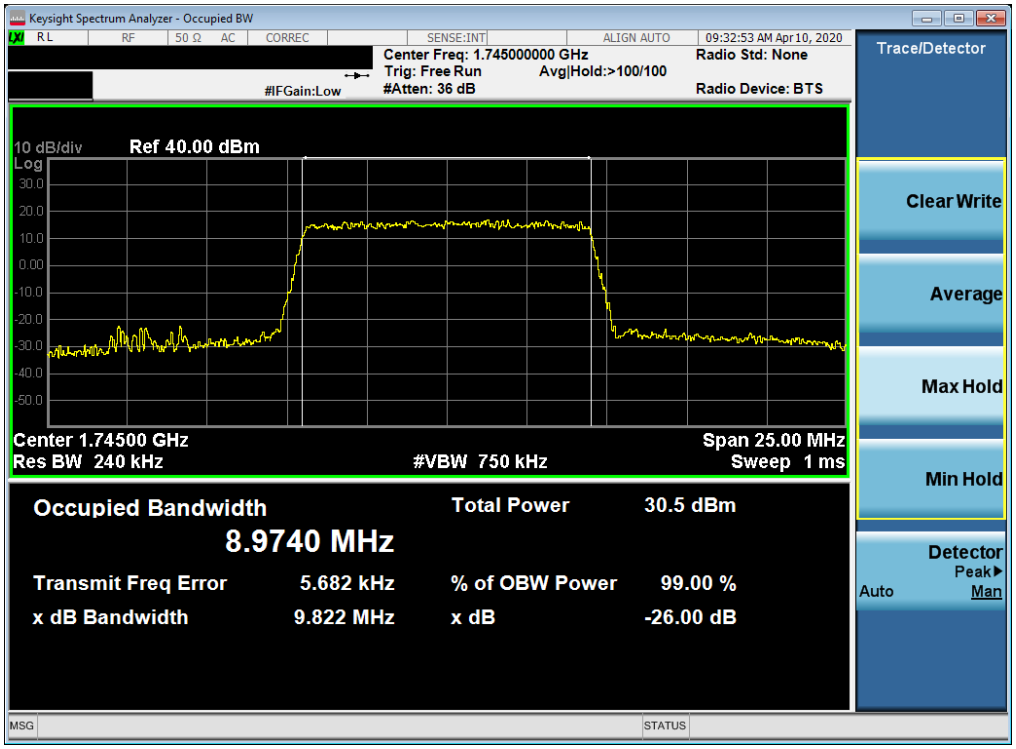

Plot 7-9. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz 64-QAM - Full RB Configuration)

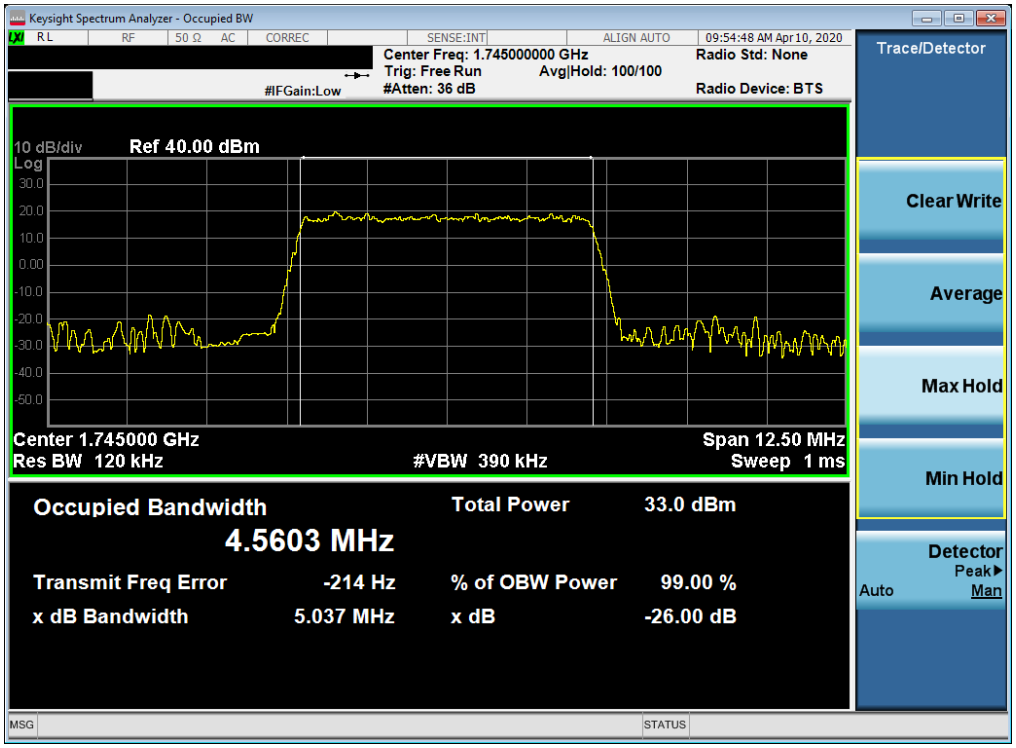

Plot 7-10. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz QPSK - Full RB Configuration)

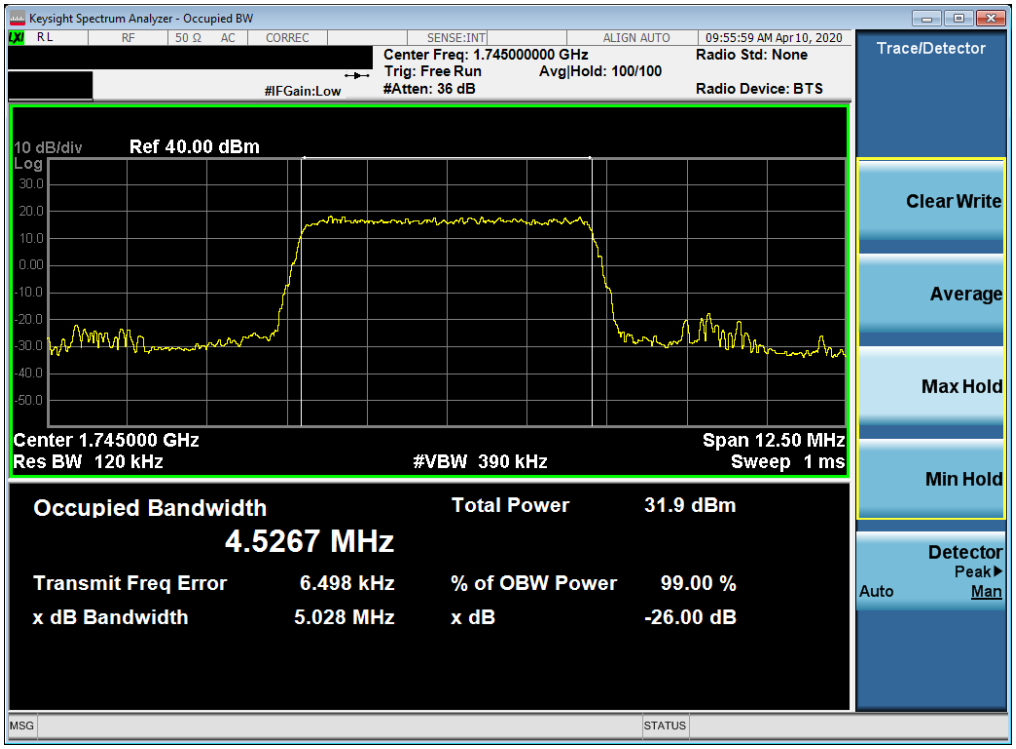

Plot 7-11. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz 16-QAM - Full RB Configuration)

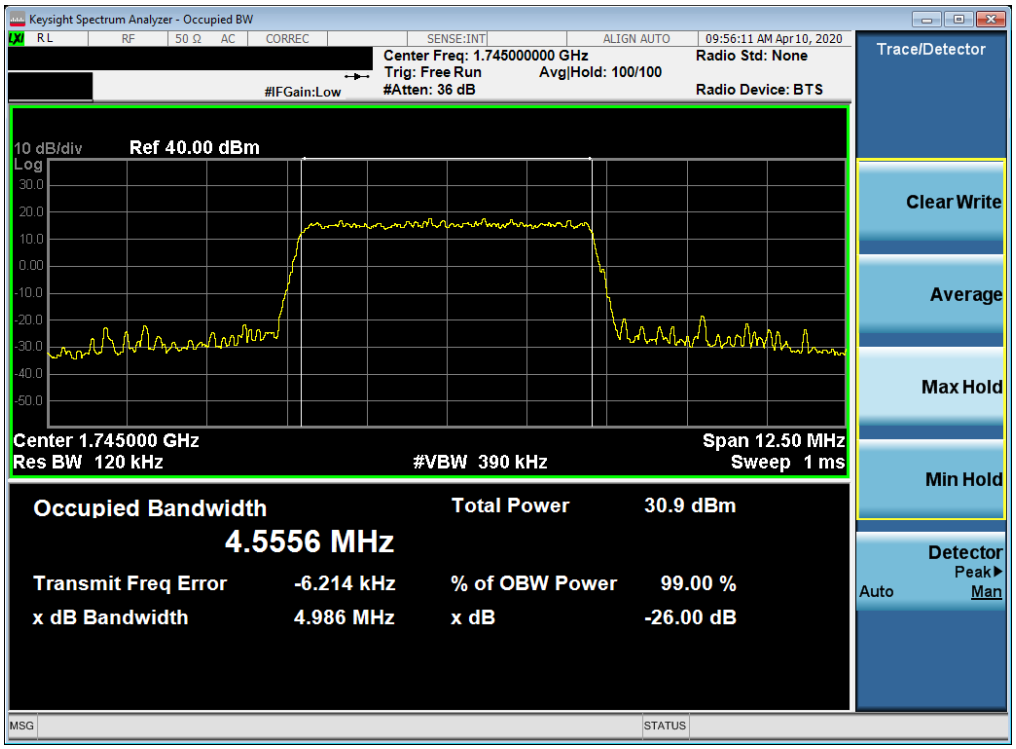

Plot 7-12. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz 64-QAM - Full RB Configuration)

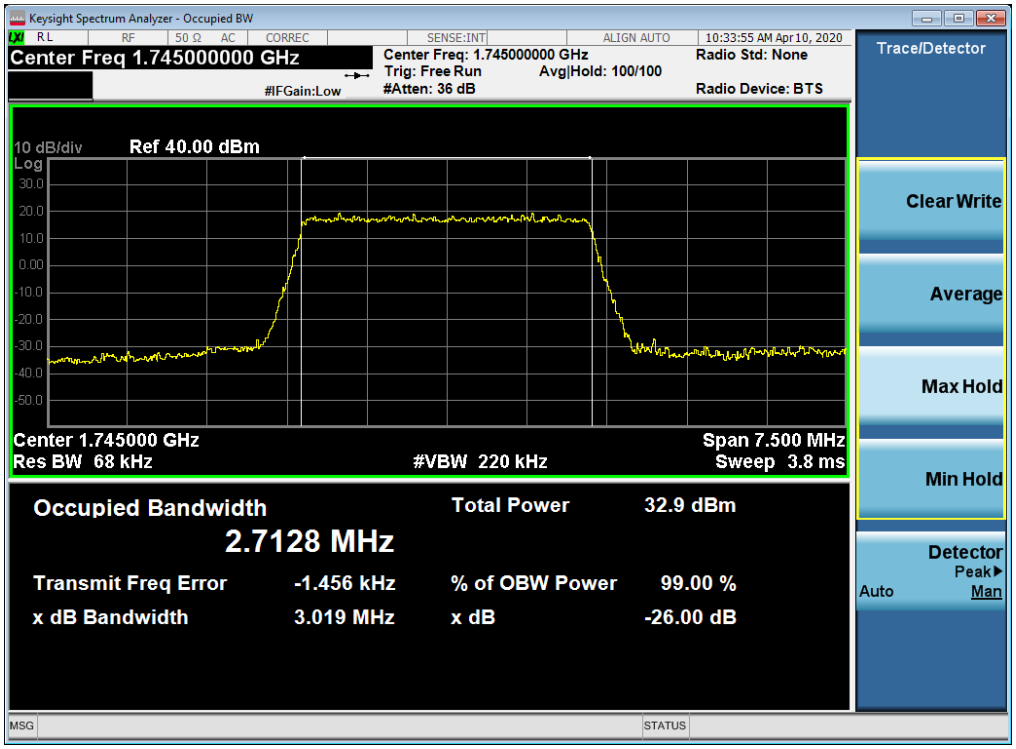

Plot 7-13. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz QPSK - Full RB Configuration)

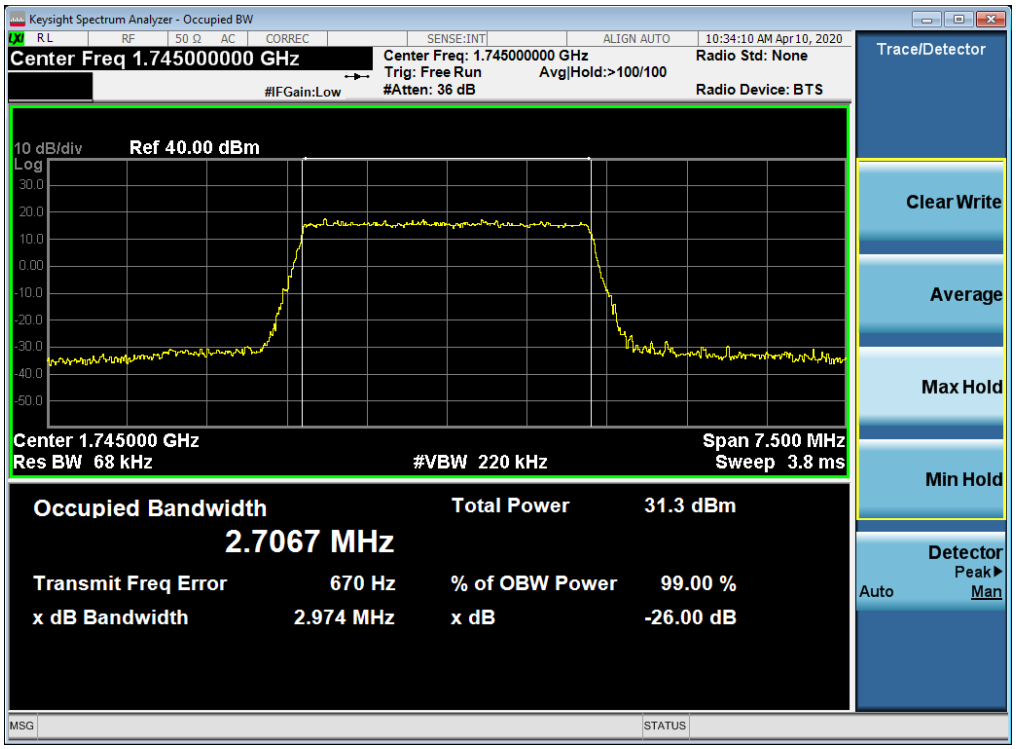

Plot 7-14. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz 16-QAM - Full RB Configuration)

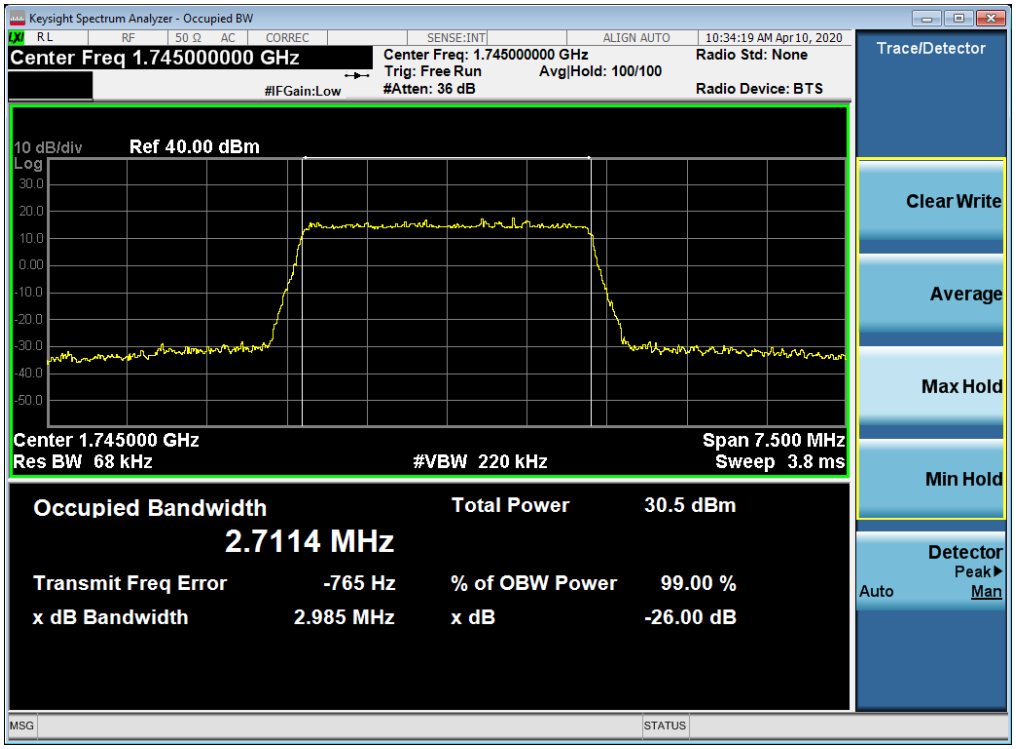

Plot 7-15. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz 64-QAM - Full RB Configuration)

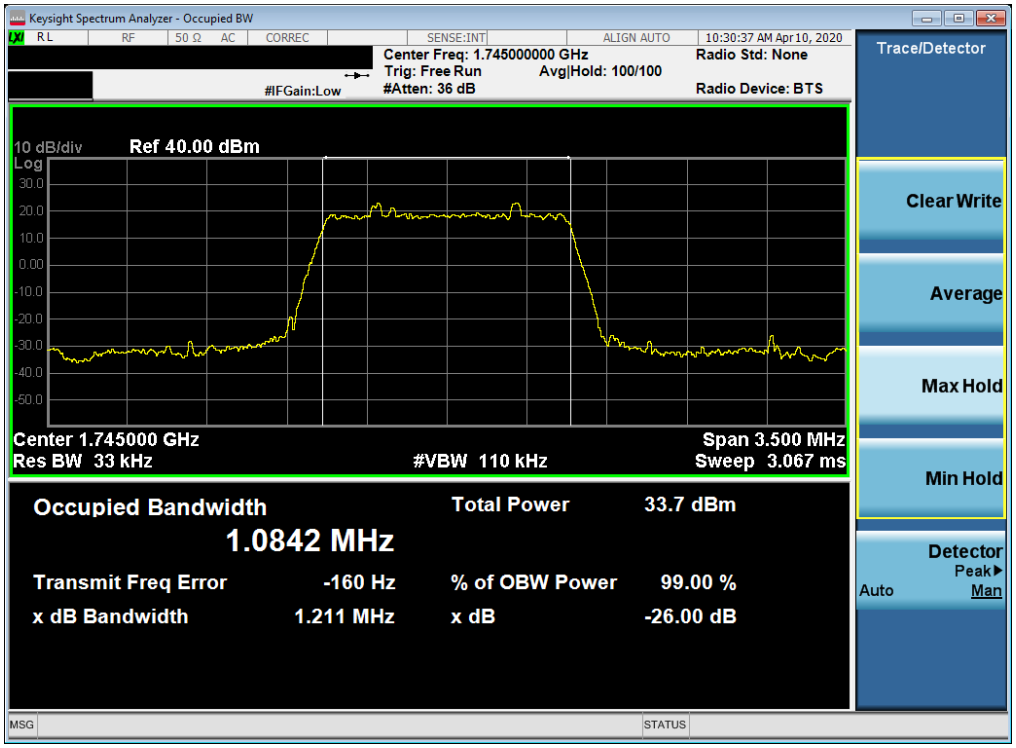

Plot 7-16. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz QPSK - Full RB Configuration)

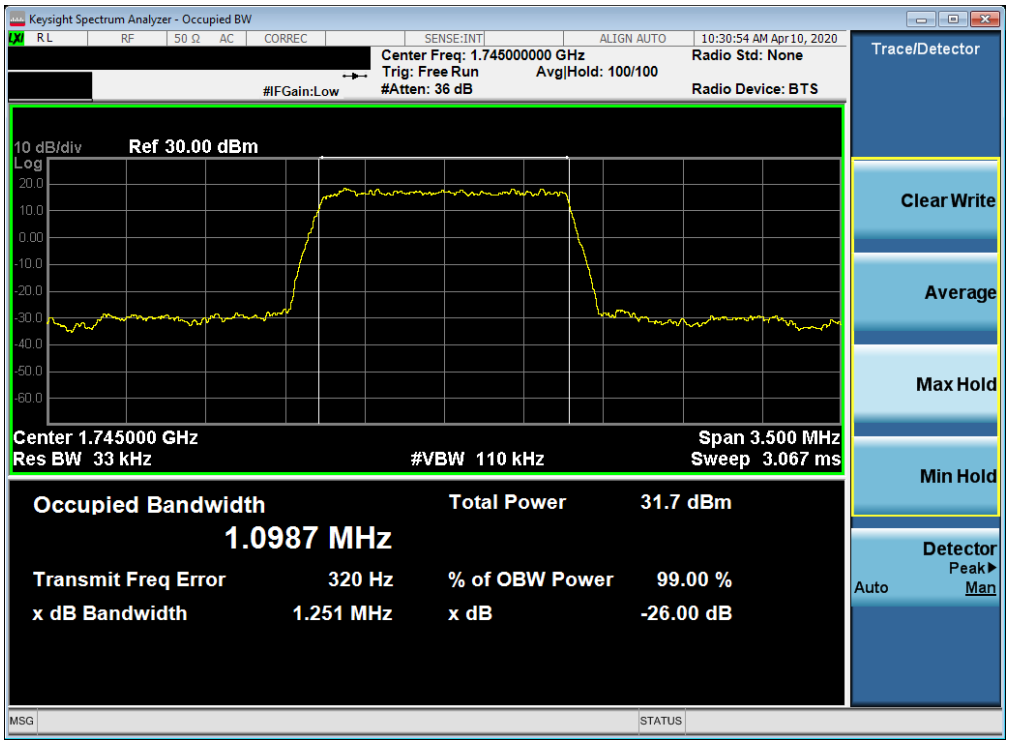

Plot 7-17. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz 16-QAM - Full RB Configuration)

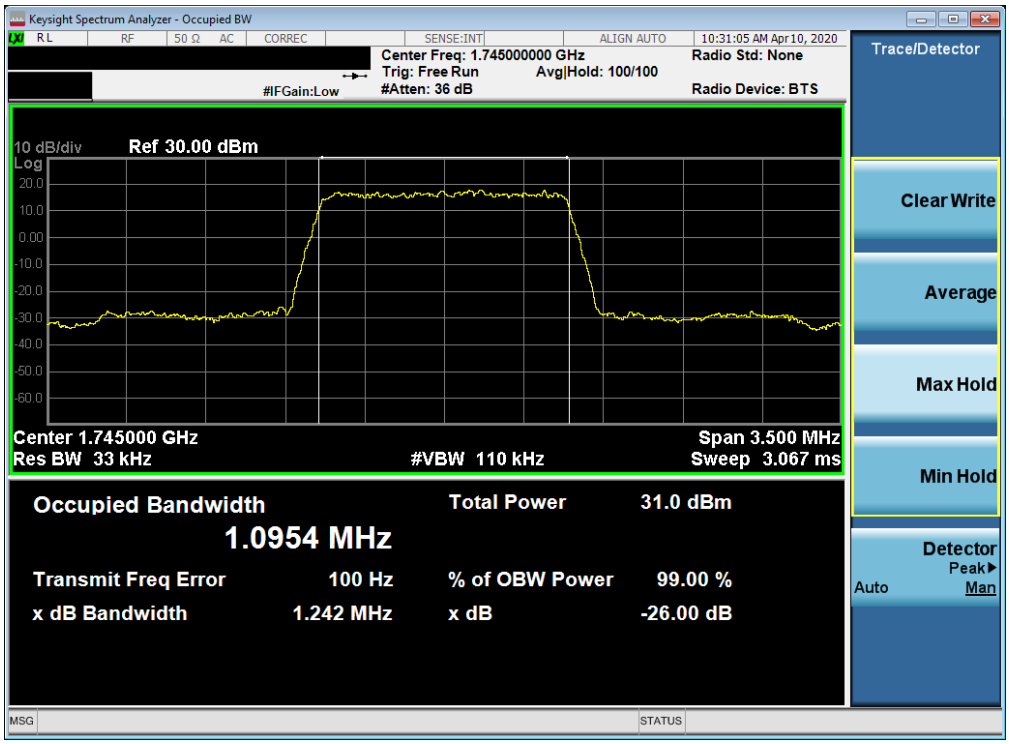

Plot 7-18. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz 64-QAM - Full RB Configuration)

Plot 7-19. Occupied Bandwidth Plot (LTE Band 12 - 10MHz QPSK - Full RB Configuration)

Plot 7-20. Occupied Bandwidth Plot (LTE Band 12 - 10MHz 16-QAM - Full RB Configuration)

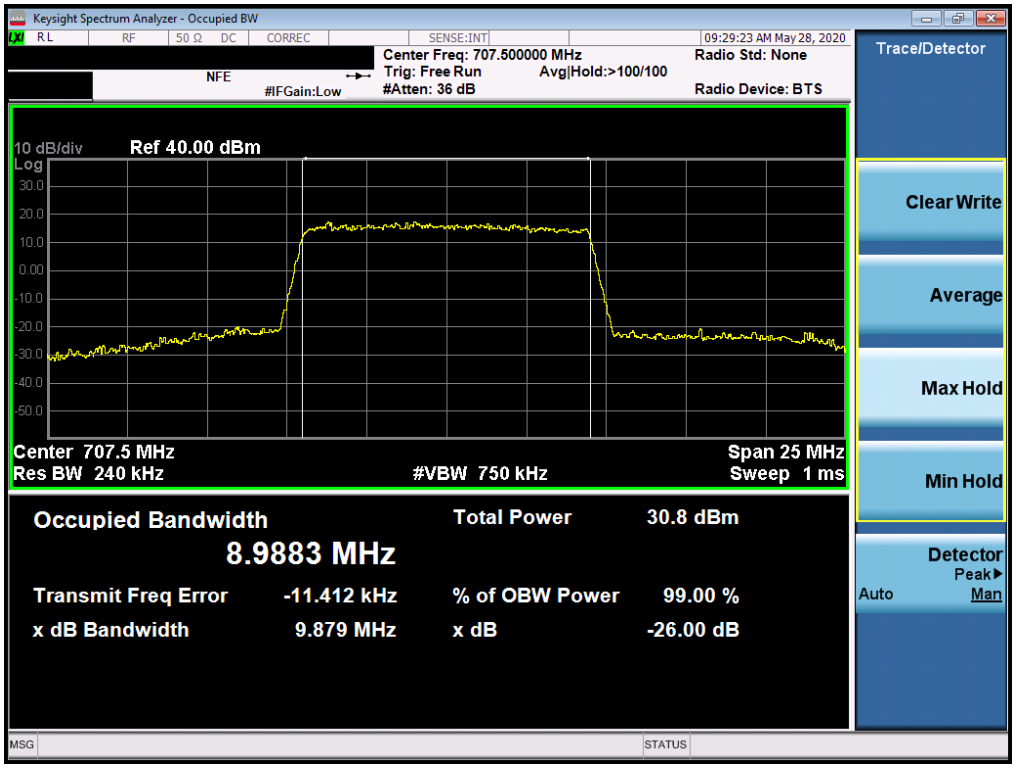

Plot 7-21. Occupied Bandwidth Plot (LTE Band 12 - 10MHz 64-QAM - Full RB Configuration)

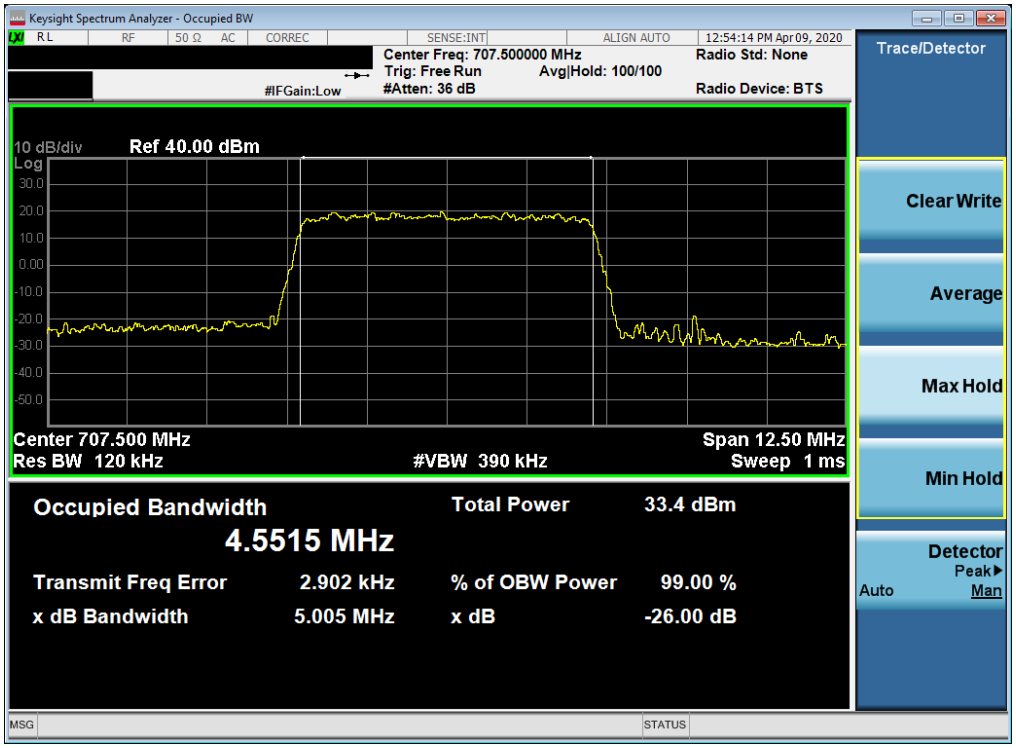

Plot 7-22. Occupied Bandwidth Plot (LTE Band 12 - 5MHz QPSK - Full RB Configuration)

Plot 7-23. Occupied Bandwidth Plot (LTE Band 12 - 5MHz 16-QAM - Full RB Configuration)

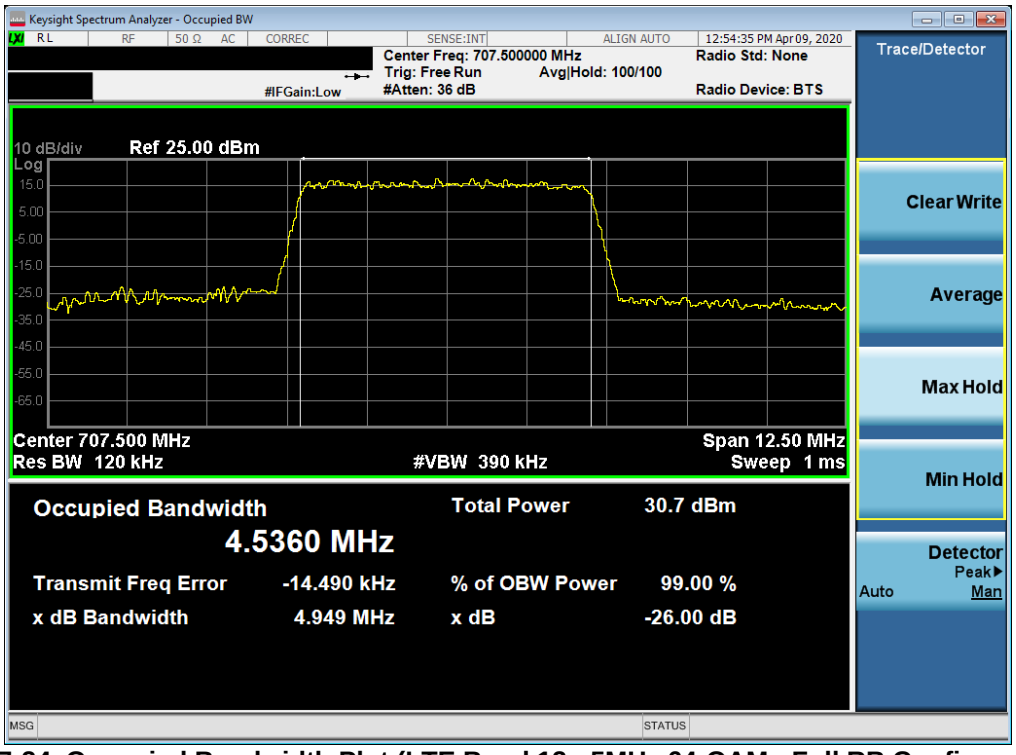

Plot 7-24. Occupied Bandwidth Plot (LTE Band 12 - 5MHz 64-QAM - Full RB Configuration)

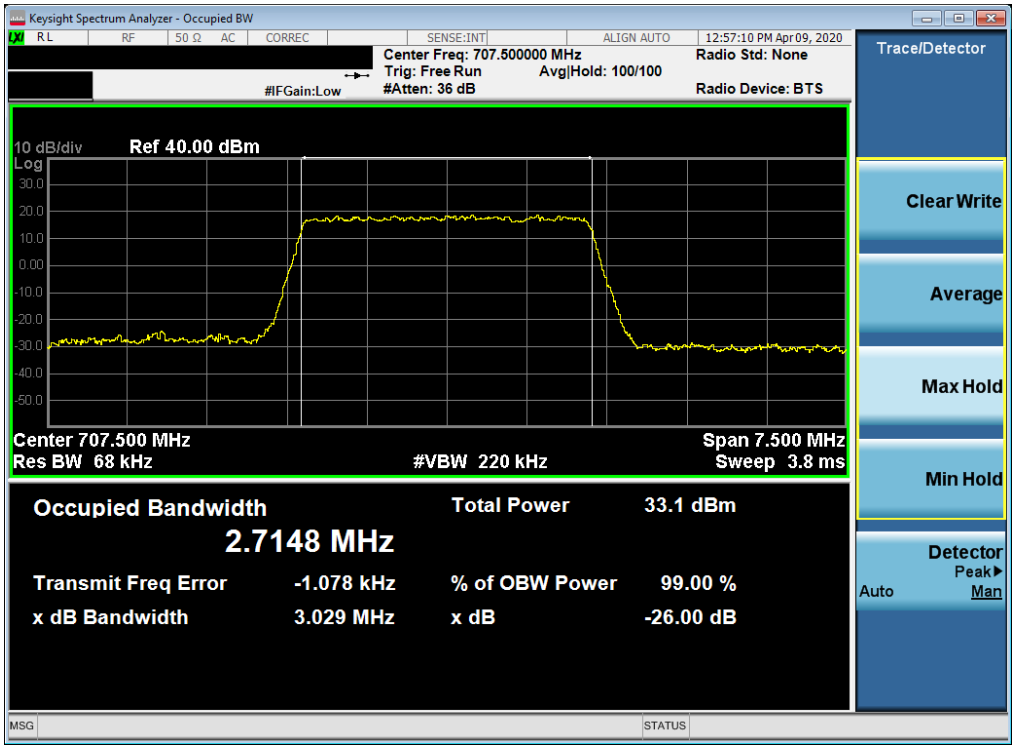

Plot 7-25. Occupied Bandwidth Plot (LTE Band 12 - 3MHz QPSK - Full RB Configuration)

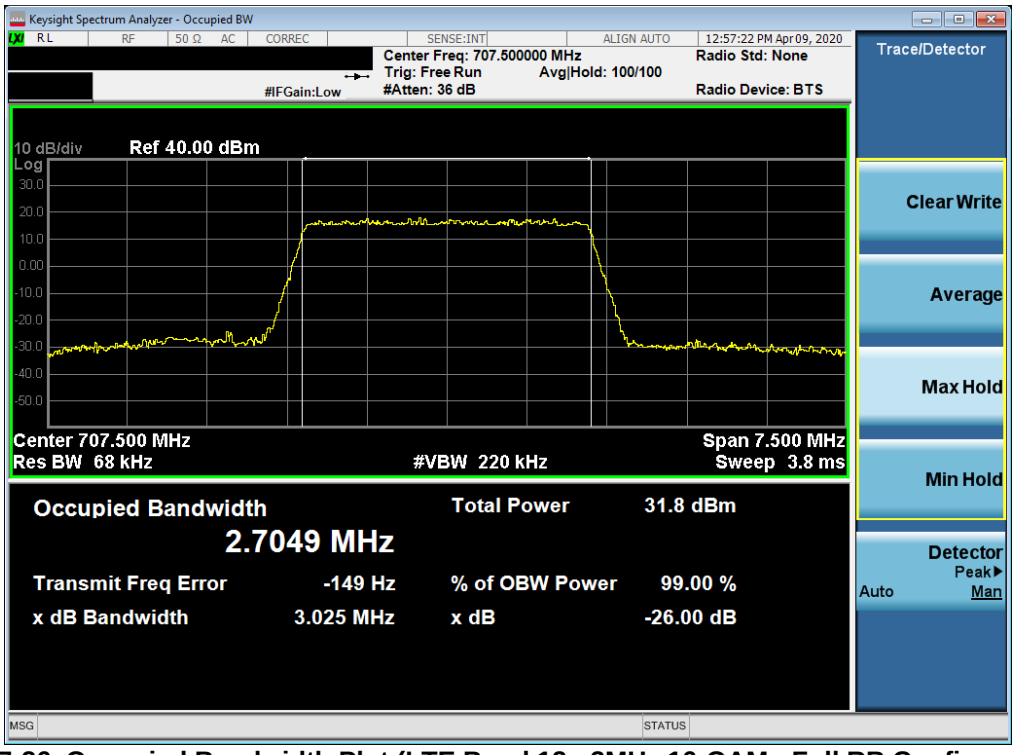

Plot 7-26. Occupied Bandwidth Plot (LTE Band 12 - 3MHz 16-QAM - Full RB Configuration)

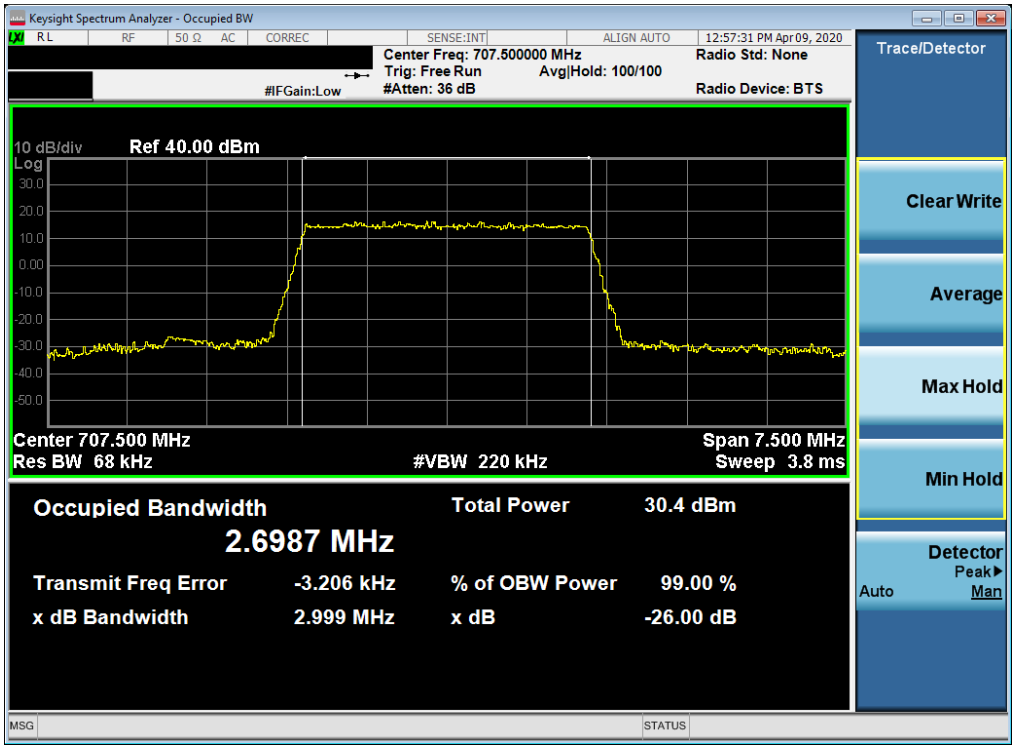

Plot 7-27. Occupied Bandwidth Plot (LTE Band 12 - 3MHz 64-QAM - Full RB Configuration)

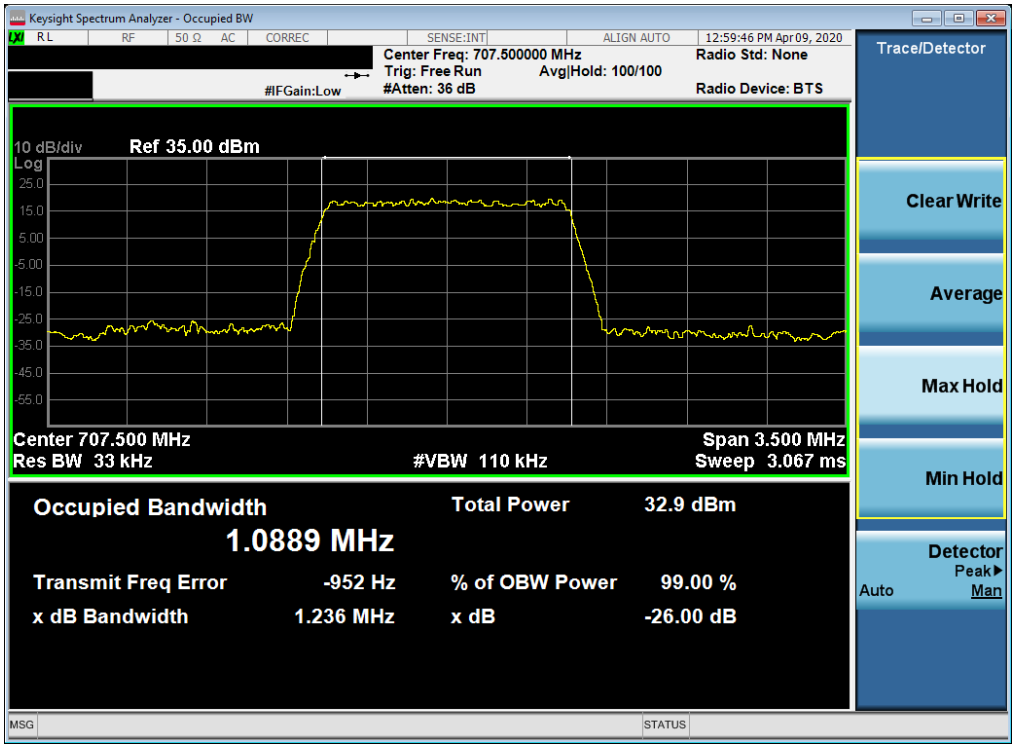

Plot 7-28. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz QPSK - Full RB Configuration)

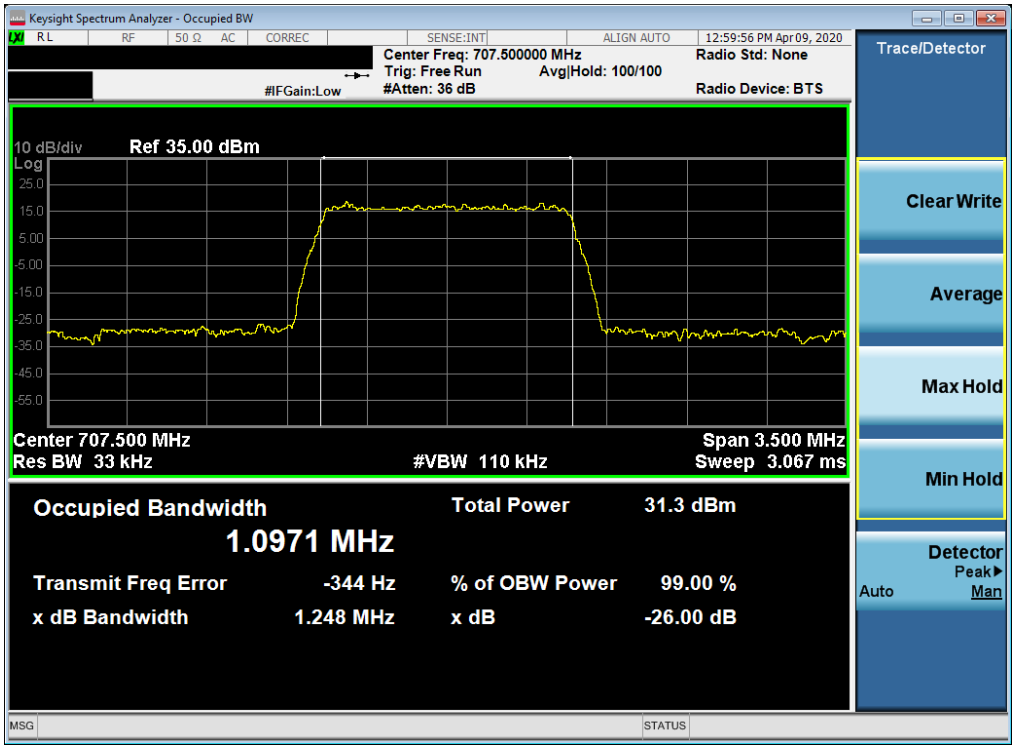

Plot 7-29. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz 16-QAM - Full RB Configuration)

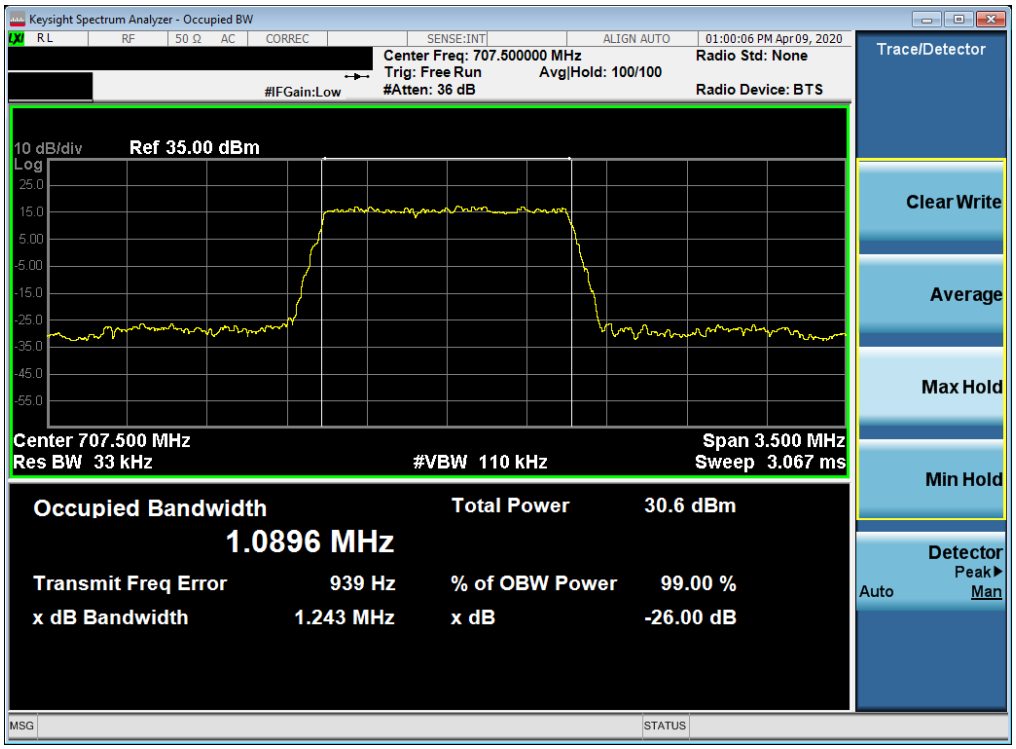

Plot 7-30. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz 64-QAM - Full RB Configuration)

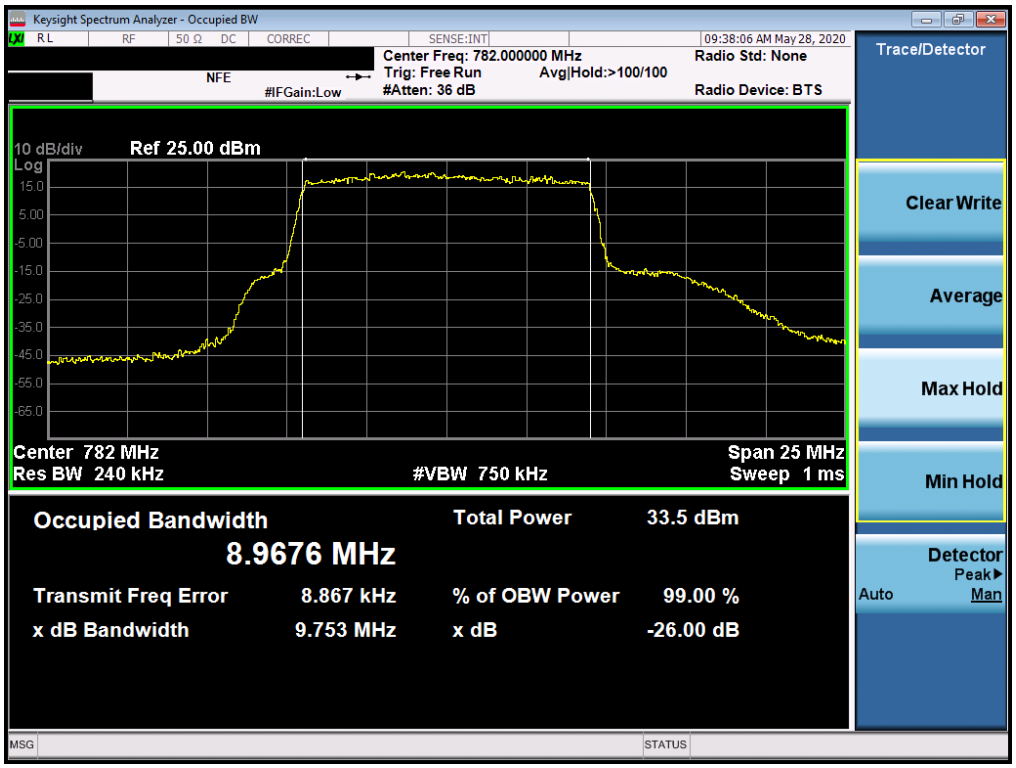

Plot 7-31. Occupied Bandwidth Plot (LTE Band 13 - 10MHz QPSK - Full RB Configuration)

Plot 7-32. Occupied Bandwidth Plot (LTE Band 13 - 10MHz 16-QAM - Full RB Configuration)

Plot 7-33. Occupied Bandwidth Plot (LTE Band 13 - 10MHz 64-QAM - Full RB Configuration)

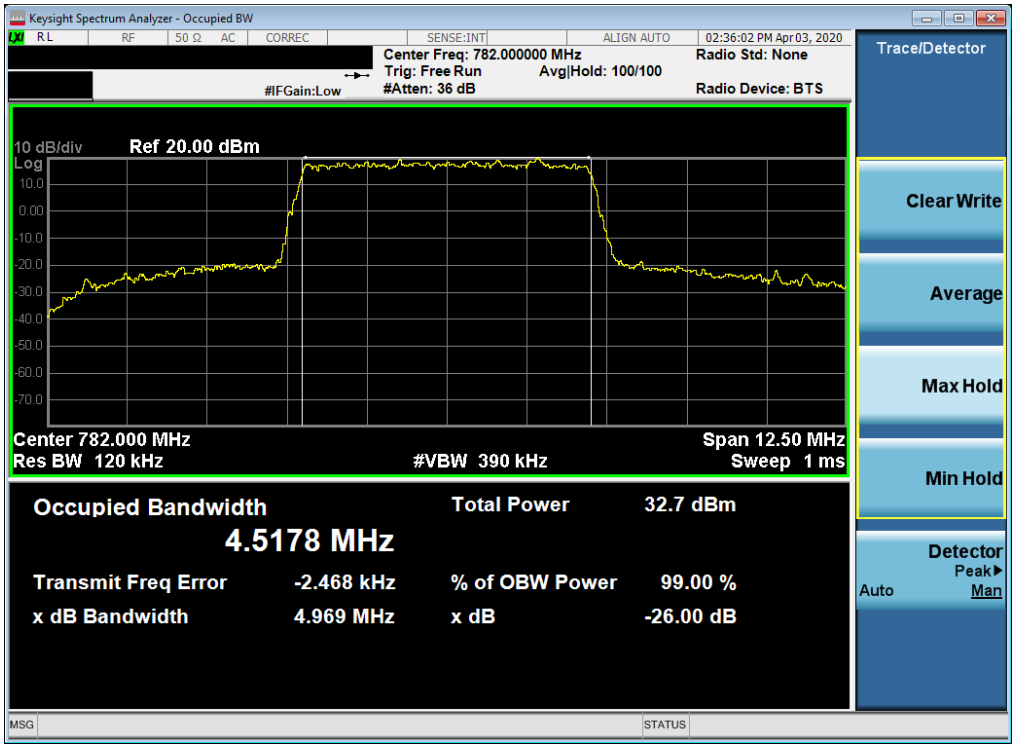

Plot 7-34. Occupied Bandwidth Plot (LTE Band 13 - 5MHz QPSK - Full RB Configuration)

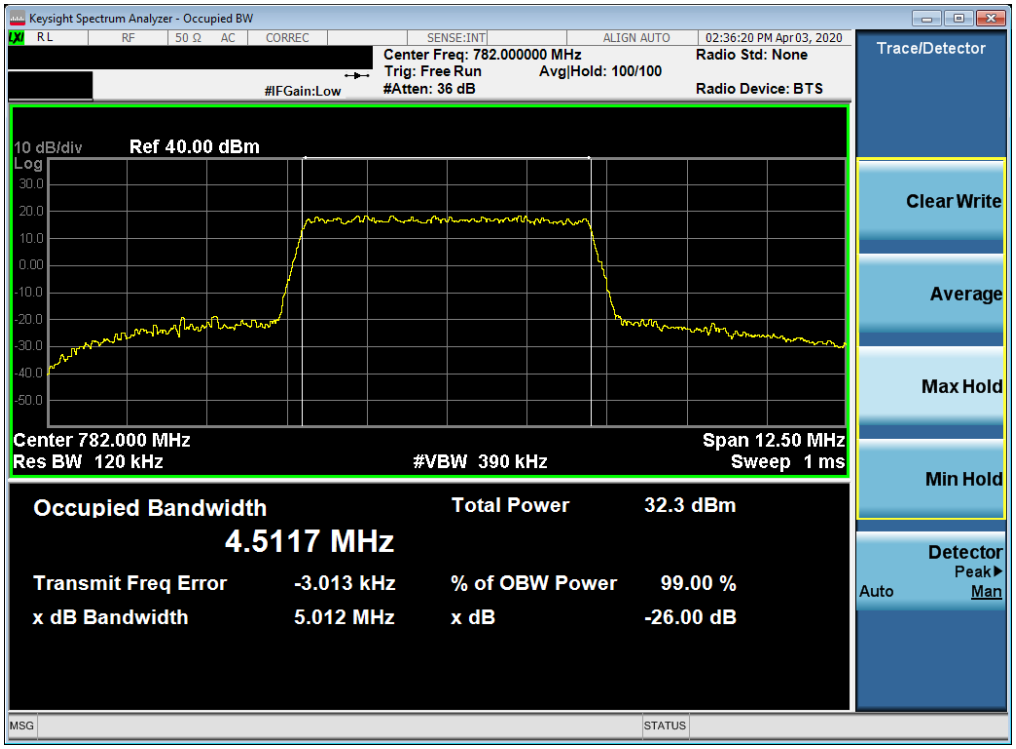

Plot 7-35. Occupied Bandwidth Plot (LTE Band 13 - 5MHz 16-QAM - Full RB Configuration)

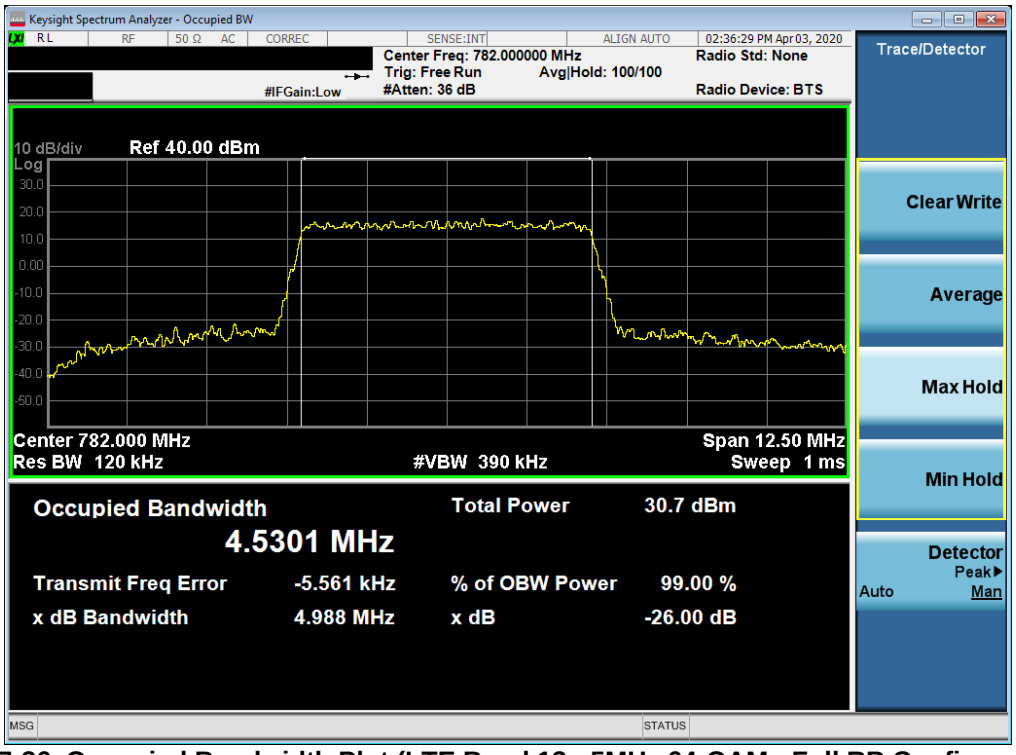

Plot 7-36. Occupied Bandwidth Plot (LTE Band 13 - 5MHz 64-QAM - Full RB Configuration)

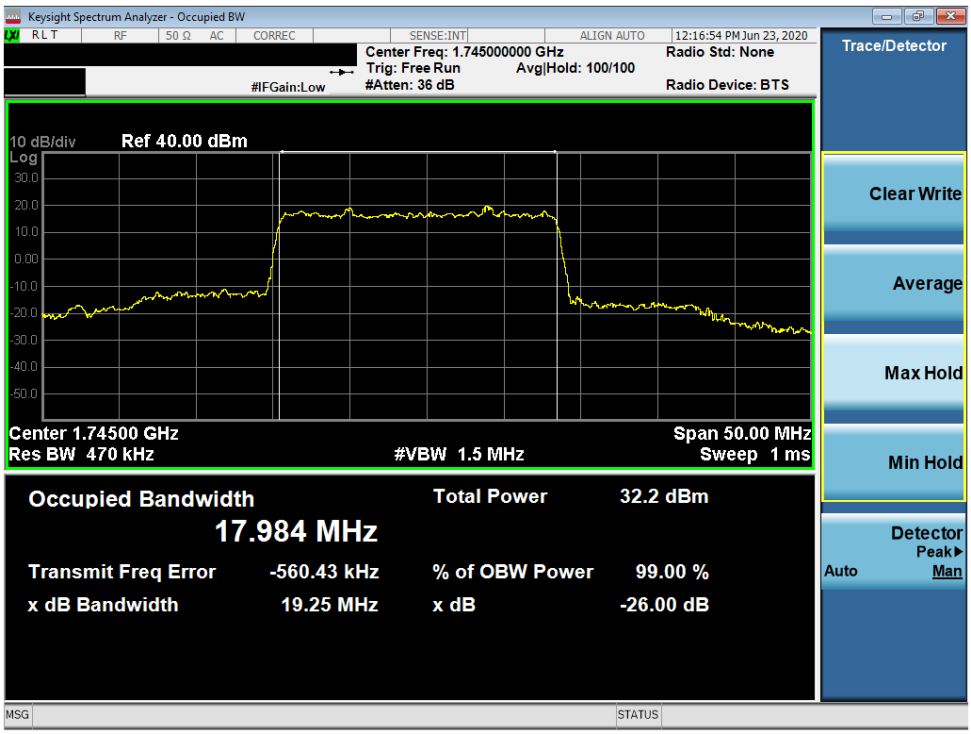

Plot 7-37. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz DFT-s-OFDM BPSK - Full RB)

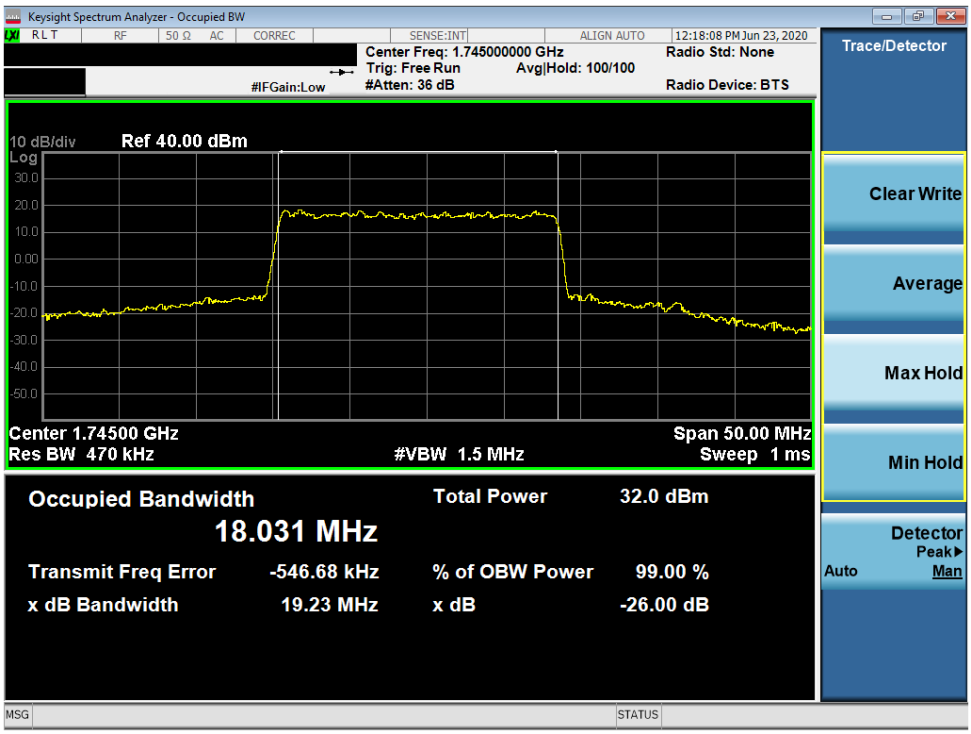

Plot 7-38. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM QPSK - Full RB)

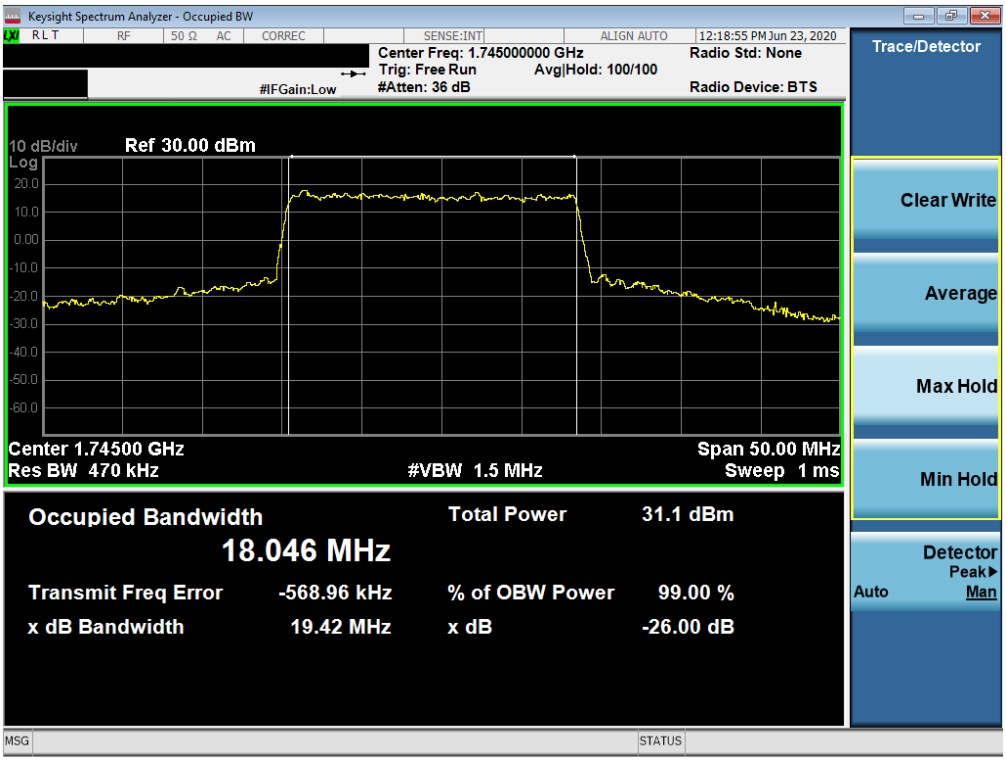

Plot 7-39. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 16QAM - Full RB)

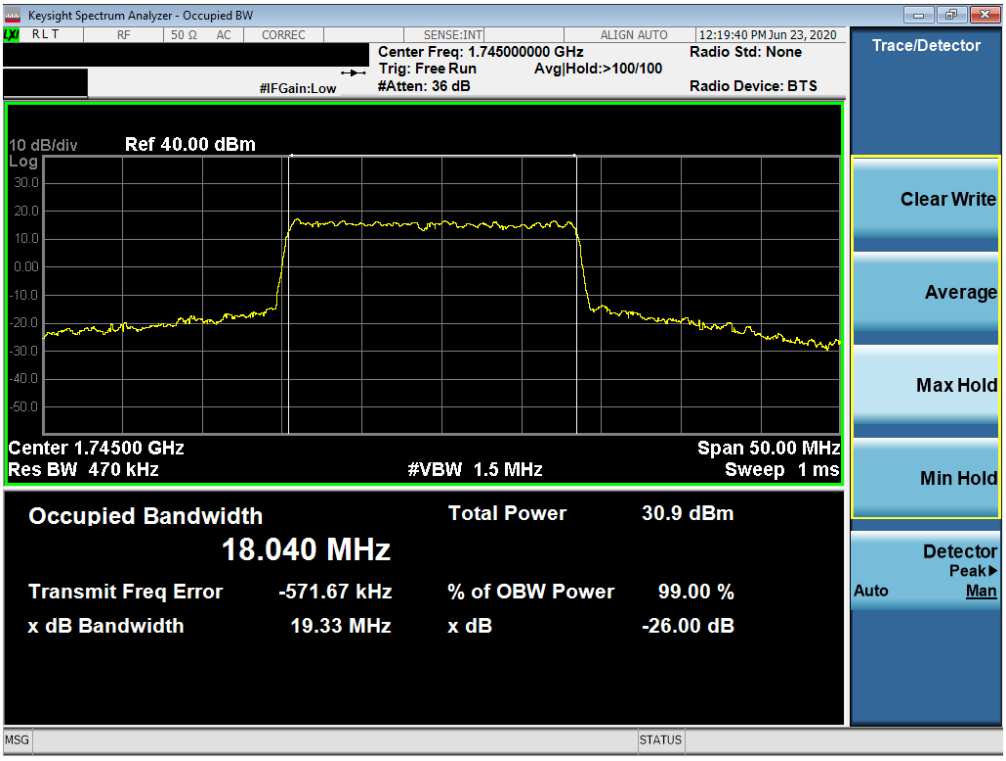

Plot 7-40. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 64QAM - Full RB)

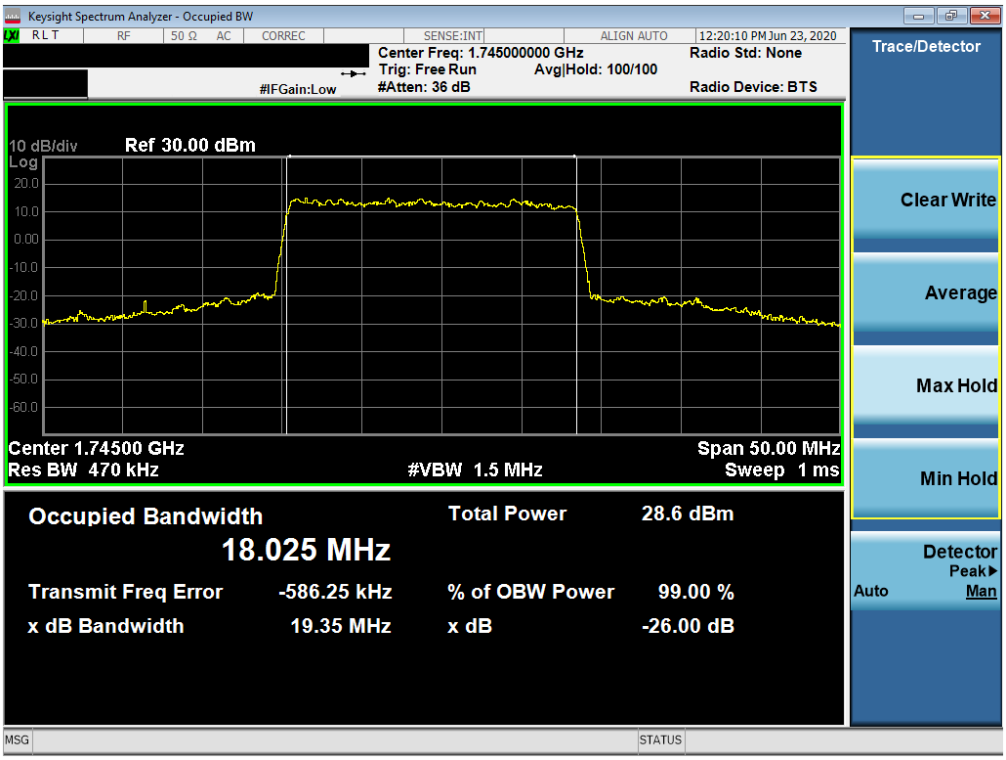

Plot 7-41. Occupied Bandwidth Plot (NR Band n66 - 20.0MHz CP-OFDM 256QAM - Full RB)

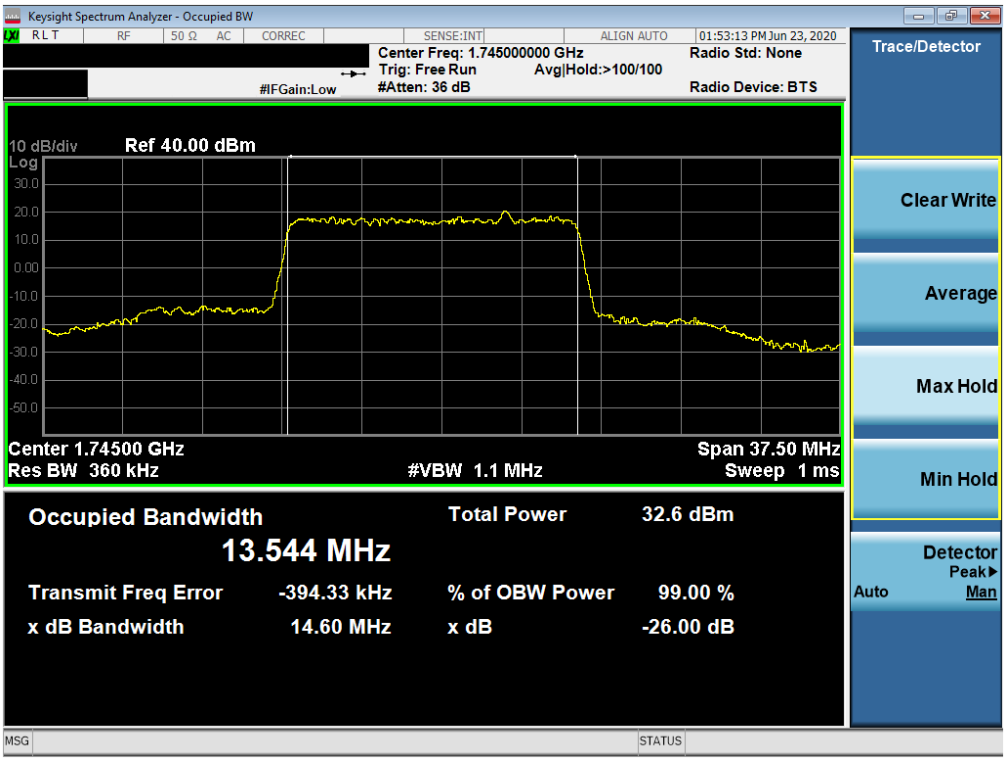

Plot 7-42. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz DFT-s-OFDM BPSK - Full RB)

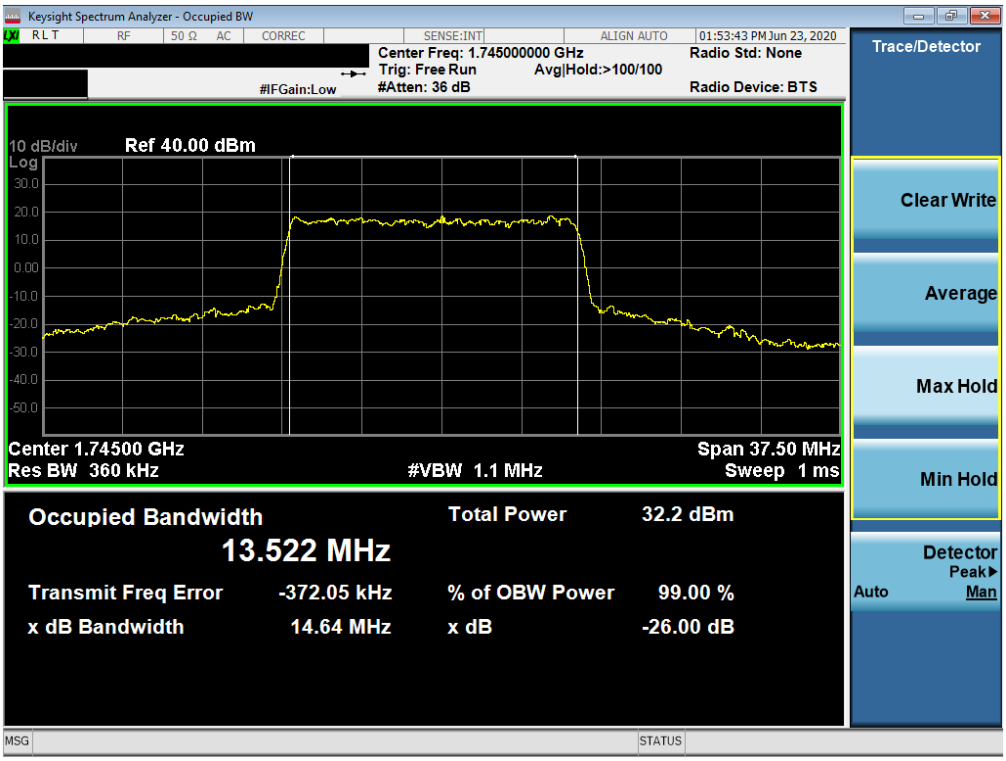

Plot 7-43. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM QPSK - Full RB)

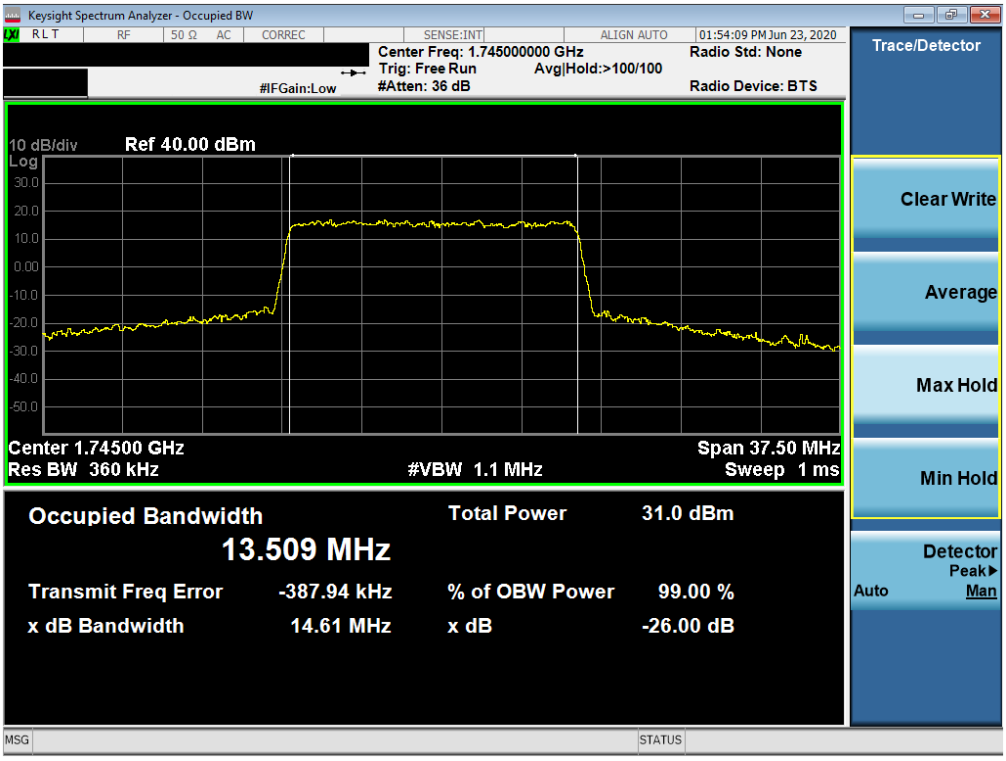

Plot 7-44. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 16QAM - Full RB)

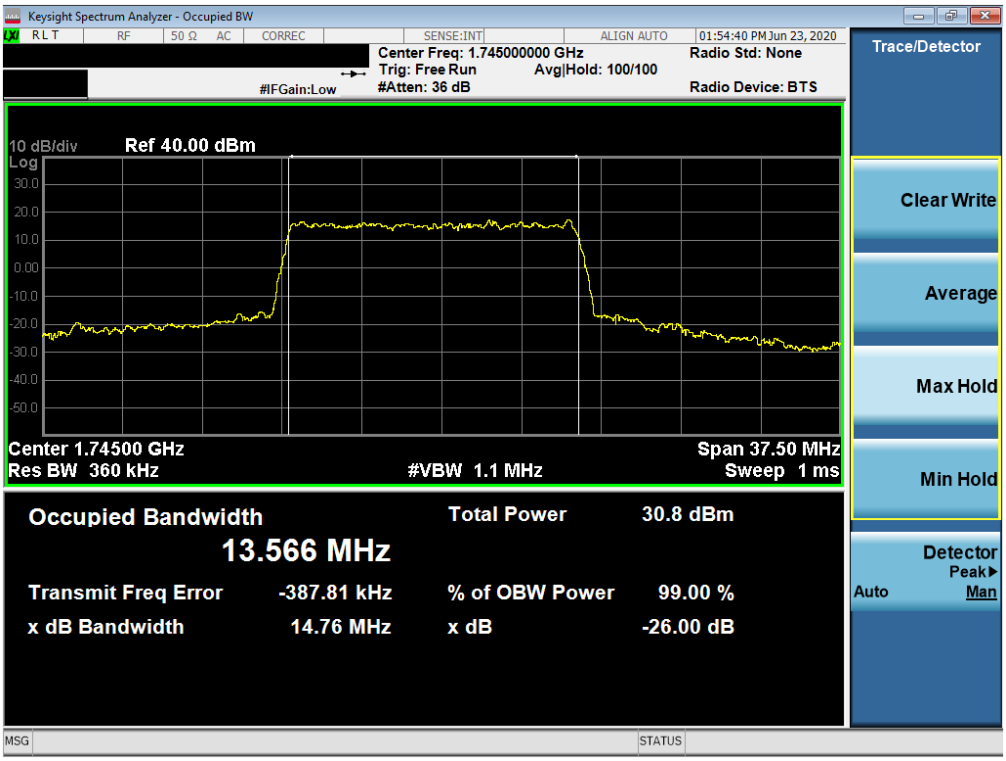

Plot 7-45. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 64QAM - Full RB)

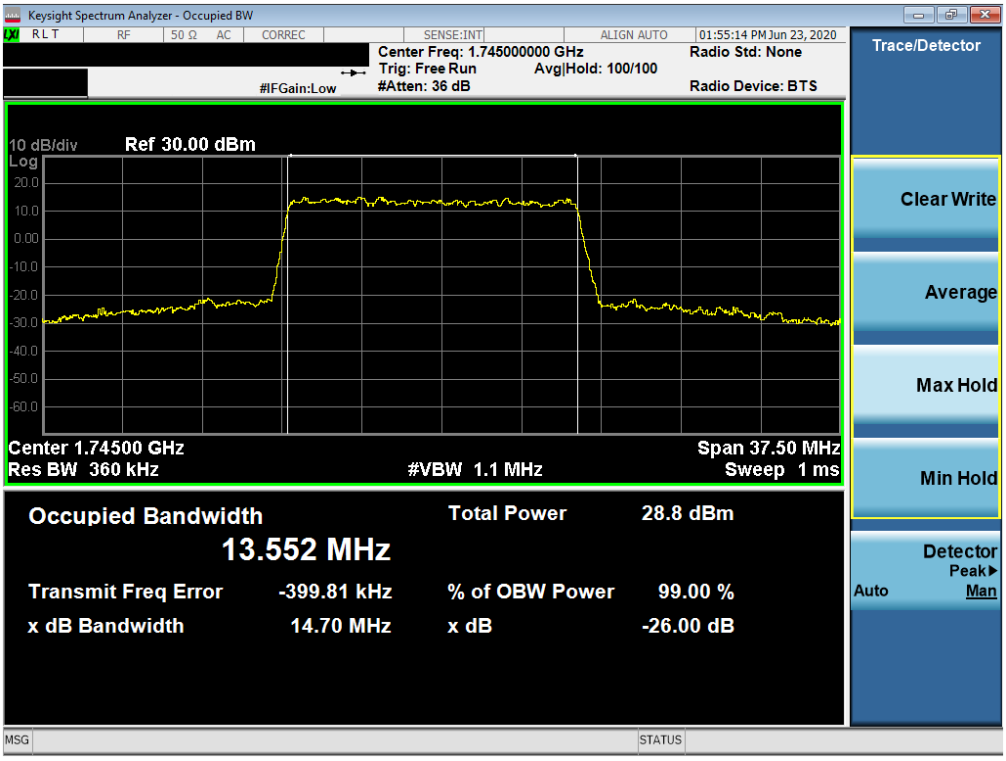

Plot 7-46. Occupied Bandwidth Plot (NR Band n66 - 15.0MHz CP-OFDM 256QAM - Full RB)

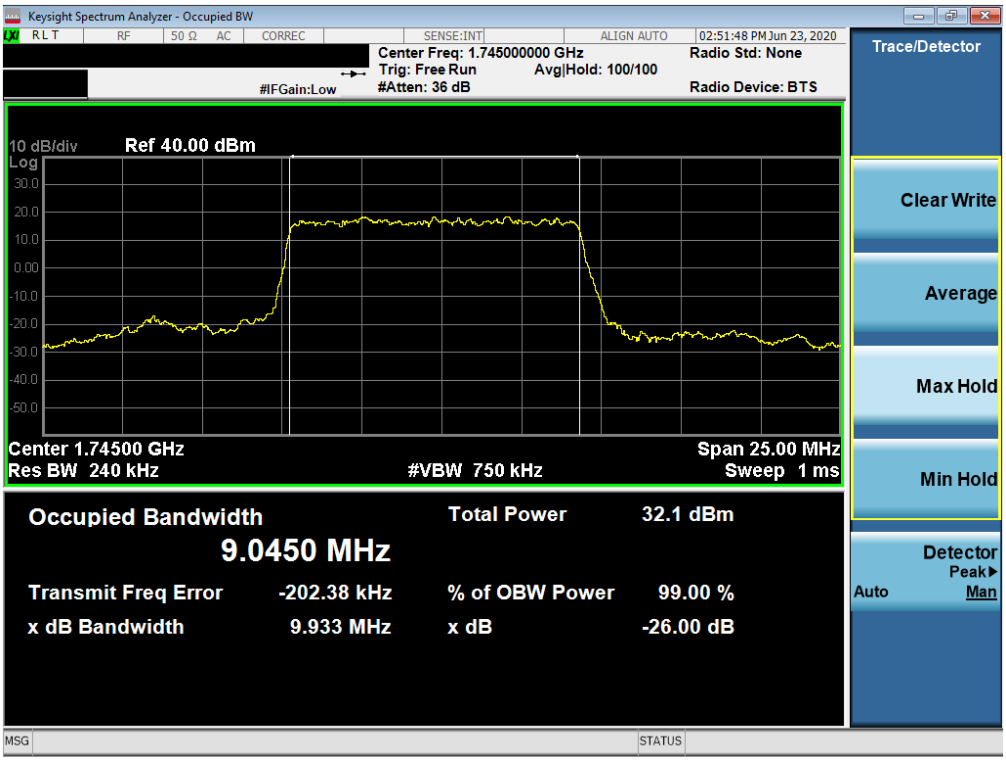

Plot 7-47. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz DFT-s-OFDM BPSK - Full RB)

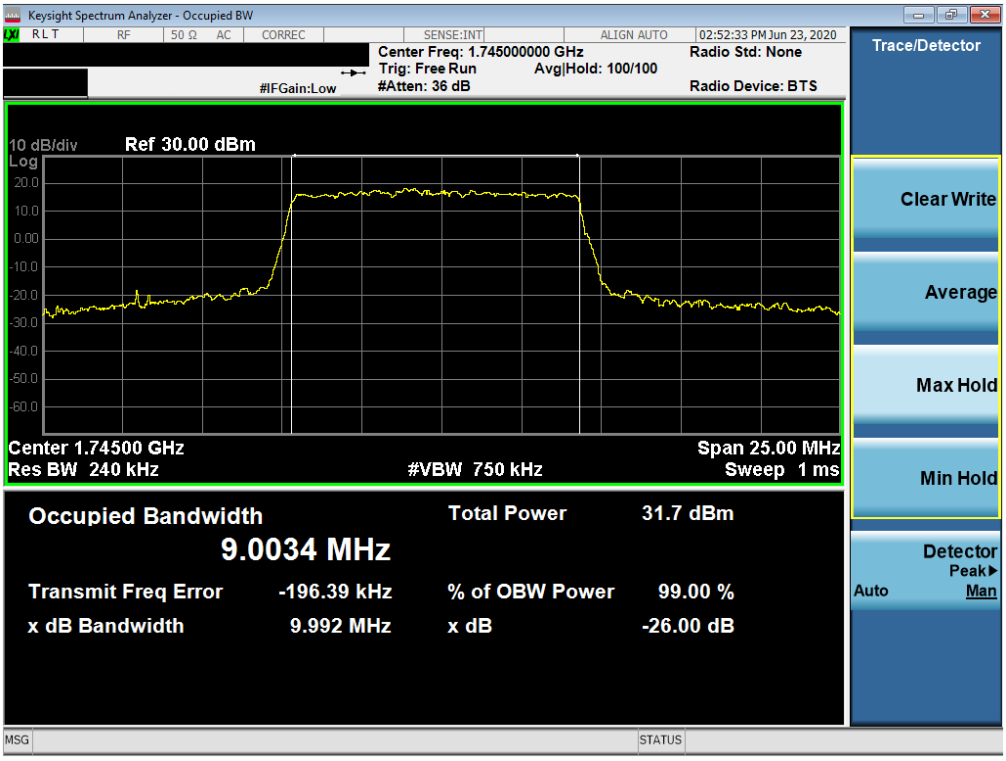

Plot 7-48. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM QPSK - Full RB)

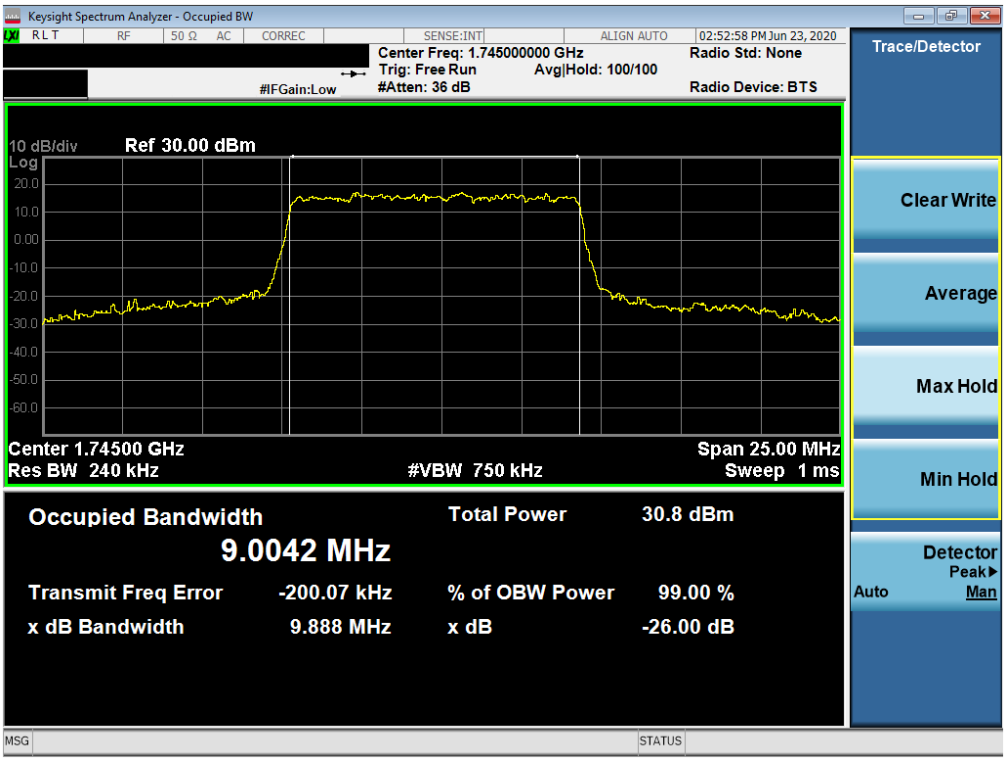

Plot 7-49. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 16QAM - Full RB)

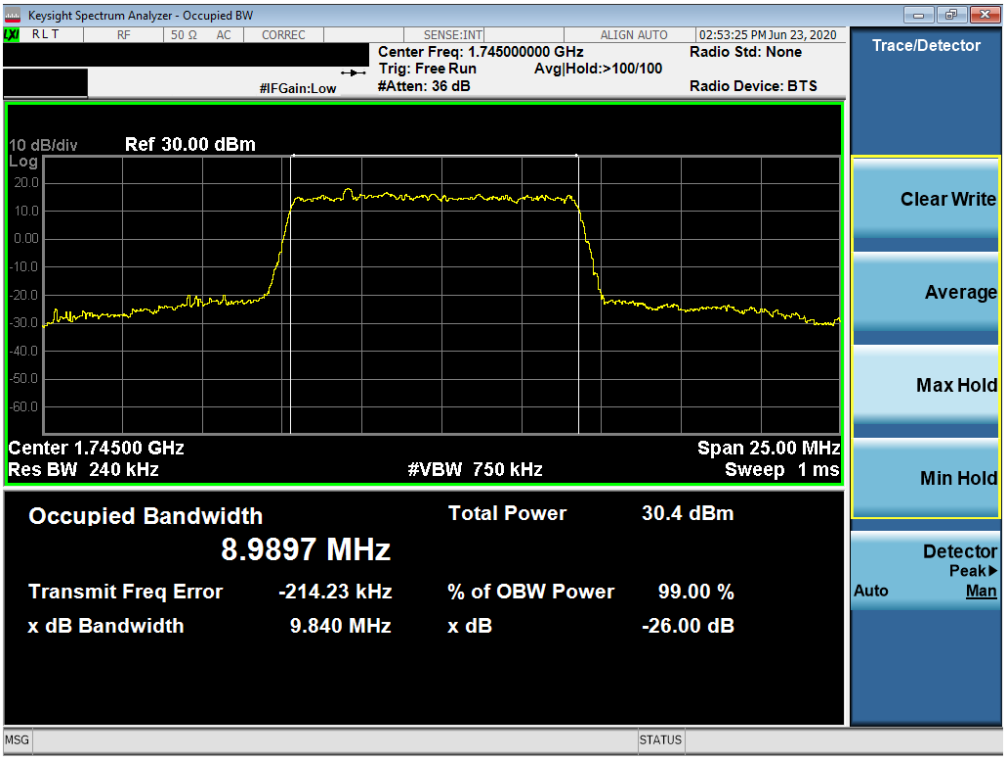

Plot 7-50. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 64QAM - Full RB)

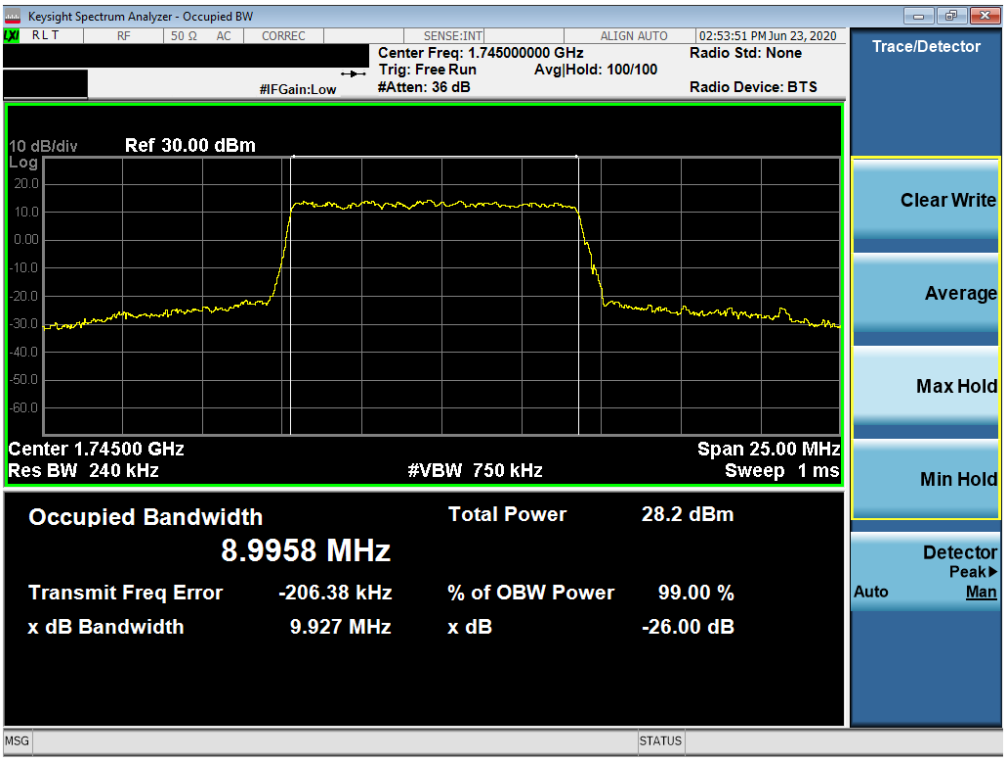

Plot 7-51. Occupied Bandwidth Plot (NR Band n66 - 10.0MHz CP-OFDM 256QAM - Full RB)

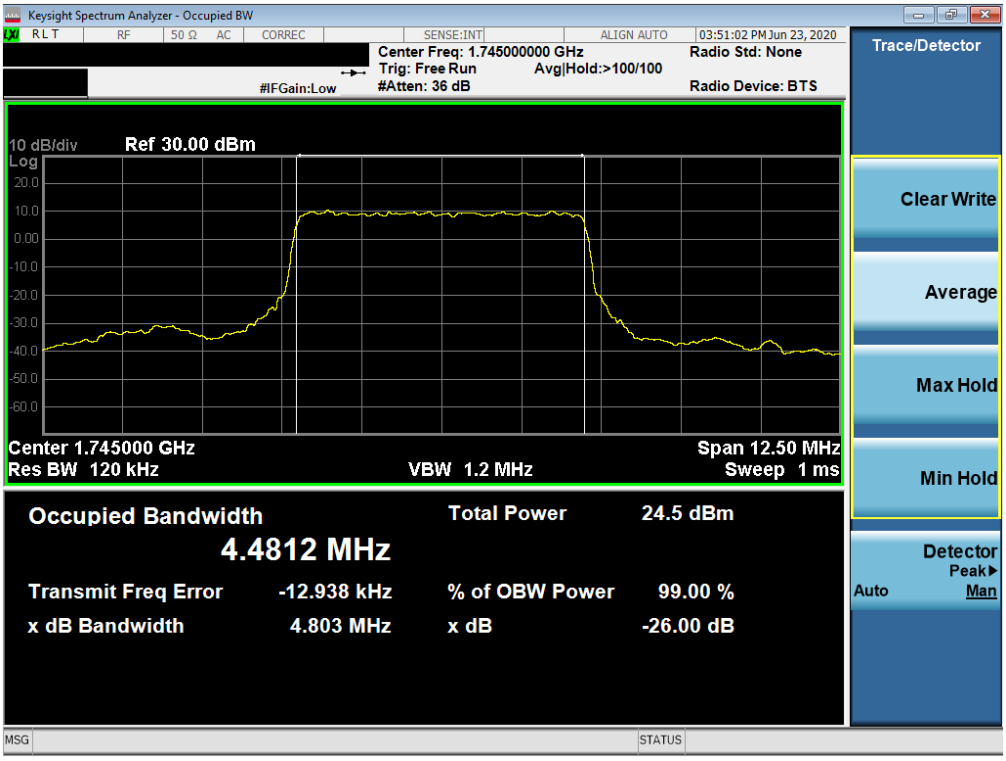

Plot 7-52. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

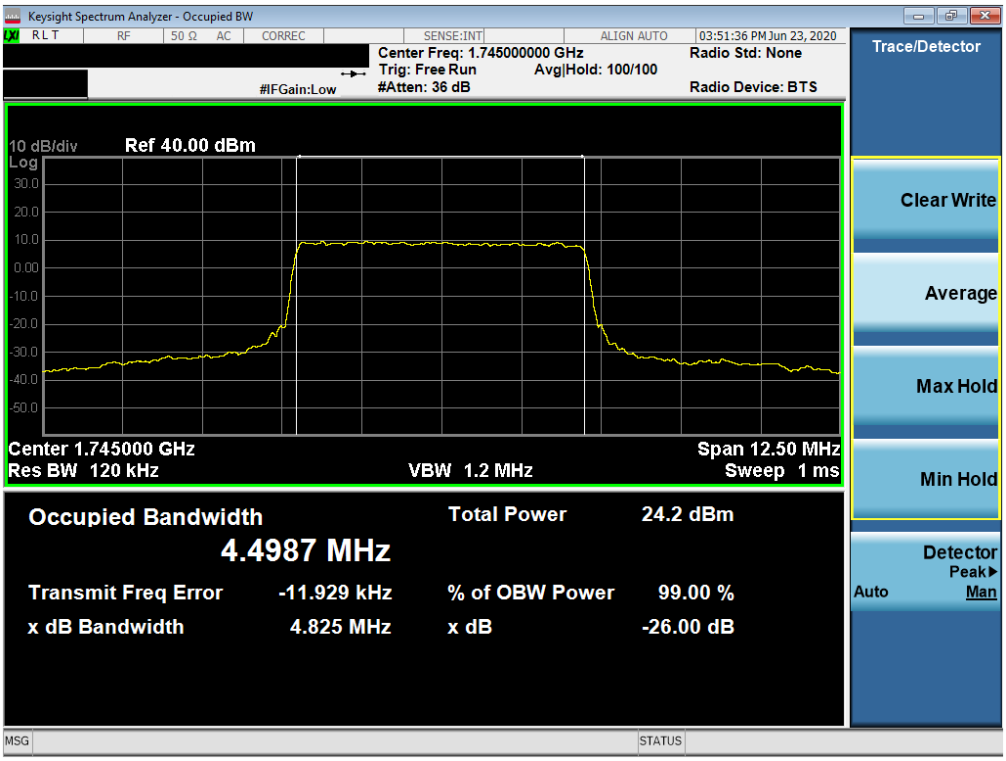

Plot 7-53. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM QPSK - Full RB)

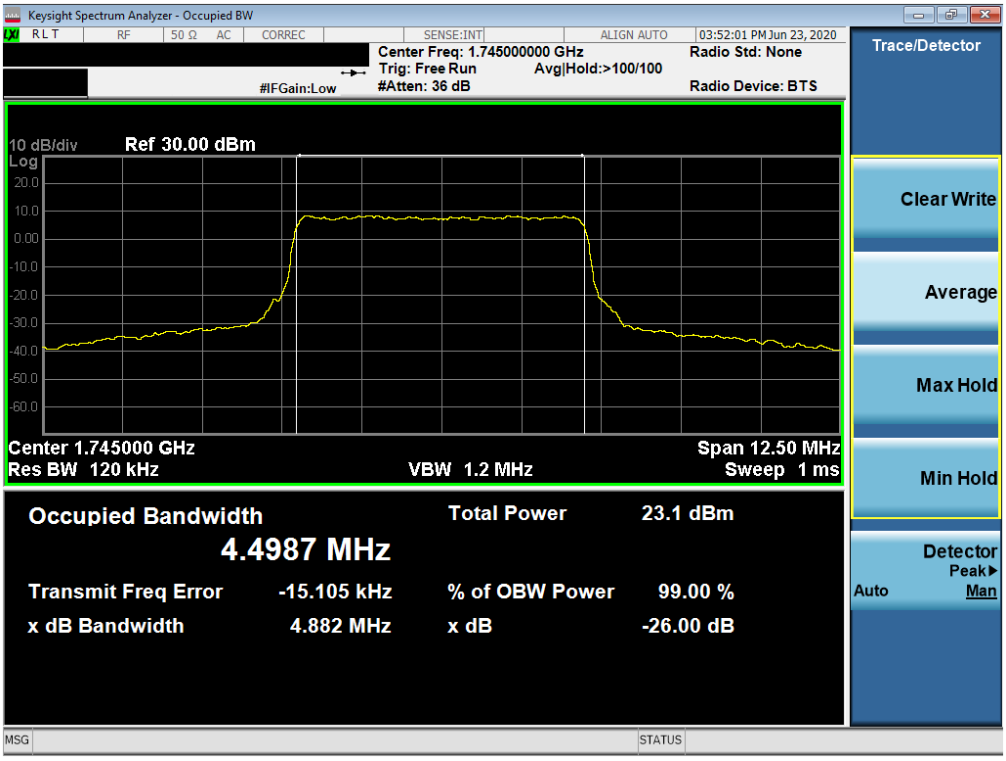

Plot 7-54. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 16QAM - Full RB)

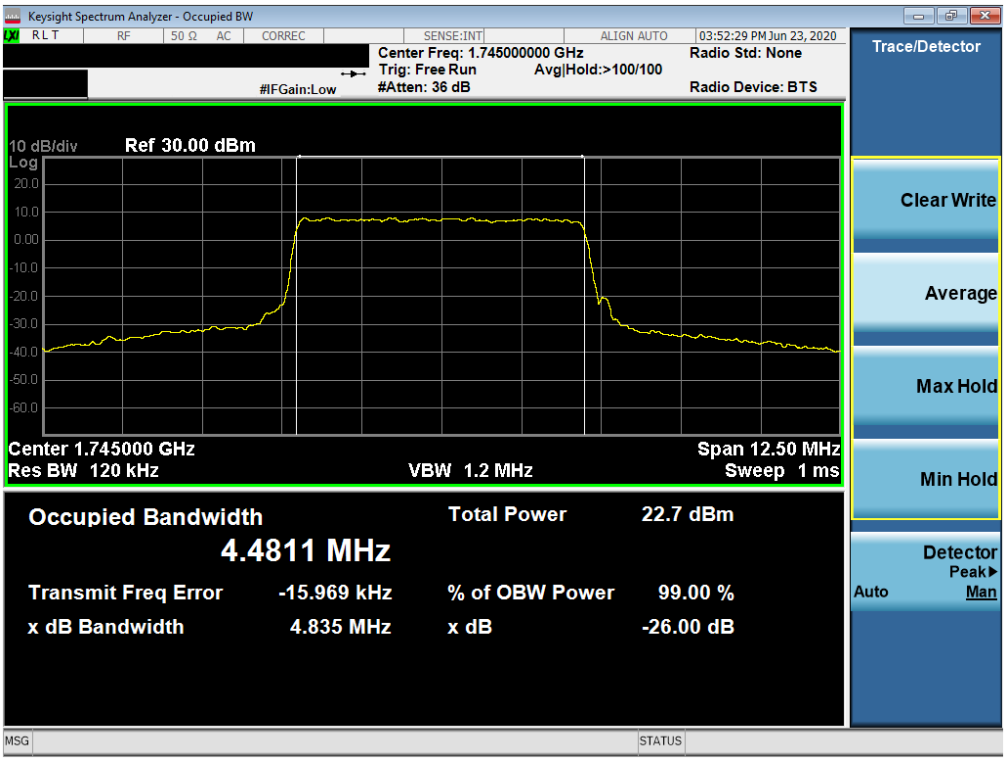

Plot 7-55. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 64QAM - Full RB)

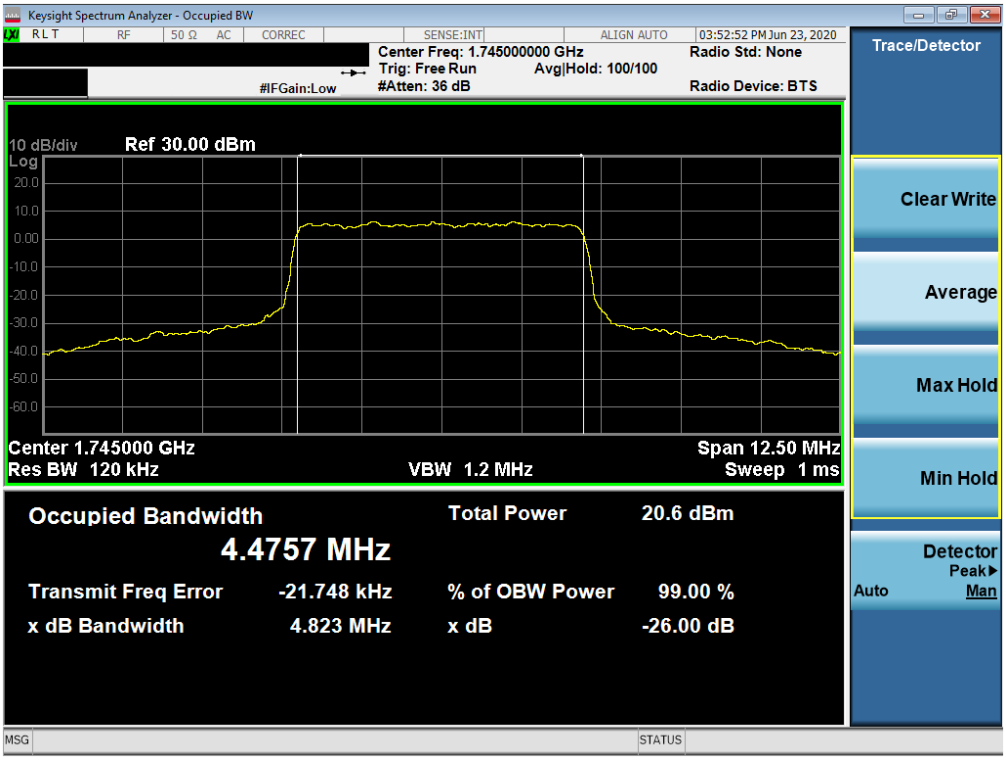

Plot 7-56. Occupied Bandwidth Plot (NR Band n66 - 5.0MHz CP-OFDM 256QAM - Full RB)

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW ≥ 100kHz
3. VBW ≥ 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

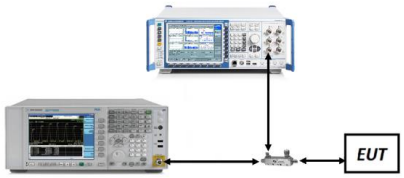

Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. Per Part 27 and RSS-139, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

LTE Band 66/4

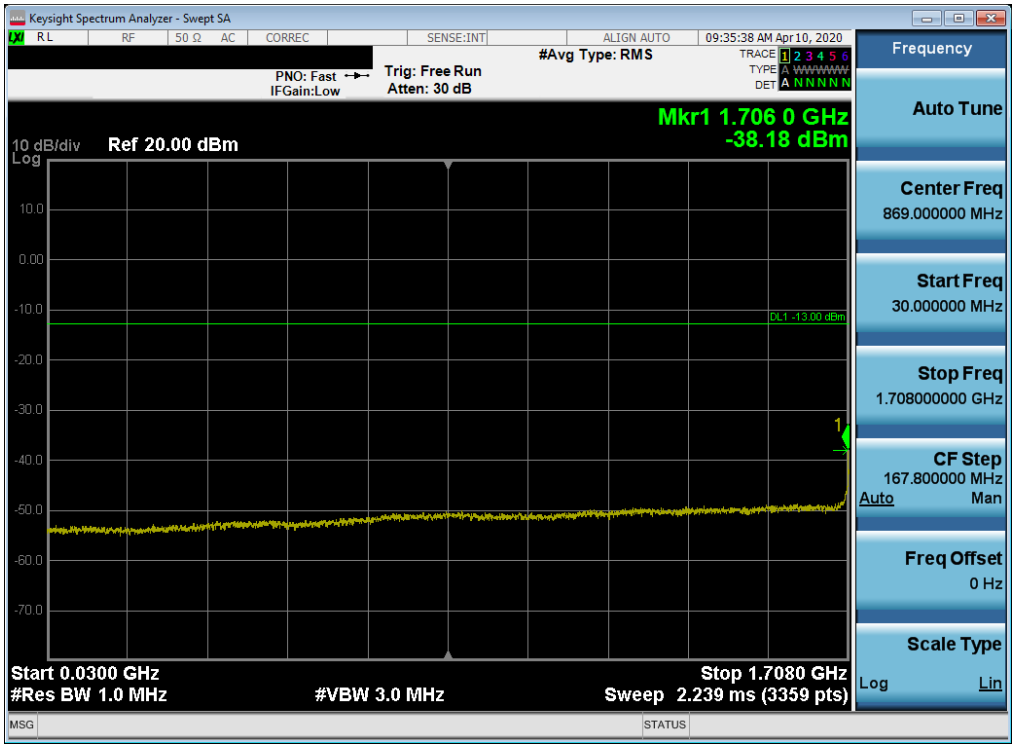

Plot 7-57. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

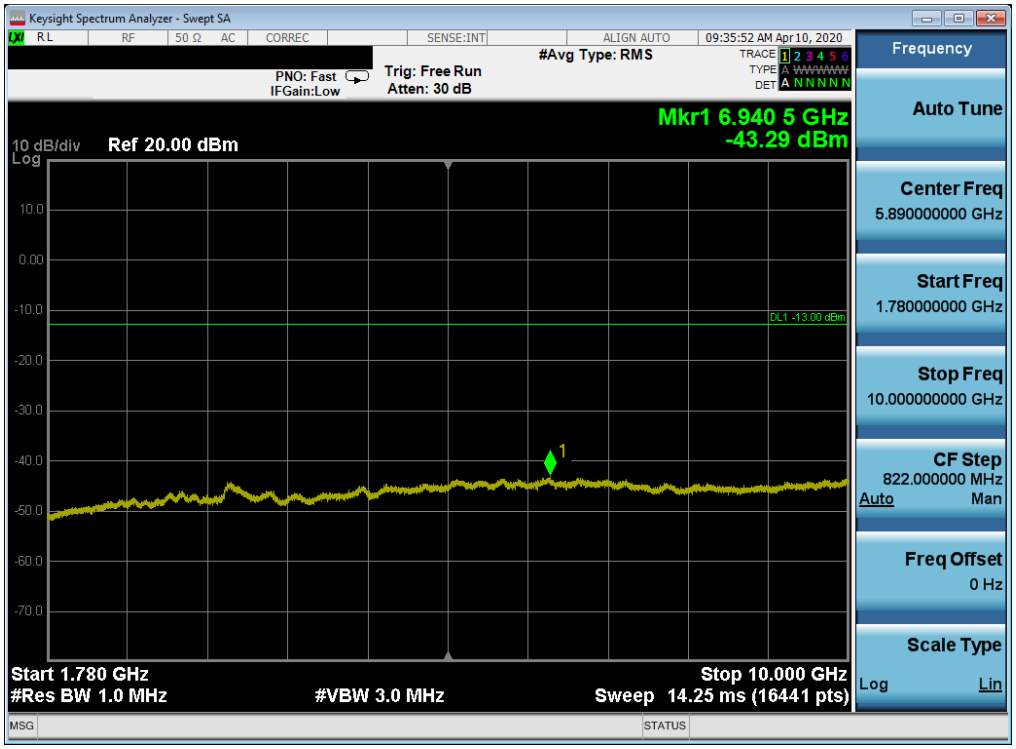

Plot 7-58. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

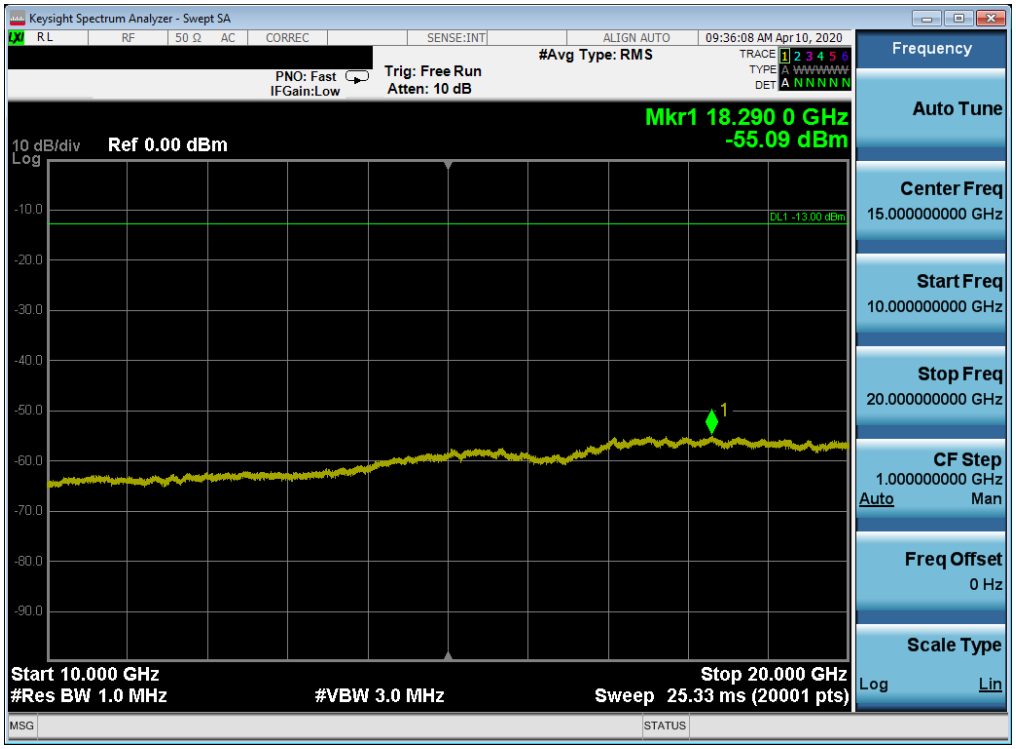

Plot 7-59. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

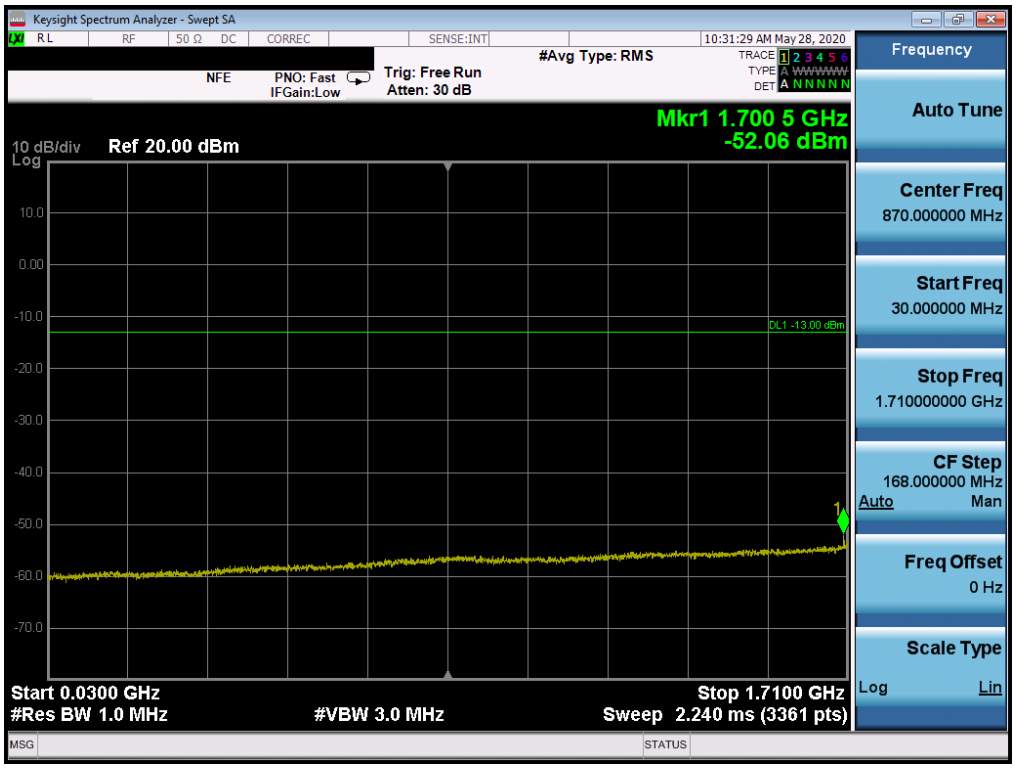

Plot 7-60. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

Plot 7-61. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

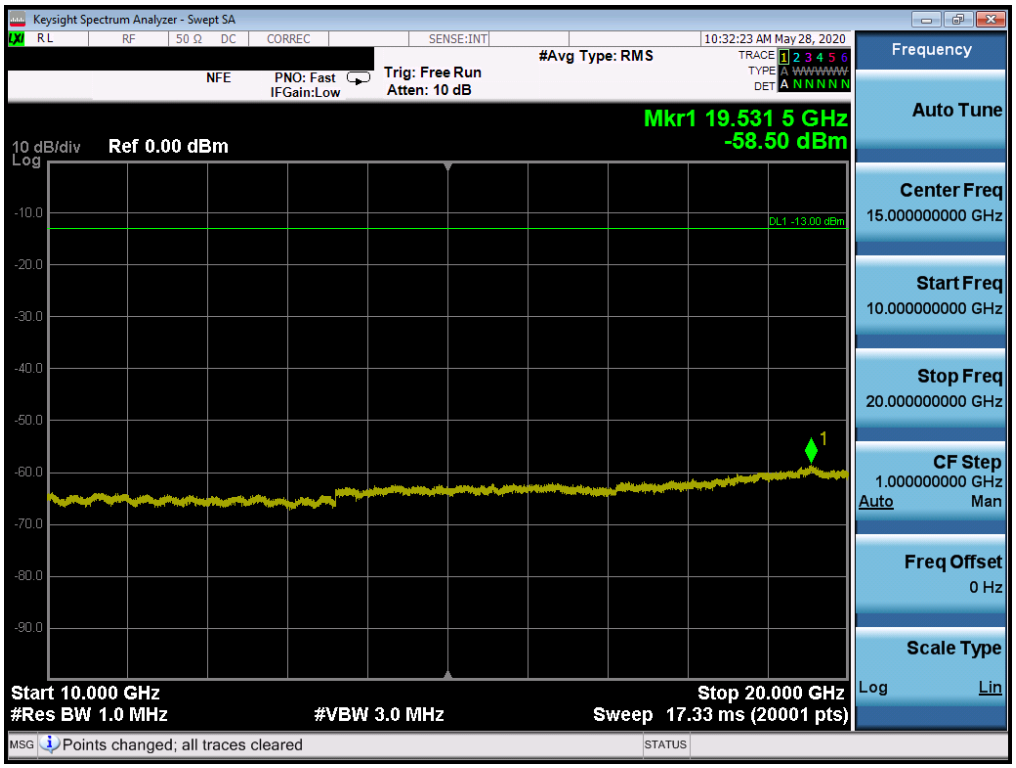

Plot 7-62. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

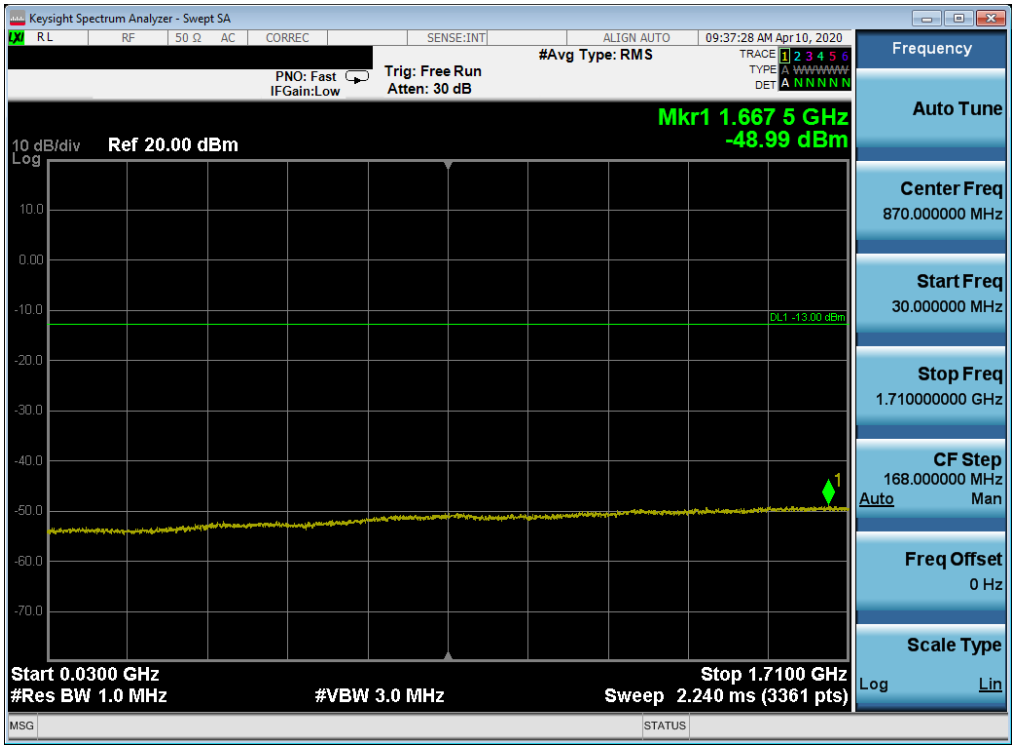

Plot 7-63. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

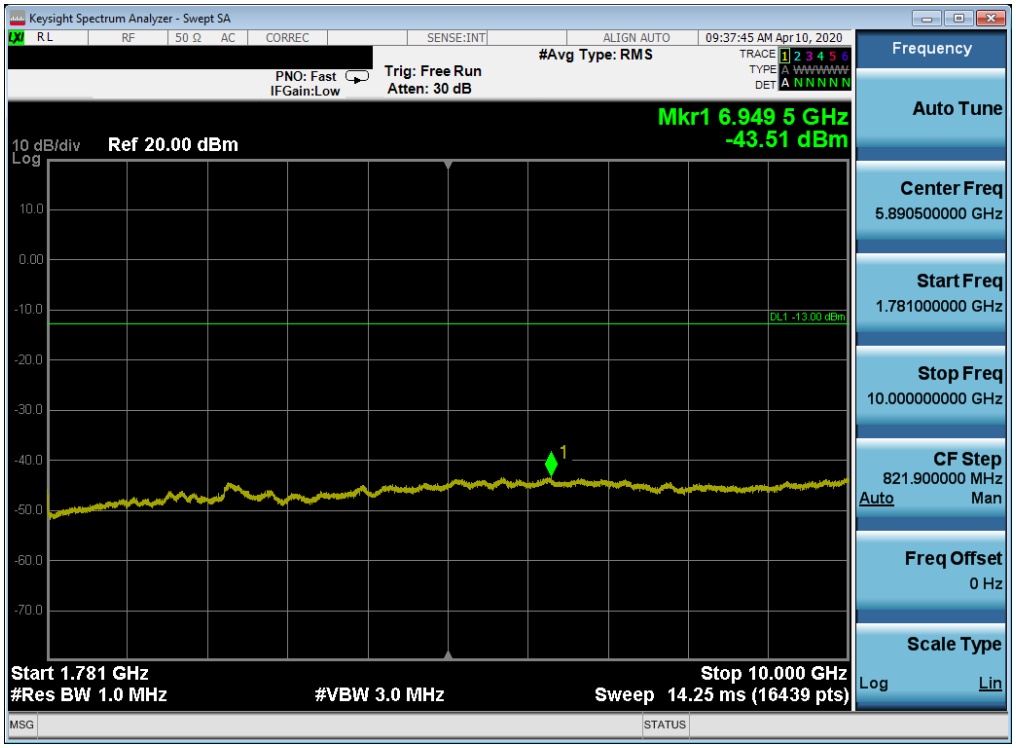

Plot 7-64. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

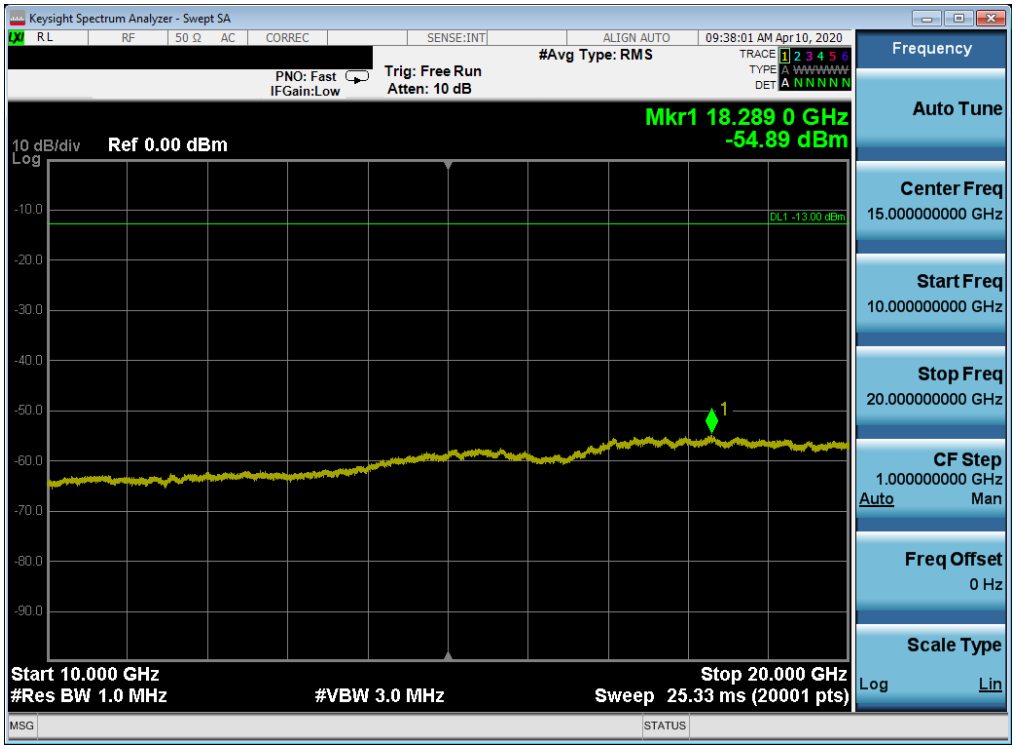

Plot 7-65. Conducted Spurious Plot (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

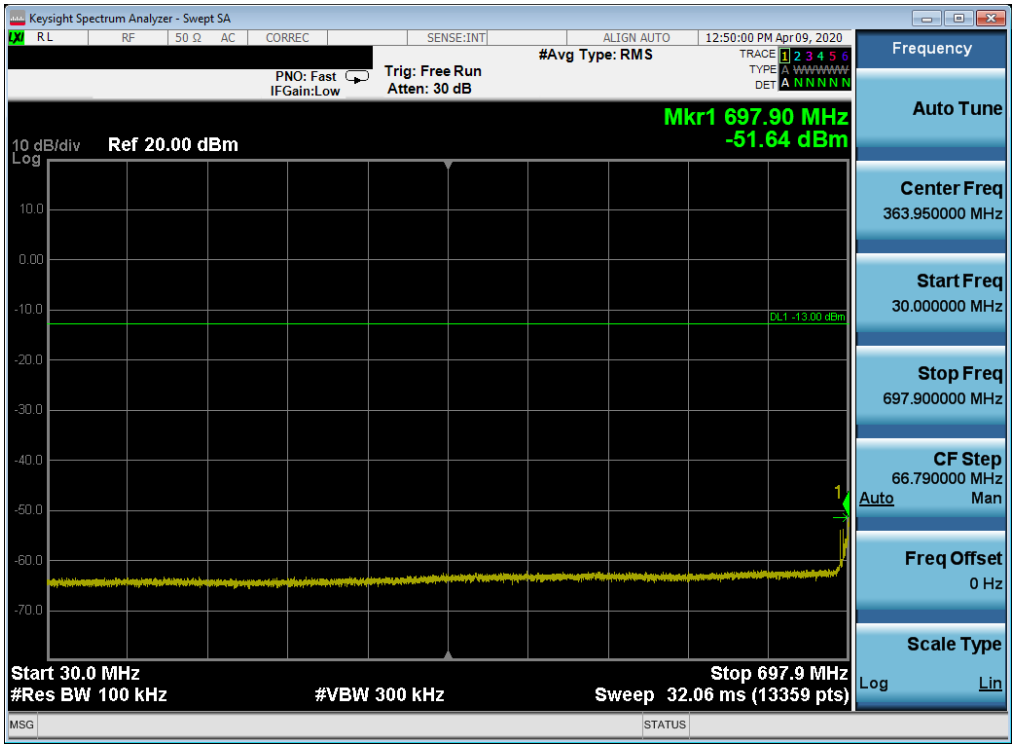

Plot 7-66. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

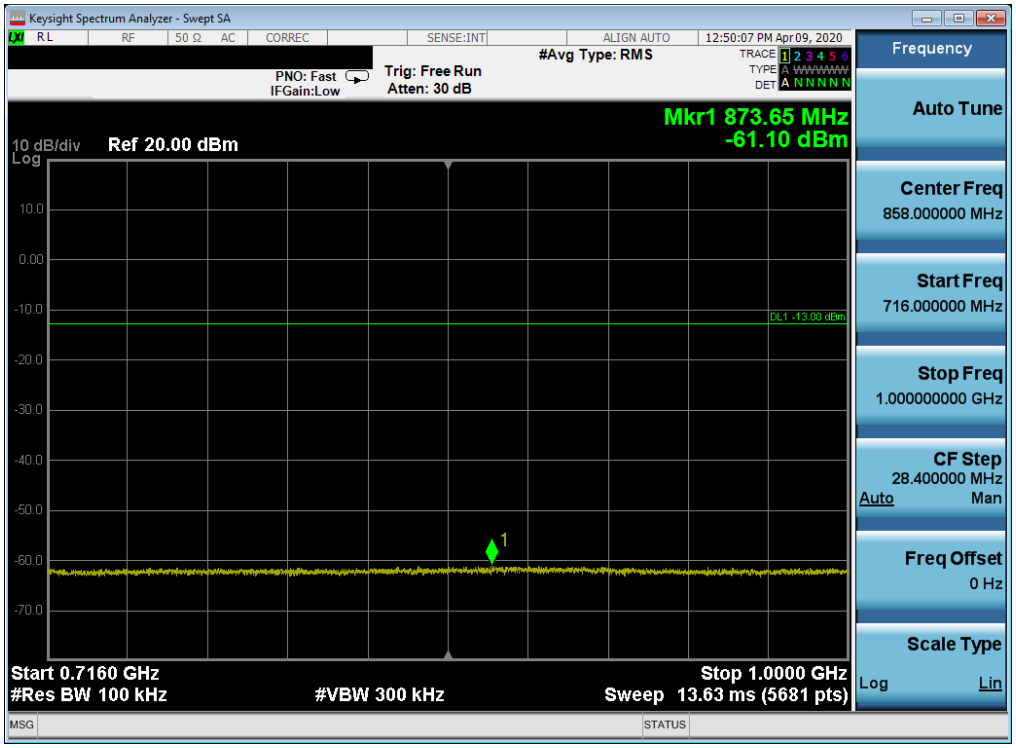

Plot 7-67. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

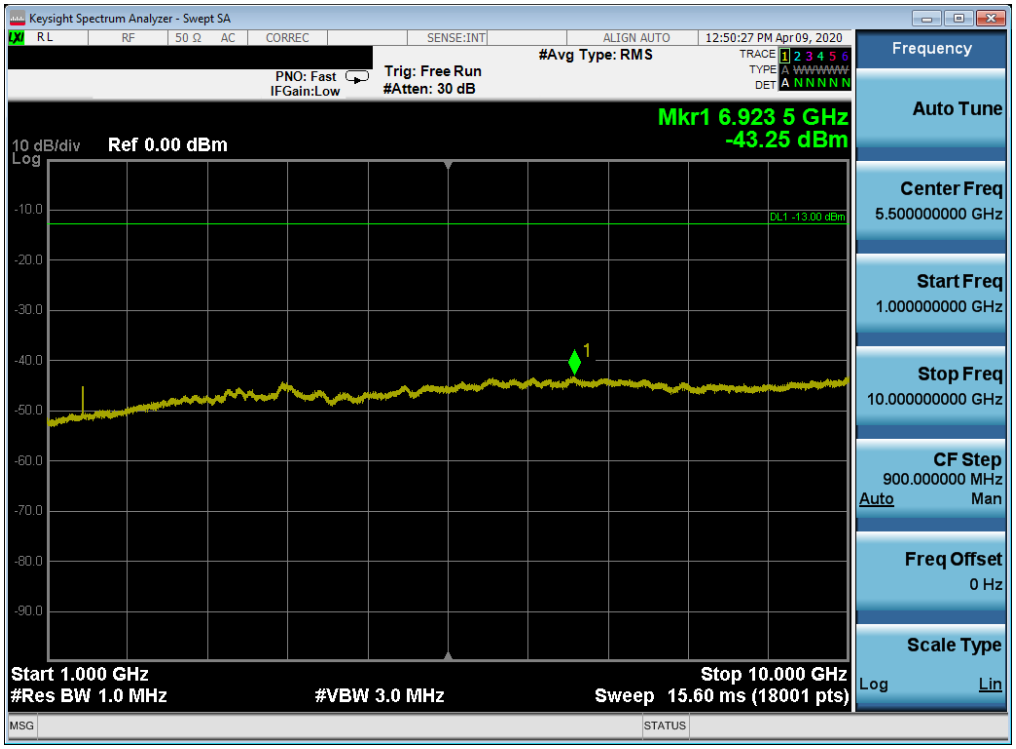

Plot 7-68. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

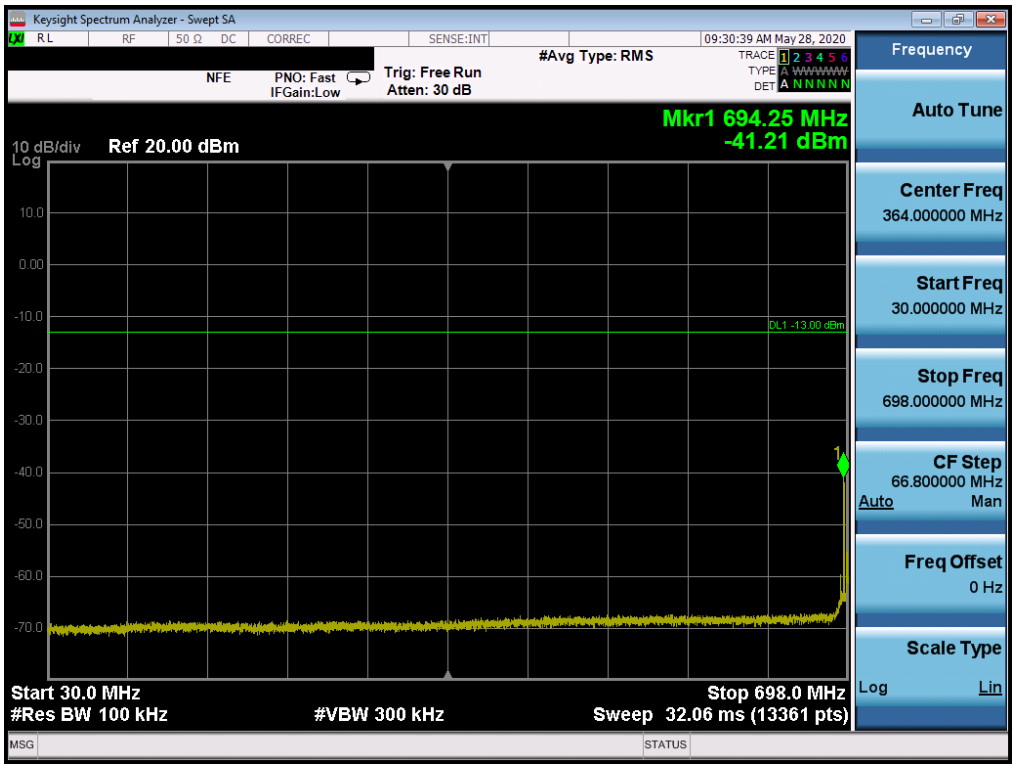

Plot 7-69. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

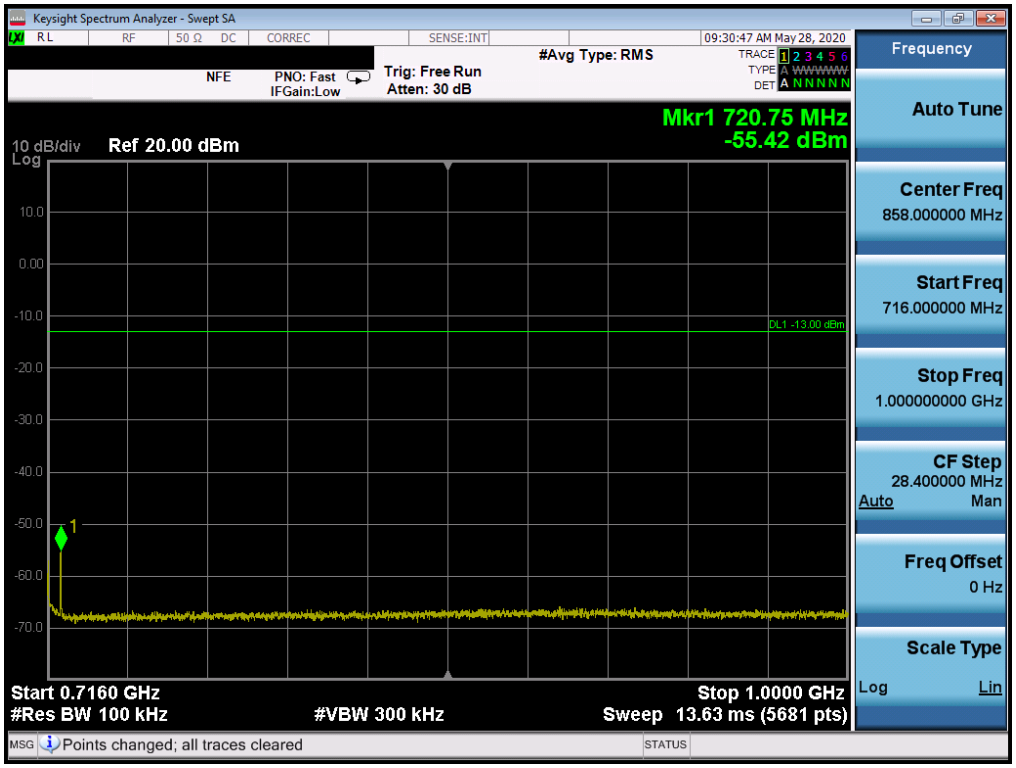

Plot 7-70. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

Plot 7-71. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

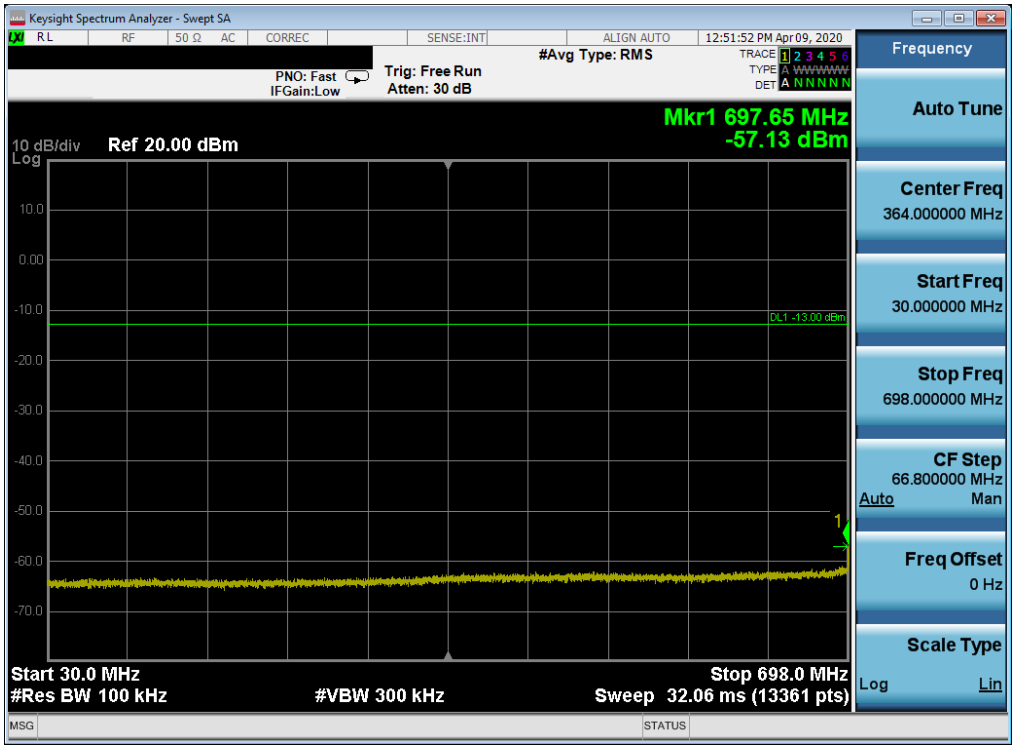

Plot 7-72. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

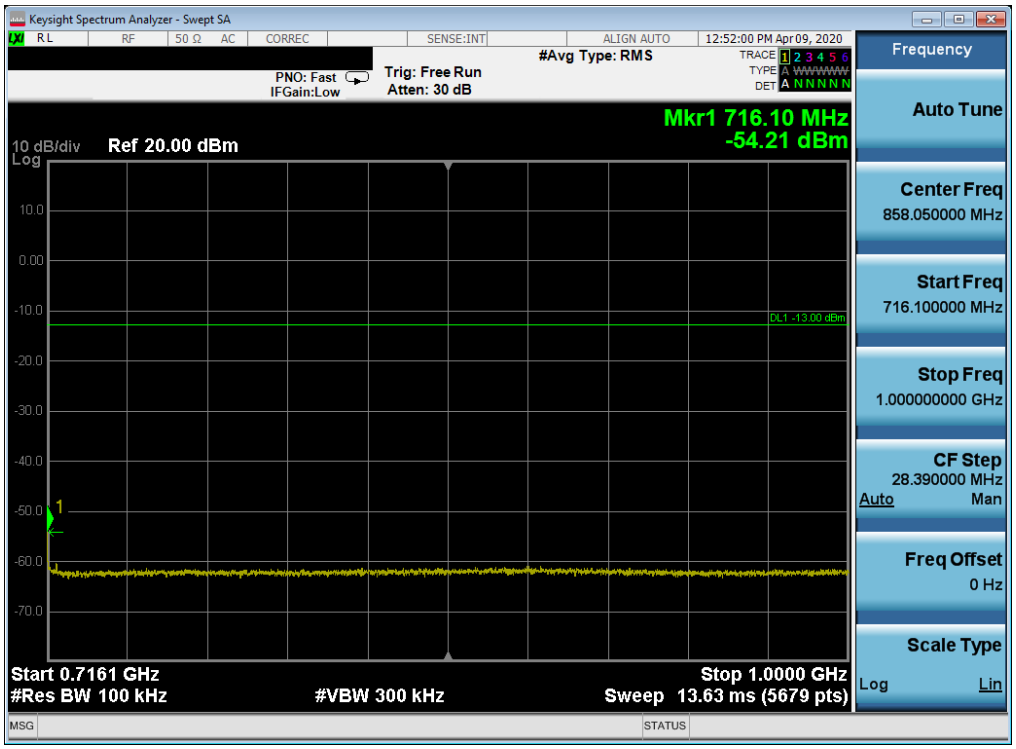

Plot 7-73. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

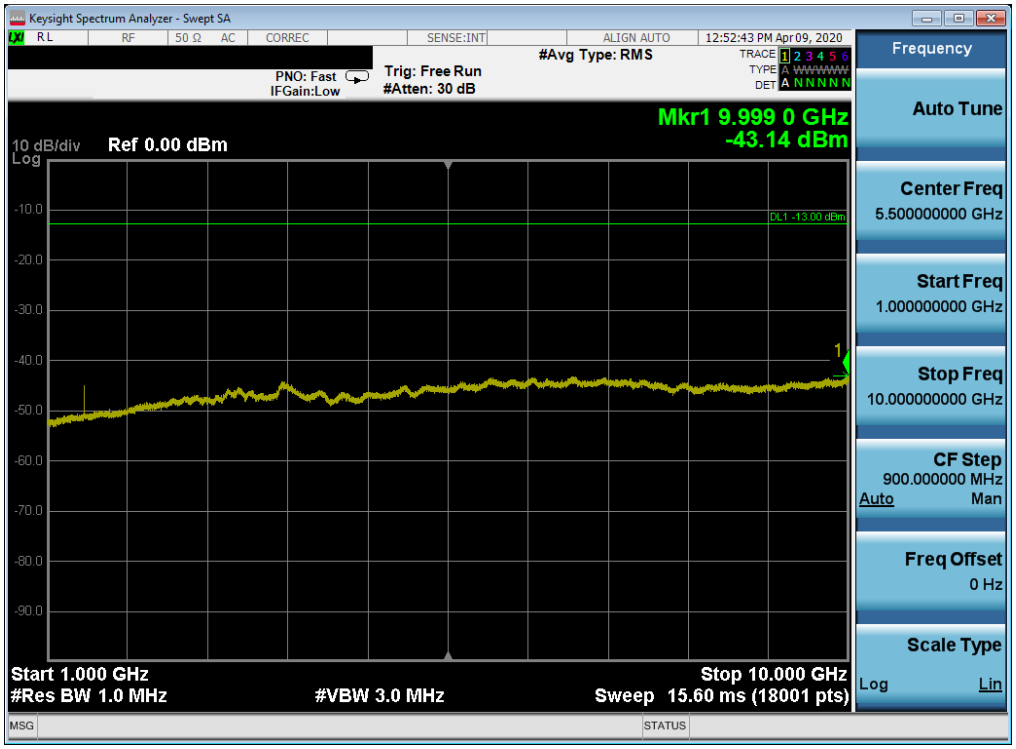

Plot 7-74. Conducted Spurious Plot (LTE Band 12 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

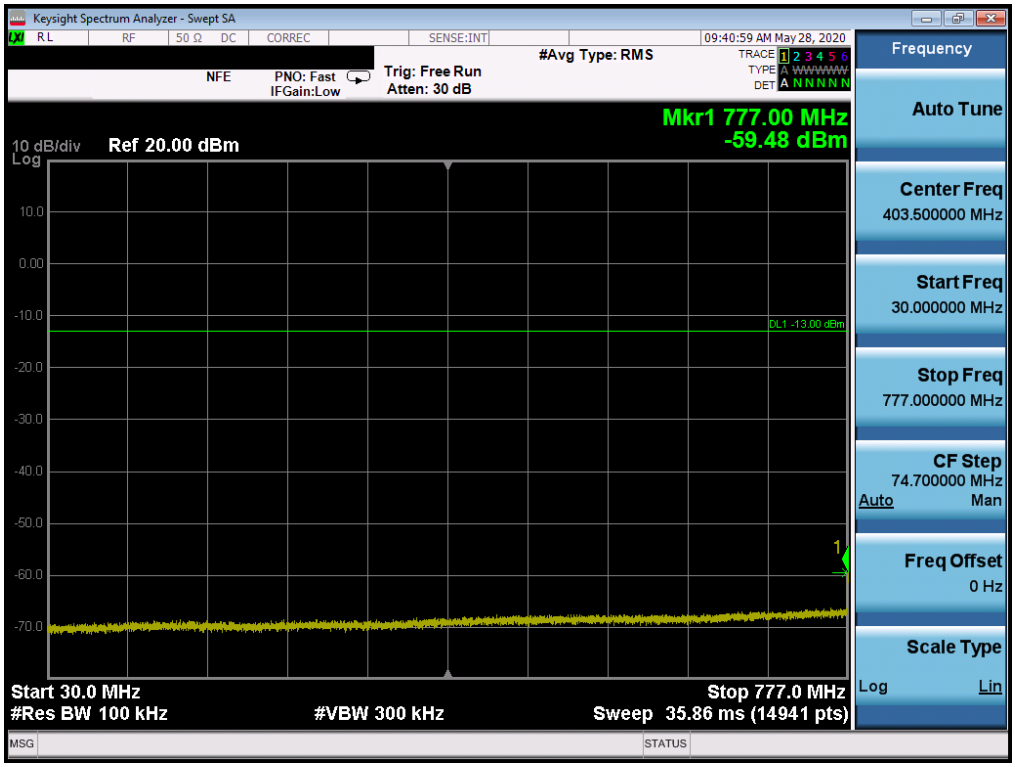

Plot 7-75. Conducted Spurious Plot (LTE Band 13 - 10MHz QPSK - RB Size 1, RB Offset 0)

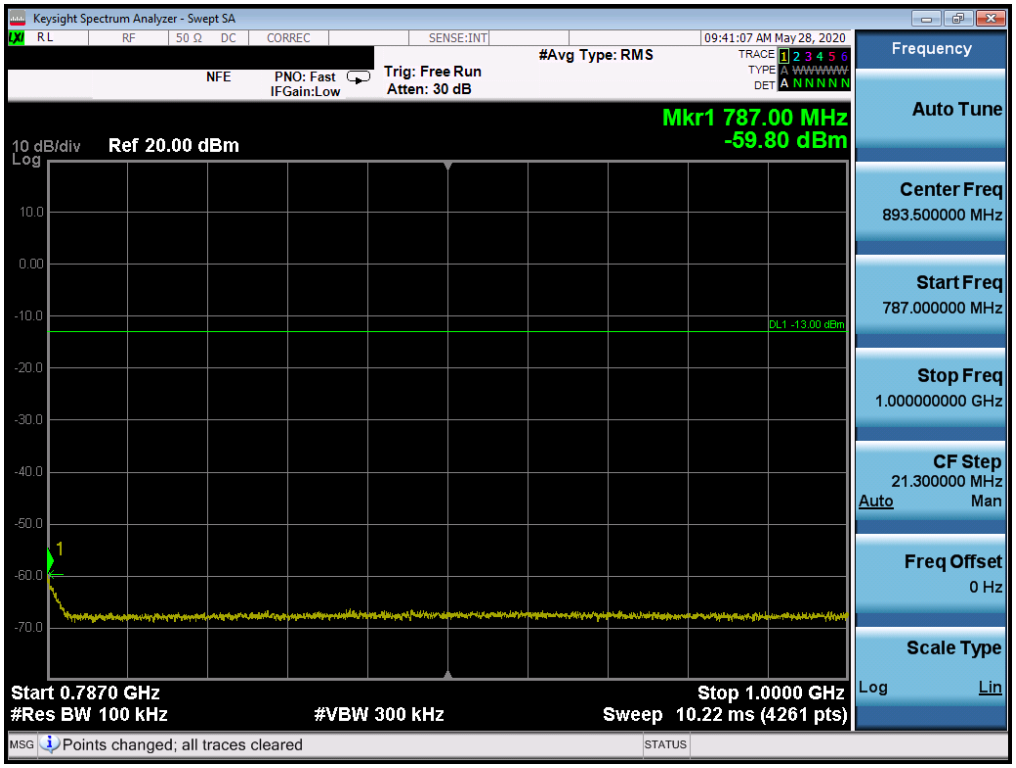

Plot 7-76. Conducted Spurious Plot (LTE Band 13 - 10MHz QPSK - RB Size 1, RB Offset 0)

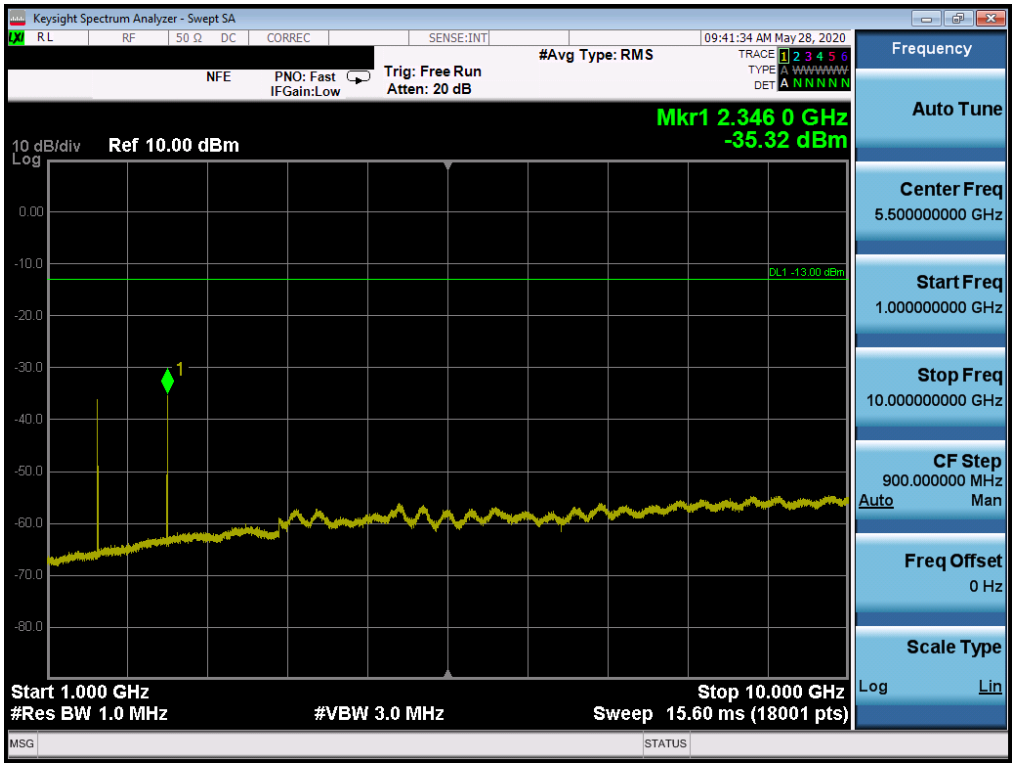

Plot 7-77. Conducted Spurious Plot (LTE Band 13 - 10MHz QPSK - RB Size 1, RB Offset 0)

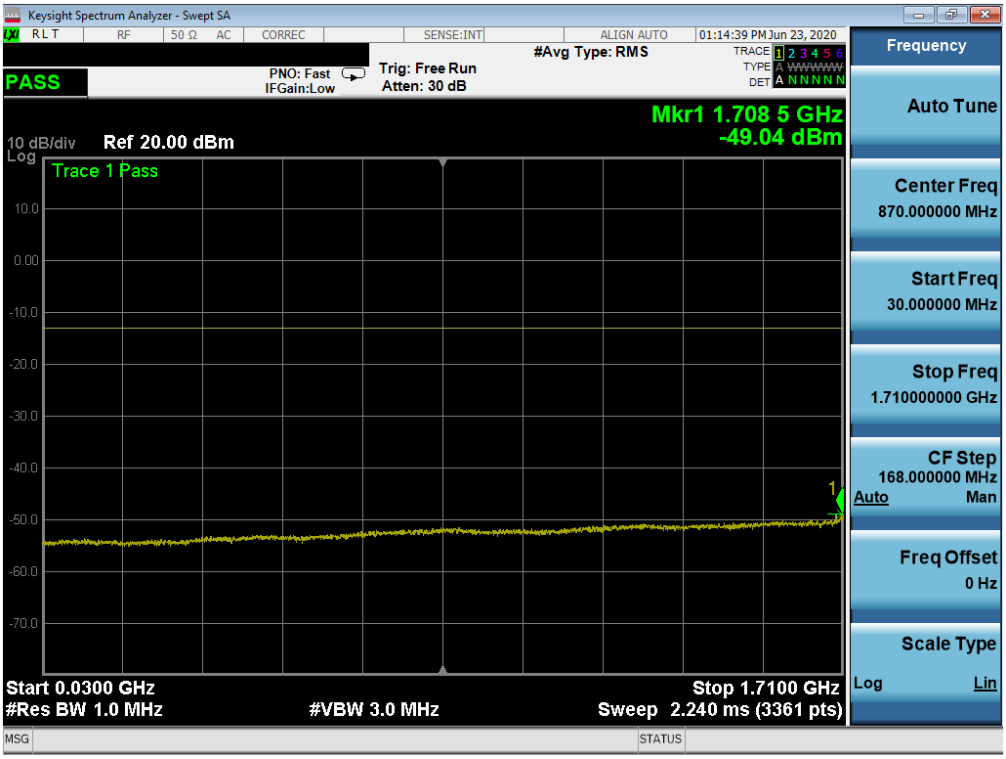

Plot 7-78. Conducted Spurious Plot (NR Band n66 -20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

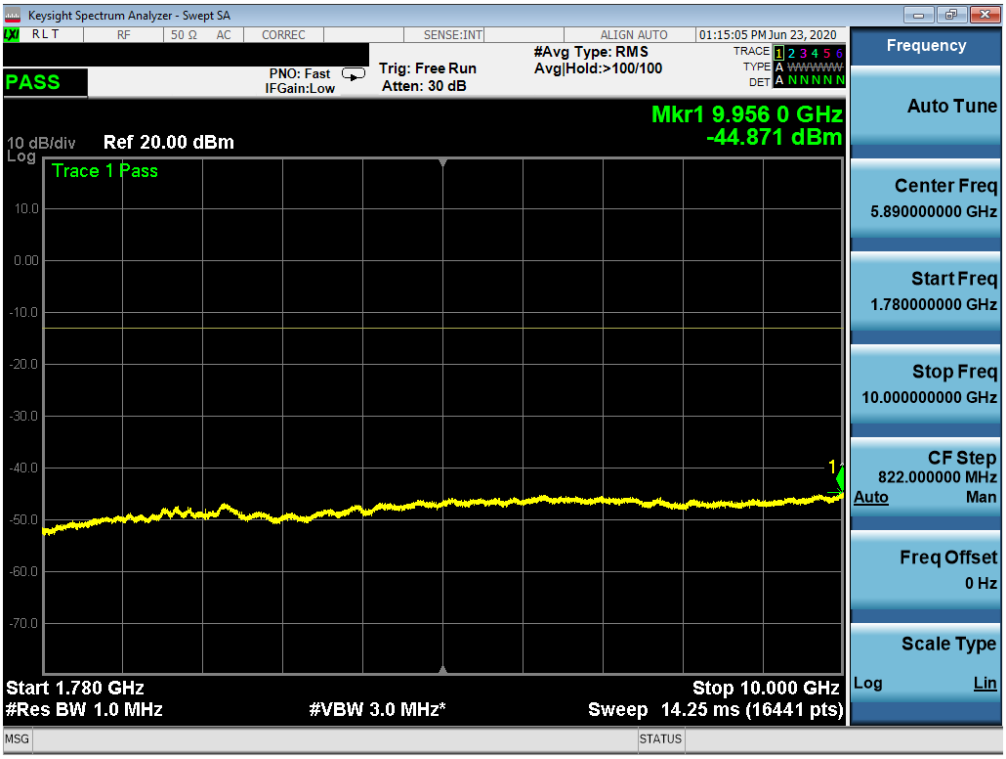

Plot 7-79. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

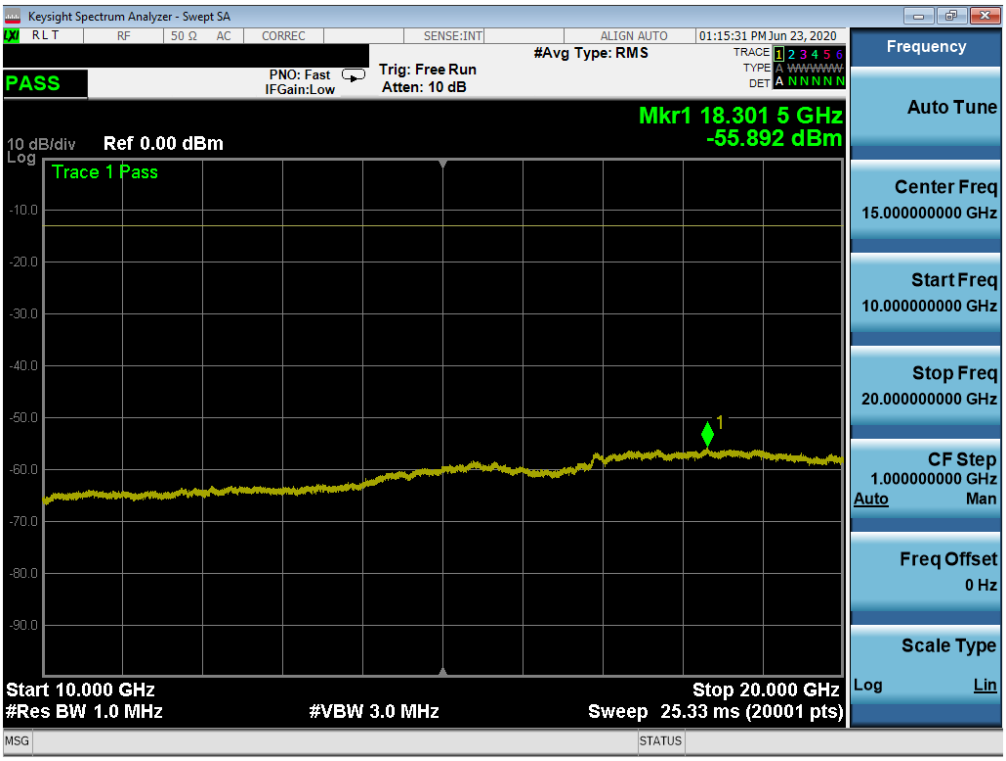

Plot 7-80. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - Low Channel)

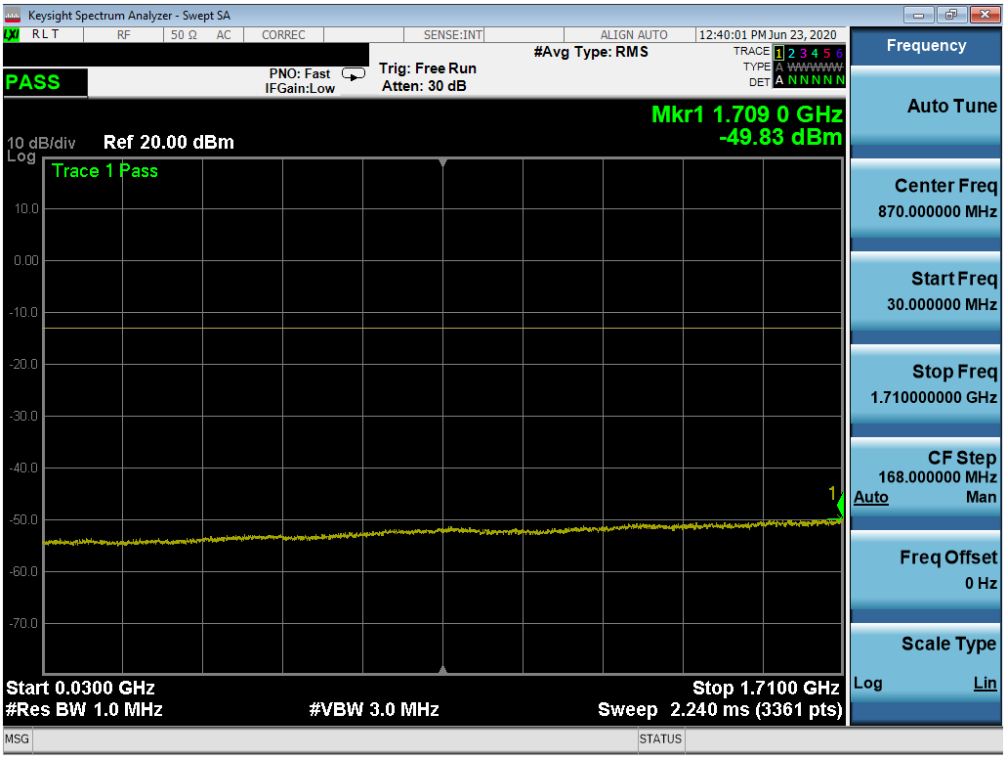

Plot 7-81. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

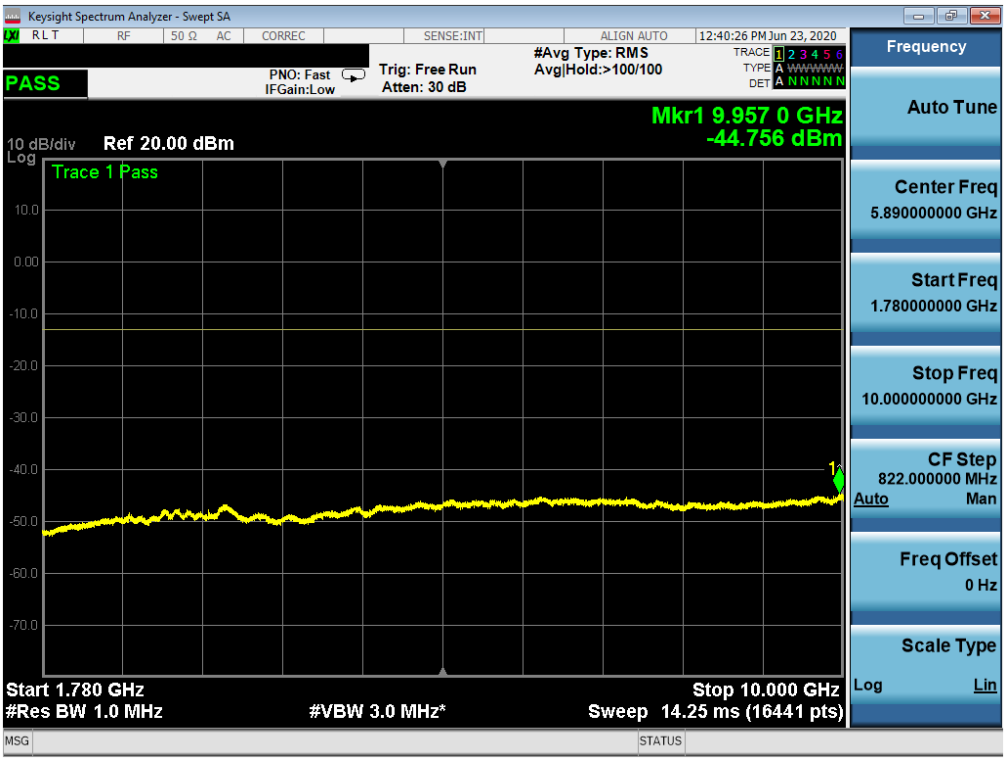

Plot 7-82. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

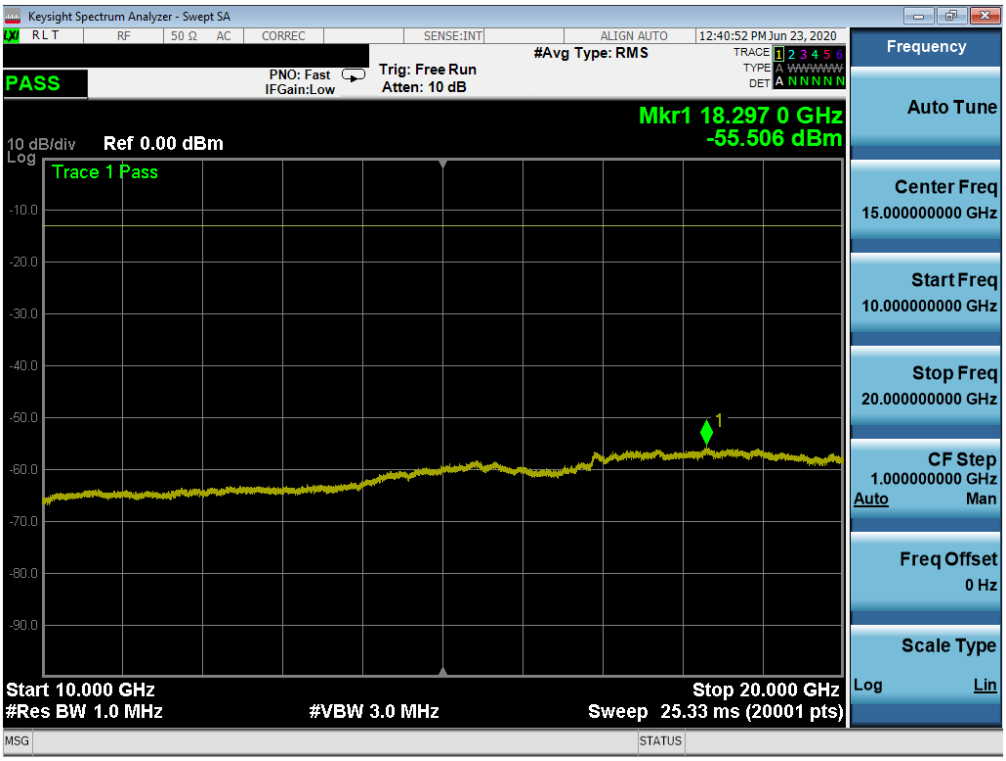

Plot 7-83. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

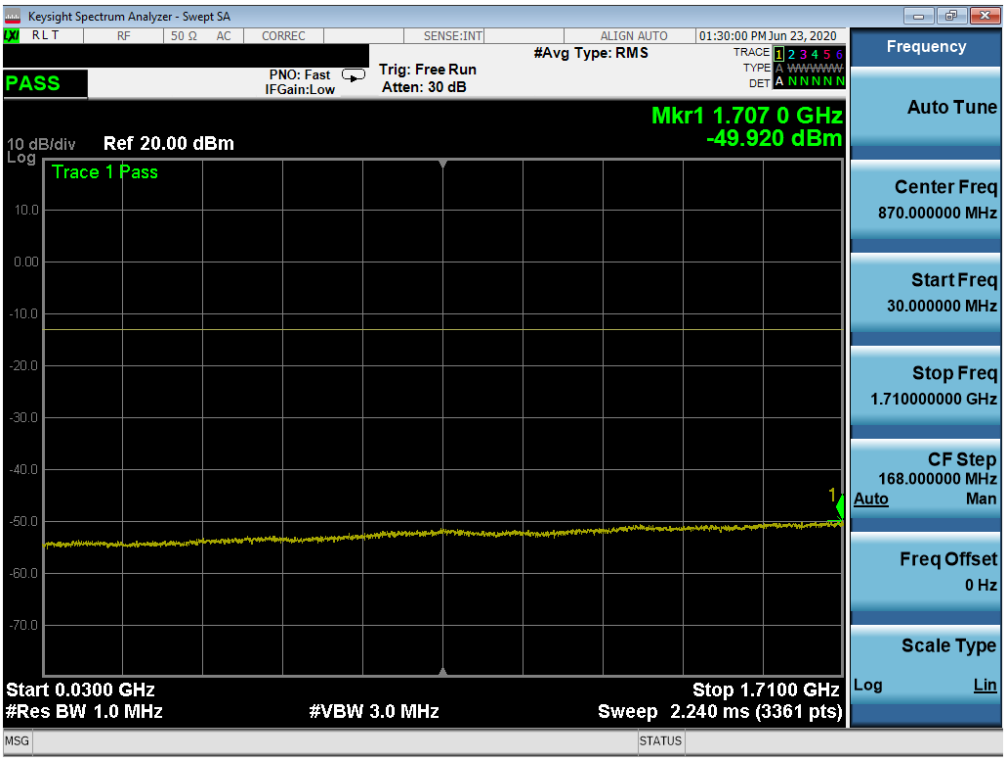

Plot 7-84. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)

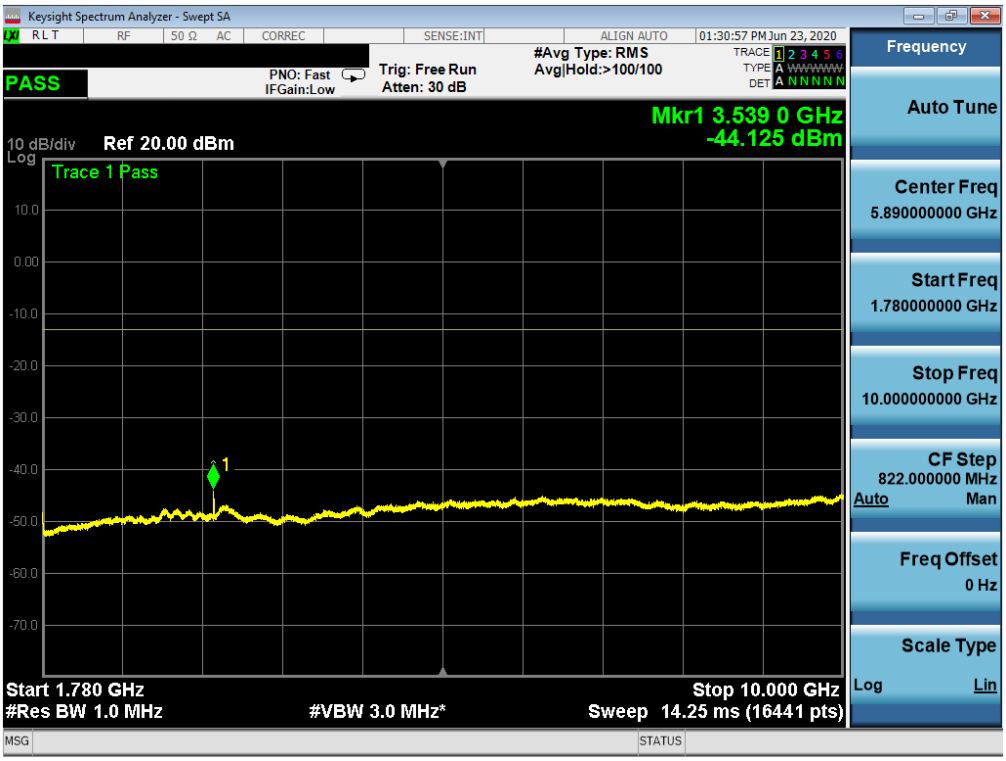

Plot 7-85. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)

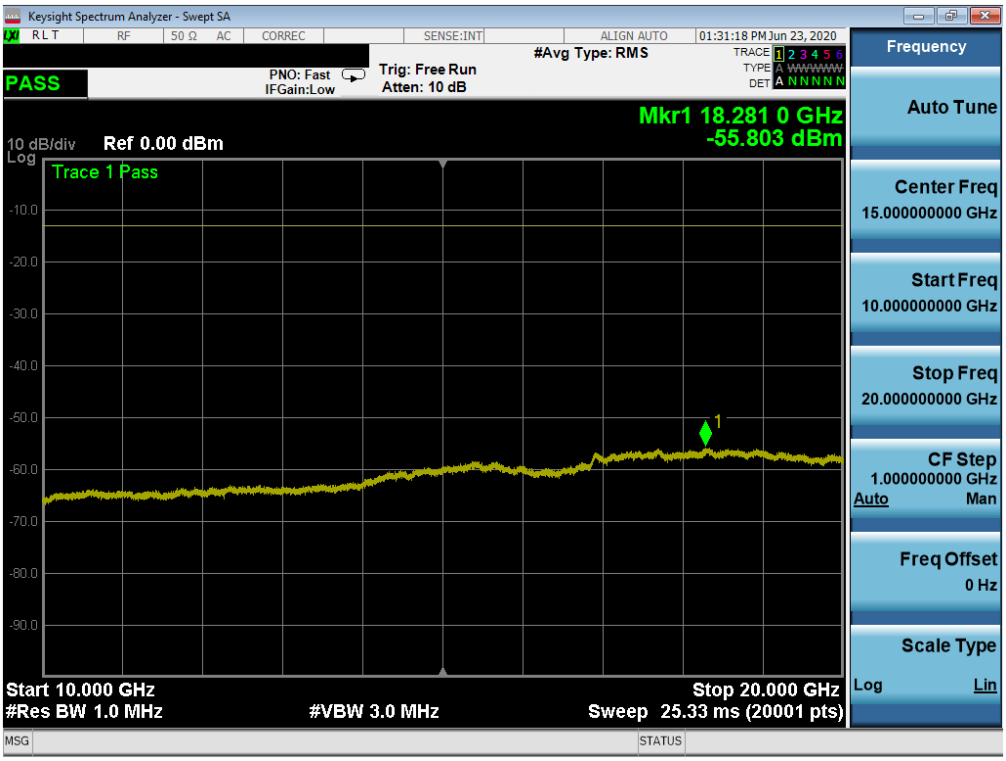

Plot 7-86. Conducted Spurious Plot (NR Band n66 - 20.0MHz - RB Size 1, RB Offset 0 - High Channel)

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

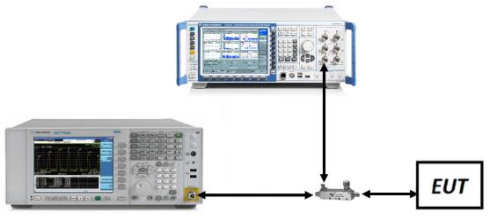

Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. Per 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

LTE Band 66/4

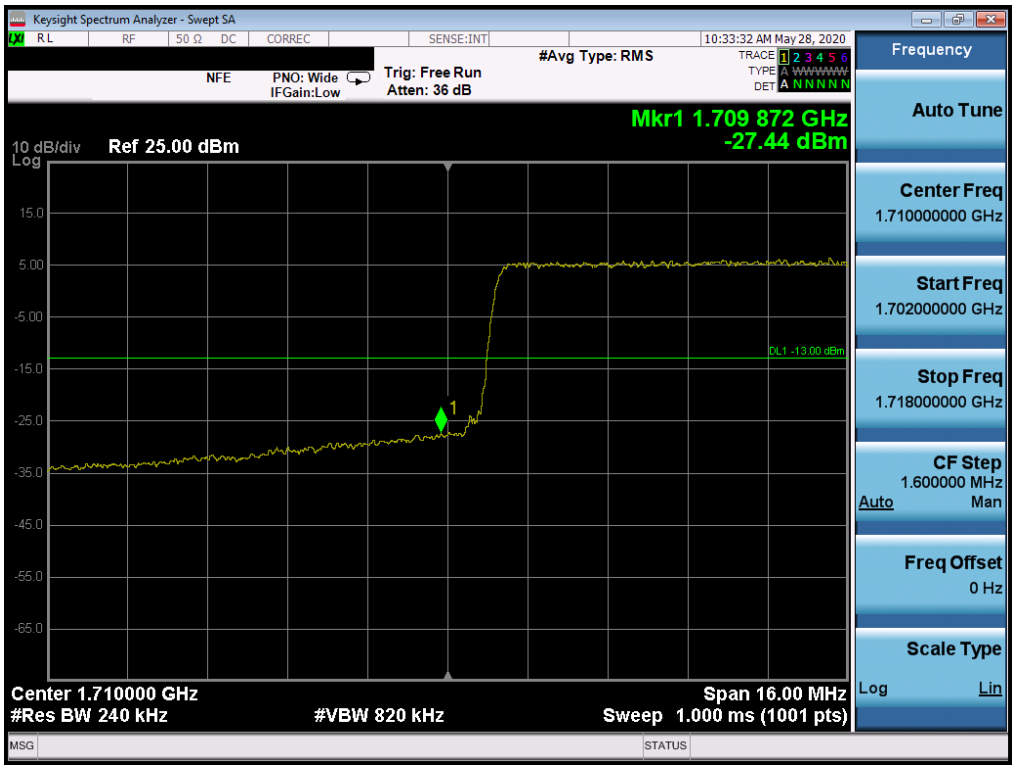

Plot 7-87. Lower Band Edge Plot (LTE Band 66/4 - 20MHz QPSK – Full RB Configuration)

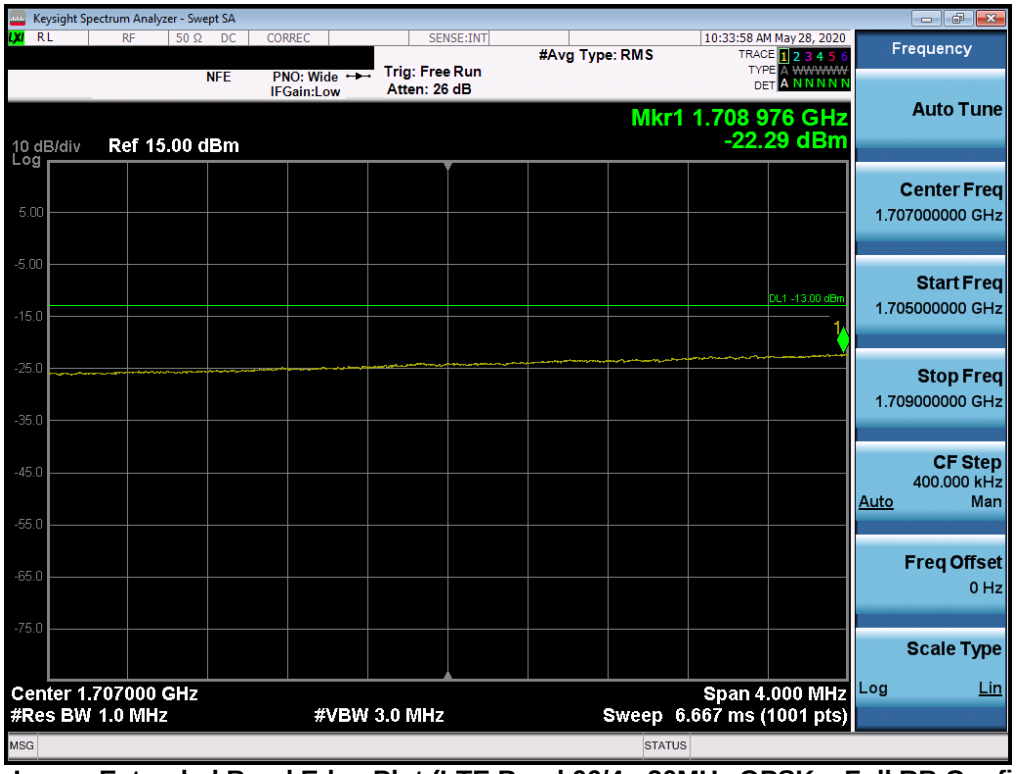

Plot 7-88. Lower Extended Band Edge Plot (LTE Band 66/4 - 20MHz QPSK – Full RB Configuration)

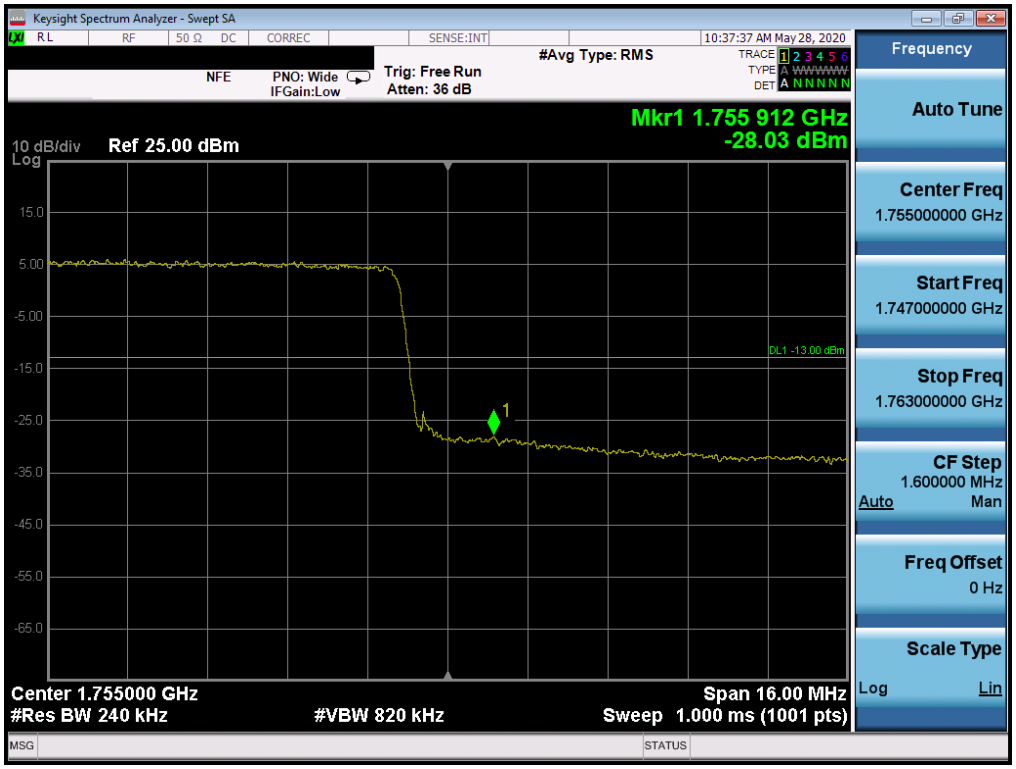

Plot 7-89. Upper Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB Configuration)

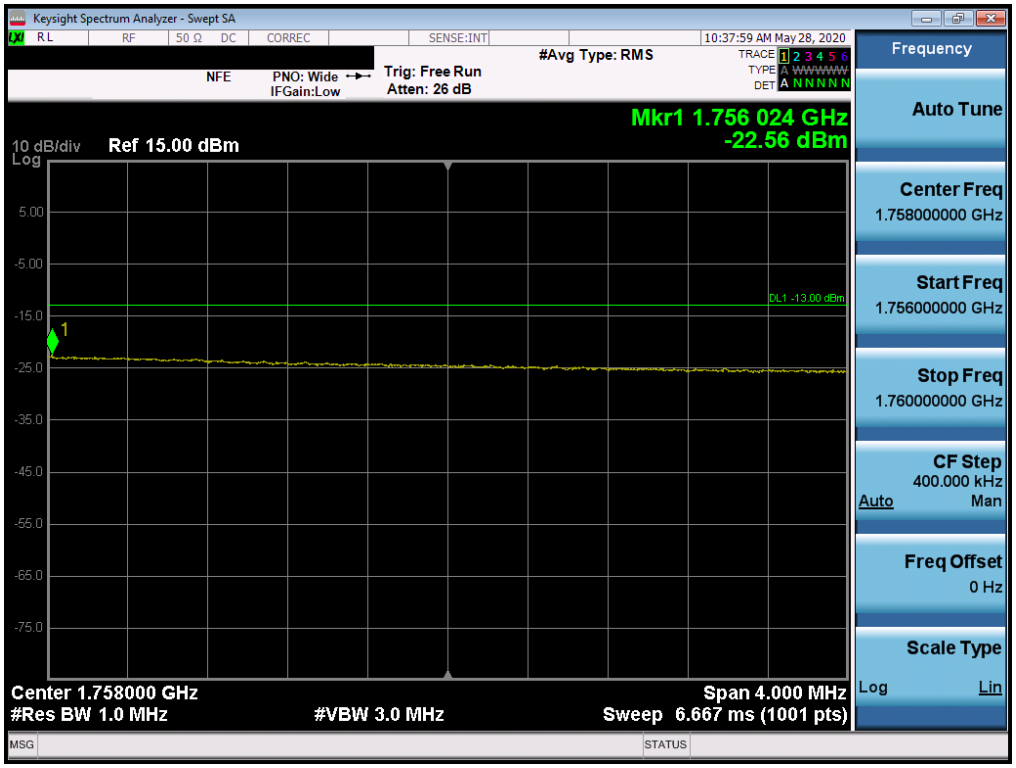

Plot 7-90. Upper Extended Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB Configuration)

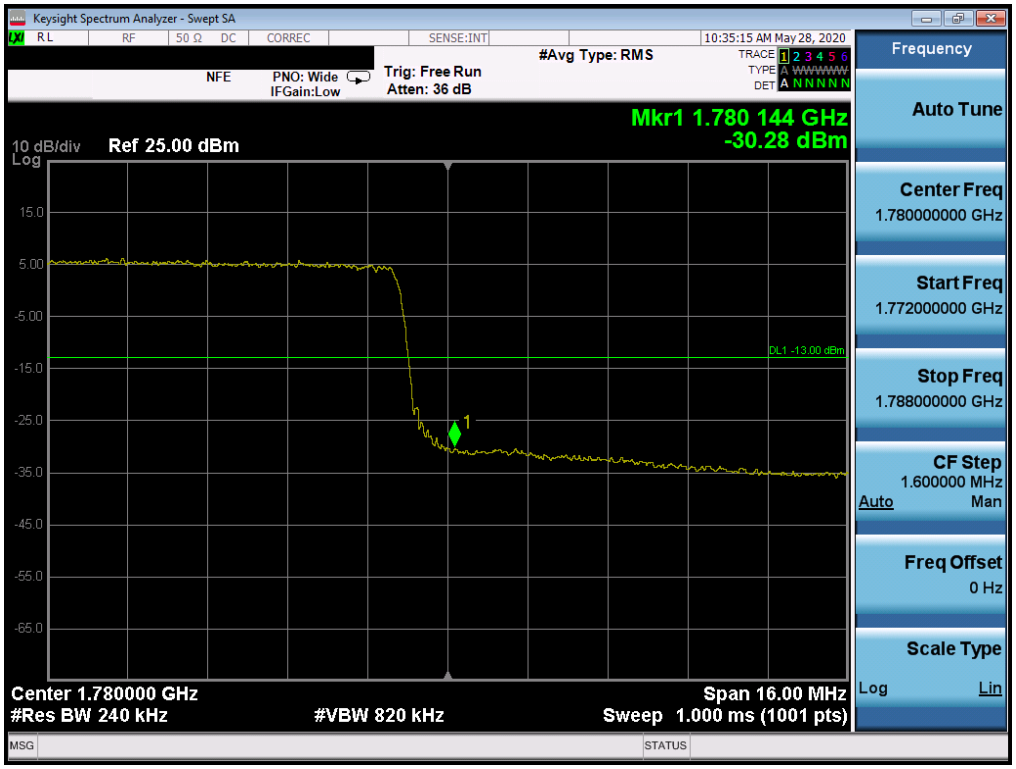

Plot 7-91. Upper Band Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB Configuration)

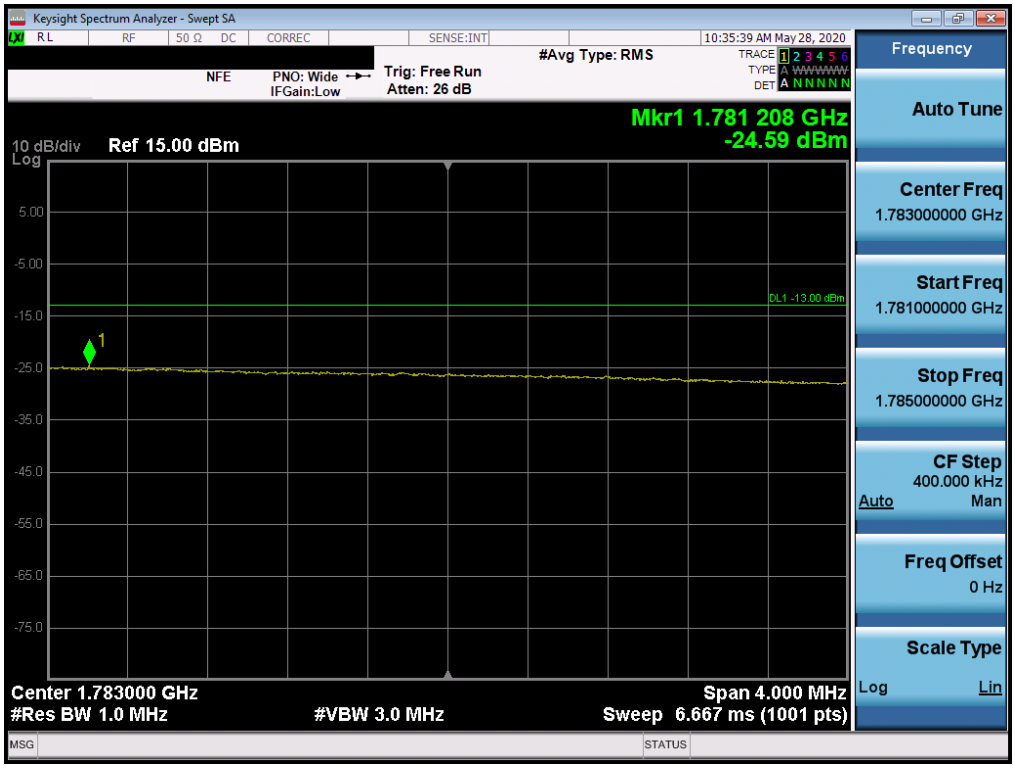

Plot 7-92. Channel Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB Configuration)

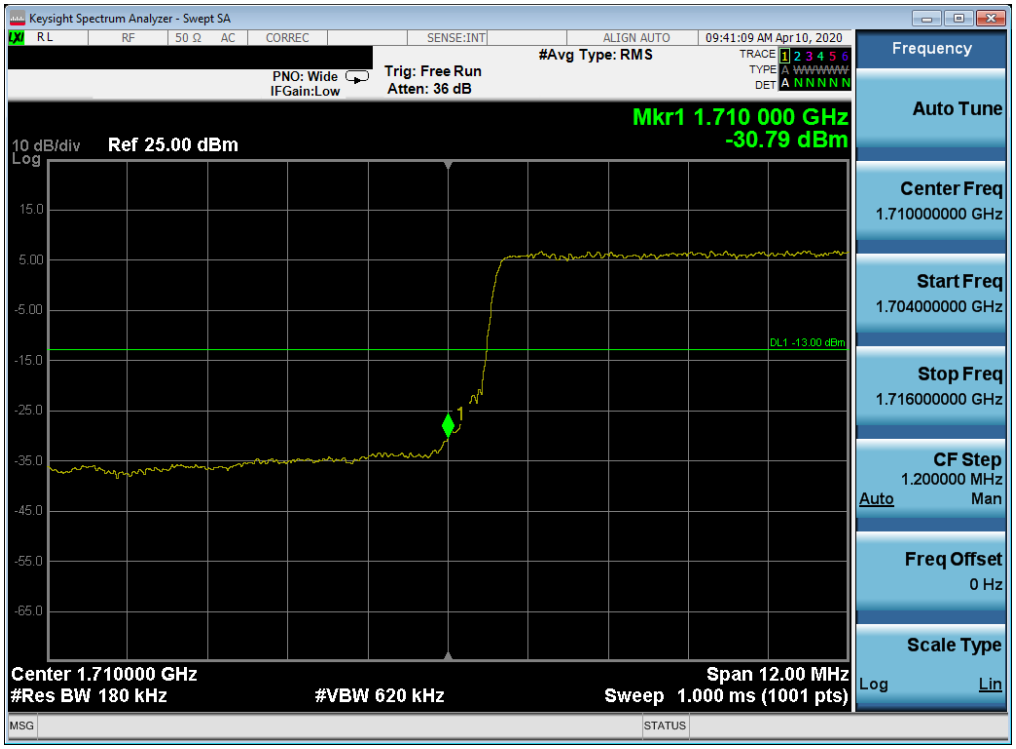

Plot 7-93. Lower Band Edge Plot (LTE Band 66/4 - 15MHz QPSK – Full RB Configuration)

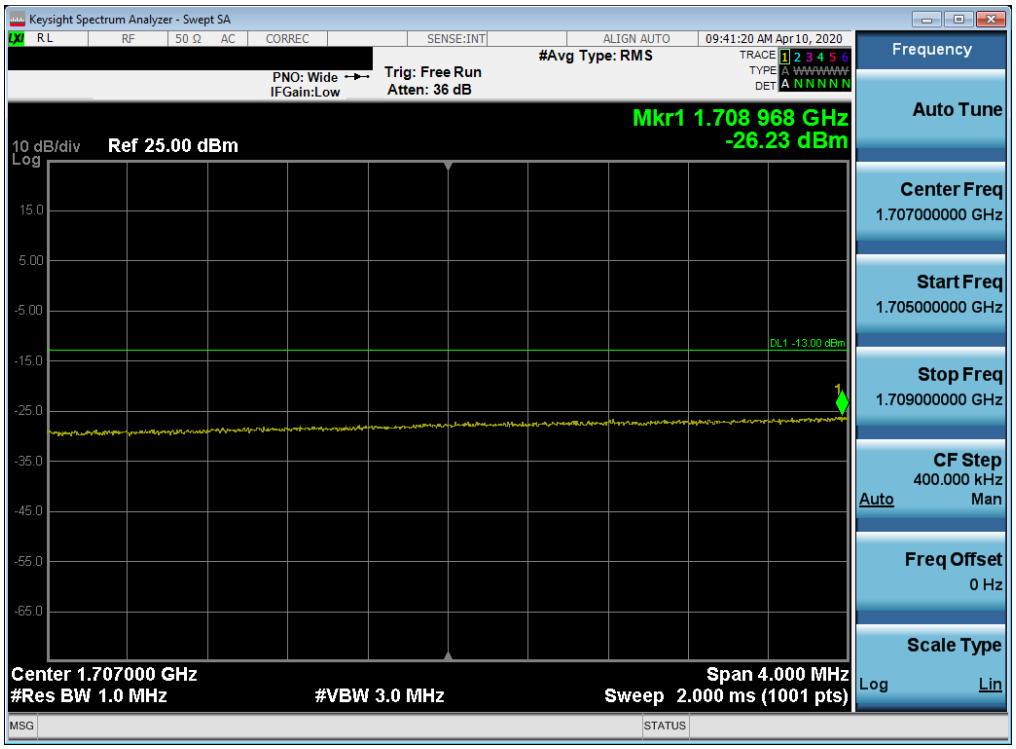

Plot 7-94. Lower Extended Band Edge Plot (LTE Band 66/4 - 15MHz QPSK – Full RB Configuration)

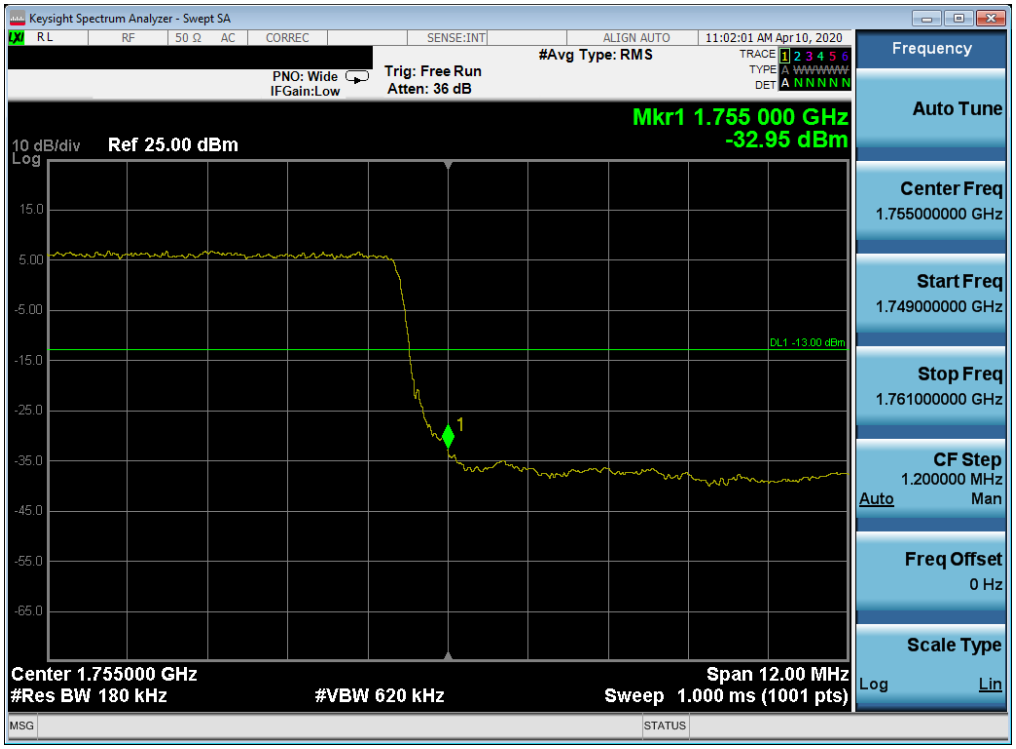

Plot 7-95. Upper Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB Configuration)

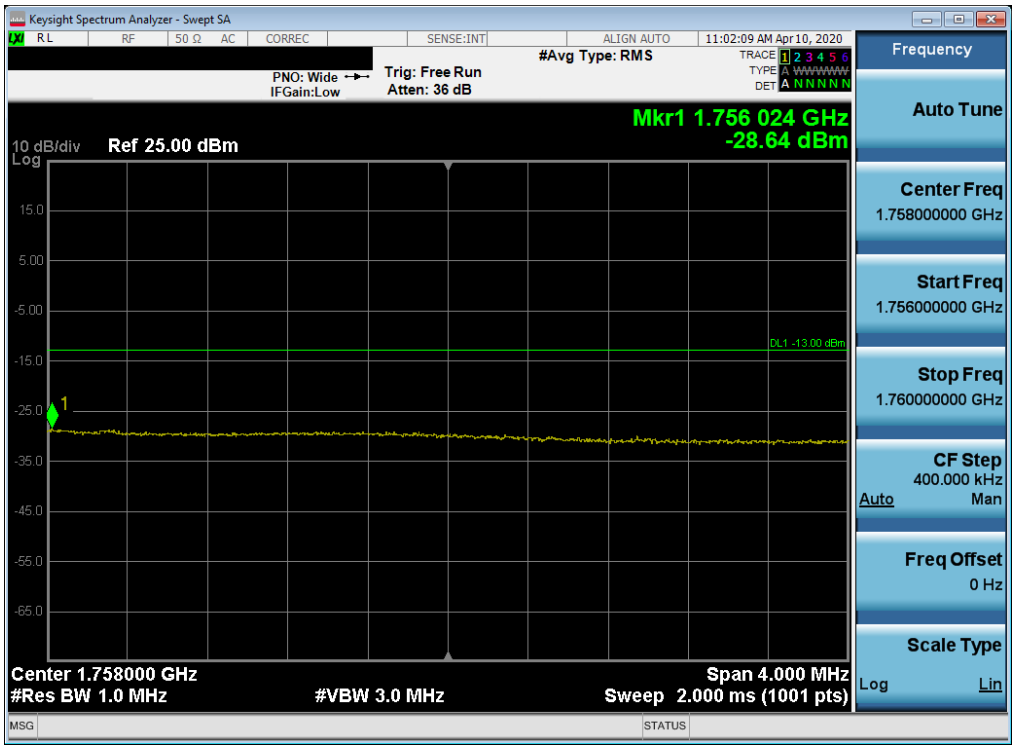

Plot 7-96. Upper Extended Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB Configuration)

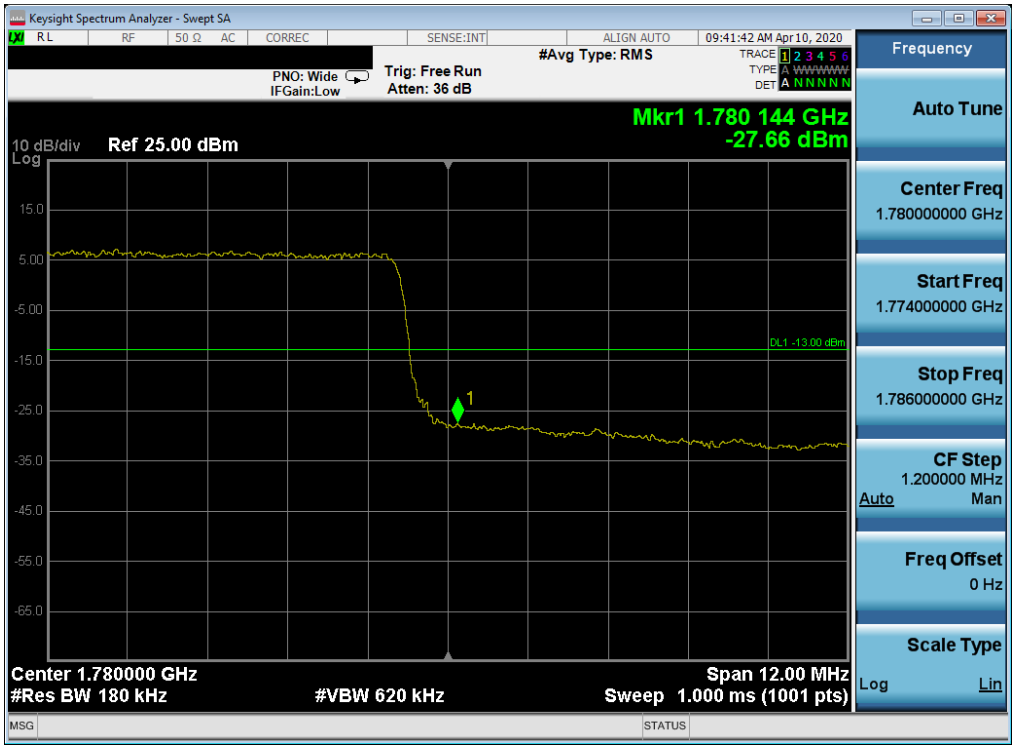

Plot 7-97. Upper Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB Configuration)

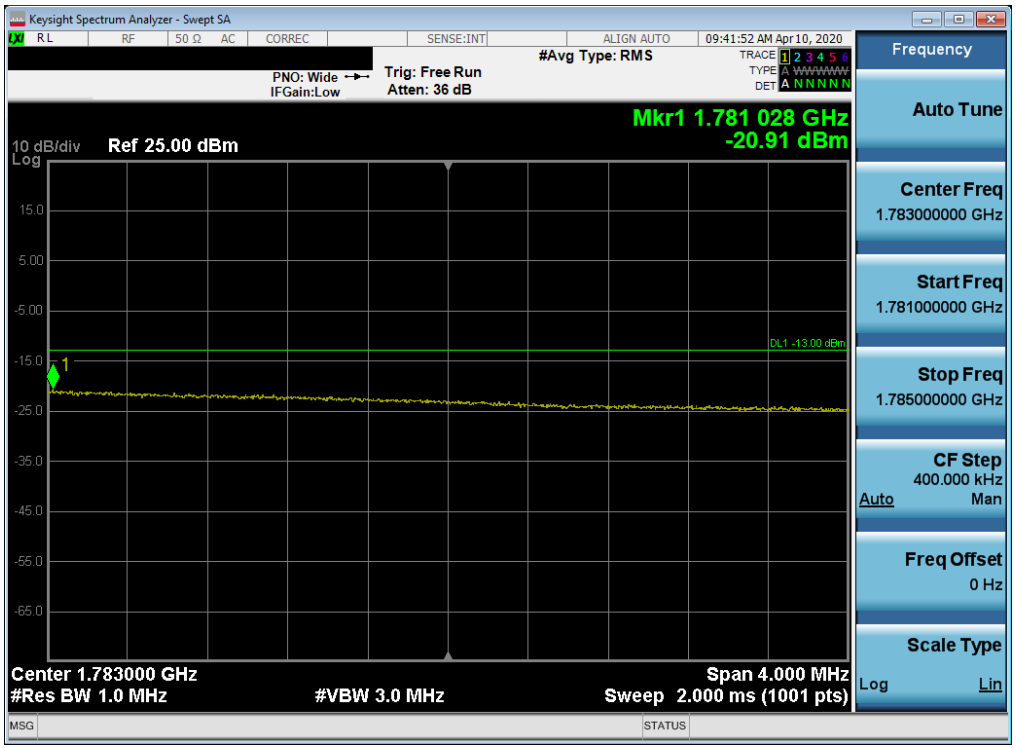

Plot 7-98. Upper Extended Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB Configuration)

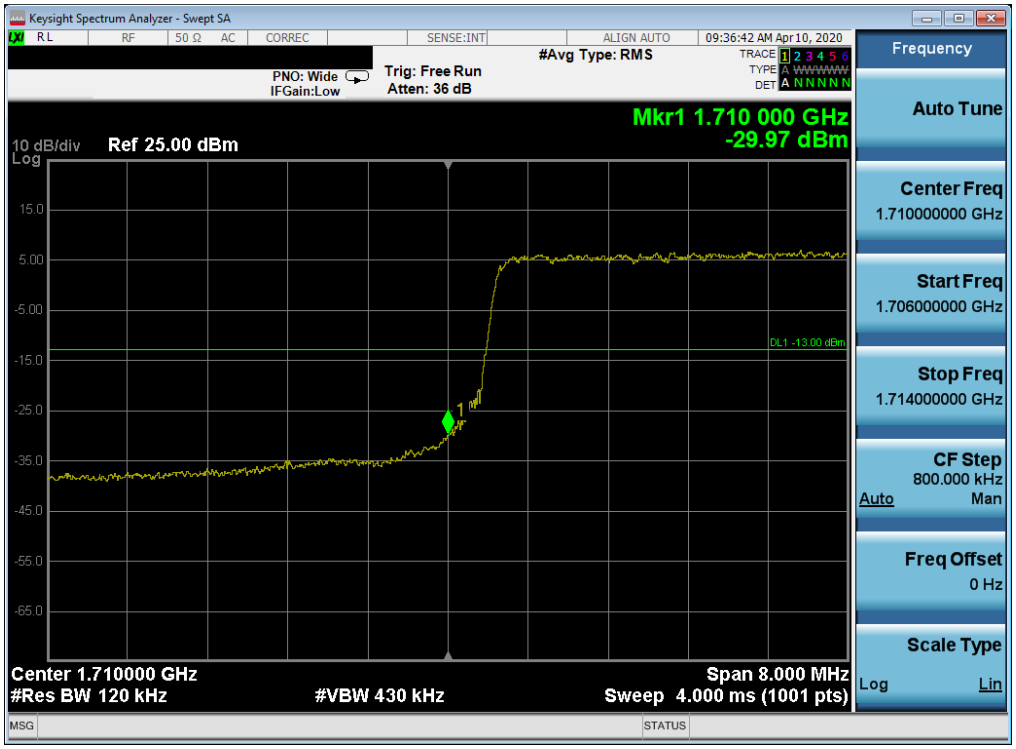

Plot 7-99. Lower Band Edge Plot (LTE Band 66/4 - 10MHz QPSK – Full RB Configuration)

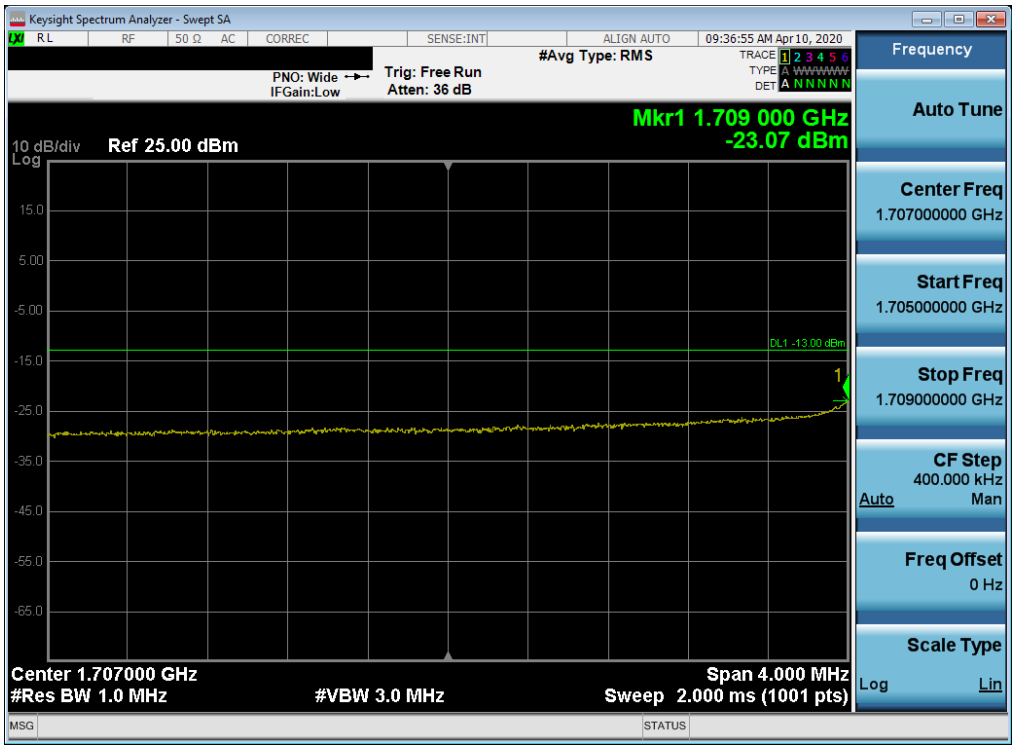

Plot 7-100. Lower Extended Band Edge Plot (LTE Band 66/4 - 10MHz QPSK – Full RB Configuration)

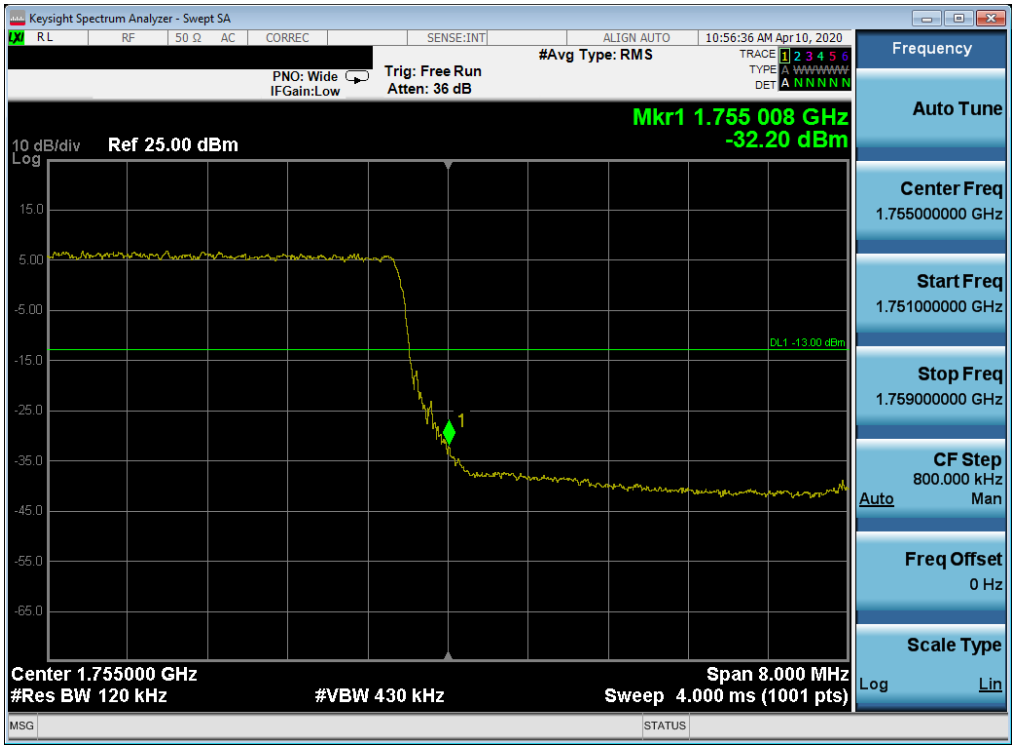

Plot 7-101. Upper Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB Configuration)

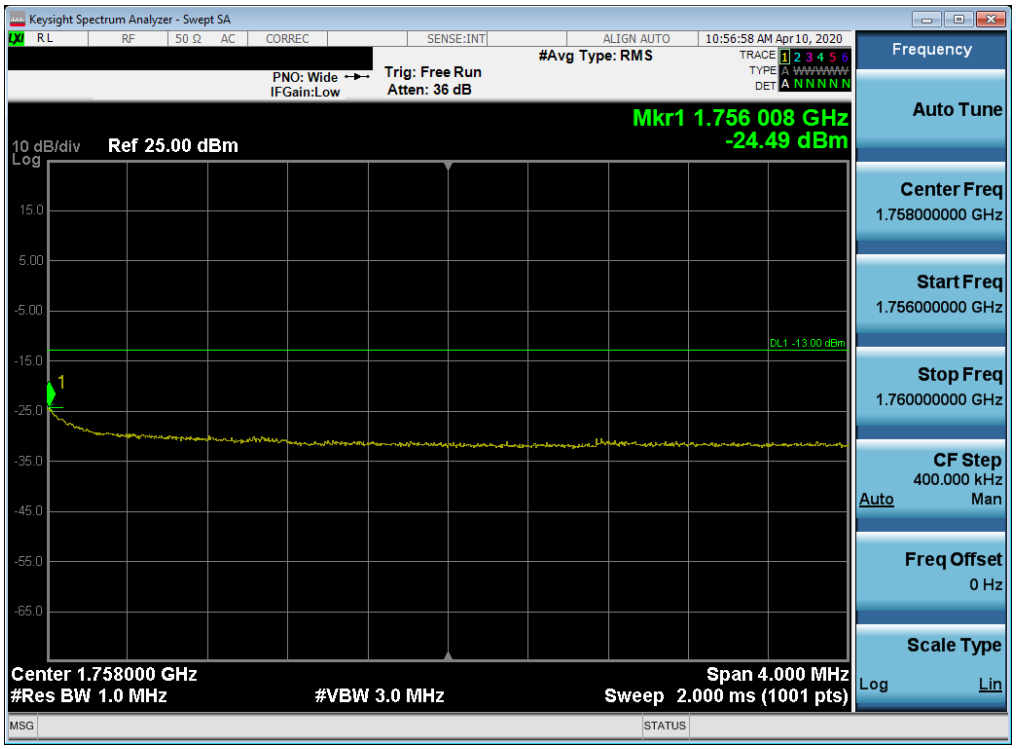

Plot 7-102. Upper Extended Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB Configuration)

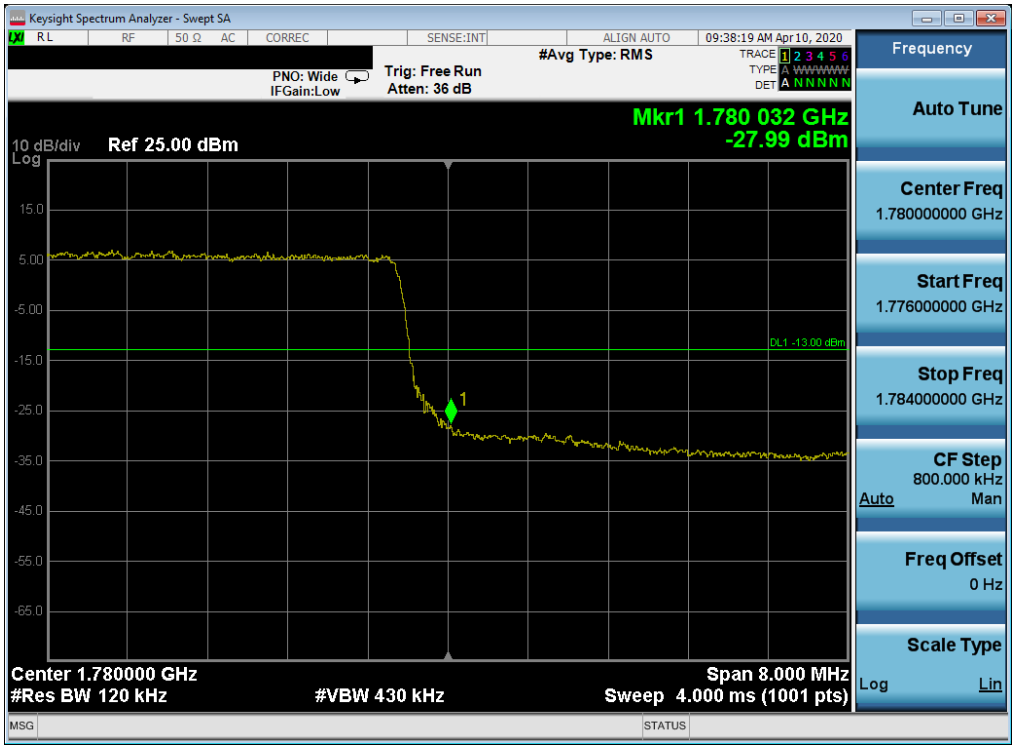

Plot 7-103. Upper Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB Configuration)

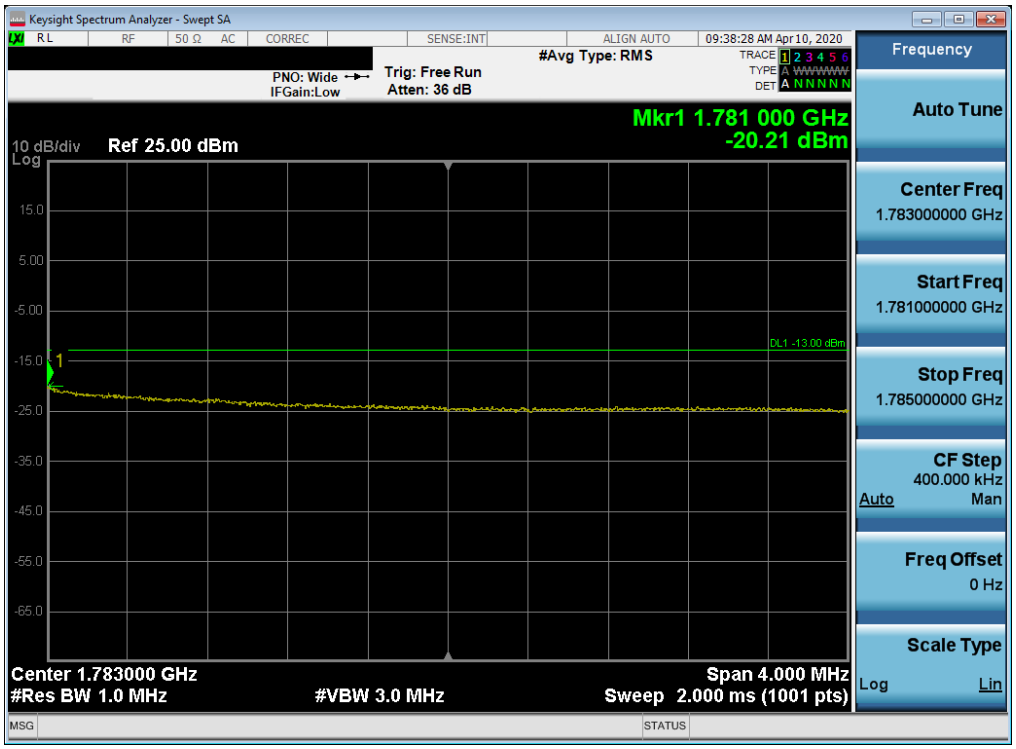

Plot 7-104. Upper Extended Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB Configuration)

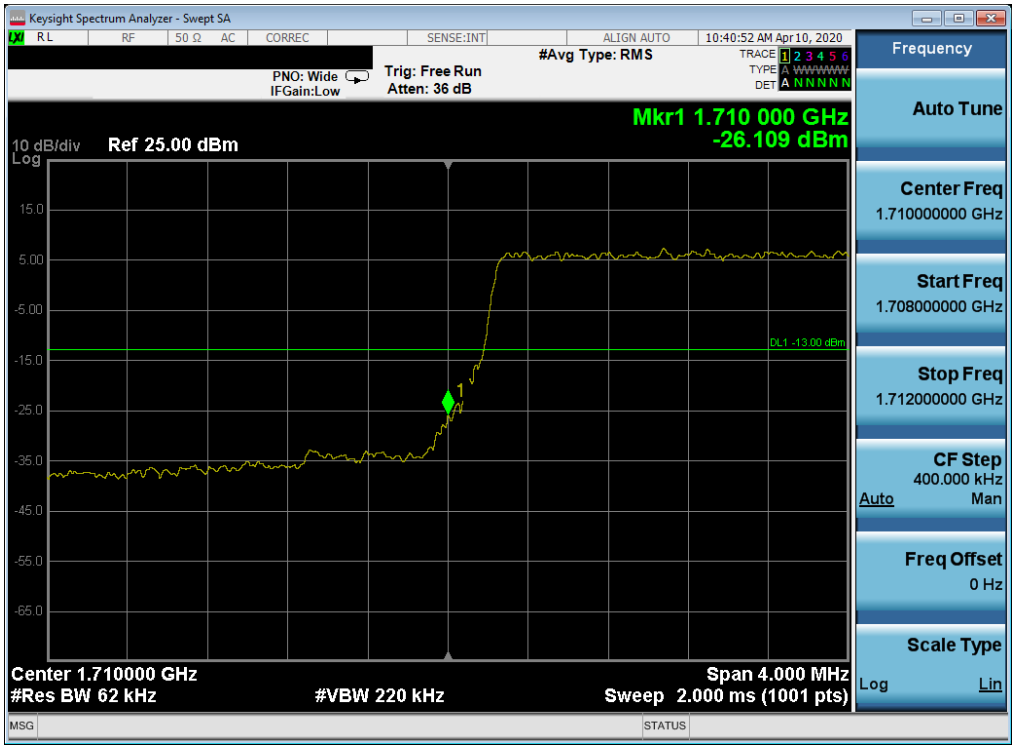

Plot 7-105. Lower Band Edge Plot (LTE Band 66/4 - 5MHz QPSK – Full RB Configuration)

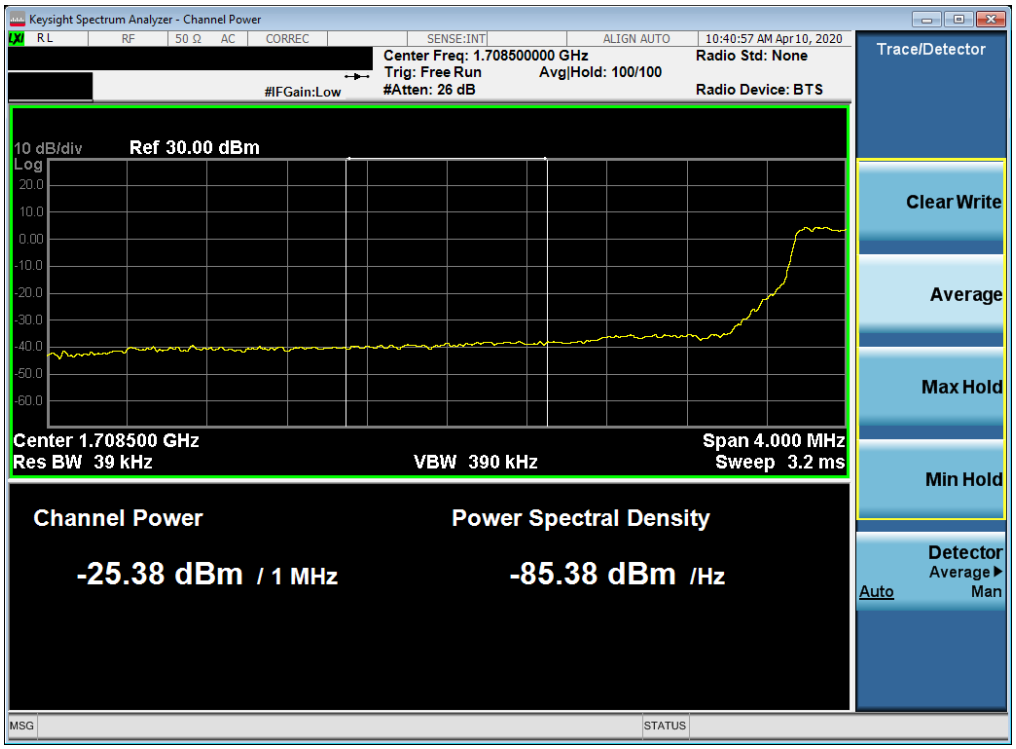

Plot 7-106. Lower Extended Band Edge Plot (LTE Band 66/4 - 5MHz QPSK – Full RB Configuration)

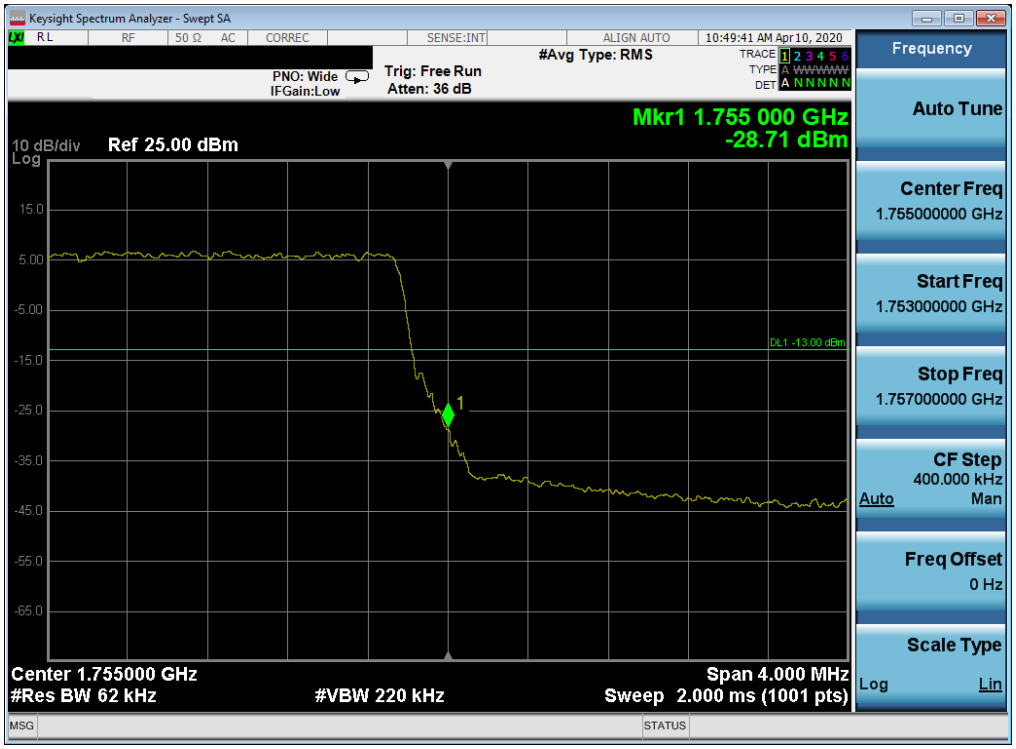

Plot 7-107. Upper Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB Configuration)

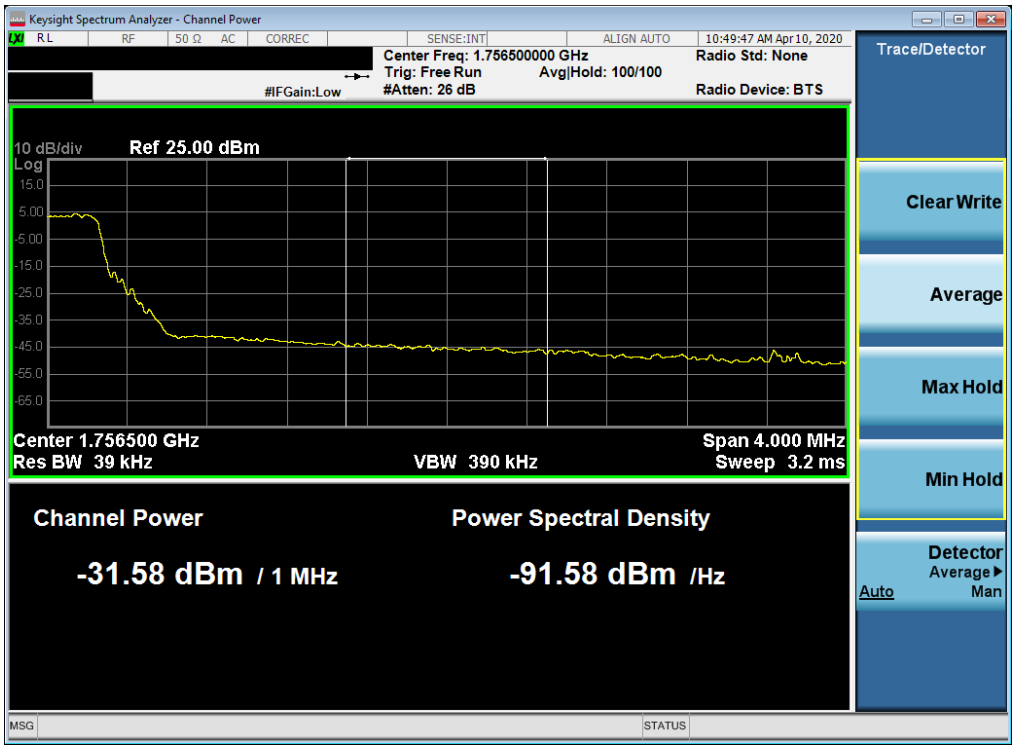

Plot 7-108. Upper Extended Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB Configuration)

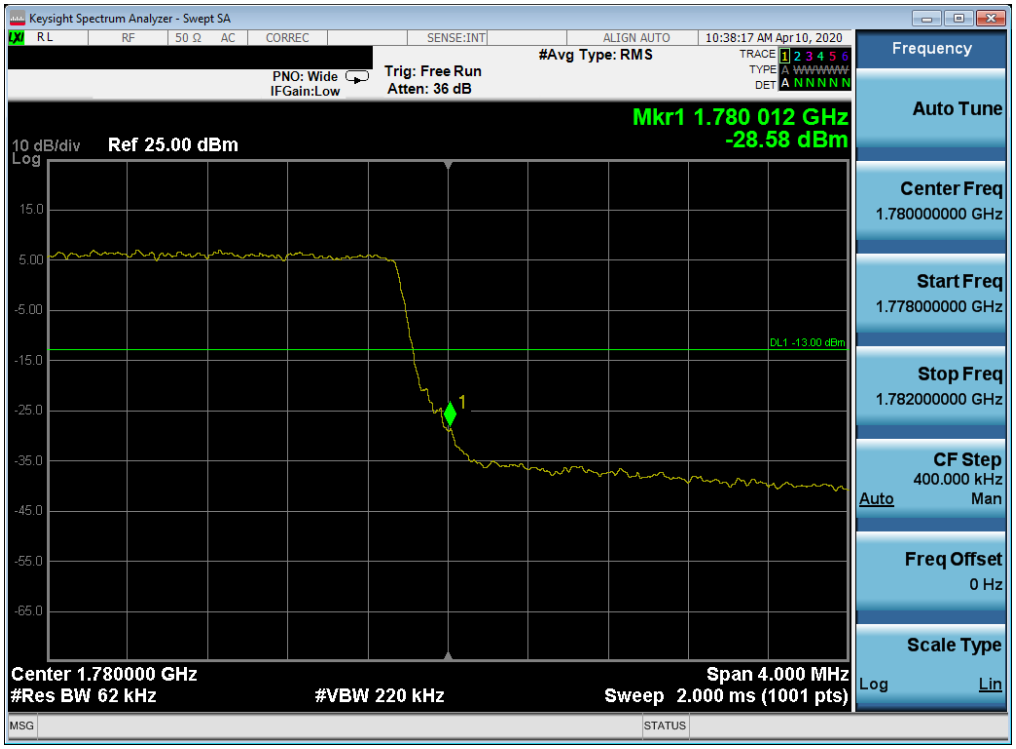

Plot 7-109. Upper Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB Configuration)

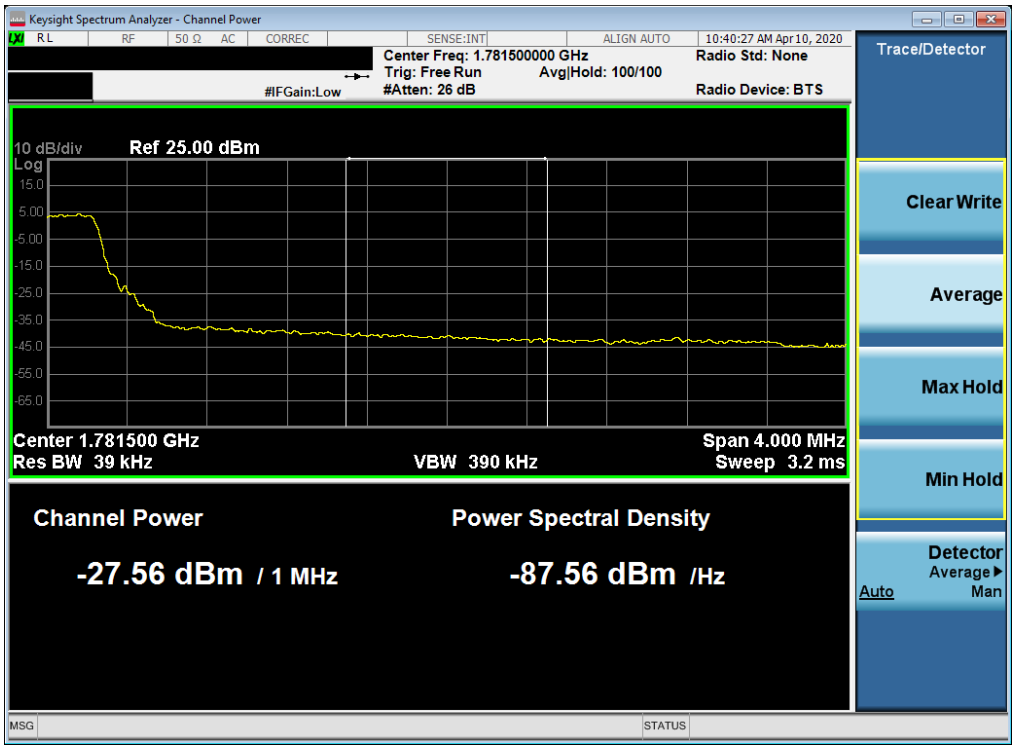

Plot 7-110. Upper Extended Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB Configuration)

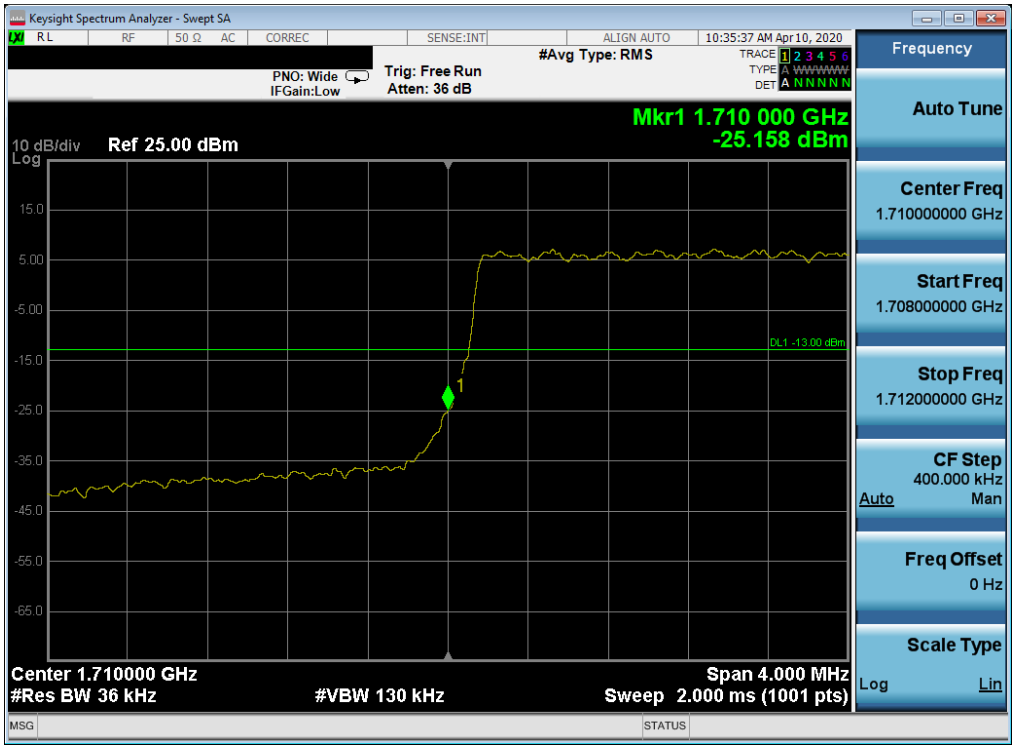

Plot 7-111. Lower Band Edge Plot (LTE Band 66/4 - 3MHz QPSK – Full RB Configuration)

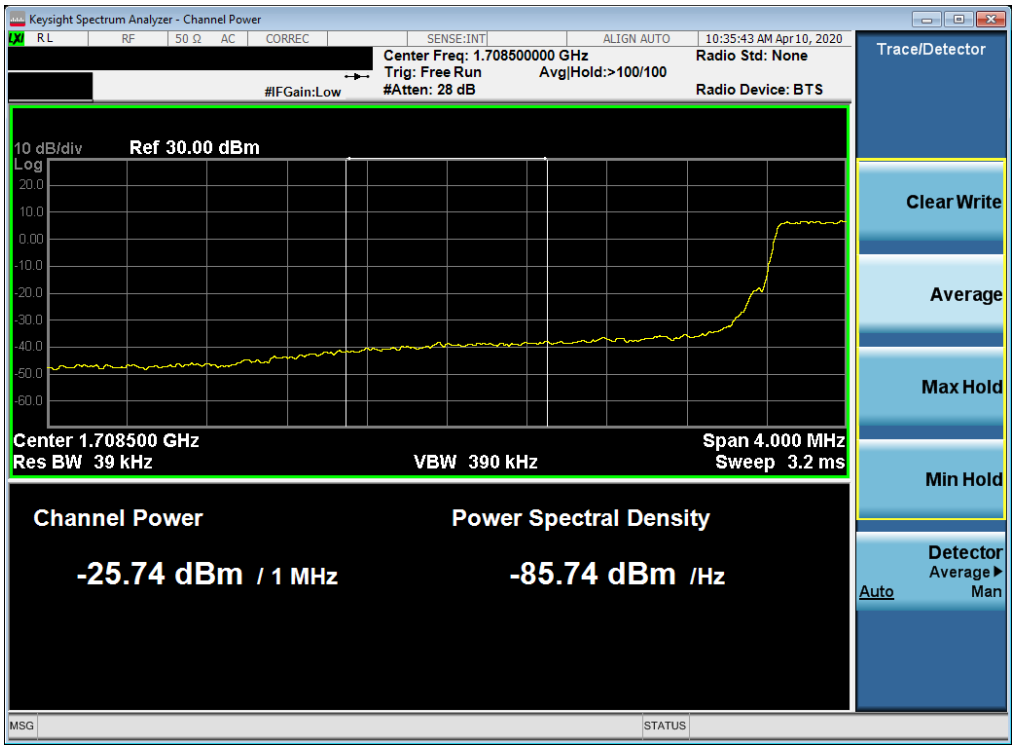

Plot 7-112. Lower Extended Band Edge Plot (LTE Band 66/4 - 3MHz QPSK – Full RB Configuration)

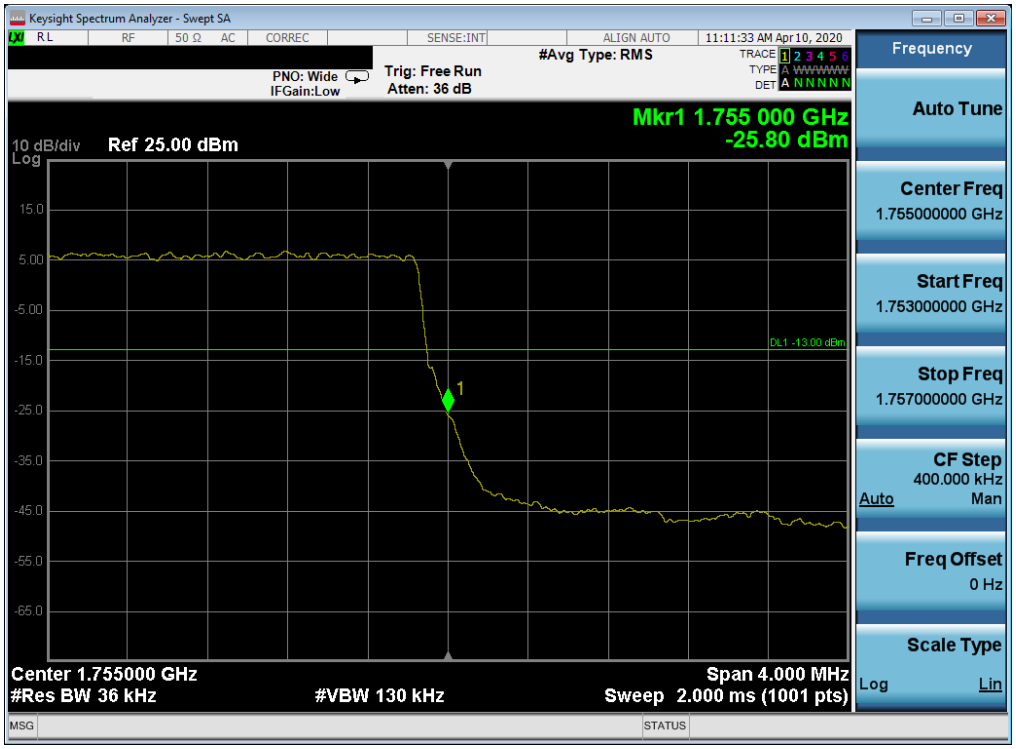

Plot 7-113. Upper Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB Configuration)

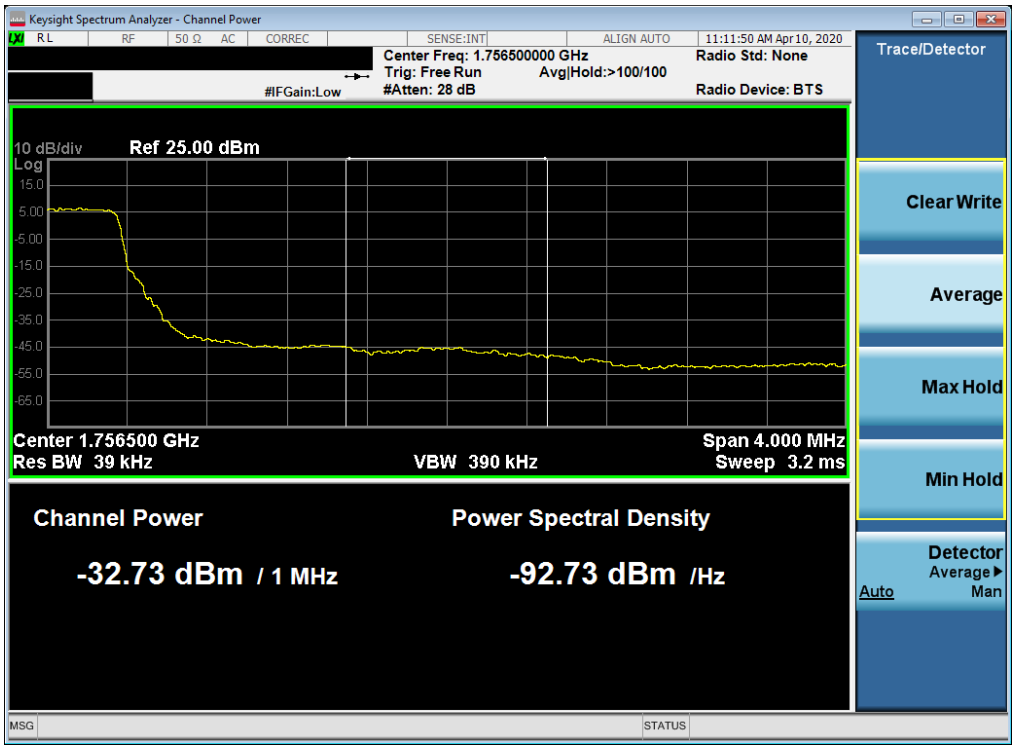

Plot 7-114. Upper Extended Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB Configuration)

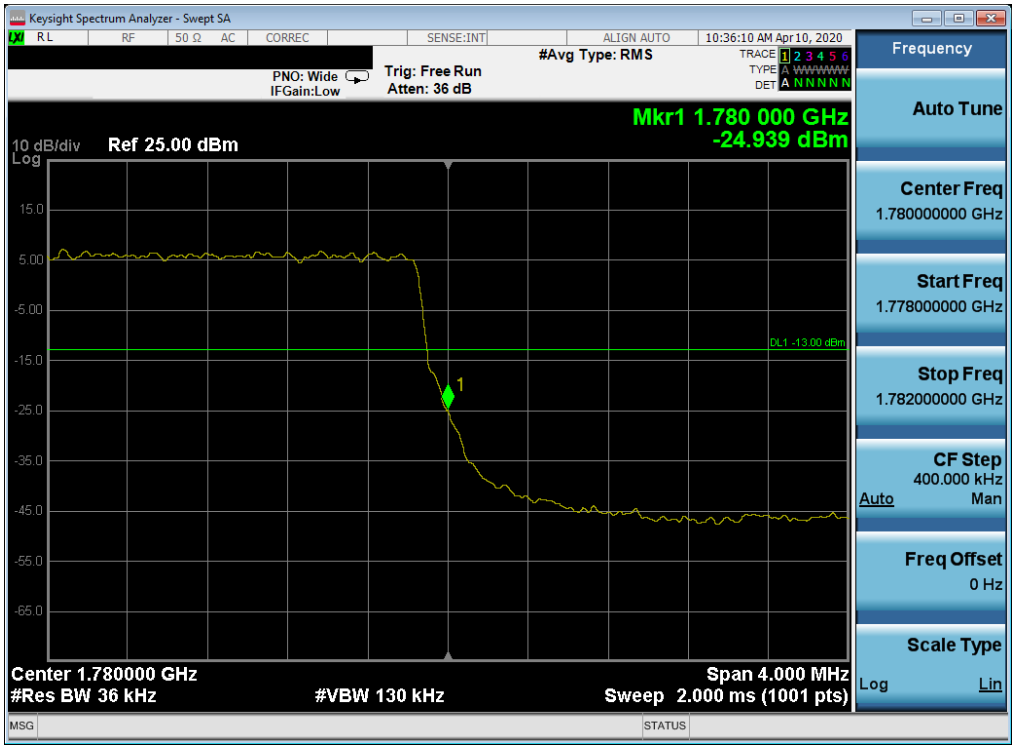

Plot 7-115. Upper Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB Configuration)

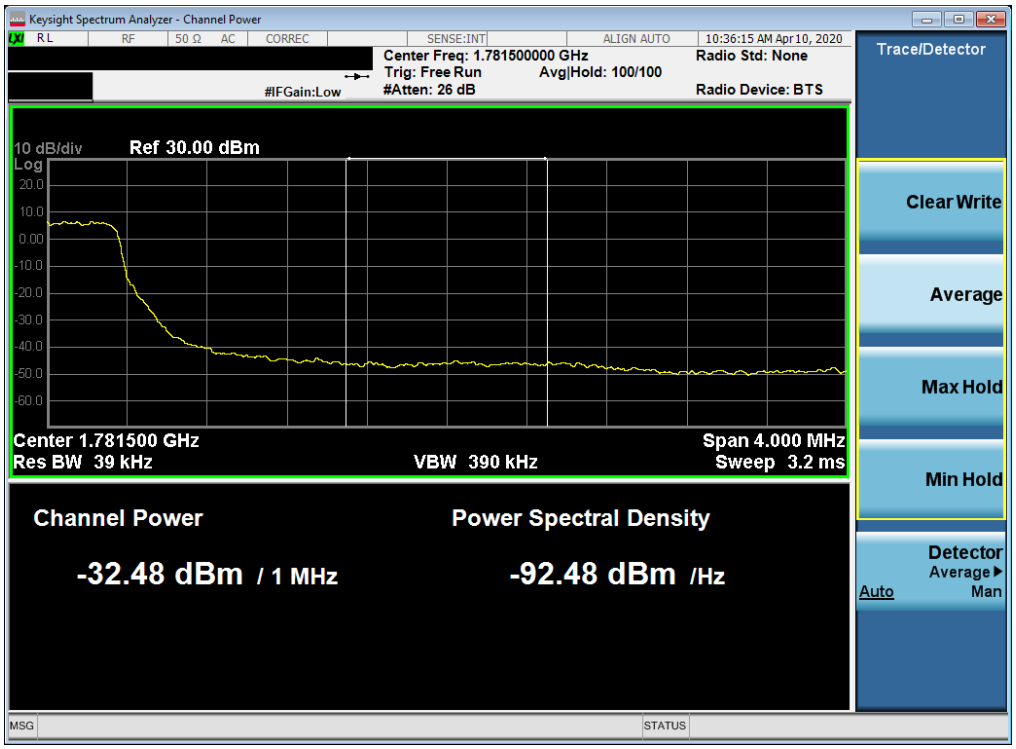

Plot 7-116. Upper Extended Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB Configuration)

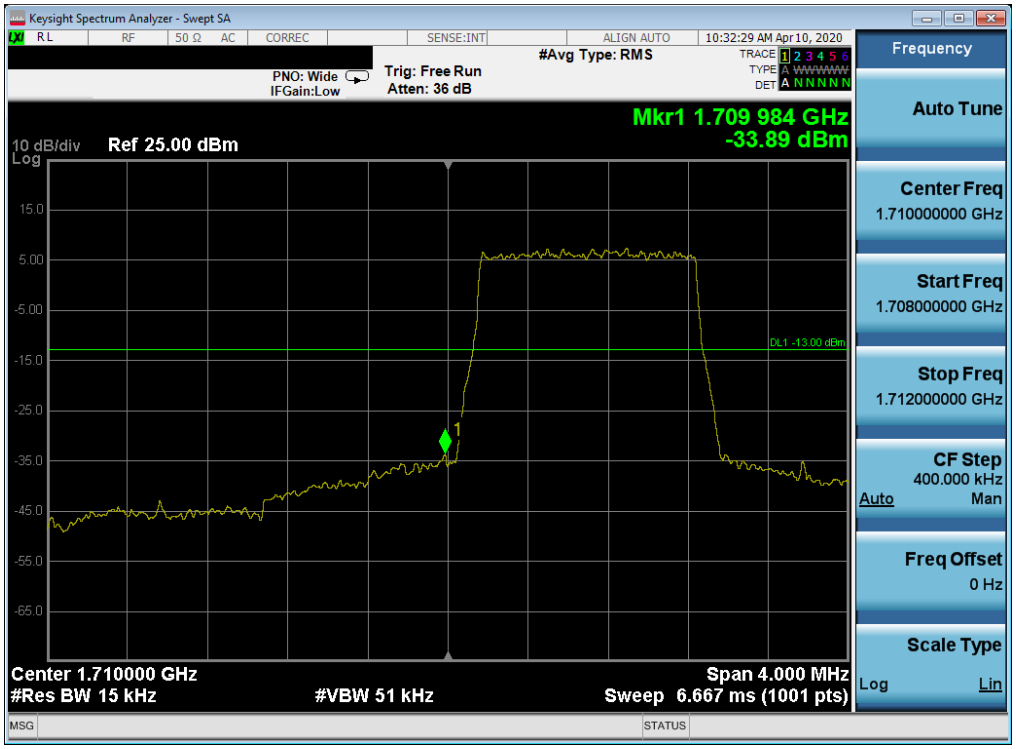

Plot 7-117. Lower Band Edge Plot (LTE Band 66/4 – 1.4MHz QPSK – Full RB Configuration)

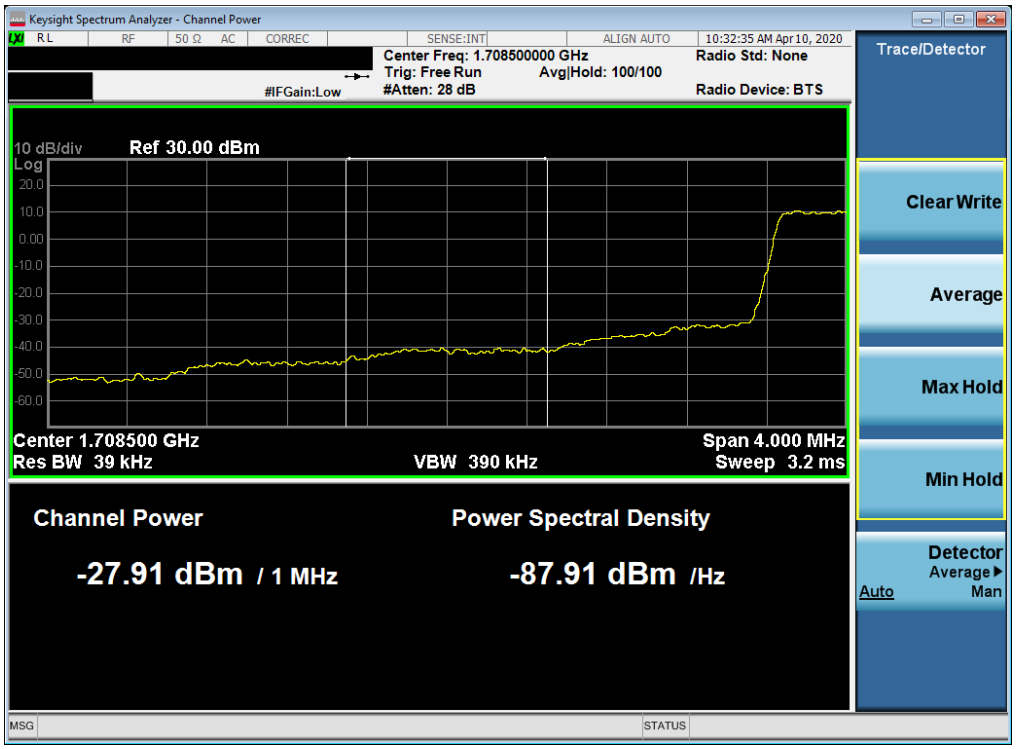

Plot 7-118. Lower Extended Band Edge Plot (LTE Band 66/4 – 1.4MHz QPSK – Full RB Configuration)

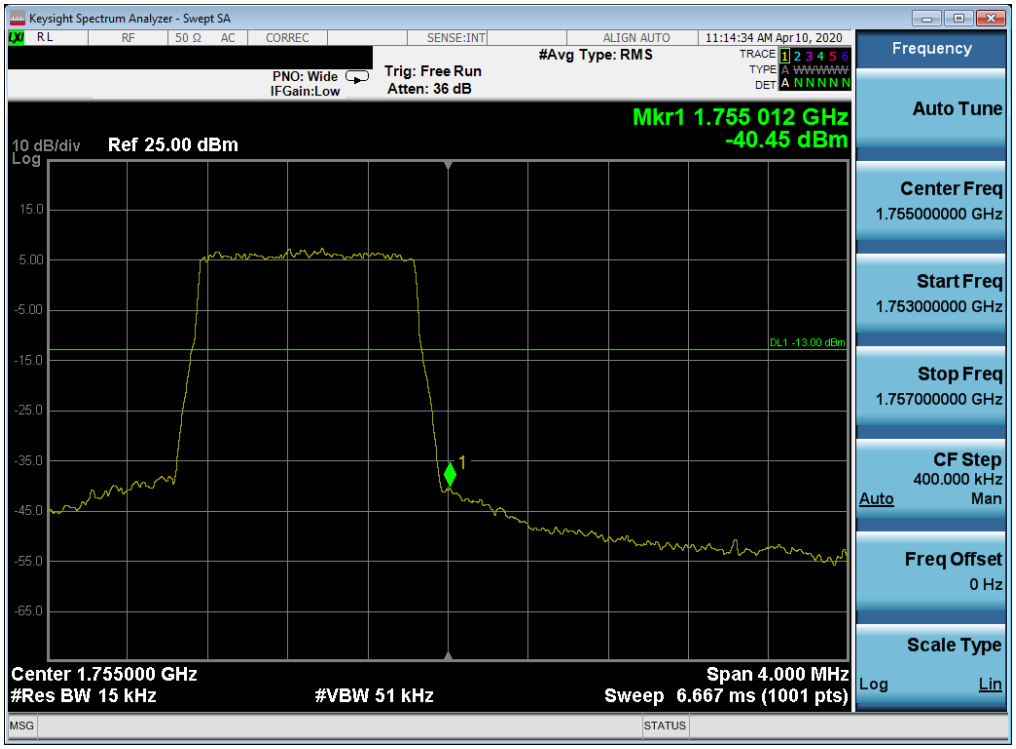

Plot 7-119. Upper Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB Configuration)

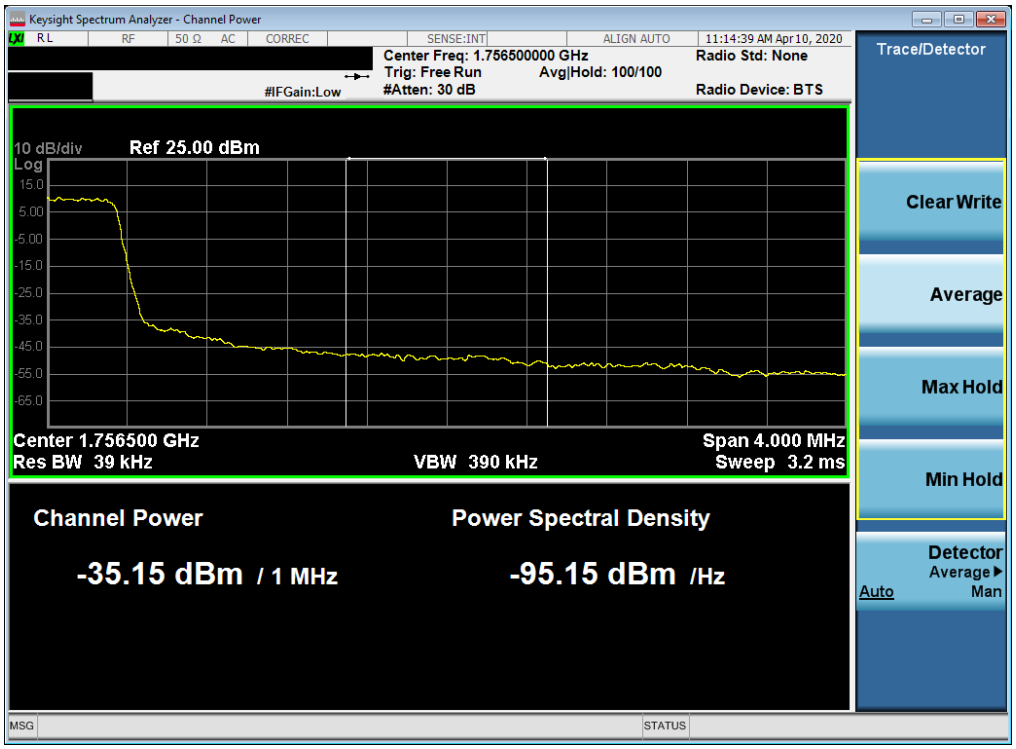

Plot 7-120. Upper Extended Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB Configuration)

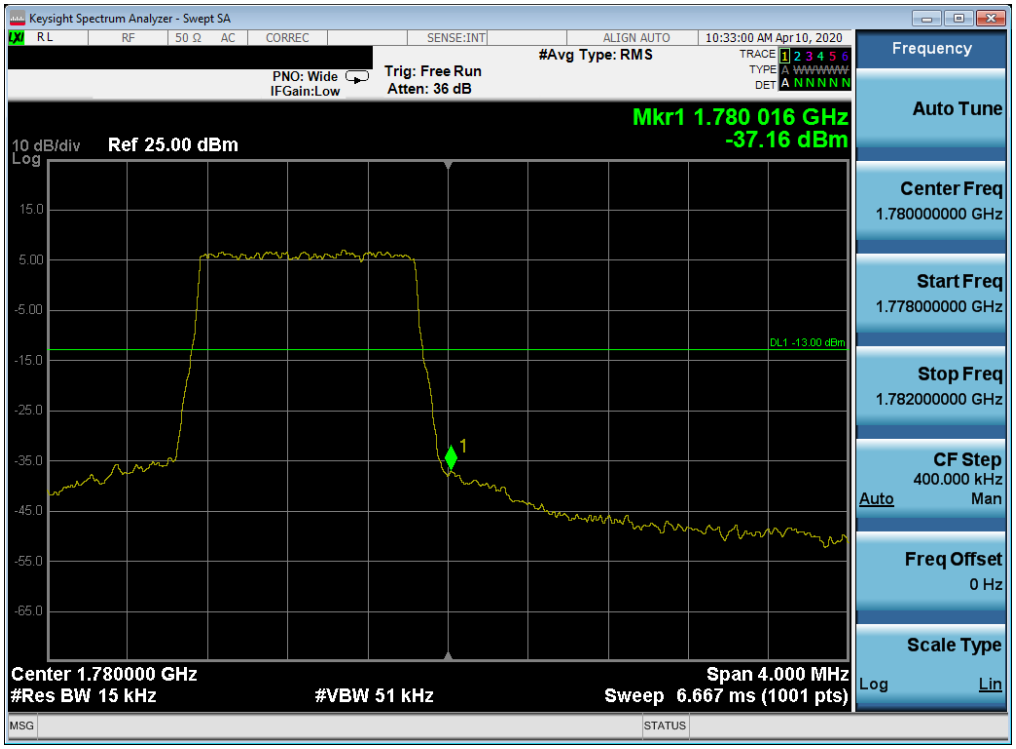

Plot 7-121. Upper Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB Configuration)

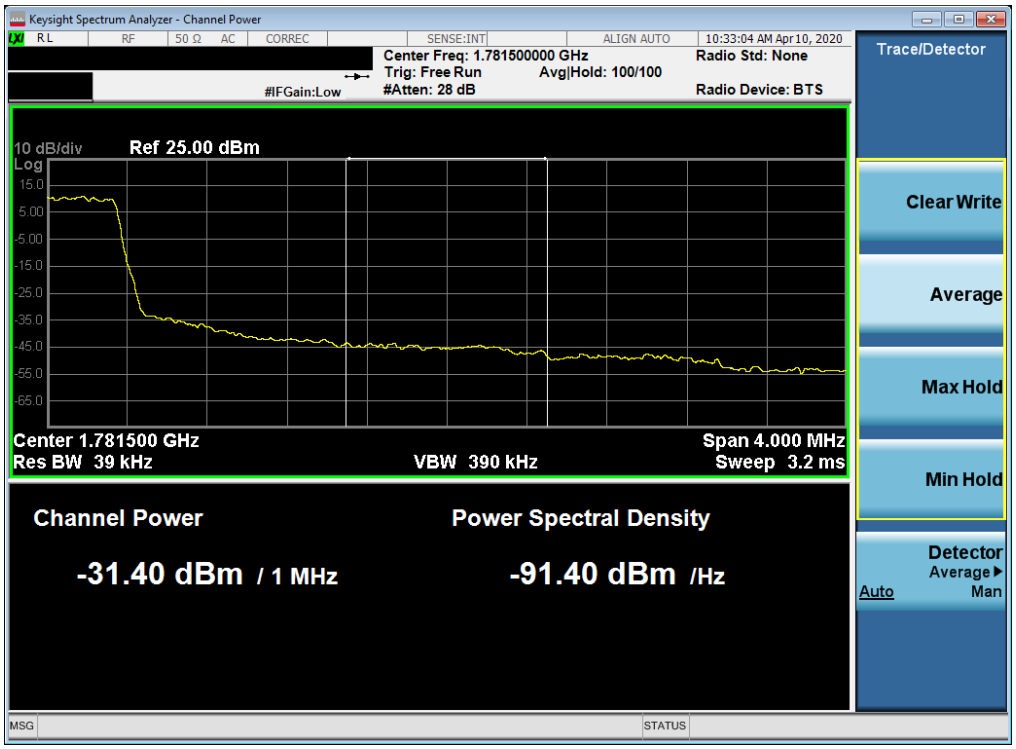

Plot 7-122. Upper Extended Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB Configuration)