

FCC WLAN REPORT

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:

February 17, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1502-F028

HCT FRN: 0005866421

FCC ID : ZNFH320

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-H320
Additional Model(s): LGH320,H320
EUT Type: Cellular/PCS GSM Phone with WLAN and Bluetooth
Max. RF Output Power: Wi-Fi 802.11b(22.89 dBm) / Wi-Fi 802.11g (22.37 dBm)
/ Wi-Fi 802.11n_20 MHz (21.17 dBm) / Wi-Fi 802.11n_40 MHz (20.20 dBm)
Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)
2422 MHz - 2452 MHz (2.4 GHz Band)_40 MHz BW
Modulation type CCK/DSSS/OFDM
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test Engineer of RF Team



Approved by
: Sang Jn Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1502-F028	February 17, 2015	- First Approval Report

Table of Contents

- 1. GENERAL INFORMATION 4
- 2. EUT DESCRIPTION 4
- 3. TEST METHODOLOGY 5
 - 3.1 EUT CONFIGURATION 5
 - 3.2 EUT EXERCISE 5
 - 3.3 GENERAL TEST PROCEDURES 5
 - 3.4 DESCRIPTION OF TEST MODES 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS 6
 - 5.1 FACILITIES 6
 - 5.2 EQUIPMENT 6
- 6. ANTENNA REQUIREMENTS 7
- 7. SUMMARY TEST OF RESULTS 8
- 8. TEST RESULT 9
 - 8.1 DUTY CYCLE..... 9
 - 8.2 6dB BANDWIDTH (802.11b/g/n) 11
 - 8.3 OUTPUT POWER (802.11b/g/n)..... 15
 - 8.4 POWER SPECTRAL DENSITY (802.11b/g/n)..... 28
 - 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 32
 - 8.6 RADIATED MEASUREMENT..... 46
 - 8.6.1 RADIATED SPURIOUS EMISSIONS..... 46
 - 8.6.2 RADIATED RESTRICTED BAND EDGES 61
 - 8.7 POWERLINE CONDUCTED EMISSIONS 64
- 9. LIST OF TEST EQUIPMENT 69
 - 9.1 LIST OF TEST EQUIPMENT(Conducted Test) 69
 - 9.2 LIST OF TEST EQUIPMENT(Radiated Test)..... 70

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFH320
EUT Type: Cellular/PCS GSM Phone with WLAN and Bluetooth
Model name(s): LG-H320
Additional Model(s): LGH320,H320
Date(s) of Tests: January 30, 2015 ~ February 17, 2015
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

FCC Model Name	LG-H320	
Additional Model(s):	LGH320,H320	
EUT Type	Cellular/PCS GSM Phone with WLAN and Bluetooth	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW RX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW	
Max. RF Output Power	Peak	Wi-Fi 802.11b(22.89 dBm) / Wi-Fi 802.11g (22.37 dBm) / Wi-Fi 802.11n_20 MHz (21.17 dBm) / Wi-Fi 802.11n_40 MHz (20.20dBm)
	Average	Wi-Fi 802.11b(16.39dBm) / Wi-Fi 802.11g (13.38dBm) / Wi-Fi 802.11n_20 MHz (12.49 dBm) / Wi-Fi 802.11n_40 MHz (11.90 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: IM-TECH Antenna type: FPCB Antenna Peak Gain : -2.71 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r02 dated June 05, 2014 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS

8. TEST RESULT


8.1 DUTY CYCLE

■ TEST PROCEDURE

According to KDB 558074)6)b), issued 06/05/2014)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

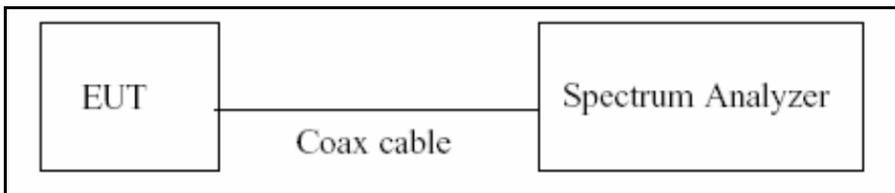

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/05/2014)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	12.160	12.280	0.99022801	0.043
	2 Mbps	6.160	6.280	0.98089172	0.084
	5.5 Mbps	2.365	2.478	0.95439871	0.203
	11 Mbps	1.266	1.386	0.91341991	0.393
g	6 Mbs	2.011	2.132	0.94324578	0.254
	9 Mbs	1.348	1.469	0.91763104	0.373
	12 Mbs	1.020	1.132	0.90106007	0.452
	18 Mbs	0.684	0.796	0.85929648	0.659
	24 Mbs	0.520	0.632	0.82278481	0.847
	36 Mbs	0.354	0.464	0.76293103	1.175
	48 Mbs	0.268	0.378	0.70899471	1.494
	54 Mbs	0.242	0.352	0.68750000	1.627
n_20 MHz BW	6.5 Mbs	1.880	1.995	0.94235589	0.258
	13 Mbs	0.955	1.070	0.89252336	0.494
	19.5 Mbs	0.651	0.765	0.85098039	0.701
	26 Mbs	0.495	0.609	0.81280788	0.900
	39 Mbs	0.346	0.455	0.76043956	1.189
	52 Mbs	0.264	0.376	0.70212766	1.536
	58.5 Mbs	0.242	0.351	0.68945869	1.615
	65 Mbs	0.222	0.333	0.66666667	1.761
n_40 MHz BW	13.5 Mbps	0.926	1.036	0.89382239	0.487
	27 Mbps	0.481	0.590	0.81525424	0.887
	40.5 Mbps	0.335	0.443	0.75620767	1.214
	54 Mbps	0.258	0.366	0.70491803	1.519
	81 Mbps	0.187	0.295	0.63389831	1.980
	108 Mbps	0.146	0.255	0.57254902	2.422
	121.5 Mbps	0.134	0.242	0.55371901	2.567
	135 Mbps	0.127	0.234	0.54273504	2.654

Note : Duty Cycle Factor = 10*log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}


8.2 6dB BANDWIDTH (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.59	0.500	Pass
2437	6	10.03	0.500	Pass
2462	11	9.58	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.39	0.500	Pass
2437	6	15.52	0.500	Pass
2462	11	16.43	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.66	0.500	Pass
2437	6	17.66	0.500	Pass
2462	11	17.64	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2422	3	36.01	0.500	Pass
2437	6	35.97	0.500	Pass
2452	9	36.03	0.500	Pass


Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.

▣ RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 6)

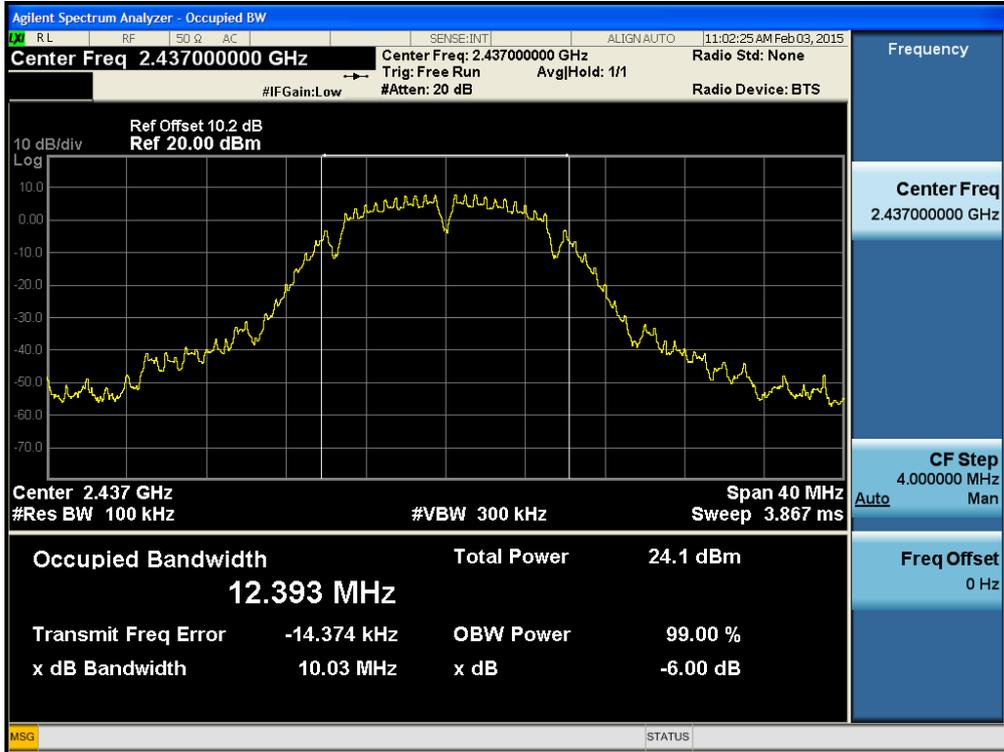


6dB Bandwidth plot (802.11g-CH 11)

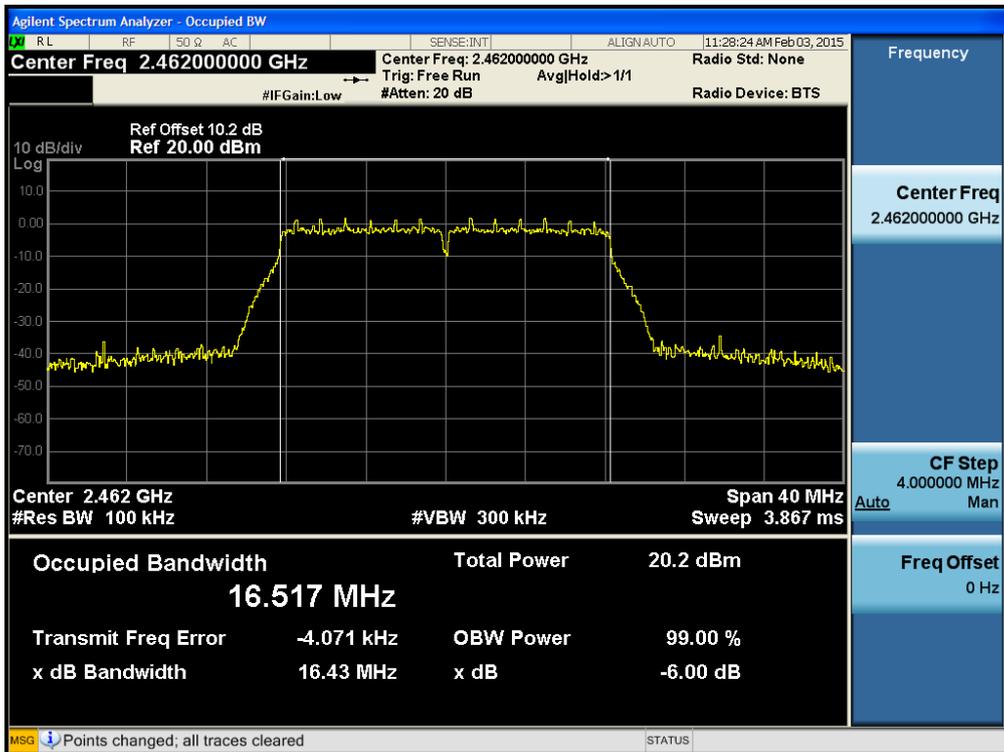

6dB Bandwidth plot (802.11n-CH 6) _20 MHz BW

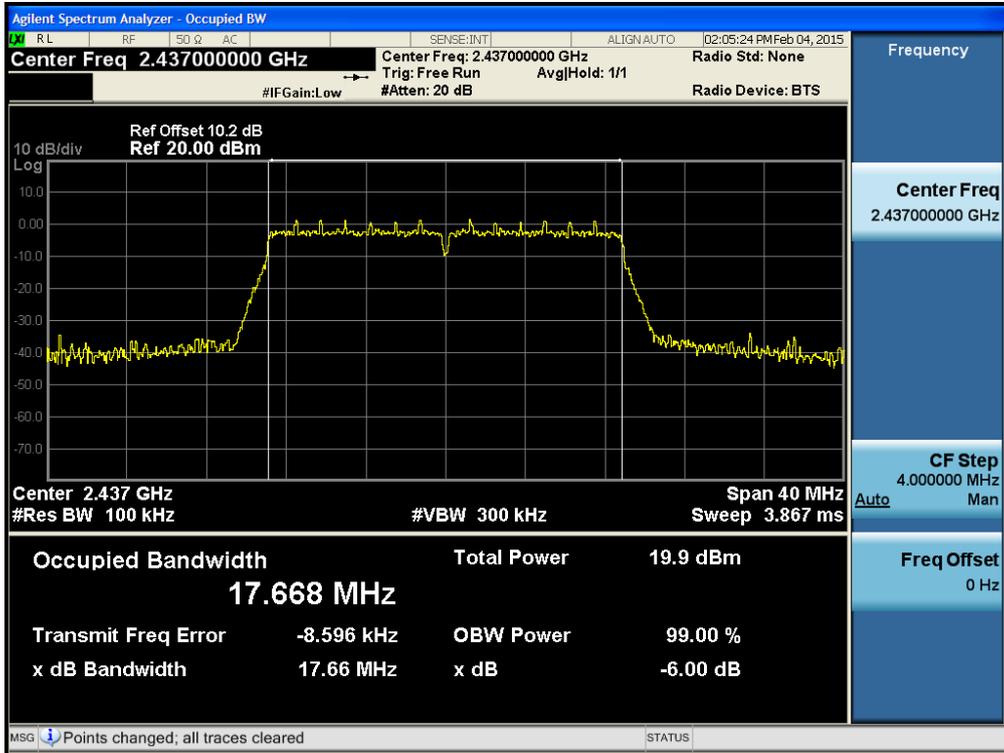

6dB Bandwidth plot (802.11n-CH 9) _40 MHz BW

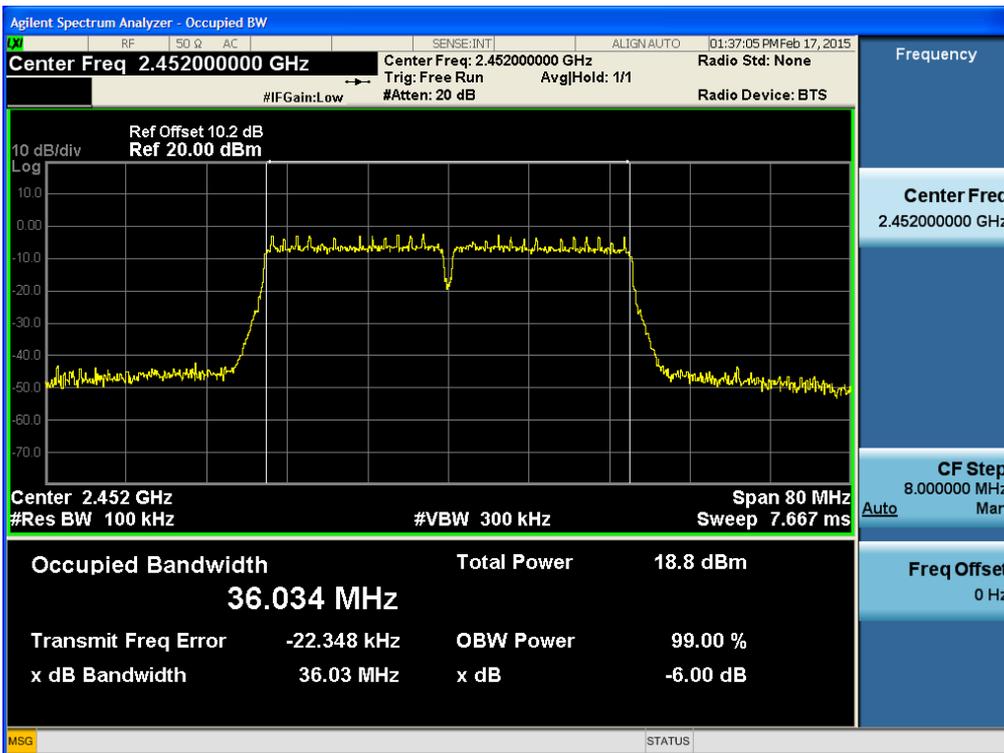


8.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION(20 MHz BW)



■ TEST PROCEDURE(20 MHz BW)

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 06/05/2014)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 06/05/2014)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

■ TEST CONFIGURATION(40 MHz BW)**■ TEST PROCEDURE(40 MHz BW)**

Power sensor(N9121A) is supported only implemented a VBW of 30 MHz. So in case of 40 MHz power measurement, we used the integrated band power method.

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Integrated Band Power Method)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/05/2014)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 20 dB + 0.8 dB + 0.2 dB = 31.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	20.21
	2437	20.24
	2462	20.24

(Actual value of loss for the attenuator and cable combination)

▣ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	18.87	30
		2	19.15	30
		5.5	20.62	30
		11	22.46	30
2437	6	1	19.29	30
		2	19.58	30
		5.5	21.05	30
		11	22.89	30
2462	11	1	18.42	30
		2	18.69	30
		5.5	20.09	30
		11	21.96	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	20.18	30
		9	20.22	30
		12	20.38	30
		18	20.29	30
		24	20.88	30
		36	20.82	30
		48	20.81	30
		54	20.87	30
2437	6	6	21.58	30
		9	21.59	30
		12	21.70	30
		18	21.62	30
		24	22.18	30
		36	22.14	30
		48	22.23	30
		54	22.37	30
2462	11	6	20.94	30
		9	20.98	30
		12	20.99	30
		18	20.84	30
		24	21.28	30
		36	21.51	30
		48	21.60	30
		54	21.78	30

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5	20.33	30
		13	20.44	30
		19.5	20.28	30
		26	20.73	30
		39	20.82	30
		52	20.93	30
		58.5	20.87	30
		65	20.90	30
2437	6	6.5	20.73	30
		13	20.36	30
		19.5	20.46	30
		26	20.90	30
		39	21.06	30
		52	21.14	30
		58.5	21.17	30
		65	21.14	30
2462	11	6.5	20.01	30
		13	20.01	30
		19.5	20.06	30
		26	20.55	30
		39	20.54	30
		52	20.68	30
		58.5	20.64	30
		65	20.42	30

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	13.5 Mbps	19.38	30
		27 Mbps	19.51	30
		40.5 Mbps	19.49	30
		54 Mbps	19.95	30
		81 Mbps	19.73	30
		108 Mbps	19.84	30
		121.5 Mbps	19.82	30
		135 Mbps	19.76	30
2437	6	13.5 Mbps	19.87	30
		27 Mbps	19.64	30
		40.5 Mbps	19.67	30
		54 Mbps	20.11	30
		81 Mbps	20.15	30
		108 Mbps	20.06	30
		121.5 Mbps	20.02	30
		135 Mbps	19.98	30
2452	9	13.5 Mbps	19.83	30
		27 Mbps	19.91	30
		40.5 Mbps	19.89	30
		54 Mbps	20.19	30
		81 Mbps	20.12	30
		108 Mbps	20.18	30
		121.5 Mbps	20.20	30
		135 Mbps	20.16	30

■ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	16.17	0.043	16.21	30
		2	16.07	0.084	16.15	30
		5.5	16.12	0.203	16.32	30
		11	15.92	0.393	16.32	30
2437	6	1	16.28	0.043	16.32	30
		2	16.25	0.084	16.33	30
		5.5	16.18	0.203	16.38	30
		11	16.00	0.393	16.39	30
2462	11	1	15.71	0.043	15.75	30
		2	15.69	0.084	15.78	30
		5.5	15.61	0.203	15.81	30
		11	15.42	0.393	15.82	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	11.85	0.254	12.10	30
		9	11.96	0.373	12.34	30
		12	11.88	0.452	12.33	30
		18	11.73	0.659	12.39	30
		24	11.58	0.847	12.43	30
		36	11.28	1.175	12.45	30
		48	10.84	1.494	12.33	30
		54	10.79	1.627	12.42	30
2437	6	6	13.04	0.254	13.29	30
		9	12.90	0.373	13.27	30
		12	12.84	0.452	13.29	30
		18	12.66	0.659	13.32	30
		24	12.51	0.847	13.36	30
		36	12.15	1.175	13.33	30
		48	11.89	1.494	13.38	30
		54	11.75	1.627	13.38	30
2462	11	6	12.68	0.254	12.94	30
		9	12.57	0.373	12.94	30
		12	12.47	0.452	12.92	30
		18	12.24	0.659	12.90	30
		24	12.12	0.847	12.97	30
		36	11.82	1.175	13.00	30
		48	11.63	1.494	13.13	30
		54	11.38	1.627	13.01	30

Conducted Output Power Measurements (802.11n Mode)_ 20 MHz BW


802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5	12.07	0.258	12.33	30
		13	11.96	0.494	12.45	30
		19.5	11.79	0.701	12.49	30
		26	11.37	0.900	12.27	30
		39	11.13	1.189	12.32	30
		52	10.86	1.536	12.40	30
		58.5	10.82	1.615	12.43	30
		65	10.66	1.761	12.42	30
2437	6	6.5	12.23	0.258	12.49	30
		13	11.75	0.494	12.24	30
		19.5	11.66	0.701	12.36	30
		26	11.32	0.900	12.22	30
		39	11.22	1.189	12.41	30
		52	10.93	1.536	12.47	30
		58.5	10.88	1.615	12.49	30
		65	10.69	1.761	12.45	30
2462	11	6.5	11.74	0.258	12.00	30
		13	11.56	0.494	12.06	30
		19.5	11.41	0.701	12.11	30
		26	11.24	0.900	12.14	30
		39	10.93	1.189	12.12	30
		52	10.68	1.536	12.22	30
		58.5	10.56	1.615	12.17	30
		65	10.45	1.761	12.21	30

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2422	3	13.5 Mbps	10.84	0.487	11.33	30
		27 Mbps	10.54	0.887	11.42	30
		40.5 Mbps	10.24	1.214	11.45	30
		54 Mbps	9.95	1.519	11.46	30
		81 Mbps	9.33	1.980	11.31	30
		108 Mbps	8.95	2.422	11.38	30
		121.5 Mbps	8.82	2.567	11.39	30
		135 Mbps	8.73	2.654	11.38	30
2437	6	13.5 Mbps	11.32	0.487	11.81	30
		27 Mbps	10.67	0.887	11.56	30
		40.5 Mbps	10.39	1.214	11.61	30
		54 Mbps	10.13	1.519	11.65	30
		81 Mbps	9.73	1.980	11.71	30
		108 Mbps	9.36	2.422	11.78	30
		121.5 Mbps	9.23	2.567	11.79	30
		135 Mbps	8.87	2.654	11.52	30
2452	9	13.5 Mbps	11.30	0.487	11.79	30
		27 Mbps	10.97	0.887	11.86	30
		40.5 Mbps	10.63	1.214	11.85	30
		54 Mbps	10.38	1.519	11.90	30
		81 Mbps	9.71	1.980	11.69	30
		108 Mbps	9.35	2.422	11.77	30
		121.5 Mbps	9.22	2.567	11.78	30
		135 Mbps	9.09	2.654	11.75	30


RESULT PLOTS-Peak
40 MHz BW
(2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 9) 121.5Mbps

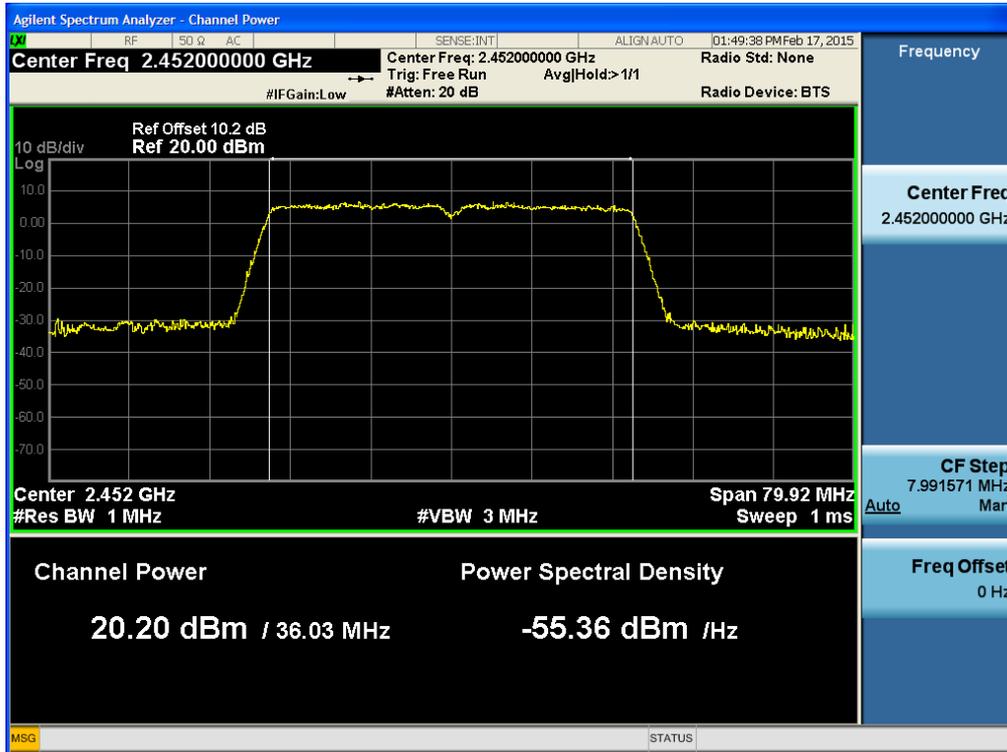

RESULT PLOTS-Average
40 MHz BW
(2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 9) 54 Mbps

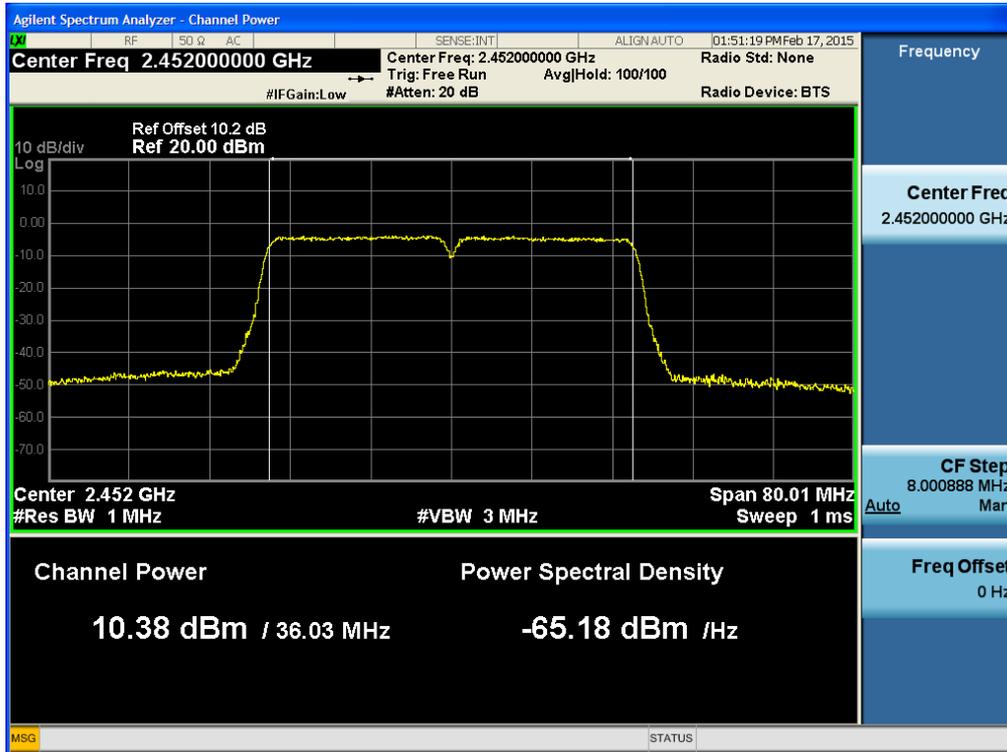


8.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ TEST CONFIGURATION



■ TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 06/05/2014

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-6.089	8	Pass
2437	6		-6.823	8	Pass
2462	11		-7.490	8	Pass
2412	1	802.11g	-13.521	8	Pass
2437	6		-10.576	8	Pass
2462	11		-12.799	8	Pass
2412	1	802.11n (20 MHz BW)	-13.256	8	Pass
2437	6		-13.288	8	Pass
2462	11		-13.682	8	Pass
2422	3	802.11n (40 MHz BW)	-17.830	8	Pass
2437	6		-17.336	8	Pass
2452	9		-17.276	8	Pass


Note : In order to simplify the report, attached plots were only the highest PSD channel.

RESULT PLOTS


Power Spectral Density (802.11b-CH 1)

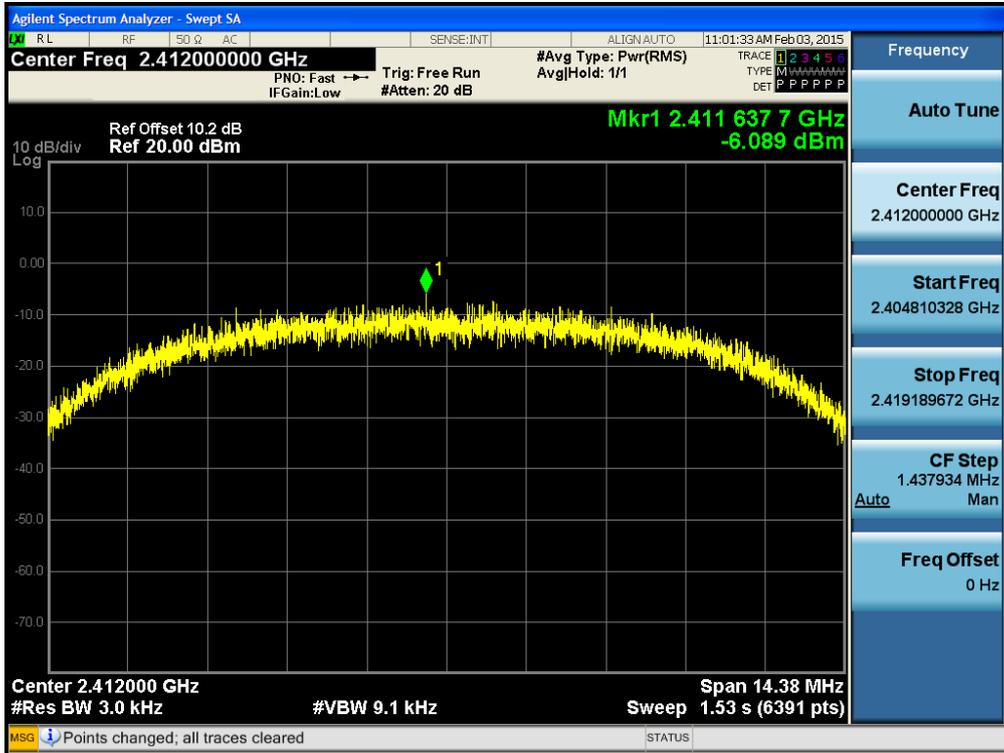


Power Spectral Density (802.11g-CH 6)

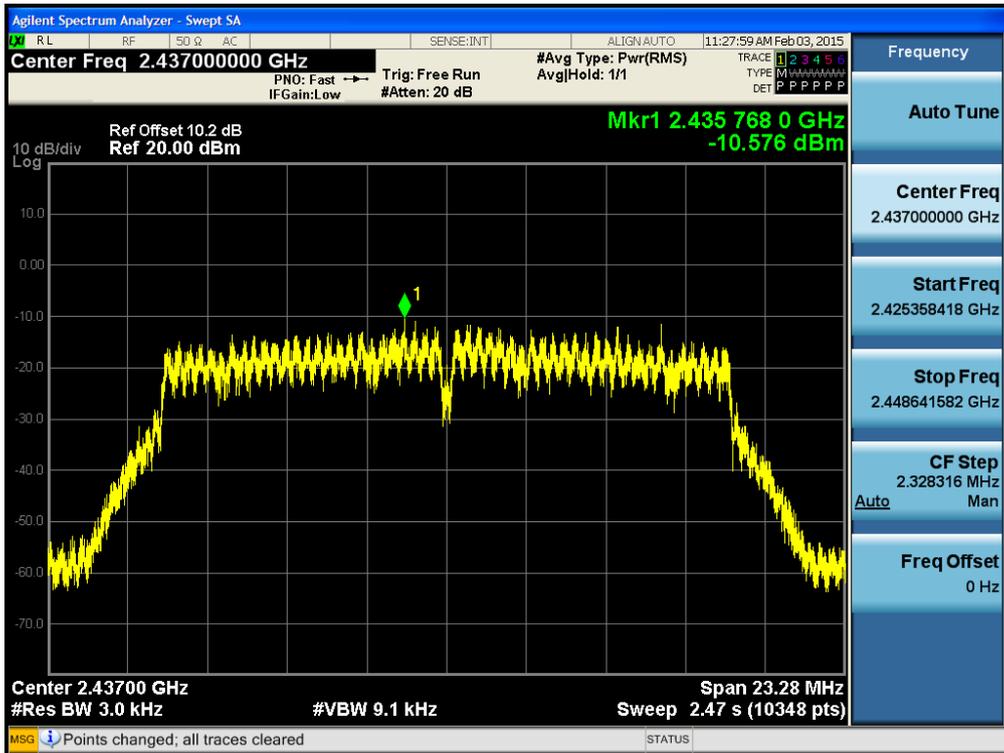

Power Spectral Density (802.11n-CH 1) _ 20 MHz BW

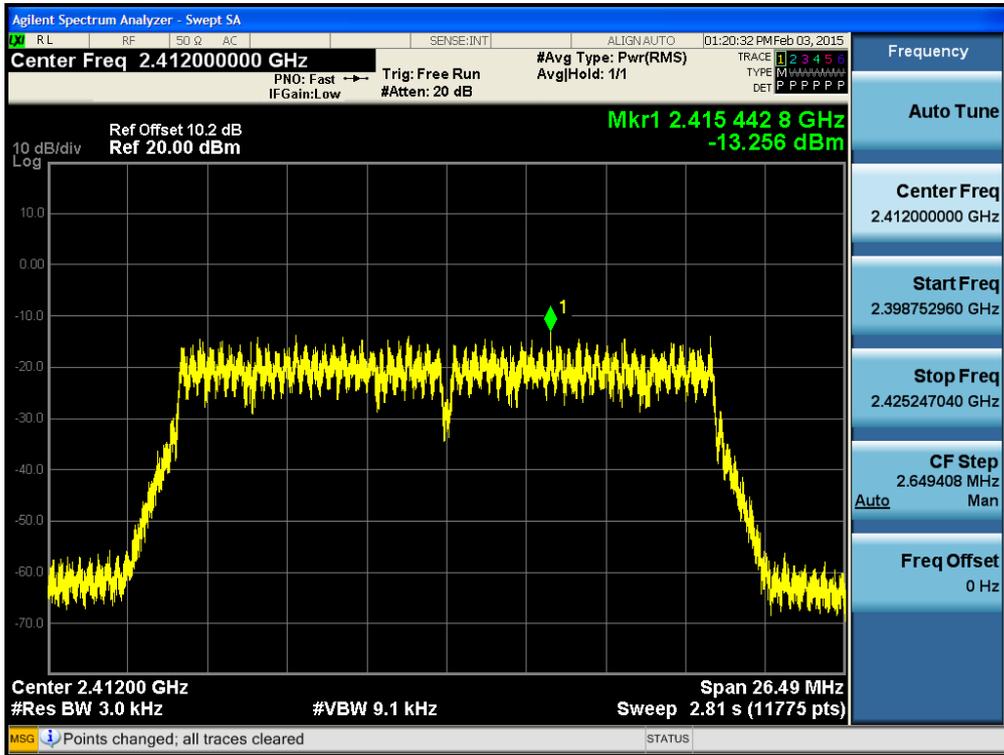

Power Spectral Density (802.11n-CH 9) _ 40 MHz BW

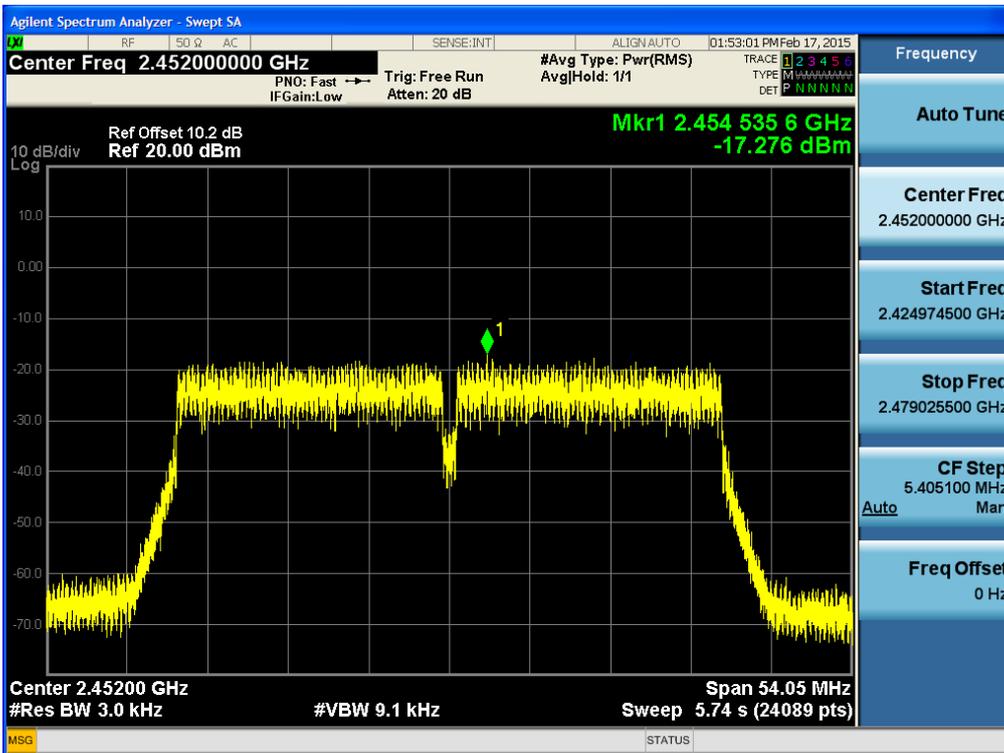


8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz

VBW \geq 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

4. In case of conducted spurious emissions test, please check factors blow table.
5. In order to simplify the report, attached plots were only the worst case channel.

■ FACTORS FOR FREQUENCY


Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.26
3000	10.27
4000	10.22
5000	10.48
5700*	10.42
5800*	10.48
6000	10.48
7000	10.57
8000	10.45

9000	10.50
10000	10.64
11000	10.69
12000	10.75
13000	10.92
14000	11.90
15000	11.00
16000	11.03
17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42


Note : 1. ** is fundamental frequency range.
2. Factor = Cable loss + Attenuator loss

RESULT PLOTS

BandEdge (802.11b-CH1)

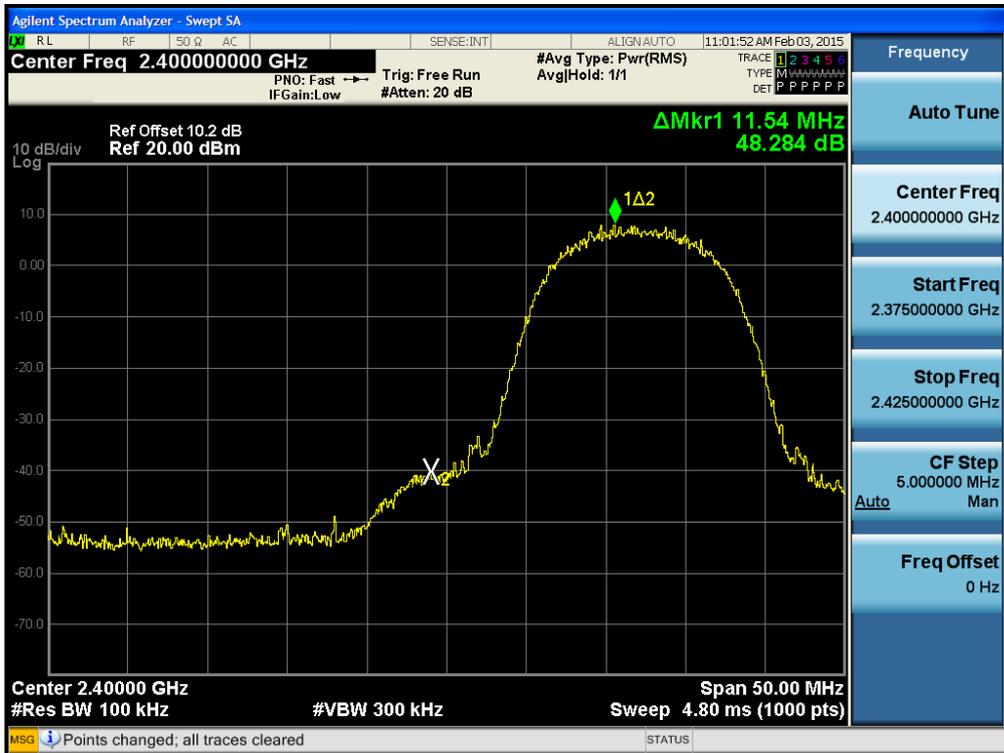


BandEdge (802.11b-CH11)

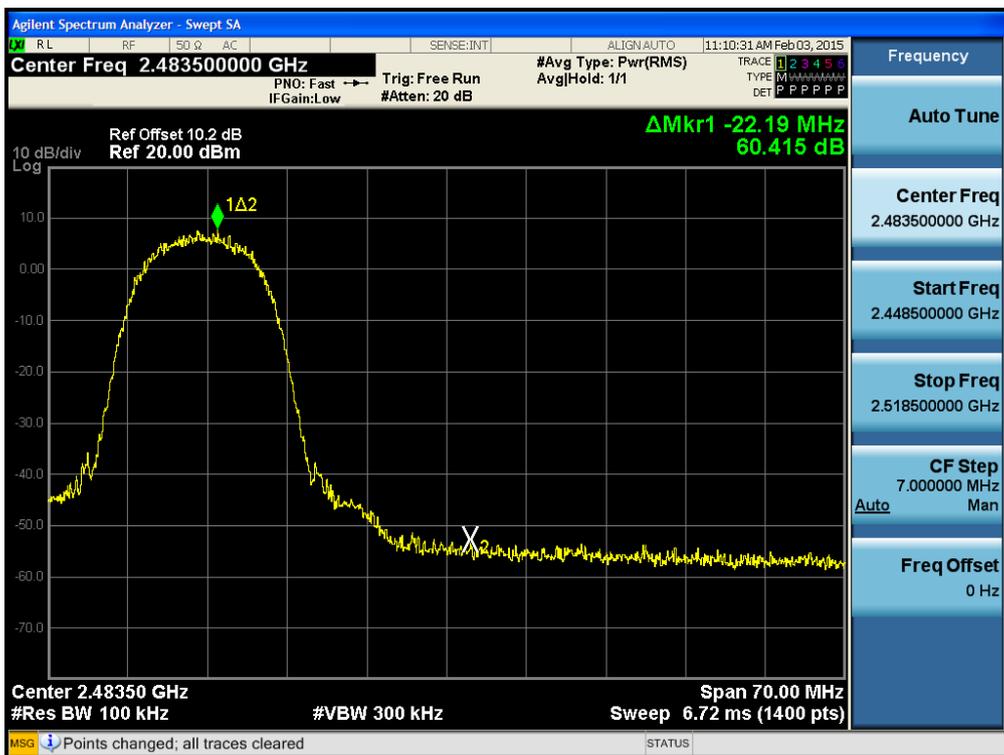

BandEdge (802.11g-CH1)




BandEdge (802.11g-CH11)

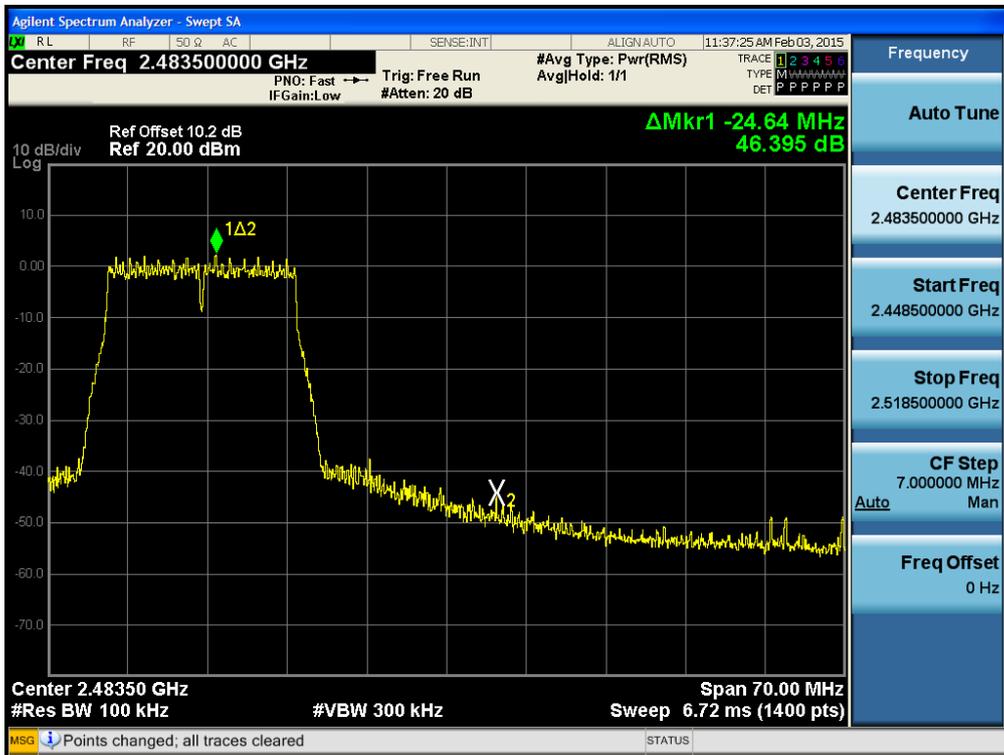


Band Edge (802.11n-CH1) _ 20 MHz BW




Band Edge (802.11n-CH11) _ 20 MHz BW

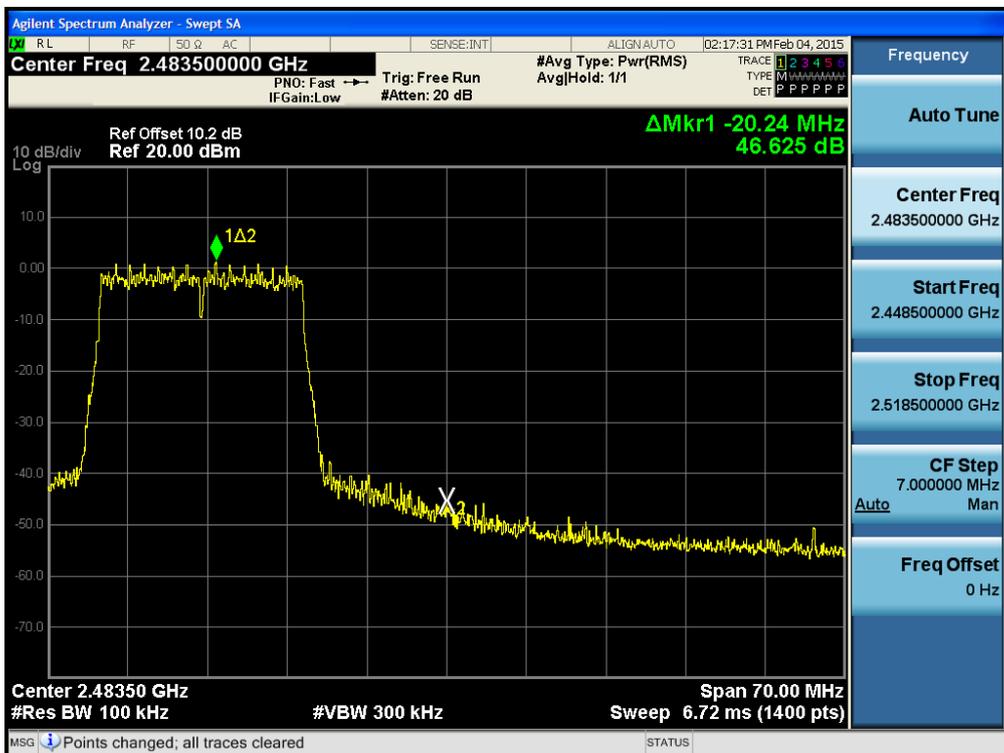

Band Edge (802.11n-CH1) _ 40 MHz BW

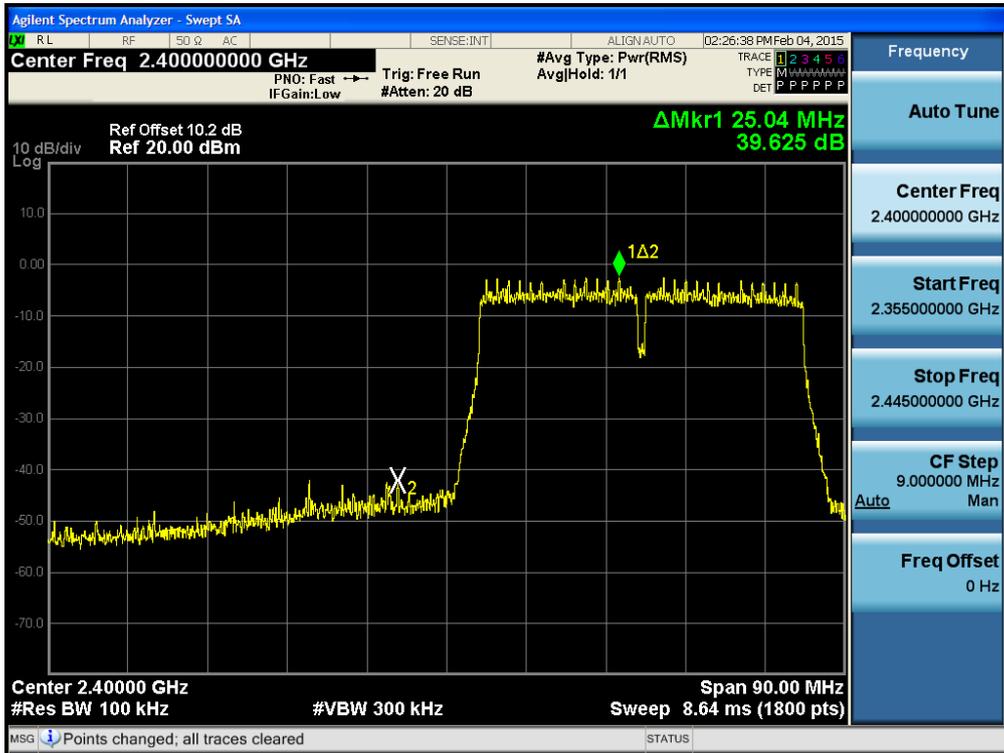


Band Edge (802.11n-CH11) _ 40 MHz BW

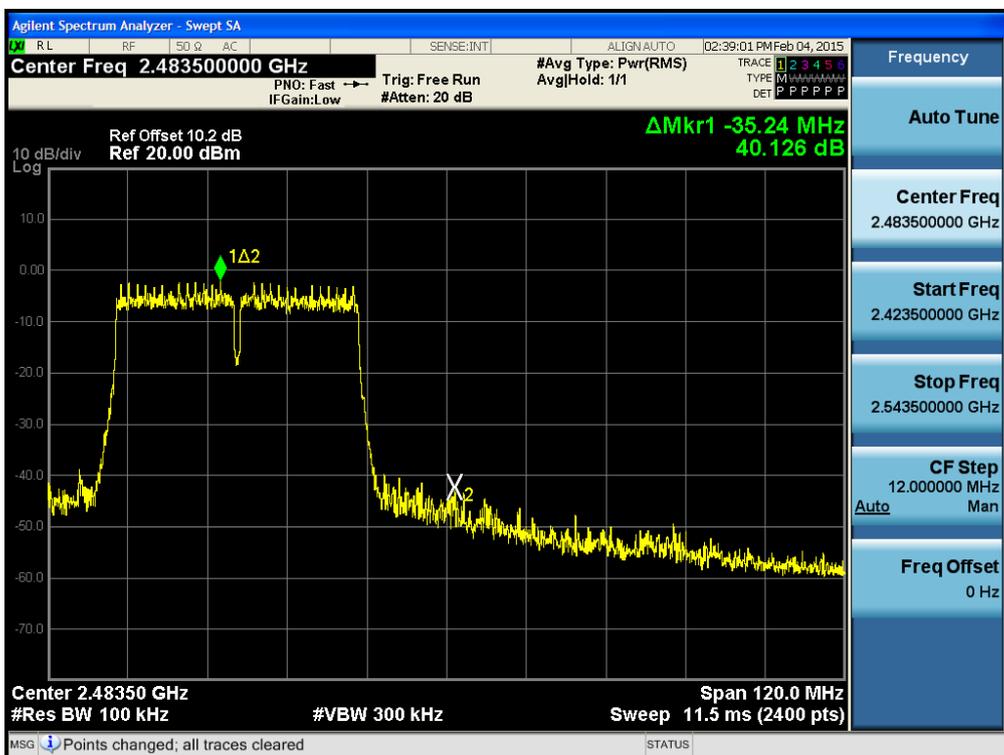


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

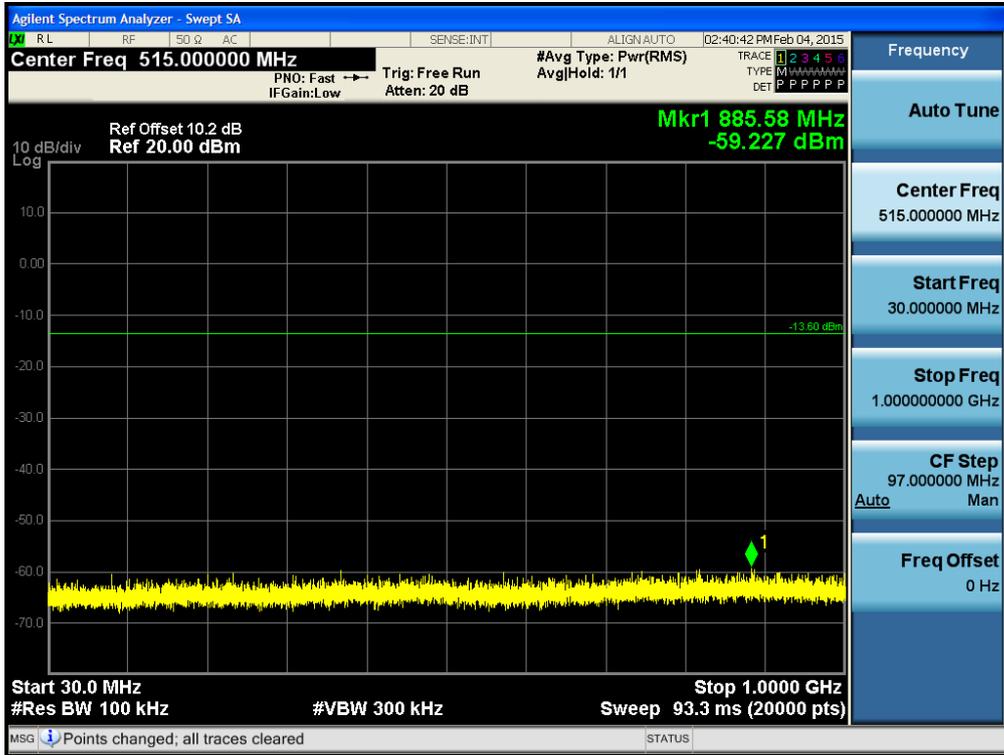


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

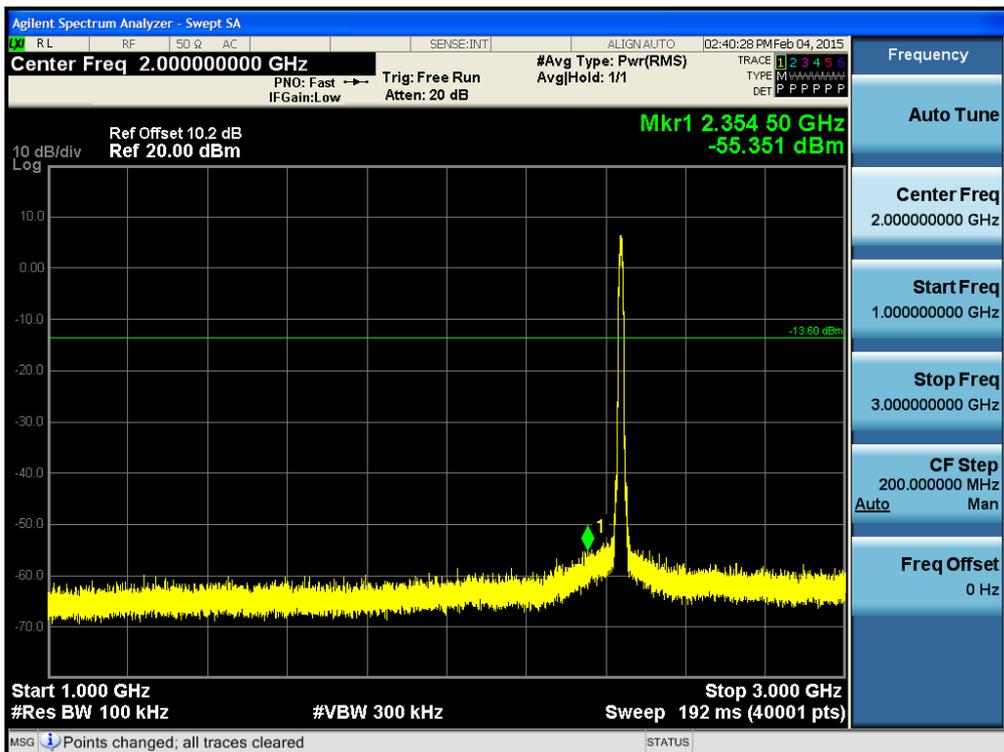


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

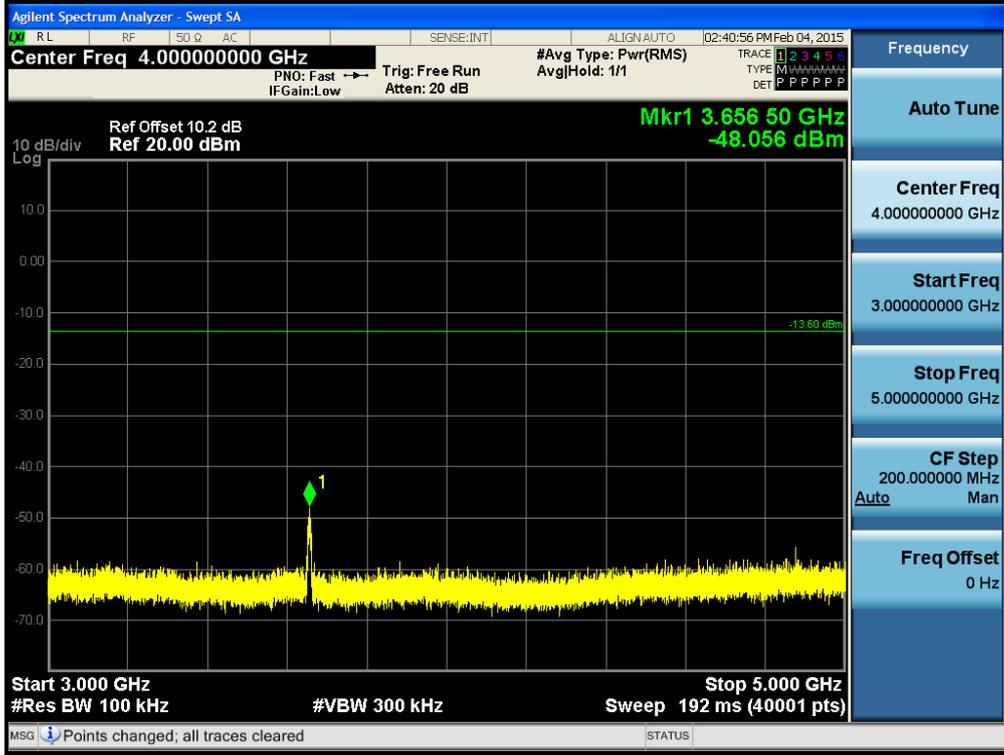


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

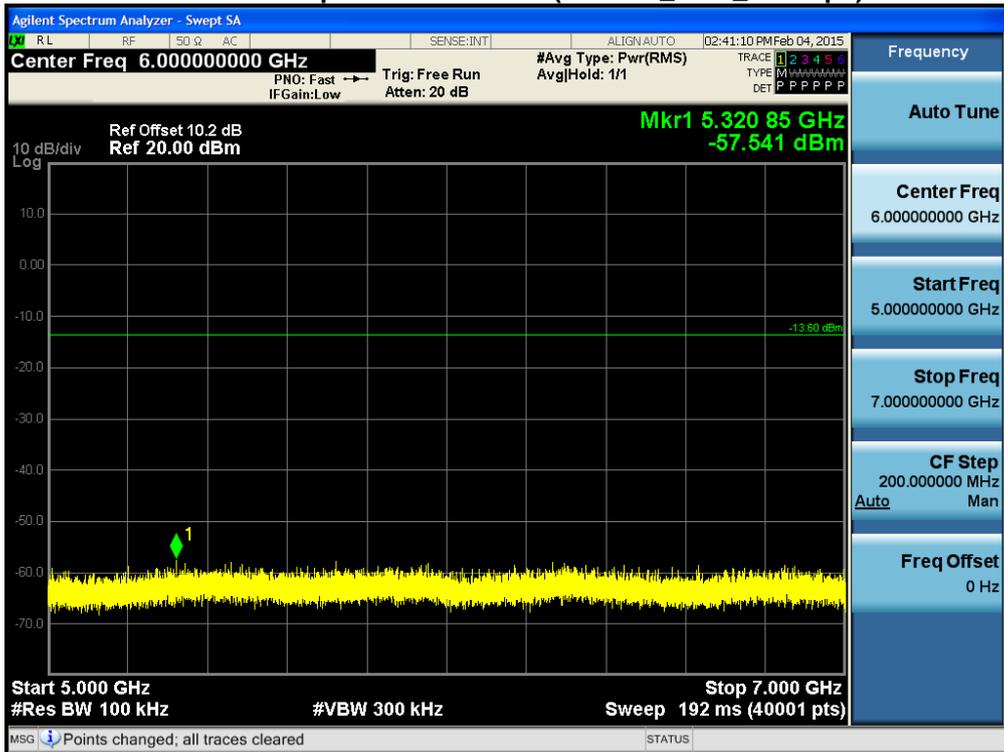


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

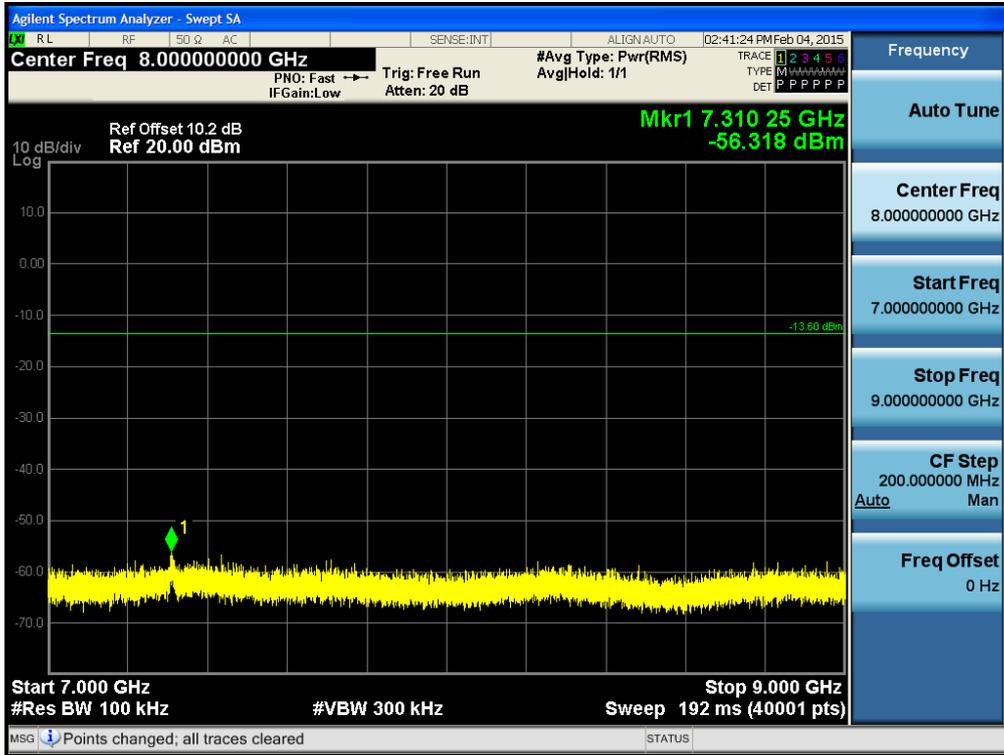


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

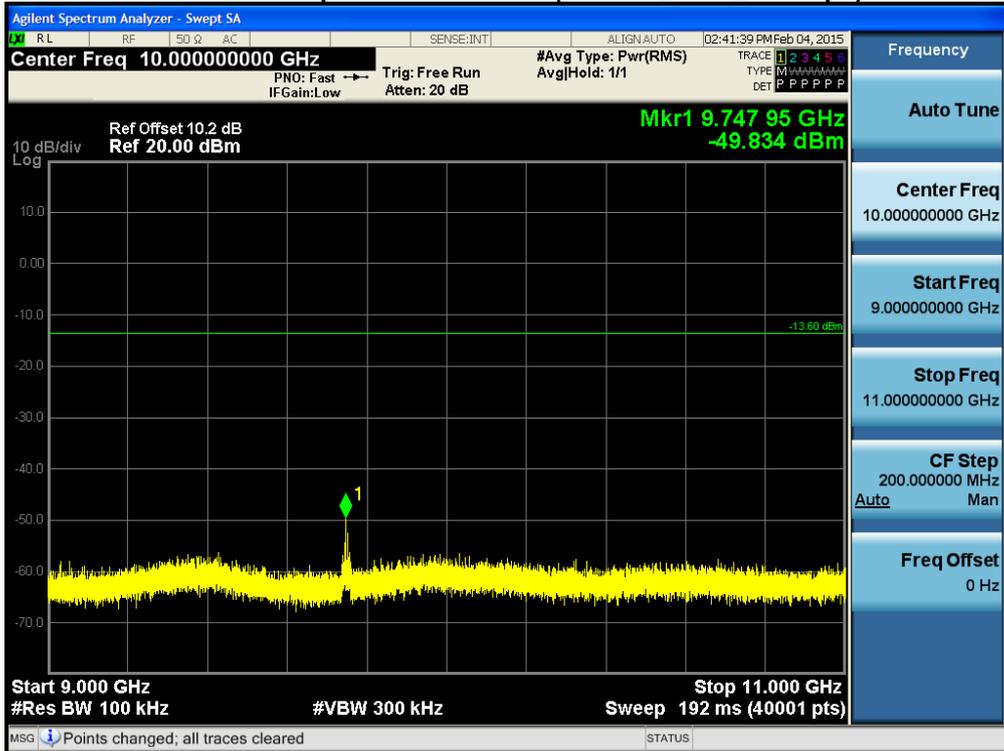


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

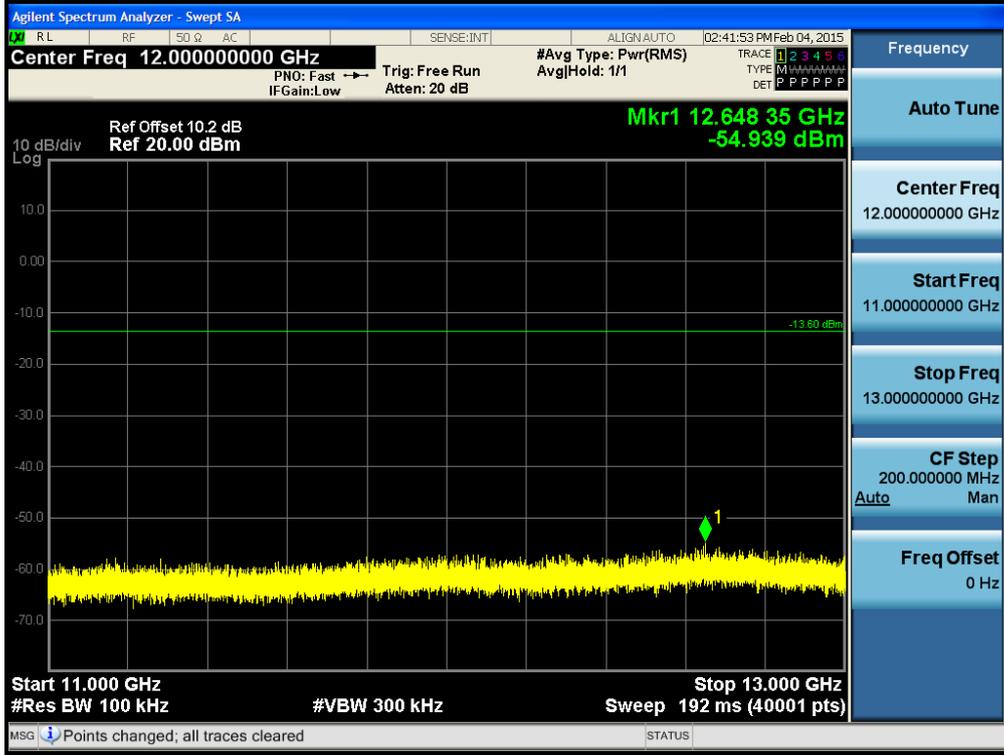


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

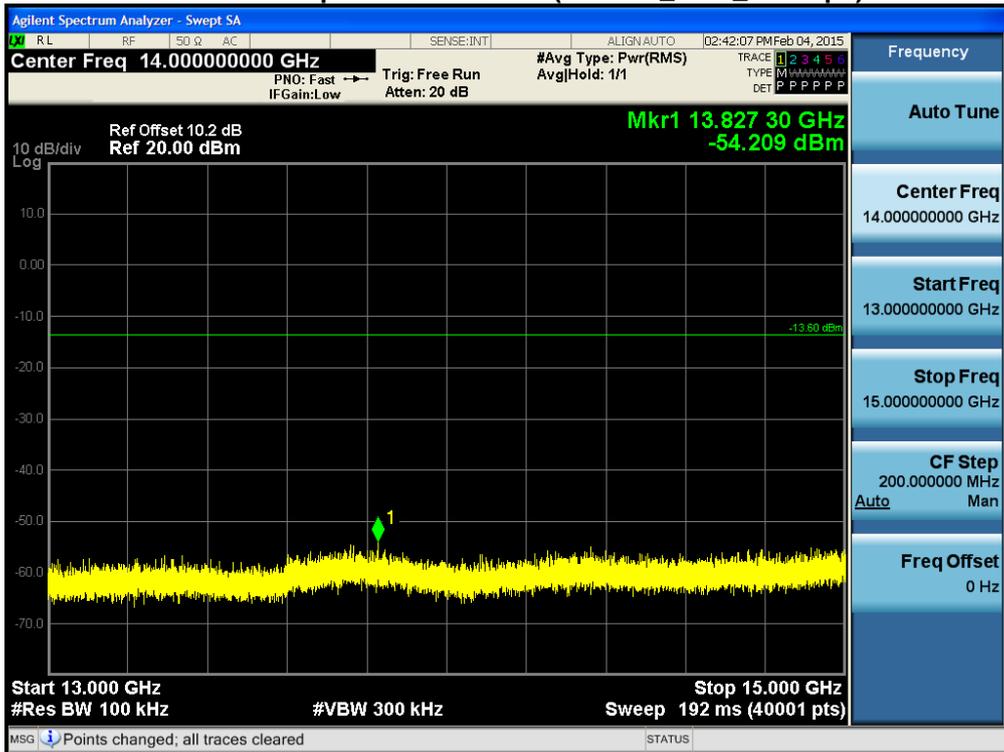


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

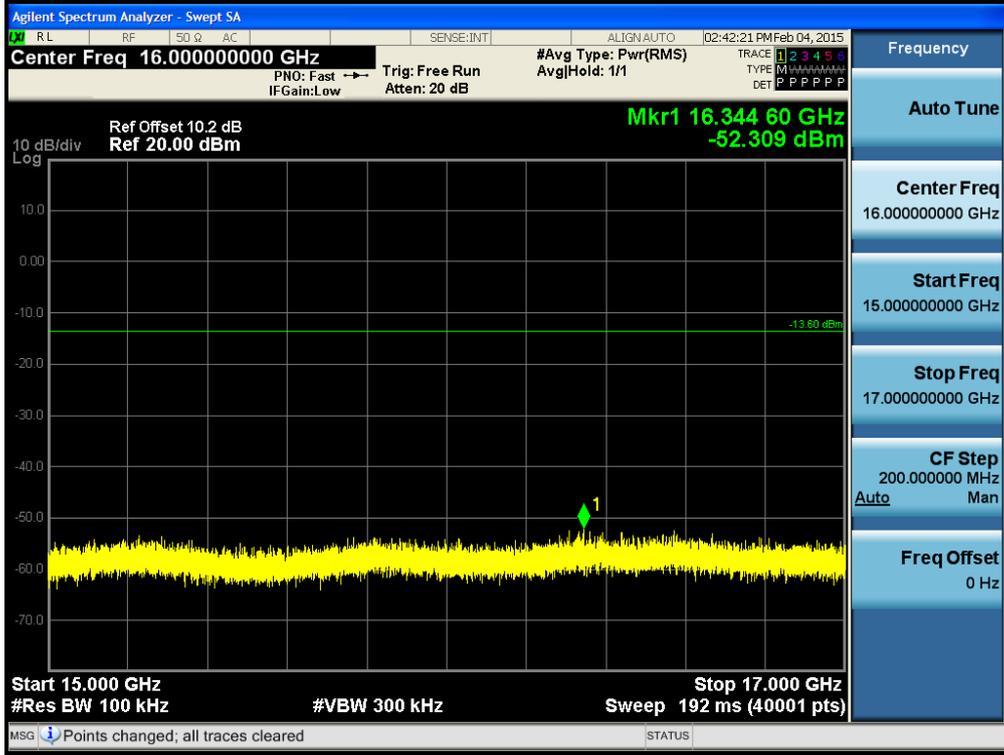


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

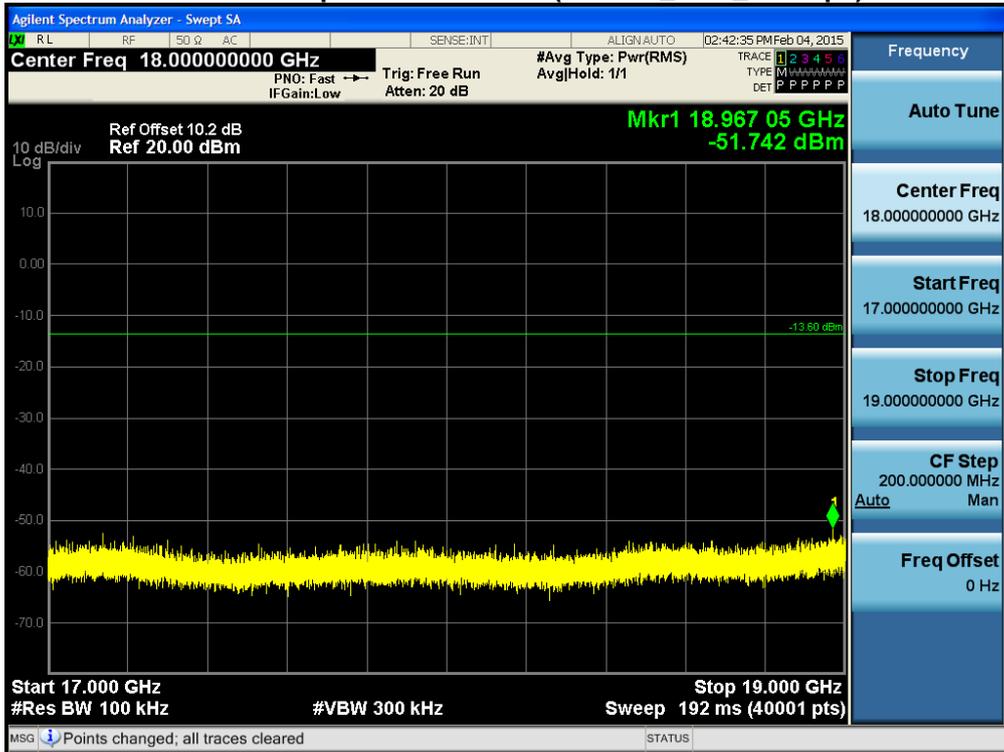


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

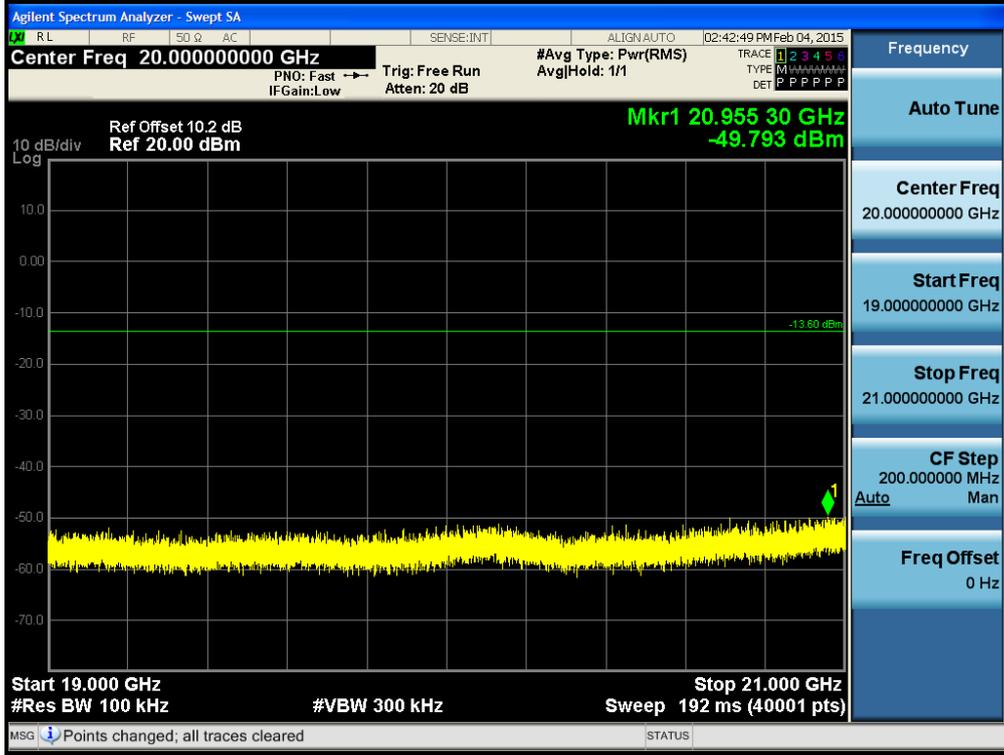


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

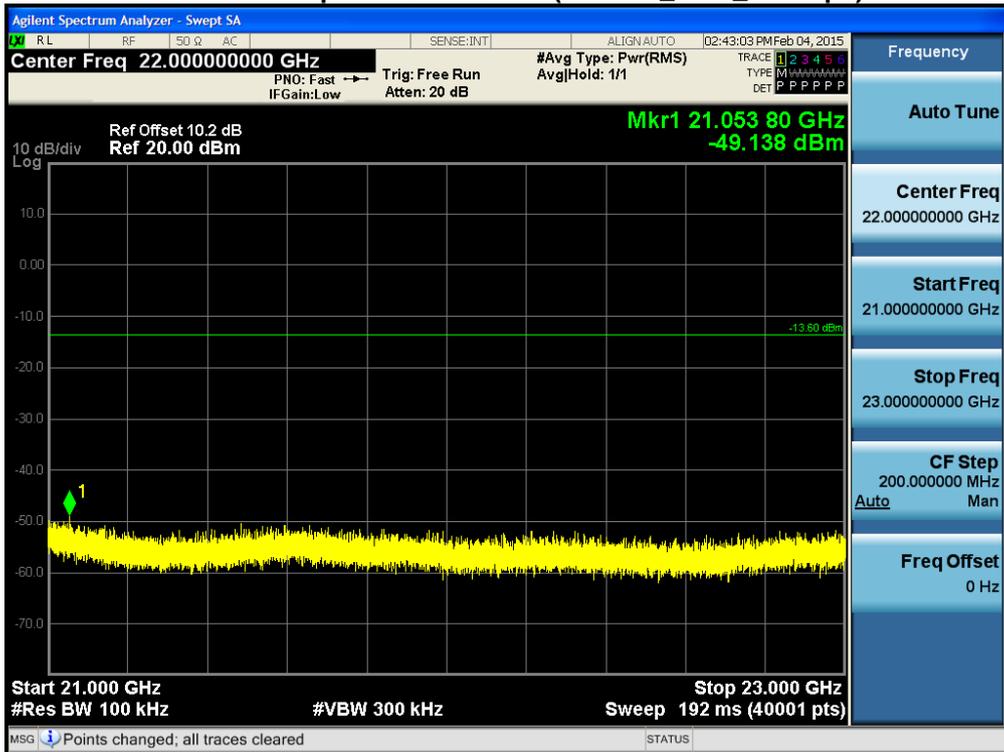

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

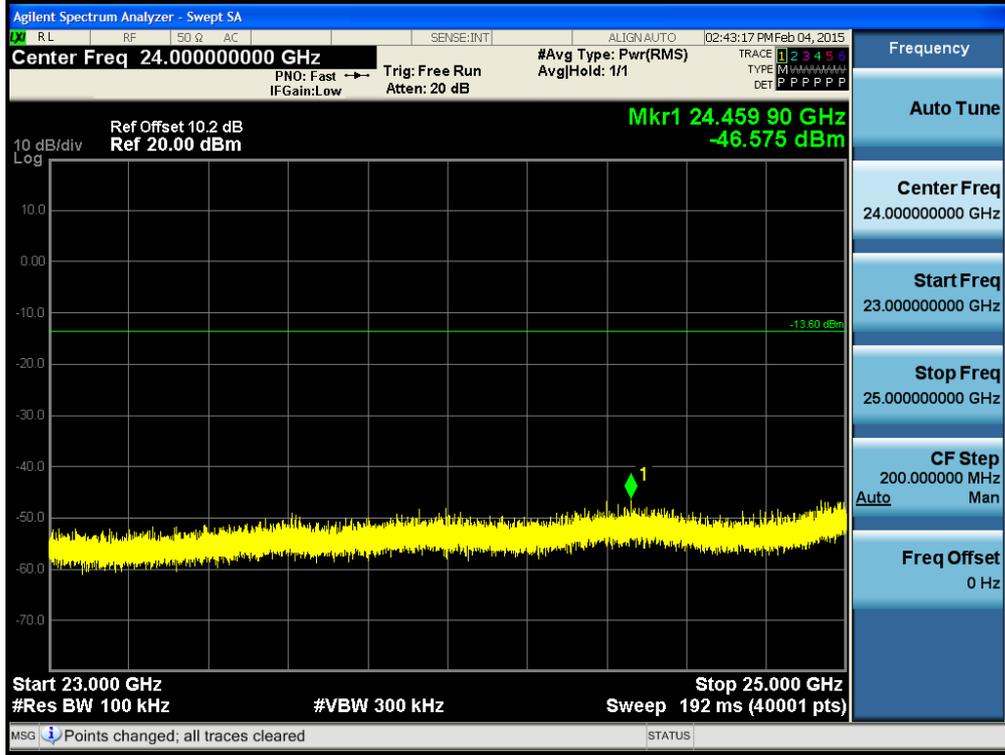

8.6 RADIATED MEASUREMENT.


8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

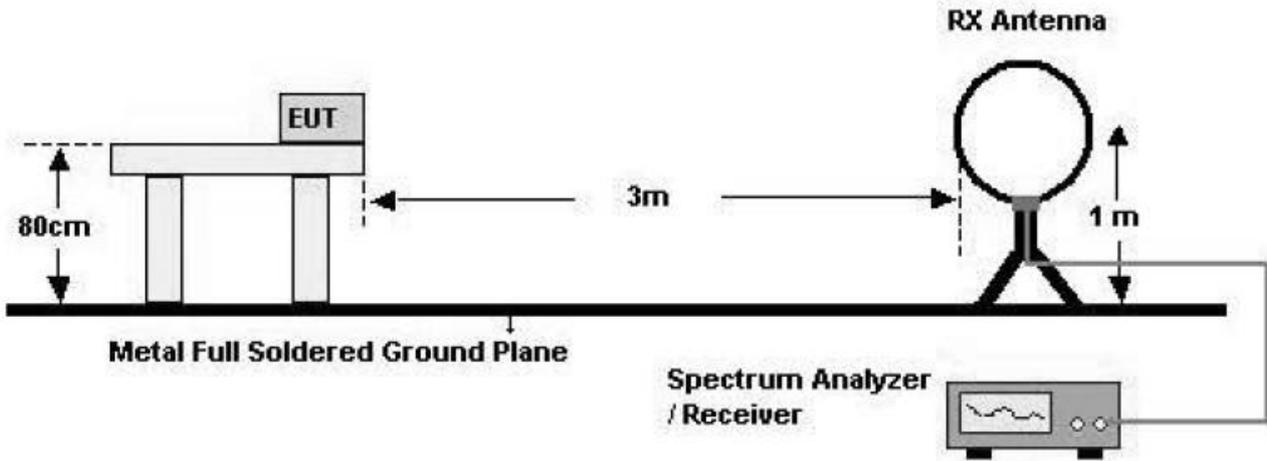

30 MHz - 1 GHz

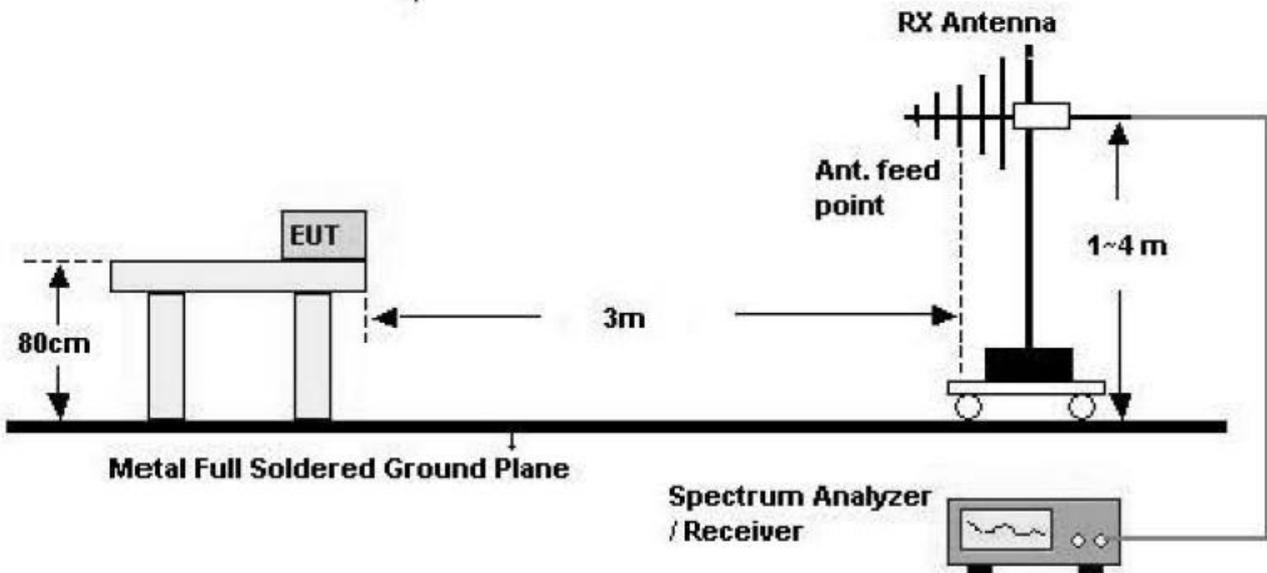

Above 1 GHz

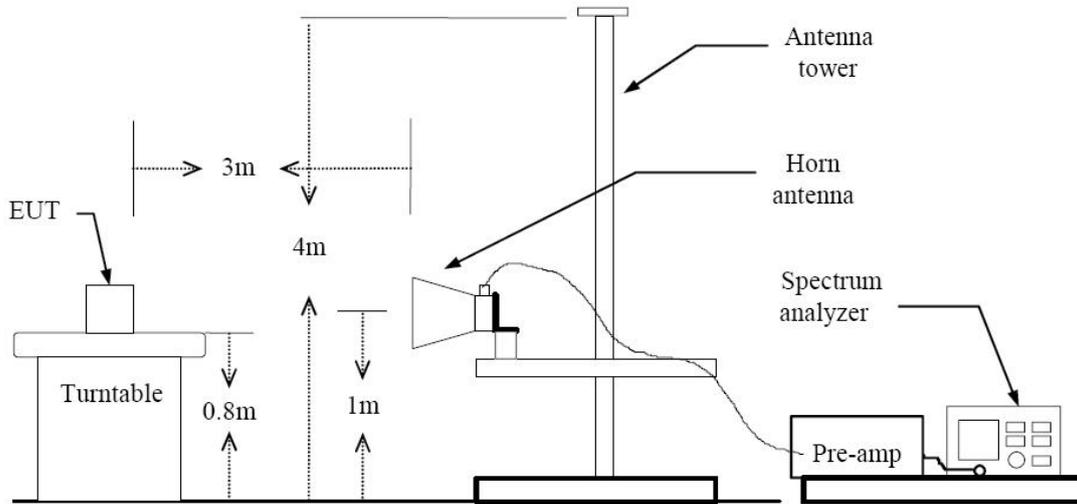

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/05/2014

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average

Set RBW = 1 MHz

Set VBW $\geq 1/T$. (at least 100 times less than the resolution bandwidth, but no less than 10 Hz.)

Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.
2. The actual setting value of VBW for 802.11 b/g/n

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
b	1	12.160	12.280	99.02	82	1000
g	6	2.011	2.132	94.32	497	1000
n_20 MHz BW	6.5	1.880	1.995	94.24	532	1000
n_40 MHz BW	13	0.926	1.036	89.38	1080	3000

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}$	dB /m	dB	(H/V)	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.28	-1.98	V	51.30	73.98	22.68	PK
4824	47.01	-1.98	V	45.03	53.98	8.95	AV
7236	46.25	7.60	V	53.85	73.98	20.13	PK
7236	32.30	7.60	V	39.90	53.98	14.08	AV
4824	51.70	-1.98	H	49.72	73.98	24.26	PK
4824	44.95	-1.98	H	42.97	53.98	11.01	AV
7236	45.80	7.60	H	53.40	73.98	20.58	PK
7236	32.29	7.60	H	39.89	53.98	14.09	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	54.25	-1.98	V	52.27	73.98	21.71	PK
4824	39.60	-1.98	V	37.62	53.98	16.36	AV
7236	46.25	7.60	V	53.85	73.98	20.13	PK
7236	32.01	7.60	V	39.61	53.98	14.37	AV
4824	53.18	-1.98	H	51.20	73.98	22.78	PK
4824	37.65	-1.98	H	35.67	53.98	18.31	AV
7236	45.94	7.60	H	53.54	73.98	20.44	PK
7236	31.94	7.60	H	39.54	53.98	14.44	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	54.06	-1.98	V	52.08	73.98	21.90	PK
4824	39.51	-1.98	V	37.53	53.98	16.45	AV
7236	46.19	7.60	V	53.79	73.98	20.19	PK
7236	32.05	7.60	V	39.65	53.98	14.33	AV
4824	53.04	-1.98	H	51.06	73.98	22.92	PK
4824	37.93	-1.98	H	35.95	53.98	18.03	AV
7236	46.07	7.60	H	53.67	73.98	20.31	PK
7236	32.03	7.60	H	39.63	53.98	14.35	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2422
 Channel No.: 03 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4844	51.79	-2.12	V	49.67	73.98	24.31	PK
4844	38.59	-2.12	V	36.47	53.98	17.51	AV
7266	45.81	7.44	V	53.25	73.98	20.73	PK
7266	32.64	7.44	V	40.08	53.98	13.90	AV
4844	50.80	-2.12	H	48.68	73.98	25.30	PK
4844	37.15	-2.12	H	35.03	53.98	18.95	AV
7266	45.63	7.44	H	53.07	73.98	20.91	PK
7266	32.47	7.44	H	39.91	53.98	14.07	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if

no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.78	-1.92	V	51.86	73.98	22.12	PK
4874	47.04	-1.92	V	45.12	53.98	8.86	AV
7311	47.86	7.38	V	55.24	73.98	18.74	PK
7311	33.17	7.38	V	40.55	53.98	13.43	AV
4874	52.17	-1.92	H	50.25	73.98	23.73	PK
4874	45.37	-1.92	H	43.45	53.98	10.53	AV
7311	47.24	7.38	H	54.62	73.98	19.36	PK
7311	33.14	7.38	H	40.52	53.98	13.46	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	56.27	-1.92	V	54.35	73.98	19.63	PK
4874	41.91	-1.92	V	39.99	53.98	13.99	AV
7311	46.81	7.38	V	54.19	73.98	19.79	PK
7311	32.86	7.38	V	40.24	53.98	13.74	AV
4874	54.90	-1.92	H	52.98	73.98	21.00	PK
4874	40.05	-1.92	H	38.13	53.98	15.85	AV
7311	46.63	7.38	H	54.01	73.98	19.97	PK
7311	32.84	7.38	H	40.22	53.98	13.76	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	55.28	-1.92	V	53.36	73.98	20.62	PK
4874	40.72	-1.92	V	38.80	53.98	15.18	AV
7311	46.73	7.38	V	54.11	73.98	19.87	PK
7311	32.87	7.38	V	40.25	53.98	13.73	AV
4874	53.88	-1.92	H	51.96	73.98	22.02	PK
4874	38.85	-1.92	H	36.93	53.98	17.05	AV
7311	46.65	7.38	H	54.03	73.98	19.95	PK
7311	32.83	7.38	H	40.21	53.98	13.77	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.11	-1.92	V	50.19	73.98	23.79	PK
4874	38.73	-1.92	V	36.81	53.98	17.17	AV
7311	46.58	7.38	V	53.96	73.98	20.02	PK
7311	33.48	7.38	V	40.86	53.98	13.12	AV
4874	49.50	-1.92	H	47.58	73.98	26.40	PK
4874	37.16	-1.92	H	35.24	53.98	18.74	AV
7311	46.43	7.38	H	53.81	73.98	20.17	PK
7311	33.42	7.38	H	40.80	53.98	13.18	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if

no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	52.19	-1.93	V	50.26	73.98	23.72	PK
4924	44.92	-1.93	V	42.99	53.98	10.99	AV
7386	47.21	7.28	V	54.49	73.98	19.49	PK
7386	32.28	7.28	V	39.56	53.98	14.42	AV
4924	51.05	-1.93	H	49.12	73.98	24.86	PK
4924	42.83	-1.93	H	40.90	53.98	13.08	AV
7386	46.57	7.28	H	53.85	73.98	20.13	PK
7386	32.21	7.28	H	39.49	53.98	14.49	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	54.51	-1.93	V	52.58	73.98	21.40	PK
4924	40.41	-1.93	V	38.48	53.98	15.50	AV
7386	46.81	7.28	V	54.09	73.98	19.89	PK
7386	32.09	7.28	V	39.37	53.98	14.61	AV
4924	52.83	-1.93	H	50.90	73.98	23.08	PK
4924	38.54	-1.93	H	36.61	53.98	17.37	AV
7386	46.23	7.28	H	53.51	73.98	20.47	PK
7386	32.03	7.28	H	39.31	53.98	14.67	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	53.92	-1.93	V	51.99	73.98	21.99	PK
4924	39.43	-1.93	V	37.50	53.98	16.48	AV
7386	46.25	7.28	V	53.53	73.98	20.45	PK
7386	32.42	7.28	V	39.70	53.98	14.28	AV
4924	52.50	-1.93	H	50.57	73.98	23.41	PK
4924	37.88	-1.93	H	35.95	53.98	18.03	AV
7386	46.23	7.28	H	53.51	73.98	20.47	PK
7386	32.40	7.28	H	39.68	53.98	14.30	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2452
 Channel No.: 09 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4904	51.64	-1.95	V	49.69	73.98	24.29	PK
4904	38.57	-1.95	V	36.62	53.98	17.36	AV
7356	46.49	7.23	V	53.72	73.98	20.26	PK
7356	33.11	7.23	V	40.34	53.98	13.64	AV
4904	50.96	-1.95	H	49.01	73.98	24.97	PK
4904	38.07	-1.95	H	36.12	53.98	17.86	AV
7356	46.22	7.23	H	53.45	73.98	20.53	PK
7356	33.04	7.23	H	40.27	53.98	13.71	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	32.61	31.47	H	64.08	73.98	9.90	PK
2390.0	16.77	31.47	H	48.24	53.98	5.74	AV
2390.0	32.40	31.47	V	63.87	73.98	10.11	PK
2390.0	16.10	31.47	V	47.57	53.98	6.41	AV
2483.5	39.31	31.46	H	70.77	73.98	3.21	PK
2483.5	16.06	31.46	H	47.52	53.98	6.46	AV
2483.5	38.94	31.46	V	70.40	73.98	3.58	PK
2483.5	15.56	31.46	V	47.02	53.98	6.96	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	26.70	31.47	H	58.17	73.98	15.81	PK
2390.0	13.95	31.47	H	45.42	53.98	8.56	AV
2390.0	26.40	31.47	V	57.87	73.98	16.11	PK
2390.0	13.33	31.47	V	44.80	53.98	9.18	AV
2483.5	25.99	31.46	H	57.45	73.98	16.53	PK
2483.5	12.94	31.46	H	44.40	53.98	9.58	AV
2483.5	25.71	31.46	V	57.17	73.98	16.81	PK
2483.5	12.84	31.46	V	44.30	53.98	9.68	AV

Operation Mode: 802.11n_20 MHz
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	35.70	31.47	H	67.17	73.98	6.81	PK
2390.0	17.33	31.47	H	48.80	53.98	5.18	AV
2390.0	35.30	31.47	V	66.77	73.98	7.21	PK
2390.0	16.89	31.47	V	48.36	53.98	5.62	AV
2483.5	33.54	31.46	H	65.00	73.98	8.98	PK
2483.5	15.38	31.46	H	46.84	53.98	7.14	AV
2483.5	32.85	31.46	V	64.31	73.98	9.67	PK
2483.5	14.87	31.46	V	46.33	53.98	7.65	AV

Operation Mode: 802.11n_40 MHz
 Transfer Rate: 13.5 Mbps
 Operating Frequency 2422 MHz, 2452 MHz
 Channel No. 03 Ch, 09 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	31.52	31.47	H	62.99	73.98	10.99	PK
2390.0	18.11	31.47	H	49.58	53.98	4.40	AV
2390.0	31.05	31.47	V	62.52	73.98	11.46	PK
2390.0	17.53	31.47	V	49.00	53.98	4.98	AV
2483.5	39.45	31.46	H	70.91	73.98	3.07	PK
2483.5	16.69	31.46	H	48.15	53.98	5.83	AV
2483.5	37.67	31.46	V	69.13	73.98	4.85	PK
2483.5	16.07	31.46	V	47.53	53.98	6.45	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 11 Mbps, Ch.6 and 802.11b
Because 802.11b mode is worst case.

▣ RESULT PLOTS

Conducted Emissions (Line 1)

WLAN N


1 / 2

HCT TEST Report

Common Information

EUT: LG-H320
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE
 Operator Name: JS LEE

FCC CLASS B

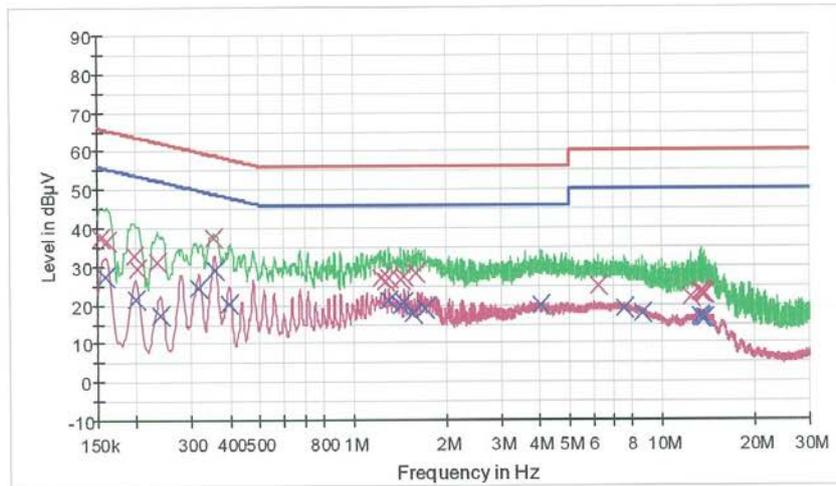

— FCCCLASS B_OP — FCCCLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154000	37.7	9.000	Off	N	9.6	28.1	65.8
0.160000	36.6	9.000	Off	N	9.6	28.9	65.5
0.196000	32.8	9.000	Off	N	9.6	31.0	63.8
0.202000	29.7	9.000	Off	N	9.6	33.8	63.5
0.234000	31.3	9.000	Off	N	9.6	31.0	62.3
0.356000	37.4	9.000	Off	N	9.7	21.4	58.8
1.230000	27.0	9.000	Off	N	9.7	29.0	56.0
1.270000	26.0	9.000	Off	N	9.7	30.0	56.0
1.308000	27.1	9.000	Off	N	9.7	28.9	56.0
1.428000	26.7	9.000	Off	N	9.7	29.3	56.0
1.466000	27.5	9.000	Off	N	9.7	28.5	56.0
1.600000	28.1	9.000	Off	N	9.7	27.9	56.0
6.228000	24.9	9.000	Off	N	9.9	35.1	60.0
12.406000	21.9	9.000	Off	N	10.1	38.1	60.0
13.286000	23.4	9.000	Off	N	10.1	36.6	60.0
13.490000	23.1	9.000	Off	N	10.1	36.9	60.0

1/27/2015

4:42:49

WLAN N

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.524000	22.8	9.000	Off	N	10.1	37.2	60.0
13.700000	22.7	9.000	Off	N	10.1	37.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	27.5	9.000	Off	N	9.6	28.1	55.6
0.198000	21.5	9.000	Off	N	9.6	32.2	53.7
0.238000	17.3	9.000	Off	N	9.6	34.9	52.2
0.318000	24.6	9.000	Off	N	9.7	25.2	49.8
0.358000	29.2	9.000	Off	N	9.7	19.6	48.8
0.398000	20.1	9.000	Off	N	9.7	27.8	47.9
1.308000	21.1	9.000	Off	N	9.7	24.9	46.0
1.428000	20.0	9.000	Off	N	9.7	26.0	46.0
1.466000	20.6	9.000	Off	N	9.7	25.4	46.0
1.556000	17.7	9.000	Off	N	9.7	28.3	46.0
1.716000	19.0	9.000	Off	N	9.7	27.0	46.0
4.050000	19.7	9.000	Off	N	9.8	26.3	46.0
7.552000	18.9	9.000	Off	N	9.9	31.1	50.0
8.642000	17.8	9.000	Off	N	10.0	32.2	50.0
13.288000	16.9	9.000	Off	N	10.1	33.1	50.0
13.292000	16.7	9.000	Off	N	10.1	33.3	50.0
13.490000	16.5	9.000	Off	N	10.1	33.5	50.0
13.700000	16.3	9.000	Off	N	10.1	33.7	50.0

Conducted Emissions (Line 2)

WLAN H


1/2

HCT TEST Report

Common Information

EUT: LG-H320
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE
 Operator Name: JS LEE

FCC CLASS B

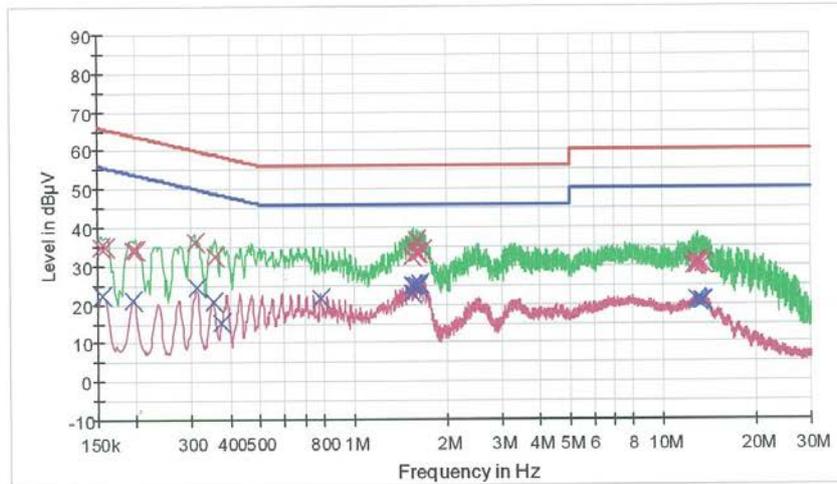

— FCCCLASS B_QP — FCCCLASS B_AV — Preview Result 1-PK*
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154000	35.1	9.000	Off	L1	9.6	30.7	65.8
0.158000	35.1	9.000	Off	L1	9.6	30.5	65.6
0.194000	33.9	9.000	Off	L1	9.6	30.0	63.9
0.198000	34.2	9.000	Off	L1	9.6	29.5	63.7
0.308000	36.3	9.000	Off	L1	9.7	23.7	60.0
0.360000	32.3	9.000	Off	L1	9.7	26.4	58.7
1.546000	32.4	9.000	Off	L1	9.8	23.6	56.0
1.564000	35.0	9.000	Off	L1	9.8	21.0	56.0
1.600000	36.5	9.000	Off	L1	9.8	19.5	56.0
1.606000	33.3	9.000	Off	L1	9.8	22.7	56.0
1.612000	33.2	9.000	Off	L1	9.8	22.8	56.0
1.680000	34.1	9.000	Off	L1	9.8	21.9	56.0
12.582000	30.0	9.000	Off	L1	10.1	30.0	60.0
12.768000	30.0	9.000	Off	L1	10.1	30.0	60.0
12.798000	30.7	9.000	Off	L1	10.1	29.3	60.0
12.862000	31.1	9.000	Off	L1	10.1	28.9	60.0

1/27/2015

4:55:45

WLAN H

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.046000	30.8	9.000	Off	L1	10.1	29.2	60.0
13.450000	30.4	9.000	Off	L1	10.1	29.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.156000	22.2	9.000	Off	L1	9.6	33.5	55.7
0.194000	21.2	9.000	Off	L1	9.6	32.7	53.9
0.312000	24.4	9.000	Off	L1	9.7	25.5	49.9
0.354000	20.5	9.000	Off	L1	9.7	28.4	48.9
0.374000	15.1	9.000	Off	L1	9.7	33.3	48.4
0.784000	21.5	9.000	Off	L1	9.7	24.5	46.0
1.540000	25.0	9.000	Off	L1	9.8	21.0	46.0
1.546000	22.6	9.000	Off	L1	9.8	23.4	46.0
1.564000	24.7	9.000	Off	L1	9.8	21.3	46.0
1.602000	24.8	9.000	Off	L1	9.8	21.2	46.0
1.612000	24.5	9.000	Off	L1	9.8	21.5	46.0
1.638000	25.2	9.000	Off	L1	9.8	20.8	46.0
12.798000	21.1	9.000	Off	L1	10.1	28.9	50.0
12.860000	21.1	9.000	Off	L1	10.1	28.9	50.0
12.878000	21.1	9.000	Off	L1	10.1	28.9	50.0
12.998000	20.8	9.000	Off	L1	10.1	29.2	50.0
13.298000	20.8	9.000	Off	L1	10.1	29.2	50.0
13.450000	20.8	9.000	Off	L1	10.1	29.2	50.0

1/27/2015

4:55:45

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	MY51110063
Agilent	N1911A/Power Meter	01/15/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2014	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/08/2014	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/28/2014	Annual	MY51360708
ITECH	IT6720 / DC POWER SUPPLY	11/04/2014	Annual	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2014	Annual	76649

9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/13/2015	Annual	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/04/2014	Annual	10094
CERNEX	CBL18265035 / POWER AMP	07/23/2014	Annual	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	07/05/2013	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	10/13/2014	Annual	836650/016
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/23/2014	Annual	8
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/17/2014	Annual	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2014	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2014	Annual	22964