



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART H
FCC CFR47 PART 27 SUBPART L

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n

MODEL NUMBER: LG-H345, LGH345, H345

FCC ID: ZNFH345

REPORT NUMBER: 15I19960-E1

ISSUE DATE: FEBRUARY 20, 2015

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	02/20/15	Initial Issue	D. Corona

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	9
5.3.	MAXIMUM OUTPUT POWER (LTE).....	10
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	12
5.5.	DESCRIPTION OF TEST SETUP.....	13
6.	TEST AND MEASUREMENT EQUIPMENT	16
7.	SUMMARY TABLE	17
8.	RF POWER OUTPUT VERIFICATION.....	18
8.1.	GSM/GPRS/EDGE	18
8.1.1.	GSM OUTPUT POWER RESULT	19
8.2.	UMTS REL 99.....	21
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	21
8.3.	UMTS HSDPA	22
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT.....	23
8.4.	UMTS HSUPA	25
8.4.1.	UMTS HSUPA OUTPUT POWER RESULT.....	26
8.5.	DC-HSDPA.....	28
8.5.1.	UMTS DC-HSDPA OUTPUT POWER RESULT	31
8.7.	LTE OUTPUT VERIFICATION.....	33
8.7.1.	LTE OUTPUT RESULT	33
9.	PEAK TO AVERAGE RATIO.....	41
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	41
10.	LIMITS AND CONDUCTED RESULTS.....	51
10.1.	OCCUPIED BANDWIDTH.....	51

10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	52
10.1.2.	LTE OCCUPIED BANDWIDTH RESULTS	54
10.1.3.	OCCUPIED BANDWIDTH PLOTS	59
10.2.	<i>BAND EDGE EMISSIONS</i>	78
10.2.1.	BAND EDGE PLOTS	79
10.3.	<i>OUT OF BAND EMISSIONS</i>	116
10.3.1.	OUT OF BAND EMISSIONS RESULT	117
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	123
10.4.	<i>FREQUENCY STABILITY</i>	134
10.4.1.	FREQUENCY STABILITY RESULTS.....	135
11.	RADIATED TEST RESULTS	137
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	137
11.1.1.	ERP/EIRP RESULTS	138
11.1.2.	LTE ERP/EIRP RESULTS.....	140
11.1.3.	ERP/EIRP PLOTS.....	145
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	187
11.2.1.	SPURIOUS RADIATION PLOTS.....	188
12.	SETUP PHOTOS	218

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n
MODEL: LG-H345, LGH345, H345
Serial Number: 501KPMZ818115 (2G/3G), 501KPE818116 (LTE)
DATE TESTED: FEBRUARY 2-16, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27H and 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, and FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation mW	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
GSM850	824~849	GMSK	33.00	1995.26		
	824~849	GPRS	33.00	1995.26	31.52	1419.38
	824~849	EGPRS	33.00	1995.26	27.40	549.67
GSM1900	1850~1910	GMSK	30.50	1122.02		
	1850~1910	GPRS	30.50	1122.02	30.05	1011.58
	1850~1910	EGPRS	26.70	467.74	26.46	442.59
Band 5	824~849	REL99	24.20	263.03	22.66	184.5
	824~849	HSDPA	24.10	257.04	22.82	191.43
	824~849	HSUPA	24.00	251.19		
Band 4	1710~1755	REL99	23.70	234.42	26.09	406.33
	1710~1755	HSDPA	23.50	223.87	26.12	409.15
	1710~1755	HSUPA	23.60	229.09		
Band 2	1850~1910	REL99	23.60	229.09	23.85	242.66
	1850~1910	HSDPA	23.40	218.78	23.82	240.99
	1850~1910	HSUPA	23.40	218.78		

5.3. MAXIMUM OUTPUT POWER (LTE)

LTE Band 12

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation mW	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE12	699~716	10MHz	QPSK	23.90	245.47	24.41	276.06
			16QAM	23.20	208.93	23.7	234.42
		5MHz	QPSK	24.20	263.03	24.6	288.4
			16QAM	23.20	208.93	23.8	239.88
		3MHz	QPSK	24.00	251.19	24.75	298.54
			16QAM	23.20	208.93	23.9	245.47
		1.4MHz	QPSK	23.90	245.47	24.3	269.15
			16QAM	23.20	208.93	23.5	223.87

LTE Band 4

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation mW	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE4	1710~1755	20MHz	QPSK	24.20	263.03	26.59	456.15
			16QAM	23.20	208.93	25.92	390.94
		15MHz	QPSK	24.20	263.03	26.72	470.01
			16QAM	23.20	208.93	25.82	382.04
		10MHz	QPSK	24.10	257.04	26.54	450.9
			16QAM	23.20	208.93	25.68	369.94
		5MHz	QPSK	24.20	263.03	26.70	468.19
			16QAM	23.20	208.93	25.94	393.03
		3MHz	QPSK	24.10	257.04	26.72	470.01
			16QAM	23.20	208.93	25.82	382.04
		1.4MHz	QPSK	24.10	257.04	26.26	422.75
			16QAM	23.20	208.93	25.52	356.54

LTE Band 2

FCC Part 24							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation mW	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE2	1850~1910	20MHz	QPSK	24.20	263.03	26.39	435.77
			16QAM	23.20	208.93	25.24	334.4
		15MHz	QPSK	24.10	257.04	25.91	390.33
			16QAM	23.20	208.93	25.14	326.91
		10MHz	QPSK	24.00	251.19	25.98	395.92
			16QAM	23.20	208.93	25.15	327.04
		5MHz	QPSK	24.20	263.03	25.68	369.64
			16QAM	23.20	208.93	24.75	298.39
		3MHz	QPSK	23.90	245.47	25.29	338.03
			16QAM	23.20	208.93	24.49	281.16
		1.4MHz	QPSK	23.80	239.88	25.19	330.51
			16QAM	23.20	208.93	24.09	256.56

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-1.0
GSM1900, 1850~1910MHz	2.2
WCDMA B2, 1850~1910MHz	2.2
WCDMA B4, 1710~1755MHz	2.4
WCDMA B5, 824~849MHz	-1.0
LTE B2, 1850~1910MHz	2.2
LTE B4, 1710~1755MHz	2.4
LTE B12, 699~716MHz	-1.0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WR	RA4Y1031433	N/A
Earphone	LG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	NA
2	Jack	1	Headset	Shielded	1m	NA
3	RF In/out	1	Communication Test Set	Un-shielded	2m	NA


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

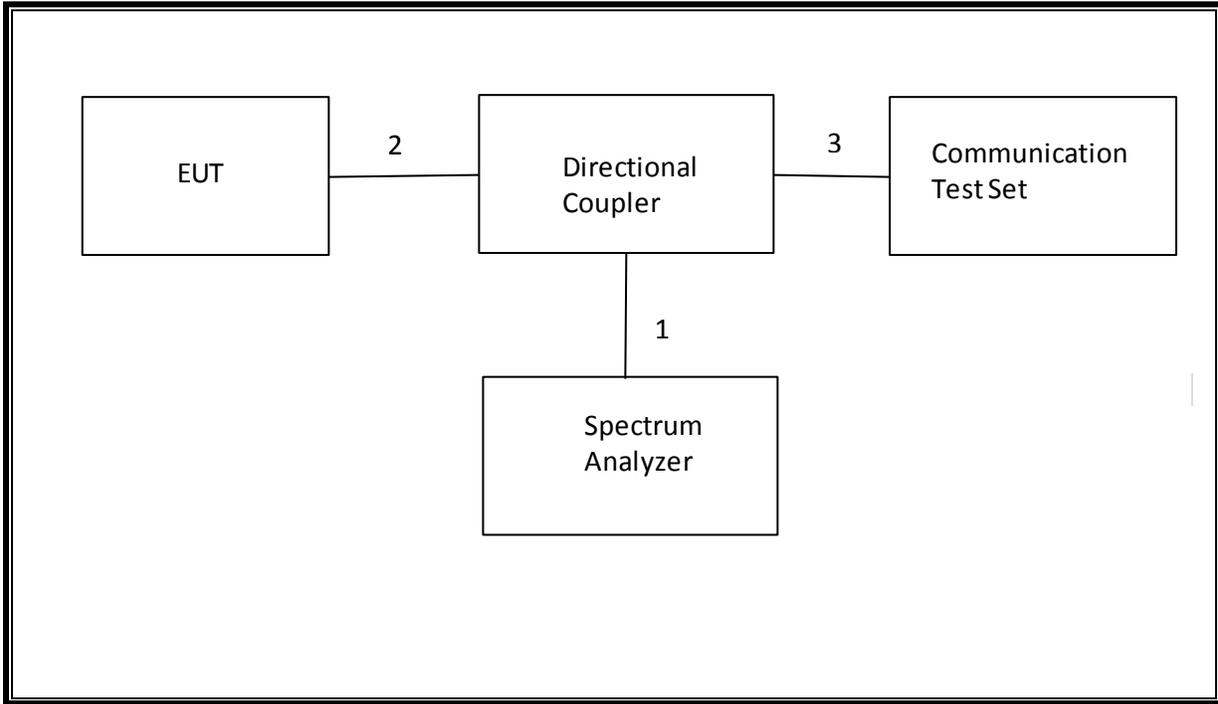

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

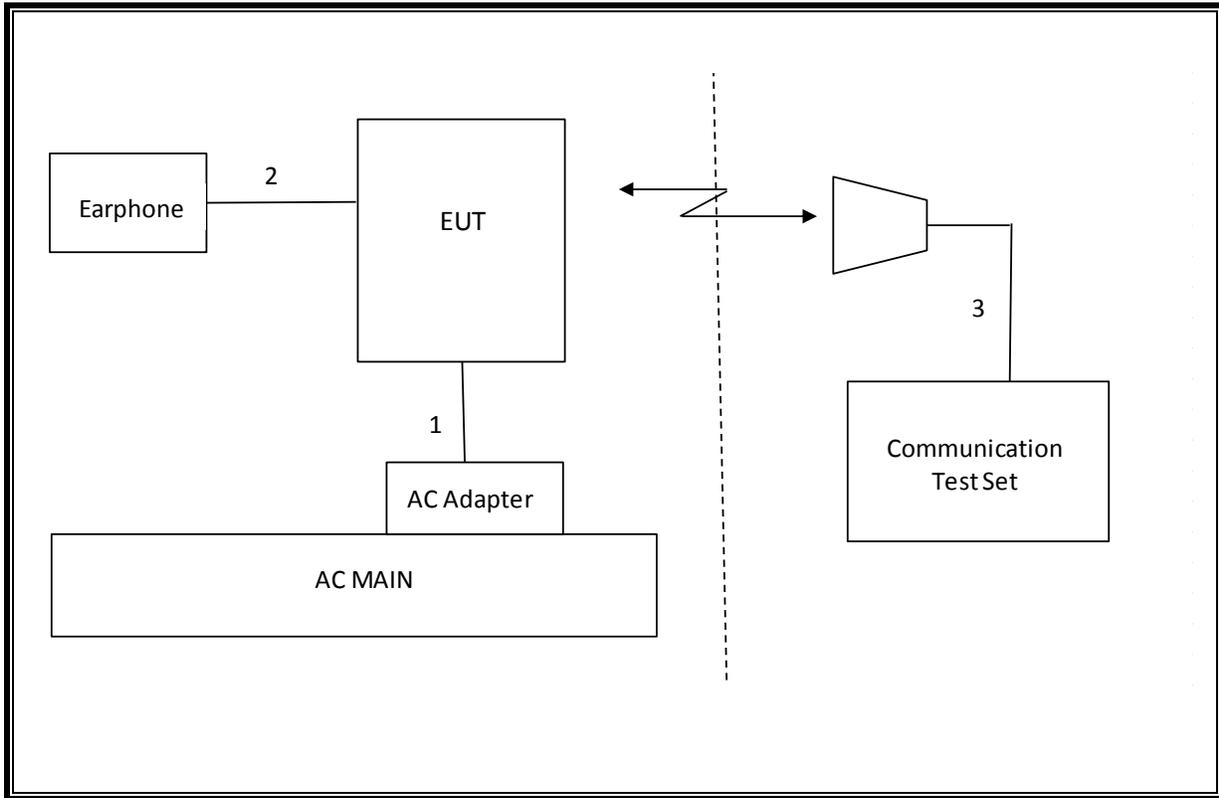

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	04/22/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	06/18/15
Antenna, Tuned Dipole 400~1000	ETS	6502	158071	10/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	17.90 MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-18.183 dBm
2.1046	N/A	Conducted output power	N/A		Pass	33 dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM	Radiated	Pass	0.012 PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm		Pass	31.5 dBm
27.50(c)(10)	N/A		34.77 dBm		Pass	26.7 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	30.1 dBm
27.50(d)(4)	RSS-139(6.4)		30dBm		Pass	26.72 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm	Pass	-41.1 dBm	

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	33.0
			190	836.6	33.0
			251	848.8	32.7
GPRS (GMSK)	CS1	1	128	824.2	33.0
			190	836.6	33.0
			251	848.8	32.7
		2	128	824.2	31.0
			190	836.6	31.7
			251	848.8	31.5
		3	128	824.2	30.2
			190	836.6	30.2
			251	848.8	30.2
		4	128	824.2	28.7
			190	836.6	28.7
			251	848.8	28.6
EGPRS (8PSK)	MCS5	1	128	824.2	27.7
			190	836.6	27.7
			251	848.8	27.4
		2	128	824.2	26.7
			190	836.6	26.7
			251	848.8	26.7
		3	128	824.2	24.7
			190	836.6	24.7
			251	848.8	24.5
		4	128	824.2	23.7
			190	836.6	23.6
			251	848.8	23.3

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.5
			661	1880.0	30.5
			810	1909.8	30.3
GPRS (GMSK)	CS1	1	512	1850.2	30.5
			661	1880.0	30.5
			810	1909.8	30.3
		2	512	1850.2	28.5
			661	1880.0	28.7
			810	1909.8	28.6
		3	512	1850.2	27.1
			661	1880.0	27.0
			810	1909.8	26.8
		4	512	1850.2	25.4
			661	1880.0	25.5
			810	1909.8	25.4
EGPRS (8PSK)	MCS5	1	512	1850.2	26.7
			661	1880.0	26.7
			810	1909.8	26.6
		2	512	1850.2	25.5
			661	1880.0	25.7
			810	1909.8	25.5
		3	512	1850.2	23.4
			661	1880.0	23.5
			810	1909.8	23.3
		4	512	1850.2	22.2
			661	1880.0	22.2
			810	1909.8	22.2

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
β_{ed}	Not Applicable	

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	0	24.1
		4183	836.6	0	24.1
		4233	846.6	0	24.2

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	0	23.6
		1413	1732.6	0	23.5
		1513	1752.6	0	23.7

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	0	23.5
		9400	1880.0	0	23.3
		9538	1907.6	0	23.4

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	24.0
		4183	836.6	0	24.1
		4233	846.6	0	24.1
	Subtest 2	4132	826.4	0	24.0
		4183	836.6	0	24.1
		4233	846.6	0	24.1
	Subtest 3	4132	826.4	0.5	23.7
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.6
	Subtest 4	4132	826.4	0.5	23.7
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.6

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Subtest 1	1312	1712.4	0	23.5
		1413	1732.6	0	23.4
		1513	1752.6	0	23.5
	Subtest 2	1312	1712.4	0	23.5
		1413	1732.6	0	23.4
		1513	1752.6	0	23.5
	Subtest 3	1312	1712.4	0.5	23.2
		1413	1732.6	0.5	23.1
		1513	1752.6	0.5	23.2
	Subtest 4	1312	1712.4	0.5	23.2
		1413	1732.6	0.5	23.1
		1513	1752.6	0.5	23.2

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.4
		9400	1880.0	0	23.3
		9538	1907.6	0	23.3
	Subtest 2	9262	1852.4	0	23.4
		9400	1880.0	0	23.3
		9538	1907.6	0	23.3
	Subtest 3	9262	1852.4	0.5	23.2
		9400	1880.0	0.5	23.2
		9538	1907.6	0.5	23.2
	Subtest 4	9262	1852.4	0.5	22.8
		9400	1880.0	0.5	23.2
		9538	1907.6	0.5	23.3

8.4. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
β_{ed} (note1)	1309/225	94/75	47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.4.1. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	24.0
		4183	836.6	0	24.0
		4233	846.6	0	23.3
	Subtest 2	4132	826.4	2	22.1
		4183	836.6	2	22.2
		4233	846.6	2	22.2
	Subtest 3	4132	826.4	1	23.1
		4183	836.6	1	23.0
		4233	846.6	1	23.1
	Subtest 4	4132	826.4	2	22.1
		4183	836.6	2	22.2
		4233	846.6	2	22.2
	Subtest 5	4132	826.4	0	24.0
		4183	836.6	0	24.0
		4233	846.6	0	23.3

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Subtest 1	1312	1712.4	0	22.7
		1413	1732.6	0	23.2
		1513	1752.6	0	22.8
	Subtest 2	1312	1712.4	2	21.5
		1413	1732.6	2	21.7
		1513	1752.6	2	21.6
	Subtest 3	1312	1712.4	1	22.1
		1413	1732.6	1	22.2
		1513	1752.6	1	22.6
	Subtest 4	1312	1712.4	2	21.7
		1413	1732.6	2	21.7
		1513	1752.6	2	21.7
	Subtest 5	1312	1712.4	0	23.5
		1413	1732.6	0	23.5
		1513	1752.6	0	23.6

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	22.6
		9400	1880.0	0	23.1
		9538	1907.6	0	22.7
	Subtest 2	9262	1852.4	2	21.5
		9400	1880.0	2	21.7
		9538	1907.6	2	21.5
	Subtest 3	9262	1852.4	1	21.9
		9400	1880.0	1	22.0
		9538	1907.6	1	22.1
	Subtest 4	9262	1852.4	2	21.7
		9400	1880.0	2	21.7
		9538	1907.6	2	21.7
	Subtest 5	9262	1852.4	0	23.4
		9400	1880.0	0	23.2
		9538	1907.6	0	23.3

8.5. DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

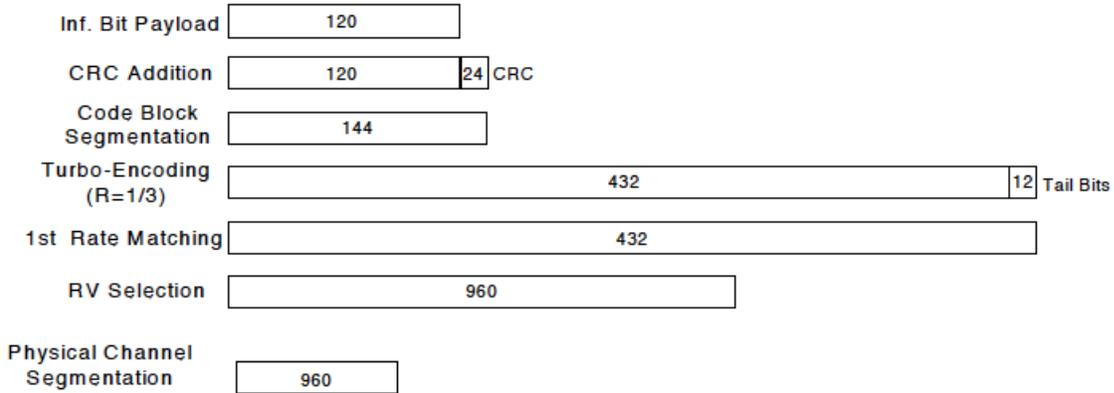


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

8.5.1. UMTS DC-HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	24.0
		4183	836.6	0	24.1
		4233	846.6	0	24.1
	Subtest 2	4132	826.4	0	24.0
		4183	836.6	0	24.1
		4233	846.6	0	24.1
	Subtest 3	4132	826.4	0.5	23.7
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.6
	Subtest 4	4132	826.4	0.5	23.7
		4183	836.6	0.5	23.6
		4233	846.6	0.5	23.6

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Subtest 1	1312	1712.4	0	23.6
		1413	1732.6	0	23.4
		1513	1752.6	0	23.7
	Subtest 2	1312	1712.4	0	23.4
		1413	1732.6	0	23.4
		1513	1752.6	0	23.7
	Subtest 3	1312	1712.4	0.5	22.9
		1413	1732.6	0.5	23.2
		1513	1752.6	0.5	23.2
	Subtest 4	1312	1712.4	0.5	23.2
		1413	1732.6	0.5	23.2
		1513	1752.6	0.5	23.2

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.4
		9400	1880.0	0	23.3
		9538	1907.6	0	23.3
	Subtest 2	9262	1852.4	0	23.4
		9400	1880.0	0	23.3
		9538	1907.6	0	23.3
	Subtest 3	9262	1852.4	0.5	23.2
		9400	1880.0	0.5	23.2
		9538	1907.6	0.5	23.2
	Subtest 4	9262	1852.4	0.5	22.8
		9400	1880.0	0.5	23.2
		9538	1907.6	0.5	23.3

8.7. LTE OUTPUT VERIFICATION

8.7.1. LTE OUTPUT RESULT

LTE Band 2

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18700	18900	19100
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	24.2	24.2	24.2
			1	49	0	24.2	23.9	24.0
			1	99	0	24.2	24.1	23.9
			50	0	1	23.1	23.0	23.0
			50	25	1	23.0	22.9	23.0
			50	49	1	23.0	22.9	22.9
		16QAM	100	0	1	22.9	22.9	22.9
			1	0	1	23.2	23.1	23.2
			1	49	1	22.9	22.8	23.2
			1	99	1	22.7	23.2	22.9
			50	0	2	22.2	22.1	22.0
			50	25	2	22.1	22.0	21.7
			50	49	2	21.8	21.9	21.7
			100	0	2	22.0	21.8	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18675	18900	19125
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	23.95	23.94	23.80
			1	37	0	23.9	23.9	24.1
			1	74	0	23.9	23.8	23.6
			36	0	1	23.0	23.0	22.9
			36	18	1	22.9	22.9	22.8
			36	35	1	22.9	22.8	22.9
			75	0	1	22.9	22.9	22.8
		16QAM	1	0	1	23.0	23.2	23.2
			1	37	1	23.2	23.2	23.2
			1	74	1	22.9	23.2	23.2
			36	0	2	22.1	22.1	21.8
			36	18	2	21.9	22.0	21.6
			36	35	2	21.9	22.0	21.7
			75	0	2	21.9	22.0	21.8

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18650	18900	19150
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.9	23.9	24.0
			1	24	0	23.8	23.9	23.7
			1	49	0	24.0	23.8	23.9
			25	0	1	22.9	22.9	22.8
			25	12	1	22.9	22.9	22.9
			25	24	1	22.8	22.7	22.9
		16QAM	50	0	1	22.9	22.9	22.8
			1	0	1	23.2	23.2	23.1
			1	24	1	23.2	23.2	23.2
			1	49	1	23.2	23.1	23.1
			25	0	2	21.9	22.2	21.8
			25	12	2	21.8	21.9	22.2
			25	24	2	21.9	21.8	22.1
			50	0	2	21.9	21.9	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18625	18900	19175
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.7	24.1	23.9
			1	12	0	23.9	24.2	24.2
			1	24	0	23.7	23.8	23.8
			12	0	1	22.7	22.8	22.9
			12	6	1	22.9	22.8	22.9
			12	11	1	22.8	22.8	22.9
		16QAM	25	0	1	22.8	22.8	23.0
			1	0	1	23.2	22.8	23.2
			1	12	1	23.2	23.0	23.2
			1	24	1	22.6	22.8	23.2
			12	0	2	21.9	21.9	22.0
			12	6	2	21.8	21.8	21.9
			12	11	2	21.9	21.9	22.0
			25	0	2	22.1	21.7	21.9

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18615	18900	19185
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	23.8	23.8	23.9
			1	7	0	23.9	23.9	23.8
			1	14	0	23.8	23.5	23.8
			6	0	1	22.8	22.7	23.0
			6	3	1	22.8	22.8	23.0
			6	5	1	22.8	22.8	22.9
			15	0	1	22.8	22.8	22.9
		16QAM	1	0	1	23.2	23.2	23.0
			1	7	1	23.1	23.2	22.9
			1	14	1	23.2	23.2	23.2
			6	0	2	21.7	21.9	22.2
			6	3	2	21.7	21.9	22.2
			6	5	2	22.0	21.8	22.2
			15	0	2	21.9	21.7	22.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18607	18900	19193
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.7	23.6	23.7
			1	2	0	23.8	23.8	23.7
			1	5	0	23.8	23.6	23.8
			3	0	0	23.8	23.7	24.1
			3	1	0	23.9	23.8	23.9
			3	2	0	23.9	23.8	23.8
			6	0	1	22.8	22.9	22.9
		16QAM	1	0	1	23.2	23.2	23.2
			1	2	1	23.2	23.2	22.5
			1	5	1	23.2	23.0	22.7
			3	0	1	23.0	23.2	22.6
			3	1	1	22.8	22.7	22.7
			3	2	1	22.7	22.8	22.7
			6	0	2	22.1	22.0	21.7

LTE Band 4

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	24.0	24.2	24.1
			1	49	0	24.1	24.2	24.1
			1	99	0	23.8	24.1	24.1
			50	0	1	23.1	23.1	23.0
			50	25	1	23.0	23.0	23.1
			50	49	1	23.0	22.9	23.1
			100	0	1	23.1	23.0	23.0
		16QAM	1	0	1	23.2	23.2	23.2
			1	49	1	23.2	23.1	23.2
			1	99	1	22.9	23.0	23.2
			50	0	2	22.1	22.1	22.0
			50	25	2	22.0	22.0	22.1
			50	49	2	21.9	21.9	22.0
			100	0	2	22.0	22.0	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	23.9	23.9	24.1
			1	37	0	24.0	23.9	24.2
			1	74	0	23.6	23.7	23.8
			36	0	1	22.9	23.0	23.2
			36	18	1	22.9	22.9	23.1
			36	35	1	22.9	22.9	23.1
			75	0	1	22.9	22.9	22.9
		16QAM	1	0	1	23.2	23.2	23.2
			1	37	1	23.2	23.2	23.2
			1	74	1	23.2	23.2	23.2
			36	0	2	21.9	21.9	22.0
			36	18	2	21.8	21.8	22.0
			36	35	2	21.8	21.9	21.9
			75	0	2	21.9	21.8	21.8

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	23.9	23.9	24.0
			1	24	0	23.7	23.8	24.1
			1	49	0	23.8	23.8	24.0
			25	0	1	23.0	22.8	23.0
			25	12	1	22.8	22.8	23.0
			25	24	1	22.9	22.8	23.0
			50	0	1	22.9	22.8	23.0
		16QAM	1	0	1	23.2	23.2	22.5
			1	24	1	23.2	23.2	23.2
			1	49	1	22.9	23.2	22.7
			25	0	2	21.8	21.9	22.0
			25	12	2	21.8	21.8	22.0
			25	24	2	21.9	21.9	21.8
			50	0	2	21.8	21.9	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.6	23.9	23.9
			1	12	0	23.9	24.2	23.9
			1	24	0	23.5	23.9	23.9
			12	0	1	22.7	22.7	23.0
			12	6	1	22.7	22.8	22.9
			12	11	1	22.8	22.7	22.9
			25	0	1	22.8	22.8	22.9
		16QAM	1	0	1	23.2	23.2	23.2
			1	12	1	23.2	23.2	23.2
			1	24	1	23.2	23.0	23.2
			12	0	2	22.1	21.9	22.0
			12	6	2	22.0	21.9	21.9
			12	11	2	21.9	21.8	21.9
			25	0	2	22.0	21.7	21.8

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19965	20175	20385
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.7	23.7	23.9
			1	7	0	23.7	23.8	24.1
			1	14	0	23.8	23.7	23.9
			6	0	1	22.8	22.8	22.8
			6	3	1	22.8	22.8	22.7
			6	5	1	22.8	22.8	22.8
			15	0	1	22.8	22.8	22.8
		16QAM	1	0	1	23.2	23.0	22.9
			1	7	1	23.2	23.1	22.8
			1	14	1	23.2	23.0	23.1
			6	0	2	22.0	21.7	21.9
			6	3	2	22.2	21.7	22.1
			6	5	2	22.1	21.5	22.0
			15	0	2	21.9	21.8	22.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19957	20175	20393
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.7	23.6	23.9
			1	2	0	23.7	23.6	24.1
			1	5	0	23.8	23.6	24.0
			3	0	0	23.8	23.7	23.9
			3	1	0	23.9	23.7	24.0
			3	2	0	23.8	23.7	24.0
			6	0	1	22.8	22.7	22.9
		16QAM	1	0	1	23.1	23.2	22.9
			1	2	1	23.2	23.2	22.6
			1	5	1	23.2	23.2	22.9
			3	0	1	22.8	22.8	23.0
			3	1	1	22.6	22.9	23.2
			3	2	1	23.1	22.6	22.8
			6	0	2	22.2	22.0	22.1

LTE Band 12

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						23060	23095	23130
						704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0	23.7	23.8	23.9
			1	24	0	23.7	23.9	23.9
			1	49	0	23.8	23.7	23.9
			25	0	1	22.8	22.8	23.0
			25	12	1	22.9	22.9	23.0
			25	24	1	22.9	22.9	22.9
		16QAM	1	0	1	23.2	23.2	23.2
			1	24	1	23.0	23.2	23.0
			1	49	1	22.7	23.2	23.1
			25	0	2	21.7	21.9	22.0
			25	12	2	21.8	21.9	21.9
			25	24	2	21.8	21.9	22.0
			50	0	2	21.7	22.0	22.0
			50	0	2	21.7	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						23035	23095	23155
						701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.8	24.2	23.9
			1	12	0	23.9	24.2	24.2
			1	24	0	23.6	23.9	23.8
			12	0	1	22.8	22.9	22.9
			12	6	1	22.7	22.9	23.0
			12	11	1	22.8	22.8	22.9
			25	0	1	22.8	22.9	22.9
		16QAM	1	0	1	22.4	23.2	23.2
			1	12	1	22.6	23.2	23.2
			1	24	1	22.4	23.2	23.2
			12	0	2	21.6	22.0	22.0
			12	6	2	21.8	22.0	22.0
			12	11	2	21.8	21.9	22.0
			25	0	2	21.9	21.8	22.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						23025	23095	23165
						700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	23.8	23.9	23.8
			1	7	0	24.0	23.8	24.2
			1	14	0	23.8	23.6	23.9
			6	0	1	22.8	22.8	22.8
			6	3	1	22.8	22.9	22.9
			6	5	1	22.9	22.8	22.9
		16QAM	15	0	1	22.8	22.9	22.9
			1	0	1	23.2	23.2	23.2
			1	7	1	23.2	23.2	23.2
			1	14	1	23.1	23.2	22.9
			6	0	2	21.9	21.7	21.5
			6	3	2	21.9	21.8	21.6
			6	5	2	21.9	21.7	21.8
			15	0	2	21.8	21.7	21.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						23017	23095	23173
						699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	23.6	23.8	23.7
			1	2	0	23.9	23.9	23.9
			1	5	0	23.8	23.8	23.8
			3	0	0	23.8	23.7	23.9
			3	1	0	23.7	23.8	23.9
			3	2	0	23.8	23.9	23.9
		16QAM	6	0	1	22.7	22.7	22.8
			1	0	1	23.2	22.8	23.2
			1	2	1	22.4	23.2	23.2
			1	5	1	23.2	23.0	23.2
			3	0	1	23.0	22.4	23.2
			3	1	1	22.6	22.7	22.4
			3	2	1	22.5	23.2	22.6
			6	0	2	21.5	21.5	21.9

9. PEAK TO AVERAGE RATIO



TEST PROCEDURE



Per KDB 971168 D01 Power Meas License Digital Systems v02r02



LIMIT



In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.



9.1. CONDUCTED PEAK TO AVERAGE RESULT

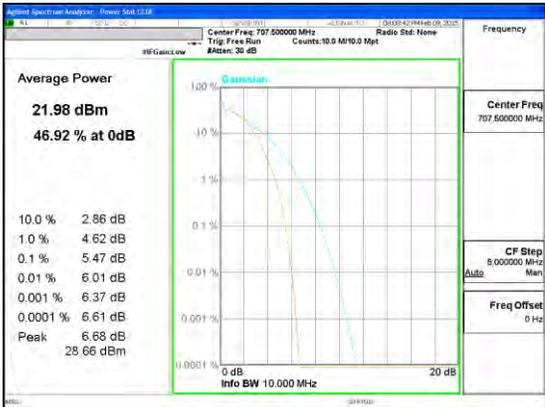
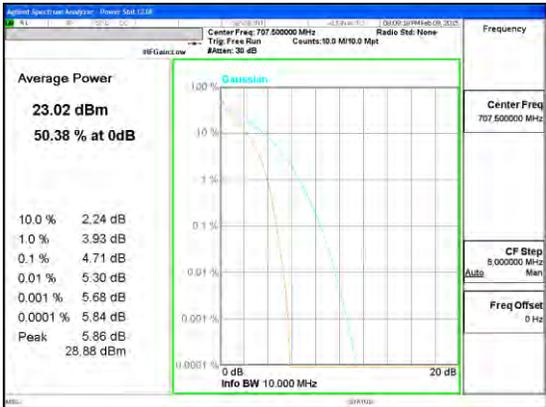
Band LTE12 10MHz 16QAM	 <p>Average Power 21.98 dBm 46.92 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>2.86 dB</td></tr> <tr><td>1.0 %</td><td>4.62 dB</td></tr> <tr><td>0.1 %</td><td>5.47 dB</td></tr> <tr><td>0.01 %</td><td>6.01 dB</td></tr> <tr><td>0.001 %</td><td>6.37 dB</td></tr> <tr><td>0.0001 %</td><td>6.61 dB</td></tr> <tr><td>Peak</td><td>6.68 dB</td></tr> <tr><td></td><td>28.66 dBm</td></tr> </table> <p>Band LTE12 10MHz 16QAM Mid channel</p>	10.0 %	2.86 dB	1.0 %	4.62 dB	0.1 %	5.47 dB	0.01 %	6.01 dB	0.001 %	6.37 dB	0.0001 %	6.61 dB	Peak	6.68 dB		28.66 dBm	 <p>Average Power 23.02 dBm 50.38 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>2.24 dB</td></tr> <tr><td>1.0 %</td><td>3.93 dB</td></tr> <tr><td>0.1 %</td><td>4.71 dB</td></tr> <tr><td>0.01 %</td><td>5.30 dB</td></tr> <tr><td>0.001 %</td><td>5.68 dB</td></tr> <tr><td>0.0001 %</td><td>5.84 dB</td></tr> <tr><td>Peak</td><td>5.86 dB</td></tr> <tr><td></td><td>28.88 dBm</td></tr> </table> <p>Band LTE12 10MHz QPSK Mid channel</p>	10.0 %	2.24 dB	1.0 %	3.93 dB	0.1 %	4.71 dB	0.01 %	5.30 dB	0.001 %	5.68 dB	0.0001 %	5.84 dB	Peak	5.86 dB		28.88 dBm
10.0 %	2.86 dB																																	
1.0 %	4.62 dB																																	
0.1 %	5.47 dB																																	
0.01 %	6.01 dB																																	
0.001 %	6.37 dB																																	
0.0001 %	6.61 dB																																	
Peak	6.68 dB																																	
	28.66 dBm																																	
10.0 %	2.24 dB																																	
1.0 %	3.93 dB																																	
0.1 %	4.71 dB																																	
0.01 %	5.30 dB																																	
0.001 %	5.68 dB																																	
0.0001 %	5.84 dB																																	
Peak	5.86 dB																																	
	28.88 dBm																																	

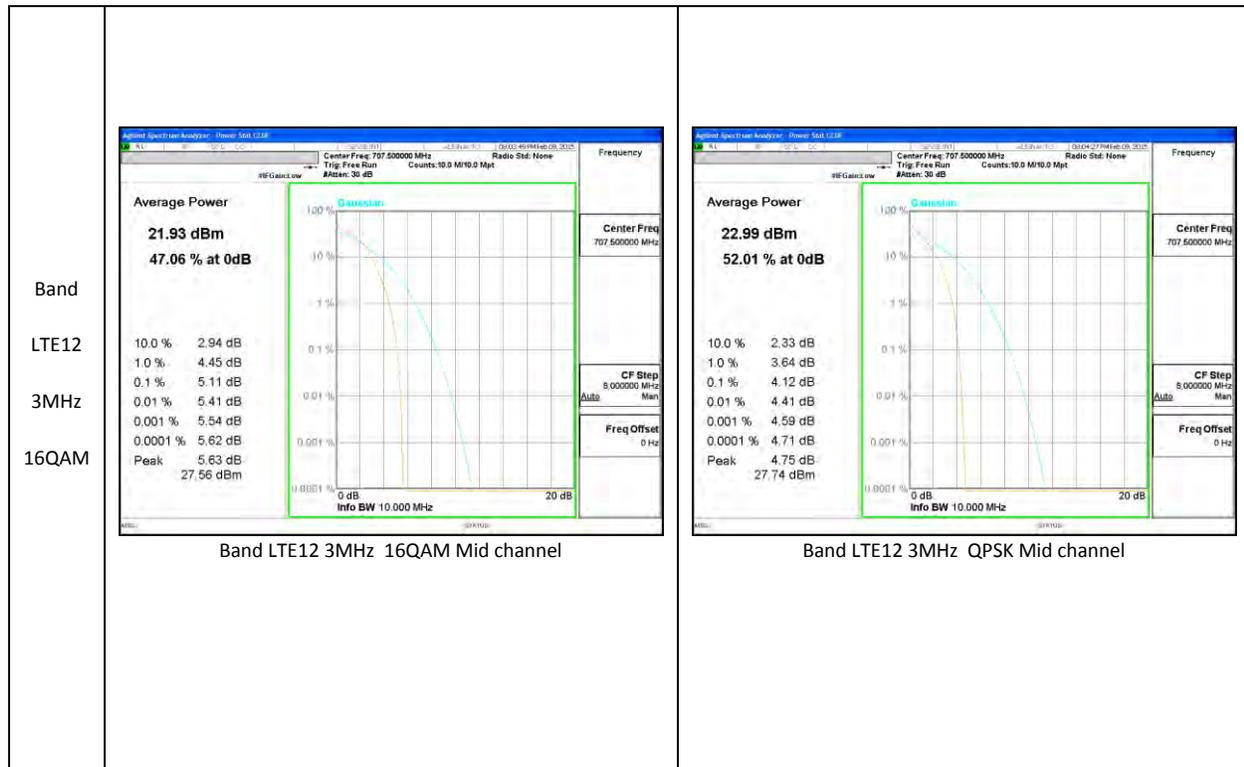
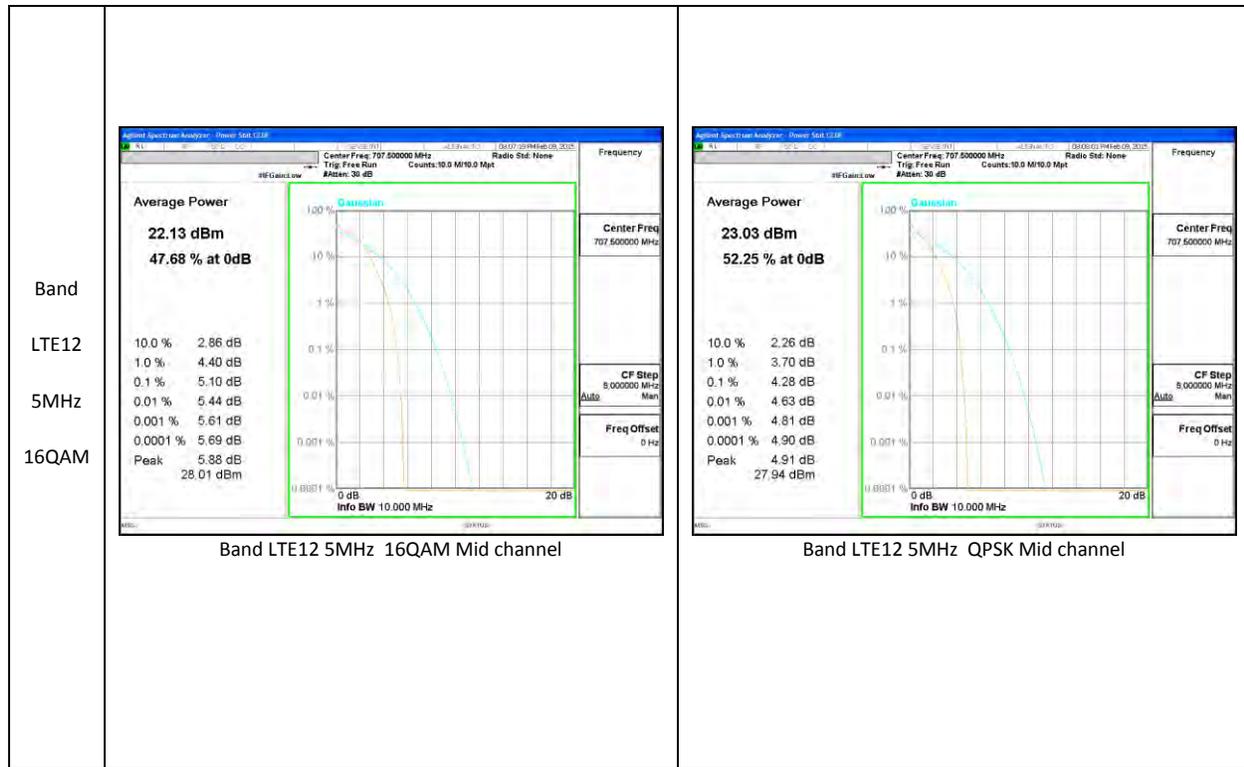


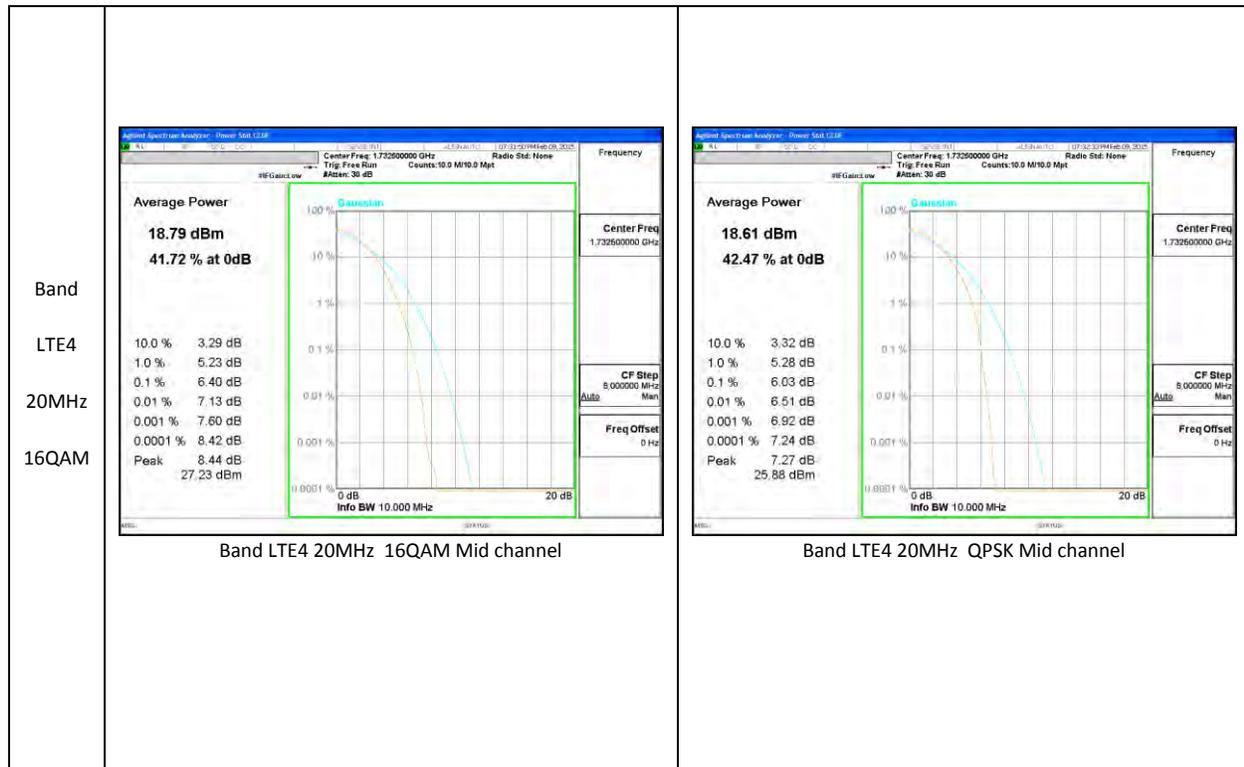
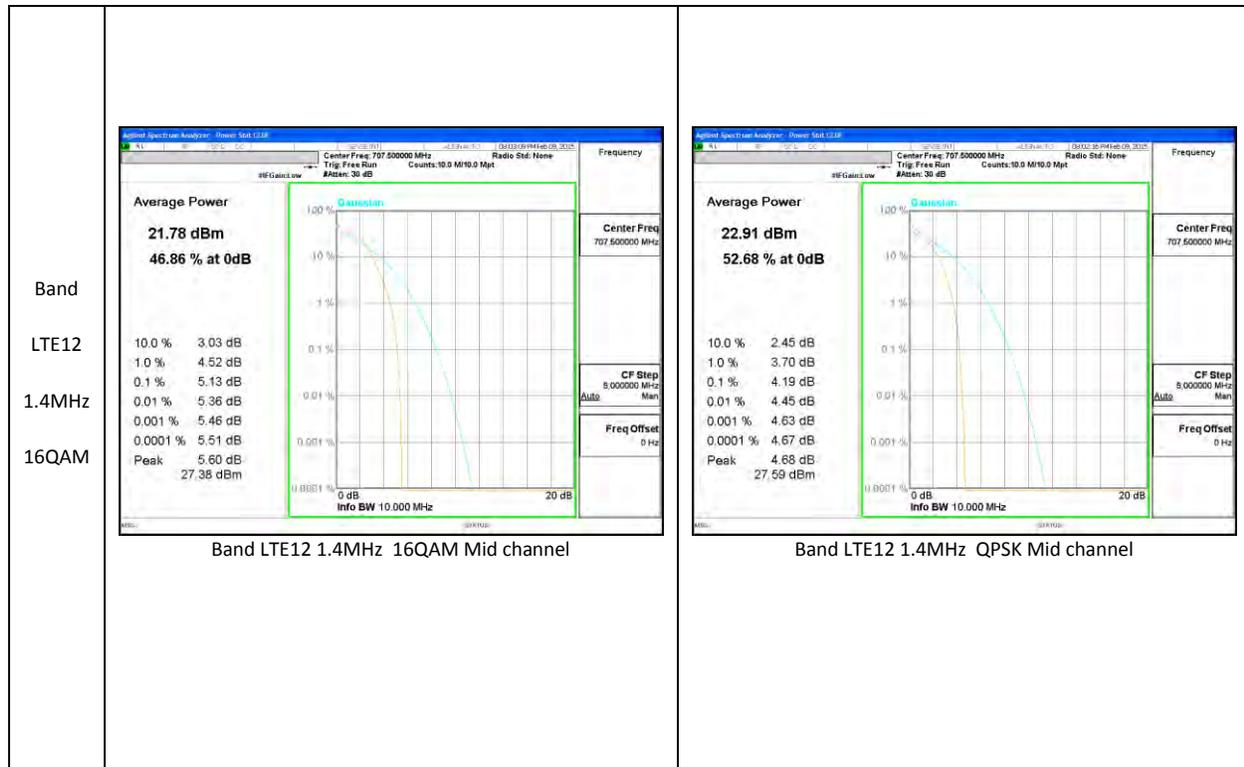


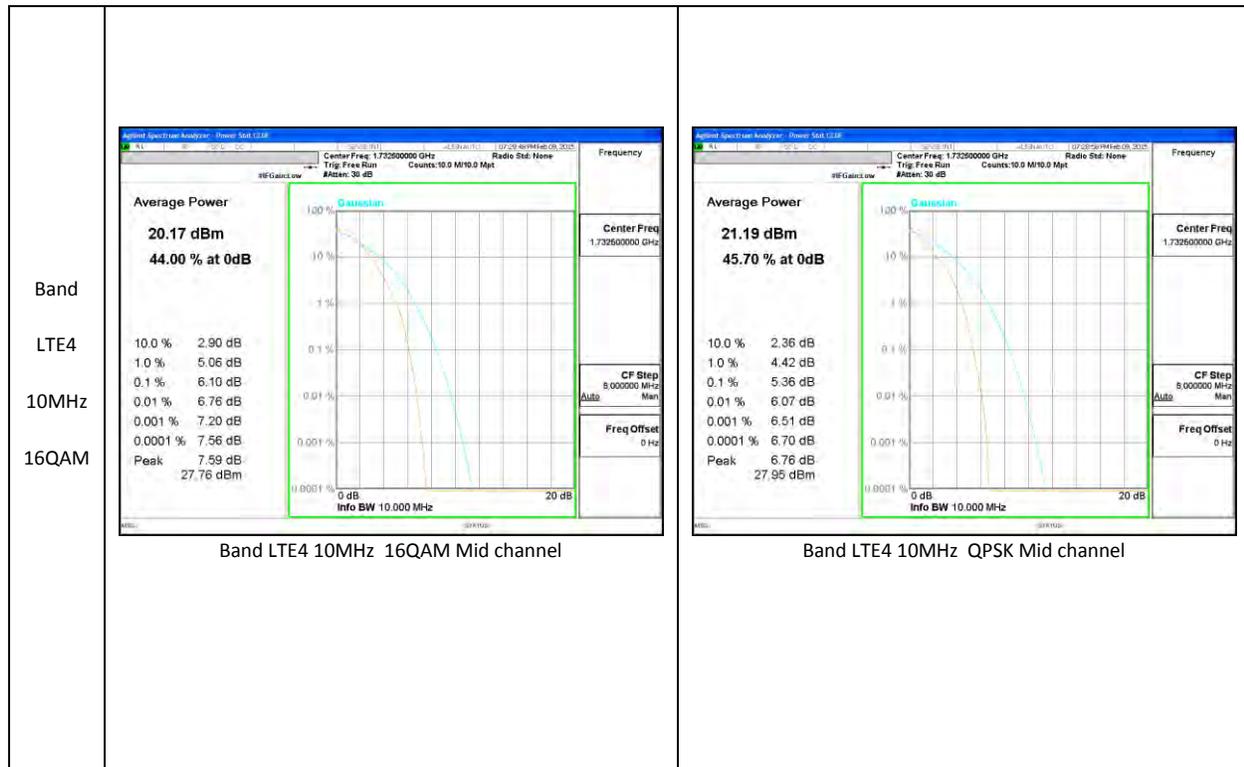
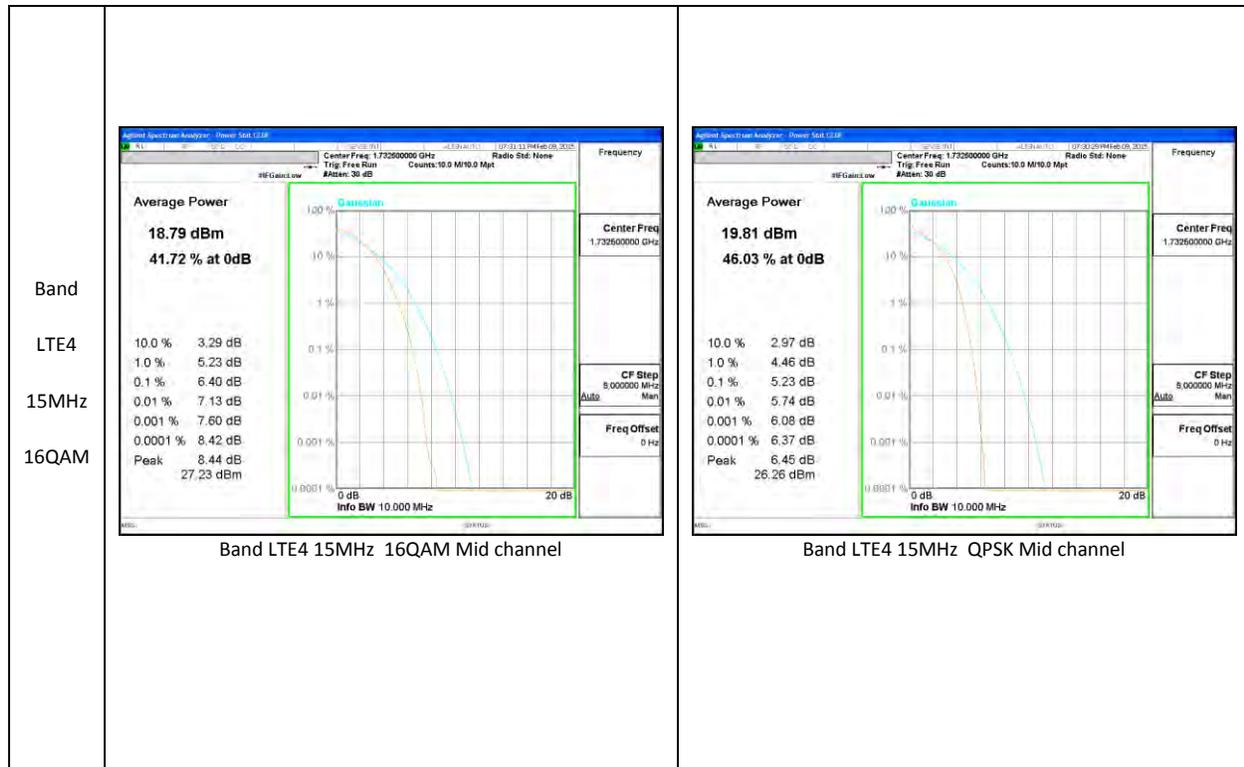


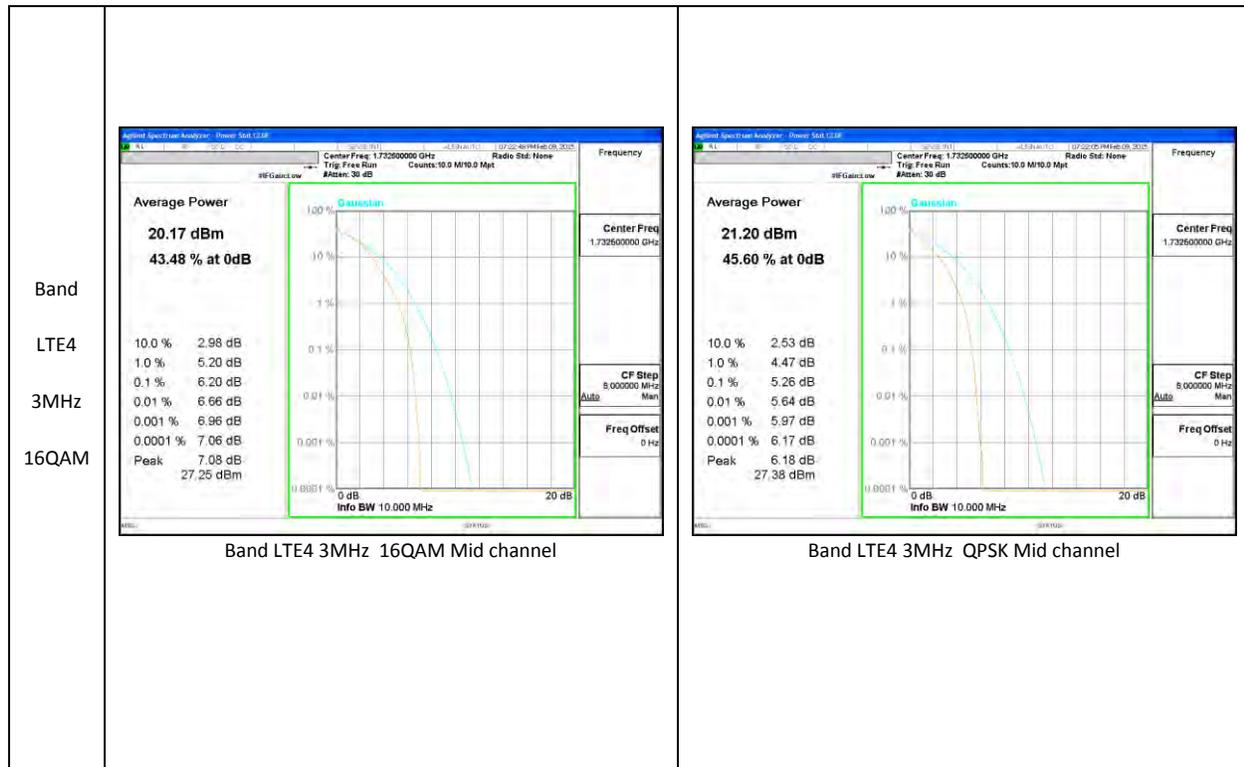
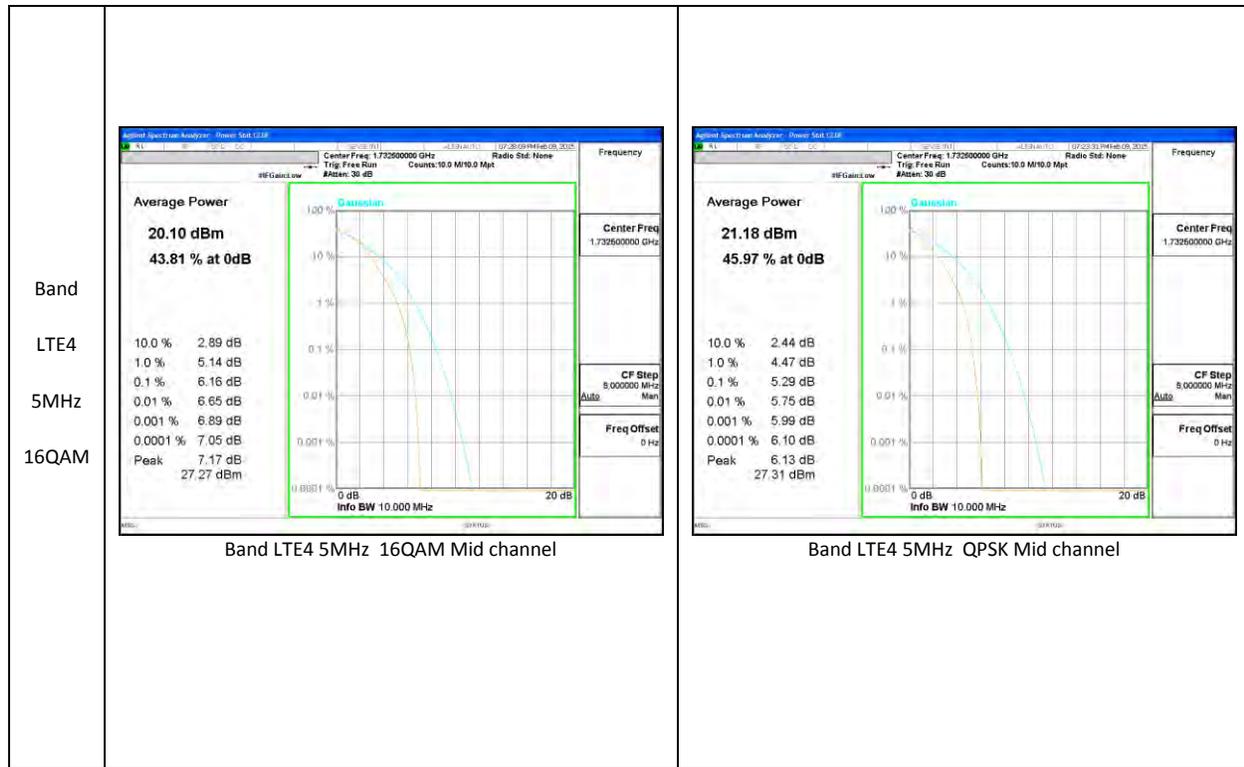


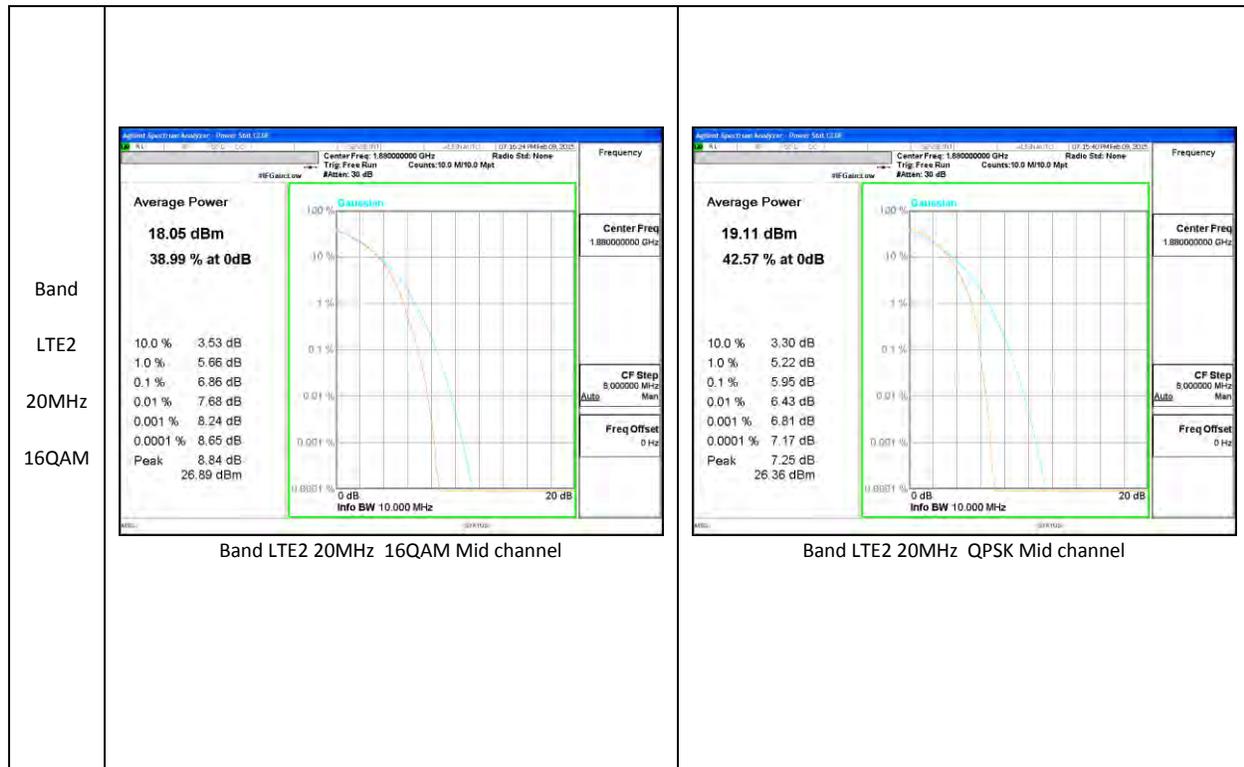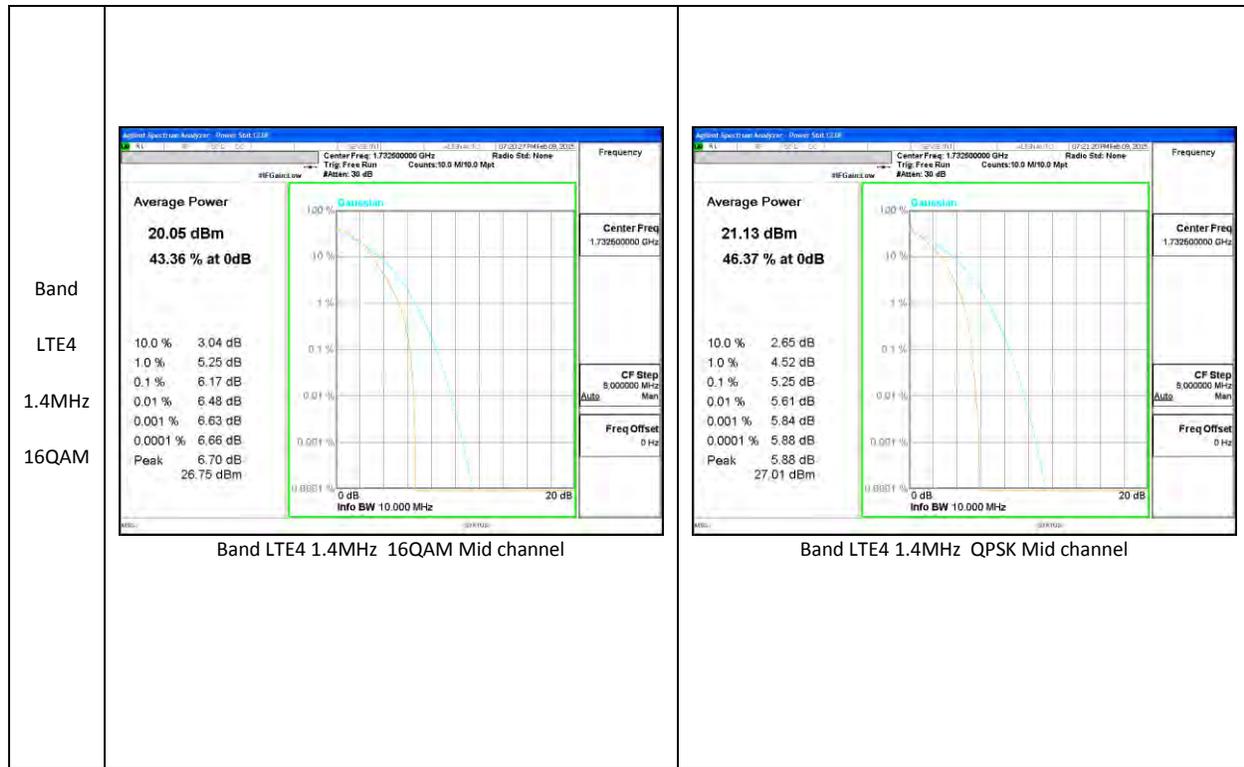

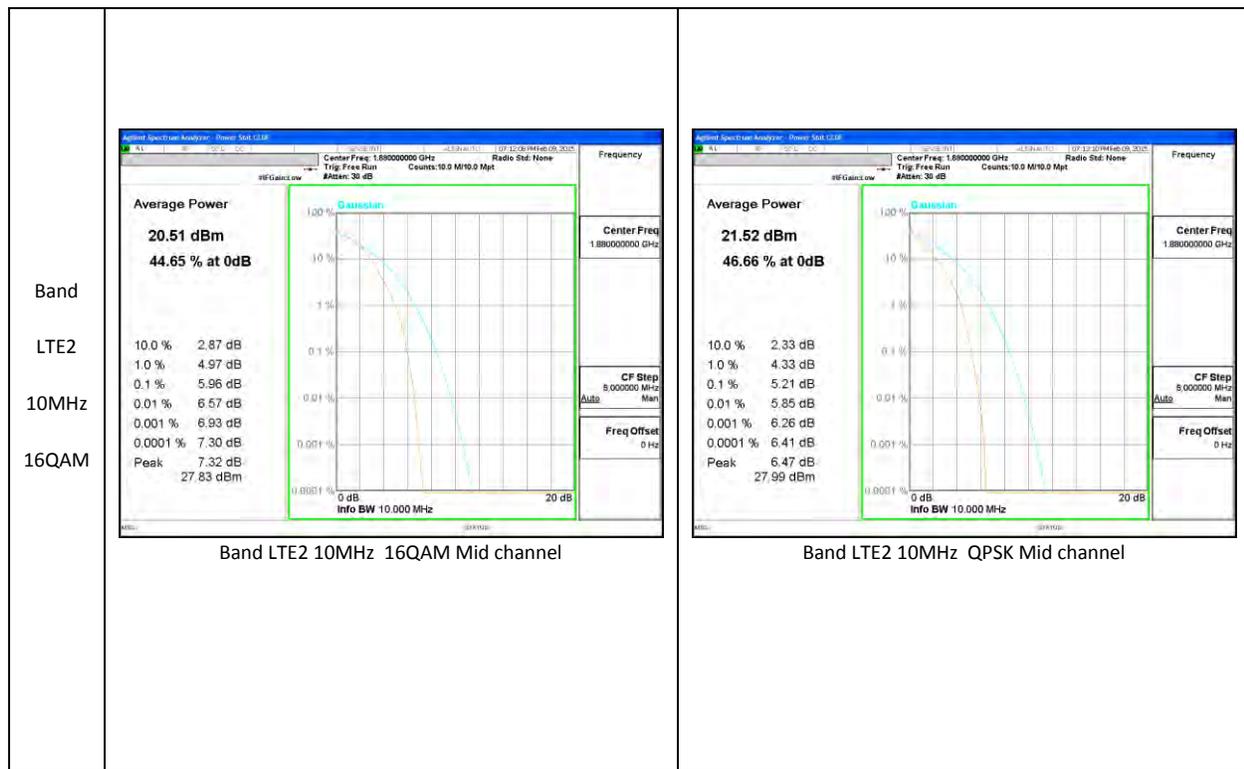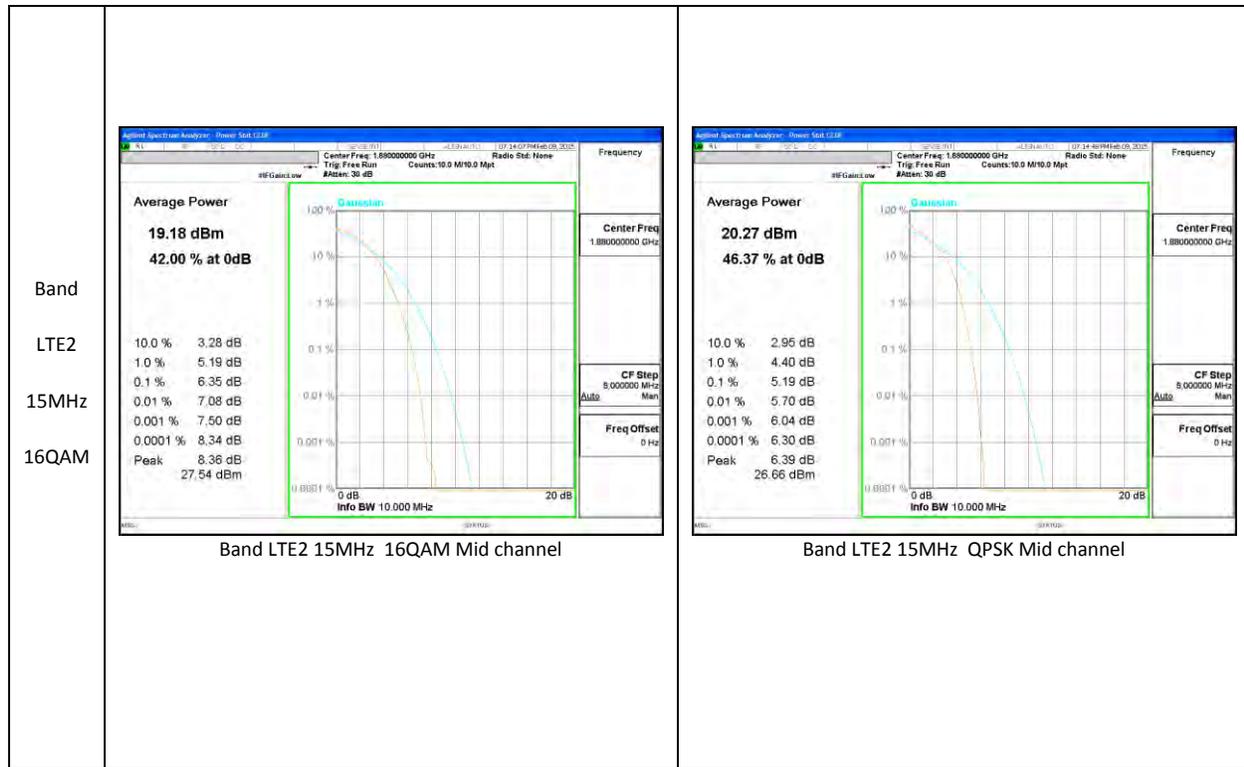

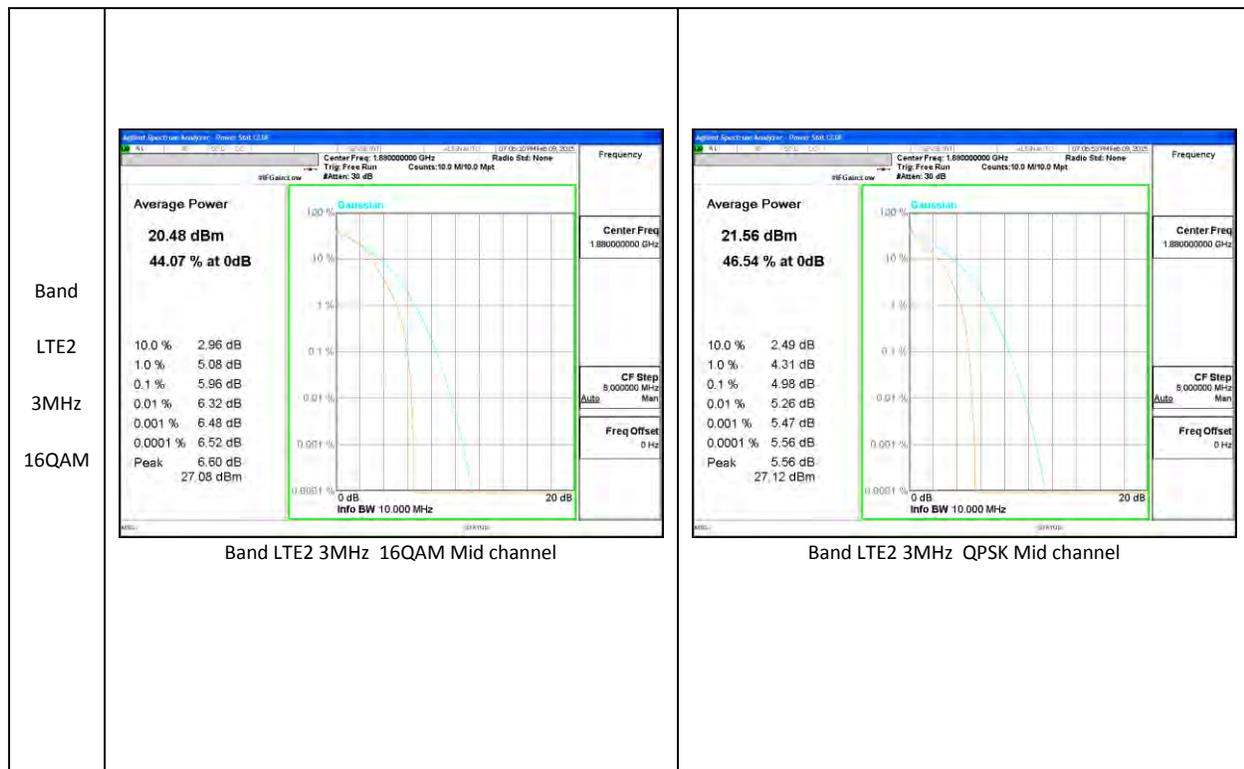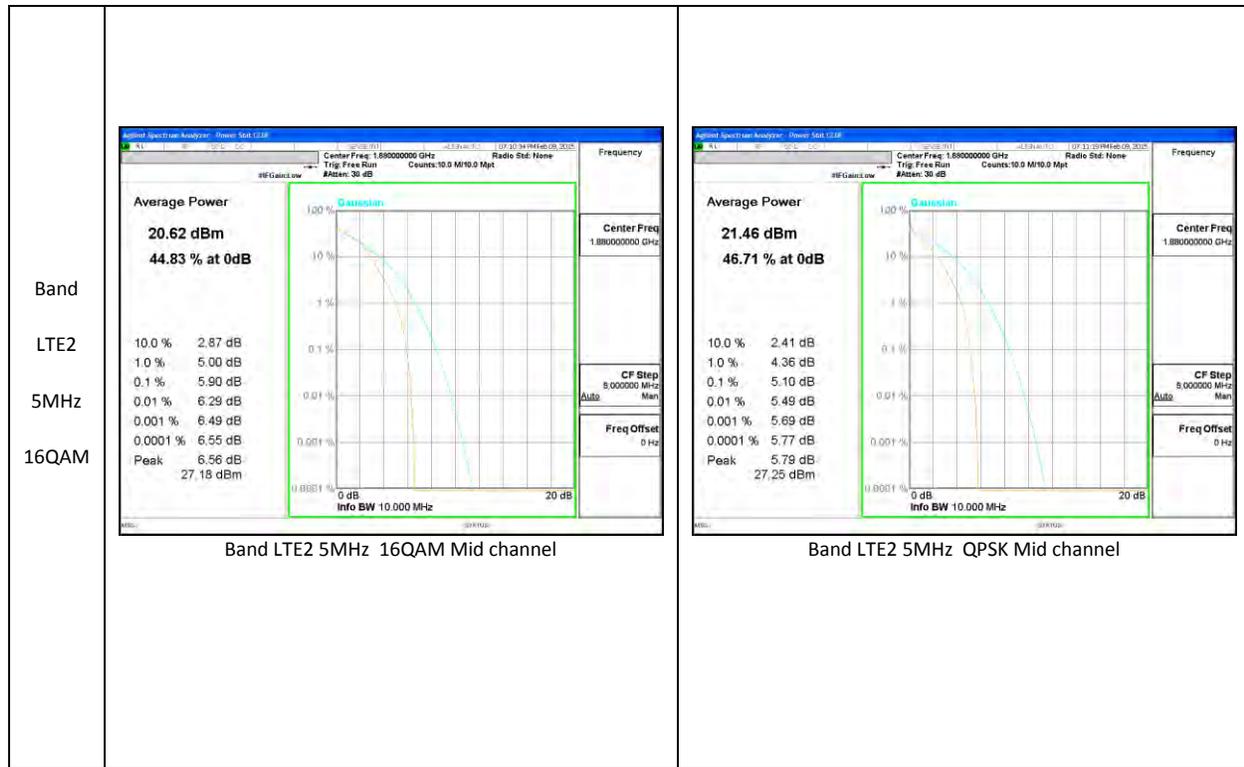

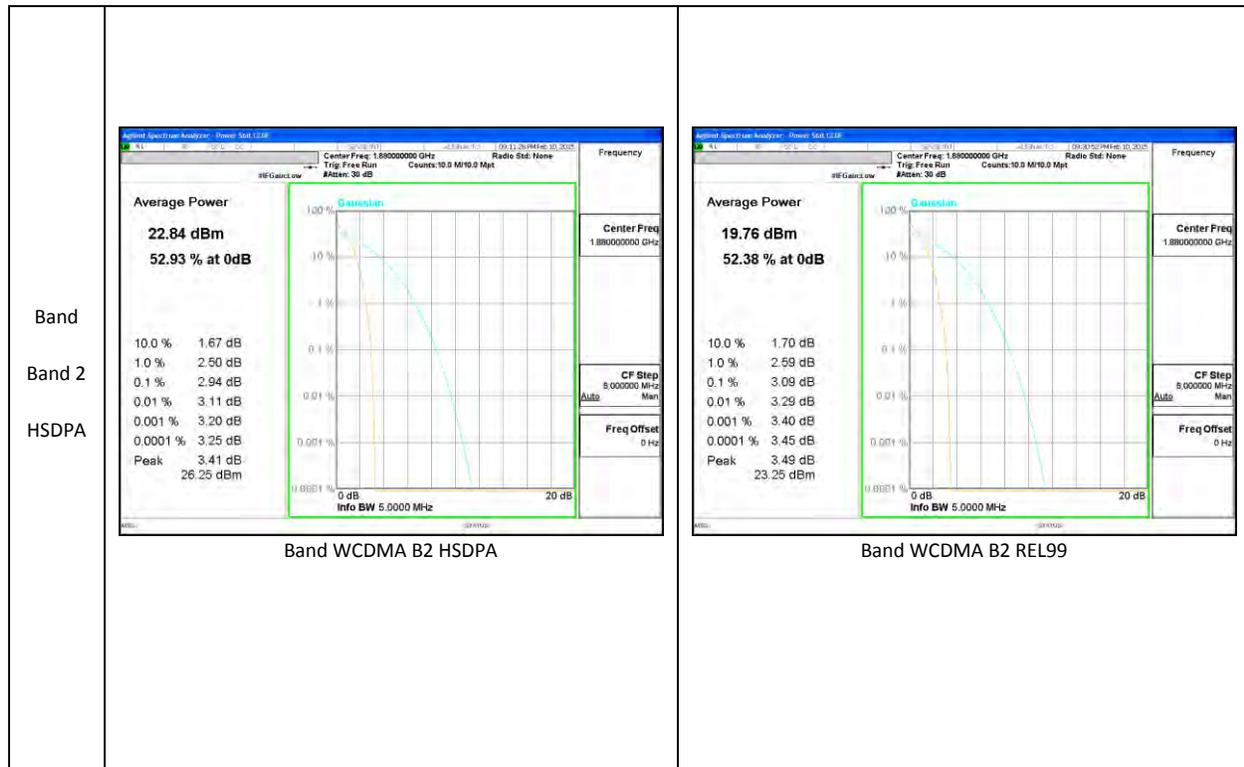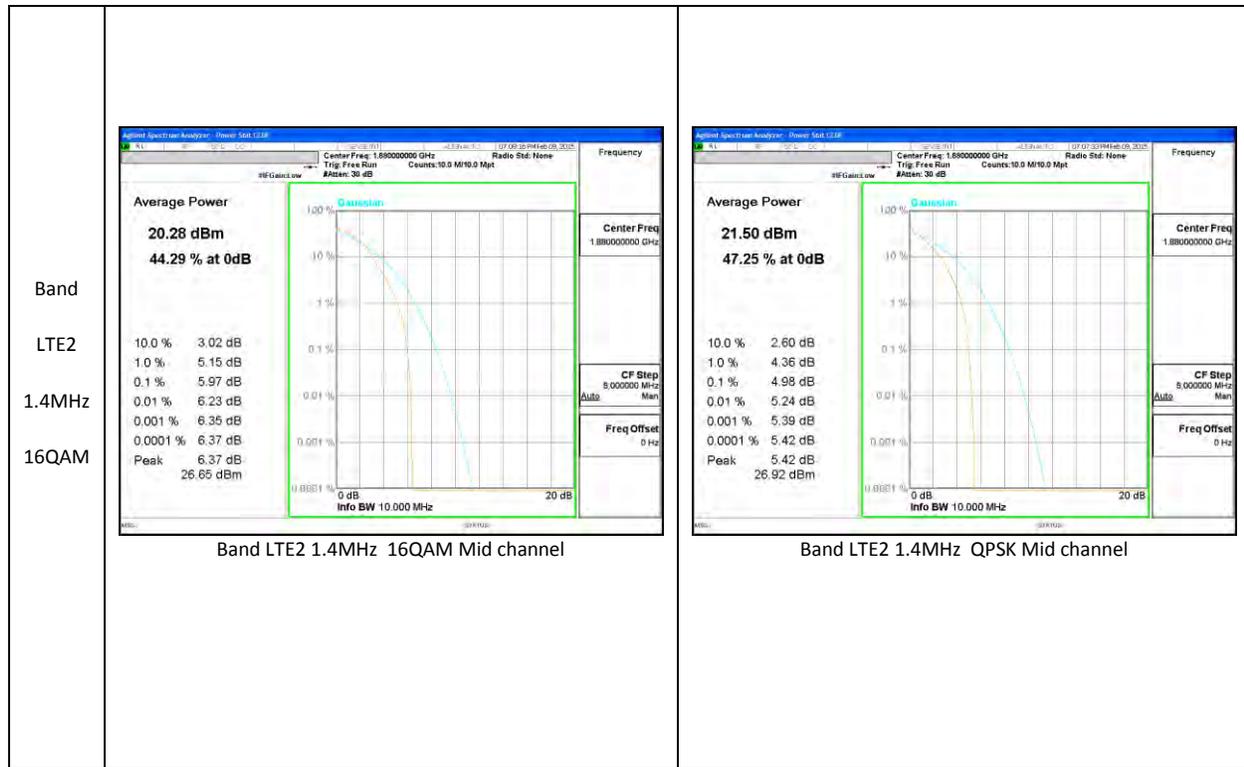

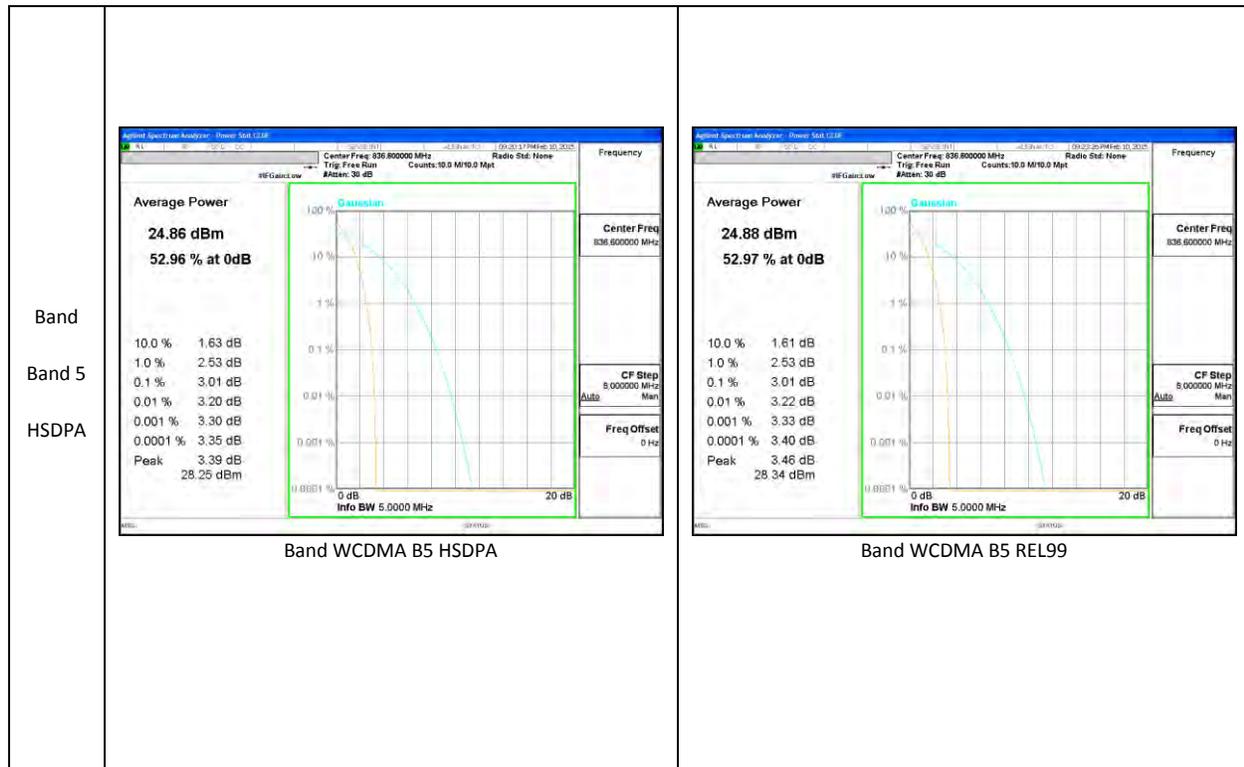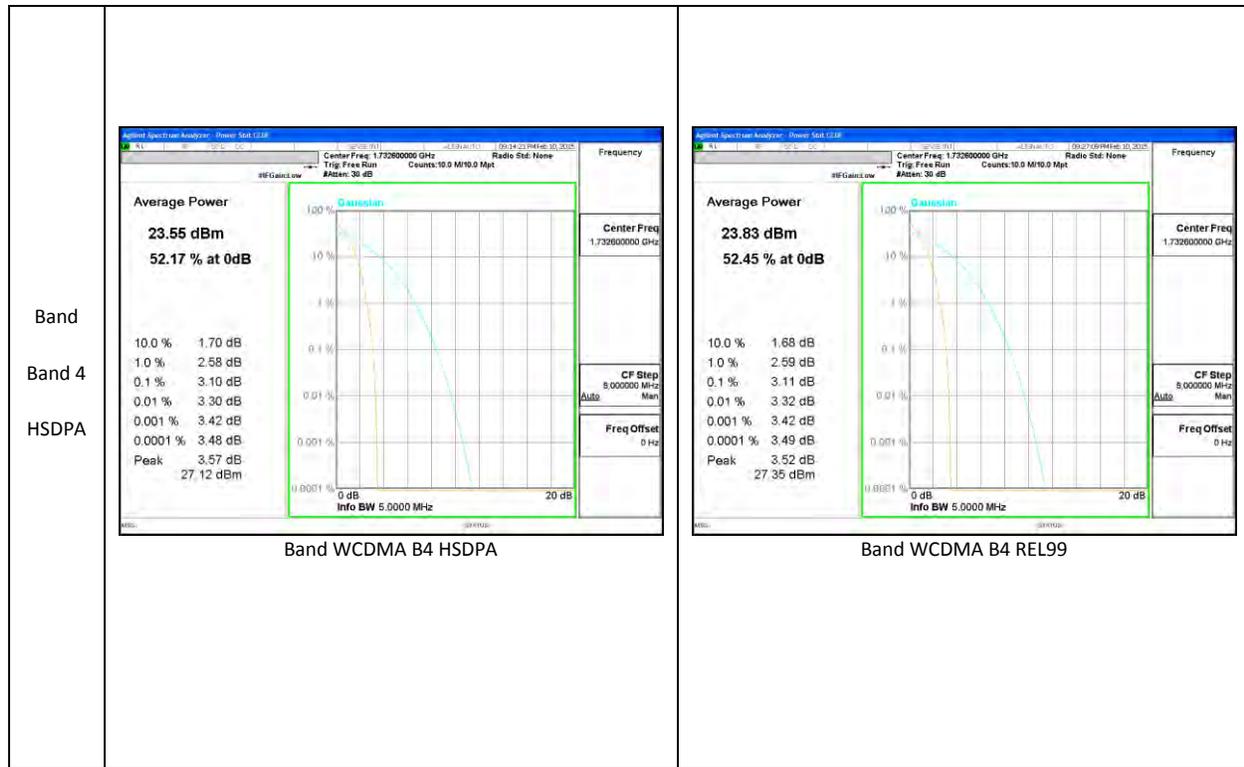

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

MODES TESTED

GSM, WCDMA, and LTE

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB BW (kHz)
GSM850	GPRS	128	824.2	243.1	317.3
		190	836.6	244.9	317.4
		251	848.8	245.3	313.4
	EGPRS	128	824.2	249	316.5
		190	836.6	244.6	304.5
		251	848.8	242.8	304.2
GSM1900	GPRS	512	1850.2	242.4	318.6
		661	1880	244.4	323.6
		810	1909.8	245.9	307.2
	EGPRS	512	1850.2	250.9	319.1
		661	1880	251.9	325.4
		810	1909.8	250.8	324

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.154	4.680
		4183	836.6	4.154	4.650
		4233	846.6	4.153	4.655
	HSDPA	4132	826.4	4.165	4.650
		4183	836.6	4.153	4.649
		4233	846.6	4.179	4.660
Band 4	REL99	1312	1712.4	4.194	4.64
		1413	1732.6	4.184	4.64
		1513	1752.6	4.175	4.638
	HSDPA	1312	1712.4	4.185	4.629
		1413	1732.6	4.189	4.629
		1513	1752.6	4.178	4.629
Band 2	REL99	9262	1852.4	4.167	4.652
		9400	1880	4.176	4.647
		9538	1907.6	4.154	4.639
	HSDPA	9262	1852.4	4.186	4.637
		9400	1880	4.181	4.637
		9538	1907.6	4.171	4.630

10.1.2. LTE OCCUPIED BANDWIDTH RESULTS

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE12	10	QPSK	50/0	704	8.974	9.723
			50/0	707.5	8.992	9.841
			50/0	711	8.979	9.968
		16QAM	50/0	704	8.963	9.869
			50/0	707.5	8.968	9.807
			50/0	711	8.936	9.820
	5	QPSK	25/0	701.5	4.504	4.982
			25/0	707.5	4.507	4.974
			25/0	713.5	4.502	4.990
		16QAM	25/0	701.5	4.517	4.981
			25/0	707.5	4.508	5.014
			25/0	713.5	4.516	5.063
	3	QPSK	15/0	700.5	2.691	2.989
			15/0	707.5	2.682	2.984
			15/0	714.5	2.699	2.979
		16QAM	15/0	700.5	2.693	2.977
			15/0	707.5	2.692	2.969
			15/0	714.5	2.691	2.979
	1.4	QPSK	6/0	699.7	1.086	1.308
			6/0	707.5	1.086	1.269
			6/0	715.3	1.086	1.285
		16QAM	6/0	699.7	1.088	1.270
			6/0	707.5	1.086	1.296
			6/0	715.3	1.087	1.296

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	20	QPSK	100/0	1720	17.92	19.12
			100/0	1732.5	17.88	19.35
			100/0	1745	17.81	19.14
		16QAM	100/0	1720	17.88	19.29
			100/0	1732.5	17.9	19.26
			100/0	1745	17.87	19.02
	15	QPSK	75/0	1717.5	13.44	14.52
			75/0	1732.5	13.45	14.5
			75/0	1747.5	13.41	14.6
		16QAM	75/0	1717.5	13.42	14.6
			75/0	1732.5	13.44	14.55
			75/0	1747.5	13.41	14.57
	10	QPSK	50/0	1715	8.957	9.632
			50/0	1732.5	8.982	9.779
			50/0	1750	8.977	9.717
		16QAM	50/0	1715	8.98	9.754
			50/0	1732.5	8.957	9.874
			50/0	1750	8.963	9.718
	5	QPSK	25/0	1712.5	4.515	4.938
			25/0	1732.5	4.512	4.986
			25/0	1752.5	4.503	4.97
		16QAM	25/0	1712.5	4.515	5.004
			25/0	1732.5	4.513	4.998
			25/0	1752.5	4.514	4.99





Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE4	3	QPSK	15/0	1711.5	2.691	2.969
			15/0	1732.5	2.696	2.97
			15/0	1753.5	2.685	2.967
		16QAM	15/0	1711.5	2.689	2.955
			15/0	1732.5	2.689	2.983
			15/0	1753.5	2.693	2.966
	1.4	QPSK	6/0	1710.7	1.086	1.287
			6/0	1732.5	1.081	1.269
			6/0	1754.3	1.084	1.293
		16QAM	6/0	1710.7	1.091	1.293
			6/0	1732.5	1.084	1.271
			6/0	1754.3	1.093	1.300

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE2	20	QPSK	100/0	1860	17.800	19.050
			100/0	1880	17.840	19.280
			100/0	1900	17.900	19.300
		16QAM	100/0	1860	17.800	19.240
			100/0	1880	17.880	19.130
			100/0	1900	17.880	19.320
	15	QPSK	75/0	1857.5	13.390	14.510
			75/0	1880	13.410	14.520
			75/0	1902.5	13.400	14.510
		16QAM	75/0	1857.5	13.390	14.450
			75/0	1880	13.410	14.690
			75/0	1902.5	13.370	14.520
	10	QPSK	50/0	1855	8.945	9.826
			50/0	1880	8.958	9.811
			50/0	1905	8.927	9.748
		16QAM	50/0	1855	8.966	9.740
			50/0	1880	8.951	9.764
			50/0	1905	8.951	9.734
	5	QPSK	25/0	1852.5	4.500	4.960
			25/0	1880	4.500	4.982
			25/0	1907.5	4.498	4.930
		16QAM	25/0	1852.5	4.509	4.916
			25/0	1880	4.506	4.960
			25/0	1907.5	4.500	4.899

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE2	3	QPSK	15/0	1851.5	2.694	2.976
			15/0	1880	2.687	2.942
			15/0	1908.5	2.689	2.978
		16QAM	15/0	1851.5	2.699	2.967
			15/0	1880	2.680	2.963
			15/0	1908.5	2.696	2.960
	1.4	QPSK	6/0	1850.7	1.087	1.264
			6/0	1880	1.081	1.275
			6/0	1909.3	1.084	1.275
		16QAM	6/0	1850.7	1.084	1.261
			6/0	1880	1.087	1.285
			6/0	1909.3	1.092	1.292

10.1.3. OCCUPIED BANDWIDTH PLOTS

<p>Band LTE12 10MHz 16QAM</p>	<p>Agilent 22:07:31 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 700.000000 MHz</p> <p>Stop Freq 715.000000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9683 MHz</p> <p>Transmit Freq Error 4.854 kHz</p> <p>x dB Bandwidth 9.807 MHz</p> <p>Occ BW % Pwr 99.00 % -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 22:07:09 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 700.000000 MHz</p> <p>Stop Freq 715.000000 MHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9924 MHz</p> <p>Transmit Freq Error 3.302 kHz</p> <p>x dB Bandwidth 9.841 MHz</p> <p>Occ BW % Pwr 99.00 % -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 10MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE12 5MHz 16QAM</p>	<p>Agilent 22:04:10 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 703.750000 MHz</p> <p>Stop Freq 711.250000 MHz</p> <p>CF Step 750.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.5085 MHz</p> <p>Transmit Freq Error -3.343 kHz</p> <p>x dB Bandwidth 5.014 MHz</p> <p>Occ BW % Pwr 99.00 % -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 22:03:48 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 703.750000 MHz</p> <p>Stop Freq 711.250000 MHz</p> <p>CF Step 750.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.5074 MHz</p> <p>Transmit Freq Error 3.455 kHz</p> <p>x dB Bandwidth 4.974 MHz</p> <p>Occ BW % Pwr 99.00 % -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 5MHz OBW QPSK Mid Channel FRB.gif</p>
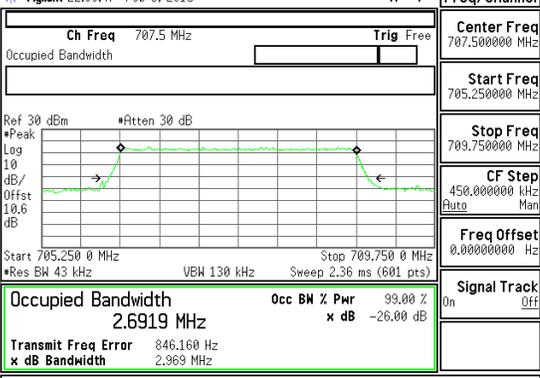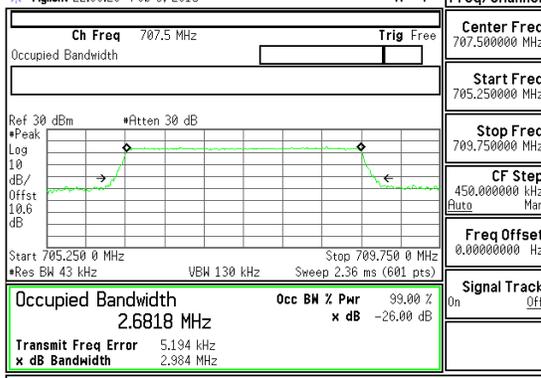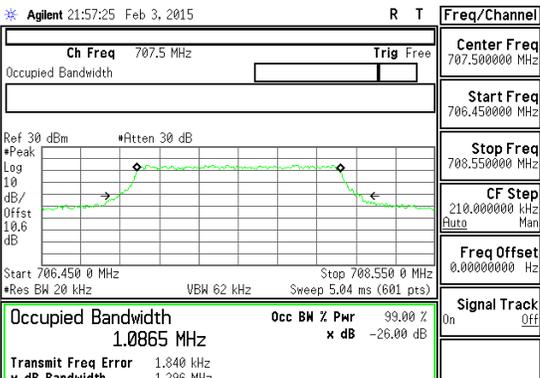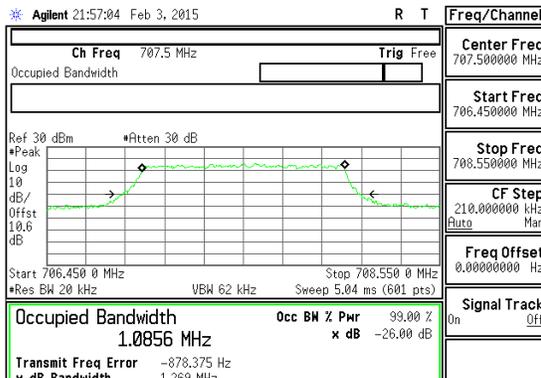
<p>Band LTE12 3MHz 16QAM</p>	 <p>Agilent 22:00:47 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 705.250000 MHz</p> <p>Stop Freq 709.750000 MHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6919 MHz</p> <p>Transmit Freq Error 846.160 Hz</p> <p>x dB Bandwidth 2.969 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 3MHz OBW 16QAM Mid Channel FRB.gif</p>	 <p>Agilent 22:00:26 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 705.250000 MHz</p> <p>Stop Freq 709.750000 MHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6818 MHz</p> <p>Transmit Freq Error 5.194 kHz</p> <p>x dB Bandwidth 2.984 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 3MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE12 1.4MHz 16QAM</p>	 <p>Agilent 21:57:25 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 706.450000 MHz</p> <p>Stop Freq 708.550000 MHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0865 MHz</p> <p>Transmit Freq Error 1.840 kHz</p> <p>x dB Bandwidth 1.296 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	 <p>Agilent 21:57:04 Feb 3, 2015</p> <p>Ch Freq 707.5 MHz Trig Free</p> <p>Center Freq 707.500000 MHz</p> <p>Start Freq 706.450000 MHz</p> <p>Stop Freq 708.550000 MHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0856 MHz</p> <p>Transmit Freq Error -878.375 Hz</p> <p>x dB Bandwidth 1.269 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE12 1.4MHz OBW QPSK Mid Channel FRB.gif</p>





<p>Band LTE4 20MHz 16QAM</p>	<p>Agilent 20:57:14 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 17.9028 MHz</p> <p>Transmit Freq Error 20.403 kHz</p> <p>x dB Bandwidth 19.257 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 20MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:56:52 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 17.8854 MHz</p> <p>Transmit Freq Error 7.700 kHz</p> <p>x dB Bandwidth 19.353 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 20MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 20MHz 16QAM</p>	<p>Agilent 20:57:14 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 17.9028 MHz</p> <p>Transmit Freq Error 20.403 kHz</p> <p>x dB Bandwidth 19.257 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 20MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:56:52 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.71750000 GHz</p> <p>Stop Freq 1.74750000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 17.8854 MHz</p> <p>Transmit Freq Error 7.700 kHz</p> <p>x dB Bandwidth 19.353 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 20MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE4 15MHz 16QAM</p>	<p>Agilent 20:53:59 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72125000 GHz</p> <p>Stop Freq 1.74375000 GHz</p> <p>CF Step 2.25000000 MHz Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 13.4356 MHz</p> <p>Transmit Freq Error 11.692 kHz</p> <p>x dB Bandwidth 14.548 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 15MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:53:37 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72125000 GHz</p> <p>Stop Freq 1.74375000 GHz</p> <p>CF Step 2.25000000 MHz Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 13.4490 MHz</p> <p>Transmit Freq Error 10.467 kHz</p> <p>x dB Bandwidth 14.503 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 15MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 15MHz 16QAM</p>	<p>Agilent 20:53:59 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72125000 GHz</p> <p>Stop Freq 1.74375000 GHz</p> <p>CF Step 2.25000000 MHz Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 13.4356 MHz</p> <p>Transmit Freq Error 11.692 kHz</p> <p>x dB Bandwidth 14.548 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 15MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:53:37 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72125000 GHz</p> <p>Stop Freq 1.74375000 GHz</p> <p>CF Step 2.25000000 MHz Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 13.4490 MHz</p> <p>Transmit Freq Error 10.467 kHz</p> <p>x dB Bandwidth 14.503 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 15MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE4 10MHz 16QAM</p>	<p>Agilent 20:50:43 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72500000 GHz</p> <p>Stop Freq 1.74000000 GHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9568 MHz</p> <p>Transmit Freq Error 61.992 Hz</p> <p>x dB Bandwidth 3.674 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:50:22 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72500000 GHz</p> <p>Stop Freq 1.74000000 GHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9811 MHz</p> <p>Transmit Freq Error 8.830 kHz</p> <p>x dB Bandwidth 3.779 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 10MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 10MHz 16QAM</p>	<p>Agilent 20:50:43 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72500000 GHz</p> <p>Stop Freq 1.74000000 GHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9568 MHz</p> <p>Transmit Freq Error 61.992 Hz</p> <p>x dB Bandwidth 3.674 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:50:22 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72500000 GHz</p> <p>Stop Freq 1.74000000 GHz</p> <p>CF Step 1.50000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 8.9811 MHz</p> <p>Transmit Freq Error 8.830 kHz</p> <p>x dB Bandwidth 3.779 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 10MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE4 5MHz 16QAM</p>	<p>Agilent 20:47:19 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72875000 GHz</p> <p>Stop Freq 1.73625000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Occupied Bandwidth 4.5133 MHz</p> <p>Transmit Freq Error -3.966 kHz</p> <p>x dB Bandwidth 4.398 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:46:57 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72875000 GHz</p> <p>Stop Freq 1.73625000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Occupied Bandwidth 4.5121 MHz</p> <p>Transmit Freq Error 316.121 Hz</p> <p>x dB Bandwidth 4.398 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 5MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 5MHz 16QAM</p>	<p>Agilent 20:47:19 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72875000 GHz</p> <p>Stop Freq 1.73625000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Occupied Bandwidth 4.5133 MHz</p> <p>Transmit Freq Error -3.966 kHz</p> <p>x dB Bandwidth 4.398 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:46:57 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.72875000 GHz</p> <p>Stop Freq 1.73625000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Occupied Bandwidth 4.5121 MHz</p> <p>Transmit Freq Error 316.121 Hz</p> <p>x dB Bandwidth 4.398 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 5MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE4 3MHz 16QAM</p>	<p>Agilent 20:42:58 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.73025000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Stop Freq 1.73475000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Start 1.730 250 0 GHz Stop 1.734 750 0 GHz</p> <p>*Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts)</p> <p>Occupied Bandwidth 2.6887 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.025 kHz x dB Bandwidth 2.983 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 3MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:42:36 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.73025000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Stop Freq 1.73475000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Start 1.730 250 0 GHz Stop 1.734 750 0 GHz</p> <p>*Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts)</p> <p>Occupied Bandwidth 2.6957 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.434 kHz x dB Bandwidth 2.970 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 3MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 3MHz 16QAM</p>	<p>Agilent 20:42:58 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.73025000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Stop Freq 1.73475000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Start 1.730 250 0 GHz Stop 1.734 750 0 GHz</p> <p>*Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts)</p> <p>Occupied Bandwidth 2.6887 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.025 kHz x dB Bandwidth 2.983 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 3MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 20:42:36 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7325 GHz Trig Free Center Freq 1.73250000 GHz</p> <p>Occupied Bandwidth Start Freq 1.73025000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Stop Freq 1.73475000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Start 1.730 250 0 GHz Stop 1.734 750 0 GHz</p> <p>*Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts)</p> <p>Occupied Bandwidth 2.6957 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.434 kHz x dB Bandwidth 2.970 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 3MHz OBW QPSK Mid Channel FRB.gif</p>
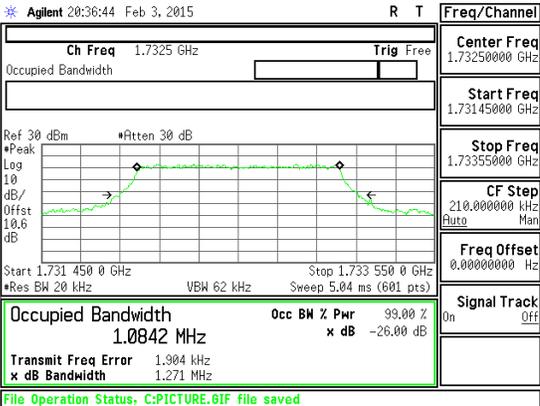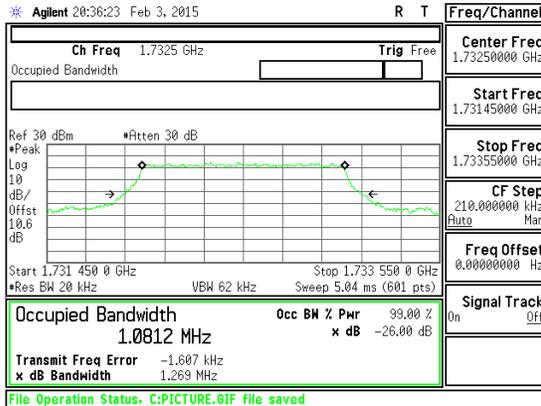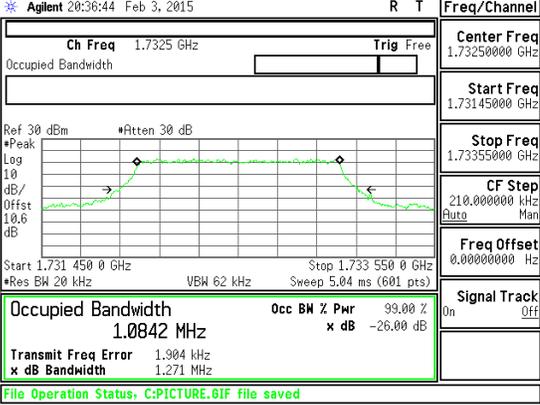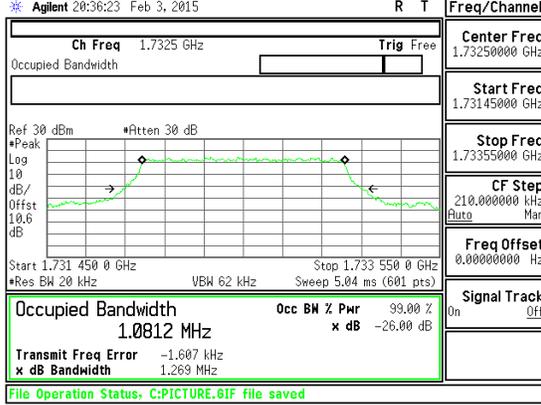
<p>Band LTE4 1.4MHz 16QAM</p>	 <p>Agilent 20:36:44 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.73145000 GHz</p> <p>Stop Freq 1.73355000 GHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0842 MHz</p> <p>Transmit Freq Error 1.904 kHz</p> <p>x dB Bandwidth 1.271 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	 <p>Agilent 20:36:23 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.73145000 GHz</p> <p>Stop Freq 1.73355000 GHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0812 MHz</p> <p>Transmit Freq Error -1.607 kHz</p> <p>x dB Bandwidth 1.269 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 1.4MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE4 1.4MHz 16QAM</p>	 <p>Agilent 20:36:44 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.73145000 GHz</p> <p>Stop Freq 1.73355000 GHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0842 MHz</p> <p>Transmit Freq Error 1.904 kHz</p> <p>x dB Bandwidth 1.271 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	 <p>Agilent 20:36:23 Feb 3, 2015</p> <p>Ch Freq 1.7325 GHz Trig Free</p> <p>Center Freq 1.73250000 GHz</p> <p>Start Freq 1.73145000 GHz</p> <p>Stop Freq 1.73355000 GHz</p> <p>CF Step 210.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 1.0812 MHz</p> <p>Transmit Freq Error -1.607 kHz</p> <p>x dB Bandwidth 1.269 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE4 1.4MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE2 20MHz 16QAM</p>	<p>Agilent 19:05:51 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.86500000 GHz</p> <p>Stop Freq 1.89500000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 17.8808 MHz</p> <p>Transmit Freq Error 667.027 Hz</p> <p>x dB Bandwidth 19.135 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 20MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 19:05:29 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.86500000 GHz</p> <p>Stop Freq 1.89500000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 17.8397 MHz</p> <p>Transmit Freq Error 32.257 kHz</p> <p>x dB Bandwidth 19.284 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 20MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 20MHz 16QAM</p>	<p>Agilent 19:05:51 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.86500000 GHz</p> <p>Stop Freq 1.89500000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 17.8808 MHz</p> <p>Transmit Freq Error 667.027 Hz</p> <p>x dB Bandwidth 19.135 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 20MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 19:05:29 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.86500000 GHz</p> <p>Stop Freq 1.89500000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 17.8397 MHz</p> <p>Transmit Freq Error 32.257 kHz</p> <p>x dB Bandwidth 19.284 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 20MHz OBW QPSK Mid Channel FRB.gif</p>


<p>Band LTE2 15MHz 16QAM</p>	<p>Agilent 19:02:26 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth Start Freq 1.868750000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Stop Freq 1.891250000 GHz</p> <p>CF Step 2.250000000 MHz Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Start 1.868 750 0 GHz Stop 1.891 250 0 GHz</p> <p>*Res BW 220 kHz VBW 680 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 13.4133 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 15.936 kHz</p> <p>x dB Bandwidth 14.694 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 15MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 19:02:05 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth Start Freq 1.868750000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Stop Freq 1.891250000 GHz</p> <p>CF Step 2.250000000 MHz Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Start 1.868 750 0 GHz Stop 1.891 250 0 GHz</p> <p>*Res BW 220 kHz VBW 680 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 13.4088 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 10.945 kHz</p> <p>x dB Bandwidth 14.520 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 15MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 15MHz 16QAM</p>	<p>Agilent 19:02:26 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth Start Freq 1.868750000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Stop Freq 1.891250000 GHz</p> <p>CF Step 2.250000000 MHz Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Start 1.868 750 0 GHz Stop 1.891 250 0 GHz</p> <p>*Res BW 220 kHz VBW 680 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 13.4133 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 15.936 kHz</p> <p>x dB Bandwidth 14.694 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 15MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 19:02:05 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth Start Freq 1.868750000 GHz</p> <p>Ref 30 dBm *Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Stop Freq 1.891250000 GHz</p> <p>CF Step 2.250000000 MHz Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Start 1.868 750 0 GHz Stop 1.891 250 0 GHz</p> <p>*Res BW 220 kHz VBW 680 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 13.4088 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 10.945 kHz</p> <p>x dB Bandwidth 14.520 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 15MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE2 10MHz 16QAM</p>	<p>Agilent 18:53:08 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87250000 GHz</p> <p>Stop Freq 1.88750000 GHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9503 MHz</p> <p>Transmit Freq Error 553.475 Hz</p> <p>x dB Bandwidth 3.764 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:58:47 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87250000 GHz</p> <p>Stop Freq 1.88750000 GHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9580 MHz</p> <p>Transmit Freq Error 4.232 kHz</p> <p>x dB Bandwidth 3.811 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 10MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 10MHz 16QAM</p>	<p>Agilent 18:53:08 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87250000 GHz</p> <p>Stop Freq 1.88750000 GHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9503 MHz</p> <p>Transmit Freq Error 553.475 Hz</p> <p>x dB Bandwidth 3.764 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 10MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:58:47 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87250000 GHz</p> <p>Stop Freq 1.88750000 GHz</p> <p>CF Step 1.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 8.9580 MHz</p> <p>Transmit Freq Error 4.232 kHz</p> <p>x dB Bandwidth 3.811 MHz</p> <p>Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 10MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE2 5MHz 16QAM</p>	<p>Agilent 18:54:28 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87625000 GHz</p> <p>Stop Freq 1.88375000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.5065 MHz</p> <p>Transmit Freq Error -4.755 kHz</p> <p>x dB Bandwidth 4.360 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:54:07 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87625000 GHz</p> <p>Stop Freq 1.88375000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.4999 MHz</p> <p>Transmit Freq Error -6.543 kHz</p> <p>x dB Bandwidth 4.362 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 5MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 5MHz 16QAM</p>	<p>Agilent 18:54:28 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87625000 GHz</p> <p>Stop Freq 1.88375000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.5065 MHz</p> <p>Transmit Freq Error -4.755 kHz</p> <p>x dB Bandwidth 4.360 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 5MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:54:07 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87625000 GHz</p> <p>Stop Freq 1.88375000 GHz</p> <p>CF Step 750.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 4.4999 MHz</p> <p>Transmit Freq Error -6.543 kHz</p> <p>x dB Bandwidth 4.362 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 5MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE2 3MHz 16QAM</p>	<p>Agilent 18:49:49 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.880000000 GHz</p> <p>Start Freq 1.8775000 GHz</p> <p>Stop Freq 1.8825000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6802 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.978 kHz x dB Bandwidth 2.963 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 3MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:49:28 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.880000000 GHz</p> <p>Start Freq 1.8775000 GHz</p> <p>Stop Freq 1.8825000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6867 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.721 kHz x dB Bandwidth 2.942 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 3MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 3MHz 16QAM</p>	<p>Agilent 18:49:49 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.880000000 GHz</p> <p>Start Freq 1.8775000 GHz</p> <p>Stop Freq 1.8825000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6802 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.978 kHz x dB Bandwidth 2.963 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 3MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:49:28 Feb 3, 2015 R T Freq/Channel</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.880000000 GHz</p> <p>Start Freq 1.8775000 GHz</p> <p>Stop Freq 1.8825000 GHz</p> <p>CF Step 450.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 2.6867 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.721 kHz x dB Bandwidth 2.942 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 3MHz OBW QPSK Mid Channel FRB.gif</p>

<p>Band LTE2 1.4MHz 16QAM</p>	<p>Agilent 18:45:13 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87895000 GHz</p> <p>Stop Freq 1.88105000 GHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 1.0870 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 597.569 Hz</p> <p>x dB Bandwidth 1.285 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:44:51 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87895000 GHz</p> <p>Stop Freq 1.88105000 GHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 1.0809 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -1.731 kHz</p> <p>x dB Bandwidth 1.275 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 1.4MHz OBW QPSK Mid Channel FRB.gif</p>
<p>Band LTE2 1.4MHz 16QAM</p>	<p>Agilent 18:45:13 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87895000 GHz</p> <p>Stop Freq 1.88105000 GHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 1.0870 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 597.569 Hz</p> <p>x dB Bandwidth 1.285 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 1.4MHz OBW 16QAM Mid Channel FRB.gif</p>	<p>Agilent 18:44:51 Feb 3, 2015</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87895000 GHz</p> <p>Stop Freq 1.88105000 GHz</p> <p>CF Step 210.000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Occupied Bandwidth 1.0809 MHz</p> <p>Occ BN % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -1.731 kHz</p> <p>x dB Bandwidth 1.275 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band LTE2 1.4MHz OBW QPSK Mid Channel FRB.gif</p>

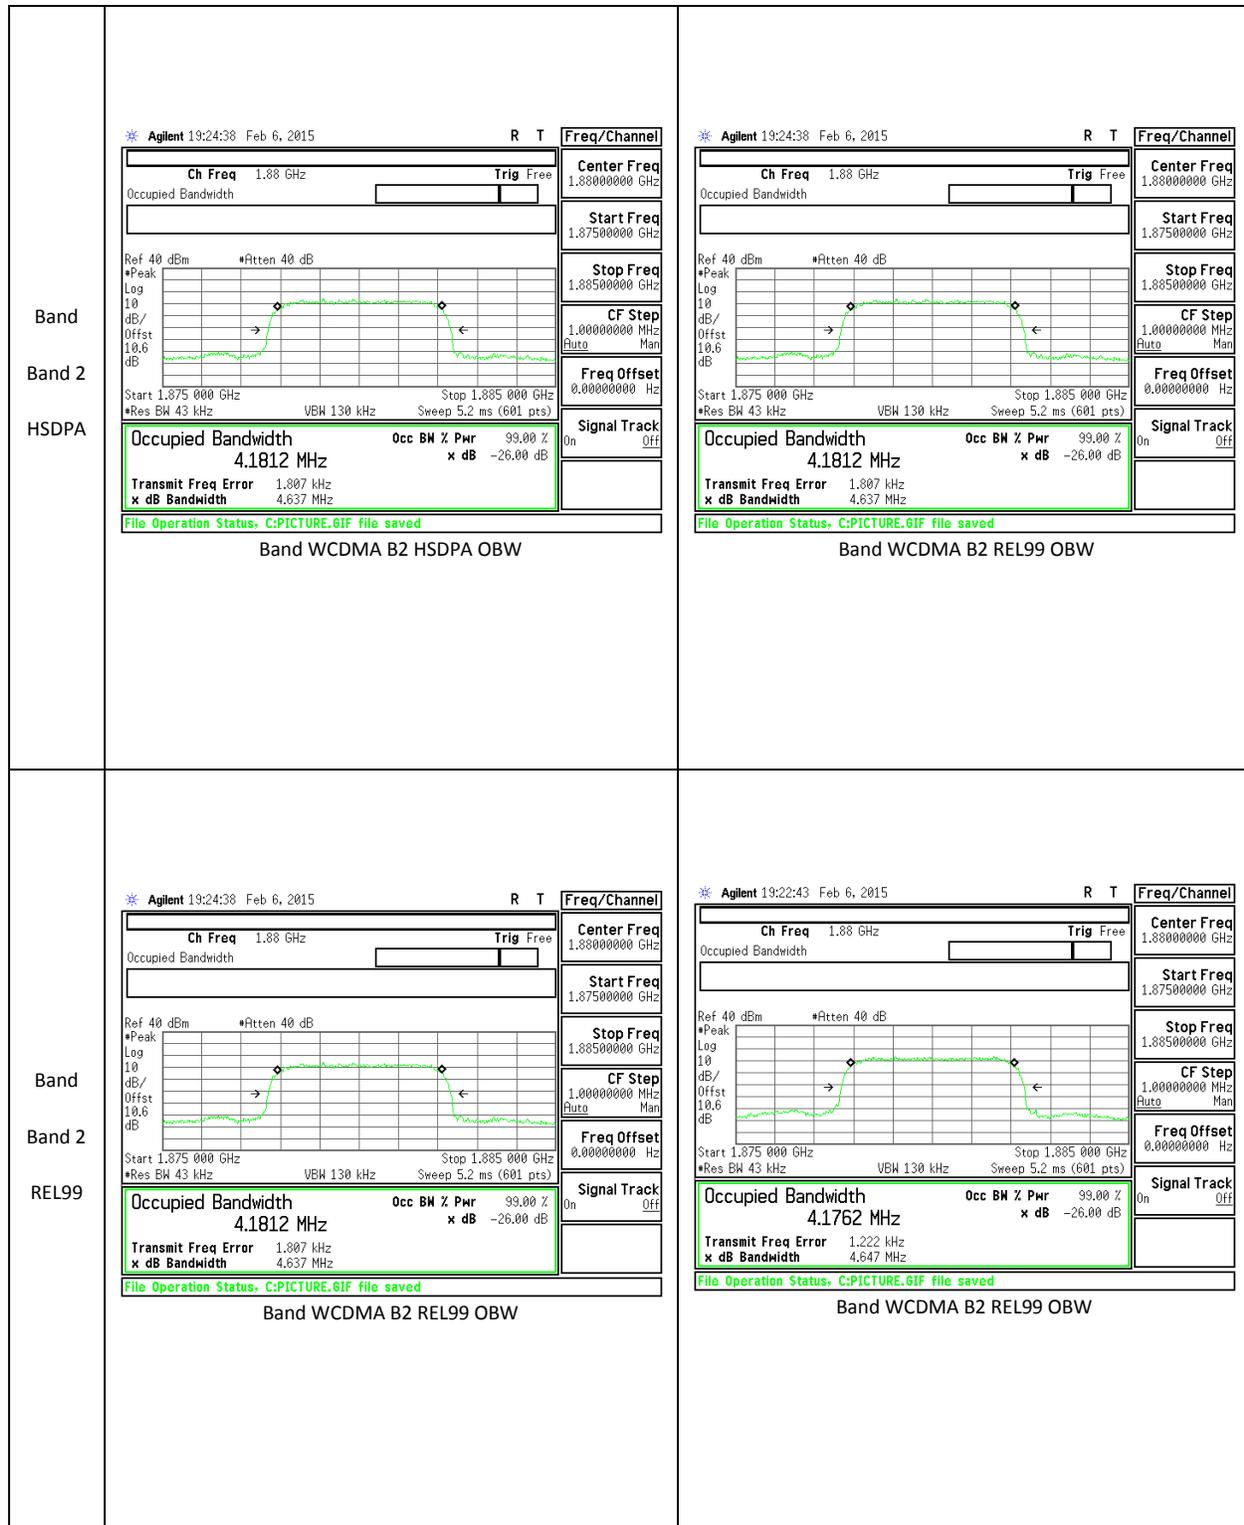

<p>Band Band 4 HSDPA</p>	<p>Agilent 19:52:13 Feb 6, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7326 GHz Trig Free Center Freq 1.73260000 GHz</p> <p>Occupied Bandwidth Start Freq 1.72760000 GHz</p> <p>Stop Freq 1.73760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Start 1.727 600 GHz Stop 1.737 600 GHz</p> <p>*Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts)</p> <p>Occupied Bandwidth 4.1893 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.813 kHz</p> <p>x dB Bandwidth 4.629 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B4 HSDPA OBW</p>	<p>Agilent 19:49:09 Feb 6, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7326 GHz Trig Free Center Freq 1.73260000 GHz</p> <p>Occupied Bandwidth Start Freq 1.72760000 GHz</p> <p>Stop Freq 1.73760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Start 1.727 600 GHz Stop 1.737 600 GHz</p> <p>*Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts)</p> <p>Occupied Bandwidth 4.1844 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 6.238 kHz</p> <p>x dB Bandwidth 4.640 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B4 REL99 OBW</p>
<p>Band Band 4 HSDPA</p>	<p>Agilent 19:52:13 Feb 6, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7326 GHz Trig Free Center Freq 1.73260000 GHz</p> <p>Occupied Bandwidth Start Freq 1.72760000 GHz</p> <p>Stop Freq 1.73760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Start 1.727 600 GHz Stop 1.737 600 GHz</p> <p>*Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts)</p> <p>Occupied Bandwidth 4.1893 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.813 kHz</p> <p>x dB Bandwidth 4.629 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B4 HSDPA OBW</p>	<p>Agilent 19:49:09 Feb 6, 2015 R T Freq/Channel</p> <p>Ch Freq 1.7326 GHz Trig Free Center Freq 1.73260000 GHz</p> <p>Occupied Bandwidth Start Freq 1.72760000 GHz</p> <p>Stop Freq 1.73760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offset 10.6 dB</p> <p>Start 1.727 600 GHz Stop 1.737 600 GHz</p> <p>*Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts)</p> <p>Occupied Bandwidth 4.1844 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 6.238 kHz</p> <p>x dB Bandwidth 4.640 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B4 REL99 OBW</p>

<p>Band Band 5 HSDPA</p>	<p>Agilent 22:24:01 Feb 6, 2015 R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1527 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.703 kHz x dB Bandwidth 4.649 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B5 HSDPA OBW</p>	<p>Agilent 22:22:06 Feb 6, 2015 R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1537 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 7.277 kHz x dB Bandwidth 4.650 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B5 REL99 OBW</p>
<p>Band Band 5 HSDPA</p>	<p>Agilent 22:24:01 Feb 6, 2015 R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1527 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.703 kHz x dB Bandwidth 4.649 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B5 HSDPA OBW</p>	<p>Agilent 22:22:06 Feb 6, 2015 R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1537 MHz Occ BN % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 7.277 kHz x dB Bandwidth 4.650 MHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band WCDMA B5 REL99 OBW</p>

<p>Band GSM1900 EGPRS</p>	<p>Band GSM1900 EGPRS OBW Mid channel</p>	<p>Band GSM1900 GPRS OBW Mid channel</p>
<p>Band GSM1900 EGPRS</p>	<p>Band GSM1900 EGPRS OBW Mid channel</p>	<p>Band GSM1900 GPRS OBW Mid channel</p>

<p>Band GSM850 EGPRS</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Center 836.600 0 MHz Span 1 MHz</p> <p>*Res BW 10 kHz VBN 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>244.5624 kHz x dB -26.00 dB</p> <p>Transmit Freq Error -2.093 kHz</p> <p>x dB Bandwidth 304.546 kHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band GSM850 EGPRS OBW Mid channel</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Center 836.600 0 MHz Span 1 MHz</p> <p>*Res BW 10 kHz VBN 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>244.8900 kHz x dB -26.00 dB</p> <p>Transmit Freq Error -624.839 Hz</p> <p>x dB Bandwidth 317.363 kHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band GSM850 GPRS OBW Mid channel</p>
<p>Band GSM850 EGPRS</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Center 836.600 0 MHz Span 1 MHz</p> <p>*Res BW 10 kHz VBN 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>244.5624 kHz x dB -26.00 dB</p> <p>Transmit Freq Error -2.093 kHz</p> <p>x dB Bandwidth 304.546 kHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band GSM850 EGPRS OBW Mid channel</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm *Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 10.6 dB</p> <p>Center 836.600 0 MHz Span 1 MHz</p> <p>*Res BW 10 kHz VBN 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>244.8900 kHz x dB -26.00 dB</p> <p>Transmit Freq Error -624.839 Hz</p> <p>x dB Bandwidth 317.363 kHz</p> <p>File Operation Status, C:PICTURE.GIF file saved</p> <p>Band GSM850 GPRS OBW Mid channel</p>

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238, and §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than $43+10\log(P)$ dB at the channel edge and $(55+10\log(P))$ dB at 5.5MHz from the channel edges.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


MODES TESTED


GSM, WCDMA, and LTE


RESULTS


10.2.1. BAND EDGE PLOTS

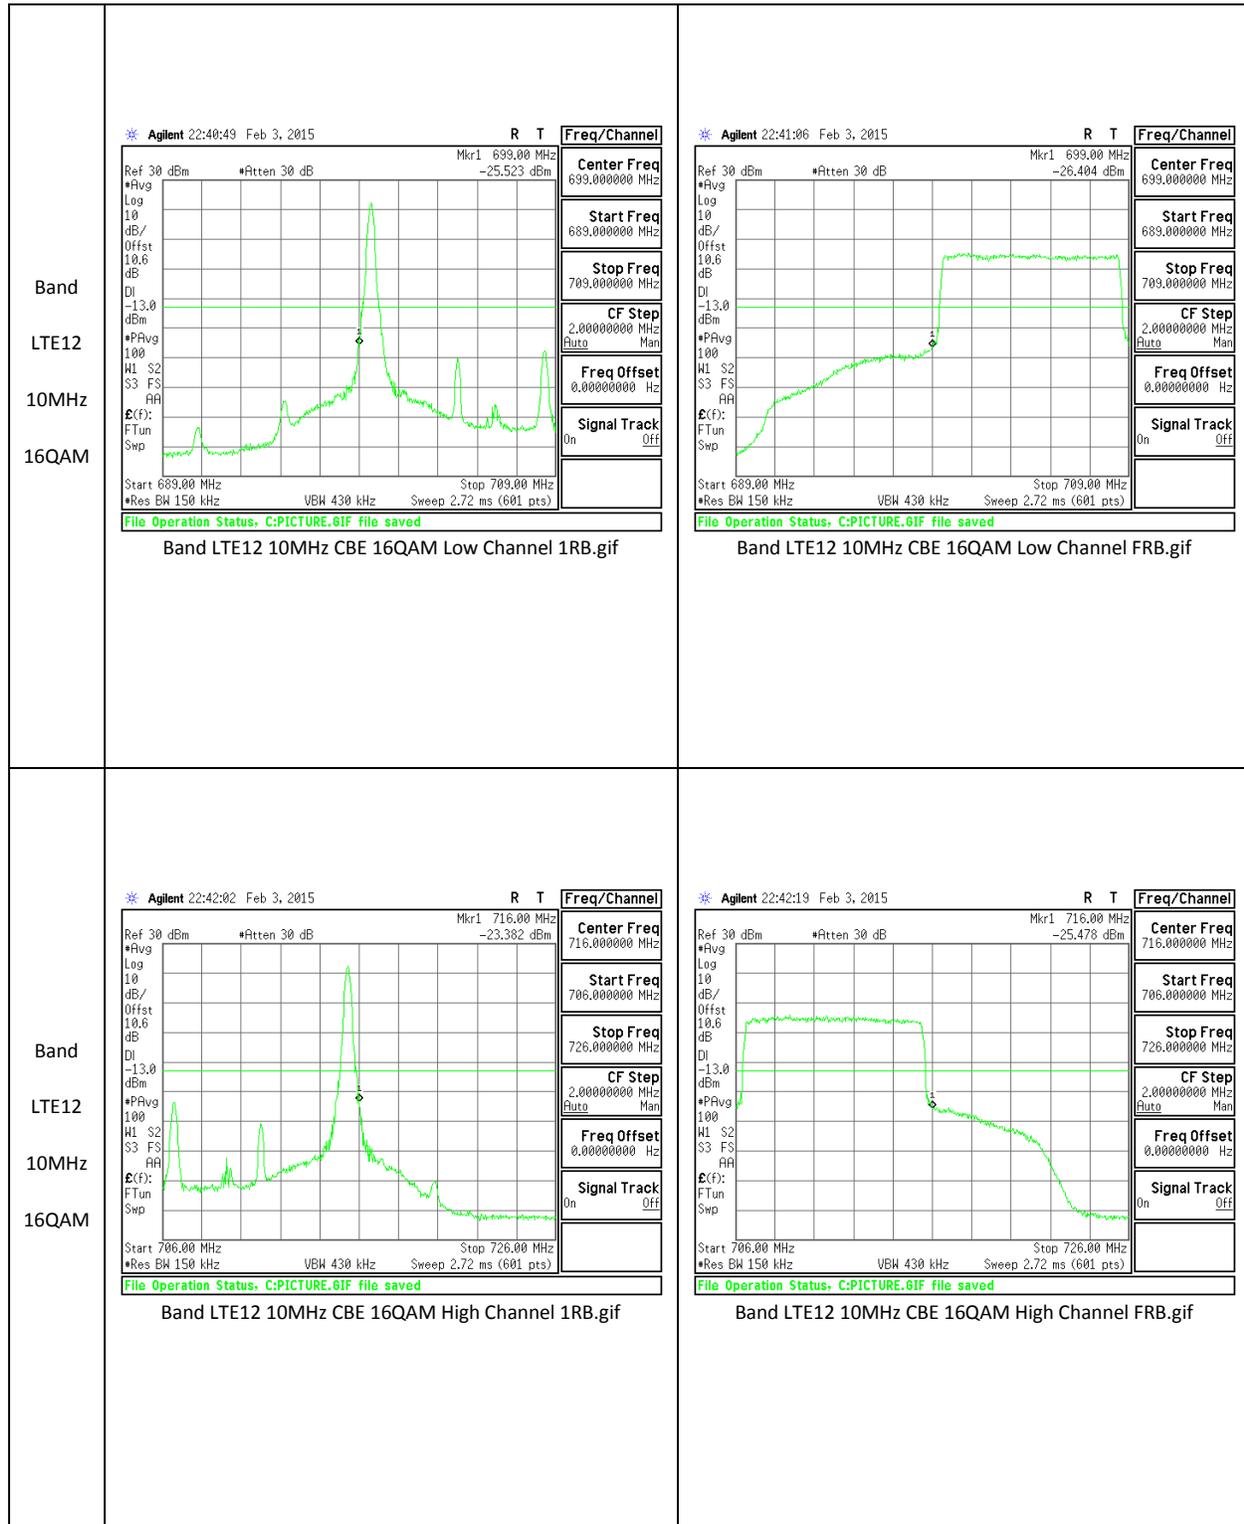


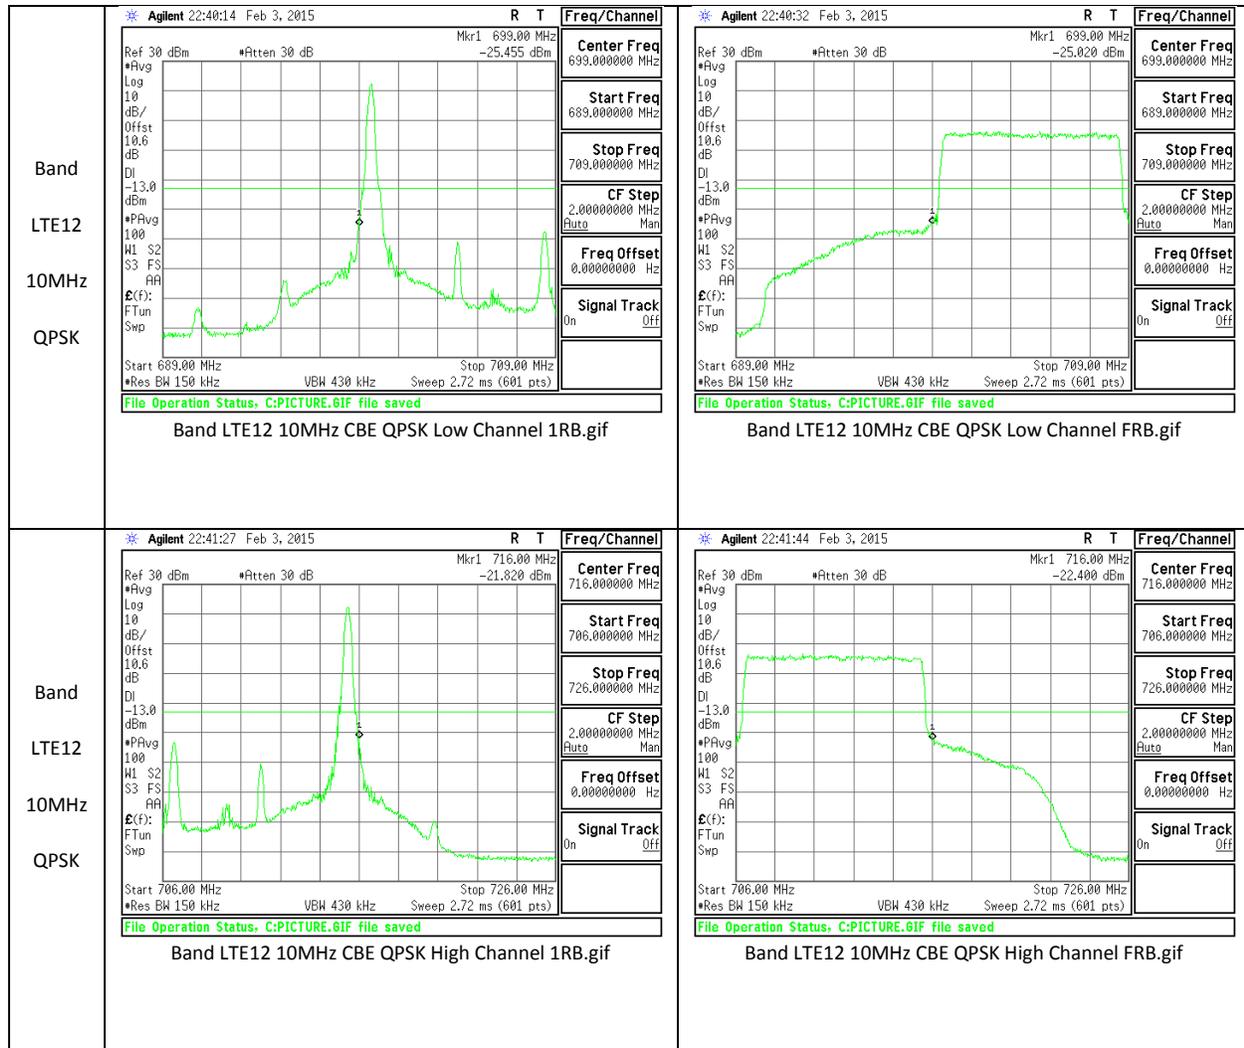


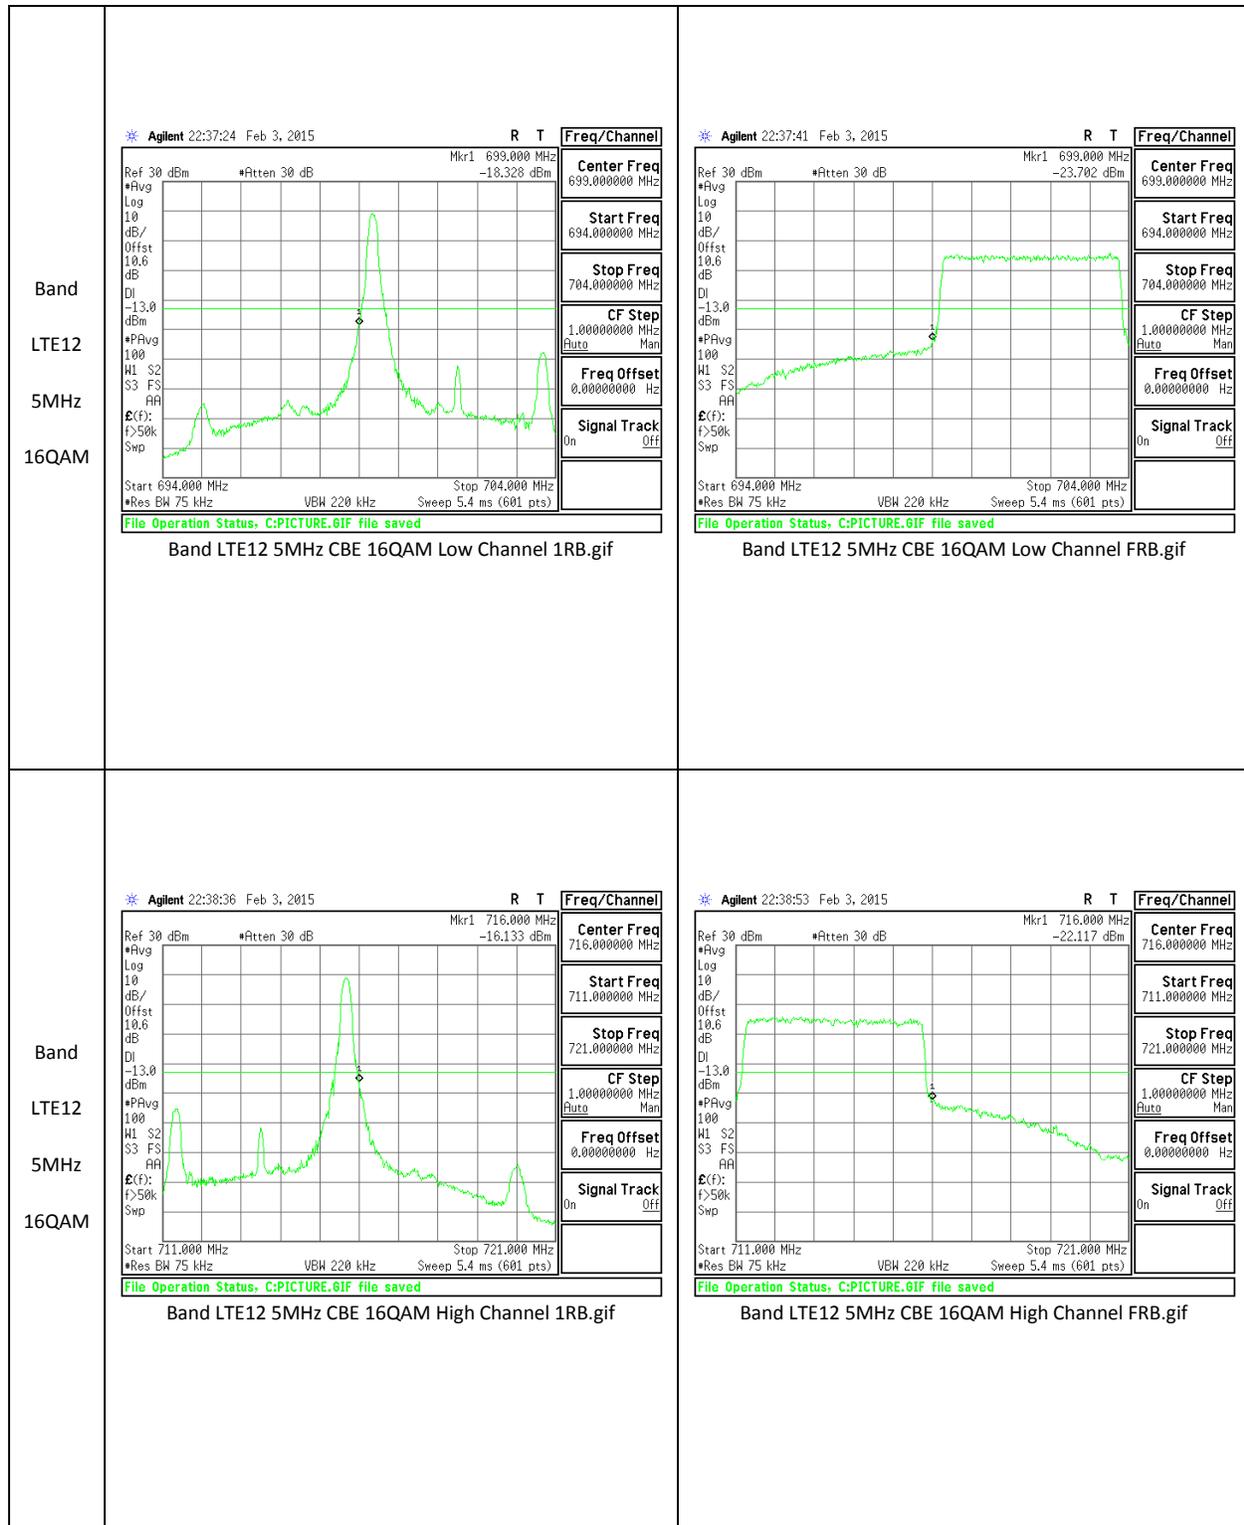


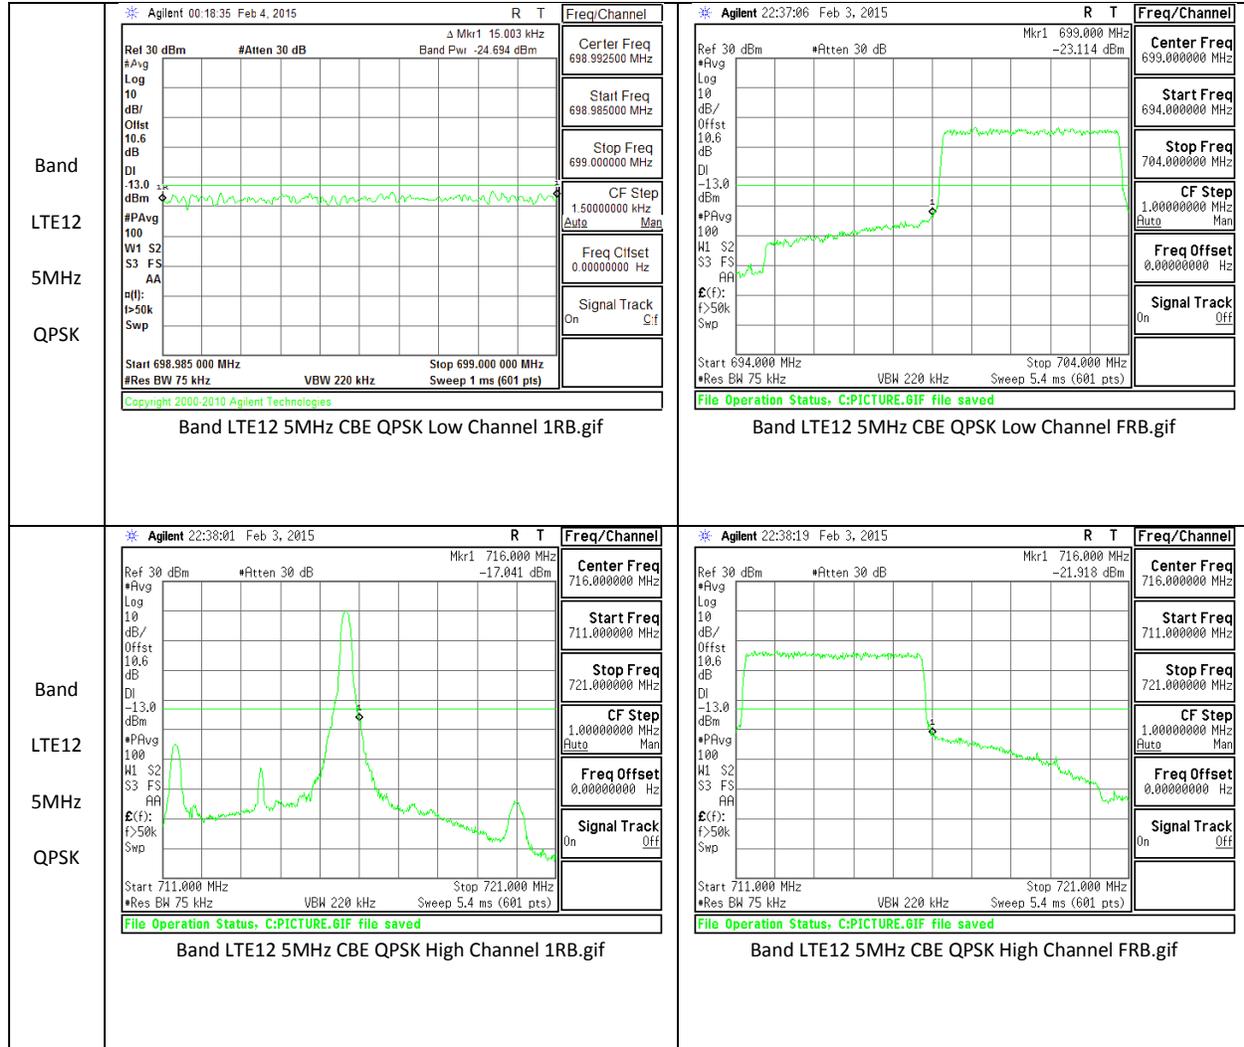


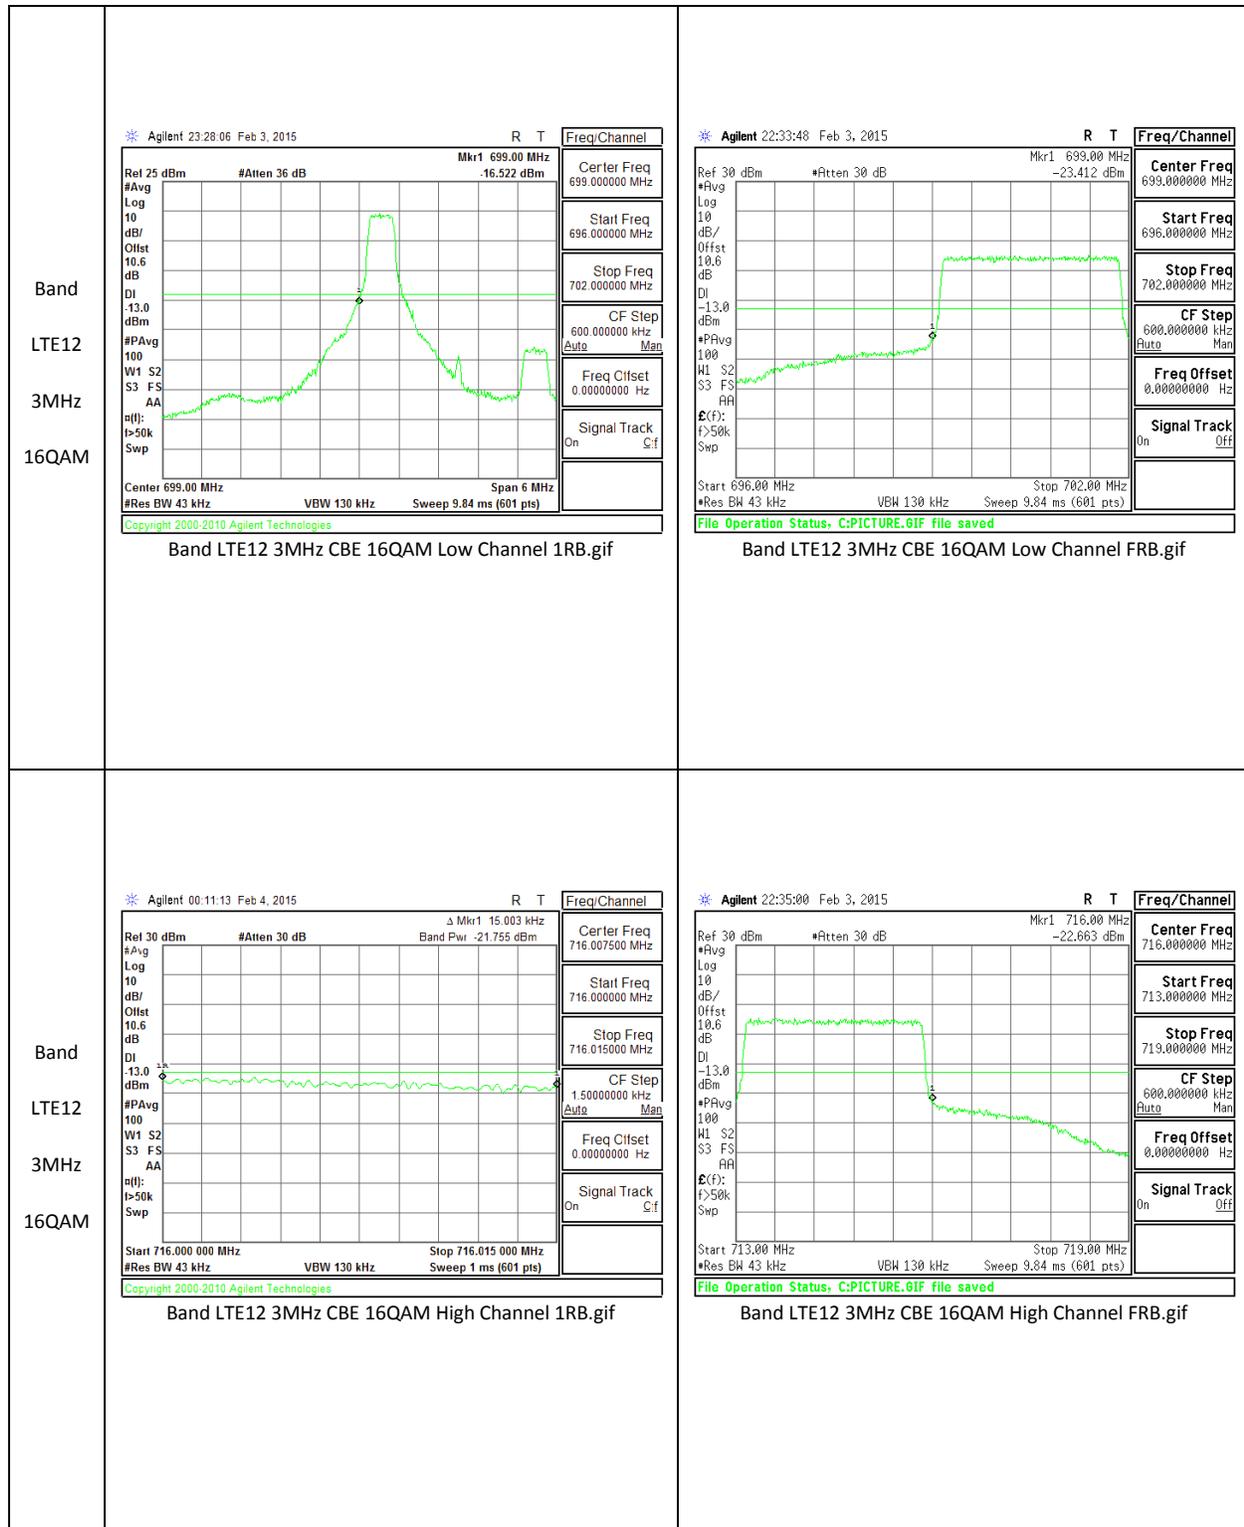


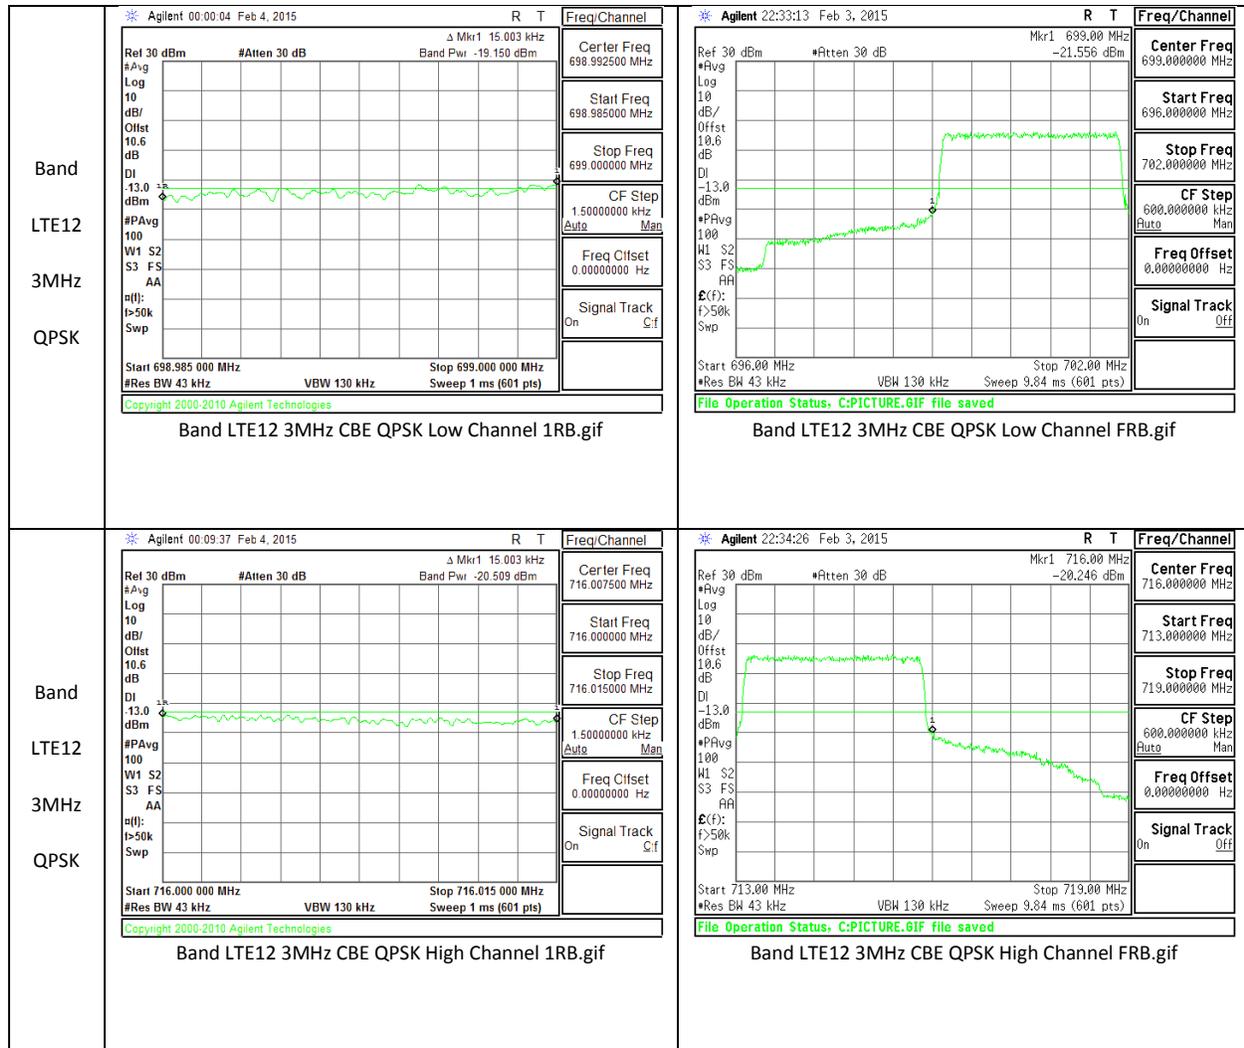


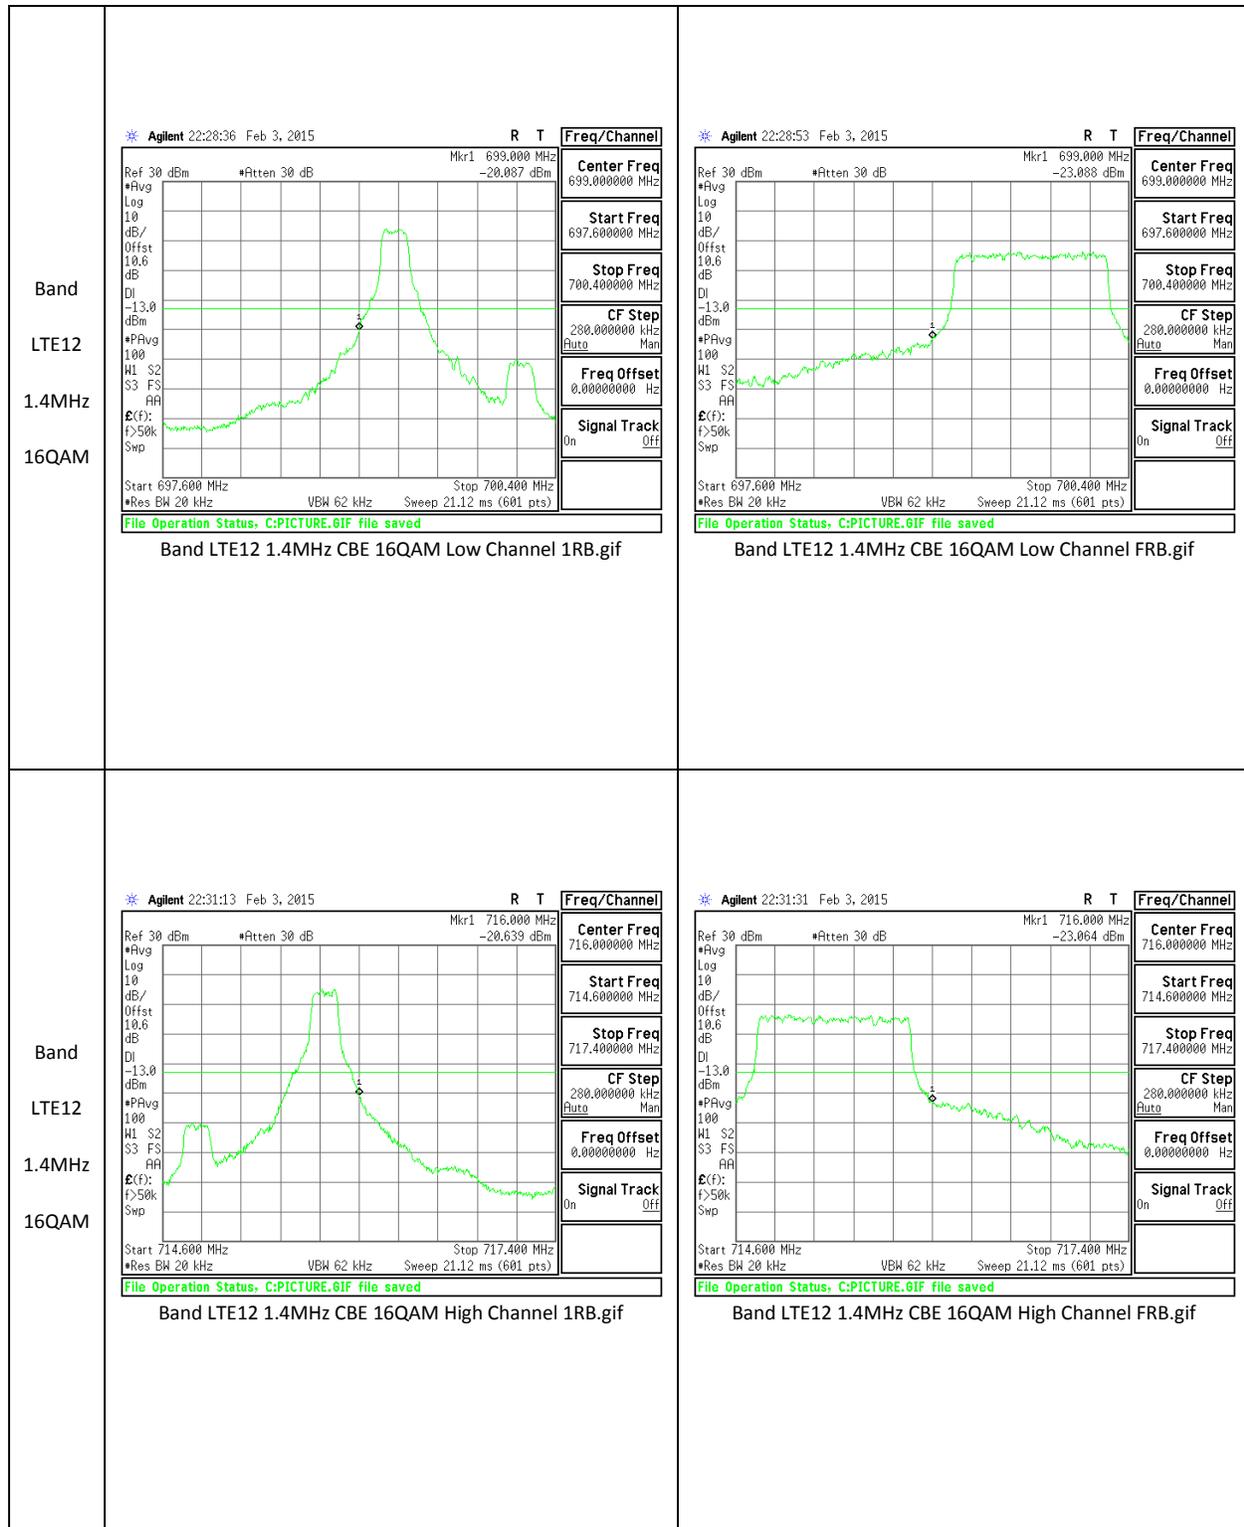


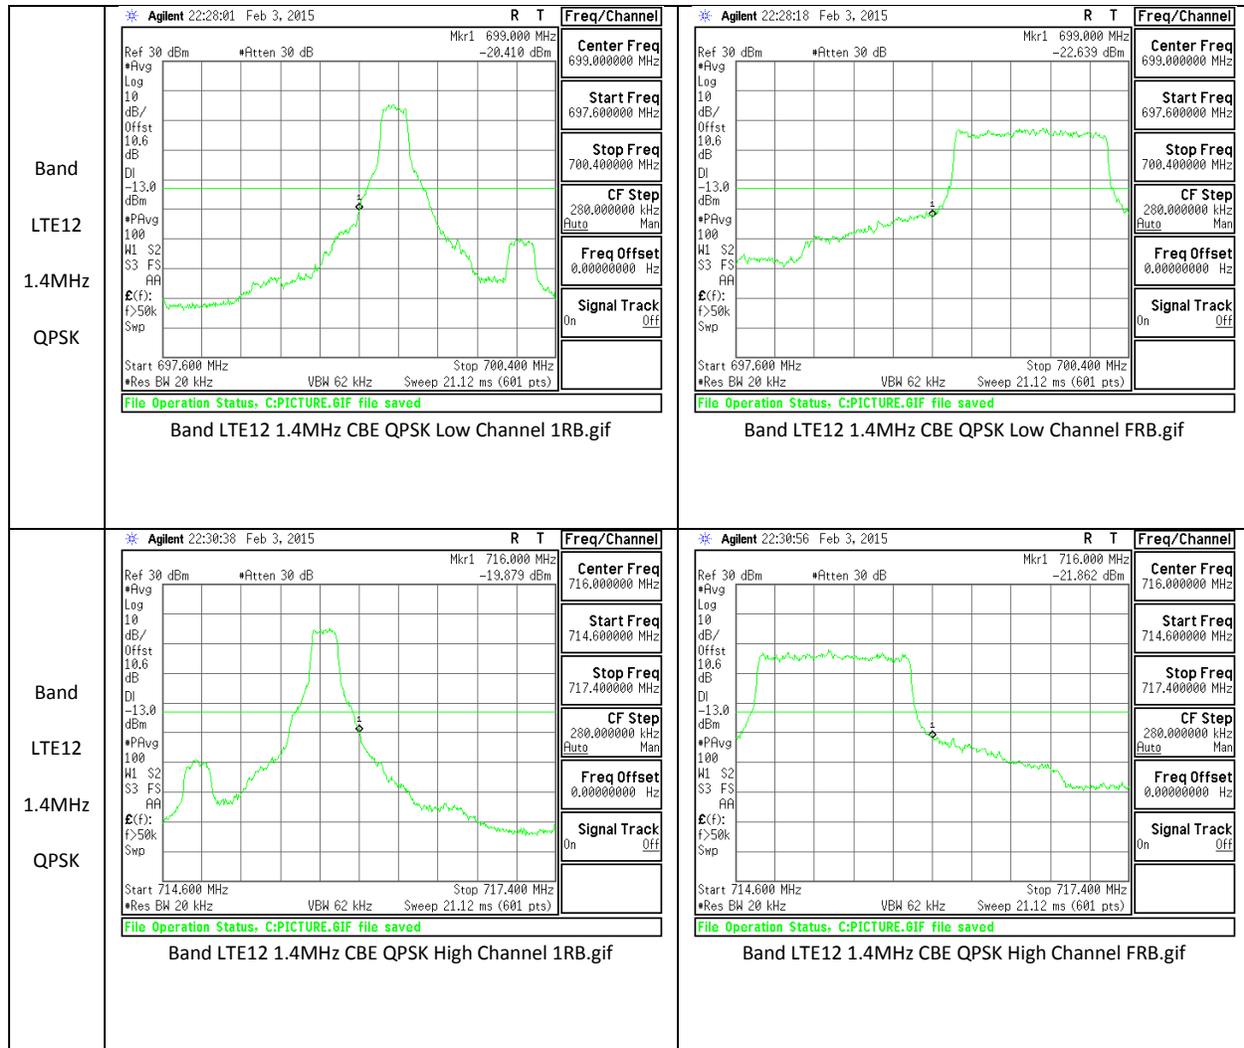


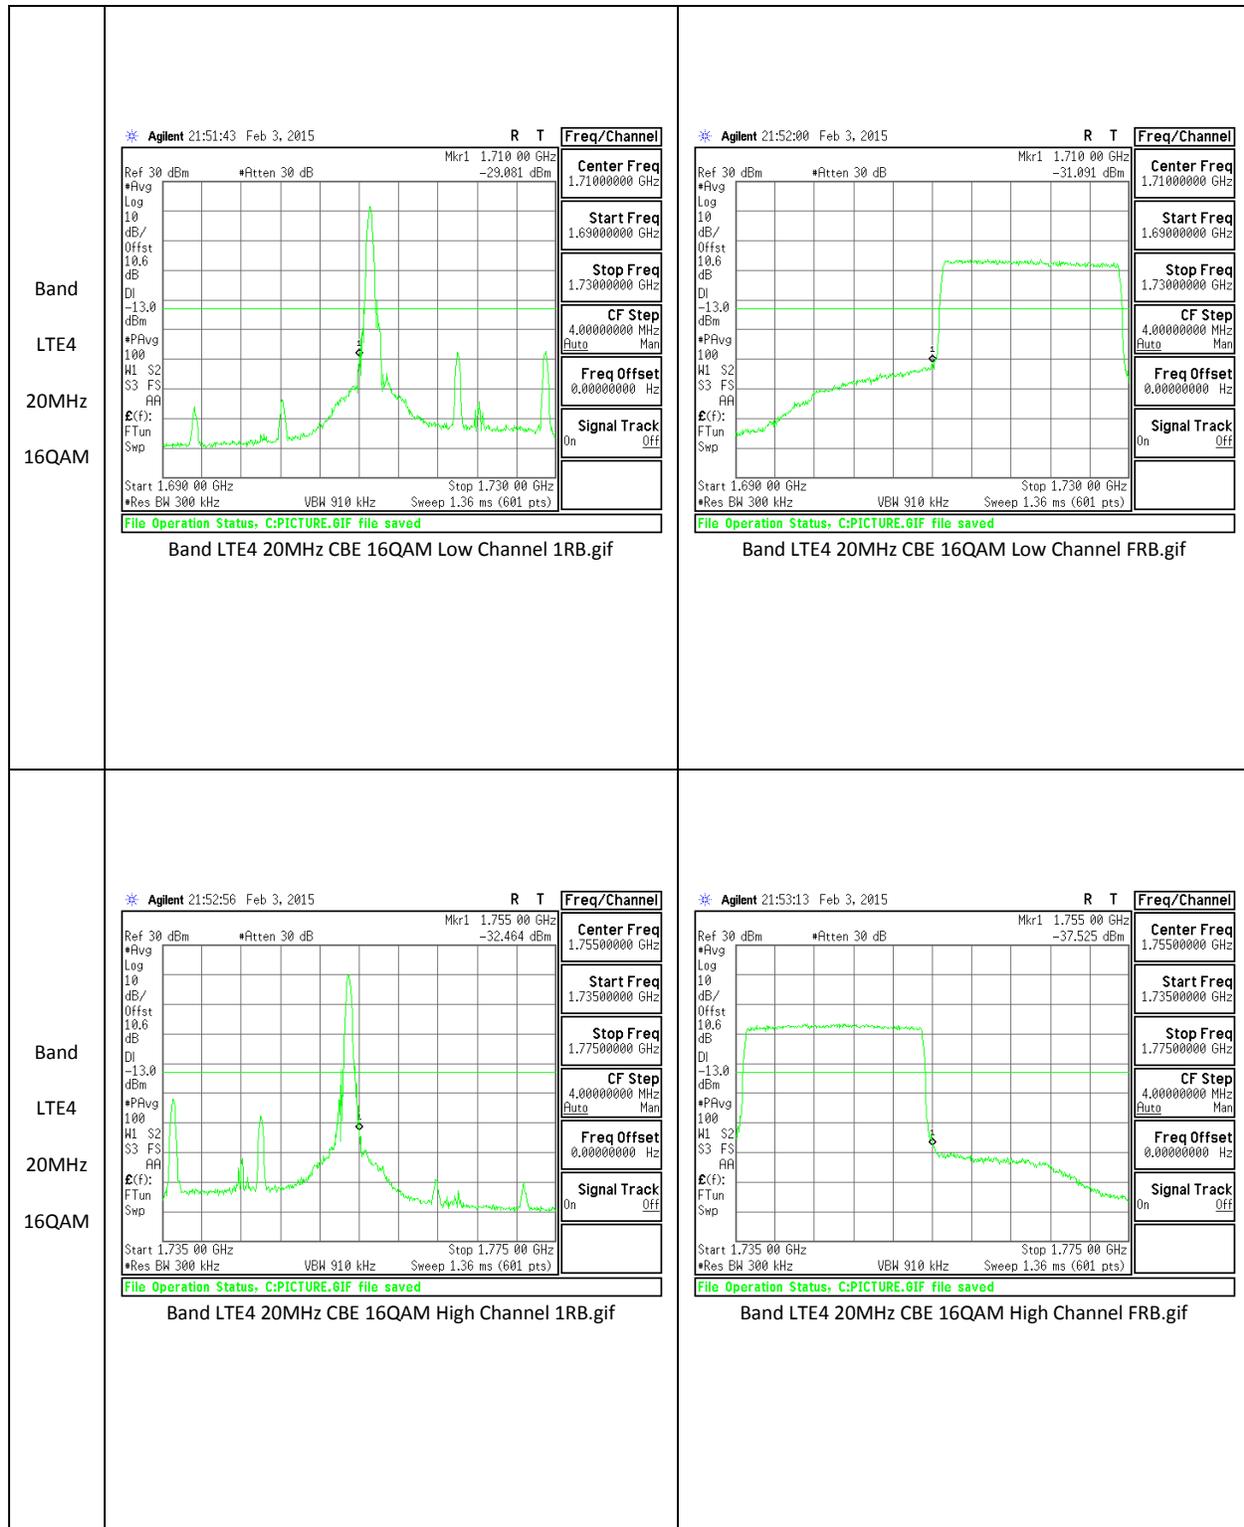


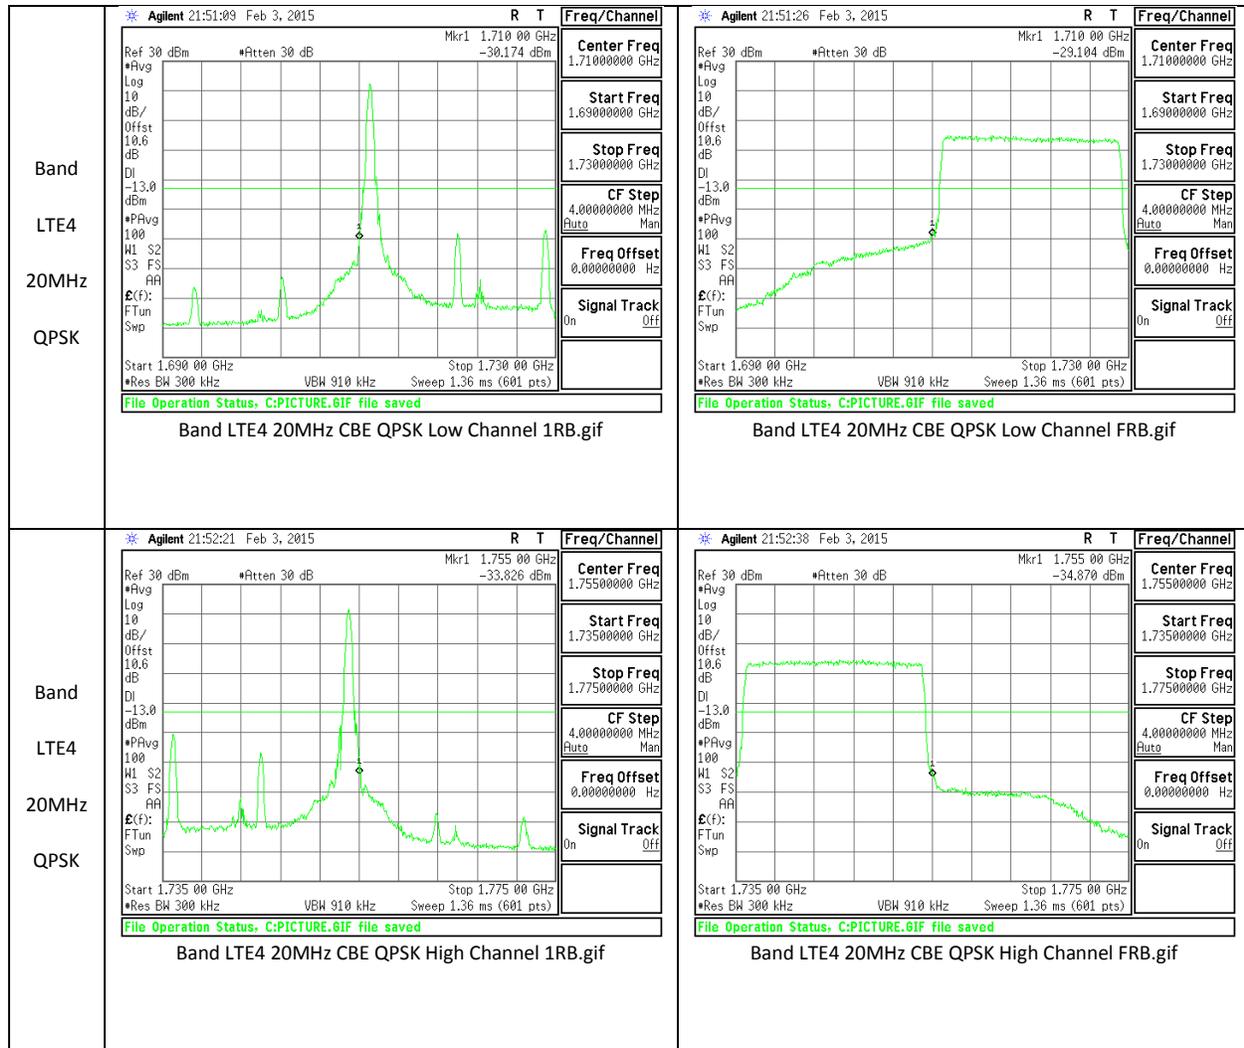


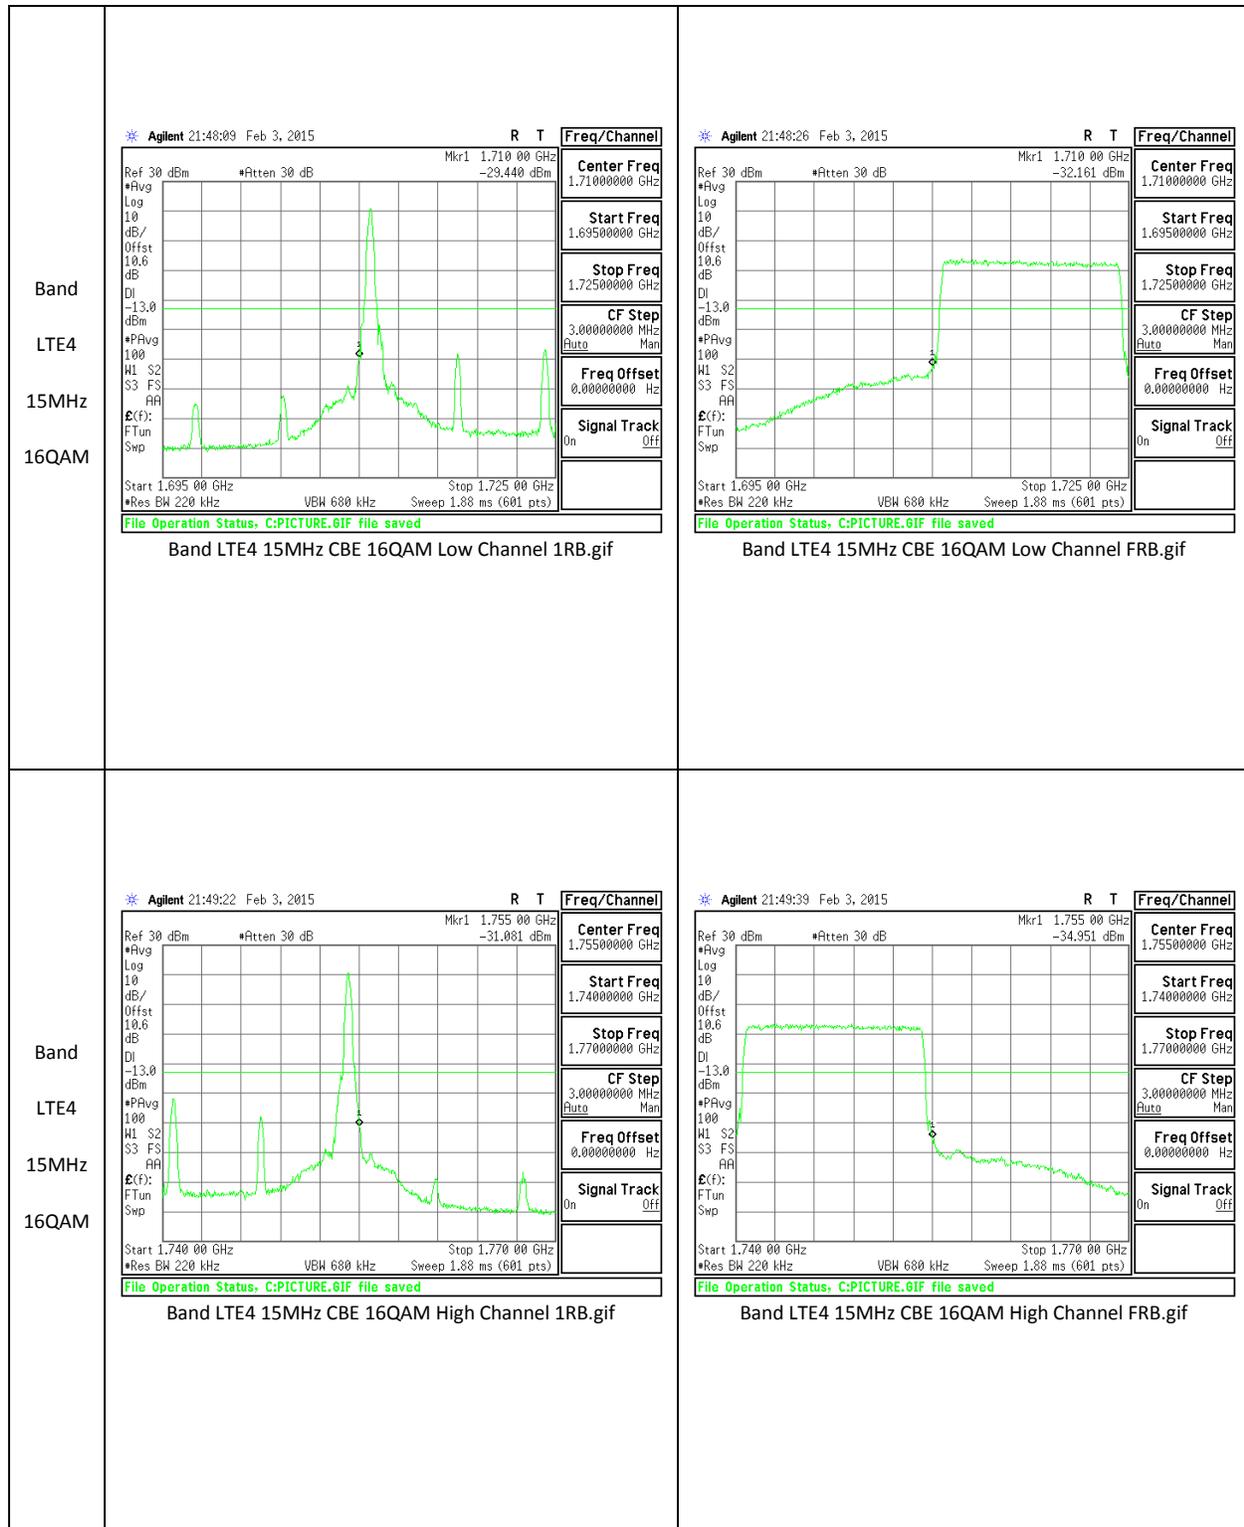


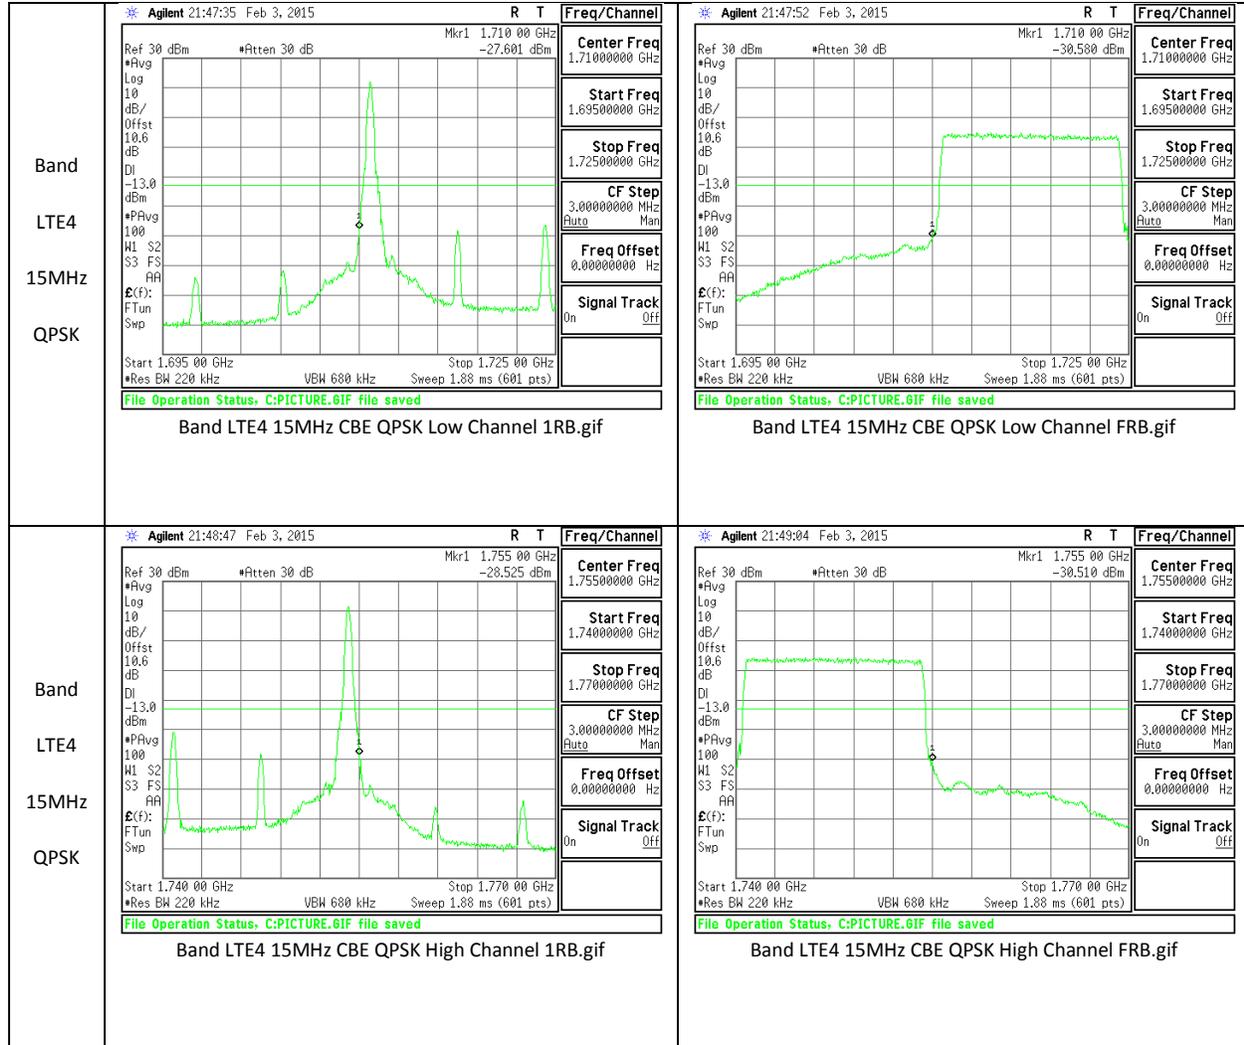


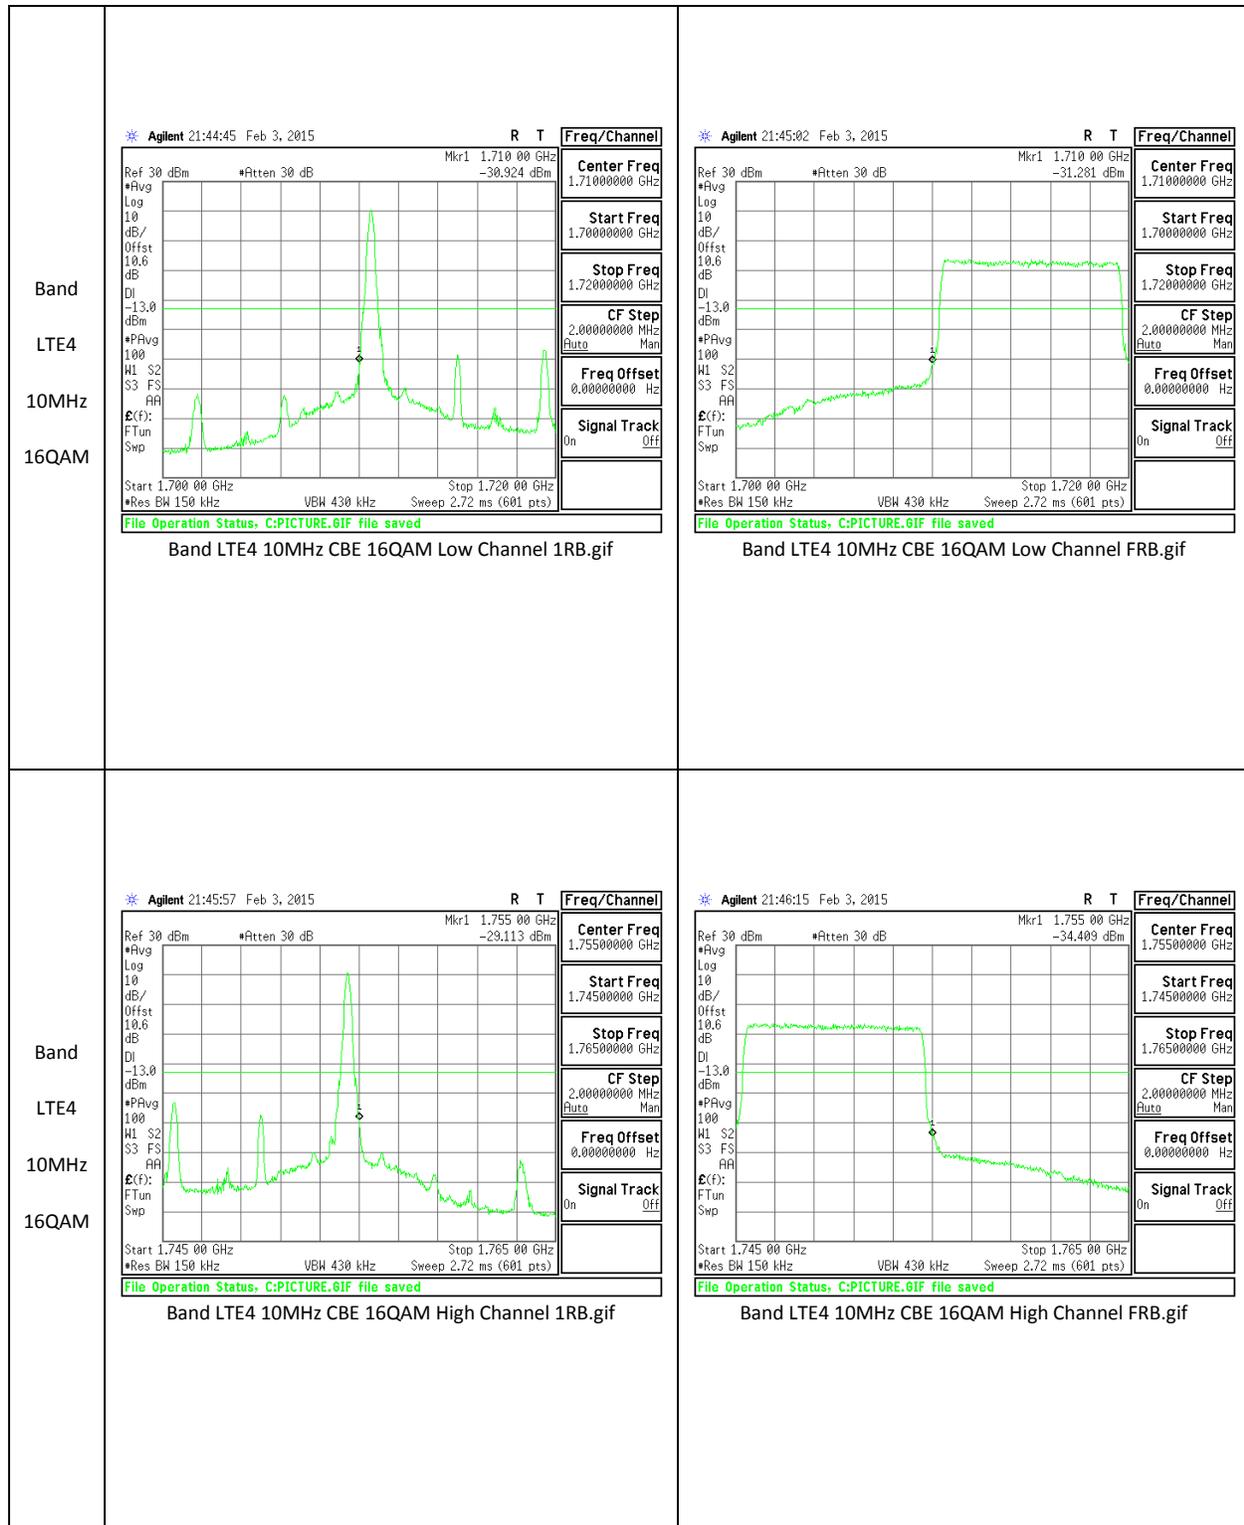


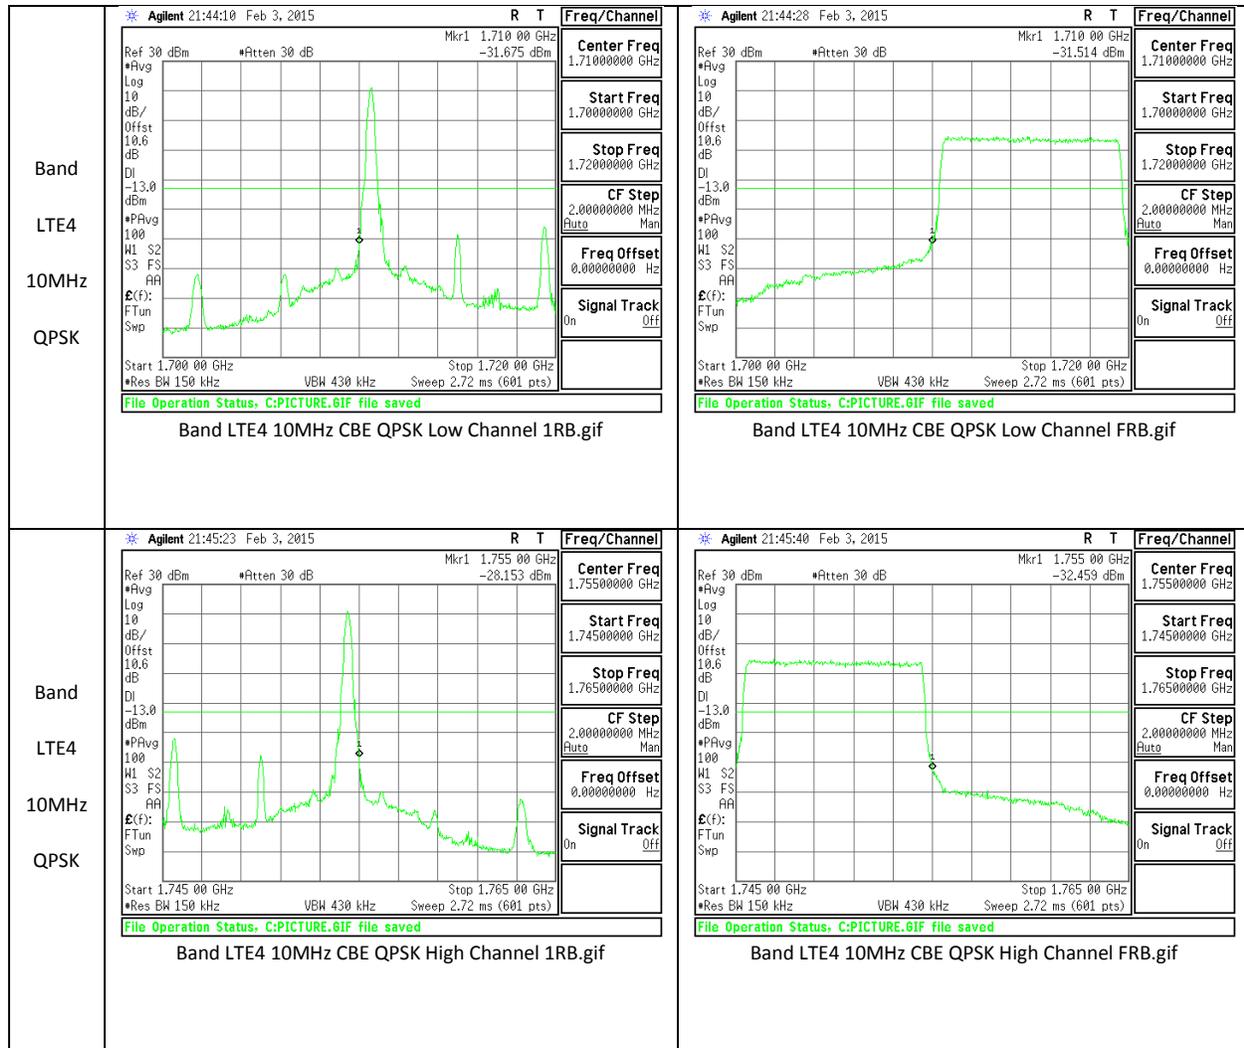


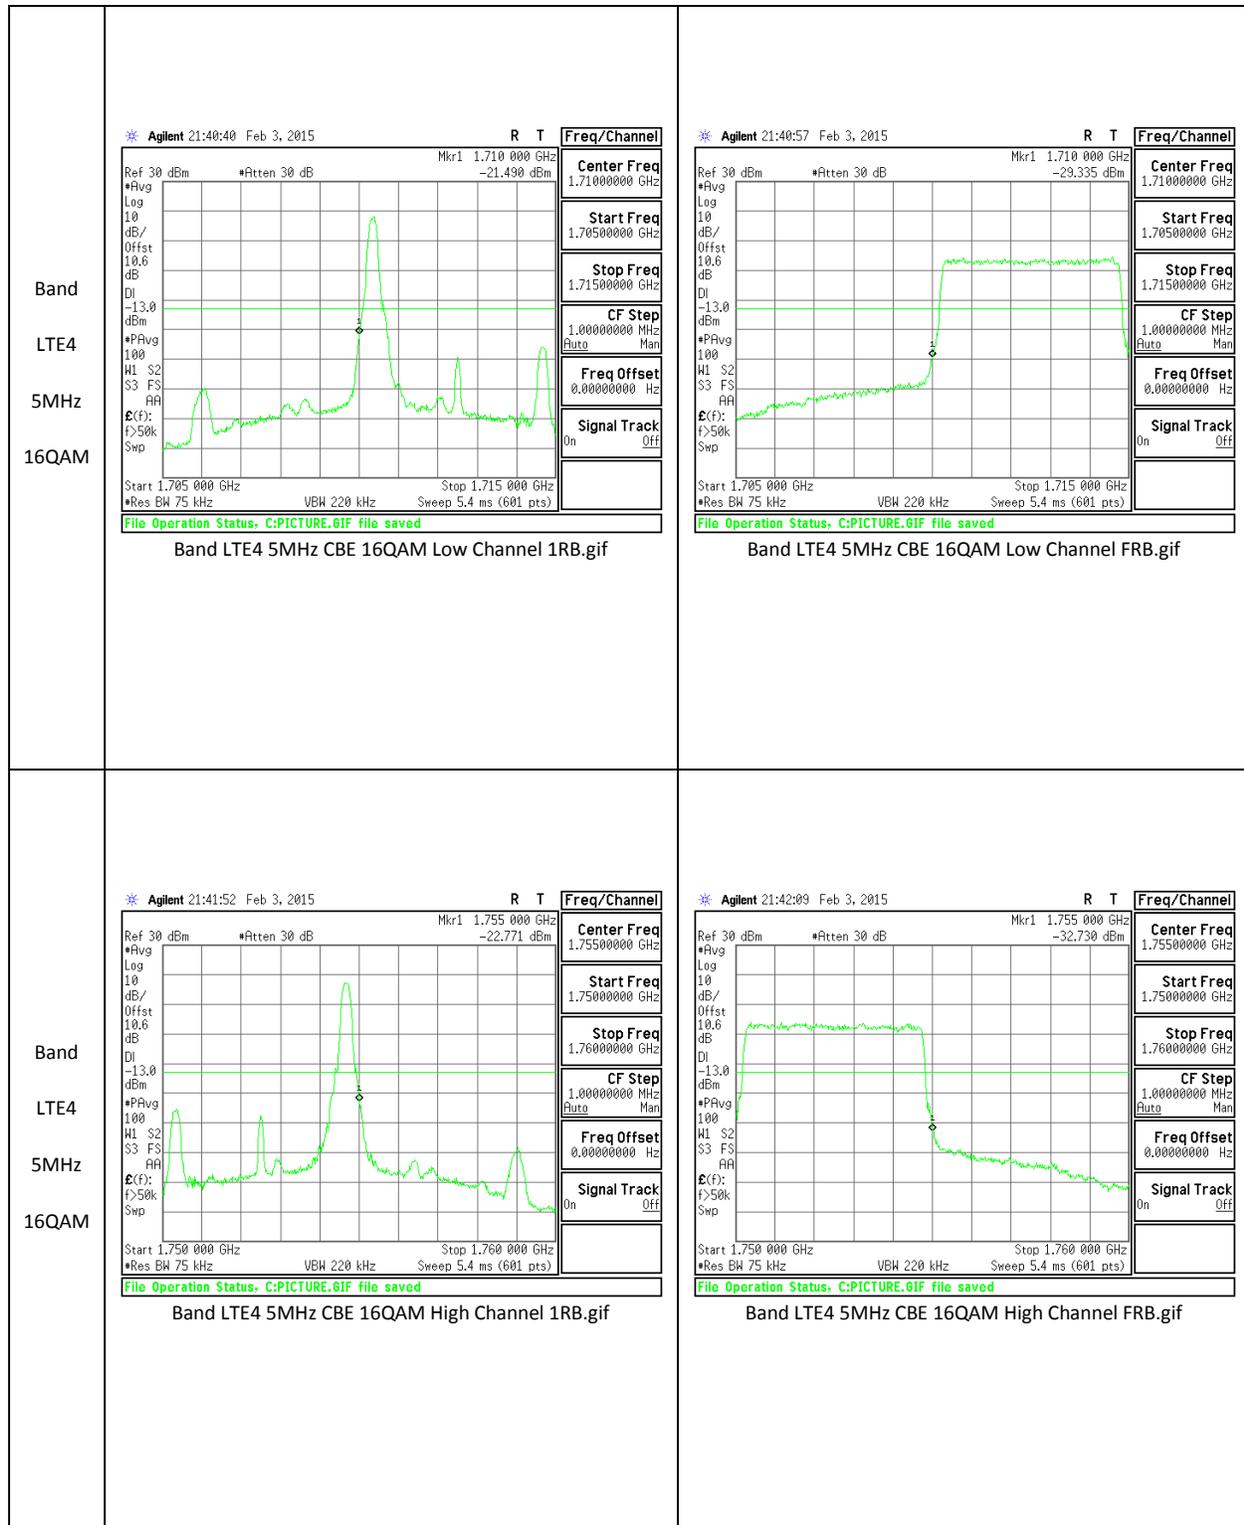


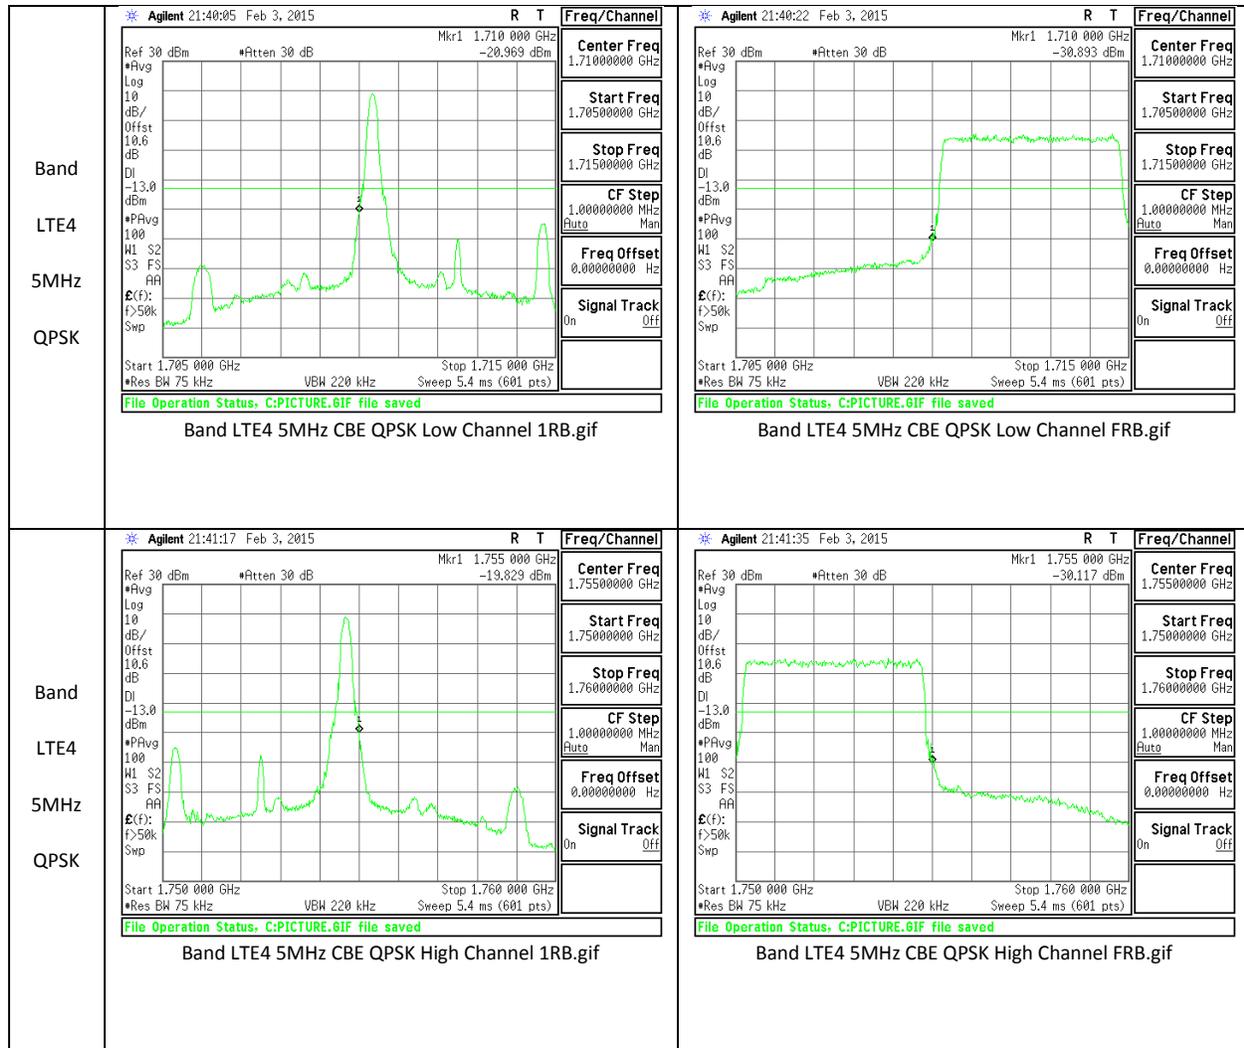


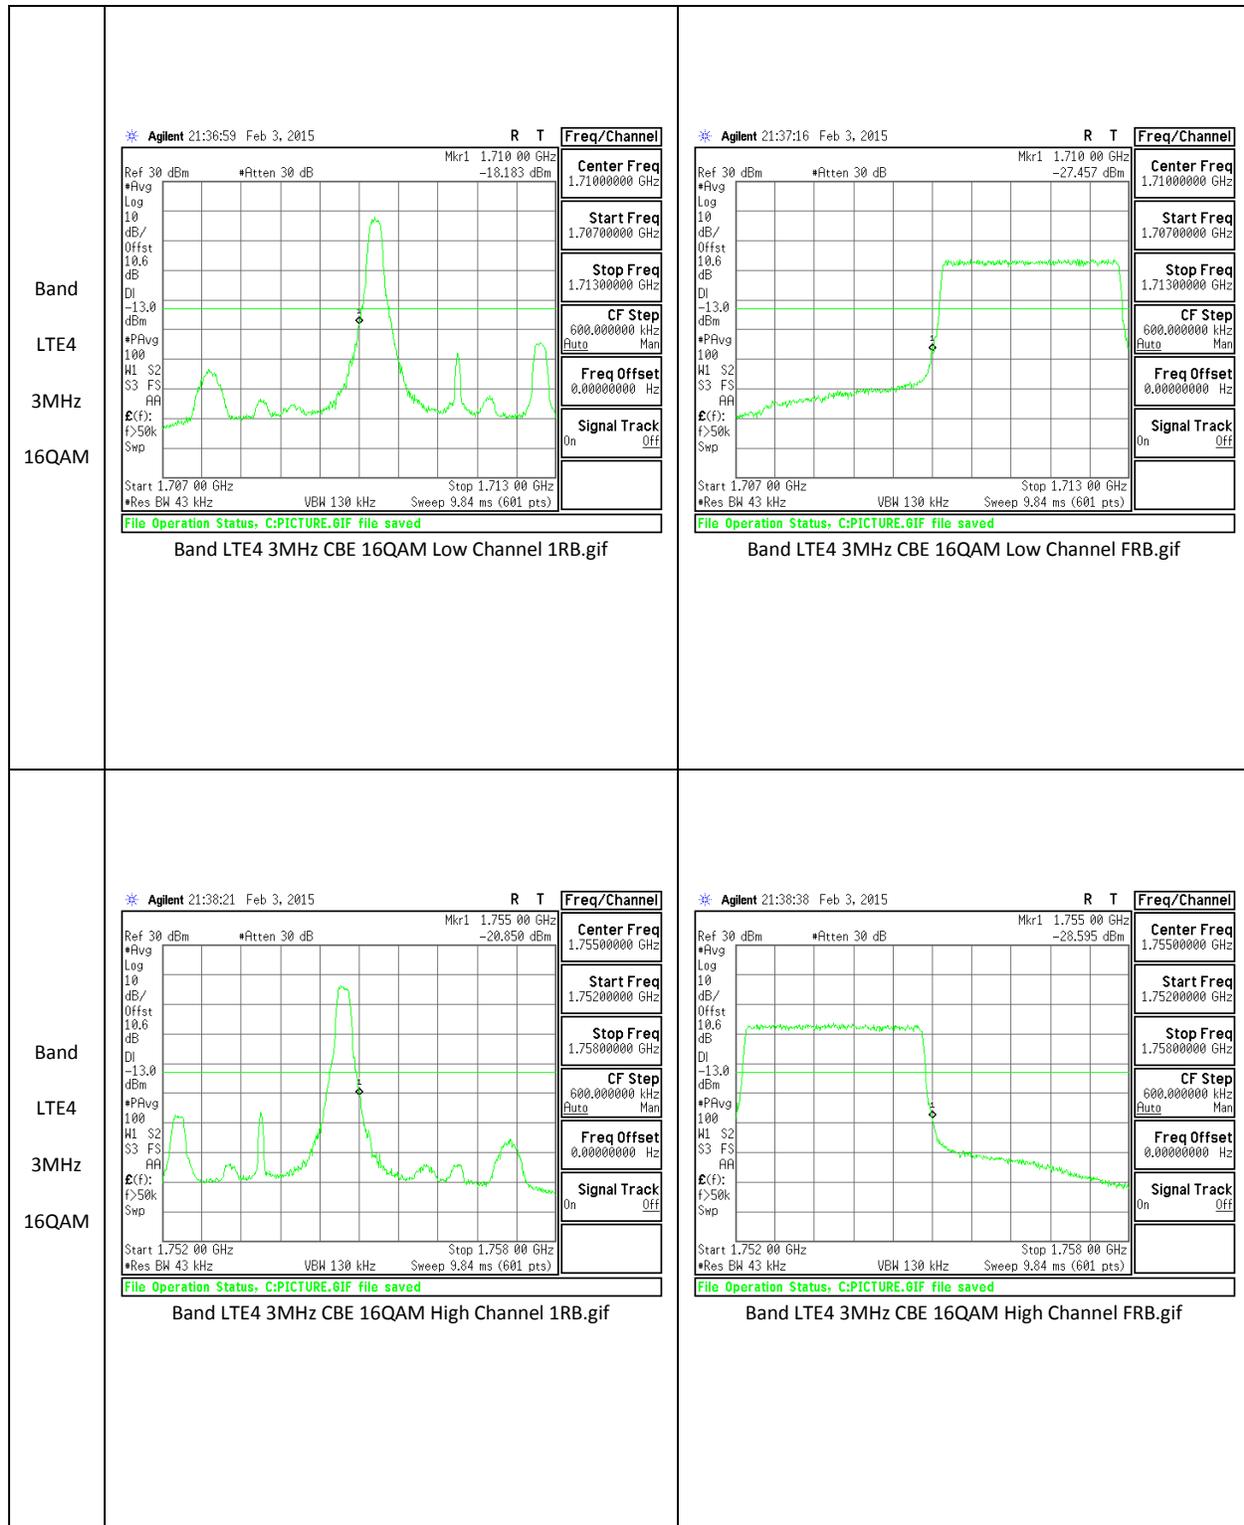


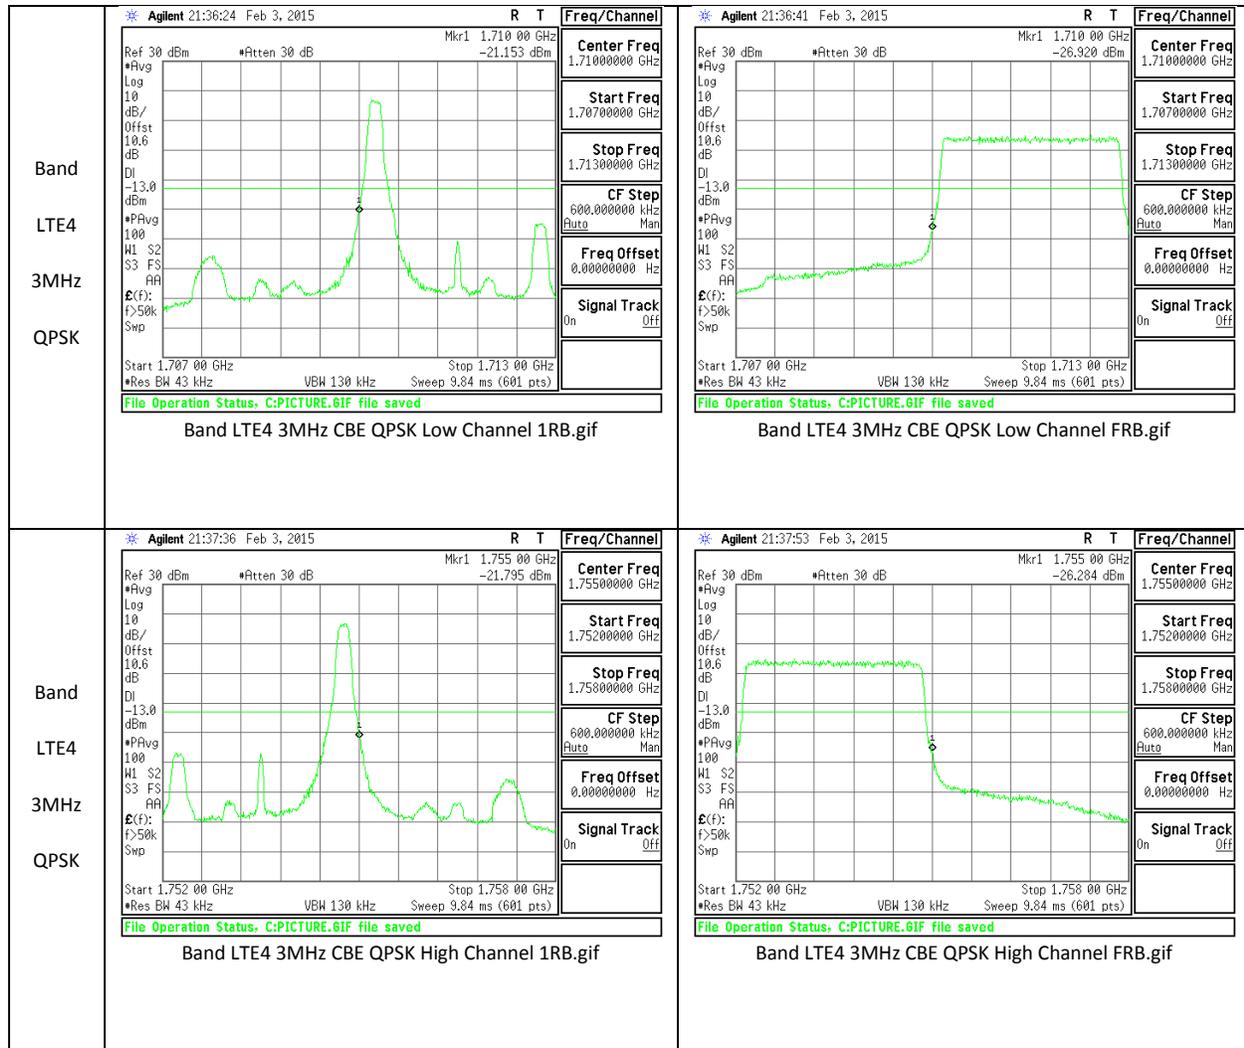


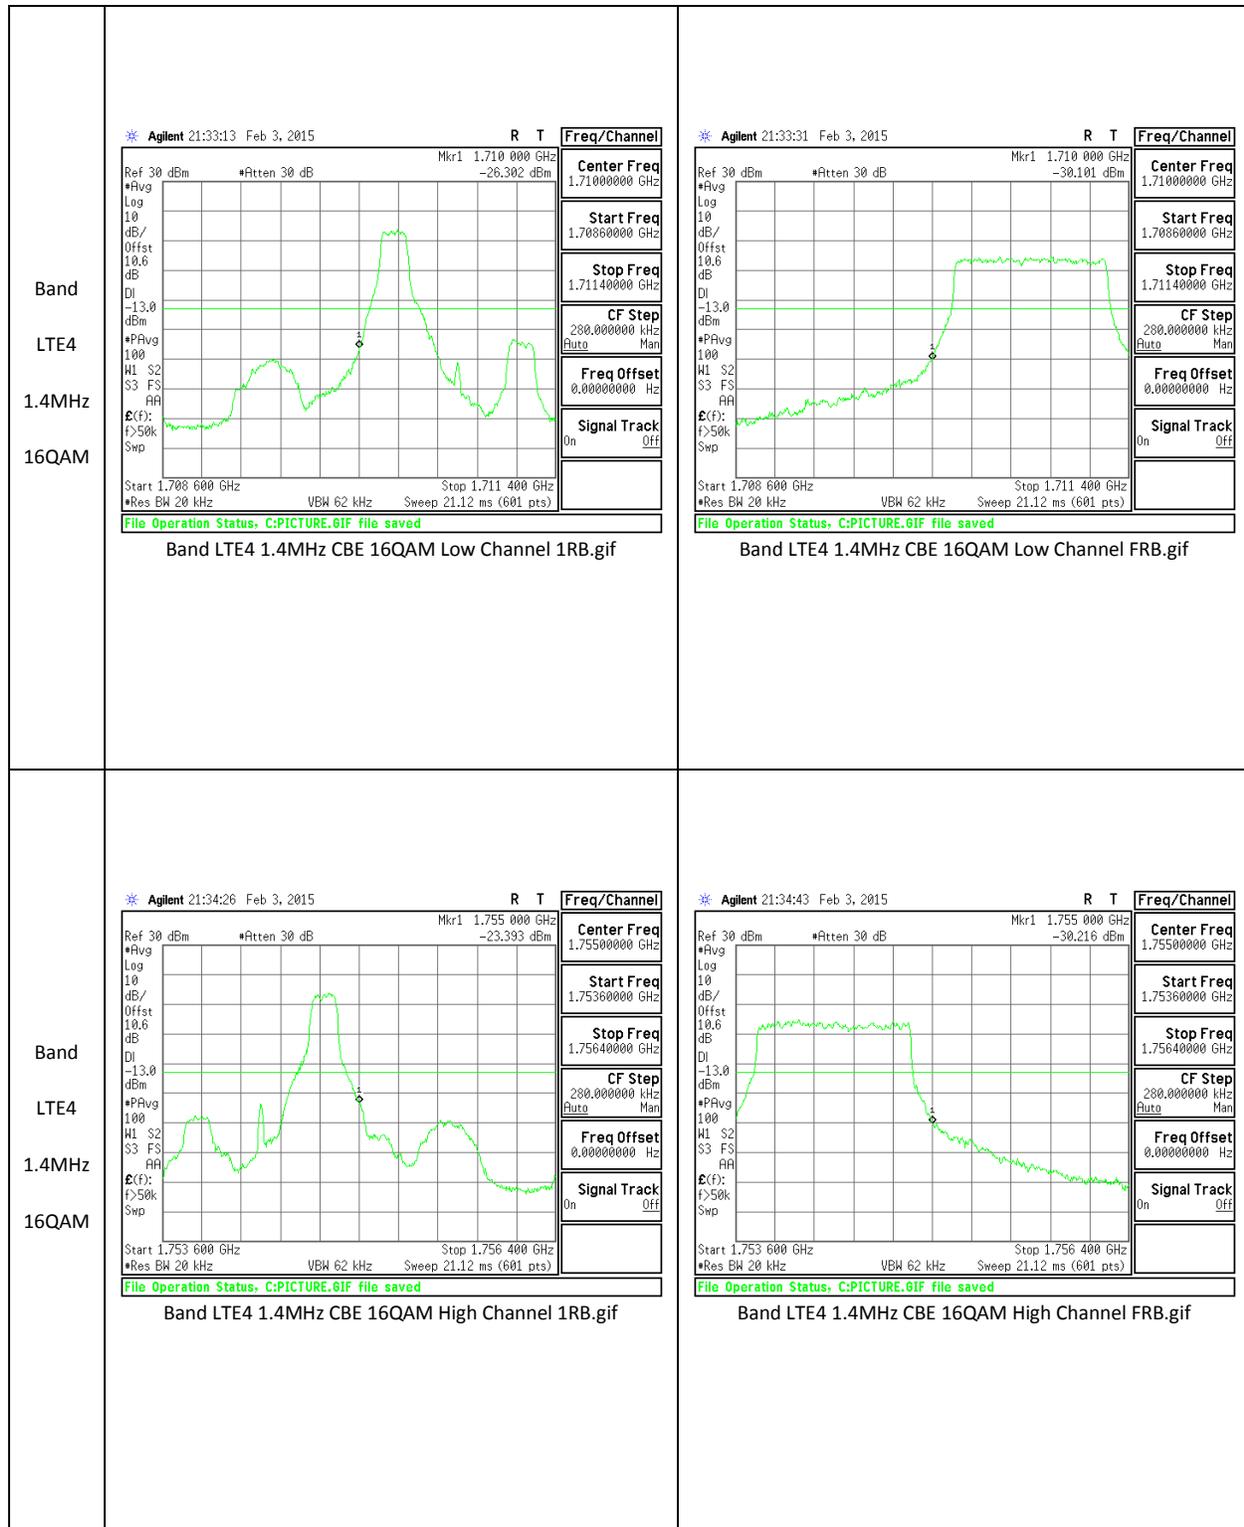


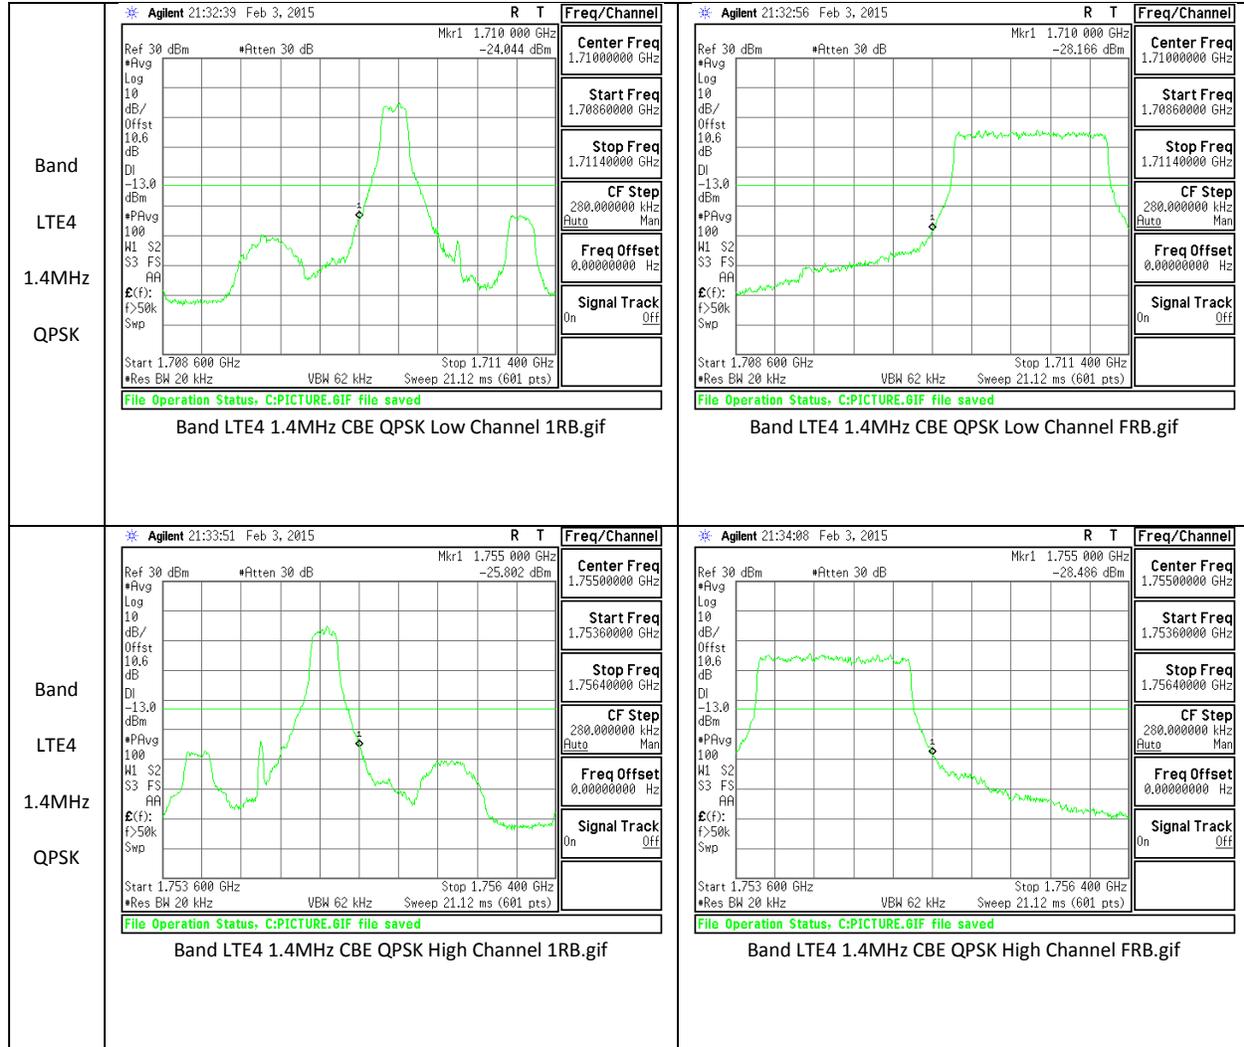


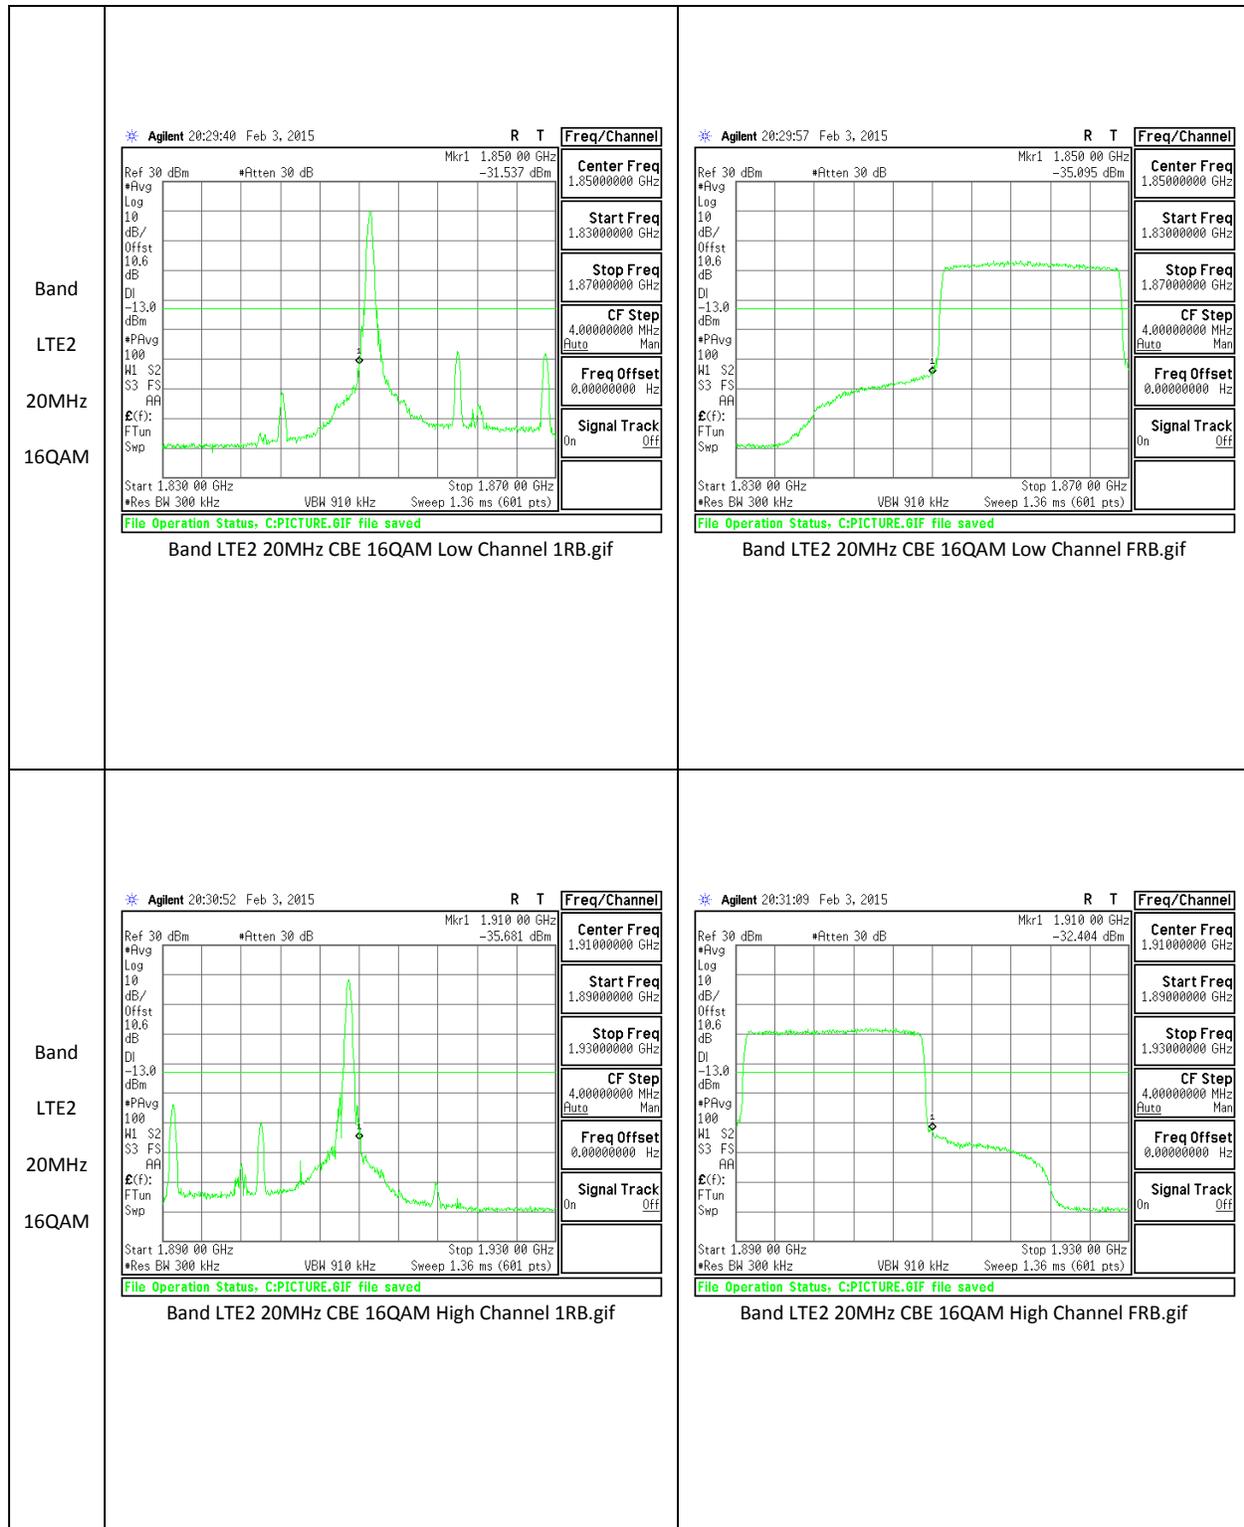


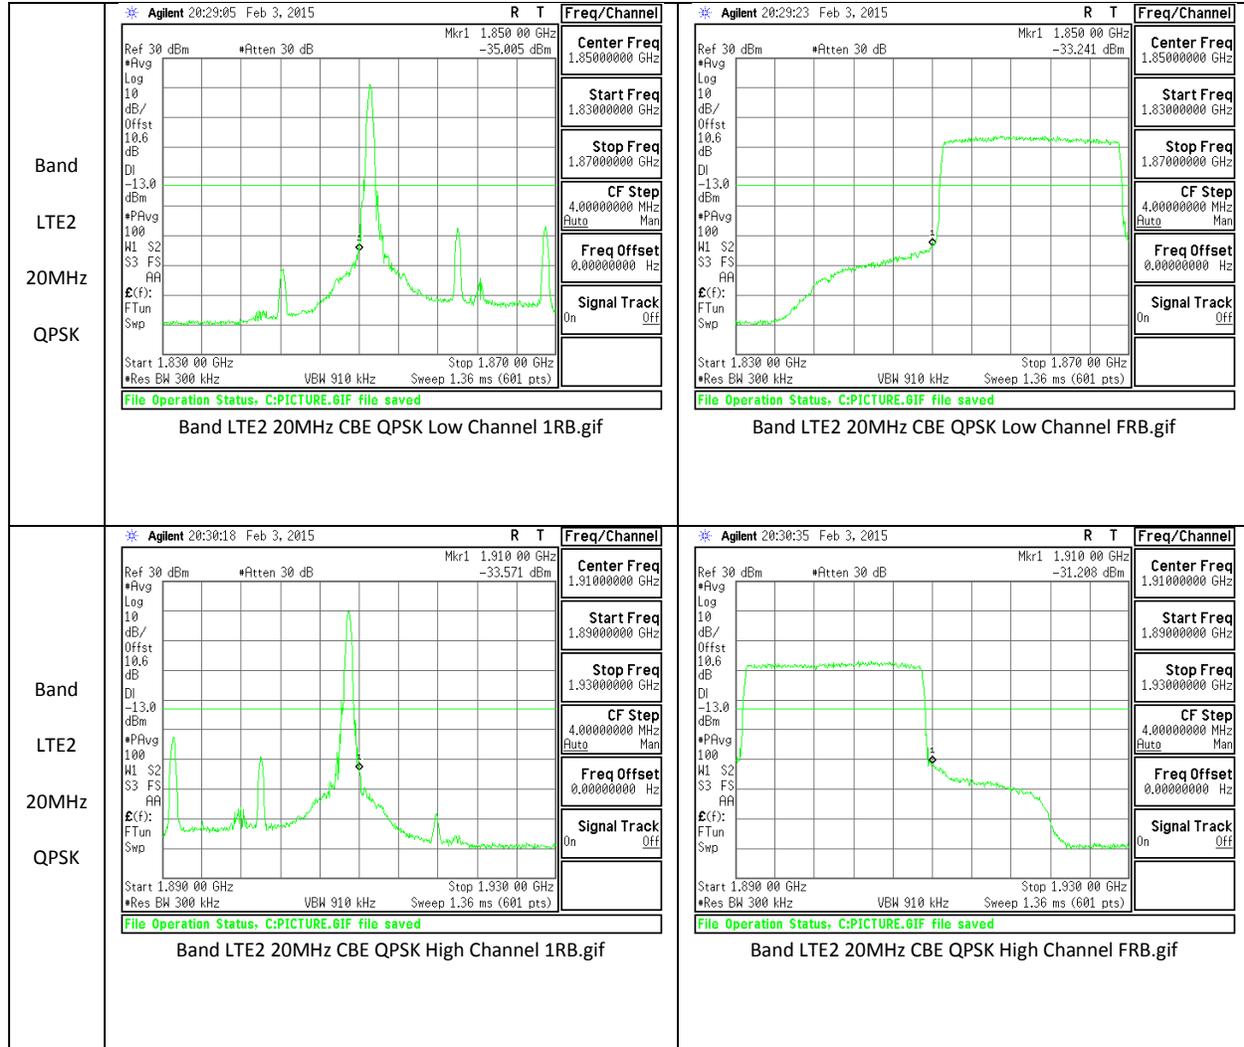


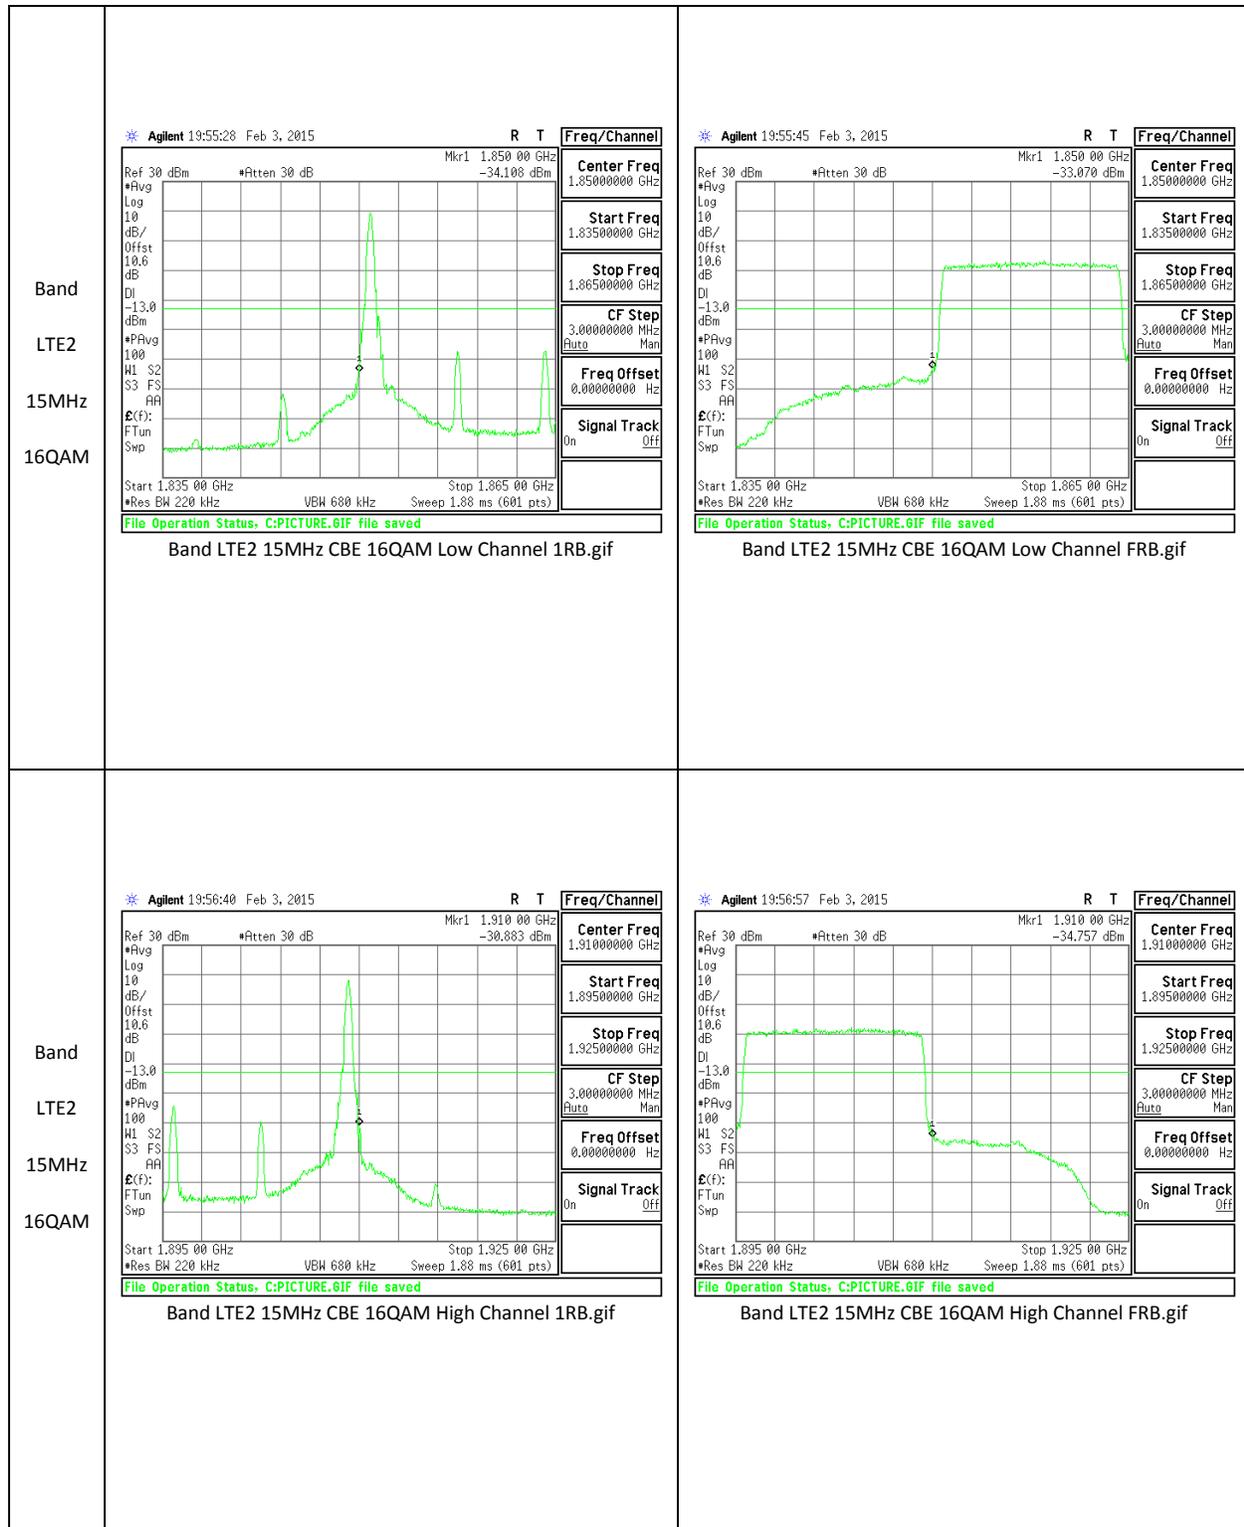


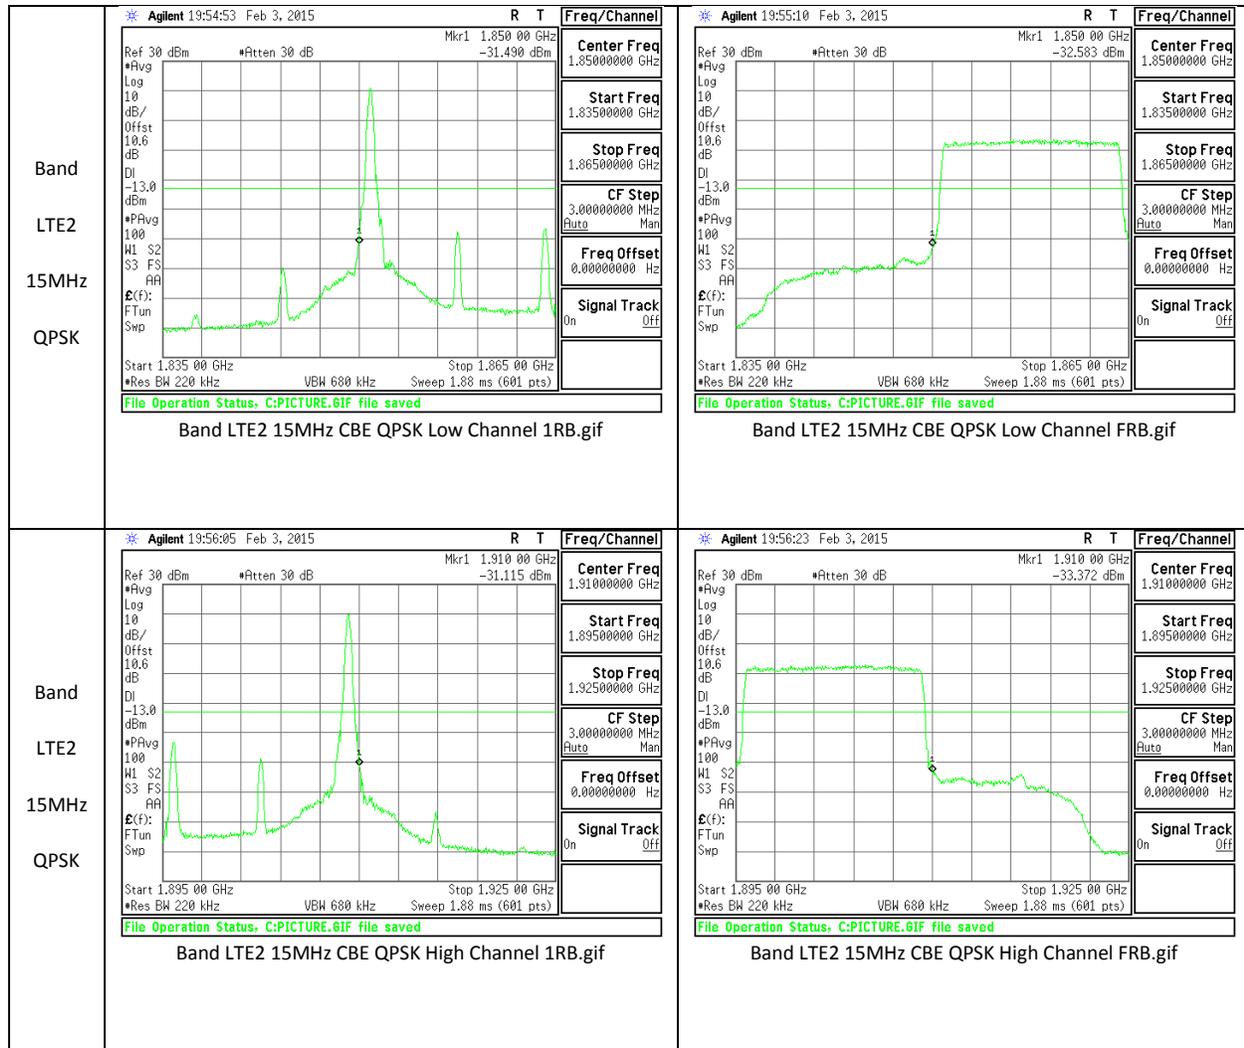


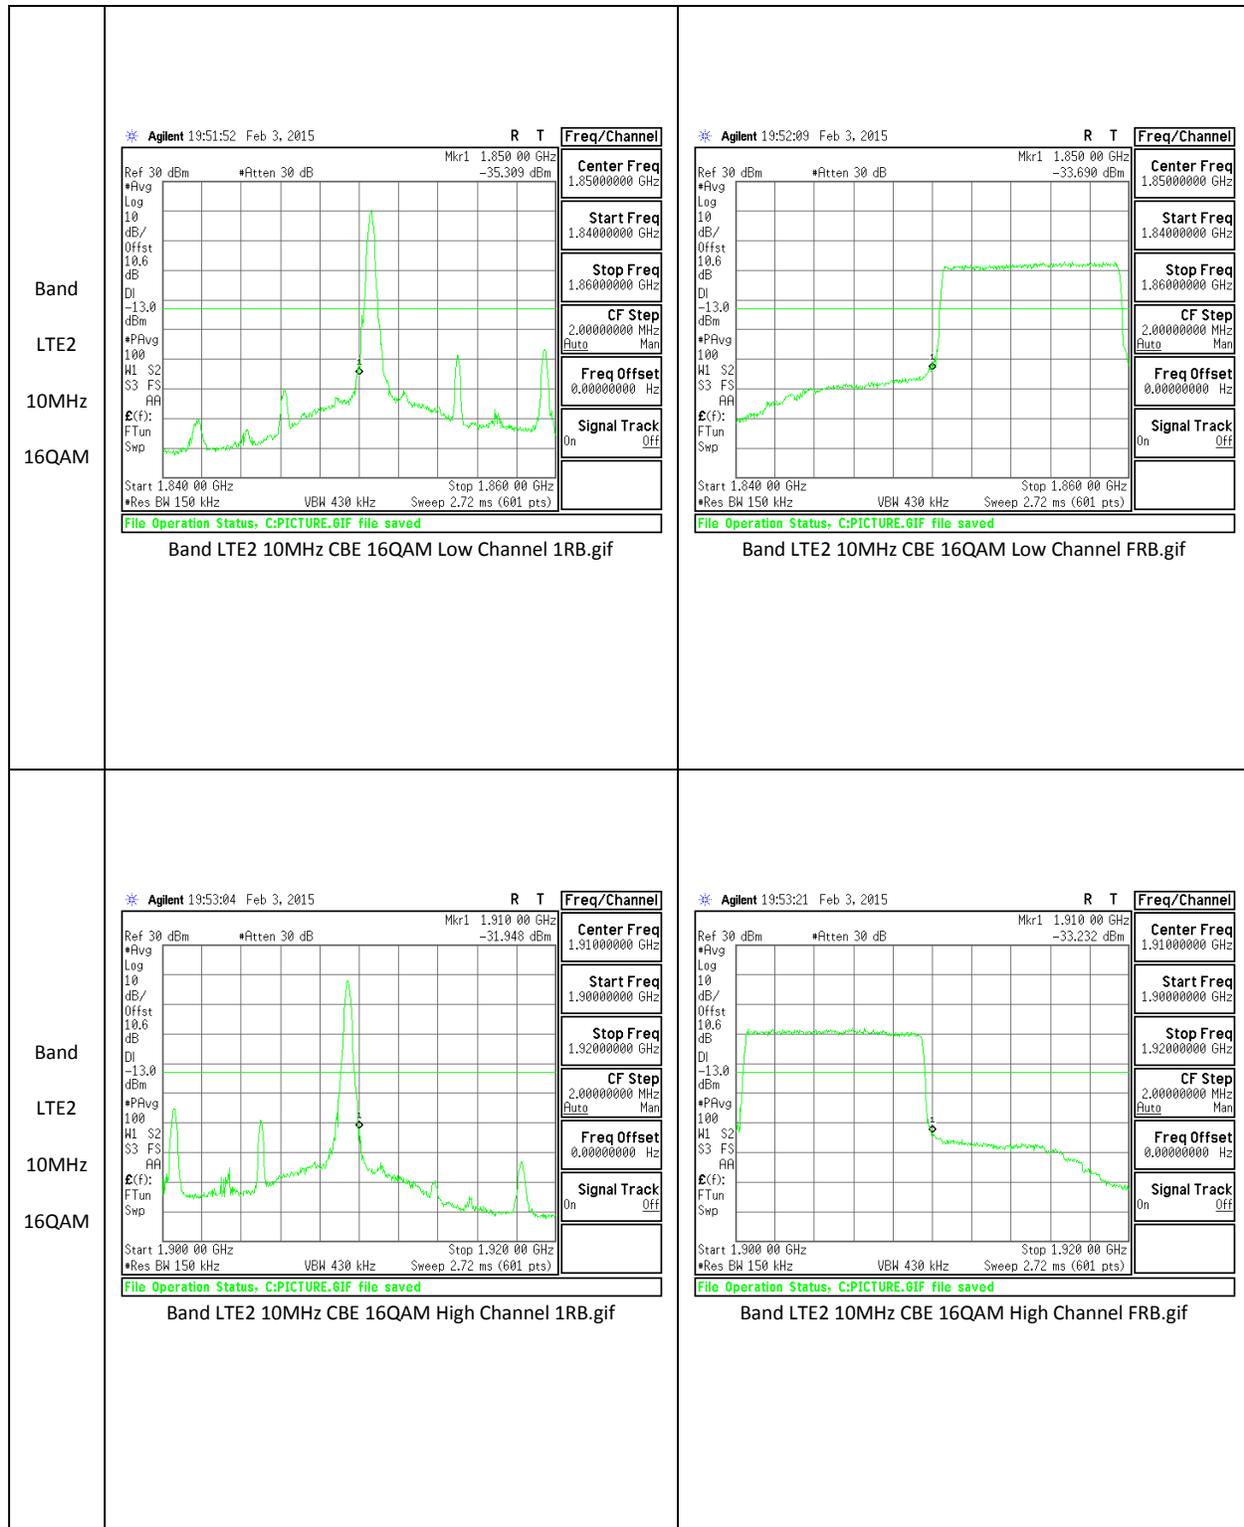


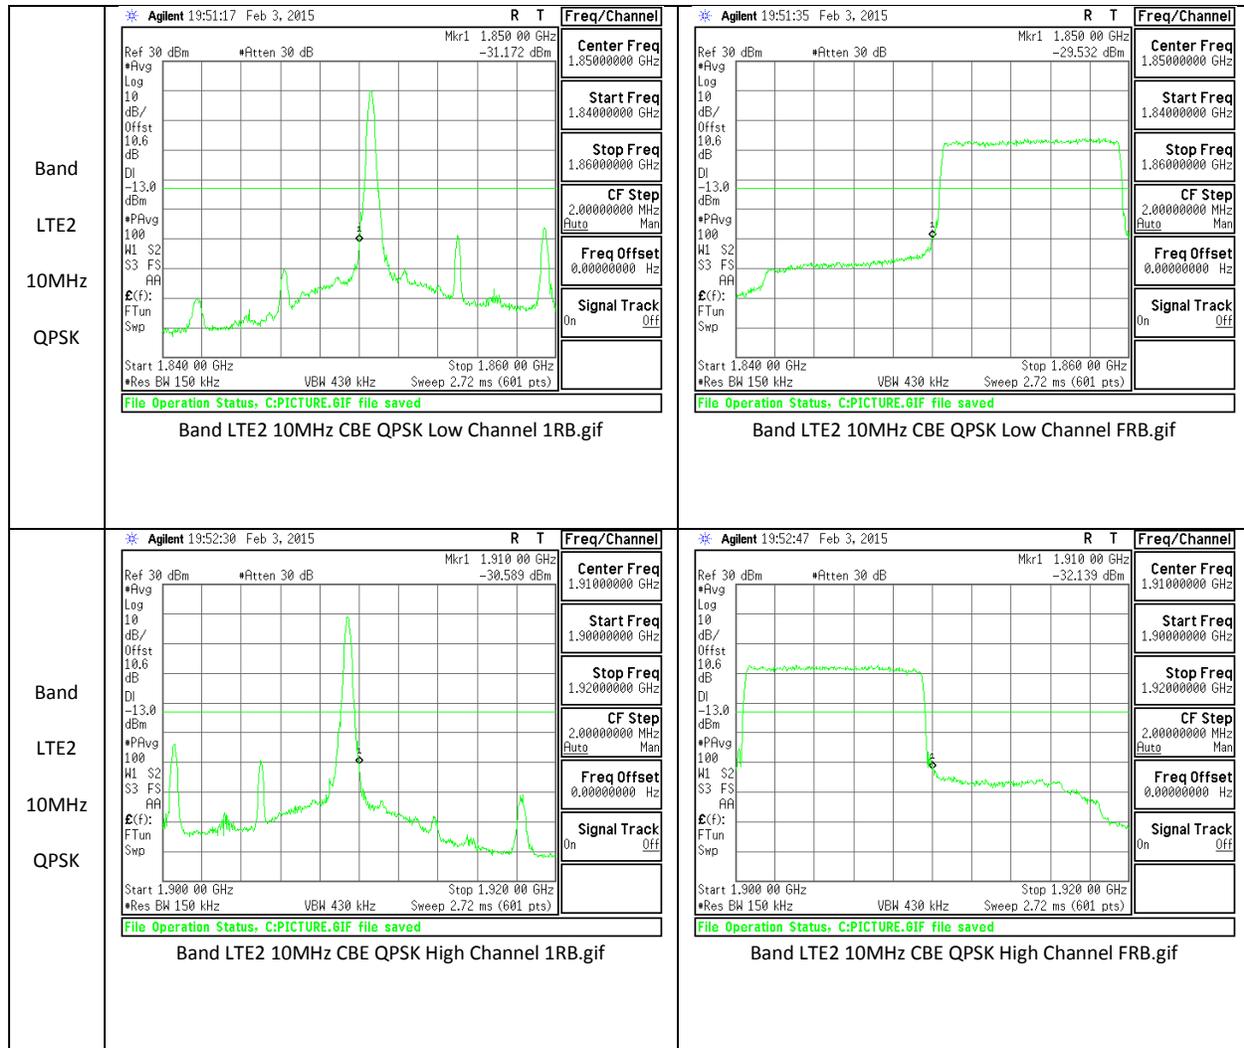


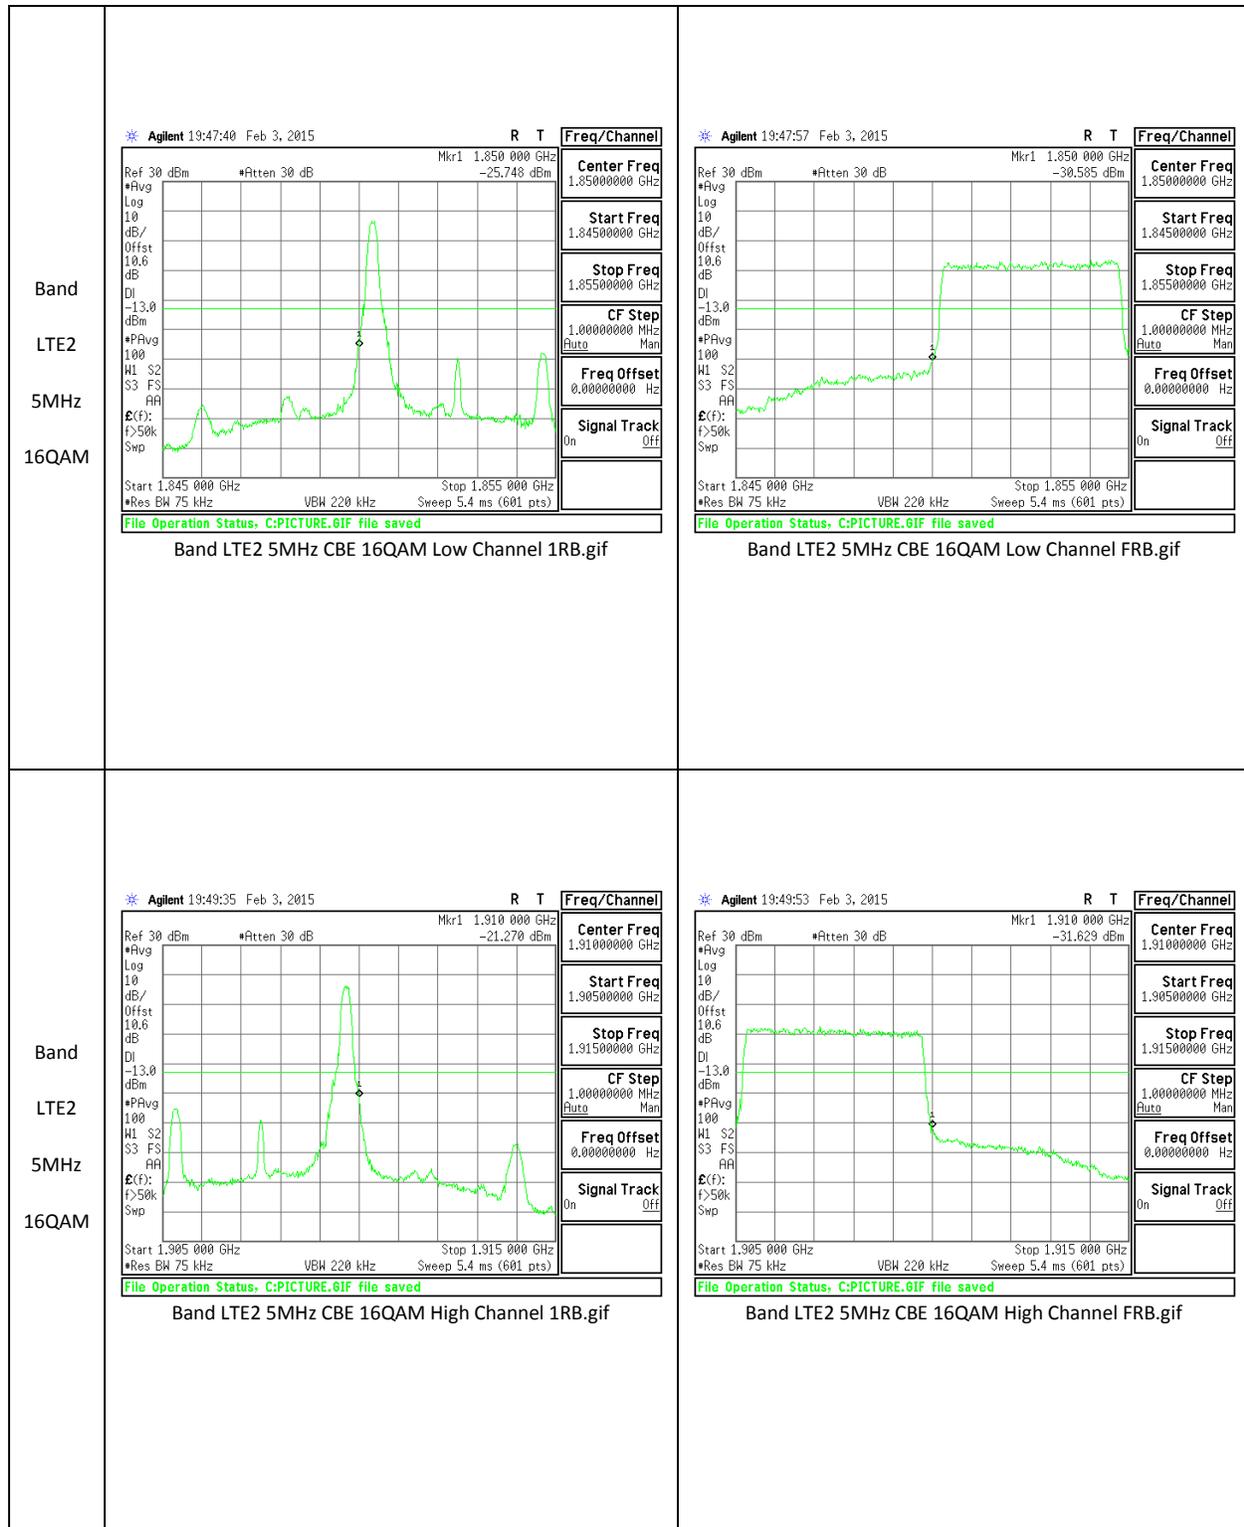


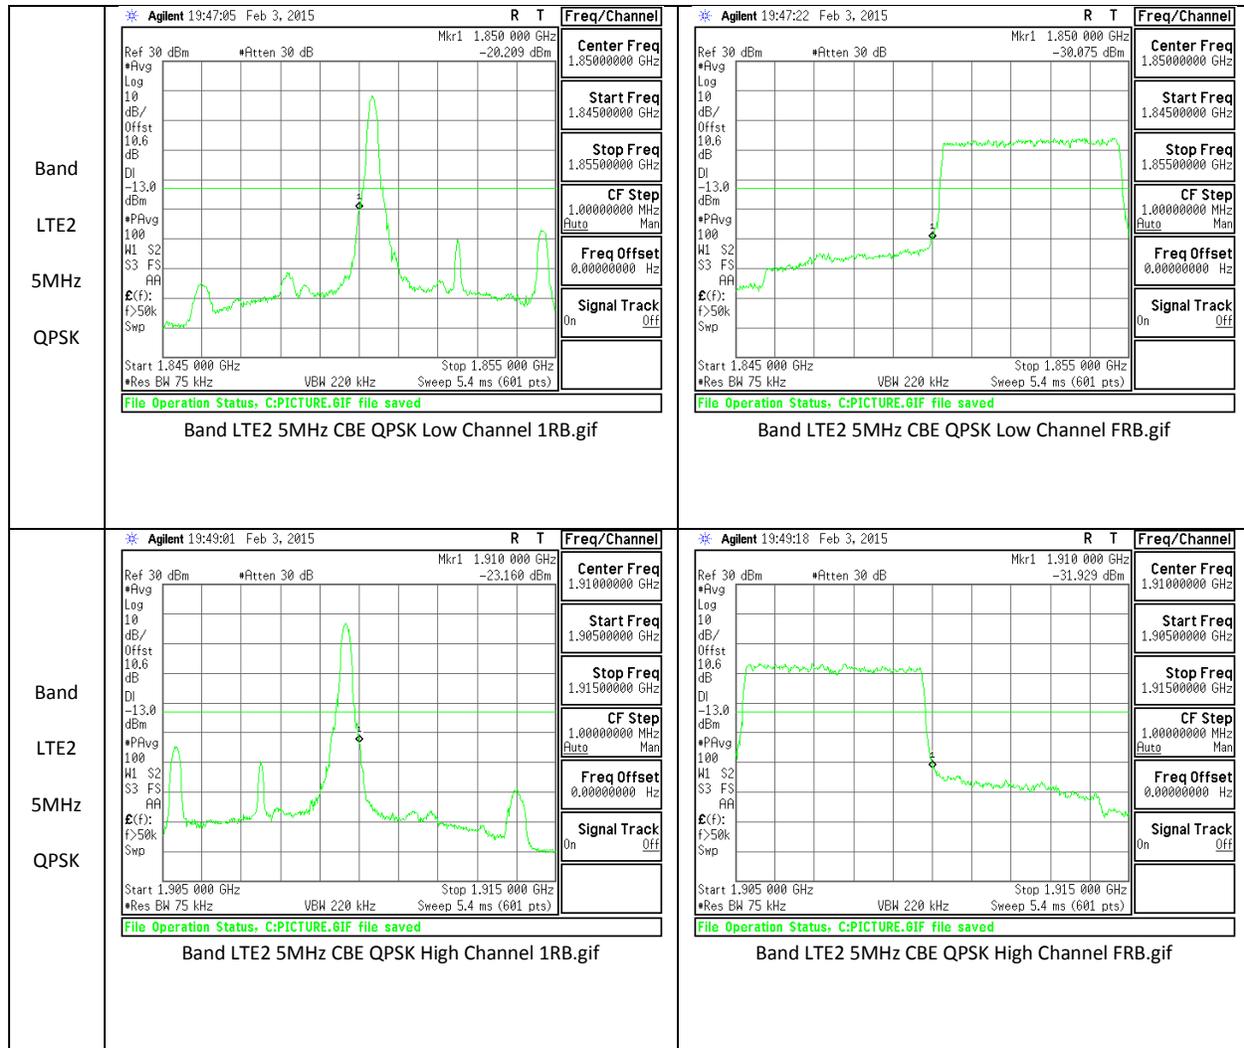


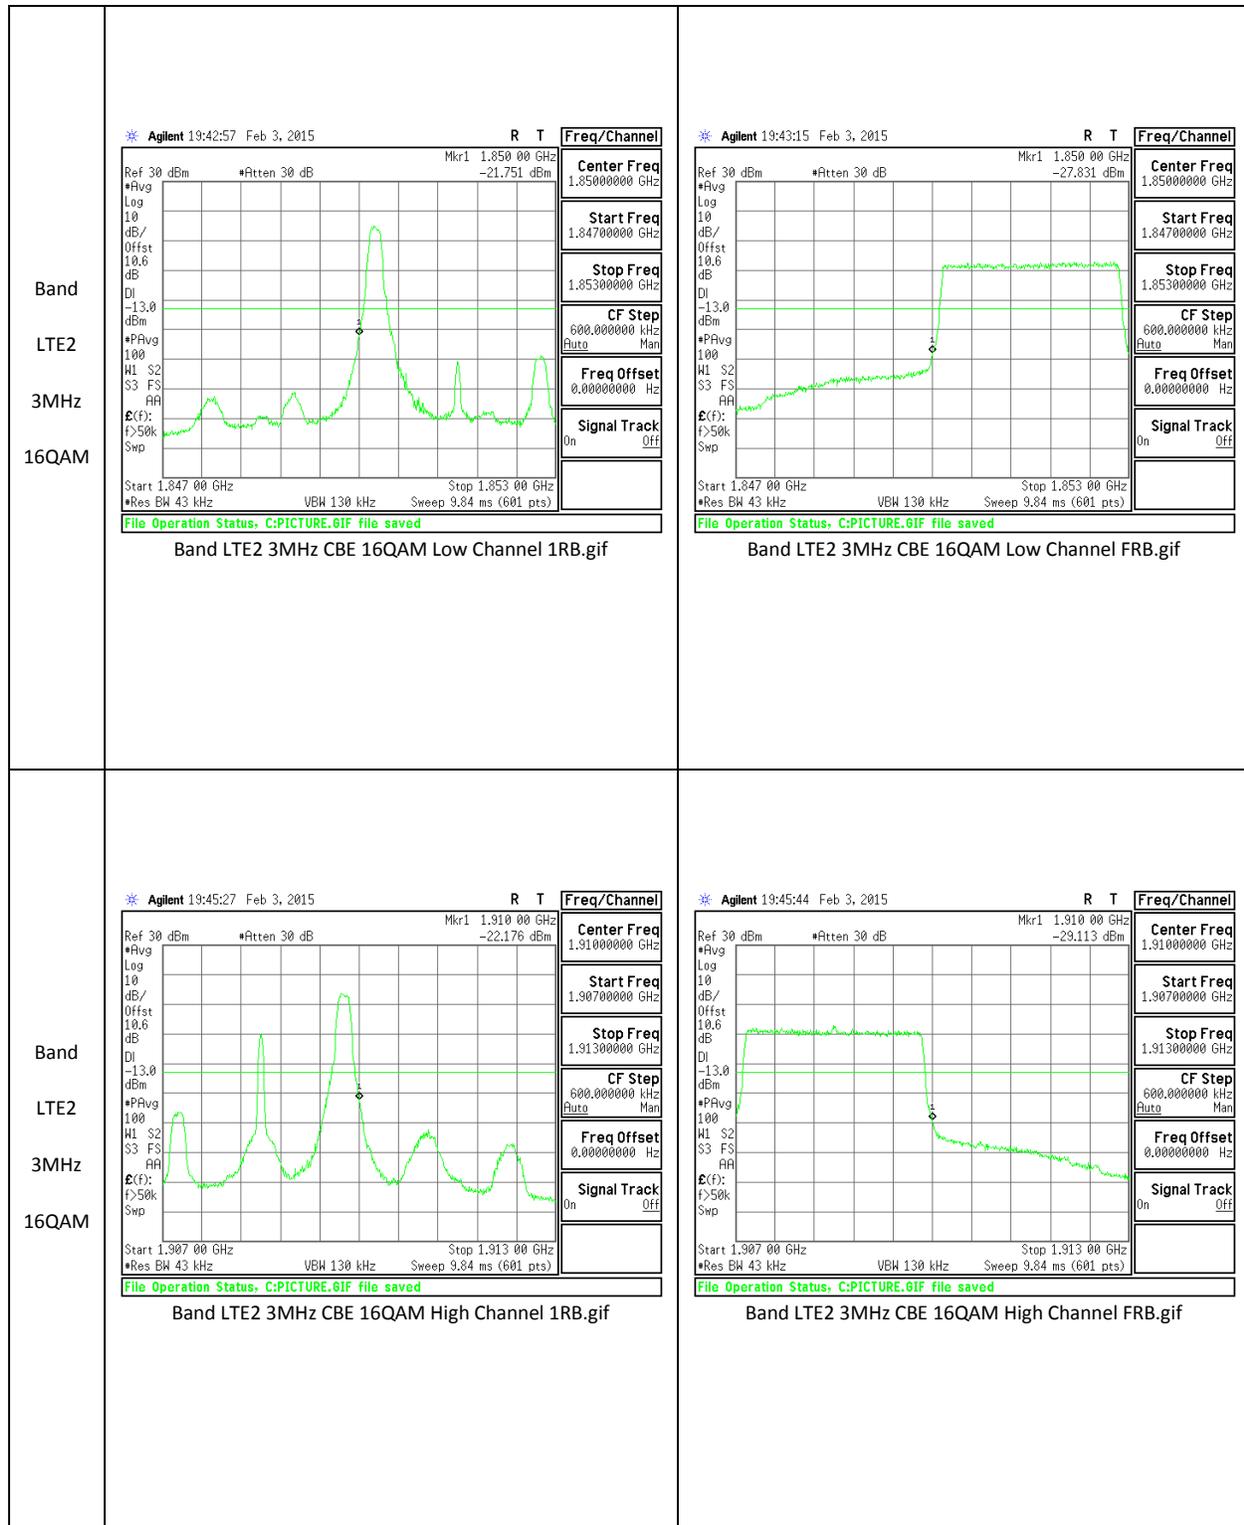


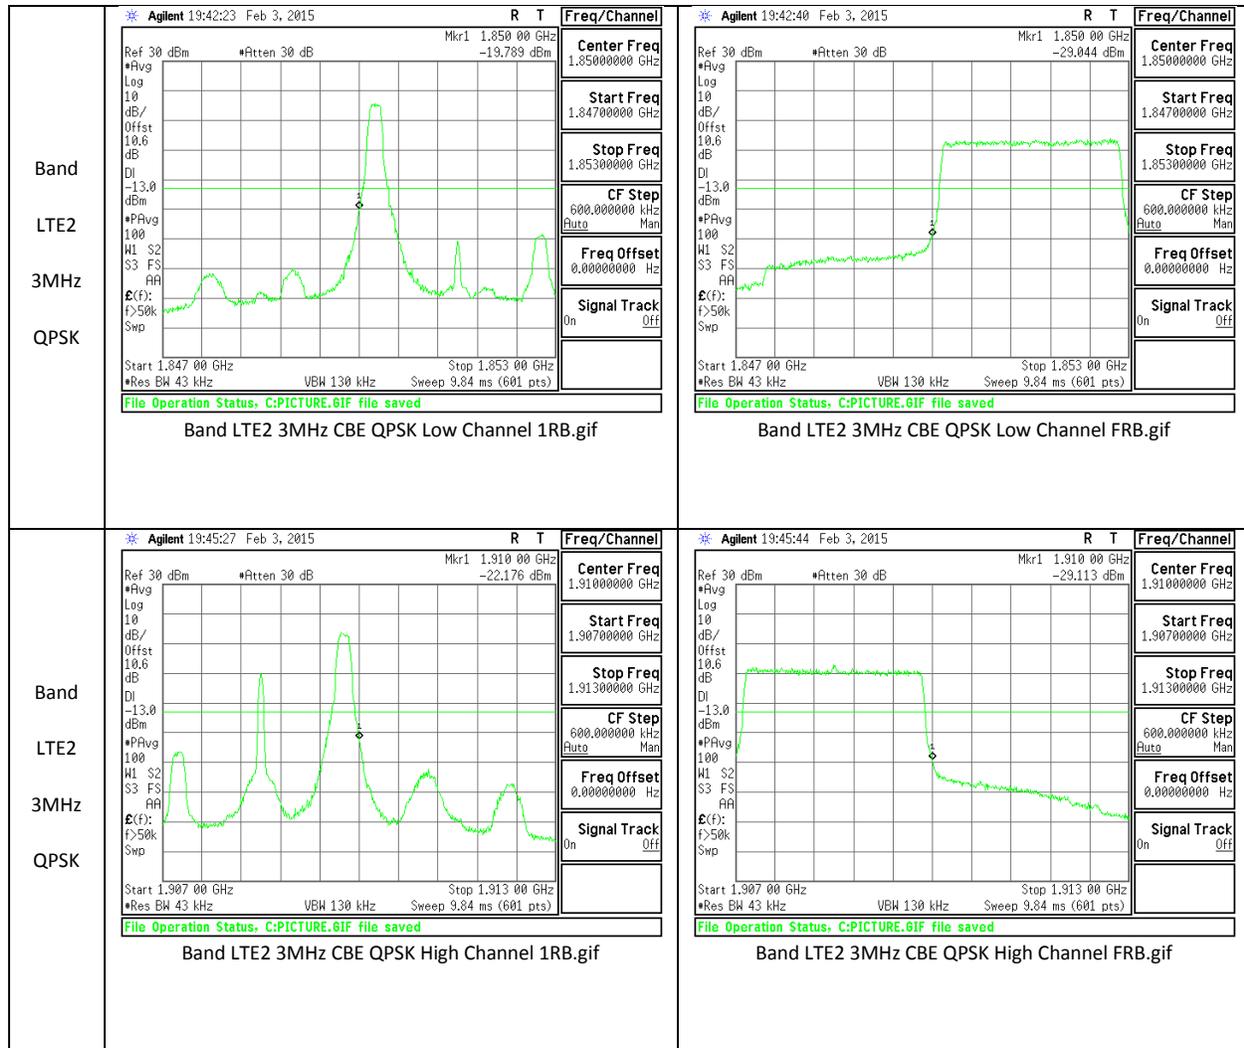


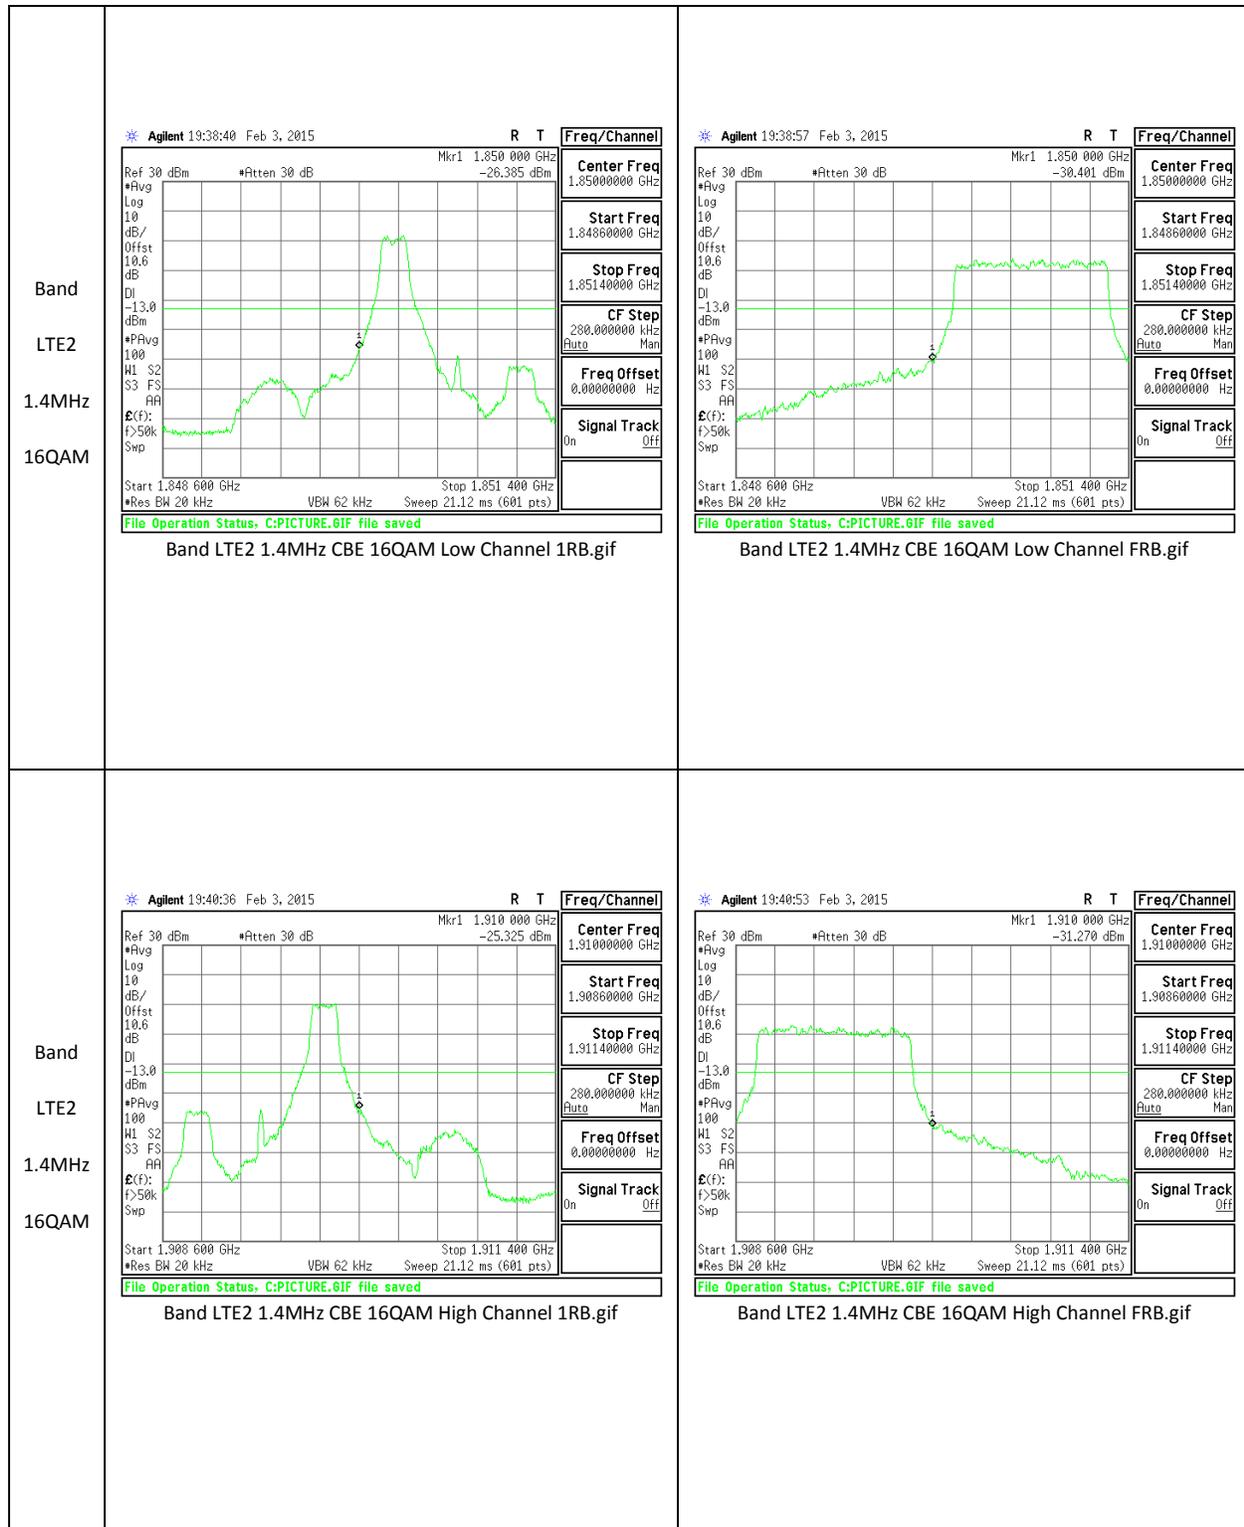


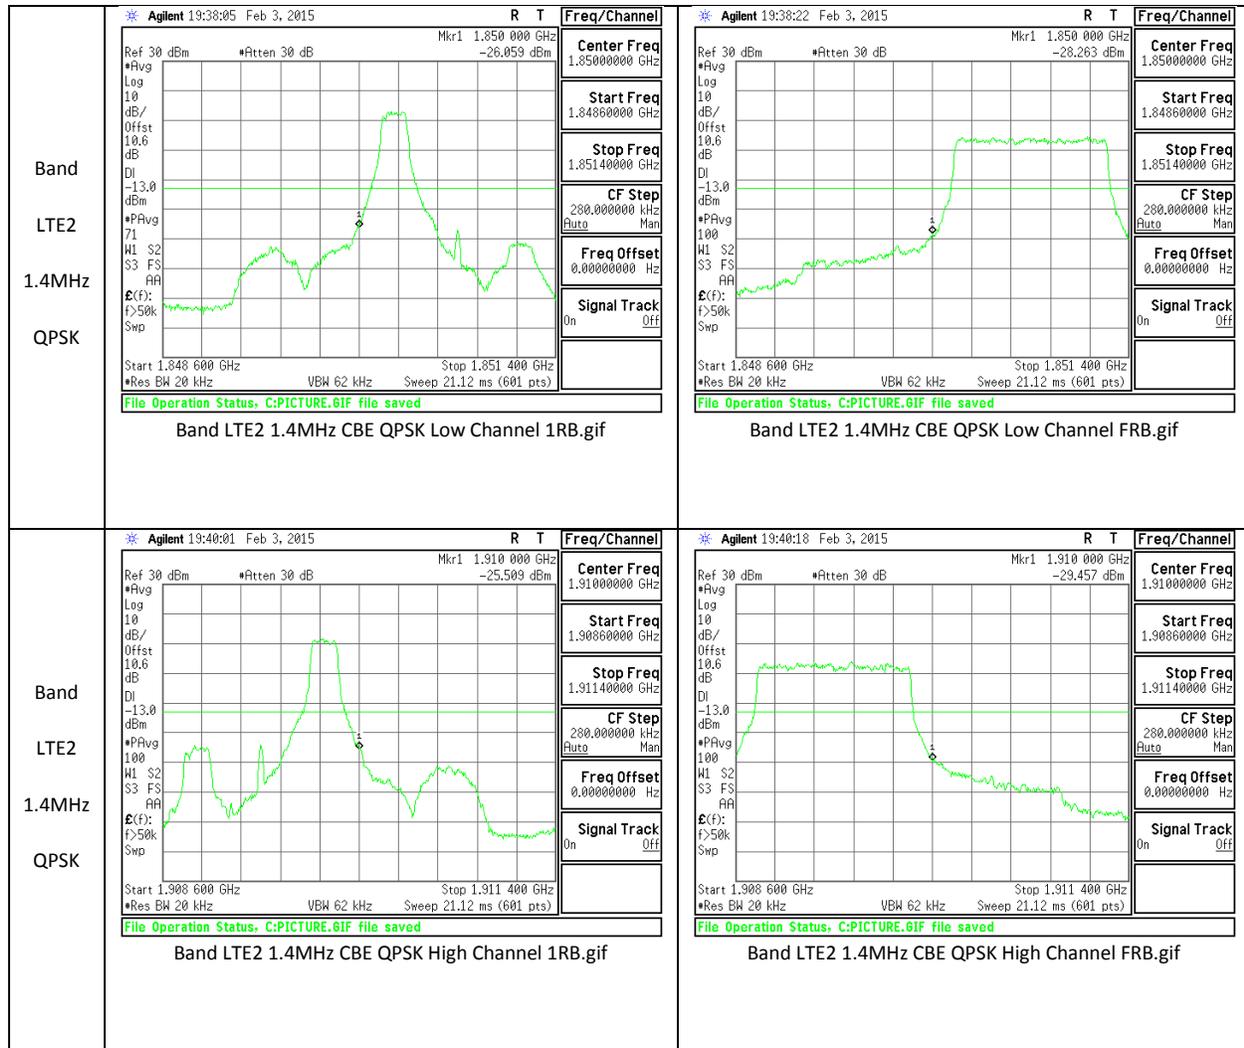


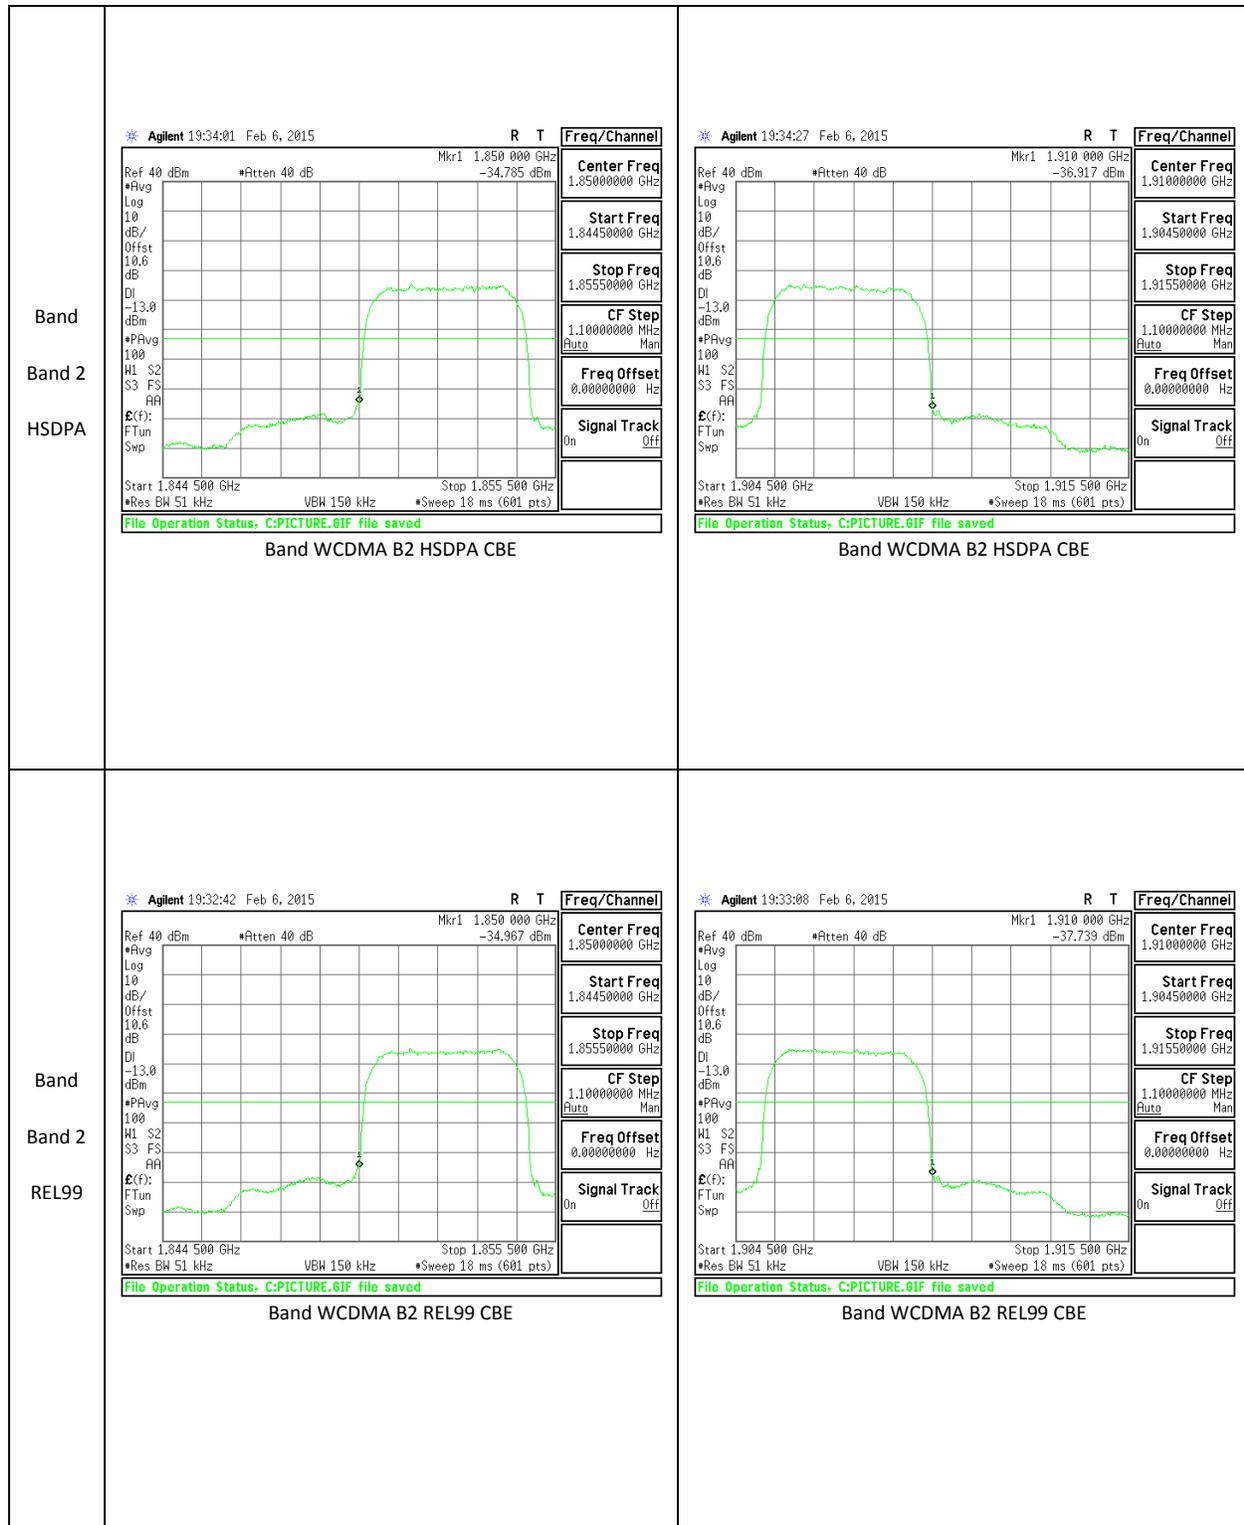

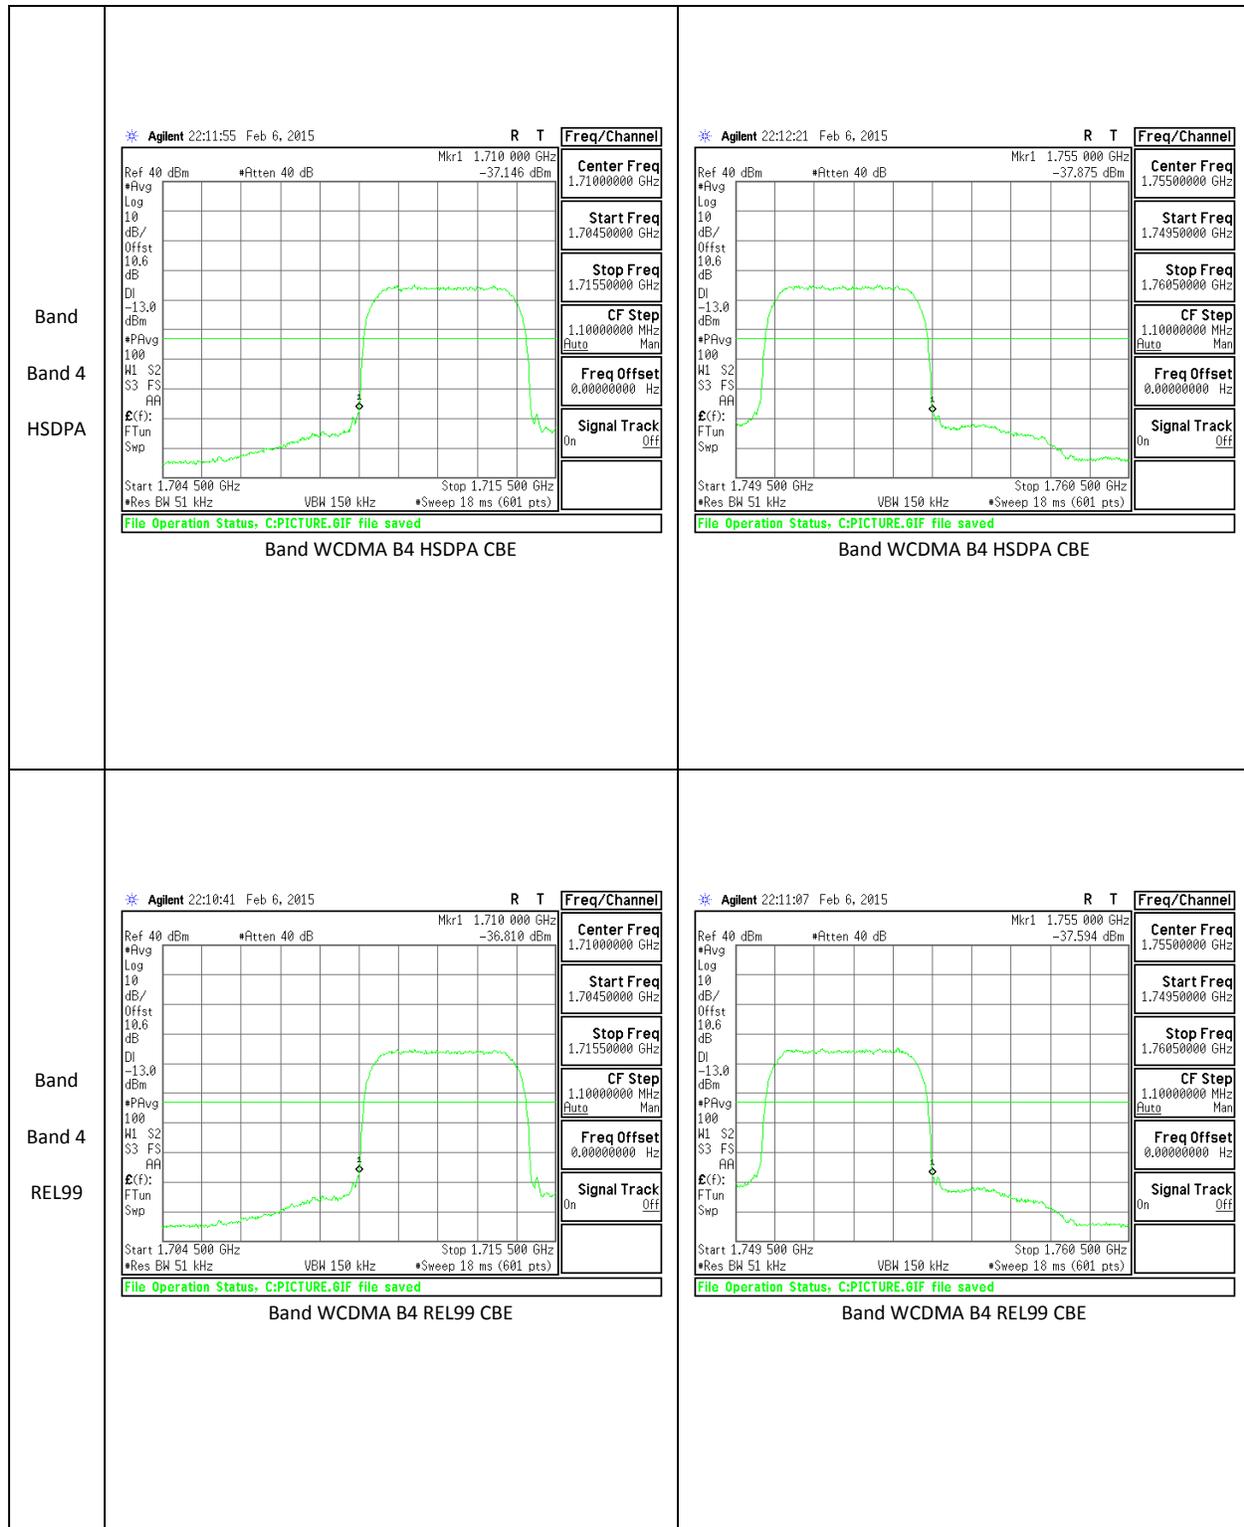

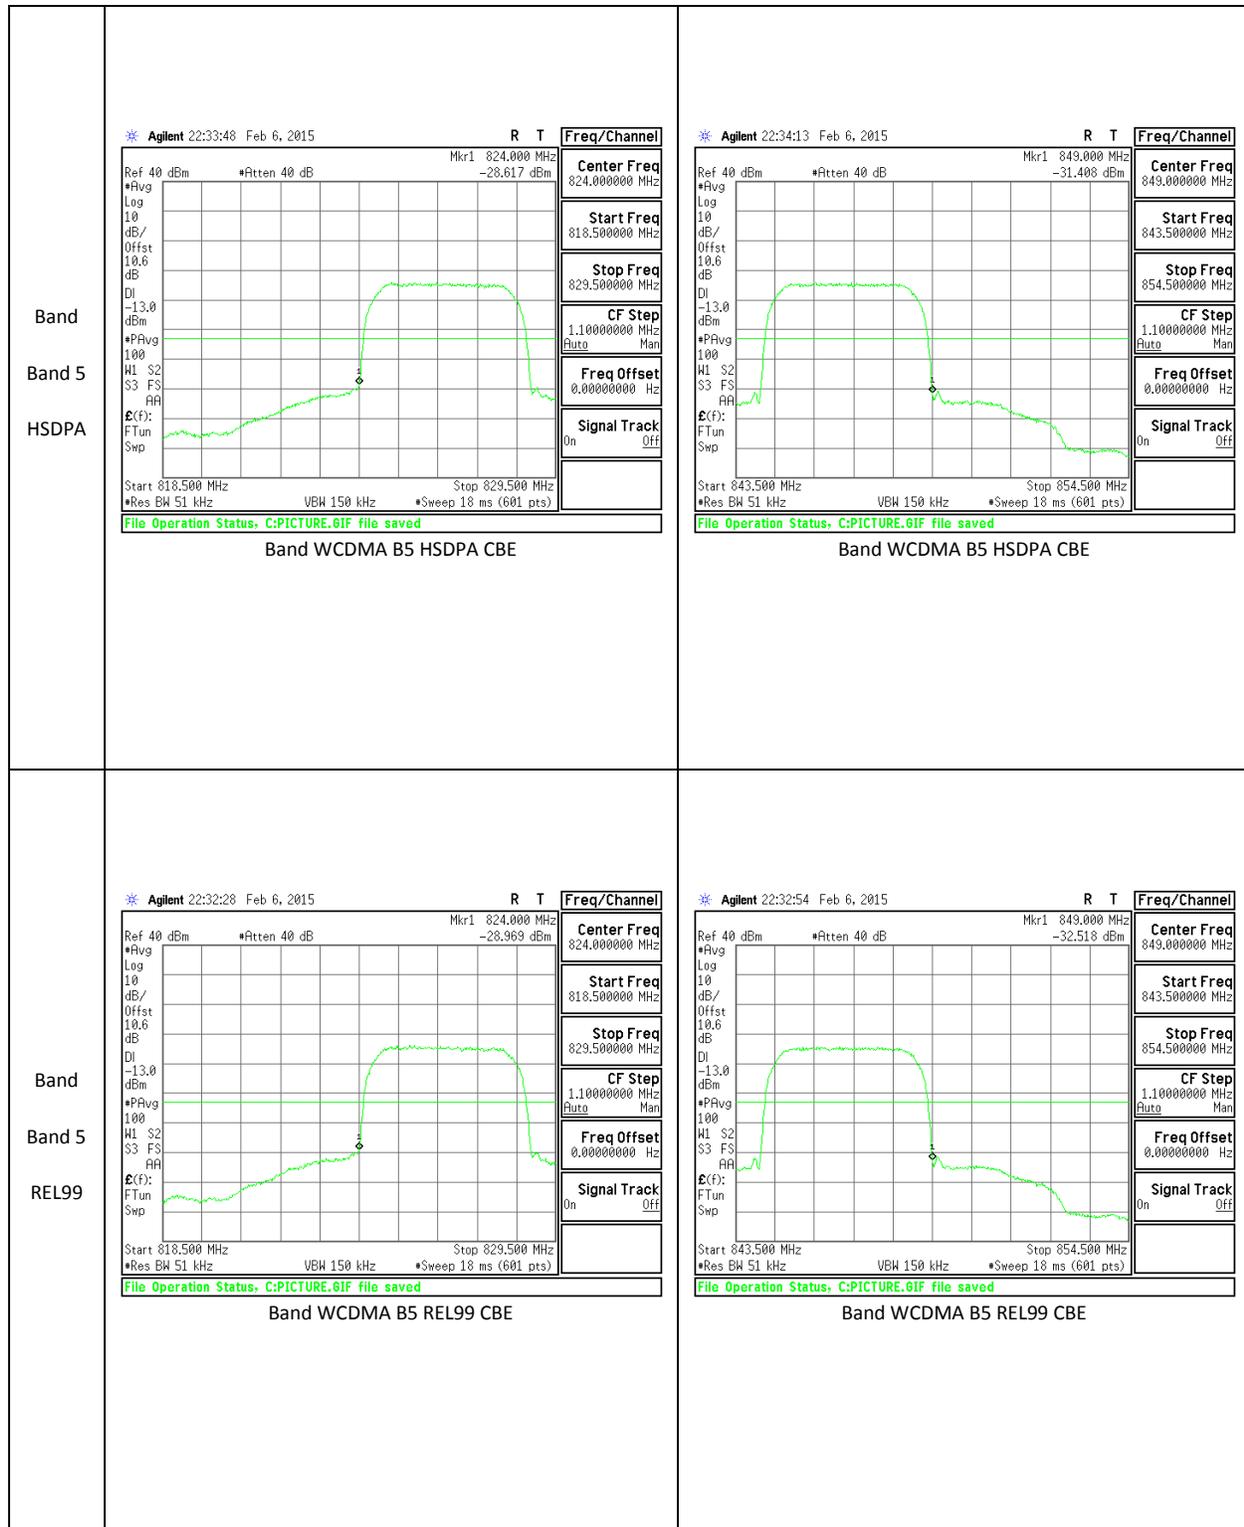

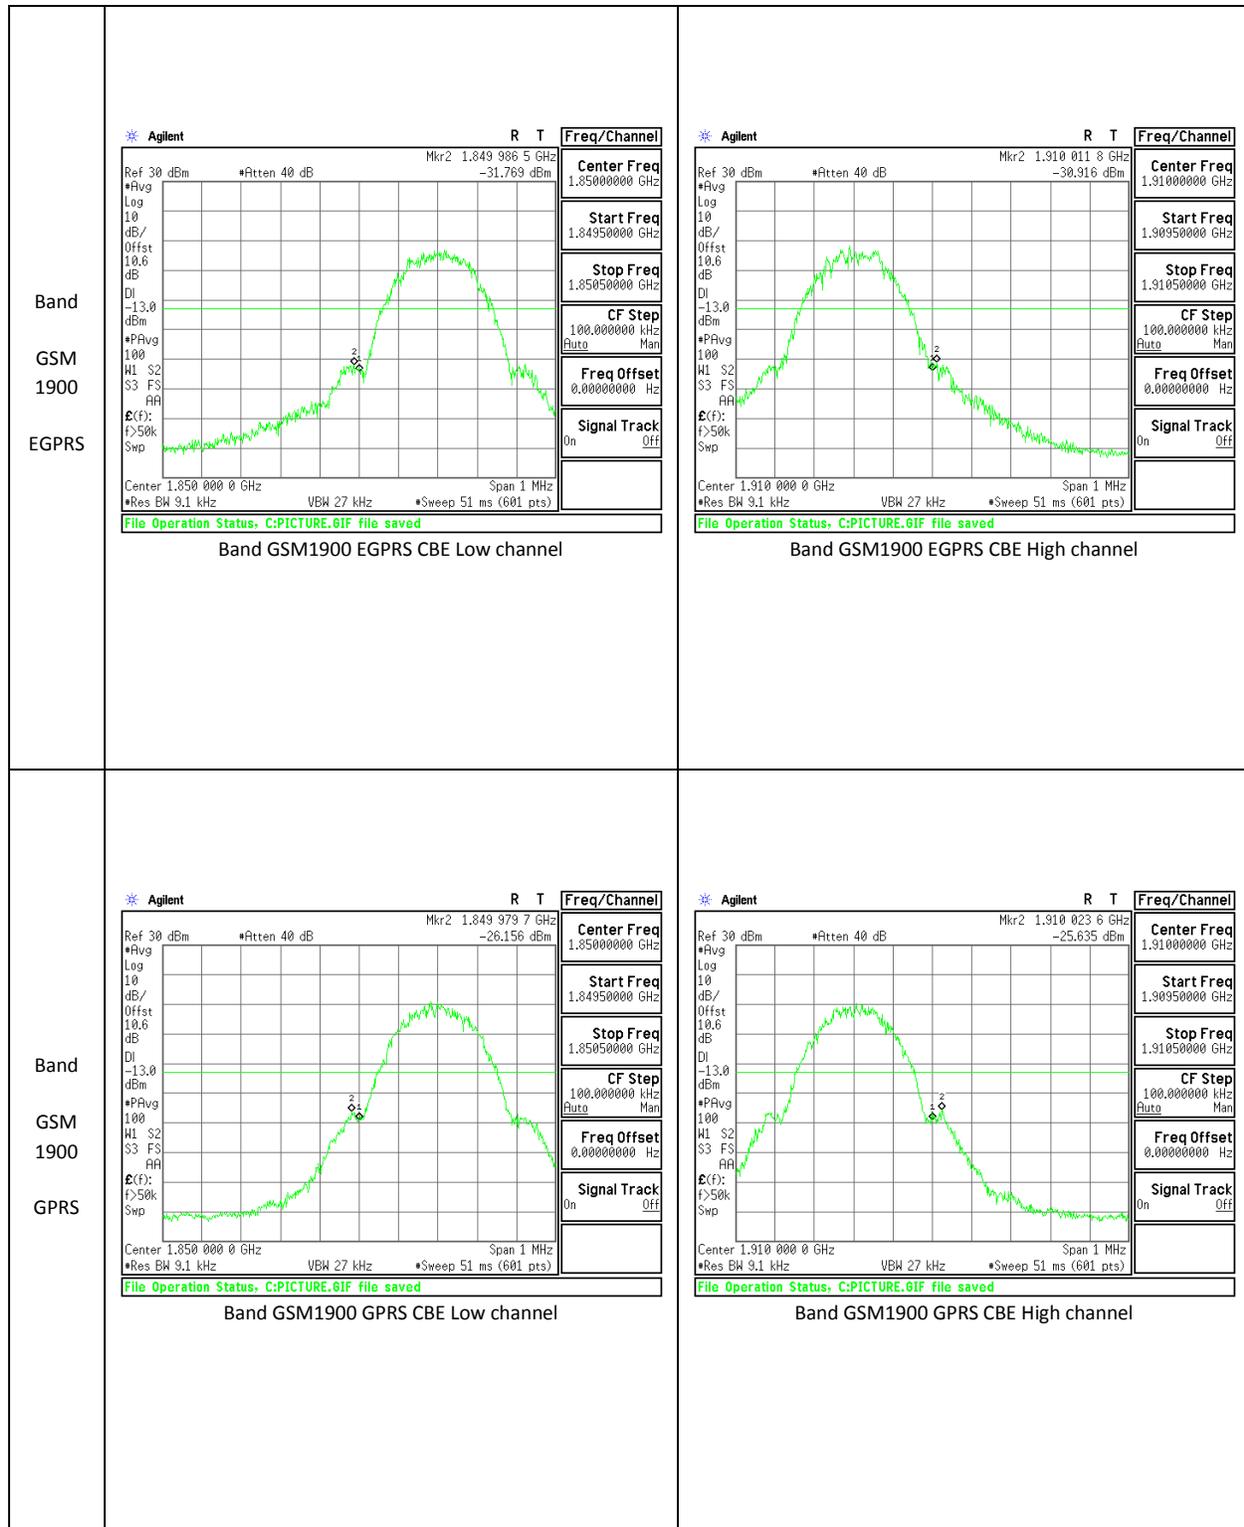

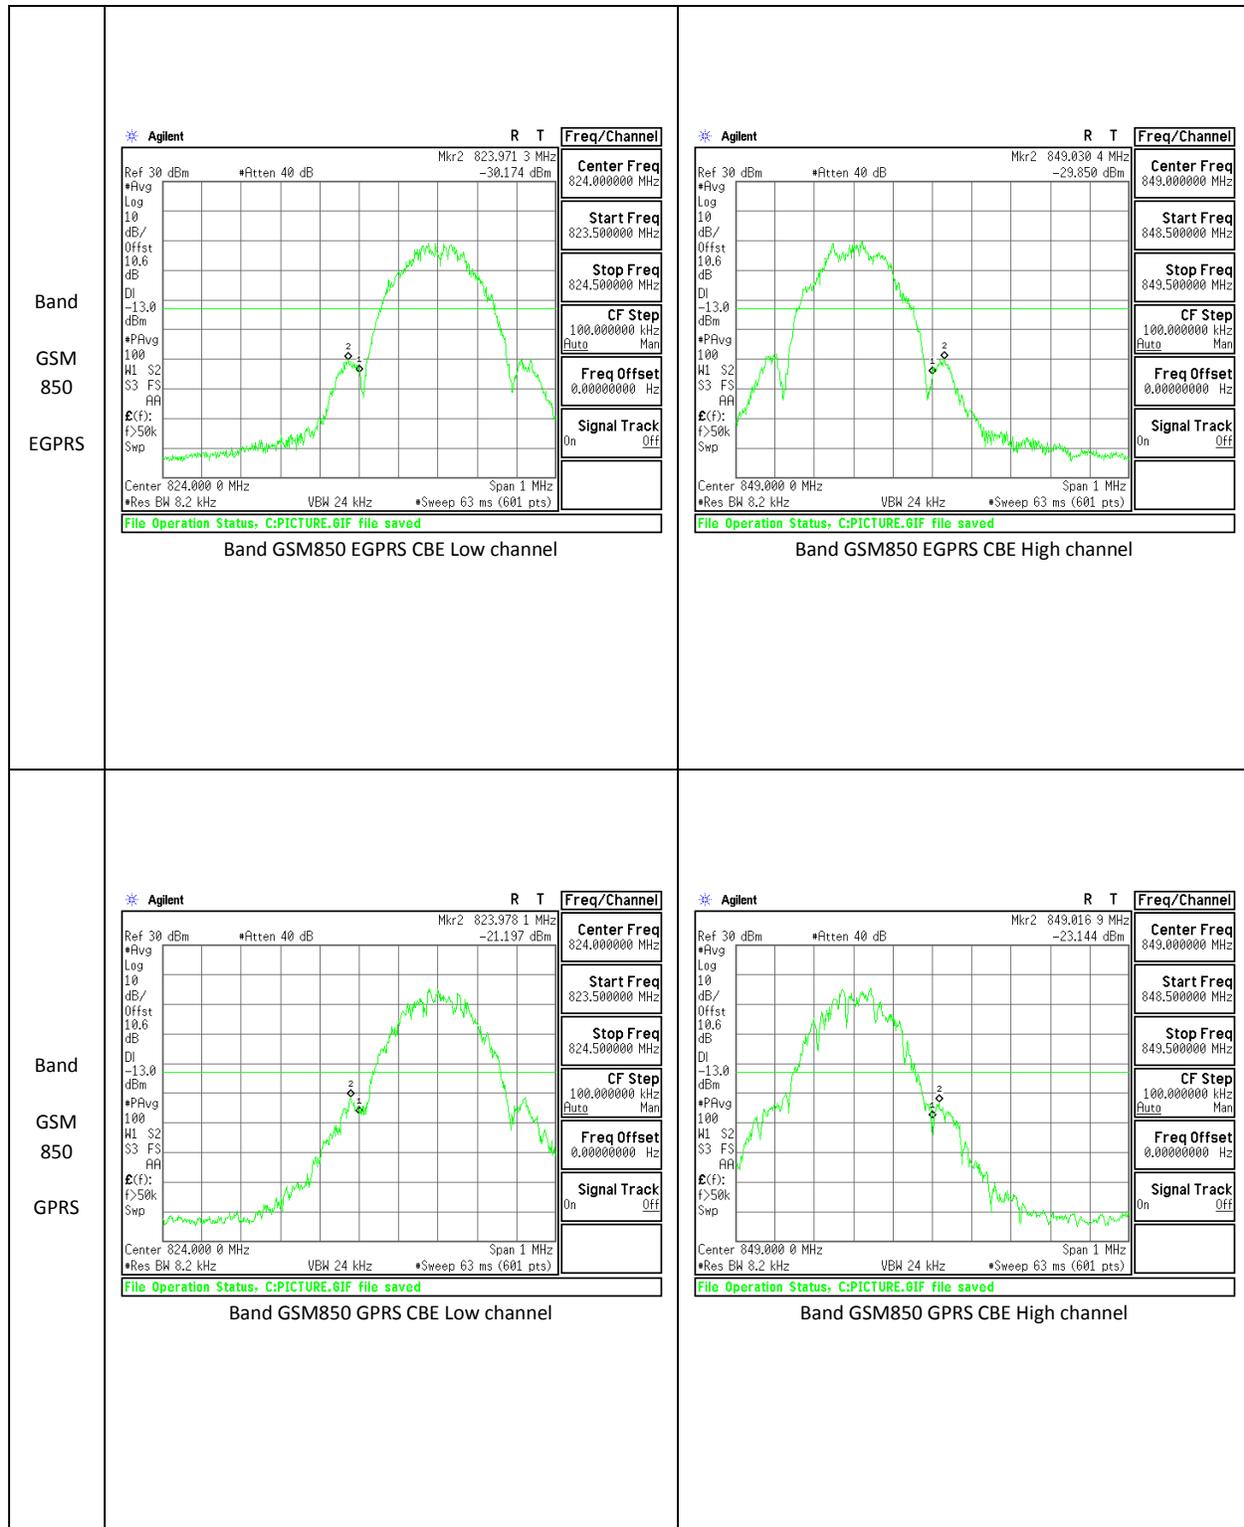

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, and §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than $43+10\log(P)$ dB at the channel edge and $(55+10\log(P))$ dB at 5.5MHz from the channel edges.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED

GSM, WCDMA, and LTE

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE12	10	QPSK	704	-33.44	-13	-19.88
			707.5	-33.16	-13	-20.16
			711	-34.22	-13	-21.22
		16QAM	704	-33.31	-13	-20.31
			707.5	-36.39	-13	-23.39
			711	-31.98	-13	-18.98
	5	QPSK	701.5	-33.36	-13	-20.36
			707.5	-33.61	-13	-20.61
			713.5	-32.88	-13	-19.88
		16QAM	701.5	-33.97	-13	-20.97
			707.5	-32.86	-13	-19.86
			713.5	-32.78	-13	-19.78
	3	QPSK	700.5	-33.72	-13	-20.72
			707.5	-33.86	-13	-20.86
			714.5	-32.84	-13	-19.84
		16QAM	700.5	-33.89	-13	-20.89
			707.5	-33.88	-13	-20.88
			714.5	-33.81	-13	-20.81
	1.4	QPSK	699.7	-32.93	-13	-19.93
			707.5	-32.68	-13	-19.68
			715.3	-33.18	-13	-20.18
		16QAM	699.7	-33.46	-13	-20.46
			707.5	-33.63	-13	-20.63
			715.3	-33.52	-13	-20.52

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	20	QPSK	1720	-26.39	-13	-13.39
			1732.5	-30.92	-13	-17.92
			1745	-27.20	-13	-14.20
		16QAM	1720	-31.40	-13	-18.40
			1732.5	-32.66	-13	-19.66
			1745	-30.66	-13	-17.66
	15	QPSK	1717.5	-26.43	-13	-13.43
			1732.5	-30.25	-13	-17.25
			1747.5	-34.39	-13	-21.39
		16QAM	1717.5	-24.65	-13	-11.65
			1732.5	-32.82	-13	-19.82
			1747.5	-29.31	-13	-16.31
	10	QPSK	1715	-25.67	-13	-12.67
			1732.5	-32.73	-13	-19.73
			1750	-28.02	-13	-15.02
		16QAM	1715	-25.91	-13	-12.91
			1732.5	-33.24	-13	-20.24
			1750	-28.02	-13	-15.02
	5	QPSK	1712.5	-26.74	-13	-13.74
			1732.5	-33.14	-13	-20.14
			1752.5	-32.52	-13	-19.52
16QAM		1712.5	-30.51	-13	-17.51	
		1732.5	-32.69	-13	-19.69	
		1752.5	-33.08	-13	-20.08	

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE4	3	QPSK	1711.5	-28.61	-13	-15.61
			1732.5	-29.64	-13	-16.64
			1753.5	-32.43	-13	-19.43
		16QAM	1711.5	-25.82	-13	-12.82
			1732.5	-30.11	-13	-17.11
			1753.5	-32.70	-13	-19.70
	1.4	QPSK	1710.7	-25.82	-13	-12.82
			1732.5	-31.25	-13	-18.25
			1754.3	-33.17	-13	-20.17
		16QAM	1710.7	-26.82	-13	-13.82
			1732.5	-32.77	-13	-19.77
			1754.3	-32.85	-13	-19.85


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE2	20	QPSK	1860	-33.44	-13	-20.44
			1880	-33.42	-13	-20.42
			1900	-35.57	-13	-22.57
		16QAM	1860	-33.10	-13	-20.10
			1880	-33.26	-13	-20.26
			1900	-37.54	-13	-24.54
	15	QPSK	1857.5	-32.23	-13	-19.23
			1880	-33.15	-13	-20.15
			1902.5	-36.42	-13	-23.42
		16QAM	1857.5	-33.71	-13	-20.71
			1880	-33.59	-13	-20.59
			1902.5	-35.60	-13	-22.60
	10	QPSK	1855	-33.33	-13	-20.33
			1880	-33.29	-13	-20.29
			1905	-32.48	-13	-19.48
		16QAM	1855	-33.46	-13	-20.46
			1880	-33.03	-13	-20.03
			1905	-32.48	-13	-19.48
	5	QPSK	1852.5	-32.77	-13	-19.77
			1880	-33.67	-13	-20.67
			1907.5	-33.93	-13	-20.93
16QAM		1852.5	-33.79	-13	-20.79	
		1880	-33.89	-13	-20.89	
		1907.5	-33.25	-13	-20.25	


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE2	3	QPSK	1851.5	-33.58	-13	-20.58
			1880	-33.63	-13	-20.63
			1908.5	-33.09	-13	-20.09
		16QAM	1851.5	-32.83	-13	-19.83
			1880	-33.85	-13	-20.85
			1908.5	-33.44	-13	-20.44
	1.4	QPSK	1850.7	-34.14	-13	-21.14
			1880	-33.75	-13	-20.75
			1909.3	-33.41	-13	-20.41
		16QAM	1850.7	-33.79	-13	-20.79
			1880	-33.48	-13	-20.48
			1909.3	-33.09	-13	-20.09


Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-25.753	-13	-12.753
		836.6	-26.018	-13	-13.018
		848.8	-25.924	-13	-12.924
	EGPRS	824.2	-24.749	-13	-11.749
		836.6	-25.668	-13	-12.668
		848.8	-25.876	-13	-12.876
GSM1900	GPRS	1850.2	-26.047	-13	-13.047
		1880	-25.387	-13	-12.387
		1909.8	-25.388	-13	-12.388
	EGPRS	1850.2	-25.582	-13	-12.582
		1880	-25.661	-13	-12.661
		1909.8	-25.736	-13	-12.736


Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
BAND 5	REL99	826.4	-25.72	-13	-12.72
		836.6	-25.49	-13	-12.49
		846.6	-25.29	-13	-12.29
	HSDPA	826.4	-24.88	-13	-11.88
		836.6	-25.81	-13	-12.81
		846.6	-25.74	-13	-12.74
BAND 4	REL99	1712.4	-25.87	-13	-12.87
		1732.6	-25.86	-13	-12.86
		1752.6	-26.04	-13	-13.04
	HSDPA	1712.4	-25.62	-13	-12.62
		1732.6	-24.81	-13	-11.81
		1752.6	-25.67	-13	-12.67
BAND 2	REL99	1852.4	-25.63	-13	-12.63
		1880	-25.81	-13	-12.81
		1907.6	-25.86	-13	-12.86
	HSDPA	1852.4	-25.19	-13	-12.19
		1880	-25.43	-13	-12.43
		1907.6	-25.71	-13	-12.71


10.3.2. OUT OF BAND EMISSIONS PLOTS

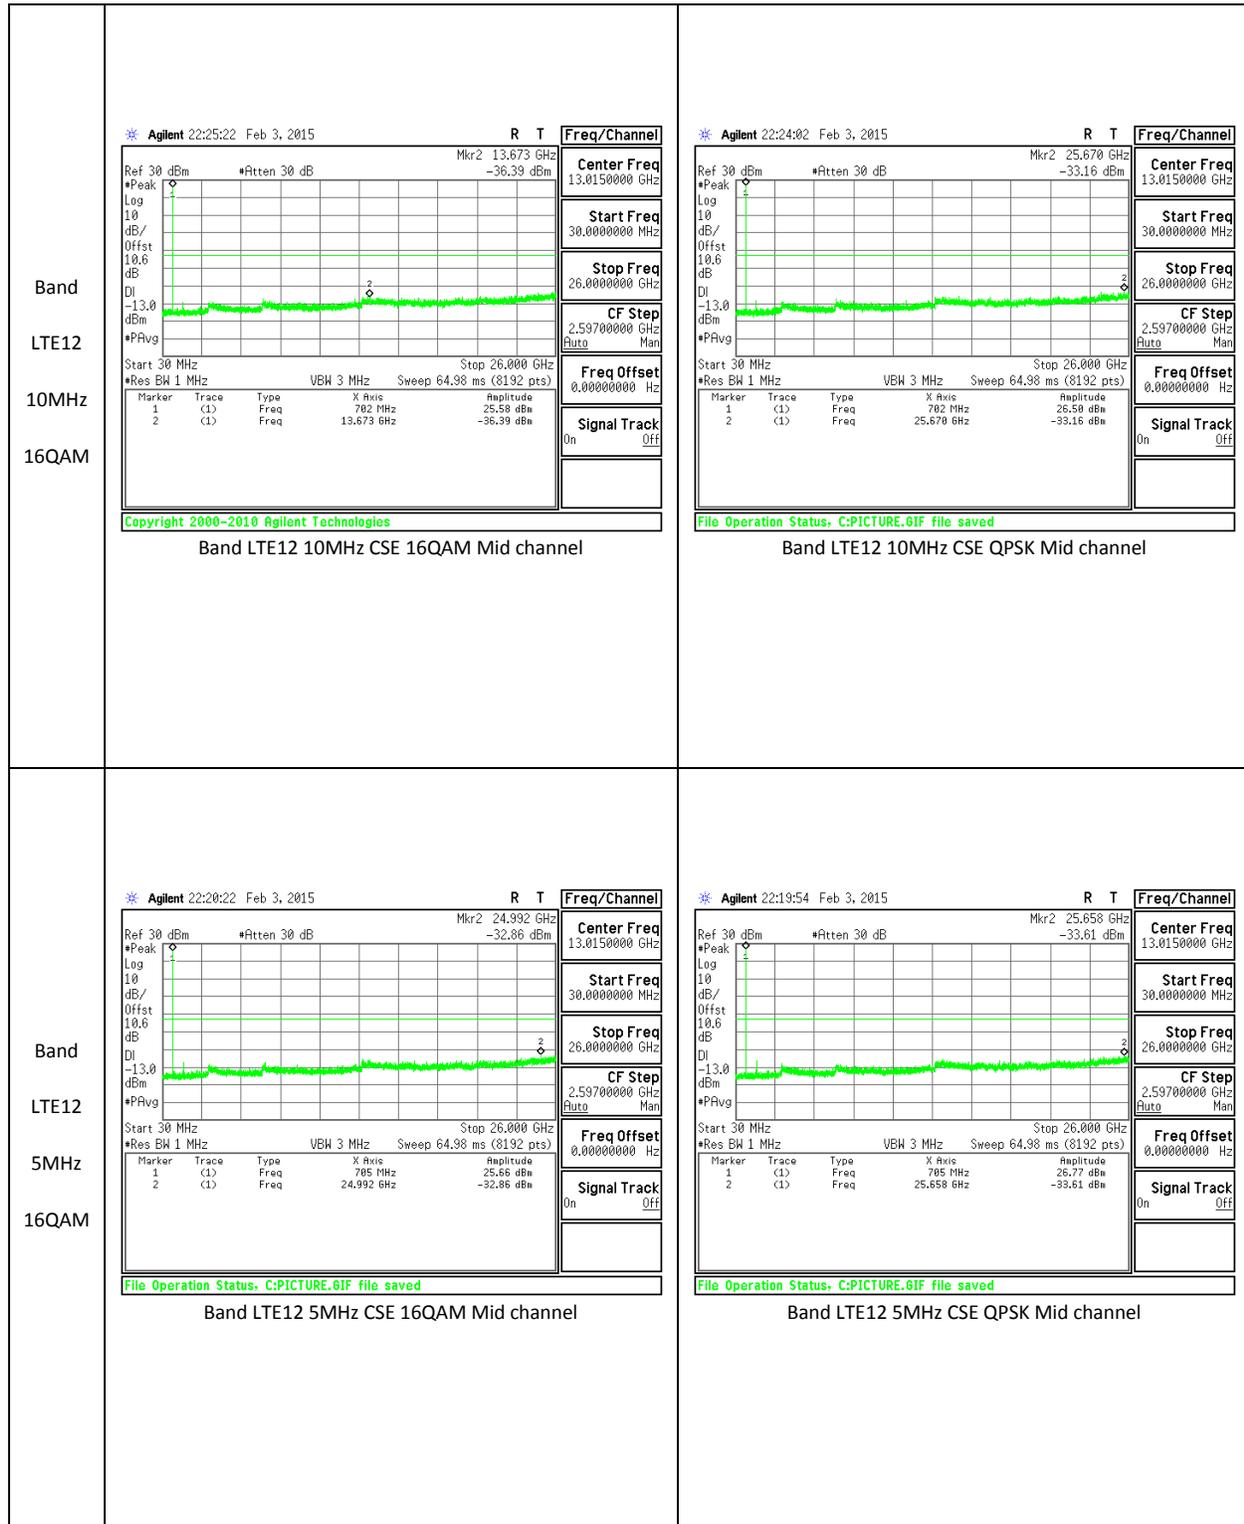


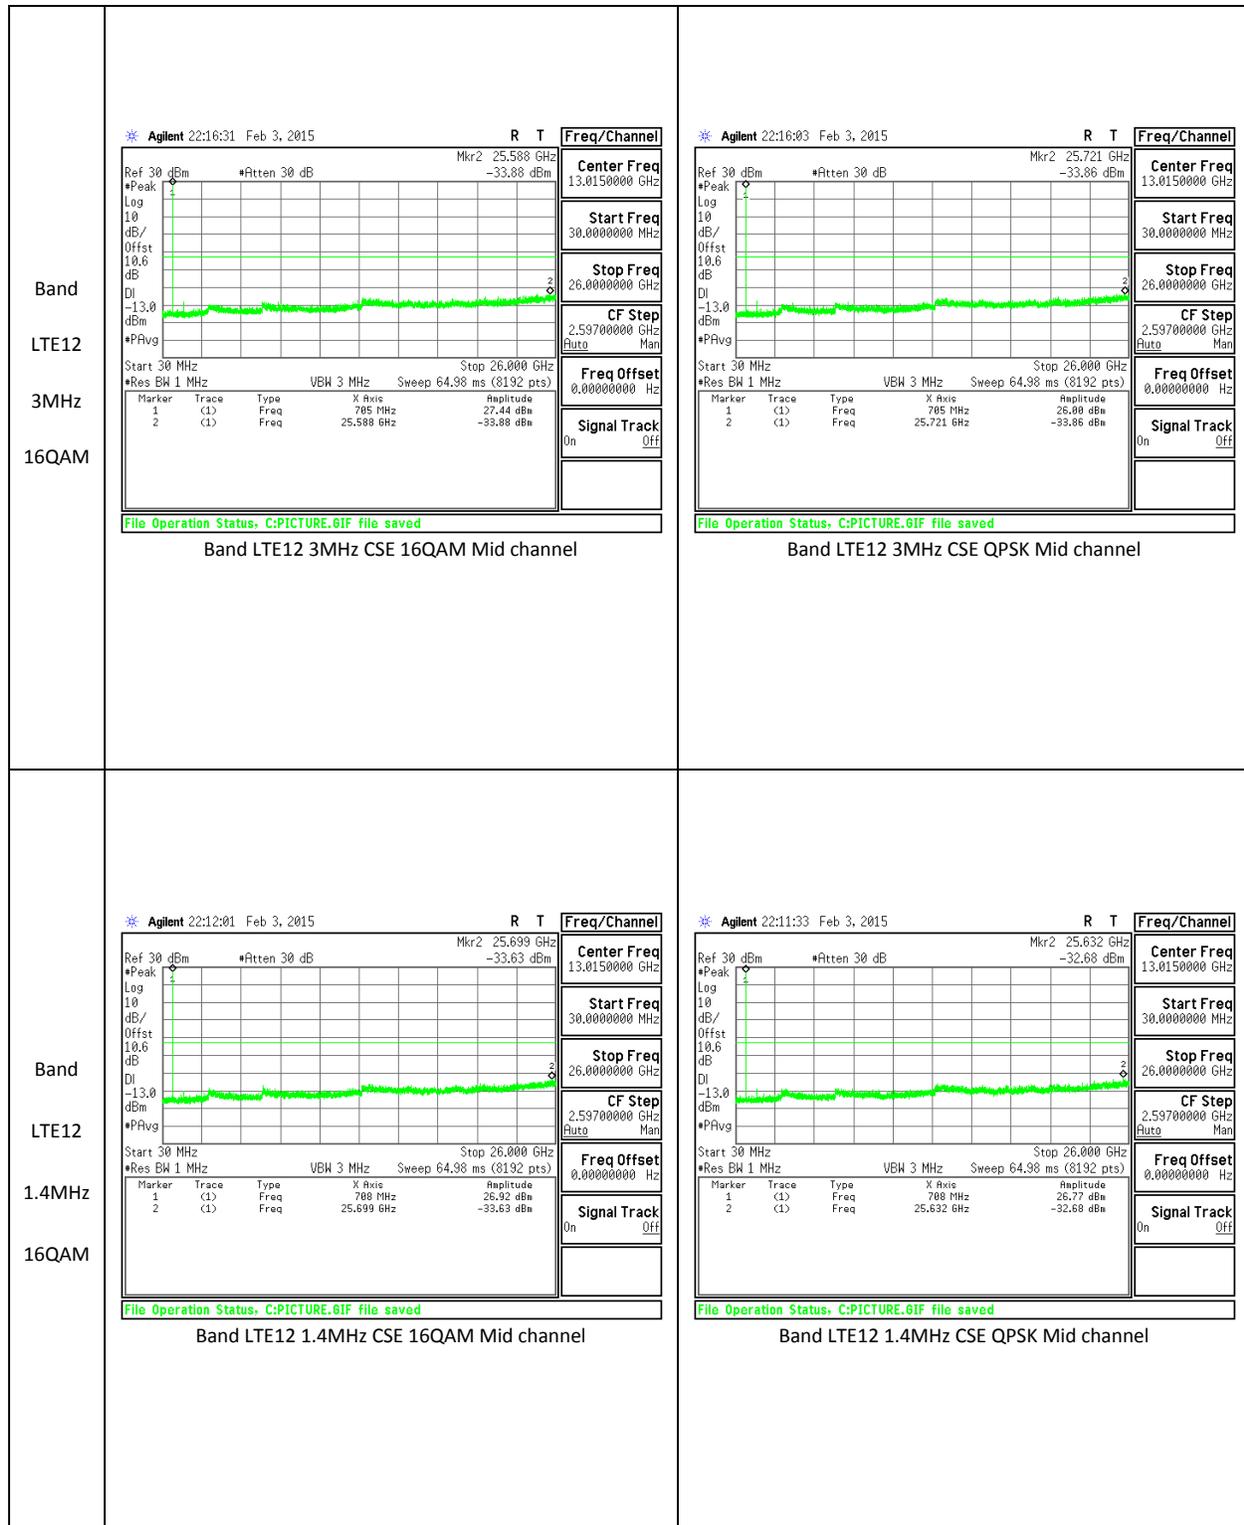


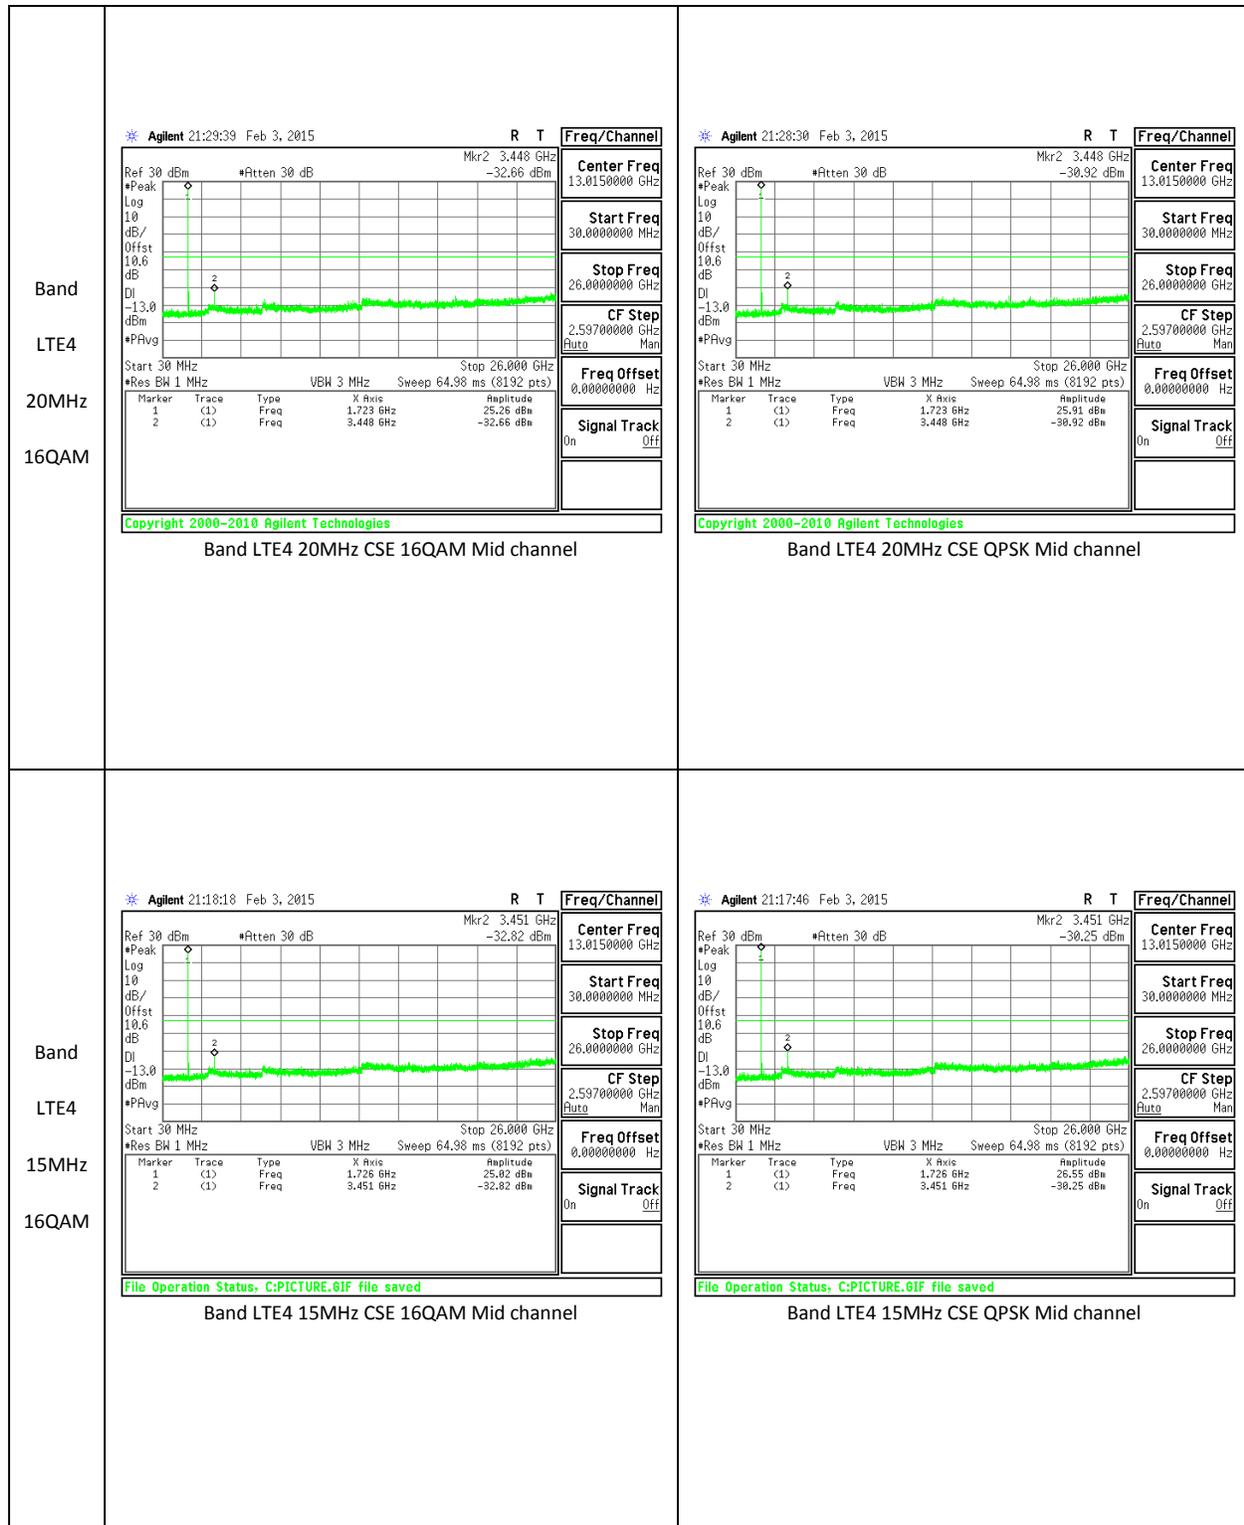



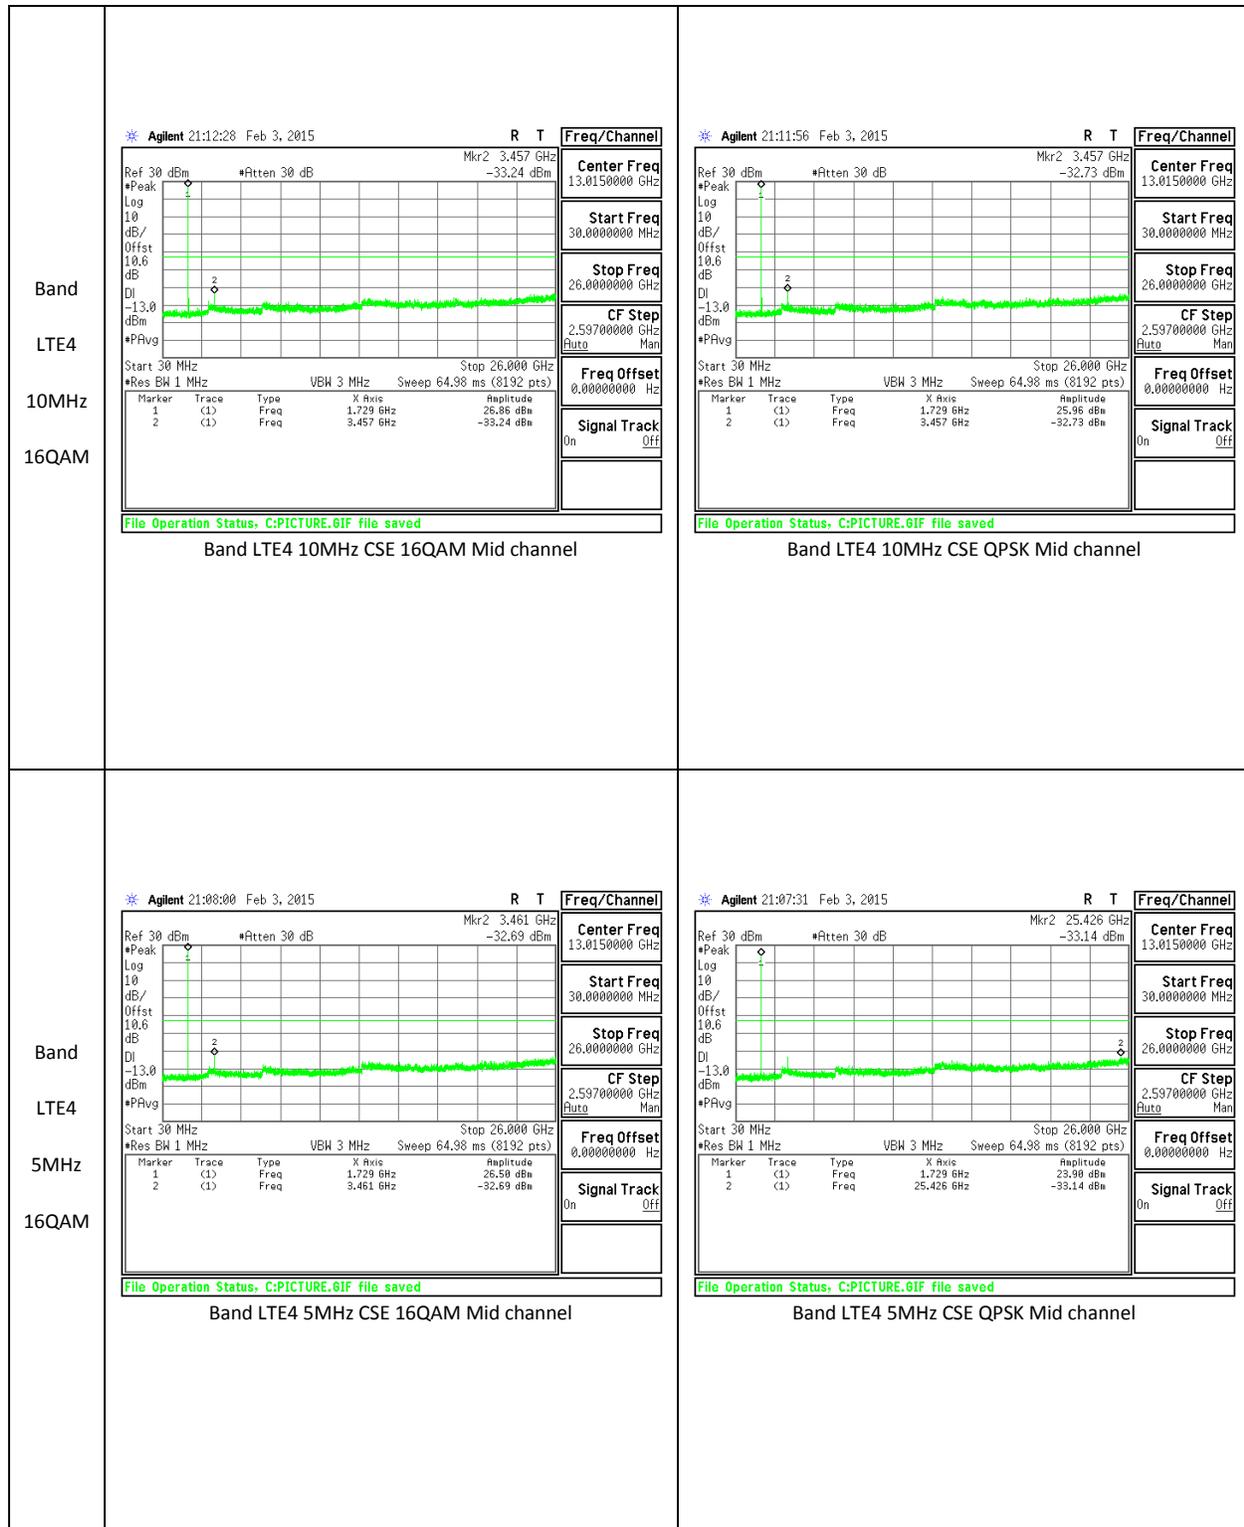



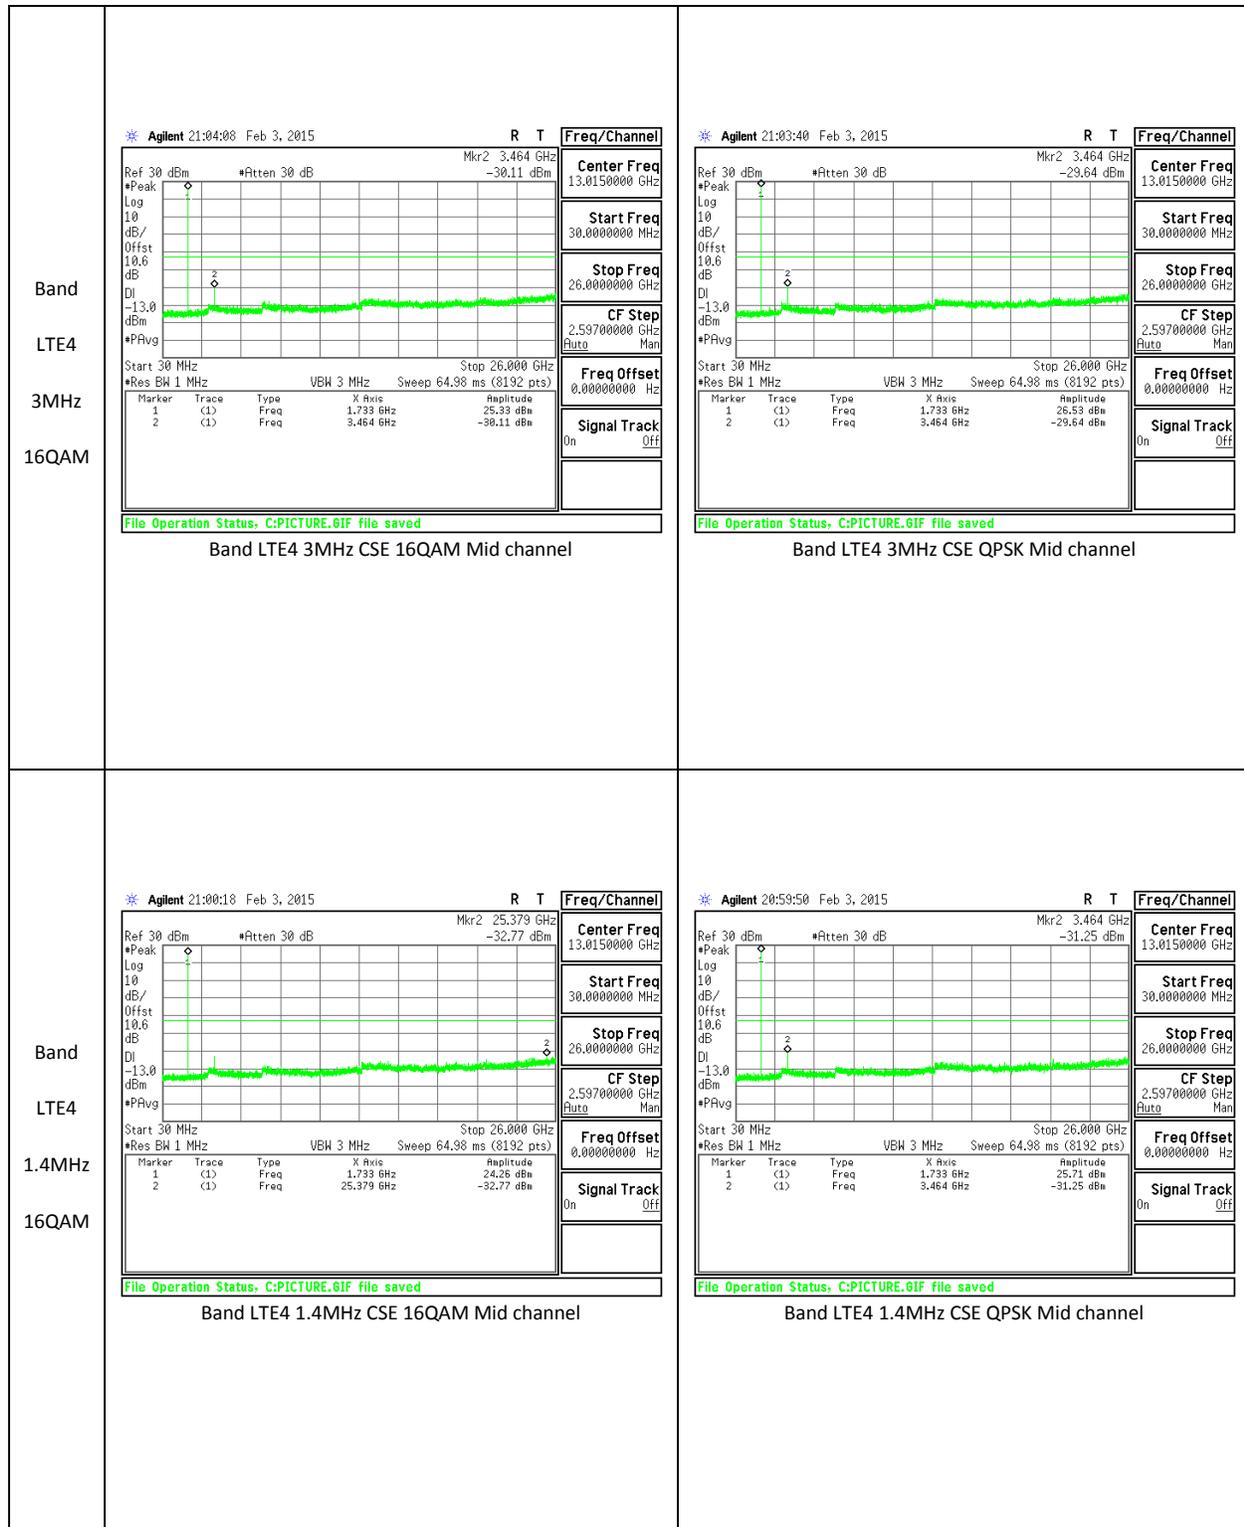


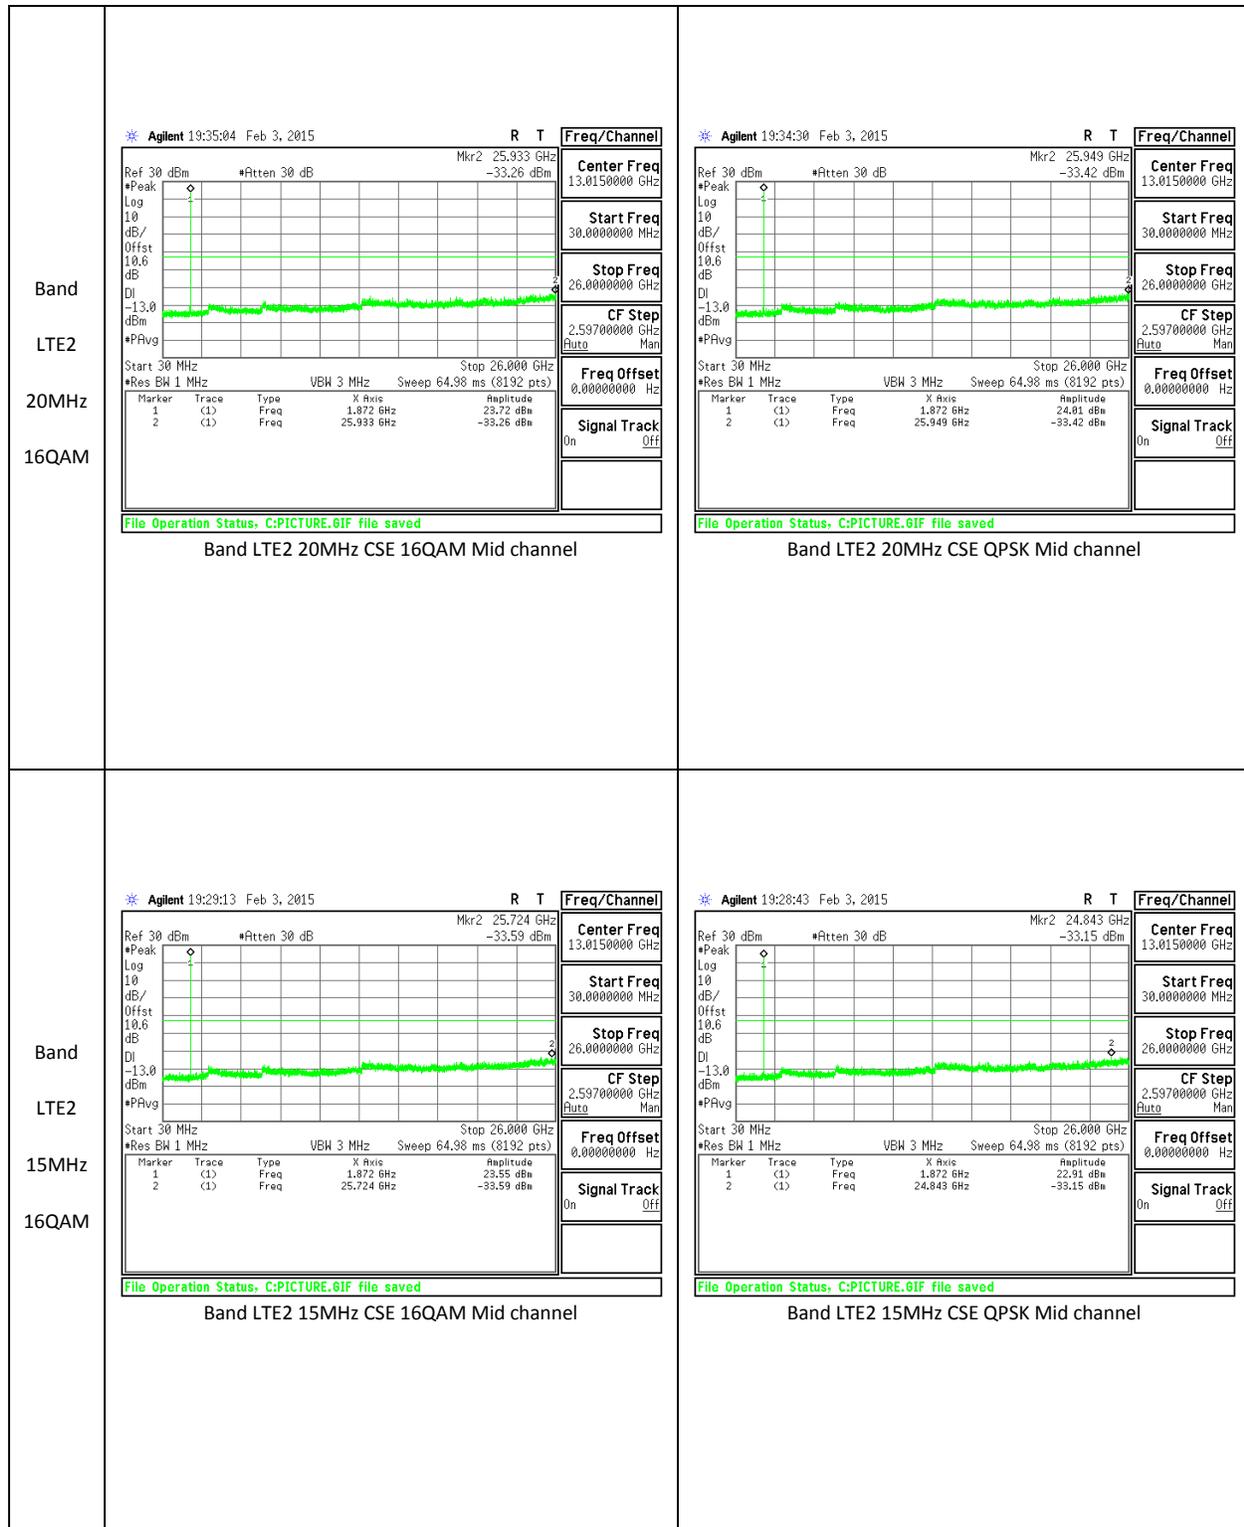


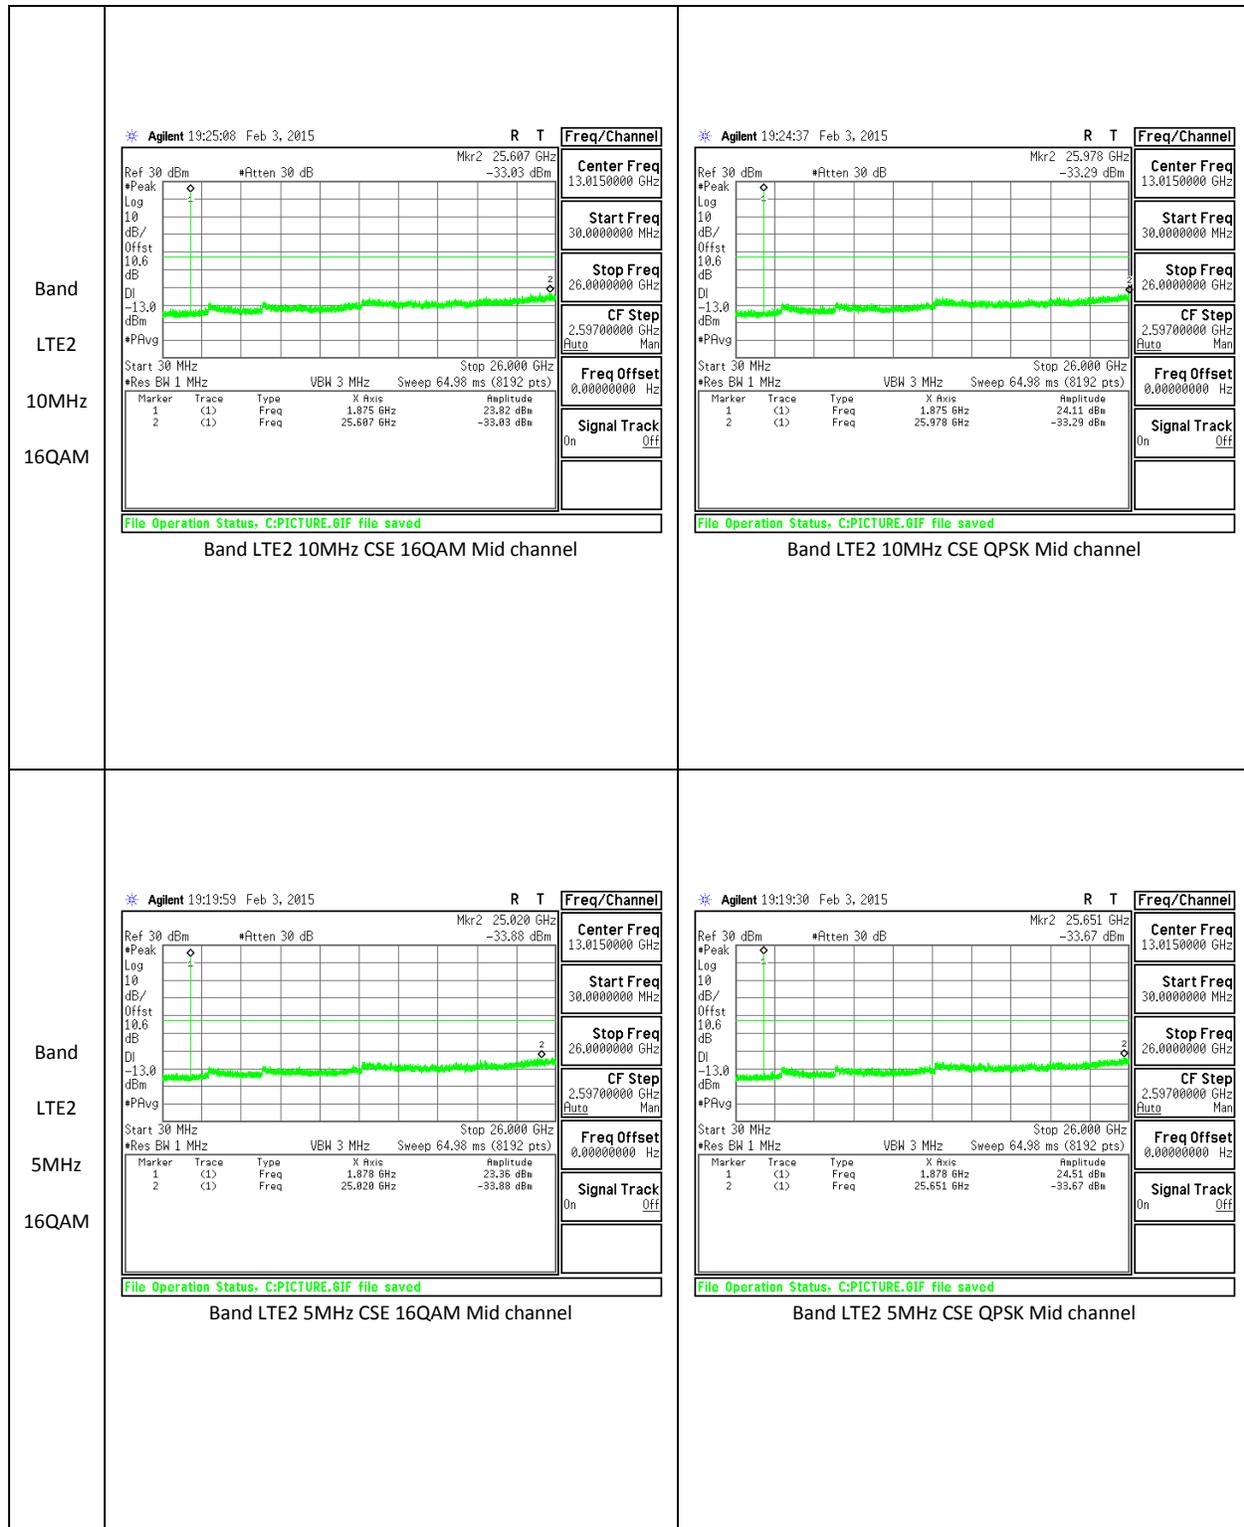

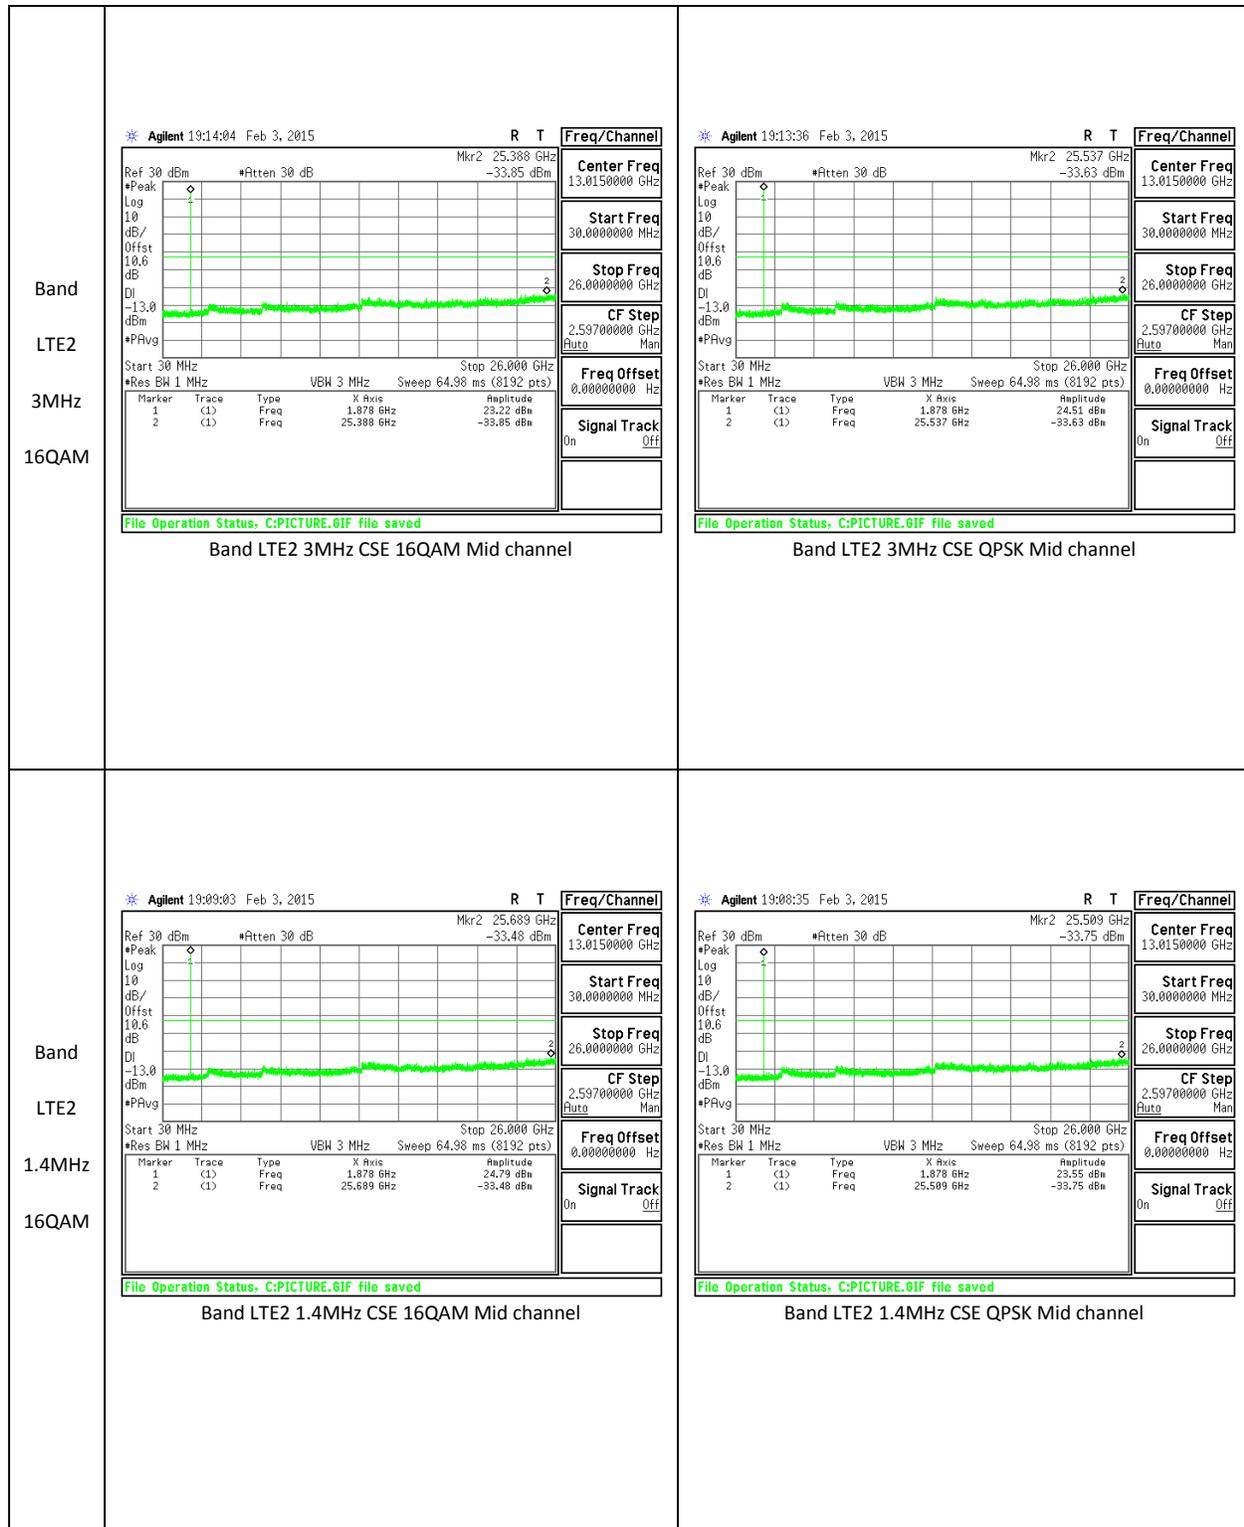

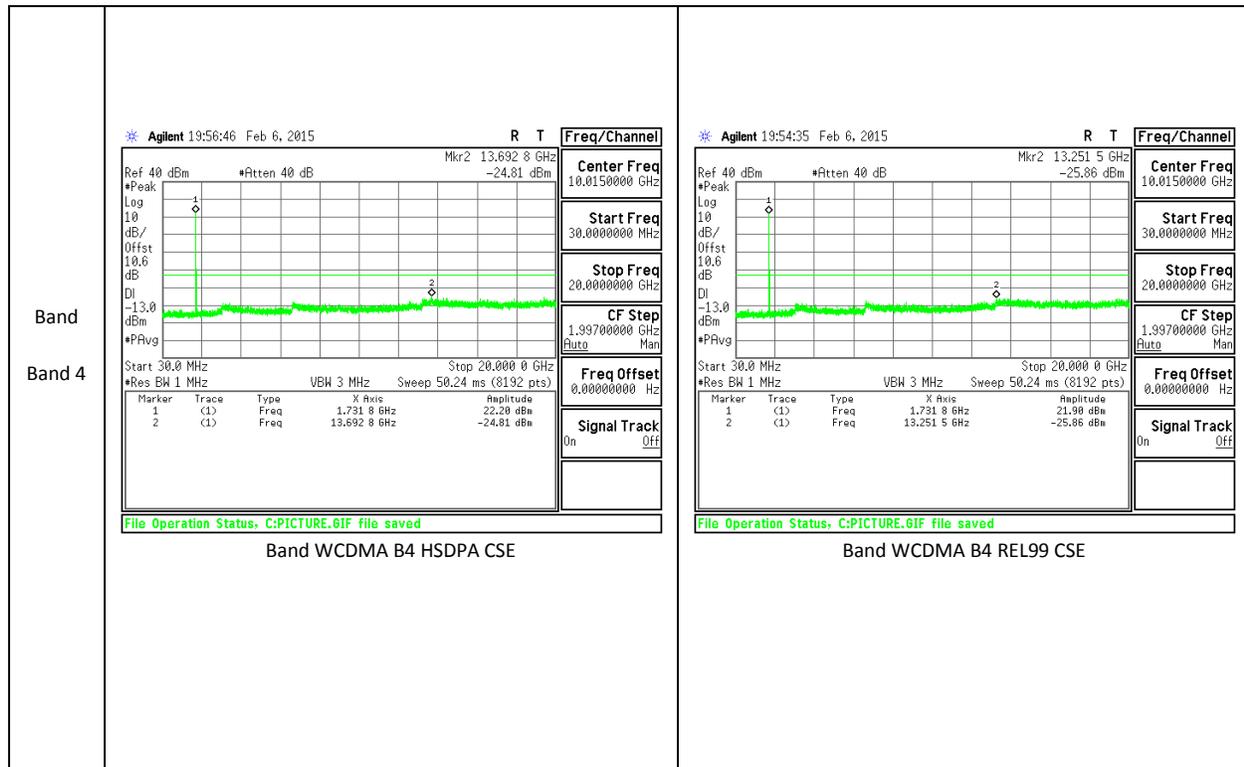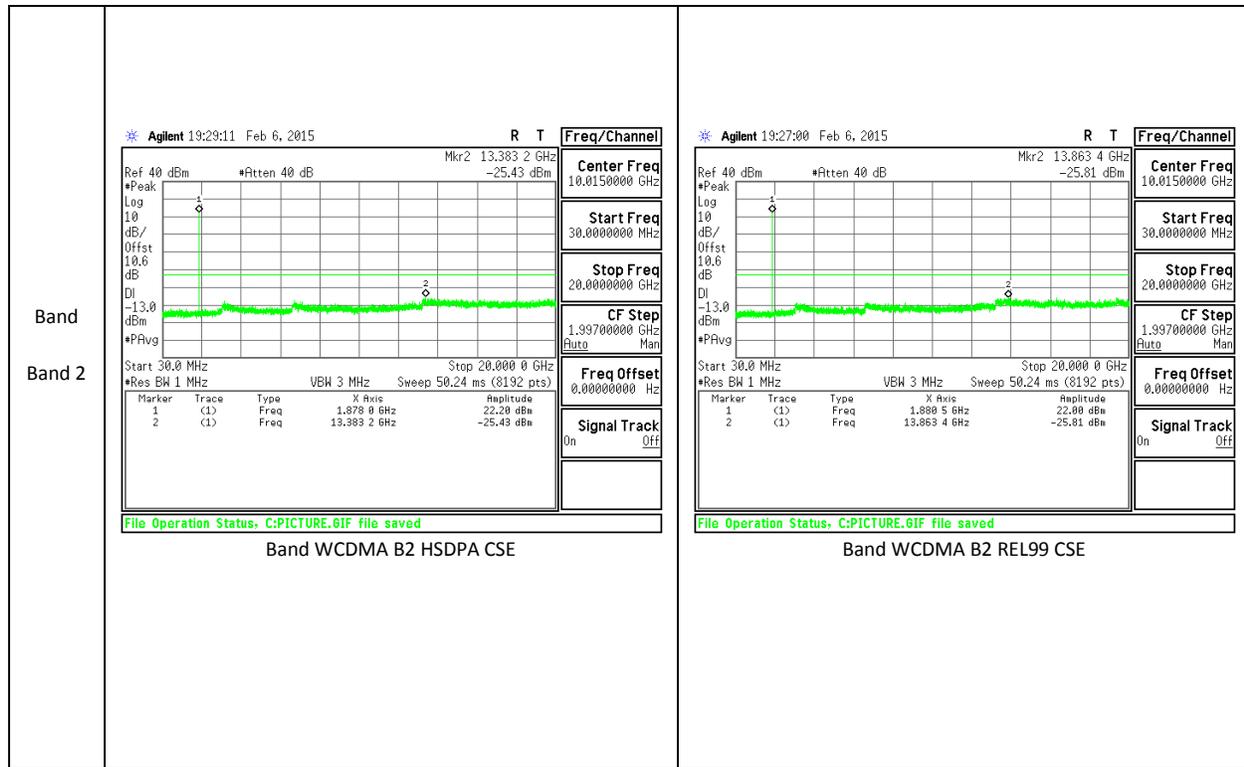

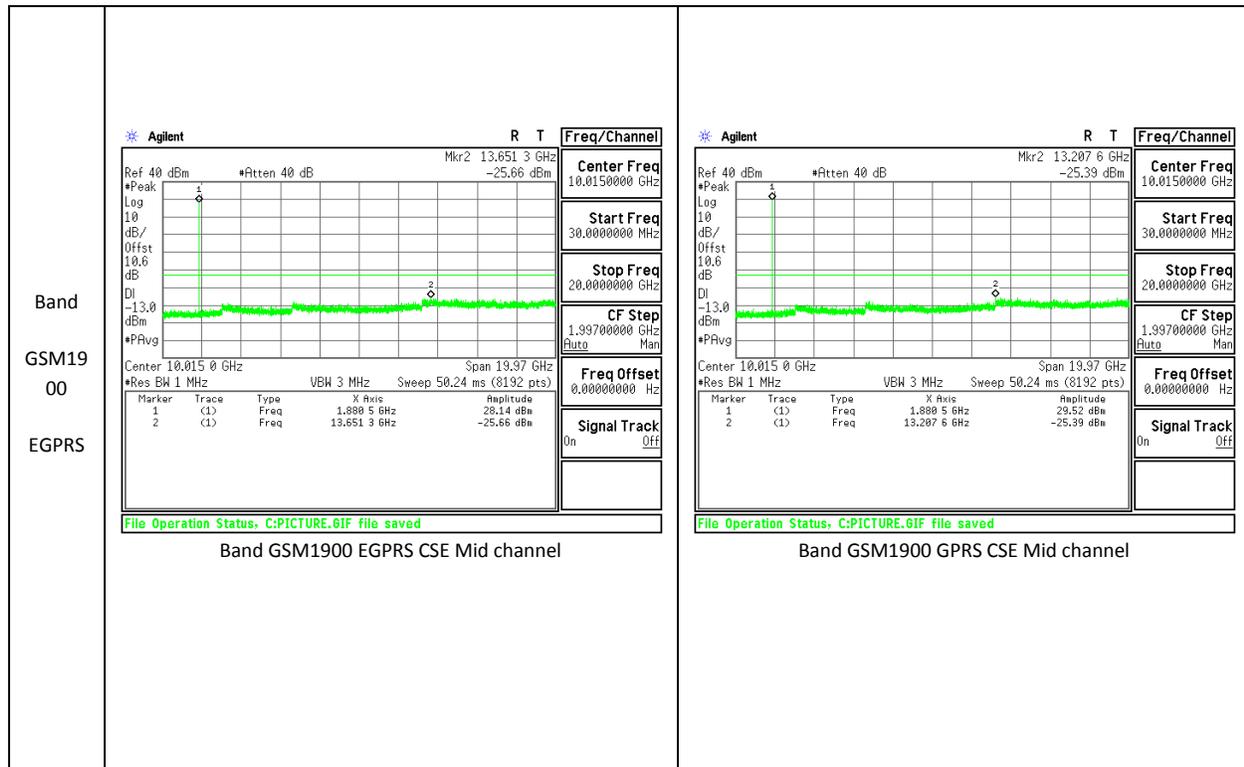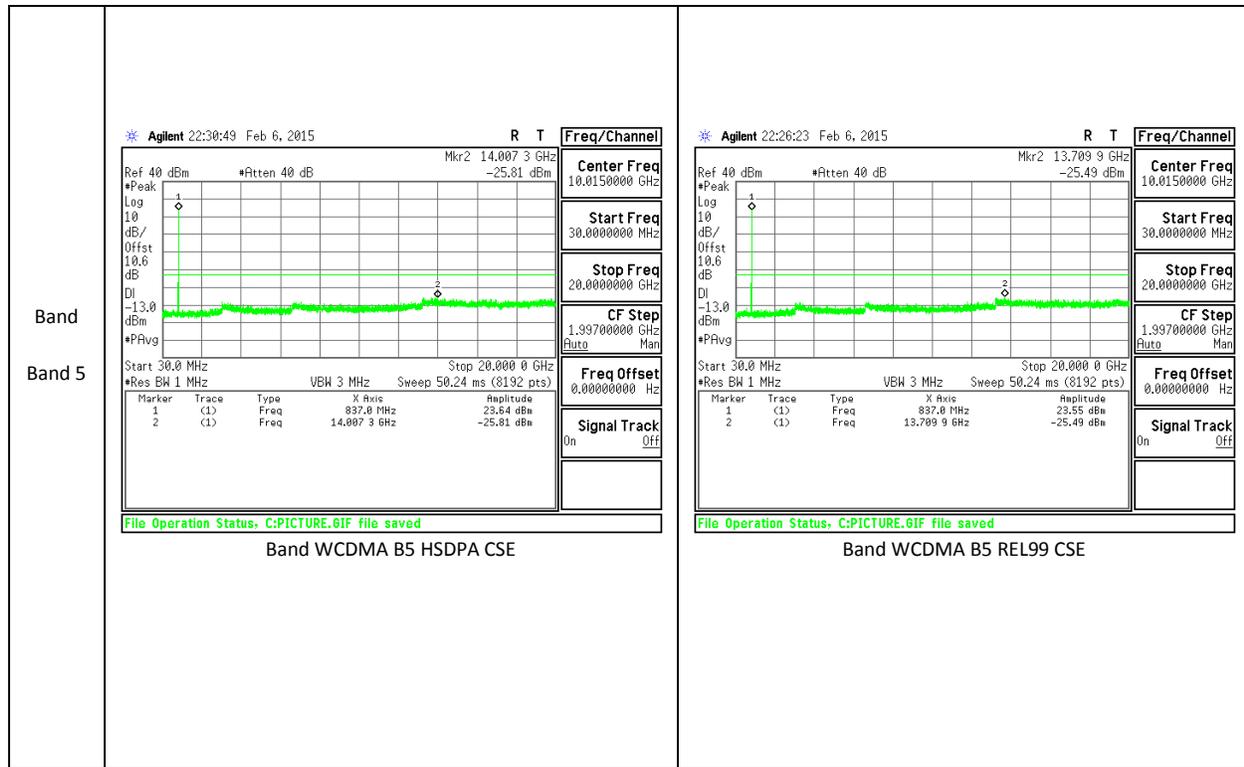

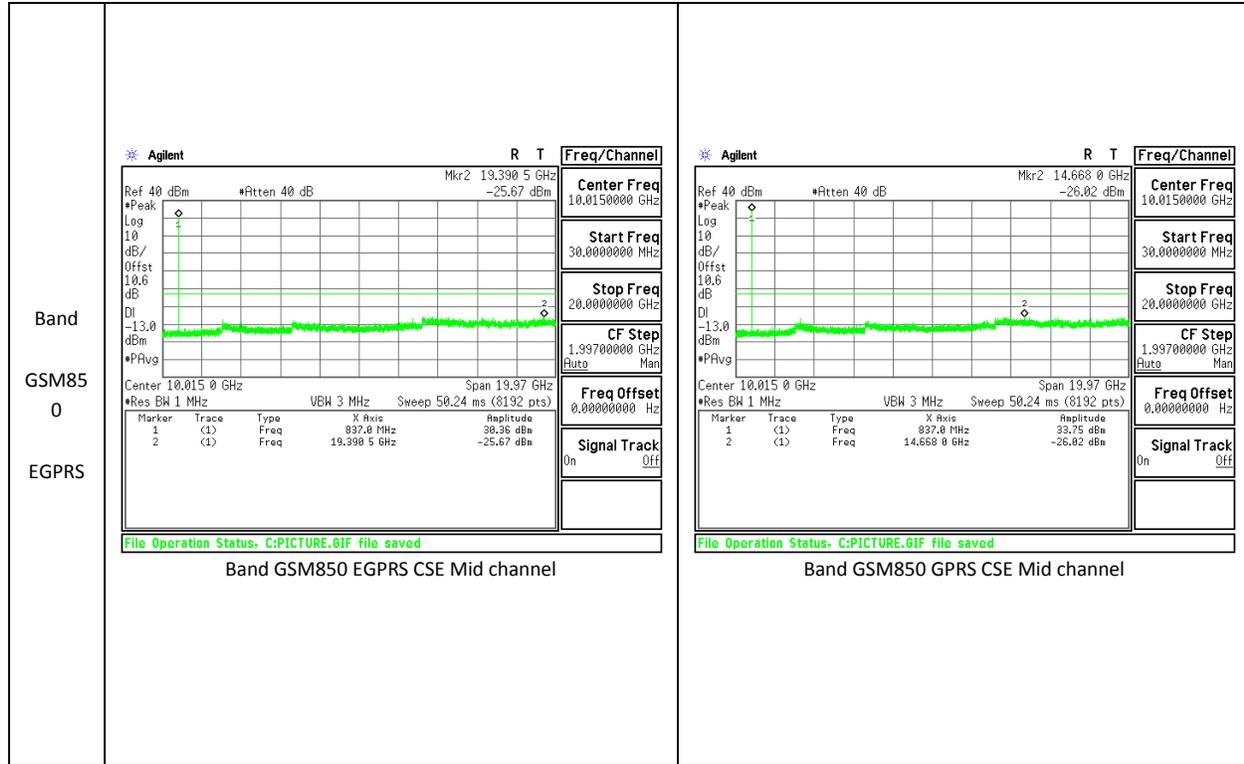

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

MODES TESTED

WCDMA, and LTE

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

WCDMA BAND 2 – MID CHANNEL (1880.0 MHz)

Reference Frequency: Cellular Mid Channel 1879.999997MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999995	0.001	2.5
3.80	40	1879.999984	0.007	2.5
3.80	30	1879.999997	0.000	2.5
3.80	20	1879.999997	0	2.5
3.80	10	1880.000007	-0.006	2.5
3.80	0	1879.999996	0.001	2.5
3.80	-10	1879.999996	0.000	2.5
3.80	-20	1879.999988	0.005	2.5
3.80	-30	1879.999997	0.000	2.5
Reference Frequency: Cellular Mid Channel 1879.999975MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999997	0	2.5
3.23	20	1880.000001	-0.002	2.5
4.37	20	1879.999996	0.000	2.5

WCDMA BAND 4 – MID CHANNEL (1732.5 MHz)

Reference Frequency: Cellular Mid Channel 1732.500004MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1732.499996	0.005	2.5
3.80	40	1732.499989	0.009	2.5
3.80	30	1732.499984	0.011	2.5
3.80	20	1732.500004	0	2.5
3.80	10	1732.500003	0.000	2.5
3.80	0	1732.500013	-0.005	2.5
3.80	-10	1732.500003	0.001	2.5
3.80	-20	1732.499988	0.010	2.5
3.80	-30	1732.500003	0.000	2.5
Reference Frequency: Cellular Mid Channel 1732.500004MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4331.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1732.500004	0	2.5
3.23	20	1732.500018	-0.008	2.5
4.37	20	1732.500005	0.000	2.5

WCDMA BAND 5 – MID CHANNEL (836.5 MHz)

Reference Frequency: Cellular Mid Channel 836.600007MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599995	0.011	2.5
3.80	40	836.599998	0.007	2.5
3.80	30	836.600003	0.002	2.5
3.80	20	836.600004	0	2.5
3.80	10	836.599998	0.008	2.5
3.80	0	836.599998	0.007	2.5
3.80	-10	836.599998	0.007	2.5
3.80	-20	836.600002	0.003	2.5
3.80	-30	836.600003	0.002	2.5
Reference Frequency: Cellular Mid Channel 836.500007MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.600004	0	2.5
3.23	20	836.599994	0.012	2.5
4.37	20	836.600002	0.003	2.5

LTE BAND 12 – MID CHANNEL (707.5 MHz)

Reference Frequency: Cellular Mid Channel 707.50000678 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1768.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	707.500052	-0.079	2.5
3.80	40	707.499990	0.008	2.5
3.80	30	707.499991	0.007	2.5
3.80	20	707.499996	0	2.5
3.80	10	707.500003	-0.010	2.5
3.80	0	707.500003	-0.009	2.5
3.80	-10	707.499996	0.001	2.5
3.80	-20	707.500028	-0.045	2.5
3.80	-30	707.499997	-0.001	2.5
Reference Frequency: Cellular Mid Channel 707.5 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 1768.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	707.499996	0	2.5
3.23	20	707.499995	0.002	2.5
4.37	20	707.499996	0.000	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, and §27

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) - (10) Portable stations (hand-held devices) are limited to 3 watts ERP; (LTE B17 & LTE B12)

27.50(d) - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.(Band 4)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

MODES TESTED

GSM, WCDMA, and LTE

TEST RESULTS

11.1.1. ERP/EIRP RESULTS

WCDMA

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	23.85	242.66
		9400	1880	23.73	236.05
		9538	1907.6	23.4	218.78
	HSDPA	9262	1852.4	23.82	240.99
		9400	1880	23.61	229.61
		9538	1907.6	23.8	239.88

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 4	REL99	1312	1712.4	24.09	256.32
		1413	1732.6	26.09	406.33
		1513	1752.6	24.48	280.35
	HSDPA	1312	1712.4	24.00	251.06
		1413	1732.6	26.12	409.15
		1513	1752.6	24.17	261.03

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	21.03	126.77
		4183	836.6	22.4	173.78
		4233	846.6	22.66	184.5
	HSDPA	4132	826.4	21.43	139
		4183	836.6	21.7	147.91
		4233	846.6	22.82	191.43

GSM

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	30.05	1011.58
		661	1880	29.49	889.2
		810	1909.8	29.45	881.05
	EGPRS	512	1850.2	26.46	442.59
		661	1880	26.18	414.95
		810	1909.8	26.18	414.95

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	30.21	1049.78
		190	836.6	31.52	1419.38
		251	848.8	30.36	1086.68
	EGPRS	128	824.2	26.33	429.64
		190	836.6	27.40	549.67
		251	848.8	26.76	474.35

11.1.2. LTE ERP/EIRP RESULTS

LTE Band 12

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE12	10	QPSK	1/0	704	24.31	269.77
			1/0	707.5	23.92	246.6
			1/0	711	24.41	276.06
		16QAM	1/0	704	23.6	229.09
			1/0	707.5	23.2	208.93
			1/0	711	23.7	234.42
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE12	5	QPSK	1/0	701.5	23.9	245.47
			1/0	707.5	24.12	258.23
			1/0	713.5	24.6	288.4
		16QAM	1/0	701.5	23.1	204.17
			1/0	707.5	23.3	213.8
			1/0	713.5	23.8	239.88
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE12	3	QPSK	1/0	700.5	24.28	267.92
			1/0	707.5	24.14	259.42
			1/0	714.5	24.75	298.54
		16QAM	1/0	700.5	23.5	223.87
			1/0	707.5	23.3	213.8
			1/0	714.5	23.9	245.47
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE12	1.4	QPSK	1/0	699.7	24.1	257.04
			1/0	707.5	24.2	263.03
			1/0	715.3	24.3	269.15
		16QAM	1/0	699.7	23.4	218.78
			1/0	707.5	23.5	223.87
			1/0	715.3	23.3	213.8

LTE Band 4

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	20	QPSK	1/0	1720	26.51	448.15
			1/0	1732.5	26.59	456.15
			1/0	1745	26.44	440.34
		16QAM	1/0	1720	25.74	375.34
			1/0	1732.5	25.92	390.94
			1/0	1745	25.69	370.5
LTE4	15	QPSK	1/0	1717.5	26.71	468.59
			1/0	1732.5	26.72	470.01
			1/0	1747.5	26.07	404.97
		16QAM	1/0	1717.5	25.75	375.66
			1/0	1732.5	25.82	382.04
			1/0	1747.5	25.28	337.61
LTE4	10	QPSK	1/0	1715	26.54	450.9
			1/0	1732.5	26.30	426.68
			1/0	1750	26.22	418.92
		16QAM	1/0	1715	25.65	367.35
			1/0	1732.5	25.52	356.54
			1/0	1750	25.68	369.94
LTE4	5	QPSK	1/0	1712.5	26.70	468.19
			1/0	1732.5	26.42	438.64
			1/0	1752.5	26.04	401.59
		16QAM	1/0	1712.5	25.94	393.03
			1/0	1732.5	25.82	382.04
			1/0	1752.5	25.89	387.96

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	3	QPSK	1/0	1711.5	26.45	441.36
			1/0	1732.5	26.72	470.01
			1/0	1753.5	25.83	383.19
		16QAM	1/0	1711.5	25.75	375.66
			1/0	1732.5	25.82	382.04
			1/0	1753.5	24.78	300.9
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE4	1.4	QPSK	1/0	1710.7	26.26	422.75
			1/0	1732.5	26.25	421.8
			1/0	1754.3	25.48	353.29
		16QAM	1/0	1710.7	24.95	312.67
			1/0	1732.5	25.52	356.54
			1/0	1754.3	24.68	293.85

LTE Band 2

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE2	20	QPSK	1/0	1860	26.39	435.77
			1/0	1880	25.49	353.9
			1/0	1900	26.11	407.85
		16QAM	1/0	1860	25.24	334.4
			1/0	1880	24.39	274.71
			1/0	1900	24.97	313.69
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE2	15	QPSK	1/0	1857.5	25.91	390.33
			1/0	1880	25.27	336.19
			1/0	1902.5	25.48	353.36
		16QAM	1/0	1857.5	25.14	326.91
			1/0	1880	24.49	281.11
			1/0	1902.5	23.87	243.91
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE2	10	QPSK	1/0	1855	25.98	395.92
			1/0	1880	25.41	347.44
			1/0	1905	25.20	331.09
		16QAM	1/0	1855	25.15	327.04
			1/0	1880	24.39	274.71
			1/0	1905	24.38	274.12
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
LTE2	5	QPSK	1/0	1852.5	25.68	369.64
			1/0	1880	24.57	286.42
			1/0	1907.5	25.42	348.07
		16QAM	1/0	1852.5	24.75	298.39
			1/0	1880	23.79	239.27
			1/0	1907.5	24.49	280.97

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE2	3	QPSK	1/0	1851.5	25.15	327.23
			1/0	1880	24.38	274.08
			1/0	1908.5	25.29	338.03
		16QAM	1/0	1851.5	24.25	265.98
			1/0	1880	23.59	228.5
			1/0	1908.5	24.49	281.16
Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE2	1.4	QPSK	1/0	1850.7	25.17	328.78
			1/0	1880	24.37	273.45
			1/0	1909.3	25.19	330.51
		16QAM	1/0	1850.7	24.05	254.04
			1/0	1880	23.54	225.88
			1/0	1909.3	24.09	256.56

11.1.3. ERP/EIRP PLOTS

Band LTE12 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.								
	Company: LG Project #: 15119960 Date: 2/4/2015 Test Engineer: Kiya Kedida Configuration: EUT Only Location: Chamber C Mode: LTE_16QAM Band 12 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	704.00	17.50	V	0.9	0.0	16.60	34.8	-18.2	
	704.00	24.50	H	0.9	0.0	23.60	34.8	-11.2	
	Mid Ch								
	707.50	16.60	V	0.9	0.0	15.70	34.8	-19.1	
	707.50	24.10	H	0.9	0.0	23.20	34.8	-11.6	
High Ch									
711.00	17.39	V	0.9	0.0	16.49	34.8	-18.3		
711.00	24.60	H	0.9	0.0	23.70	34.8	-11.1		

Band LTE12 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/4/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 12 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>704.00</td> <td>18.36</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.46</td> <td>34.8</td> <td>-17.3</td> <td></td> </tr> <tr> <td>704.00</td> <td>25.21</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.31</td> <td>34.8</td> <td>-10.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>17.72</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.82</td> <td>34.8</td> <td>-18.0</td> <td></td> </tr> <tr> <td>707.50</td> <td>24.82</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.92</td> <td>34.8</td> <td>-10.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>711.00</td> <td>17.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.00</td> <td>34.8</td> <td>-17.8</td> <td></td> </tr> <tr> <td>711.00</td> <td>25.31</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.41</td> <td>34.8</td> <td>-10.4</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	18.36	V	0.9	0.0	17.46	34.8	-17.3		704.00	25.21	H	0.9	0.0	24.31	34.8	-10.5		Mid Ch									707.50	17.72	V	0.9	0.0	16.82	34.8	-18.0		707.50	24.82	H	0.9	0.0	23.92	34.8	-10.9		High Ch									711.00	17.90	V	0.9	0.0	17.00	34.8	-17.8		711.00	25.31	H	0.9	0.0	24.41	34.8	-10.4
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
704.00	18.36	V	0.9	0.0	17.46	34.8	-17.3																																																																																											
704.00	25.21	H	0.9	0.0	24.31	34.8	-10.5																																																																																											
Mid Ch																																																																																																		
707.50	17.72	V	0.9	0.0	16.82	34.8	-18.0																																																																																											
707.50	24.82	H	0.9	0.0	23.92	34.8	-10.9																																																																																											
High Ch																																																																																																		
711.00	17.90	V	0.9	0.0	17.00	34.8	-17.8																																																																																											
711.00	25.31	H	0.9	0.0	24.41	34.8	-10.4																																																																																											

Band LTE12 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.									
	Company: LG Project #: 15119960 Date: 2/4/2015 Test Engineer: Kiya Kedida Configuration: EUT Only Location: Chamber C Mode: LTE_16QAM Band 12 Fundamentals, 5MHz Bandwidth									
	Test Equipment: Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch									
	701.50	16.80	V	0.9	0.0	15.90	34.8	-18.9		
	701.50	24.00	H	0.9	0.0	23.10	34.8	-11.7		
	Mid Ch									
	707.50	16.90	V	0.9	0.0	16.00	34.8	-18.8		
	707.50	24.20	H	0.9	0.0	23.30	34.8	-11.5		
	High Ch									
	713.50	17.50	V	0.9	0.0	16.60	34.8	-18.2		
713.50	24.70	H	0.9	0.0	23.80	34.8	-11.0			

Band LTE12 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/4/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 12 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>701.50</td> <td>17.50</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.60</td> <td>34.8</td> <td>-18.2</td> <td></td> </tr> <tr> <td>701.50</td> <td>24.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.90</td> <td>34.8</td> <td>-10.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>17.51</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.61</td> <td>34.8</td> <td>-18.2</td> <td></td> </tr> <tr> <td>707.50</td> <td>25.02</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.12</td> <td>34.8</td> <td>-10.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>713.50</td> <td>18.15</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.25</td> <td>34.8</td> <td>-17.6</td> <td></td> </tr> <tr> <td>713.50</td> <td>25.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.60</td> <td>34.8</td> <td>-10.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									701.50	17.50	V	0.9	0.0	16.60	34.8	-18.2		701.50	24.80	H	0.9	0.0	23.90	34.8	-10.9		Mid Ch									707.50	17.51	V	0.9	0.0	16.61	34.8	-18.2		707.50	25.02	H	0.9	0.0	24.12	34.8	-10.7		High Ch									713.50	18.15	V	0.9	0.0	17.25	34.8	-17.6		713.50	25.50	H	0.9	0.0	24.60	34.8	-10.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
701.50	17.50	V	0.9	0.0	16.60	34.8	-18.2																																																																																											
701.50	24.80	H	0.9	0.0	23.90	34.8	-10.9																																																																																											
Mid Ch																																																																																																		
707.50	17.51	V	0.9	0.0	16.61	34.8	-18.2																																																																																											
707.50	25.02	H	0.9	0.0	24.12	34.8	-10.7																																																																																											
High Ch																																																																																																		
713.50	18.15	V	0.9	0.0	17.25	34.8	-17.6																																																																																											
713.50	25.50	H	0.9	0.0	24.60	34.8	-10.2																																																																																											

Band LTE12 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/4/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 12 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>700.50</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.20</td> <td>34.8</td> <td>-18.6</td> <td></td> </tr> <tr> <td>700.50</td> <td>24.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.50</td> <td>34.8</td> <td>-11.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>17.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.10</td> <td>34.8</td> <td>-18.7</td> <td></td> </tr> <tr> <td>707.50</td> <td>24.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.30</td> <td>34.8</td> <td>-11.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>714.50</td> <td>17.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.00</td> <td>34.8</td> <td>-17.8</td> <td></td> </tr> <tr> <td>714.50</td> <td>24.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.90</td> <td>34.8</td> <td>-10.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	17.10	V	0.9	0.0	16.20	34.8	-18.6		700.50	24.40	H	0.9	0.0	23.50	34.8	-11.3		Mid Ch									707.50	17.00	V	0.9	0.0	16.10	34.8	-18.7		707.50	24.20	H	0.9	0.0	23.30	34.8	-11.5		High Ch									714.50	17.90	V	0.9	0.0	17.00	34.8	-17.8		714.50	24.80	H	0.9	0.0	23.90	34.8	-10.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
700.50	17.10	V	0.9	0.0	16.20	34.8	-18.6																																																																																											
700.50	24.40	H	0.9	0.0	23.50	34.8	-11.3																																																																																											
Mid Ch																																																																																																		
707.50	17.00	V	0.9	0.0	16.10	34.8	-18.7																																																																																											
707.50	24.20	H	0.9	0.0	23.30	34.8	-11.5																																																																																											
High Ch																																																																																																		
714.50	17.90	V	0.9	0.0	17.00	34.8	-17.8																																																																																											
714.50	24.80	H	0.9	0.0	23.90	34.8	-10.9																																																																																											

Band LTE12 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG																																																																																														
	Project #:		15119960																																																																																														
	Date:		2/4/2015																																																																																														
	Test Engineer:		Kiya Kedida																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber C																																																																																														
	Mode:		LTE_QPSK Band 12 Fundamentals, 3MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>700.50</td> <td>17.82</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.92</td> <td>34.8</td> <td>-17.9</td> <td></td> </tr> <tr> <td>700.50</td> <td>25.18</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.28</td> <td>34.8</td> <td>-10.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>17.65</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.75</td> <td>34.8</td> <td>-18.1</td> <td></td> </tr> <tr> <td>707.50</td> <td>25.04</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.14</td> <td>34.8</td> <td>-10.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>714.50</td> <td>18.48</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.58</td> <td>34.8</td> <td>-17.2</td> <td></td> </tr> <tr> <td>714.50</td> <td>25.65</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.75</td> <td>34.8</td> <td>-10.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	17.82	V	0.9	0.0	16.92	34.8	-17.9		700.50	25.18	H	0.9	0.0	24.28	34.8	-10.5		Mid Ch									707.50	17.65	V	0.9	0.0	16.75	34.8	-18.1		707.50	25.04	H	0.9	0.0	24.14	34.8	-10.7		High Ch									714.50	18.48	V	0.9	0.0	17.58	34.8	-17.2		714.50	25.65	H	0.9	0.0	24.75	34.8	-10.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
700.50	17.82	V	0.9	0.0	16.92	34.8	-17.9																																																																																										
700.50	25.18	H	0.9	0.0	24.28	34.8	-10.5																																																																																										
Mid Ch																																																																																																	
707.50	17.65	V	0.9	0.0	16.75	34.8	-18.1																																																																																										
707.50	25.04	H	0.9	0.0	24.14	34.8	-10.7																																																																																										
High Ch																																																																																																	
714.50	18.48	V	0.9	0.0	17.58	34.8	-17.2																																																																																										
714.50	25.65	H	0.9	0.0	24.75	34.8	-10.1																																																																																										

Band LTE12 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/4/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 12 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>699.70</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.00</td> <td>34.8</td> <td>-18.8</td> <td></td> </tr> <tr> <td>699.70</td> <td>24.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.40</td> <td>34.8</td> <td>-11.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>16.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.90</td> <td>34.8</td> <td>-18.9</td> <td></td> </tr> <tr> <td>707.50</td> <td>24.40</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.50</td> <td>34.8</td> <td>-11.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>715.30</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.20</td> <td>34.8</td> <td>-18.6</td> <td></td> </tr> <tr> <td>715.30</td> <td>24.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.30</td> <td>34.8</td> <td>-11.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									699.70	16.90	V	0.9	0.0	16.00	34.8	-18.8		699.70	24.30	H	0.9	0.0	23.40	34.8	-11.4		Mid Ch									707.50	16.80	V	0.9	0.0	15.90	34.8	-18.9		707.50	24.40	H	0.9	0.0	23.50	34.8	-11.3		High Ch									715.30	17.10	V	0.9	0.0	16.20	34.8	-18.6		715.30	24.20	H	0.9	0.0	23.30	34.8	-11.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
699.70	16.90	V	0.9	0.0	16.00	34.8	-18.8																																																																																											
699.70	24.30	H	0.9	0.0	23.40	34.8	-11.4																																																																																											
Mid Ch																																																																																																		
707.50	16.80	V	0.9	0.0	15.90	34.8	-18.9																																																																																											
707.50	24.40	H	0.9	0.0	23.50	34.8	-11.3																																																																																											
High Ch																																																																																																		
715.30	17.10	V	0.9	0.0	16.20	34.8	-18.6																																																																																											
715.30	24.20	H	0.9	0.0	23.30	34.8	-11.5																																																																																											

Band LTE12 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/4/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 12 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>699.70</td> <td>17.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.70</td> <td>34.8</td> <td>-18.1</td> <td></td> </tr> <tr> <td>699.70</td> <td>25.00</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.10</td> <td>34.8</td> <td>-10.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>17.44</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.54</td> <td>34.8</td> <td>-18.3</td> <td></td> </tr> <tr> <td>707.50</td> <td>25.10</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.20</td> <td>34.8</td> <td>-10.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>715.30</td> <td>17.80</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.90</td> <td>34.8</td> <td>-17.9</td> <td></td> </tr> <tr> <td>715.30</td> <td>25.20</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>24.30</td> <td>34.8</td> <td>-10.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									699.70	17.60	V	0.9	0.0	16.70	34.8	-18.1		699.70	25.00	H	0.9	0.0	24.10	34.8	-10.7		Mid Ch									707.50	17.44	V	0.9	0.0	16.54	34.8	-18.3		707.50	25.10	H	0.9	0.0	24.20	34.8	-10.6		High Ch									715.30	17.80	V	0.9	0.0	16.90	34.8	-17.9		715.30	25.20	H	0.9	0.0	24.30	34.8	-10.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
699.70	17.60	V	0.9	0.0	16.70	34.8	-18.1																																																																																											
699.70	25.00	H	0.9	0.0	24.10	34.8	-10.7																																																																																											
Mid Ch																																																																																																		
707.50	17.44	V	0.9	0.0	16.54	34.8	-18.3																																																																																											
707.50	25.10	H	0.9	0.0	24.20	34.8	-10.6																																																																																											
High Ch																																																																																																		
715.30	17.80	V	0.9	0.0	16.90	34.8	-17.9																																																																																											
715.30	25.20	H	0.9	0.0	24.30	34.8	-10.5																																																																																											

Band LTE4 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/5/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 4 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1720.00</td> <td>17.10</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.44</td> <td>30.0</td> <td>-5.6</td> <td></td> </tr> <tr> <td>1720.00</td> <td>18.40</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.74</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>16.70</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>23.97</td> <td>30.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.65</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.92</td> <td>30.0</td> <td>-4.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1745.00</td> <td>16.77</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.97</td> <td>30.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1745.00</td> <td>18.49</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.69</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	17.10	V	0.9	8.2	24.44	30.0	-5.6		1720.00	18.40	H	0.9	8.2	25.74	30.0	-4.3		Mid Ch									1732.50	16.70	V	0.9	8.2	23.97	30.0	-6.0		1732.50	18.65	H	0.9	8.2	25.92	30.0	-4.1		High Ch									1745.00	16.77	V	0.9	8.1	23.97	30.0	-6.0		1745.00	18.49	H	0.9	8.1	25.69	30.0	-4.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1720.00	17.10	V	0.9	8.2	24.44	30.0	-5.6																																																																																											
1720.00	18.40	H	0.9	8.2	25.74	30.0	-4.3																																																																																											
Mid Ch																																																																																																		
1732.50	16.70	V	0.9	8.2	23.97	30.0	-6.0																																																																																											
1732.50	18.65	H	0.9	8.2	25.92	30.0	-4.1																																																																																											
High Ch																																																																																																		
1745.00	16.77	V	0.9	8.1	23.97	30.0	-6.0																																																																																											
1745.00	18.49	H	0.9	8.1	25.69	30.0	-4.3																																																																																											

Band LTE4 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/5/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1720.00</td> <td>17.96</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>25.30</td> <td>30.0</td> <td>-4.7</td> <td></td> </tr> <tr> <td>1720.00</td> <td>19.17</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.51</td> <td>30.0</td> <td>-3.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.53</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.80</td> <td>30.0</td> <td>-5.2</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.32</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.59</td> <td>30.0</td> <td>-3.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1745.00</td> <td>17.43</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>24.63</td> <td>30.0</td> <td>-5.4</td> <td></td> </tr> <tr> <td>1745.00</td> <td>19.24</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>26.44</td> <td>30.0</td> <td>-3.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	17.96	V	0.9	8.2	25.30	30.0	-4.7		1720.00	19.17	H	0.9	8.2	26.51	30.0	-3.5		Mid Ch									1732.50	17.53	V	0.9	8.2	24.80	30.0	-5.2		1732.50	19.32	H	0.9	8.2	26.59	30.0	-3.4		High Ch									1745.00	17.43	V	0.9	8.1	24.63	30.0	-5.4		1745.00	19.24	H	0.9	8.1	26.44	30.0	-3.6	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1720.00	17.96	V	0.9	8.2	25.30	30.0	-4.7																																																																																											
1720.00	19.17	H	0.9	8.2	26.51	30.0	-3.5																																																																																											
Mid Ch																																																																																																		
1732.50	17.53	V	0.9	8.2	24.80	30.0	-5.2																																																																																											
1732.50	19.32	H	0.9	8.2	26.59	30.0	-3.4																																																																																											
High Ch																																																																																																		
1745.00	17.43	V	0.9	8.1	24.63	30.0	-5.4																																																																																											
1745.00	19.24	H	0.9	8.1	26.44	30.0	-3.6																																																																																											

Band LTE4 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/5/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 4 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.25</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1717.50</td> <td>18.40</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.75</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.17</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.55</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.82</td> <td>30.0</td> <td>-4.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1747.50</td> <td>16.57</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.76</td> <td>30.0</td> <td>-6.2</td> <td></td> </tr> <tr> <td>1747.50</td> <td>18.09</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.28</td> <td>30.0</td> <td>-4.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	16.90	V	0.9	8.2	24.25	30.0	-5.8		1717.50	18.40	H	0.9	8.2	25.75	30.0	-4.3		Mid Ch									1732.50	16.90	V	0.9	8.2	24.17	30.0	-5.8		1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2		High Ch									1747.50	16.57	V	0.9	8.1	23.76	30.0	-6.2		1747.50	18.09	H	0.9	8.1	25.28	30.0	-4.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1717.50	16.90	V	0.9	8.2	24.25	30.0	-5.8																																																																																											
1717.50	18.40	H	0.9	8.2	25.75	30.0	-4.3																																																																																											
Mid Ch																																																																																																		
1732.50	16.90	V	0.9	8.2	24.17	30.0	-5.8																																																																																											
1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2																																																																																											
High Ch																																																																																																		
1747.50	16.57	V	0.9	8.1	23.76	30.0	-6.2																																																																																											
1747.50	18.09	H	0.9	8.1	25.28	30.0	-4.7																																																																																											

Band LTE4 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/5/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>17.62</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.97</td> <td>30.0</td> <td>-5.0</td> <td></td> </tr> <tr> <td>1717.50</td> <td>19.36</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.71</td> <td>30.0</td> <td>-3.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.56</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.83</td> <td>30.0</td> <td>-5.2</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.45</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.72</td> <td>30.0</td> <td>-3.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1747.50</td> <td>17.22</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>24.41</td> <td>30.0</td> <td>-5.6</td> <td></td> </tr> <tr> <td>1747.50</td> <td>18.88</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>26.07</td> <td>30.0</td> <td>-3.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	17.62	V	0.9	8.2	24.97	30.0	-5.0		1717.50	19.36	H	0.9	8.2	26.71	30.0	-3.3		Mid Ch									1732.50	17.56	V	0.9	8.2	24.83	30.0	-5.2		1732.50	19.45	H	0.9	8.2	26.72	30.0	-3.3		High Ch									1747.50	17.22	V	0.9	8.1	24.41	30.0	-5.6		1747.50	18.88	H	0.9	8.1	26.07	30.0	-3.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1717.50	17.62	V	0.9	8.2	24.97	30.0	-5.0																																																																																											
1717.50	19.36	H	0.9	8.2	26.71	30.0	-3.3																																																																																											
Mid Ch																																																																																																		
1732.50	17.56	V	0.9	8.2	24.83	30.0	-5.2																																																																																											
1732.50	19.45	H	0.9	8.2	26.72	30.0	-3.3																																																																																											
High Ch																																																																																																		
1747.50	17.22	V	0.9	8.1	24.41	30.0	-5.6																																																																																											
1747.50	18.88	H	0.9	8.1	26.07	30.0	-3.9																																																																																											

Band LTE4 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG																																																																																														
	Project #:		15119960																																																																																														
	Date:		2/5/2015																																																																																														
	Test Engineer:		Kiya Kedida																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber C																																																																																														
	Mode:		LTE_16QAM Band 4 Fundamentals, 1.4MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>16.80</td> <td>V</td> <td>0.9</td> <td>8.3</td> <td>24.15</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1715.00</td> <td>18.30</td> <td>H</td> <td>0.9</td> <td>8.3</td> <td>25.65</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>16.50</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>23.77</td> <td>30.0</td> <td>-6.2</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.25</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.52</td> <td>30.0</td> <td>-4.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1750.00</td> <td>16.57</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.76</td> <td>30.0</td> <td>-6.2</td> <td></td> </tr> <tr> <td>1750.00</td> <td>18.49</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.68</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	16.80	V	0.9	8.3	24.15	30.0	-5.8		1715.00	18.30	H	0.9	8.3	25.65	30.0	-4.3		Mid Ch									1732.50	16.50	V	0.9	8.2	23.77	30.0	-6.2		1732.50	18.25	H	0.9	8.2	25.52	30.0	-4.5		High Ch									1750.00	16.57	V	0.9	8.1	23.76	30.0	-6.2		1750.00	18.49	H	0.9	8.1	25.68	30.0	-4.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1715.00	16.80	V	0.9	8.3	24.15	30.0	-5.8																																																																																										
1715.00	18.30	H	0.9	8.3	25.65	30.0	-4.3																																																																																										
Mid Ch																																																																																																	
1732.50	16.50	V	0.9	8.2	23.77	30.0	-6.2																																																																																										
1732.50	18.25	H	0.9	8.2	25.52	30.0	-4.5																																																																																										
High Ch																																																																																																	
1750.00	16.57	V	0.9	8.1	23.76	30.0	-6.2																																																																																										
1750.00	18.49	H	0.9	8.1	25.68	30.0	-4.3																																																																																										

Band LTE4 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/5/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>17.38</td> <td>V</td> <td>0.9</td> <td>8.3</td> <td>24.73</td> <td>30.0</td> <td>-5.3</td> <td></td> </tr> <tr> <td>1715.00</td> <td>19.19</td> <td>H</td> <td>0.9</td> <td>8.3</td> <td>26.54</td> <td>30.0</td> <td>-3.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.26</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.53</td> <td>30.0</td> <td>-5.5</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.03</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.30</td> <td>30.0</td> <td>-3.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1750.00</td> <td>17.05</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>24.24</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1750.00</td> <td>19.03</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>26.22</td> <td>30.0</td> <td>-3.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	17.38	V	0.9	8.3	24.73	30.0	-5.3		1715.00	19.19	H	0.9	8.3	26.54	30.0	-3.5		Mid Ch									1732.50	17.26	V	0.9	8.2	24.53	30.0	-5.5		1732.50	19.03	H	0.9	8.2	26.30	30.0	-3.7		High Ch									1750.00	17.05	V	0.9	8.1	24.24	30.0	-5.8		1750.00	19.03	H	0.9	8.1	26.22	30.0	-3.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1715.00	17.38	V	0.9	8.3	24.73	30.0	-5.3																																																																																											
1715.00	19.19	H	0.9	8.3	26.54	30.0	-3.5																																																																																											
Mid Ch																																																																																																		
1732.50	17.26	V	0.9	8.2	24.53	30.0	-5.5																																																																																											
1732.50	19.03	H	0.9	8.2	26.30	30.0	-3.7																																																																																											
High Ch																																																																																																		
1750.00	17.05	V	0.9	8.1	24.24	30.0	-5.8																																																																																											
1750.00	19.03	H	0.9	8.1	26.22	30.0	-3.8																																																																																											

Band LTE4 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 4 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.50</td> <td>16.60</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>23.94</td> <td>30.0</td> <td>-6.1</td> <td></td> </tr> <tr> <td>1712.50</td> <td>18.60</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.94</td> <td>30.0</td> <td>-4.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.20</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.47</td> <td>30.0</td> <td>-5.5</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.55</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.82</td> <td>30.0</td> <td>-4.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1752.50</td> <td>16.47</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.67</td> <td>30.0</td> <td>-6.3</td> <td></td> </tr> <tr> <td>1752.50</td> <td>18.69</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.89</td> <td>30.0</td> <td>-4.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	16.60	V	0.9	8.2	23.94	30.0	-6.1		1712.50	18.60	H	0.9	8.2	25.94	30.0	-4.1		Mid Ch									1732.50	17.20	V	0.9	8.2	24.47	30.0	-5.5		1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2		High Ch									1752.50	16.47	V	0.9	8.1	23.67	30.0	-6.3		1752.50	18.69	H	0.9	8.1	25.89	30.0	-4.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1712.50	16.60	V	0.9	8.2	23.94	30.0	-6.1																																																																																											
1712.50	18.60	H	0.9	8.2	25.94	30.0	-4.1																																																																																											
Mid Ch																																																																																																		
1732.50	17.20	V	0.9	8.2	24.47	30.0	-5.5																																																																																											
1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2																																																																																											
High Ch																																																																																																		
1752.50	16.47	V	0.9	8.1	23.67	30.0	-6.3																																																																																											
1752.50	18.69	H	0.9	8.1	25.89	30.0	-4.1																																																																																											

Band LTE4 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.50</td> <td>17.66</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>25.00</td> <td>30.0</td> <td>-5.0</td> <td></td> </tr> <tr> <td>1712.50</td> <td>19.36</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.70</td> <td>30.0</td> <td>-3.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.93</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>25.20</td> <td>30.0</td> <td>-4.8</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.15</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.42</td> <td>30.0</td> <td>-3.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1752.50</td> <td>17.41</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>24.61</td> <td>30.0</td> <td>-5.4</td> <td></td> </tr> <tr> <td>1752.50</td> <td>18.84</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>26.04</td> <td>30.0</td> <td>-4.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	17.66	V	0.9	8.2	25.00	30.0	-5.0		1712.50	19.36	H	0.9	8.2	26.70	30.0	-3.3		Mid Ch									1732.50	17.93	V	0.9	8.2	25.20	30.0	-4.8		1732.50	19.15	H	0.9	8.2	26.42	30.0	-3.6		High Ch									1752.50	17.41	V	0.9	8.1	24.61	30.0	-5.4		1752.50	18.84	H	0.9	8.1	26.04	30.0	-4.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1712.50	17.66	V	0.9	8.2	25.00	30.0	-5.0																																																																																											
1712.50	19.36	H	0.9	8.2	26.70	30.0	-3.3																																																																																											
Mid Ch																																																																																																		
1732.50	17.93	V	0.9	8.2	25.20	30.0	-4.8																																																																																											
1732.50	19.15	H	0.9	8.2	26.42	30.0	-3.6																																																																																											
High Ch																																																																																																		
1752.50	17.41	V	0.9	8.1	24.61	30.0	-5.4																																																																																											
1752.50	18.84	H	0.9	8.1	26.04	30.0	-4.0																																																																																											

Band LTE4 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 4 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>16.30</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>23.65</td> <td>30.0</td> <td>-6.4</td> <td></td> </tr> <tr> <td>1711.50</td> <td>18.40</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.75</td> <td>30.0</td> <td>-4.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.17</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.55</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>25.82</td> <td>30.0</td> <td>-4.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1753.50</td> <td>16.27</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.46</td> <td>30.0</td> <td>-6.5</td> <td></td> </tr> <tr> <td>1753.50</td> <td>17.59</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>24.78</td> <td>30.0</td> <td>-5.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	16.30	V	0.9	8.2	23.65	30.0	-6.4		1711.50	18.40	H	0.9	8.2	25.75	30.0	-4.3		Mid Ch									1732.50	16.90	V	0.9	8.2	24.17	30.0	-5.8		1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2		High Ch									1753.50	16.27	V	0.9	8.1	23.46	30.0	-6.5		1753.50	17.59	H	0.9	8.1	24.78	30.0	-5.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1711.50	16.30	V	0.9	8.2	23.65	30.0	-6.4																																																																																											
1711.50	18.40	H	0.9	8.2	25.75	30.0	-4.3																																																																																											
Mid Ch																																																																																																		
1732.50	16.90	V	0.9	8.2	24.17	30.0	-5.8																																																																																											
1732.50	18.55	H	0.9	8.2	25.82	30.0	-4.2																																																																																											
High Ch																																																																																																		
1753.50	16.27	V	0.9	8.1	23.46	30.0	-6.5																																																																																											
1753.50	17.59	H	0.9	8.1	24.78	30.0	-5.2																																																																																											

Band LTE4 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 3MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>16.96</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.31</td> <td>30.0</td> <td>-5.7</td> <td></td> </tr> <tr> <td>1711.50</td> <td>19.10</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.45</td> <td>30.0</td> <td>-3.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.86</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>25.13</td> <td>30.0</td> <td>-4.9</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.45</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.72</td> <td>30.0</td> <td>-3.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1753.50</td> <td>17.22</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>24.41</td> <td>30.0</td> <td>-5.6</td> <td></td> </tr> <tr> <td>1753.50</td> <td>18.64</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.83</td> <td>30.0</td> <td>-4.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	16.96	V	0.9	8.2	24.31	30.0	-5.7		1711.50	19.10	H	0.9	8.2	26.45	30.0	-3.6		Mid Ch									1732.50	17.86	V	0.9	8.2	25.13	30.0	-4.9		1732.50	19.45	H	0.9	8.2	26.72	30.0	-3.3		High Ch									1753.50	17.22	V	0.9	8.1	24.41	30.0	-5.6		1753.50	18.64	H	0.9	8.1	25.83	30.0	-4.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1711.50	16.96	V	0.9	8.2	24.31	30.0	-5.7																																																																																											
1711.50	19.10	H	0.9	8.2	26.45	30.0	-3.6																																																																																											
Mid Ch																																																																																																		
1732.50	17.86	V	0.9	8.2	25.13	30.0	-4.9																																																																																											
1732.50	19.45	H	0.9	8.2	26.72	30.0	-3.3																																																																																											
High Ch																																																																																																		
1753.50	17.22	V	0.9	8.1	24.41	30.0	-5.6																																																																																											
1753.50	18.64	H	0.9	8.1	25.83	30.0	-4.2																																																																																											

Band LTE4 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: Kiya Kedida Configuration: EUT Only Location: Chamber C Mode: LTE_16QAM Band 4 Fundamentals, 1.4MHz Bandwidth								
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1710.70	16.10	V	0.9	8.3	23.45	30.0	-6.5	
	1710.70	17.60	H	0.9	8.3	24.95	30.0	-5.0	
	Mid Ch								
	1732.50	16.40	V	0.9	8.2	23.67	30.0	-6.3	
	1732.50	18.25	H	0.9	8.2	25.52	30.0	-4.5	
High Ch									
1754.30	15.87	V	0.9	8.1	23.06	30.0	-6.9		
1754.30	17.49	H	0.9	8.1	24.68	30.0	-5.3		

Band LTE4 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 4 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1710.70</td> <td>16.61</td> <td>V</td> <td>0.9</td> <td>8.3</td> <td>23.96</td> <td>30.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1710.70</td> <td>18.91</td> <td>H</td> <td>0.9</td> <td>8.3</td> <td>26.26</td> <td>30.0</td> <td>-3.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>17.29</td> <td>V</td> <td>0.9</td> <td>8.2</td> <td>24.56</td> <td>30.0</td> <td>-5.4</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.98</td> <td>H</td> <td>0.9</td> <td>8.2</td> <td>26.25</td> <td>30.0</td> <td>-3.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1754.30</td> <td>16.77</td> <td>V</td> <td>0.9</td> <td>8.1</td> <td>23.96</td> <td>30.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td>1754.30</td> <td>18.29</td> <td>H</td> <td>0.9</td> <td>8.1</td> <td>25.48</td> <td>30.0</td> <td>-4.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	16.61	V	0.9	8.3	23.96	30.0	-6.0		1710.70	18.91	H	0.9	8.3	26.26	30.0	-3.7		Mid Ch									1732.50	17.29	V	0.9	8.2	24.56	30.0	-5.4		1732.50	18.98	H	0.9	8.2	26.25	30.0	-3.7		High Ch									1754.30	16.77	V	0.9	8.1	23.96	30.0	-6.0		1754.30	18.29	H	0.9	8.1	25.48	30.0	-4.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1710.70	16.61	V	0.9	8.3	23.96	30.0	-6.0																																																																																											
1710.70	18.91	H	0.9	8.3	26.26	30.0	-3.7																																																																																											
Mid Ch																																																																																																		
1732.50	17.29	V	0.9	8.2	24.56	30.0	-5.4																																																																																											
1732.50	18.98	H	0.9	8.2	26.25	30.0	-3.7																																																																																											
High Ch																																																																																																		
1754.30	16.77	V	0.9	8.1	23.96	30.0	-6.0																																																																																											
1754.30	18.29	H	0.9	8.1	25.48	30.0	-4.5																																																																																											

Band LTE2 20MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.88</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td>1860.00</td> <td>18.26</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.24</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>15.73</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.70</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.42</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.39</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1900.00</td> <td>15.65</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.61</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>1900.00</td> <td>18.01</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.97</td> <td>33.0</td> <td>-8.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	16.90	V	0.9	7.9	23.88	33.0	-9.1		1860.00	18.26	H	0.9	7.9	25.24	33.0	-7.8		Mid Ch									1880.00	15.73	V	0.9	7.9	22.70	33.0	-10.3		1880.00	17.42	H	0.9	7.9	24.39	33.0	-8.6		High Ch									1900.00	15.65	V	0.9	7.9	22.61	33.0	-10.4		1900.00	18.01	H	0.9	7.9	24.97	33.0	-8.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	16.90	V	0.9	7.9	23.88	33.0	-9.1																																																																																											
1860.00	18.26	H	0.9	7.9	25.24	33.0	-7.8																																																																																											
Mid Ch																																																																																																		
1880.00	15.73	V	0.9	7.9	22.70	33.0	-10.3																																																																																											
1880.00	17.42	H	0.9	7.9	24.39	33.0	-8.6																																																																																											
High Ch																																																																																																		
1900.00	15.65	V	0.9	7.9	22.61	33.0	-10.4																																																																																											
1900.00	18.01	H	0.9	7.9	24.97	33.0	-8.0																																																																																											

Band LTE2 20MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>17.95</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.93</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td>1860.00</td> <td>19.41</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>26.39</td> <td>33.0</td> <td>-6.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.53</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.50</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td>1880.00</td> <td>18.52</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.49</td> <td>33.0</td> <td>-7.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1900.00</td> <td>16.59</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.55</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td>1900.00</td> <td>19.15</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>26.11</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	17.95	V	0.9	7.9	24.93	33.0	-8.1		1860.00	19.41	H	0.9	7.9	26.39	33.0	-6.6		Mid Ch									1880.00	16.53	V	0.9	7.9	23.50	33.0	-9.5		1880.00	18.52	H	0.9	7.9	25.49	33.0	-7.5		High Ch									1900.00	16.59	V	0.9	7.9	23.55	33.0	-9.5		1900.00	19.15	H	0.9	7.9	26.11	33.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	17.95	V	0.9	7.9	24.93	33.0	-8.1																																																																																											
1860.00	19.41	H	0.9	7.9	26.39	33.0	-6.6																																																																																											
Mid Ch																																																																																																		
1880.00	16.53	V	0.9	7.9	23.50	33.0	-9.5																																																																																											
1880.00	18.52	H	0.9	7.9	25.49	33.0	-7.5																																																																																											
High Ch																																																																																																		
1900.00	16.59	V	0.9	7.9	23.55	33.0	-9.5																																																																																											
1900.00	19.15	H	0.9	7.9	26.11	33.0	-6.9																																																																																											

Band LTE2 15MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>17.90</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.88</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td>1857.50</td> <td>18.16</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.14</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>15.87</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.84</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.52</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.49</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1902.50</td> <td>15.40</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.36</td> <td>33.0</td> <td>-10.6</td> <td></td> </tr> <tr> <td>1902.50</td> <td>16.91</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>23.87</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	17.90	V	0.9	7.9	24.88	33.0	-8.1		1857.50	18.16	H	0.9	7.9	25.14	33.0	-7.9		Mid Ch									1880.00	15.87	V	0.9	7.9	22.84	33.0	-10.2		1880.00	17.52	H	0.9	7.9	24.49	33.0	-8.5		High Ch									1902.50	15.40	V	0.9	7.9	22.36	33.0	-10.6		1902.50	16.91	H	0.9	7.9	23.87	33.0	-9.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1857.50	17.90	V	0.9	7.9	24.88	33.0	-8.1																																																																																											
1857.50	18.16	H	0.9	7.9	25.14	33.0	-7.9																																																																																											
Mid Ch																																																																																																		
1880.00	15.87	V	0.9	7.9	22.84	33.0	-10.2																																																																																											
1880.00	17.52	H	0.9	7.9	24.49	33.0	-8.5																																																																																											
High Ch																																																																																																		
1902.50	15.40	V	0.9	7.9	22.36	33.0	-10.6																																																																																											
1902.50	16.91	H	0.9	7.9	23.87	33.0	-9.1																																																																																											

Band LTE2 15MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>17.99</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.97</td> <td>33.0</td> <td>-8.0</td> <td></td> </tr> <tr> <td>1857.50</td> <td>18.93</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.91</td> <td>33.0</td> <td>-7.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.81</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.78</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td>1880.00</td> <td>18.30</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.27</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1902.50</td> <td>16.20</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.16</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td>1902.50</td> <td>18.52</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.48</td> <td>33.0</td> <td>-7.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	17.99	V	0.9	7.9	24.97	33.0	-8.0		1857.50	18.93	H	0.9	7.9	25.91	33.0	-7.1		Mid Ch									1880.00	16.81	V	0.9	7.9	23.78	33.0	-9.2		1880.00	18.30	H	0.9	7.9	25.27	33.0	-7.7		High Ch									1902.50	16.20	V	0.9	7.9	23.16	33.0	-9.8		1902.50	18.52	H	0.9	7.9	25.48	33.0	-7.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1857.50	17.99	V	0.9	7.9	24.97	33.0	-8.0																																																																																											
1857.50	18.93	H	0.9	7.9	25.91	33.0	-7.1																																																																																											
Mid Ch																																																																																																		
1880.00	16.81	V	0.9	7.9	23.78	33.0	-9.2																																																																																											
1880.00	18.30	H	0.9	7.9	25.27	33.0	-7.7																																																																																											
High Ch																																																																																																		
1902.50	16.20	V	0.9	7.9	23.16	33.0	-9.8																																																																																											
1902.50	18.52	H	0.9	7.9	25.48	33.0	-7.5																																																																																											

Band LTE2 10MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>16.90</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.89</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> <tr> <td>1855.00</td> <td>18.16</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.15</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>15.73</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.70</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.42</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.39</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1905.00</td> <td>15.80</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.77</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> <tr> <td>1905.00</td> <td>17.41</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	16.90	V	0.9	7.9	23.89	33.0	-9.1		1855.00	18.16	H	0.9	7.9	25.15	33.0	-7.9		Mid Ch									1880.00	15.73	V	0.9	7.9	22.70	33.0	-10.3		1880.00	17.42	H	0.9	7.9	24.39	33.0	-8.6		High Ch									1905.00	15.80	V	0.9	7.9	22.77	33.0	-10.2		1905.00	17.41	H	0.9	7.9	24.38	33.0	-8.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	16.90	V	0.9	7.9	23.89	33.0	-9.1																																																																																											
1855.00	18.16	H	0.9	7.9	25.15	33.0	-7.9																																																																																											
Mid Ch																																																																																																		
1880.00	15.73	V	0.9	7.9	22.70	33.0	-10.3																																																																																											
1880.00	17.42	H	0.9	7.9	24.39	33.0	-8.6																																																																																											
High Ch																																																																																																		
1905.00	15.80	V	0.9	7.9	22.77	33.0	-10.2																																																																																											
1905.00	17.41	H	0.9	7.9	24.38	33.0	-8.6																																																																																											

Band LTE2 10MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, Xft SMA Cable (SN # SERIALNUMBER) Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>17.71</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.70</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td>1855.00</td> <td>18.99</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.98</td> <td>33.0</td> <td>-7.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.70</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.67</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>18.44</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.41</td> <td>33.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1905.00</td> <td>16.56</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.53</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td>1905.00</td> <td>18.23</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.20</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	17.71	V	0.9	7.9	24.70	33.0	-8.3		1855.00	18.99	H	0.9	7.9	25.98	33.0	-7.0		Mid Ch									1880.00	16.70	V	0.9	7.9	23.67	33.0	-9.3		1880.00	18.44	H	0.9	7.9	25.41	33.0	-7.6		High Ch									1905.00	16.56	V	0.9	7.9	23.53	33.0	-9.5		1905.00	18.23	H	0.9	7.9	25.20	33.0	-7.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	17.71	V	0.9	7.9	24.70	33.0	-8.3																																																																																											
1855.00	18.99	H	0.9	7.9	25.98	33.0	-7.0																																																																																											
Mid Ch																																																																																																		
1880.00	16.70	V	0.9	7.9	23.67	33.0	-9.3																																																																																											
1880.00	18.44	H	0.9	7.9	25.41	33.0	-7.6																																																																																											
High Ch																																																																																																		
1905.00	16.56	V	0.9	7.9	23.53	33.0	-9.5																																																																																											
1905.00	18.23	H	0.9	7.9	25.20	33.0	-7.8																																																																																											

Band LTE2 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																		
	Company:		LG																																																																																																
	Project #:		15119960																																																																																																
	Date:		2/3/2015																																																																																																
	Test Engineer:		Kiya Kedida																																																																																																
	Configuration:		EUT Only																																																																																																
	Location:		Chamber C																																																																																																
	Mode:		LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth																																																																																																
	Test Equipment:																																																																																																		
	Receiving: Horn T119, and Chamber C SMA Cables																																																																																																		
	Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																		
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>17.20</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.19</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td>1852.50</td> <td>17.76</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.75</td> <td>33.0</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.78</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.75</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.82</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>23.79</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.50</td> <td>15.20</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.18</td> <td>33.0</td> <td>-10.8</td> <td></td> </tr> <tr> <td>1907.50</td> <td>17.51</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.49</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	17.20	V	0.9	7.9	24.19	33.0	-8.8		1852.50	17.76	H	0.9	7.9	24.75	33.0	-8.3		Mid Ch									1880.00	16.78	V	0.9	7.9	23.75	33.0	-9.3		1880.00	16.82	H	0.9	7.9	23.79	33.0	-9.2		High Ch									1907.50	15.20	V	0.9	7.9	22.18	33.0	-10.8		1907.50	17.51	H	0.9	7.9	24.49	33.0	-8.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1852.50	17.20	V	0.9	7.9	24.19	33.0	-8.8																																																																																											
1852.50	17.76	H	0.9	7.9	24.75	33.0	-8.3																																																																																												
Mid Ch																																																																																																			
1880.00	16.78	V	0.9	7.9	23.75	33.0	-9.3																																																																																												
1880.00	16.82	H	0.9	7.9	23.79	33.0	-9.2																																																																																												
High Ch																																																																																																			
1907.50	15.20	V	0.9	7.9	22.18	33.0	-10.8																																																																																												
1907.50	17.51	H	0.9	7.9	24.49	33.0	-8.5																																																																																												

Band LTE2 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>18.10</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>25.09</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td>1852.50</td> <td>18.69</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.68</td> <td>33.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>17.58</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.55</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.57</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.57</td> <td>33.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.50</td> <td>16.09</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.07</td> <td>33.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td>1907.50</td> <td>18.44</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.42</td> <td>33.0</td> <td>-7.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	18.10	V	0.9	7.9	25.09	33.0	-7.9		1852.50	18.69	H	0.9	7.9	25.68	33.0	-7.3		Mid Ch									1880.00	17.58	V	0.9	7.9	24.55	33.0	-8.5		1880.00	17.57	H	0.9	7.9	24.57	33.0	-8.4		High Ch									1907.50	16.09	V	0.9	7.9	23.07	33.0	-9.9		1907.50	18.44	H	0.9	7.9	25.42	33.0	-7.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1852.50	18.10	V	0.9	7.9	25.09	33.0	-7.9																																																																																											
1852.50	18.69	H	0.9	7.9	25.68	33.0	-7.3																																																																																											
Mid Ch																																																																																																		
1880.00	17.58	V	0.9	7.9	24.55	33.0	-8.5																																																																																											
1880.00	17.57	H	0.9	7.9	24.57	33.0	-8.4																																																																																											
High Ch																																																																																																		
1907.50	16.09	V	0.9	7.9	23.07	33.0	-9.9																																																																																											
1907.50	18.44	H	0.9	7.9	25.42	33.0	-7.6																																																																																											

Band LTE2 3MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG																																																																																														
	Project #:		15119960																																																																																														
	Date:		2/3/2015																																																																																														
	Test Engineer:		Kiya Kedida																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber C																																																																																														
	Mode:		LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>17.20</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.19</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td>1851.50</td> <td>17.26</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.25</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.43</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.40</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.62</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>23.59</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1908.50</td> <td>15.10</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.08</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>1908.50</td> <td>17.51</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.49</td> <td>33.0</td> <td>-8.5</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	17.20	V	0.9	7.9	24.19	33.0	-8.8		1851.50	17.26	H	0.9	7.9	24.25	33.0	-8.8		Mid Ch									1880.00	16.43	V	0.9	7.9	23.40	33.0	-9.6		1880.00	16.62	H	0.9	7.9	23.59	33.0	-9.4		High Ch									1908.50	15.10	V	0.9	7.9	22.08	33.0	-10.9		1908.50	17.51	H	0.9	7.9	24.49	33.0	-8.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1851.50	17.20	V	0.9	7.9	24.19	33.0	-8.8																																																																																										
1851.50	17.26	H	0.9	7.9	24.25	33.0	-8.8																																																																																										
Mid Ch																																																																																																	
1880.00	16.43	V	0.9	7.9	23.40	33.0	-9.6																																																																																										
1880.00	16.62	H	0.9	7.9	23.59	33.0	-9.4																																																																																										
High Ch																																																																																																	
1908.50	15.10	V	0.9	7.9	22.08	33.0	-10.9																																																																																										
1908.50	17.51	H	0.9	7.9	24.49	33.0	-8.5																																																																																										

Band LTE2 3MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG																																																																																														
	Project #:		15119960																																																																																														
	Date:		2/3/2015																																																																																														
	Test Engineer:		Kiya Kedida																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber C																																																																																														
	Mode:		LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>18.00</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.99</td> <td>33.0</td> <td>-8.0</td> <td></td> </tr> <tr> <td>1851.50</td> <td>18.16</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.15</td> <td>33.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>17.23</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.20</td> <td>33.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.41</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.38</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1908.50</td> <td>15.91</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.89</td> <td>33.0</td> <td>-10.1</td> <td></td> </tr> <tr> <td>1908.50</td> <td>18.31</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.29</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	18.00	V	0.9	7.9	24.99	33.0	-8.0		1851.50	18.16	H	0.9	7.9	25.15	33.0	-7.9		Mid Ch									1880.00	17.23	V	0.9	7.9	24.20	33.0	-8.8		1880.00	17.41	H	0.9	7.9	24.38	33.0	-8.6		High Ch									1908.50	15.91	V	0.9	7.9	22.89	33.0	-10.1		1908.50	18.31	H	0.9	7.9	25.29	33.0	-7.7	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1851.50	18.00	V	0.9	7.9	24.99	33.0	-8.0																																																																																										
1851.50	18.16	H	0.9	7.9	25.15	33.0	-7.9																																																																																										
Mid Ch																																																																																																	
1880.00	17.23	V	0.9	7.9	24.20	33.0	-8.8																																																																																										
1880.00	17.41	H	0.9	7.9	24.38	33.0	-8.6																																																																																										
High Ch																																																																																																	
1908.50	15.91	V	0.9	7.9	22.89	33.0	-10.1																																																																																										
1908.50	18.31	H	0.9	7.9	25.29	33.0	-7.7																																																																																										

Band LTE2 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		Kiya Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		LTE_16QAM Band 2 Fundamentals, 1.4MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>17.00</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.99</td> <td>33.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td>1850.70</td> <td>17.06</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.05</td> <td>33.0</td> <td>-9.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.03</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.00</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>1880.00</td> <td>16.57</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>23.54</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.30</td> <td>14.90</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>21.88</td> <td>33.0</td> <td>-11.1</td> <td></td> </tr> <tr> <td>1909.30</td> <td>17.11</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.09</td> <td>33.0</td> <td>-8.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	17.00	V	0.9	7.9	23.99	33.0	-9.0		1850.70	17.06	H	0.9	7.9	24.05	33.0	-9.0		Mid Ch									1880.00	16.03	V	0.9	7.9	23.00	33.0	-10.0		1880.00	16.57	H	0.9	7.9	23.54	33.0	-9.5		High Ch									1909.30	14.90	V	0.9	7.9	21.88	33.0	-11.1		1909.30	17.11	H	0.9	7.9	24.09	33.0	-8.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.70	17.00	V	0.9	7.9	23.99	33.0	-9.0																																																																																											
1850.70	17.06	H	0.9	7.9	24.05	33.0	-9.0																																																																																											
Mid Ch																																																																																																		
1880.00	16.03	V	0.9	7.9	23.00	33.0	-10.0																																																																																											
1880.00	16.57	H	0.9	7.9	23.54	33.0	-9.5																																																																																											
High Ch																																																																																																		
1909.30	14.90	V	0.9	7.9	21.88	33.0	-11.1																																																																																											
1909.30	17.11	H	0.9	7.9	24.09	33.0	-8.9																																																																																											

Band LTE2 1.4MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																
	Company:		LG																																																																																														
	Project #:		15119960																																																																																														
	Date:		2/3/2015																																																																																														
	Test Engineer:		Kiya Kedida																																																																																														
	Configuration:		EUT Only																																																																																														
	Location:		Chamber C																																																																																														
	Mode:		LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>17.80</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>24.79</td> <td>33.0</td> <td>-8.2</td> <td></td> </tr> <tr> <td>1850.70</td> <td>18.18</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.17</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.73</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>23.70</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>1880.00</td> <td>17.40</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>24.37</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.30</td> <td>15.66</td> <td>V</td> <td>0.9</td> <td>7.9</td> <td>22.64</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td>1909.30</td> <td>18.21</td> <td>H</td> <td>0.9</td> <td>7.9</td> <td>25.19</td> <td>33.0</td> <td>-7.8</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	17.80	V	0.9	7.9	24.79	33.0	-8.2		1850.70	18.18	H	0.9	7.9	25.17	33.0	-7.8		Mid Ch									1880.00	16.73	V	0.9	7.9	23.70	33.0	-9.3		1880.00	17.40	H	0.9	7.9	24.37	33.0	-8.6		High Ch									1909.30	15.66	V	0.9	7.9	22.64	33.0	-10.4		1909.30	18.21	H	0.9	7.9	25.19	33.0	-7.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1850.70	17.80	V	0.9	7.9	24.79	33.0	-8.2																																																																																										
1850.70	18.18	H	0.9	7.9	25.17	33.0	-7.8																																																																																										
Mid Ch																																																																																																	
1880.00	16.73	V	0.9	7.9	23.70	33.0	-9.3																																																																																										
1880.00	17.40	H	0.9	7.9	24.37	33.0	-8.6																																																																																										
High Ch																																																																																																	
1909.30	15.66	V	0.9	7.9	22.64	33.0	-10.4																																																																																										
1909.30	18.21	H	0.9	7.9	25.19	33.0	-7.8																																																																																										

Band Band 2 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: R. Alegre Configuration: EUT Only Mode: HSDPA B2								
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1852.40	8.53	V	0.9	8.0	15.64	33.0	-17.4	
	1852.40	16.71	H	0.9	8.0	23.82	33.0	-9.2	
	Mid Ch								
	1880.00	8.46	V	0.9	8.0	15.57	33.0	-17.4	
	1880.00	16.50	H	0.9	8.0	23.61	33.0	-9.4	
High Ch									
1907.60	8.50	V	0.9	8.0	15.61	33.0	-17.4		
1907.60	16.69	H	0.9	8.0	23.80	33.0	-9.2		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band Band 2 REL99	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: R. Alegre Configuration: EUT Only Mode: Rel99 B2								
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1852.40	8.56	V	0.9	8.0	15.67	33.0	-17.3	
	1852.40	16.74	H	0.9	8.0	23.85	33.0	-9.2	
	Mid Ch								
	1880.00	8.63	V	0.9	8.0	15.74	33.0	-17.3	
	1880.00	16.62	H	0.9	8.0	23.73	33.0	-9.3	
High Ch									
1907.60	8.54	V	0.9	8.0	15.65	33.0	-17.4		
1907.60	16.29	H	0.9	8.0	23.40	33.0	-9.6		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band Band 4 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc.								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: Kiya Kedida Configuration: EUT Only Location: Chamber C Mode: HSDPA Band 4 Fundamentals								
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1712.40	12.48	V	0.9	7.9	19.47	33.0	-13.5	
	1712.40	17.01	H	0.9	7.9	24.00	33.0	-9.0	
	Mid Ch								
	1732.60	13.21	V	0.9	7.9	20.18	33.0	-12.8	
	1732.60	19.15	H	0.9	7.9	26.12	33.0	-6.9	
High Ch									
1752.60	11.30	V	0.9	7.9	18.28	33.0	-14.7		
1752.60	17.19	H	0.9	7.9	24.17	33.0	-8.8		

Band Band 4 REL99	High Frequency Substitution Measurement UL Verification Services, Inc.								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: Kiya Kedida Configuration: EUT Only Location: Chamber C Mode: Rel99 Band 4 Fundamentals								
	Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1712.40	12.30	V	0.9	7.9	19.29	33.0	-13.7	
	1712.40	17.10	H	0.9	7.9	24.09	33.0	-8.9	
	Mid Ch								
	1732.60	12.83	V	0.9	7.9	19.80	33.0	-13.2	
	1732.60	19.12	H	0.9	7.9	26.09	33.0	-6.9	
High Ch									
1752.60	11.17	V	0.9	7.9	18.15	33.0	-14.9		
1752.60	17.50	H	0.9	7.9	24.48	33.0	-8.5		

Band Band 5 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		K.Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		HSDPA Band 5 Fundamentals																																																																																															
	Test Equipment:		Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, 4ft SMA Cable Warehouse																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>17.44</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.54</td> <td>38.5</td> <td>-22.0</td> <td></td> </tr> <tr> <td>826.40</td> <td>22.33</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.43</td> <td>38.5</td> <td>-17.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>17.58</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.68</td> <td>38.5</td> <td>-21.8</td> <td></td> </tr> <tr> <td>836.60</td> <td>22.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.70</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>19.24</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>18.34</td> <td>38.5</td> <td>-20.2</td> <td></td> </tr> <tr> <td>846.60</td> <td>23.72</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.82</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	17.44	V	0.9	0.0	16.54	38.5	-22.0		826.40	22.33	H	0.9	0.0	21.43	38.5	-17.1		Mid Ch									836.60	17.58	V	0.9	0.0	16.68	38.5	-21.8		836.60	22.60	H	0.9	0.0	21.70	38.5	-16.8		High Ch									846.60	19.24	V	0.9	0.0	18.34	38.5	-20.2		846.60	23.72	H	0.9	0.0	22.82	38.5	-15.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.40	17.44	V	0.9	0.0	16.54	38.5	-22.0																																																																																											
826.40	22.33	H	0.9	0.0	21.43	38.5	-17.1																																																																																											
Mid Ch																																																																																																		
836.60	17.58	V	0.9	0.0	16.68	38.5	-21.8																																																																																											
836.60	22.60	H	0.9	0.0	21.70	38.5	-16.8																																																																																											
High Ch																																																																																																		
846.60	19.24	V	0.9	0.0	18.34	38.5	-20.2																																																																																											
846.60	23.72	H	0.9	0.0	22.82	38.5	-15.7																																																																																											

Band Band 5 REL99	High Frequency Substitution Measurement UL Verification Services, Inc.																																																																																																	
	Company:		LG																																																																																															
	Project #:		15119960																																																																																															
	Date:		2/3/2015																																																																																															
	Test Engineer:		K. Kedida																																																																																															
	Configuration:		EUT Only																																																																																															
	Location:		Chamber C																																																																																															
	Mode:		Rel99 Band 5 Fundamentals																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, 4ft SMA Cable Warehouse																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>17.19</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.29</td> <td>38.5</td> <td>-22.2</td> <td></td> </tr> <tr> <td>826.40</td> <td>21.93</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>21.03</td> <td>38.5</td> <td>-17.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>16.88</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>15.98</td> <td>38.5</td> <td>-22.5</td> <td></td> </tr> <tr> <td>836.60</td> <td>23.30</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.40</td> <td>38.5</td> <td>-16.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>18.64</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.74</td> <td>38.5</td> <td>-20.8</td> <td></td> </tr> <tr> <td>846.60</td> <td>23.56</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.66</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	17.19	V	0.9	0.0	16.29	38.5	-22.2		826.40	21.93	H	0.9	0.0	21.03	38.5	-17.5		Mid Ch									836.60	16.88	V	0.9	0.0	15.98	38.5	-22.5		836.60	23.30	H	0.9	0.0	22.40	38.5	-16.1		High Ch									846.60	18.64	V	0.9	0.0	17.74	38.5	-20.8		846.60	23.56	H	0.9	0.0	22.66	38.5	-15.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.40	17.19	V	0.9	0.0	16.29	38.5	-22.2																																																																																											
826.40	21.93	H	0.9	0.0	21.03	38.5	-17.5																																																																																											
Mid Ch																																																																																																		
836.60	16.88	V	0.9	0.0	15.98	38.5	-22.5																																																																																											
836.60	23.30	H	0.9	0.0	22.40	38.5	-16.1																																																																																											
High Ch																																																																																																		
846.60	18.64	V	0.9	0.0	17.74	38.5	-20.8																																																																																											
846.60	23.56	H	0.9	0.0	22.66	38.5	-15.8																																																																																											

Band GSM 1900 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: R. Alegre Configuration: EUT Only Mode: EGPRS 1880								
	Test Equipment: Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.20	11.97	V	0.9	8.0	19.08	33.0	-13.9	
	1850.20	19.35	H	0.9	8.0	26.46	33.0	-6.5	
	Mid Ch								
	1880.00	11.65	V	0.9	8.0	18.76	33.0	-14.2	
	1880.00	19.07	H	0.9	8.0	26.18	33.0	-6.8	
High Ch									
1909.80	11.92	V	0.9	8.0	19.03	33.0	-14.0		
1909.80	19.07	H	0.9	8.0	26.18	33.0	-6.8		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band GSM 1900 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company: LG Project #: 15119960 Date: 2/3/2015 Test Engineer: R. Alegre Configuration: EUT Only Mode: GPRS 1880								
	Test Equipment:								
	Receiving: Horn T119 and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.20	14.92	V	0.9	8.0	22.03	33.0	-11.0	
	1850.20	22.94	H	0.9	8.0	30.05	33.0	-3.0	
	Mid Ch								
1880.00	14.59	V	0.9	8.0	21.70	33.0	-11.3		
1880.00	22.38	H	0.9	8.0	29.49	33.0	-3.5		
High Ch									
1909.80	14.91	V	0.9	8.0	22.02	33.0	-11.0		
1909.80	22.34	H	0.9	8.0	29.45	33.0	-3.6		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band GSM 850 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C									
	Company: LG Project #: 15119960 Date: 02/04/15 Test Engineer: Kiya Kedida Configuration: EUT Only Mode: EGPRS850									
	Test Equipment: Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, 4ft SMA Cable Warehouse									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	824.20	18.34	V	0.9	0.0	17.44	38.5	-21.0		
	824.20	27.23	H	0.9	0.0	26.33	38.5	-12.1		
	Mid Ch									
	836.60	17.28	V	0.9	0.0	16.38	38.5	-22.1		
	836.60	28.30	H	0.9	0.0	27.40	38.5	-11.0		
High Ch										
848.80	20.29	V	0.9	0.0	19.39	38.5	-19.1			
848.80	27.66	H	0.9	0.0	26.76	38.5	-11.7			
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

Band GSM 850 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C																																																																																																						
	Company:		LG																																																																																																				
	Project #:		15119960																																																																																																				
	Date:		02/04/15																																																																																																				
	Test Engineer:		Kiya Kedida																																																																																																				
	Configuration:		EUT Only																																																																																																				
	Mode:		GPRS850																																																																																																				
	Test Equipment:		Receiving: Hybrid T185, and Chamber C SMA Cables Substitution: Dipole T416, 4ft SMA Cable Warehouse																																																																																																				
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch</td> </tr> <tr> <td>824.20</td> <td>22.42</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>21.52</td> <td>38.5</td> <td>-16.9</td> <td></td> </tr> <tr> <td>824.20</td> <td>31.11</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>30.21</td> <td>38.5</td> <td>-8.2</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>23.96</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>23.06</td> <td>38.5</td> <td>-15.4</td> <td></td> </tr> <tr> <td>836.60</td> <td>32.42</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>31.52</td> <td>38.5</td> <td>-6.9</td> <td></td> </tr> <tr> <td colspan="10">High Ch</td> </tr> <tr> <td>848.80</td> <td>23.60</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>22.70</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> <tr> <td>848.80</td> <td>31.26</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>30.36</td> <td>38.5</td> <td>-8.1</td> <td></td> </tr> </tbody> </table>										f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch										824.20	22.42	V	0.9	0.0	21.52	38.5	-16.9		824.20	31.11	H	0.9	0.0	30.21	38.5	-8.2		Mid Ch										836.60	23.96	V	0.9	0.0	23.06	38.5	-15.4		836.60	32.42	H	0.9	0.0	31.52	38.5	-6.9		High Ch										848.80	23.60	V	0.9	0.0	22.70	38.5	-15.7		848.80	31.26	H	0.9	0.0	30.36	38.5	-8.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																														
Low Ch																																																																																																							
824.20	22.42	V	0.9	0.0	21.52	38.5	-16.9																																																																																																
824.20	31.11	H	0.9	0.0	30.21	38.5	-8.2																																																																																																
Mid Ch																																																																																																							
836.60	23.96	V	0.9	0.0	23.06	38.5	-15.4																																																																																																
836.60	32.42	H	0.9	0.0	31.52	38.5	-6.9																																																																																																
High Ch																																																																																																							
848.80	23.60	V	0.9	0.0	22.70	38.5	-15.7																																																																																																
848.80	31.26	H	0.9	0.0	30.36	38.5	-8.1																																																																																																
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																							

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, and §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

GSM, WCDMA, and LTE

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services Chamber Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15I19960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 12 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,704									
1408.00	-28.6	V	3.0	37.4	1.0	-64.9	-13.0	-51.9	
2112.00	-24.3	V	3.0	36.6	1.0	-59.9	-13.0	-46.9	
2816.00	-22.5	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
10MHz									
1408.00	-26.3	H	3.0	37.4	1.0	-62.7	-13.0	-49.7	
2112.00	-24.9	H	3.0	36.6	1.0	-60.4	-13.0	-47.4	
2816.00	-24.2	H	3.0	36.4	1.0	-59.6	-13.0	-46.6	
16QAM									
Mid Ch,707.5									
1415.00	-28.8	V	3.0	37.3	1.0	-65.1	-13.0	-52.1	
2122.50	-23.8	V	3.0	36.6	1.0	-59.3	-13.0	-46.3	
2830.00	-23.2	V	3.0	36.4	1.0	-58.6	-13.0	-45.6	
1415.00	-27.2	H	3.0	37.3	1.0	-63.5	-13.0	-50.5	
2122.50	-23.8	H	3.0	36.6	1.0	-59.4	-13.0	-46.4	
2830.00	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	
High Ch,711									
1422.00	-29.1	V	3.0	37.3	1.0	-65.4	-13.0	-52.4	
2133.00	-23.7	V	3.0	36.6	1.0	-59.3	-13.0	-46.3	
2844.00	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
1422.00	-27.3	H	3.0	37.3	1.0	-63.6	-13.0	-50.6	
2133.00	-23.8	H	3.0	36.6	1.0	-59.4	-13.0	-46.4	
2844.00	-24.3	H	3.0	36.4	1.0	-59.7	-13.0	-46.7	

UL Verification Services Chamber Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 12 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,704									
1408.00	-28.3	V	3.0	37.4	1.0	-64.7	-13.0	-51.7	
2112.00	-23.4	V	3.0	36.6	1.0	-59.0	-13.0	-46.0	
2816.00	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1408.00	-24.6	H	3.0	37.4	1.0	-60.9	-13.0	-47.9	
2112.00	-24.4	H	3.0	36.6	1.0	-59.9	-13.0	-46.9	
2816.00	-23.6	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
Mid Ch,707.5									
1415.00	-28.2	V	3.0	37.3	1.0	-64.6	-13.0	-51.6	
2122.50	-23.2	V	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2830.00	-22.3	V	3.0	36.4	1.0	-57.7	-13.0	-44.7	
1415.00	-25.9	H	3.0	37.3	1.0	-62.3	-13.0	-49.3	
2122.50	-23.2	H	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2830.00	-22.7	H	3.0	36.4	1.0	-58.1	-13.0	-45.1	
High Ch,711									
1422.00	-28.4	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
2133.00	-23.1	V	3.0	36.6	1.0	-58.7	-13.0	-45.7	
2844.00	-22.6	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
1422.00	-25.9	H	3.0	37.3	1.0	-62.2	-13.0	-49.2	
2133.00	-23.2	H	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2844.00	-23.2	H	3.0	36.4	1.0	-58.6	-13.0	-45.6	

UL Verification Services Chamber									
Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I19834							
Date:		01/30/15							
Test Engineer:		J. Jackson							
Configuration:		EUT , AC Adapter							
Location:		Chamber C							
Mode:		LTE_16QAM Band 12 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE12									
5MHz									
16QAM									
Low Ch, 701.50									
1403.00	-28.0	V	3.0	37.4	1.0	-64.4	-13.0	-51.4	
2104.50	-23.4	V	3.0	36.6	1.0	-59.0	-13.0	-46.0	
2806.00	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
1403.00	-26.1	H	3.0	37.4	1.0	-62.5	-13.0	-49.5	
2104.50	-24.2	H	3.0	36.6	1.0	-59.8	-13.0	-46.8	
2806.00	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	
Mid Ch, 707.50									
1415.00	-28.4	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
2122.50	-23.3	V	3.0	36.6	1.0	-58.9	-13.0	-45.9	
2830.00	-23.3	V	3.0	36.4	1.0	-58.7	-13.0	-45.7	
1415.00	-26.3	H	3.0	37.3	1.0	-62.6	-13.0	-49.6	
2122.50	-22.7	H	3.0	36.6	1.0	-58.2	-13.0	-45.2	
2830.00	-23.3	H	3.0	36.4	1.0	-58.7	-13.0	-45.7	
High Ch, 713.50									
1427.00	-27.1	V	3.0	37.3	1.0	-63.4	-13.0	-50.4	
2140.50	-23.9	V	3.0	36.6	1.0	-59.5	-13.0	-46.5	
2854.00	-23.1	V	3.0	36.4	1.0	-58.5	-13.0	-45.5	
1427.00	-26.0	H	3.0	37.3	1.0	-62.4	-13.0	-49.4	
2140.50	-25.1	H	3.0	36.6	1.0	-60.7	-13.0	-47.7	
2854.00	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	

UL Verification Services Chamber									
Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 12 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 701.50									
1403.00	-27.3	V	3.0	37.4	1.0	-63.7	-13.0	-50.7	
2104.50	-24.0	V	3.0	36.6	1.0	-59.5	-13.0	-46.5	
2806.00	-22.3	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1403.00	-25.1	H	3.0	37.4	1.0	-61.5	-13.0	-48.5	
2104.50	-23.1	H	3.0	36.6	1.0	-58.7	-13.0	-45.7	
2806.00	-23.2	H	3.0	36.4	1.0	-58.5	-13.0	-45.5	
Mid Ch, 707.50									
1415.00	-28.4	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
2122.50	-22.7	V	3.0	36.6	1.0	-58.2	-13.0	-45.2	
2830.00	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
1415.00	-25.0	H	3.0	37.3	1.0	-61.4	-13.0	-48.4	
2122.50	-22.5	H	3.0	36.6	1.0	-58.1	-13.0	-45.1	
2830.00	-22.2	H	3.0	36.4	1.0	-57.6	-13.0	-44.6	
High Ch, 713.50									
1427.00	-27.3	V	3.0	37.3	1.0	-63.6	-13.0	-50.6	
2140.50	-23.1	V	3.0	36.6	1.0	-58.7	-13.0	-45.7	
2854.00	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
1427.00	-25.3	H	3.0	37.3	1.0	-61.7	-13.0	-48.7	
2140.50	-23.8	H	3.0	36.6	1.0	-59.4	-13.0	-46.4	
2854.00	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	

UL Verification Services Chamber									
Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 12 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE12									
3MHz									
16QAM									
Low Ch, 700.5									
1401.00	-27.5	V	3.0	37.4	1.0	-63.8	-13.0	-50.8	
2101.50	-23.7	V	3.0	36.6	1.0	-59.2	-13.0	-46.2	
2802.00	-23.0	V	3.0	36.4	1.0	-58.4	-13.0	-45.4	
1401.00	-25.1	H	3.0	37.4	1.0	-61.5	-13.0	-48.5	
2101.50	-22.9	H	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2802.00	-23.4	H	3.0	36.4	1.0	-58.7	-13.0	-45.7	
Mid Ch, 707.50									
1415.00	-27.6	V	3.0	37.3	1.0	-64.0	-13.0	-51.0	
2122.00	-23.8	V	3.0	36.6	1.0	-59.3	-13.0	-46.3	
2830.00	-23.2	V	3.0	36.4	1.0	-58.6	-13.0	-45.6	
1415.00	-26.0	H	3.0	37.3	1.0	-62.4	-13.0	-49.4	
2122.00	-25.6	H	3.0	36.6	1.0	-61.2	-13.0	-48.2	
2830.00	-24.4	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
High Ch, 714.5									
1429.00	-28.1	V	3.0	37.3	1.0	-64.5	-13.0	-51.5	
2143.50	-24.3	V	3.0	36.6	1.0	-59.9	-13.0	-46.9	
2858.00	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1429.00	-26.2	H	3.0	37.3	1.0	-62.5	-13.0	-49.5	
2143.50	-24.2	H	3.0	36.6	1.0	-59.8	-13.0	-46.8	
2858.00	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3	

UL Verification Services Chamber									
Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 12 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 700.5									
1401.00	-27.2	V	3.0	37.4	1.0	-63.5	-13.0	-50.5	
2101.50	-23.1	V	3.0	36.6	1.0	-58.7	-13.0	-45.7	
2802.00	-22.3	V	3.0	36.4	1.0	-57.7	-13.0	-44.7	
1401.00	-24.5	H	3.0	37.4	1.0	-60.8	-13.0	-47.8	
2101.50	-22.2	H	3.0	36.6	1.0	-57.8	-13.0	-44.8	
2802.00	-22.3	H	3.0	36.4	1.0	-57.6	-13.0	-44.6	
Mid Ch, 707.50									
1415.00	-27.8	V	3.0	37.3	1.0	-64.1	-13.0	-51.1	
2122.00	-22.6	V	3.0	36.6	1.0	-58.1	-13.0	-45.1	
2830.00	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
1415.00	-25.3	H	3.0	37.3	1.0	-61.6	-13.0	-48.6	
2122.00	-24.2	H	3.0	36.6	1.0	-59.8	-13.0	-46.8	
2830.00	-23.4	H	3.0	36.4	1.0	-58.8	-13.0	-45.8	
High Ch, 714.5									
1429.00	-26.9	V	3.0	37.3	1.0	-63.2	-13.0	-50.2	
2143.50	-22.8	V	3.0	36.6	1.0	-58.3	-13.0	-45.3	
2858.00	-22.0	V	3.0	36.4	1.0	-57.4	-13.0	-44.4	
1429.00	-24.8	H	3.0	37.3	1.0	-61.2	-13.0	-48.2	
2143.50	-22.8	H	3.0	36.6	1.0	-58.4	-13.0	-45.4	
2858.00	-22.7	H	3.0	36.4	1.0	-58.1	-13.0	-45.1	

UL Verification Services Chamber Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 12 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 699.7									
1399.40	-27.8	V	3.0	37.4	1.0	-64.2	-13.0	-51.2	
2099.10	-22.8	V	3.0	36.6	1.0	-58.4	-13.0	-45.4	
2798.80	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
1.4MHz									
1399.40	-24.9	H	3.0	37.4	1.0	-61.3	-13.0	-48.3	
2099.10	-23.8	H	3.0	36.6	1.0	-59.3	-13.0	-46.3	
2798.80	-23.9	H	3.0	36.4	1.0	-59.3	-13.0	-46.3	
16QAM									
Mid Ch, 707.50									
1415.00	-27.3	V	3.0	37.3	1.0	-63.7	-13.0	-50.7	
2122.00	-23.2	V	3.0	36.6	1.0	-58.8	-13.0	-45.8	
2830.00	-22.4	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
1415.00	-25.1	H	3.0	37.3	1.0	-61.4	-13.0	-48.4	
2122.00	-22.9	H	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2830.00	-24.1	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
High Ch, 715.3									
1430.60	-27.1	V	3.0	37.3	1.0	-63.4	-13.0	-50.4	
2145.90	-23.8	V	3.0	36.6	1.0	-59.3	-13.0	-46.3	
2861.20	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
1430.60	-25.1	H	3.0	37.3	1.0	-61.4	-13.0	-48.4	
2145.90	-22.0	H	3.0	36.6	1.0	-57.6	-13.0	-44.6	
2861.20	-23.1	H	3.0	36.4	1.0	-58.5	-13.0	-45.5	

UL Verification Services Chamber Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 12 Harmonics, 1.4MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE12									
1.4MHz									
QPSK									
Low Ch, 699.7									
1399.40	-27.5	V	3.0	37.4	1.0	-63.8	-13.0	-50.8	
2099.10	-24.1	V	3.0	36.6	1.0	-59.7	-13.0	-46.7	
2798.80	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
1399.40	-24.8	H	3.0	37.4	1.0	-61.2	-13.0	-48.2	
2099.10	-23.0	H	3.0	36.6	1.0	-58.5	-13.0	-45.5	
2798.80	-23.6	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
Mid Ch, 707.50									
1415.00	-27.6	V	3.0	37.3	1.0	-64.0	-13.0	-51.0	
2122.00	-22.7	V	3.0	36.6	1.0	-58.3	-13.0	-45.3	
2830.00	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
1415.00	-24.1	H	3.0	37.3	1.0	-60.4	-13.0	-47.4	
2122.00	-22.0	H	3.0	36.6	1.0	-57.6	-13.0	-44.6	
2830.00	-23.4	H	3.0	36.4	1.0	-58.8	-13.0	-45.8	
High Ch, 715.3									
1430.60	-26.8	V	3.0	37.3	1.0	-63.1	-13.0	-50.1	
2145.90	-23.3	V	3.0	36.6	1.0	-58.9	-13.0	-45.9	
2861.20	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1430.60	-24.0	H	3.0	37.3	1.0	-60.4	-13.0	-47.4	
2145.90	-21.6	H	3.0	36.6	1.0	-57.2	-13.0	-44.2	
2861.20	-23.6	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 4 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Low Ch, 1720									
3440.00	-8.7	V	3.0	36.0	1.0	-43.7	-13.0	-30.7	
5160.00	-15.9	V	3.0	35.4	1.0	-50.3	-13.0	-37.3	
LTE4									
6880.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4	
3440.00	-10.8	H	3.0	36.0	1.0	-45.8	-13.0	-32.8	
5160.00	-15.6	H	3.0	35.4	1.0	-50.0	-13.0	-37.0	
20MHz									
6880.00	-13.0	H	3.0	35.7	1.0	-47.6	-13.0	-34.6	
16QAM									
Mid Ch, 1732.5									
3465.00	-9.4	V	3.0	36.0	1.0	-44.5	-13.0	-31.5	
5197.50	-14.5	V	3.0	35.4	1.0	-48.9	-13.0	-35.9	
6930.00	-14.8	V	3.0	35.7	1.0	-49.5	-13.0	-36.5	
3465.00	-12.1	H	3.0	36.0	1.0	-47.1	-13.0	-34.1	
5197.50	-15.4	H	3.0	35.4	1.0	-49.8	-13.0	-36.8	
6930.00	-13.0	H	3.0	35.7	1.0	-47.7	-13.0	-34.7	
High Ch, 1745									
3490.00	-11.8	V	3.0	36.0	1.0	-46.8	-13.0	-33.8	
5235.00	-15.8	V	3.0	35.4	1.0	-50.3	-13.0	-37.3	
6980.00	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3	
3490.00	-12.9	H	3.0	36.0	1.0	-47.9	-13.0	-34.9	
5235.00	-14.8	H	3.0	35.4	1.0	-49.2	-13.0	-36.2	
6980.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15119960								
Date:		2/5/2015								
Test Engineer:		K.Kedida								
Configuration:		EUT , AC Adapter and HP								
Location:		Chamber C								
Mode:		LTE_QPSK Band 4 Harmonics, 20MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1720									
	3440.00	-8.0	V	3.0	36.0	1.0	-43.1	-13.0	-30.1	
	5160.00	-16.1	V	3.0	35.4	1.0	-50.5	-13.0	-37.5	
LTE4	6880.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
	3440.00	-8.9	H	3.0	36.0	1.0	-44.0	-13.0	-31.0	
20MHz	5160.00	-15.9	H	3.0	35.4	1.0	-50.3	-13.0	-37.3	
	6880.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
QPSK	Mid Ch, 1732.5									
	3465.00	-8.7	V	3.0	36.0	1.0	-43.7	-13.0	-30.7	
	5197.50	-13.4	V	3.0	35.4	1.0	-47.8	-13.0	-34.8	
	6930.00	-14.1	V	3.0	35.7	1.0	-48.8	-13.0	-35.8	
	3465.00	-10.9	H	3.0	36.0	1.0	-46.0	-13.0	-33.0	
	5197.50	-15.7	H	3.0	35.4	1.0	-50.1	-13.0	-37.1	
	High Ch, 1745									
	3490.00	-10.1	V	3.0	36.0	1.0	-45.1	-13.0	-32.1	
	5235.00	-15.0	V	3.0	35.4	1.0	-49.4	-13.0	-36.4	
	6980.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
	3490.00	-13.1	H	3.0	36.0	1.0	-48.1	-13.0	-35.1	
	5235.00	-13.2	H	3.0	35.4	1.0	-47.7	-13.0	-34.7	
	6980.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 4 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
LTE4									
15MHz									
16QAM									
Low Ch, 1717.5									
3435.00	-9.8	V	3.0	36.1	1.0	-44.8	-13.0	-31.8	
5152.50	-16.0	V	3.0	35.4	1.0	-50.5	-13.0	-37.5	
6870.00	-13.9	V	3.0	35.7	1.0	-48.6	-13.0	-35.6	
3435.00	-10.9	H	3.0	36.1	1.0	-46.0	-13.0	-33.0	
5152.50	-13.3	H	3.0	35.4	1.0	-47.7	-13.0	-34.7	
6870.00	-12.6	H	3.0	35.7	1.0	-47.3	-13.0	-34.3	
Mid Ch, 1732.5									
3465.00	-9.1	V	3.0	36.0	1.0	-44.1	-13.0	-31.1	
5197.50	-13.8	V	3.0	35.4	1.0	-48.2	-13.0	-35.2	
6930.00	-14.1	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
3465.00	-11.8	H	3.0	36.0	1.0	-46.8	-13.0	-33.8	
5197.50	-15.4	H	3.0	35.4	1.0	-49.8	-13.0	-36.8	
6930.00	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
High Ch, 1747.5									
3495.00	-11.8	V	3.0	36.0	1.0	-46.8	-13.0	-33.8	
5242.50	-14.8	V	3.0	35.4	1.0	-49.2	-13.0	-36.2	
6990.00	-14.4	V	3.0	35.7	1.0	-49.1	-13.0	-36.1	
3495.00	-11.8	H	3.0	36.0	1.0	-46.8	-13.0	-33.8	
5242.50	-15.8	H	3.0	35.4	1.0	-50.2	-13.0	-37.2	
6990.00	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 4 Harmonics, 15MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1717.5									
Band	3435.00	-9.2	V	3.0	36.1	1.0	-44.3	-13.0	-31.3
	5152.50	-16.0	V	3.0	35.4	1.0	-50.5	-13.0	-37.5
LTE4	6870.00	-14.5	V	3.0	35.7	1.0	-49.2	-13.0	-36.2
	3435.00	-10.5	H	3.0	36.1	1.0	-45.5	-13.0	-32.5
	5152.50	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4
15MHz	6870.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1
Mid Ch, 1732.5									
QPSK	3465.00	-7.2	V	3.0	36.0	1.0	-42.3	-13.0	-29.3
	5197.50	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9
	6930.00	-13.2	V	3.0	35.7	1.0	-47.8	-13.0	-34.8
	3465.00	-10.0	H	3.0	36.0	1.0	-45.1	-13.0	-32.1
	5197.50	-15.1	H	3.0	35.4	1.0	-49.5	-13.0	-36.5
	6930.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2
High Ch, 1747.5									
	3495.00	-11.0	V	3.0	36.0	1.0	-46.0	-13.0	-33.0
	5242.50	-13.6	V	3.0	35.4	1.0	-48.0	-13.0	-35.0
	6990.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3495.00	-11.6	H	3.0	36.0	1.0	-46.6	-13.0	-33.6
	5242.50	-14.7	H	3.0	35.4	1.0	-49.1	-13.0	-36.1
	6990.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 4 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1715									
Band	3430.00	-10.3	V	3.0	36.1	1.0	-45.4	-13.0	-32.4
	5145.00	-14.6	V	3.0	35.4	1.0	-49.0	-13.0	-36.0
LTE4	6860.00	-13.9	V	3.0	35.7	1.0	-48.6	-13.0	-35.6
	3430.00	-11.3	H	3.0	36.1	1.0	-46.3	-13.0	-33.3
	5145.00	-15.3	H	3.0	35.4	1.0	-49.7	-13.0	-36.7
10MHz	6860.00	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5
Mid Ch, 1732.5									
16QAM	3465.00	-9.0	V	3.0	36.0	1.0	-44.0	-13.0	-31.0
	5197.50	-13.6	V	3.0	35.4	1.0	-48.0	-13.0	-35.0
	6930.00	-15.1	V	3.0	35.7	1.0	-49.8	-13.0	-36.8
	3465.00	-10.2	H	3.0	36.0	1.0	-45.2	-13.0	-32.2
	5197.50	-15.0	H	3.0	35.4	1.0	-49.4	-13.0	-36.4
	6930.00	-12.8	H	3.0	35.7	1.0	-47.4	-13.0	-34.4
High Ch, 1750									
	3500.00	-12.3	V	3.0	36.0	1.0	-47.3	-13.0	-34.3
	5250.00	-14.4	V	3.0	35.4	1.0	-48.8	-13.0	-35.8
	7000.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3500.00	-12.7	H	3.0	36.0	1.0	-47.7	-13.0	-34.7
	5250.00	-14.7	H	3.0	35.4	1.0	-49.1	-13.0	-36.1
	7000.00	-12.5	H	3.0	35.7	1.0	-47.1	-13.0	-34.1

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 4 Harmonics, 10MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1715									
Band	3430.00	-9.7	V	3.0	36.1	1.0	-44.7	-13.0	-31.7
	5145.00	-13.7	V	3.0	35.4	1.0	-48.2	-13.0	-35.2
LTE4	6860.00	-13.2	V	3.0	35.7	1.0	-47.9	-13.0	-34.9
	3430.00	-9.5	H	3.0	36.1	1.0	-44.5	-13.0	-31.5
	5145.00	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3
10MHz	6860.00	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5
Mid Ch, 1732.5									
QPSK	3465.00	-8.0	V	3.0	36.0	1.0	-43.0	-13.0	-30.0
	5197.50	-12.5	V	3.0	35.4	1.0	-46.9	-13.0	-33.9
	6930.00	-14.1	V	3.0	35.7	1.0	-48.8	-13.0	-35.8
	3465.00	-9.3	H	3.0	36.0	1.0	-44.3	-13.0	-31.3
	5197.50	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3
	6930.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1
High Ch, 1750									
	3500.00	-11.8	V	3.0	36.0	1.0	-46.8	-13.0	-33.8
	5250.00	-13.2	V	3.0	35.4	1.0	-47.6	-13.0	-34.6
	7000.00	-13.2	V	3.0	35.7	1.0	-47.8	-13.0	-34.8
	3500.00	-12.8	H	3.0	36.0	1.0	-47.8	-13.0	-34.8
	5250.00	-14.2	H	3.0	35.4	1.0	-48.6	-13.0	-35.6
	7000.00	-12.7	H	3.0	35.7	1.0	-47.3	-13.0	-34.3

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber B							
Mode:		LTE_16QAM Band 4 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.5									
Band	3425.00	-11.8	V	3.0	36.1	1.0	-46.8	-13.0	-33.8
	5137.50	-14.6	V	3.0	35.4	1.0	-49.1	-13.0	-36.1
LTE4	6850.00	-14.1	V	3.0	35.7	1.0	-48.7	-13.0	-35.7
	3425.00	-8.3	H	3.0	36.1	1.0	-43.4	-13.0	-30.4
	5137.50	-15.5	H	3.0	35.4	1.0	-49.9	-13.0	-36.9
5MHz	6850.00	-13.6	H	3.0	35.7	1.0	-48.3	-13.0	-35.3
Mid Ch, 1732.5									
16QAM	3465.00	-9.1	V	3.0	36.0	1.0	-44.1	-13.0	-31.1
	5197.50	-13.7	V	3.0	35.4	1.0	-48.1	-13.0	-35.1
	6930.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3465.00	-9.6	H	3.0	36.0	1.0	-44.6	-13.0	-31.6
	5197.50	-14.8	H	3.0	35.4	1.0	-49.2	-13.0	-36.2
	6930.00	-12.4	H	3.0	35.7	1.0	-47.0	-13.0	-34.0
High Ch, 1752.5									
	3505.00	-12.8	V	3.0	36.0	1.0	-47.8	-13.0	-34.8
	5257.50	-14.4	V	3.0	35.4	1.0	-48.8	-13.0	-35.8
	7010.00	-13.9	V	3.0	35.7	1.0	-48.6	-13.0	-35.6
	3505.00	-11.6	H	3.0	36.0	1.0	-46.6	-13.0	-33.6
	5257.50	-14.5	H	3.0	35.4	1.0	-48.9	-13.0	-35.9
	7010.00	-12.3	H	3.0	35.7	1.0	-46.9	-13.0	-33.9

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15119960								
Date:		2/5/2015								
Test Engineer:		K.Kedida								
Configuration:		EUT , AC Adapter and HP								
Location:		Chamber B								
Mode:		LTE_QPSK Band 4 Harmonics, 5MHz Bandwidth								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1712.5									
Band	3425.00	-11.2	V	3.0	36.1	1.0	-46.3	-13.0	-33.3	
	5137.50	-15.9	V	3.0	35.4	1.0	-50.3	-13.0	-37.3	
LTE4	6850.00	-14.3	V	3.0	35.7	1.0	-49.0	-13.0	-36.0	
	3425.00	-7.0	H	3.0	36.1	1.0	-42.1	-13.0	-29.1	
	5137.50	-14.9	H	3.0	35.4	1.0	-49.4	-13.0	-36.4	
5MHz	6850.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
	Mid Ch, 1732.5									
	3465.00	-7.6	V	3.0	36.0	1.0	-42.7	-13.0	-29.7	
QPSK	5197.50	-13.0	V	3.0	35.4	1.0	-47.4	-13.0	-34.4	
	6930.00	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
	3465.00	-9.1	H	3.0	36.0	1.0	-44.2	-13.0	-31.2	
	5197.50	-14.1	H	3.0	35.4	1.0	-48.5	-13.0	-35.5	
	6930.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6	
	High Ch, 1752.5									
	3505.00	-12.4	V	3.0	36.0	1.0	-47.4	-13.0	-34.4	
	5257.50	-14.3	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
	7010.00	-13.8	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
	3505.00	-11.3	H	3.0	36.0	1.0	-46.3	-13.0	-33.3	
	5257.50	-13.9	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
	7010.00	-12.0	H	3.0	35.7	1.0	-46.7	-13.0	-33.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_16QAM Band 4 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5									
Band	3423.00	-8.4	V	3.0	36.1	1.0	-43.5	-13.0	-30.5
	5134.50	-14.8	V	3.0	35.4	1.0	-49.3	-13.0	-36.3
LTE4	6846.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3423.00	-8.1	H	3.0	36.1	1.0	-43.1	-13.0	-30.1
	5134.50	-15.3	H	3.0	35.4	1.0	-49.8	-13.0	-36.8
3MHz	6846.00	-13.5	H	3.0	35.7	1.0	-48.2	-13.0	-35.2
Mid Ch, 1732.5									
16QAM	3465.00	-8.3	V	3.0	36.0	1.0	-43.3	-13.0	-30.3
	5197.50	-15.6	V	3.0	35.4	1.0	-50.0	-13.0	-37.0
	6930.00	-13.4	V	3.0	35.7	1.0	-48.0	-13.0	-35.0
	3465.00	-9.7	H	3.0	36.0	1.0	-44.8	-13.0	-31.8
	5197.50	-14.2	H	3.0	35.4	1.0	-48.6	-13.0	-35.6
	6930.00	-12.3	H	3.0	35.7	1.0	-46.9	-13.0	-33.9
High Ch, 1753.5									
	3507.00	-13.1	V	3.0	36.0	1.0	-48.1	-13.0	-35.1
	5260.50	-14.5	V	3.0	35.4	1.0	-49.0	-13.0	-36.0
	7014.00	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7
	3507.00	-12.9	H	3.0	36.0	1.0	-47.9	-13.0	-34.9
	5260.50	-14.6	H	3.0	35.4	1.0	-49.0	-13.0	-36.0
	7014.00	-11.5	H	3.0	35.7	1.0	-46.2	-13.0	-33.2

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/5/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT , AC Adapter and HP							
Location:		Chamber C							
Mode:		LTE_QPSK Band 4 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1711.5									
Band	3423.00	-7.2	V	3.0	36.1	1.0	-42.3	-13.0	-29.3
	5134.50	-13.7	V	3.0	35.4	1.0	-48.2	-13.0	-35.2
LTE4	6846.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1
	3423.00	-8.0	H	3.0	36.1	1.0	-43.0	-13.0	-30.0
	5134.50	-15.1	H	3.0	35.4	1.0	-49.5	-13.0	-36.5
3MHz	6846.00	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5
Mid Ch, 1732.5									
QPSK	3465.00	-8.1	V	3.0	36.0	1.0	-43.1	-13.0	-30.1
	5197.50	-14.6	V	3.0	35.4	1.0	-49.1	-13.0	-36.1
	6930.00	-13.7	V	3.0	35.7	1.0	-48.3	-13.0	-35.3
	3465.00	-8.3	H	3.0	36.0	1.0	-43.4	-13.0	-30.4
	5197.50	-15.7	H	3.0	35.4	1.0	-50.2	-13.0	-37.2
	6930.00	-12.4	H	3.0	35.7	1.0	-47.0	-13.0	-34.0
High Ch, 1753.5									
	3507.00	-13.1	V	3.0	36.0	1.0	-48.1	-13.0	-35.1
	5260.50	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7
	7014.00	-12.5	V	3.0	35.7	1.0	-47.2	-13.0	-34.2
	3507.00	-11.5	H	3.0	36.0	1.0	-46.5	-13.0	-33.5
	5260.50	-13.9	H	3.0	35.4	1.0	-48.3	-13.0	-35.3
	7014.00	-11.3	H	3.0	35.7	1.0	-46.0	-13.0	-33.0

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: LG Project #: 15119960 Date: 2/5/2015 Test Engineer: K.Kedida Configuration: EUT , AC Adapter and HP Location: Chamber C Mode: LTE_16QAM Band 4 Harmonics, 1.4MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1710.7									
Band	3421.40	-7.2	V	3.0	36.1	1.0	-42.2	-13.0	-29.2
	5132.10	-14.1	V	3.0	35.4	1.0	-48.6	-13.0	-35.6
LTE4	6842.80	-12.8	V	3.0	35.7	1.0	-47.5	-13.0	-34.5
	3421.40	-6.5	H	3.0	36.1	1.0	-41.5	-13.0	-28.5
	5132.10	-12.1	H	3.0	35.4	1.0	-46.5	-13.0	-33.5
1.4MHz	6842.80	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6
Mid Ch, 1732.5									
16QAM	3465.00	-7.1	V	3.0	36.0	1.0	-42.1	-13.0	-29.1
	5197.50	-13.8	V	3.0	35.4	1.0	-48.2	-13.0	-35.2
	6930.00	-13.3	V	3.0	35.7	1.0	-47.9	-13.0	-34.9
	3465.00	-7.8	H	3.0	36.0	1.0	-42.8	-13.0	-29.8
	5197.50	-15.3	H	3.0	35.4	1.0	-49.7	-13.0	-36.7
	6930.00	-13.4	H	3.0	35.7	1.0	-48.0	-13.0	-35.0
High Ch, 1754.3									
	3508.60	-11.9	V	3.0	36.0	1.0	-46.9	-13.0	-33.9
	5262.90	-14.6	V	3.0	35.4	1.0	-49.0	-13.0	-36.0
	7017.20	-14.2	V	3.0	35.7	1.0	-48.9	-13.0	-35.9
	3508.60	-12.7	H	3.0	36.0	1.0	-47.7	-13.0	-34.7
	5262.90	-14.1	H	3.0	35.4	1.0	-48.6	-13.0	-35.6
	7017.20	-11.5	H	3.0	35.7	1.0	-46.2	-13.0	-33.2

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: LG Project #: 15119960 Date: 2/5/2015 Test Engineer: K.Kedida Configuration: EUT , AC Adapter and HP Location: Chamber C Mode: LTE_QPSK Band 4 Harmonics, 1.4MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1710.7									
Band	3421.40	-6.1	V	3.0	36.1	1.0	-41.2	-13.0	-28.2
	5132.10	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3
LTE4	6842.80	-12.9	V	3.0	35.7	1.0	-47.5	-13.0	-34.5
	3421.40	-6.1	H	3.0	36.1	1.0	-41.1	-13.0	-28.1
	5132.10	-12.9	H	3.0	35.4	1.0	-47.4	-13.0	-34.4
1.4MHz	6842.80	-12.1	H	3.0	35.7	1.0	-46.7	-13.0	-33.7
Mid Ch, 1732.5									
QPSK	3465.00	-6.2	V	3.0	36.0	1.0	-41.3	-13.0	-28.3
	5197.50	-11.7	V	3.0	35.4	1.0	-46.1	-13.0	-33.1
	6930.00	-13.2	V	3.0	35.7	1.0	-47.8	-13.0	-34.8
	3465.00	-7.9	H	3.0	36.0	1.0	-43.0	-13.0	-30.0
	5197.50	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3
	6930.00	-12.5	H	3.0	35.7	1.0	-47.1	-13.0	-34.1
High Ch, 1754.3									
	3508.60	-12.1	V	3.0	36.0	1.0	-47.1	-13.0	-34.1
	5262.90	-15.3	V	3.0	35.4	1.0	-49.7	-13.0	-36.7
	7017.20	-12.9	V	3.0	35.7	1.0	-47.6	-13.0	-34.6
	3508.60	-10.7	H	3.0	36.0	1.0	-45.7	-13.0	-32.7
	5262.90	-13.4	H	3.0	35.4	1.0	-47.9	-13.0	-34.9
	7017.20	-11.5	H	3.0	35.7	1.0	-46.1	-13.0	-33.1

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: LG Electronics Project #: 15119960 Date: 2/4/2015 Test Engineer: Jude Semana Configuration: X Position, AC Charger + Headset Mode: HSDPA B2										
		Chamber	Pre-amplifier		Filter		Limit			
		5m Chamber A	T343 8449B		Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 2 HSDPA	Low Ch, 1852.4MHz									
	3.704	-18.8	V	3.0	35.4	1.0	-53.2	-13.0	-40.2	
	5.557	-16.7	V	3.0	34.7	1.0	-50.4	-13.0	-37.4	
	7.409	-16.3	V	3.0	34.9	1.0	-50.2	-13.0	-37.2	
	3.704	-19.8	H	3.0	35.4	1.0	-54.2	-13.0	-41.2	
	5.557	-15.0	H	3.0	34.7	1.0	-48.7	-13.0	-35.7	
	7.409	-15.4	H	3.0	34.9	1.0	-49.3	-13.0	-36.3	
	Mid Ch, 1880.0MHz									
	3.760	-16.2	V	3.0	35.3	1.0	-50.5	-13.0	-37.5	
	5.640	-14.2	V	3.0	34.7	1.0	-47.9	-13.0	-34.9	
	7.520	-15.7	V	3.0	34.9	1.0	-49.7	-13.0	-36.7	
	3.760	-14.6	H	3.0	35.3	1.0	-49.0	-13.0	-36.0	
	5.640	-16.5	H	3.0	34.7	1.0	-50.2	-13.0	-37.2	
	7.520	-15.5	H	3.0	34.9	1.0	-49.4	-13.0	-36.4	
	High Ch, 1907.6 MHz									
	3.815	-17.8	V	3.0	35.3	1.0	-52.1	-13.0	-39.1	
	5.723	-13.3	V	3.0	34.7	1.0	-47.0	-13.0	-34.0	
	7.630	-16.2	V	3.0	34.9	1.0	-50.2	-13.0	-37.2	
	3.815	-14.5	H	3.0	35.3	1.0	-48.7	-13.0	-35.7	
	5.723	-12.5	H	3.0	34.7	1.0	-46.3	-13.0	-33.3	
	7.630	-13.9	H	3.0	34.9	1.0	-47.9	-13.0	-34.9	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		LG Electronics								
Project #:		15119960								
Date:		2/4/2015								
Test Engineer:		Jude Semana								
Configuration:		X Position, AC Charger + Headset								
Mode:		REL99 B2								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber A		T343 8449B		Filter 1		Part 24				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 2 REL99	Low Ch, 1852.4MHz									
	3.704	-18.7	V	3.0	35.4	1.0	-53.1	-13.0	-40.1	
	5.557	-16.4	V	3.0	34.7	1.0	-50.1	-13.0	-37.1	
	7.409	-16.1	V	3.0	34.9	1.0	-50.0	-13.0	-37.0	
	3.704	-19.0	H	3.0	35.4	1.0	-53.4	-13.0	-40.4	
	5.557	-15.1	H	3.0	34.7	1.0	-48.8	-13.0	-35.8	
	7.409	-14.6	H	3.0	34.9	1.0	-48.5	-13.0	-35.5	
	Mid Ch, 1880.0MHz									
	3.760	-15.4	V	3.0	35.3	1.0	-49.8	-13.0	-36.8	
	5.640	-13.8	V	3.0	34.7	1.0	-47.6	-13.0	-34.6	
	7.520	-15.5	V	3.0	34.9	1.0	-49.5	-13.0	-36.5	
	3.760	-13.4	H	3.0	35.3	1.0	-47.7	-13.0	-34.7	
	5.640	-16.0	H	3.0	34.7	1.0	-49.7	-13.0	-36.7	
	7.520	-14.1	H	3.0	34.9	1.0	-48.0	-13.0	-35.0	
	High Ch, 1907.6 MHz									
	3.815	-17.9	V	3.0	35.3	1.0	-52.2	-13.0	-39.2	
	5.723	-12.8	V	3.0	34.7	1.0	-46.5	-13.0	-33.5	
	7.630	-15.8	V	3.0	34.9	1.0	-49.7	-13.0	-36.7	
3.815	-15.1	H	3.0	35.3	1.0	-49.4	-13.0	-36.4		
5.723	-11.9	H	3.0	34.7	1.0	-45.6	-13.0	-32.6		
7.630	-14.3	H	3.0	34.9	1.0	-48.3	-13.0	-35.3		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/7/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT Only							
Location:		Chamber C							
Mode:		HSDPA Band 2 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.4									
3424.80	-9.5	V	3.0	35.9	1.0	-44.4	-13.0	-31.4	
5137.20	-13.6	V	3.0	35.5	1.0	-48.1	-13.0	-35.1	
Band 4									
6849.60	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8	
3424.80	-11.8	H	3.0	35.9	1.0	-46.7	-13.0	-33.7	
5137.20	-13.2	H	3.0	35.5	1.0	-47.6	-13.0	-34.6	
HSDPA									
6849.60	-12.6	H	3.0	35.7	1.0	-47.3	-13.0	-34.3	
Mid Ch, 1732.6									
3465.20	-7.0	V	3.0	35.8	1.0	-41.8	-13.0	-28.8	
5197.80	-13.1	V	3.0	35.5	1.0	-47.5	-13.0	-34.5	
6930.04	-12.7	V	3.0	35.7	1.0	-47.4	-13.0	-34.4	
3465.20	-11.3	H	3.0	35.8	1.0	-46.2	-13.0	-33.2	
5197.80	-12.0	H	3.0	35.5	1.0	-46.5	-13.0	-33.5	
6930.04	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6	
High Ch, 1752.6									
3505.20	-10.4	V	3.0	35.8	1.0	-45.2	-13.0	-32.2	
5257.80	-12.8	V	3.0	35.5	1.0	-47.3	-13.0	-34.3	
7010.40	-12.1	V	3.0	35.8	1.0	-46.9	-13.0	-33.9	
3505.20	-12.6	H	3.0	35.8	1.0	-47.4	-13.0	-34.4	
5257.80	-13.3	H	3.0	35.5	1.0	-47.8	-13.0	-34.8	
7010.40	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/7/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT Only							
Location:		Chamber C							
Mode:		Rel 99 Band 2 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.4									
3424.80	-8.8	V	3.0	35.9	1.0	-43.7	-13.0	-30.7	
5137.20	-14.1	V	3.0	35.5	1.0	-48.6	-13.0	-35.6	
Band 4									
6849.60	-12.7	V	3.0	35.7	1.0	-47.5	-13.0	-34.5	
3424.80	-11.2	H	3.0	35.9	1.0	-46.1	-13.0	-33.1	
5137.20	-13.6	H	3.0	35.5	1.0	-48.0	-13.0	-35.0	
REL99									
6849.60	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5	
Mid Ch, 1732.6									
3465.20	-8.6	V	3.0	35.8	1.0	-43.4	-13.0	-30.4	
5197.80	-13.8	V	3.0	35.5	1.0	-48.3	-13.0	-35.3	
6930.04	-12.7	V	3.0	35.7	1.0	-47.5	-13.0	-34.5	
3465.20	-11.9	H	3.0	35.8	1.0	-46.7	-13.0	-33.7	
5197.80	-13.2	H	3.0	35.5	1.0	-47.7	-13.0	-34.7	
6930.04	-11.5	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	
High Ch, 1752.6									
3505.20	-10.1	V	3.0	35.8	1.0	-44.9	-13.0	-31.9	
5257.80	-13.1	V	3.0	35.5	1.0	-47.6	-13.0	-34.6	
7010.40	-12.2	V	3.0	35.8	1.0	-47.0	-13.0	-34.0	
3505.20	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	
5257.80	-14.2	H	3.0	35.5	1.0	-48.7	-13.0	-35.7	
7010.40	-12.3	H	3.0	35.8	1.0	-47.1	-13.0	-34.1	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT Only							
Location:		Chamber C							
Mode:		HSDPA Band 5 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Band 5									
HSDPA									
Low Ch, 826.4									
1652.80	-18.0	V	3.0	37.0	1.0	-54.0	-13.0	-41.0	
2479.20	-23.4	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
3305.60	-21.3	V	3.0	36.1	1.0	-56.5	-13.0	-43.5	
1652.80	-17.1	H	3.0	37.0	1.0	-53.2	-13.0	-40.2	
2479.20	-23.5	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
3305.60	-22.1	H	3.0	36.1	1.0	-57.3	-13.0	-44.3	
Mid Ch, 836.6									
1673.20	-21.3	V	3.0	37.0	1.0	-57.3	-13.0	-44.3	
2509.80	-22.4	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
3346.40	-21.2	V	3.0	36.1	1.0	-56.4	-13.0	-43.4	
1673.20	-17.3	H	3.0	37.0	1.0	-53.3	-13.0	-40.3	
2509.80	-24.0	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
3346.40	-21.5	H	3.0	36.1	1.0	-56.6	-13.0	-43.6	
High Ch, 846.6									
1693.20	-22.2	V	3.0	37.0	1.0	-58.1	-13.0	-45.1	
2539.80	-23.3	V	3.0	36.4	1.0	-58.7	-13.0	-45.7	
3386.40	-21.7	V	3.0	36.1	1.0	-56.8	-13.0	-43.8	
1693.20	-21.3	H	3.0	37.0	1.0	-57.3	-13.0	-44.3	
2539.80	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2	
3386.40	-21.6	H	3.0	36.1	1.0	-56.7	-13.0	-43.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG							
Project #:		15119960							
Date:		2/6/2015							
Test Engineer:		K.Kedida							
Configuration:		EUT Only							
Location:		Chamber C							
Mode:		Rel99 Band 5 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
Band 5									
REL99									
Low Ch, 826.4									
1652.80	-16.3	V	3.0	37.0	1.0	-52.4	-13.0	-39.4	
2479.20	-22.9	V	3.0	36.4	1.0	-58.4	-13.0	-45.4	
3305.60	-21.0	V	3.0	36.1	1.0	-56.2	-13.0	-43.2	
1652.80	-17.1	H	3.0	37.0	1.0	-53.1	-13.0	-40.1	
2479.20	-23.7	H	3.0	36.4	1.0	-59.1	-13.0	-46.1	
3305.60	-21.8	H	3.0	36.1	1.0	-57.0	-13.0	-44.0	
Mid Ch, 836.6									
1673.20	-20.1	V	3.0	37.0	1.0	-56.1	-13.0	-43.1	
2509.80	-23.3	V	3.0	36.4	1.0	-58.7	-13.0	-45.7	
3346.40	-21.6	V	3.0	36.1	1.0	-56.7	-13.0	-43.7	
1673.20	-19.4	H	3.0	37.0	1.0	-55.4	-13.0	-42.4	
2509.80	-24.7	H	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3346.40	-22.0	H	3.0	36.1	1.0	-57.1	-13.0	-44.1	
High Ch, 846.6									
1693.20	-20.8	V	3.0	37.0	1.0	-56.7	-13.0	-43.7	
2539.80	-23.6	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
3386.40	-21.6	V	3.0	36.1	1.0	-56.7	-13.0	-43.7	
1693.20	-19.0	H	3.0	37.0	1.0	-55.0	-13.0	-42.0	
2539.80	-24.4	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3386.40	-21.6	H	3.0	36.1	1.0	-56.7	-13.0	-43.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: LG Electronics Project #: 15I19960 Date: 2/4/2015 Test Engineer: Jude Semana Configuration: EUT w/ AC Charger + HS Mode: EGPRS 1900										
<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f7fa;">Chamber</div> 5m Chamber A		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f7fa;">Pre-amplifier</div> T34 8449B		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f7fa;">Filter</div> Filter 1		<div style="border: 1px solid black; padding: 2px; display: inline-block; background-color: #e0f7fa;">Limit</div> Part 24				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz										
GSM 1900	3.700	-17.5	V	3.0	35.4	1.0	-51.9	-13.0	-38.9	
	5.551	-15.3	V	3.0	34.7	1.0	-49.0	-13.0	-36.0	
	7.401	-15.5	V	3.0	34.9	1.0	-49.4	-13.0	-36.4	
EGPRS	3.700	-17.6	H	3.0	35.4	1.0	-52.0	-13.0	-39.0	
	5.551	-14.2	H	3.0	34.7	1.0	-48.0	-13.0	-35.0	
	7.401	-14.2	H	3.0	34.9	1.0	-48.1	-13.0	-35.1	
Mid Ch, 1880.0MHz										
	3.760	-17.4	V	3.0	35.3	1.0	-51.8	-13.0	-38.8	
	5.640	-16.0	V	3.0	34.7	1.0	-49.8	-13.0	-36.8	
	7.520	-15.1	V	3.0	34.9	1.0	-49.0	-13.0	-36.0	
	3.760	-17.4	H	3.0	35.3	1.0	-51.7	-13.0	-38.7	
	5.640	-14.2	H	3.0	34.7	1.0	-47.9	-13.0	-34.9	
	7.520	-13.1	H	3.0	34.9	1.0	-47.0	-13.0	-34.0	
High Ch, 1909.8MHz										
	3.820	-17.9	V	3.0	35.3	1.0	-52.1	-13.0	-39.1	
	5.729	-13.9	V	3.0	34.7	1.0	-47.6	-13.0	-34.6	
	7.639	-13.2	V	3.0	35.0	1.0	-47.1	-13.0	-34.1	
	3.820	-16.4	H	3.0	35.3	1.0	-50.7	-13.0	-37.7	
	5.729	-13.6	H	3.0	34.7	1.0	-47.4	-13.0	-34.4	
	7.639	-13.3	H	3.0	35.0	1.0	-47.2	-13.0	-34.2	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: LG Electronics Project #: 15119960 Date: 2/4/2015 Test Engineer: Jude Semana Configuration: EUT w/ AC Charger + HS Mode: GPRS1900										
		Chamber	Pre-amplifier	Filter	Limit					
		5m Chamber A	T34 8449B	Filter 1	Part 24					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850.2MHz									
GSM 1900	3.700	-17.1	V	3.0	35.4	1.0	-51.5	-13.0	-38.5	
	5.551	-15.2	V	3.0	34.7	1.0	-48.9	-13.0	-35.9	
	7.401	-14.5	V	3.0	34.9	1.0	-48.5	-13.0	-35.5	
GPRS	3.700	-17.4	H	3.0	35.4	1.0	-51.8	-13.0	-38.8	
	5.551	-13.7	H	3.0	34.7	1.0	-47.5	-13.0	-34.5	
	7.401	-14.0	H	3.0	34.9	1.0	-47.9	-13.0	-34.9	
	Mid Ch, 1880.0MHz									
	3.760	-16.4	V	3.0	35.3	1.0	-50.7	-13.0	-37.7	
	5.640	-15.9	V	3.0	34.7	1.0	-49.6	-13.0	-36.6	
	7.520	-13.8	V	3.0	34.9	1.0	-47.7	-13.0	-34.7	
	3.760	-18.1	H	3.0	35.3	1.0	-52.4	-13.0	-39.4	
	5.640	-13.2	H	3.0	34.7	1.0	-46.9	-13.0	-33.9	
	7.520	-12.8	H	3.0	34.9	1.0	-46.8	-13.0	-33.8	
	High Ch, 1909.8MHz									
	3.820	-17.7	V	3.0	35.3	1.0	-52.0	-13.0	-39.0	
	5.729	-12.9	V	3.0	34.7	1.0	-46.6	-13.0	-33.6	
	7.639	-13.2	V	3.0	35.0	1.0	-47.1	-13.0	-34.1	
	3.820	-16.0	H	3.0	35.3	1.0	-50.3	-13.0	-37.3	
	5.729	-12.5	H	3.0	34.7	1.0	-46.2	-13.0	-33.2	
	7.639	-12.8	H	3.0	35.0	1.0	-46.8	-13.0	-33.8	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15119960								
Date:		02/16/15								
Test Engineer:		K.Kedida								
Configuration:		EUT,AC charger and HS								
Mode:		EGPRS 850								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
GSM 850	1.648	-9.4	V	3.0	37.4	1.0	-45.8	-13.0	-32.8	
	2.473	-18.4	V	3.0	36.4	1.0	-53.8	-13.0	-40.8	
	3.297	-21.5	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
EGPRS	1.648	-9.9	H	3.0	37.4	1.0	-46.3	-13.0	-33.3	
	2.473	-21.2	H	3.0	36.4	1.0	-56.6	-13.0	-43.6	
	3.297	-22.5	H	3.0	35.8	1.0	-57.3	-13.0	-44.3	
	Mid Ch, 836.6MHz									
	1.673	-9.8	V	3.0	37.3	1.0	-46.1	-13.0	-33.1	
	2.510	-19.8	V	3.0	36.4	1.0	-55.2	-13.0	-42.2	
	3.346	-21.4	V	3.0	35.8	1.0	-56.1	-13.0	-43.1	
	1.673	-10.2	H	3.0	37.3	1.0	-46.6	-13.0	-33.6	
	2.510	-20.6	H	3.0	36.4	1.0	-55.9	-13.0	-42.9	
	3.346	-22.3	H	3.0	35.8	1.0	-57.0	-13.0	-44.0	
	High Ch, 848.8MHz									
	1.698	-11.0	V	3.0	37.3	1.0	-47.3	-13.0	-34.3	
	2.547	-18.7	V	3.0	36.3	1.0	-54.0	-13.0	-41.0	
	3.395	-20.5	V	3.0	35.7	1.0	-55.2	-13.0	-42.2	
	1.698	-9.1	H	3.0	37.3	1.0	-45.4	-13.0	-32.4	
	2.547	-21.3	H	3.0	36.3	1.0	-56.6	-13.0	-43.6	
	3.395	-21.6	H	3.0	35.7	1.0	-56.3	-13.0	-43.3	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		LG								
Project #:		15119960								
Date:		02/16/15								
Test Engineer:		K.Kedida								
Configuration:		EUT,AC charger and HS								
Mode:		GPRS 850								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz										
GSM 850	1.648	-8.5	V	3.0	37.4	1.0	-44.9	-13.0	-31.9	
	2.473	-18.0	V	3.0	36.4	1.0	-53.4	-13.0	-40.4	
	3.297	-21.4	V	3.0	35.8	1.0	-56.2	-13.0	-43.2	
GPRS	1.648	-9.3	H	3.0	37.4	1.0	-45.6	-13.0	-32.6	
	2.473	-20.4	H	3.0	36.4	1.0	-55.8	-13.0	-42.8	
	3.297	-22.0	H	3.0	35.8	1.0	-56.8	-13.0	-43.8	
Mid Ch, 836.6MHz										
	1.673	-8.5	V	3.0	37.3	1.0	-44.8	-13.0	-31.8	
	2.510	-19.4	V	3.0	36.4	1.0	-54.7	-13.0	-41.7	
	3.346	-21.6	V	3.0	35.8	1.0	-56.4	-13.0	-43.4	
	1.673	-9.3	H	3.0	37.3	1.0	-45.6	-13.0	-32.6	
	2.510	-21.9	H	3.0	36.4	1.0	-57.3	-13.0	-44.3	
	3.346	-21.3	H	3.0	35.8	1.0	-56.0	-13.0	-43.0	
High Ch, 848.8MHz										
	1.698	-10.5	V	3.0	37.3	1.0	-46.8	-13.0	-33.8	
	2.547	-17.5	V	3.0	36.3	1.0	-52.8	-13.0	-39.8	
	3.395	-19.8	V	3.0	35.7	1.0	-54.5	-13.0	-41.5	
	1.698	-7.9	H	3.0	37.3	1.0	-44.2	-13.0	-31.2	
	2.547	-20.7	H	3.0	36.3	1.0	-56.0	-13.0	-43.0	
	3.395	-21.4	H	3.0	35.7	1.0	-56.1	-13.0	-43.1	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										