HAC-RF Emission

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration:

- Probe: ER3DV6 SN2540; ConvF(1, 1, 1); Calibrated: 8/26/2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1259; Calibrated: 1/14/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/835 MHz/Hearing Aid Compatibility Test at 15mm distance

(41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm

Reference Value = 133.2 V/m; Power Drift = -0.05 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 118.1 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
114.2 V/m	118.1 V/m	117.3 V/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
66.19 V/m	69.06 V/m	68.70 V/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
110.1 V/m	114.0 V/m	112.6 V/m

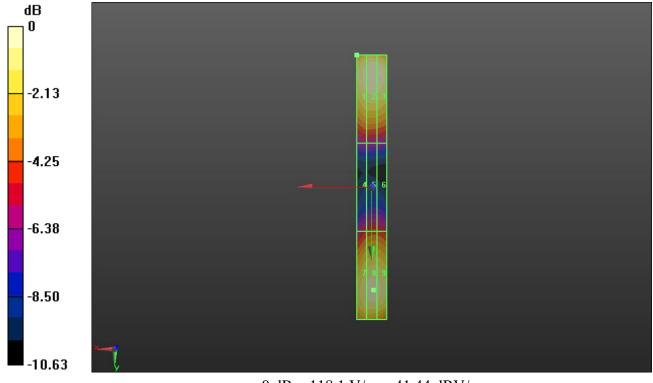

0 dB = 118.1 V/m = 41.44 dBV/m

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1 Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 SN2540; ConvF(1, 1, 1); Calibrated: 8/26/2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1259; Calibrated: 1/14/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm

distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 140.6 V/m; Power Drift = 0.08 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 89.13 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
84.01 V/m	85.10 V/m	83.26 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
68.46 V/m	70.94 V/m	70.83 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
86.54 V/m	89.13 V/m	88.37 V/m

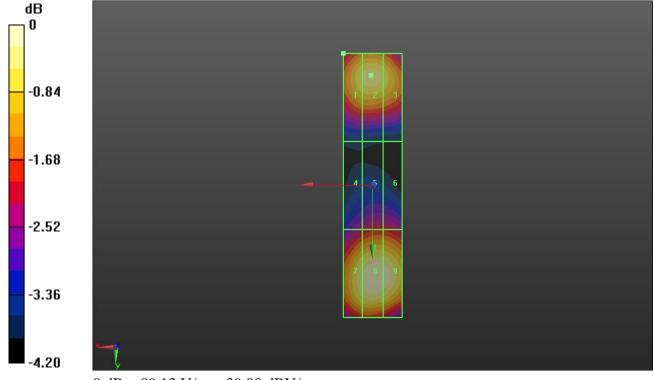

0 dB = 89.13 V/m = 39.00 dBV/m