



**FCC CFR47 PART 15 SUBPART C**

**BLUETOOTH LOW ENERGY  
C2PC CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n**

**MODEL NUMBER: LG-H345, LGH345, H345**

**FCC ID: ZNFH345**

**REPORT NUMBER: 15I20243-E3**

**ISSUE DATE: MARCH 24, 2015**

*Prepared for*

**LG ELECTRONICS MOBILECOMM U.S.A., INC  
1000 SYLVAN AVENUE  
ENGLEWOOD CLIFFS,  
NEW JERSEY, 07632, U.S.A**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

Rev.	Date	Revisions	Revised By
--	03/24/15	Initial Issue	D. Corona

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. SUMMARY TABLE .....</b>	<b>11</b>
<b>8. RADIATED TEST RESULTS.....</b>	<b>12</b>
8.1. <i>LIMITS AND PROCEDURE.....</i>	<i>12</i>
8.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>13</i>
8.3. <i>TRANSMITTER BELOW 1 GHz.....</i>	<i>26</i>
<b>9. SETUP PHOTOS.....</b>	<b>28</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC  
**EUT DESCRIPTION:** GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n  
**MODEL:** LG-H345, LGH345, H345  
**SERIAL NUMBER:** 501KPLC818448 (conducted) 501KPED818500 (radiated)  
**DATE TESTED:** MARCH 11 & 24, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input checked="" type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS b/g/n

### **5.2. MAXIMUM OUTPUT POWER**

The transmitter has a maximum peak conducted output power as follows:  
See original report for details.

### **5.3. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an FPCB antenna, with a maximum gain of 0.46dBi.

### **5.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WR	RA4Y1031433	N/A
Earphone	LG	N/A	N/A	N/A

### I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.



**SETUP DIAGRAM FOR TESTS**

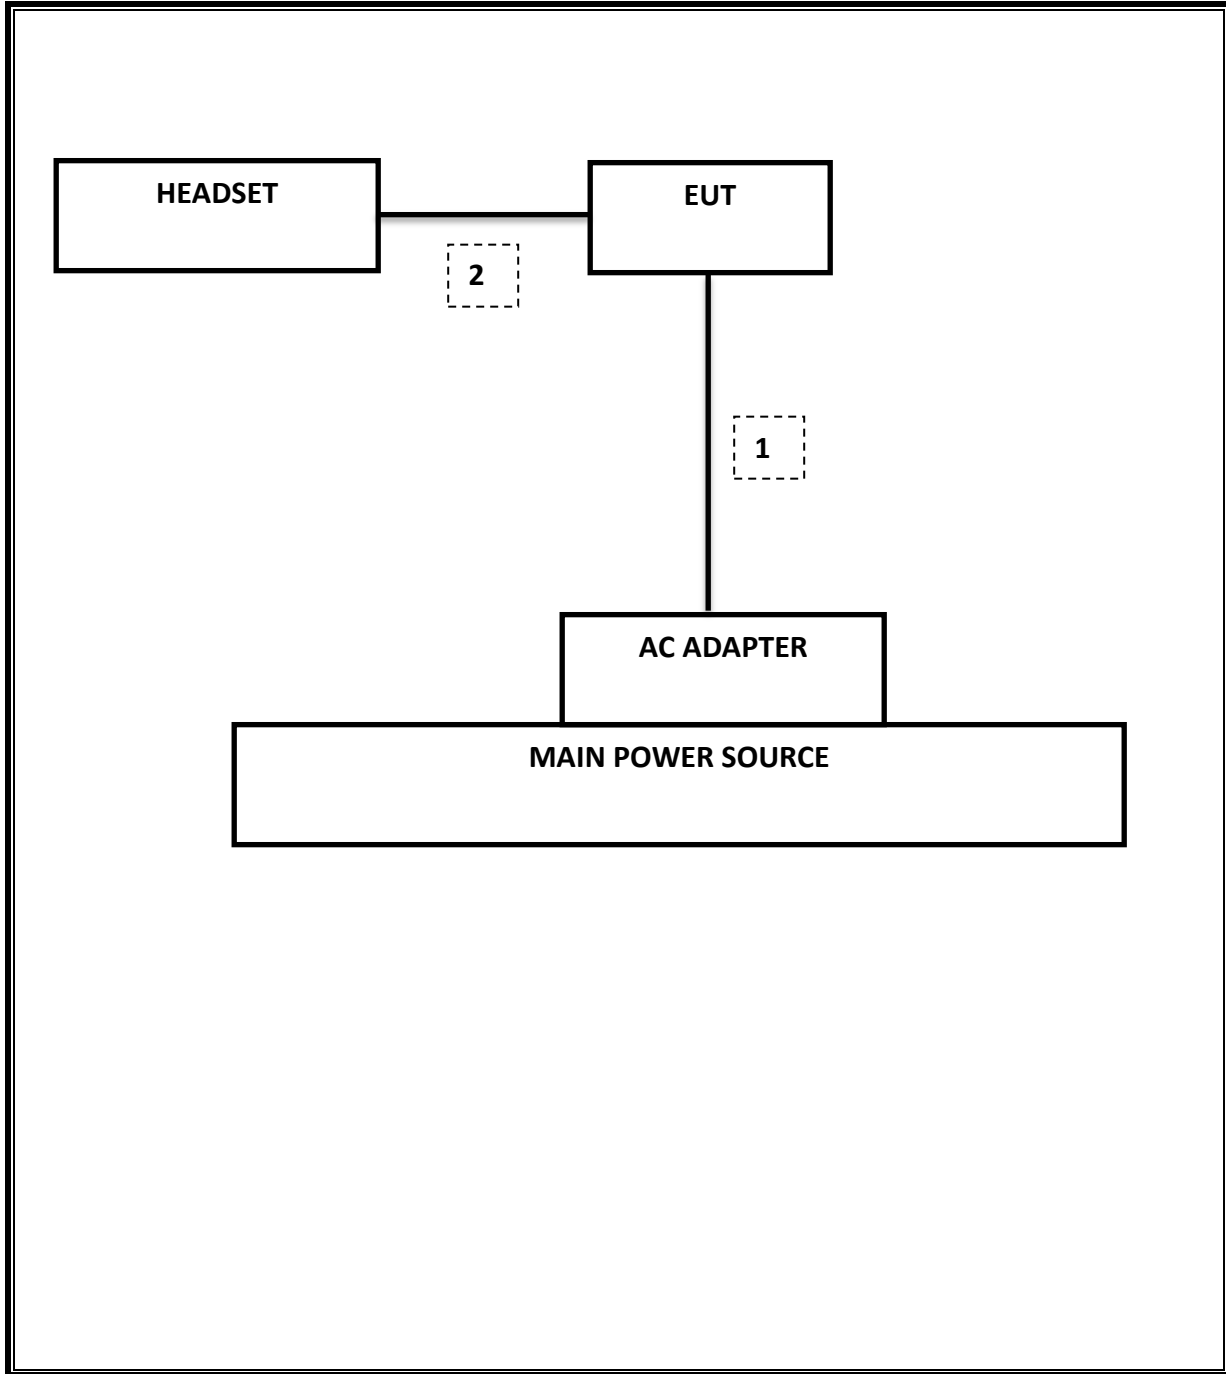

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Tnumber	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	122	02/13/16
Antenna, Horn, 18GHz	EMCO	3115	60	10/25/16
Antenna, Horn, 26.5 GHz	ARA	MWH-1826	89	11/14/15
Preamplifier, 10kHz to 1GHz	Agilent / HP	8447D	15	08/16/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	F00351	06/27/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	123	10/28/15
CBT Bluetooth Tester	R & S	CBT	258	07/08/15
Peak Power Meter	Agilent / HP	E4416A	84	01/26/16
Peak / Average Power Sensor	Agilent / HP	8481A	224	12/10/15
LISN, 30 MHz	FCC	50/250-25-2	24	01/16/16
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

## 7. SUMMARY TABLE

C2PC reason: Please see LG FCC Class II Change Description letter for details.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	See Original
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	See Original
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	See Original
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	See Original
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	See Original
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	40.13 dBuV/m

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor =  $10 \log (1/x)$ . For this sample:  $DCF = 10 \log (1/0.597) = 2.24 \text{ dB}$   
(Spectrum Analyzer round it down to 2.2dB)


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

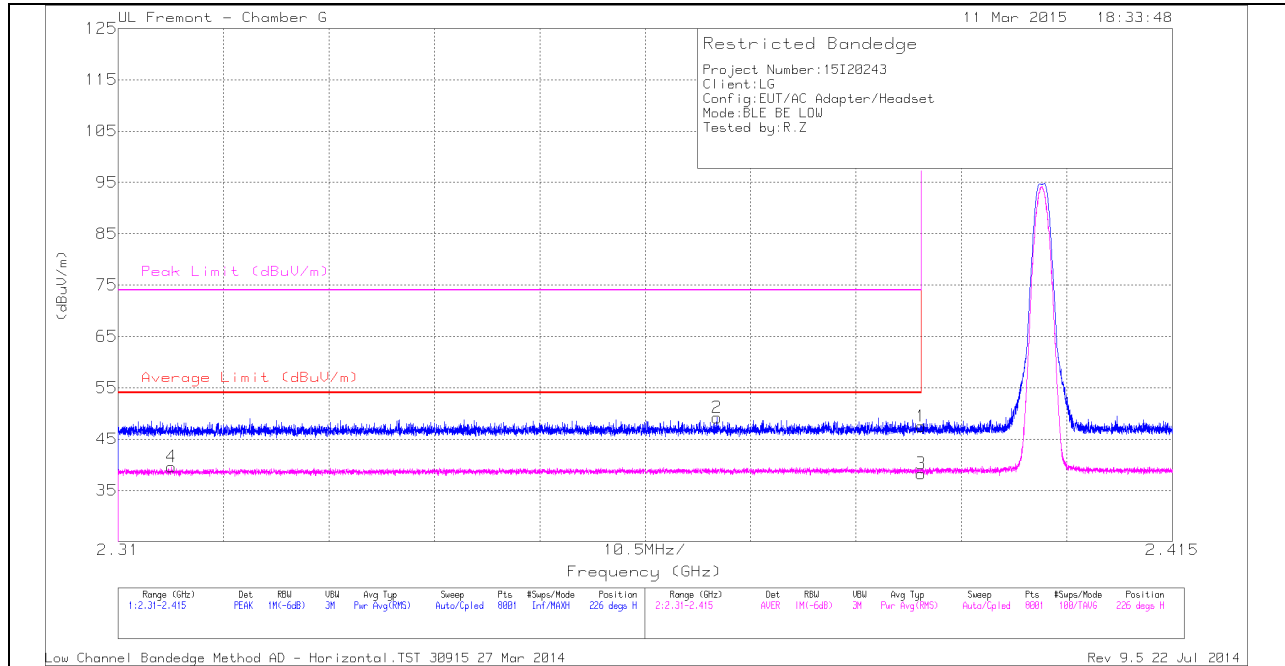

### HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.58	PK	31.8	-24.9	0	47.48	-	-	74	-26.52	226	237	H
2	* 2.37	42.38	PK	31.7	-24.9	0	49.18	-	-	74	-24.82	226	237	H
3	* 2.39	29.14	RMS	31.8	-24.9	2.22	38.26	54	-15.74	-	-	226	237	H
4	* 2.315	30.78	RMS	31.6	-25	2.22	39.6	54	-14.4	-	-	226	237	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

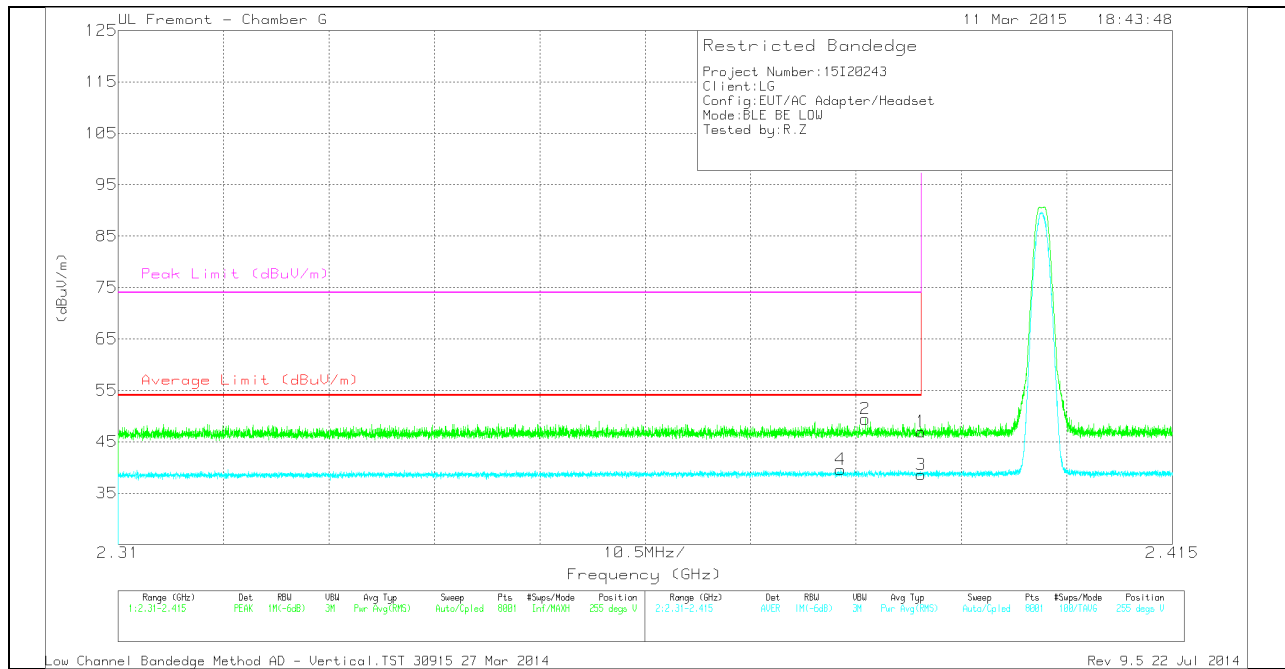

**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.04	PK	31.8	-24.9	0	46.94	-	-	74	-27.06	255	367	V
2	* 2.384	42.53	PK	31.8	-24.9	0	49.43	-	-	74	-24.57	255	367	V
3	* 2.39	29.45	RMS	31.8	-24.9	2.22	38.57	54	-15.43	-	-	255	367	V
4	* 2.382	30.47	RMS	31.8	-24.9	2.22	39.59	54	-14.41	-	-	255	367	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

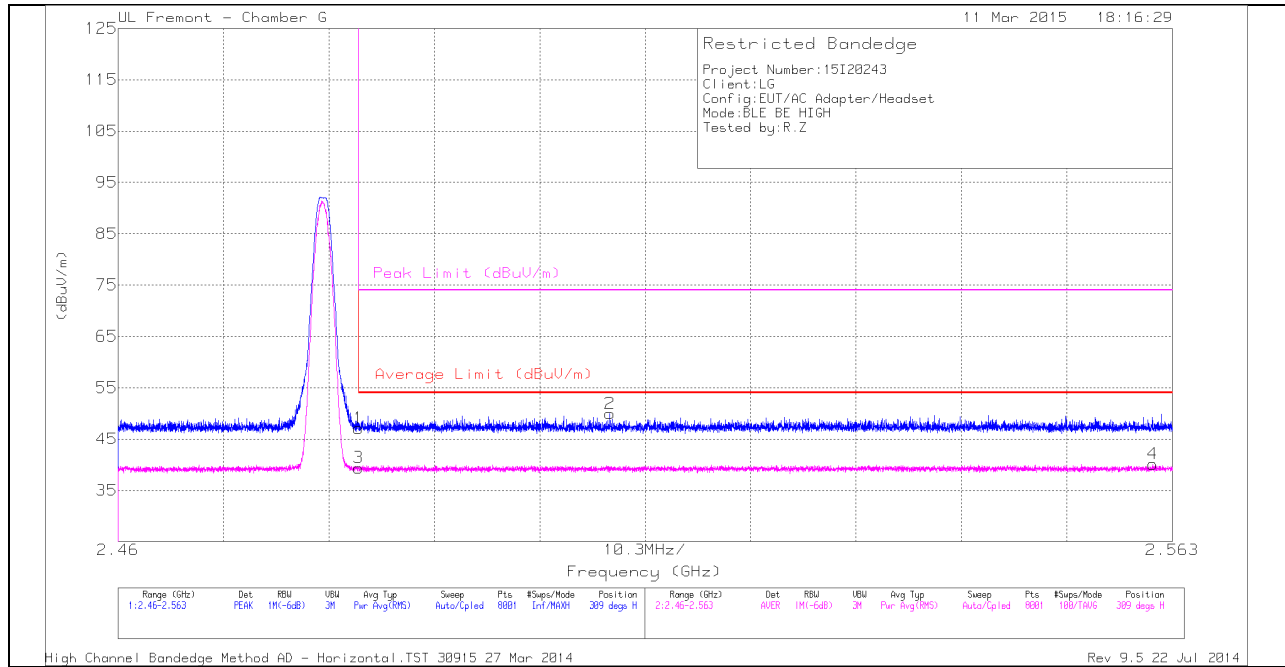


**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.01	PK	32	-24.9	0	47.11	-	-	74	-26.89	309	223	H
3	* 2.484	30.07	RMS	32	-24.9	2.22	39.39	54	-14.61	-	-	309	223	H
2	2.508	42.84	PK	32	-24.9	0	49.94	-	-	74	-24.06	309	223	H
4	2.561	30.81	RMS	32	-24.9	2.22	40.13	54	-13.87	-	-	309	223	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK - Peak detector  
 RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

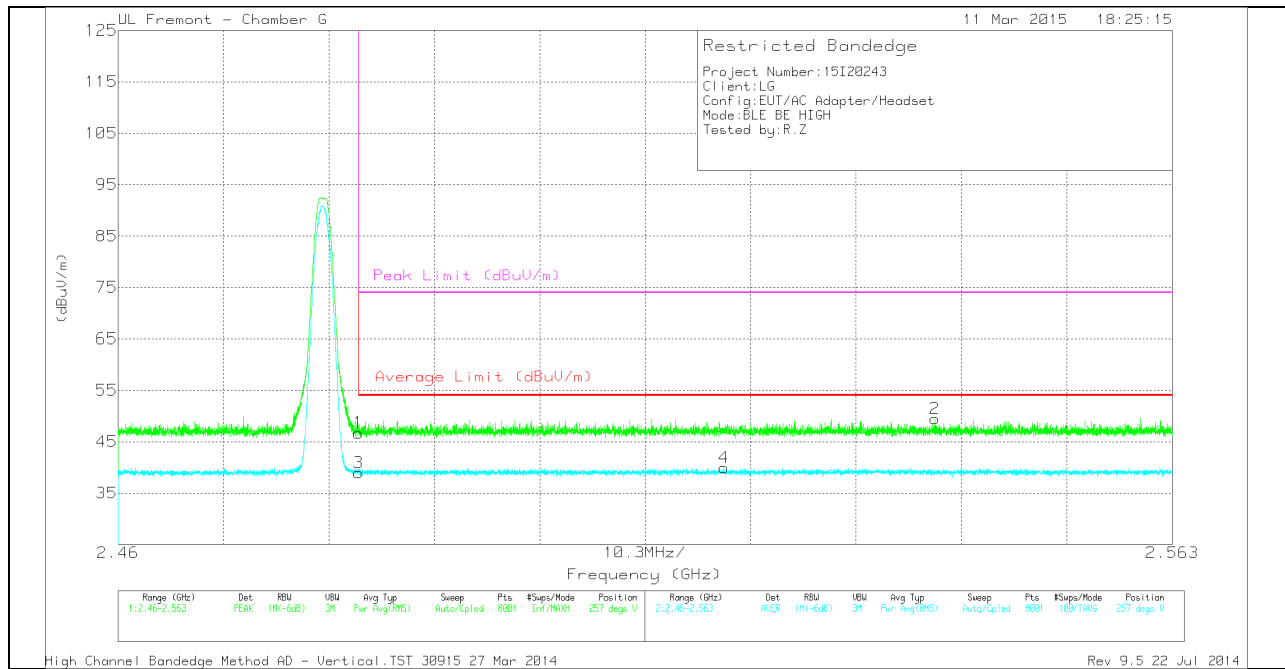

**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.61	PK	32	-24.9	0	46.71	-	-	74	-27.29	257	273	V
3	* 2.484	29.62	RMS	32	-24.9	2.22	38.94	54	-15.06	-	-	257	273	V
4	2.519	30.63	RMS	32	-24.9	2.22	39.95	54	-14.05	-	-	257	273	V
2	2.54	42.36	PK	32	-24.9	0	49.46	-	-	74	-24.54	257	273	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector  
 RMS - RMS detection




**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL HORIZONTAL**

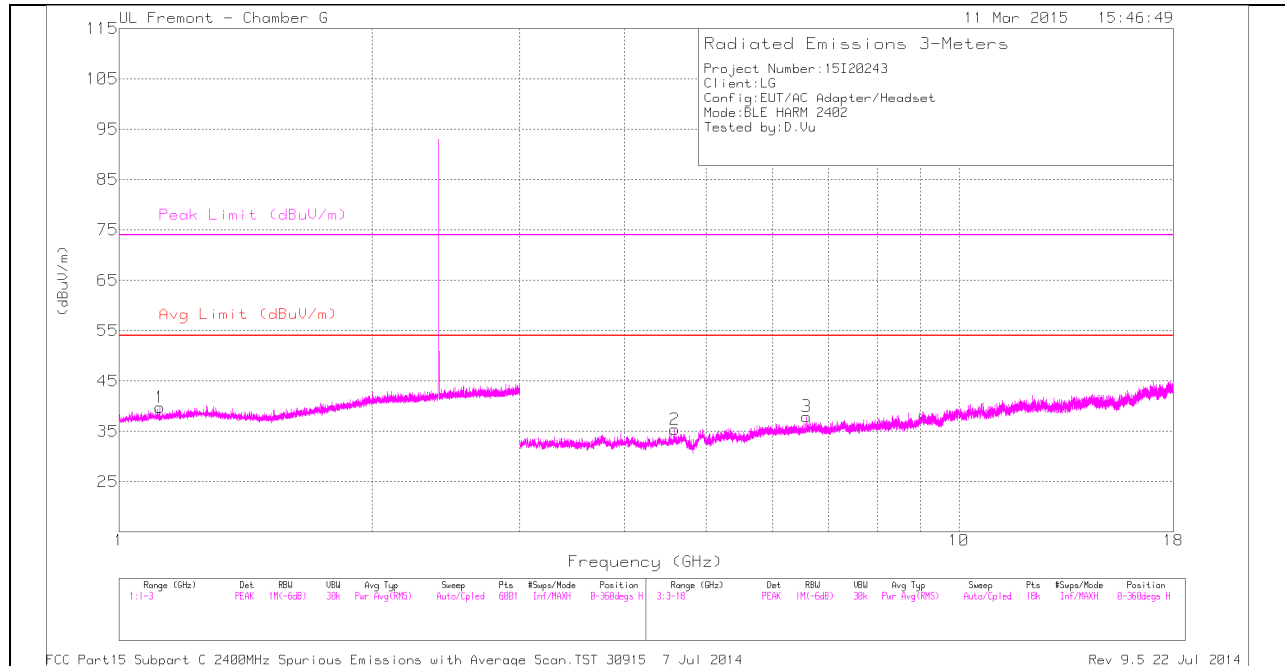

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

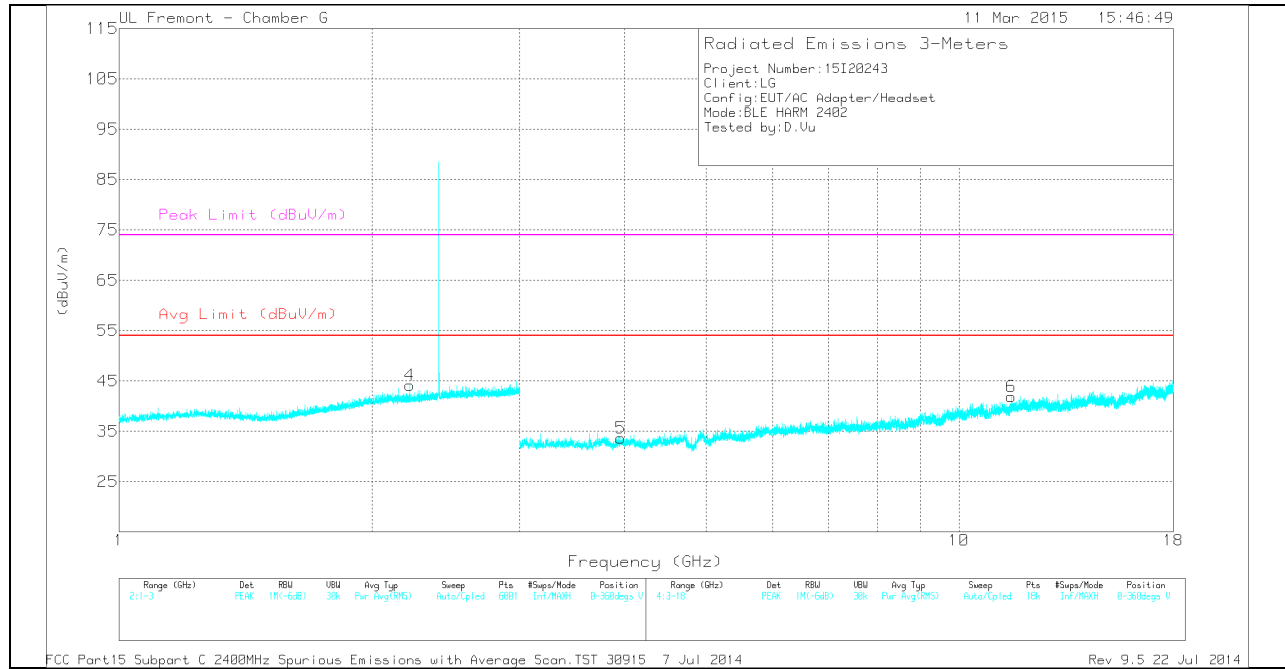

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.119	37.15	PK	28.6	-26	0	39.75	-	-	74	-34.25	0-360	201	H
4	* 2.22	37.75	PK	31.5	-25.1	0	44.15	-	-	74	-29.85	0-360	201	V
2	* 4.586	34.88	PK	33.8	-33.3	0	35.38	-	-	74	-38.62	0-360	101	H
5	* 3.959	33.44	PK	33.3	-33.1	0	33.64	-	-	74	-40.36	0-360	101	V
6	* 11.543	30.1	PK	38.4	-26.6	0	41.9	-	-	74	-32.1	0-360	101	V
3	6.586	33.83	PK	35.6	-31.5	0	37.93	-	-	-	-	0-360	201	H


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK - Peak detector

**Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.117	44.14	PK2	28.6	-26	0	46.74	-	-	74	-27.26	308	185	H
* 1.12	32.29	MAV1	28.6	-26	2.22	37.11	54	-16.89	-	-	308	185	H
* 11.543	36.58	PK2	38.4	-26.6	0	48.38	-	-	74	-25.62	4	215	V
* 11.543	24.93	MAV1	38.4	-26.6	2.22	38.95	54	-15.05	-	-	4	215	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK2 - KDB558074 Method: Maximum Peak  
 MAV1 - KDB558074 Option 1 Maximum RMS Average

**MID CHANNEL HORIZONTAL**

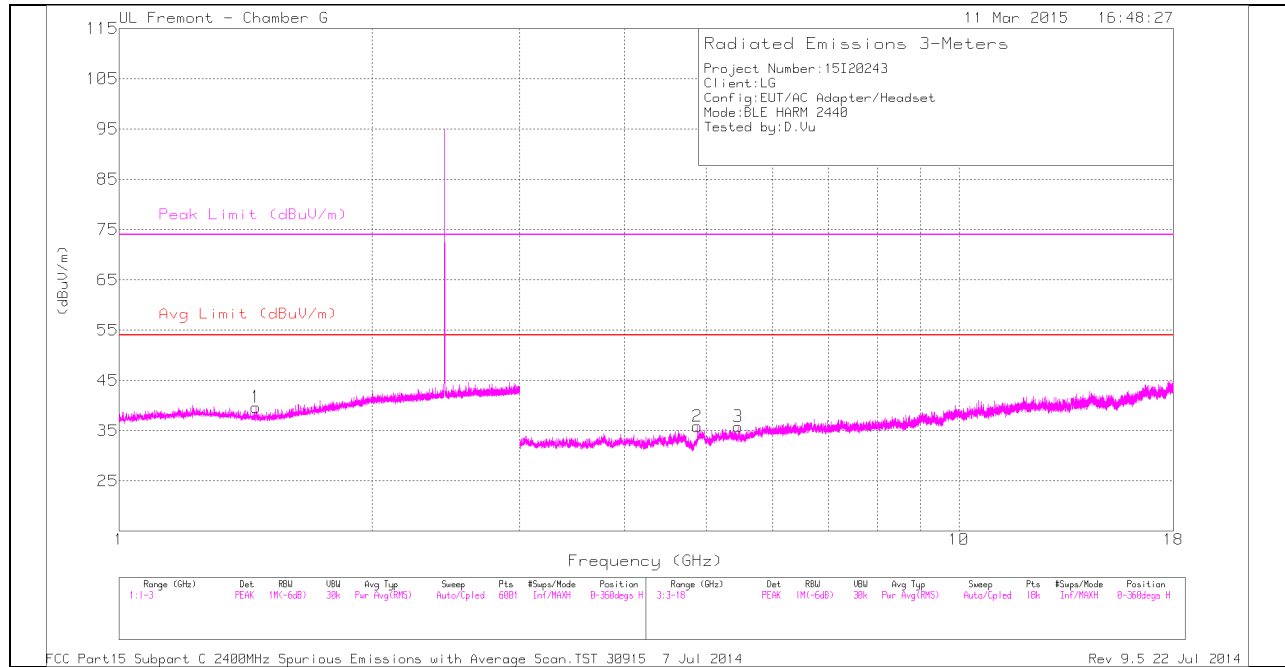

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

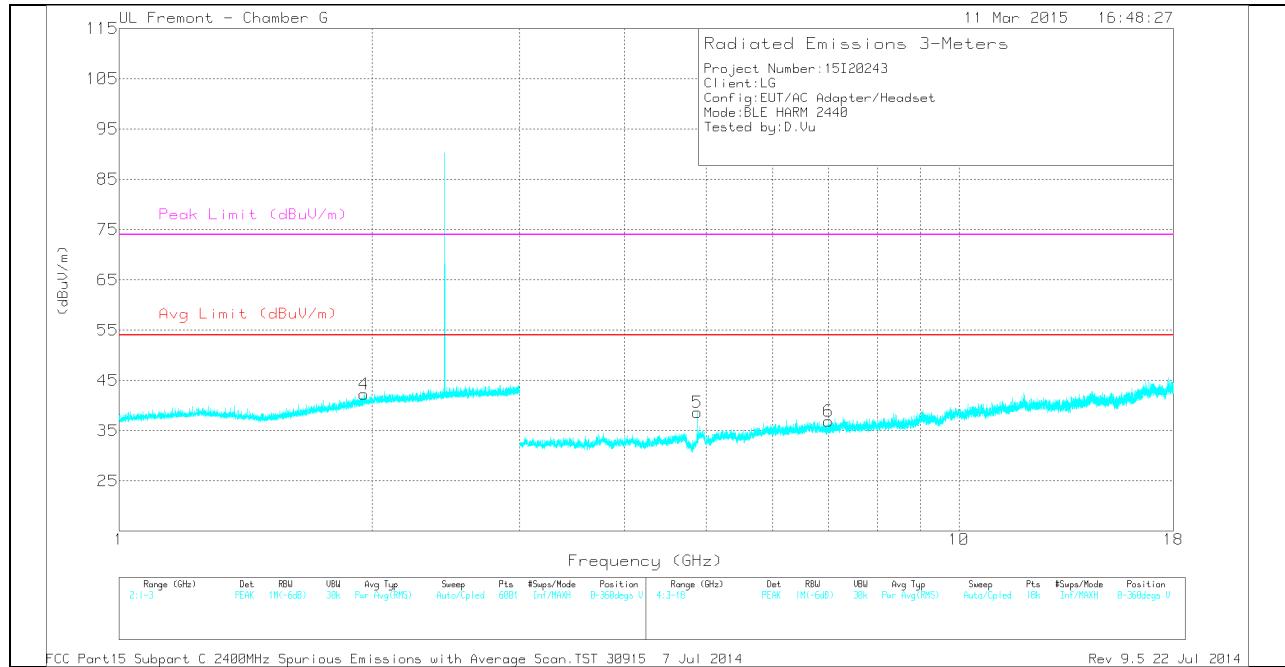

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.456	37.19	PK	28.1	-25.6	0	39.69	-	-	74	-34.31	0-360	201	H
2	* 4.88	34.77	PK	34.1	-33	0	35.87	-	-	74	-38.13	0-360	101	H
5	* 4.88	37.53	PK	34.1	-33	0	38.63	-	-	74	-35.37	0-360	101	V
4	1.958	36.68	PK	31	-25.4	0	42.28	-	-	-	-	0-360	201	V
3	5.462	34	PK	34.7	-32.9	0	35.8	-	-	-	-	0-360	101	H
6	6.994	32.98	PK	35.6	-31.7	0	36.88	-	-	-	-	0-360	201	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK - Peak detector

**Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.456	43.94	PK2	28.1	-25.6	0	46.44	-	-	74	-27.56	205	114	H
* 1.456	31.94	MAV1	28.1	-25.6	2.22	36.66	54	-17.34	-	-	205	114	H
* 4.88	42.99	PK2	34.1	-33	0	44.09	-	-	74	-29.91	356	312	V
* 4.88	35.07	MAV1	34.1	-33	2.22	38.39	54	-15.61	-	-	356	312	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK2 - KDB558074 Method: Maximum Peak  
 MAV1 - KDB558074 Option 1 Maximum RMS Average

**HIGH CHANNEL HORIZONTAL**

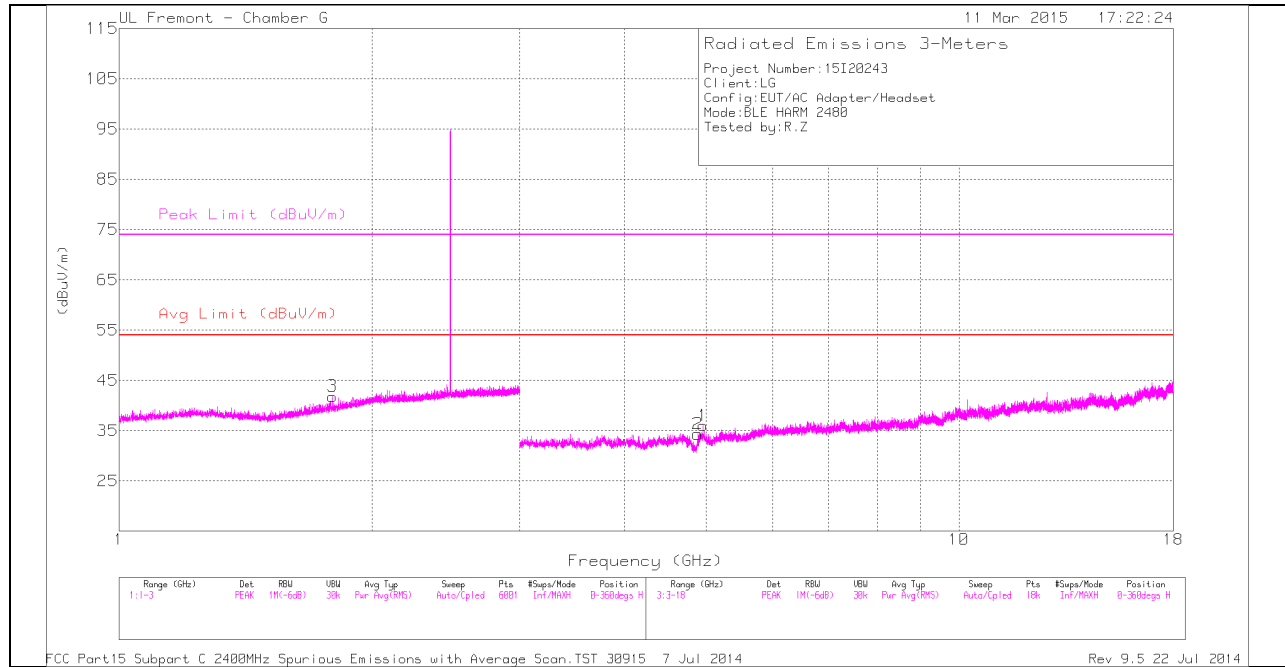

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

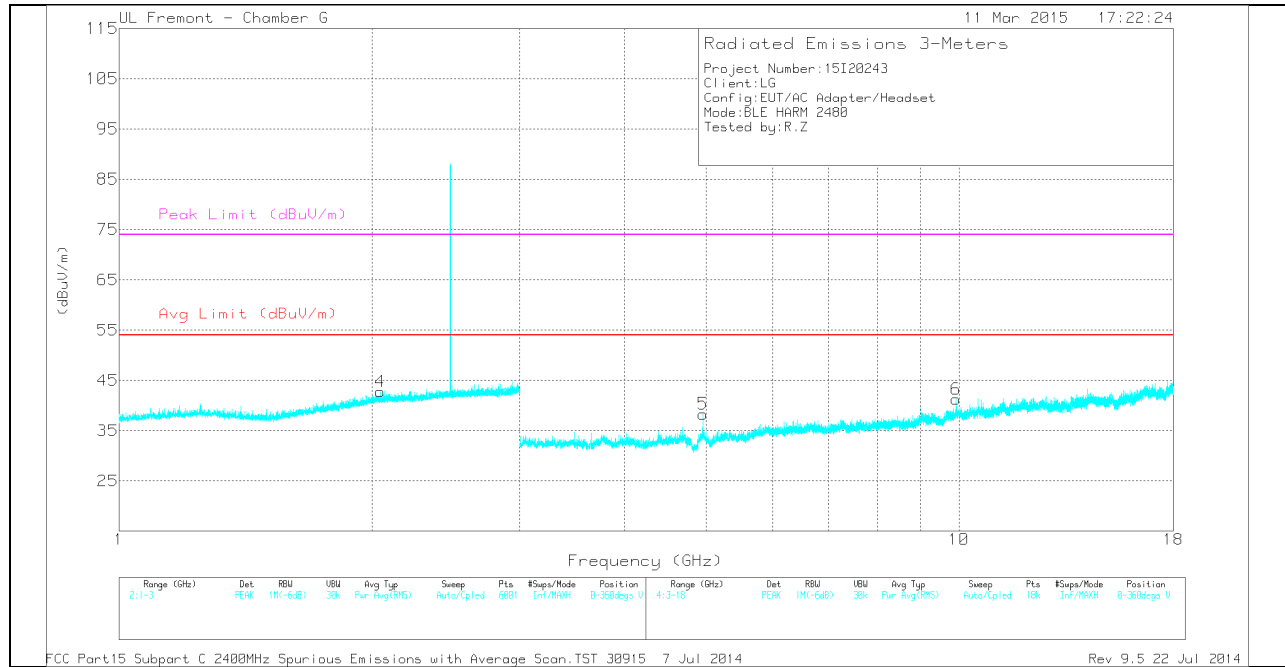

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



### HIGH CHANNEL DATA

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	34.8	PK	34.1	-32.9	0	36	-	-	74	-38	0-360	101	H
2	* 4.887	33.26	PK	34.1	-33	0	34.36	-	-	74	-39.64	0-360	101	H
5	* 4.96	37.12	PK	34.1	-32.9	0	38.32	-	-	74	-35.68	0-360	101	V
3	1.795	37.33	PK	29.9	-25.4	0	41.83	-	-	-	-	0-360	201	H
4	2.048	36.65	PK	31.3	-25.2	0	42.75	-	-	-	-	0-360	101	V
6	9.92	31.65	PK	37.3	-27.7	0	41.25	-	-	-	-	0-360	201	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK - Peak detector


#### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	42.6	PK2	34.1	-32.9	0	43.8	-	-	74	-30.2	177	186	H
* 4.96	32.63	MAV1	34.1	-32.9	2.22	36.05	54	-17.95	-	-	177	186	H
* 4.885	40.02	PK2	34.1	-33	0	41.12	-	-	74	-32.88	224	234	H
* 4.885	28.81	MAV1	34.1	-33	2.22	32.13	54	-21.87	-	-	224	234	H
* 4.96	44.35	PK2	34.1	-32.9	0	45.55	-	-	74	-28.45	356	301	V
* 4.96	36.18	MAV1	34.1	-32.9	2.22	39.6	54	-14.4	-	-	356	301	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.  
 PK2 - KDB558074 Method: Maximum Peak  
 MAV1 - KDB558074 Option 1 Maximum RMS Average

### 8.3. TRANSMITTER BELOW 1 GHz SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

#### HORIZONTAL PLOT

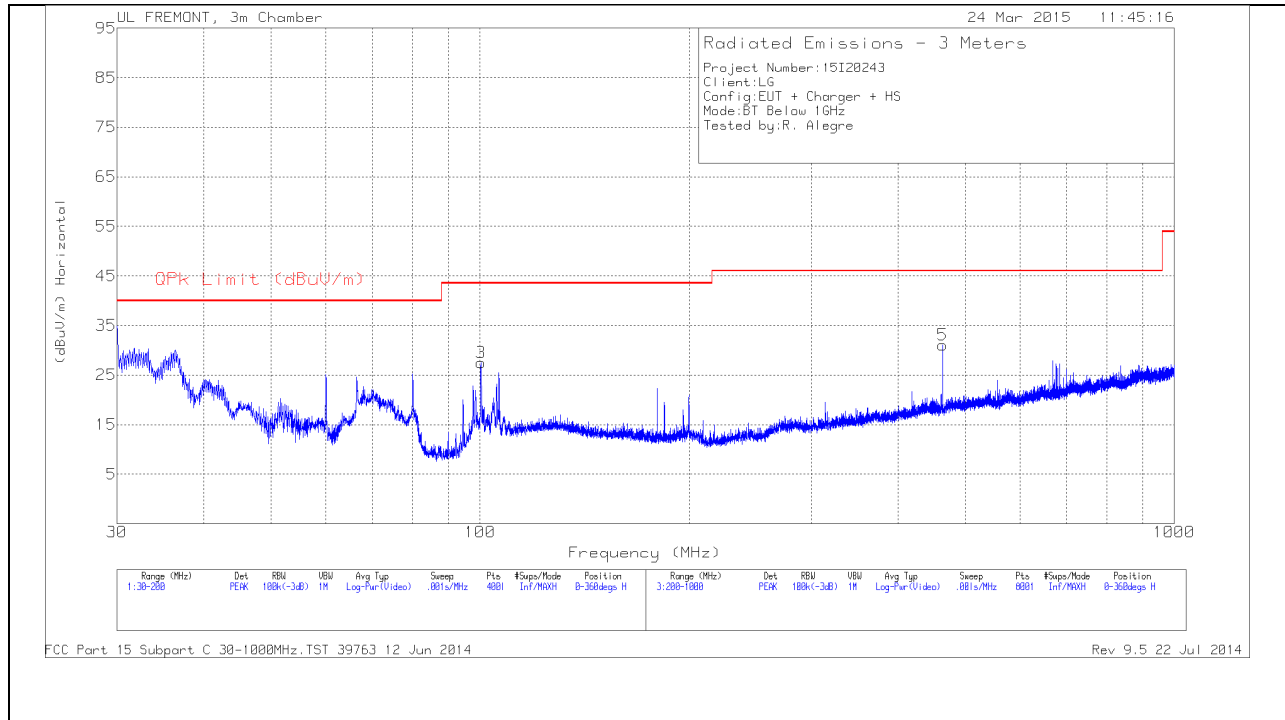

**VERTICAL PLOT**

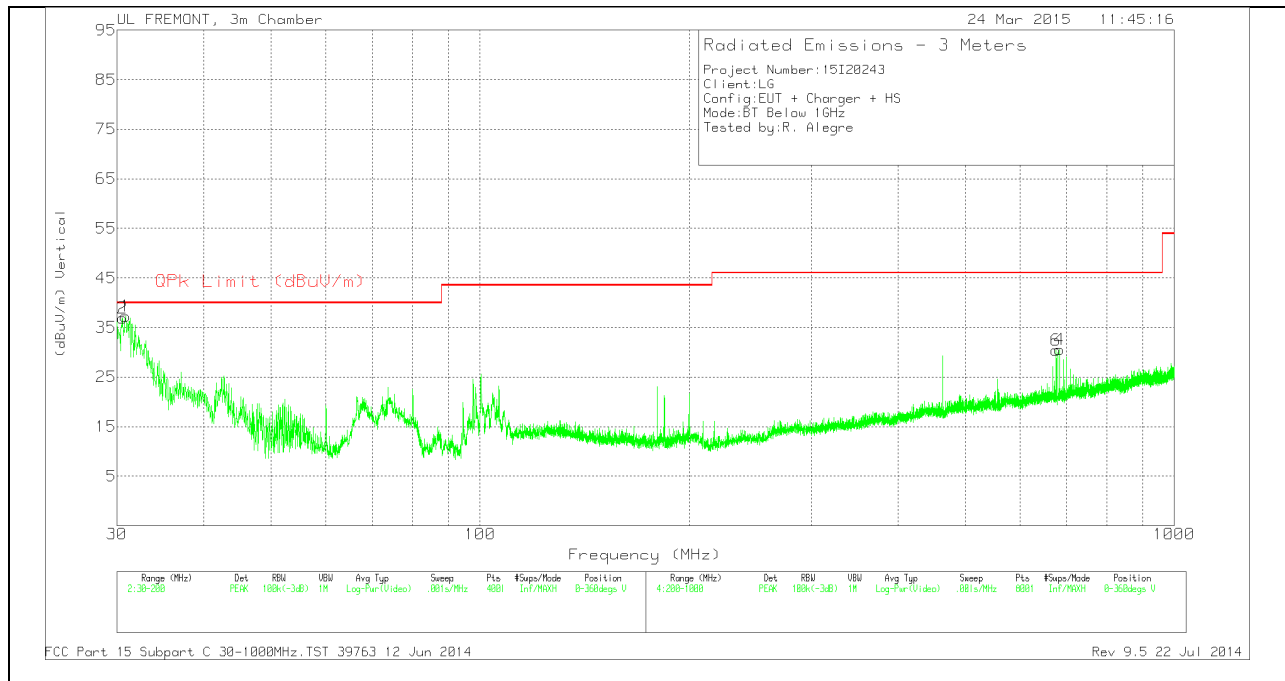

**BELOW 1 GHz TABLE**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T185 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	30.5525	43.14	PK	21.3	-27.5	36.94	40	-3.06	0-360	100	V
1	30.85	43.9	PK	21	-27.6	37.3	40	-2.7	0-360	100	V
3	100.295	44.5	PK	9.8	-26.8	27.5	43.52	-16.02	0-360	300	H
5	463.7	40.23	PK	16.6	-25.8	31.03	46.02	-14.99	0-360	100	H
6	676	36.45	PK	19.3	-25.3	30.45	46.02	-15.57	0-360	200	V
4	684	36.16	PK	19.6	-25.2	30.56	46.02	-15.46	0-360	200	V

PK - Peak detector