# Calibration Laboratory of Schmid & Partner

Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Certificate No: ES3-3209\_Mar15

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

**PC Test** 

## **CALIBRATION CERTIFICATE**

Object

ES3DV3 - SN:3209

Calibration procedure(s)

QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes 3/2G

Calibration date:

March 19, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}$ C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Certificate No: ES3-3209\_Mar15

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Notwork Applyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:

Israe Elnaouq

Approved by:

Katja Pokovic

Function

Function

Signature

Aboratory Technician

Signature

Aboratory Technician

Issued: March 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner **Engineering AG** Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF

sensitivity in TSL / NORMx,y,z

DCP

diode compression point

CF

crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters

A, B, C, D Polarization φ

φ rotation around probe axis

Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e.,  $\vartheta = 0$  is normal to probe axis

Connector Angle

information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close

proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization  $\vartheta$  = 0 (f  $\leq$  900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \le 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm$  50 MHz to  $\pm$  100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

March 19, 2015 ES3DV3 - SN:3209

# Probe ES3DV3

SN:3209

Calibrated:

Manufactured: October 14, 2008 March 19, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

**Basic Calibration Parameters** 

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V/(V/m)^2)^A$	1.35	1.33	1.14	± 10.1 %
DCP (mV) <sup>B</sup>	102.0	100.9	103.3	

**Modulation Calibration Parameters** 

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>t</sup> (k=2)
0	CW	х	0.0	0.0	1.0	0.00	214.5	±3.5 %
		Y	0.0	0.0	1.0		192.6	
		Z	0.0	0.0	1.0		199.1	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	Х	2.61	65.1	12.2	10.00	42.3	±1.7 %
0701		Y	1.39	57.8	8.9		42.7	
		Z	4,57	70.3	14.0		38.3	
10011- CAB	UMTS-FDD (WCDMA)	Х	3.12	66.3	18.1	2.91	130.3	±0.7 %
		Υ	3.08	65.6	17.5		132.2	
		Z	3.32	67.7	19.0		137.6	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	2.54	66.8	17.8	1.87	131.1	±0.7 %
		Υ	2.67	67.1	17.7		131.6	
		Z	2.85	69.2	19.1		138.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	10.78	70.5	23.4	9.46	146.9	±2.7 %
		Y	10.39	69.2	22.5		123.5	
		Z	10.50	69.9	23.1		128.4	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	3.65	74.2	17.7	9.39	130.0	±1.9 %
		Υ	6.62	83.5	22.0		149.4	
		Z	4.25	76.8	19.2		136.2	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	Х	3.95	75.3	18.4	9.57	138.8	±2.5 %
		Υ	4.99	78.2	19.8		143.3	
		Z	4.11	75.8	18.9		129.3	4 = 24
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	Х	6.44	80.3	17.7	6.56	135.0	±1.7 %
		Υ	3.76	73.7	16.0	<u> </u>	144.2	
		Z	11.61	88.5	20.7		148.0	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	Х	43.77	99.9	21.8	4.80	131.8	±1.7 %
		Y	13.95	87.5	19.0		142.7	
		Z	39.96	99.9	22.1		145.6	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	Х	62.88	99.8	20.4	3.55	144.5	±2.2 %
		Υ	2.45	70.4	12.9		130.3	
		Z	80.83	99.9	19.9		135.1	1.2.24
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	0.32	58.4	4.3	1.16	144.1	±1.9 %
		Y	16.25	79.9	12.1		129.5	
		Z	95.90	91.1	14.4		134.6	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.32	67.4	19.8	5.67	138.3	±1.4 %
		Υ	6.35	67.3	19.5		144.4	
		Z	6.20	67.1	19.6		127.7	

10103-	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	8.72	73.1	25.3	9.29	138.6	±2.7 %
CAB	IVINZ, QFSR)	Y	8.88	72.9	24.9		147.9	
		Z	8.48	72.3	24.9		127.4	
10108- CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	×	6.14	66.9	19.6	5.80	136.2	±1.7 %
5/10	14112, 91 019	Υ	6.20	66.8	19.4		142.8	
		z	6.10	66.8	19.6		126.2	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	10.05	68.9	21.4	8.07	126.8	±2.2 %
<u> </u>	3, 3,7	Υ	9.98	68.5	21.1		132.4	
		z	10.23	69.4	21.7		140.4	
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.16	72.2	25.0	9.28	133.6	±2.7 %
		Υ	8.33	72.0	24.5		142.6	
		Ζ	8.40	73.1	25.6		147.5	
10154- CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	5.83	66.5	19.4	5.75	133.1	±1.4 %
		Υ	5.89	66.3	19.2		139.3	
		Z	6.00	67.2	19.9		146.5	
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.26	66.9	19.6	5.82	138.8	±1.7 %
		Υ	6.34	67.0	19.5		145.1	
		Z	6.22	66.9	19.7		128.8	
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.77	66.7	19.8	5.73	135.9	±1.4 %
		Υ	4.89	66.6	19.5		141.8	
		Z	4.85	66.8	19.9		128.3	.0.5.04
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	6.77	75.0	26.9	9.21	144.2	±2.5 %
		Y	6.56	72.6	25.2	ļ	131.1	
		Z	6.68	74.0	26.4	5.70	137.1	14 4 0/
10175- CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.80	66.9	19.9	5.72	135.2	±1.4 %
		Y	4.87	66.5	19.5		140.6	
		Z	5.03	67.7	20.4			14 2 0/
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.77	66.7	19.8	5.72	134.7 140.6	±1.2 %
		Y	4.88	66.5	19.5	<u> </u>	127.8	
		Z	4.84	66.8	19.9	0.40		12.2.0/
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.97	69.5	21.9	8.10	145.2 125.1	±2.2 %
		Y	9.60	68.2	21.0	<u> </u>	133.9	
		Z	9.80	69.1	21.7	5.97	147.3	±1.4 %
10225- CAB	UMTS-FDD (HSPA+)	X	6.95	67.5	19.8	5.97	128.7	I1.4 70
		Y	6.73	66.4	19.1		137.2	<del> </del>
		Z	6.89	67.4	19.8	0.24	146.0	±2.5 %
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	6.85	75.4	27.2	9.21	131.6	12.5 /0
		Y	6.54	72.5	25.1	+	138.2	-
		Z	6.76	74.4	26.6	9.24	126.6	±2.5 %
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	7.58	71.3	24.6	5.24	133.3	12.0 /0
		Y	7.73	71.1	24.2		139.0	1
		Z	7.82	72.4	25.3	0.30	133.6	±2.7 %
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.18	72.2	25.1	9.30	141.1	12.1 70
		Y	8.35	72.0	24.6		147.0	<del>  -</del>
		Z	8.42	73.2	25.6		147.0	.1

10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	Х	4.22	66.1	18.4	3.96	128.8	±0.9 %
<u> </u>		Υ	4.24	65.9	18.1		133.8	
<del></del>		Z	4.39	67.1	19.0		141.7	
10291- AAB CDMA2000, RC3, SO55,	CDMA2000, RC3, SO55, Full Rate	Х	3.51	66.7	18.6	3.46	140.9	±0.7 %
, , , ,		Υ	3.52	66.2	18.1		143.4	
		Z	3.58	67.2	19.0		131.7	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	3.45	66.7	18.5	3.39	142.0	±0.7 %
		Υ	3.50	66.4	18.2		146.9	
		Z	3.61	67.8	19.3		132.2	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6.15	66.9	19.6	5.81	136.3	±1.4 %
		Υ	6.20	66.8	19.4		140.3	
		Z	6.11	66.8	19.6		126.6	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	6.80	67.8	20.1	6.06	143.2	±1.7 %
		Υ	6.80	67.5	19.9		147.4	
		Z	6.71	67.6	20.1		131.9	
10400- AAB	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	10.31	70.0	22.4	8.37	147.9	±3.0 %
,		Υ	9.88	68.5	21.3		127.2	
		Z	10.13	69.5	22.1		135.8	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	4.60	68.6	18.9	3.76	128.2	±0.5 %
		Υ	4.58	67.9	18.4		134.2	
		Z	4.86	69.6	19.5		142.6	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	4.57	68.9	19.1	3.77	149.7	±0.5 %
		Y	4.51	68.0	18.5		132.3	
		Z	4.78	69.6	19.5		140.3	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	2.47	67.0	17.9	1.54	128.1	±0.7 %
		Υ	2.46	66.4	17.4		132.5	
		Z	2.72	69.1	19.2		140.6	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	Х	10.12	69.7	22.1	8.23	146.8	±2.7 %
		Υ	9.66	68.2	21.1		125.0	
		Z	9.91	69.2	21.8		134.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 7 and 8).

B Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

## Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.34	6.34	6.34	0.29	2.02	± 12.0 %
835	41.5	0.90	6.04	6.04	6.04	0.23	2.57	± 12.0 %
1750	40.1	1.37	5.23	5.23	5.23	0.80	1.08	± 12.0 %
1900	40.0	1.40	5.05	5.05	5.05	0.10	2.40	± 12.0 %
2300	39.5	1.67	4.76	4.76	4.76	0.70	1.27	± 12.0 %
2450	39.2	1.80	4.53	4.53	4.53	0.80	1.22	± 12.0 %
2600	39.0	1.96	4.36	4.36	4.36	0.75	1.31	± 12.0 %

<sup>&</sup>lt;sup>c</sup> Frequency validity above 300 MHz of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is  $\pm$  10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency

validity can be extended to  $\pm$  110 MHz. F At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

<sup>6</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.12	6.12	6.12	0.34	1.81	± 12.0 %
835	55.2	0.97	6.07	6.07	6.07	0.37	1.79	± 12.0 %
1750	53.4	1.49	4.86	4.86	4.86	0.67	1.43	± 12.0 %
1900	53.3	1.52	4.57	4.57	4.57	0.57	1.53	± 12.0 %
2300	52.9	1.81	4.28	4.28	4.28	0.80	1.19	± 12.0 %
2450	52.7	1.95	4.12	4.12	4.12	0.72	1.15	± 12.0 %
2600	52.5	2.16	3.92	3.92	3.92	0.80	1.10	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Galpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

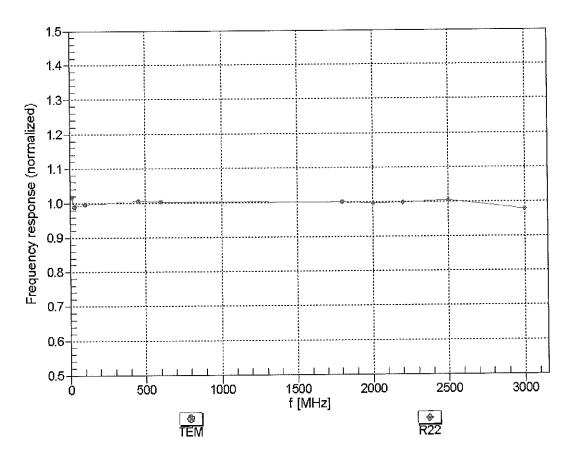


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


March 19, 2015 ES3DV3-SN:3209


# Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$






Certificate No: ES3-3209\_Mar15




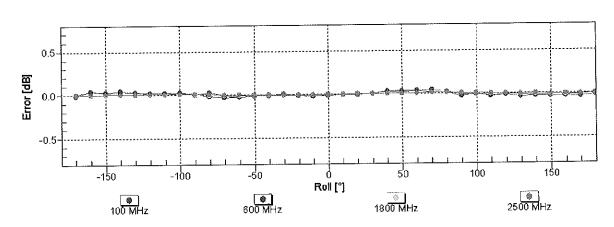

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

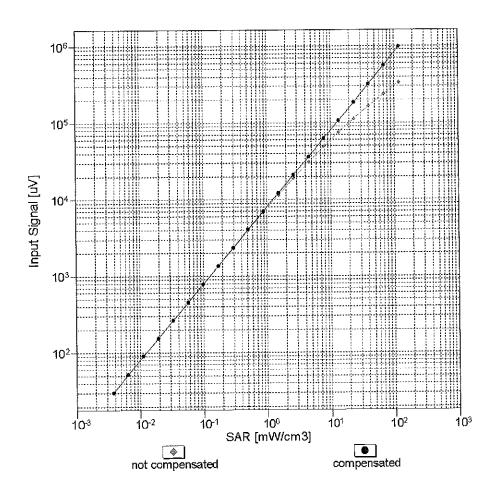

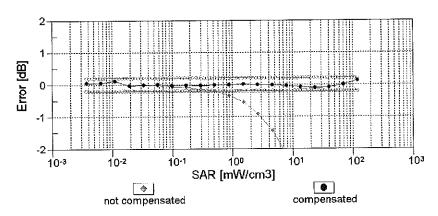



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## **Conversion Factor Assessment**

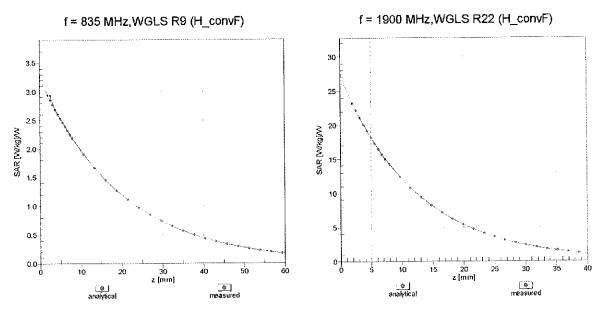

Deviation from Isotropy in Liquid Error ( $\phi$ ,  $\theta$ ), f = 900 MHz

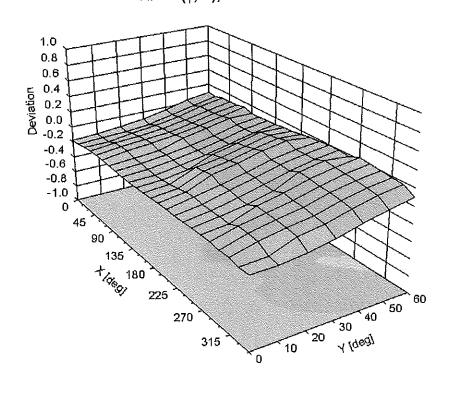



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-40.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service sulsse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

S

C

S

Client

**PC Test** 

Certificate No: ES3-3022\_Aug14/2

## CALIBRATION CERTIFICATE (Replacement of No: ES3-3022\_Aug14)

Object

ES3DV2 - SN:3022

Calibration procedure(s)

QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for doslmetric E-field probes

o Min

Calibration date:

August 19, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Altenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Allenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Altenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature	
Calibrated by:	Jeton Kastrati	Laboratory Technician	- C-U	
Approved by:	Katja Pokovic	Technical Manager	M	<u></u>

Issued: November 3, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 0004 Zurich, Switzerland





S

S

Schweizerlscher Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF DCP

sensitivity in TSL / NORMx,y,z diode compression point

CF A, B, C, D crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters

Polarization @

φ rotation around probe axis

Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle

information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required), DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx, v, z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle; The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: ES3-3022\_Aug14/2

# Probe ES3DV2

SN:3022

Manufactured:

April 15, 2003

Calibrated:

August 19, 2014

Calibrated for DASY/EASY Systems (Note; non-compatible with DASY2 system!)

### DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V/(V/m)^2)^A$	1.00	1.04	0.96	±10.1 %
DCP (mV) <sup>B</sup>	103.0	96.3	101.6	

Modu	lation	Calibration	Parameters
------	--------	-------------	------------

UID	Communication System Name		A dB	Β dB√μV	С	D dB	VR mV	Unc <sup>E</sup> (k≈2)
.0	CW	Х	0.0	0.0	1.0	0.00	181.8	±2.7 %
		Y	0.0	0.0	1.0		183.0	
		Z	0,0	0.0	1.0		192.3	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.51	63.1	12,7	10,00	42.6	±1.9 %
		Υ	2.62	63.1	12.9		42.7	
*****		Z	3,12	65.7	13.6		40.4	
10011- CAB	UMTS-FDD (WCDMA)	X	3.33	67.8	19,2	2.91	145.9	±0.9 %
		Y	3.13	64.9	16.9		147.4	
		Z	3.20	66.4	18.2		139.6	
10012- CAA	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	3.05	70.1	19.8	1.87	147.2	±0.9 %
		Y	2.62	65.1	16.2		147.4	
40040	ISSE COOLS IN THE CALL IN COOL	Z	2.85	68.2	18.4		141.7	10.004
10013- CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	X	11.10	70,9	23.6	9.46	143.9	±3.0 %
		Y	11.04	70.2	22.9		144.2	
		Z	10.77	70.2	23.1		134.7	
10021- DAB	GSM-FDD (TDMA, GMSK)	Х	19.66	99.7	28.6	9.39	126.0	±1.9 %
···-		Υ	11.04	89.6	25.5		138.9	
10000		Z	10.45	88.8	24.9		137.5	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	20.19	99.6	28.5	9.57	142.0	±2.5 %
		Υ	10.53	88.4	25.0		145.5	
10001	0000 500 (70144 6110)( 7110 1)	Z	15.52	96.5	27.8	0.50	147.6	. 4 O D(
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	31.93	99.6	25.2	6.56	149.5	±1.9 %
		Υ	12.70	87.9	22.2		148.0	
40007	ORDO TRO TRAMA CAMON MAIO CON	Z	27.00	99.8	25.7	1.00	135.3	VO 0 01
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	38.32	99.8	23.8	4.80	148.1	±2.2 %
		Υ	9.80	83.2	19.3		138.8	
40000	ODDO COD (TOMA OMOV THE CO	Z	31.96	99.9	24.2	0.55	128.9	10 0 0/
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	40.03	99.5	22.8	3,55	130.5	±2.2 %
		Y	40.27	99.6	23.0		148.1	
10032-	HEEF 000 45 4 Physics H. (OFOX, DUS)	Z	43.09	99.7	22.5	4.46	140.1 146.7	±1.9 %
CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	38.93	99.4	20.4	1.16	139.2	±1.9 %
	<u> </u>	Y	32.83	92.5	17.9		139.2	
10039-	CDMA2000 (1xRTT, RC1)	Z	31,94	99.5	20.8	4.57	133.1	±1.2 %
CAB	CDWAZOUU (TXRTT, RC3)	Х	4.66	66.8	19.3	4.57		II.Z %
		Y	4.56	65.3	17.9		137.2	
		Z	4.52	66.1	18.7		131.7	

10081- CAB	CDMA2000 (1xRTT, RC3)	Х	3.82	66.0	18.7	3.97	140.3	±0,9 %
4712		Υ	3.77	64.5	17.3		133.6	
		Z	3.79	65.7	18.4		128.2	
10098- CAB	UMTS-FDD (HSUPA, Subtest 2)	Х	4.40	66.2	18.5	3.98	130.9	±1.2 %
		Υ	4.39	65.0	17.4		131.1	
		Z	4.47	66.3	18.4		140.0	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	6.30	67.3	19.8	5.67	137.4	±1.7 %
		Υ	6.25	66.3	18.9		135.9	
		Z	6.36	67.4	19.7		147.5	
10108- CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.14	66.8	19.6	5.80	134.6	±1.7 %
		Y	6.17	66.1	18.9		133.9	
		Z	6.24	67.0	19,7		144.5	
10110- CAB	LTE-FDD (SC-FDMA, 100% RB, 6 MHz, QPSK)	Х	5.82	66.3	19.4	5.75	131.2	±1.7 %
		Y	5.82	65.4	18.6		130.3	
40444	LEEE 000 44 - (UT C C - L - L - L - L - L - L - L - L	Z	5.91	66.5	19.4	0.40	140.4	±2.5 %
10114- CAA	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.00	68.5	21.2	8.10	124.3	12.5 %
		Y	9.89	67.9	20,6		124.0	
40448	1955 000 44 317 14 4 40 5 14 3	Z	10.05	68.6	21.2	0.07	133.2	10 5 0/
10117- CAA	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	10,01	68,6	21.2	8.07	125.8 125.8	±2.5 %
		Y	9.91	67.9	20.7		134.7	
40454	LTE TOP (OO FD) A FOR DD CO MILE	Z	10.09	68.8	21.3	9,28	144.7	±3,3 %
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	9.69	75.5	26.4	9.20	143.2	13,3 70
		Y	9.09	72.7	24.6 24.5		124.8	· · ·
10154- CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.54 5.82	72.0 66.2	19.4	5.75	131.3	±1.9 %
0/10	- Grony	Υ	6.06	66.3	19.1		149.2	
		Z	5.91	66.5	19.4		140.7	
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.27	66.9	19.7	5.82	136.5	±1.4 %
		Υ	6.19	65.8	18.7		128.4	
		Z	6.33	67.0	19.6		145.4	
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	4.81	66.4	19.7	5.73	134.8	±1.7 %
		Υ	4,92	66.1	19.1		149.9	
		Z	4.78	66.4	19.6		141.2	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	7.83	76.6	27,2	9.21	131.4	±3.5 %
		Y	7.54	74.5	25.8	<u> </u>	147.8	·
		Z	7,71	76.7	27.4		145.3	14.40
10175- CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	4.90	66.9	20.0	5.72	147.6	±1.4 %
		Y	4.90	66.0	19,1		148.0	
1016:	1	Z	4.78	66.4	19.6	6 70	141.6	34 4 07
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.90	66.9	20.0	5.72	148.1	±1.4 %
		Y	4.89	65.9	19.0		146.9	<u></u>
20200	HER OOD 44. ALT O	Z	4.80	66.5	19.7	9.00	142.1	+270/
10193- CAA	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	×	9,80	68.7	21,4	8.09	135.1 135.5	±2.7 %
<del> </del>		Y	9.78	68.2	20,9			<u> </u>
		Z	9.70	68.5	21.2		130.2	L

Page 5 of 14

August 19, 2014

10196- CAA	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	9.79	68.7	21.4	8.10	136.4	±2.7 %
	7.7.7	Υ	9.81	68.3	20.9	1	138.0	
		Z	9.72	68.6	21.3		132.8	
10219- CAA	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	Х	9.68	68.6	21.3	8.03	136.0	±2.7 %
		Υ	9.74	68.3	21.0		137.4	
		Z	9.62	68.5	21.2		132.6	
10222- CAA	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	Х	10.20	69.1	21.5	8,06	143.4	±2.5 %
		Υ	9.91	60.0	20.7		125.8	
		Z	10.27	69.4	21.6		148.4	
10225- CAB	UMTS-FDD (HSPA+)	X	6.87	66.9	19.6	5.97	139.5	±1.9 %
		Y	7.04	66.9	19.3		149.3	
		Z	6.89	67.0	19.5		143.5	
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	7.66	75.9	26.9	9.21	126.1	±3.0 %
		Υ	7.17	73.1	25.1		132.1	
40055	LTE TOD (OO FOLAL FOR SE ACCE)	Z	7,18	74.6	26.3	0.04	128.0	±3,3 %
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.58	73.1	25,3	9.24	127.6	±3.3 %
		Υ	8,22	71.0	23.7		126,9	
10007	LITE TED (SO EDIM 400% ED 40	Z	8.83	74,3	26.0	0.00	149.8	12.2.0/
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	9.69	75.5	26.5	9.30	143.8	±3.3 %
		Υ	8.88	72.0	24.2		135.2 131.3	***
40074	LULTO FOR ALCURA O LL LE CORD	Z	8.83	72.9	25.1	4.07		±1.4 %
10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	5.87	67.0	19.2	4.87	141.2	11.4 %
	· · · · · · · · · · · · · · · · · · ·	Y	5.77	65.8	18.1		132.7	
10275- CAB	UMTS-FDD (HSUPA, Sublest 5, 3GPP Rel8.4)	X	5.71 4.44	66.3 67.2	18.6 19.2	3,96	147.3	±0.9 %
Q/1D	1,010,47	Υ	4.29	65.3	17.6		139,2	
		Z	4.31	66,3	18.5		139.6	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	X	3.60	67.1	19.1	3.46	137.8	±0.7 %
		Y	3.44	64.8	17.2		129.6	
		Z	3,48	66.2	18.4		130.5	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	3,50	66.9	18.9	3.39	139,5	±0.7 %
		Υ	3.38	64.8	17.2		132.0	
		Z	3,48	66.5	18.5		133.1	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.12	66.7	19.6	5,81	133.3	±1.9 %
		Y	6.35	66,7	19.3		149.3	
		Z	6,17	66.8	19.5	1 2 2 2	132.7	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.72	67.4	20,0	6.06	138.7	±1.7 %
		Y.	6.63	66.3	19.1	ļ	131,4	
40045	IEEE 000 44k WELO 4 O'L 19900 1	Z	6.72	67.3	19.9	A 7/4	138.7	#0 E 0/
10315- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.90	69.9	19.8	1.71	146.4	±0.5 %
		Y	2.54	65.2	16.5	<del>                                     </del>	146.4	
10316-	IEEE 802.11g WIFI 2.4 GHz (ERP-	Z X	2.75 10.12	68.1 69.3	18.5 21.9	8.36	142.9	±3.0 %
AAA	OFDM, 6 Mbps, 96pc duty cycle)	Y	10.01	68.5	21.3		135.2	

ES3DV2-SN:3022 August 19, 2014

10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.59	68.2	19,0	3.76	126.7	±0.7 %
		Υ	4.59	67.2	18.0		142.4	
		Z	4.64	68.5	19.0		143.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.64	68.8	19.3	3.77	147.1	±0.9 %
		Y	4,47	67.1	17.9		139.6	
		Z	4.54	68.4	18.9		147.2	
10415- AAA	IEEE 802,11b WiFi 2,4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	2.66	69.0	19.4	1.54	145.8	±0.5 %
		Y	2.40	64.8	16.2		140.0	
		Z	2.62	67.8	18.4		147.2	
10416- AAA	IEEE 802,11g WiFi 2,4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	9,97	69.1	21.7	8.23	142.0	±3.0 %
		Υ	10.08	68.9	21.4		145.8	
		Z	10.01	69.2	21.8		143.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 8 and 9).

Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

August 19, 2014

#### DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>6</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.39	6.39	6.39	0.20	2.24	± 12.0 %
835	41.5	0.90	6,18	6.18	6.18	0.23	1.98	± 12.0 %
1750	40.1	1.37	5.04	5.04	5.04	0.51	1.35	± 12.0 %
1900	40.0	1,40	4.85	4.85	4.85	0.38	1,66	± 12.0 %
2450	39.2	1.80	4.31	4.31	4.31	0.66	1.28	± 12.0 %
2600	39.0	1.96	4.13	4.13	4.13	0.76	1.28	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

Fat frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to

measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c and o) is restricted to ± 5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

GAlpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

August 19, 2014

#### DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>o</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
450	56.7	0.94	6,78	6.78	6.78	0.12	1.30	± 13.3 %
600	56,1	0,95	6,72	6,72	6.72	0.05	1.20	± 13.3 %
750	55.5	0.96	6.02	6.02	6,02	0.23	2.05	± 12.0 %
835	55.2	0.97	5.98	5,98	5.98	0,29	1.85	± 12.0 %
1750	53.4	1.49	4.70	4.70	4.70	0.66	1.25	± 12.0 %
1900	53,3	1.52	4.49	4.49	4.49	0.33	2.02	± 12.0 %
2450	52.7	1,95	4.05	4.05	4.05	0.80	1.01	± 12.0 %
2600	52.5	2,16	3,94	3.94	3.94	0.68	1,03	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


FAt frequencies below 3 GHz, the validity of tissue parameters (c and σ) can be relaxed to ± 10% if liquid compressation formula is applied to

measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of

the ConyF uncertainty for indicated target tissue parameters.


GAIpha/Depth are determined during calibration. SPEAG warrents that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

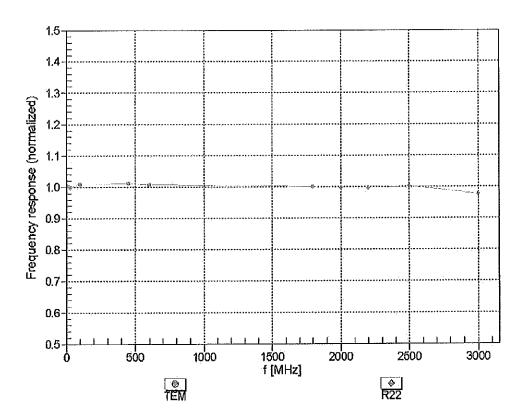



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


# Receiving Pattern ( $\phi$ ), $\theta = 0^{\circ}$



f=1800 MHz,R22







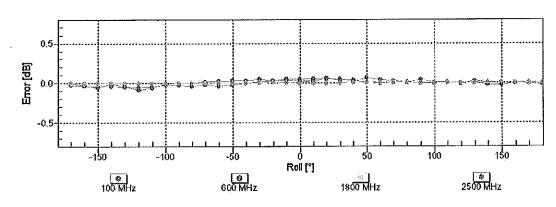

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

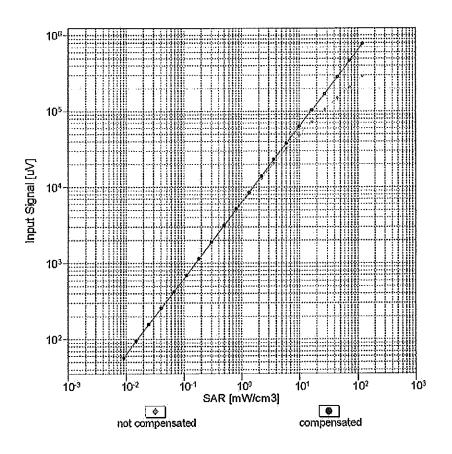

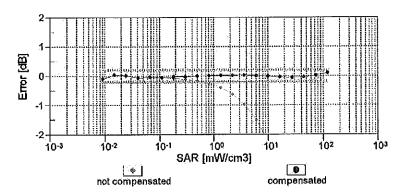



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## **Conversion Factor Assessment**

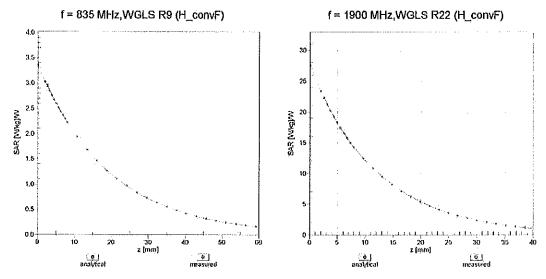

Deviation from Isotropy in Liquid Error (\( \phi, \( \phi \)), f = 900 MHz

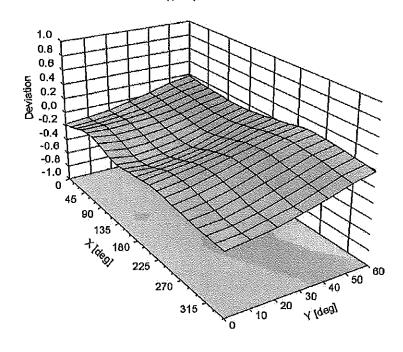



## DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-80.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm
•	I

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurlch, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

C

Client

**PC Test** 

Certificate No: ES3-3333\_Oct14

#### **CALIBRATION CERTIFICATE**

Object

ES3DV3 - SN:3333

Calibration procedure(s)

QA CAL-01:v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes

UU wish

Celibration date:

October 24, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Certificate No: ES3-3333\_Oct14

Primary Standards	ID.	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID.	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:

Lelf Klysner

Lelf Klysner

Laboratory Technician

Signature

Sey Much

Approved by:

Kalja Pokovic

Technical Manager

Issued: October 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurlch, Switzerland





S Schweizerischer Kalibrierdienst
Service sulsse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF

sensitivity in TSL / NORMx,y,z diode compression point

DCP CF

crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters

A, B, C, D Polarization φ

φ rotation around probe axis

Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e.,  $\vartheta = 0$  is normal to proba axis

Connector Angle

information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wiraless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media, VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

# Probe ES3DV3

SN:3333

Manufactured:

January 24, 2012

Calibrated:

October 24, 2014

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

October 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

**Basic Calibration Parameters** 

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	1.08	0.90	0.88	± 10.1 %
DCP (mV) <sup>B</sup>	102.7	107.7	106.3	

UID	Communication System Name		A	B dB√μV	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
			dB			0.00	190.7	±2.5 %
0	CW	X	0.0	0.0	1.0	0,00	183.3	TE:0 70
		Y	0.0	0.0	1,0		197.9	
		Z	0.0	0.0	1.0	10.00	42.4	±1.9 %
10010- CAA	SAR Validation (Square, 100ms, 10ms)	Х	3,17	61.7	12.2	10.00	38.0	11.5 /0
		Υ	3.16	63.7	12.4		39.9	<del></del> :
		Z	1.84	59.2	10.5	0.04	128.5	±0.5 %
10011- CAB	UMTS-FDD (WCDMA)	Х	3.22	65.9	17.6	2.91	146.7	10.0 %
		Y	3.60	69.3	19.8		133.7	
		Z	3.51	68.1	18.8	4.05		0.70/
10012- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	3.14	68.6	18.2	1,87	132.6	±0.7 %
		Υ	3.64	73.3	21.1		127.5	
·		Z	3.50	71.4	19.6	- 10	136.4	10.5.00
10013- CAA	IEEE 802.11g WIFI 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	11.56	70.8	23.0	9.46	135.8	±3.5 %
		Υ	10,93	70.2	23.0		122.3	
		Z	10.93	70.0	22.6		132.8	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	24.60	96.9	27.6	9.39	147.6	±1.9 %
		Υ	19.44	94.3	26.1		148.6	
		Ζ	9,58	82.7	21.9		138.2	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	×	20.09	93.0	26.4	9.57	141.7	±2.7 %
,,		Y	24.86	99.0	27.9		143.5	
		Z	11.74	86.4	23,4		134.4	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	Х	23.76	91.2	23.1	6.56	147.8	±2.5 %
		Y	37.10	99.8	25.3		149.9	
		Z	16.01	88.1	21,6		128.0	<u> </u>
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	Х	36.24	94.5	22.6	4.80	128.6	±2.5 %
		Y	47.57	99.9	23.7		133.5	
		Z	44.37	99.7	23.6		140.1	<u></u>
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	Х	65,86	99.7	22.7	3.55	133.1	±2.7 %
		Υ	55.92	100.0	22.6		142.0	
		Z	59.41	100.0	22.2		125.1	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	85.87	100.0	20.1	1.16	138.3	±2.2 %
		Υ	14.41	99.2	23.3		130.5	
		Z	85.82	99.8	19.3		135.9	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	6.49	67.4	19.4	5.67	144.6	±1.7 %
		Υ	6.49	68.0	20.1		139.9	
		Z	6.54	67.9	19.7		147.3	

10103-	LTE-TDD (SC-FDMA, 100% RB, 20	х	10.81	74.7	24.9	9.29	122.0	±3.0 %
CAB	MHz, QPSK)	Υ.	10.50	75.9	26.1		131.6	
		Z	9.76	73.5	24.5		138.6	
10108- CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	6.43	67.2	19.4	5.80	143.3	±1.7 %
0/10	Throng street	Υ	6.37	67.7	20.0		138.0	
		Z	6.43	67.5	19.7		146.7	
10117- CAA	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.19	68.6	20.9	8.07	136.2	±2.5 %
		Υ	10,15	68.9	21.4		128.3	
		Z	10.12	68,7	21.0		137.9	-000
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	11.48	77.0	26.1	9.28	147.5 125.7	±3.3 %
		Υ	9.81	74.9	25.8		133.2	
		Z	9.22	72.8	24.3	- E 7E		±1.7 %
10154- CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6,10	66,5	19.1	5.75	140.0	II.1 70
		Υ	6.04	67.1	19.8		143.2	
		Z	6.12	67.1	19.5	5.82	146.3	±1.7 %
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	6.57	67.2	19.4 20.0	5.62	139,6	±1.7 70
		Y	6.47	67.6	19.7	-	148.5	
10169-	LTE-FDD (SC-FDMA, 1 RB, 20 MHz,	Z X	6.56 5.16	67,6 66.7	19.4	5.73	145.8	±1.4 %
CAB	QPSK)	Y	5,02	67.5	20.2		137.5	
		z	5.07	67.2	19.7		147.1	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	10.07	79.2	27.3	9.21	136.5	±3.0 %
<u> </u>		Υ	9.70	81.5	29.3		142.5	
		Z	7.63	74.3	25.3		125.0	
10175- CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	5.13	66.6	19.3	5.72	145.9	±1.4 %
		Y	5.01	67.4	20.1		137.5	
		Z	5.04	67.1	19.7	- 70	146.3	14.4.0/
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	Х	5.14	66.6	19.3	5.72	145.7	±1.4 %
		Y	5.03	67.5	20.3	ļ	146.6	
		Z	5.06	67.2	19.7	8.10	130.9	±2.5 %
10196- CAA	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.88	68.3	20.8	8,10	149.0	12.0 70
		Y	10.13	69.6	20.9	<del>                                     </del>	131.6	
10225-	UMTS-FDD (HSPA+)	Z X	9.77 6.98	68.4 66.5	19.0	5.97	132,9	±1,7 %
CAB		Ϋ́	7.14	67.8	20.0		149.7	· · · · · · · · · · · · · · · · · · ·
		Z	7.02	67.2	19.4		134.3	
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	10.13	79.4	27.4	9.21	137.5	±3.0 %
UMB	Sa Ory	Y	9.73	81.6	29.3		143.3	
ra/a	1	Z	7.59	74.1	25.1		125.6	
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	10.80	76.4	25.9	9,24	140.0	±3.3 %
		Υ	10.19	77.2	27.1		147.2	
		Z	8.55	71.8	23.9	1	124.9	10 = 51
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	11.59	77.3	26.3	9.30	148.4	±3.5 %
		Y	9.87	75.1	25.9		126.0	<del> </del>
		<u>  z</u>	9.21	72.7	24.2		133.6	

October 24, 2014

10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	Х	4.40	66.1	18.1	3.96	134.1	±0.7 %
		Υ	4.48	67.4	19.2		129.7	
		Z	4.54	67.2	18.7		137.4	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	3.59	65.7	17.7	3.46	127.5	±0.7 %
		Υ	3.85	68.4	19.7		143.4	
		Z	3,78	67.6	18.8		129.7	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	3.56	65.9	17.8	3.39	127.9	±0.7 %
, ,		Υ	3.81	68.6	19.8		144.2	
		Z	3,71	67.5	18.8		130.7	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6.44	67.1	19.4	5.81	143.0	±1.7 %
		Υ	6.37	67.6	20.0		137.9	
		Z	6.43	67.5	19.7		146.5	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	7.02	67.8	19.8	6.06	148.7	±1.9 %
		Υ	6.96	68.2	20.4		143.6	
		Z	6.72	67.1	19.5		126.9	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	4.73	67.0	17.9	3.76	140.2	±0.7 %
		Υ	4.96	69.4	19.5		130.7	
· · · · · · · · · · · · · · · · · · ·		Z	5.05	69.3	19.1		140.9	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	4.70	67.2	18.1	3.77	138.1	±0.7 %
		Υ	4.85	69.5	19.6		129.6	
		Z	5.14	70.1	19.5		139.3	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	2.47	66.1	17.1	1.54	133.2	±0.7 %
		Υ	3,15	72.2	20.9		127.9	
***************************************		Z	3,32	72.0	20.1		137.2	
10416- AAA	IEEE 802.11g WiFl 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duly cycle)	Х	9,99	68.4	21.0	8.23	131.6	±2.5 %
		Y	9.84	68.6	21.4		123.3	
		Z	9.89	68,6	21.1		133.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 7 and 8).

Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

October 24, 2014

### DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.55	6,55	6.55	0.34	1.74	± 12.0 %
835	41.5	0.90	6,33	6.33	6.33	0.44	1.48	± 12.0 %
1750	40.1	1.37	5.26	5.26	5.26	0.73	1.21	± 12.0 %
1900	40.0	1.40	5.11	5.11	5,11	0.66	1.32	± 12.0 %
2450	39.2	1.80	4.53	4.53	4,53	0.62	1.40	± 12.0 %
2600	39.0	1,96	4,40	4.40	4.40	0.68	1.38	± 12.0 %

<sup>&</sup>lt;sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (c and o) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c end o) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

The Converting for indicated target assue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3333 October 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>6</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.14	6.14	6.14	0.35	1.76	± 12.0 %
835	55.2	0,97	6.12	6.12	6.12	0.57	1.37	± 12.0 %
1750	53.4	1.49	4.89	4.89	4.89	0.80	1.24	± 12.0 %
1900	53.3	1.52	4,67	4.67	4.67	0.75	1,29	± 12.0 %
2450	52.7	1.95	4.26	4.26	4,26	0.80	1.01	± 12.0 %
2600	52,5	2.16	4.13	4,13	4.13	0.80	0.99	± 12.0 %

<sup>&</sup>lt;sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF essessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (a and 6) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Alpha/Depth ere determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

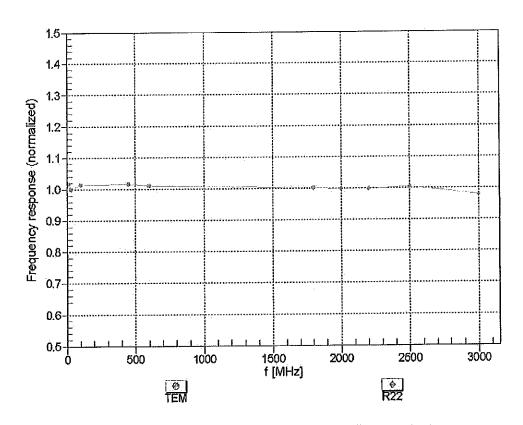

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


# Receiving Pattern ( $\phi$ ), $\theta = 0^{\circ}$

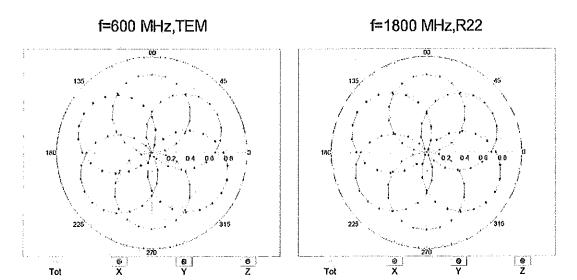


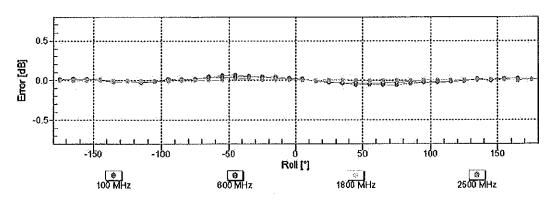

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

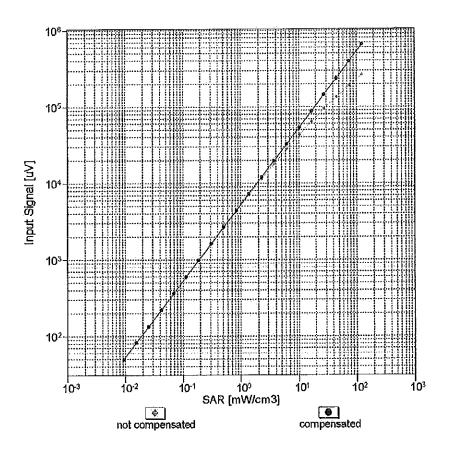

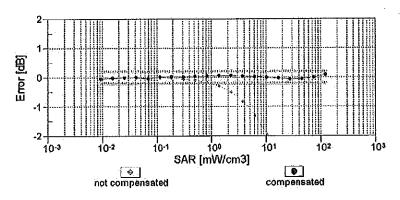


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

### **Conversion Factor Assessment**

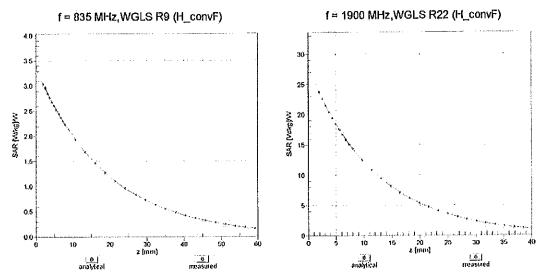

Deviation from Isotropy in Liquid Error (φ, θ), f = 900 MHz

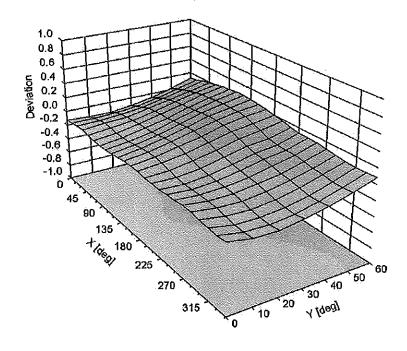

October 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-34.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm
	1

### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Certificate No: ES3-3318 Jan15

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client

**PC Test** 

### CALIBRATION CERTIFICATE

Object

ES3DV3 - SN:3318

Calibration procedure(s)

QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes CC 1/30/15

Calibration date:

January 23, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Certificate No: ES3-3318\_Jan15

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:

Israe Elnaouq

Laboratory Technician

Signature

Laboratory Technician

Signature

Katja Pokovic

Technical Manager

Issued: January 26, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF DCP sensitivity in TSL / NORMx,y,z diode compression point

CF

crest factor (1/duty\_cycle) of the RF signal

A, B, C, D

modulation dependent linearization parameters

Polarization φ

φ rotation around probe axis

Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle

Certificate No: ES3-3318\_Jan15

information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Page 2 of 13

ES3DV3 – SN:3318 January 23, 2015

# Probe ES3DV3

SN:3318

Manufactured:

January 10, 2012

Calibrated:

January 23, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

January 23, 2015

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	1.15	0.92	1.28	± 10.1 %
DCP (mV) <sup>B</sup>	106.4	109.2	103.4	

#### **Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	Х	0.0	0.0	1.0	0.00	200.6	±3.5 %
		Υ	0.0	0.0	1.0		185.3	
		z	0.0	0.0	1.0		207.7	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	Х	3.26	66.4	14.0	10.00	41.4	±1.2 %
		Υ	1.76	59.6	9.8		36.1	
		Ζ	1.82	57.7	9.6		43.6	
10011- CAB	UMTS-FDD (WCDMA)	Х	3.48	68.9	19.9	2.91	120.2	±0.5 %
		Υ	3.76	70.1	19.9		146.0	
		Z	3.11	66.0	17.9		124.4	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	3.71	74.2	21.7	1.87	121.7	±0.7 %
		Υ	3.65	73.3	20.7		147.5	
		Z	2.77	67.4	17.8	0.40	126.6	±0 = 0/
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	10.68	69.5	22.7	9.46	114.7	±2.5 %
		Υ	10.82	70.4	23.0		139.8	
		Z	11.22	71.1	23.7		122.2	.000
10021- DAB	GSM-FDD (TDMA, GMSK)	Х	16.13	95.0	26.6	9.39	122.7	±2.2 %
		Y	4.61	73.1	17.2		130.8	
		Z	15.10	92.0	25.4		135.9	14.0.0/
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	17.03	96.8	27.5	9.57	113.0	±1.9 %
		Υ	4.15	71.7	16.8		119.9	
		Z	21.50	98.0	27.5	2.50	130.9	10.7.0
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	Х	35.51	99.5	24.5	6.56	147.6	±2.7 %
		Υ	6.12	77.2	17.1	<u> </u>	118.1	
		Z	38.50	99.7	24.7	4.00	114.0	14 7 0/
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	45.57	99.9	23.2	4.80	113.3	±1.7 %
		Y	2.73	68.4	12.6		131.0	
10000	OPPO FOR (TRAIN CHICK THICK ON	Z	54.59	99.9	22.9	2.55	123.0	±3.0 %
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	53.68	99.5	21.9	3.55	144.9	±3.0 %
		Y	60.05	99.8	21.1		140.7	
10032-	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Z X	66.60 20.92	99.6 99.4	21.6 21.8	1.16	136.6	±2.2 %
CAA		1	05.40	90.2	12.0		117.6	
		Y 7	95.40	88.3	13.8		110.1	
10100	LTE-FDD (SC-FDMA, 100% RB, 20	Z	100.00	99.5	18.7	5.67	130.5	±1.2 %
10100- CAB	MHz, QPSK)	X	6.50	68.1	20.2	3.07		±1.2 /0
		Y	6.11	66.7	19.2		107.2	
		Z	6.55	68.2	20.1		142.7	

ES3DV3- SN:3318 January 23, 2015

10103-	LTE-TDD (SC-FDMA, 100% RB, 20	Тх	9.76	74.8	25,9	9.29	116.0	±2.5 %
CAB	MHz, QPSK)							
		Y	8.85	72.2	24.1		134.9 131.5	
10108-	LTE-FDD (SC-FDMA, 100% RB, 10	Z X	10.83	77.4	27.2	5.80	128.7	±1.2 %
CAC	MHz, QPSK)		6.36	67.7	20.1	3.00		±1.2 /0
		Y	5.92	66.1	19.0		106.6	
		Z	6.42	67.7	20.0		140.4	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.20	69.1	21.6	8.07	118.1	±2.5 %
		Y	10.27	69.3	21.4		143.9	
		Z	10.43	69.7	21.8		131.0	
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	9.09	73,7	25,5	9.28	112.0	±2.7 %
		Y	8.35	71.5	23.9		131.1	
		Z	9.58	74.4	25.6		126.8	
10154- CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	6,01	67.0	19.8	5.75	126.4	±1.2 %
1 44		Υ	6.17	67.7	19.9		148.9	
		Z	6.07	67.1	19.7		137.2	
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	6.41	67.4	19.9	5.82	130.9	±0.9 %
		Y	6.06	66.2	19.0		109.1	
		Z	6.54	67.7	20.0		142.6	
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	4.79	66.5	19.8	5.73	109.4	±0.9 %
		ΥΥ	4.82	67.1	19.8		128.8	
		Z	4.85	66.4	19.5		119.0	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	8.44	79.3	28.7	9.21	125.1	±2.5 %
		Υ	7.15	75.0	26.0		144.0	
		Z	10.13	83.8	30.8		141.9	
10175- CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	5.13	68.2	20.8	5.72	146.5	±0.9 %
		Y	4.77	66.8	19.6		125.2	
		Z	4.81	66.2	19.4		118.5	
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	Х	5.11	68.1	20.7	5.72	146.4	±0.9 %
		Y	4.79	67.0	19.7		126.0	
		Z	4.88	66.6	19.7		118.9	
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	9.63	68.3	21.2	8.10	108.2	±2.5 %
		Υ	9.84	68.9	21.3		135.5	
		Z	9.99	69.2	21.7		124.0	
10225- CAB	UMTS-FDD (HSPA+)	X	6.99	67.3	19.7	5.97	134.8	±0.9 %
		Y	6.73	66.8	19.2		115.9	
		Z	6.71	66.2	19.0		106.3	
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	7.79	76.4	27.0	9.21	126.4	±2.5 %
		Y	7.19	75.1	26.1		144.7	
		Z	10.12	83.9	30.9		142.0	
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	8.19	71.9	24.7	9.24	103.3	±2.2 %
		Υ	7.76	70.8	23.6		122.0	
		Z	9.31	75.2	26.4		119.1	
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.90	73.0	25.1	9.30	108.7	±2.2 %
		Y	8.38	71.6	24.0		129.7	
		Z	10.15	76.5	26.9		126.1	

January 23, 2015

10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	Х	4.42	67.2	19.2	3.96	119.1	±0.7 %
		Υ	4.71	68.5	19.5		143.8	
		Z	4.39	66.7	18.6		131.7	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	3.65	67.5	19.3	3.46	111.3	±0.5 %
		Υ	3.89	69.0	19.6		130.9	
		Ζ	3.49	66.1	18.2		122.4	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	3.60	67.6	19.3	3.39	114.4	±0.5 %
		Υ	3.85	69.1	19.7		133.4	
		Z	3.45	66.2	18.2		123.7	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6.36	67.6	20.1	5.81	128.7	±1.2 %
<u></u>		Υ	5.95	66.1	19.0		106.5	
		Z	6.39	67.6	19.9		140.7	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	6,98	68.4	20.6	6.06	134.9	±1.2 %
		Υ	6.52	66.7	19.3		111.3	
		Z	7.06	68.6	20.5		146.2	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	4.97	69.7	19.7	3.76	122.2	±0.5 %
		Υ	5.31	71.6	20.2		143.6	
		Z	4.54	67.3	18.2		133.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	4.77	69.4	19.6	3.77	120.8	±0.5 %
		Υ	5.40	72.4	20.6		141.3	
		Z	4.71	68.5	18.9		131.5	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	3.07	71.7	20.7	1.54	120.5	±0.7 %
		Y	3.52	73.8	21.0		142.0	
*******		Z	2.38	66.1	17.4		129.6	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	Х	9.73	68.3	21.2	8.23	114.7	±2.5 %
		Υ	9.99	69.2	21.5		138.0	
		Z	10.10	69.4	21.9		125.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 7 and 8).

B Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3318 January 23, 2015

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.58	6.58	6.58	0.36	1.73	± 12.0 %
835	41.5	0.90	6.39	6.39	6.39	0.80	1.14	± 12.0 %
1750	40.1	1.37	5.27	5.27	5.27	0.76	1.19	± 12.0 %
1900	40.0	1.40	5.05	5.05	5.05	0.44	1.55	± 12.0 %
2300	39.5	1.67	4.78	4.78	4.78	0.80	1.23	± 12.0 %
2450	39.2	1.80	4.50	4.50	4.50	0.55	1.49	± 12.0 %
2600	39.0	1.96	4.34	4.34	4.34	0.76	1.32	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to ± 110 MHz.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvE uncertainty for indicated farcet tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3318 January 23, 2015

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.22	6.22	6.22	0.67	1.28	± 12.0 %
835	55.2	0.97	6.23	6.23	6.23	0.80	1.19	± 12.0 %
1750	53.4	1.49	4.95	4.95	4.95	0.40	1.77	± 12.0 %
1900	53.3	1.52	4.76	4.76	4.76	0.60	1.48	± 12.0 %
2300	52.9	1.81	4.52	4.52	4.52	0.80	1.19	± 12.0 %
2450	52.7	1.95	4.37	4.37	4.37	0.72	1.23	± 12.0 %
2600	52.5	2.16	4.17	4.17	4.17	0.80	1.00	± 12.0 %

<sup>&</sup>lt;sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


\*\*Attraction in the latter of the control of the contr

F At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

Galpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

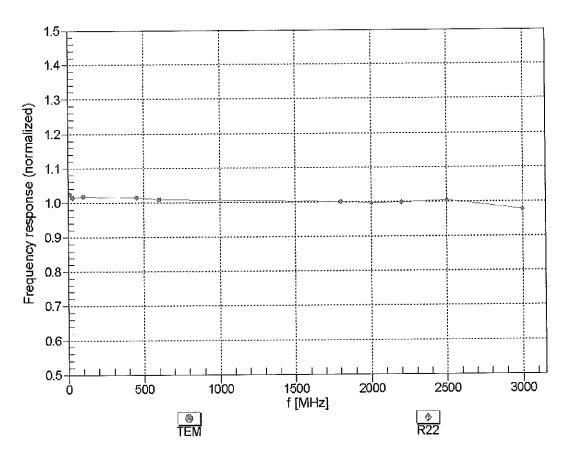



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


# Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

f=600 MHz,TEM

f=1800 MHz,R22







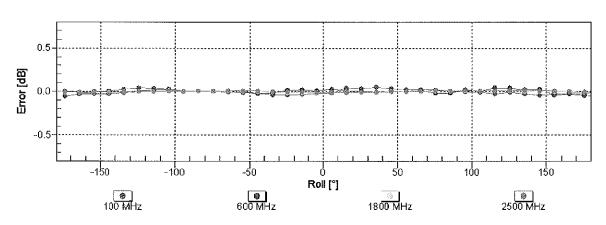

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

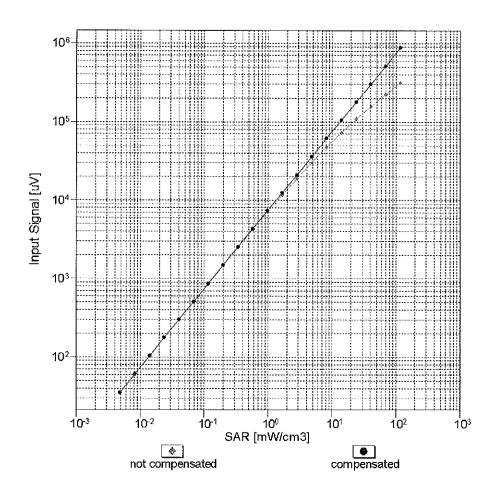


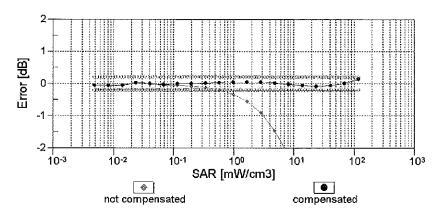

Uncertainty of Linearity Assessment: ± 0.6% (k=2)


ES3DV3-SN:3318


## **Conversion Factor Assessment**

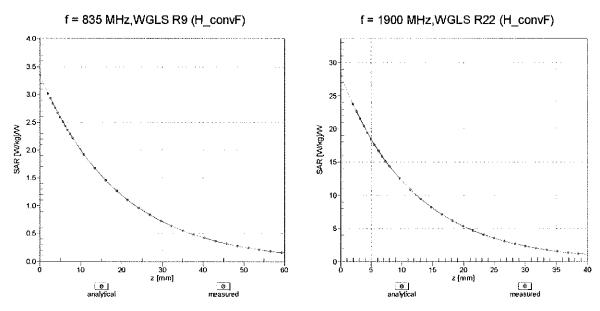

# **Deviation from Isotropy in Liquid**

Error  $(\phi, \vartheta)$ , f = 900 MHz

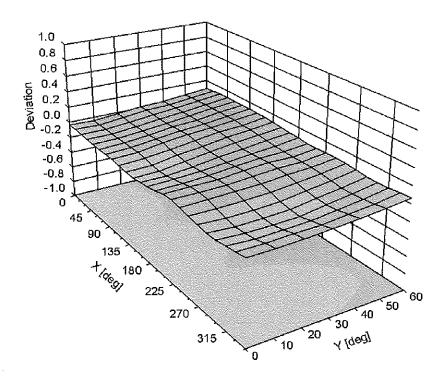



# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-104.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

#### Calibration Laboratory of Schmid & Partner Engineering AG

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Certificate No: EX3-3914\_Feb15

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

**PC Test** 

#### **CALIBRATION CERTIFICATE**

Object

EX3DV4 - SN:3914

CCA

3/6/15

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date:

February 10, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID .	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:

Name

Function

Laboratory Technician

Approved by:

Certificate No: EX3-3914\_Feb15

Katja Pokovic

Claudio Leubler

Technical Manager

Issued: February 10, 2015

Signature

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Certificate No: EX3-3914\_Feb15

Schmid & Partner **Engineering AG** Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S

Service suisse d'étalonnage

C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

tissue simulating liquid **TSL** 

sensitivity in free space NORMx,y,z

sensitivity in TSL / NORMx,y,z ConvF

diode compression point DCP

crest factor (1/duty\_cycle) of the RF signal CF

modulation dependent linearization parameters A, B, C, D

φ rotation around probe axis Polarization φ

3 rotation around an axis that is in the plane normal to probe axis (at measurement center), Polarization 9

i.e.,  $\vartheta = 0$  is normal to probe axis

information used in DASY system to align probe sensor X to the robot coordinate system Connector Angle

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx, y, z: Assessed for E-field polarization  $\vartheta = 0$  (f  $\leq 900$  MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E2-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \le 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

# Probe EX3DV4

SN:3914

Manufactured:

December 18, 2012

Repaired:

January 23, 2015

Calibrated:

February 10, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

**Basic Calibration Parameters** 

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V/(V/m)^2)^A$	0.48	0.42	0.45	± 10.1 %
DCP (mV) <sup>B</sup>	102.7	103.2	101.3	

**Modulation Calibration Parameters** 

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>೬</sup> (k=2)
0	CW	V	0.0	0.0	1.0	0.00	137.3	±2.7 %
U	CVV	X	0.0	0.0	1.0	0.00	140.8	
		Z	0.0	0.0	1.0		134.6	
10010-	SAR Validation (Square, 100ms, 10ms)	X	1.33	60.3	9.9	10.00	40.4	±1.2 %
CAA	SAR Validation (Square, 100ms, 10ms)	^	1.33			10,00		
		Υ	1.02	57.7	9.2		42.2	
		Z	1.41	61.3	11.0		39.9	
10011- CAB	UMTS-FDD (WCDMA)	Х	3.39	67.3	18.6	2.91	148.9	±0.5 %
<u> </u>		Υ	3.47	67.6	18.6		130.1	
		Ζ	3.30	66.5	17.9		145.8	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	2.92	68.9	18.9	1.87	149.0	±0.7 %
UND	Niopoy	Υ	3.17	70.1	19.2		131.4	
		Z	2.72	67.0	17.6		146.9	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	X	10.52	69.1	22.1	9.46	140.7	±3.3 %
O/ LD	Of Diff, 6 Hidps/	Υ	10.67	69.8	22.6		146.8	
		Z	10.44	68.9	22.0		136.8	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	1.64	63.4	11.8	9.39	86.2	±1.7 %
טאט		Υ	2.03	65.7	13.6		105.2	
		Z	1.78	63.6	12.4		85.9	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	1.78	65.0	13.2	9.57	84.0	±2.2 %
D) 10		Υ	1.84	63.8	12.5		101.1	
		Z	1.92	64.9	13.4		83.0	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	Х	2.04	68.8	13.2	6.56	141.3	±1.9 %
		Υ	2.32	70.4	14.4		134.7	
		Z	1.59	65.5	12.3		139.3	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	Х	1.51	67.3	11.9	4.80	148.8	±1.9 %
		Y	1.27	63.7	10.0		136.2	
		Z	3.26	75.5	15.4		148.7	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	52.54	99.9	20.2	3.55	143.3	±1.7 %
		Υ	2.95	74.0	13.7		149.7	
		Z	32.98	99.9	21.5		141.9	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	96.97	99.5	17,5	1.16	145.3	±1.2 %
		Υ	83.69	99.7	18.1		128.6	
		Z	0.69	65.4	9.0		143.2	

10062- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	Х	10.27	68.9	21.5	8.68	145.1	±2.7 %
		Υ	9.95	68.4	21.3		123.8	
		Z	10.18	68.8	21.4		140.9	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	х	6.38	67.0	19.3	5.67	140.1	±1.4 %
		Υ	6.54	67.7	19.6		147.0	
		Ζ	6.34	66.8	19.1		137.4	
10103- CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	7,44	67.6	21.6	9.29	132.4	±1.7 %
		Υ	7.78	69.0	22.4		140.2	
		Z	7.40	67.4	21.4		129.5	
10108- CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	6.25	66.7	19.2	5.80	137.9	±1.4 %
		Υ	6.36	67.2	19.5		143.3	
		Z	6.20	66.4	19.0		135.0	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	10.03	68.2	20.7	8.07	128.5	±2.5 %
:-=		Υ	10.17	68.7	21.0		134.9	
		Z	9.94	68.0	20.5		125.2	
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	7.21	67.6	21.8	9.28	149.5	±1.9 %
		Υ	7.39	68.5	22.3		135.1	
		Z	7.19	67.5	21.7		147.3	
10154- CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	5.91	66.2	19.1	5.75	133.8	±1.2 %
		Υ	6.04	66.8	19.4		139.4	
		Z	5.88	66.0	18.9		131.1	
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.36	66.7	19.3	5.82	139.0	±1.4 %
		Υ	6.51	67.4	19.7		145.5	
		Z	6.31	66.4	19.0		136.5	
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	4.79	66.3	19.4	5.73	136.1	±1.2 %
		Y	4.90	67.0	19.8		141.5	
		Z	4.76	66.0	19.1		133.8	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	Х	5.66	68.8	22.7	9.21	138.2	±2.5 %
		Y	5.93	70.3	23.7		147.0	
		Z	5.68	68.6	22.6		136.7	
10175- CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.77	66.2	19.3	5.72	135.7	±1.2 %
		Y	4.92	67.1	19.8		141.2	
		Z	4.72	65.8	19.0		133.6	14 0 01
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.77	66.2	19.3	5.72	134.8	±1.2 %
		Y	4.91	67.0	19.7		141.1	
		Z	4.76	66.0	19.1		132.8	10 5 07
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	9.99	68.8	21.1	8.10	146.9	±2.5 %
		Y	9.71	68.4	21.0		127.0	
		<u>z</u>	9.91	68.7	21.0		143.4	14.0.07
10225- CAB	UMTS-FDD (HSPA+)	X	7.10	67.5	19.5	5.97	149.1	±1.2 %
		Y	6.98	67.4	19.5		128.9	
		Z	7.01	67.2	19.3		145.5	

10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	5.68	68.9	22.8	9.21	139.9	±2.2 %
<i>3/10</i>	· · ·	Y	5.93	70.3	23.6		148.1	
		Ζ	5.70	68.8	22.7		137.5	
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	6.81	67.4	21.7	9.24	143.4	±2.2 %
0/10	Qi Oily	Y	6.93	68.0	22.2		129.3	
		Z	6.79	67.2	21.6		140.3	
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	7.23	67.7	21.9	9.30	149.4	±1.9 %
<u> </u>		Υ	7.42	68.6	22.4		135.2	
		Z	7.19	67.4	21.6		146.2	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	Х	4.44	66.7	18.6	3.96	129.1	±0.7 %
		Υ	4.57	67.4	18.9		134.5	
		Z	4.35	66.1	18.1		126.6	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	3.64	66.9	18.6	3.46	140.9	±0.7 %
		Υ	3.87	68.3	19.3		147.1	
		Z	3.61	66.5	18.2		138.4	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	3.64	67.4	18.8	3.39	142.3	±0.5 %
		Y	3.85	68.5	19.3		148.3	
		Z	3.59	66.7	18.3		139.6	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6.23	66.6	19.2	5.81	136.3	±1.4 %
		Υ	6.42	67.4	19.7	<u> </u>	142.8	
		Z	6.19	66.3	19.0		133.9	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.84	67.3	19.6	6.06	142.4	±1.4 %
		Υ	6.98	67.8	19.9		149.5	
		Z	6.75	66.8	19.3		140.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	10.13	68.9	21.3	8.36	147.4	±2.7 %
		Y	9.84	68.4	21.1		127.5	
		Z	10.04	68.7	21.2		143.2	
10400- AAB	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	10.24	69.0	21.4	8.37	148.6	±2.7 %
		Y	9.92	68.4	21.2		126.6	
		Z	10.14	68.8	21.3		144.6	
10401- AAB	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	Х	10.60	68.6	21.2	8.60	129.4	±3.0 %
		Y	10.77	69.1	21.5		136.8	1
		Z	10.52	68.4	21.1		125.9	10.00
10402- AAB	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	10.60	68.5	20.9	8.53	129.7	±3.0 %
		Y	11.01	69.5	21.5		139.1	<u> </u>
		Z	10.54	68.3	20.8		126.7	10 5 01
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	5.07	70.1	19.4	3.76	127.5	±0.5 %
		Y	5.47	71.9	20.2	1	133.6	<u> </u>
		Z	4.93	69.5	19.0		124.9	1
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	5.01	70.2	19.5	3.77	149.3	±0.7 %
		Υ	5.38	71.9	20.2		132.0	
		Z	4.94	69.9	19.2		146.4	

10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	3.20	71.2	19.8	1.54	126.8	±0.7 %
AAA	Wibbs, aspeduty cycle)	TY	3.51	72.6	20.4		134.5	
		Z	2.79	68.1	18.1		148.4	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	10.07	68.8	21.2	8.23	147.8	±2.7 %
AVV	Of Divi, o Mape, cope day oyaley	Y	9.81	68.4	21.1		128.4	
<u> </u>		z	10.00	68.7	21.1		144.0	
10417-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	Х	10.07	68.8	21.2	8.23	148.4	±2.7 %
AAA	wiphs, sape duty cycle)	Y	9.82	68.4	21.1		129.0	
		Z	9.99	68.7	21.1		144.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E2-field uncertainty inside TSL (see Pages 8 and 9).

Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

## Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	9.82	9.82	9.82	0.39	0.92	± 12.0 %
835	41.5	0.90	9.50	9.50	9.50	0.43	0.83	± 12.0 %
1750	40.1	1.37	8.04	8.04	8.04	0.30	0.93	± 12.0 %
1900	40.0	1.40	7.86	7.86	7.86	0.35	0.86	± 12.0 %
2450	39.2	1.80	7.02	7.02	7.02	0.28	1.05	± 12.0 %
2600	39.0	1.96	6.82	6.82	6.82	0.26	1.17	± 12.0 %
5200	36.0	4.66	5.26	5.26	5.26	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.06	5.06	5.06	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.92	4.92	4.92	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.73	4.73	4.73	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.67	4.67	4.67	0.40	1.80	± 13.1 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to  $\pm$  110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvE uncertainty for indicated tarrent figure parameters.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-3914\_Feb15

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

#### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	9.53	9.53	9.53	0.33	1.09	± 12.0 %
835	55.2	0.97	9.49	9.49	9.49	0.27	1.25	± 12.0 %
1750	53.4	1.49	7.78	7.78	7.78	0.51	0.79	± 12.0 %
1900	53.3	1.52	7.49	7.49	7.49	0.73	0.64	± 12.0 %
2450	52.7	1.95	7.15	7.15	7.15	0.69	0.64	± 12.0 %
2600	52.5	2.16	6.84	6.84	6.84	0.80	0.57	± 12.0 %
5200	49.0	5.30	4.50	4.50	4.50	0.45	1.90	± 13.1 %
5300	48.9	5.42	4.33	4.33	4.33	0.45	1.90	± 13.1 %
5500	48.6	5.65	3.91	3.91	3.91	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.89	3.89	3.89	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.01	4.01	4.01	0.55	1,90	± 13.1 %

 $<sup>^{\</sup>rm C}$  Frequency validity above 300 MHz of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is  $\pm$  10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to  $\pm$  110 MHz.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>&</sup>lt;sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

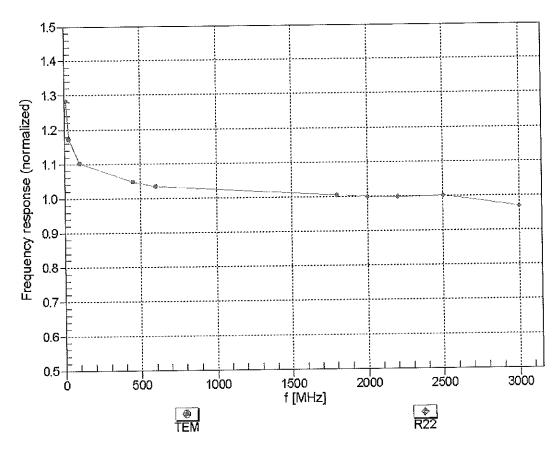


Uncertainty of Frequency Response of E-field:  $\pm$  6.3% (k=2)


# Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$




f=600 MHz,TEM

f=1800 MHz,R22







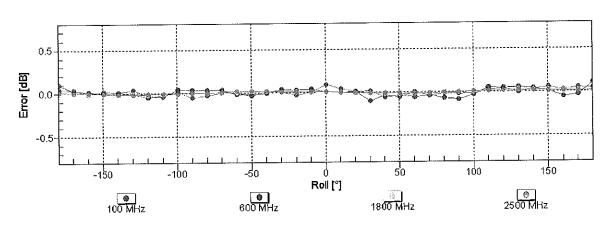

Uncertainty of Axial Isotropy Assessment:  $\pm$  0.5% (k=2)


## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

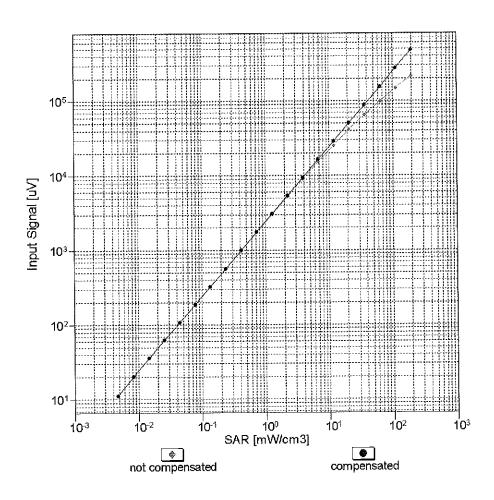

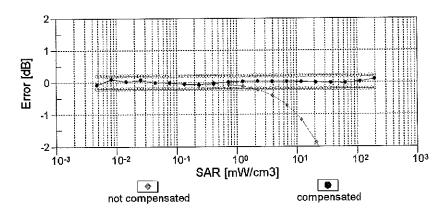


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## **Conversion Factor Assessment**

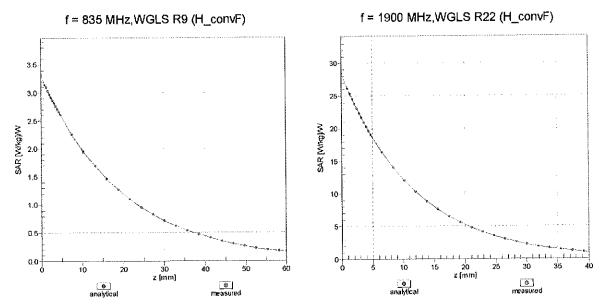

Deviation from Isotropy in Liquid Error (φ, θ), f = 900 MHz

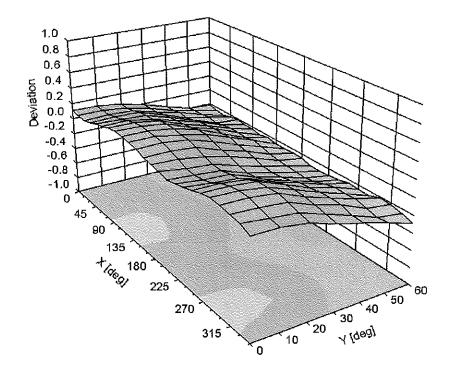

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-49.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service sulsse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signetories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

S

C

S

Client

**PC Test** 

Certificate No: ES3-3334\_Dec14

#### **CALIBRATION CERTIFICATE**

Object

ES3DV3 - SN:3334

Calibration procedure(s)

QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes CC

Calibration date:

December 16, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-16
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Арг-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 789	30-Apr-14 (No. DAE4-789_Apr14)	Apr-15
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check; Oct-15

Calibrated by:

Lelf Klysner

Laboratory Technician

Approved by:

Kalja Pokovic

Technical Manager

Issuad: December 16, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF

DCP CF

A, B, C, D

Polarization @

Polarization 9

Connector Angle

modulation dependent linearization parameters φ rotation around probe axis

crest factor (1/duty\_cycle) of the RF signal

sensitivity in TSL / NORMx,y,z diode compression point

8 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx, v.z: Assessed for E-field polarization 9 = 0 (f  $\leq 900$  MHz in TEM-cell; f > 1800 MHz; R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx.v.z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

# Probe ES3DV3

SN:3334

Manufactured:

January 24, 2012

Repaired:

December 9, 2014

Calibrated:

December 16, 2014

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

December 16, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) <sup>2</sup> ) <sup>A</sup>	1.04	1.05	1.01	± 10.1 %
DCP (mV) <sup>8</sup>	106.5	105.0	105.6	

Modulatio	on Calibrat	ion Para	matare

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	cw	Х	0,0	0.0	1.0	0.00	188.0	±3.0 %
		Y	0.0	0.0	1.0		183.2	
		Z.	0.0	0.0	1.0		181.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	4.61	67.2	13.7	10.00	38.4	±1.4 %
		Y	20.36	82.7	18.7		38.0	
		Z	17.55	80.3	17.6		37.0	
10011- CAB	UMTS-FDD (WCDMA)	Х	3.56	68.4	19.1	2.91	148.4	±0.7 %
,		Υ	3.44	68.1	19.2		146.9	
		Z	3,52	68.3	19.1		144.7	
CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	3.54	71.9	20,0	1.87	148.0	±0.7 %
		.Y	3.51	72.2	20.5		148.9	
		Z	3.80	73.3	20.6		144.6	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	11.39	71.1	23.3	9.46	149.8	±3.8 %
		Υ	11.54	71.8	24.0		149.5	
	<u> </u>	Z	11.11	70.5	23.0		141.6	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	15.29	91.3	25.0	9.39	131.9	±1.7 %
		Υ	24.16	100.0	28,4		142.8	
		Z	13.05	89.2	24.5		126.5	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	Х	16.07	91.7	25.1	9.57	144.0	±2.2 %
		Y	19.00	95.3	26,8		136.4	
		Z	13,93	89.8	24.6		141.0	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	19.98	91.0	22.4	6.56	134.2	±1.9 %
		Υ	34.78	99.7	25.5		145.0	
		Z	29.89	96,8	24,1		129,8	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	Х	56.30	99.7	22.8	4.80	125.2	±1.9 %
		Υ	41.16	99.6	23,9		131,2	
		Z	50.78	99.8	23.1		147.6	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	49,35	99.7	22,5	3.55	133.2	±2.2 %
		Y	46.49	99.6	22.9		139.2	
		Z.	58,21	99.7	22.0		129.4	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	56.54	100.0	20.2	1.16	128.0	±1.7 %
		Υ	20.03	99,3	22.4		130.3	
		Z	84.01	100.0	19.4		141.0	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.44	67.6	19.6	5.67	138.5	±1.4 %
		Y	6.50	67,9	20.0		142.1	
		Z	6,31	67.2	19.4	l	129,4	l

10103- CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	9.77	73.6	24.6	9.29	129.6	±3.3 %
		Y	10,52	76.0	26.3		132.1	
		Z	10.21	75.0	25.4		147.7	
10108- CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	6.36	67.2	19.6	5.80	136.8	±1.4 %
		Υ	6.31	67.3	19.8		137.2	
		Z	6.20	66.7	19,3		128.8	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	9.96	68,3	20,8	8.07	126,5	±2.5 %
		Y	10,12	68.8	21.3		126.6	
		Z	10,22	69.0	21.2		143.7	
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	9,29	73,0	24.4	9.28	125.3	±3.3 %
		Υ	9.65	74.5	25.6		124.4	
	<u> </u>	Z	9.65	74.3	25,2		141.1	
10154- CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.03	66.7	19,3	5.75	132.7	±1.4 %
		<u> Y</u>	5.97	66.7	19.5		132.7	
40400	LTE EDD (OO EDWA EOW DD 4544)	Z	6.17	67.3	19.7	E 00	148.3	14.4.0/
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	×	6.47	67,2	19.5	5.82	138.1	±1.4 %
	<u> </u>	Y	6.44	67.3	19.8	***.	126.8	
40400	LITE EDD (OO EDMA 4 DD CO MIL-	Z	6.27	66.6	19.2	E 70	137.2	14.0.0/
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.03	66.9	19.6	5.73	137.2	±1.2 %
		Y	4.97	67.0	19.9		127.1	
10172-	LTE-TDD (SC-FDMA, 1 RB, 20 MHz,	Z	4.91	66,5	19.5	9.21	142.4	±2.7 %
CAB	QPSK)	×	8.53	77.4	26.9 29.3	9.21	142.3	IZ.1 /0
		Y	9.59	81.3			126.7	
10175- CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	7.78 5.02	75.0 67.0	25.7 19.7	5.72	131.8	±1.2 %
		Υ	4.98	67.0	19.9	,	136.1	
		Z	4.95	66.8	19.6		128.1	
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.99	66.8	19.6	5.72	131.2	±1.2 %
		Υ	4.99	67.1	20.0		136.2	
		Ζ	4.92	66.6	19.5		127.9	
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	9.98	68.8	21.2	8.10	141.7	±2.5 %
		Υ	10.14	69.5	21.8		147.2	
		Z	9.85	68.6	21.1		137.5	
10225- CAB	UMTS-FDD (HSPA+)	X	7.17	67.5	19.6	5.97	146,0	±1.4 %
		Υ	7,13	67.7	19.9		149.9	·
		Z	7.12	67.5	19.6		142.9	23121
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	8.29	76.6	26.5	9.21	136.1	±2.7 %
		Y	9.60	81.4	29.3		142.3	
		Z	7,98	75.8	26.1		132.9	1000
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	×	9.27	74.1	25.1	9.24	139.1	±3.3 %
		Y	10.25	77.5	27.4		146.3	
		Z	9.07	73.7	25.0	0.00	135.8	1000
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.95	74.9	25.4	9.30	147.0	±3.3 %
		Υ	9.80	75.0	25.9		125.9	
		Z	9.74	74.6	25.4		143.8	<u> </u>

December 16, 2014 ES3DV3-SN:3334

10275- CAB	UMTS-FDD (HSUPA, Sublest 5, 3GPP Rel8.4)	X	4.63	67.6	19.0	3.96	147.5	±0.7 %
		Υ	4.41	66.9	18.9		129.5	
		Z	4.61	67.6	19.1		148.1	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	X	3,83	67.7	19.0	3.46	133,7	±0,7 %
		Υ	3.71	67.4	19.0		139.0	
		Z	3.86	68.1	19.2		133.7	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	3.85	68.2	19.2	3.39	136.7	±0.5 %
		Υ	3.67	67.5	19.1		141.3	
		Z	3.75	67.8	19.0		136.2	
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6,31	67.1	19.5	5.81	130.6	±1.4 %
		Υ	6.32	67.3	19,8		135.1	
: '' "		Z.	6.24	66.9	19.4		129.2	
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	6,85	67.5	19.8	6.06	135.1	±1.4 %
		Υ	6,90	67.9	20.2		141.5	
		Z	6.82	67.5	19.8		135.1	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	5.04	69.1	19,1	3.76	126.0	±0.5 %
		Υ	4.90	69,0	19.3		129.6	
•		Z	5.11	69.7	19.4		125.8	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	5.05	69.6	19.4	3,77	147.1	±0.7 %
		Y	4.84	69.2	19.5		127.8	
		Z	5.15	70.1	19.6		143.3	
10415- AAA	IEEE 802,11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	3.13	71.2	19.9	1.54	144.5	±0.5 %
		Υ	2.93	70.4	19.9		149.8	
		Z	3.18	71.6	20,1		141.4	
10416- AAA	IEEE 802.11g WIFI 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	Х	10,11	69.0	21.4	8.23	144.3	±2.5 %
		Υ	10.21	69.6	21.9		148.3	7
		Z	9.99	68.9	21.3		141.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 7 and 8).

B Numerical linearization parameter: uncertainty not required.

C Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

December 16, 2014

#### DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>6</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.51	6,51	6.51	0.80	1.17	± 12.0 %
835	41.5	0.90	6.25	6.25	6.25	0.38	1.58	± 12.0 %
1750	40.1	1.37	5.21	5.21	5.21	0.43	1.63	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.53	1.45	± 12.0 %
2450	39.2	1,80	4.51	4.51	4.51	0.80	1,26	± 12.0 %
2600	39.0	1.96	4.31	4.31	4.31	0.79	1.27	± 12.0 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

Fat frequencies below 3 GHz, the validity of tissue parameters (c and c) can be relaxed to ± 10% if liquid compensation formula is explicit to the RSS of the convergence of the second second

measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε end σ) is restricted to ± 5%. The uncertainty is the RSS of

the ConyF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

December 16, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>0</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.09	6.09	6.09	0.49	1.47	± 12.0 %
835	55.2	0.97	6.14	6.14	6.14	0.69	1.27	± 12.0 %
1750	53.4	1.49	4.94	4.94	4.94	0.80	1.24	± 12.0 %
1900	53.3	1.52	4.73	4.73	4.73	0.62	1.44	± 12.0 %
2450	52.7	1.95	4.28	4.28	4.28	0.80	1.13	± 12.0 %
2600	52.5	2.16	4.16	4.16	4.16	0.75	1.25	± 12.0 %


Grequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

A higha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies belowen 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


diameter from the boundary.


## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

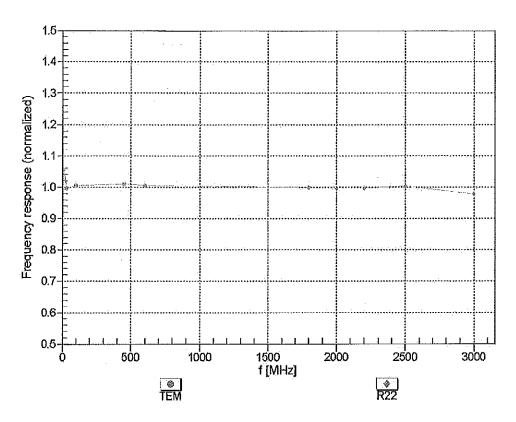

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


## Receiving Pattern ( $\phi$ ), $\theta = 0^{\circ}$

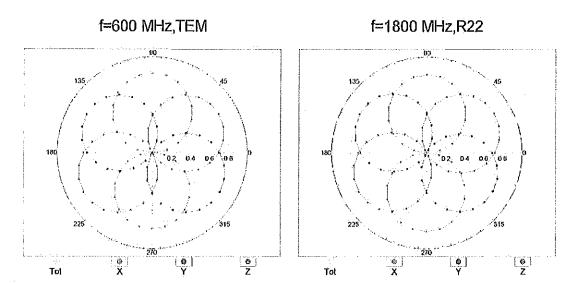


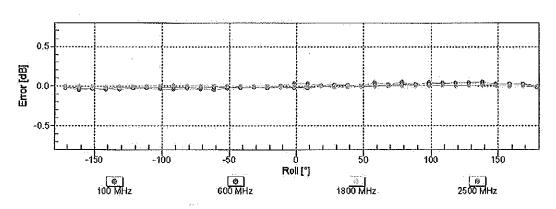

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

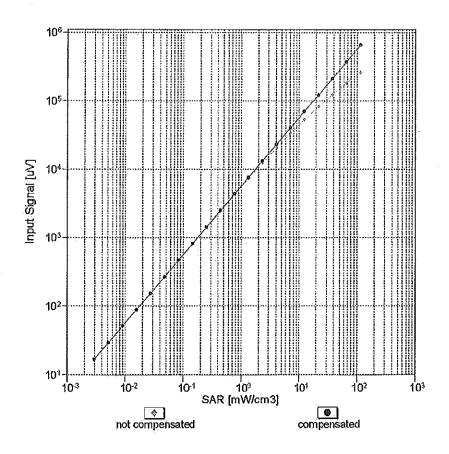

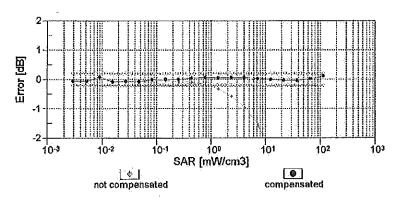



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

### **Conversion Factor Assessment**

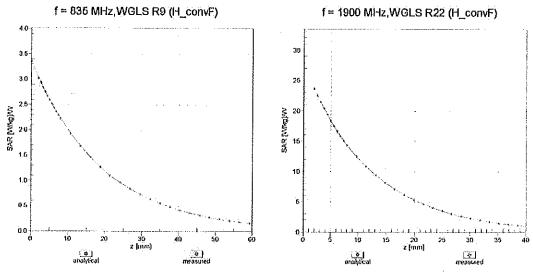

Deviation from Isotropy in Liquid Error (\( \phi, \( \theta \)), f = 900 MHz

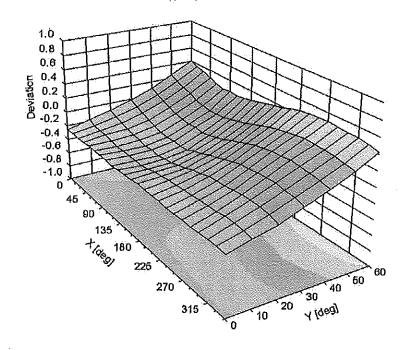



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3334

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	18.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

C

Client

**PC Test** 

Certificate No: ES3-3288\_Sep14/2

<b>CALIBRATION CERT</b>		

Object

ES3DV3 - SN:3288

Calibration procedure(s)

QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes

CC

Calibration date:

September 24, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}$ C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
O d Chanderdo	ID.	Check Date (in house)	Scheduled Check
Secondary Standards RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature	DASSKA SASSÁ
Calibrated by:	Leif Klysner	Laboratory Technician	Seif Alger	
Approved by:	Katja Pokovic	Technical Manager		

Issued: November 3, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid NORMx,y,z sensitivity in free space

ConvF sensitivity in TSL / NORMx,y,z

DCP diode compression point

Certificate No: ES3-3288\_Sep14/2

CF crest factor (1/duty\_cycle) of the RF signal modulation dependent linearization parameters

Polarization  $\phi$   $\phi$  rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Page 2 of 14

September 24, 2014

## Probe ES3DV3

SN:3288

Manufactured:

July 6, 2010

Repaired:

September 18, 2014

Calibrated:

September 24, 2014

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

**Basic Calibration Parameters** 

Basic Calibration Fara	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) <sup>2</sup> ) <sup>A</sup>	1.05	1.16	0.92	± 10.1 %
DCP (mV) <sup>B</sup>	105.1	104.6	106.7	

Modulation	Calibration	Parameters

JID	Communication System Name		A dB	B dB√μV	C	dB	VR mV	Unc <sup>E</sup> (k=2)
)	CW	Х	0.0	0.0	1.0	0.00	195.8	±3.5 %
		Y	0.0	0.0	1.0		175.9	
		Z	0.0	0.0	1.0		177.1	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.71	61.9	11.4	10.00	40.3	±2.2 %
<u> </u>		Y	2.37	60.2	11.2		42.6	
		Z	1.54	56.6	8.9		41.2	
10011- CAB	UMTS-FDD (WCDMA)	Х	3.29	67.1	18.4	2.91	133.8	±0.5 %
<u> </u>		Y	3.43	67.9	18.9		139.5	***************************************
		Z	3.45	68.1	18.9		141.3	
10012- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	2.99	68.9	18.6	1.87	135.1	±0.7 %
		Υ	3.59	72.4	20.4		140.7	
		Z	3.54	72.4	20.3		143.0	
10013- CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	11.15	70.8	23.3	9.46	132.3	±3.5 %
		Y	11.29	70.8	23.2		141.1	
		Z	11.07	70.7	23.2		139.2	
10021- DAB	GSM-FDD (TDMA, GMSK)	Х	14.71	90.5	24.5	9.39	149.0	±1.9 %
		Y	16.40	92.8	26.0		131.3	
		Z	11.34	87.2	23.6		126.1	<u></u>
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	Х	15.91	92.2	25.3	9.57	138.9	±2.5 %
		Y	21.25	96.9	27.2		142.0	
		Z	11.68	87.2	23.5		145.9	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	×	38.62	99.8	24.7	6.56	123.8	±2.2 %
		Y	36.71	99.7	25.2		128.1	
		Z	36.56	99.4	24.5		129.5	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	56.60	99.6	22.6	4.80	138.8	±1.9 %
		Y	46.94	99.9	23.7		149.9	
		Z	51.17	99.8	22.9		144.9	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	×	70.88	100.0	21.6	3.55	147.5	±1.9 %
		Y	52.58	99.8	22.6		129.4	
		Z	76.98	99.8	21.2		128.7	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	×	98.89	99.5	18.9	1.16	135.8	±1.4 %
		Y	78.39	99.6	19.5	<u> </u>	141.7	
~~****		Z	95.21	95.5	17.1		143.4	
10039- CAB	CDMA2000 (1xRTT, RC1)	X	4.72	66.7	18.9	4.57	133.7	±0.9 %
<u> </u>		Y	4.85	67.1	19.1		137.7	
<del></del>		Z	4.81	67.4	19.2		141.9	

0081-	CDMA2000 (1xRTT, RC3)	Х	3.91	66.3	18.6	3.97	129.5	±0.7 %
AB		Y	4.00	66.6	18.7		133.7	
		Z	3.99	66.8	18.8		137.5	
0098- CAB	UMTS-FDD (HSUPA, Subtest 2)	X	4.63	66.9	18.7	3.98	141.4	±0.7 %
AD		Y	4.78	67.5	19.0		147.7	
		Z	4.57	66.8	18.6		127.8	
10100- CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	×	6.59	68.2	20.1	5.67	149.2	±1.4 %
<u> </u>		Υ	6.36	67.3	19.6		130.7	
		Z	6.36	67.5	19.6		133.6	
10108- CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.44	67.8	20.0	5.80	146.6	±1.4 %
		Υ	6.23	66.8	19.4		128.8	
		Z	6.24	67.1	19.6		131.4	
10110- CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.08	67.1	19.6	5.75	143.2	±1.4 %
		Υ	6.20	67.4	19.8		148.0	
		Z	5.92	66.6	19.3	0.40	128.5	10.0.0/
10114- CAA	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.32	69.3	21.5	8.10	137.0	±2.2 %
		Υ	10.31	69.1	21.4		143.5	
		Z	10.37	69.5	21.6	0.07	146.1	±2.2 %
10117- CAA	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.35	69.4	21.6	8.07	138.3	<b>∑∠.∠</b> 70
	MARINE MA	Y	10.36	69.3	21.4	1	149.0	
		Z	10.42	69.6	21.6	0.00	134.9	±3.3 %
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	9.95	75.7	26.2	9.28	146.6	13.3 76
		Y	10.37	76.0	26.0		142.5	
10151	1.75 FDD (CO FDMA 500/ BB 40 MHz	Z	9.77	75.4	19.7	5.75	144.9	±1.4 %
10154- CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.12	67.2 67.4	19.7	3.73	148.8	211.1 70
		Z	5.91	66.5	19.3		128.7	
10160- CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.28	66.7	19.4	5.82	125.5	±1.2 %
CAB	QF SI()	Y	6.37	66.8	19.4		129.7	
		Z	6.36	67.1	19.6		132.9	
10169- CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.08	67.6	20.2	5.73	147.0	±1.2 %
		Υ	4.95	66.6	19.6		128.6	
		Z	4.91	66.9	19.8		131.2	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	8.18	77.2	27.2	9.21	123.4	±2.7 %
		Υ	8.37	76.6	26.6		129.5	ļ
		Z	7.97	76.7	26.9		128.7	
10175- CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	5.05	67.4	20.1	5.72	146.2	±1.4 %
		Y	5.10	67.3	20.0		142.8	-
		Z	4.87	66.7	19.6	E 70	129.6	±1.2 %
10181- CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X		67.4	20.0	5.72	145.5	±1.2 7
		Y	5.12	67.4	20.0		129.9	
L		Z	4.87	66.7	19.6	8.09	131.0	±2.2 %
10193- CAA	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)			68.9	21.4	0.09	130.0	-2.2
1		ΙY	9.84	68.5	21.		138.6	

0196- CAA	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.90	68.9	21.4	8.10	130.8	±2.2 %
<i>/</i> ///	BEGN	Y	9.81	68.4	21.0		131.4	
		Z	9.95	69.1	21.5		140.5	
0219- CAA	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.81	68.8	21.3	8.03	130.0	±2.2 %
<i></i>	DI OIO	Y	9.89	68.9	21.3		138.1	
		Z	9.89	69.1	21.5		140.5	
10222- CAA	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	×	10.25	69.2	21.4	8.06	137.1	±2.2 %
		Y	10.30	69.2	21.4		144.4	
		Z	10.38	69.6	21.6		148.4	
10225- CAB	UMTS-FDD (HSPA+)	×	6.90	66.8	19.3	5.97	132.8	±1.4 %
		Υ	7.09	67.3	19.6		142.0	
		Z	7.04	67.4	19.6		143.5	
10237- CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	×	9.61	81.9	29.6	9.21	149.3	±2.7 %
		Υ	8.66	77.6	27.1		133.7	
		Z	8.20	77.5	27.3	0.04	132.2	42 O 0/
10252- CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	9.16	74.5	25.8	9.24	126.3 137.4	±3.0 %
		Y	9.62	75.0	25.8		137.4	
4000	1.TE TOD (00 FDMA 1000) FD 10	Z	9.16	74.8	25.9	9.30	133.7	±3.3 %
10267- CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.97	75.7	26.3	9.30	146.1	±3.3 %
		Y 7	10.38	75.9	26.1		143.8	
10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	9.91 5.86	75.7 66.6	26.3 18.7	4.87	129.9	±0.9 %
ÇAD	1(0.10)	Y	6.01	67.1	19.0		135.7	
		Ž	5.95	67.1	19.0		139.4	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.40	66.7	18.6	3.96	136.4	±0.7 %
		Y	4.55	67.3	19.0		138.3	
	100000000000000000000000000000000000000	Z	4.56	67.6	19.1		144.3	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	3.64	66.9	18.7	3.46	127.4	±0.5 %
		Y	3.77	67.6	19.1		130.2	
		Z	3.72	67.5	19.0		134.4	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	3.58	67.0	18.7	3.39	128.4	±0.5 %
	- MANAGEMENT	Y	3.73	67.7	19.1		132.7	
		Z	3.69	67.8	19.1	5.04	136.1	14.40
10297- AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	6.43	67.7	19.9	5.81	145.5	±1.4 %
		Y	6.49	67.7	19.9		149.5 129.5	
40044	TE EDD (CO EDMA 4000/ DD 45	<u>Z</u>	6.23	67.0	19.6	6.06	129.5	±1.4 %
10311- AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.74	67.3 67.5	19.8	0.00	132.9	-1.4 /
	- ANTHONY	Z	6.81	67.6	19.0		135.8	
10315- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	3.00	69.9	19.4	1.71	133.9	±0.5 %
	mope, cope daty cycle/	Y	3,30	71.5	20.1		141.0	
		Z	3.22	71.4	20.0		142.9	
10316- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	10.17	69.2	21.8	8.36	130.5	±2.5 %
	and the state of t	Y	10.20	69.1	21.6		138.4	
		Z	10.20	69.4	21.8		140.7	

September 24, 2014 ES3DV3-SN:3288

10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	4.75	68.3	18.8	3.76	138.5	±0.7 %
700		Υ	5.00	69.1	19.2		146.7	
		Z	4.92	69.2	19.1		148.5	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.73	68.6	18.9	3.77	136.3	±0.7 %
		Y	4.97	69.4	19.4		143.7	
		Z	4.91	69.6	19.3		146.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.65	68.1	18.5	1.54	135.2	±0.5 %
		Υ	3.05	70.8	19.9		140.7	
		Z	2.87	69.8	19.3		144.8	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	10.00	69.0	21.5	8.23	130.8	±2.2 %
, , , , ,		Y	10.06	68.9	21.4		138.6	
		Z	10.08	69.3	21.7		141.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>&</sup>lt;sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the

ES3DV3- SN:3288 September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

#### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.81	6.81	6.81	0.37	1.70	± 12.0 %
835	41.5	0.90	6.51	6.51	6.51	0.45	1.52	± 12.0 %
1750	40.1	1.37	5.38	5.38	5.38	0.44	1.58	± 12.0 %
1900	40.0	1.40	5.17	5.17	5.17	0.80	1.18	± 12.0 %
2450	39.2	1.80	4.56	4.56	4.56	0.80	1.21	± 12.0 %
2600	39.0	1.96	4.44	4.44	4,44	0.80	1.22	± 12.0 %

 $<sup>^{\</sup>rm C}$  Frequency validity above 300 MHz of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is  $\pm$  10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to  $\pm$  110 MHz.

validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConyE uncertainty for indicated target tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

#### Calibration Parameter Determined in Body Tissue Simulating Media

****										
f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)		
750	55.5	0.96	6.38	6.38	6.38	0.31	1.89	± 12.0 %		
835	55.2	0.97	6.32	6.32	6.32	0.55	1.39	± 12.0 %		
1750	53.4	1.49	5.03	5.03	5.03	0.57	1.44	± 12.0 %		
1900	53.3	1.52	4.82	4.82	4.82	0.51	1.54	± 12.0 %		
2450	52.7	1.95	4.36	4.36	4.36	0.71	1.07	± 12.0 %		
2600	52.5	2.16	4.22	4.22	4.22	0.80	1.07	± 12.0 %		

<sup>&</sup>lt;sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to ± 110 MHz.


At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the CopyE uncertainty for indicated target tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

September 24, 2014 ES3DV3-SN:3288

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

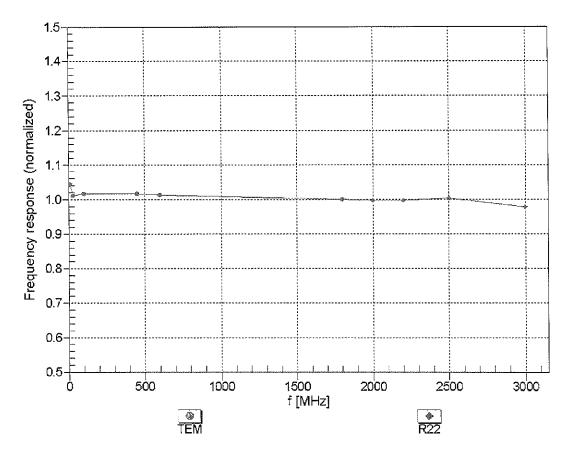



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: ES3-3288\_Sep14/2

ES3DV3- SN:3288 September 24, 2014


## Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

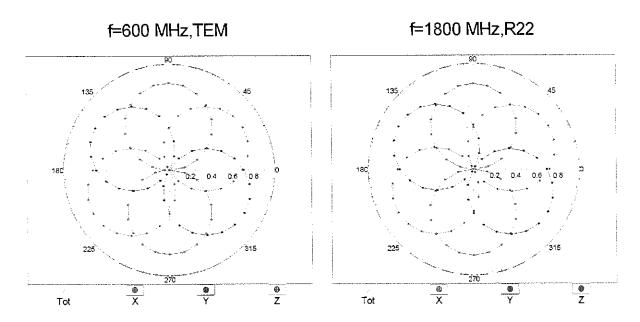


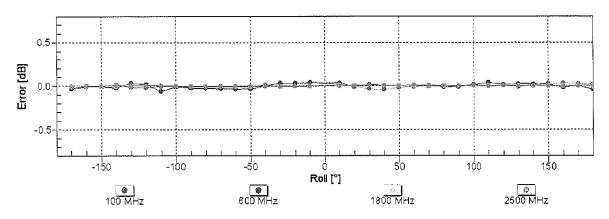

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

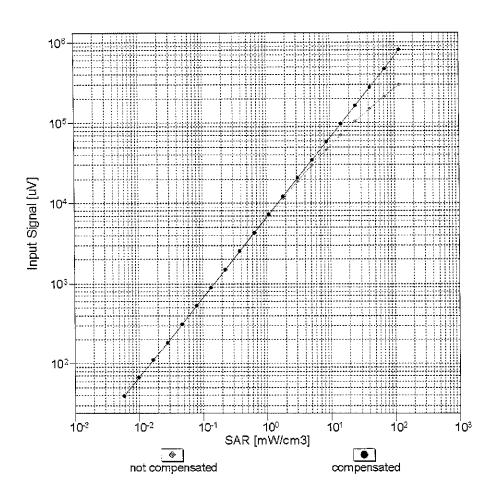

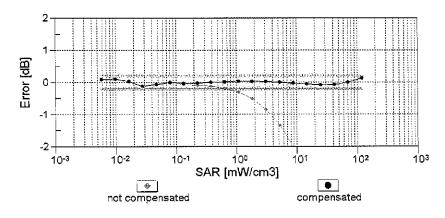



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## **Conversion Factor Assessment**

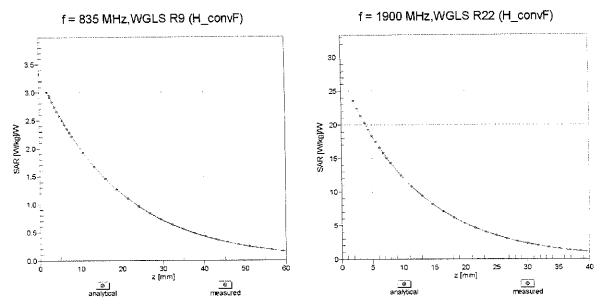

Deviation from Isotropy in Liquid Error  $(\phi, \theta)$ , f = 900 MHz

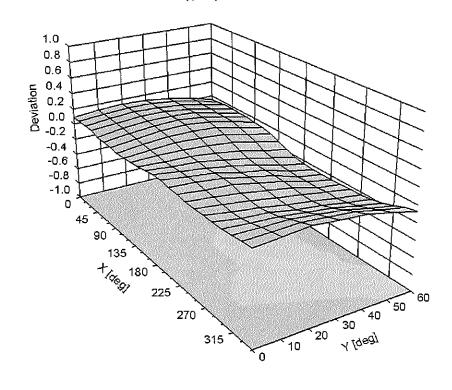



ES3DV3- SN:3288 September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-110
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client

PC Test

Certificate No: EX3-3589\_Jan15

### CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3589

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

CC 1/30/16

Calibration date:

January 22, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22  $\pm$  3) $^{\circ}$ C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator SN: S5129 (30b)		03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Name Function
Calibrated by: Claudio Leubler Laboratory Technician

Approved by:

Certificate No: EX3-3589\_Jan15

Katja Pokovic

Technical Manager

Issued: January 26, 2015

Signature

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL NORMx,y,z tissue simulating liquid sensitivity in free space

ConvF

sensitivity in TSL / NORMx,y,z

DCP CF diode compression point crest factor (1/duty\_cycle) of the RF signal

A, B, C, D Polarization φ modulation dependent linearization parameters

Polarization 9

 $\phi$  rotation around probe axis  $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e.,  $\vartheta = 0$  is normal to probe axis

Connector Angle

information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

January 22, 2015 EX3DV4 - SN:3589

# Probe EX3DV4

SN:3589

Calibrated:

Manufactured: March 30, 2006 January 22, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

**Basic Calibration Parameters** 

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.46	0.41	0.39	± 10.1 %
DCP (mV) <sup>B</sup>	103.1	102.4	104.4	

**Modulation Calibration Parameters** 

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	146.6	±3.3 %
		Υ	0.0	0.0	1.0		143.1	
		Z	0.0	0.0	1.0		170.4	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	16.82	80.0	16.9	10.00	39.1	±0.7 %
0707		Υ	7.79	73.4	15.1		39.0	
		Z	2.50	64.1	12.2		43.2	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	3.02	68.9	18.6	1.87	115.1	±0.7 %
		Υ	3.08	69.3	18.8		114.1	
		Z	3.07	70.1	19.4		134.9	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	10.36	68.2	21.5	9.46	104.8	±2.5 %
		Υ	10.20	68.2	21.6		104.2	
		Z	10.36	68.6	21.7		122.2	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	79.80	100.0	18.7	1.16	134.5	±0.9 %
		Y	98.53	99.4	18.2		133.2	
		Z	0.27	57.7	4.8		113.6	
10062- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	Х	9.91	67.7	20.7	8.68	104.8	±2.2 %
		Y	9.83	67.7	20.9		105.4	
		Z	10.08	68.3	21.1		126.6	
10103- CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	7.73	67.7	21.4	9.29	106.3	±1.9 %
		Y	8.16	69.5	22.6		106.5	
		Z	7.50	67.6	21.5		121.6	1 0 01
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	9.91	67.7	20.3	8.07	112.1	±1.9 %
		Y	9.90	67.8	20,5		111.8	
		Z	10.04	68.2	20.6		134.2	
10151- CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	7.99	69.5	22.6	9.28	146.2	±2.2 %
		Y	8.43	71.4	23.8		148.8	
		Z	7.09	66.7	21.0		116.8	
10172- CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	×	6.34	69.7	22.8	9.21	118.1	±1.7 %
		Y	6.41	70.8	23.7	ļ	115.8	
		Z	6.10	69.1	22.6	1	132.9	
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	×	9.49	67.3	20.2	8.10	101.7	±1.9 %
		Y	9.44	67.3	20.3	<u> </u>	106.1	
		Z	9.71	68.1	20.6		127.1	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	×	9.70	67.5	20.5	8.36	102.8	±2.2 %
		Υ	9.68	67.7	20.7		108.0	
		Z	9.97	68.5	21.0		127.5	

10400- AAB	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	Х	9.73	67.5	20.4	8.37	102.2	±1.9 %
·		Y	9.78	67.8	20.7		109.0	
		Z	10.00	68.4	20.9		129.9	
10401- AAB	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	Х	10.39	67.9	20.7	8.60	108.7	±2.2 %
70.0		Y	10.63	68.6	21.2		117.4	
		Z	10.71	68.9	21.2		138.2	
10402- AAB	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	Х	10.38	67.8	20.5	8.53	107.9	±2.2 %
		Y	10.82	69.0	21.2		119.6	
		Z	10.65	68.6	20.9		137.1	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	3.06	70.1	19.2	1.54	108.9	±0.7 %
		Y	3.37	71.8	19.9		116.8	
		Z	2.93	69.8	19.1		135.5	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	Х	10.23	69.0	21.2	8.23	149.0	±2.2 %
, , , , ,		Y	9.64	67.7	20.7		109.5	
		Z	9.67	67.8	20.5		125.2	
10417- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	9.56	67.3	20.3	8.23	101.7	±1.9 %
		Y	9.64	67.8	20.7		109.6	
		Z	9.79	68.1	20.7		128.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX,Y,Z do not affect the E2-field uncertainty inside TSL (see Pages 6 and 7).

B Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
2450	39.2	1.80	6.48	6.48	6.48	0.39	0.82	± 12.0 %
2600	39.0	1.96	6.30	6.30	6.30	0.38	0.89	± 12.0 %
5200	36.0	4.66	4.66	4.66	4.66	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.43	4.43	4.43	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.23	4.23	4.23	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.03	4.03	4.03	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.19	4.19	4.19	0.40	1.80	± 13.1 %

<sup>&</sup>lt;sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvE uncertainty for indicated target tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Galpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
2450	52.7	1.95	6.60	6.60	6.60	0.80	0.57	± 12.0 %
2600	52.5	2.16	6.36	6.36	6.36	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.01	4.01	4.01	0.45	1.90	± 13.1 %
5300	48.9	5.42	3.79	3.79	3.79	0.45	1.90	± 13.1 %
5500	48.6	5.65	3.65	3.65	3.65	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.42	3.42	3.42	0.50	1.90	± 13.1 %
5800	48.2	6.00	3.79	3.79	3.79	0.50	1.90	± 13.1 %

 $<sup>^{\</sup>rm C}$  Frequency validity above 300 MHz of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is  $\pm$  10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to  $\pm$  110 MHz.


validity can be extended to  $\pm$  110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

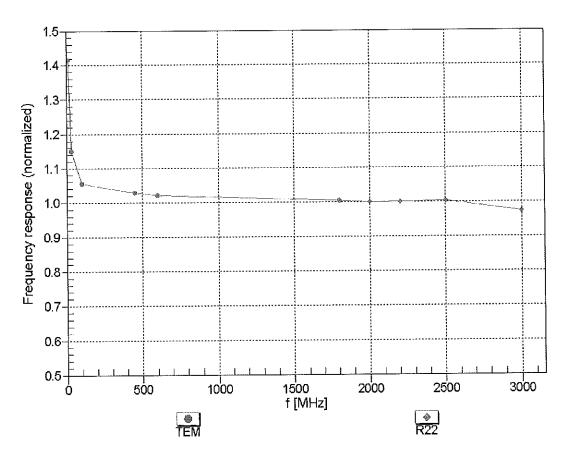



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


## Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

f=600 MHz,TEM

f=1800 MHz,R22







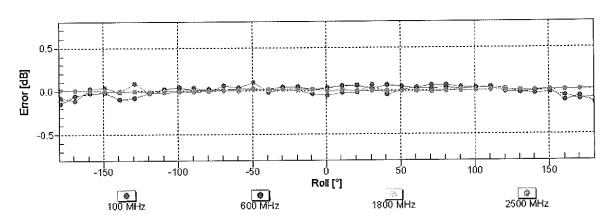

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


## Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

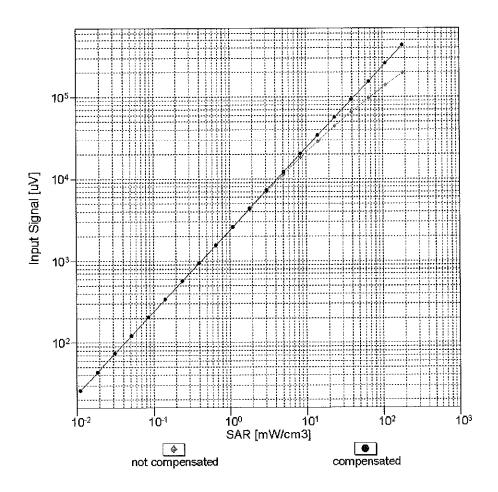

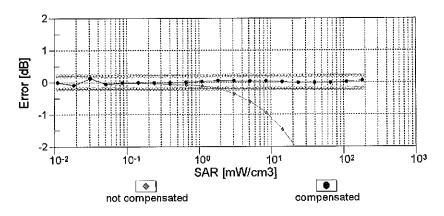



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

### **Conversion Factor Assessment**

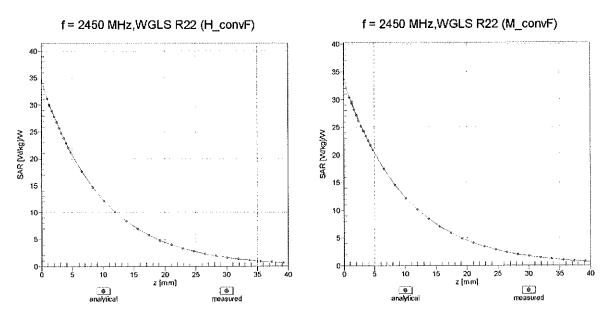

Deviation from Isotropy in Liquid Error ( $\phi$ ,  $\vartheta$ ), f = 900 MHz

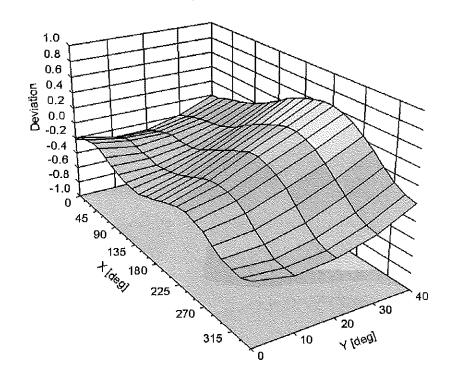



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

#### **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-39.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

#### APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 3) The network analyzer and probe system was configured and calibrated.
- 4) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 5) The complex admittance with respect to the probe aperture was measured
- 6) The complex relative permittivity ε can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_{r}\varepsilon_{0}}{\left[\ln(b/a)\right]^{2}} \int_{a}^{b} \int_{a}^{b} \int_{0}^{\pi} \cos\phi' \frac{\exp\left[-j\omega r(\mu_{0}\varepsilon_{r}\varepsilon_{0})^{1/2}\right]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

Table D-I Composition of the Tissue Equivalent Matter

Frequency (MHz)	750	750	835	835	1750	1750	1900	1900	2450	2450	5200-5800	5200-5800
Tissue	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Ingredients (% by weight)												
Bactericide			0.1	0.1							See page 5	
DGBE					47	31	44.92	29.44		26.7		
HEC	Saa naga		1	1								
NaCl	See page 2-3	See page 2	1.45	0.94	0.4	0.2	0.18	0.39	See page 4	0.1		
Sucrose			57	44.9								
Polysorbate (Tween) 80												20
Water	ļ		40.45	53.06	52.6	68.8	54.9	70.17		73.2		80

FCC ID: ZNFH634	PCTEST:	SAR EVALUATION REPORT	(LG	Reviewed by:  Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
04/20/15 - 05/01/15	Portable Handset			Page 1 of 5

#### 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H<sub>2</sub>O Water, 35 – 58%

Sucrose Sugar, white, refined, 40 – 60% NaCl Sodium Chloride, 0 – 6%

Hydroxyethyl-cellulose Medium Viscosity (CAS# 9004-62-0), <0.3%

Preventol-D7 Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyyl-3(2H)-isothiazolone,

0.1 - 0.7%

Relevant for safety; Refer to the respective Safety Data Sheet\*.

## Figure D-1 Composition of 750 MHz Head and Body Tissue Equivalent Matter

**Note:** 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

#### Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL750V2)
Product No.	SL AAM 075 AA (Charge: 130828-1)
Manufacturer	SPEAG

#### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

#### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

#### Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

#### **Test Condition**


Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.

TSL Temperature 22°C
Test Date 28-Aug-13
Operator IEN

#### Additional Information

TSL Density 1.212 g/cm<sup>3</sup> TSL Heat-capacity 3.006 kJ/(kg\*K)

	Measu	red		Targe	t	Diff.to Target [%]			
f [MHz]	HP-e'	НР-е"	sigma	eps	sigma	Δ-eps	∆-sigma		
600	57.4	24.76	0.83	56.1	0.95	2.3	-13.2		
625	57.1	24.42	0.85	56.0	0.95	2.0	-11.0		
650	56.8	24.09	0.87	55.9	0.96	1.6	-8.9		
675	56.6	23.80	0.89	55.8	0.96	1.3	-6.7		
700	56.3	23.52	0.92	55.7	0.96	1.0	-4.5		
725	56.1	23.27	0.94	55.6	0.96	0.8	-2.4		
750	55.8	23.03	0.96	55.5	0.96	0.5	-0.3		
775	55.6	22.87	0.99	55.4	0.97	0.2	2.1		
800	55.3	22.71	1.01	55.3	0.97	-0.1	4.5		
825	55.1	22.54	1.03	55.2	0.98	-0.3	5.8		
838	54.9	22.45	1.05	55.2	0.98	-0.5	6.4		
850	54.8	22.37	1.06	55.2	0.99	-0.6	7.0		
875	54.6	22.25	1.08	55.1	1.02	-0.9	6.2		
900	54.4	22.13	1.11	55.0	1.05	-1.1	5.5		
925	54.2	22.02	1.13	55.0	1.06	-1.5	6.6		
950	53.9	21.91	1.16	54.9	1.08	-1.8	7.7		
975	53.7	21.84	1.18	54.9	1.09	-2.2	9.0		
1000	53.5	21.77	1.21	54.8	1.10	-2.5	10.3		






Figure D-2 750MHz Body Tissue Equivalent Matter

FCC ID: ZNFH634	PCTEST:	SAR EVALUATION REPORT	(LG	Reviewed by:  Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
04/20/15 - 05/01/15	Portable Handset			Page 2 of 5

#### Measurement Certificate / Material Test

Item Name	Head Tissue Simulating Liquid (HSL750V2)
Product No.	SL AAH 075 AA (Charge: 130826-2)
Manufacturer	SPEAG

#### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

#### Setup Validation

Validation results were within ± 2.5% towards the target values of Methanol.

#### **Target Parameters**

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.


#### **Test Condition**

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	28-Aug-13
Operator	IEN

#### Additional Information

TSL Density 1.284 g/cm<sup>3</sup>
TSL Heat-capacity 2.701 kJ/(kg\*K)

	Measu	ired		Targe	t	Diff.to Target [%]			
f [MHz]	HP-e'	HP-e"	IP-e" sigma		sigma	∆-eps	∆-sigma		
600	44.4	23.32	0.78	42.7	0.88	3.9	-11.7		
625	44.0	23.05	0.80	42.6	0.88	3.4	-9.3		
650	43.6	22.78	0.82	42.5	0.89	2.8	-7.0		
675	43.3	22.54	0.85	42.3	0.89	2.2	-4.7		
700	42.9	22.30	0.87	42.2	0.89	1.6	-2.4		
725	42.6	22.10	0.89	42.1	0.89	1.2	0.0		
750	42.3	42.3 21.90 0.91		41.9 0.89		0.8	2.3		
775	41.9	21.74	0.94	41.8	0.90	0.2	4.6		
800	41.6	21.57	0.96	41.7	0.90	-0.3	7.0		
825	41.3	21.42	0.98	41.6	0.91	-0.8	8.4		
838	41.1	21.35	0.99	41.5	0.91	-1.0	9.1		
850	41.0	21.27	1.01	41.5	0.92	-1.3	9.8		
875	40.7	21.14	1.03	41.5	0.94	-2.0	9.1		
900	40.4	21.00	1.05	41.5	0.97	-2.6	8.4		
925	40.1	20.89	1.07	41.5	0.98	-3.2	9.4		
950	39.9	20.78	1.10	41.4	0.99	-3.8	10.4		
975	39.6	20.69	1.12	41.4	1.00	-4.4	11.7		
1000	39.3	20.60	1.15	41.3	1.01	-4.9	12.9		






Figure D-3
750MHz Head Tissue Equivalent Matter

FCC ID: ZNFH634	PCTEST*	SAR EVALUATION REPORT	(LG	Reviewed by:  Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
04/20/15 - 05/01/15	Portable Handset			Page 3 of 5

#### 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H2O Water, 52 – 75%

C8H18O3 Diethylene glycol monobutyl ether (DGBE), 25 – 48%

(CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8)

Relevant for safety; Refer to the respective Safety Data Sheet\*.

NaCl Sodium Chloride, <1.0%

#### Figure D-4

#### Composition of 2.4 GHz Head Tissue Equivalent Matter

**Note:** 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

#### Measurement Certificate / Material Test Head Tissue Simulating Liquid (HSL2450V2) SL AAH 245 BA (Charge: 130926-1) Manufacturer SPEAG Measurement Method TSL dielectric parameters measured using calibrated OCP probe Validation results were within ± 2.5% towards the target values of Methanol Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards **Test Condition** Environment temperatur (22 ± 3)°C and humidity < 70%. Ambient TSL Temperature 23°C 2-Oct-13 Test Date Operator CL Additional Information 0.988 g/cm TSL Density TSL Heat-capacity 3.680 kJ/(kg\*K) Diff.to Target [%] Measured Target f [MHz] HP-e' HP-e" sigma eps sigma Δ-eps Δ-sigma 7.5 5.0 1925 40.3 11.98 1.28 40.0 1.40 0.6 -8.3 40.0 -6.4 1950 40.2 12.08 1.31 1.40 0.4 0.0 12.15 1.34 40.0 1.40 0.2 -4.6 Dev -2.8 2000 40.0 12.23 1.36 40.0 1.40 -0.1 1.42 -0.2 -2.3 40.0 2025 39.9 12.34 1.39 -10.0 39.9 -0.3 -1.7 39.8 1900 2000 2100 2200 2300 2400 2500 2600 2700 2075 39.7 12.54 1.45 39.9 1.47 -0.4 -1.3 Frequency MHz -0.5 -0.8 12.64 1.48 39.8 1.49 2100 39.6 -0.7 -0.7 2125 39.5 12.69 1.50 39.8 2150 39.4 12.75 1.52 39.7 1.53 -0.8 -0.6 -0.1 10.0 39.7 1.56 -1.0 2175 39.3 12.84 1.55 7.5 5.0 1.58 2200 39.2 2225 39.1 13.00 1.61 39.6 1.60 -1.3 0.6 0.8 1.62 -1.4 2250 39.0 13.07 1.64 39.6 0.0 1.66 13.15 39.5 38.9 2275 38.8 13.22 1.69 39.5 1.67 -1.7 1.5 Dev. 2325 38.7 13.32 1.72 39.4 1.69 -1.9 2.0 13.42 1.75 2.5 38.6 2350 1900 2000 2100 2200 2300 2400 2500 2600 2700 38.5 13.49 1.78 39.3 1.73 -2.1 2.8 Frequency MHz 3.1 -2.32400 38.4 13.56 1.81 39.3 1.76 1.84 13.63 38.3 2450 38.2 13.71 1.87 39.2 1.80 -2.6 3.8 2475 38.1 13.79 1.90 39.2 1.83 13.87 1.93 39.1 1.85 -3.0 4.0 2525 37.9 13.96 1.96 39.1 1.88 -3.1 4.2 -3.3 2550 37.8 14.05 1.99 39.1 1.91 2.02 2600 37.5 14.17 2.05 39.0 1.96 -3.8 4.4 1.99 2625 37.4 14.23 2.08 39.0 37.3 14.30 2.11 38.9 2.02 -4.2 4.5 2675 37.2 14.37 2.14 38.9 2.05 -4.4

Figure D-5
2.4 GHz Head Tissue Equivalent Matter

FCC ID: ZNFH634	@ PCTEST	SAR EVALUATION REPORT	( LG	Reviewed by:
	SHOINILLING LABORATORY, INC.			Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
04/20/15 - 05/01/15	Portable Handset			Page 4 of 5

#### 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

 $\begin{array}{lll} \text{Water} & 50-65\% \\ \text{Mineral oil} & 10-30\% \\ \text{Emulsifiers} & 8-25\% \\ \text{Sodium salt} & 0-1.5\% \\ \end{array}$ 

#### Figure D-6

#### Composition of 5 GHz Head Tissue Equivalent Matter

**Note:** 5GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

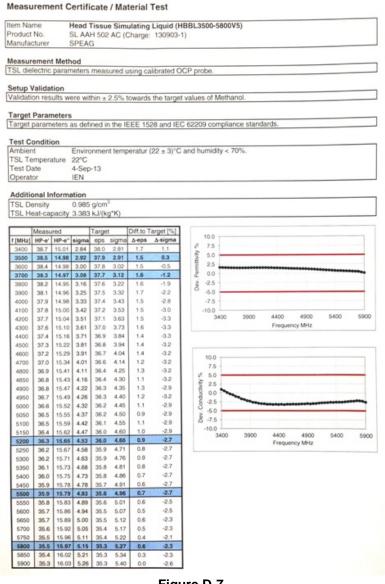


Figure D-7
5GHz Head Tissue Equivalent Matter

FCC ID: ZNFH634	PCTEST*	SAR EVALUATION REPORT	<b>(</b> LG	Reviewed by: Quality Manager
Test Dates:	DUT Type:			APPENDIX D:
04/20/15 - 05/01/15	Portable Handset			Page 5 of 5

#### APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 v01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-I
1g SAR System Validation Summary

	ig oak cystem validation cultimary													
							COND.	PERM. CW VALIDATION				MOD. VALIDATION	1	
SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE C	PROBE CAL. POINT		(Er)	SENSITIVITY	PROBEILINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
D	750	4/28/2015	3209	ES3DV3	750	Head	0.904	40.418	PASS	PASS	PASS	N/A	N/A	N/A
J	835	9/30/2014	3022	ES3DV2	835	Head	0.911	41.350	PASS	PASS	PASS	GMSK	PASS	N/A
С	1750	11/12/2014	3333	ES3DV3	1750	Head	1.332	39.430	PASS	PASS	PASS	N/A	N/A	N/A
G	1900	4/8/2015	3318	ES3DV3	1900	Head	1.447	40.150	PASS	PASS	PASS	GMSK	PASS	N/A
G	2450	4/16/2015	3318	ES3DV3	2450	Head	1.842	40.370	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
A	5300	3/2/2015	3914	EX3DV4	5300	Head	4.931	36.290	PASS	PASS	PASS	OFDM	N/A	PASS
A	5500	3/2/2015	3914	EX3DV4	5500	Head	5.144	35.860	PASS	PASS	PASS	OFDM	N/A	PASS
A	5800	3/2/2015	3914	EX3DV4	5800	Head	5.110	35.100	PASS	PASS	PASS	OFDM	N/A	PASS
В	750	1/3/2015	3334	ES3DV3	750	Body	0.987	56.400	PASS	PASS	PASS	N/A	N/A	N/A
С	835	11/11/2014	3333	ES3DV3	835	Body	0.948	53.050	PASS	PASS	PASS	GMSK	PASS	N/A
J	1750	9/26/2014	3022	ES3DV2	1750	Body	1.471	51.490	PASS	PASS	PASS	N/A	N/A	N/A
К	1900	10/15/2014	3288	ES3DV3	1900	Body	1.532	50.910	PASS	PASS	PASS	GMSK	PASS	N/A
В	2450	1/5/2015	3334	ES3DV3	2450	Body	2.044	50.900	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
E	5300	4/20/2015	3589	EX3DV4	5300	Body	5.460	48.600	PASS	PASS	PASS	OFDM	N/A	PASS
E	5500	4/20/2015	3589	EX3DV4	5500	Body	5.724	48.270	PASS	PASS	PASS	OFDM	N/A	PASS
E	5800	4/20/2015	3589	EX3DV4	5800	Body	6.150	47.800	PASS	PASS	PASS	OFDM	N/A	PASS

Table E-II
10g SAR System Validation Summary

										PERM.		CW VALIDATIO	V		MOD. VALIDATIO	N
SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE C	AL. POINT	(σ)	(Er)	SENSITIVITY	PROBEILINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR		
E	5300	4/20/2015	3589	EX3DV4	5300	Body	5.460	48.600	PASS	PASS	PASS	OFDM	N/A	PASS		
F	5500	4/20/2015	3589	FX3DV4	5500	Body	5.724	48.270	PASS	PASS	PASS	OFDM	N/A	PASS		

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

FCC ID: ZNFH634	PCTEST	SAR EVALUATION REPORT	(LG	Reviewed by:  Quality Manager
Test Dates:	DUT Type:			APPENDIX E:
04/20/15 - 05/01/15	Portable Handset			Page 1 of 1