



SAR EVALUATION REPORT

CLASS II PERMISSIVE CHANGE

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For

GSM/WCDMA/LTE PHONE + BLUETOOTH, DTS/UNII a/b/g/n/ac & NFC

FCC ID: ZNFH791

Model Name: LG-H791, LGH791, H791, LG-H791F, LGH791F, H791F

Report Number: 15I21552-S1V1

Issue Date: 9/14/2015

Prepared for

LG ELECTRONICS MOBILECOMM USA, INC.

1000 SYLVAN AVENUE

ENGLEWOOD CLIFFS, NEW JERSEY 07632, UNITED STATES of AMERICA

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	9/14/2015	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	13
6.3.	Nominal and Maximum Output Power.....	14
6.4.	General LTE SAR Test and Reporting Considerations.....	16
6.5.	LTE (TDD) Considerations.....	18
7.	RF Exposure Conditions (Test Configurations)	19
8.	Dielectric Property Measurements & System Check	20
8.1.	Dielectric Property Measurements	20
8.2.	System Check.....	24
9.	Conducted Output Power Measurements.....	28
9.1.	GSM	28
9.2.	W-CDMA	30
9.3.	LTE.....	36
9.4.	Wi-Fi 2.4GHz (DTS Band)	48
9.5.	Wi-Fi 5GHz (U-NII Bands).....	49
9.6.	Bluetooth	50
10.	Measured and Reported (Scaled) SAR Results	51
10.1.	GSM850.....	53
10.2.	GSM1900.....	53
10.4.	W-CDMA Band II.....	54
10.5.	W-CDMA Band IV	54
10.6.	W-CDMA Band V	54
10.7.	LTE Band 2 (20MHz Bandwidth)	55
10.8.	LTE Band 4 (20MHz Bandwidth)	55

10.9.	LTE Band 5 (10MHz Bandwidth)	55
10.10.	LTE Band 7 (20MHz Bandwidth)	56
10.11.	LTE Band 17 (10MHz Bandwidth)	56
10.12.	LTE Band 26 (15MHz Bandwidth)	57
10.13.	LTE Band 41 (20MHz Bandwidth)	57
10.14.	Wi-Fi (DTS Band).....	58
10.15.	Wi-Fi (U-NII Band).....	58
10.16.	Bluetooth.....	59
11.	SAR Measurement Variability.....	60
12.	Simultaneous Transmission SAR Analysis.....	61
12.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	62
12.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	62
12.3.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	63
12.4.	Sum of the SAR for WCDMA Band IV & Wi-Fi & BT.....	64
12.5.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT.....	64
12.6.	Sum of the SAR for LTE Band 2 & Wi-Fi & BT	65
12.7.	Sum of the SAR for LTE Band 4 & Wi-Fi & BT	66
12.8.	Sum of the SAR for LTE Band 5 & Wi-Fi & BT	66
12.9.	Sum of the SAR for LTE Band 7 & Wi-Fi & BT	66
12.10.	Sum of the SAR for LTE Band 17 & Wi-Fi & BT	67
12.11.	Sum of the SAR for LTE Band 26 & Wi-Fi & BT	67
12.12.	Sum of the SAR for LTE Band 41 & Wi-Fi & BT	67
Appendixes		77
	15I21552-S1V1 SAR_App A Photos & Ant. Locations.....	77
	15I21552-S1V1 SAR_App B System Check Plots.....	77
	15I21552-S1V1 SAR_App C Highest Test Plots.....	77
	15I21552-S1V1 SAR_App D Tissue Ingredients.....	77
	15I21552-S1V1 SAR_App E1 Probe Cal. Certs.....	77
	15I21552-S1V1 SAR_App E2 Probe Cal. Certs.....	77
	15I21552-S1V1 SAR_App F1 Dipole Cal. Certs	77
	15I21552-S1V1 SAR_App F2 Dipole Cal. Certs	77

1. Attestation of Test Results

Applicant Name	LG ELECTRONICS MOBILECOMM USA, INC.			
FCC ID	ZNFH791			
Model Name	LG-H791, LGH791, H791, LG-H791F, LGH791F, H791F			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average (1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS (BT)
Head	0.904	0.919	1.179	0.108
Body-worn	0.990	0.250	0.488	0.031
Hotspot/Wi-Fi Direct	0.996		0.417	N/A
Simultaneous Tx	1.557	1.428	1.557	
Date Tested	8/18/2015 to 8/28/2015			
Test Results	Pass			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:		Prepared By:		
				
Devin Chang Senior Engineer UL Verification Services Inc.		Coltyce Sanders Laboratory Engineer UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02
- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 648474 D03 Handset Wireless Chargers Battery Covers v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r01
- 941225 D06 Hotspot Mode v02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by [NVLAP](#), Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

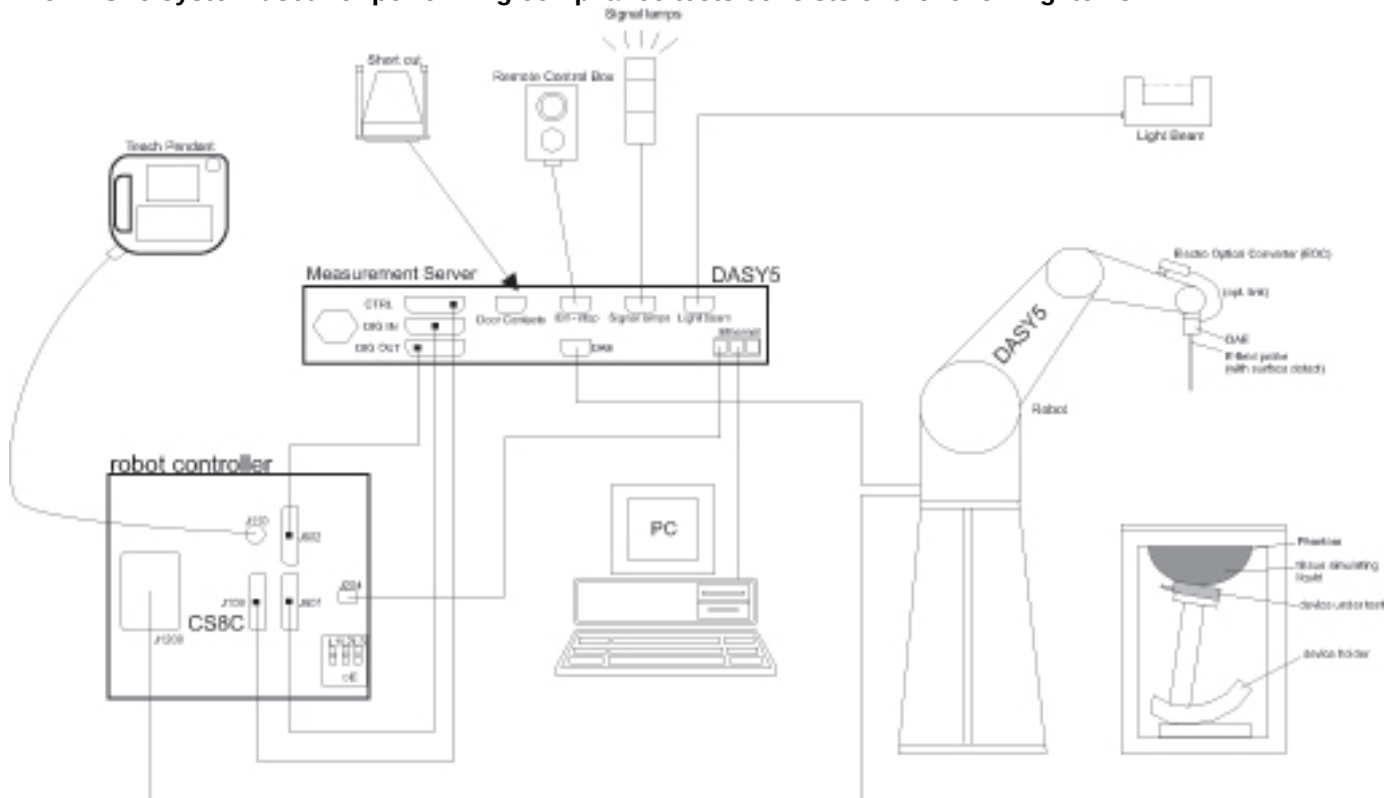

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	7/28/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	140493798	8/4/2016
Network Analyzer	Agilent	E753ES	MY40000980	4/17/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/11/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529162	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/27/2016
Power Meter	Agilent	N1912A	MY55196007	7/2/2017
Power Sensor	Agilent	N1921A	MY53260010	7/8/2016
Power Sensor	Agilent	N1921A	MY52260009	12/15/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT15-4	1319A02780	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	8/29/2015
Power Meter	Agilent	N1912A	MY50001018	9/3/2015
Power Sensor	Agilent	E9323A	MY5307009	6/5/2016
Power Sensor	Agilent	N1921A	MY52200012	9/26/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
Synthesized Signal Generator	HP	8665B	3744A01155	3/18/2016
Power Meter	HP	437B	3125U16345	6/15/2016
Power Meter	HP	437B	3125U12345	7/31/2016
Power Sensor	HP	8481A	2349A36506	9/29/2016
Power Sensor	HP	8481A	2702A76223	9/17/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK PRECISION	1611	215-02292	N/A

System Check (continued)

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	7356	4/22/2016
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3990	3/18/2016
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3749	1/26/2016
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3989	3/17/2016
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	3773	4/22/2016
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3929	4/22/2016
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	7335	3/13/2016
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1259	1/14/2016
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1434	4/16/2016
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1239	4/16/2016
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1359	2/18/2016
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1472	3/5/2016
System Validation Dipole	SPEAG	D750V3	1071	11/13/2015
System Validation Dipole	SPEAG	D835V2	4d117	5/18/2016
System Validation Dipole	SPEAG	D1750V2	1050	4/15/2016
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2450V2	706	5/11/2016
System Validation Dipole	SPEAG	D2600V2	1006	9/10/2015
System Validation Dipole	SPEAG	D5GHzV2	1138	9/18/2015
System Validation Dipole	SPEAG	D5GHzV2	1168	12/4/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/20/2016
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/19/2016
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/5/2016
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/5/2016
Thermometer (SAR Lab 5)	EXTECH	445703	CCS-239	6/5/2016
Thermometer (SAR Lab F)	EXTECH	445703	CCS-209	3/16/2016
Thermometer (SAR Lab H)	EXTECH	445703	CCS-209	3/16/2016

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY55196007	7/2/2016
Power Sensor	Agilent	N1921A	MY53020038	3/6/2016
Power Sensor	Agilent	N1921A	MY53260010	7/8/2016
Base Station Simulator	R & S	CMW500	132910	10/16/2015
Base Station Simulator	R & S	CBT	100900	6/30/2016
Base Station Simulator	Agilent	8960	MY53211024	9/19/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 146.1 mm x 72.2 mm Overall Diagonal: 150.5 mm Display Diagonal: 112 mm		
Back Cover	☒ The rechargeable battery is not user accessible.		
Battery Options	☒ The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5.8 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5.2 and 5.8 GHz)		
Test sample information	S/N	IMEI	Notes
	1ZBR9	353627070000503	2G/3G SAR #1
	1ZBRA	353627070000487	2G/3G SAR #2
	1ZBRM	353627070000495	LTE SAR #1
	1ZBRB	353627070000479	LTE SAR #2
	1ZBRJ	353627070000404	Wi-Fi SAR #1
	1ZBRH	353627070000412	Wi-Fi SAR #2
	1ZBRT	353627070000065	Wi-Fi conducted #1
	1ZBRU	353627070000073	Wi-Fi conducted #2
Hardware Version	LG-H791, LGH791, H791, LG-H791F, LGH791F, H791F		
Software Version	N/A		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☒ Class 12 - 4 Up, 4 Down ☐ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	☐ Class A = Can be connected to GPRS service and GSM service (voice, SMS), using both at the same time. Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☐ No ☒ Class B = GPRS connection interrupted during a GSM call, automatically resumed at end of call. ☐ Class C = manual GSM / GPRS mode switching.			
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 17 FDD Band 26 TDD Band 41	QPSK 16QAM ☐ Rel. 10 Does not support Carrier Aggregation (CA) ☒ Rel. 10 Carrier Aggregation (1 Uplink and 2 Downlinks) ☐ Rel. 11 Carrier Aggregation (2 Uplink and 2 Downlinks)		100% (FDD) 63.3% (TDD)
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ac (VHT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☐ Yes ☒ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 4.2 LE		77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		Max. RF Output Power (dBm)		
RF Air interface	Mode	Target	Max. tune-up tolerance limit	
			Burst	Frame
GSM850	Voice (1 slot)	32.7	33.2	24.2
	GPRS 1 slot	32.7	33.2	24.2
	GPRS 2 slots	30.7	31.2	25.2
	GPRS 3 slots	28.7	29.2	24.9
	GPRS 4 slots	27.7	28.2	25.2
	EGPRS 1 slot	26.7	27.2	18.2
	EGPRS 2 slots	25.7	26.2	20.2
	EGPRS 3 slots	24.7	25.2	20.9
	EGPRS 4 slots	23.7	24.2	21.2
GSM1900	Voice (1 slot)	29.2	29.7	20.7
	GPRS 1 slot	29.2	29.7	20.7
	GPRS 2 slots	27.2	27.7	21.7
	GPRS 3 slots	25.2	25.7	21.4
	GPRS 4 slots	24.2	24.7	21.7
	EGPRS 1 slot	25.2	25.7	16.7
	EGPRS 2 slots	24.2	24.7	18.7
	EGPRS 3 slots	23.2	23.7	19.4
	EGPRS 4 slots	22.2	22.7	19.7
Upper limit (dB): -1.5 ~ 0.5		Max. RF Output Power (dBm)		
RF Air interface	Mode	Target	Max. tune-up tolerance limit	
W-CDMA Band V	R99	24.2	24.7	
	HSDPA	24.2	24.7	
	HSUPA	24.2	24.7	
	DC-HSDPA	24.2	24.7	
W-CDMA Band IV	R99	23.4	23.9	
	HSDPA	23.4	23.9	
	HSUPA	23.4	23.9	
	DC-HSDPA	23.4	23.9	
W-CDMA Band II	R99	23.4	23.9	
	HSDPA	23.4	23.9	
	HSUPA	23.4	23.9	
	DC-HSDPA	23.4	23.9	
LTE Band 2	QPSK	22.9	23.4	
	16QAM	21.9	22.4	
LTE Band 4	QPSK	22.9	23.4	
	16QAM	21.9	22.4	
LTE Band 5	QPSK	23.7	24.2	
	16QAM	22.7	23.2	
LTE Band 7	QPSK	23.2	23.7	
	16QAM	22.2	22.7	
LTE Band 17	QPSK	23.7	24.2	
	16QAM	22.7	23.2	
LTE Band 26	QPSK	23.7	24.2	
	16QAM	22.7	23.2	
LTE Band 41	QPSK	22.7	23.2	
	16QAM	21.7	22.2	

*LTE Carrier Aggregation shares identical target power and tune-up tolerance as noted above

Upper limit (dB):		1.0	Max. RF Output Power (dBm)	
RF Air interface	Mode	Ch. #	Target (Core0 and Core1)	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	1 ~ 11	17.0	18.0
		1	14.5	15.5
	802.11g	2 ~ 10	15.5	16.5
		11	14.5	15.5
	802.11n	1	14.5	15.5
	HT20	2 ~ 10	15.5	16.5
		11	14.5	15.5
	802.11ac	1	14.5	15.5
	VHT20	2 ~ 10	15.5	16.5
		11	14.5	15.5
WiFi 5 GHz	802.11a		14.0	15.0
	802.11n HT20		13.5	14.5
	802.11n HT40		11.5	12.5
	802.11ac VHT20		13.5	14.5
	802.11ac VHT40		11.5	12.5
	802.11ac VHT80		10.5	11.5
Bluetooth			8.9	9.9
Bluetooth LE			1.0	2.0

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 17	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High				23825/ 713.5		
	Band 26	Frequency range: 814 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low		26765/ 821.5	26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7
	Mid		26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5
	High		26965/ 841.5	26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 41	Frequency range: 2496 - 2690 MHz																																										
		Channel Bandwidth																																										
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																					
	Low	39750/ 2506.0	39725/ 2503.5	39700/ 2501	39675/ 2498.5																																							
	Low-Mid	40185/ 2549.5	40173/ 2548.3	40160/ 2547.0	40148/ 2545.8																																							
	Mid	40620/ 2593.0	40620/ 2593.0	40620/ 2593.0	40620/ 2593.0																																							
	Mid-High	41055/ 2636.5	41068/ 2547.8	41080/ 2639.0	41093/ 2640.3																																							
	High	41490/ 2680.0	41515/ 2682.5	41540/ 2685.0	41565/ 2687.5																																							
Carrier Aggregation Combinations (For supported channels, please refer to the tables above)	Primary Channel Bandwidth (MHz)			Secondary Channel Bandwidth (MHz)																																								
	Band 5	10, 5, 3, 1.4		Band 7	20, 15, 10																																							
	Band 7	20, 15, 10		Band 5	10, 5, 3, 1.4																																							
	Band 7	20, 15		Band 7	20, 15																																							
	Band 41	20, 15, 10		Band 41	20, 15, 10																																							
LTE transmitter and antenna implementation	LTE bands 2/4/41 have one (1) Tx/Rx antenna LTE bands 5/7/17/26 have one (1) Tx/Rx antenna LTE bands 2/4/5/17/26 have one (1) Rx antenna LTE bands 7/41 have one (1) Rx antenna Refer to Appendix A.																																											
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing						Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)							MPR (dB)																																				
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																						
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																					
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																					
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																					
Power reduction	No																																											
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																											

6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN ①	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	> 25 mm	No	1
WWAN ②	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN ③ & ④	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
2. The Body-worn minimum separation distance is 15 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR Lab 1**

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
8/21/2015	Body 2450	e'	51.6900	Relative Permittivity (ϵ_r):	51.69	52.70	-1.92	5
		e"	14.8500	Conductivity (σ):	2.02	1.95	3.74	5
	Body 2410	e'	51.8200	Relative Permittivity (ϵ_r):	51.82	52.76	-1.78	5
		e"	14.7500	Conductivity (σ):	1.98	1.91	3.62	5
	Body 2475	e'	51.6300	Relative Permittivity (ϵ_r):	51.63	52.67	-1.97	5
		e"	14.8700	Conductivity (σ):	2.05	1.99	3.08	5
8/21/2015	Head 2450	e'	38.7800	Relative Permittivity (ϵ_r):	38.78	39.20	-1.07	5
		e"	13.6000	Conductivity (σ):	1.85	1.80	2.93	5
	Head 2410	e'	38.9600	Relative Permittivity (ϵ_r):	38.96	39.28	-0.81	5
		e"	13.5100	Conductivity (σ):	1.81	1.76	2.84	5
	Head 2475	e'	38.7500	Relative Permittivity (ϵ_r):	38.75	39.17	-1.07	5
		e"	13.6300	Conductivity (σ):	1.88	1.83	2.67	5
8/24/2015	Body 2600	e'	50.3800	Relative Permittivity (ϵ_r):	50.38	52.51	-4.06	5
		e"	15.1000	Conductivity (σ):	2.18	2.16	1.03	5
	Body 2500	e'	50.7000	Relative Permittivity (ϵ_r):	50.70	52.64	-3.68	5
		e"	14.8200	Conductivity (σ):	2.06	2.02	1.97	5
	Body 2700	e'	50.0900	Relative Permittivity (ϵ_r):	50.09	52.38	-4.38	5
		e"	15.2800	Conductivity (σ):	2.29	2.30	-0.32	5
8/24/2015	Head 2600	e'	37.3900	Relative Permittivity (ϵ_r):	37.39	39.01	-4.15	5
		e"	13.7100	Conductivity (σ):	1.98	1.96	1.01	5
	Head 2500	e'	37.7500	Relative Permittivity (ϵ_r):	37.75	39.14	-3.54	5
		e"	13.4200	Conductivity (σ):	1.87	1.85	0.62	5
	Head 2700	e'	37.0400	Relative Permittivity (ϵ_r):	37.04	38.88	-4.74	5
		e"	13.8600	Conductivity (σ):	2.08	2.07	0.51	5

SAR Lab 2

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/18/2015	Head 1750	e'	38.7900	Relative Permittivity (ϵ_r):	38.79	40.08	-3.23	5
		e"	13.9500	Conductivity (σ):	1.36	1.37	-0.84	5
	Head 1710	e'	38.9100	Relative Permittivity (ϵ_r):	38.91	40.15	-3.08	5
		e"	13.9000	Conductivity (σ):	1.32	1.35	-1.84	5
	Head 1755	e'	38.7300	Relative Permittivity (ϵ_r):	38.73	40.08	-3.36	5
		e"	14.0100	Conductivity (σ):	1.37	1.37	-0.34	5
8/18/2015	Body 1750	e'	51.4300	Relative Permittivity (ϵ_r):	51.43	53.44	-3.76	5
		e"	15.0300	Conductivity (σ):	1.46	1.49	-1.59	5
	Body 1710	e'	51.5300	Relative Permittivity (ϵ_r):	51.53	53.54	-3.76	5
		e"	14.9200	Conductivity (σ):	1.42	1.46	-2.94	5
	Body 1755	e'	51.4200	Relative Permittivity (ϵ_r):	51.42	53.43	-3.76	5
		e"	15.1000	Conductivity (σ):	1.47	1.49	-1.06	5
8/20/2015	Body 750	e'	56.2100	Relative Permittivity (ϵ_r):	56.21	55.55	1.20	5
		e"	24.1700	Conductivity (σ):	1.01	0.96	4.66	5
	Body 700	e'	56.6400	Relative Permittivity (ϵ_r):	56.64	55.74	1.62	5
		e"	24.6600	Conductivity (σ):	0.96	0.96	0.06	5
	Body 720	e'	56.4400	Relative Permittivity (ϵ_r):	56.44	55.66	1.40	5
		e"	24.4300	Conductivity (σ):	0.98	0.96	1.80	5
8/20/2015	Head 750	e'	40.3400	Relative Permittivity (ϵ_r):	40.34	41.96	-3.86	5
		e"	21.4100	Conductivity (σ):	0.89	0.89	-0.03	5
	Head 700	e'	40.8800	Relative Permittivity (ϵ_r):	40.88	42.22	-3.17	5
		e"	21.8200	Conductivity (σ):	0.85	0.89	-4.49	5
	Head 720	e'	40.6800	Relative Permittivity (ϵ_r):	40.68	42.12	-3.41	5
		e"	21.6700	Conductivity (σ):	0.87	0.89	-2.61	5

SAR Lab 3

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/18/2015	Head 1900	e'	38.4900	Relative Permittivity (ϵ_r):	38.49	40.00	-3.78	5
		e"	13.2400	Conductivity (σ):	1.40	1.40	-0.09	5
	Head 1850	e'	38.6300	Relative Permittivity (ϵ_r):	38.63	40.00	-3.42	5
		e"	13.1400	Conductivity (σ):	1.35	1.40	-3.45	5
	Head 1910	e'	38.3900	Relative Permittivity (ϵ_r):	38.39	40.00	-4.03	5
		e"	13.2700	Conductivity (σ):	1.41	1.40	0.66	5
8/18/2015	Body 1900	e'	50.9100	Relative Permittivity (ϵ_r):	50.91	53.30	-4.48	5
		e"	14.2200	Conductivity (σ):	1.50	1.52	-1.17	5
	Body 1850	e'	51.0100	Relative Permittivity (ϵ_r):	51.01	53.30	-4.30	5
		e"	14.0800	Conductivity (σ):	1.45	1.52	-4.71	5
	Body 1910	e'	50.8200	Relative Permittivity (ϵ_r):	50.82	53.30	-4.65	5
		e"	14.2200	Conductivity (σ):	1.51	1.52	-0.65	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/21/2015	Body 5180	e'	48.1900	Relative Permittivity (ϵ_r):	48.19	49.05	-1.75	5
		e"	18.5600	Conductivity (σ):	5.35	5.27	1.41	5
	Body 5200	e'	48.0700	Relative Permittivity (ϵ_r):	48.07	49.02	-1.94	5
		e"	18.5700	Conductivity (σ):	5.37	5.29	1.41	5
	Body 5600	e'	47.7900	Relative Permittivity (ϵ_r):	47.79	48.48	-1.42	5
		e"	18.9800	Conductivity (σ):	5.91	5.76	2.59	5
	Body 5800	e'	47.0600	Relative Permittivity (ϵ_r):	47.06	48.20	-2.37	5
		e"	19.0800	Conductivity (σ):	6.15	6.00	2.55	5
	Body 5825	e'	47.1600	Relative Permittivity (ϵ_r):	47.16	48.20	-2.16	5
		e"	19.1600	Conductivity (σ):	6.21	6.00	3.43	5

SAR Lab 5

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/18/2015	Head 835	e'	39.9000	Relative Permittivity (ϵ_r):	39.90	41.50	-3.86	5
		e''	19.0800	Conductivity (σ):	0.89	0.90	-1.57	5
	Head 820	e'	40.1300	Relative Permittivity (ϵ_r):	40.13	41.60	-3.54	5
		e''	19.1200	Conductivity (σ):	0.87	0.90	-2.97	5
	Head 850	e'	39.7200	Relative Permittivity (ϵ_r):	39.72	41.50	-4.29	5
		e''	19.0000	Conductivity (σ):	0.90	0.92	-1.86	5
8/18/2015	Body 835	e'	53.3700	Relative Permittivity (ϵ_r):	53.37	55.20	-3.32	5
		e''	21.6800	Conductivity (σ):	1.01	0.97	3.77	5
	Body 820	e'	53.4600	Relative Permittivity (ϵ_r):	53.46	55.28	-3.29	5
		e''	21.7400	Conductivity (σ):	0.99	0.97	2.35	5
	Body 850	e'	53.2400	Relative Permittivity (ϵ_r):	53.24	55.16	-3.48	5
		e''	21.6300	Conductivity (σ):	1.02	0.99	3.56	5

SAR Lab F

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/27/2015	Head 5180	e'	36.6800	Relative Permittivity (ϵ_r):	36.68	36.01	1.85	5
		e''	15.5800	Conductivity (σ):	4.49	4.63	-3.09	5
	Head 5200	e'	36.6300	Relative Permittivity (ϵ_r):	36.63	35.99	1.78	5
		e''	15.5900	Conductivity (σ):	4.51	4.65	-3.08	5
	Head 5600	e'	36.1100	Relative Permittivity (ϵ_r):	36.11	35.53	1.62	5
		e''	15.8100	Conductivity (σ):	4.92	5.06	-2.71	5
	Head 5800	e'	35.8600	Relative Permittivity (ϵ_r):	35.86	35.30	1.59	5
		e''	15.9100	Conductivity (σ):	5.13	5.27	-2.64	5
	Head 5825	e'	35.8300	Relative Permittivity (ϵ_r):	35.83	35.30	1.50	5
		e''	15.8900	Conductivity (σ):	5.15	5.27	-2.34	5

SAR Lab H

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
8/27/2015	Head 5180	e'	34.9500	Relative Permittivity (ϵ_r):	34.95	36.01	-2.95	5
		e''	16.1300	Conductivity (σ):	4.65	4.63	0.33	5
	Head 5200	e'	34.9200	Relative Permittivity (ϵ_r):	34.92	35.99	-2.97	5
		e''	16.1000	Conductivity (σ):	4.66	4.65	0.09	5
	Head 5600	e'	34.3000	Relative Permittivity (ϵ_r):	34.30	35.53	-3.47	5
		e''	16.2900	Conductivity (σ):	5.07	5.06	0.24	5
	Head 5800	e'	33.9900	Relative Permittivity (ϵ_r):	33.99	35.30	-3.71	5
		e''	16.3500	Conductivity (σ):	5.27	5.27	0.05	5
	Head 5825	e'	33.9800	Relative Permittivity (ϵ_r):	33.98	35.30	-3.74	5
		e''	16.3500	Conductivity (σ):	5.30	5.27	0.49	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1071	11/13/2014	750	1g	8.22	8.52
				10g	5.39	5.64
D835V2	4d117	5/18/2015	835	1g	9.08	9.38
				10g	5.93	6.20
D1750V2	1050	4/15/2015	1750	1g	36.40	37.00
				10g	19.30	19.90
D1900V2	5d163	9/11/2014	1900	1g	40.80	40.60
				10g	21.20	21.40
D2450V2	706	5/11/2015	2450	1g	52.60	51.30
				10g	24.60	24.00
D2600V2	1006	9/10/2014	2600	1g	58.60	56.30
				10g	26.10	25.10
D5GHzV2	1138	9/18/2014	5200	1g	81.40	75.40
				10g	23.30	21.00
			5600	1g	85.10	81.90
				10g	24.20	22.60
			5800	1g	80.60	75.20
				10g	23.00	20.80
D5GHzV2	1168	12/4/2014	5200	1g	79.30	76.00
				10g	22.50	21.10
			5600	1g	81.70	82.00
				10g	23.20	22.70
			5800	1g	78.00	76.20
				10g	22.10	21.00

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/21/2015	D2450V2	706	Body	1g	5.41	54.1	51.30	1,2
				10g	2.49	24.9	24.00	
8/21/2015	D2450V2	706	Head	1g	5.23	52.3	52.6	
				10g	2.40	24.0	24.6	
8/24/2015	D2600V2	1006	Body	1g	5.81	58.1	56.30	3,4
				10g	2.55	25.5	25.10	
8/24/2015	D2600V2	1006	Head	1g	5.76	57.6	58.6	
				10g	2.52	25.2	26.1	

SAR Lab 2

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/18/2015	D1750V2	1050	Head	1g	3.60	36.0	36.4	-1.10
				10g	1.89	18.9	19.3	-2.07
8/18/2015	D1750V2	1050	Body	1g	3.75	37.5	37.00	1.35
				10g	2.00	20.0	19.9	0.50
8/20/2015	D750V3	1071	Body	1g	0.893	8.9	8.52	4.81
				10g	0.595	6.0	5.64	5.50
8/20/2015	D750V3	1071	Head	1g	0.81	8.1	8.22	-1.46
				10g	0.53	5.3	5.39	-1.48

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/18/2015	D1900V2	5d163	Head	1g	3.91	39.1	40.8	-4.17
				10g	2.01	20.1	21.2	-5.19
8/18/2015	D1900V2	5d163	Body	1g	4.06	40.6	40.6	0.00
				10g	2.11	21.1	21.4	-1.40

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/21/2015	D5GHzV2 (5.2)	1138	Body	1g	7.39	73.9	75.4	-1.99
				10g	2.08	20.8	21.0	-0.95
8/21/2015	D5GHzV2 (5.6)	1138	Body	1g	8.43	84.3	81.9	2.93
				10g	2.36	23.6	22.6	4.42
8/21/2015	D5GHzV2 (5.8)	1138	Body	1g	7.29	72.9	75.2	-3.06
				10g	2.04	20.4	20.8	-1.92

SAR Lab 5

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/18/2015	D835V2	4d117	Head	1g	0.85	8.5	9.08	-6.61
				10g	0.56	5.6	5.93	-5.73
8/18/2015	D835V2	4d117	Body	1g	0.89	8.9	9.38	-5.33
				10g	0.59	5.9	6.2	-5.65

SAR Lab F

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/27/2015	D5GHzV2 (5.2)	1168	Head	1g	7.56	75.6	79.3	-4.67
				10g	2.15	21.5	22.5	-4.44
8/27/2015	D5GHzV2 (5.6)	1168	Head	1g	7.70	77.0	81.7	-5.75
				10g	2.16	21.6	23.2	-6.90
8/27/2015	D5GHzV2 (5.8)	1168	Head	1g	7.38	73.8	78.0	-5.38
				10g	2.07	20.7	22.1	-6.33

SAR Lab H

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
8/27/2015	D5GHzV2 (5.2)	1168	Head	1g	7.88	78.8	79.3	-0.63
				10g	2.26	22.6	22.5	0.44
8/27/2015	D5GHzV2 (5.6)	1168	Head	1g	8.24	82.4	81.7	0.86
				10g	2.34	23.4	23.2	0.86
8/27/2015	D5GHzV2 (5.8)	1168	Head	1g	7.44	74.4	78.0	-4.62
				10g	2.11	21.1	22.1	-4.52

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Pwr	
						Burst (dBm)	Frame (dBm)
850	GSM (Voice)	CS1	1	128	824.2	33.0	23.9
				190	836.6	33.0	23.9
				251	848.8	33.1	24.1
	GPRS (GMSK)	CS1	1	128	824.2	33.0	24.0
				190	836.6	33.0	24.0
				251	848.8	33.1	24.1
			2	128	824.2	31.1	25.1
				190	836.6	31.0	25.0
				251	848.8	31.1	25.1
			3	128	824.2	29.2	24.9
				190	836.6	29.1	24.8
				251	848.8	29.1	24.8
			4	128	824.2	28.2	25.2
				190	836.6	28.0	25.0
				251	848.8	28.0	25.0
	EGPRS (8PSK)	MCS5	1	128	824.2	27.2	18.2
				190	836.6	27.1	18.1
				251	848.8	27.2	18.2
			2	128	824.2	26.1	20.1
				190	836.6	26	20.0
				251	848.8	26	20.0
			3	128	824.2	25.1	20.8
				190	836.6	25	20.7
				251	848.8	25.1	20.8
			4	128	824.2	24.1	21.1
				190	836.6	24.0	21.0
				251	848.8	24.0	21.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 4 time slots, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Pwr	
						Burst (dBm)	Frame (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	29.7	20.6
				661	1880.0	29.6	20.6
				810	1909.8	29.6	20.6
	GPRS (GMSK)	CS1	1	512	1850.2	29.7	20.6
				661	1880.0	29.6	20.6
				810	1909.8	29.6	20.6
			2	512	1850.2	27.7	21.7
				661	1880.0	27.5	21.5
				810	1909.8	27.6	21.6
			3	512	1850.2	25.7	21.4
				661	1880.0	25.5	21.2
				810	1909.8	25.5	21.2
			4	512	1850.2	24.7	21.7
				661	1880.0	24.6	21.6
				810	1909.8	24.7	21.7
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.6	16.6
				661	1880.0	25.5	16.5
				810	1909.8	25.6	16.6
			2	512	1850.2	24.7	18.7
				661	1880.0	24.6	18.6
				810	1909.8	24.7	18.7
			3	512	1850.2	23.6	19.3
				661	1880.0	23.6	19.3
				810	1909.8	23.6	19.3
			4	512	1850.2	22.6	19.6
				661	1880.0	22.6	19.6
				810	1909.8	22.6	19.5

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 4 time slots, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

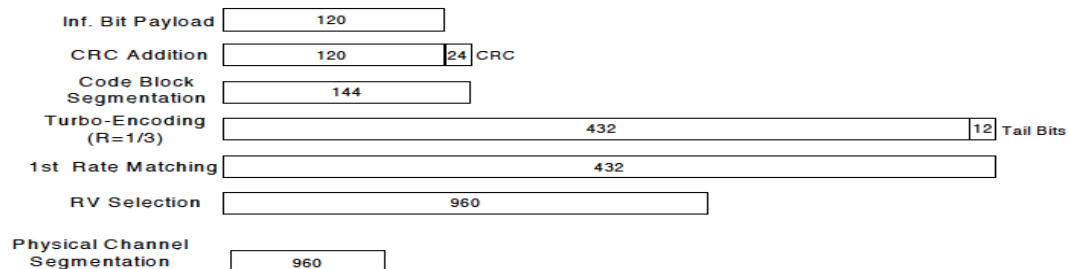**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7 Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.9
			9400	1880.0	N/A	23.9
			9538	1907.6	N/A	23.9
	HSDPA	Subtest 1	9262	1852.4	0	23.6
			9400	1880.0	0	23.8
			9538	1907.6	0	23.6
		Subtest 2	9262	1852.4	0	23.6
			9400	1880.0	0	23.9
			9538	1907.6	0	23.5
		Subtest 3	9262	1852.4	0.5	23.1
			9400	1880.0	0.5	23.4
			9538	1907.6	0.5	23.0
		Subtest 4	9262	1852.4	0.5	23.1
			9400	1880.0	0.5	23.3
			9538	1907.6	0.5	23.0
	HSUPA	Subtest 1	9262	1852.4	0	23.0
			9400	1880.0	0	23.0
			9538	1907.6	0	23.1
		Subtest 2	9262	1852.4	2	21.5
			9400	1880.0	2	21.6
			9538	1907.6	2	21.5
		Subtest 3	9262	1852.4	1	22.4
			9400	1880.0	1	22.6
			9538	1907.6	1	22.1
		Subtest 4	9262	1852.4	2	21.9
			9400	1880.0	2	21.9
			9538	1907.6	2	21.9
		Subtest 5	9262	1852.4	0	23.5
			9400	1880.0	0	23.2
			9538	1907.6	0	23.2
	DC-HSDPA	Subtest 1	9262	1852.4	0	23.9
			9400	1880.0	0	23.9
			9538	1907.6	0	23.9
		Subtest 2	9262	1852.4	0	23.9
			9400	1880.0	0	23.8
			9538	1907.6	0	23.8
		Subtest 3	9262	1852.4	0.5	23.3
			9400	1880.0	0.5	23.3
			9538	1907.6	0.5	23.3
		Subtest 4	9262	1852.4	0.5	23.3
			9400	1880.0	0.5	23.3
			9538	1907.6	0.5	23.3

W-CDMA Band IV Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)
W-CDMA Band IV	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	23.9
			1413	1732.6	N/A	23.9
			1513	1752.6	N/A	23.9
	HSDPA	Subtest 1	1312	1712.4	0	23.8
			1413	1732.6	0	23.8
			1513	1752.6	0	23.8
		Subtest 2	1312	1712.4	0	23.9
			1413	1732.6	0	23.8
			1513	1752.6	0	23.8
		Subtest 3	1312	1712.4	0.5	23.2
			1413	1732.6	0.5	23.2
			1513	1752.6	0.5	23.2
		Subtest 4	1312	1712.4	0.5	23.3
			1413	1732.6	0.5	23.2
			1513	1752.6	0.5	23.2
	HSUPA	Subtest 1	1312	1712.4	0	23.3
			1413	1732.6	0	23.3
			1513	1752.6	0	23.3
		Subtest 2	1312	1712.4	2	21.9
			1413	1732.6	2	21.9
			1513	1752.6	2	21.9
		Subtest 3	1312	1712.4	1	22.7
			1413	1732.6	1	22.7
			1513	1752.6	1	22.7
		Subtest 4	1312	1712.4	2	21.9
			1413	1732.6	2	21.9
			1513	1752.6	2	21.9
		Subtest 5	1312	1712.4	0	23.5
			1413	1732.6	0	23.6
			1513	1752.6	0	23.5
	DC-HSDPA	Subtest 1	1312	1712.4	0	23.8
			1413	1732.6	0	23.8
			1513	1752.6	0	23.8
		Subtest 2	1312	1712.4	0	23.7
			1413	1732.6	0	23.8
			1513	1752.6	0	23.7
		Subtest 3	1312	1712.4	0.5	23.3
			1413	1732.6	0.5	23.2
			1513	1752.6	0.5	23.2
		Subtest 4	1312	1712.4	0.5	23.2
			1413	1732.6	0.5	23.2
			1513	1752.6	0.5	23.2

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.6
			4183	836.6	N/A	24.6
			4233	846.6	N/A	24.6
	HSDPA	Subtest 1	4132	826.4	0	24.6
			4183	836.6	0	24.6
			4233	846.6	0	24.5
		Subtest 2	4132	826.4	0	24.6
			4183	836.6	0	24.6
			4233	846.6	0	24.4
		Subtest 3	4132	826.4	0.5	24.0
			4183	836.6	0.5	24.1
			4233	846.6	0.5	23.9
		Subtest 4	4132	826.4	0.5	24.0
			4183	836.6	0.5	24.1
			4233	846.6	0.5	24.0
	HSUPA	Subtest 1	4132	826.4	0	24.1
			4183	836.6	0	24.0
			4233	846.6	0	24.2
		Subtest 2	4132	826.4	2	22.7
			4183	836.6	2	22.6
			4233	846.6	2	22.6
		Subtest 3	4132	826.4	1	23.6
			4183	836.6	1	23.5
			4233	846.6	1	23.3
		Subtest 4	4132	826.4	2	22.7
			4183	836.6	2	22.6
			4233	846.6	2	22.6
		Subtest 5	4132	826.4	0	24.4
			4183	836.6	0	24.5
			4233	846.6	0	24.0
	DC-HSDPA	Subtest 1	4132	826.4	0	24.6
			4183	836.6	0	24.6
			4233	846.6	0	24.5
		Subtest 2	4132	826.4	0	24.6
			4183	836.6	0	24.6
			4233	846.6	0	24.5
		Subtest 3	4132	826.4	0.5	24.0
			4183	836.6	0.5	24.1
			4233	846.6	0.5	24.0
		Subtest 4	4132	826.4	0.5	24.0
			4183	836.6	0.5	24.1
			4233	846.6	0.5	24.0

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.4	23.4	23.4
			1	49	0	23.2	23.3	23.3
			1	99	0	23.3	23.3	22.9
			50	0	1	22.3	22.3	22.2
			50	24	1	22.0	22.3	22.3
			50	50	1	22.1	22.3	22.2
			100	0	1	22.1	22.2	22.4
		16QAM	1	0	1	22.4	22.0	21.9
			1	49	1	22.1	22.4	22.0
			1	99	1	22.4	22.3	21.9
			50	0	2	21.3	21.2	21.2
			50	24	2	21.0	21.2	21.2
			50	50	2	21.1	21.2	21.3
			100	0	2	21.2	21.2	21.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	23.2	23.4	23.3
			1	37	0	23.4	23.3	23.3
			1	74	0	23.0	23.4	22.9
			36	0	1	22.4	22.3	22.2
			36	20	1	22.3	22.3	22.2
			36	39	1	21.9	22.3	22.1
			75	0	1	22.1	22.2	22.3
		16QAM	1	0	1	22.3	22.3	22.2
			1	37	1	22.3	22.3	21.9
			1	74	1	22.4	22.3	21.8
			36	0	2	21.4	21.3	21.1
			36	20	2	21.2	21.2	21.2
			36	39	2	20.9	21.2	21.2
			75	0	2	21.0	21.1	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	22.9	23.4	23.4
			1	25	0	23.2	23.4	23.0
			1	49	0	23.1	23.3	22.9
			25	0	1	21.9	22.1	22.2
			25	12	1	21.7	22.2	22.2
			25	25	1	21.9	22.1	21.9
			50	0	1	21.8	22.2	22.1
		16QAM	1	0	1	21.9	21.9	22.1
			1	25	1	21.7	21.9	22.1
			1	49	1	22.2	21.9	21.8
			25	0	2	20.8	21.1	21.2
			25	12	2	20.7	21.2	21.3
			25	25	2	20.9	21.1	21.0
			50	0	2	20.7	21.1	21.2

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.1	23.3	22.9
			1	12	0	23.4	23.3	22.7
			1	24	0	23.2	23.3	23.0
			12	0	1	21.9	22.2	22.0
			12	7	1	21.9	22.2	21.9
			12	13	1	21.8	22.1	21.8
			25	0	1	21.8	22.1	21.9
		16QAM	1	0	1	22.2	21.9	22.3
			1	12	1	22.0	22.0	22.0
			1	24	1	22.2	21.9	22.0
			12	0	2	20.9	21.0	21.0
			12	7	2	20.9	21.1	20.9
			12	13	2	20.8	21.1	20.9
			25	0	2	20.8	21.2	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	23.0	23.3	22.8
			1	8	0	23.2	23.3	22.9
			1	14	0	23.1	23.3	23.0
			8	0	1	21.9	22.1	21.8
			8	4	1	21.9	22.2	21.9
			8	7	1	21.9	22.2	21.8
			15	0	1	21.8	22.1	21.8
		16QAM	1	0	1	22.1	21.8	21.9
			1	8	1	22.1	22.1	22.0
			1	14	1	22.0	21.8	21.8
			8	0	2	20.9	21.1	20.8
			8	4	2	20.9	21.2	20.9
			8	7	2	20.8	21.2	20.9
			15	0	2	20.9	21.1	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.1	23.3	22.9
			1	3	0	23.3	23.2	22.9
			1	5	0	23.1	23.4	22.9
			3	0	0	23.1	23.3	22.7
			3	1	0	23.0	23.3	22.7
			3	3	0	23.1	23.3	22.6
			6	0	1	21.8	22.1	21.8
		16QAM	1	0	1	21.9	22.0	21.7
			1	3	1	21.9	22.0	21.8
			1	5	1	21.9	22.0	21.6
			3	0	1	21.6	21.8	21.8
			3	1	1	21.6	21.8	21.8
			3	3	1	21.6	21.8	21.8
			6	0	2	20.8	21.2	20.8

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
							1732.5 MHz	
LTE Band 4	20	QPSK	1	0	0		23.3	
			1	49	0		23.4	
			1	99	0		23.2	
			50	0	1		22.2	
			50	24	1		22.1	
			50	50	1		22.1	
			100	0	1		22.1	
		16QAM	1	0	1		22.1	
			1	49	1		22.0	
			1	99	1		21.9	
			50	0	2		21.1	
			50	24	2		21.1	
			50	50	2		21.1	
			100	0	2		21.1	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	23.3	23.3	23.3
			1	37	0	23.2	23.3	22.5
			1	74	0	23.2	23.3	22.4
			36	0	1	22.2	22.1	22.2
			36	20	1	22.1	22.1	21.7
			36	39	1	22.1	22.2	21.4
			75	0	1	22.1	22.1	21.7
		16QAM	1	0	1	22.2	22.0	22.1
			1	37	1	22.1	21.8	21.6
			1	74	1	22.2	21.9	21.3
			36	0	2	21.1	21.0	21.1
			36	20	2	21.0	21.0	20.7
			36	39	2	21.1	21.1	20.5
			75	0	2	21.1	21.1	20.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	23.4	23.3	22.7
			1	25	0	23.2	23.2	22.4
			1	49	0	23.1	23.2	22.1
			25	0	1	22.0	22.0	21.6
			25	12	1	22.0	22.0	21.5
			25	25	1	22.0	22.0	21.3
			50	0	1	22.0	22.0	21.4
		16QAM	1	0	1	22.2	21.8	21.8
			1	25	1	21.9	21.7	21.5
			1	49	1	22.1	21.8	21.2
			25	0	2	20.9	20.9	20.6
			25	12	2	21.0	21.1	20.5
			25	25	2	20.9	21.0	20.4
			50	0	2	20.8	21.1	20.4

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.4	23.1	22.3
			1	12	0	23.4	23.1	22.2
			1	24	0	23.4	23.2	22.1
			12	0	1	22.2	22.1	21.4
			12	7	1	22.1	22.0	21.3
			12	13	1	22.1	22.1	21.3
			25	0	1	22.0	21.9	21.3
		16QAM	1	0	1	22.5	21.8	21.6
			1	12	1	22.3	22.0	21.5
			1	24	1	22.2	21.9	21.4
			12	0	2	21.1	20.9	20.4
			12	7	2	21.1	20.9	20.4
			12	13	2	21.1	21.0	20.3
			25	0	2	21.0	21.0	20.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.2	23.1	22.3
			1	8	0	23.2	23.3	22.3
			1	14	0	23.3	23.2	22.2
			8	0	1	22.1	22.0	21.3
			8	4	1	22.2	22.1	21.3
			8	7	1	22.1	21.8	21.2
			15	0	1	22.1	21.9	21.2
		16QAM	1	0	1	22.2	21.7	21.4
			1	8	1	22.3	21.7	21.4
			1	14	1	22.1	21.7	21.3
			8	0	2	21.1	20.9	20.3
			8	4	2	21.1	20.8	20.2
			8	7	2	21.1	20.8	20.2
			15	0	2	21.2	20.9	20.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.3	23.2	22.2
			1	3	0	23.3	23.3	22.3
			1	5	0	23.3	23.2	22.2
			3	0	0	23.3	23.2	22.1
			3	1	0	23.3	23.1	22.1
			3	3	0	23.2	23.1	22.1
			6	0	1	22.1	21.8	21.1
		16QAM	1	0	1	22.2	22.0	21.4
			1	3	1	22.3	22.0	21.4
			1	5	1	22.1	21.9	21.3
			3	0	1	21.9	21.7	21.1
			3	1	1	21.8	21.8	21.2
			3	3	1	21.8	21.7	21.1
			6	0	2	21.1	20.9	20.2

Note(s):

20 MHz Bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 5 Measured Results

SAR for LTE Band 5 is covered by LTE Band 26 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 7 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	23.6	23.7	23.5
			1	49	0	23.4	23.6	23.4
			1	99	0	23.2	23.7	23.3
			50	0	1	22.4	22.5	22.4
			50	24	1	22.3	22.5	22.4
			50	50	1	22.4	22.6	22.3
			100	0	1	22.4	22.5	22.4
		16QAM	1	0	1	22.4	22.1	22.0
			1	49	1	22.3	22.1	21.9
			1	99	1	22.4	22.1	21.9
			50	0	2	21.4	21.4	21.4
			50	24	2	21.3	21.5	21.4
			50	50	2	21.3	21.5	21.3
			100	0	2	21.5	21.5	21.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	23.3	23.6	23.5
			1	37	0	23.3	23.6	23.6
			1	74	0	23.4	23.7	23.5
			36	0	1	22.2	22.4	22.3
			36	20	1	22.2	22.4	22.3
			36	39	1	22.3	22.4	22.2
			75	0	1	22.3	22.5	22.3
		16QAM	1	0	1	22.3	21.8	22.0
			1	37	1	22.3	21.9	21.9
			1	74	1	22.1	21.9	22.2
			36	0	2	21.3	21.4	21.4
			36	20	2	21.3	21.4	21.4
			36	39	2	21.2	21.4	21.2
			75	0	2	21.3	21.4	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	23.3	23.7	23.7
			1	25	0	23.4	23.5	23.4
			1	49	0	23.3	23.5	23.5
			25	0	1	22.1	22.4	22.3
			25	12	1	22.2	22.3	22.4
			25	25	1	22.3	22.4	22.2
			50	0	1	22.3	22.3	22.2
		16QAM	1	0	1	21.9	21.9	22.1
			1	25	1	21.9	21.7	22.0
			1	49	1	22.2	21.8	21.9
			25	0	2	21.2	21.3	21.3
			25	12	2	21.3	21.2	21.3
			25	25	2	21.2	21.3	21.3
			50	0	2	21.1	21.2	21.2

LTE Band 7 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0	23.4	23.3	23.7
			1	12	0	23.7	23.4	23.6
			1	24	0	23.4	23.4	23.5
			12	0	1	22.1	22.3	22.2
			12	7	1	22.0	22.3	22.2
			12	13	1	22.1	22.3	22.2
			25	0	1	22.0	22.2	22.2
		16QAM	1	0	1	22.1	21.9	22.2
			1	12	1	22.1	21.9	22.1
			1	24	1	22.2	22.0	22.0
			12	0	2	21.0	21.3	21.2
			12	7	2	21.1	21.2	21.2
			12	13	2	21.2	21.2	21.1
			25	0	2	21.0	21.3	21.1

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	10	QPSK	1	0	0	24.2
			1	25	0	24.0
			1	49	0	24.1
			25	0	1	22.9
			25	12	1	22.9
			25	25	1	22.8
			50	0	1	22.8
		16QAM	1	0	1	23.0
			1	25	1	23.0
			1	49	1	23.0
			25	0	2	21.9
			25	12	2	21.9
			25	25	2	21.8
			50	0	2	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	5	QPSK	1	0	0	24.0
			1	12	0	24.2
			1	24	0	24.0
			12	0	1	22.8
			12	6	1	22.8
			12	11	1	22.8
			25	0	1	22.8
		16QAM	1	0	1	22.9
			1	12	1	22.9
			1	24	1	23.0
			12	0	2	21.8
			12	6	2	21.8
			12	11	2	21.7
			25	0	2	21.7

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 26 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						819 MHz	831.5 MHz	844 MHz
LTE Band 26	15	QPSK	1	0	0		24.1	
			1	37	0		24.1	
			1	74	0		24.1	
			36	0	1		22.8	
			36	20	1		22.8	
			36	39	1		22.8	
			75	0	1		22.8	
		16QAM	1	0	1		22.9	
			1	37	1		23.0	
			1	74	1		22.9	
			36	0	2		21.8	
			36	20	2		21.8	
			36	39	2		21.8	
			75	0	2		21.8	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						819 MHz	831.5 MHz	844 MHz
LTE Band 26	10	QPSK	1	0	0	24.0	23.9	24.0
			1	25	0	23.9	24.2	23.9
			1	49	0	23.9	24.1	24.0
			25	0	1	22.6	22.8	22.6
			25	12	1	22.7	22.8	22.7
			25	25	1	22.5	22.7	22.8
			50	0	1	22.6	22.7	22.6
		16QAM	1	0	1	22.7	22.5	22.7
			1	25	1	22.7	22.6	22.5
			1	49	1	22.7	22.5	22.7
			25	0	2	21.6	21.7	21.7
			25	12	2	21.7	21.7	21.6
			25	25	2	21.5	21.6	21.8
			50	0	2	21.5	21.6	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						816.5 MHz	831.5 MHz	846.5 MHz
LTE Band 26	5	QPSK	1	0	0	24.1	24.0	24.1
			1	12	0	24.0	24.1	24.2
			1	24	0	24.0	24.1	24.0
			12	0	1	22.5	22.8	22.7
			12	7	1	22.7	22.7	22.6
			12	13	1	22.6	22.7	22.6
			25	0	1	22.6	22.6	22.6
		16QAM	1	0	1	22.7	22.9	23.1
			1	12	1	22.6	23.0	22.9
			1	24	1	22.5	22.9	22.9
			12	0	2	21.4	21.8	21.5
			12	7	2	21.5	21.8	21.6
			12	13	2	21.4	21.7	21.6
			25	0	2	21.5	21.7	21.5

LTE Band 26 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						815.5 MHz	831.5 MHz	847.5 MHz
LTE Band 26	3	QPSK	1	0	0	24.0	24.1	23.9
			1	8	0	24.2	24.2	24.0
			1	14	0	23.9	24.2	24.0
			8	0	1	22.6	22.8	22.6
			8	4	1	22.5	22.7	22.6
			8	7	1	22.6	22.7	22.6
			15	0	1	22.5	22.7	22.6
		16QAM	1	0	1	22.4	22.8	23.0
			1	8	1	22.5	22.9	23.1
			1	14	1	22.3	22.7	22.7
			8	0	2	21.5	21.7	21.6
			8	4	2	21.5	21.7	21.6
			8	7	2	21.5	21.7	21.5
			15	0	2	21.4	21.7	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						814.7 MHz	831.5 MHz	848.3 MHz
LTE Band 26	1.4	QPSK	1	0	0	24.2	24.2	23.9
			1	3	0	24.1	24.2	24.0
			1	5	0	24.2	24.1	23.9
			3	0	0	24.0	24.0	23.9
			3	1	0	23.9	24.1	23.9
			3	3	0	23.9	23.9	23.7
			6	0	1	22.5	22.6	22.4
		16QAM	1	0	1	22.7	22.8	22.3
			1	3	1	22.8	22.9	22.4
			1	5	1	22.7	22.8	22.3
			3	0	1	22.5	22.5	22.5
			3	1	1	22.4	22.5	22.6
			3	3	1	22.4	22.5	22.5
			6	0	2	21.5	21.6	21.5

Note(s):

15 MHz Bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	23.0	23.2	23.1	23.0	23.2
			1	49	0	23.1	23.2	23.0	23.0	23.1
			1	99	0	23.0	23.2	23.0	23.0	23.1
			50	0	1	21.8	21.9	21.9	22.1	21.9
			50	24	1	21.8	21.9	22.0	21.9	21.9
			50	50	1	21.7	21.8	21.9	21.9	21.9
			100	0	1	21.7	21.8	21.9	22.1	21.9
		16QAM	1	0	1	21.6	21.5	22.1	21.7	21.6
			1	49	1	21.7	21.6	21.8	21.7	21.6
			1	99	1	21.9	21.5	22.0	21.8	21.4
			50	0	2	20.8	20.9	21.0	21.0	20.8
			50	24	2	20.8	20.8	21.0	21.0	20.7
			50	50	2	20.7	20.8	20.9	21.0	20.7
			100	0	2	20.7	20.9	20.9	21.1	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)				
						2503.5 MHz	2548.3 MHz	2593 MHz	2637.8 MHz	2682.5 MHz
LTE Band 41	15	QPSK	1	0	0	23.0	23.1	23.0	23.1	23.1
			1	37	0	23.0	23.1	23.1	23.1	22.9
			1	74	0	23.1	23.0	22.9	23.1	22.8
			36	0	1	21.8	21.9	22.0	21.9	21.9
			36	20	1	21.9	21.9	22.0	21.8	21.8
			36	39	1	21.8	21.8	22.0	22.0	21.8
			75	0	1	21.7	21.8	22.0	21.8	21.8
		16QAM	1	0	1	21.7	21.4	21.6	22.1	21.5
			1	37	1	21.7	21.5	21.5	21.8	21.5
			1	74	1	21.7	21.4	21.6	21.7	21.4
			36	0	2	20.8	20.9	21.1	21.0	20.8
			36	20	2	20.8	20.9	21.0	21.0	20.7
			36	39	2	20.8	20.8	21.0	20.8	20.7
			75	0	2	20.7	20.9	20.9	20.8	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)				
						2501 MHz	2547 MHz	2593 MHz	2639 MHz	2685 MHz
LTE Band 41	10	QPSK	1	0	0	22.9	23.1	23.2	23.2	23.0
			1	25	0	22.9	23.0	23.0	23.2	22.9
			1	49	0	22.9	23.0	23.2	23.1	22.9
			25	0	1	21.7	21.9	21.9	21.8	21.7
			25	12	1	21.8	22.0	22.0	21.7	21.8
			25	25	1	21.9	22.0	22.0	21.9	21.8
			50	0	1	21.7	21.9	21.9	22.0	21.7
		16QAM	1	0	1	21.6	21.4	21.7	21.9	21.5
			1	25	1	21.5	21.5	21.6	21.9	21.4
			1	49	1	21.6	21.4	21.7	21.8	21.3
			25	0	2	20.7	20.9	20.9	21.0	20.7
			25	12	2	20.7	20.9	20.9	21.0	20.7
			25	25	2	20.8	20.9	20.9	20.9	20.8
			50	0	2	20.6	20.9	21.0	20.9	20.7

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)				
						2498.5 MHz	2545.8 MHz	2593 MHz	2640.3 MHz	2687.5 MHz
LTE Band 41	5	QPSK	1	0	0	22.9	23.1	23.2	22.9	23.1
			1	12	0	23.0	23.1	23.1	22.8	23.0
			1	24	0	23.0	23.1	23.2	22.8	23.1
			12	0	1	21.7	21.8	21.9	21.8	21.7
			12	7	1	21.9	21.9	21.9	22.0	21.9
			12	13	1	21.7	21.8	21.9	21.9	21.7
			25	0	1	21.7	21.8	21.8	21.7	21.7
		16QAM	1	0	1	21.8	21.6	22.0	22.1	21.5
			1	12	1	21.8	21.9	21.8	22.0	21.8
			1	24	1	21.8	21.6	22.0	22.0	21.4
			12	0	2	20.7	20.8	20.9	20.8	20.6
			12	7	2	20.8	20.9	21.0	20.8	20.8
			12	13	2	20.7	20.8	20.9	20.9	20.6
			25	0	2	20.6	20.9	20.9	20.9	20.7

LTE Rel. 10 Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this particular project only supports one (1) uplink and two (2) downlinks.

LTE CA combinations			PCC (UL)				SCC (DL)			LTE Rel 10 Tx. Power [dBm]
			Bandwidth (MHz)	Frequency (MHz)	Channel	RB/Offset	Bandwidth (MHz)	Frequency (MHz)	Channel	
5	+	7	10	836.5	20525	1/25	20	2655	3100	24.2
7	+	5	20	2535	21100	1/0	10	881.5	2525	23.7
7	+	7	20	2535	21100	1/0	20	2560	21350	23.6
41	+	41	20	2636.5	41055	1/0	20	2593	40620	23.1

Note:

SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a $1/4$ dBm

9.4. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
Core0	2.4	802.11b	1 Mbps	1	2412	17.8	18.0	Yes	
				6	2437	17.4			
				11	2462	17.3			
		802.11g	6 Mbps	1	2412	Not Required	15.5	No	1
				6	2437		16.5		
				11	2462		15.5		
		802.11n (HT20)	6.5 Mbps	1	2412		15.5	No	1
				6	2437		16.5		
				11	2462		15.5		
		802.11ac (VHT20)	6.5 Mbps	1	2412		15.5	No	1
				6	2437		16.5		
				11	2462		15.5		
Core1	2.4	802.11b	1 Mbps	1	2412	17.6	18.0	Yes	
				6	2437	17.4			
				11	2462	17.6			
		802.11g	6 Mbps	1	2412	Not Required	15.5	No	1
				6	2437		16.5		
				11	2462		15.5		
		802.11n (HT20)	6.5 Mbps	1	2412		15.5	No	1
				6	2437		16.5		
				11	2462		15.5		
		802.11ac (VHT20)	6.5 Mbps	1	2412		15.5	No	1
				6	2437		16.5		
				11	2462		15.5		

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.5. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)		Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
					Core 0	Core 1			
5.3 UNII-2A	802.11a	6 Mbps	52	5260	14.5	14.3	15.0	Yes	2
			56	5280	14.6	14.6			
			60	5300	14.6	14.7			
			64	5320	14.5	14.6			
	802.11n/ac (HT20/VHT20)	6.5 Mbps	52	5260	Not Required	Not Required	14.5	No	1
			56	5280					
			60	5300					
			64	5320					
	802.11n/ac (HT40/VHT40)	13.5 Mbps	54	5270			12.5	No	1
			62	5310					
	802.11ac (VHT80)	29.3 Mbps	58	5290			11.5	No	1
5.5 UNII-2C	802.11a	6 Mbps	100	5500	14.9	14.8	15.0	Yes	
			104	5520	14.9	15.0			
			108	5540	14.6	14.6			
			112	5560	14.6	14.6			
			116	5580	14.9	14.8			
	802.11n/ac (HT20/VHT20)	6.5 Mbps	100	5500	Not Required	Not Required	14.5	No	1
			116	5580					
	802.11n/ac (HT40/VHT40)	13.5 Mbps	102	5510			12.5	No	1
			110	5550					
	802.11ac (VHT80)	29.3 Mbps	106	5530			11.5	No	1
5.8 UNII-3	802.11a	6 Mbps	132	5660	14.7	14.8	15.0	Yes	
			136	5680	14.6	14.7			
			140	5700	15.0	14.7			
			144	5720	14.7	14.7			
			149	5745	14.7	14.9			
			153	5765	14.7	14.8			
			157	5785	14.7	14.0			
			161	5805	14.8	14.9			
			165	5825	14.7	13.9			
	802.11n/ac (HT20/VHT20)	6.5 Mbps	132	5660	Not Required	Not Required	14.5	No	1
			136	5680					
			140	5700					
			144	5720					
			149	5745					
			157	5785					
	802.11n/ac (HT40/VHT40)	13.5 Mbps	161	5805			12.5	No	1
			165	5825					
			134	5670					
			142	5710					
	802.11ac (VHT80)	29.3 Mbps	151	5755			11.5	No	1
			159	5795					
			138	5690					
			155	5775					

Note(s):

- Output Power and SAR measurement is not required for 802.11n HT20/HT40/ac VHT20/VHT40/VHT80 channels when the specified tune-up tolerances for 802.11n HT20/HT40/ac VHT20/VHT40/VHT80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6. Bluetooth

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Avg Pwr (mW)
2.4	V3.0 + EDR, GFSK	0	2402	7.50	5.6
		39	2441	9.90	9.8
		78	2480	8.00	6.3
	V3.0 + EDR, $\pi/4$ DQPSK	0	2402	4.10	2.6
		39	2441	6.40	4.4
		78	2480	4.50	2.8
	V3.0 + EDR, 8-DPSK	0	2402	4.00	2.5
		39	2441	6.40	4.4
		78	2480	4.50	2.8
	V4.0 LE, GFSK	0	2402	-0.85	0.8
		19	2440	1.47	1.4
		39	2480	0.29	1.1

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.2	33.0	0.339	0.359	1
			Left Tilt	190	836.6	33.2	33.0	0.217	0.230	
			Right Touch	190	836.6	33.2	33.0	0.303	0.321	
			Right Tilt	190	836.6	33.2	33.0	0.205	0.217	
Head VoIP	GPRS 4 Slots	0	Left Touch	190	836.6	28.2	28.0	0.392	0.410	2
			Left Tilt	190	836.6	28.2	28.0	0.262	0.274	
			Right Touch	190	836.6	28.2	28.0	0.326	0.341	
			Right Tilt	190	836.6	28.2	28.0	0.238	0.249	
Body-worn	Voice	10	Rear	190	836.6	33.2	33.0	0.380	0.403	
			Front	190	836.6	33.2	33.0	0.474	0.502	3
Body-worn(VoIP) & Hotspot	GPRS 4 Slots	10	Rear	190	836.6	28.2	28.0	0.439	0.460	
Front			190	836.6	28.2	28.0	0.544	0.570	4	
Hotspot			Edge 2	190	836.6	28.2	28.0	0.284	0.297	
			Edge 3	190	836.6	28.2	28.0	0.426	0.446	
			Edge 4	190	836.6	28.2	28.0	0.458	0.480	

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	29.7	29.6	0.239	0.245	5
			Left Tilt	661	1880.0	29.7	29.6	0.143	0.146	
			Right Touch	661	1880.0	29.7	29.6	0.435	0.445	
			Right Tilt	661	1880.0	29.7	29.6	0.178	0.182	
Head VoIP	GPRS 4 Slots	0	Left Touch	661	1880.0	24.7	24.6	0.295	0.302	6
			Left Tilt	661	1880.0	24.7	24.6	0.172	0.176	
			Right Touch	661	1880.0	24.7	24.6	0.497	0.509	
			Right Tilt	661	1880.0	24.7	24.6	0.201	0.206	
Body-worn	Voice	10	Rear	661	1880.0	29.7	29.6	0.328	0.336	7
			Front	661	1880.0	29.7	29.6	0.388	0.397	
Body-worn(VoIP) & Hotspot	GPRS 4 Slots	10	Rear	661	1880.0	24.7	24.6	0.402	0.411	8
Front			661	1880.0	24.7	24.6	0.489	0.500		
Hotspot			Edge 2	661	1880.0	24.7	24.6	0.501	0.513	
			Edge 3	661	1880.0	24.7	24.6	0.321	0.328	

10.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	23.9	23.9	0.402	0.403	
			Left Tilt	9400	1880.0	23.9	23.9	0.269	0.270	
			Right Touch	9262	1852.4	23.9	23.9	0.856	0.862	
				9400	1880.0	23.9	23.9	0.878	0.880	
			Right Tilt	9538	1907.6	23.9	23.9	0.904	0.904	9
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	23.9	23.9	0.758	0.760	
			Front	9262	1852.4	23.9	23.9	0.922	0.928	
				9400	1880.0	23.9	23.9	0.898	0.900	
				9538	1907.6	23.9	23.9	0.928	0.928	10
Hotspot	Rel 99 RMC	10	Edge 2	9262	1852.4	23.9	23.9	0.833	0.839	
				9400	1880.0	23.9	23.9	0.914	0.916	
				9538	1907.6	23.9	23.9	0.996	0.996	11
			Edge 3	9400	1880.0	23.9	23.9	0.533	0.534	

10.5. W-CDMA Band IV

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	23.9	23.9	0.374	0.374	
			Left Tilt	1413	1732.6	23.9	23.9	0.258	0.258	
			Right Touch	1413	1732.6	23.9	23.9	0.690	0.690	12
			Right Tilt	1413	1732.6	23.9	23.9	0.233	0.233	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	1312	1712.4	23.9	23.9	0.883	0.883	
				1413	1732.6	23.9	23.9	0.899	0.899	
				1513	1752.6	23.9	23.9	0.933	0.933	13
			Front	1312	1712.4	23.9	23.9	0.813	0.813	
				1413	1732.6	23.9	23.9	0.876	0.876	
				1513	1752.6	23.9	23.9	0.915	0.915	
Hotspot	Rel 99 RMC	10	Edge 2	1413	1732.6	23.9	23.9	0.570	0.570	
			Edge 3	1413	1732.6	23.9	23.9	0.507	0.507	

10.6. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	24.7	24.6	0.484	0.499	14
			Left Tilt	4183	836.6	24.7	24.6	0.271	0.279	
			Right Touch	4183	836.6	24.7	24.6	0.372	0.383	
			Right Tilt	4183	836.6	24.7	24.6	0.243	0.250	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	4183	836.6	24.7	24.6	0.544	0.561	
			Front	4183	836.6	24.7	24.6	0.725	0.747	15
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	24.7	24.6	0.268	0.276	
			Edge 3	4183	836.6	24.7	24.6	0.509	0.524	
			Edge 4	4183	836.6	24.7	24.6	0.569	0.586	

10.7. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	23.4	23.4	0.337	0.339	16
						50	0	22.4	22.3	0.326	0.331	
			Left Tilt	18900	1880.0	1	0	23.4	23.4	0.229	0.230	
						50	0	22.4	22.3	0.210	0.213	
			Right Touch	18900	1880.0	1	0	23.4	23.4	0.766	0.770	
						50	0	22.4	22.3	0.699	0.709	
			Right Tilt	18900	1880.0	1	0	23.4	23.4	0.315	0.316	
						50	0	22.4	22.3	0.288	0.292	
Body-worn & Hotspot	QPSK	10	Rear	18900	1880.0	1	0	23.4	23.4	0.666	0.669	17
						50	0	22.4	22.3	0.615	0.624	
			Front	18700	1860.0	1	0	23.4	23.4	0.860	0.868	
				18900	1880.0	1	0	23.4	23.4	0.823	0.827	
						50	0	22.4	22.3	0.768	0.779	
				19100	1900.0	1	0	23.4	23.4	0.794	0.796	
			Edge 2	18900	1880.0	1	0	23.4	23.4	0.777	0.781	
						50	0	22.4	22.3	0.727	0.737	
Hotspot	QPSK	10	Edge 3	18900	1880.0	1	0	23.4	23.4	0.422	0.424	
						50	0	22.4	22.3	0.393	0.398	

10.8. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	49	23.4	23.4	0.409	0.414	18
						50	0	22.4	22.2	0.348	0.364	
			Left Tilt	20175	1732.5	1	49	23.4	23.4	0.294	0.297	
						50	0	22.4	22.2	0.256	0.268	
			Right Touch	20175	1732.5	1	49	23.4	23.4	0.787	0.796	
						50	0	22.4	22.2	0.677	0.709	
			Right Tilt	20175	1732.5	1	49	23.4	23.4	0.274	0.277	
						50	0	22.4	22.2	0.244	0.255	
Body-worn & Hotspot	QPSK	10	Rear	20025	1717.5	1	0	23.4	23.3	0.905	0.926	19
						36	0	22.4	22.2	0.804	0.842	
				20175	1732.5	1	49	23.4	23.4	0.942	0.953	
						50	0	22.4	22.2	0.845	0.885	
				20325	1747.5	1	0	23.4	23.3	0.967	0.990	
						36	0	22.4	22.2	0.836	0.875	
			Front	20025	1717.5	1	0	23.4	23.3	0.802	0.821	
				20175	1732.5	1	49	23.4	23.4	0.851	0.851	
						50	0	22.4	22.2	0.748	0.783	
				20325	1747.5	1	0	23.4	23.3	0.966	0.989	
						50	0	22.4	22.2	0.569	0.596	
Hotspot	QPSK	10	Edge 2	20175	1732.5	1	49	23.4	23.4	0.626	0.626	
						50	0	22.4	22.2	0.569	0.596	
			Edge 3	20175	1732.5	1	49	23.4	23.4	0.610	0.610	
						50	0	22.4	22.2	0.546	0.572	

10.9. LTE Band 5 (10MHz Bandwidth)

SAR for LTE Band 5 is covered by LTE Band 26 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

10.10. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	21100	2535.0	1	0	23.7	23.7	0.622	0.626	20
						50	50	22.7	22.6	0.488	0.504	
			Left Tilt	21100	2535.0	1	0	23.7	23.7	0.146	0.147	
						50	50	22.7	22.6	0.103	0.106	
			Right Touch	21100	2535.0	1	0	23.7	23.7	0.268	0.270	
						50	50	22.7	22.6	0.218	0.225	
			Right Tilt	21100	2535.0	1	0	23.7	23.7	0.184	0.185	
						50	50	22.7	22.6	0.097	0.100	
Body-worn & Hotspot	QPSK	10	Rear	21100	2535.0	1	0	23.7	23.7	0.407	0.407	
						50	50	22.7	22.6	0.319	0.326	
			Front	21100	2535.0	1	0	23.7	23.7	0.696	0.696	21
						50	50	22.7	22.6	0.592	0.606	
Hotspot	QPSK	10	Edge 2	21100	2535.0	1	0	23.7	23.7	0.064	0.064	
						50	50	22.7	22.6	0.053	0.054	
			Edge 3	21100	2535.0	1	0	23.7	23.7	0.652	0.652	
						50	50	22.7	22.6	0.526	0.538	
			Edge 4	21100	2535.0	1	0	23.7	23.7	0.419	0.419	
						50	50	22.7	22.6	0.344	0.352	

10.11. LTE Band 17 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23790	710.0	1	0	24.2	24.2	0.210	0.212	
						25	0	23.2	22.9	0.201	0.216	22
			Left Tilt	23790	710.0	1	0	24.2	24.2	0.117	0.118	
						25	0	23.2	22.9	0.113	0.122	
			Right Touch	23790	710.0	1	0	24.2	24.2	0.156	0.158	
						25	0	23.2	22.9	0.147	0.158	
			Right Tilt	23790	710.0	1	0	24.2	24.2	0.095	0.096	
						25	0	23.2	22.9	0.091	0.098	
Body-worn & Hotspot	QPSK	10	Rear	23790	710.0	1	0	24.2	24.2	0.415	0.420	23
						25	0	23.2	22.9	0.363	0.391	
			Front	23790	710.0	1	0	24.2	24.2	0.391	0.396	
						25	0	23.2	22.9	0.352	0.379	
Hotspot	QPSK	10	Edge 2	23790	710.0	1	0	24.2	24.2	0.272	0.275	
						25	0	23.2	22.9	0.248	0.267	
			Edge 3	23790	710.0	1	0	24.2	24.2	0.199	0.201	
						25	0	23.2	22.9	0.183	0.197	
			Edge 4	23790	710.0	1	0	24.2	24.2	0.493	0.499	24
						25	0	23.2	22.9	0.443	0.477	

10.12. LTE Band 26 (15MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	0	24.2	24.1	0.386	0.395	25
						36	0	23.2	22.8	0.325	0.356	
			Left Tilt	26865	831.5	1	0	24.2	24.1	0.243	0.249	
						36	0	23.2	22.8	0.198	0.217	
			Right Touch	26865	831.5	1	0	24.2	24.1	0.304	0.311	
						36	0	23.2	22.8	0.256	0.281	
			Right Tilt	26865	831.5	1	0	24.2	24.1	0.206	0.211	
						36	0	23.2	22.8	0.163	0.179	
Body-worn & Hotspot	QPSK	10	Rear	26865	831.5	1	0	24.2	24.1	0.474	0.485	26
						36	0	23.2	22.8	0.379	0.416	
			Front	26865	831.5	1	0	24.2	24.1	0.584	0.598	
						36	0	23.2	22.8	0.481	0.527	
Hotspot	QPSK	10	Edge 2	26865	831.5	1	0	24.2	24.1	0.235	0.240	
						36	0	23.2	22.8	0.188	0.206	
			Edge 3	26865	831.5	1	0	24.2	24.1	0.398	0.407	
						36	0	23.2	22.8	0.333	0.365	
			Edge 4	26865	831.5	1	0	24.2	24.1	0.426	0.436	
						36	0	23.2	22.8	0.349	0.383	

10.13. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	0	23.2	23.1	0.286	0.295	27
						50	24	22.2	22.0	0.181	0.188	
			Left Tilt	40620	2593.0	1	0	23.2	23.1	0.072	0.074	
						50	24	22.2	22.0	0.045	0.046	
			Right Touch	40620	2593.0	1	0	23.2	23.1	0.132	0.136	
						50	24	22.2	22.0	0.078	0.081	
			Right Tilt	40620	2593.0	1	0	23.2	23.1	0.088	0.091	
						50	24	22.2	22.0	0.051	0.053	
Body-worn & Hotspot	QPSK	10	Rear	40620	2593.0	1	0	23.2	23.1	0.186	0.192	28
						50	24	22.2	22.0	0.122	0.127	
			Front	40620	2593.0	1	0	23.2	23.1	0.353	0.364	
						50	24	22.2	22.0	0.206	0.214	
Hotspot	QPSK	10	Edge 2	40620	2593.0	1	0	23.2	23.1	0.033	0.034	
						50	24	22.2	22.0	0.020	0.021	
			Edge 3	40620	2593.0	1	0	23.2	23.1	0.308	0.317	
						50	24	22.2	22.0	0.179	0.186	

10.14. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz (Core0)	SISO 802.11b 1 Mbps	Head	0	Left Touch	1	2412	0.327	18.0	17.8	0.264	0.276		
				Left Tilt	1	2412	0.307	18.0	17.8				
				Right Touch	1	2412	1.090	18.0	17.8	0.812	0.850	2	
					6	2437	1.040	18.0	17.4	0.800	0.919	3	29
				Right Tilt	6	2437	0.622	18.0	17.8	0.474	0.496		
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	1	2412	0.271	18.0	17.8	0.188	0.197	1	
				Front	1	2412	0.160	18.0	17.8				
				Edge 1	1	2412	0.181	18.0	17.8				
				Edge 4	1	2412	0.152	18.0	17.8				
2.4GHz (Core1)	SISO 802.11b 1 Mbps	Head	0	Left Touch	11	2462	0.080	18.0	17.6				
				Left Tilt	11	2462	0.053	18.0	17.6				
				Right Touch	11	2462	0.254	18.0	17.6	0.201	0.220	1	
					11	2462	0.164	18.0	17.6				
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	11	2462	0.227	18.0	17.6	0.228	0.250	1	30
				Front	11	2462	0.053	18.0					
				Edge 1	11	2462	0.019	18.0					
				Edge 4	11	2462	0.200	18.0					

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.

10.15. Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm) Core0		Power (dBm) Core1		1-g SAR (W/kg) Core0		1-g SAR (W/kg) Core1		Notes	Plot No.
								Tune-up limit	Meas.	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.3 GHz U-NII 2A (MIMO)	802.11a 6 Mbps	Head	0	Left Touch	64	5320.0	0.875	15.0	14.5	15.0	14.6	0.441	0.495			4	
				Left Tilt	64	5320.0	0.753	15.0	14.5	15.0	14.6						
				Right Touch	52	5260.0	2.010	15.0	14.5	15.0	14.3	0.953	1.069			3, 4	
					64	5320.0	2.150	15.0	14.5	15.0	14.6	1.030	1.156			2, 4	31
				Right Tilt	52	5260.0	1.430	15.0	14.5	15.0	14.3	0.719	0.807			3, 4	
					64	5320.0	1.540	15.0	14.5	15.0	14.6	0.819	0.919			3, 4	
		Body-worn	10	Rear	64	5320.0	0.395	15.0	14.5	15.0	14.6	0.435	0.488	0.379	0.416	1	32
				Front	64	5320.0	0.234	15.0	14.5	15.0	14.6						
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm) Core0		Power (dBm) Core1		1-g SAR (W/kg) Core0		1-g SAR (W/kg) Core1		Notes	Plot No.
								Tune-up limit	Meas.	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.5 GHz U-NII 2C (MIMO)	802.11a 6 Mbps	Head	0	Left Touch	116	5580.0	0.992	15.0	14.9	15.0	14.8						
				Left Tilt	116	5580.0	0.752	15.0	14.9	15.0	14.8						
				Right Touch	100	5500.0	2.070	15.0	14.9	15.0	14.8	0.896	0.917			3, 4	
					116	5580.0	2.120	15.0	14.9	15.0	14.8	1.030	1.054			2, 4	
				Right Tilt	140	5700.0	1.820	15.0	15.0	15.0	14.7	0.806	0.806			3, 4	33
					116	5580.0	1.320	15.0	14.9	15.0	14.8	0.627	0.642			2, 4	
		Body-worn	10	Rear	116	5580.0	0.354	15.0	14.9	15.0	14.8	0.366	0.375	0.361	0.378	1	34
				Front	116	5580.0	0.265	15.0	14.9	15.0	14.8						

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm) Core0		Power (dBm) Core1		1-g SAR (W/kg) Core0		1-g SAR (W/kg) Core1		Notes	Plot No.
								Tune-up limit	Meas.	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.8 GHz U-NII 3 (MIMO)	802.11a 6 Mbps	Head	0	Left Touch	149	5745.0	0.940	15.0	14.7	15.0	14.9						
				Left Tilt	149	5745.0	0.732	15.0	14.7	15.0	14.9						
				Right Touch	149	5745.0	1.840	15.0	14.7	15.0	14.9	0.901	0.965			3, 4	
					165	5825.0	1.810	15.0	14.7	15.0	13.9	1.100	1.179			2, 4	35
				Right Tilt	149	5745.0	1.480	15.0	14.7	15.0	14.9	0.731	0.783			2, 4	
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	149	5745.0	0.504	15.0	14.7	15.0	14.9	0.280	0.300	0.269	0.275	1	36
				Front	149	5745.0	0.391	15.0	14.7	15.0	14.9						
				Edge 1	149	5745.0	0.224	15.0	14.7	15.0	14.9						
				Edge 4	149	5745.0	0.664	15.0	14.7	15.0	14.9	0.389	0.417	0.400	0.409	2	37

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head/Body-worn/Hotspot exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
4. No SAR could be measured for Core1 during MIMO.

10.16. Bluetooth

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	GFSK	0	Left Touch	39	2441	9.9	9.9	0.041	0.041	
				Left Tilt	39	2441	9.9	9.9	0.037	0.037	
				Right Touch	39	2441	9.9	9.9	0.108	0.108	38
				Right Tilt	39	2441	9.9	9.9	0.076	0.076	
	Body-worn	GFSK	10	Rear	39	2441	9.9	9.9	0.031	0.031	39
				Front	39	2441	9.9	9.9	0.016	0.016	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated		Third Repeated
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)
700	LTE Band 17	Hotspot	Edge 4	No	0.493	N/A	N/A	N/A	N/A	N/A
850	GSM 850	Body & Hotspot	Front	No	0.544	N/A	N/A	N/A	N/A	N/A
	WCDMA Band V	Body & Hotspot	Front	No	0.725	N/A	N/A	N/A	N/A	N/A
	LTE Band 26	Body & Hotspot	Front	No	0.584	N/A	N/A	N/A	N/A	N/A
1900	GSM 1900	Hotspot	Edge 2	No	0.501	N/A	N/A	N/A	N/A	N/A
	WCDMA Band II	Hotspot	Edge 2	Yes	0.996	0.995	1.00	N/A	N/A	N/A
	LTE Band 2	Body & Hotspot	Front	No	0.860	0.854	1.01	N/A	N/A	N/A
1700	LTE Band 4	Body & Hotspot	Rear	Yes	0.967	0.956	1.01	N/A	N/A	N/A
	WCDMA Band IV	Body & Hotspot	Rear	No	0.933	0.931	1.00	N/A	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	Yes	0.812	0.806	1.01	N/A	N/A	N/A
	BT	Head	Right Touch	No	0.108	N/A	N/A	N/A	N/A	N/A
2600	LTE Band 7	Body & Hotspot	Front	No	0.696	N/A	N/A	N/A	N/A	N/A
	LTE Band 41	Body & Hotspot	Front	No	0.353	N/A	N/A	N/A	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Right Touch	Yes	1.030	0.929	1.11	N/A	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Right Touch	Yes	1.030	1.010	1.02	N/A	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	Yes	1.100	1.100	1.00	N/A	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations			
Head & Body-worn	1	GSM(Voice)	+	DTS	
	2	GSM(Voice)	+	U-NII	
	3	GSM(Voice)	+	BT	
	4	GSM(Voice)	+	U-NII	+ BT
	5	GSM(GPRS/EDGE)	+	DTS	
	6	GSM(GPRS/EDGE)	+	U-NII	
	7	GSM(GPRS/EDGE)	+	BT	
	8	GSM(GPRS/EDGE)	+	U-NII	+ BT
	9	W-CDMA	+	DTS	
	10	W-CDMA	+	U-NII	
	11	W-CDMA	+	BT	
	12	W-CDMA	+	U-NII	+ BT
	13	LTE	+	DTS	
	14	LTE	+	U-NII	
	15	LTE	+	BT	
	16	LTE	+	U-NII	+ BT
Hotspot & Wi-Fi Direct	17	GSM(GPRS/EDGE)	+	DTS	
	18	GSM(GPRS/EDGE)	+	U-NII	
	19	W-CDMA	+	DTS	
	20	W-CDMA	+	U-NII	
	21	LTE	+	DTS	
	22	LTE	+	U-NII	
Notes:					
1. DTS and UNII-3 bands support Hotspot.					
2. DTS, UNII-1, and UNII-3 bands support Wi-Fi Direct.					
3. VoIP is supported in GPRS/EDGE, W-CDMA, and LTE.					
4. DTS Radio cannot transmit simultaneously with Bluetooth Radio.					
5. U-NII Radio can transmit simultaneously with Bluetooth Radio.					

12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.410	0.276	0.495	0.041	0.686	No	0.905	No	0.946	No
	Left Tilt	0.274	0.919	1.179	0.037	1.193	No	1.453	No	1.490	No
	Right Touch	0.341	0.919	1.179	0.108	1.260	No	1.520	No	1.628	Yes
	Right Tilt	0.249	0.496	0.919	0.076	0.745	No	1.168	No	1.244	No
Body-worn & Hotspot	Rear	0.460	0.250	0.488	0.031	0.710	No	0.948	No	0.979	No
	Front	0.570	0.250	0.282	0.016	0.820	No	0.852	No	0.868	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.297				0.297	No	0.297	No		
	Edge 3	0.446				0.446	No	0.446	No		
	Edge 4	0.480	0.250	0.417		0.730	No	0.897	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII +BT						
Right Touch	0.341	1.287	① + ③ + ④	1.628	93.2	0.02	No	1

12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.302	0.276	0.495	0.041	0.578	No	0.797	No	0.838	No
	Left Tilt	0.176	0.919	1.179	0.037	1.095	No	1.355	No	1.392	No
	Right Touch	0.509	0.919	1.179	0.108	1.428	No	1.688	Yes	1.796	Yes
	Right Tilt	0.206	0.496	0.919	0.076	0.702	No	1.125	No	1.201	No
Body-worn & Hotspot	Rear	0.411	0.250	0.488	0.031	0.661	No	0.899	No	0.930	No
	Front	0.500	0.250	0.282	0.016	0.750	No	0.782	No	0.798	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.513				0.513	No	0.513	No		
	Edge 3	0.328				0.328	No	0.328	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure	
	① WWAN	③ U-NII						
Right Touch	0.509	1.179	① + ③	1.688	83.1	0.03	No	2

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure	
	① WWAN	③ + ④ U-NII + BT						
Right Touch	0.509	1.287	① + ③ + ④	1.796	83.0	0.03	No	3

12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.403	0.276	0.495	0.041	0.679	No	0.898	No	0.939	No
	Left Tilt	0.270	0.919	1.179	0.037	1.189	No	1.449	No	1.486	No
	Right Touch	0.904	0.919	1.179	0.108	1.823	Yes	2.083	Yes	2.191	Yes
	Right Tilt	0.348	0.496	0.919	0.076	0.844	No	1.267	No	1.343	No
Body-worn & Hotspot	Rear	0.760	0.250	0.488	0.031	1.010	No	1.248	No	1.279	No
	Front	0.928	0.250	0.282	0.016	1.178	No	1.210	No	1.226	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.996				0.996	No	0.996	No		
	Edge 3	0.534				0.534	No	0.534	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS						
Right Touch	0.904	0.919	① + ②	1.823	89.5	0.03	No	4
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ U-NII						
Right Touch	0.904	1.179	① + ③	2.083	93.5	0.03	No	5
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT						
Right Touch	0.904	1.287	① + ③ + ④	2.191	93.2	0.03	No	6

12.4. Sum of the SAR for WCDMA Band IV & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.374	0.276	0.495	0.041	0.650	No	0.869	No	0.910	No
	Left Tilt	0.258	0.919	1.179	0.037	1.177	No	1.437	No	1.474	No
	Right Touch	0.690	0.919	1.179	0.108	1.609	Yes	1.869	Yes	1.977	Yes
	Right Tilt	0.233	0.496	0.919	0.076	0.729	No	1.152	No	1.228	No
Body-worn & Hotspot	Rear	0.933	0.250	0.488	0.031	1.183	No	1.421	No	1.452	No
	Front	0.915	0.250	0.282	0.016	1.165	No	1.197	No	1.213	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.570				0.570	No	0.570	No		
	Edge 3	0.507				0.507	No	0.507	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS	① + ②					
Right Touch	0.690	0.919	① + ②	1.609	84.8	0.02	No	7
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ U-NII	① + ③					
Right Touch	0.690	1.179	① + ③	1.869	88.8	0.03	No	8
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT	① + ③ + ④					
Right Touch	0.690	1.287	① + ③ + ④	1.977	88.5	0.03	No	9

12.5. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.499	0.276	0.495	0.041	0.775	No	0.994	No	1.035	No
	Left Tilt	0.279	0.919	1.179	0.037	1.198	No	1.458	No	1.495	No
	Right Touch	0.383	0.919	1.179	0.108	1.302	No	1.562	No	1.670	Yes
	Right Tilt	0.250	0.496	0.919	0.076	0.746	No	1.169	No	1.245	No
Body-worn & Hotspot	Rear	0.561	0.250	0.488	0.031	0.811	No	1.049	No	1.080	No
	Front	0.747	0.250	0.282	0.016	0.997	No	1.029	No	1.045	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.276				0.276	No	0.276	No		
	Edge 3	0.524				0.524	No	0.524	No		
	Edge 4	0.586	0.250	0.417		0.836	No	1.003	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT	① + ③ + ④					
Right Touch	0.383	1.287	① + ③ + ④	1.670	62.1	0.03	No	10

12.6. Sum of the SAR for LTE Band 2 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.339	0.276	0.495	0.041	0.615	No	0.834	No	0.875	No
	Left Tilt	0.230	0.919	1.179	0.037	1.149	No	1.409	No	1.446	No
	Right Touch	0.770	0.919	1.179	0.108	1.689	Yes	1.949	Yes	2.057	Yes
	Right Tilt	0.316	0.496	0.919	0.076	0.812	No	1.235	No	1.311	No
Body-worn & Hotspot	Rear	0.669	0.250	0.488	0.031	0.919	No	1.157	No	1.188	No
	Front	0.868	0.250	0.282	0.016	1.118	No	1.150	No	1.166	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.781				0.781	No	0.781	No		
	Edge 3	0.424				0.424	No	0.424	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS						
Right Touch	0.770	0.919	① + ②	1.689	84.5	0.03	No	11
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ U-NII						
Right Touch	0.770	1.179	① + ③	1.949	88.5	0.03	No	12
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT						
Right Touch	0.770	1.287	① + ③ + ④	2.057	88.5	0.03	No	13

12.7. Sum of the SAR for LTE Band 4 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.414	0.276	0.495	0.041	0.690	No	0.909	No	0.950	No
	Left Tilt	0.297	0.919	1.179	0.037	1.216	No	1.476	No	1.513	No
	Right Touch	0.796	0.919	1.179	0.108	1.715	Yes	1.975	Yes	2.083	Yes
	Right Tilt	0.277	0.496	0.919	0.076	0.773	No	1.196	No	1.272	No
Body-worn & Hotspot	Rear	0.990	0.250	0.488	0.031	1.240	No	1.478	No	1.509	No
	Front	0.989	0.250	0.282	0.016	1.239	No	1.271	No	1.287	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.626				0.626	No	0.626	No		
	Edge 3	0.610				0.610	No	0.610	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS	① + ②					
Right Touch	0.796	0.919	① + ②	1.715	84.8	0.03	No	14
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ U-NII	① + ③					
Right Touch	0.796	1.179	① + ③	1.975	88.8	0.03	No	15
Test Position	Worst-case combination		Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT	① + ③ + ④					
Right Touch	0.796	1.287	① + ③ + ④	2.083	88.8	0.03	No	16

12.8. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

LTE Band 5 is covered by LTE Band 26 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

12.9. Sum of the SAR for LTE Band 7 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.626	0.276	0.495	0.041	0.902	No	1.121	No	1.162	No
	Left Tilt	0.147	0.919	1.179	0.037	1.066	No	1.326	No	1.363	No
	Right Touch	0.270	0.919	1.179	0.108	1.189	No	1.449	No	1.557	No
	Right Tilt	0.185	0.496	0.919	0.076	0.681	No	1.104	No	1.180	No
Body-worn & Hotspot	Rear	0.407	0.250	0.488	0.031	0.657	No	0.895	No	0.926	No
	Front	0.696	0.250	0.282	0.016	0.946	No	0.978	No	0.994	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.064				0.064	No	0.064	No		
	Edge 3	0.652				0.652	No	0.652	No		
	Edge 4	0.419	0.250	0.417		0.669	No	0.836	No		

12.10. Sum of the SAR for LTE Band 17 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.216	0.276	0.495	0.041	0.492	No	0.711	No	0.752	No
	Left Tilt	0.122	0.919	1.179	0.037	1.041	No	1.301	No	1.338	No
	Right Touch	0.158	0.919	1.179	0.108	1.077	No	1.337	No	1.445	No
	Right Tilt	0.098	0.496	0.919	0.076	0.594	No	1.017	No	1.093	No
Body-worn & Hotspot	Rear	0.420	0.250	0.488	0.031	0.670	No	0.908	No	0.939	No
	Front	0.396	0.250	0.282	0.016	0.646	No	0.678	No	0.694	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.275				0.275	No	0.275	No		
	Edge 3	0.201				0.201	No	0.201	No		
	Edge 4	0.499	0.250	0.417		0.749	No	0.916	No		

12.11. Sum of the SAR for LTE Band 26 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.395	0.276	0.495	0.041	0.671	No	0.890	No	0.931	No
	Left Tilt	0.249	0.919	1.179	0.037	1.168	No	1.428	No	1.465	No
	Right Touch	0.311	0.919	1.179	0.108	1.230	No	1.490	No	1.598	Yes
	Right Tilt	0.211	0.496	0.919	0.076	0.707	No	1.130	No	1.206	No
Body-worn & Hotspot	Rear	0.485	0.250	0.488	0.031	0.735	No	0.973	No	1.004	No
	Front	0.598	0.250	0.282	0.016	0.848	No	0.880	No	0.896	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.240				0.240	No	0.240	No		
	Edge 3	0.407				0.407	No	0.407	No		
	Edge 4	0.436	0.250	0.417		0.686	No	0.853	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	③ + ④ U-NII + BT					
Right Touch	0.311	1.287	① + ③ + ④	58.5	0.03	No	17

12.12. Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ③ + ④ WWAN + U-NII + BT	
						Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.295	0.276	0.495	0.041	0.571	No	0.790	No	0.831	No
	Left Tilt	0.074	0.919	1.179	0.037	0.993	No	1.253	No	1.290	No
	Right Touch	0.136	0.919	1.179	0.108	1.055	No	1.315	No	1.423	No
	Right Tilt	0.091	0.496	0.919	0.076	0.587	No	1.010	No	1.086	No
Body-worn & Hotspot	Rear	0.192	0.250	0.488	0.031	0.442	No	0.680	No	0.711	No
	Front	0.364	0.250	0.282	0.016	0.614	No	0.646	No	0.662	No
Hotspot	Edge 1		0.250	0.417		0.250	No	0.417	No		
	Edge 2	0.034				0.034	No	0.034	No		
	Edge 3	0.317				0.317	No	0.317	No		
	Edge 4		0.250	0.417		0.250	No	0.417	No		

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Figure (1)

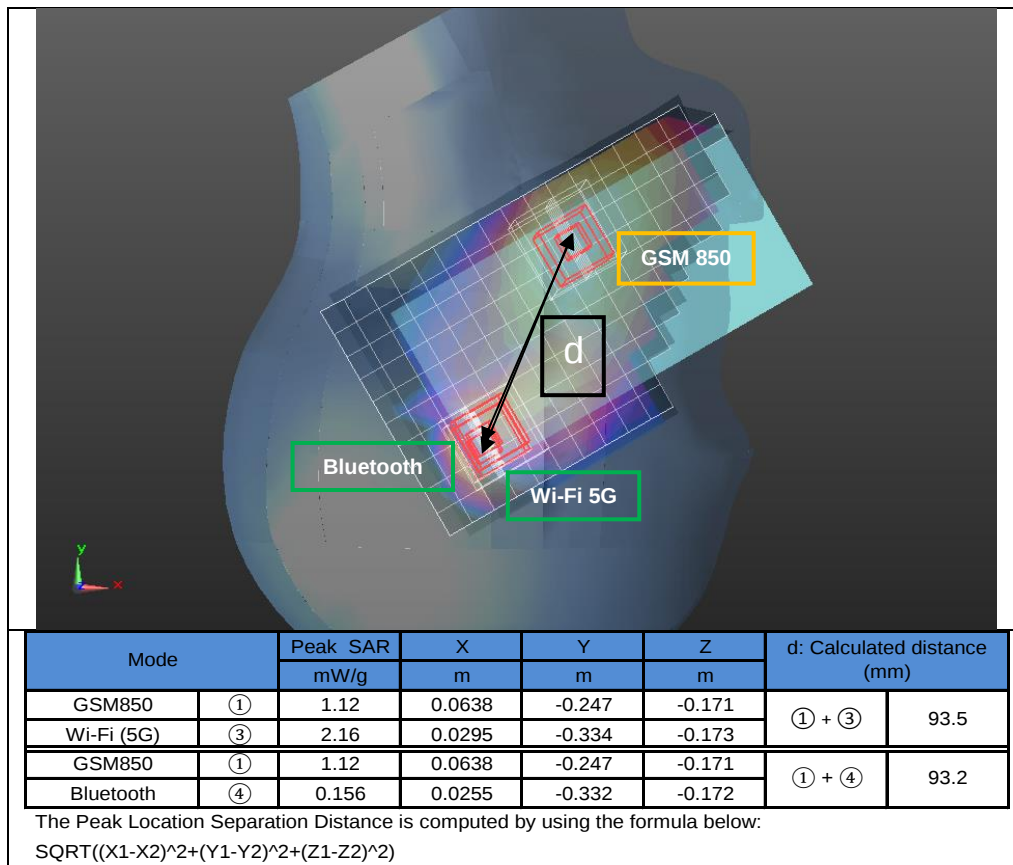


Figure (2)

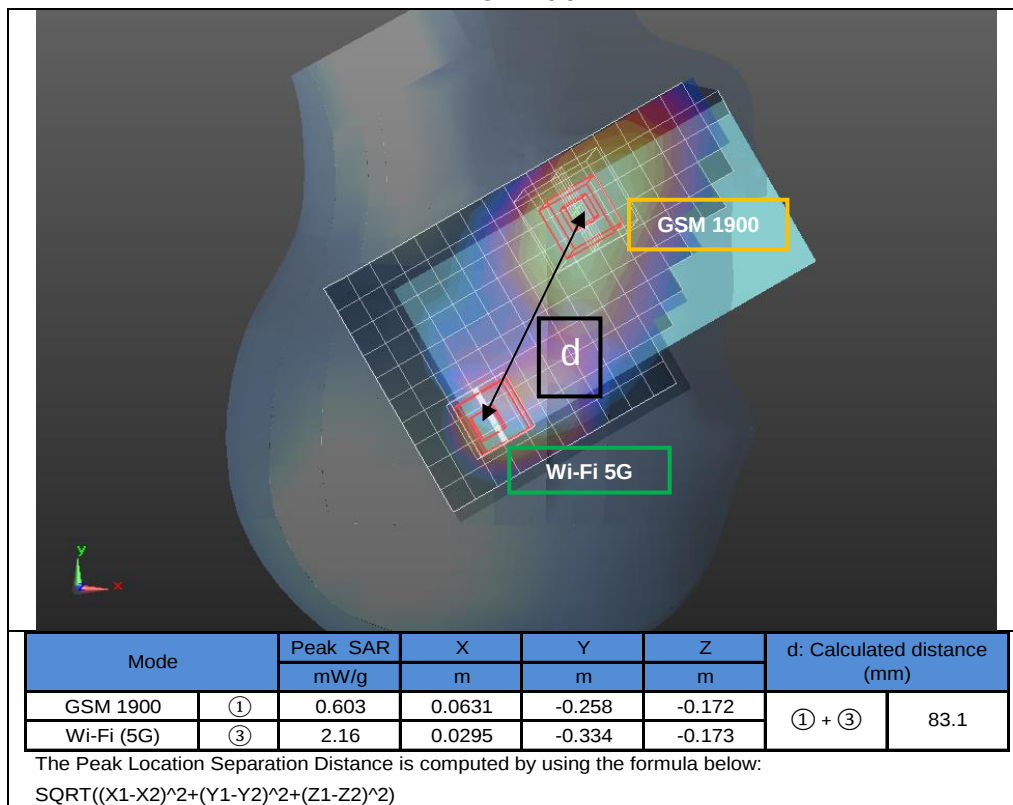


Figure (3)

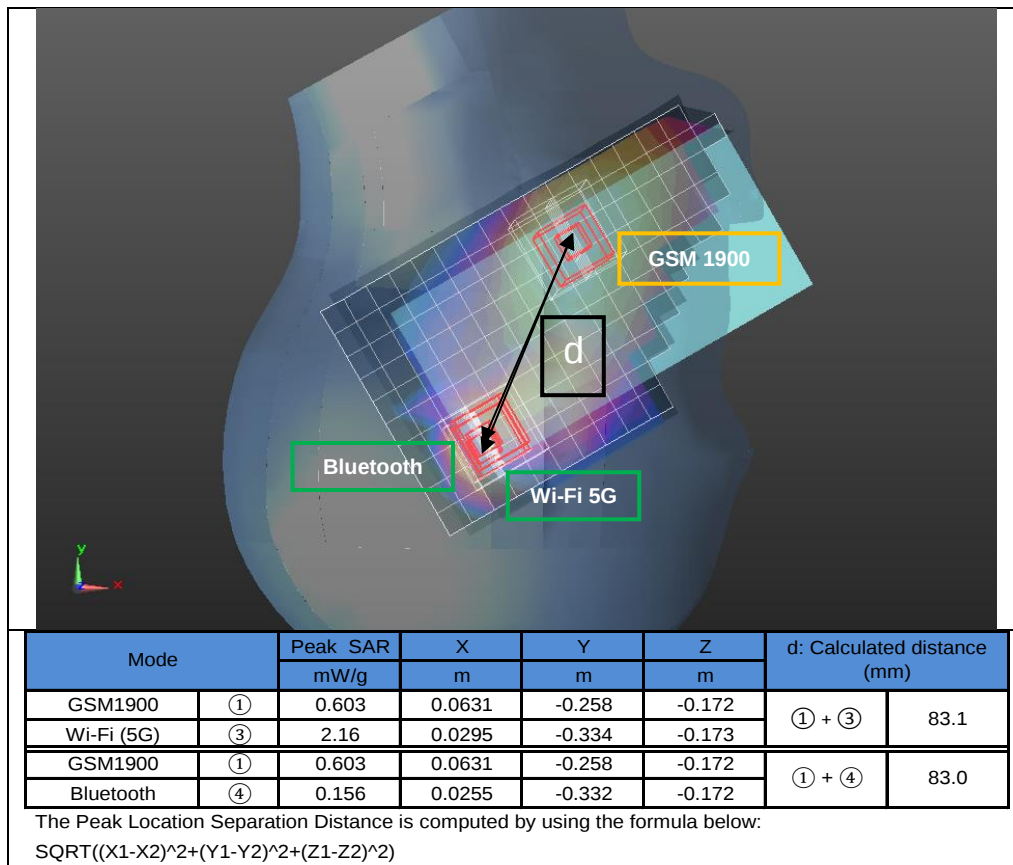


Figure (4)

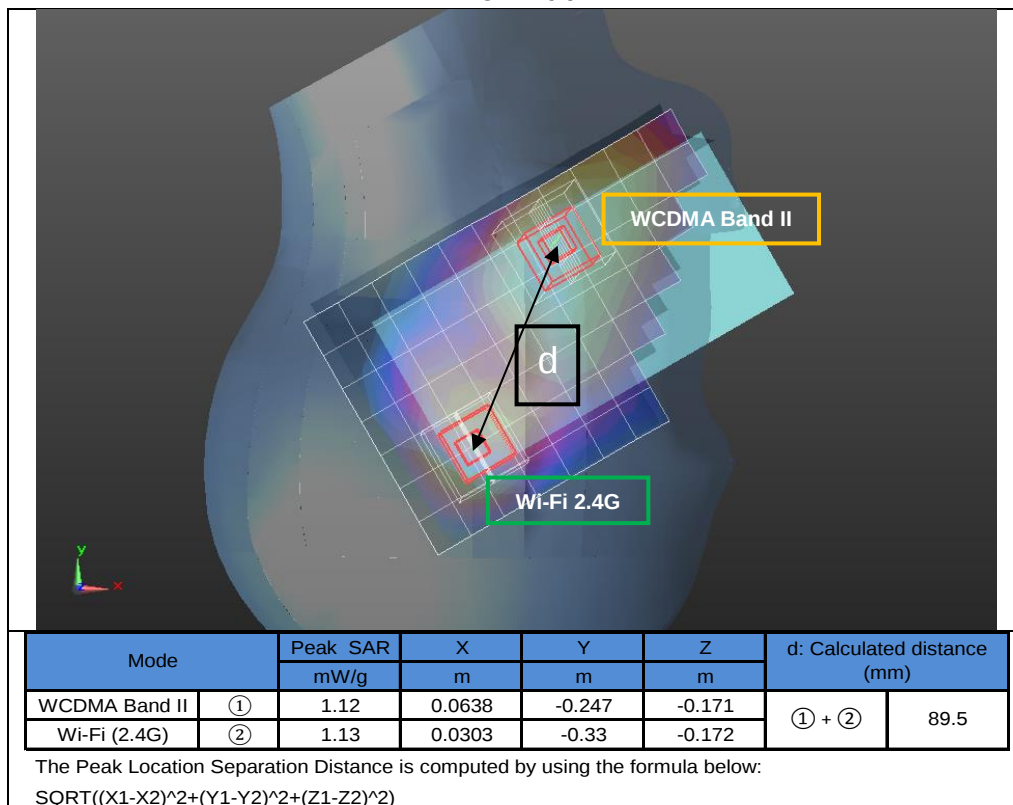


Figure (5)

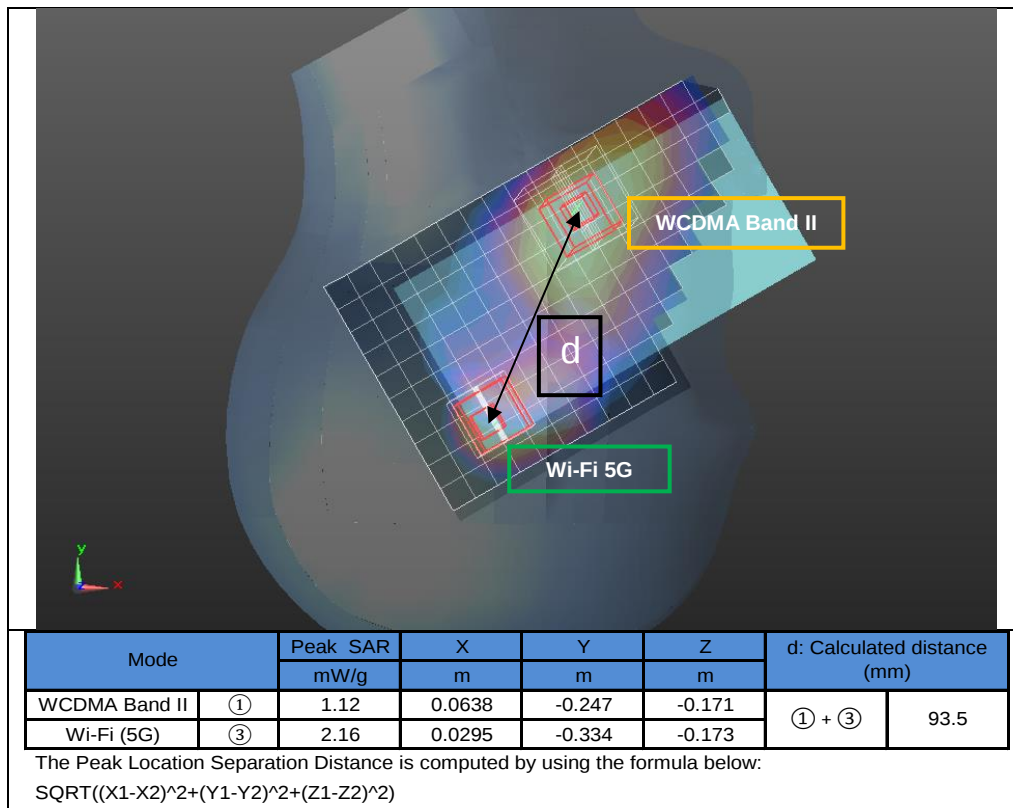


Figure (6)

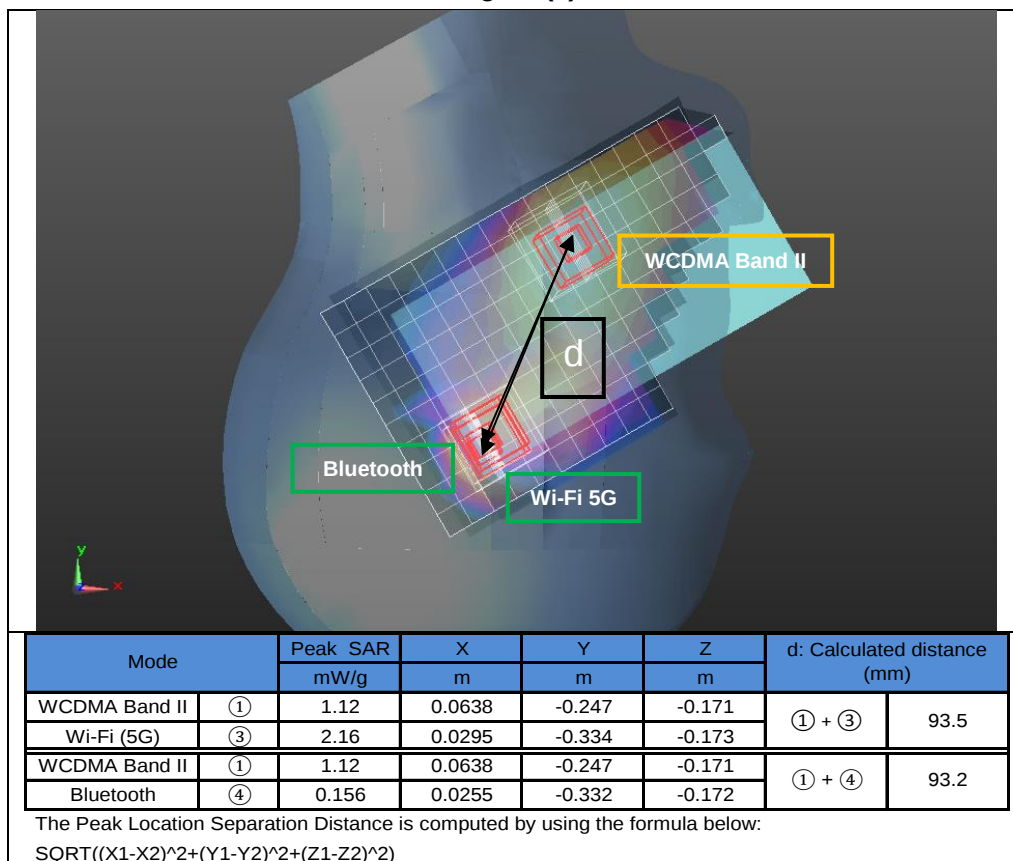


Figure (7)

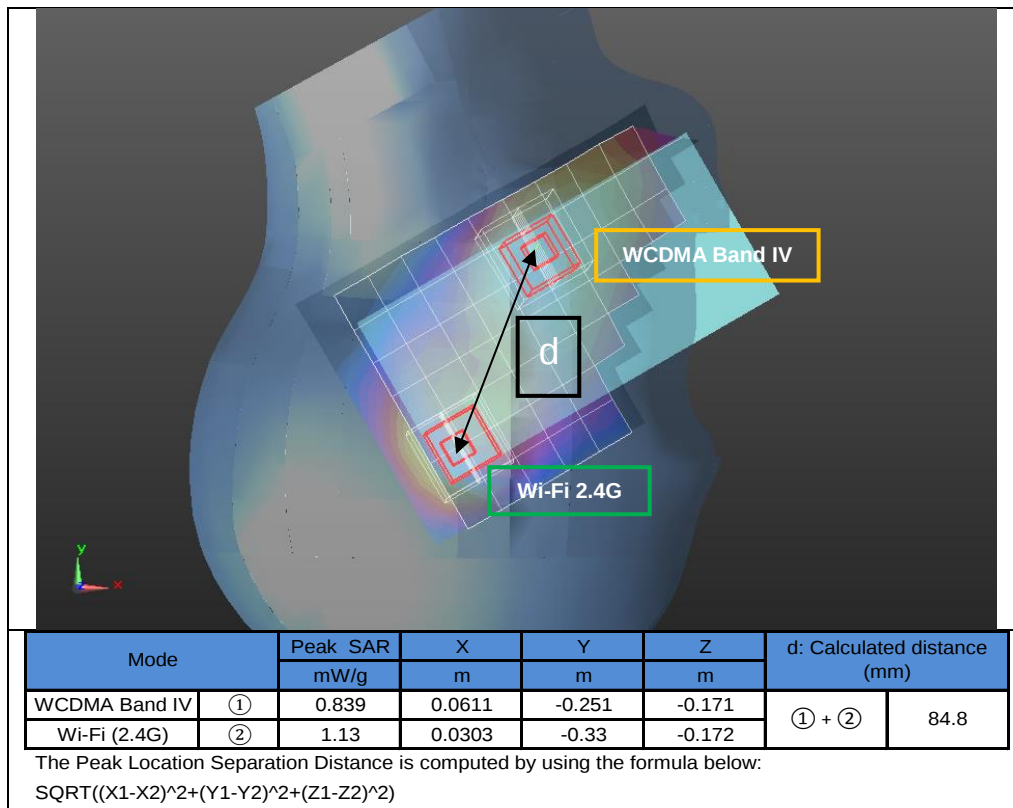


Figure (8)

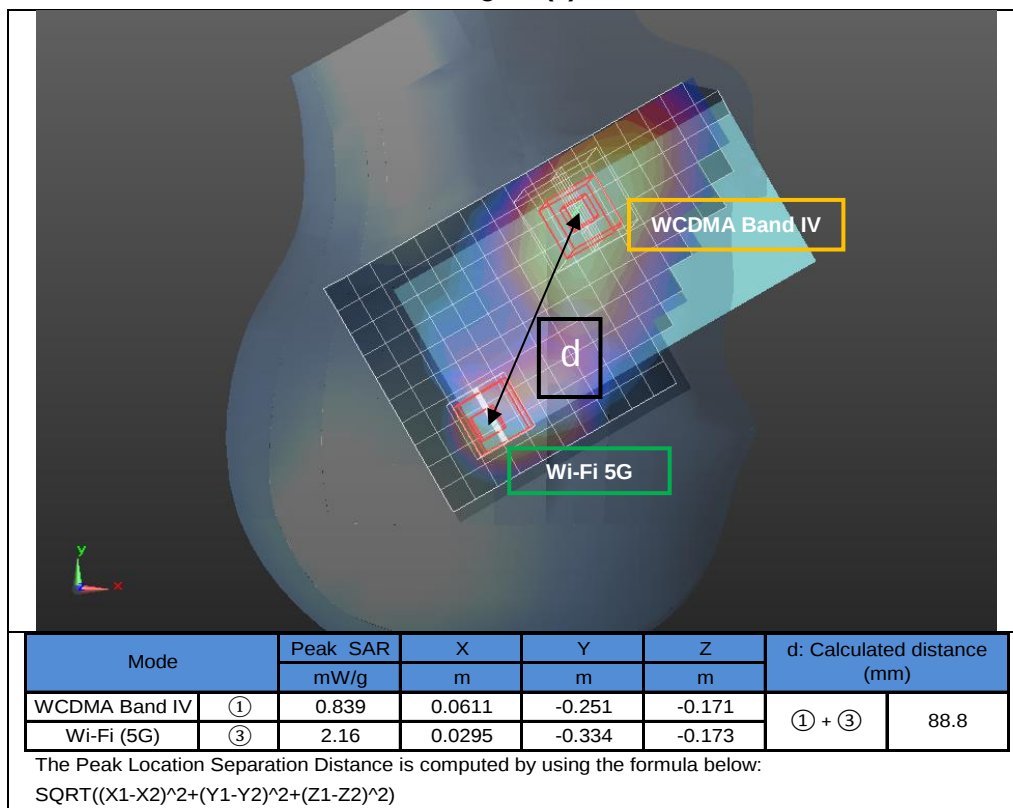


Figure (9)

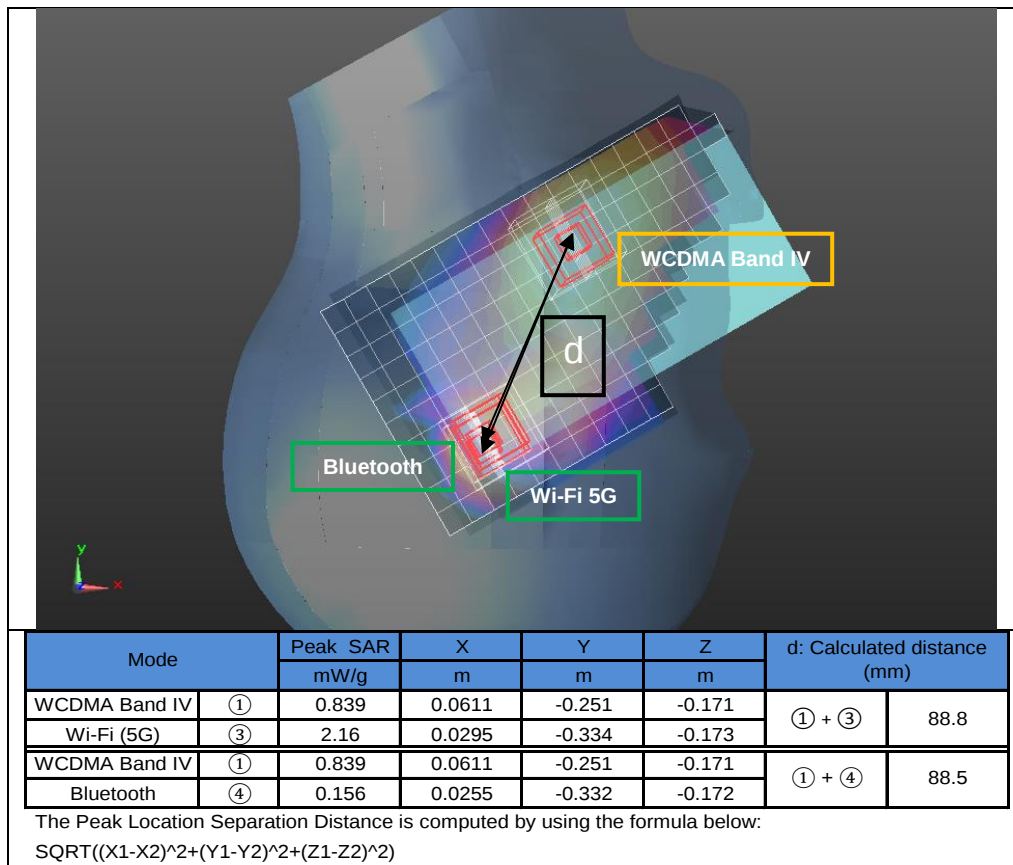


Figure (10)

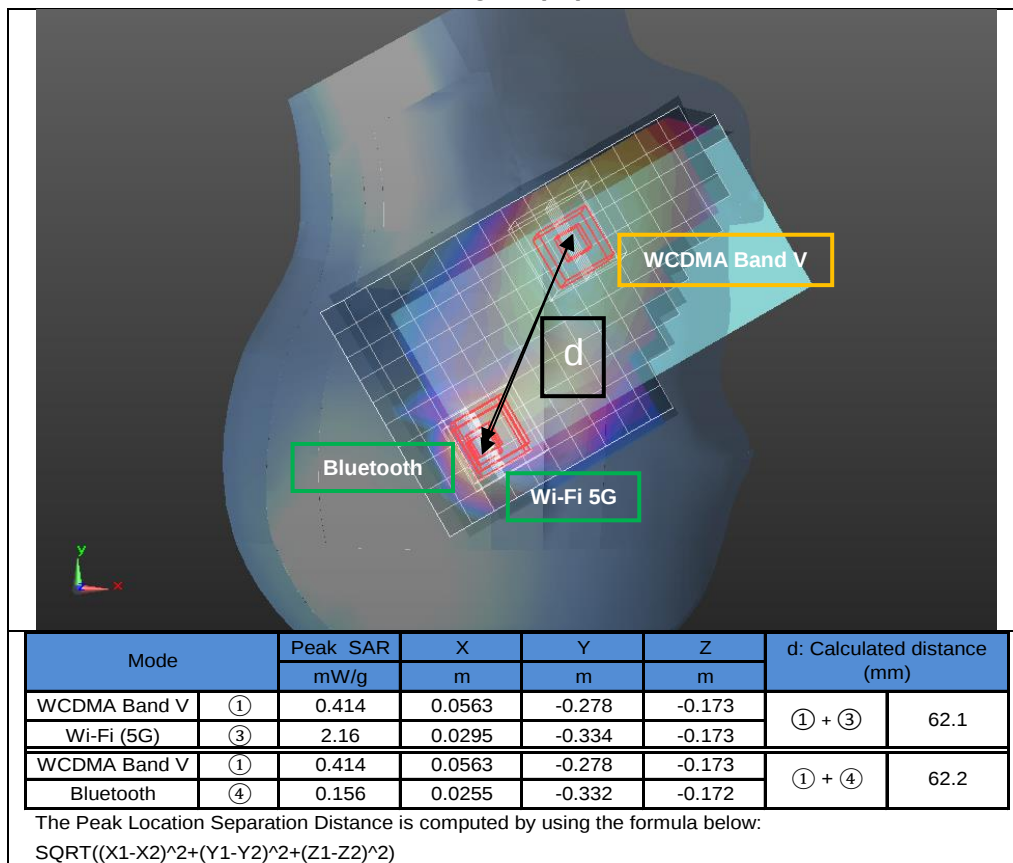


Figure (11)

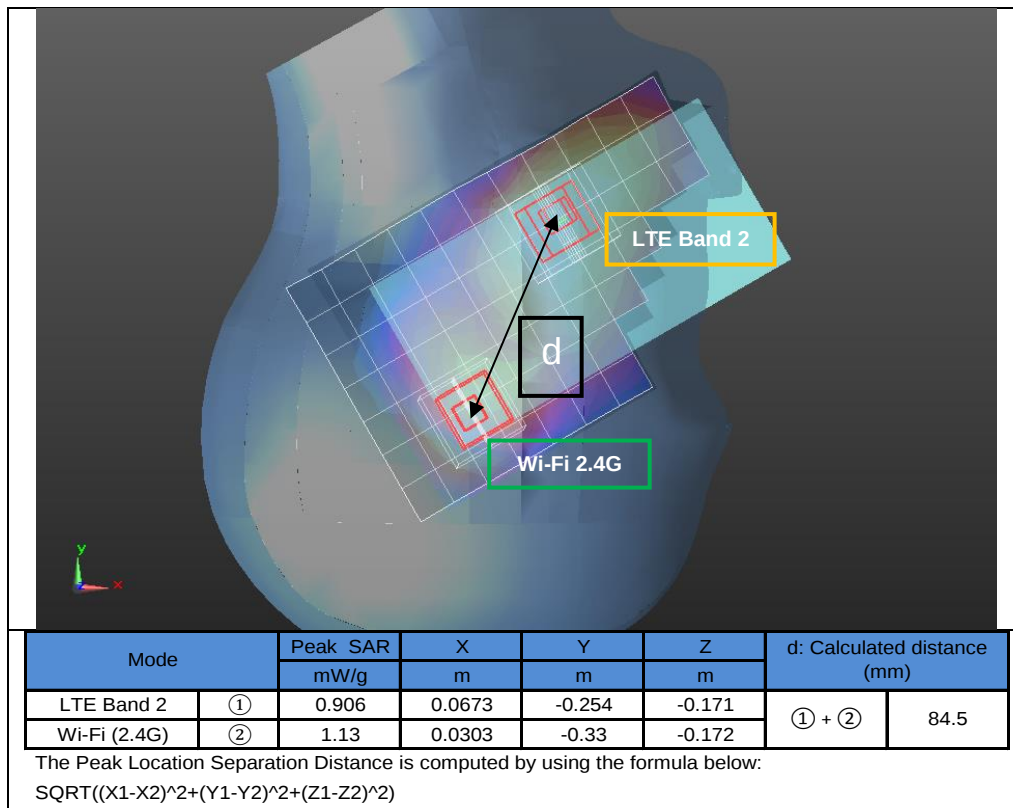


Figure (12)

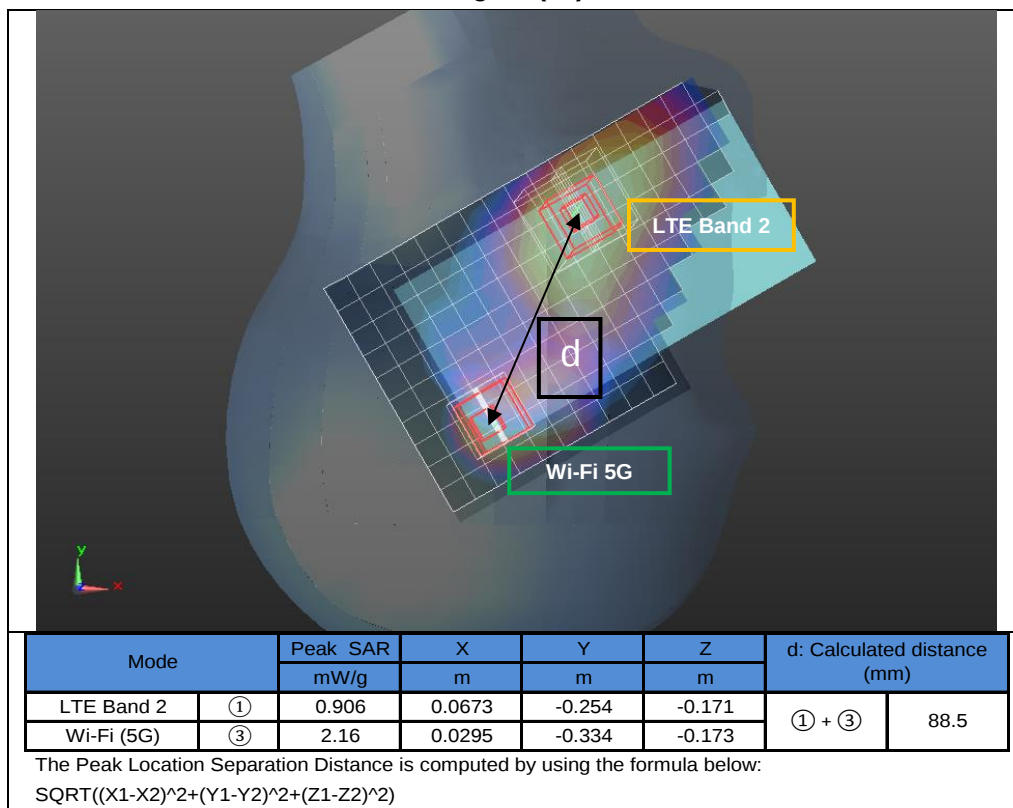


Figure (13)

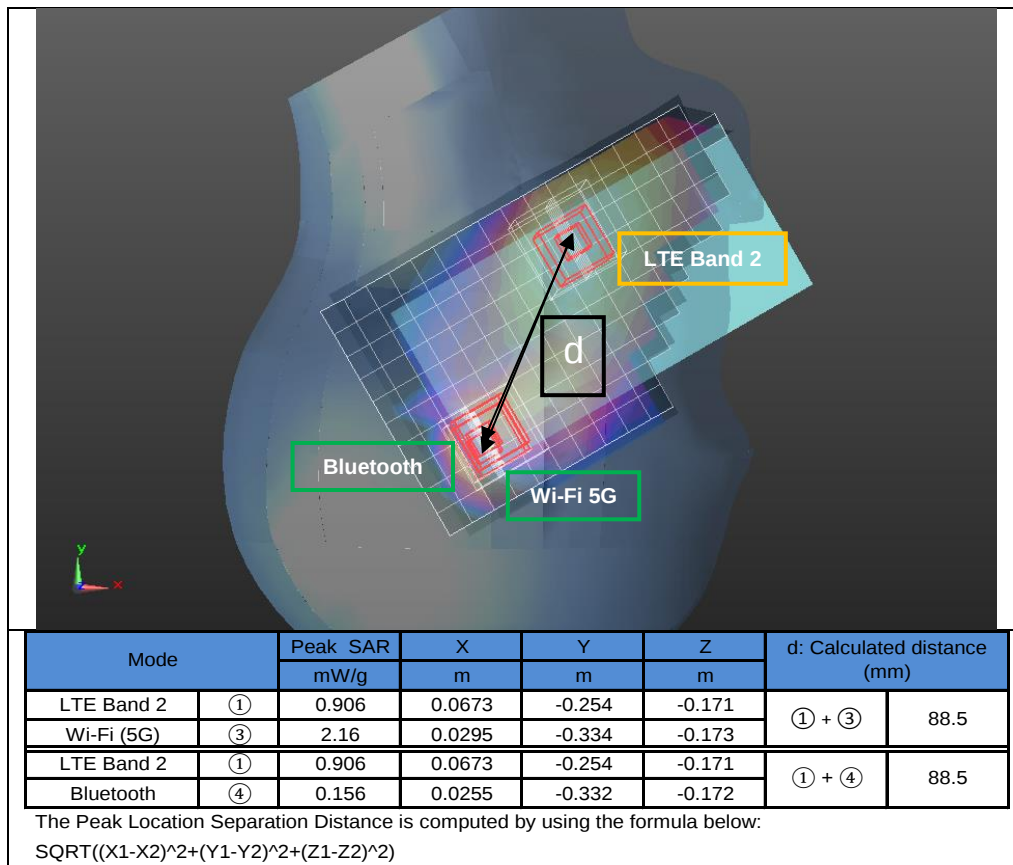


Figure (14)

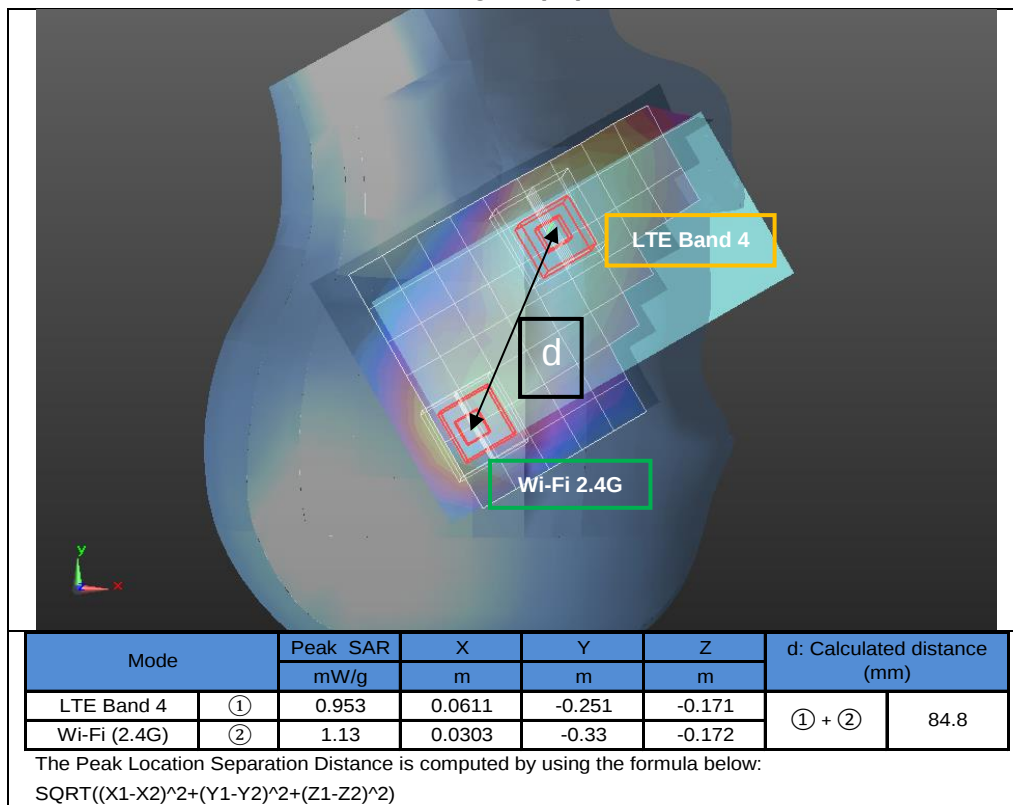


Figure (15)

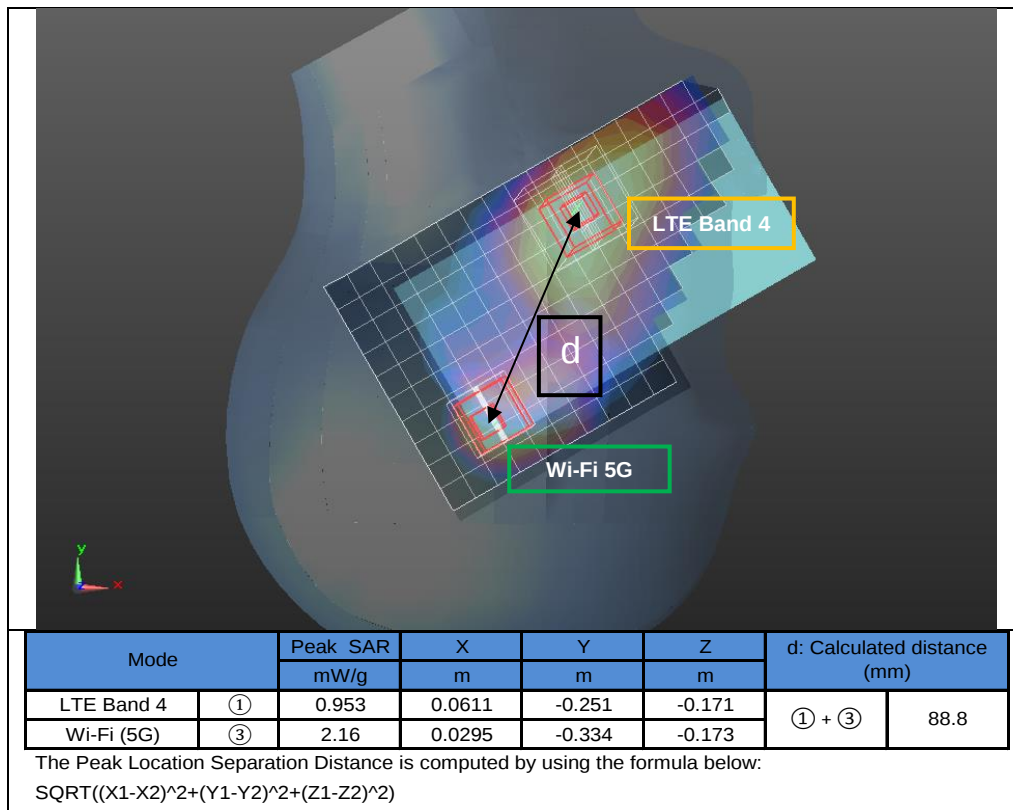


Figure (16)


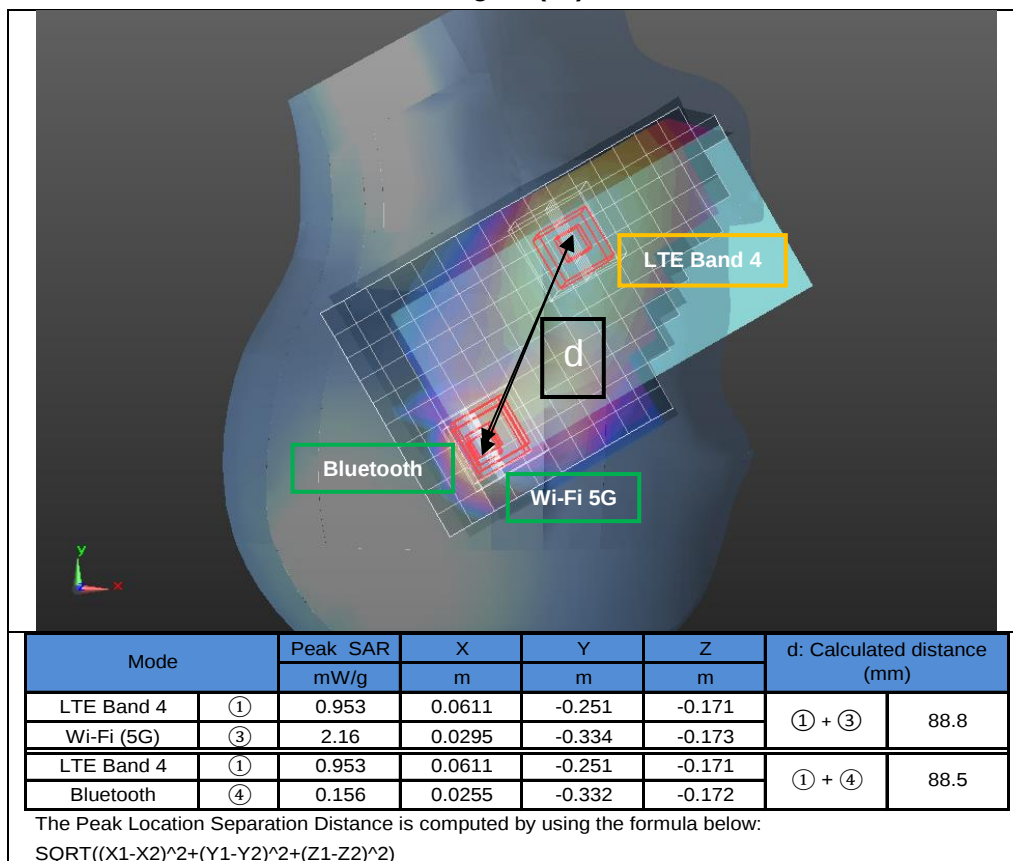


Figure (17)

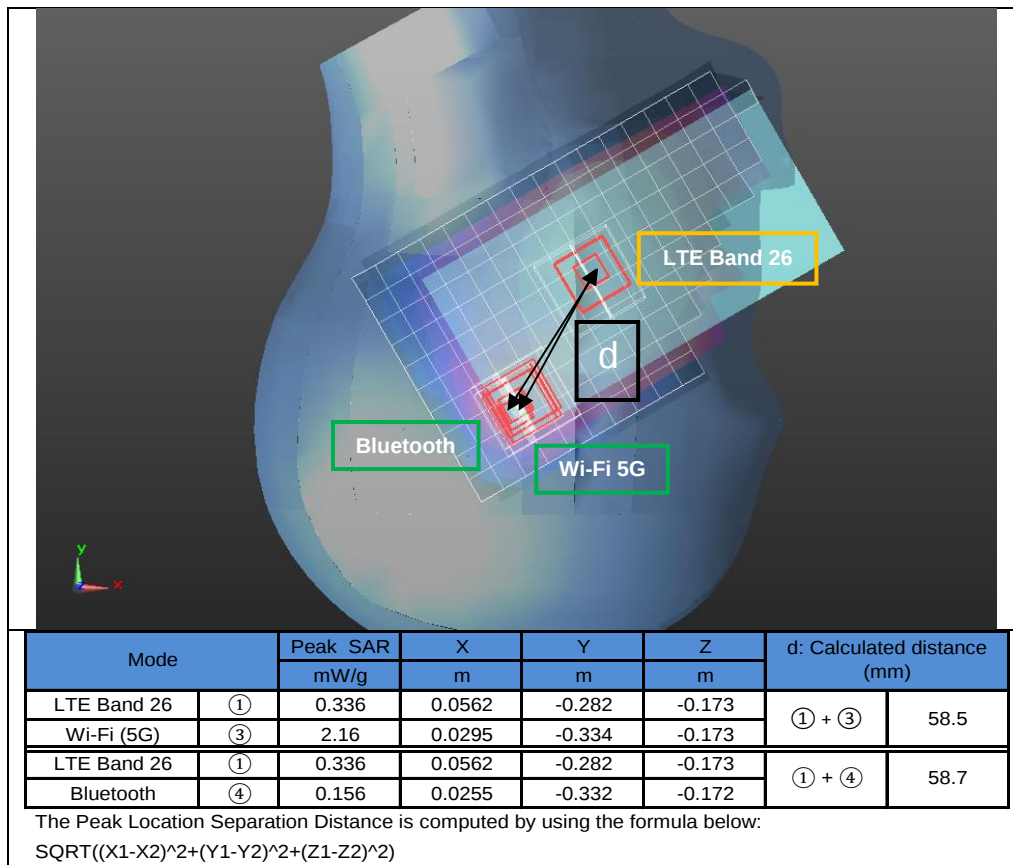

Appendixes

Refer to separated files for the following appendixes.

15I21552-S1V1 SAR_App A Photos & Ant. Locations

15I21552-S1V1 SAR_App B System Check Plots

15I21552-S1V1 SAR_App C Highest Test Plots

15I21552-S1V1 SAR_App D Tissue Ingredients

15I21552-S1V1 SAR_App E1 Probe Cal. Certs

15I21552-S1V1 SAR_App E2 Probe Cal. Certs

15I21552-S1V1 SAR_App F1 Dipole Cal. Certs

15I21552-S1V1 SAR_App F2 Dipole Cal. Certs

END OF REPORT