



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
8/10-8/21/2015, 8/27/2015  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1508101507.ZNF

**FCC ID:** ZNFH900

**APPLICANT:** LG Electronics MobileComm U.S.A

**Application Type:** Certification  
**Model(s):** LG-H900, LGH900, H900  
**EUT Type:** Portable Handset  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15.407  
**Test Procedure(s):** KDB 789033 D02 v01, KDB 644545 v01r02, KDB 648474 D03 v01r02

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power		Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)					Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	28.119	14.49	802.11n	1	40	5190 - 5230	16.482	12.17
	2A	20	5260 - 5320	30.832	14.89		2A	40	5270 - 5310	16.444	12.16
	2C	20	5500 - 5720	29.580	14.71		2C	40	5510 - 5710	19.588	12.92
	3	20	5745 - 5825	30.339	14.82		3	40	5755 - 5795	17.498	12.43
802.11n	1	20	5180 - 5240	27.040	14.32	802.11ac	1	40	5190 - 5230	16.634	12.21
	2A	20	5260 - 5320	27.416	14.38		2A	40	5270 - 5310	16.255	12.11
	2C	20	5500 - 5720	19.907	12.99		2C	40	5510 - 5710	19.861	12.98
	3	20	5745 - 5825	22.284	13.48		3	40	5755 - 5795	18.707	12.72
802.11ac	1	20	5180 - 5240	31.405	14.97	802.11ac	1	80	5210	8.433	9.26
	2A	20	5260 - 5320	30.061	14.78		2A	80	5290	9.705	9.87
	2C	20	5500 - 5720	31.477	14.98		2C	80	5530 - 5690	10.965	10.40
	3	20	5745 - 5825	31.405	14.97		3	80	5775	12.106	10.83

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01 and KDB 644545 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortañez  
President




<b>FCC ID:</b> ZNFH900		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset		Page 1 of 126

# TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 PCTEST TEST LOCATION .....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES .....		5
2.3 TEST CONFIGURATION.....		6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		6
3.0 DESCRIPTION OF TEST .....		7
3.1 EVALUATION PROCEDURE .....		7
3.2 AC LINE CONDUCTED EMISSIONS .....		7
3.3 RADIATED EMISSIONS.....		8
3.4 ENVIRONMENTAL CONDITIONS .....		8
4.0 ANTENNA REQUIREMENTS.....		9
5.0 TEST EQUIPMENT CALIBRATION DATA.....		10
6.0 TEST RESULTS .....		11
6.1 SUMMARY.....		11
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC .....		12
6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N/AC .....		29
6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC .....		35
6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N/AC .....		38
6.6 FREQUENCY STABILITY .....		60
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS – ABOVE 1GHZ.....		64
6.7.1 RADIATED SPURIOUS EMISSION MEASUREMENTS .....		67
6.7.2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW) .....		79
6.7.3 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW) .....		95
6.7.4 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW) .....		108
6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ.....		115
6.9 LINE-CONDUCTED TEST DATA.....		118
7.0 CONCLUSION .....		126

<b>FCC ID:</b> ZNFH900	 ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 2 of 126	



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A

**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.407

**BASE MODEL:** LG-H900

**FCC ID:** ZNFH900

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**Test Device Serial No.:** 353074070005119,  Production  Pre-Production  Engineering  
353074070005176,  Production  Pre-Production  Engineering  
353074070005192


**DATE(S) OF TEST:** 8/10-8/21/2015, 8/27/2015

**TEST REPORT S/N:** 0Y1508101507.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 3 of 126	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

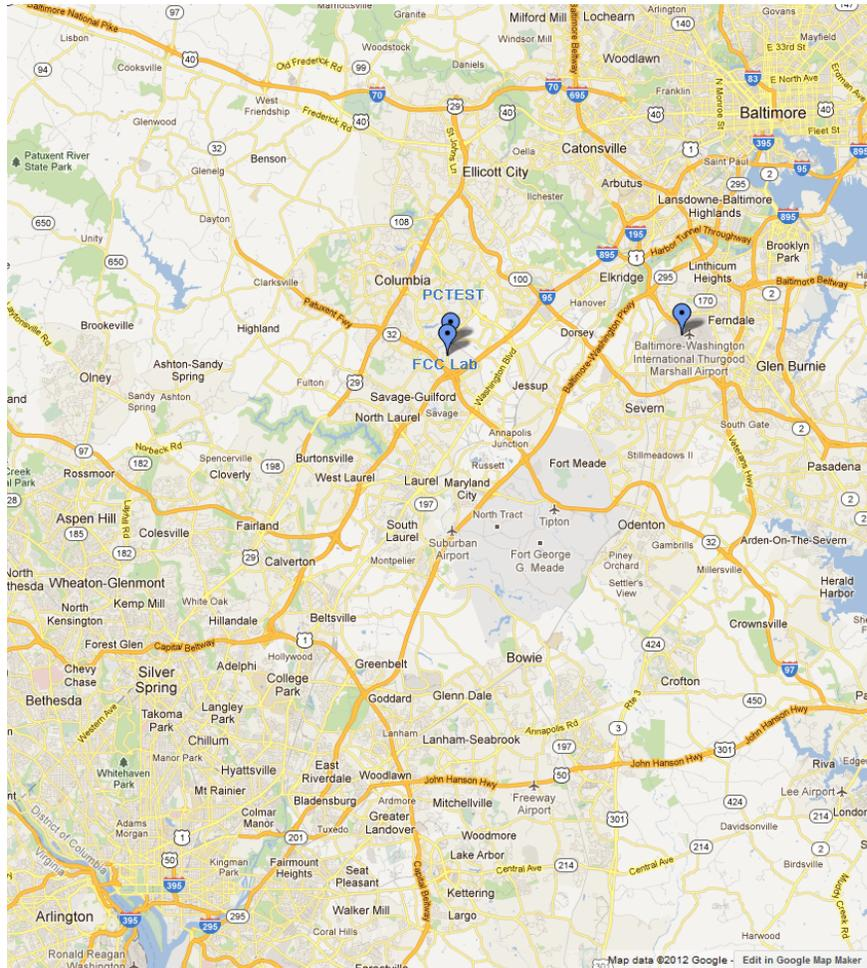

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNI MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 4 of 126	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH900**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

**Note:** 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		ANT1
5GHz	a	99.1
	n (HT20)	99.6
	ac (HT20)	99.6
	n (HT40)	98.2
	ac (HT40)	98.0
	ac (HT80)	97.5

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)  
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)  
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,  
 351/390, 390/433.3 (ac – 80MHz BW)

FCC ID: ZNFH900	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 5 of 126	

## 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFH900 was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.3, 6.4, and 6.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r02. Additional radiated spurious emission measurements were performed with the EUT wirelessly charging via a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 6 of 126

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **LG Portable Handset FCC ID: ZNFH900**.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 7 of 126	

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 8 of 126	



## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The **LG Portable Handset FCC ID: ZNFH900** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

**Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations**

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				142	5710	159	5795

**Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations**

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

**Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 9 of 126	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	4/28/2015	Annual	4/28/2016	N/A
-	RE3	Radiated Emissions Cable Set	4/29/2015	Annual	4/29/2016	N/A
-	WL25-1	Conducted Cable Set (25GHz)	4/8/2015	Annual	4/8/2016	N/A
-	WL40-1	Conducted Cable Set (40GHz)	4/20/2015	Annual	4/20/2016	N/A
Agilent	8447D	Broadband Amplifier	6/12/2015	Annual	6/12/2016	2443A01900
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	3/19/2015	Annual	3/19/2016	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/24/2015	Annual	3/24/2016	MY52350166
Agilent	N9038A	MXE EMI Receiver	3/24/2015	Annual	3/24/2016	MY51210133
Anritsu	MA2411B	Pulse Power Sensor	2/3/2014	Biennial	2/3/2016	1339026
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/17/2015	Annual	3/17/2016	17620
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	10/20/2014	Biennial	10/20/2016	114452
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	4/20/2015	Annual	4/20/2016	251425001
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	11SH10-6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	4/28/2015	Annual	4/28/2016	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/5/2015	Annual	3/5/2016	101622
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/12/2015	Annual	3/12/2016	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/17/2015	Annual	7/17/2016	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2015	Annual	3/5/2016	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/3/2015	Annual	3/3/2016	100037
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140420

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>FCC ID:</b> ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNI MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 10 of 126	

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFH900  
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 6.3
15.407 (a.1)	Maximum Conducted Output Power	< 250mW (23.98dBm) (5150-5250MHz) < 250mW (23.98dBm) (5250-5350MHz) < 250mW (23.98dBm) (5470-5725MHz) < 1W (30dBm) (5725-5850MHz)		PASS	Section 6.4
15.407 (a.1), (5)	Maximum Power Spectral Density	< 11 dBm/MHz (5150-5250MHz, 5250-5350MHz, 5470-5725MHz) < 30 dBm/500kHz (5725-5850MHz)		PASS	Section 6.5
15.407(g)	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (outside 5150-5350MHz, 5470-5725MHz, 5715-5860MHz) < -17 dBm/MHz EIRP (within 5715-5725MHz and 5850-5860MHz)		RADIATED	PASS
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS		Section 6.7, 6.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.9

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.2.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 11 of 126	

## 6.2 26dB Bandwidth Measurement – 802.11a/n/ac

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

*The 26dB bandwidth is used to determine the conducted power limits.*

### Test Procedure Used


KDB 789033 D02 v01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 12 of 126	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.11
	5200	40	a	6	20.88
	5240	48	a	6	21.01
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.40
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.72
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.36
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.70
	5230	46	n (40MHz)	13.5/15 (MCS0)	44.19
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.60
Band 2A	5260	52	a	6	21.30
	5280	56	a	6	21.21
	5320	64	a	6	21.09
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.43
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.62
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.35
	5270	54	n (40MHz)	13.5/15 (MCS0)	47.34
	5310	62	n (40MHz)	13.5/15 (MCS0)	41.04
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.29
	5500	100	a	6	21.27
	5580	116	a	6	21.19
	5720	144	a	6	21.01
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.43
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.26
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.69
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.50
	5550	110	n (40MHz)	13.5/15 (MCS0)	42.33
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.66
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.22
5690	138	ac (80MHz)	29.3/32.5 (MCS0)	80.30	

**Table 6-2. Conducted Bandwidth Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 13 of 126	

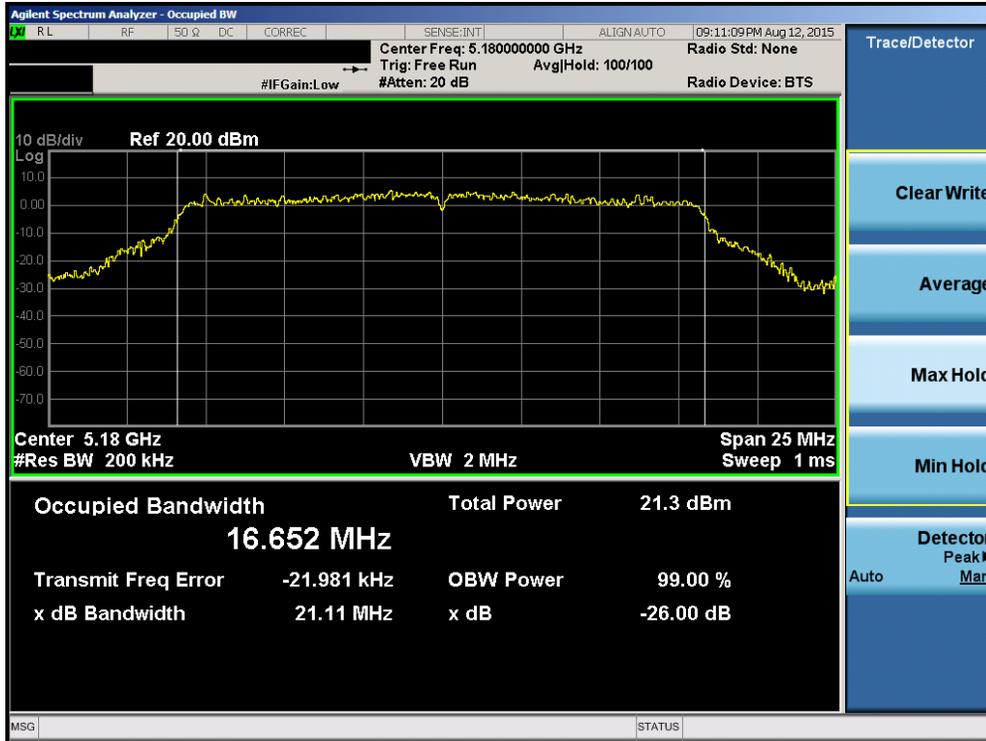


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

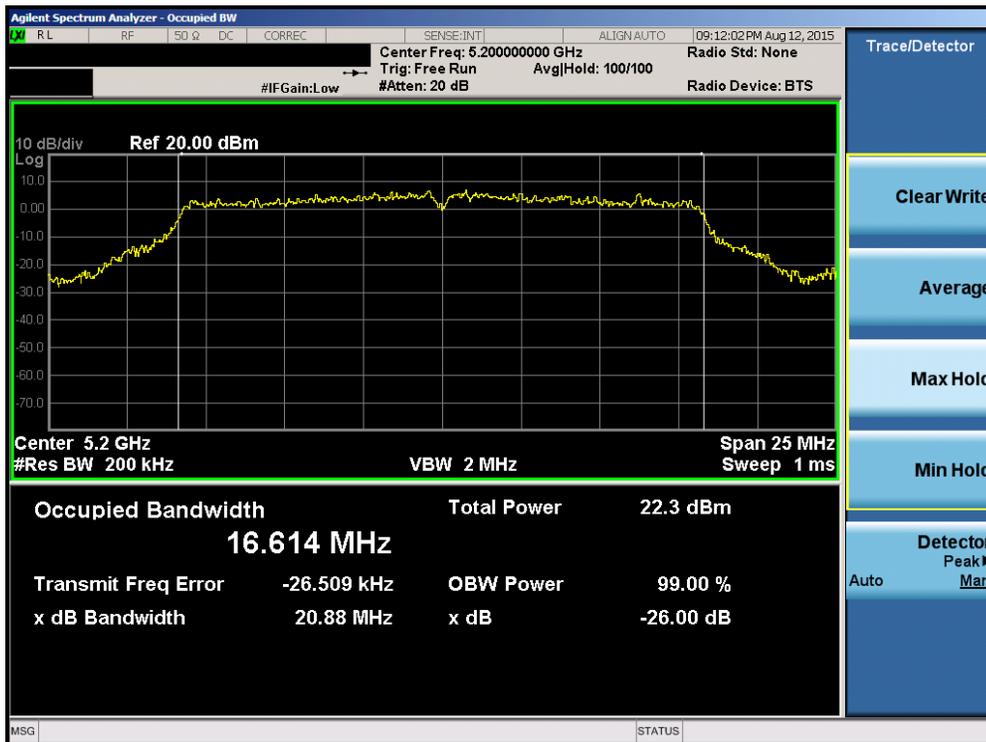


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 14 of 126

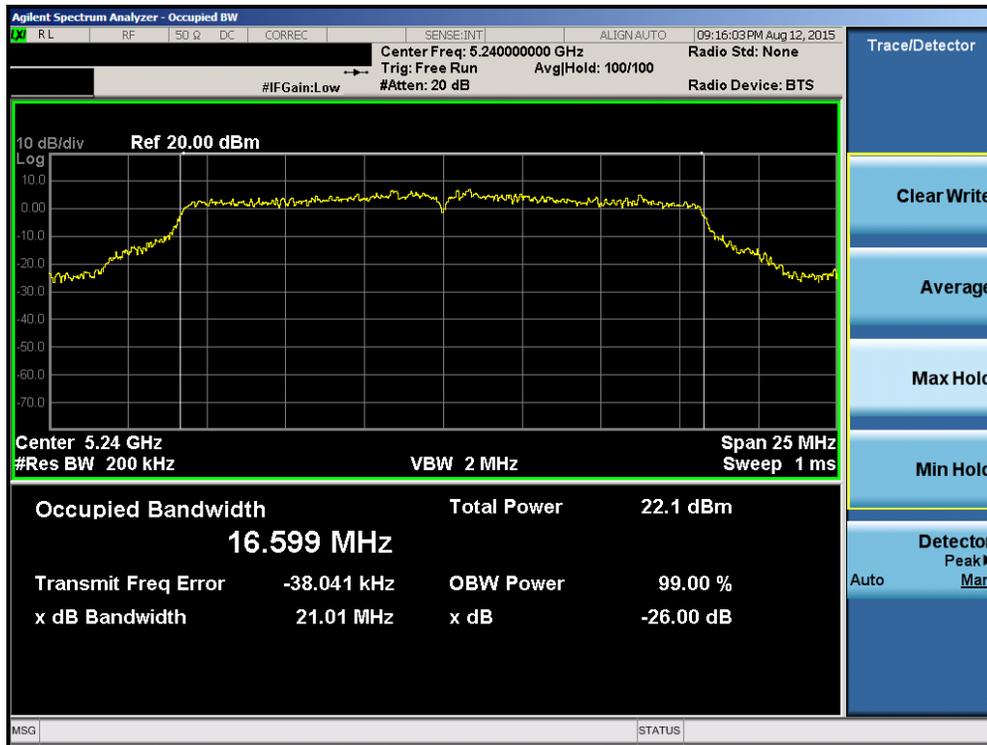


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

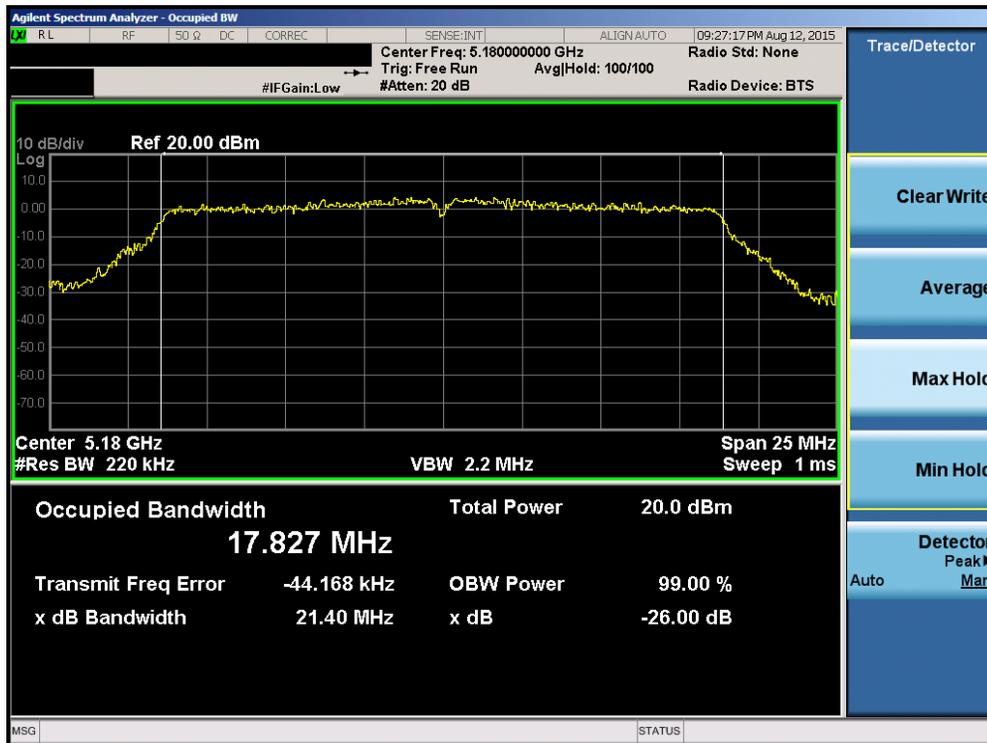

Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 15 of 126

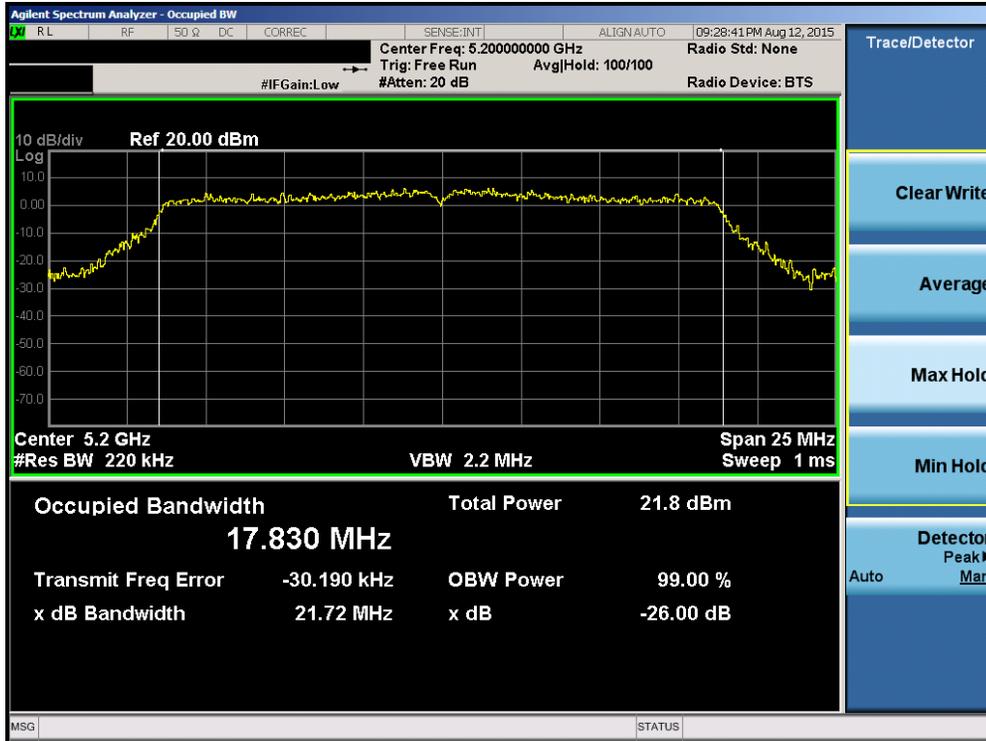


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)




Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 16 of 126



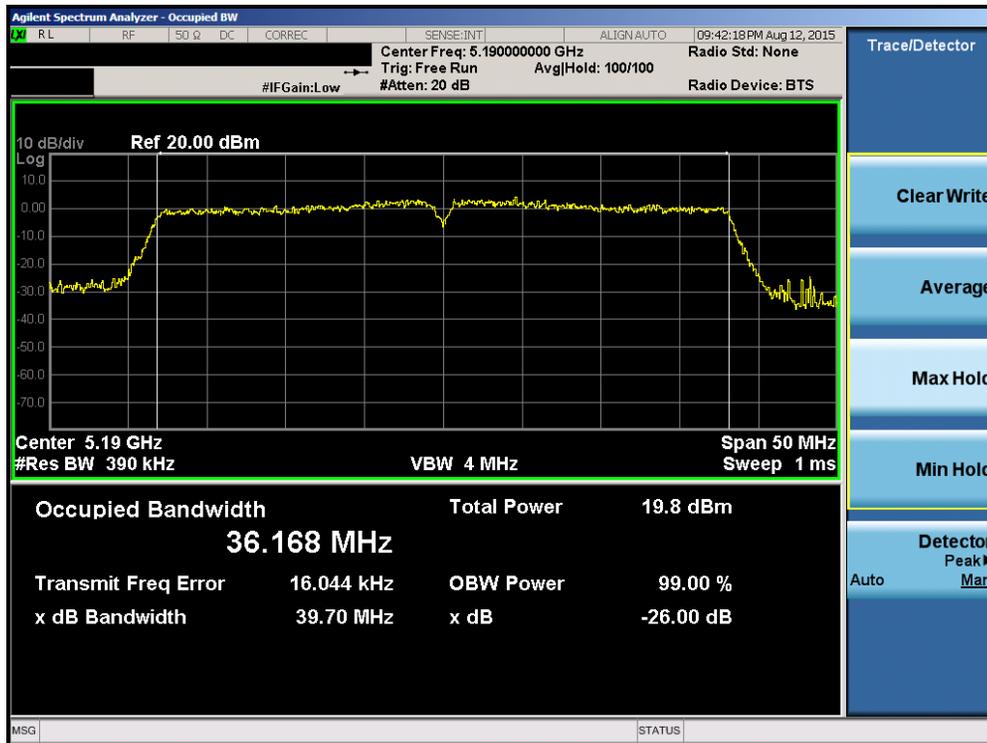

Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

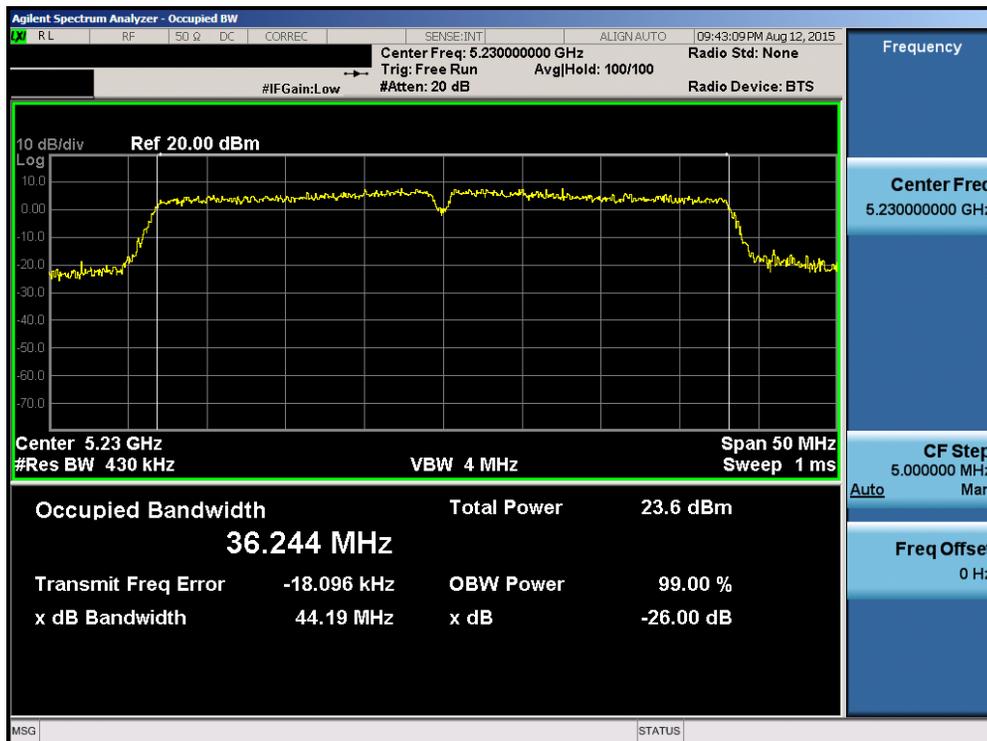


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 17 of 126




Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

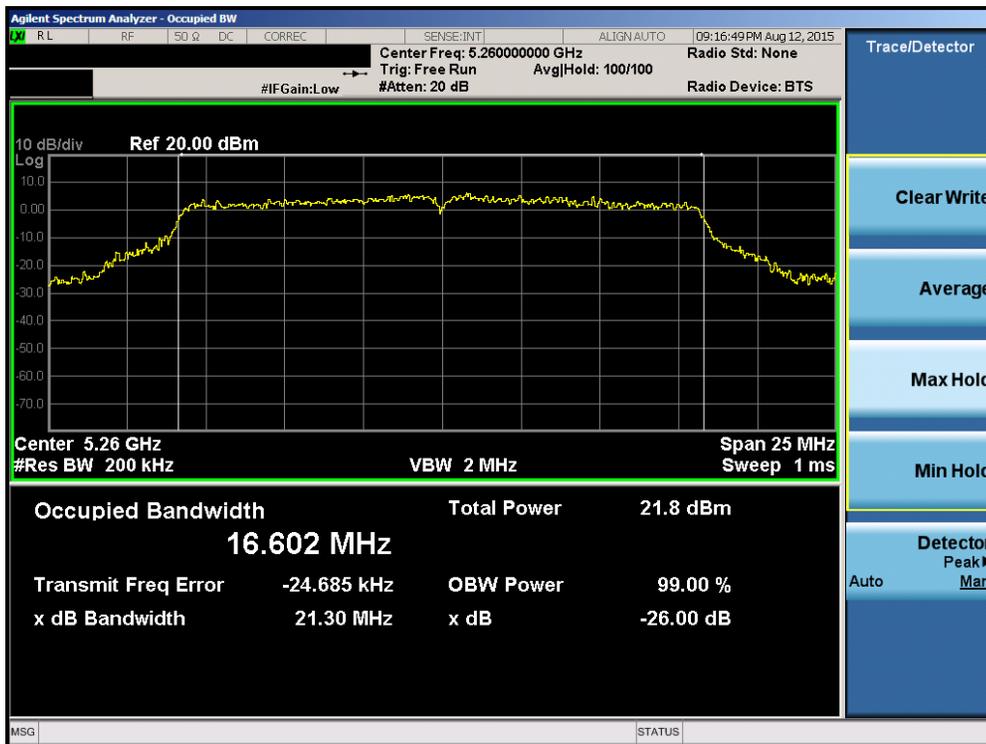


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 18 of 126

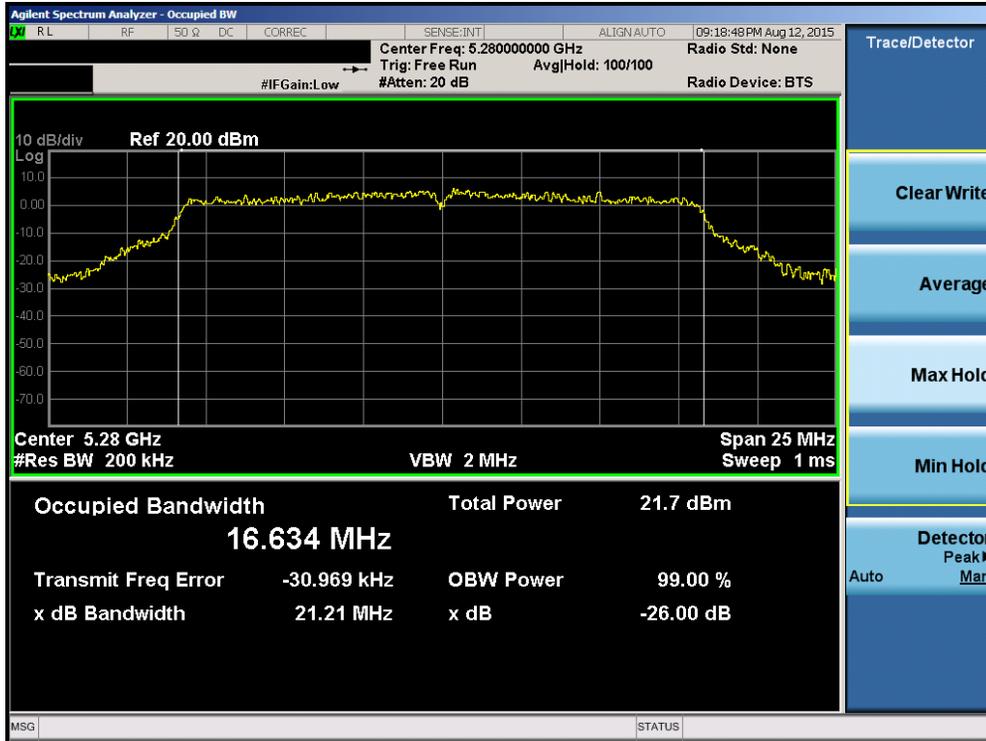


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

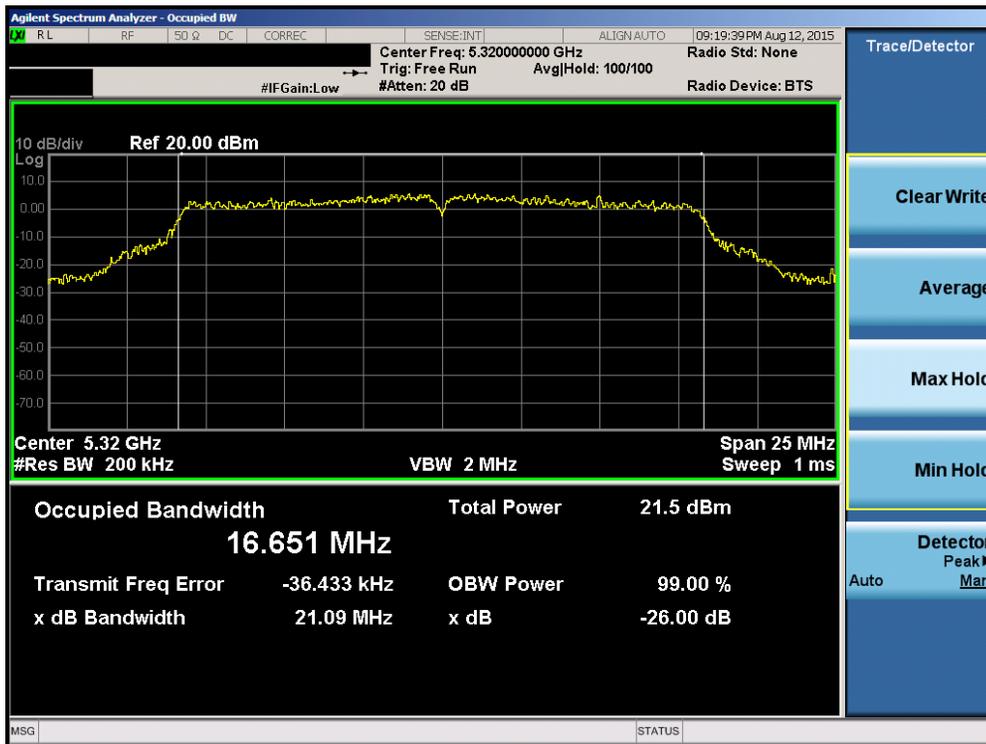


Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 19 of 126

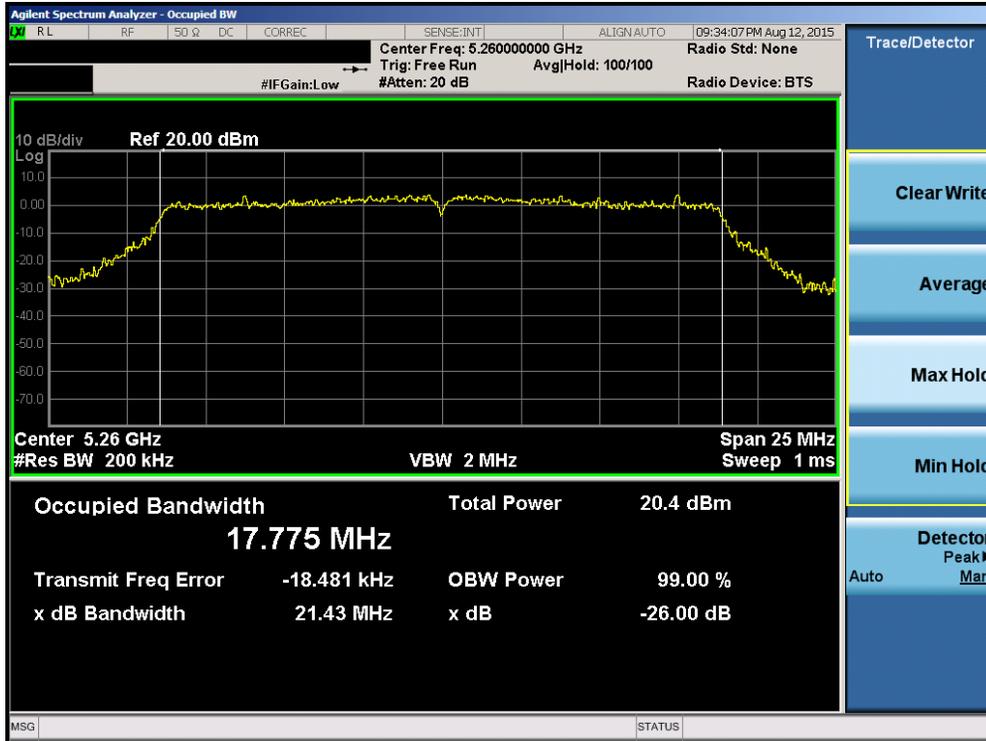


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

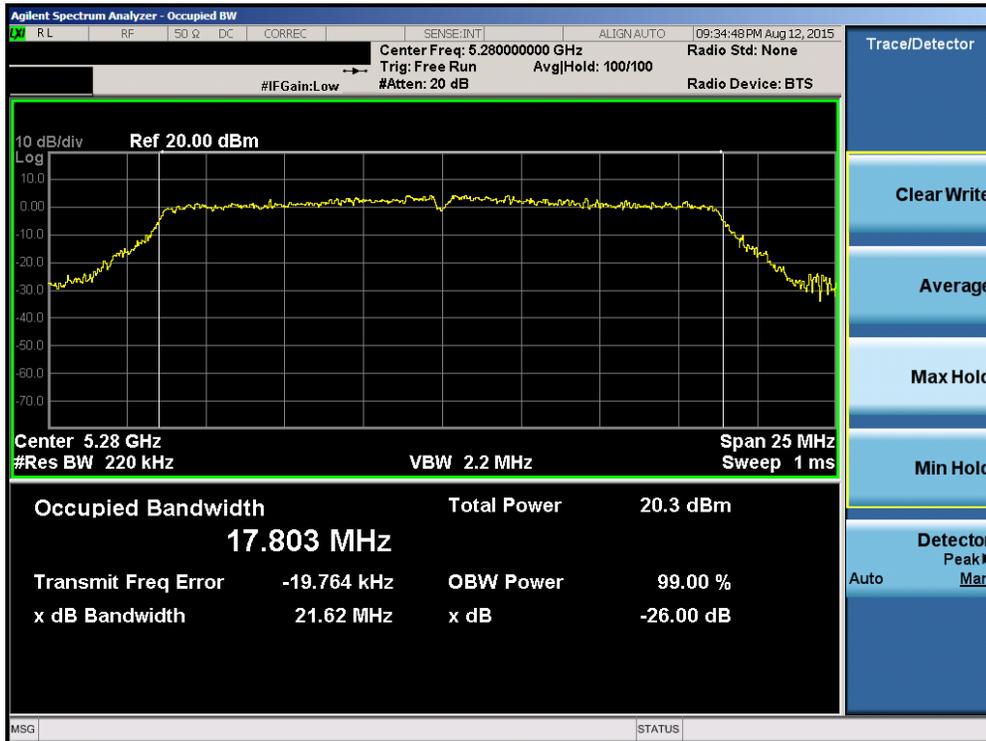


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 20 of 126

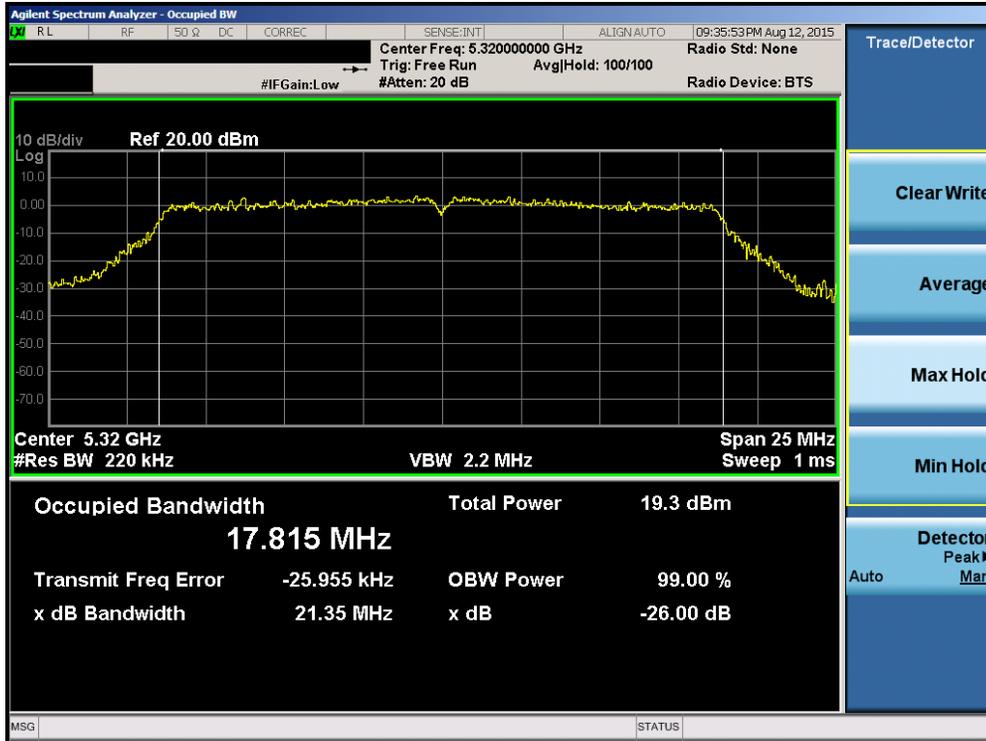


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

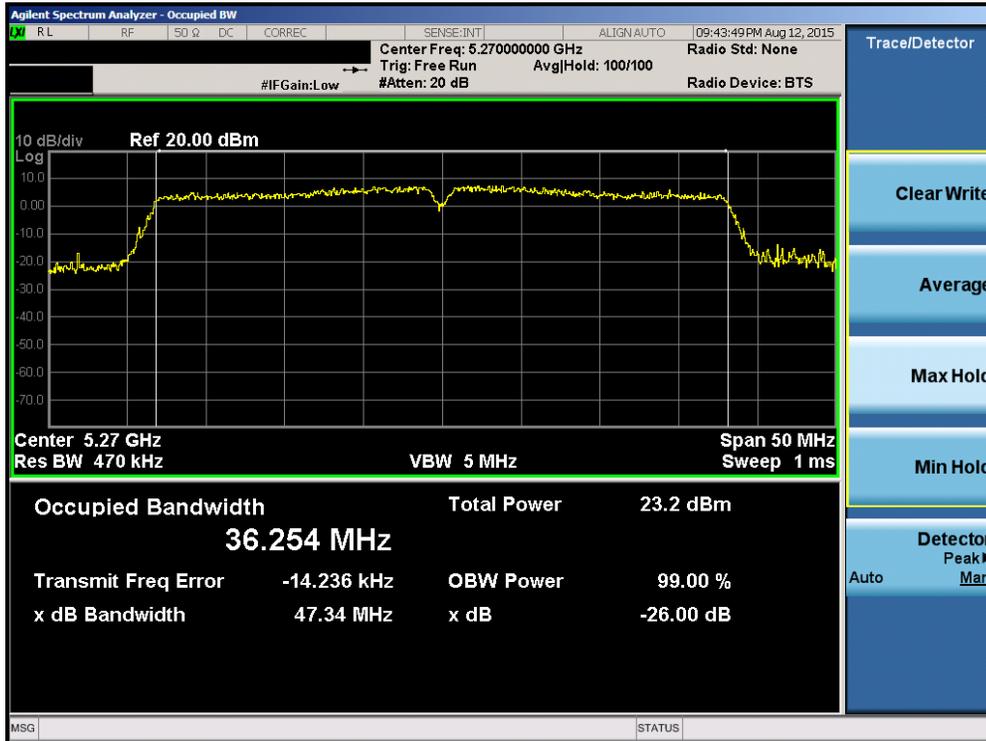

Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 21 of 126

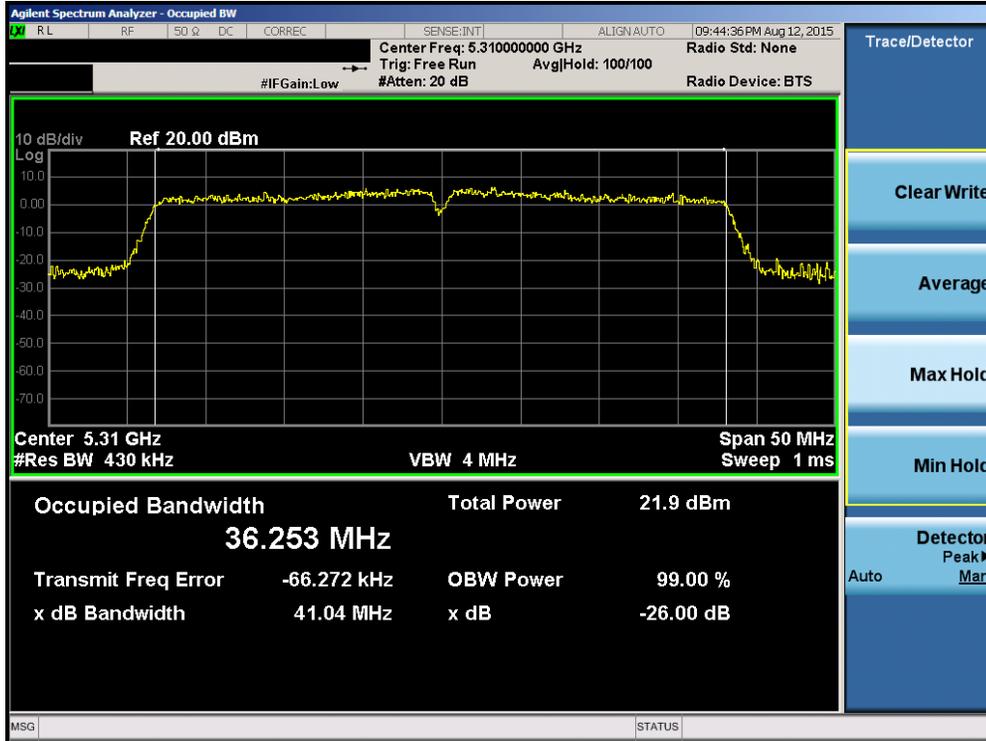

Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)



Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 22 of 126




Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)




Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 23 of 126

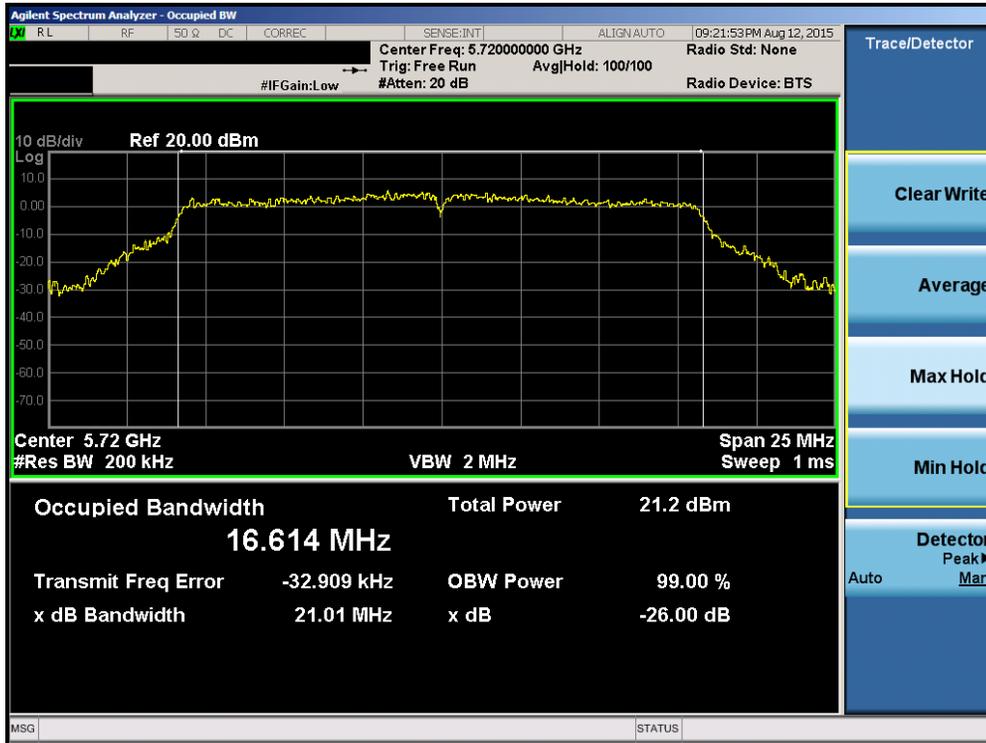


Plot 6-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

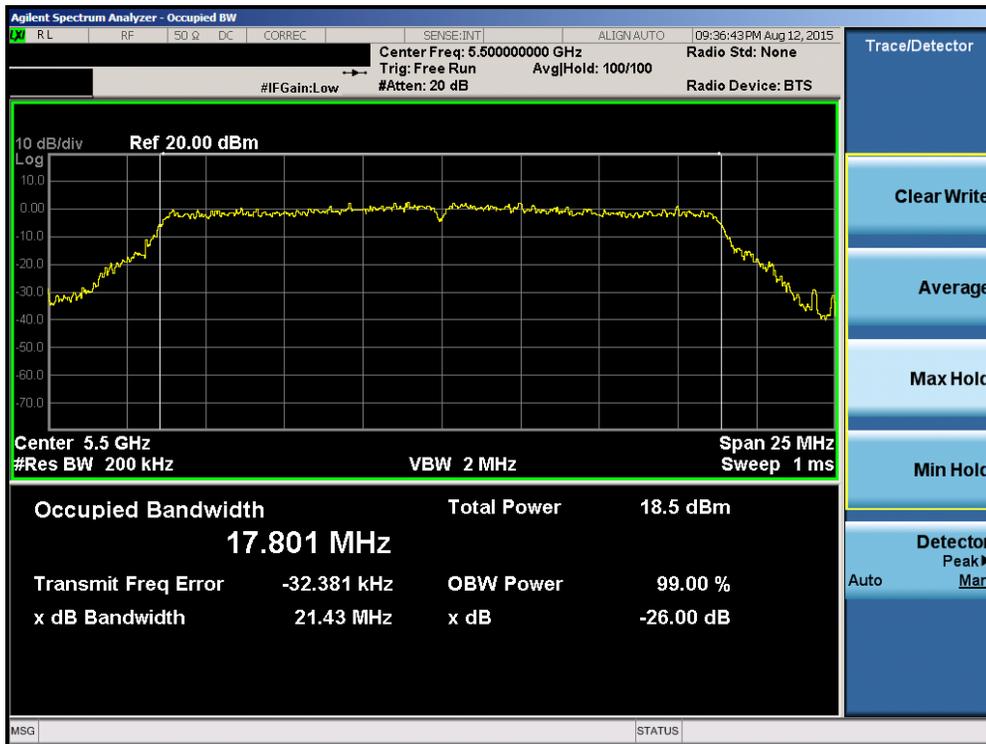


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 24 of 126



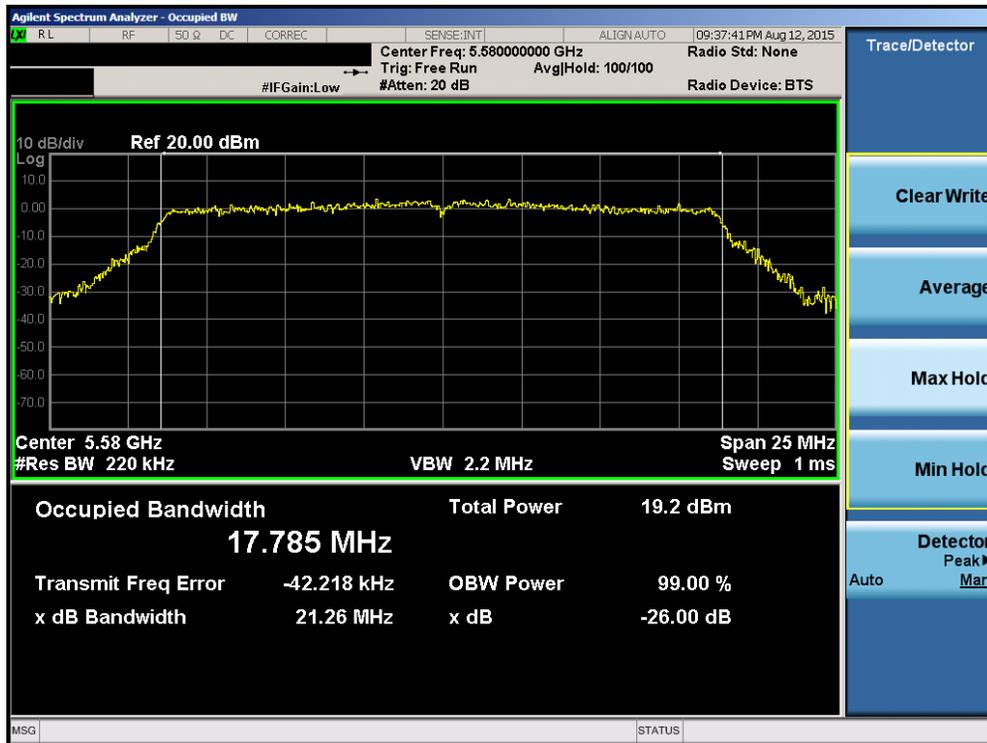


Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

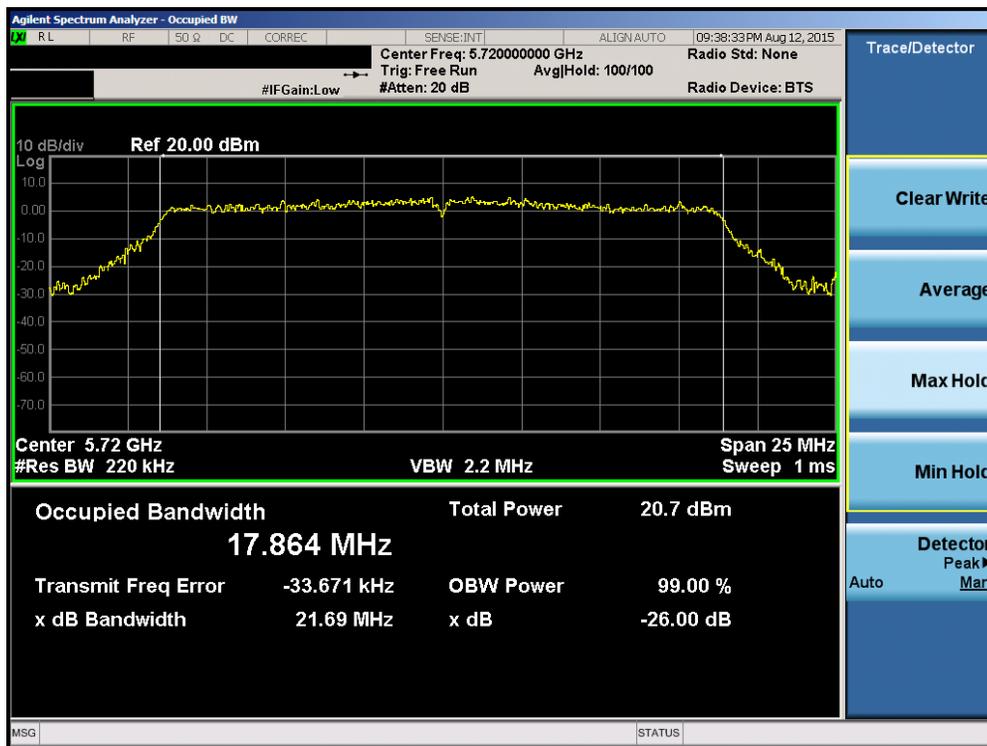


Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 25 of 126

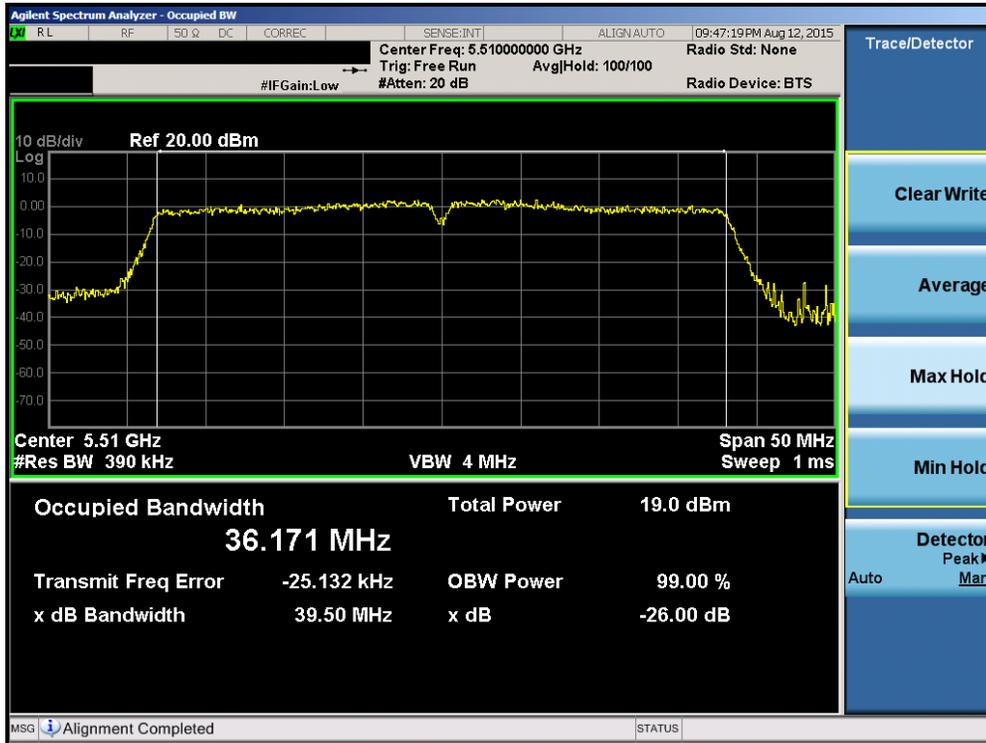


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

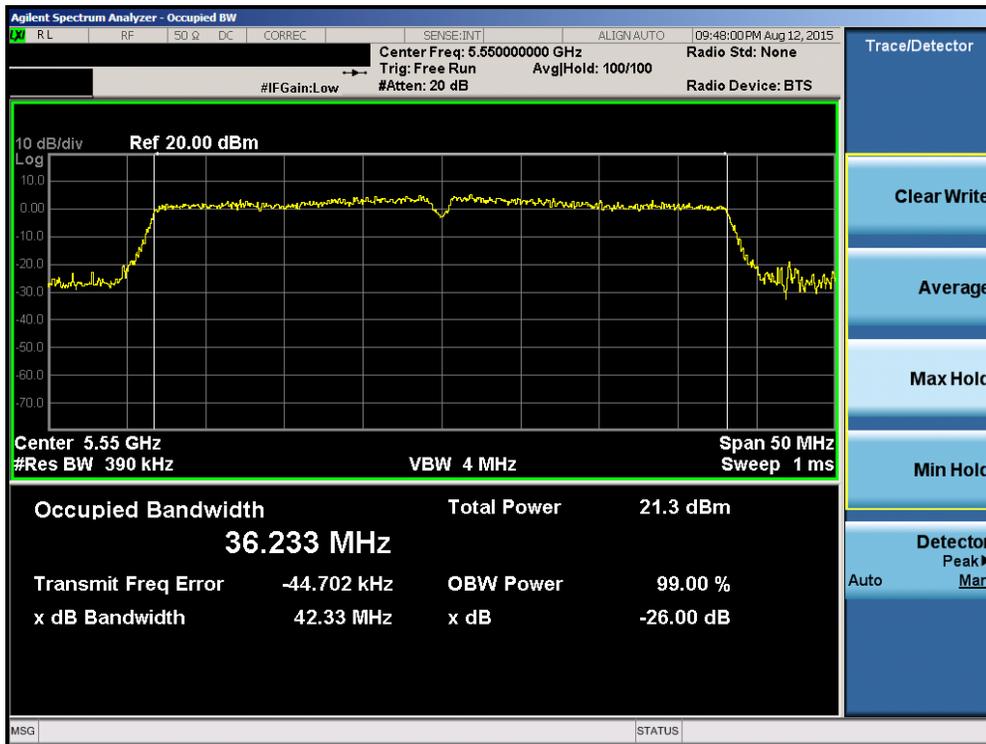


Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 26 of 126

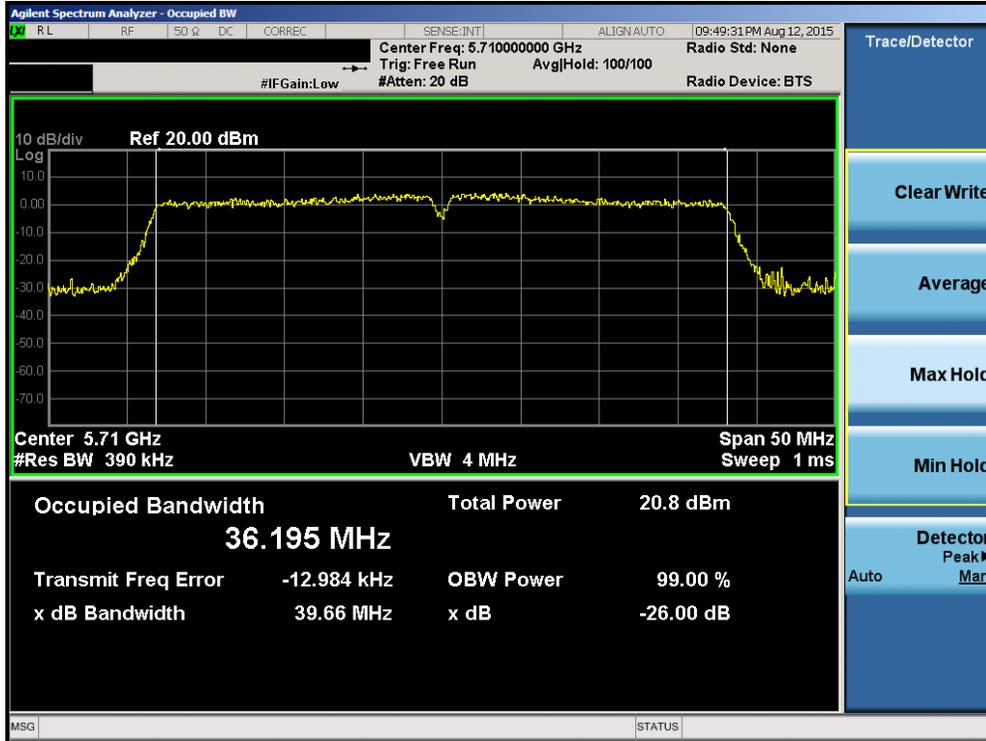


Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

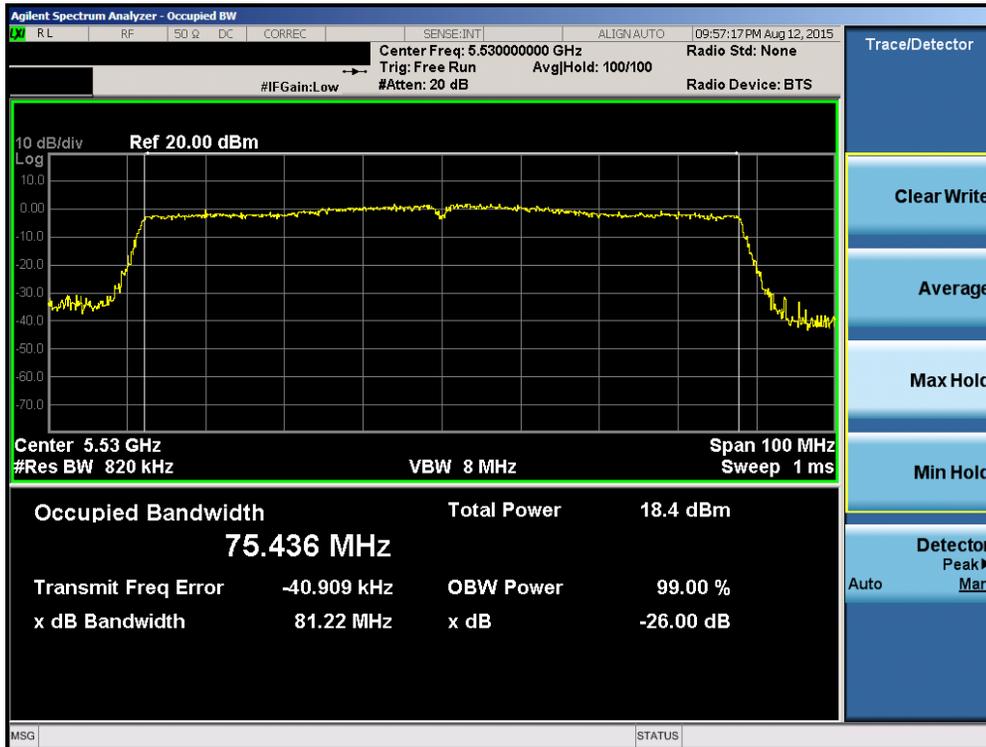

Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 27 of 126

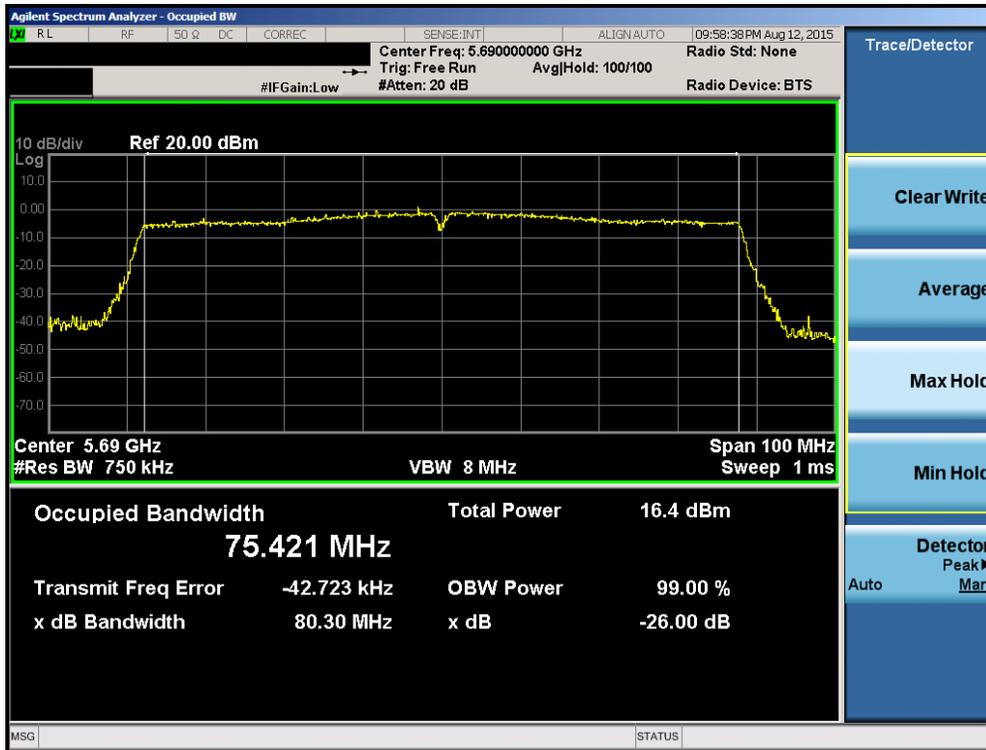

Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 28 of 126

### 6.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e)

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

*In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq 500$  kHz.*

#### Test Procedure Used


KDB 789033 D02 v01 – Section C

#### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-2. Test Instrument & Measurement Setup**

#### Test Notes


None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 29 of 126	

## Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	a	6	16.33
	5785	157	a	6	16.32
	5825	165	a	6	16.35
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.29
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.59
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.59
	5755	151	n (40MHz)	13.5/15 (MCS0)	35.67
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.01
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.19

**Table 6-3. Conducted Bandwidth Measurements**

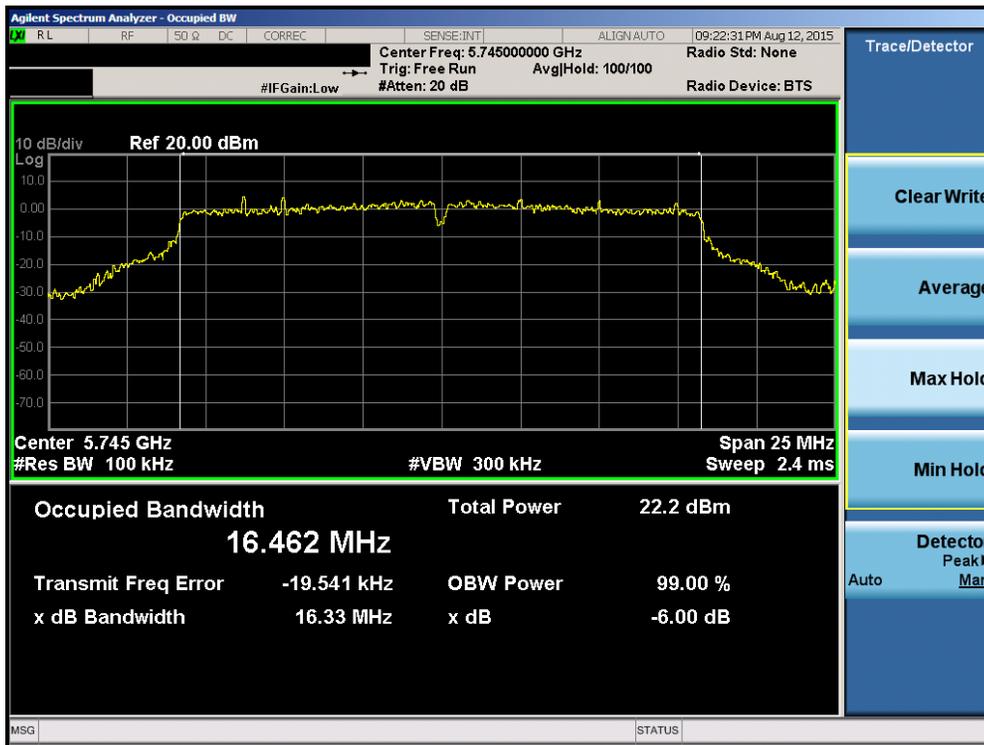


**Plot 6-30. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 30 of 126

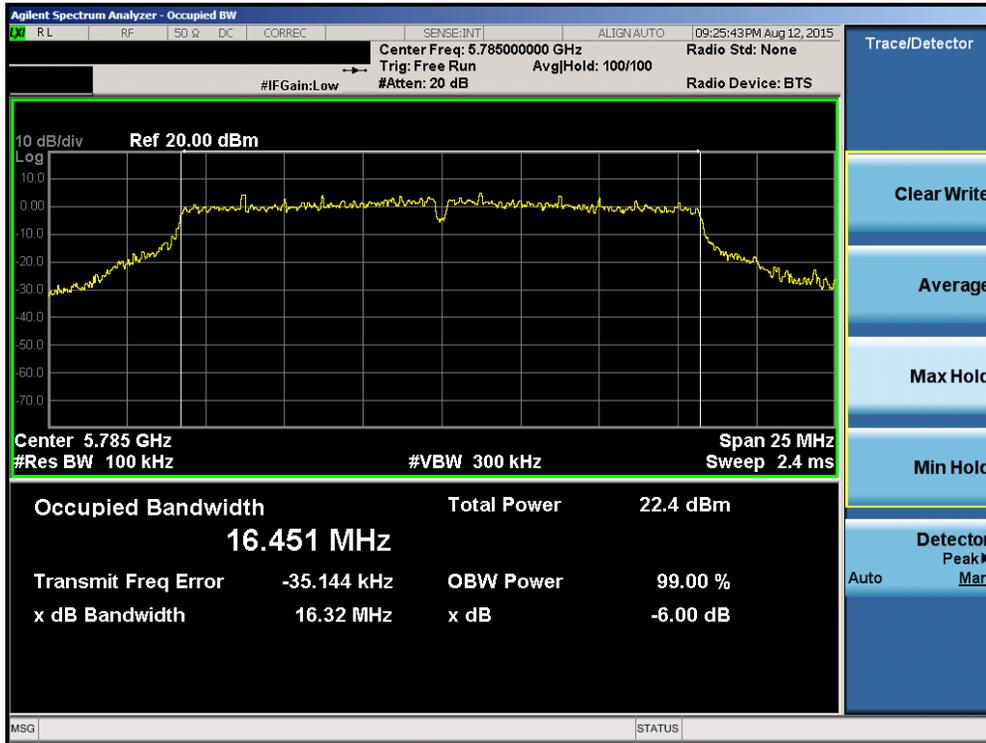


Plot 6-31. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

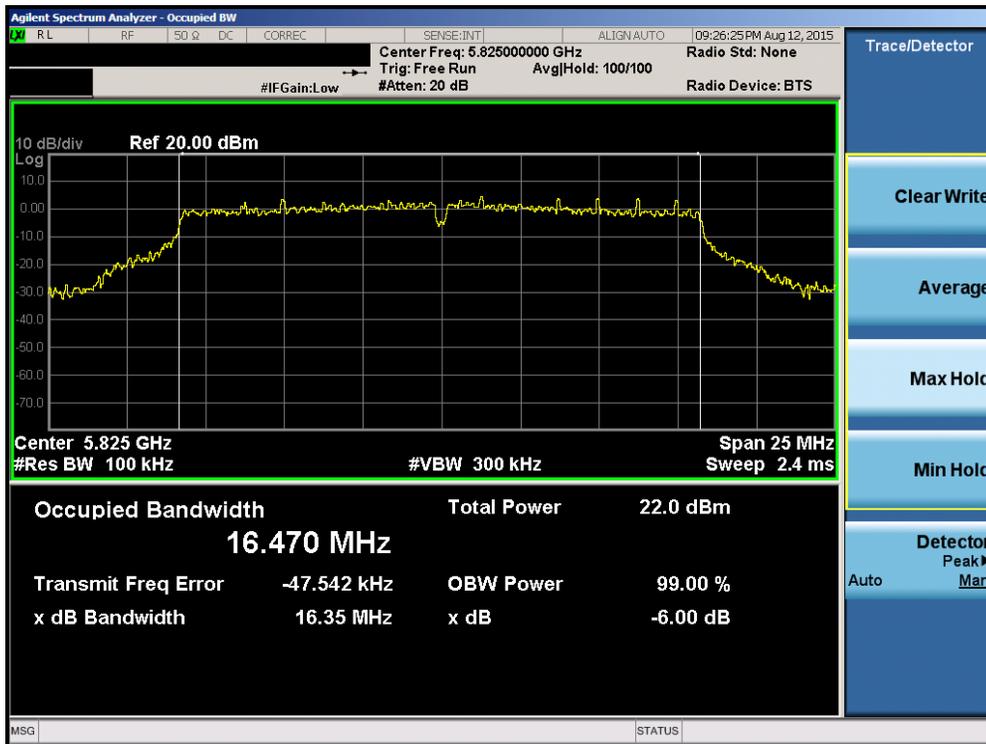


Plot 6-32. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 31 of 126

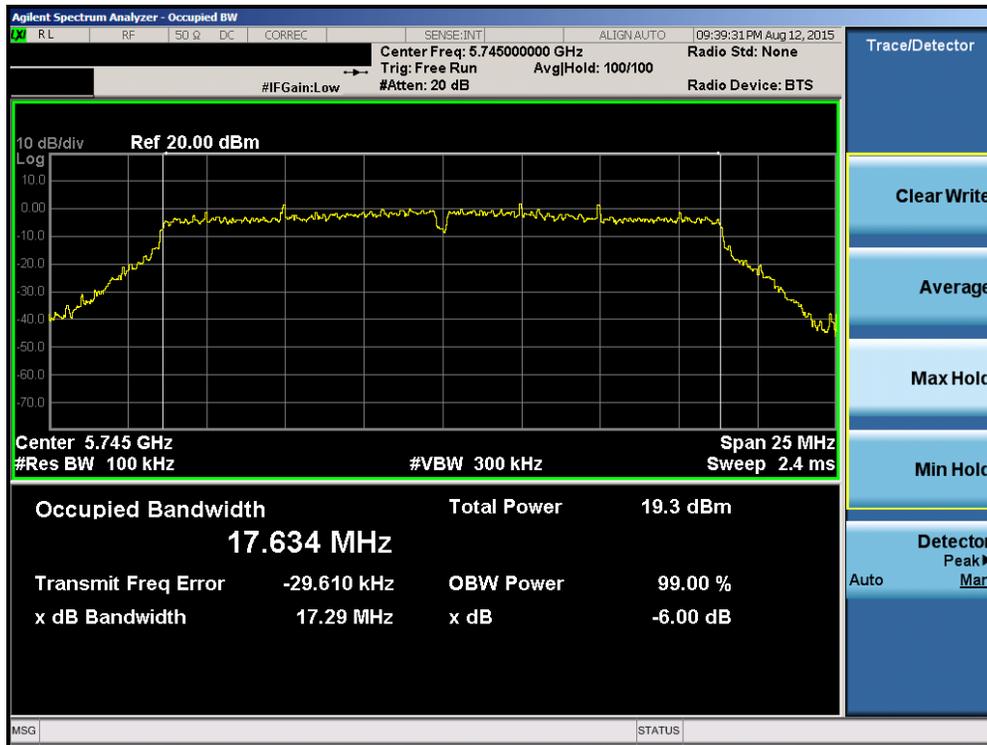


Plot 6-33. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

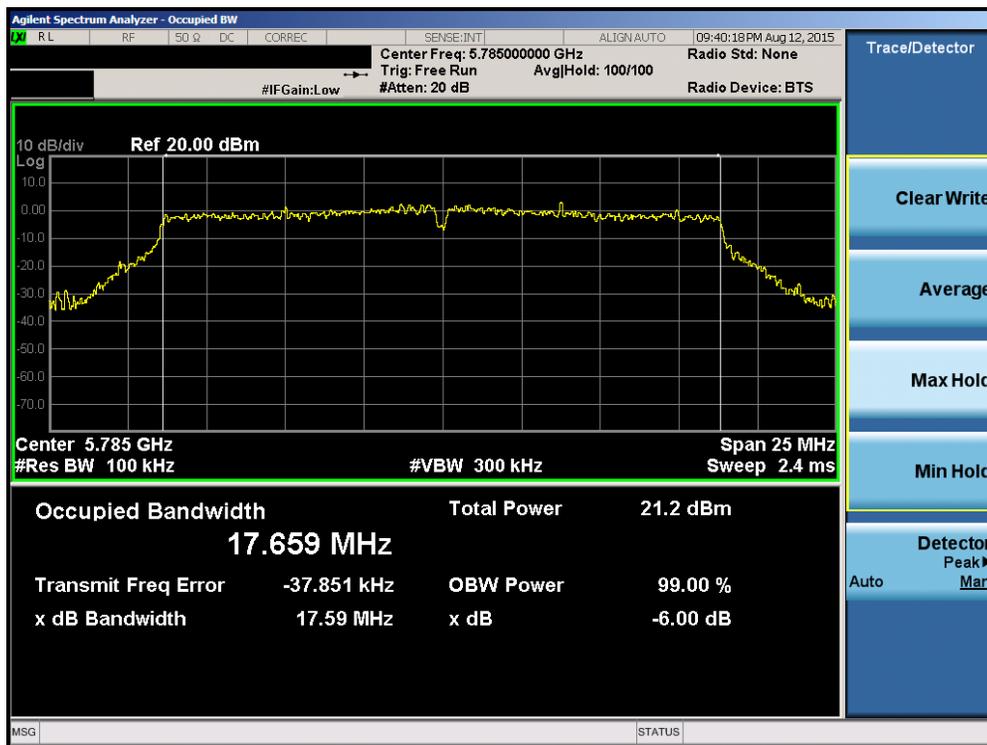


Plot 6-34. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 32 of 126



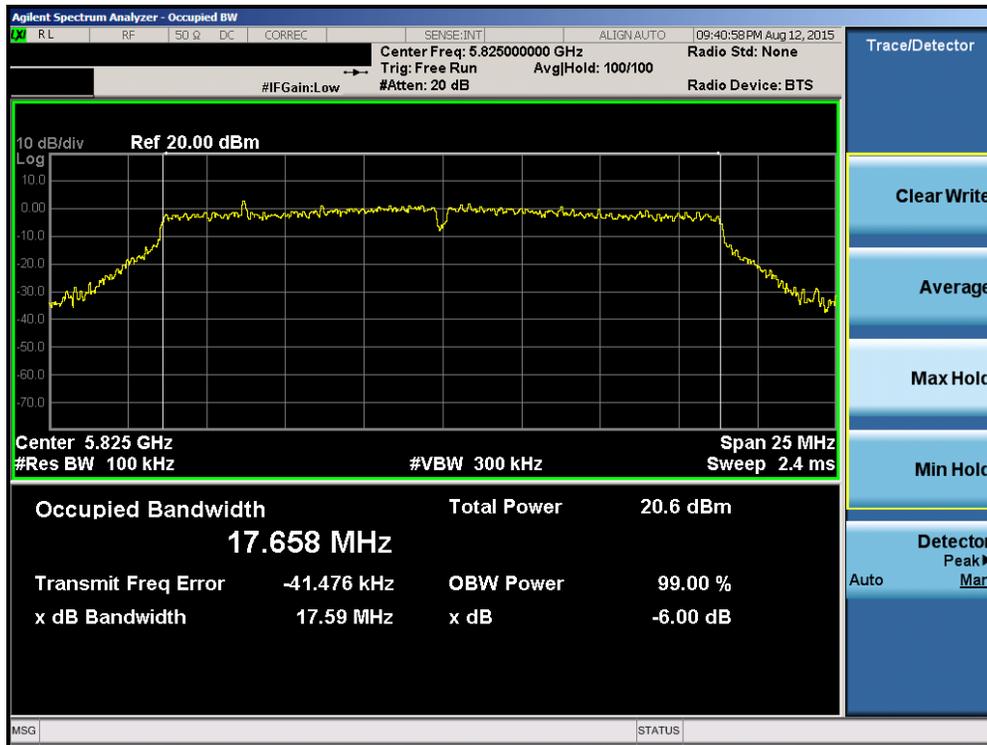


Plot 6-35. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

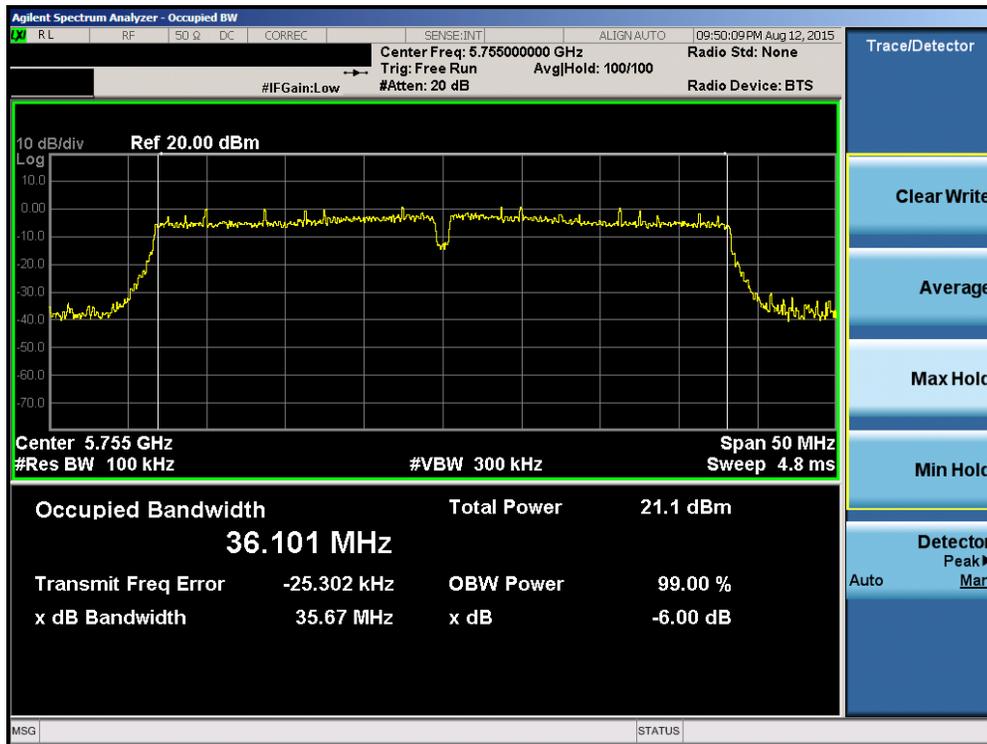


Plot 6-36. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 33 of 126

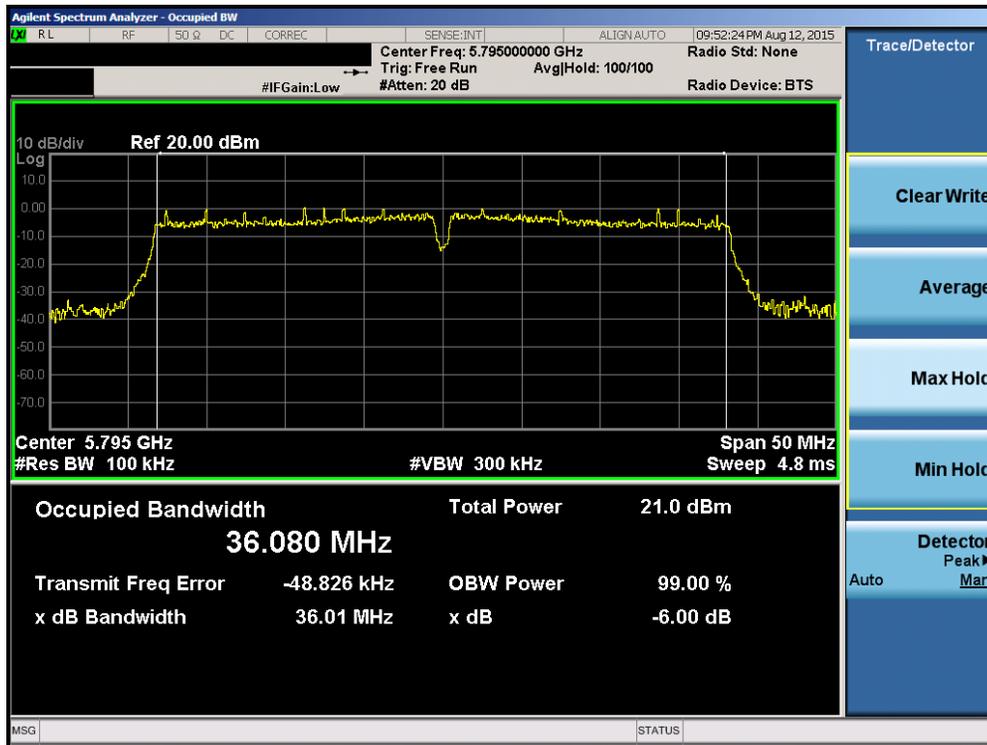

Plot 6-37. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

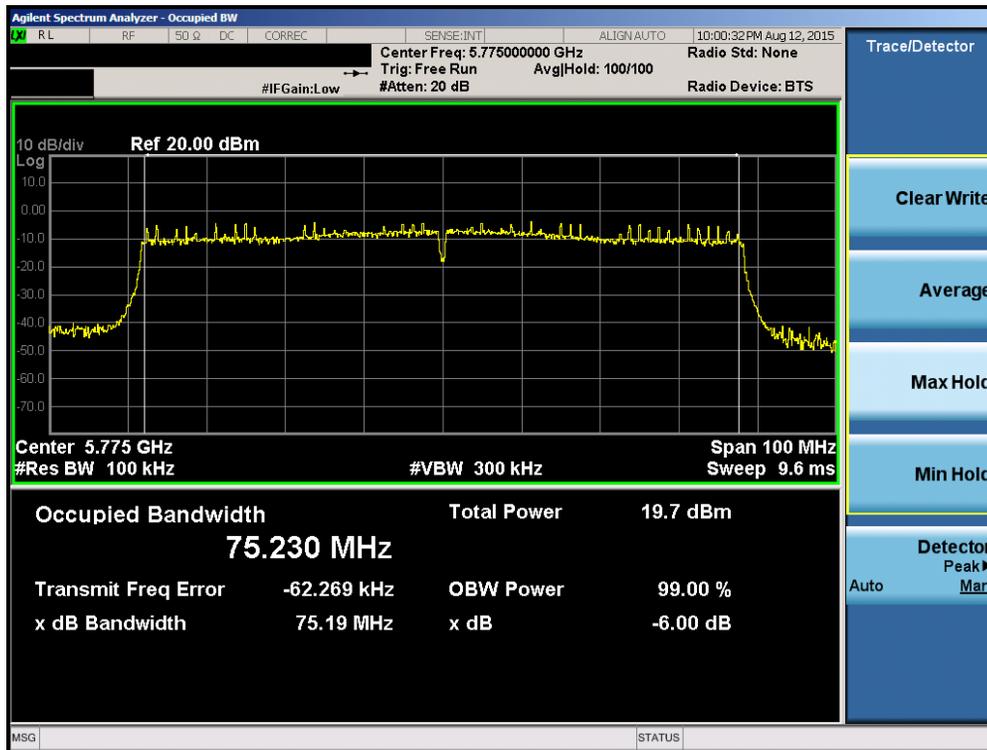

Plot 6-38. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 34 of 126

## 6.4 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a.1)

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).***

***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.09) = 24.24\text{dBm}$ .***

***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.01) = 24.22\text{dBm}$ .***

***In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).***

### Test Procedure Used


KDB 789033 D02 v01 – Section E)3)b) Method PM-G

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

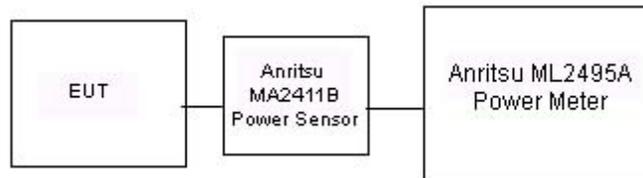

**Figure 6-3. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 35 of 126	

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	13.62	12.38	12.24
5200	40	14.65	14.25	14.15
5220	44	14.49	14.32	14.71
5240	48	14.47	14.29	14.97
5260	52	14.53	14.24	14.78
5280	56	14.74	14.38	14.69
5300	60	14.89	14.31	14.36
5320	64	13.92	12.56	12.85
5500	100	12.76	11.52	11.41
5560	112	14.47	12.58	14.82
5580	116	14.71	12.26	14.85
5660	132	14.57	12.44	14.91
5700	140	14.67	12.43	14.98
5720	144	14.07	12.99	14
5745	149	14.82	12.43	14.97
5785	157	14.77	12.12	14.91
5825	165	14.73	13.48	13.24

**Table 6-4. 20MHz BW (UNII) Maximum Conducted Output Power**

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11n	802.11ac
5190	38	11.26	11.12
5230	46	12.17	12.21
5270	54	12.16	12.11
5310	62	11.59	11.72
5510	102	10.13	10.74
5550	110	12.92	12.98
5670	134	12.29	12.75
5710	142	12.3	12.66
5755	151	12.31	12.67
5795	159	12.43	12.72

**Table 6-5. 40MHz BW (UNII) Maximum Conducted Output Power**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 36 of 126	

5GHz (80MHz) Conducted Power		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	9.26
5290	58	9.87
5530	106	8.99
5690	138	10.4
5775	155	10.83

**Table 6-6. 80MHz BW (UNII) Maximum Conducted Output Power**

<b>FCC ID:</b> ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 37 of 126	

## 6.5 Maximum Power Spectral Density – 802.11a/n/ac §15.407(a.1)(2.5)

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

### Test Procedure Used


KDB 789033 D02 v01 – Section F

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-4. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 38 of 126	

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	6.08	11.0	-4.92	Pass
	5200	40	a	6	6.96	11.0	-4.04	Pass
	5240	48	a	6	6.83	11.0	-4.17	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	1.44	11.0	-9.56	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.01	11.0	-4.99	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.40	11.0	-5.60	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	1.14	11.0	-9.86	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.06	11.0	-8.94	Pass
Band 2A	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-7.52	11.0	-18.52	Pass
	5260	52	a	6	6.84	11.0	-4.16	Pass
	5280	56	a	6	6.43	11.0	-4.57	Pass
	5320	64	a	6	6.14	11.0	-4.86	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.52	11.0	-5.48	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	1.91	11.0	-9.09	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	1.69	11.0	-9.31	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	4.24	11.0	-6.76	Pass
Band 2C	5310	62	n (40MHz)	13.5/15 (MCS0)	2.77	11.0	-8.23	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.35	11.0	-14.35	Pass
	5500	100	a	6	5.19	11.0	-5.81	Pass
	5580	116	a	6	5.89	11.0	-5.11	Pass
	5720	144	a	6	6.42	11.0	-4.58	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	0.74	11.0	-10.26	Pass
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	3.61	11.0	-7.39	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.86	11.0	-8.14	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.30	11.0	-10.70	Pass
	5550	110	n (40MHz)	13.5/15 (MCS0)	2.45	11.0	-8.55	Pass
5710	142	n (40MHz)	13.5/15 (MCS0)	-0.54	11.0	-11.54	Pass	
5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-6.99	11.0	-17.99	Pass	
5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-5.21	11.0	-16.21	Pass	


**Table 6-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 39 of 126	








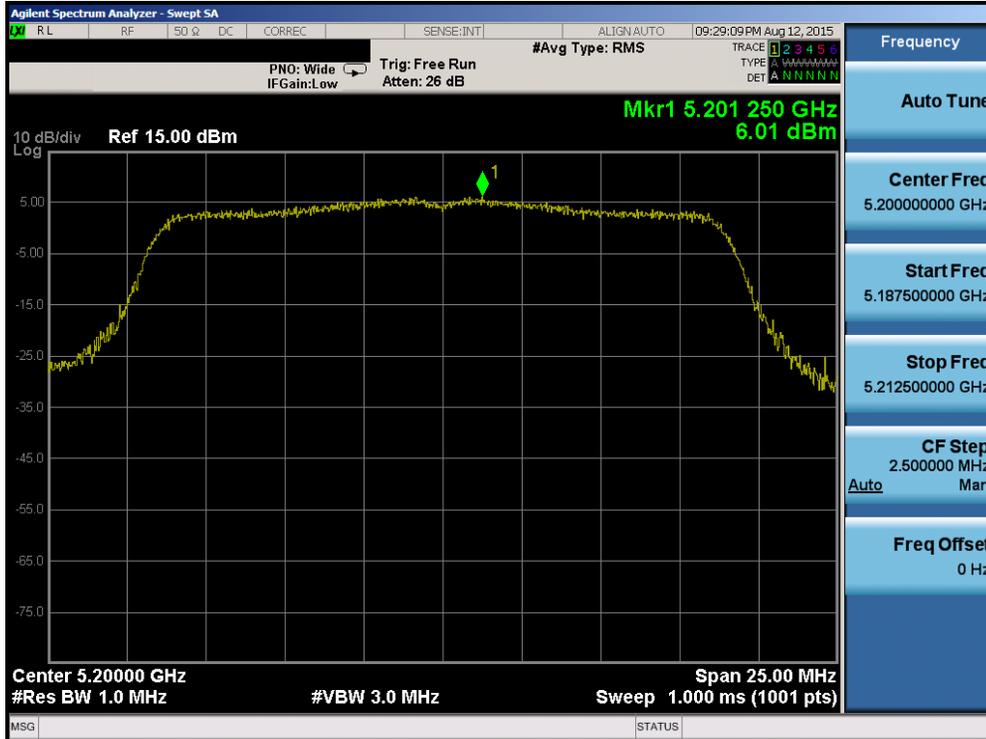

Plot 6-43. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

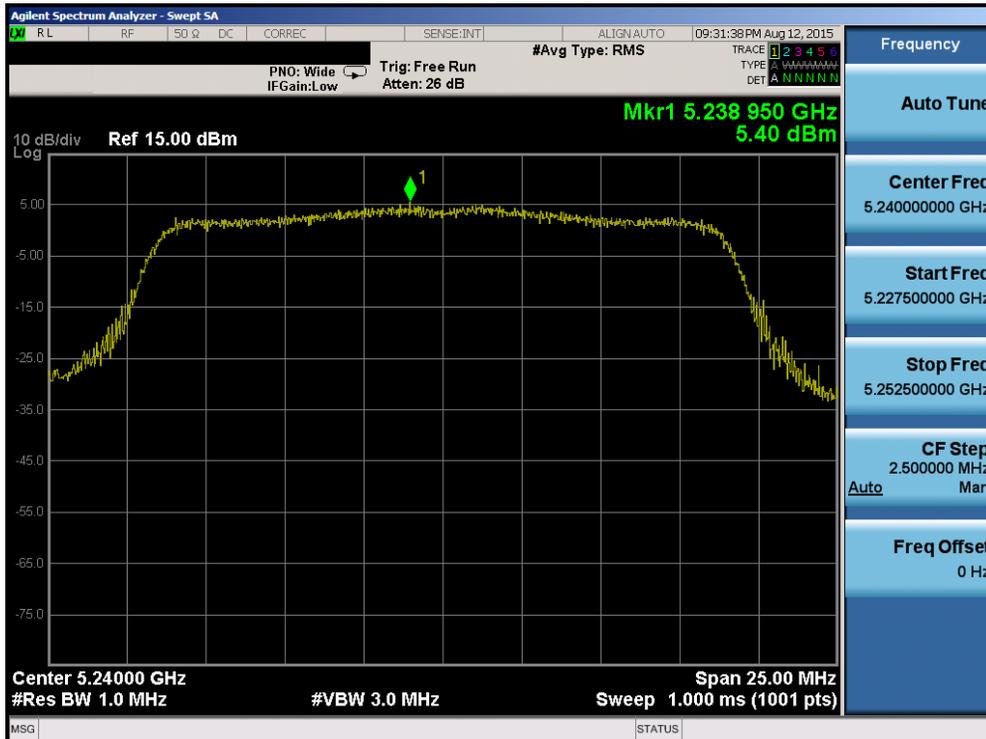

Plot 6-44. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)


FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 42 of 126








Plot 6-49. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

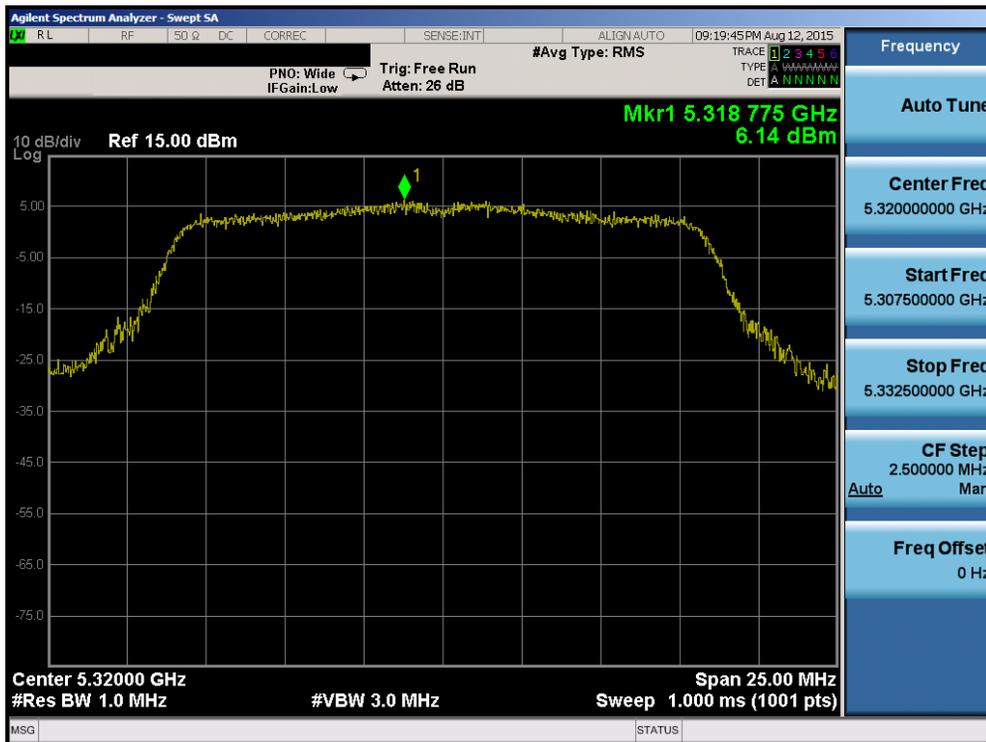


Plot 6-50. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 45 of 126

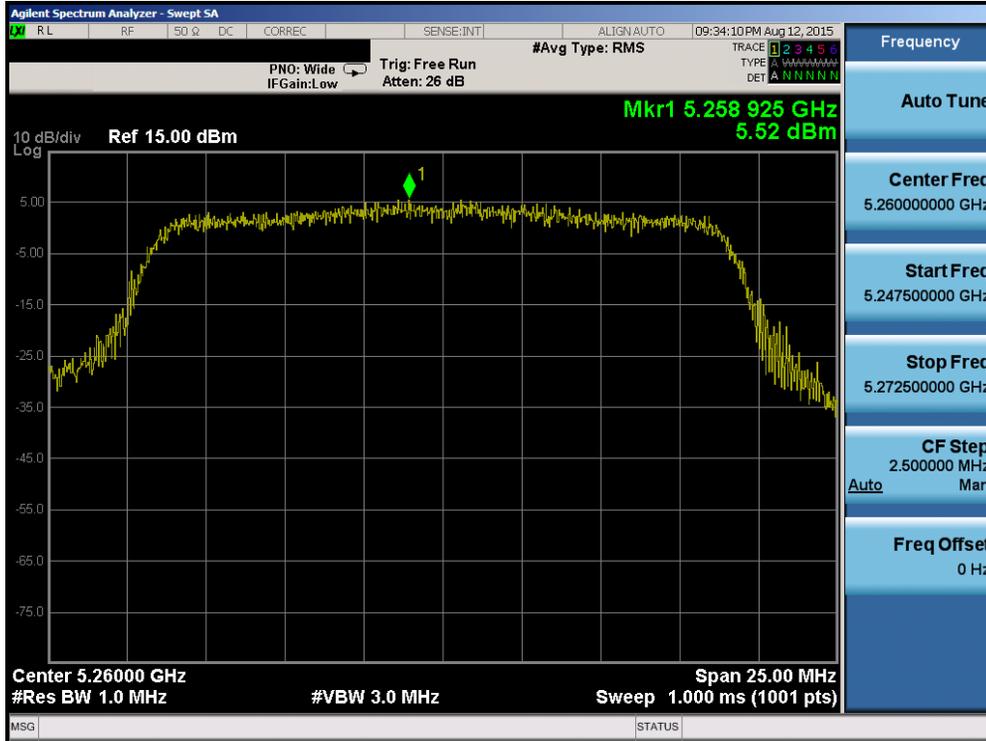

Plot 6-51. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

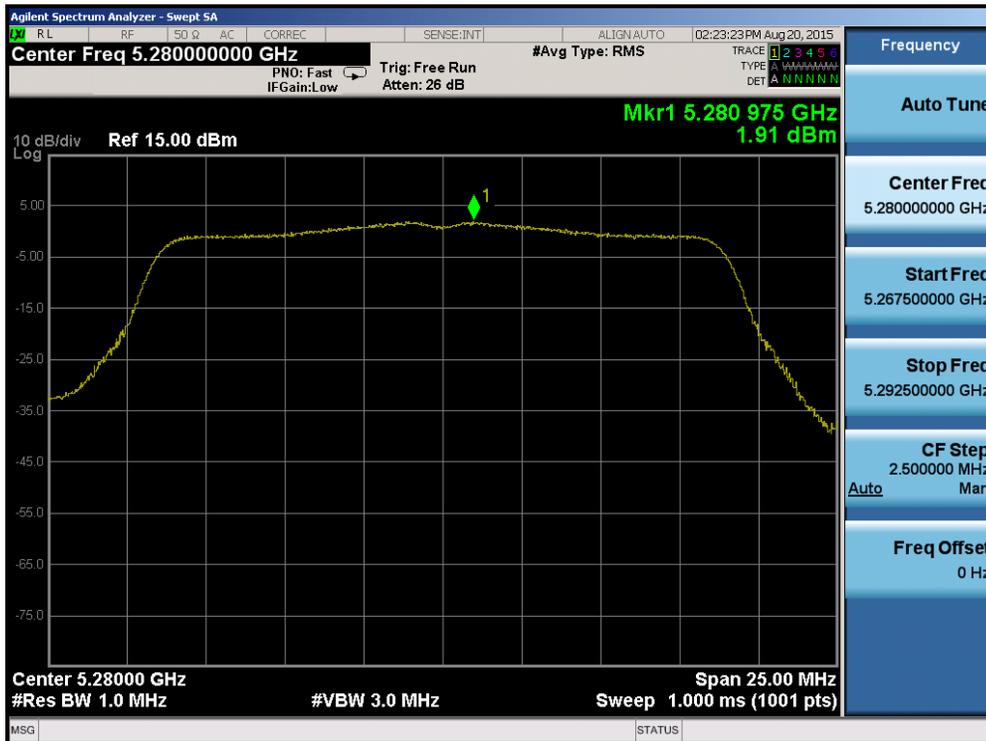


Plot 6-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 46 of 126








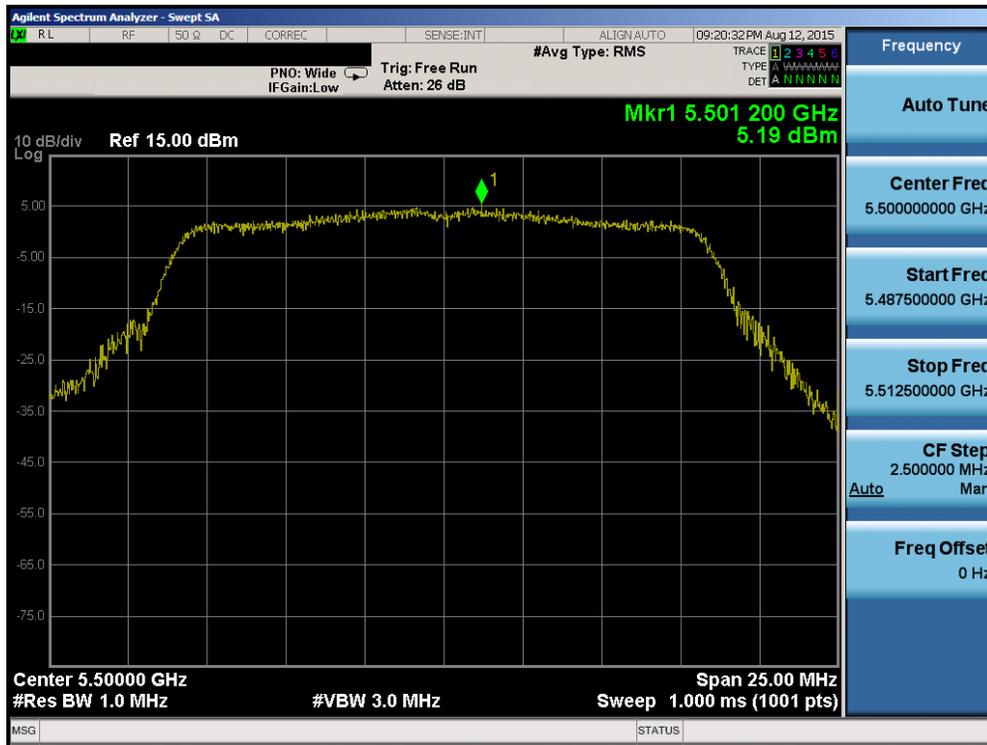


Plot 6-57. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

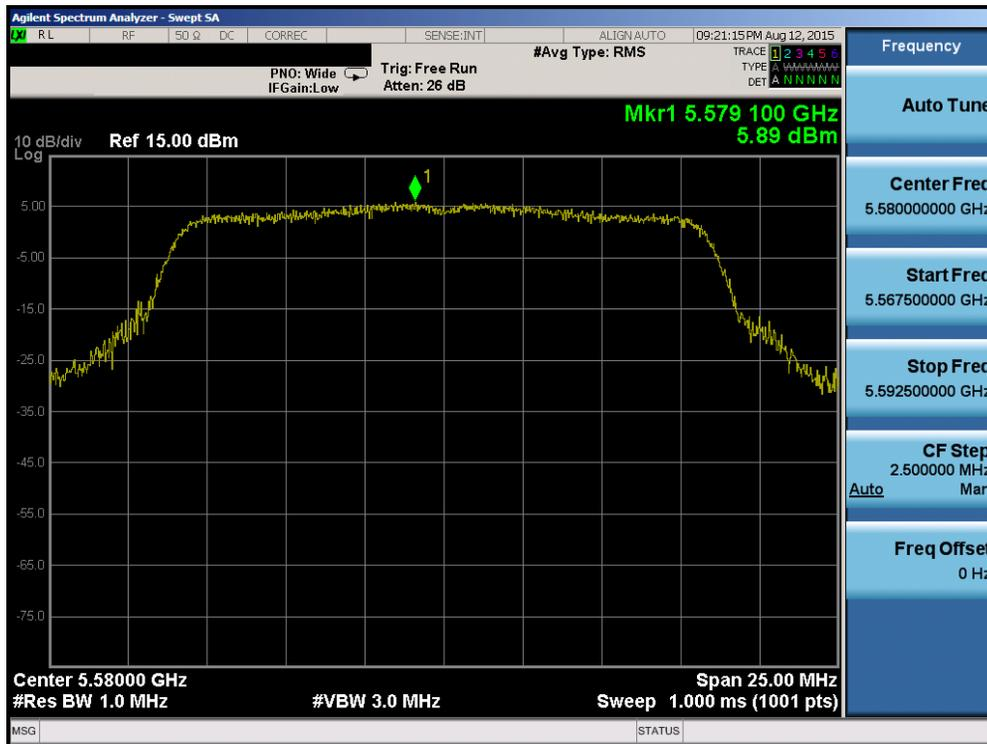

Plot 6-58. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 49 of 126

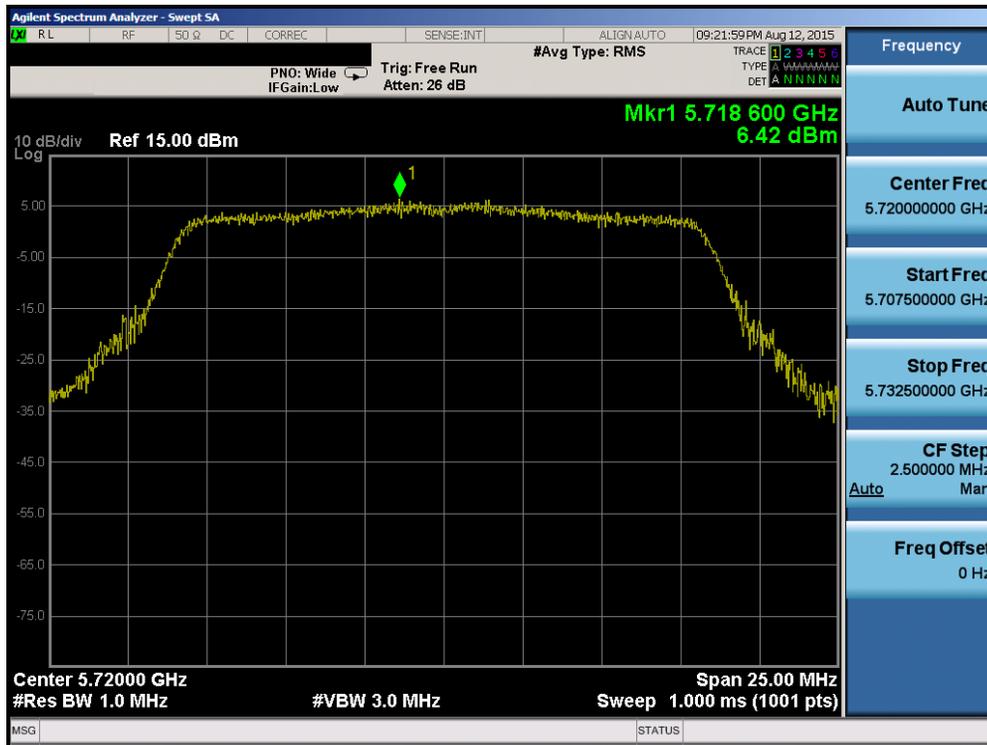


Plot 6-59. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)




Plot 6-60. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 50 of 126



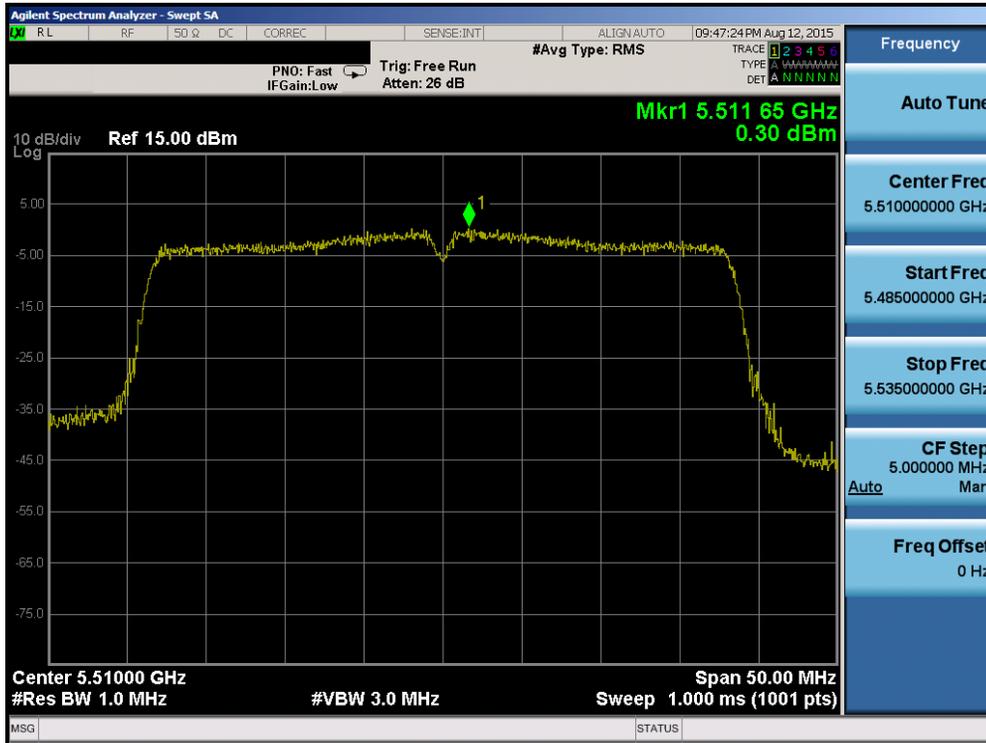


Plot 6-63. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

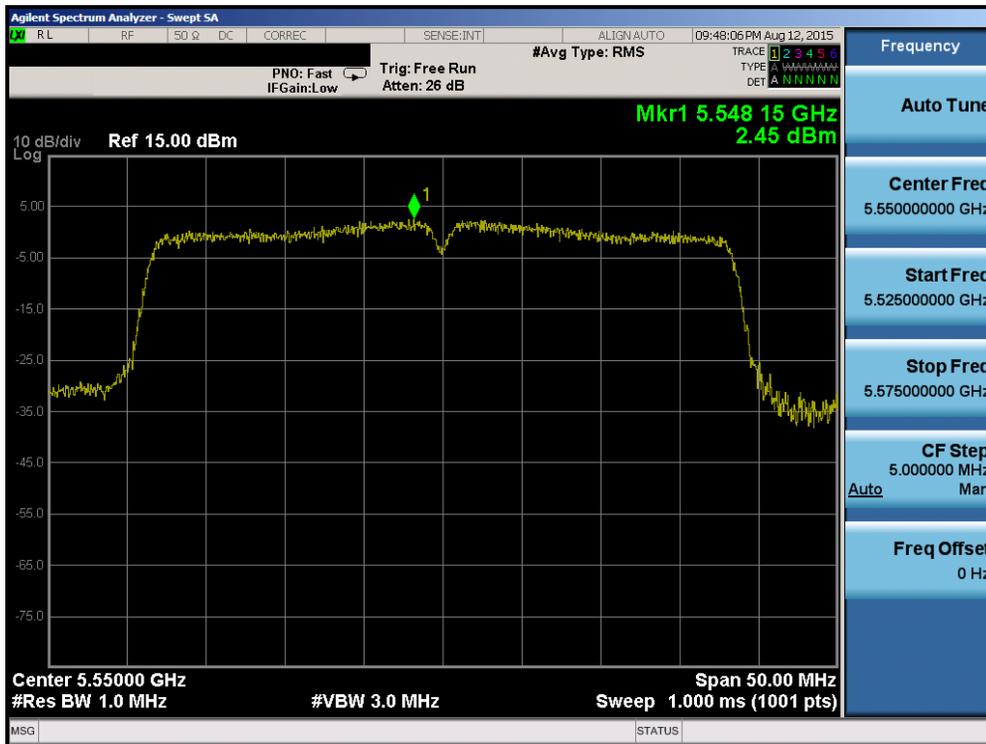


Plot 6-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 52 of 126

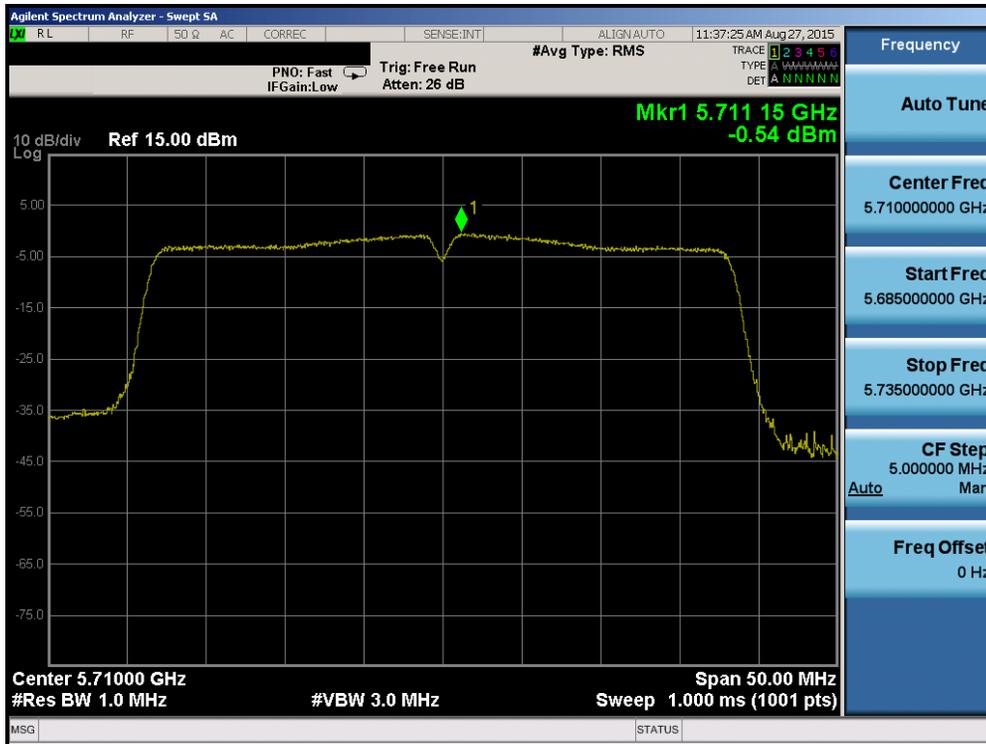


Plot 6-65. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

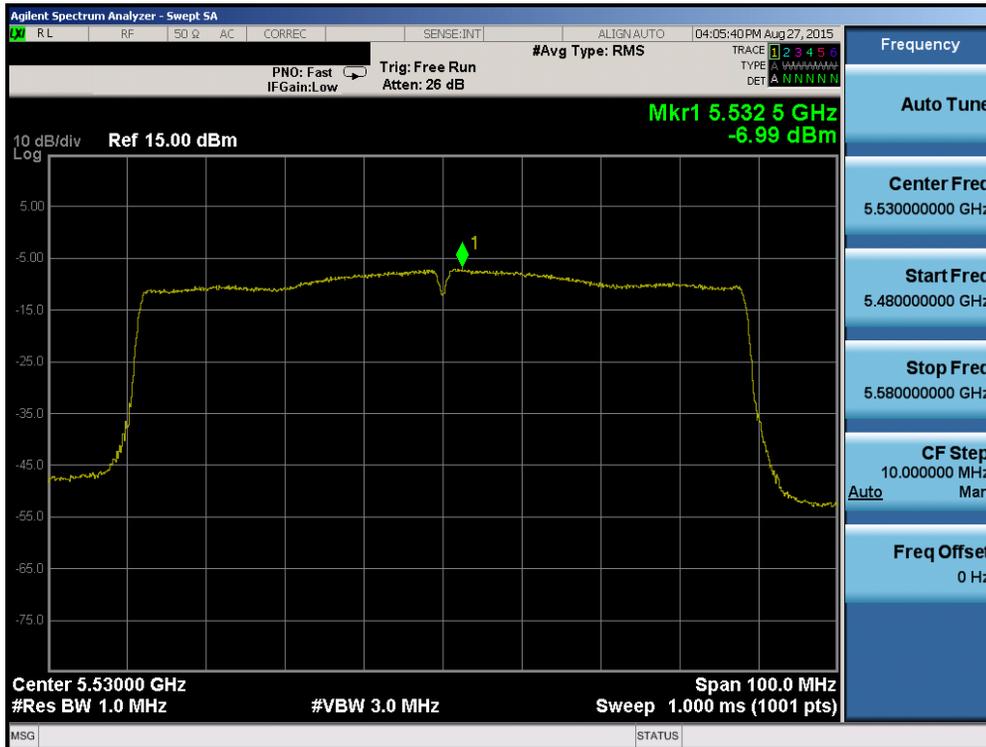

Plot 6-66. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 53 of 126

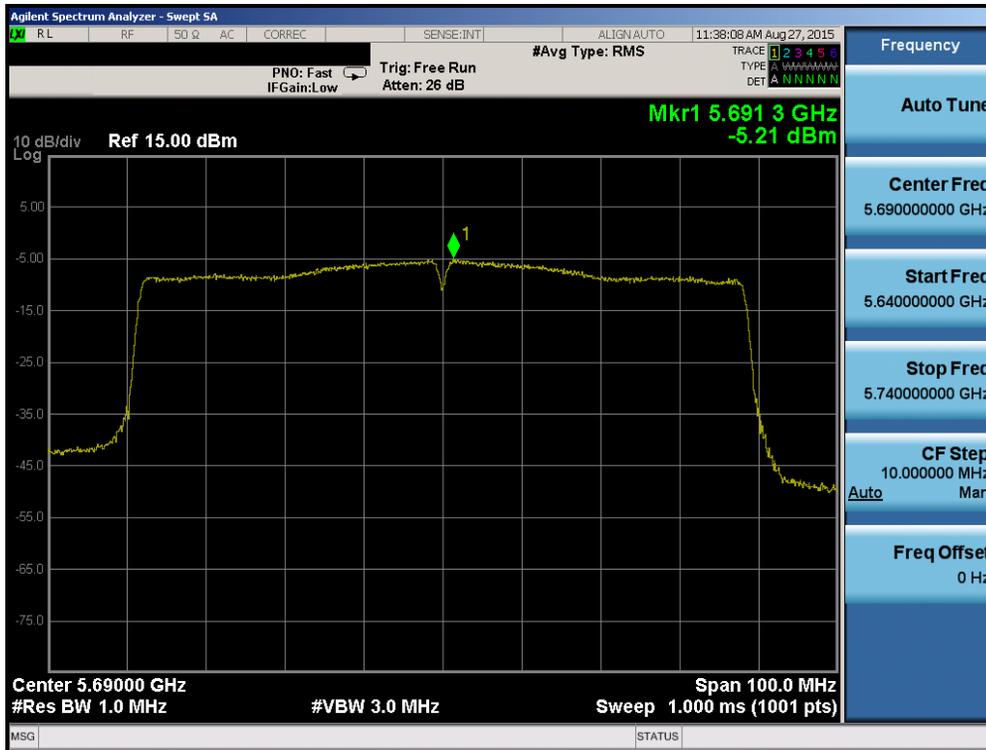


Plot 6-67. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 54 of 126

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
<b>Band 3</b>	5745	149	a	6	4.31	30.0	-25.69	Pass
	5785	157	a	6	1.90	30.0	-28.10	Pass
	5825	165	a	6	3.78	30.0	-26.22	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	1.34	30.0	-28.66	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	0.01	30.0	-29.99	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	-0.03	30.0	-30.03	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-0.50	30.0	-30.50	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-2.94	30.0	-32.94	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-5.66	30.0	-35.66	Pass

**Table 6-8. Band 3 Conducted Power Spectral Density Measurements**

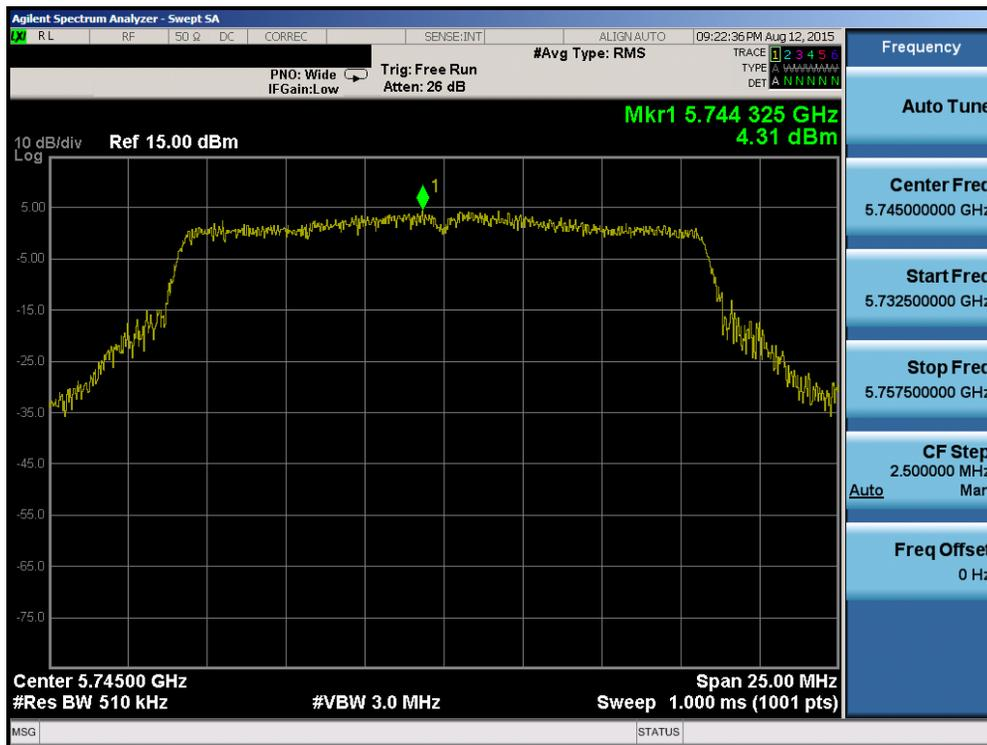

**Plot 6-68. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 55 of 126












Plot 6-75. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

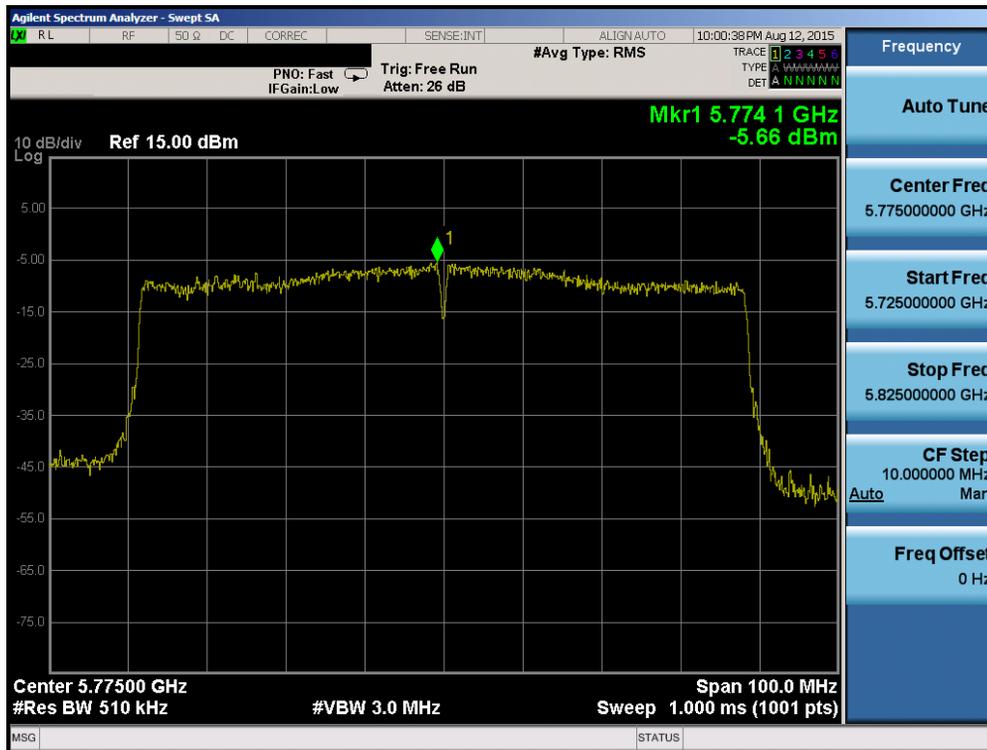

Plot 6-76. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ZNFH900	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 59 of 126

## 6.6 Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,179,999,973	-27	-0.00000052
100 %		- 30	5,179,999,885	-115	-0.00000222
100 %		- 20	5,180,000,307	307	0.00000593
100 %		- 10	5,180,000,119	119	0.00000230
100 %		0	5,180,000,076	76	0.00000147
100 %		+ 10	5,179,999,968	-32	-0.00000062
100 %		+ 20	5,179,999,746	-254	-0.00000490
100 %		+ 30	5,180,000,046	46	0.00000089
100 %		+ 40	5,179,999,941	-59	-0.00000114
100 %		+ 50	5,180,000,133	133	0.00000257
BATT. ENDPOINT		3.45	+ 20	5,180,000,032	32

**Table 6-9. Frequency Stability Measurements for UNII Band 1 (Ch. 36)**

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 60 of 126	

## Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz  
 CHANNEL: 52  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,259,999,643	-357	-0.00000679
100 %		- 30	5,260,000,181	181	0.00000344
100 %		- 20	5,260,000,147	147	0.00000279
100 %		- 10	5,259,999,725	-275	-0.00000523
100 %		0	5,260,000,037	37	0.00000070
100 %		+ 10	5,260,000,310	310	0.00000589
100 %		+ 20	5,260,000,000	0	0.00000000
100 %		+ 30	5,260,000,165	165	0.00000314
100 %		+ 40	5,259,999,737	-263	-0.00000500
100 %		+ 50	5,260,000,268	268	0.00000510
BATT. ENDPOINT	3.45	+ 20	5,260,000,298	298	0.00000567

**Table 6-10. Frequency Stability Measurements for UNII Band 2A (Ch. 52)**

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 61 of 126	

## Frequency Stability §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,500,000,016	16	0.00000029
100 %		- 30	5,500,000,017	17	0.00000031
100 %		- 20	5,499,999,917	-83	-0.00000151
100 %		- 10	5,500,000,002	2	0.00000004
100 %		0	5,499,999,984	-16	-0.00000029
100 %		+ 10	5,499,999,744	-256	-0.00000465
100 %		+ 20	5,499,999,725	-275	-0.00000500
100 %		+ 30	5,500,000,036	36	0.00000065
100 %		+ 40	5,499,999,718	-282	-0.00000513
100 %		+ 50	5,500,000,038	38	0.00000069
BATT. ENDPOINT	3.45	+ 20	5,499,999,858	-142	-0.00000258

**Table 6-11. Frequency Stability Measurements for UNII Band 2C (Ch. 100)**

### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 62 of 126	

## Frequency Stability §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz  
 CHANNEL: 149  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,745,000,061	61	0.00000106
100 %		- 30	5,744,999,813	-187	-0.00000326
100 %		- 20	5,745,000,049	49	0.00000085
100 %		- 10	5,744,999,891	-109	-0.00000190
100 %		0	5,744,999,731	-269	-0.00000468
100 %		+ 10	5,745,000,281	281	0.00000489
100 %		+ 20	5,745,000,193	193	0.00000336
100 %		+ 30	5,744,999,800	-200	-0.00000348
100 %		+ 40	5,744,999,833	-167	-0.00000291
100 %		+ 50	5,745,000,016	16	0.00000028
BATT. ENDPOINT	3.45	+ 20	5,744,999,714	-286	-0.00000498

**Table 6-12. Frequency Stability Measurements for UNII Band 3 (Ch. 149)**

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 63 of 126	

## 6.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b.1)(b.6) §15.205 §15.209

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-13 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 6-13. Radiated Limits**

### Test Procedures Used

KDB 789033 D02 v01 – Section G

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

#### Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 64 of 126	




### Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

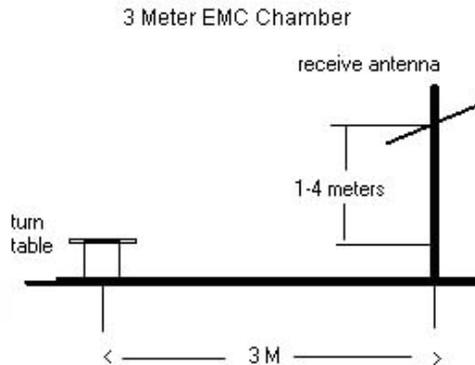

**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01 Section H.
2. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-13.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 65 of 126	

6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

### **Sample Calculations**

#### **Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB_{\mu V/m}]}$  = Analyzer Level  $_{[dBm]}$  + 107 + AFCL  $_{[dB/m]}$
- AFCL  $_{[dB/m]}$  = Antenna Factor  $_{[dB/m]}$  + Cable Loss  $_{[dB]}$
- Margin  $_{[dB]}$  = Field Strength Level  $_{[dB_{\mu V/m}]}$  – Limit  $_{[dB_{\mu V/m}]}$


#### **Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 66 of 126	


## 6.7.1 Radiated Spurious Emission Measurements

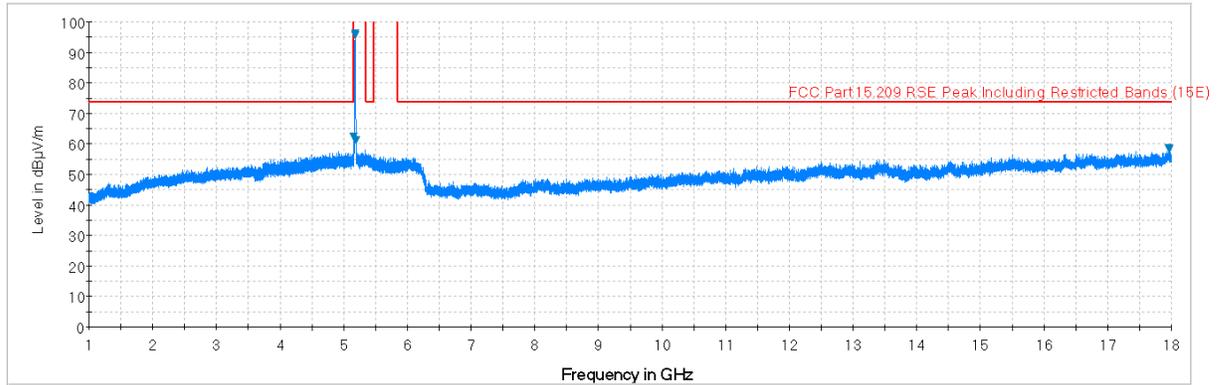

**Plot 6-77. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)**

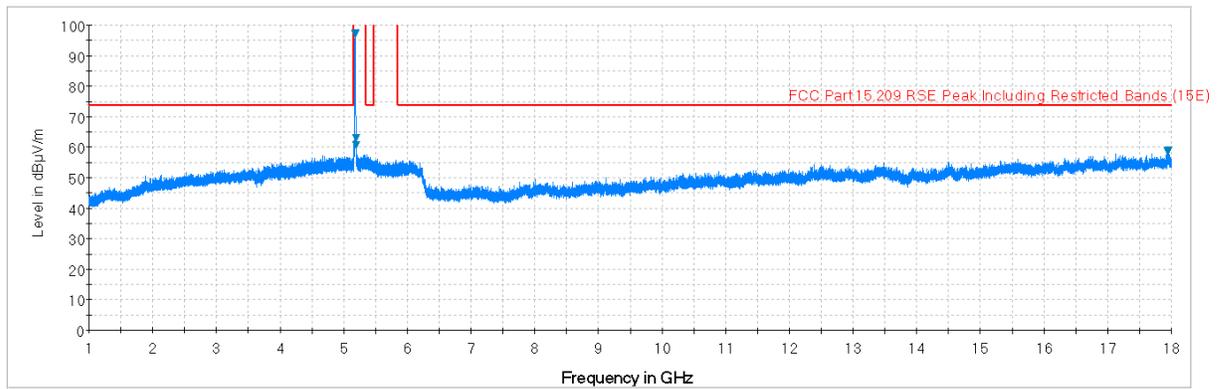


**Plot 6-78. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)**

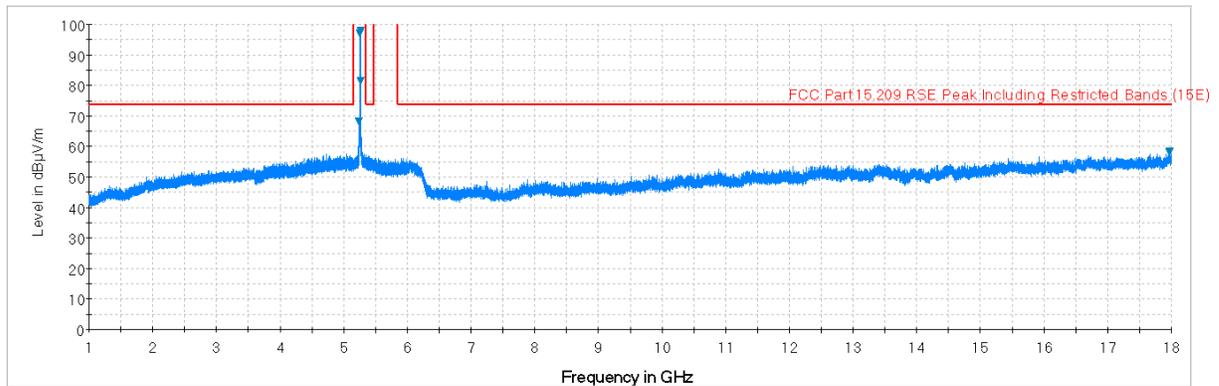


**Plot 6-79. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)**


FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 67 of 126	

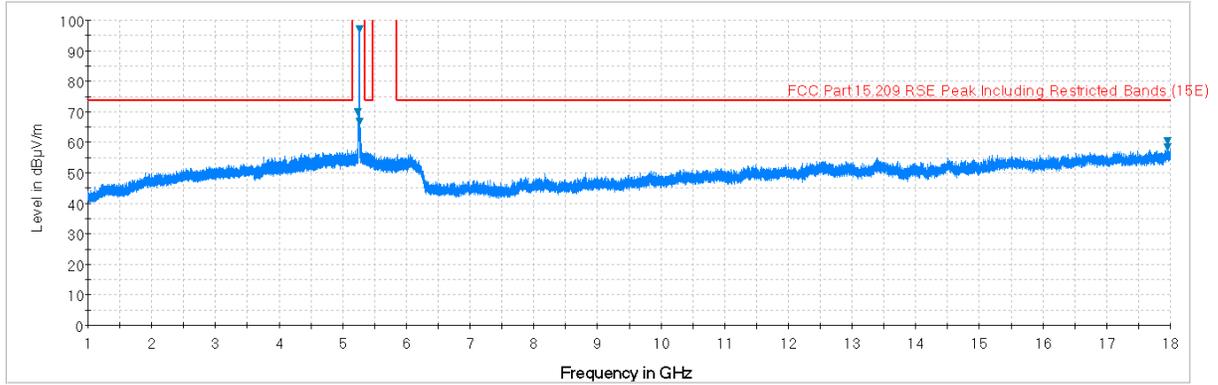

**Plot 6-80. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)**

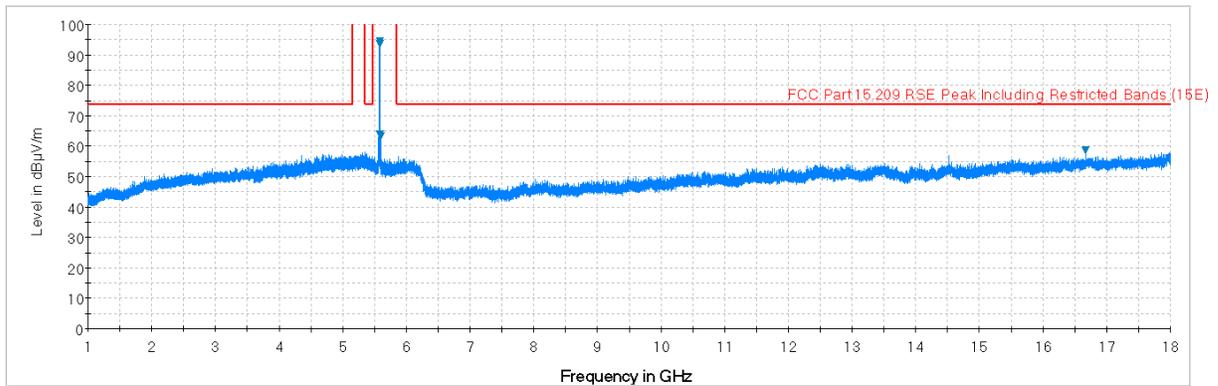


**Plot 6-81. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)**

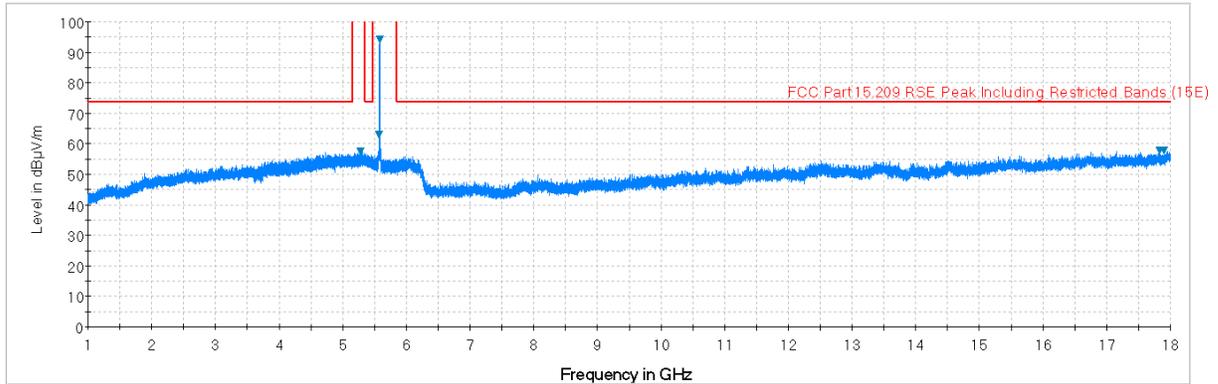


**Plot 6-82. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)**

<b>FCC ID:</b> ZNFH900		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 68 of 126	

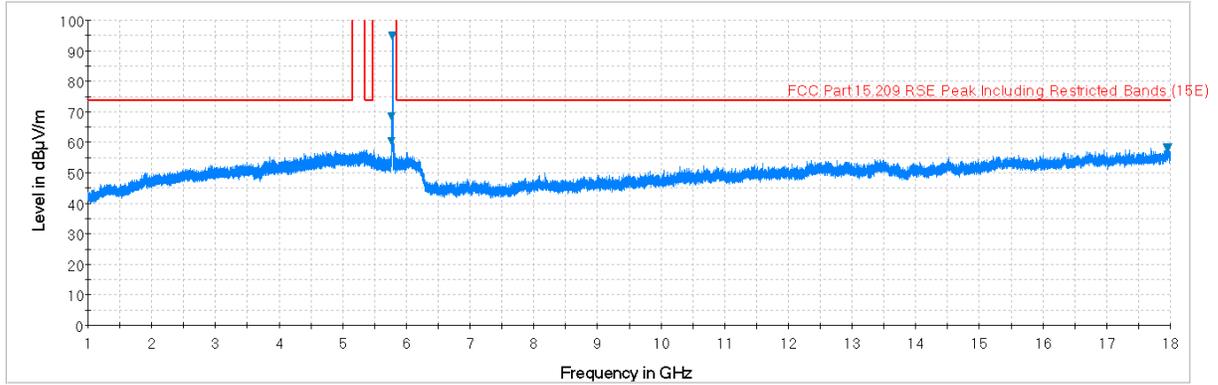

**Plot 6-83. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

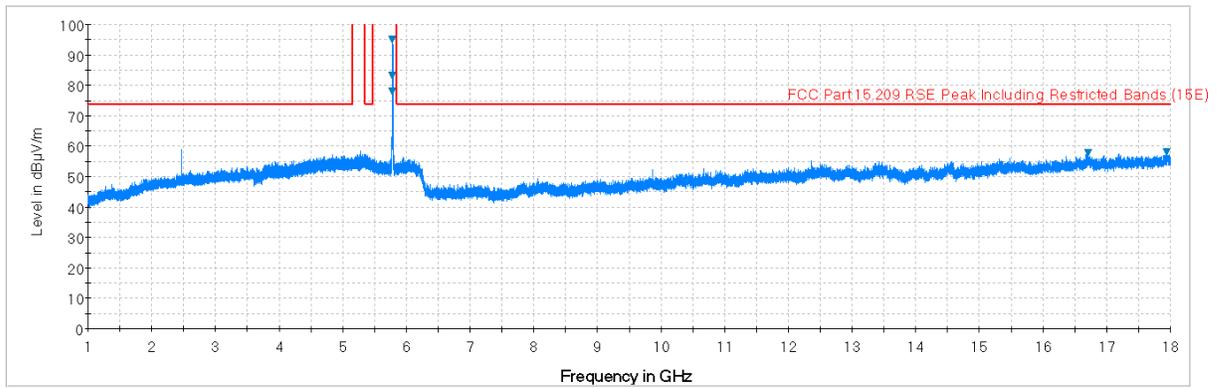


**Plot 6-84. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**


<b>FCC ID:</b> ZNFH900		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 69 of 126	

# Radiated Spurious Emissions Measurements (Above 18GHz)

## §15.209

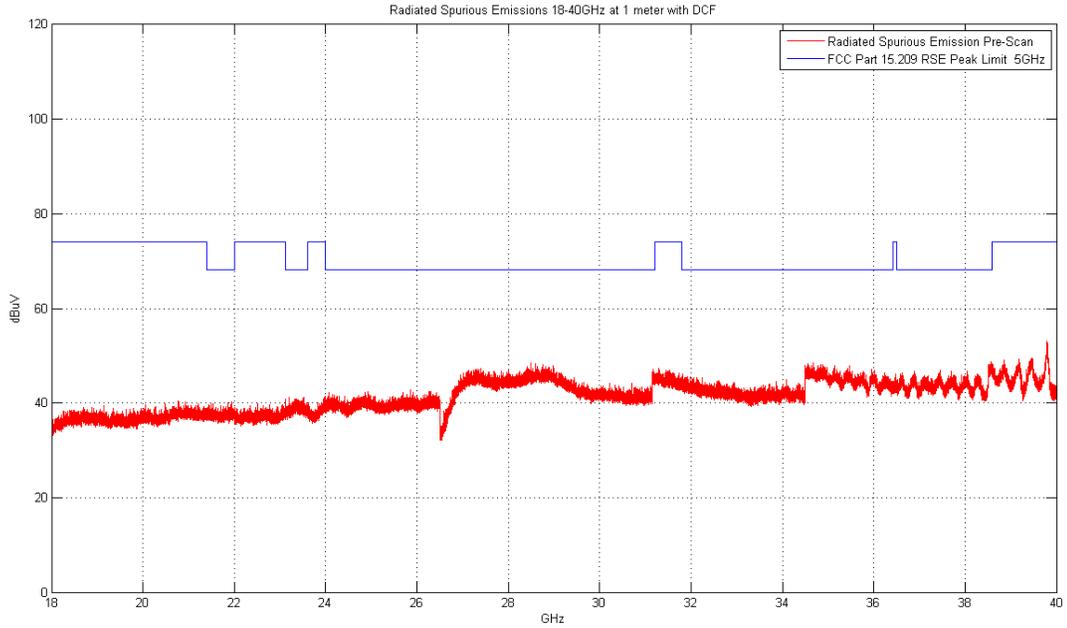

**Plot 6-85. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)**

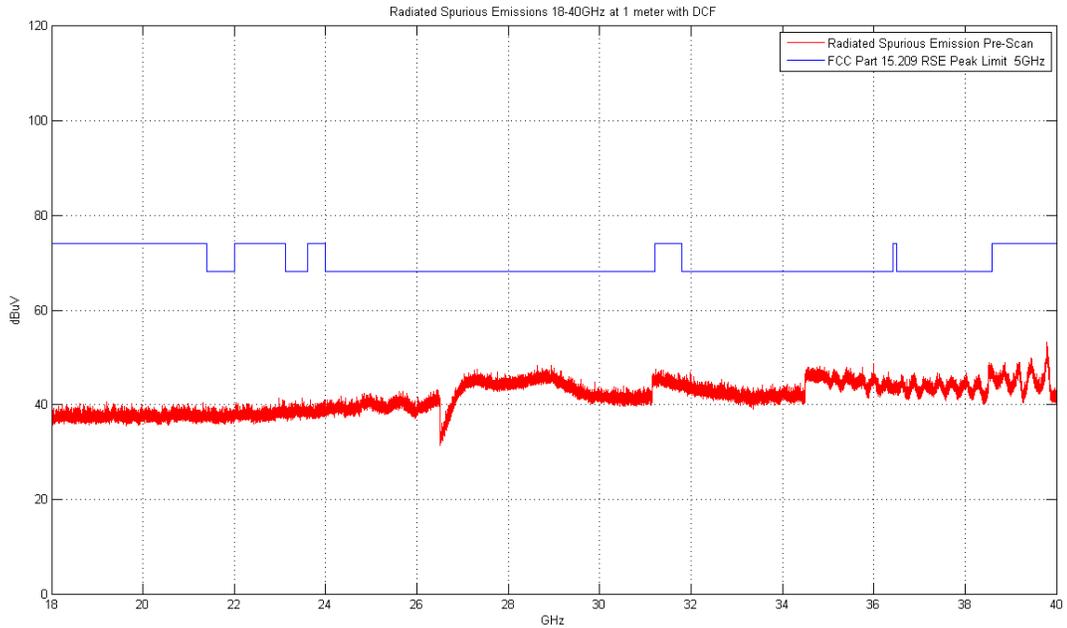

**Plot 6-86. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 70 of 126	

## Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	-98.81	Peak	V	47.29	0.00	55.48	68.20	-12.72
* 15540.00	-111.73	Average	V	51.35	0.00	46.62	53.98	-7.36
* 15540.00	-98.60	Peak	V	51.35	0.00	59.75	73.98	-14.23
* 20720.00	-109.66	Average	H	44.39	-9.54	32.19	53.98	-21.79
* 20720.00	-97.51	Peak	H	44.39	-9.54	44.34	73.98	-29.64
25900.00	-101.46	Peak	H	45.11	-9.54	41.11	68.20	-27.09

**Table 6-14. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	-98.44	Peak	V	47.31	0.00	55.86	68.20	-12.34
* 15600.00	-111.32	Average	V	50.87	0.00	46.55	53.98	-7.43
* 15600.00	-98.64	Peak	V	50.87	0.00	59.23	73.98	-14.75
* 20800.00	-108.48	Average	H	44.39	-9.54	33.37	53.98	-20.61
* 20800.00	-98.13	Peak	H	44.39	-9.54	43.72	73.98	-30.26
26000.00	-97.91	Peak	H	45.12	-9.54	44.66	68.20	-23.54

**Table 6-15. Radiated Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 71 of 126

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-99.62	Peak	V	47.35	0.00	54.74	68.20	-13.46
* 15720.00	-111.81	Average	V	50.12	0.00	45.31	53.98	-8.67
* 15720.00	-99.52	Peak	V	50.12	0.00	57.60	73.98	-16.38
* 20960.00	-109.80	Average	H	44.31	-9.54	31.97	53.98	-22.01
* 20960.00	-99.14	Peak	H	44.31	-9.54	42.63	73.98	-31.35
26200.00	-98.75	Peak	H	45.01	-9.54	43.72	68.20	-24.48

**Table 6-16. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-98.57	Peak	V	47.29	0.00	55.72	68.20	-12.48
* 15540.00	-111.90	Average	V	51.35	0.00	46.45	53.98	-7.53
* 15540.00	-99.35	Peak	V	51.35	0.00	59.00	73.98	-14.98
* 20720.00	-108.52	Average	V	44.39	-9.54	33.33	53.98	-20.65
* 20720.00	-98.87	Peak	V	44.39	-9.54	42.98	73.98	-31.00
25900.00	-99.06	Peak	V	45.11	-9.54	43.51	68.20	-24.69

**Table 6-17. Radiated Measurements with WCP**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 72 of 126	



Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-98.79	Peak	V	47.37	0.00	55.59	68.20	-12.61
* 15780.00	-112.28	Average	V	49.97	0.00	44.69	53.98	-9.29
* 15780.00	-99.51	Peak	V	49.97	0.00	57.46	73.98	-16.52
* 21040.00	-110.36	Average	H	44.29	-9.54	31.38	53.98	-22.60
* 21040.00	-99.22	Peak	H	44.29	-9.54	42.52	73.98	-31.46
26300.00	-98.62	Peak	H	45.00	-9.54	43.84	68.20	-24.36

**Table 6-18. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-99.70	Peak	V	47.40	0.00	54.69	68.20	-13.51
* 15840.00	-111.94	Average	V	50.17	0.00	45.23	53.98	-8.75
* 15840.00	-99.52	Peak	V	50.17	0.00	57.65	73.98	-16.33
* 21120.00	-109.58	Average	H	44.28	-9.54	32.16	53.98	-21.82
* 21120.00	-99.21	Peak	H	44.28	-9.54	42.53	73.98	-31.45
26400.00	-96.81	Peak	H	45.02	-9.54	45.67	68.20	-22.53

**Table 6-19. Radiated Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 73 of 126

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-111.64	Average	V	47.46	0.00	42.83	53.98	-11.15
* 10640.00	-98.62	Peak	V	47.46	0.00	55.85	73.98	-18.13
* 15960.00	-112.40	Average	V	50.85	0.00	45.44	53.98	-8.54
* 15960.00	-99.66	Peak	V	50.85	0.00	58.18	73.98	-15.80
* 21280.00	-108.52	Average	H	44.26	-9.54	33.20	53.98	-20.78
* 21280.00	-99.78	Peak	H	44.26	-9.54	41.94	73.98	-32.04
26600.00	-102.24	Peak	H	47.61	-9.54	42.83	68.20	-25.37

**Table 6-20. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-111.44	Average	V	47.46	0.00	43.03	53.98	-10.95
* 10640.00	-98.74	Peak	V	47.46	0.00	55.73	73.98	-18.25
* 15960.00	-112.36	Average	V	50.85	0.00	45.48	53.98	-8.50
* 15960.00	-100.10	Peak	V	50.85	0.00	57.74	73.98	-16.24
* 21280.00	-110.17	Average	V	44.26	-9.54	31.55	53.98	-22.43
* 21280.00	-100.65	Peak	V	44.26	-9.54	41.07	73.98	-32.91
26600.00	-103.64	Peak	V	47.61	-9.54	41.43	68.20	-26.77

**Table 6-21. Radiated Measurements with WCP**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 74 of 126	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-111.51	Average	V	47.69	0.00	43.18	53.98	-10.80
* 11000.00	-98.72	Peak	V	47.69	0.00	55.97	73.98	-18.01
16500.00	-102.26	Peak	V	52.32	0.00	57.05	68.20	-11.15
22000.00	-101.59	Peak	H	44.50	-9.54	40.36	68.20	-27.84
27500.00	-103.26	Peak	H	47.97	-9.54	42.17	68.20	-26.03

**Table 6-22. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5580MHz  
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-111.75	Average	V	47.87	0.00	43.12	53.98	-10.86
* 11160.00	-99.03	Peak	V	47.87	0.00	55.84	73.98	-18.14
16740.00	-99.88	Peak	V	53.47	0.00	60.60	68.20	-7.60
* 22320.00	-109.35	Average	H	44.56	-9.54	32.67	53.98	-21.31
* 22320.00	-98.69	Peak	H	44.56	-9.54	43.33	73.98	-30.65
27900.00	-103.41	Peak	H	48.08	-9.54	42.13	68.20	-26.07

**Table 6-23. Radiated Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 75 of 126	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	-111.94	Average	V	48.47	0.00	43.52	53.98	-10.45
* 11440.00	-99.85	Peak	V	48.47	0.00	55.61	73.98	-18.36
17160.00	-100.47	Peak	V	55.08	0.00	61.61	68.20	-6.59
* 22880.00	-109.37	Average	H	44.56	-9.54	32.64	53.98	-21.34
* 22880.00	-99.38	Peak	H	44.56	-9.54	42.63	73.98	-31.35
28600.00	-103.85	Peak	H	48.32	-9.54	41.93	68.20	-26.27

**Table 6-24. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	-112.63	Average	H	48.47	0.00	42.83	53.98	-11.14
* 11440.00	-99.72	Peak	H	48.47	0.00	55.74	73.98	-18.23
17160.00	-100.91	Peak	H	55.08	0.00	61.17	68.20	-7.03
* 22880.00	-109.67	Average	H	44.56	-9.54	32.34	53.98	-21.64
* 22880.00	-98.49	Peak	H	44.56	-9.54	43.52	73.98	-30.46
28600.00	-104.90	Peak	H	48.32	-9.54	40.88	68.20	-27.32

**Table 6-25. Radiated Measurements with WCP**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 76 of 126	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	-111.75	Average	V	48.88	0.00	44.14	53.98	-9.84
* 11490.00	-99.22	Peak	V	48.88	0.00	56.67	73.98	-17.31
17235.00	-99.60	Peak	V	56.08	0.00	63.48	68.20	-4.72
* 22980.00	-110.39	Average	H	44.68	-9.54	31.75	53.98	-22.23
* 22980.00	-98.95	Peak	H	44.68	-9.54	43.19	73.98	-30.79
28725.00	-103.96	Peak	H	48.26	-9.54	41.76	68.20	-26.44

**Table 6-26. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	-111.83	Average	H	49.13	0.00	44.30	53.98	-9.68
* 11570.00	-98.83	Peak	H	49.13	0.00	57.30	73.98	-16.68
17355.00	-98.65	Peak	H	56.39	0.00	64.73	68.20	-3.47
23140.00	-101.08	Peak	H	44.75	-9.54	41.13	68.20	-27.07
28925.00	-105.26	Peak	H	48.29	-9.54	40.49	68.20	-27.71

**Table 6-27. Radiated Measurements**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 77 of 126	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	-111.51	Average	H	49.22	0.00	44.71	53.98	-9.27
* 11650.00	-99.09	Peak	H	49.22	0.00	57.13	73.98	-16.85
17475.00	-99.84	Peak	H	57.03	0.00	64.19	68.20	-4.01
23300.00	-99.45	Peak	H	44.75	-9.54	42.75	68.20	-25.45
29125.00	-104.23	Peak	H	48.28	-9.54	41.52	68.20	-26.68

**Table 6-28. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	-112.01	Average	V	49.13	0.00	44.12	53.98	-9.86
* 11570.00	-101.15	Peak	V	49.13	0.00	54.98	73.98	-19.00
17355.00	-100.13	Peak	V	56.39	0.00	63.25	68.20	-4.95
23140.00	-101.01	Peak	V	44.75	-9.54	41.20	68.20	-27.00
28925.00	-105.40	Peak	V	48.29	-9.54	40.35	68.20	-27.85

**Table 6-29. Radiated Measurements with WCP**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 78 of 126	

## 6.7.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MSC0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

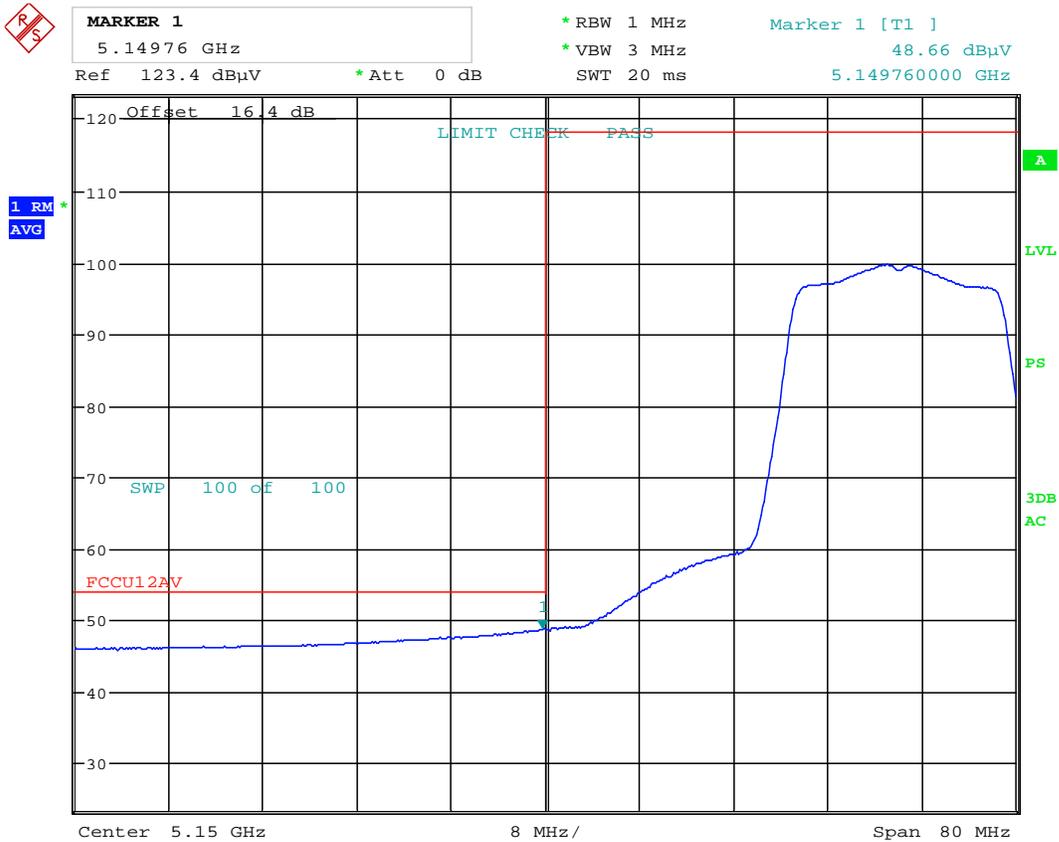

Date: 13.AUG.2015 11:52:04

**Plot 6-87. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 79 of 126	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
 5.14624 GHz  
 Ref 123.4 dBµV \*Att 0 dB  
 \*RBW 1 MHz Marker 1 [T1] 66.90 dBµV  
 \*VBW 3 MHz 5.146240000 GHz  
 SWT 20 ms

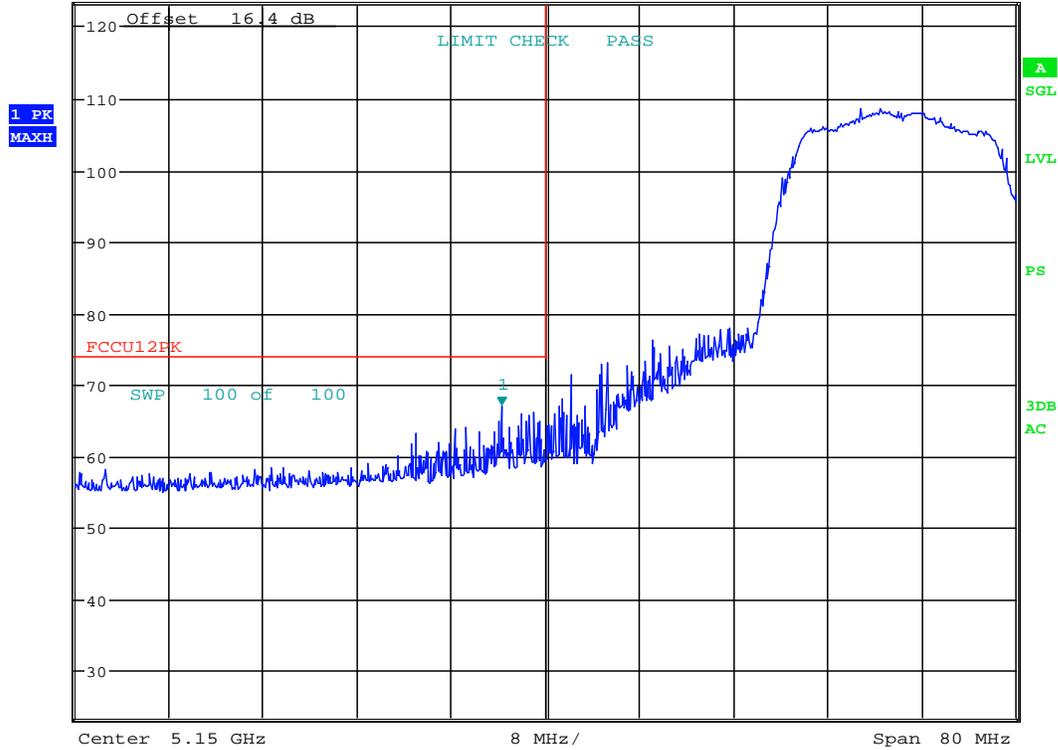

Date: 13.AUG.2015 11:53:04

**Plot 6-88. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 80 of 126	



# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz


Channel: 40



**MARKER 1**  
 5.149879 GHz  
 Ref 123.4 dBµV \*Att 0 dB

\*RBW 1 MHz  
 \*VBW 3 MHz  
 SWT 20 ms

Marker 1 [T1 ]  
 48.16 dBµV  
 5.149879000 GHz

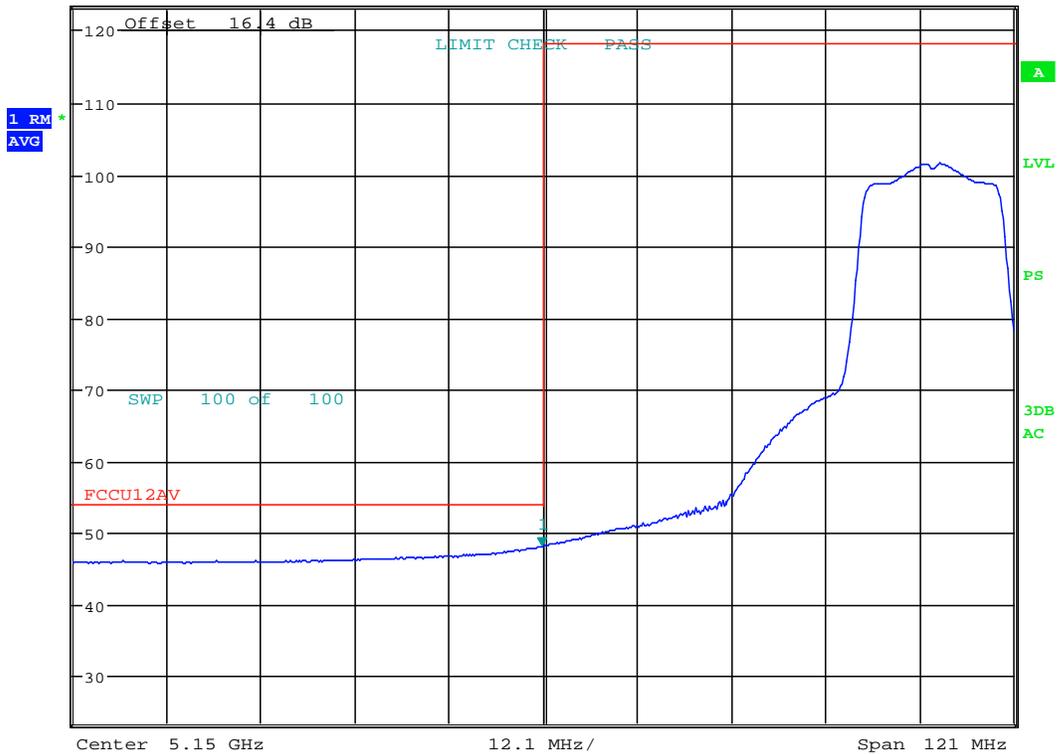


Date: 13.AUG.2015 12:12:20

**Plot 6-89. Radiated Restricted Lower Band Edge Plot (Average - UNII Band 1)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 81 of 126	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

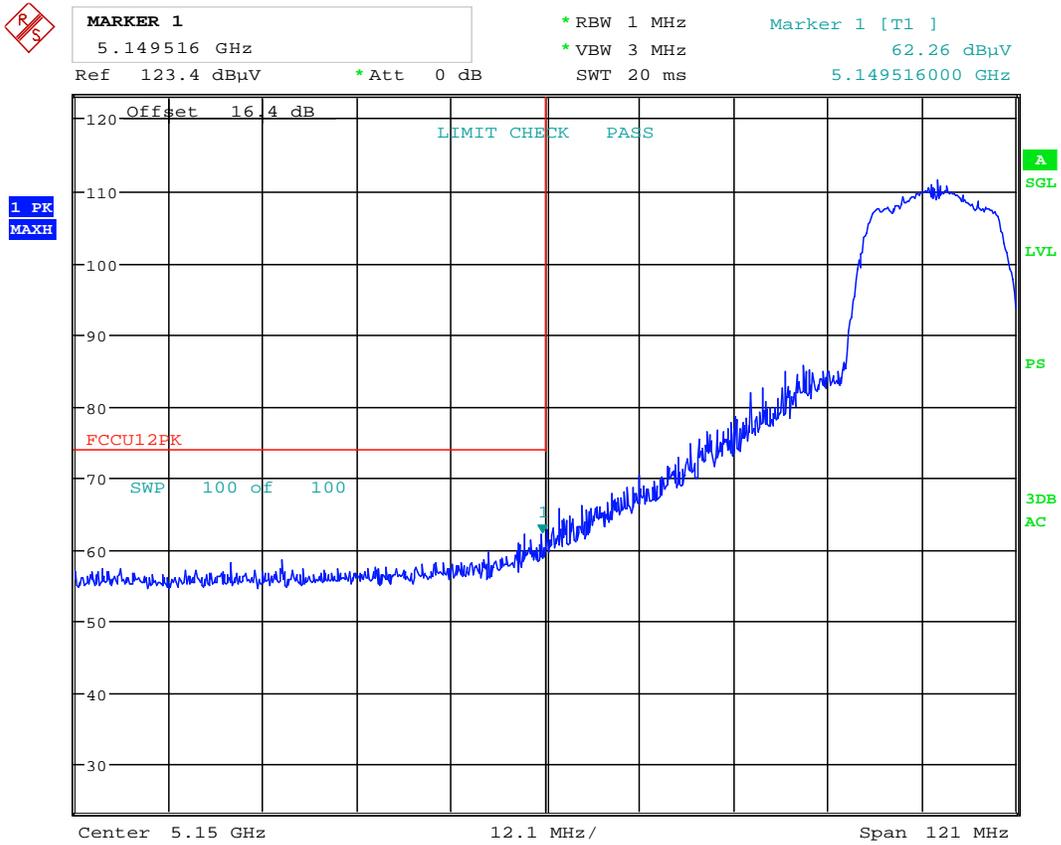

Date: 13.AUG.2015 12:12:52

**Plot 6-90. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 1)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 82 of 126	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 5320MHz

Channel: 64



**MARKER 1**  
 5.350426 GHz  
 Ref 123.7 dBµV \* Att 0 dB SWT 20 ms

\* RBW 1 MHz  
 \* VBW 3 MHz  
 Marker 1 [T1 ]  
 50.41 dBµV  
 5.350426000 GHz

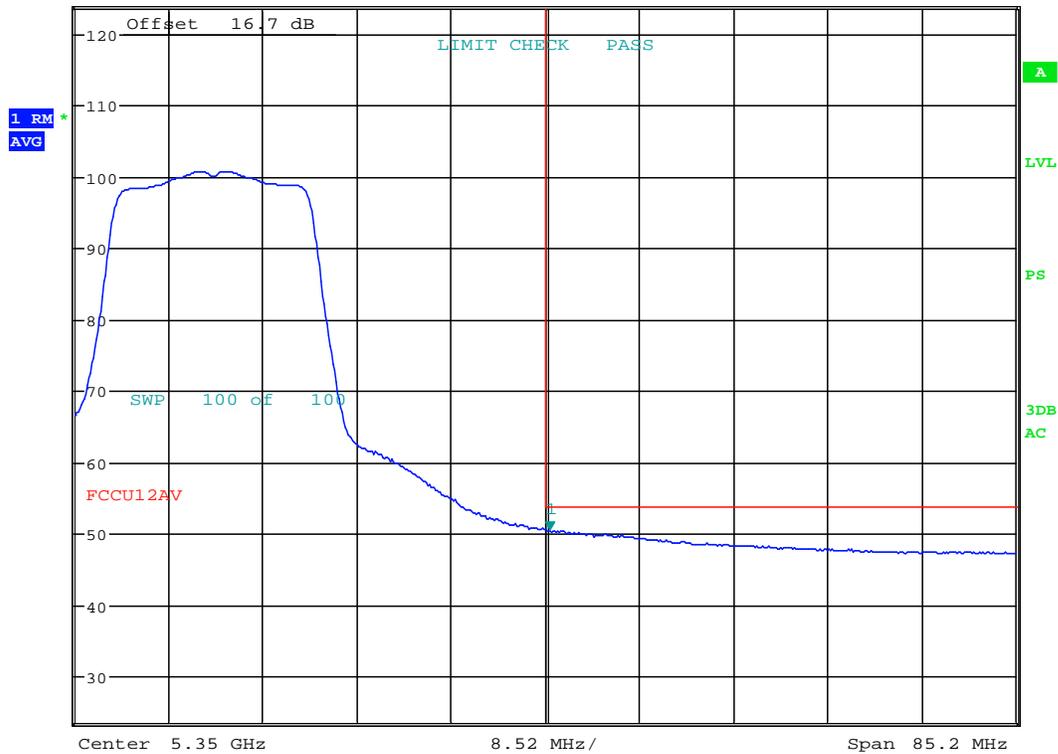

Date: 13.AUG.2015 12:34:47

**Plot 6-91. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 83 of 126	


# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
5.35 GHz  
Ref 123.7 dBµV \*Att 0 dB

\*RBW 1 MHz Marker 1 [T1 ]  
\*VBW 3 MHz 68.91 dBµV  
SWT 20 ms 5.35000000 GHz

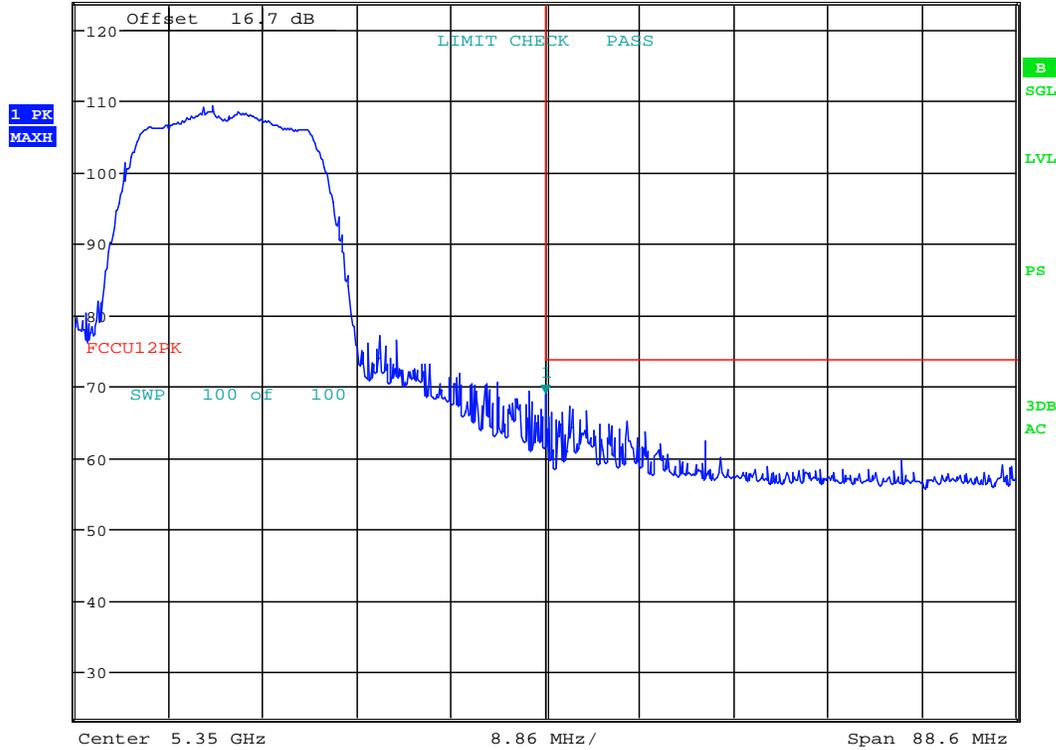

Date: 13.AUG.2015 14:43:21

**Plot 6-92. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 84 of 126


# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5300MHz  
 Channel: 60



**MARKER 1**  
 5.350242 GHz  
 Ref 123.7 dBµV \* Att 0 dB \* RBW 1 MHz \* VBW 3 MHz SWT 20 ms  
 Marker 1 [T1] 48.04 dBµV  
 5.350242000 GHz

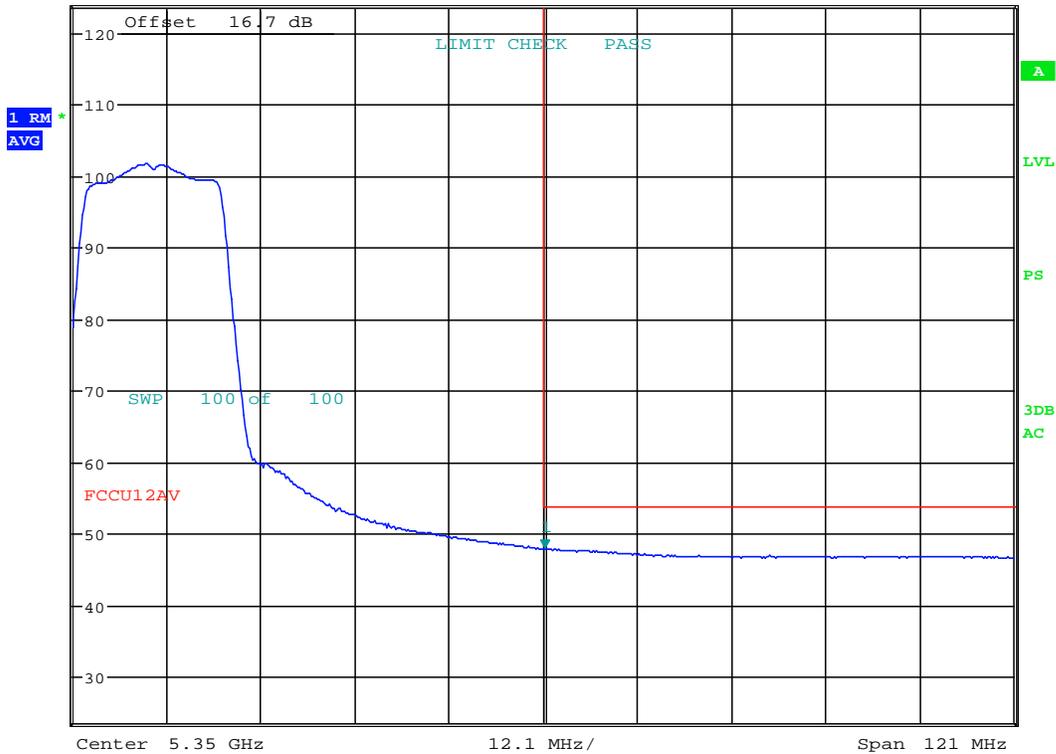

Date: 13.AUG.2015 12:22:45

**Plot 6-93. Radiated Restricted Upper Band Edge Plot (Average - UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 85 of 126	


**Radiated Band Edge Measurements (20MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**



**MARKER 1**  
5.354961 GHz  
Ref 123.7 dBµV \*Att 0 dB

\*RBW 1 MHz  
\*VBW 3 MHz  
SWT 20 ms

Marker 1 [T1 ]  
62.05 dBµV  
5.354961000 GHz

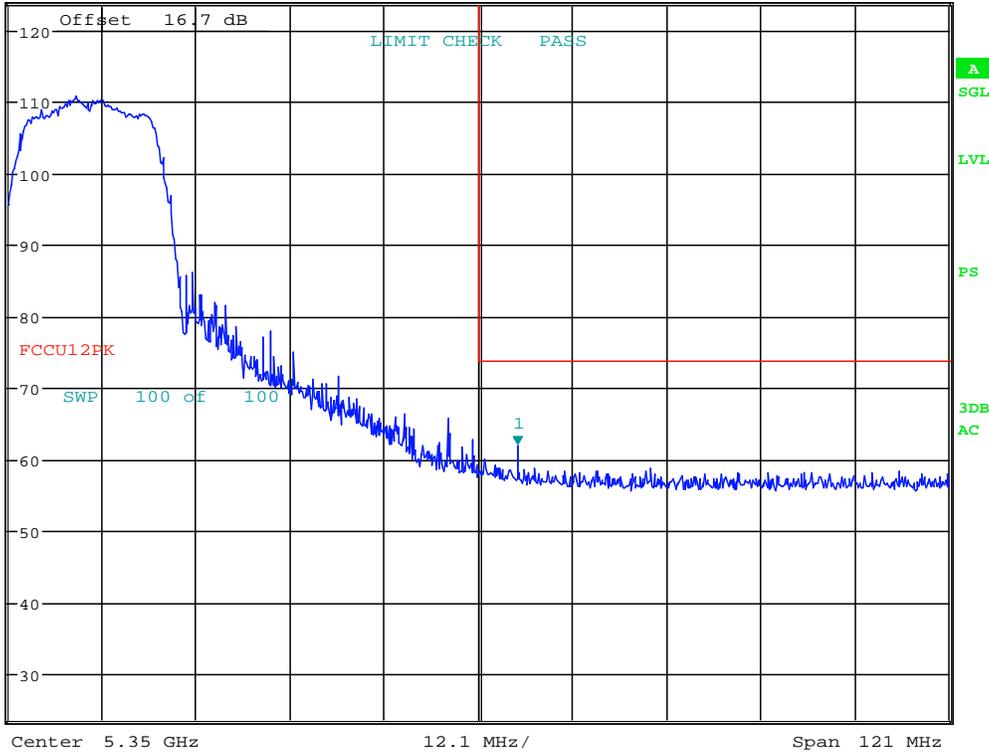

Date: 13.AUG.2015 12:23:31

**Plot 6-94. Radiated Restricted Upper Band Edge Plot (Peak - UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 86 of 126	


# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MSC0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100



**MARKER 1**  
 5.459682 GHz  
 Ref 124.1 dBµV \* Att 0 dB \* RBW 1 MHz \* VBW 3 MHz SWT 20 ms  
 Marker 1 [T1] 47.35 dBµV  
 5.459682000 GHz

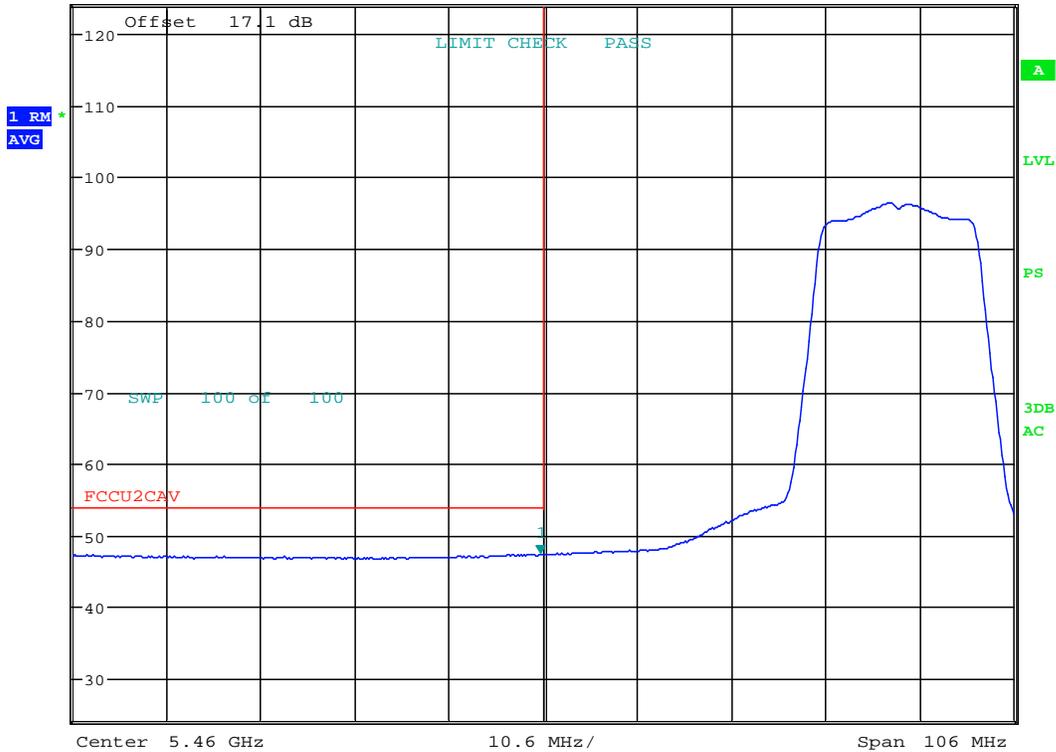

Date: 13.AUG.2015 12:51:10

**Plot 6-95. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 87 of 126	


# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
 5.469046 GHz  
 Ref 124.1 dBµV \*Att 0 dB \*RBW 1 MHz \*VBW 3 MHz SWT 20 ms  
 Marker 1 [T1] 62.48 dBµV  
 5.469046000 GHz

1 PK  
MAXH

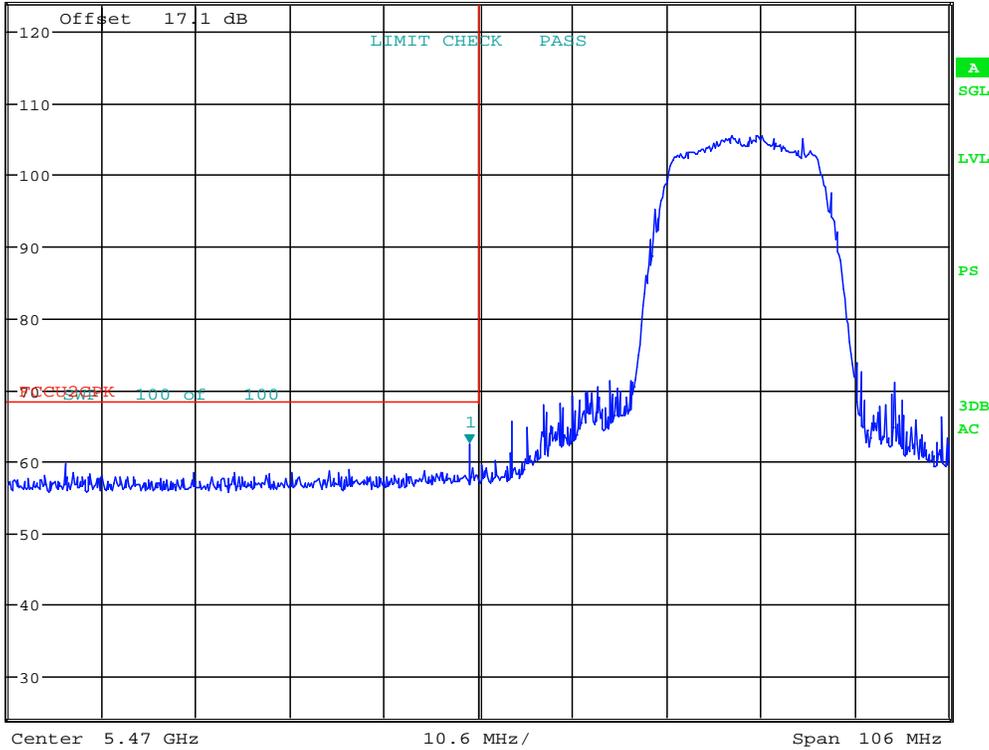

Date: 13.AUG.2015 12:52:23

**Plot 6-96. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 88 of 126




# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MSC0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5560MHz  
 Channel: 112



**MARKER 1**  
 5.393769 GHz  
 Ref 124.1 dBµV \* Att 0 dB \* RBW 1 MHz \* VBW 3 MHz  
 Marker 1 [T1] 47.22 dBµV  
 SWT 20 ms 5.393769000 GHz

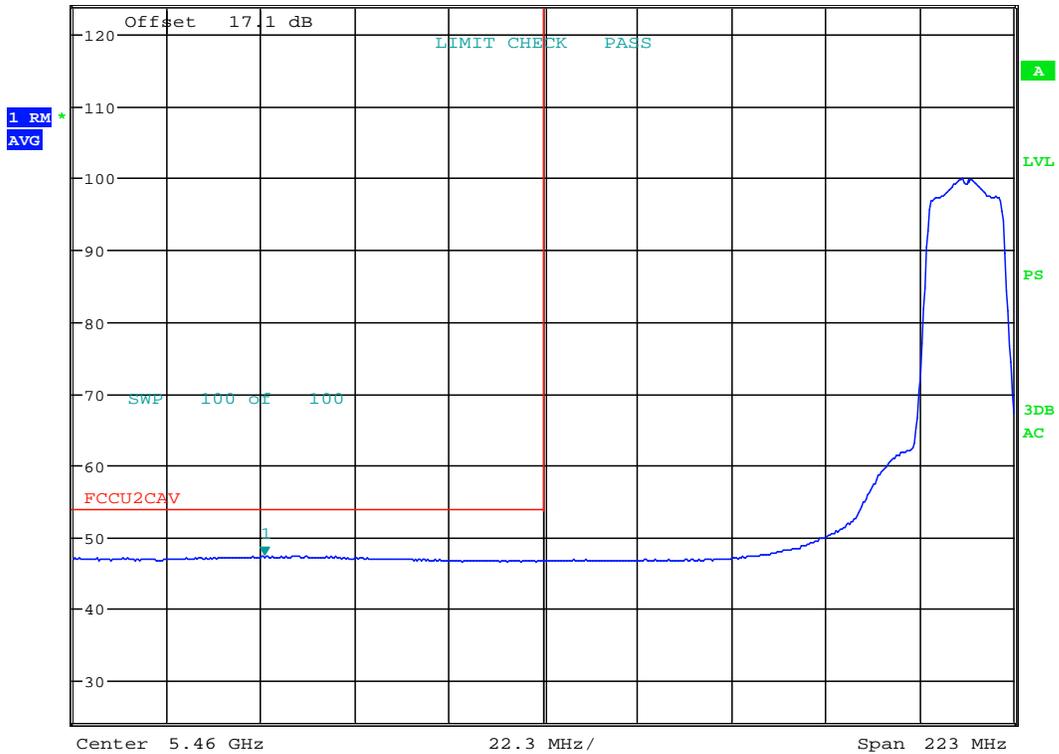

Date: 13.AUG.2015 13:07:37


**Plot 6-97. Radiated Restricted Lower Band Edge Plot (Average - UNII Band 2C)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 89 of 126	

**Radiated Band Edge Measurements (20MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**



**MARKER 1**  
5.446585 GHz  
Ref 124.1 dBµV \*Att 0 dB \*RBW 1 MHz \*VSW 3 MHz Marker 1 [T1] 58.91 dBµV  
SWT 20 ms 5.446585000 GHz

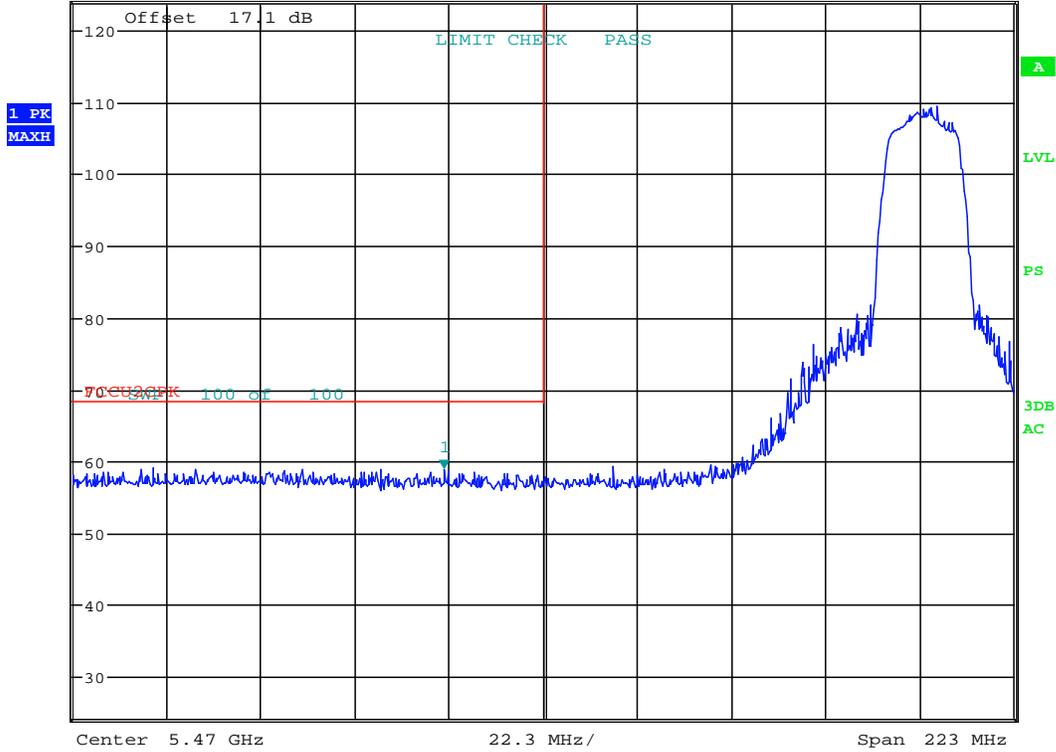

Date: 13.AUG.2015 13:08:27


**Plot 6-98. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 2C)**

<b>FCC ID:</b> ZNFH900	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 90 of 126	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

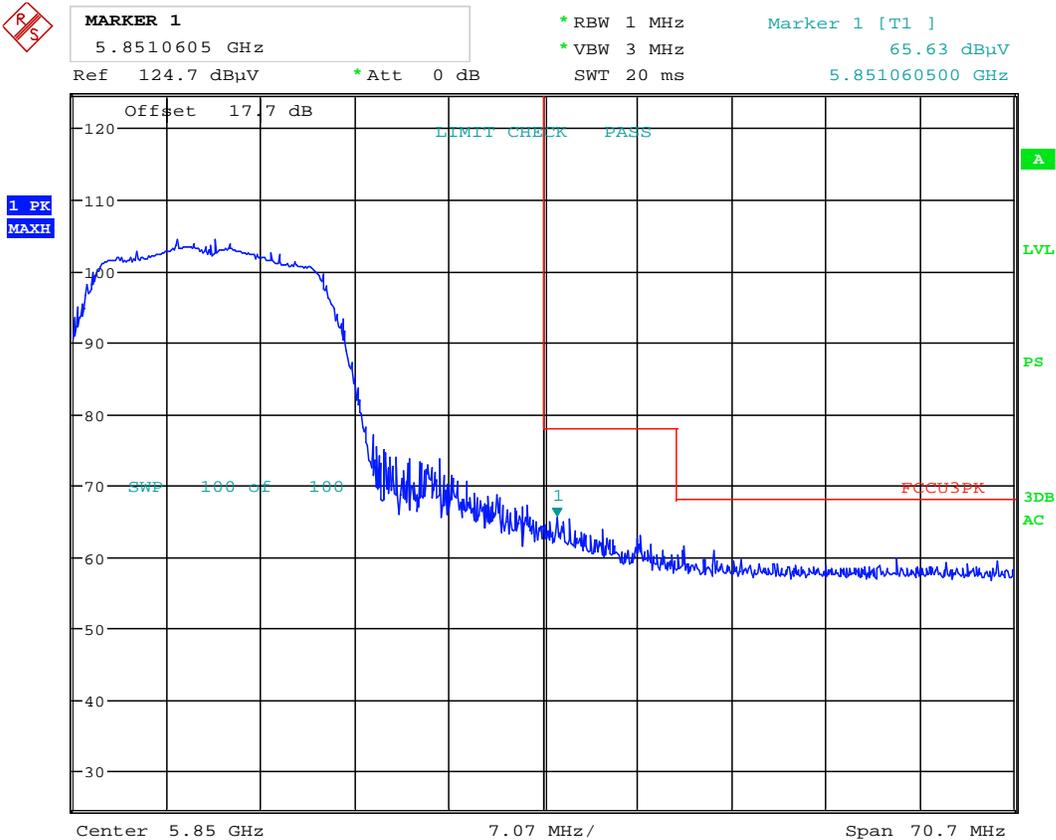

Date: 13.AUG.2015 13:28:44


**Plot 6-99. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 91 of 126	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

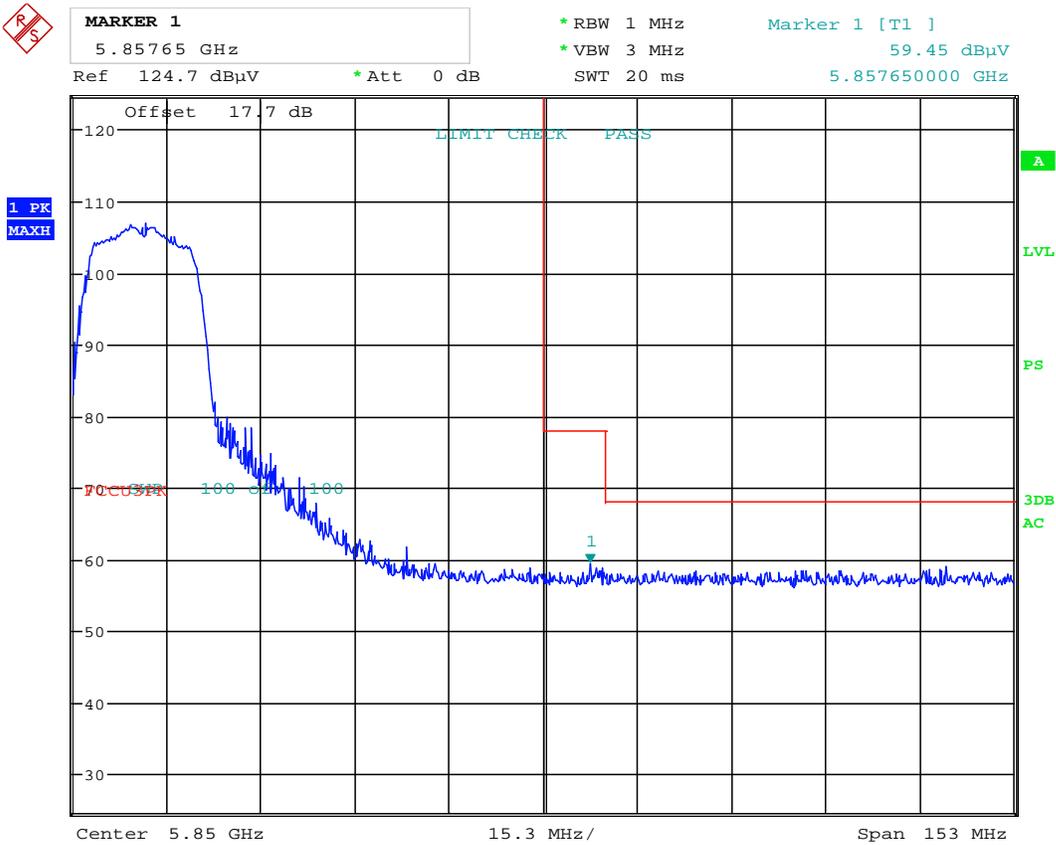


Date: 13.AUG.2015 13:22:00

**Plot 6-100. Radiated Restricted Upper Band Edge Plot (Peak - UNII Band 3)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 92 of 126	

### WCP Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

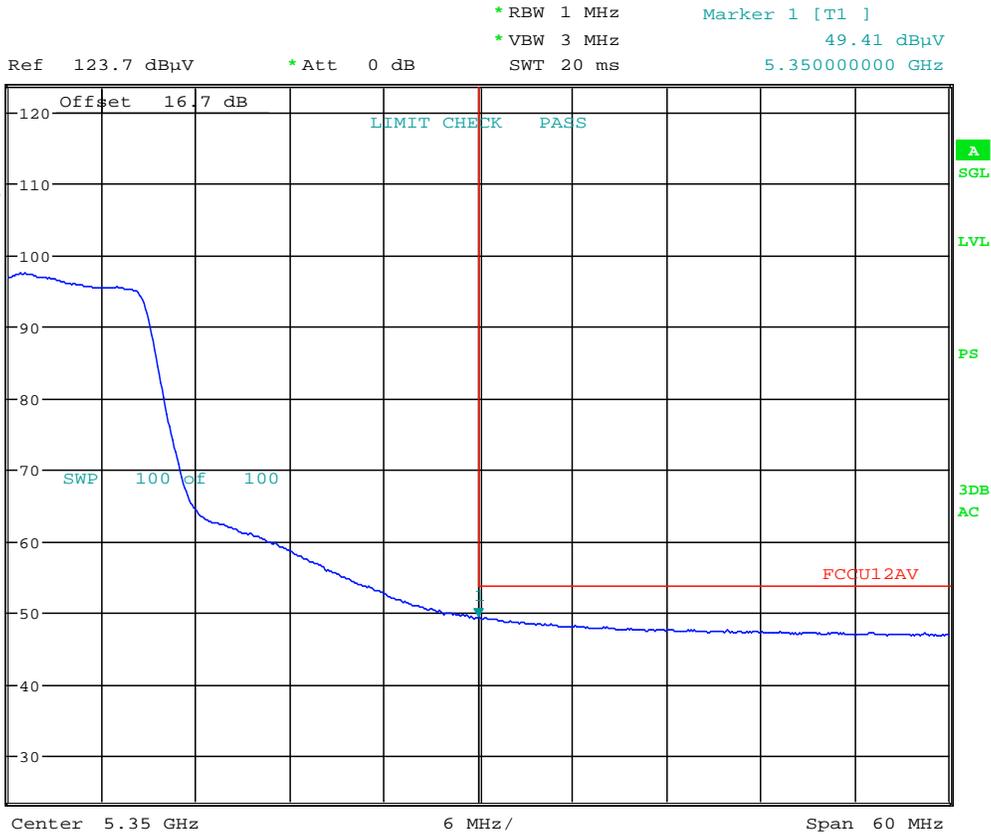


Date: 20.AUG.2015 23:20:41

**Plot 6-101. Radiated Restricted Band Edge Plot with WCP (Average – UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 93 of 126	

**WCP Radiated Band Edge Measurements (20MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**

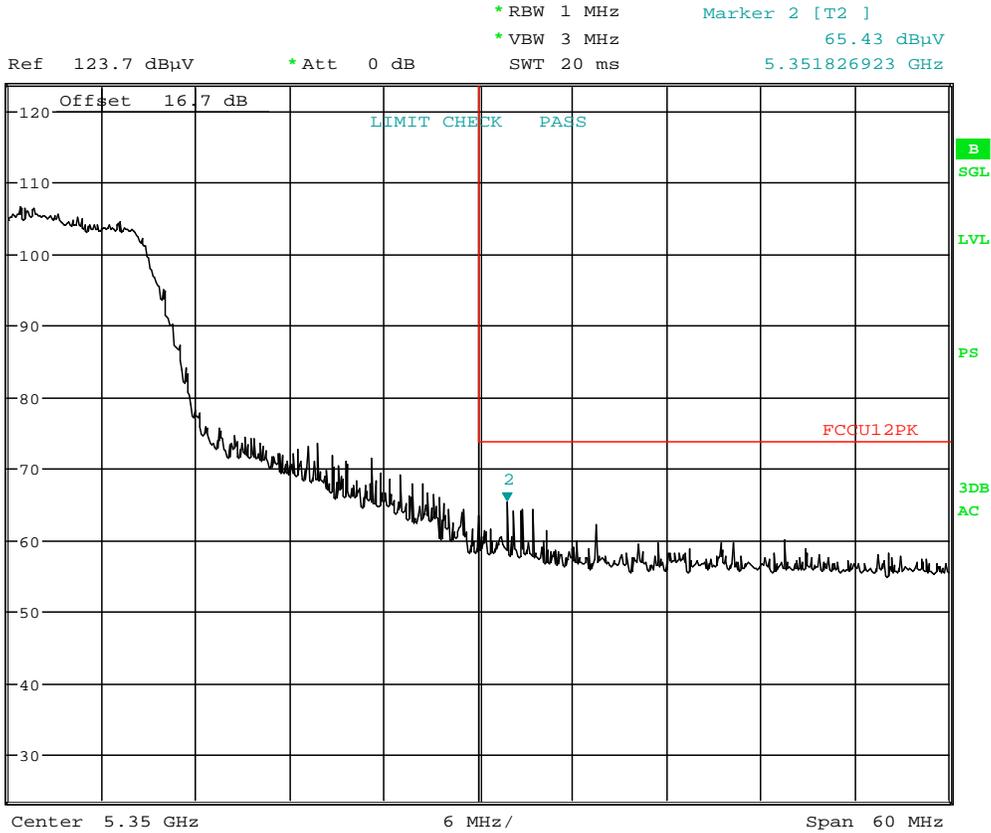


Date: 20.AUG.2015 23:21:48

**Plot 6-102. Radiated Restricted Band Edge Plot with WCP (Peak – UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 94 of 126	

### 6.7.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

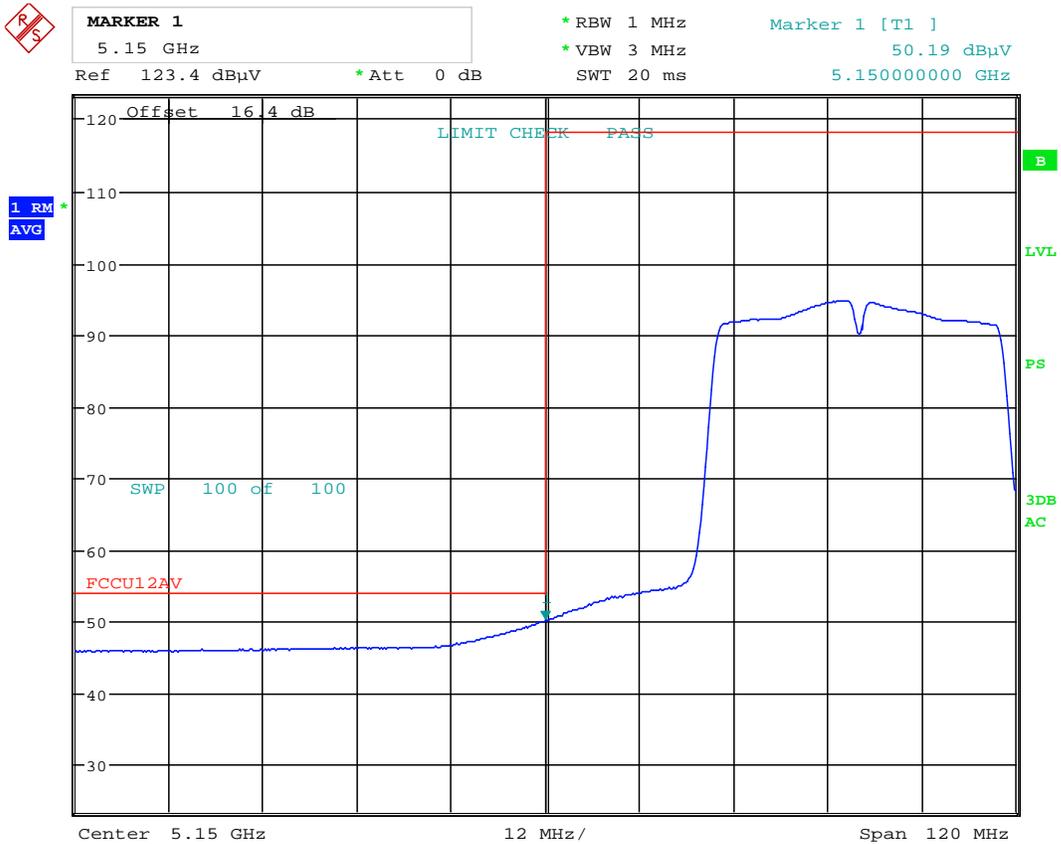

Date: 14.AUG.2015 10:59:12

**Plot 6-103. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**


FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 95 of 126

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



<b>MARKER 1</b>		* RBW 1 MHz	Marker 1 [T1 ]
5.14395 GHz		* VBW 3 MHz	68.95 dBµV
Ref 123.4 dBµV	* Att 0 dB	SWT 20 ms	5.143950000 GHz

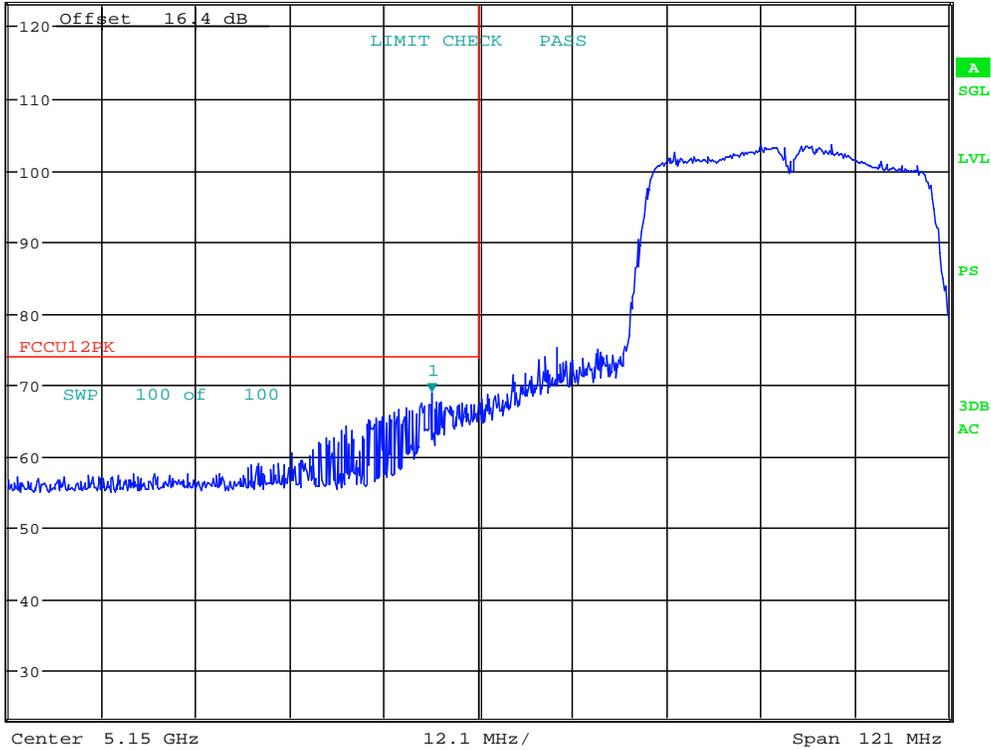

Date: 13.AUG.2015 11:55:55

**Plot 6-104. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 96 of 126	




# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5230MHz  
 Channel: 46



**MARKER 1**  
 5.149403 GHz  
 Ref 123.4 dBµV \* Att 0 dB \* RBW 1 MHz \* VBW 3 MHz \* Marker 1 [T1] 46.84 dBµV  
 SWT 20 ms 5.149403000 GHz

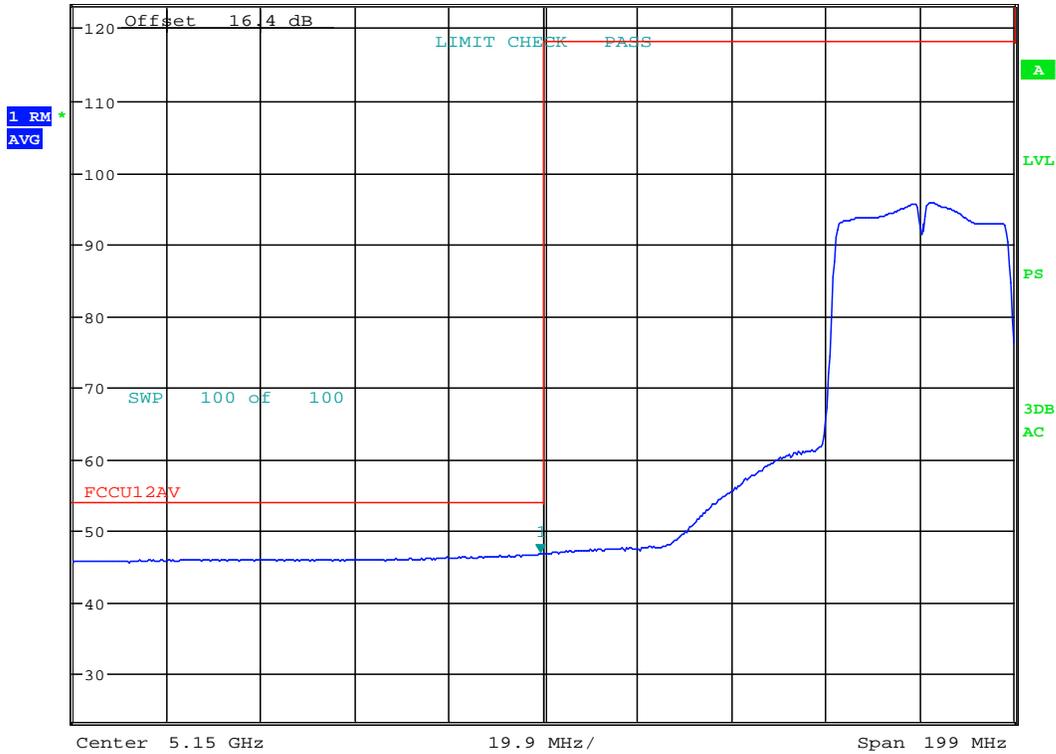

Date: 13.AUG.2015 12:14:52

**Plot 6-105. Radiated Restricted Lower Band Edge Plot (Average - UNII Band 1)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 97 of 126	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209




**MARKER 1**  
 5.149602 GHz  
 Ref 123.4 dBµV \*Att 0 dB

\* RBW 1 MHz  
 \* VBW 3 MHz  
 SWT 20 ms

Marker 1 [T1 ]  
 59.12 dBµV  
 5.149602000 GHz

1 PK  
 MAXH

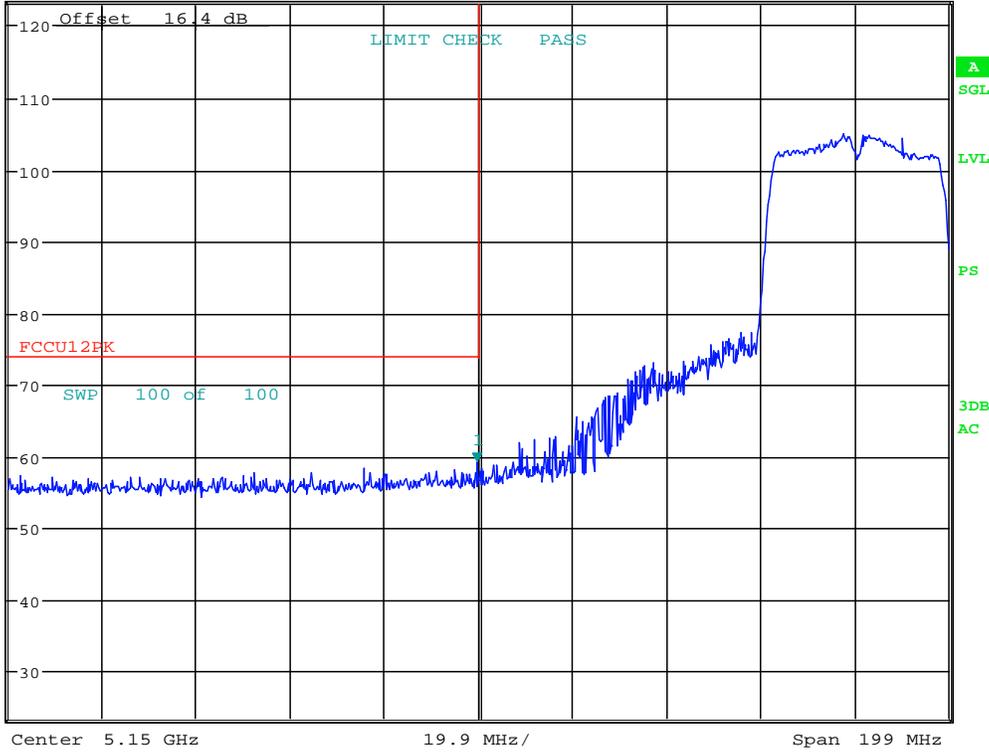

Date: 13.AUG.2015 12:15:25

**Plot 6-106. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 1)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 98 of 126

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

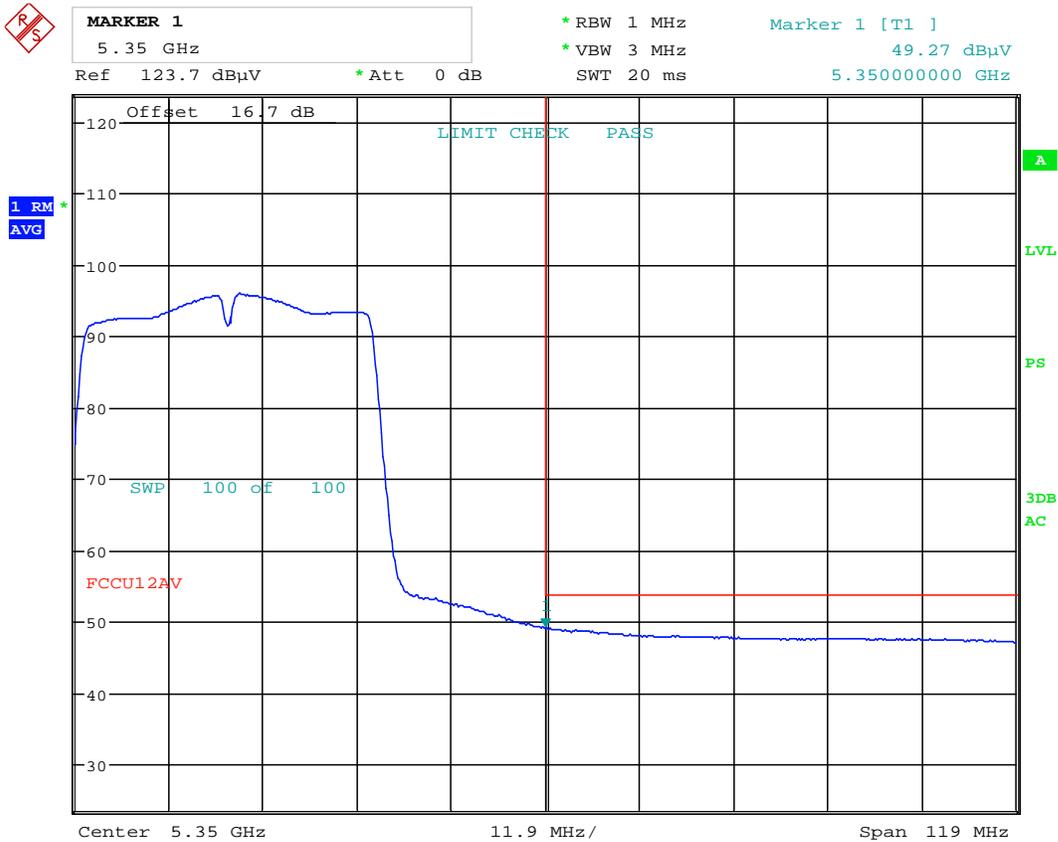

Date: 13.AUG.2015 12:38:34

**Plot 6-107. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 99 of 126	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



<b>MARKER 1</b>		* RBW 1 MHz	Marker 1 [T1 ]
5.350238 GHz		* VBW 3 MHz	67.11 dBµV
Ref 123.7 dBµV	* Att 0 dB	SWT 20 ms	5.350238000 GHz

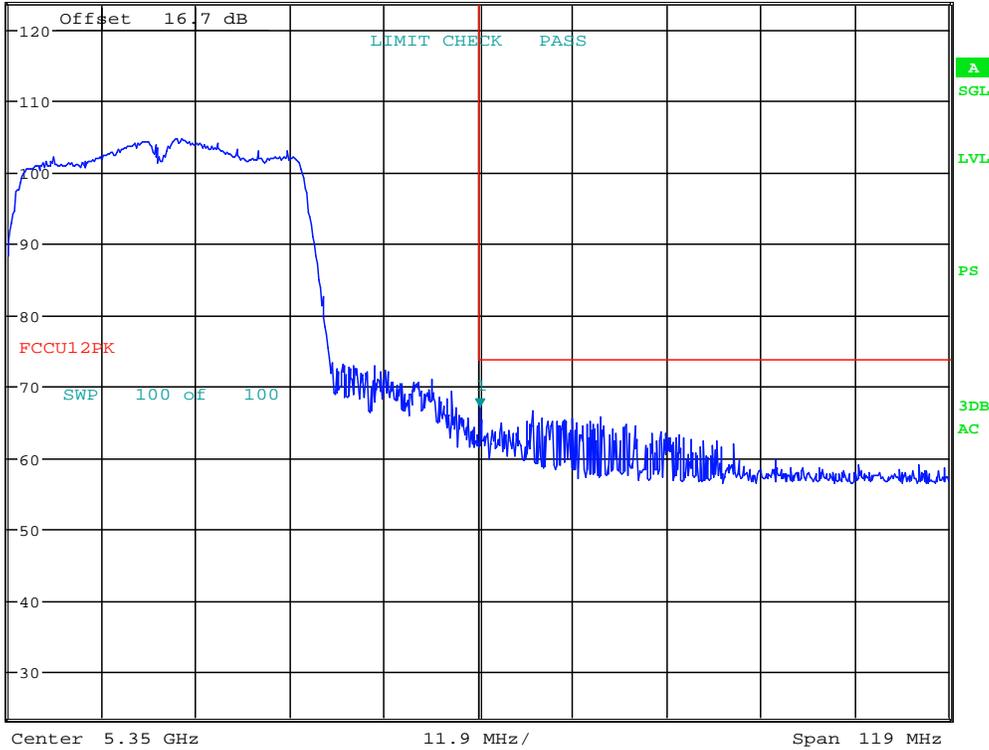

Date: 13.AUG.2015 12:39:47

**Plot 6-108. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 100 of 126	


# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5270MHz  
 Channel: 54



**MARKER 1**  
 5.353184 GHz  
 Ref 123.7 dBµV \* Att 0 dB  
 \* RBW 1 MHz  
 \* VBW 3 MHz  
 SWT 20 ms  
 Marker 1 [T1] 47.63 dBµV  
 5.353184000 GHz

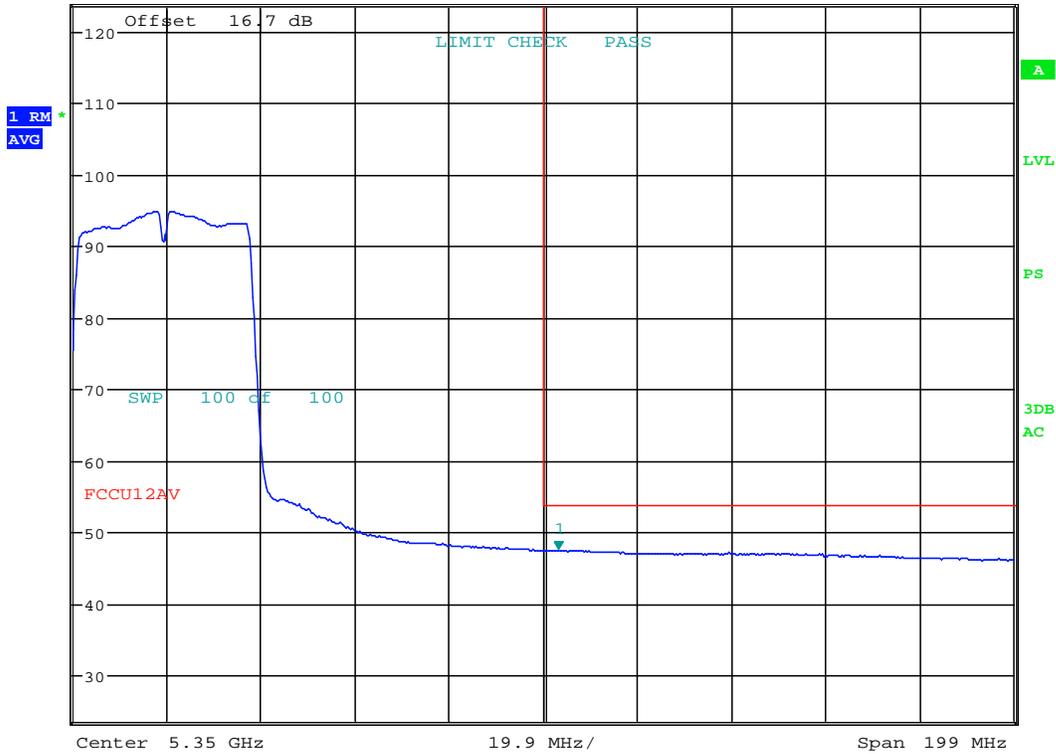

Date: 13.AUG.2015 12:26:05

**Plot 6-109. Radiated Restricted Upper Band Edge Plot (Average - UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 101 of 126	

## Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
 5.355771 GHz  
 Ref 123.7 dBµV \*Att 0 dB

\*RBW 1 MHz  
 \*VBW 3 MHz  
 SWT 20 ms

Marker 1 [T1 ]  
 61.52 dBµV  
 5.355771000 GHz

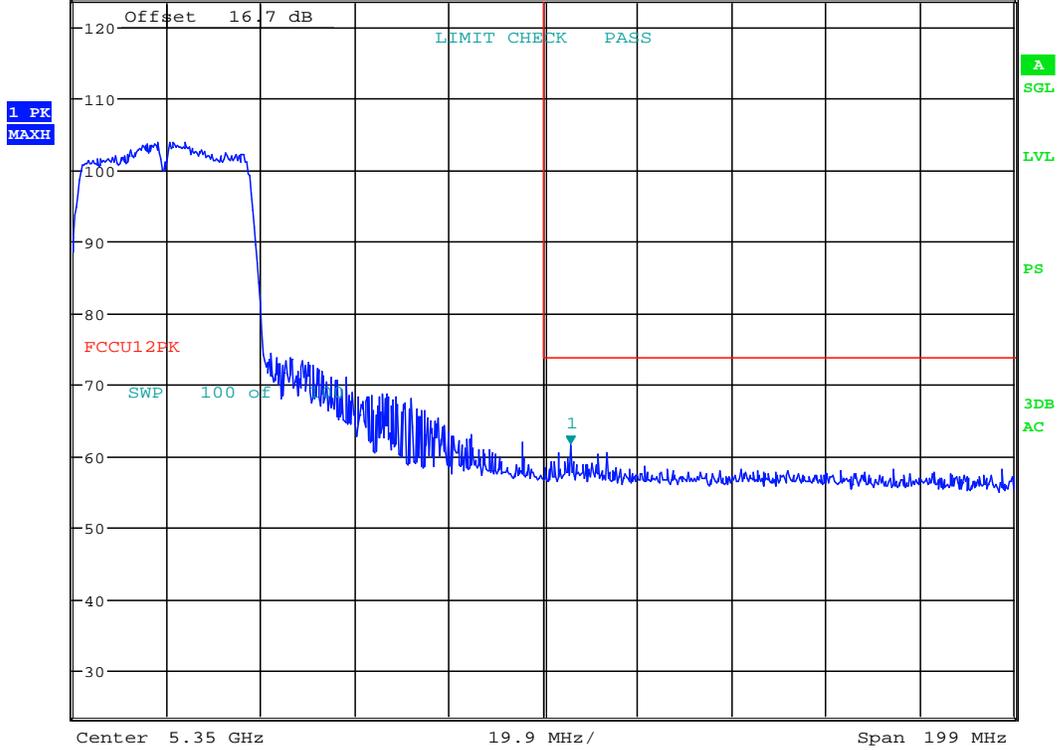

Date: 13.AUG.2015 12:27:10

**Plot 6-110. Radiated Restricted Upper Band Edge Plot (Peak - UNII Band 2A)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 102 of 126


# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102



**MARKER 1**  
 5.399934 GHz  
 Ref 124.1 dBµV \* Att 0 dB SWT 20 ms  
 \* RBW 1 MHz \* VBW 3 MHz  
 Marker 1 [T1] 47.24 dBµV  
 5.399934000 GHz

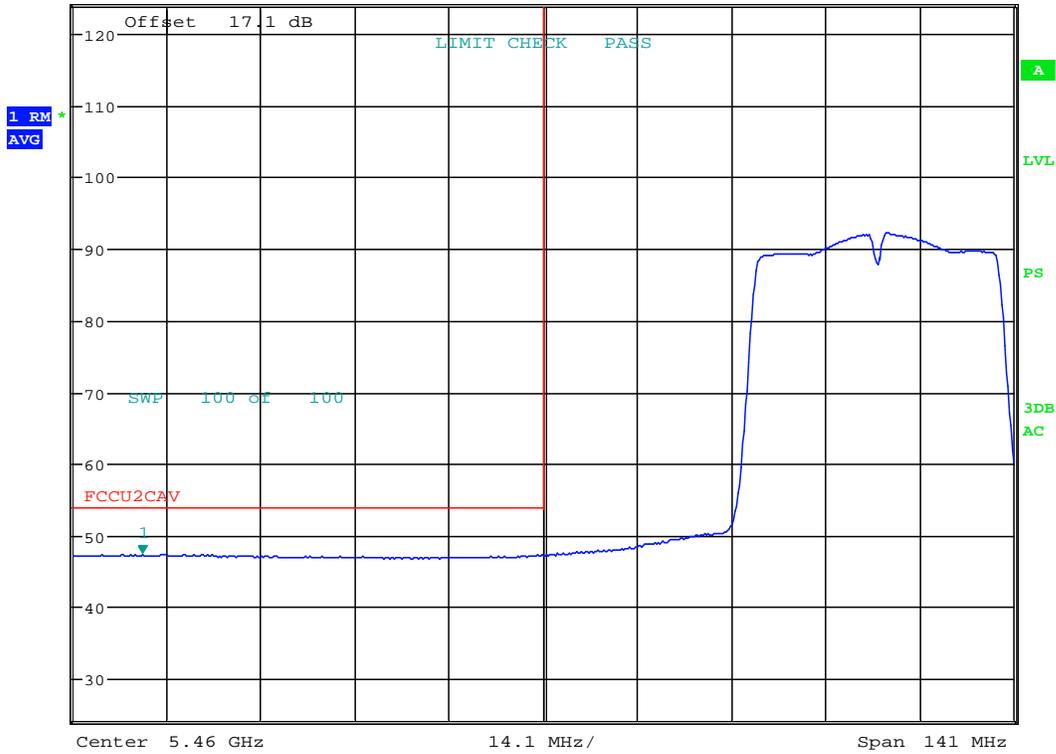

Date: 13.AUG.2015 12:55:45

**Plot 6-111. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 103 of 126

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
 5.469295 GHz  
 Ref 124.1 dBµV \*Att 0 dB SWT 20 ms  
 \*RBW 1 MHz Marker 1 [T1] 61.58 dBµV  
 \*VBW 3 MHz 5.469295000 GHz

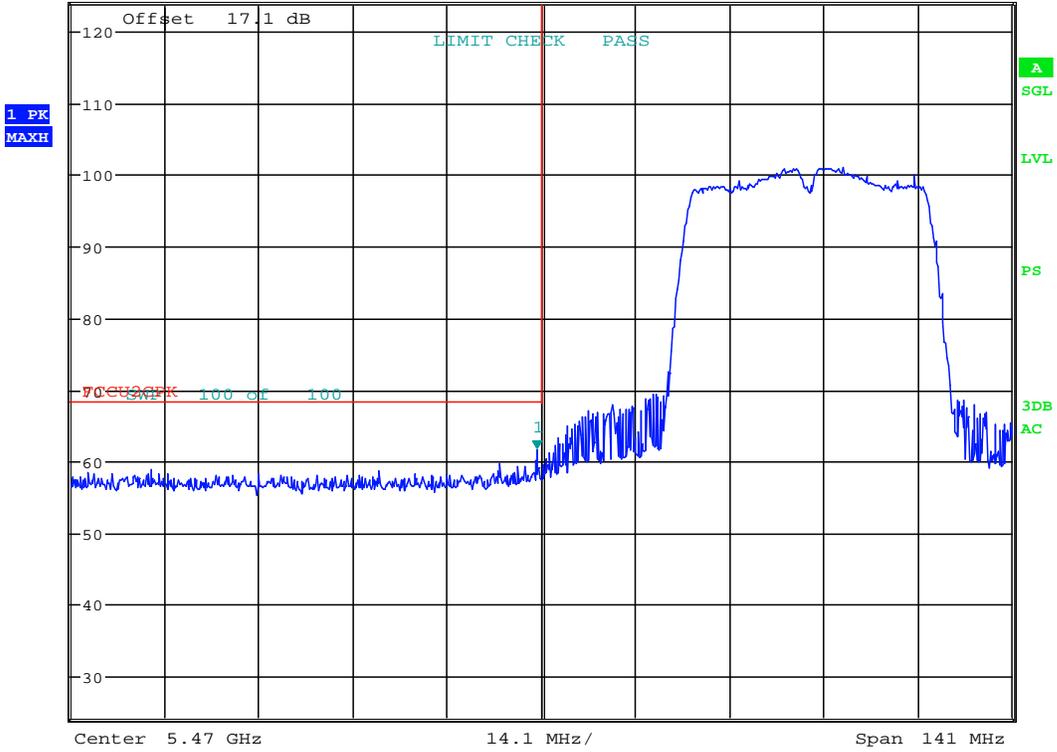

Date: 13.AUG.2015 12:56:33

**Plot 6-112. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**


FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 104 of 126



# Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5550MHz  
 Channel: 110

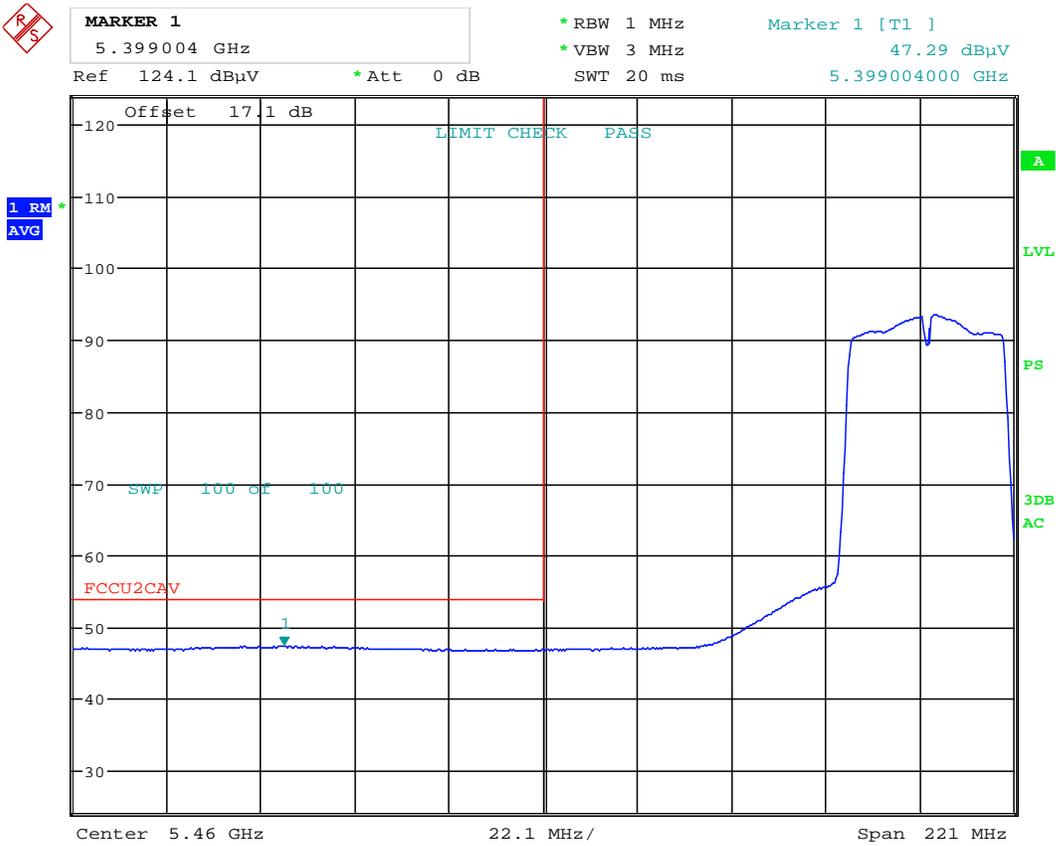

Date: 13.AUG.2015 13:13:45

**Plot 6-113. Radiated Restricted Lower Band Edge Plot (Average - UNII Band 2C)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 105 of 126	

## Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209



**MARKER 1**  
 5.403921 GHz  
 Ref 124.1 dBµV \*Att 0 dB

\*RBW 1 MHz      Marker 1 [T1 ]  
 \*VBW 3 MHz      58.64 dBµV  
 SWT 20 ms      5.403921000 GHz

1 PK  
MAXH

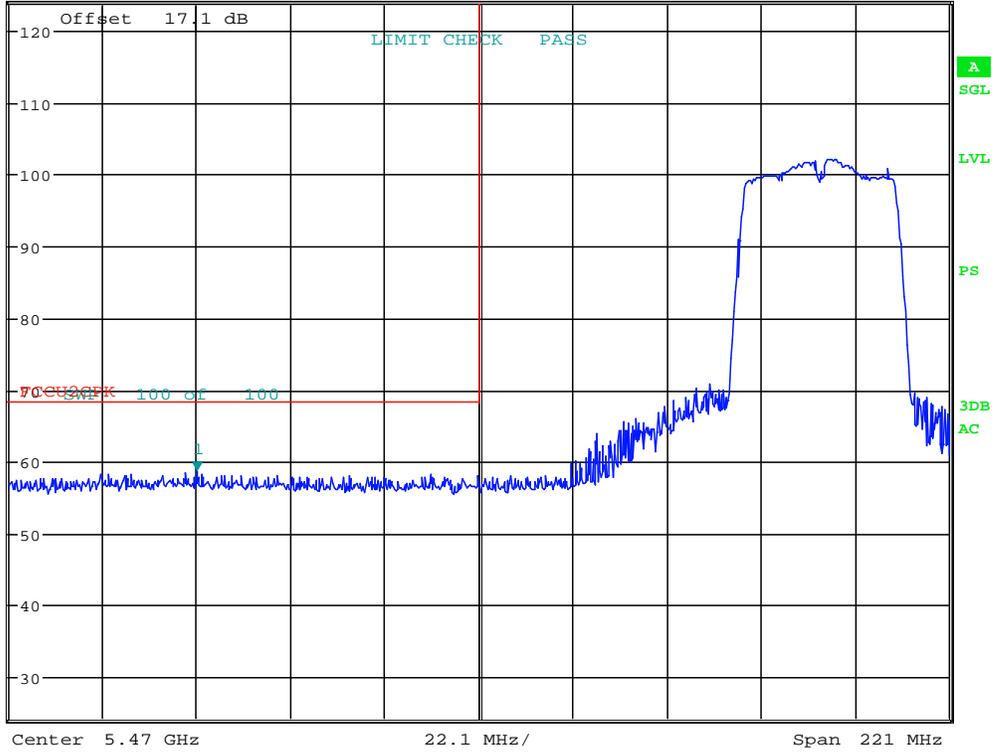

Date: 13.AUG.2015 13:14:22


**Plot 6-114. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 2C)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 106 of 126

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

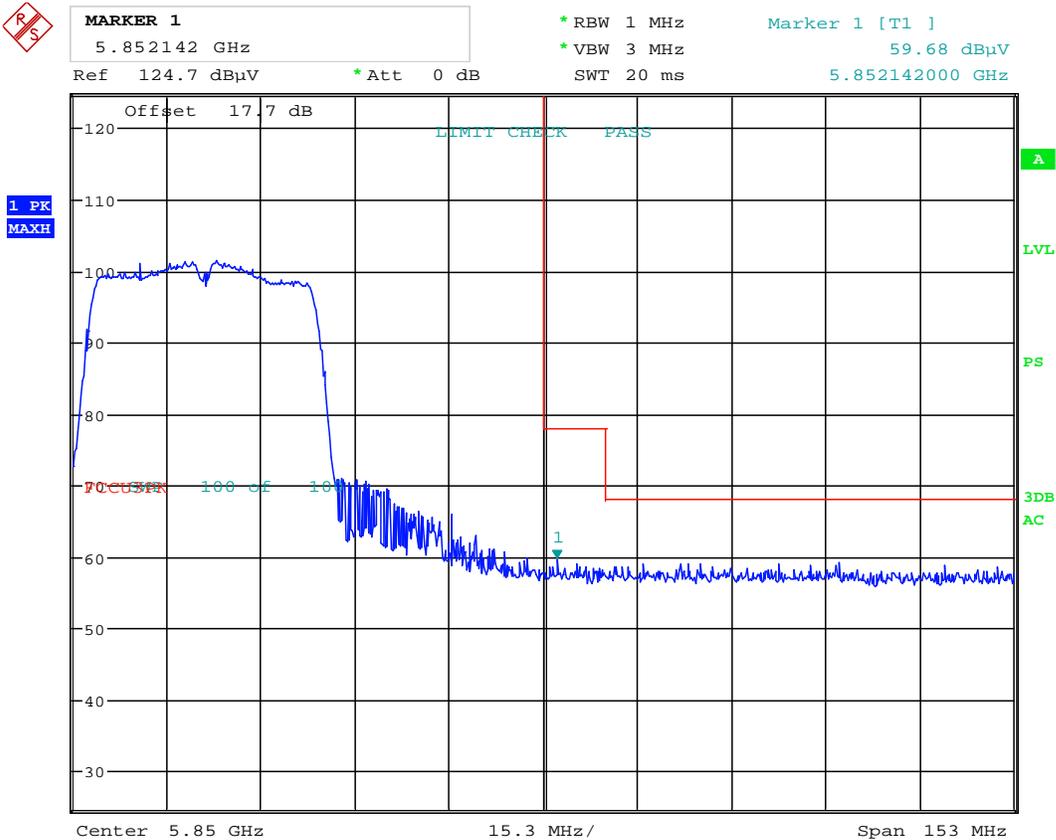


Date: 13.AUG.2015 13:23:34

**Plot 6-115. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 107 of 126	

### 6.7.4 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5210MHz  
 Channel: 42

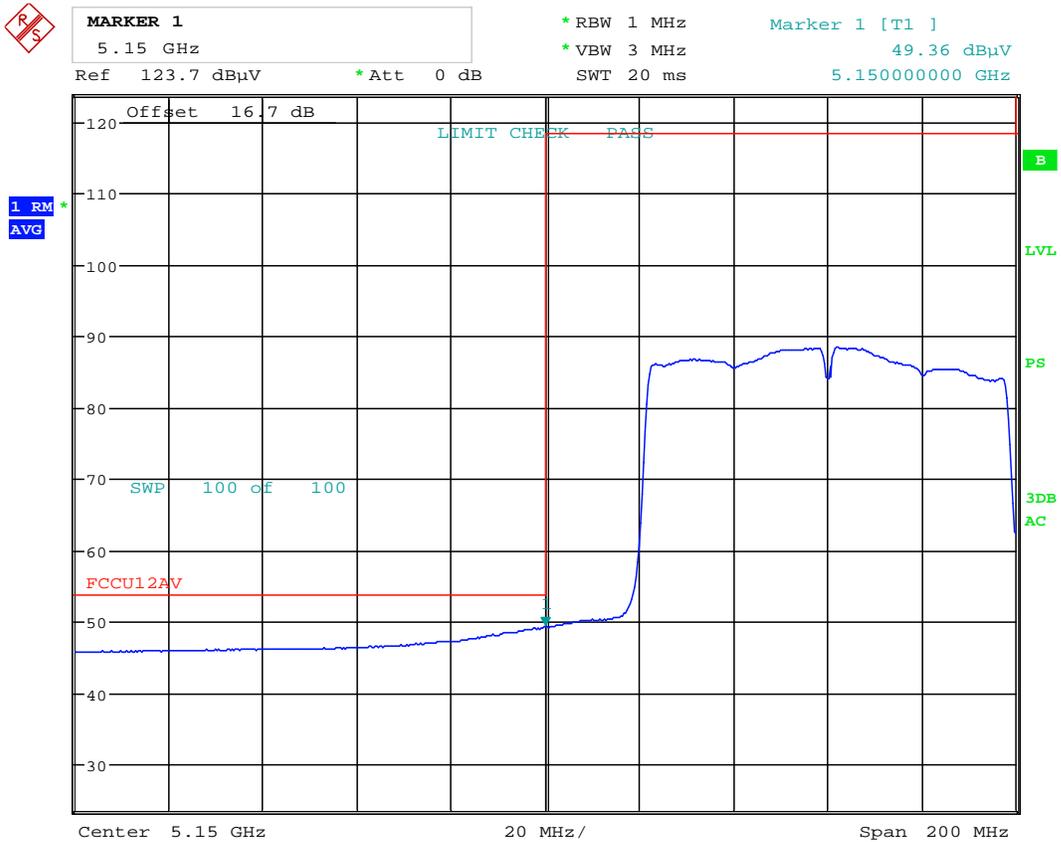

Date: 14.AUG.2015 11:04:11

**Plot 6-116. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 108 of 126	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



<b>MARKER 1</b>		* RBW 1 MHz	Marker 1 [T1 ]
5.15 GHz		* VBW 3 MHz	68.28 dBµV
Ref 123.4 dBµV	* Att 0 dB	SWT 20 ms	5.15000000 GHz

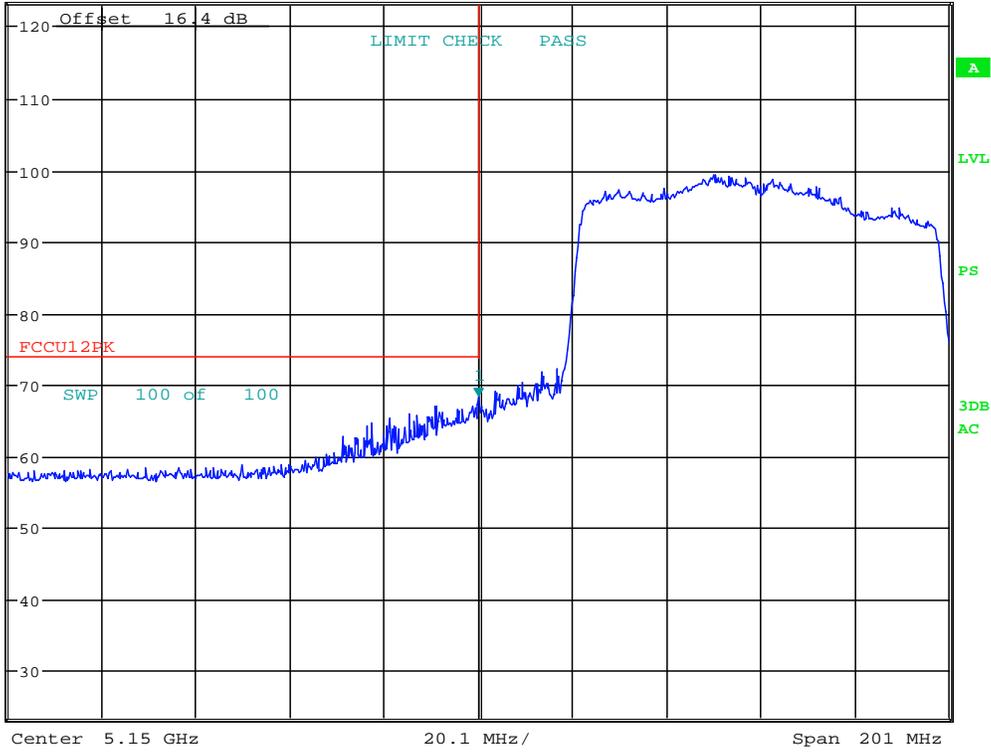

Date: 13.AUG.2015 12:07:34


**Plot 6-117. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

<b>FCC ID:</b> ZNFH900		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 109 of 126	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58

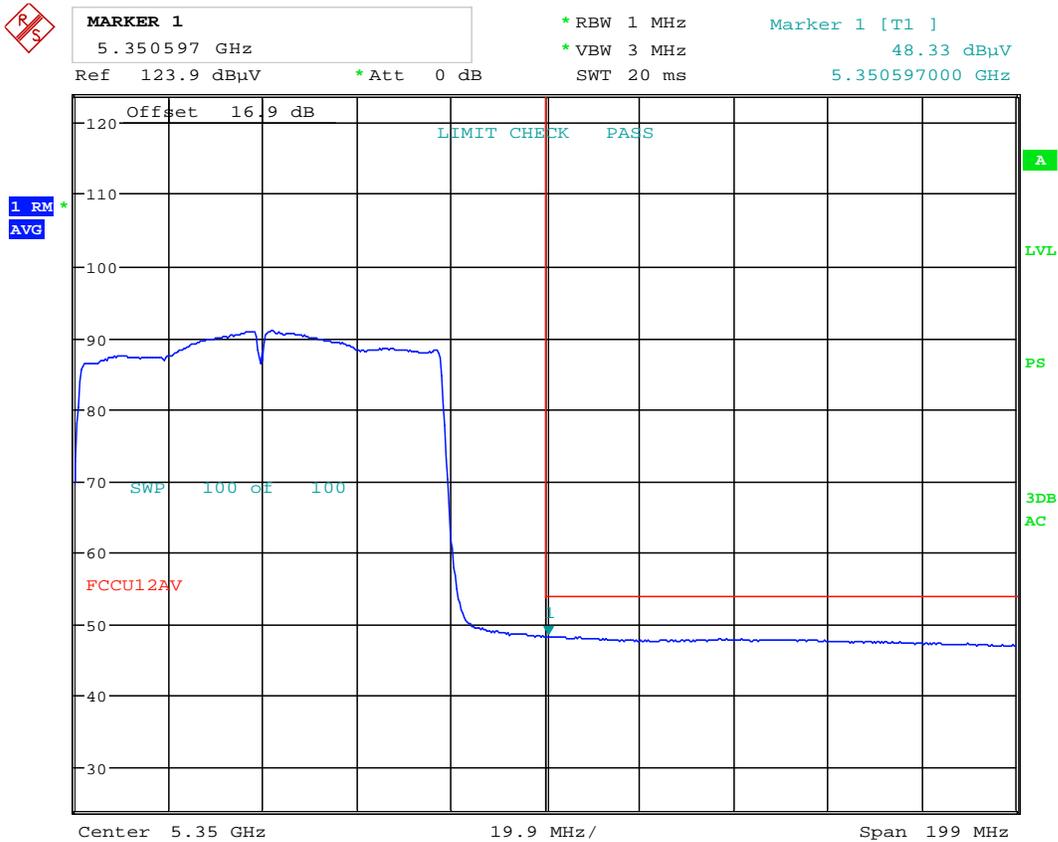

Date: 13.AUG.2015 12:30:45

Plot 6-118. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 110 of 126	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



<b>MARKER 1</b>	* RBW 1 MHz	Marker 1 [T1 ]
5.353781 GHz	* VBW 3 MHz	62.80 dBµV
Ref 123.7 dBµV	* Att 0 dB	SWT 20 ms
		5.353781000 GHz

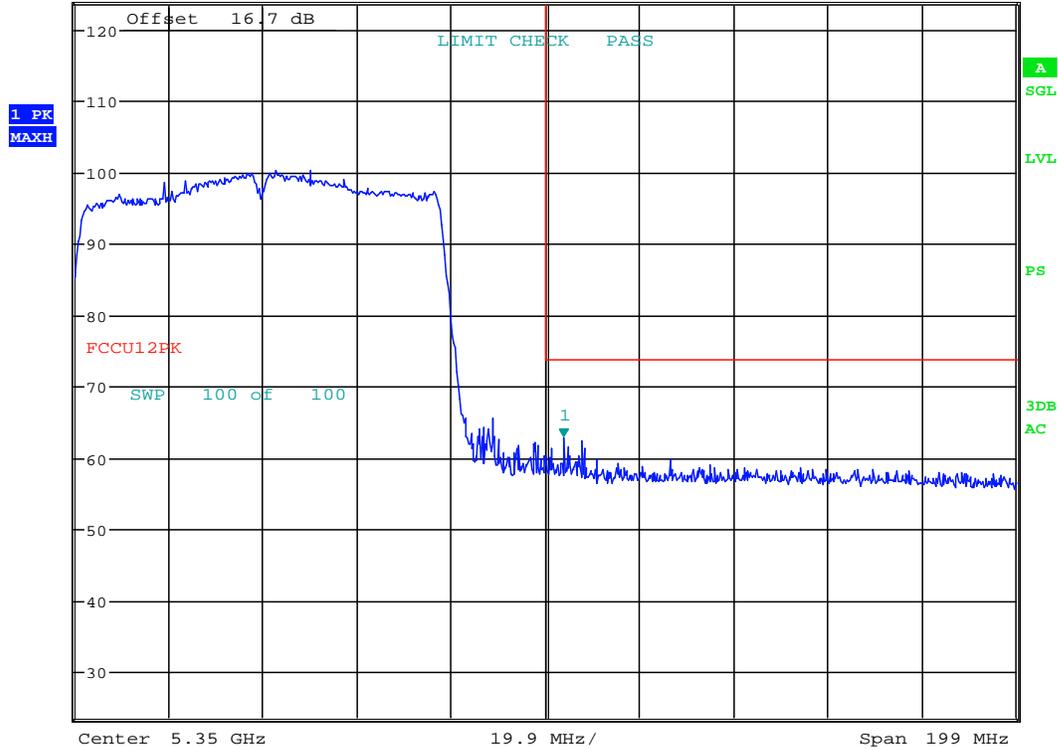

Date: 13.AUG.2015 12:31:48


**Plot 6-119. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

<b>FCC ID:</b> ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 111 of 126	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

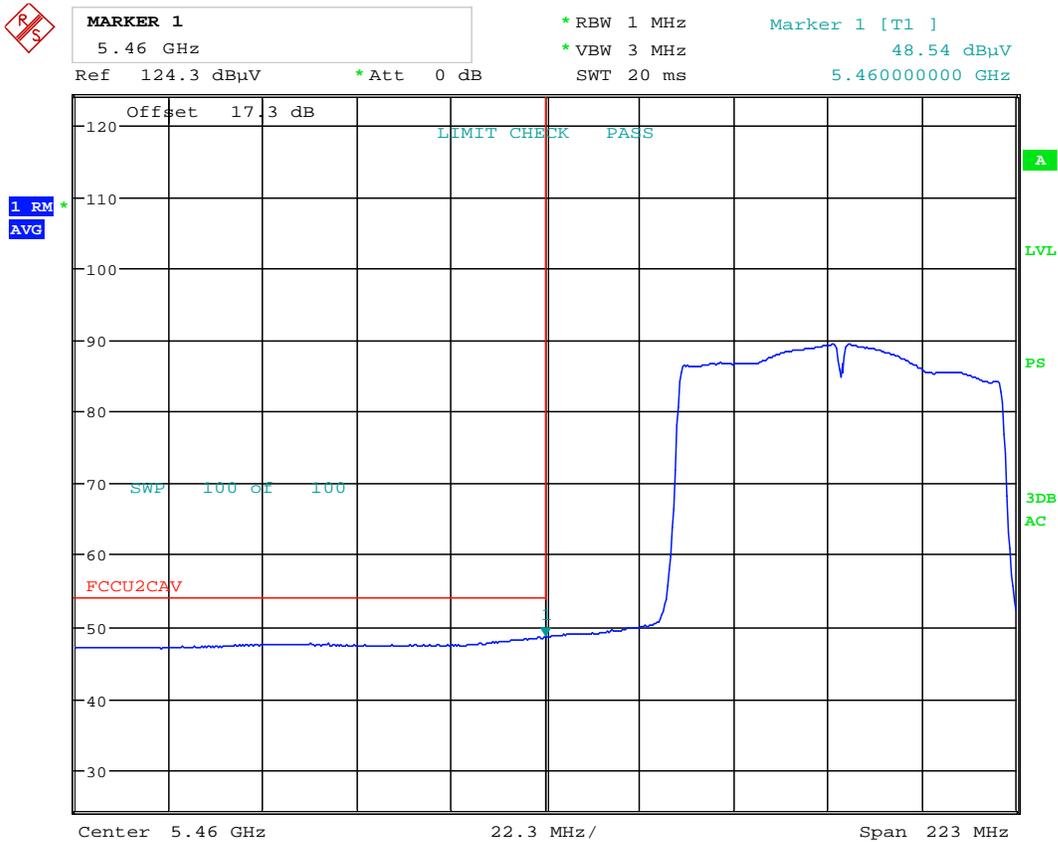

Date: 13.AUG.2015 13:03:31

**Plot 6-120. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**


FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 112 of 126	



**Radiated Band Edge Measurements (80MHz BW)**  
**§15.407(b.1)(b.2) §15.205 §15.209**



**MARKER 1**  
5.460857 GHz  
Ref 124.1 dBµV \*Att 0 dB \*RBW 1 MHz \*VSW 3 MHz Marker 1 [T1] 62.29 dBµV  
SWT 20 ms 5.460857000 GHz

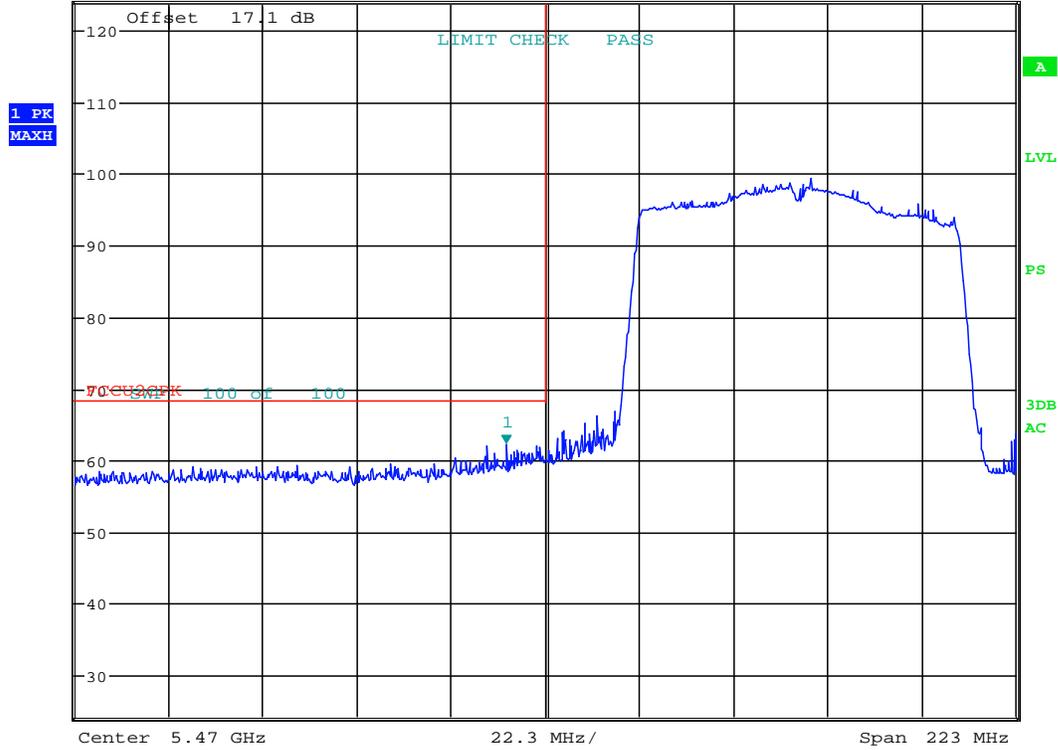

Date: 13.AUG.2015 13:04:37


**Plot 6-121. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

<b>FCC ID:</b> ZNFH900		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 113 of 126	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

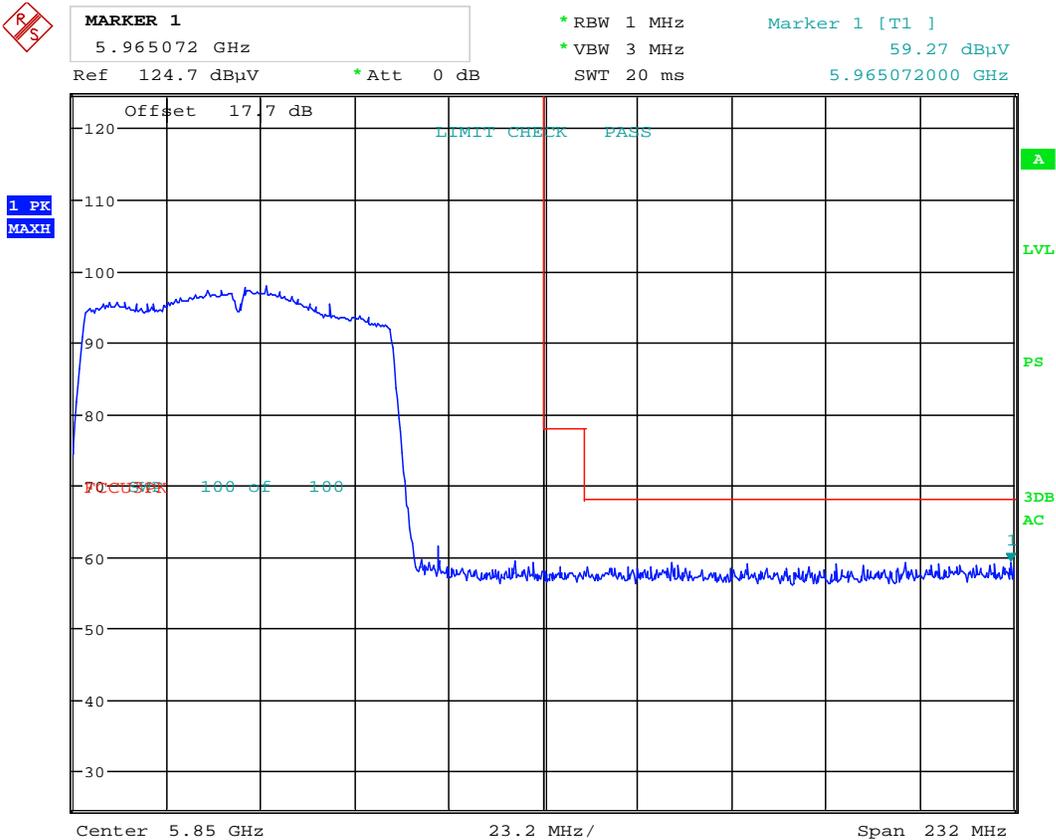

Date: 13.AUG.2015 13:26:50

**Plot 6-122. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFH900	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 114 of 126	

## 6.8 Radiated Spurious Emissions Measurements – Below 1GHz

### §15.209

#### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-30 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-30. Radiated Limits**

#### Test Procedures Used

ANSI C63.4-2009

#### Test Settings


##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 115 of 126	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

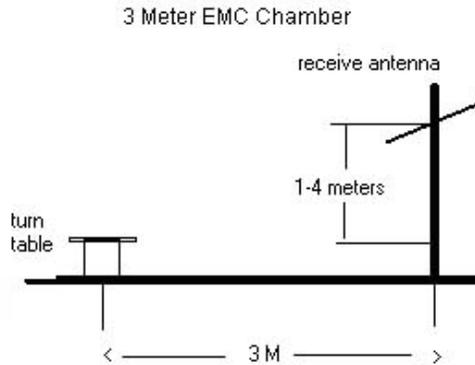

**Figure 6-6. Test Instrument & Measurement Setup**


### Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-13.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 116 of 126	

## Radiated Spurious Emissions Measurements (Below 1GHz)

### §15.209

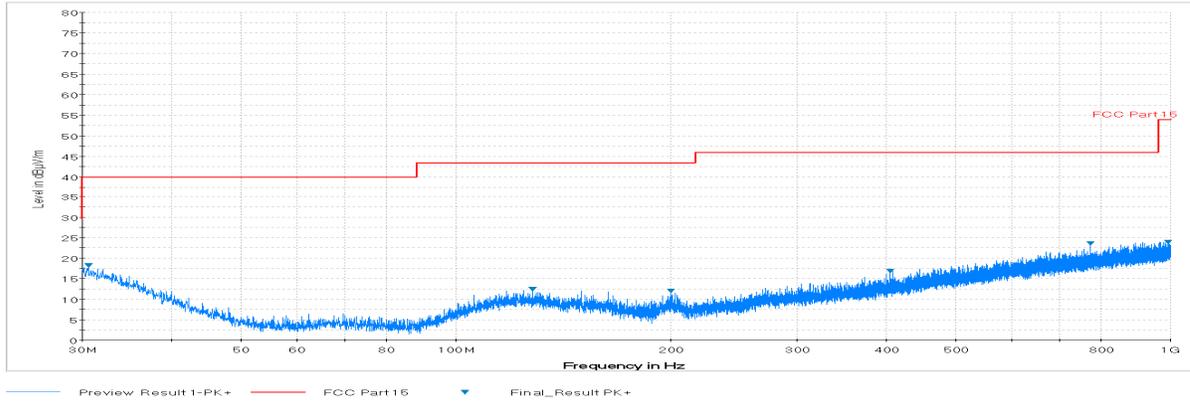

**Plot 6-123. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

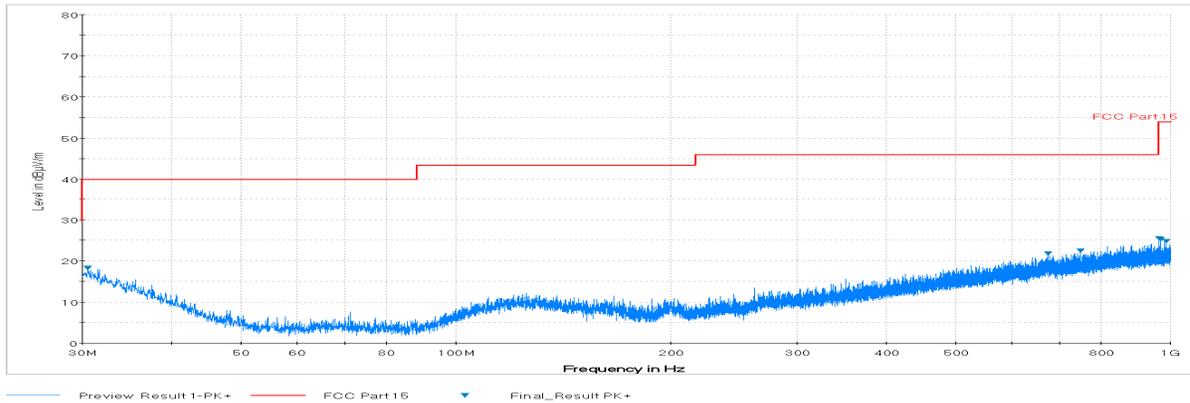


**Plot 6-124. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset	Page 117 of 126	

## 6.9 Line-Conducted Test Data

\$15.407

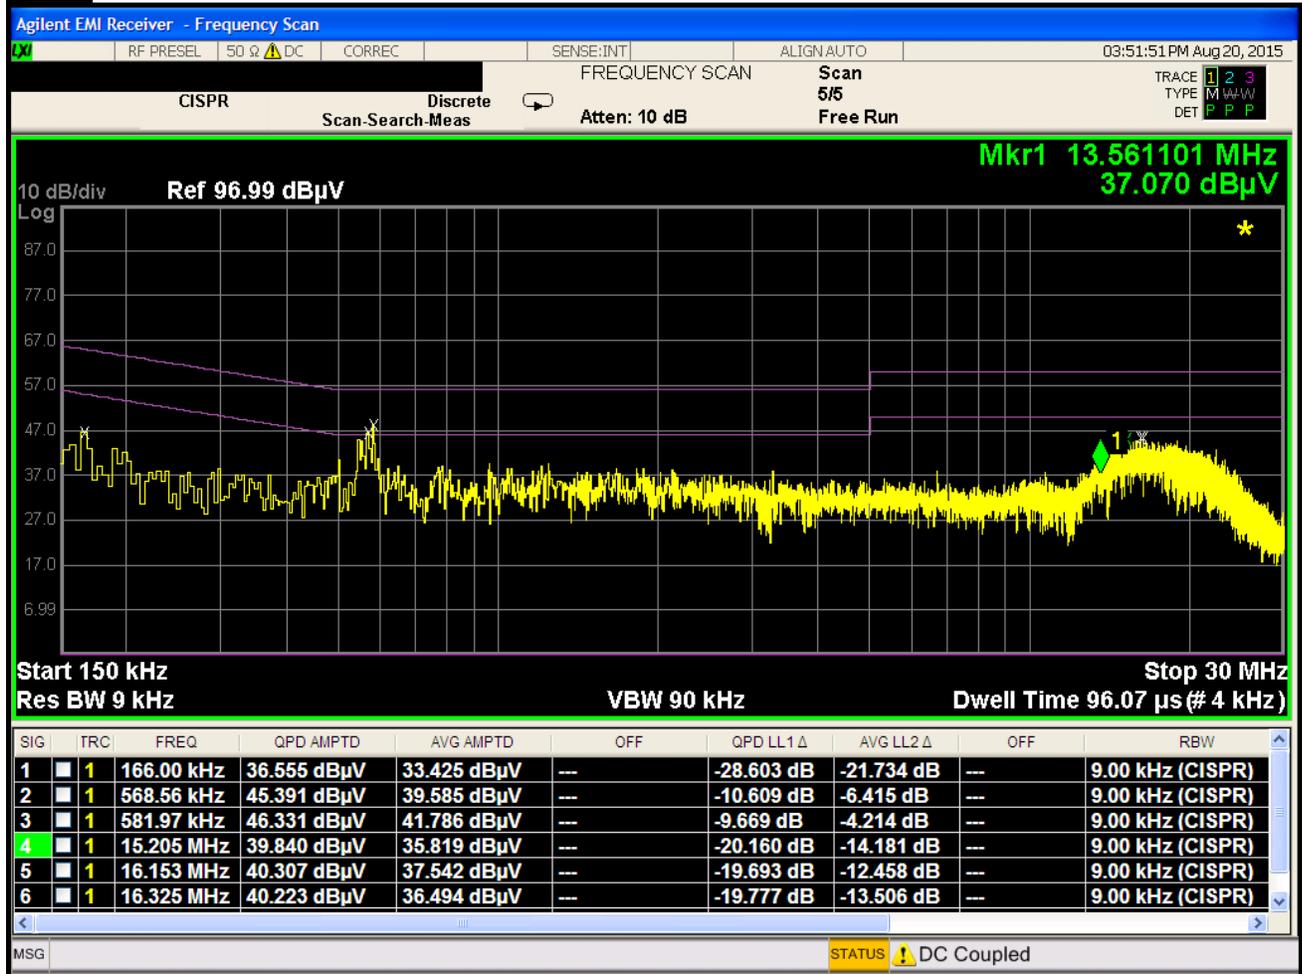

Plot 6-125. Line Conducted Plot with 802.11a UNII Band 1 (L1)


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 118 of 126

# Line-Conducted Test Data

\$15.407

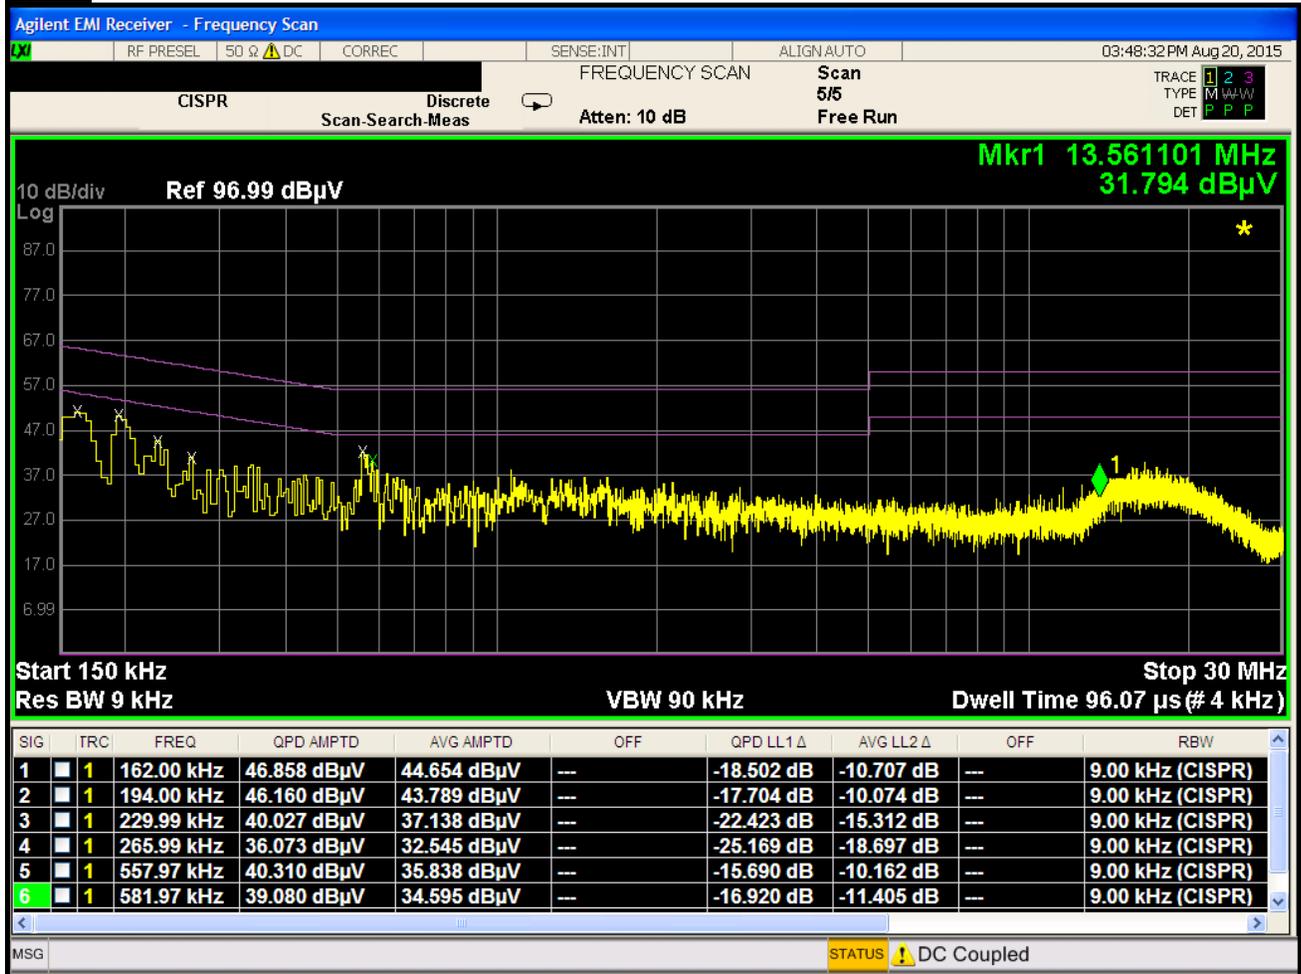

Plot 6-126. Line Conducted Plot with 802.11a UNII Band 1 (N)


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 119 of 126

# Line-Conducted Test Data

## \$15.407

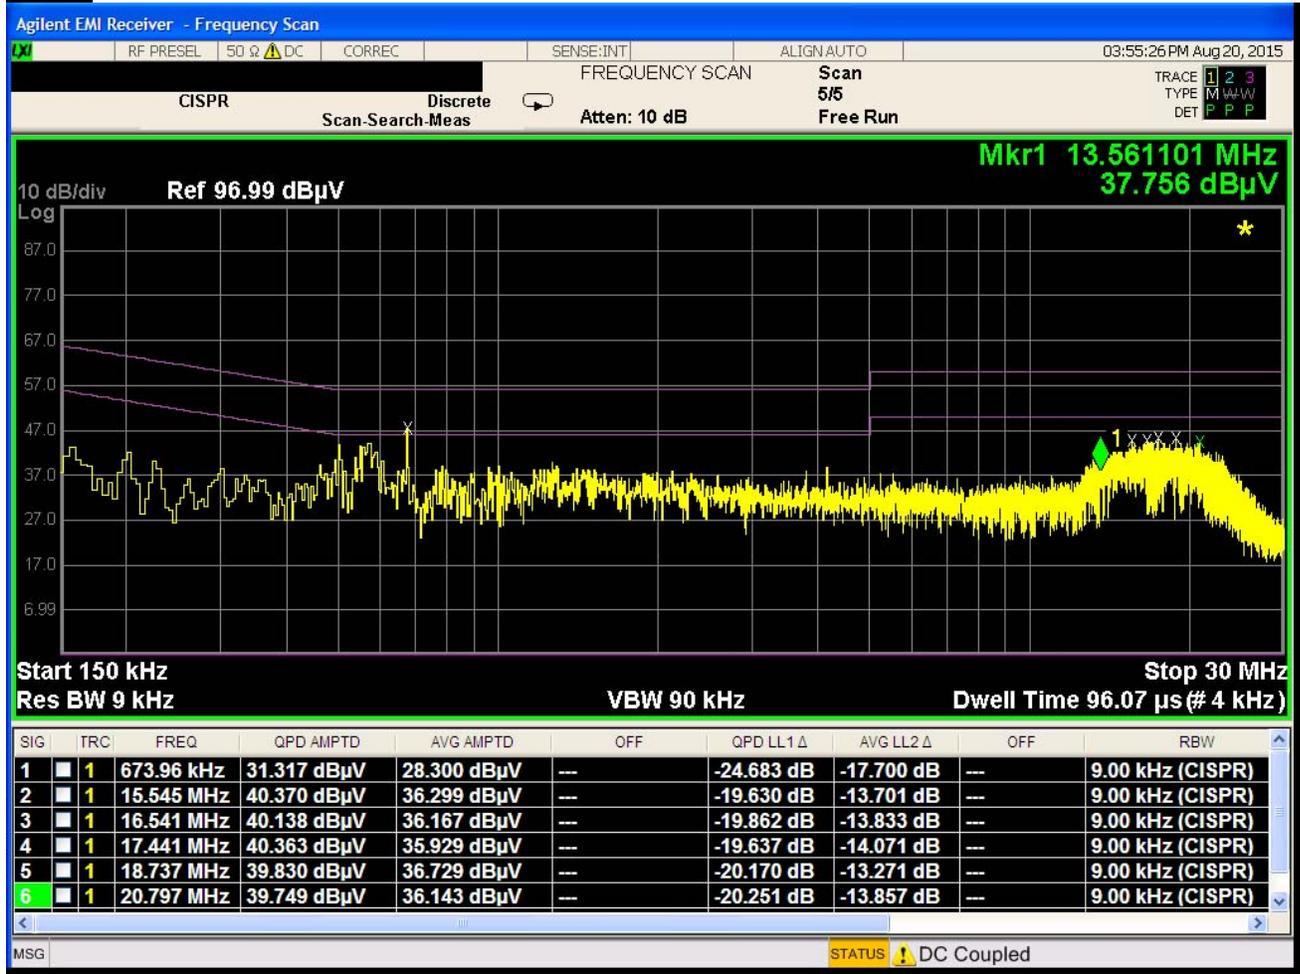

Plot 6-127. Line Conducted Plot with 802.11a UNII Band 2A (L1)

**Notes:**


- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 120 of 126



# Line-Conducted Test Data

## \$15.407

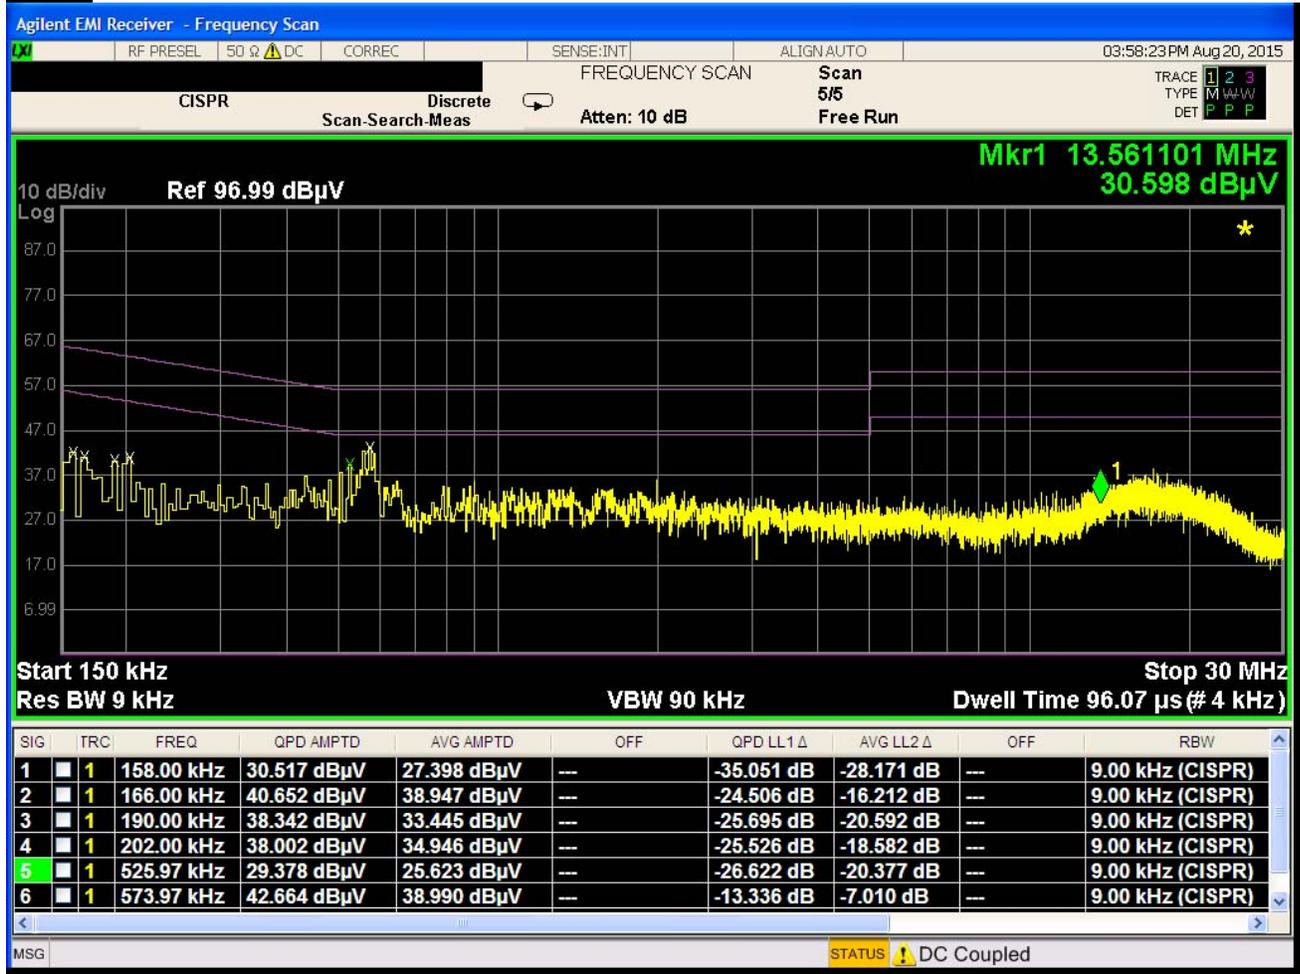

**Plot 6-128. Line Conducted Plot with 802.11a UNII Band 2A (N)**


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 121 of 126

# Line-Conducted Test Data

## \$15.407

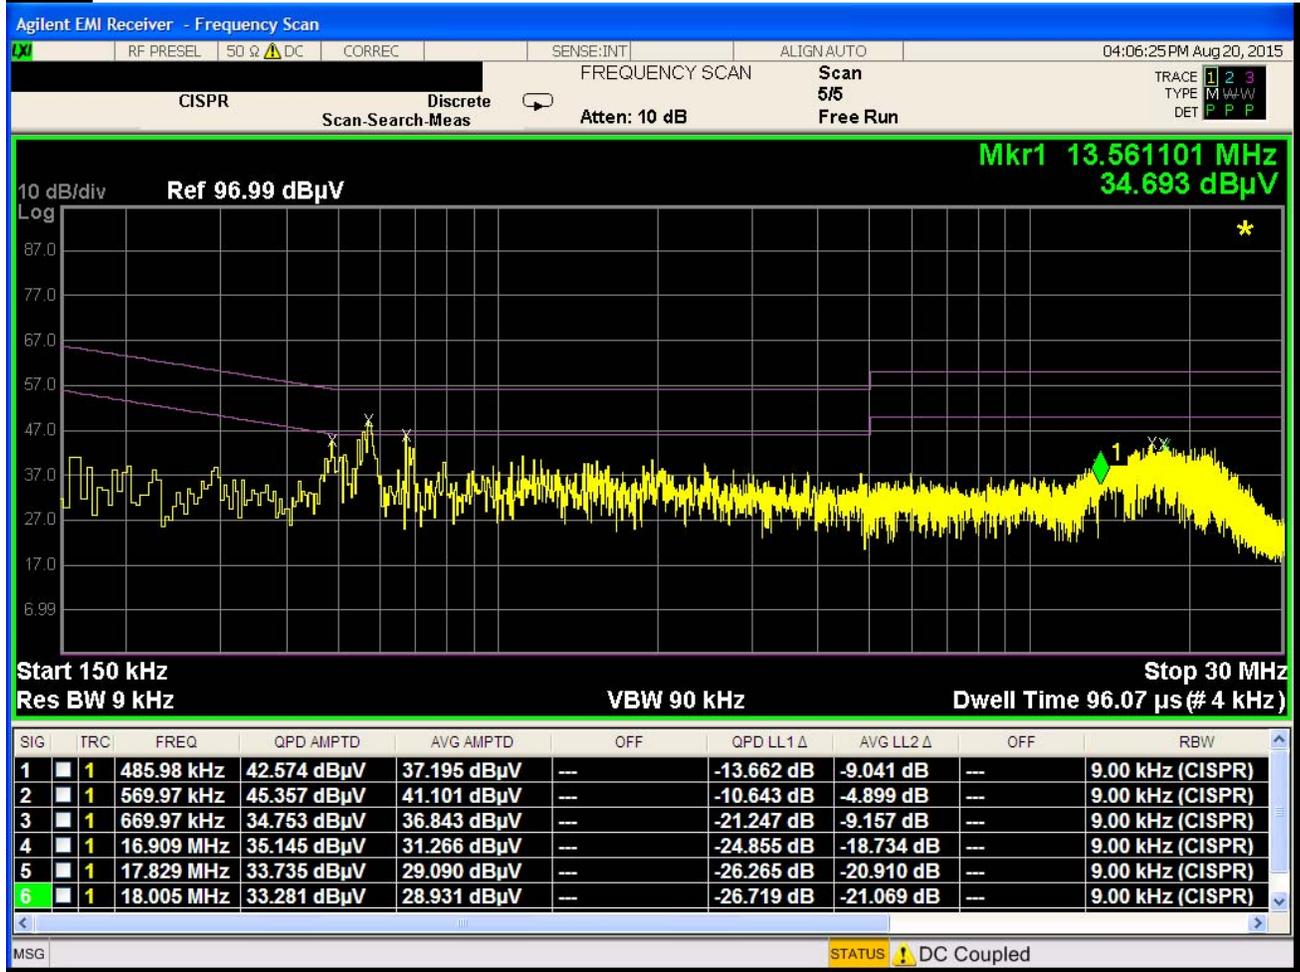

Plot 6-129. Line Conducted Plot with 802.11a UNII Band 2C (L1)


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 122 of 126

# Line-Conducted Test Data

## \$15.407

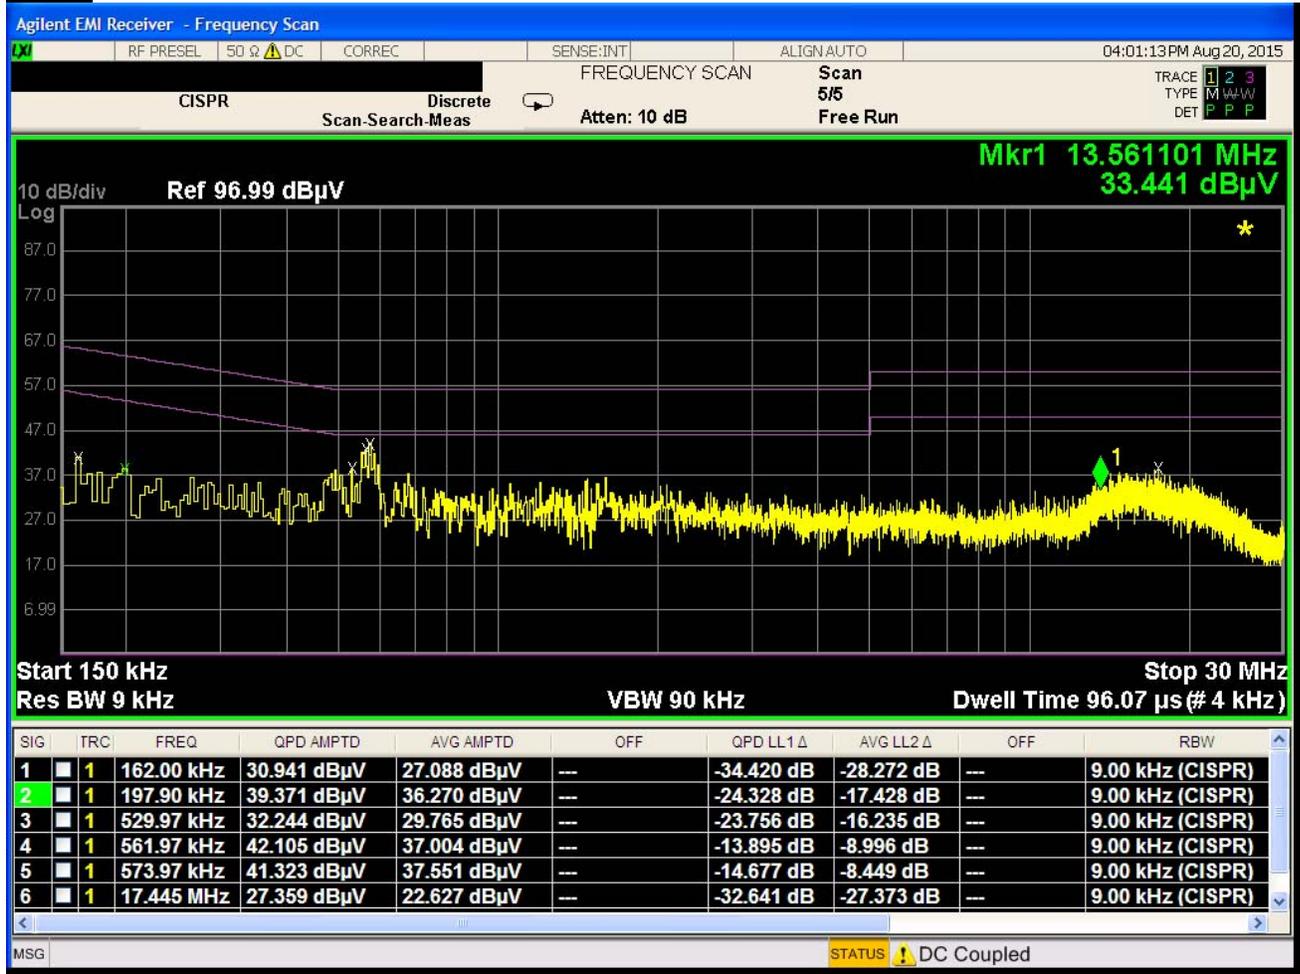

Plot 6-130. Line Conducted Plot with 802.11a UNII Band 2C (N)


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 123 of 126

# Line-Conducted Test Data

## \$15.407

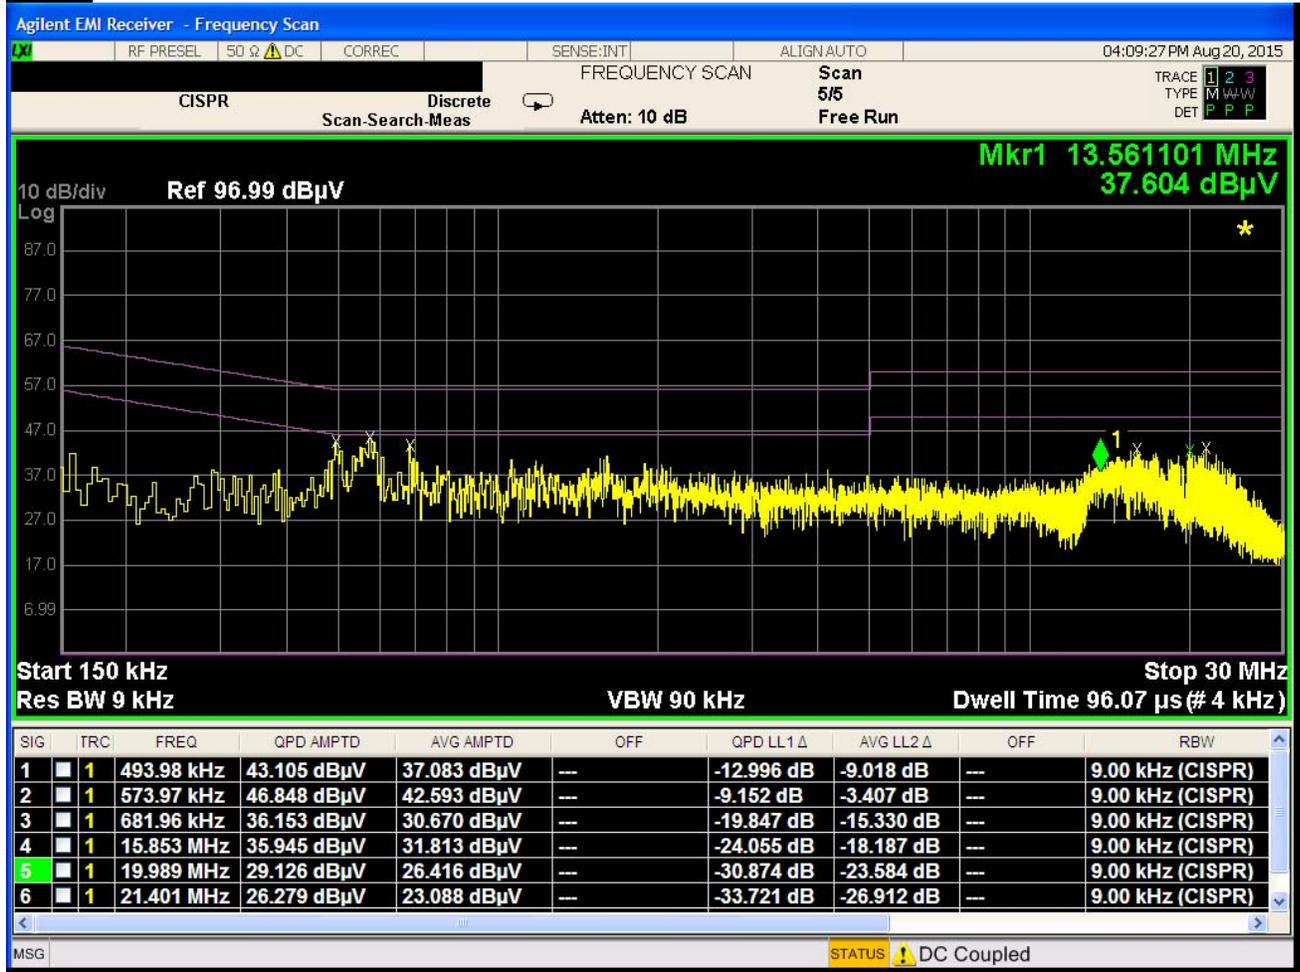

Plot 6-131. Line Conducted Plot with 802.11a UNII Band 3 (L1)


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 124 of 126

# Line-Conducted Test Data

## \$15.407

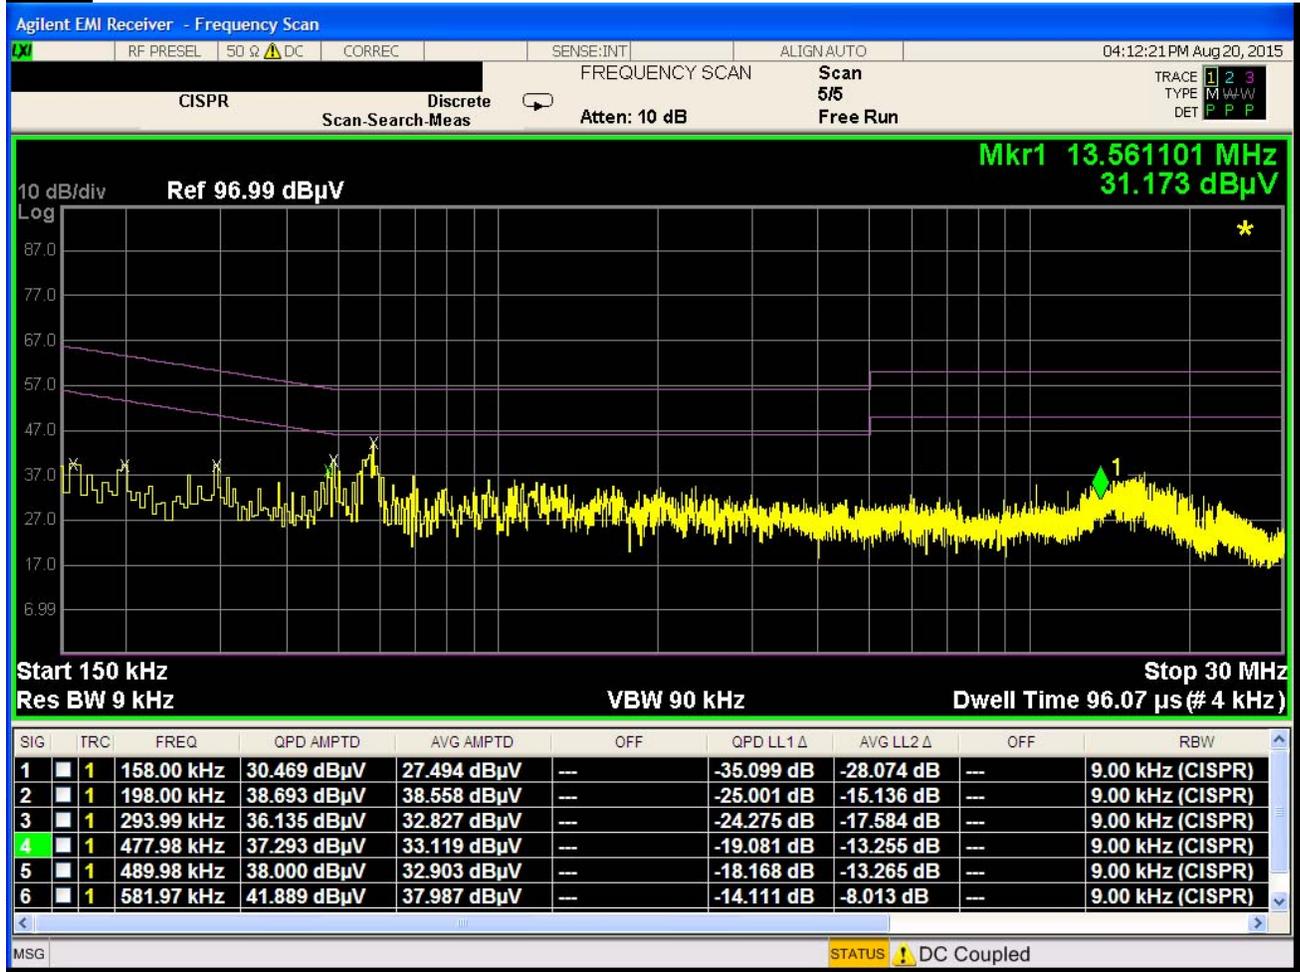

Plot 6-132. Line Conducted Plot with 802.11a UNII Band 3 (N)

**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1508101507.ZNF	Test Dates: 8/10-8/21/2015, 8/27/2015	EUT Type: Portable Handset		Page 125 of 126

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFH900** is in compliance with Part 15E of the FCC Rules.

<b>FCC ID:</b> ZNFH900		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1508101507.ZNF	<b>Test Dates:</b> 8/10-8/21/2015, 8/27/2015	<b>EUT Type:</b> Portable Handset	Page 126 of 126	