PCTEST ENGINEERING LABORATORY, INC.
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com

# MEASUREMENT REPORT
## FCC Part 22, 24, & 27 LTE

**Applicant Name:**
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

**Date of Testing:**
7/6 - 7/19/2016
**Test Site/Location:**
PCTEST Lab., Columbia, MD, USA
**Test Report Serial No.:**
0Y1607051193.ZNF

**FCC ID :** **ZNFH918**

**APPLICANT:** **LG ELECTRONICS MOBILECOMM U.S.A**

| | |
|---|---|
| **Application Type:** | Certification |
| **FCC Classification:** | PCS Licensed Transmitter Held to Ear (PCE) |
| **FCC Rule Part(s):** | §2; §22; §24; §27 |
| **Test Procedure(s):** | ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02 |
| **EUT Type:** | Portable Handset |
| **Model(s):** | LGH918, LG-H918, H918, LGH910PR, H910PR, LG-H910PR |
| **Test Device Serial No.:** | *identical prototype* [S/N: 2762, 2663] |

| Mode | Tx Frequency (MHz) | Emission Designator | Modulation | ERP/EIRP | |
|---|---|---|---|---|---|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE Band 12 | 699.7 - 715.3 | 1M11G7D | QPSK | 0.104 | 20.18 |
| LTE Band 12 | 699.7 - 715.3 | 1M11W7D | 16QAM | 0.083 | 19.18 |
| LTE Band 12 | 700.5 - 714.5 | 2M71G7D | QPSK | 0.107 | 20.30 |
| LTE Band 12 | 700.5 - 714.5 | 2M71W7D | 16QAM | 0.085 | 19.29 |
| LTE Band 12 | 701.5 - 713.5 | 4M49G7D | QPSK | 0.107 | 20.28 |
| LTE Band 12 | 701.5 - 713.5 | 4M50W7D | 16QAM | 0.085 | 19.32 |
| LTE Band 12 | 704 - 711 | 9M00G7D | QPSK | 0.099 | 19.95 |
| LTE Band 12 | 704 - 711 | 8M96W7D | 16QAM | 0.077 | 18.88 |
| LTE Band 13 | 779.5 - 784.5 | 4M49G7D | QPSK | 0.094 | 19.75 |
| LTE Band 13 | 779.5 - 784.5 | 4M49W7D | 16QAM | 0.071 | 18.50 |
| LTE Band 13 | 782 | 8M97G7D | QPSK | 0.095 | 19.77 |
| LTE Band 13 | 782 | 8M93W7D | 16QAM | 0.068 | 18.35 |
| LTE Band 5 | 824.7 - 848.3 | 1M11G7D | QPSK | 0.071 | 18.51 |
| LTE Band 5 | 824.7 - 848.3 | 1M11W7D | 16QAM | 0.056 | 17.50 |
| LTE Band 5 | 825.5 - 847.5 | 2M71G7D | QPSK | 0.070 | 18.43 |
| LTE Band 5 | 825.5 - 847.5 | 2M70W7D | 16QAM | 0.054 | 17.34 |
| LTE Band 5 | 826.5 - 846.5 | 4M49G7D | QPSK | 0.065 | 18.10 |
| LTE Band 5 | 826.5 - 846.5 | 4M48W7D | 16QAM | 0.051 | 17.05 |
| LTE Band 5 | 829 - 844 | 8M99G7D | QPSK | 0.056 | 17.51 |
| LTE Band 5 | 829 - 844 | 8M95W7D | 16QAM | 0.057 | 17.57 |
| LTE Band 4 | 1710.7 - 1754.3 | 1M11G7D | QPSK | 0.313 | 24.96 |
| LTE Band 4 | 1710.7 - 1754.3 | 1M12W7D | 16QAM | 0.249 | 23.97 |

| Mode | Tx Frequency (MHz) | Emission Designator | Modulation | EIRP | |
|---|---|---|---|---|---|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE Band 4 | 1711.5 - 1753.5 | 2M72G7D | QPSK | 0.313 | 24.96 |
| LTE Band 4 | 1711.5 - 1753.5 | 2M73W7D | 16QAM | 0.249 | 23.96 |
| LTE Band 4/66 | 1712.5 - 1777.5 | 4M55G7D | QPSK | 0.284 | 24.53 |
| LTE Band 4/66 | 1712.5 - 1777.5 | 4M51W7D | 16QAM | 0.268 | 24.28 |
| LTE Band 4/66 | 1715 - 1775 | 8M98G7D | QPSK | 0.304 | 24.83 |
| LTE Band 4/66 | 1715 - 1775 | 9M01W7D | 16QAM | 0.273 | 24.36 |
| LTE Band 4/66 | 1717.5 - 1772.5 | 13M5G7D | QPSK | 0.305 | 24.84 |
| LTE Band 4/66 | 1717.5 - 1772.5 | 13M5W7D | 16QAM | 0.246 | 23.91 |
| LTE Band 4/66 | 1720 - 1770 | 18M0G7D | QPSK | 0.301 | 24.79 |
| LTE Band 4/66 | 1720 - 1770 | 18M0W7D | 16QAM | 0.222 | 23.46 |
| LTE Band 2 | 1850.7 - 1909.3 | 1M11G7D | QPSK | 0.260 | 24.15 |
| LTE Band 2 | 1850.7 - 1909.3 | 1M11W7D | 16QAM | 0.205 | 23.11 |
| LTE Band 2 | 1851.5 - 1908.5 | 2M71G7D | QPSK | 0.286 | 24.56 |
| LTE Band 2 | 1851.5 - 1908.5 | 2M71W7D | 16QAM | 0.239 | 23.78 |
| LTE Band 2 | 1852.5 - 1907.5 | 4M48G7D | QPSK | 0.281 | 24.49 |
| LTE Band 2 | 1852.5 - 1907.5 | 4M49W7D | 16QAM | 0.223 | 23.48 |
| LTE Band 2 | 1855 - 1905 | 8M99G7D | QPSK | 0.199 | 22.99 |
| LTE Band 2 | 1855 - 1905 | 8M95W7D | 16QAM | 0.156 | 21.94 |
| LTE Band 2 | 1857.5 - 1902.5 | 13M5G7D | QPSK | 0.337 | 25.27 |
| LTE Band 2 | 1857.5 - 1902.5 | 13M4W7D | 16QAM | 0.254 | 24.04 |
| LTE Band 2 | 1860 - 1900 | 17M9G7D | QPSK | 0.294 | 24.68 |
| LTE Band 2 | 1860 - 1900 | 18M0W7D | 16QAM | 0.237 | 23.75 |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President

# TABLE OF CONTENTS



# MEASUREMENT REPORT
## FCC Part 22, 24, & 27

## §2.1033 General Information

| | |
|---|---|
| **APPLICANT:** | LG Electronics MobileComm U.S.A |
| **APPLICANT ADDRESS:** | 1000 Sylvan Avenue |
| | Englewood Cliffs, NJ 07632, United States |
| **TEST SITE:** | PCTEST ENGINEERING LABORATORY, INC. |
| **TEST SITE ADDRESS:** | 7185 Oakland Mills Road, Columbia, MD 21045 USA |
| **FCC RULE PART(S):** | §2; §22; §24; §27 |
| **BASE MODEL:** | LGH918 |
| **FCC ID:** | ZNFH918 |
| **FCC CLASSIFICATION:** | PCS Licensed Transmitter Held to Ear (PCE) |
| **FREQUENCY TOLERANCE:** | ±0.00025 % (2.5 ppm) |
| **Test Device Serial No.:** | 2762, 2663 ☐ Production ☒ Pre-Production ☐ Engineering |
| **DATE(S) OF TEST:** | 7/6 - 7/19/2016 |
| **TEST REPORT S/N:** | 0Y1607051193.ZNF |

## Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**




- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (S*ee Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39º 10'23" N latitude and 76º 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

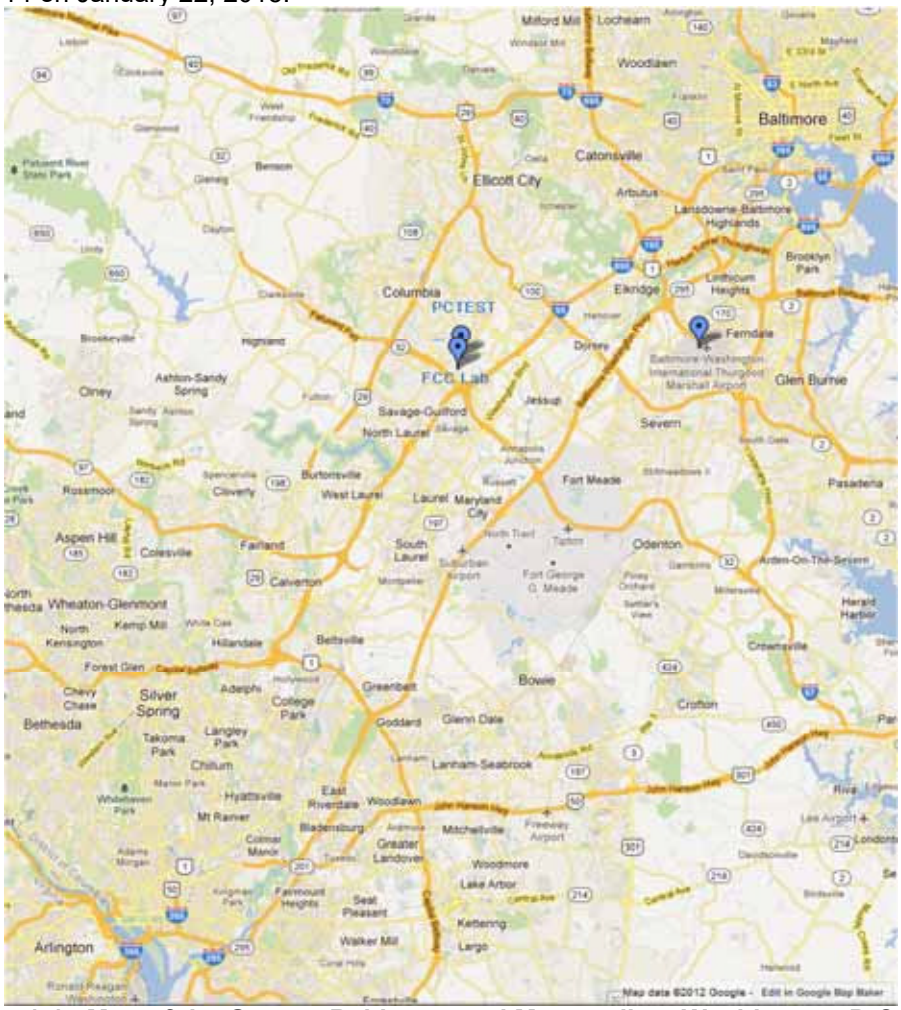


**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

# 2.0 PRODUCT INFORMATION

## 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH918**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

## 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, MIMO, Bluetooth (1x, EDR, LE), NFC

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 66 as well as Band 4.

This device also employs an antenna switching diversity (ASDiv) mechanism that allows for radiatred transmission from one of two antennas at a time for LTE Band 5, 12 and 13. Both antennas cannot transmit simultaneously so dual transmission conditions were not investigated. The two antennas share the same conducted circuitry so only one set of conducted measurements is included. The main transmit antenna data is labeled as "Antenna 1" and the Secondary Antenna data is labeled as "Antenna 2" in the radiated section of this report.

In addition, in order to optimize antenna performance, the tuner for this device was set to simulate a "free space" condition in which the transmit antenna is matched to the medium into which it is transmitting and, thus, all power is at its maximum level.

## 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFH918 was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

# 3.0 DESCRIPTION OF TESTS

## 3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-D-2010) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v02r02) were used in the measurement of the **LG Portable Handset FCC ID: ZNFH918.**

## 3.1 Block C Frequency Range

**§27.5(b)(3)**

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

## 3.2 Block A Frequency Range

**§27.5(c)**

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.

## 3.3 Cellular - Base Frequency Blocks

**§22.905**

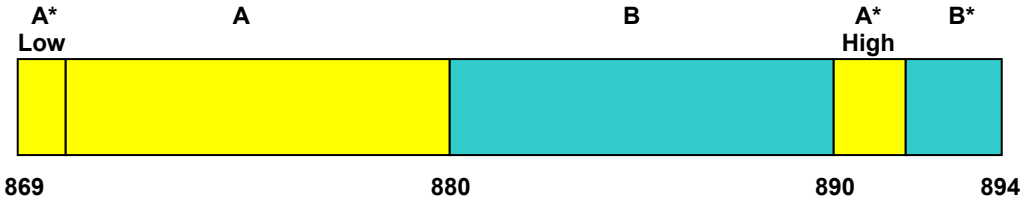


**BLOCK 1: 869 – 880 MHz (A* Low + A)**
**BLOCK 2: 880 – 890 MHz (B)**
**BLOCK 3: 890 – 891.5 MHz (A* High)**
**BLOCK 4: 891.5 – 894 MHz (B*)**

## 3.4 Cellular - Mobile Frequency Blocks

§22.905

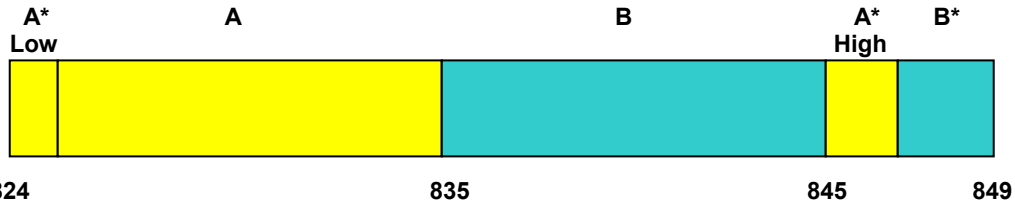


**BLOCK 1: 824 – 835 MHz (A* Low + A)**
**BLOCK 2: 835 – 845 MHz (B)**
**BLOCK 3: 845 – 846.5 MHz (A* High)**
**BLOCK 4: 846.5 – 849 MHz (B*)**

## 3.5 PCS - Base Frequency Blocks

§24.229

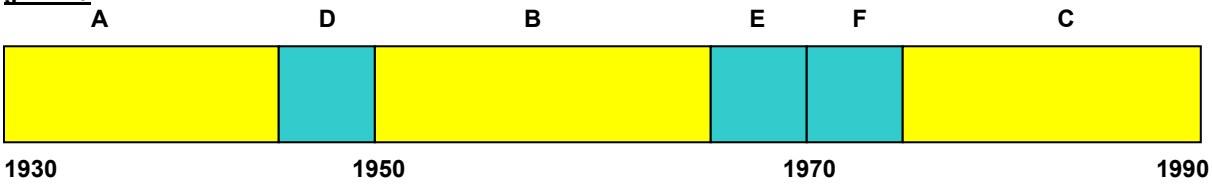


**BLOCK 1: 1930 – 1945 MHz (A)**
**BLOCK 2: 1945 – 1950 MHz (D)**
**BLOCK 3: 1950 – 1965 MHz (B)**
**BLOCK 4: 1965 – 1970 MHz (E)**
**BLOCK 5: 1970 – 1975 MHz (F)**
**BLOCK 6: 1975 – 1990 MHz (C)**

## 3.6 PCS - Mobile Frequency Blocks

§24.229

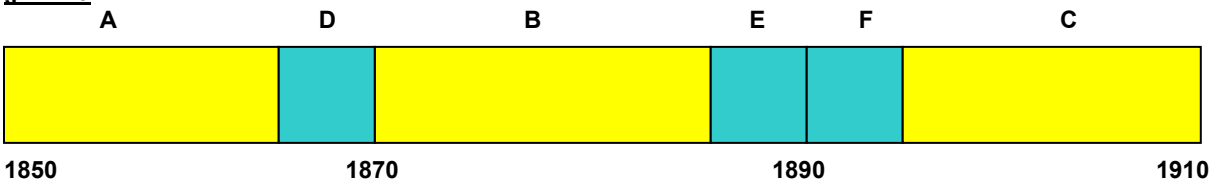


**BLOCK 1: 1850 – 1865 MHz (A)**
**BLOCK 2: 1865 – 1870 MHz (D)**
**BLOCK 3: 1870 – 1885 MHz (B)**
**BLOCK 4: 1885 – 1890 MHz (E)**
**BLOCK 5: 1890 – 1895 MHz (F)**
**BLOCK 6: 1895 – 1910 MHz (C)**

## 3.7 AWS - Base Frequency Blocks

§27.5(h)

1710-1780 MHz band. The following frequencies are available for licensing pursuant to this part in the 1710-1780 MHz band: (1) Four paired channel blocks of 10 megahertz each are available for assignment as follows:

Block A: 1710-1720 MHz and 2110-2120 MHz;
Block B: 1720-1730 MHz and 2120-2130 MHz;
Block F: 1745-1755 MHz and 2145-2155 MHz; and
Block J: 1770-1780 MHz and 2170-2180 MHz.

(2) Six paired channel blocks of 5 megahertz each are available for assignment as follows:

Block C: 1730-1735 MHz and 2130-2135 MHz;
Block D: 1735-1740 MHz and 2135-2140 MHz;
Block E: 1740-1745 MHz and 2140-2145 MHz;

Block G: 1755-1760 MHz and 2155-2160 MHz;
Block H: 1760-1765 MHz and 2160-2165 MHz; and
Block I: 1765-1770 MHz and 2165-2170 MHz.

## 3.8 AWS - Mobile Frequency Blocks

**§27.5(h)**

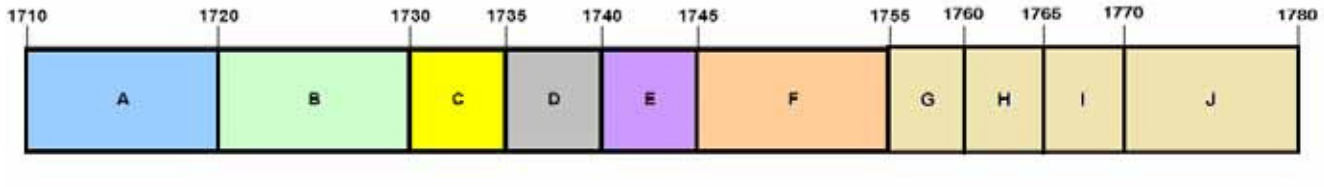


**BLOCK 1: 1710 – 1720 MHz (A)**
**BLOCK 2: 1720 – 1730 MHz (B)**
**BLOCK 3: 1730 – 1735 MHz (C)**
**BLOCK 4: 1735 – 1740 MHz (D)**
**BLOCK 5: 1740 – 1745 MHz (E)**
**BLOCK 6: 1745 – 1755 MHz (F)**
**BLOCK 7: 1755 – 1760 MHz (G)**
**BLOCK 8: 1760 – 1765 MHz (H)**
**BLOCK 9: 1765 – 1770 MHz (I)**
**BLOCK 10: 1770 – 1780 MHz (J)**

## 3.9 Radiated Power and Radiated Spurious Emissions

**§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(b.10) §27.50(c.10) §27.50(d.4) §27.53(f) §27.53(g) §27.53(h)**

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d\ [dBm]} = P_{g\ [dBm]} - \text{cable loss}_{\ [dB]} + \text{antenna gain}_{\ [dBd/dBi]}$$

Where, $P_d$ is the dipole equivalent power, $P_g$ is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g\ [dBm]}$ – cable loss $_{[dB]}$.

The calculated $P_d$ levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{[Watts]})$.

# 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the $U_{CISPR}$ measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (±dB) |
|---|---|
| Conducted Bench Top Measurements | 1.13 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

# 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|---|---|---|---|---|---|---|
| - | LTx3 | LIcensed Transmitter Cable Set | 6/12/2015 | Annual | 12/12/2016 | N/A |
| - | RE1 | Radiated Emissions Cable Set (UHF/EHF) | 3/4/2016 | Annual | 3/4/2017 | RE1 |
| Agilent | N9020A | MXA Signal Analyzer | 11/5/2015 | Annual | 11/5/2016 | US46470561 |
| Agilent | N9030A | PXA Signal Analyzer (44GHz) | 3/1/2016 | Annual | 3/1/2017 | MY52350166 |
| Anritsu | MT8820C | Radio Communication Analyzer | 7/24/2015 | Annual | 7/24/2016 | 6200901190 |
| Com-Power | PAM-103 | Pre-Amplifier (1-1000MHz) | 2/26/2016 | Annual | 2/26/2017 | 441112 |
| Emco | 3115 | Horn Antenna (1-18GHz) | 3/10/2016 | Biennial | 3/10/2018 | 9704-5182 |
| Espec | ESX-2CA | Environmental Chamber | 3/4/2016 | Annual | 3/4/2017 | 17620 |
| ETS Lindgren | 3160-09 | 18-26.5 GHz Standard Gain Horn | 6/17/2014 | Biennial | 12/17/2016 | 135427 |
| ETS Lindgren | 3164-08 | Quad Ridge Horn Antenna | 10/22/2014 | Biennial | 10/22/2016 | 128338 |
| K & L | 11SH10-3075/U18000 | High Pass Filter | 7/18/2015 | Annual | 10/18/2016 | 11SH10-3075/U18000-2 |
| K & L | 13SH10-1000/U1000 | N Type High Pass Filter | 7/18/2015 | Annual | 10/18/2016 | 13SH10-1000/U1000-1 |
| Mini-Circuits | PWR-SENS-4RMS | USB Power Sensor | 3/4/2016 | Annual | 3/4/2017 | 11210140001 |
| Mini-Circuits | SSG-4000HP | USB Synthesized Signal Generator | N/A | | | 11208010032 |
| Mini-Circuits | TVA-11-422 | RF Power Amp | N/A | | | QA1303002 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 10/13/2015 | Annual | 10/13/2016 | 100976 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 7/17/2015 | Annual | 10/17/2016 | 100348 |
| Rohde & Schwarz | TS-PR18 | 1-18 GHz Pre-Amplifier | 3/7/2016 | Annual | 3/7/2017 | 100071 |
| Rohde & Schwarz | TS-PR26 | 18-26.5 GHz Pre-Amplifier | 3/7/2016 | Annual | 3/7/2017 | 100040 |
| Schwarzbeck | UHA 9105 | Dipole Antenna (400 - 1GHz) Rx | 3/30/2016 | Biennial | 3/30/2018 | 9105-2404 |
| Seekonk | NC-100 | Torque Wrench 5/16", 8" lbs | 3/2/2016 | Biennial | 3/2/2018 | N/A |
| Sunol | JB5 | Bi-Log Antenna (30M - 5GHz) | 3/14/2016 | Biennial | 3/14/2018 | A051107 |
| VWR | 62344-734 | Thermometer with Clock | 2/20/2014 | Biennial | 8/20/2016 | 140140420 |

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

2. Equipment with a calibration date of “N/A” shown in this list was not used to make direct calibrated measurements.

# 6.0 SAMPLE CALCULATIONS

## Emission Designator

### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

### 16QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

## Spurious Radiated Emission – LTE Band

**Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analzyer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

# 7.0 TEST RESULTS

## 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
FCC ID: ZNFH918
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
Mode(s): LTE

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Result | Reference |
|---|---|---|---|---|---|
| **TRANSMITTER MODE (TX)** | | | | | |
| 2.1049 | Occupied Bandwidth | N/A | CONDUCTED | PASS | Section 7.2 |
| 2.1051 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) | Out of Band Emissions | > 43 + 10log$_{10}$ (P[Watts]) at Band Edge and for all out-of-band emissions | | PASS | Section 7.3, 7.4 |
| 27.53(m) | Out of Band Emissions | > 43 + 10log$_{10}$ (P[Watts]) at channel edges and > 55 + 10log$_{10}$ (P[Watts]) at 5.5MHz away and beyond channel edges | | PASS | Section 7.3, 7.4 |
| 24.232(d) | Peak-Average Ratio | < 13 dB | | PASS | Section 7.5 |
| 2.1046 | Transmitter Conducted Output Power | N/A | | PASS | See RF Exposure Report |
| 2.1055. 22.355 24.235 27.54 | Frequency Stability | < 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27) | | PASS | Section 7.8 |
| 22.913(a.2) | Effective Radiated Power (Band 5) | < 7 Watts max. ERP | RADIATED | PASS | Section 7.6 |
| 27.50(b.10) 27.50(c.10) | Effective Radiated Power (Band 12 13) | < 3 Watts max. ERP | | PASS | Section 7.6 |
| 24.232(c) 27.50(h.2) | Equivalent Isotropic Radiated Power (Band 2) | < 2 Watts max. EIRP | | PASS | Section 7.6 |
| 27.50(d.4) | Equivalent Isotropic Radiated Power (Band 4/66) | < 1 Watts max. EIRP | | PASS | Section 7.6 |
| 2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) | Undesirable Emissions | > 43 + 10log$_{10}$ (P[Watts]) for all out-of-band emissions | | PASS | Section 7.7 |
| 27.53(f) | Undesirable Emissions (Band 13) | < -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz | | PASS | Section 7.7 |

**Table 7-1. Summary of Test Results**

**Notes:**

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots (Sections 7.2, 7.3, 7.4, 7.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 4.2.

## 7.2 Occupied Bandwidth

**§2.1049**

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v02r02 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

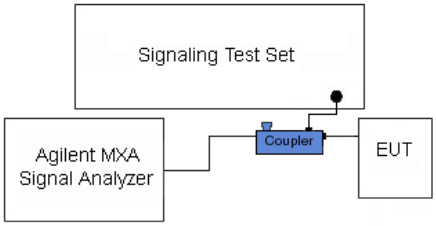


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

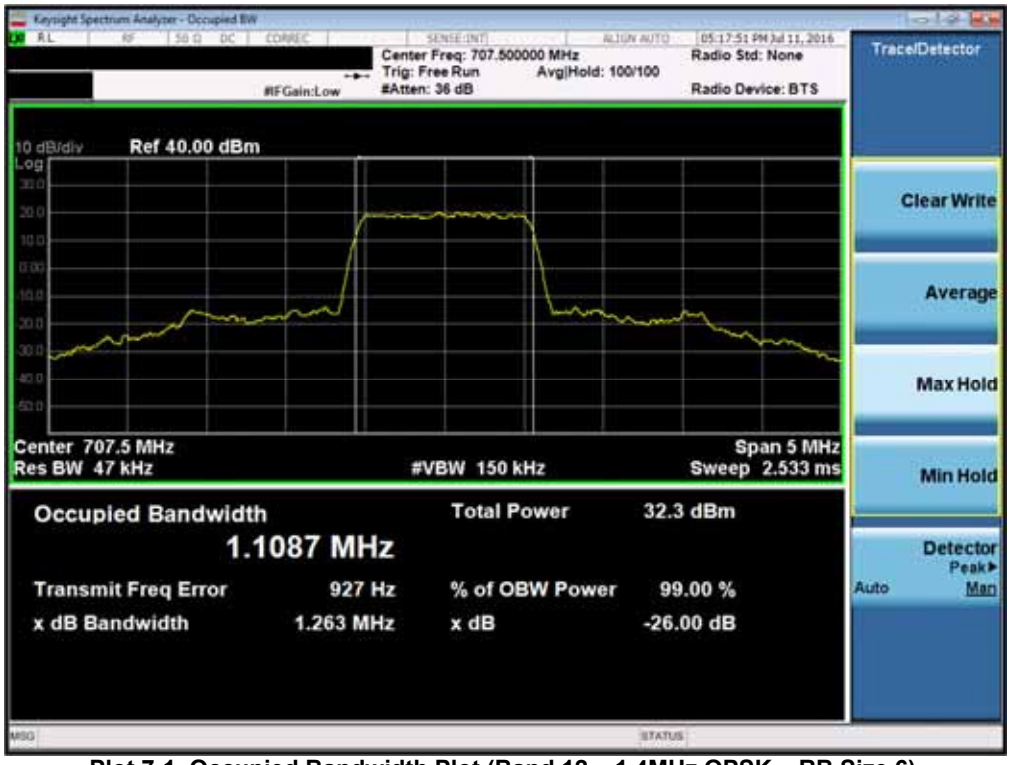


**Plot 7-1. Occupied Bandwidth Plot (Band 12 – 1.4MHz QPSK – RB Size 6)**

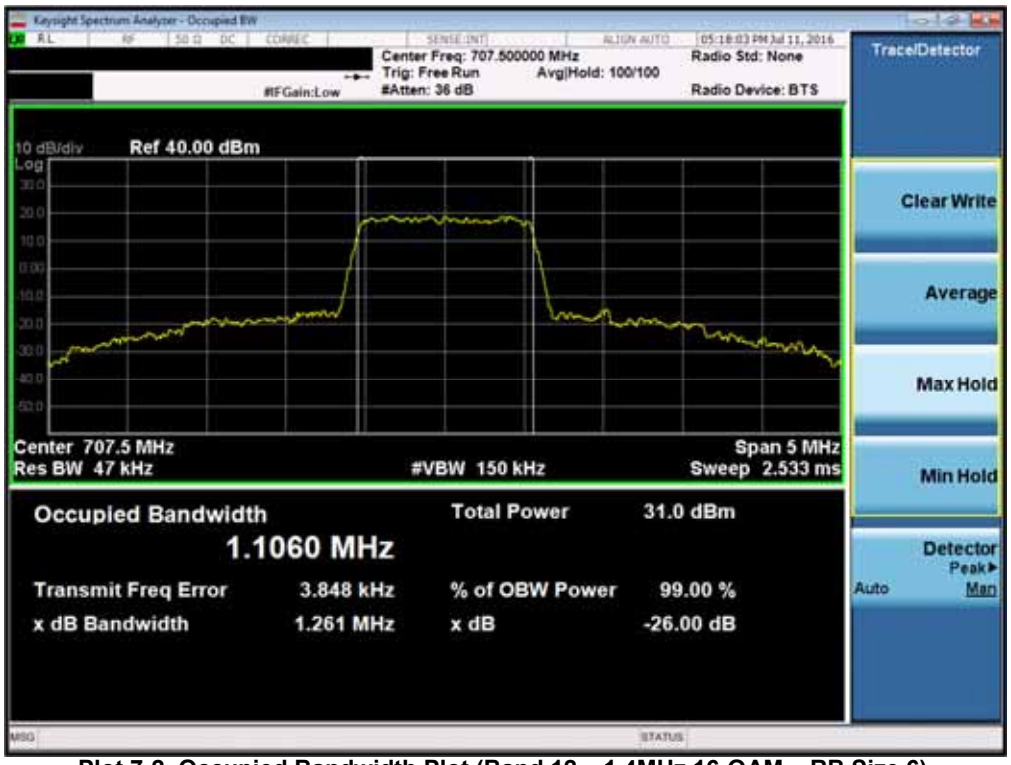


**Plot 7-2. Occupied Bandwidth Plot (Band 12 – 1.4MHz 16-QAM – RB Size 6)**

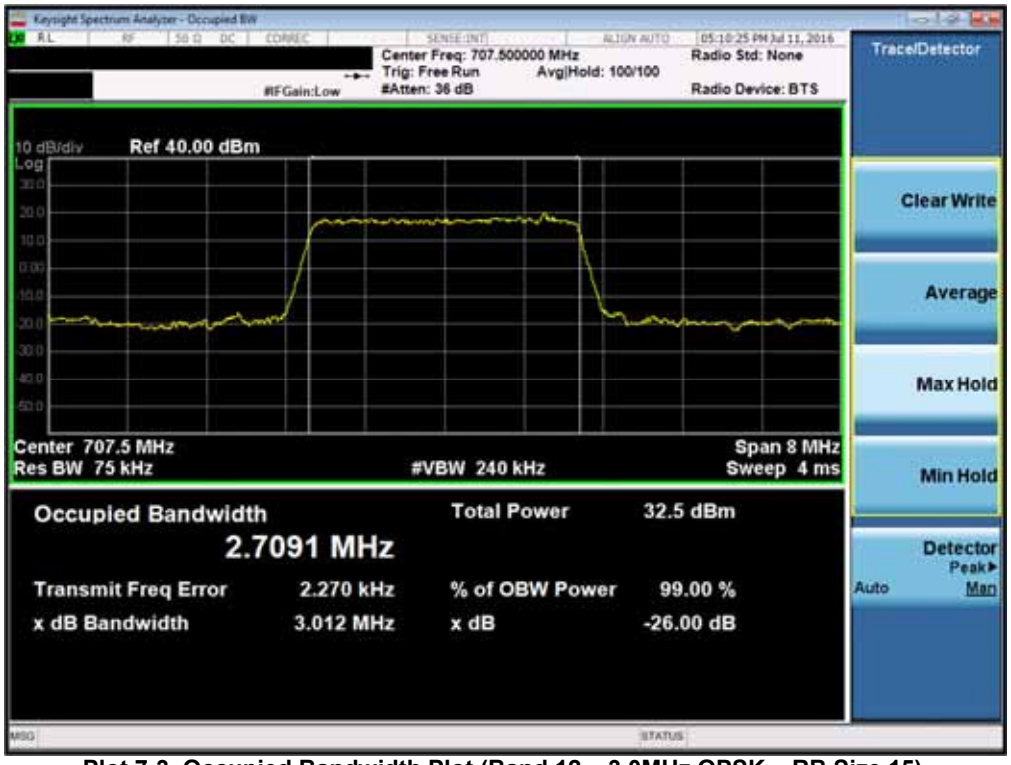


**Plot 7-3. Occupied Bandwidth Plot (Band 12 – 3.0MHz QPSK – RB Size 15)**

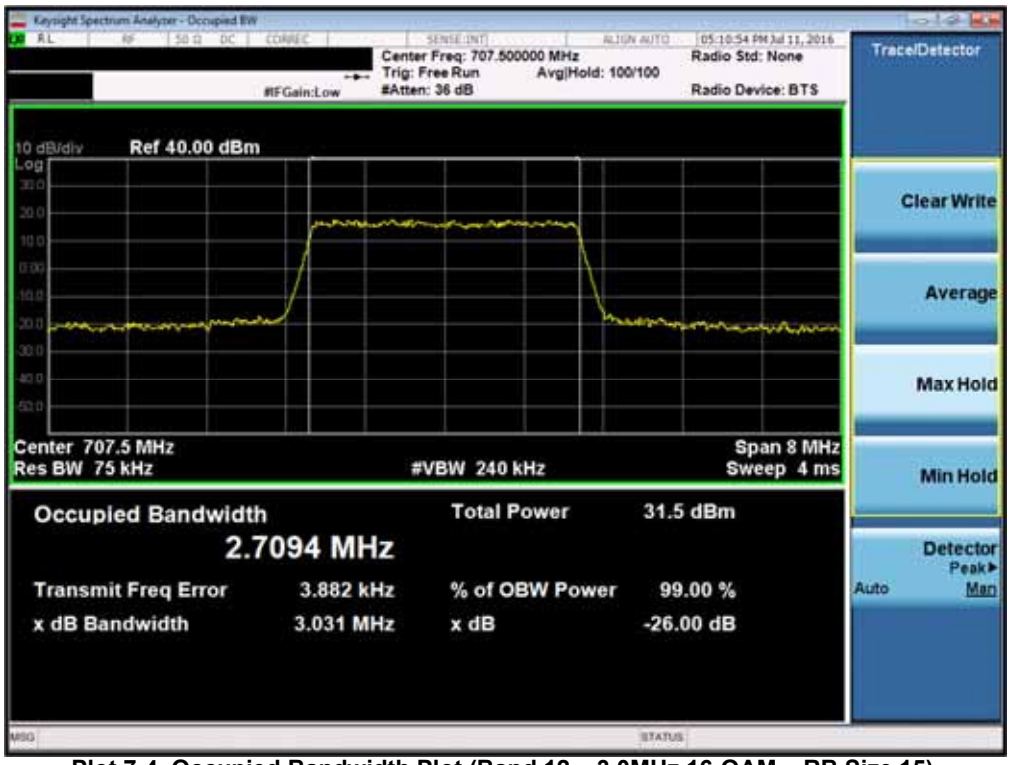


**Plot 7-4. Occupied Bandwidth Plot (Band 12 – 3.0MHz 16-QAM – RB Size 15)**


**Plot 7-5. Occupied Bandwidth Plot (Band 12 – 5.0MHz QPSK – RB Size 25)**


**Plot 7-6. Occupied Bandwidth Plot (Band 12 – 5.0MHz 16-QAM – RB Size 25)**

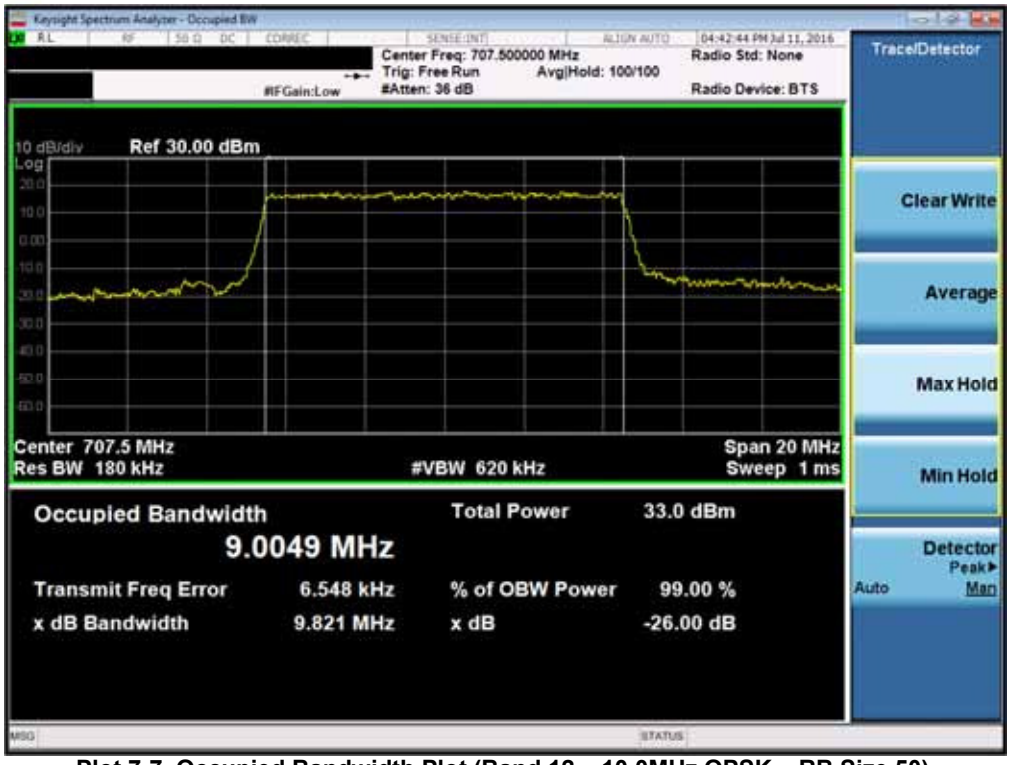


**Plot 7-7. Occupied Bandwidth Plot (Band 12 – 10.0MHz QPSK – RB Size 50)**


**Plot 7-8. Occupied Bandwidth Plot (Band 12 – 10.0MHz 16-QAM – RB Size 50)**


**Plot 7-9. Occupied Bandwidth Plot (Band 13 – 5.0MHz QPSK – RB Size 25)**


**Plot 7-10. Occupied Bandwidth Plot (Band 13 – 5.0MHz 16-QAM – RB Size 25)**

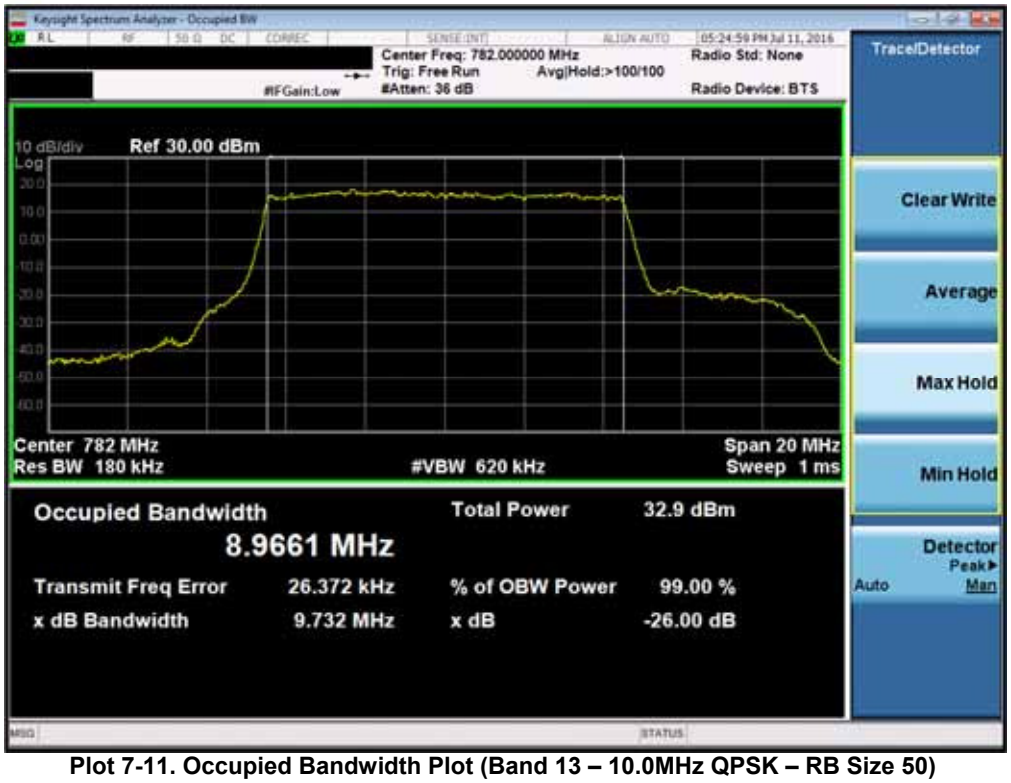


**Plot 7-11. Occupied Bandwidth Plot (Band 13 – 10.0MHz QPSK – RB Size 50)**

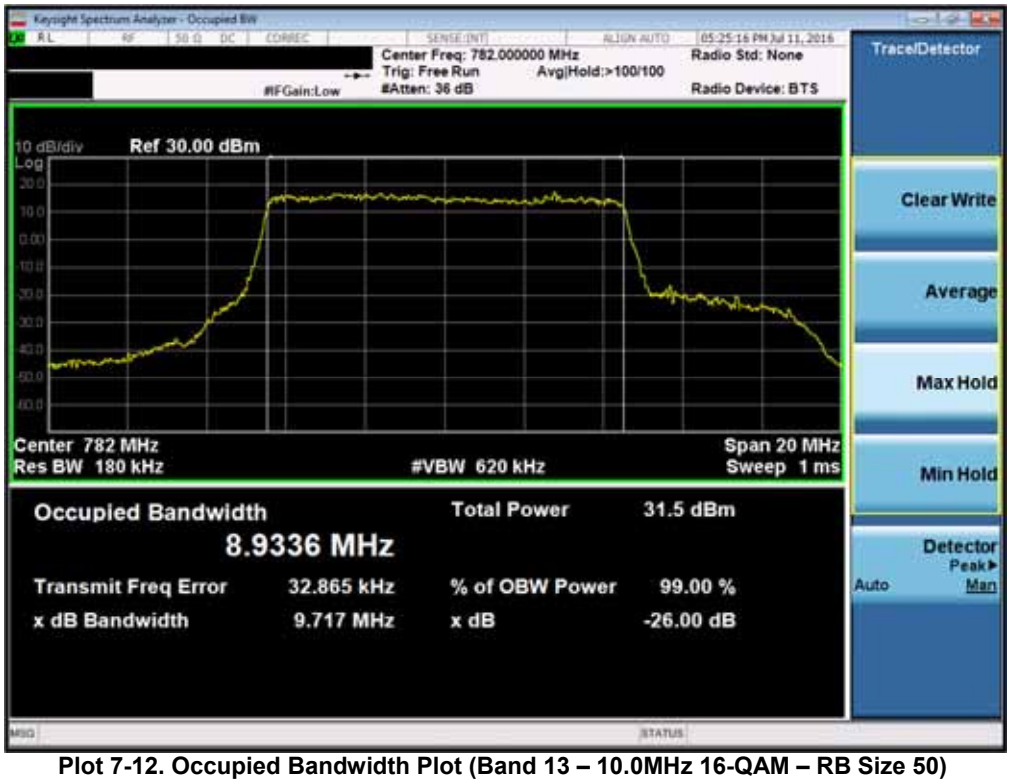


**Plot 7-12. Occupied Bandwidth Plot (Band 13 – 10.0MHz 16-QAM – RB Size 50)**

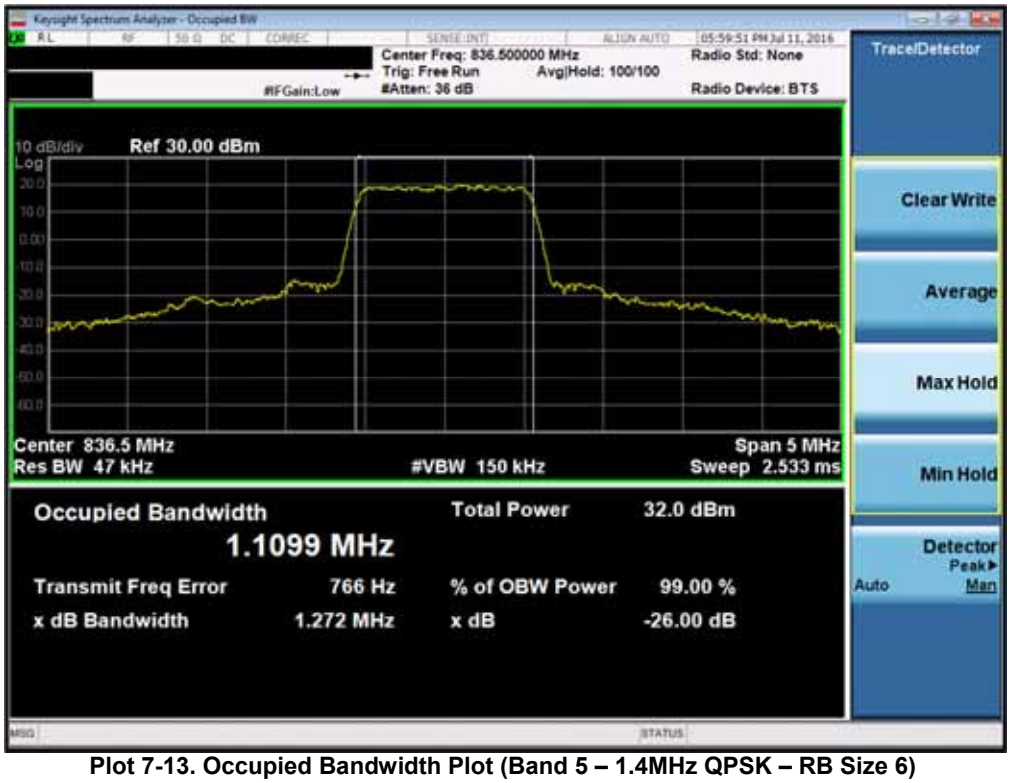


**Plot 7-13. Occupied Bandwidth Plot (Band 5 – 1.4MHz QPSK – RB Size 6)**

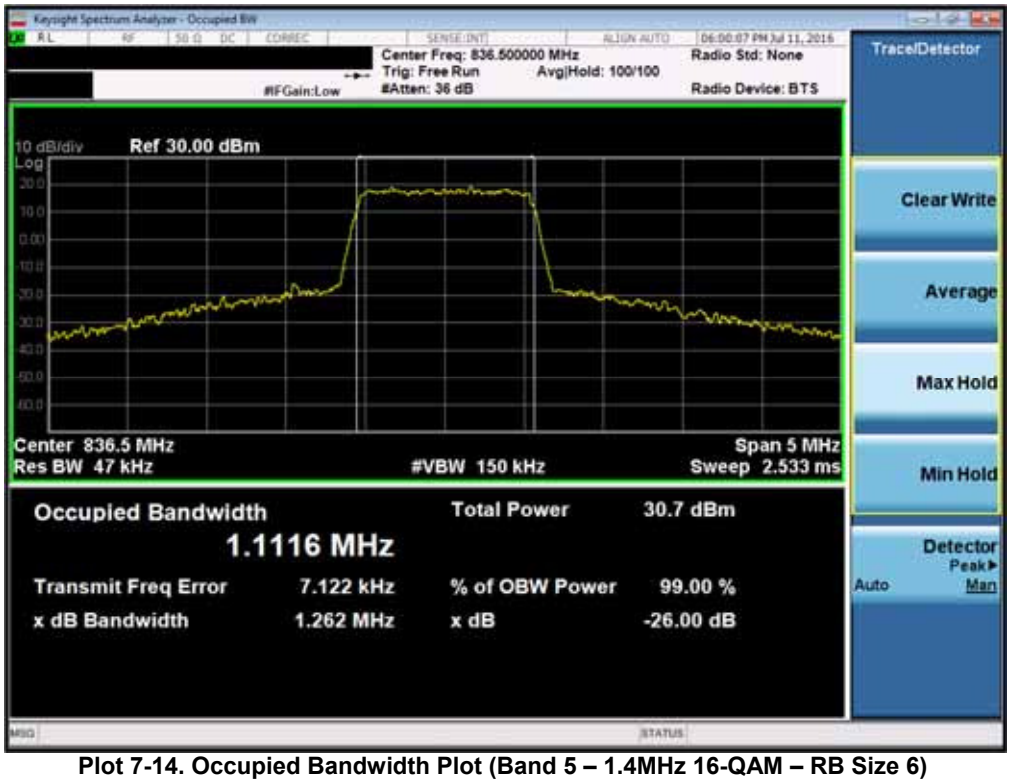


**Plot 7-14. Occupied Bandwidth Plot (Band 5 – 1.4MHz 16-QAM – RB Size 6)**


**Plot 7-15. Occupied Bandwidth Plot (Band 5 – 3.0MHz QPSK – RB Size 15)**


**Plot 7-16. Occupied Bandwidth Plot (Band 5 – 3.0MHz 16-QAM – RB Size 15)**

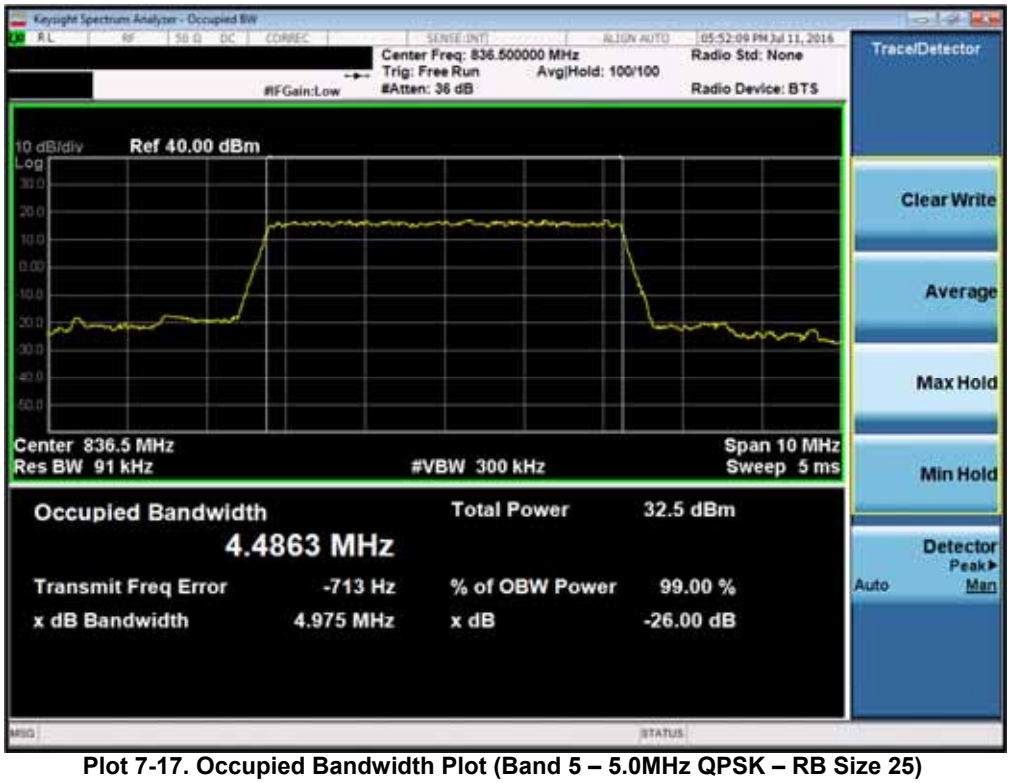


**Plot 7-17. Occupied Bandwidth Plot (Band 5 – 5.0MHz QPSK – RB Size 25)**

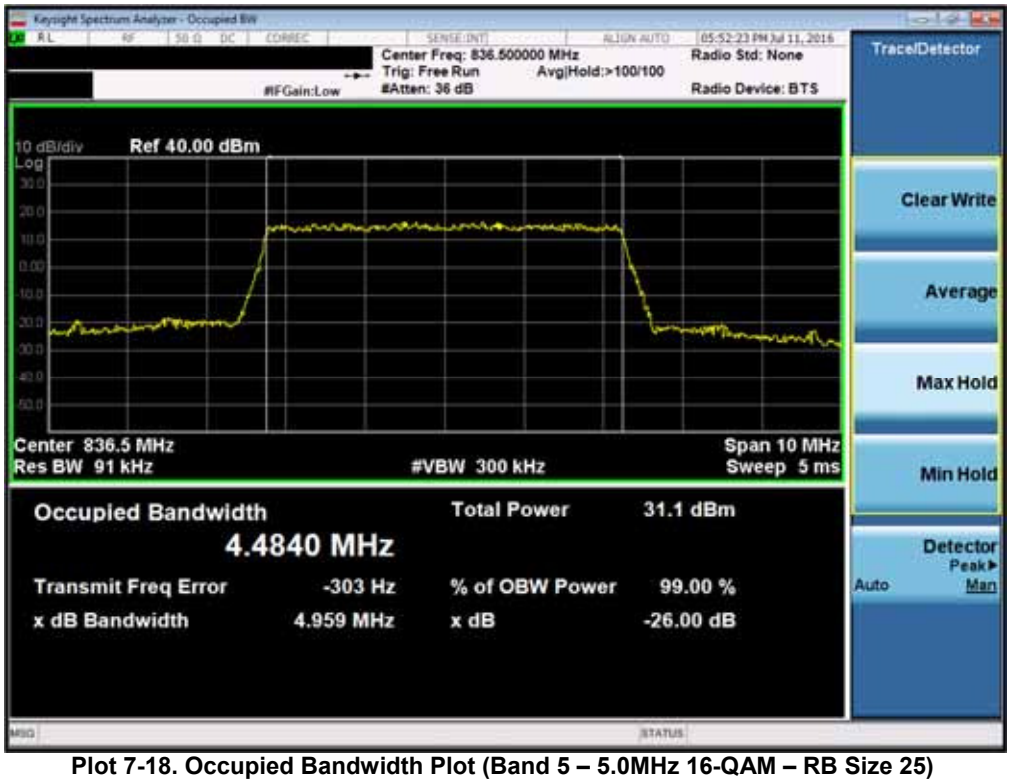


**Plot 7-18. Occupied Bandwidth Plot (Band 5 – 5.0MHz 16-QAM – RB Size 25)**

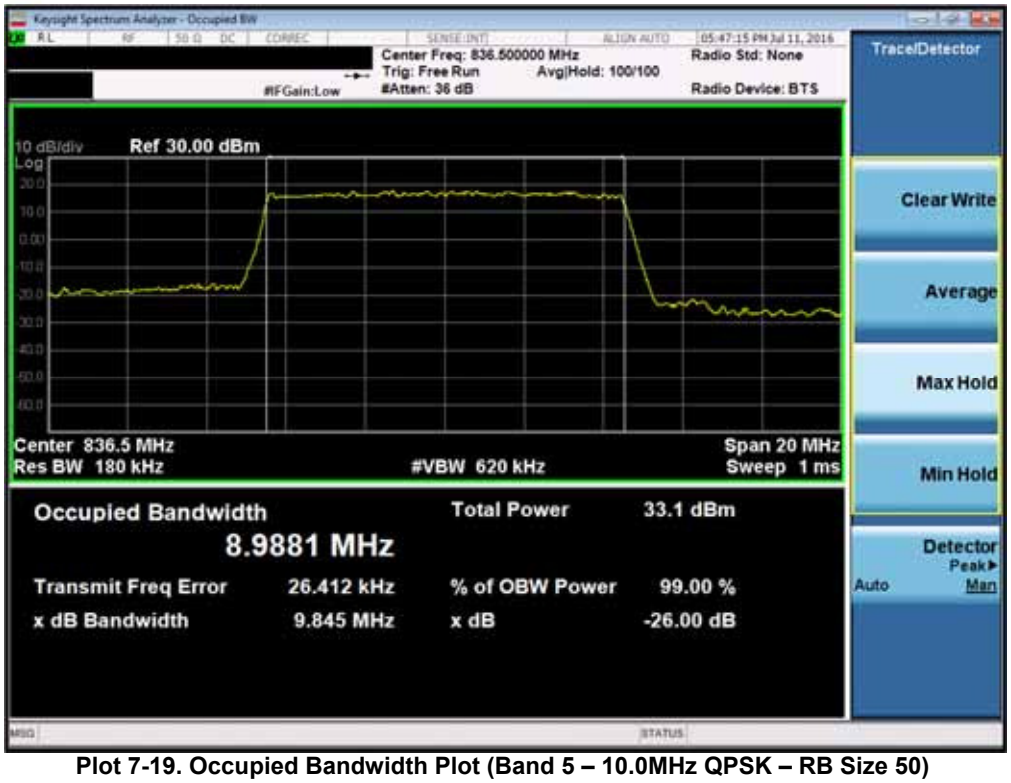


**Plot 7-19. Occupied Bandwidth Plot (Band 5 – 10.0MHz QPSK – RB Size 50)**

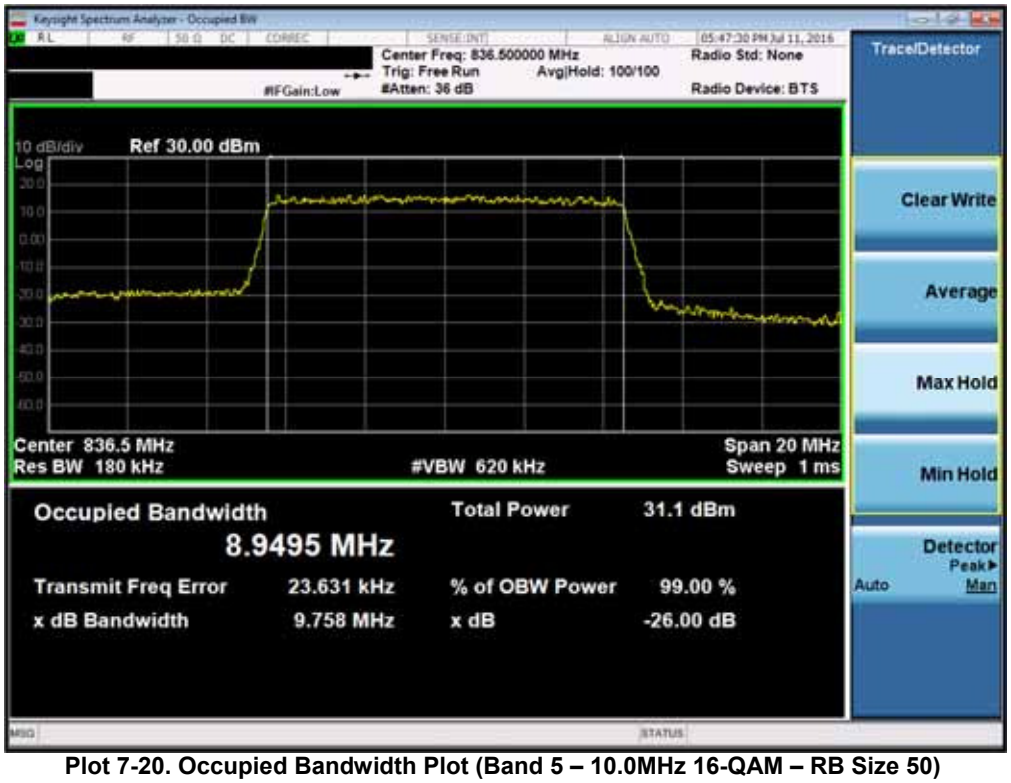


**Plot 7-20. Occupied Bandwidth Plot (Band 5 – 10.0MHz 16-QAM – RB Size 50)**

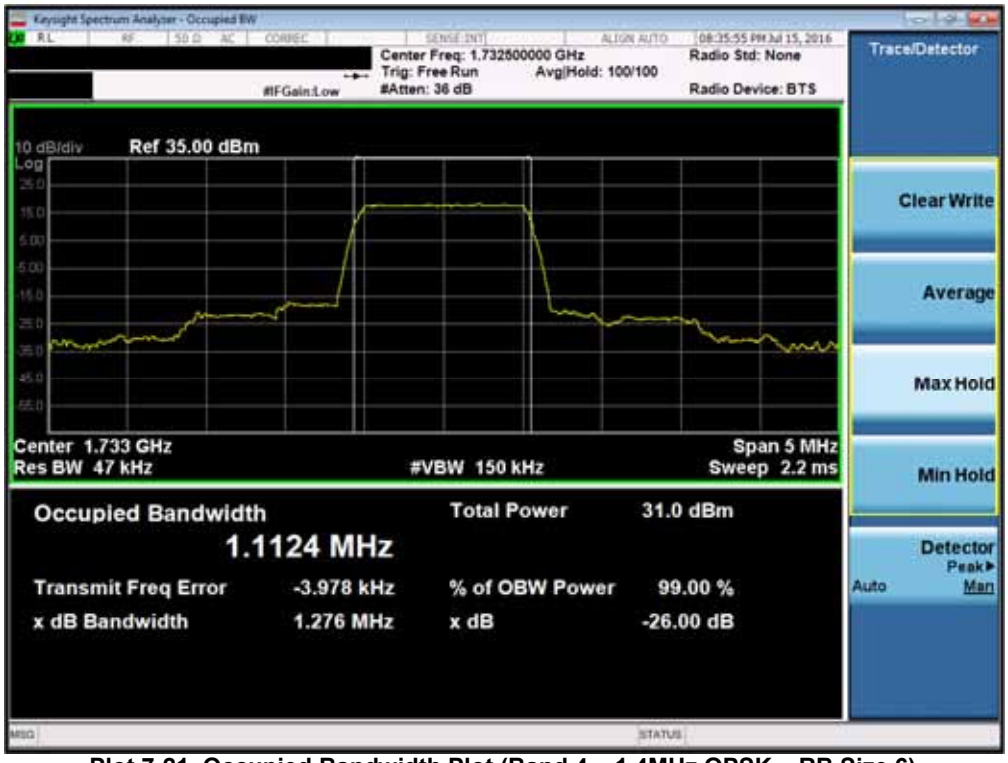


**Plot 7-21. Occupied Bandwidth Plot (Band 4 – 1.4MHz QPSK – RB Size 6)**

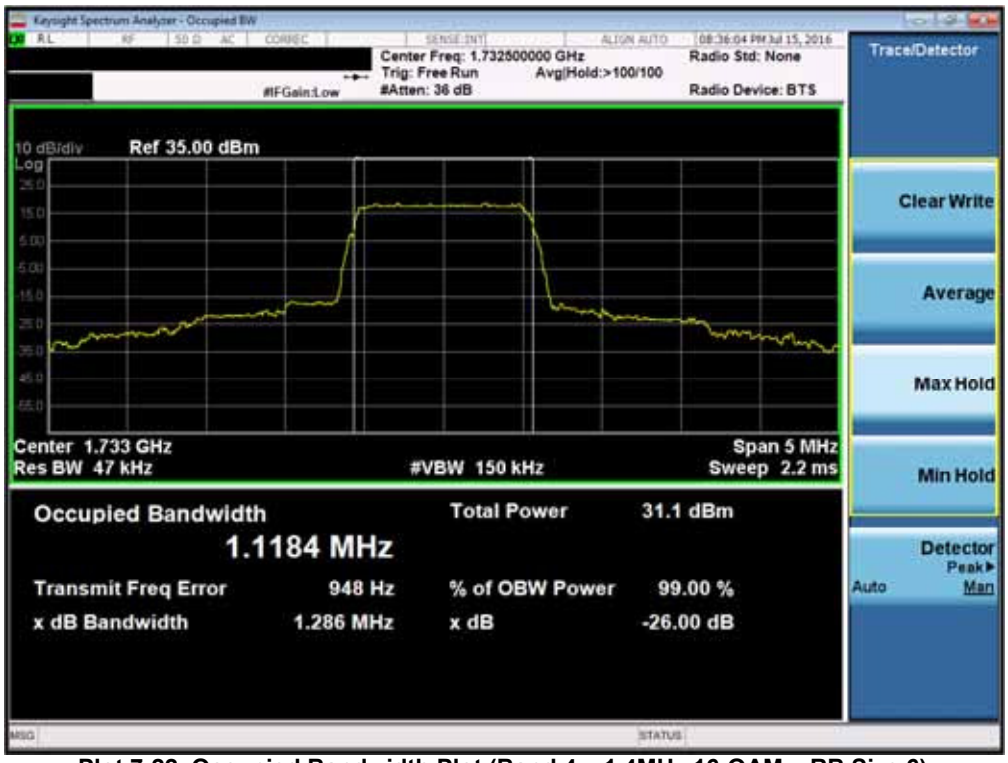


**Plot 7-22. Occupied Bandwidth Plot (Band 4 – 1.4MHz 16-QAM – RB Size 6)**


**Plot 7-23. Occupied Bandwidth Plot (Band 4 – 3.0MHz QPSK – RB Size 15)**

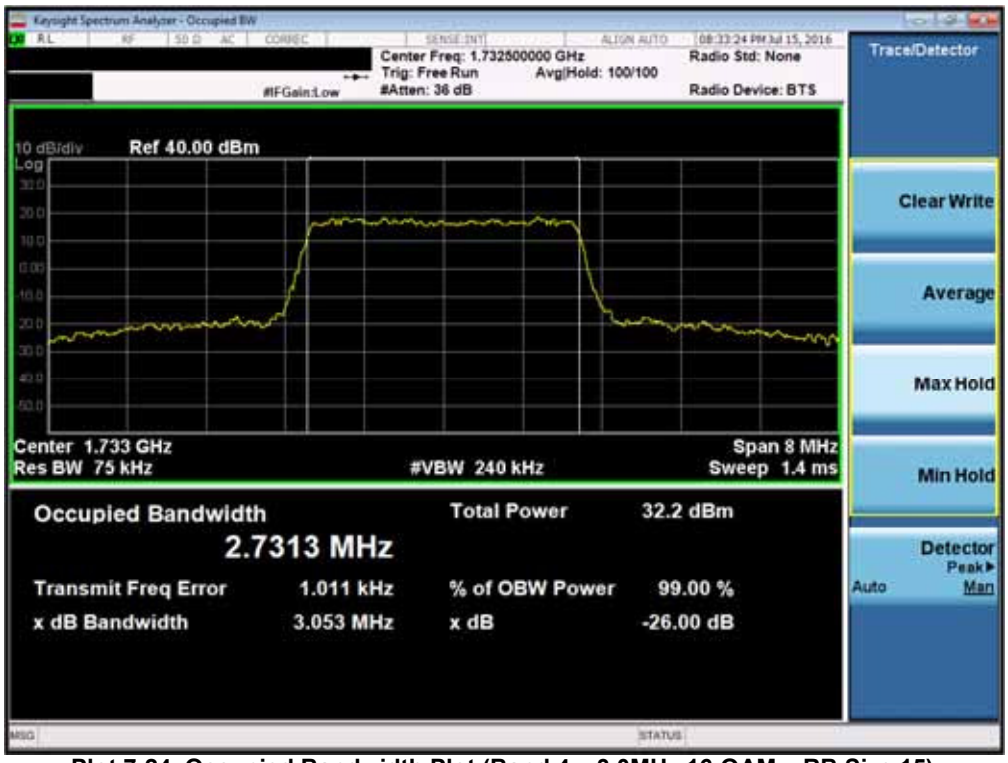


**Plot 7-24. Occupied Bandwidth Plot (Band 4 – 3.0MHz 16-QAM – RB Size 15)**


**Plot 7-25. Occupied Bandwidth Plot (Band 4/66– 5.0MHz QPSK – RB Size 25)**

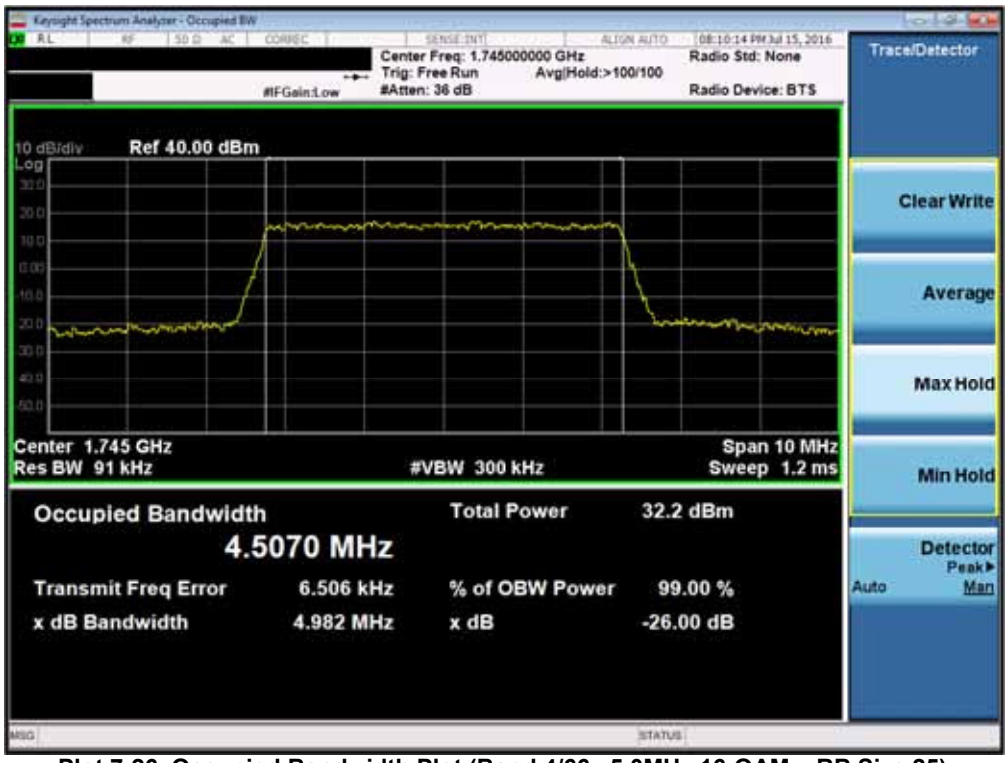


**Plot 7-26. Occupied Bandwidth Plot (Band 4/66– 5.0MHz 16-QAM – RB Size 25)**

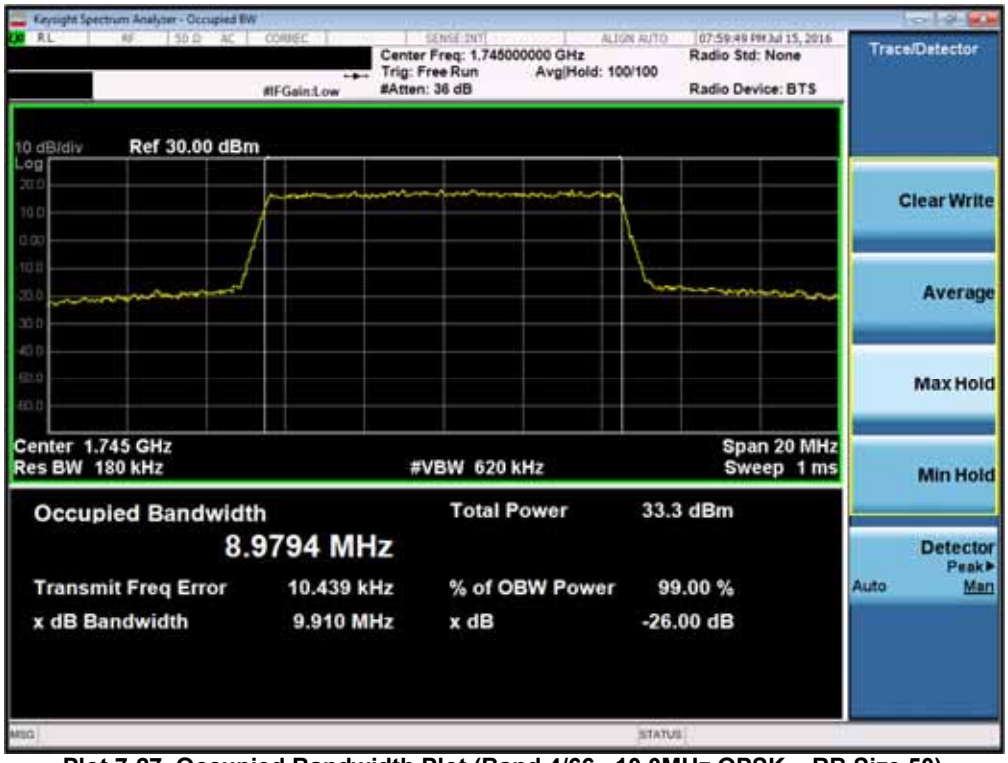


**Plot 7-27. Occupied Bandwidth Plot (Band 4/66– 10.0MHz QPSK – RB Size 50)**

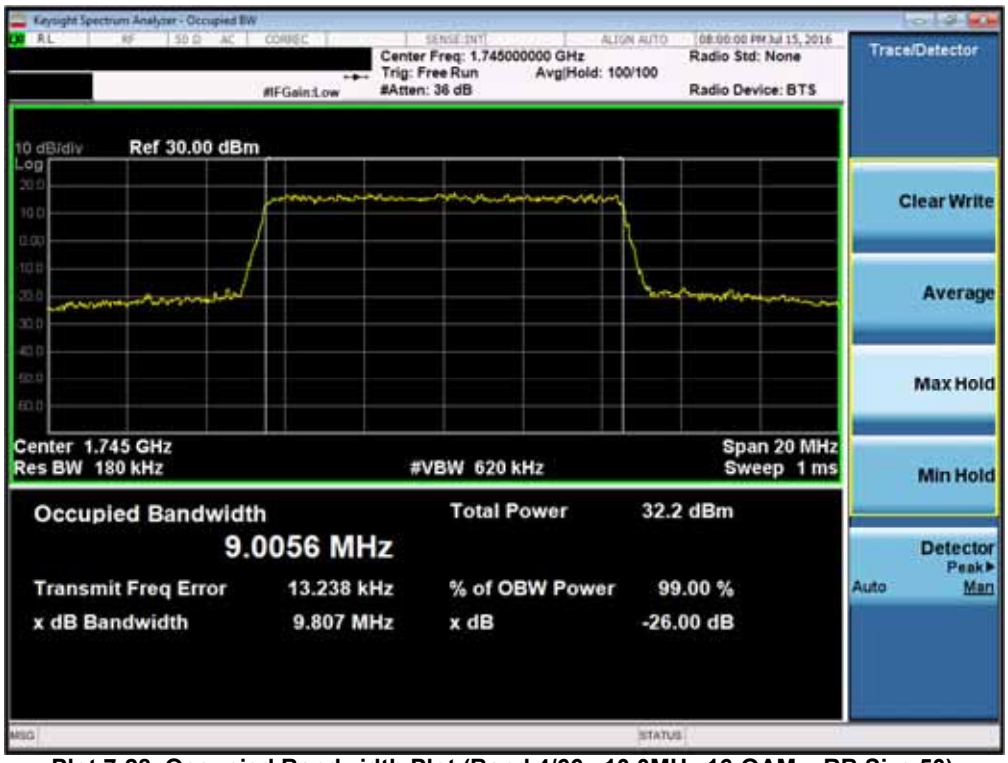


**Plot 7-28. Occupied Bandwidth Plot (Band 4/66– 10.0MHz 16-QAM – RB Size 50)**


**Plot 7-29. Occupied Bandwidth Plot (Band 4/66– 15.0MHz QPSK – RB Size 75)**

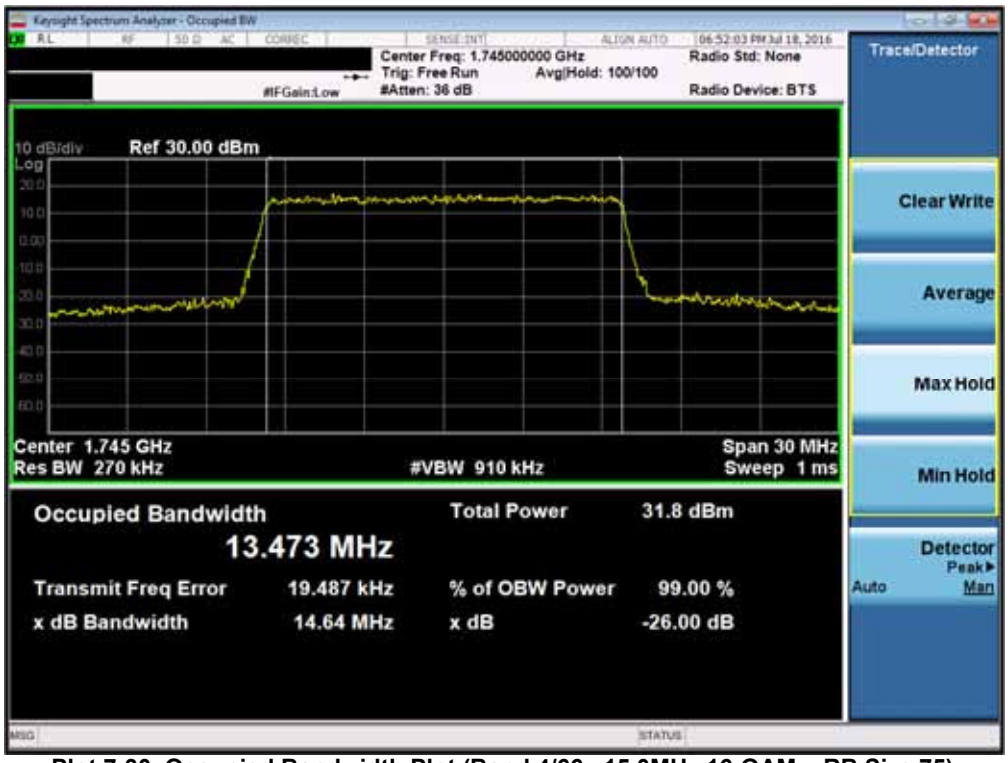


**Plot 7-30. Occupied Bandwidth Plot (Band 4/66– 15.0MHz 16-QAM – RB Size 75)**


**Plot 7-31. Occupied Bandwidth Plot (Band 4/66– 20.0MHz QPSK – RB Size 100)**

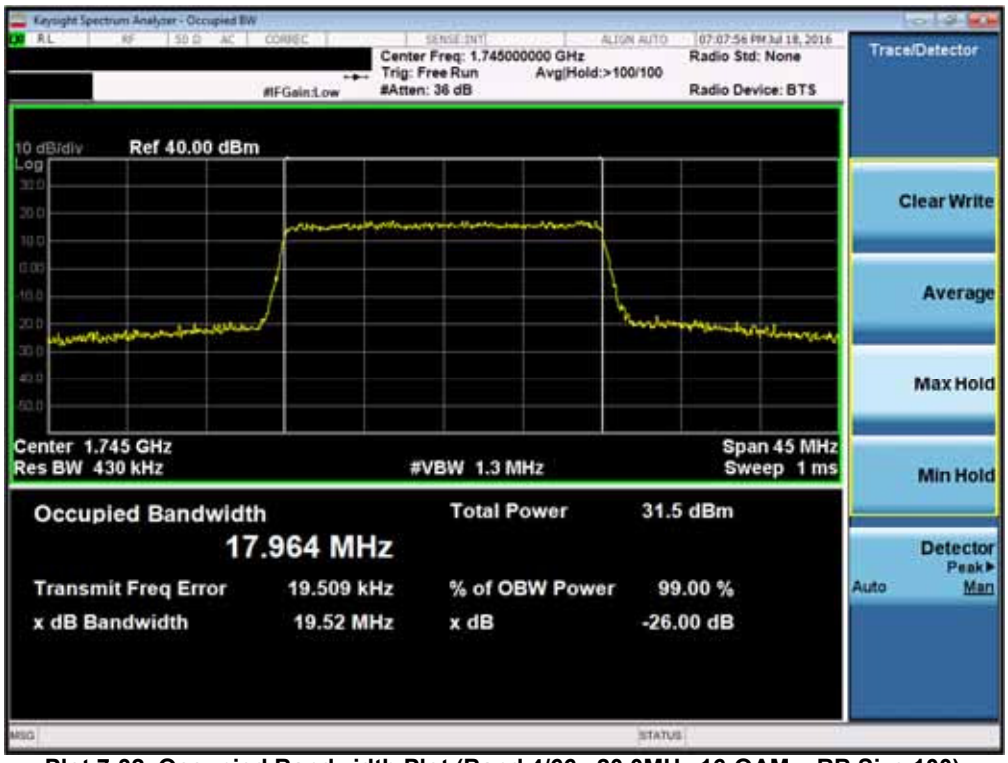


**Plot 7-32. Occupied Bandwidth Plot (Band 4/66– 20.0MHz 16-QAM – RB Size 100)**

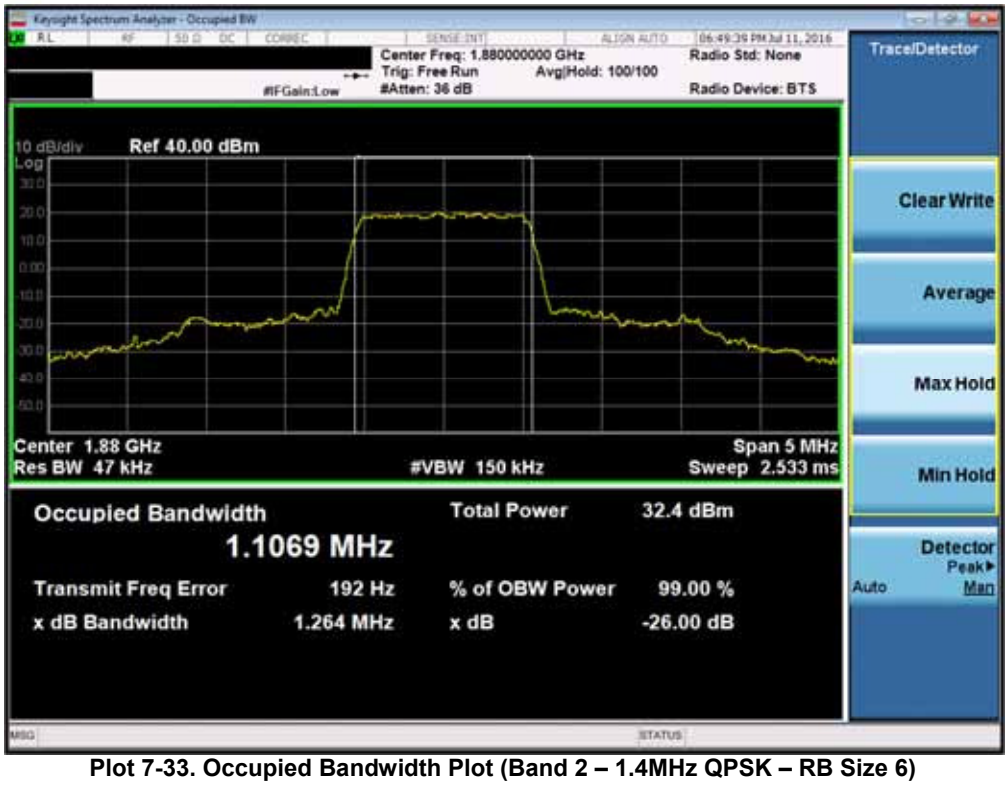


**Plot 7-33. Occupied Bandwidth Plot (Band 2 – 1.4MHz QPSK – RB Size 6)**

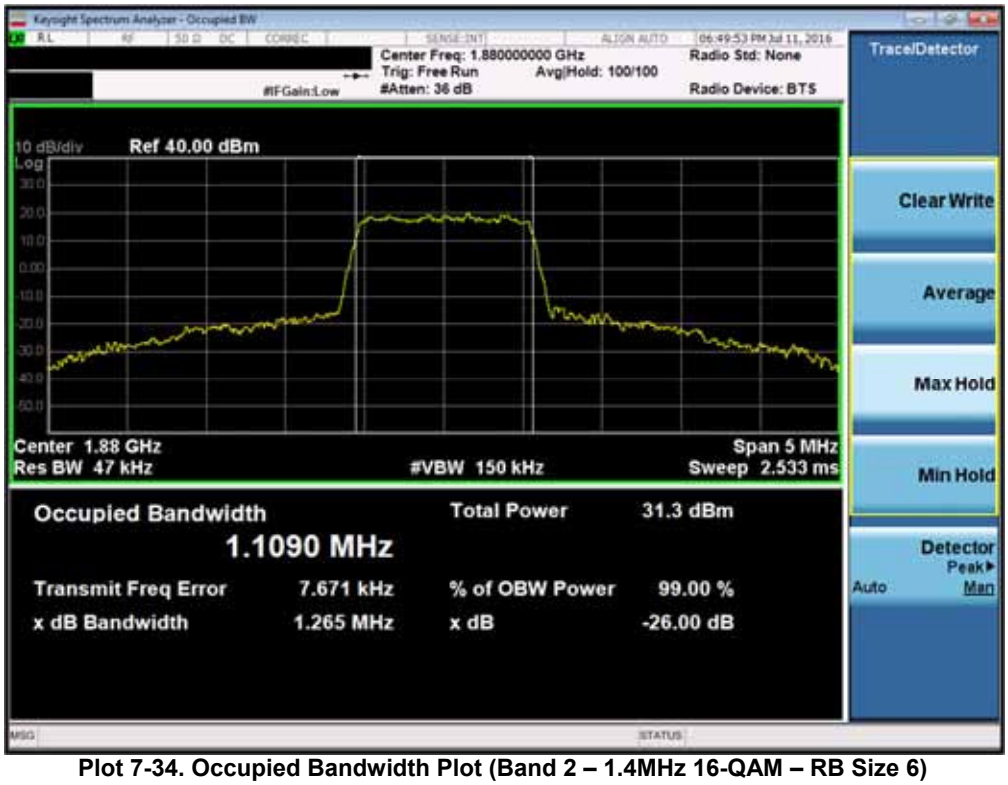


**Plot 7-34. Occupied Bandwidth Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)**

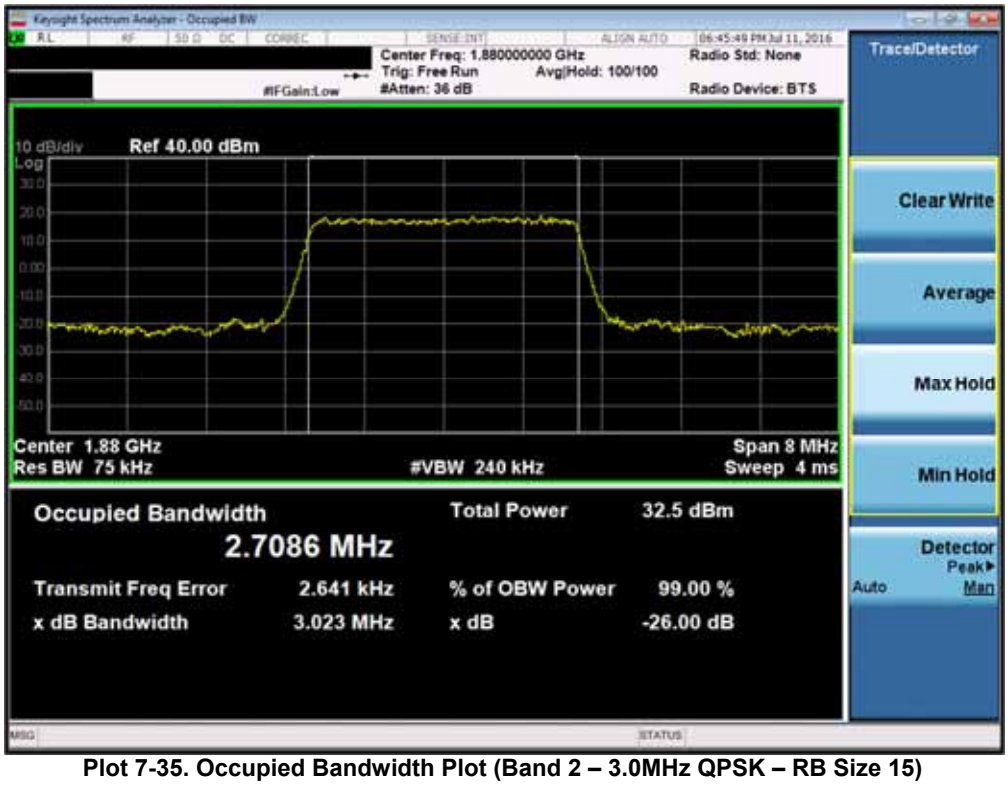


**Plot 7-35. Occupied Bandwidth Plot (Band 2 – 3.0MHz QPSK – RB Size 15)**

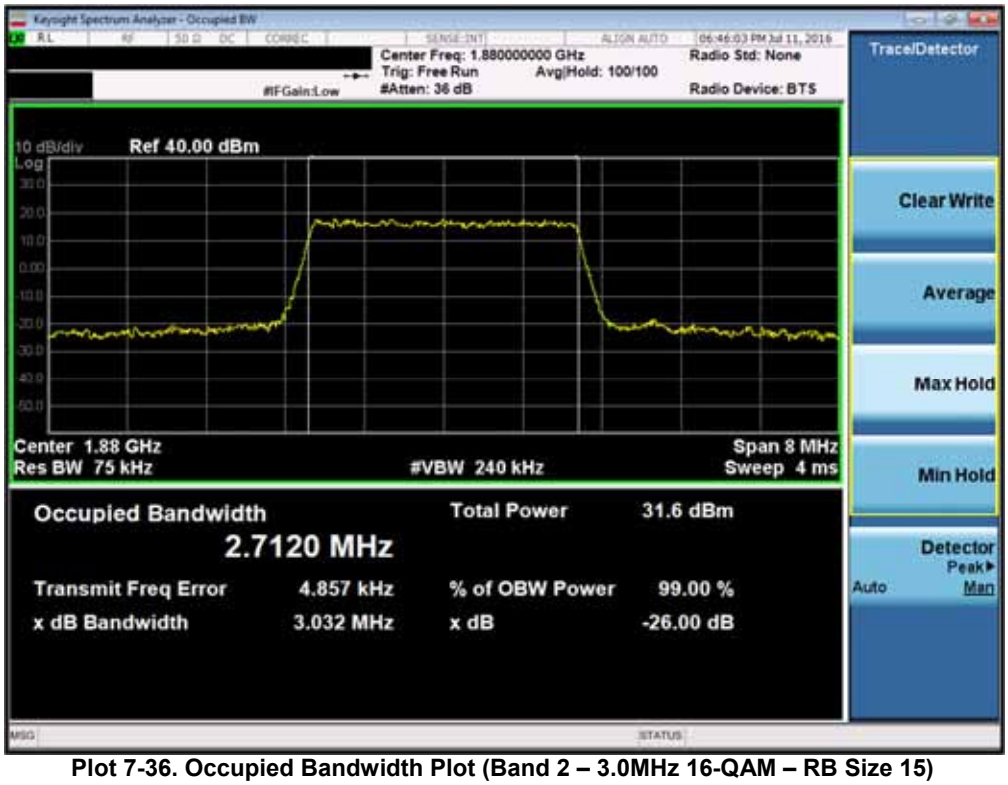


**Plot 7-36. Occupied Bandwidth Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)**

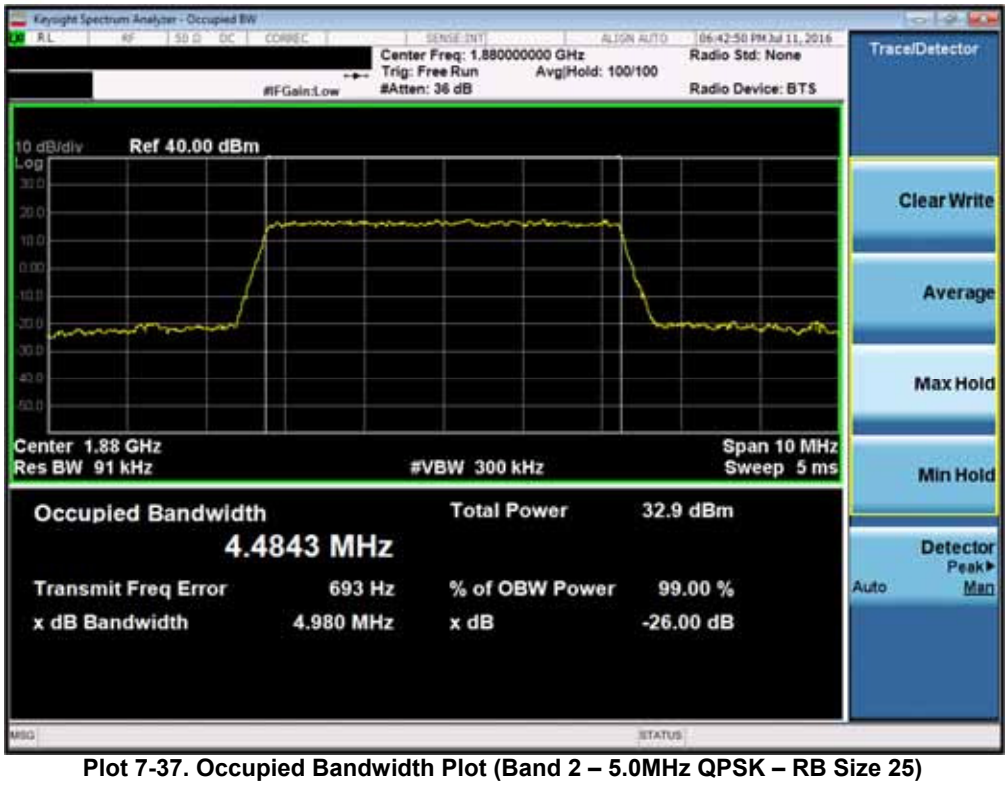


**Plot 7-37. Occupied Bandwidth Plot (Band 2 – 5.0MHz QPSK – RB Size 25)**

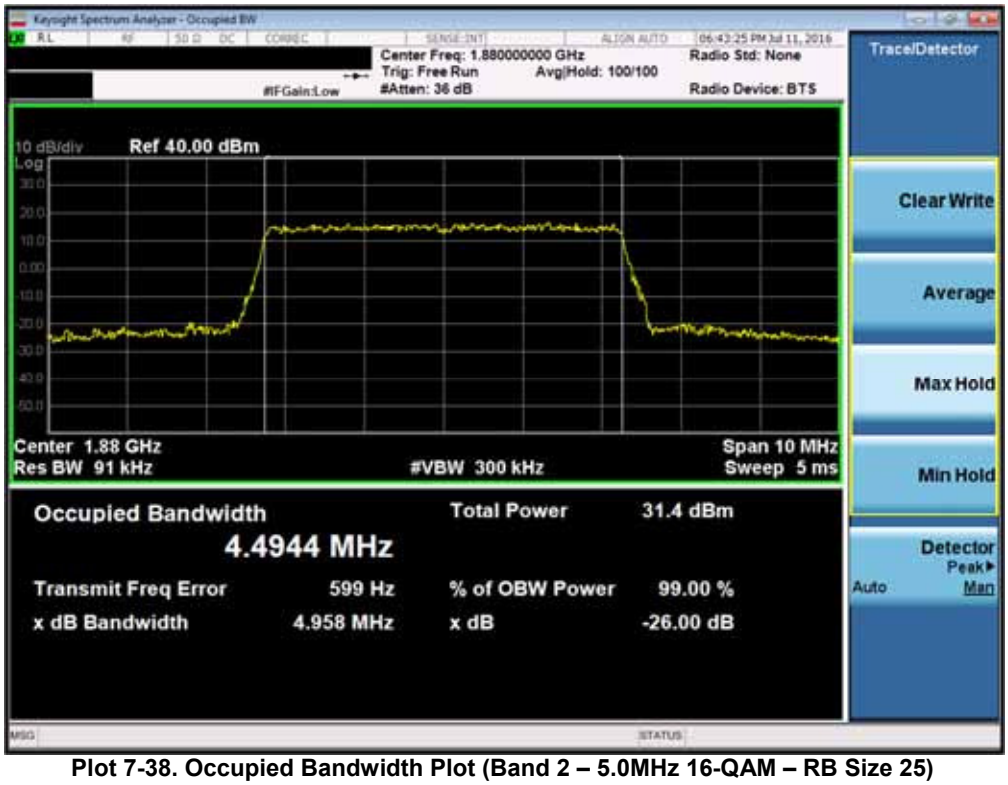


**Plot 7-38. Occupied Bandwidth Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)**

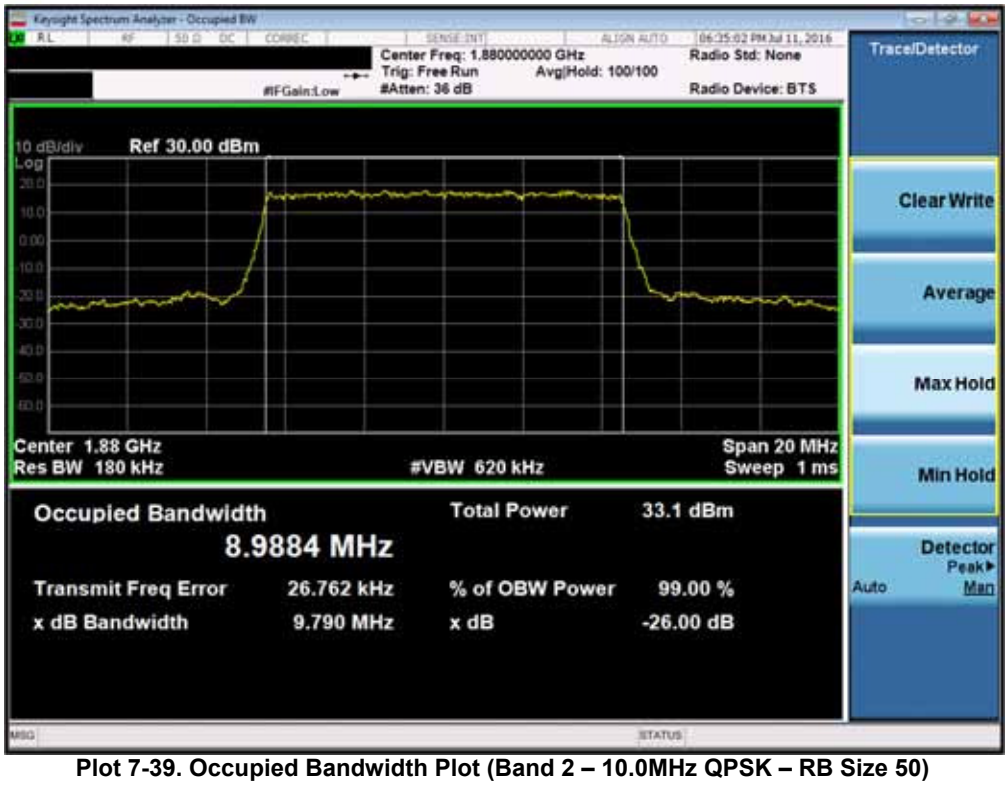


**Plot 7-39. Occupied Bandwidth Plot (Band 2 – 10.0MHz QPSK – RB Size 50)**

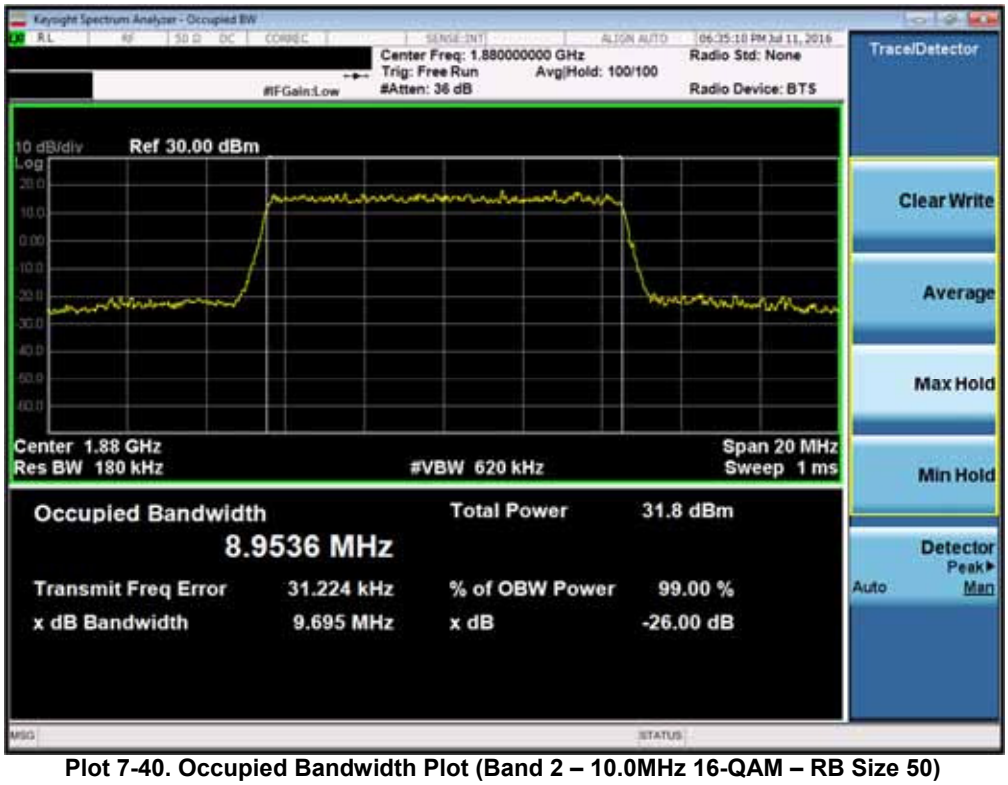


**Plot 7-40. Occupied Bandwidth Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)**

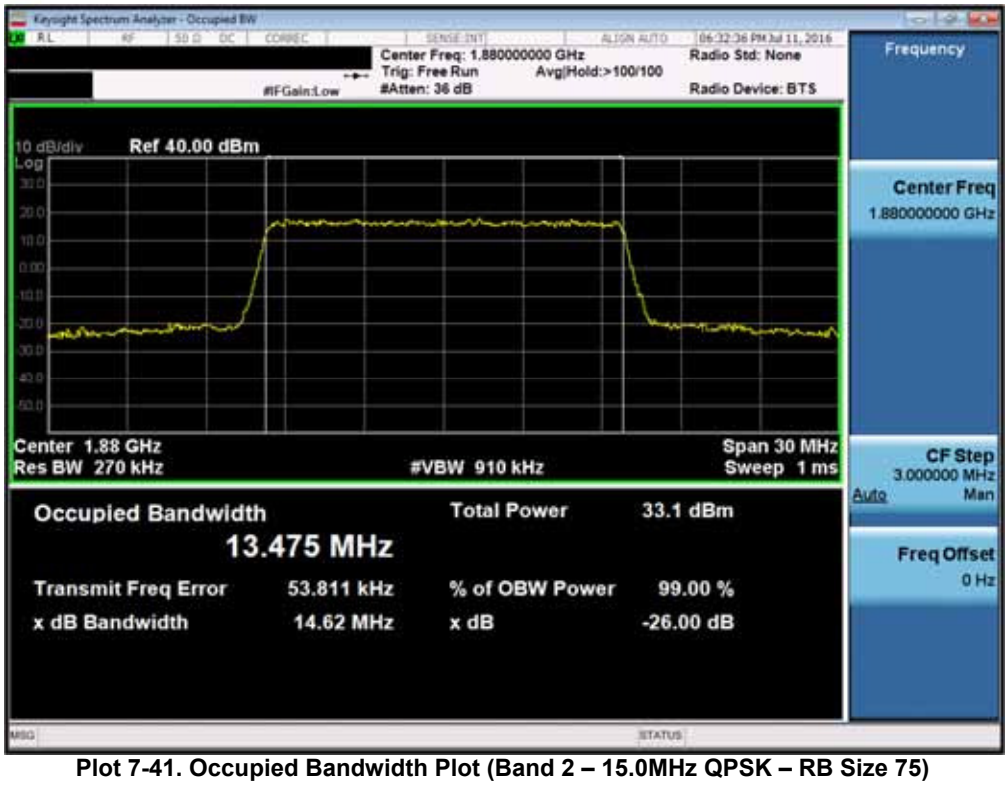


**Plot 7-41. Occupied Bandwidth Plot (Band 2 – 15.0MHz QPSK – RB Size 75)**

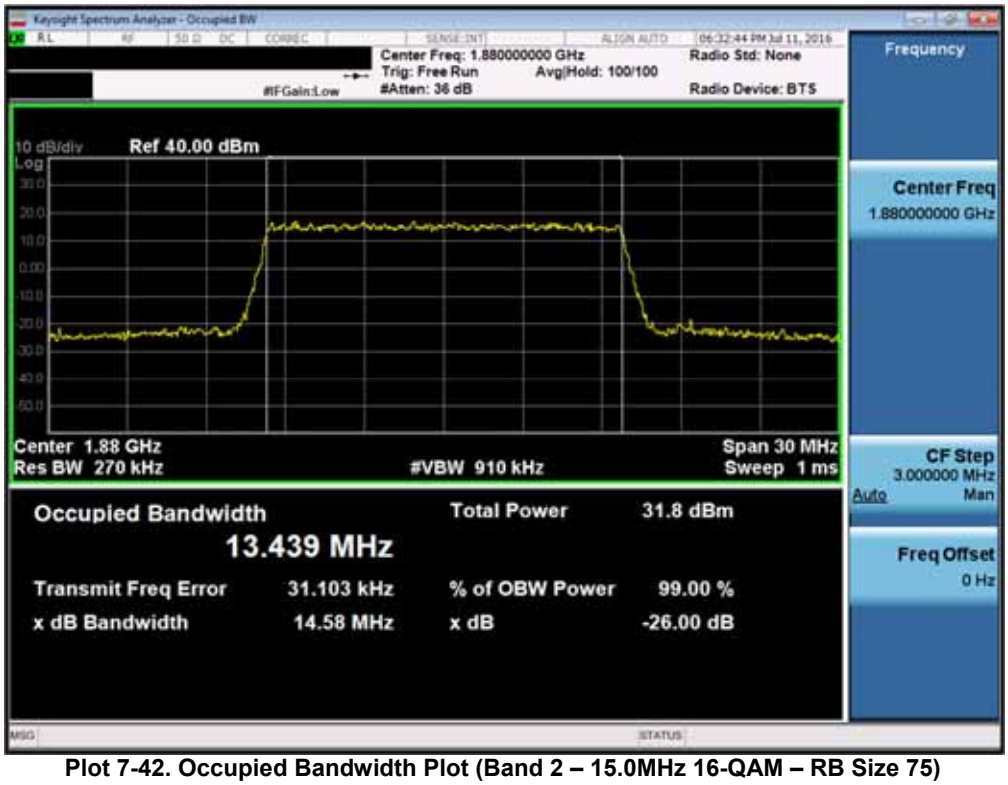


**Plot 7-42. Occupied Bandwidth Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)**

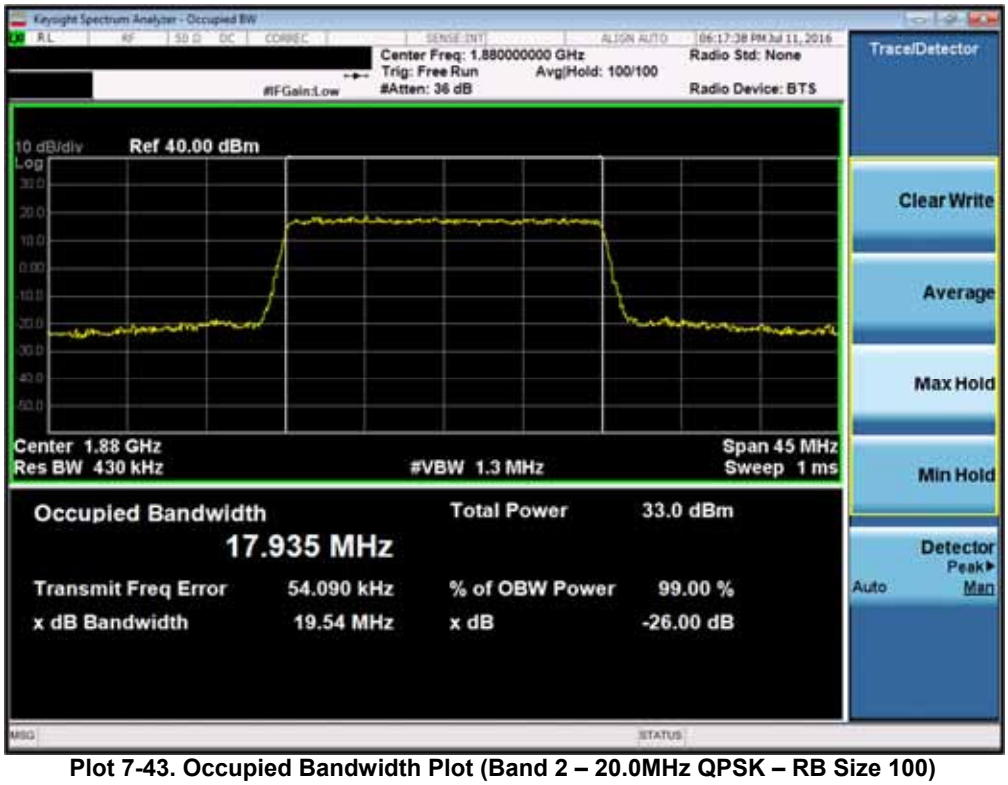


**Plot 7-43. Occupied Bandwidth Plot (Band 2 – 20.0MHz QPSK – RB Size 100)**

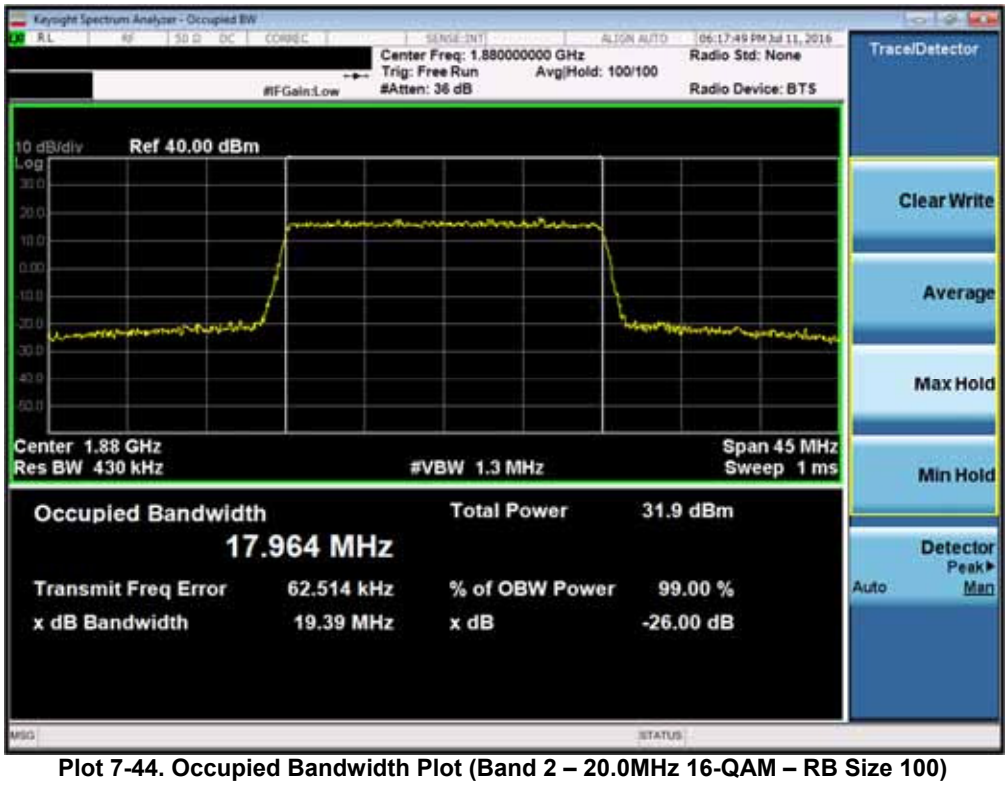


**Plot 7-44. Occupied Bandwidth Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)**

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

**§2.1051 §22.917(a) §24.238(a) §27.53(c.2) §27.53(g) §27.53(h) §27.53(m)**

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is 43 + $\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.***

### Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

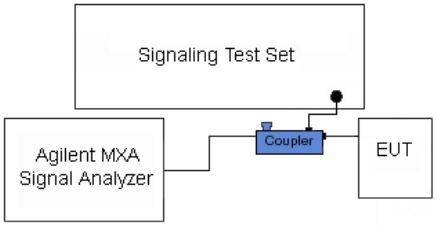


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

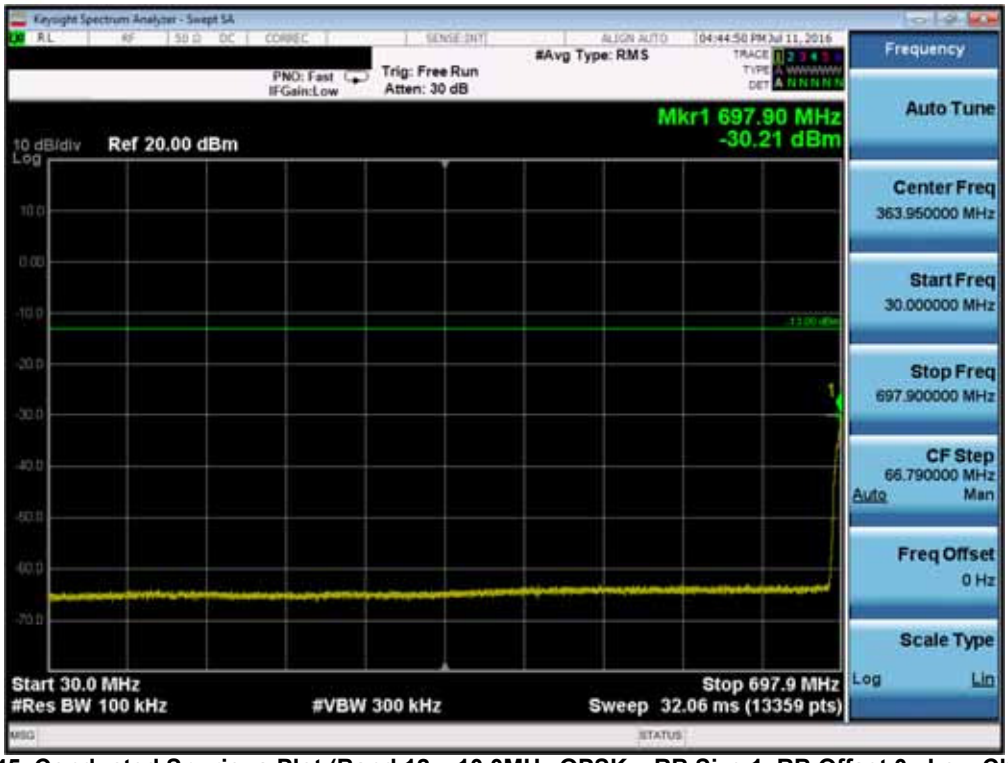


**Plot 7-45. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)**

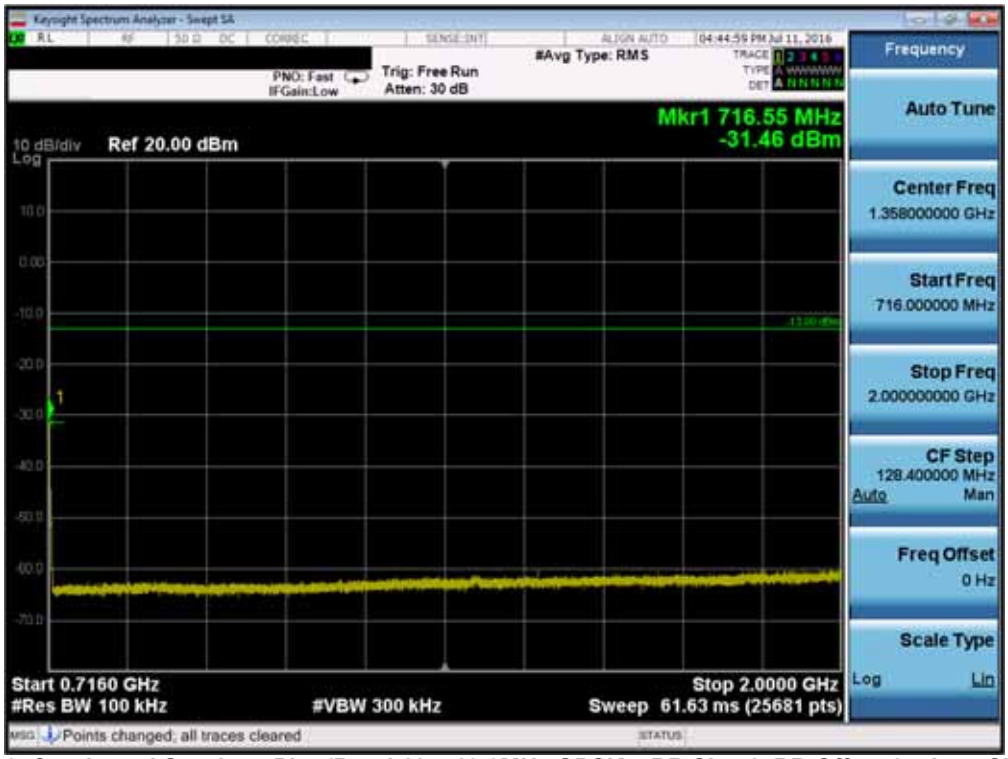


**Plot 7-46. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

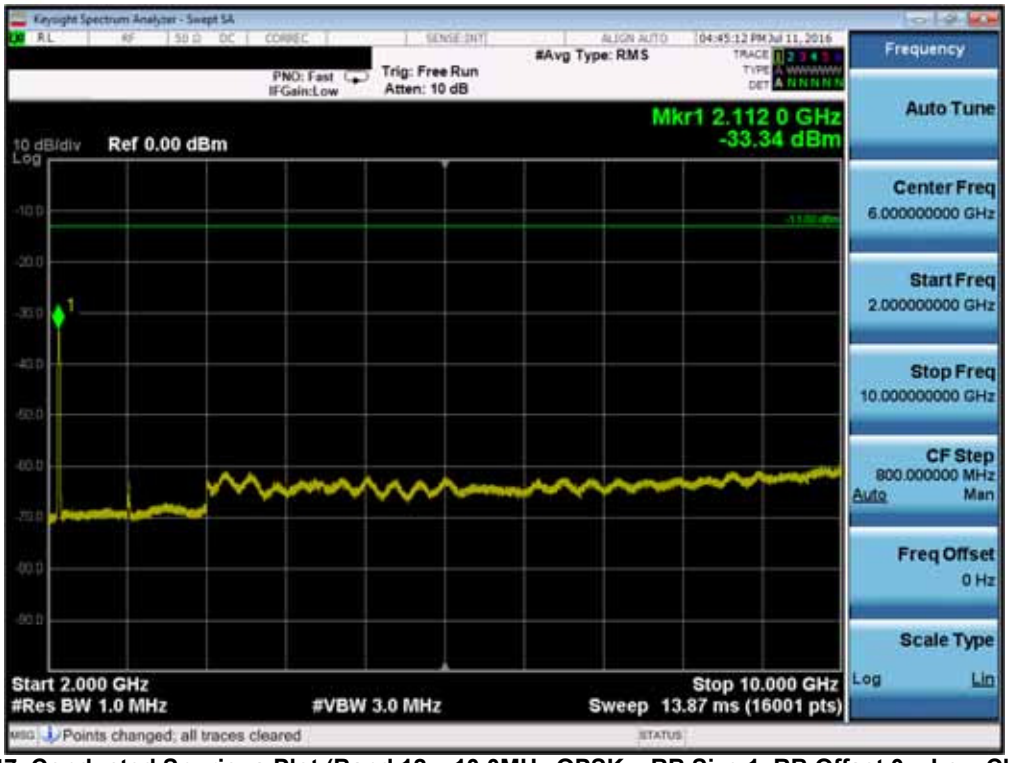


**Plot 7-47. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

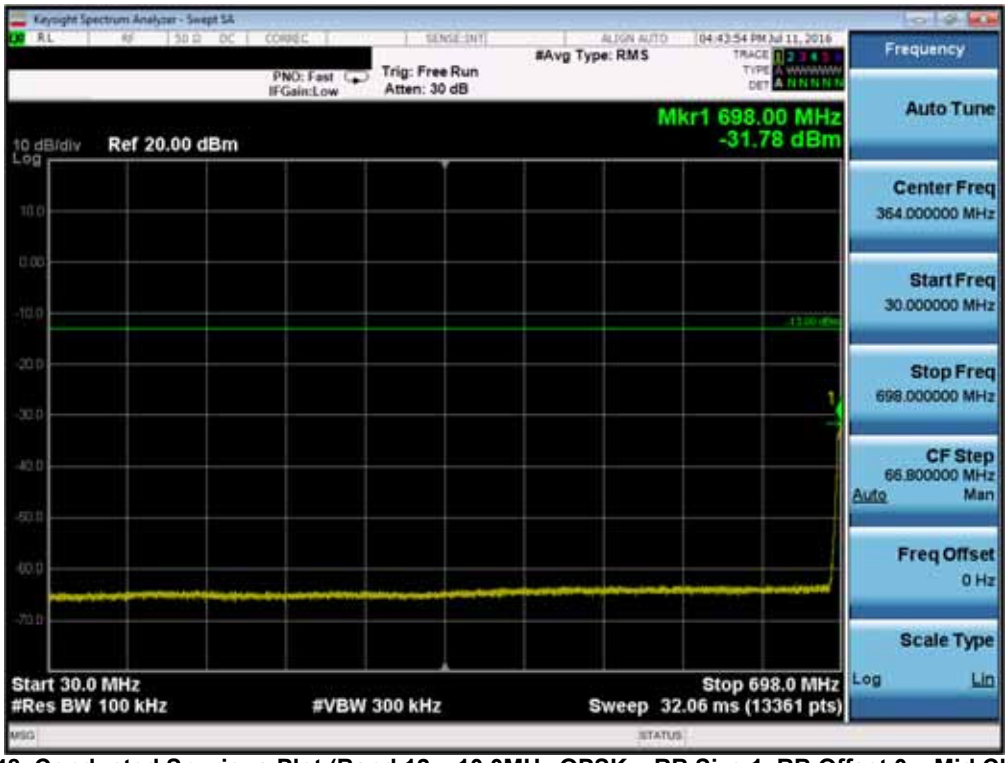


**Plot 7-48. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

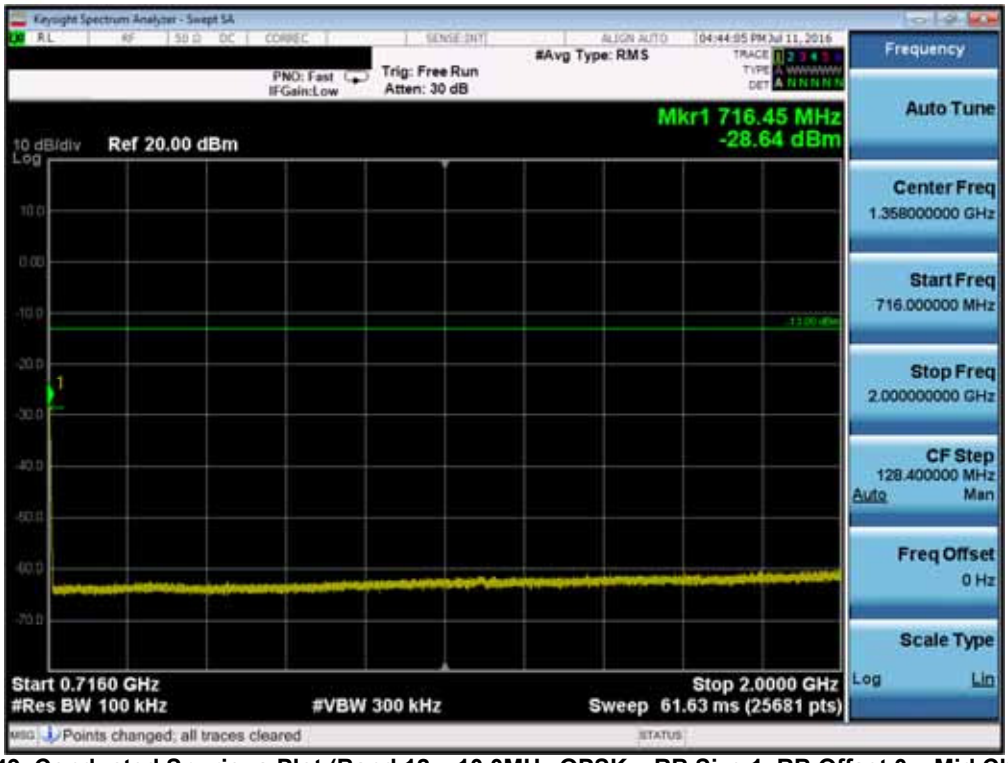


**Plot 7-49. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

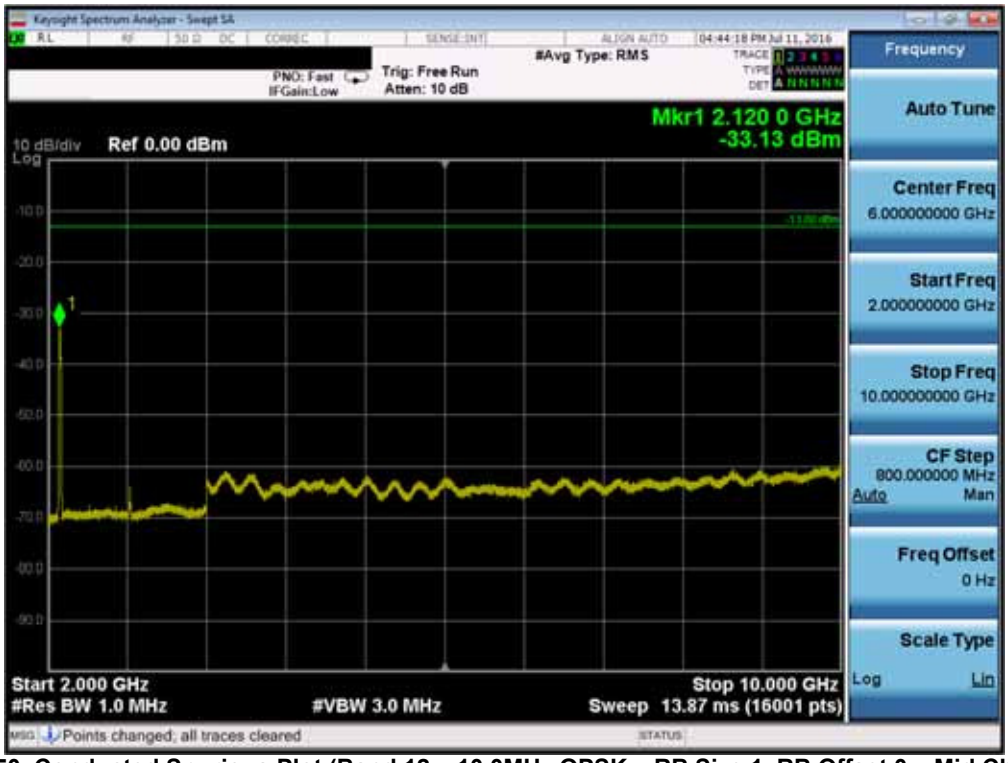


**Plot 7-50. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

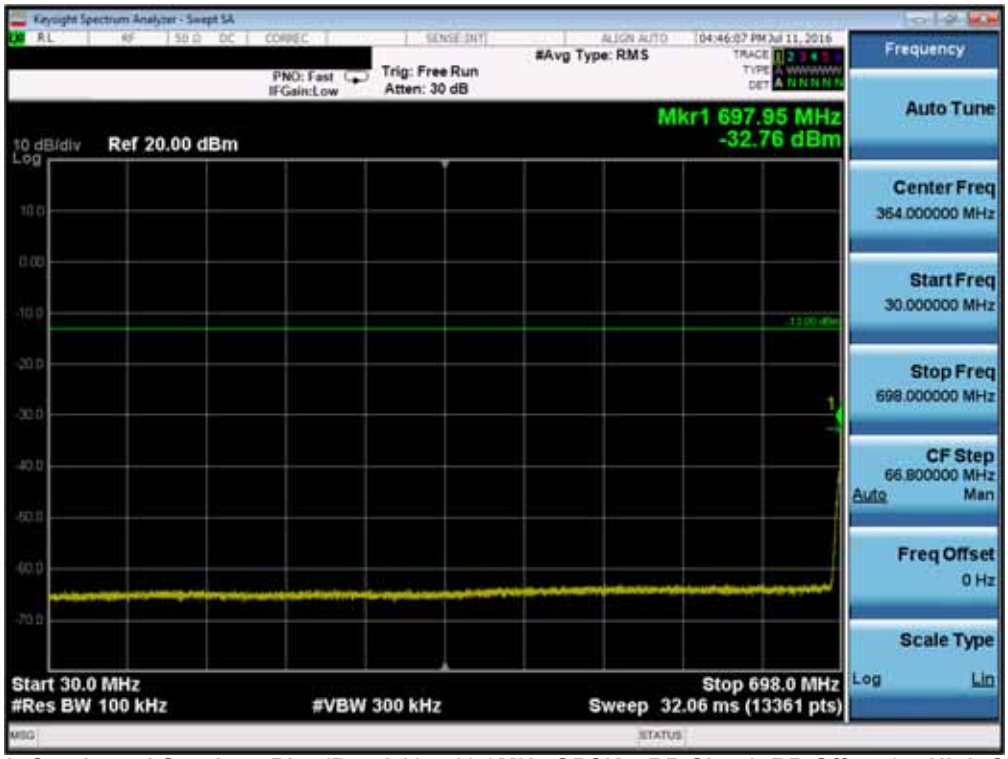


**Plot 7-51. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

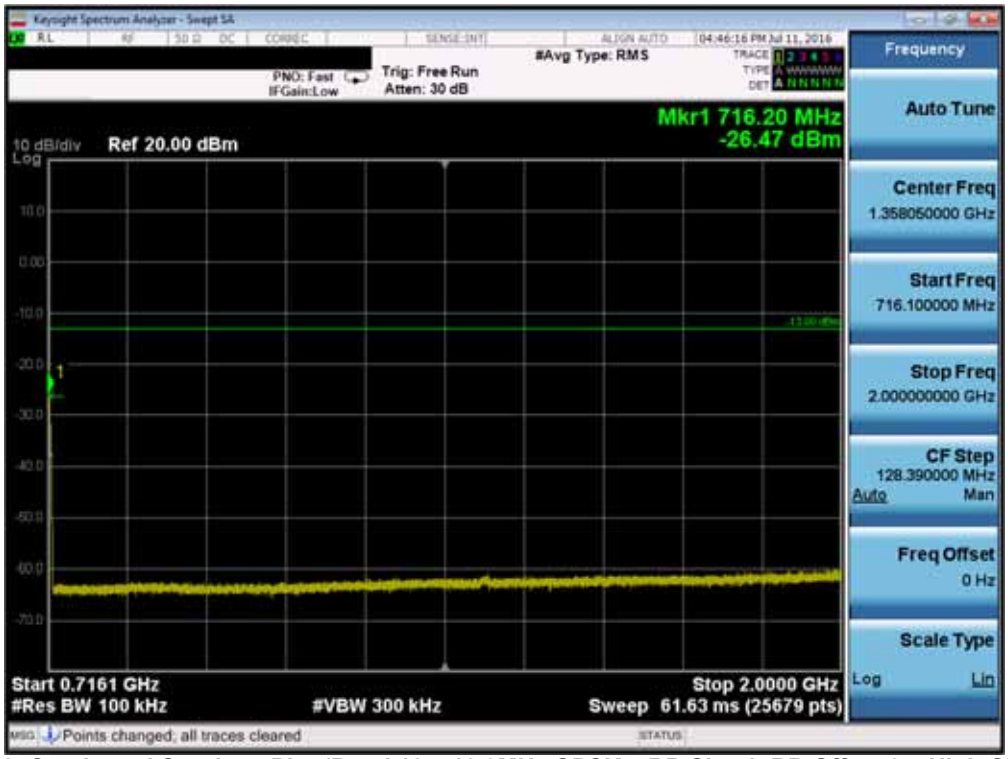


**Plot 7-52. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

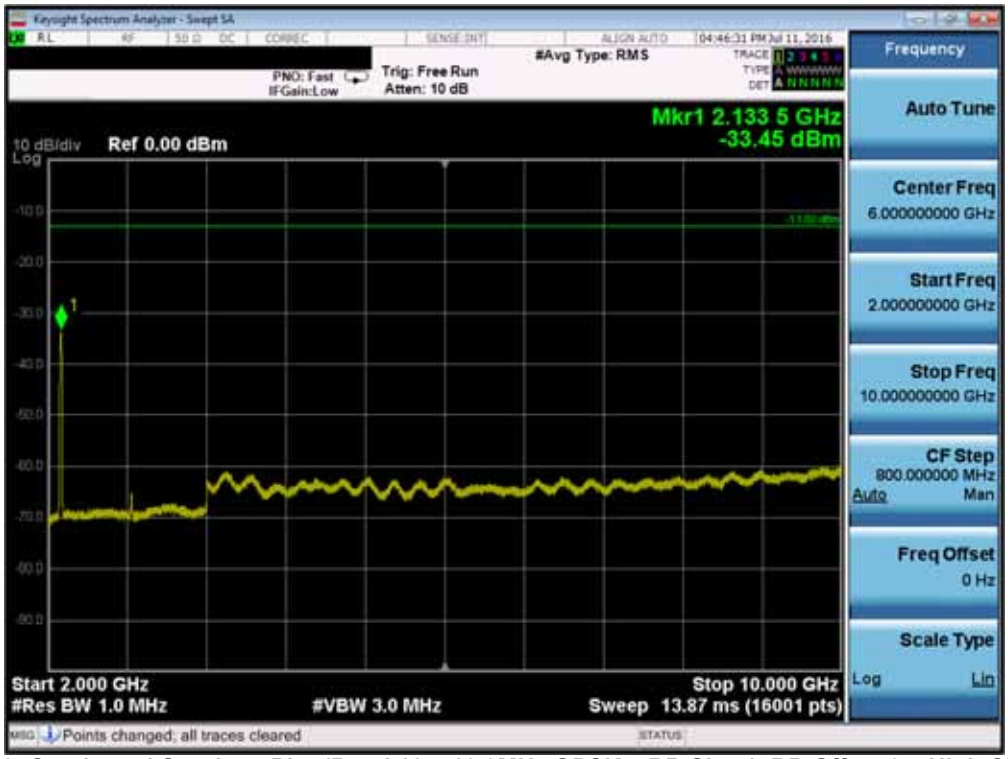


**Plot 7-53. Conducted Spurious Plot (Band 12 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

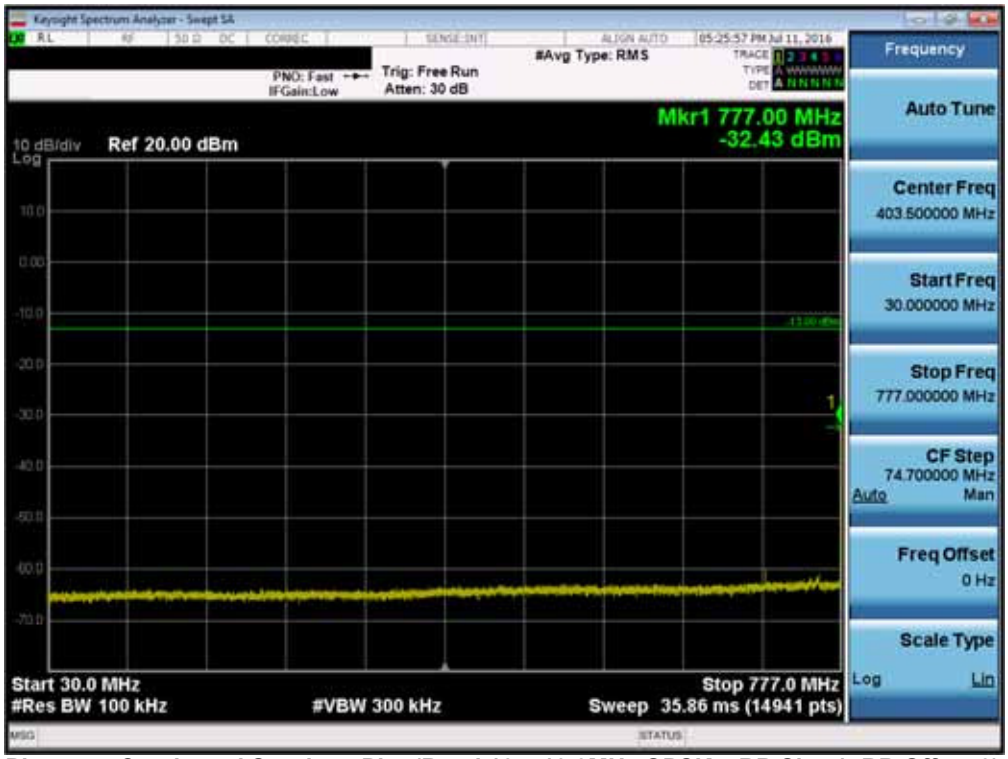


**Plot 7-54. Conducted Spurious Plot (Band 13 – 10.0MHz QPSK – RB Size 1, RB Offset 0)**

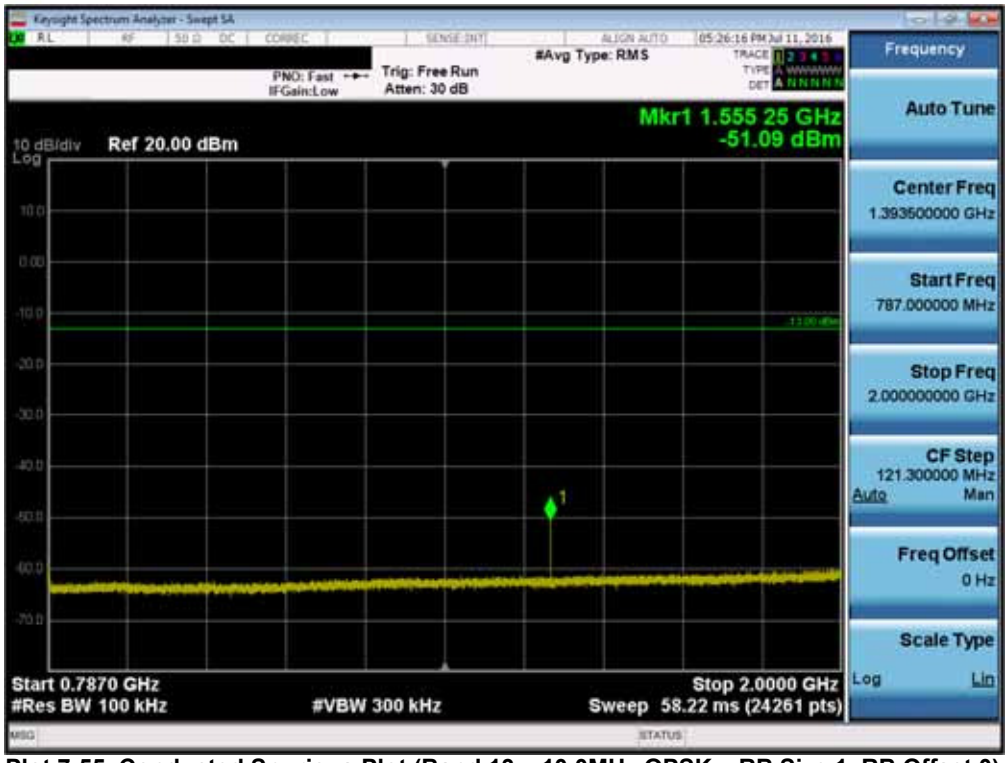


**Plot 7-55. Conducted Spurious Plot (Band 13 – 10.0MHz QPSK – RB Size 1, RB Offset 0)**

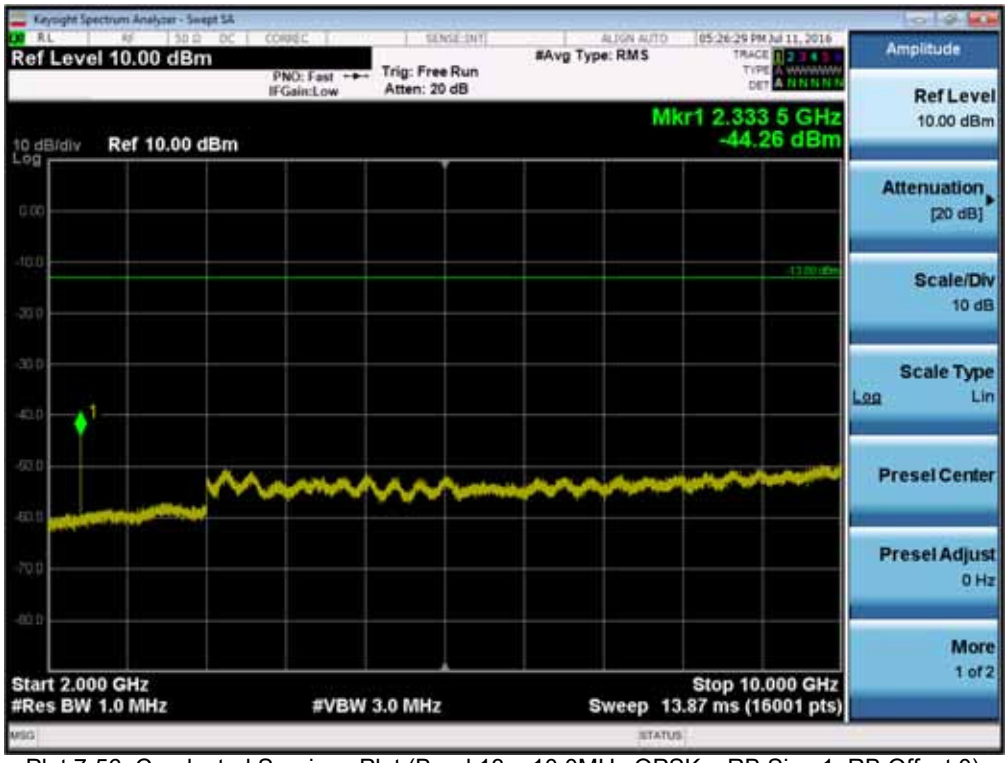


Plot 7-56. Conducted Spurious Plot (Band 13 – 10.0MHz QPSK – RB Size 1, RB Offset 0)

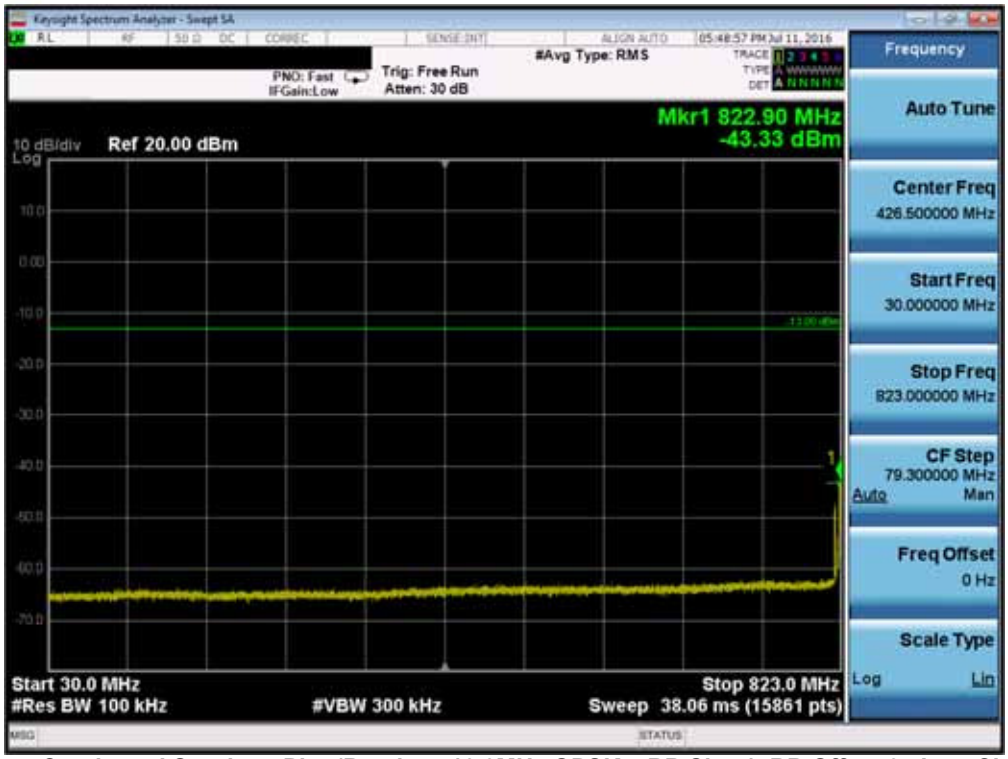


**Plot 7-57. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)**

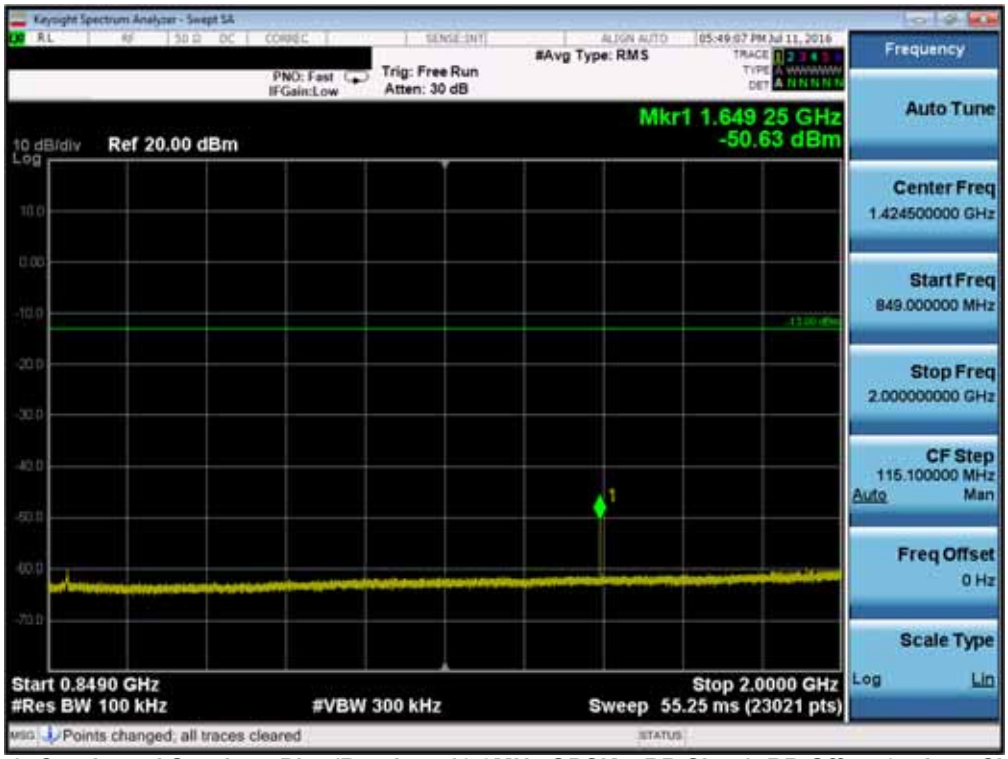


**Plot 7-58. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

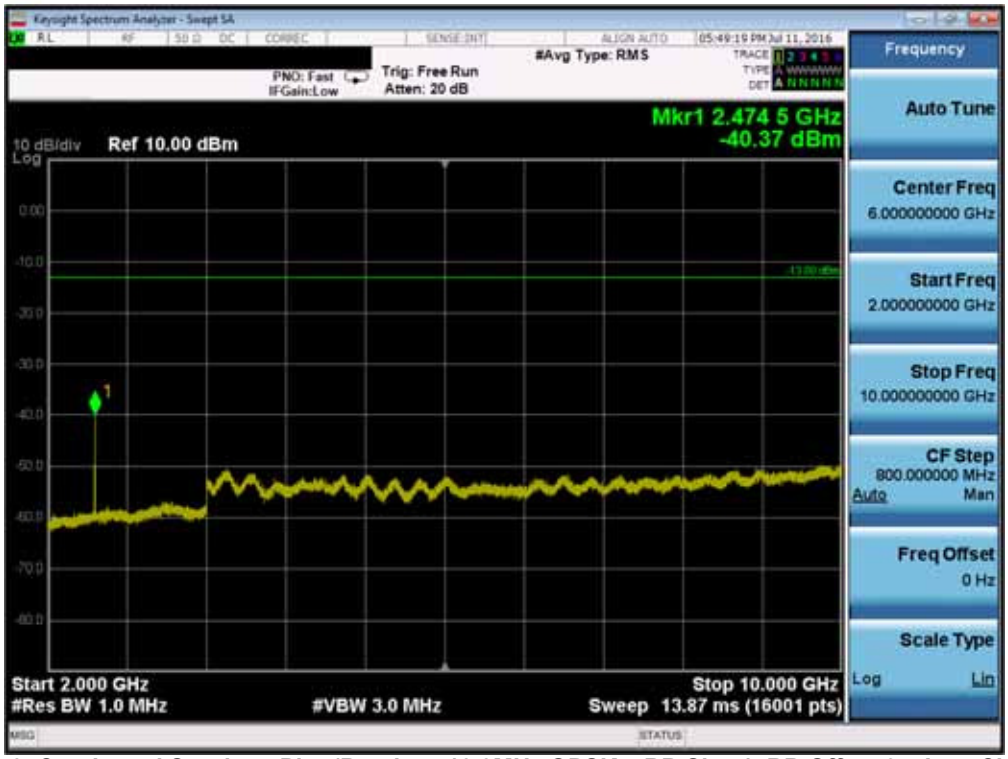


**Plot 7-59. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

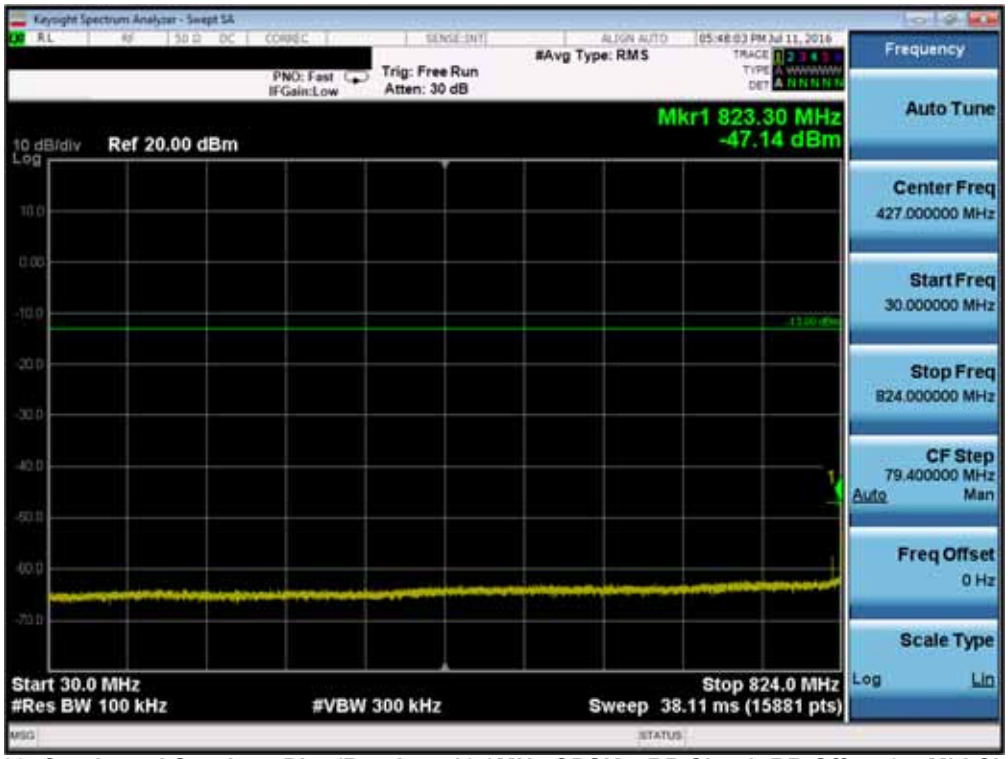


**Plot 7-60. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

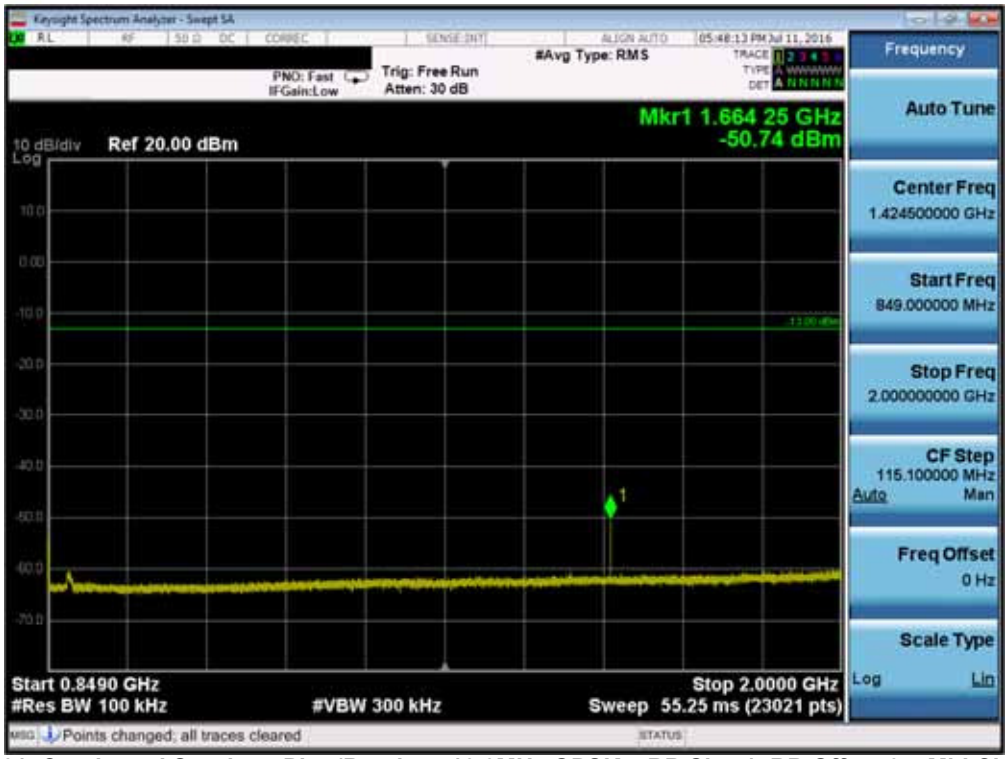


**Plot 7-61. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

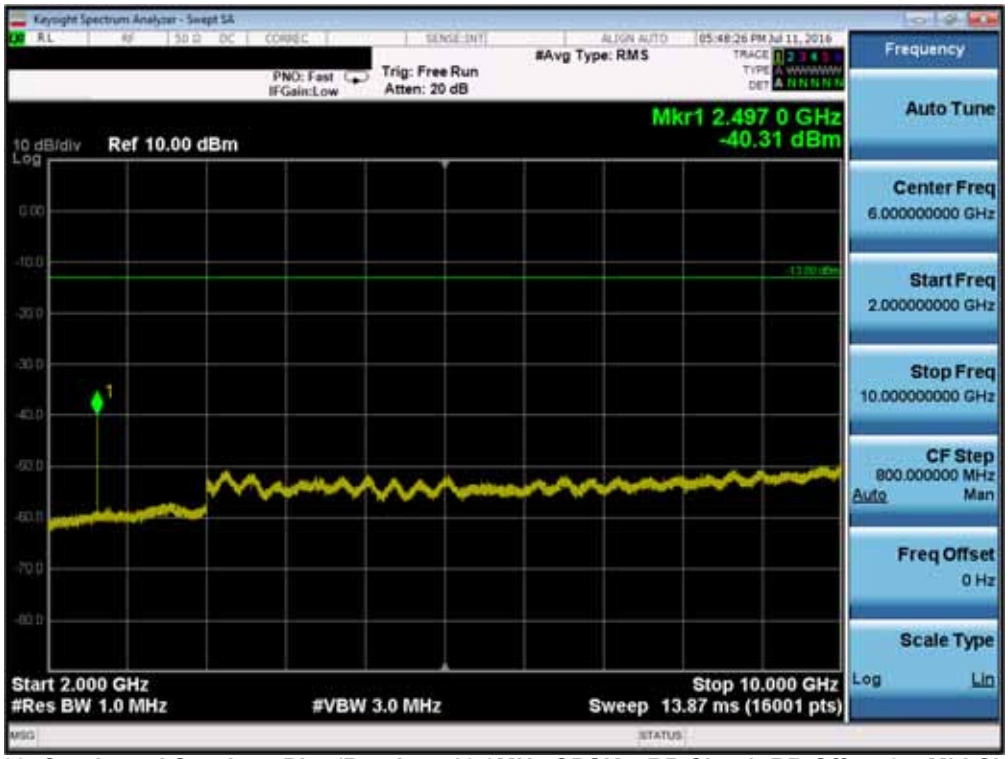


**Plot 7-62. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

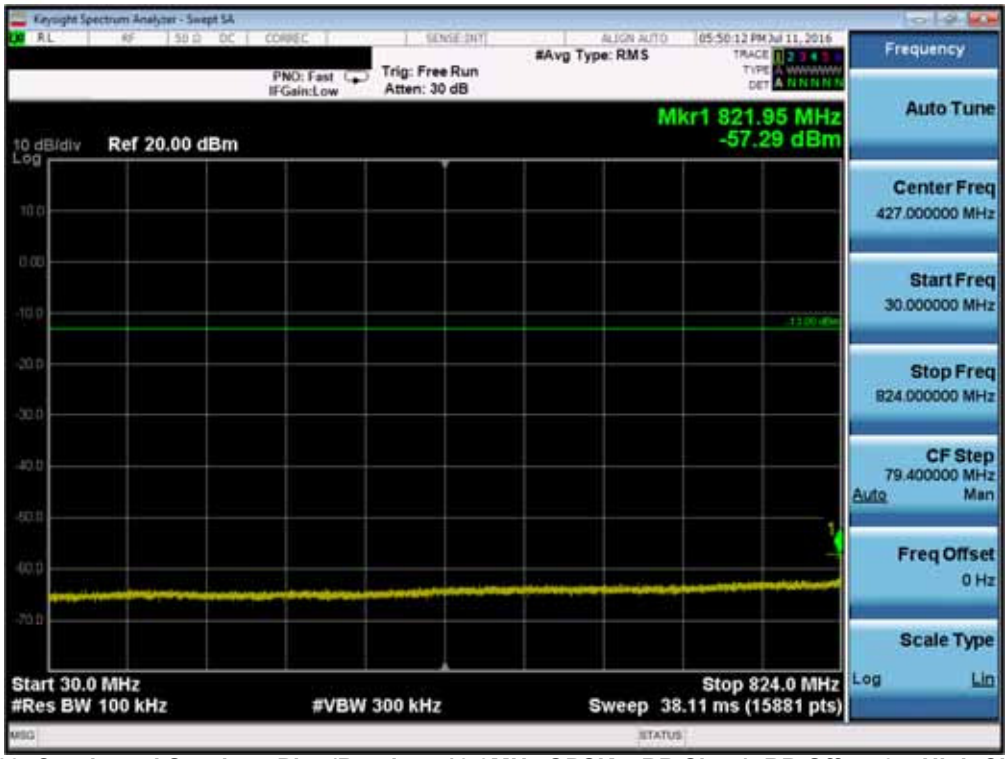


**Plot 7-63. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

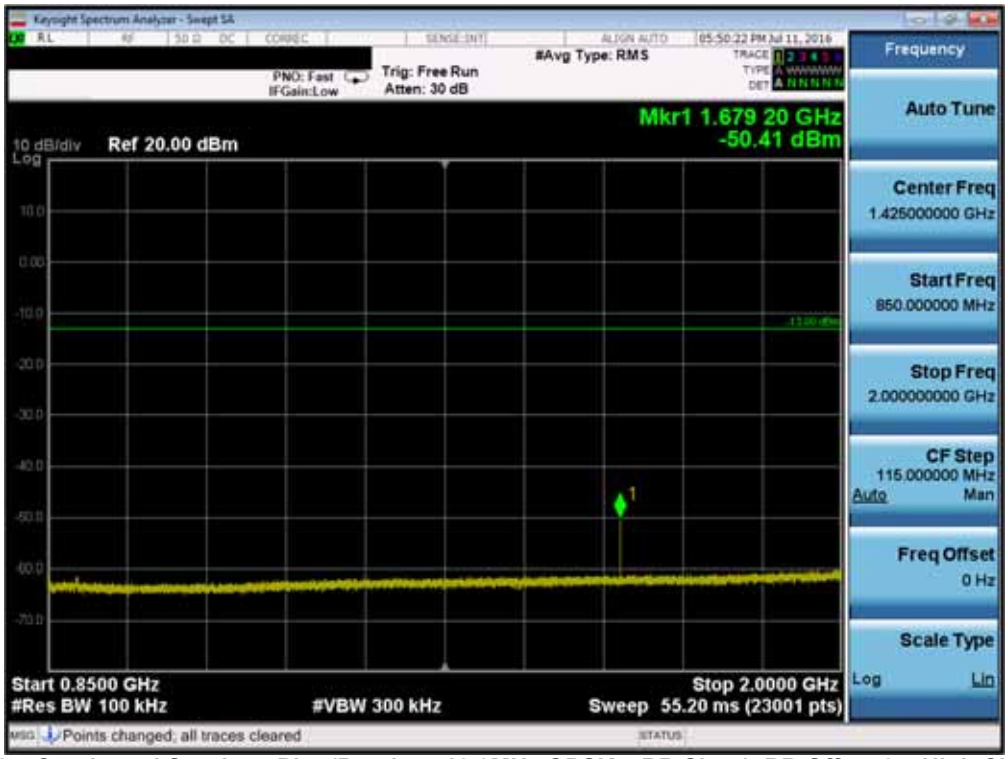


**Plot 7-64. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

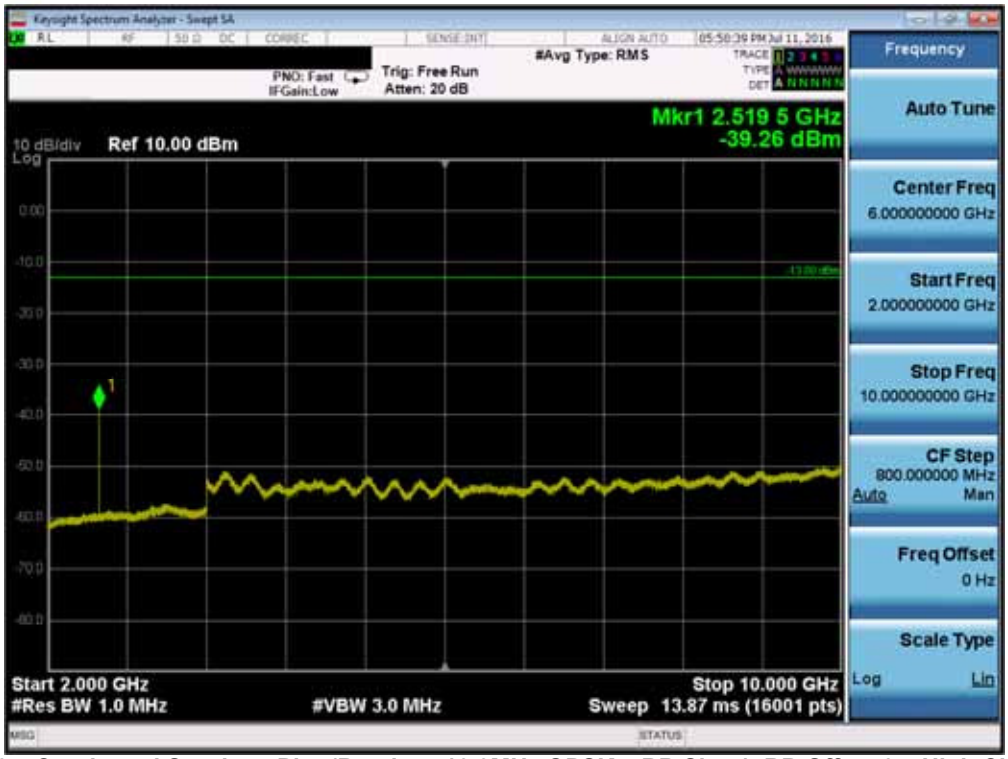


**Plot 7-65. Conducted Spurious Plot (Band 5 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**


**Plot 7-66. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)**

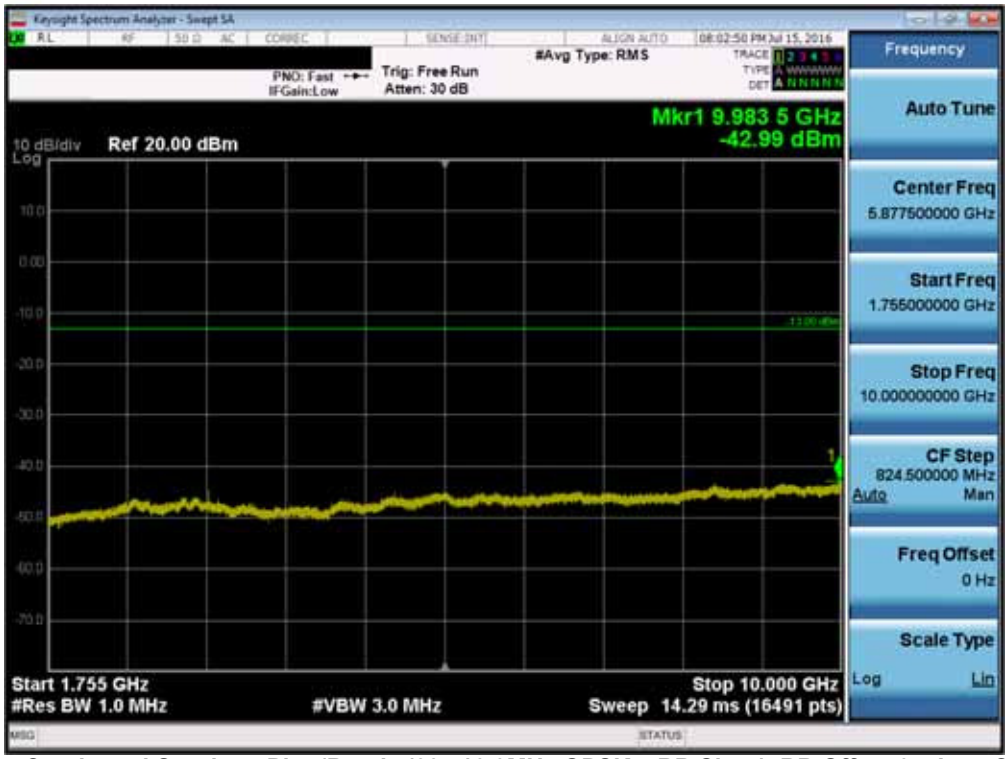


**Plot 7-67. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

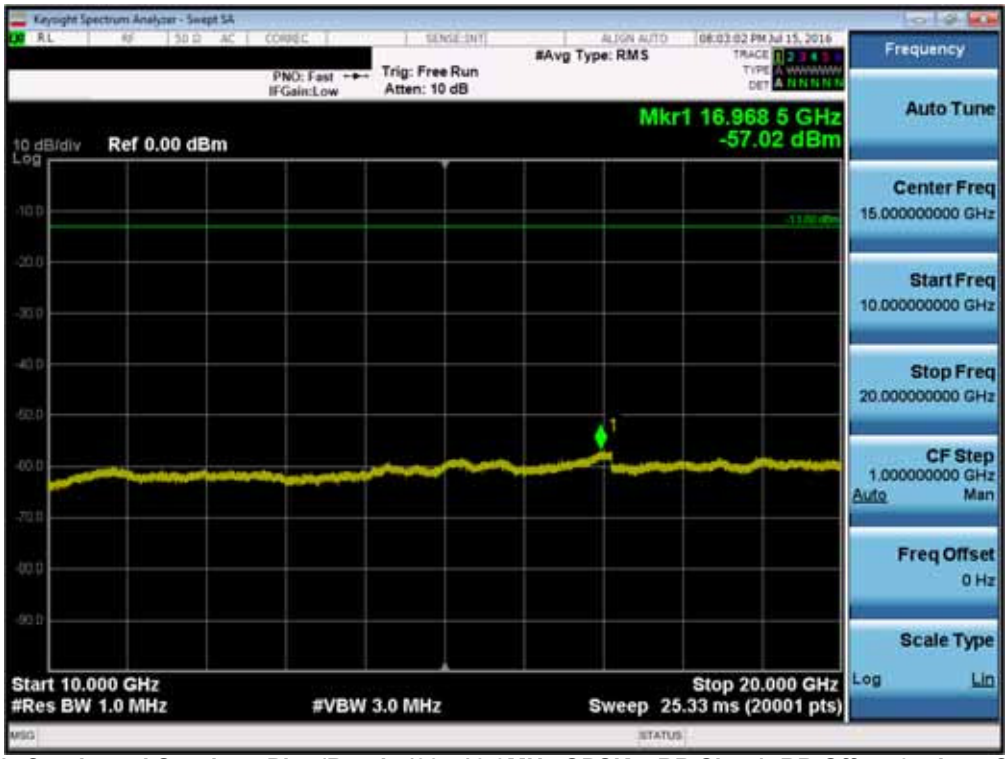


**Plot 7-68. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**


**Plot 7-69. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

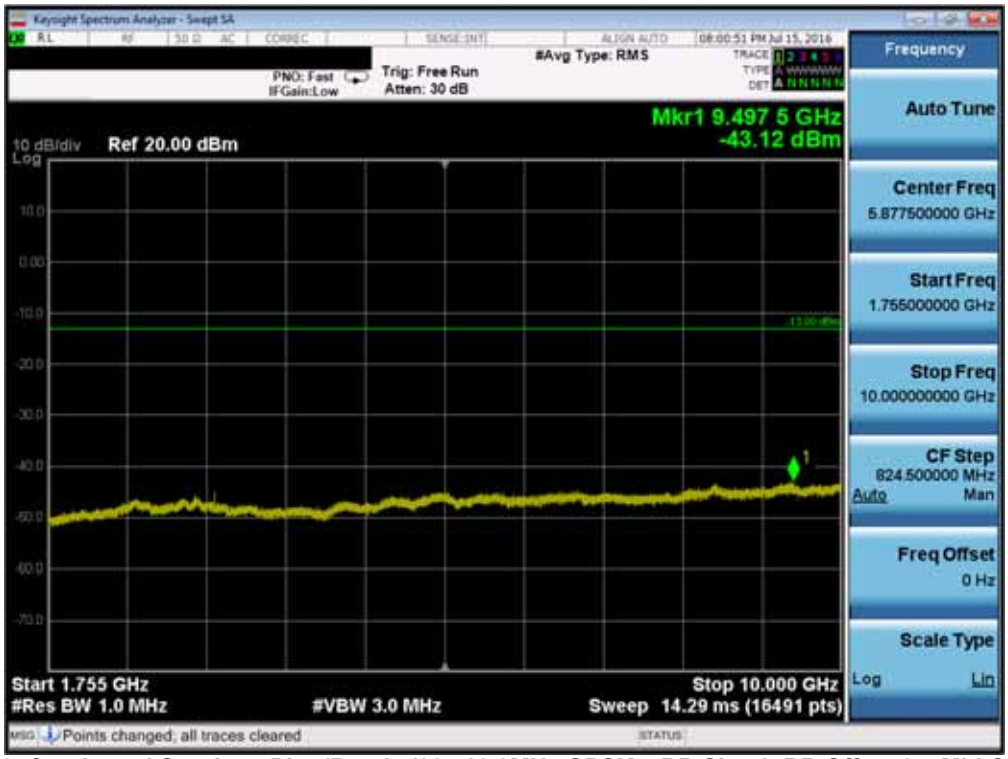


**Plot 7-70. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

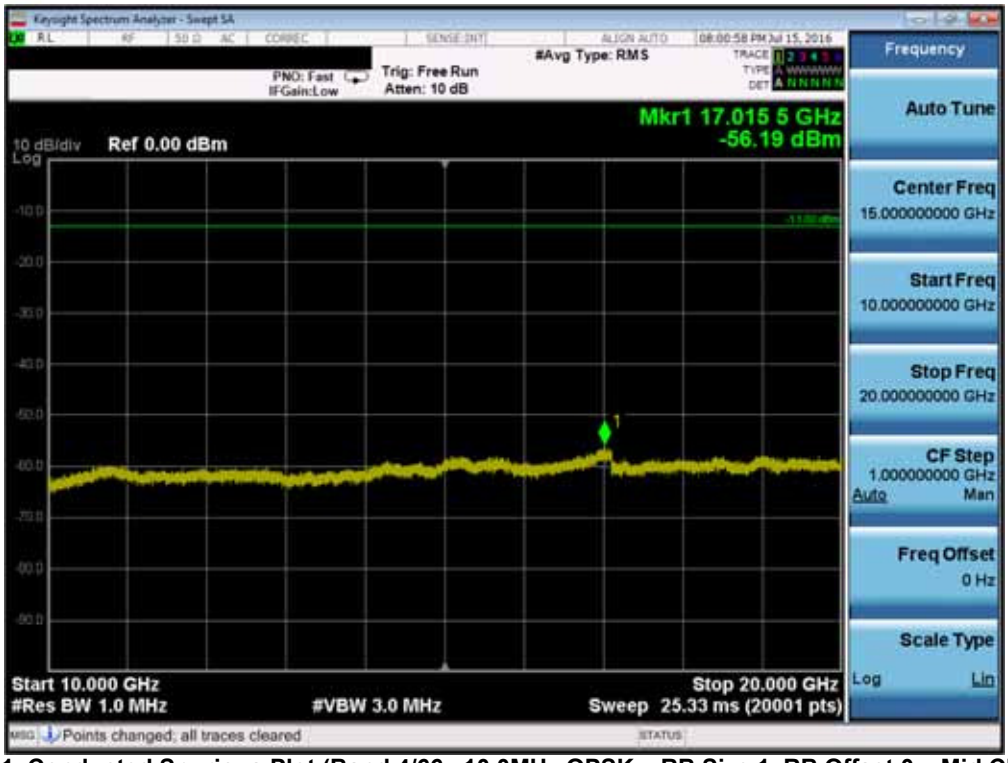


**Plot 7-71. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**


**Plot 7-72. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

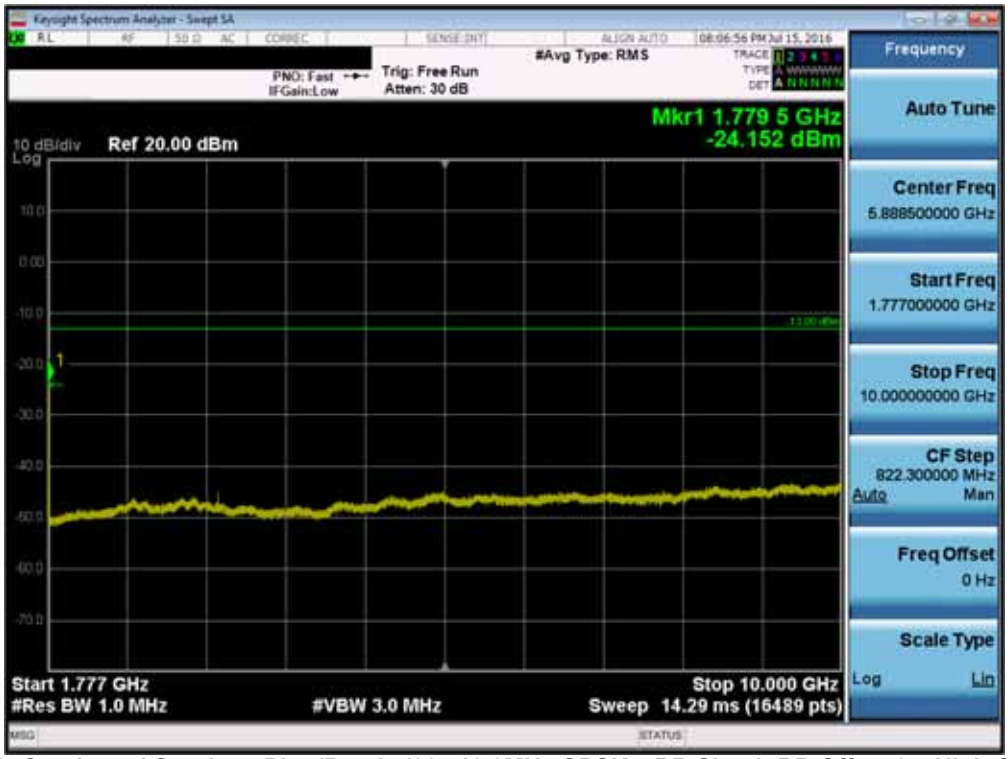


**Plot 7-73. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

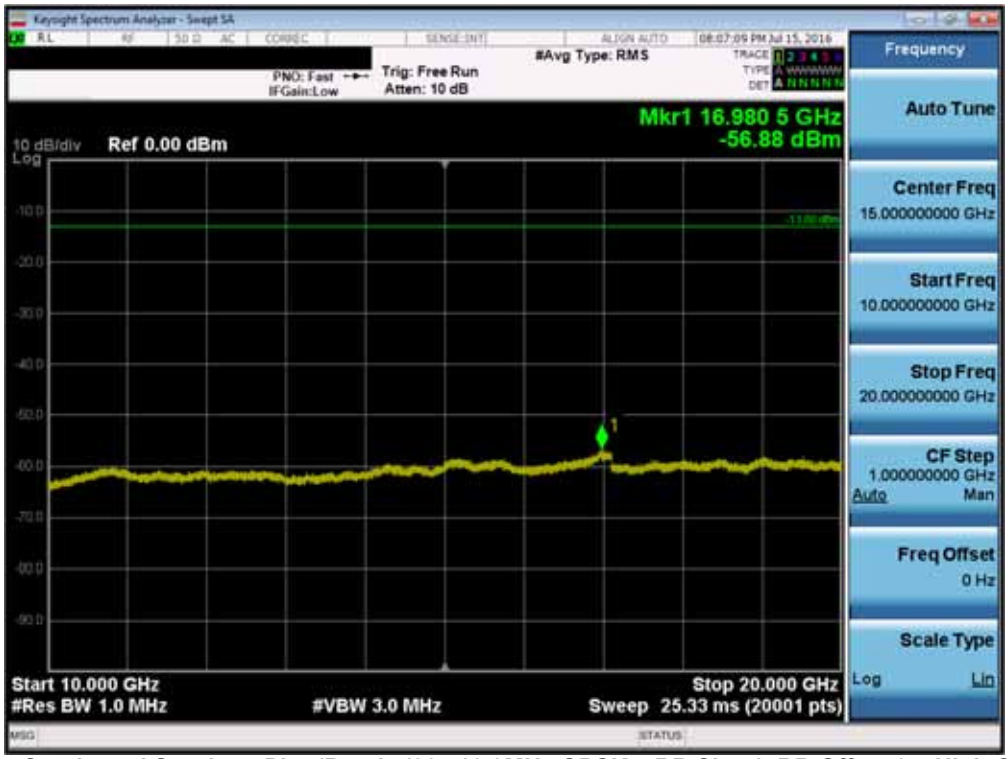


**Plot 7-74. Conducted Spurious Plot (Band 4/66– 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**


**Plot 7-75. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)**

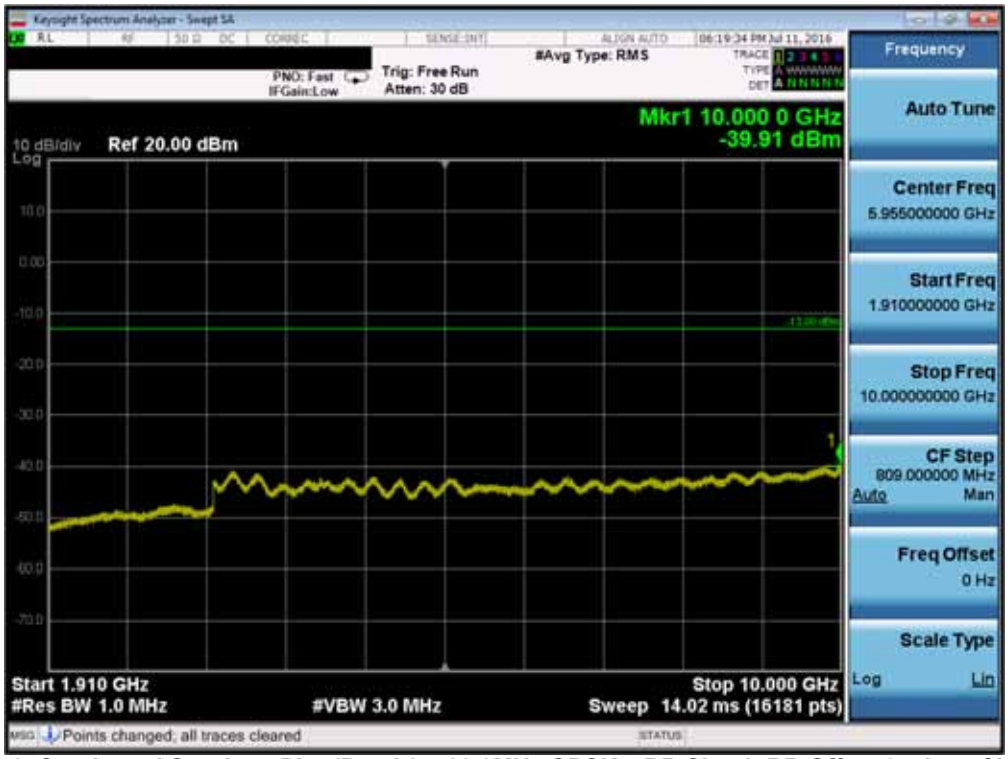


**Plot 7-76. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**

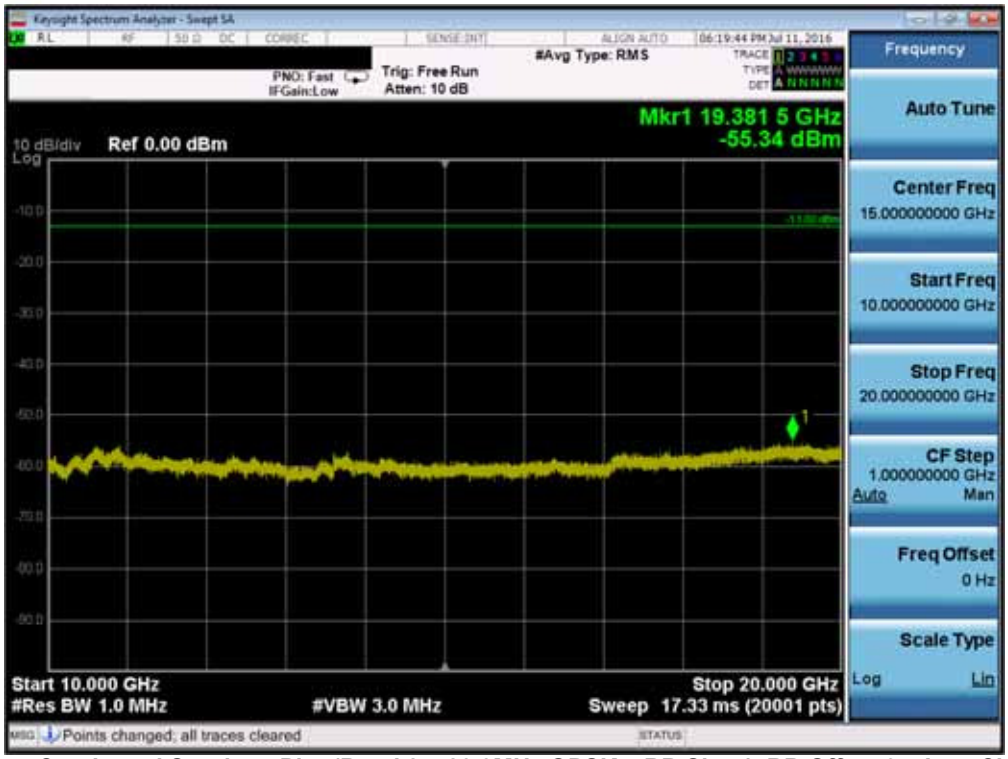


**Plot 7-77. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)**


**Plot 7-78. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

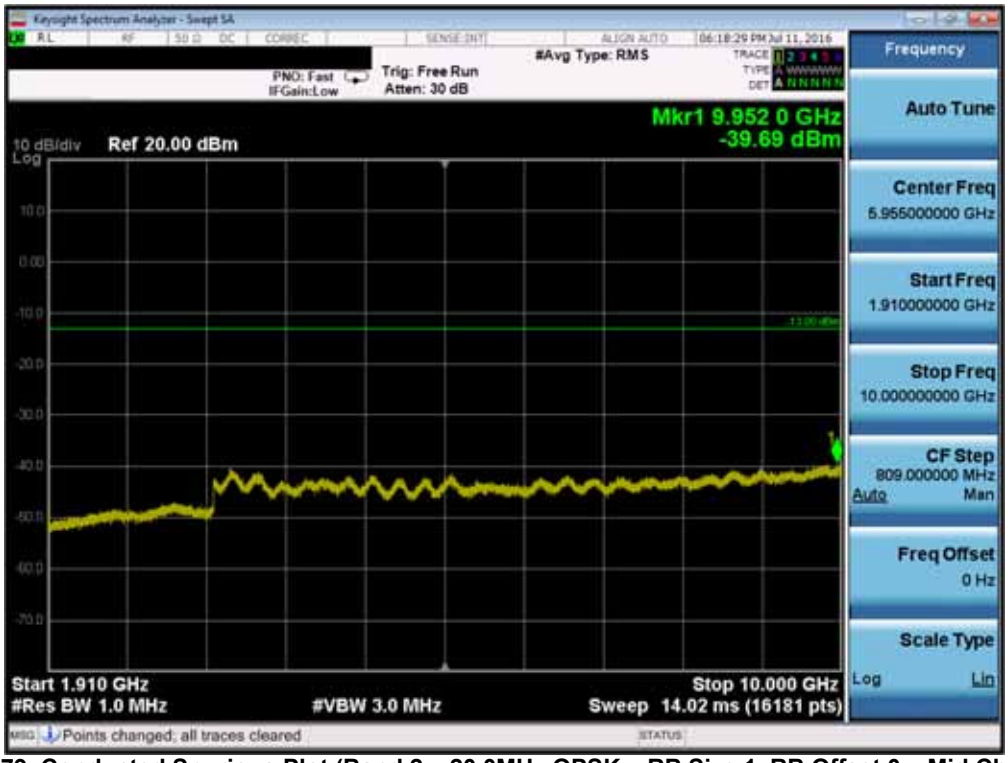


**Plot 7-79. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**

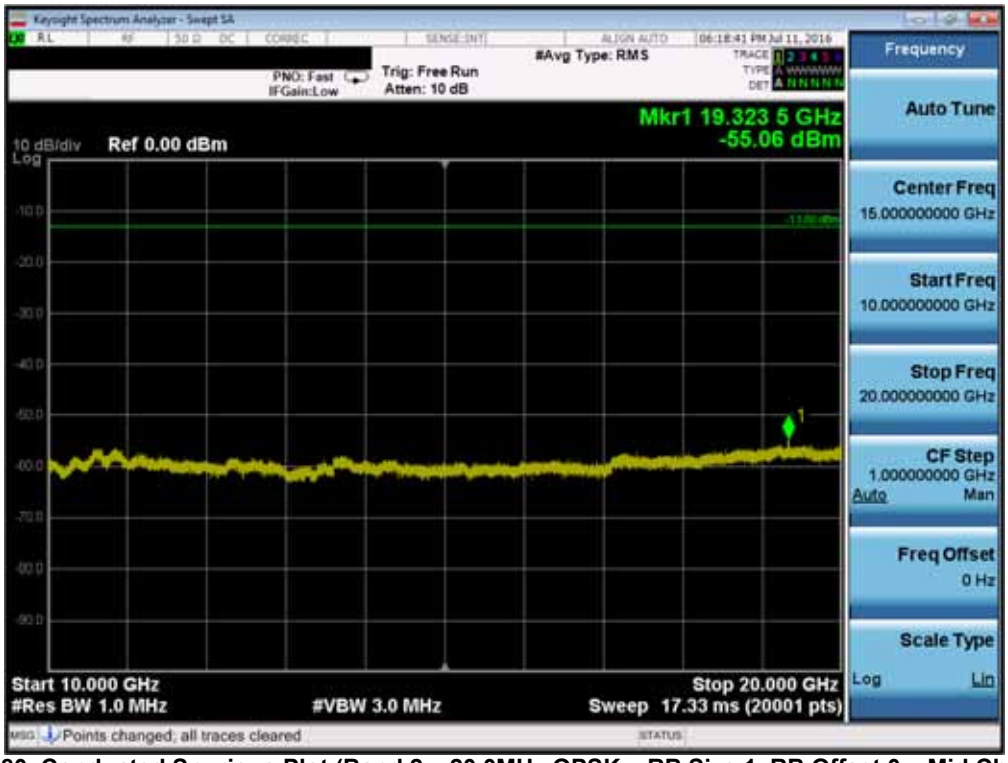


**Plot 7-80. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)**


**Plot 7-81. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

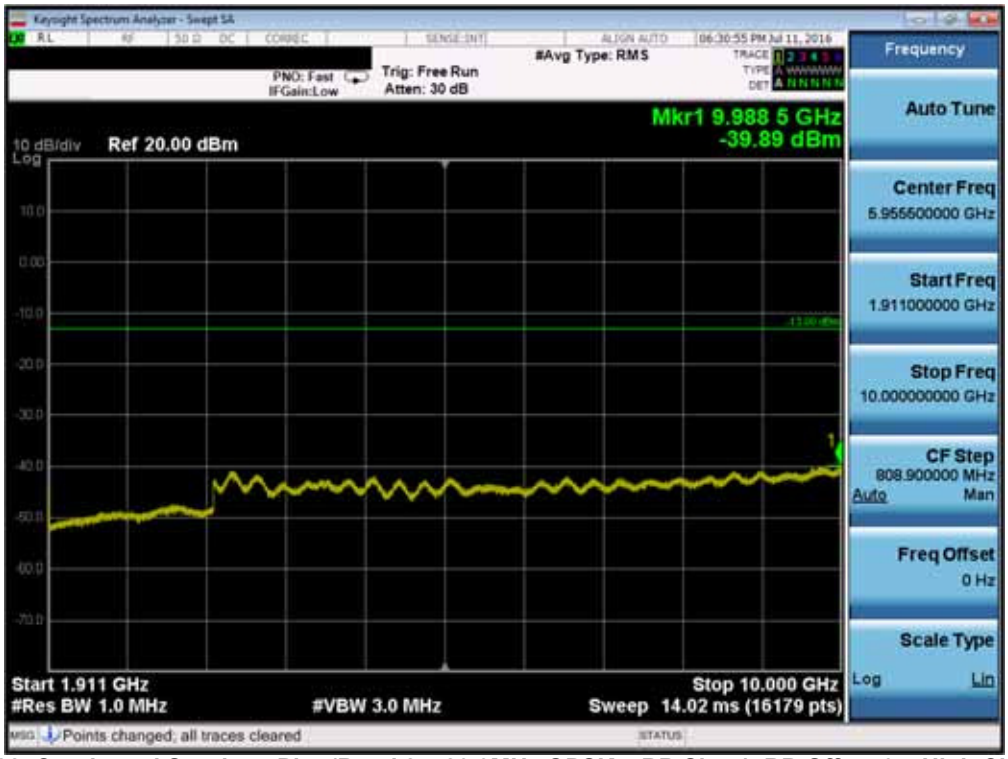


**Plot 7-82. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**

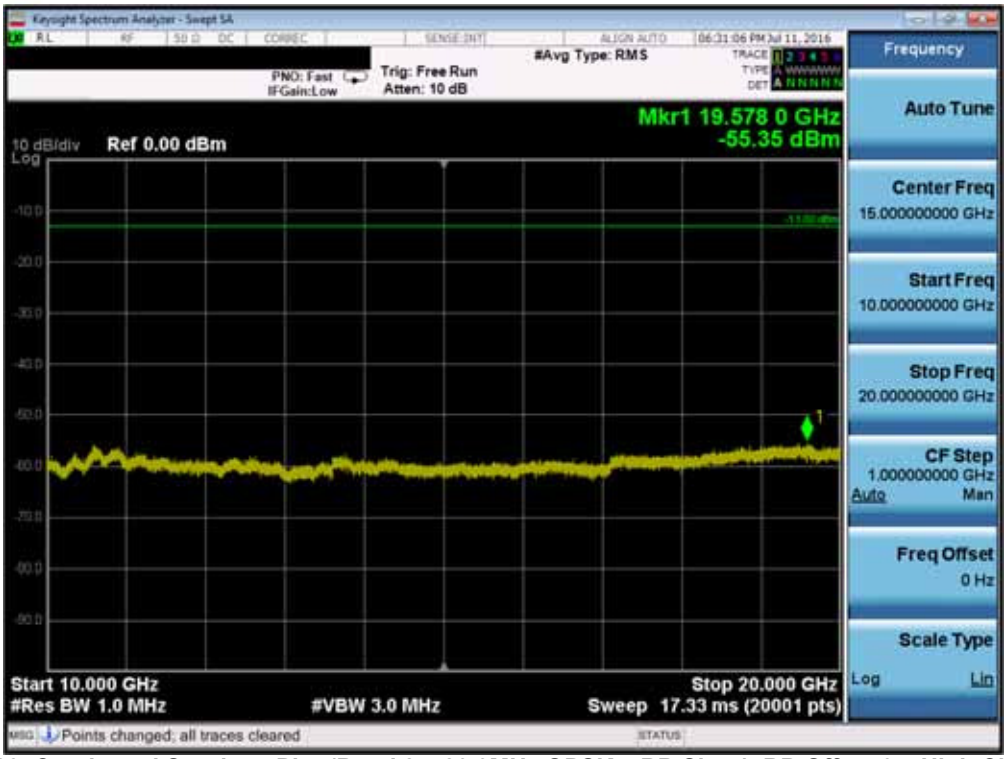


**Plot 7-83. Conducted Spurious Plot (Band 2 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)**