

## PART 24 MEASUREMENT REPORT

**Applicant Name:**  
LG Electronics USA, Inc.  
111 Sylvan Avenue, North Building  
Englewood Cliffs, NJ 07632  
United States


**Date of Testing:**  
11/24/2020 - 1/4/2021  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M2011240185-02.ZNF

<b>FCC ID:</b>	<b>ZNFK200AM</b>
<b>Applicant Name:</b>	<b>LG Electronics USA, Inc.</b>

**Application Type:** Certification  
**Model:** LM-K200AM  
**Additional Model(s):** LMK200AM, K200AM, LM-K200CMR, LMK200CMR, K200CMR  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 24  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President




<b>FCC ID:</b> ZNFK200AM		<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset		Page 1 of 88


## TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	PCS - Base Frequency Blocks .....	6
3.3	PCS - Mobile Frequency Blocks.....	6
3.4	Radiated Power and Radiated Spurious Emissions .....	7
4.0	MEASUREMENT UNCERTAINTY .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	SAMPLE CALCULATIONS .....	10
7.0	TEST RESULTS .....	12
7.1	Summary .....	12
7.2	Occupied Bandwidth .....	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	25
7.4	Band Edge Emissions at Antenna Terminal .....	41
7.5	Peak-Average Ratio .....	57
7.6	Radiated Power (ERP/EIRP).....	69
7.7	Radiated Spurious Emissions Measurements.....	72
7.8	Frequency Stability / Temperature Variation .....	81
8.0	CONCLUSION.....	88

FCC ID: ZNFK200AM		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 2 of 88	



## PART 24 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 2	20 MHz	QPSK	1860 - 1905	0.234	23.69	17M9G7D
		16QAM	1860 - 1905	0.182	22.60	17M9W7D
		64QAM	1860 - 1905	0.146	21.65	17M9W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.236	23.73	13M4G7D
		16QAM	1857.5 - 1907.5	0.177	22.48	13M5W7D
		64QAM	1857.5 - 1907.5	0.145	21.61	13M4W7D
	10 MHz	QPSK	1855 - 1910	0.241	23.82	9M01G7D
		16QAM	1855 - 1910	0.188	22.74	9M00W7D
		64QAM	1855 - 1910	0.135	21.32	9M00W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.248	23.94	4M52G7D
		16QAM	1852.5 - 1912.5	0.179	22.54	4M51W7D
		64QAM	1852.5 - 1912.5	0.150	21.77	4M51W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.235	23.71	2M70G7D
		16QAM	1851.5 - 1913.5	0.175	22.43	2M70W7D
		64QAM	1851.5 - 1913.5	0.144	21.58	2M70W7D
	1.4 MHz	QPSK	1850.7 - 1914.3	0.238	23.77	1M10G7D
		16QAM	1850.7 - 1914.3	0.176	22.46	1M10W7D
		64QAM	1850.7 - 1914.3	0.151	21.79	1M09W7D

Mode	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	1850.2 - 1909.8	0.785	28.95	241KGXW
EDGE	8-PSK	1850.2 - 1909.8	0.323	25.09	244KG7W
WCDMA	Spread Spectrum	1852.4 - 1907.6	0.223	23.49	4M15F9W

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 3 of 88

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFK200AM	 <b>PART 24 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 4 of 88

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFK200AM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

**Test Device Serial No.:** 11803, 11951

### 2.2 Device Capabilities

This device contains the following capabilities:

GSM/GPRS/EDGE, WCDMA/HSPA, Multi-band LTE, WLAN, BT (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFK200AM	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset		Page 5 of 88


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure


The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 PCS - Base Frequency Blocks

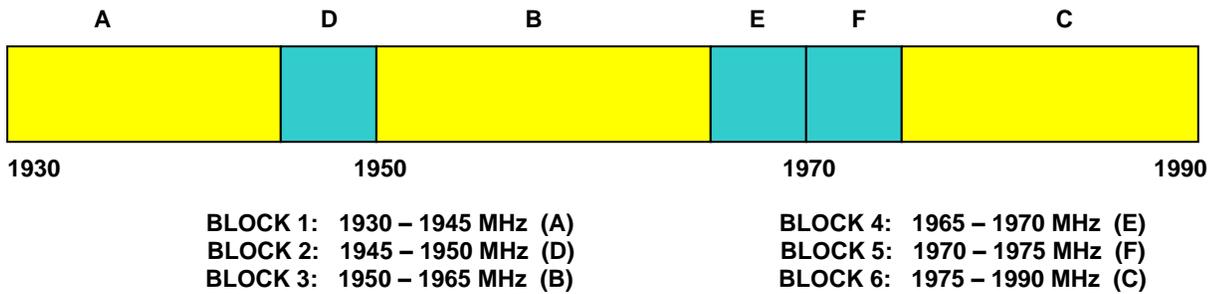

### 3.3 PCS - Mobile Frequency Blocks

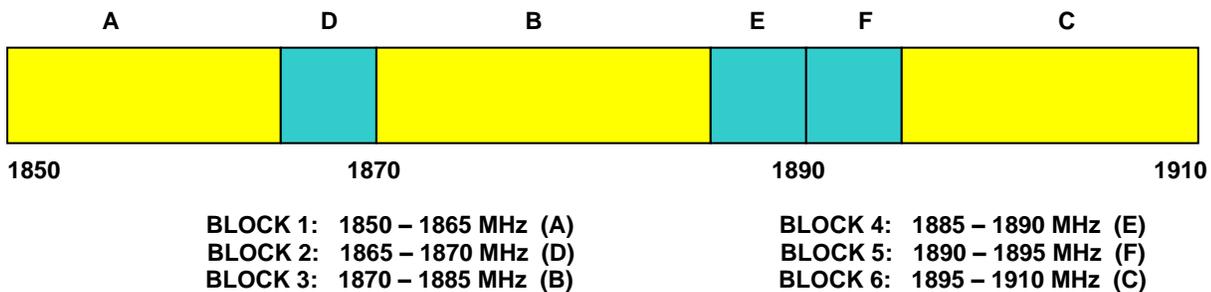

FCC ID: ZNFK200AM	 Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 6 of 88	

### 3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 7 of 88

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 8 of 88

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
-	LTx4	Licensed Transmitter Cable Set	7/9/2020	Annual	7/9/2021	LTx4
Agilent	N9020A	MXA Signal Analyzer	8/4/2020	Annual	8/4/2021	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/17/2020	Annual	7/17/2021	MY52350166
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-4GHS	USB Power Sensor	6/18/2020	Annual	6/18/2021	12001070013
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 9 of 88	

## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

#### **Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### QAM Modulation

#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 10 of 88

## Spurious Radiated Emission

### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFK200AM	 <b>PART 24 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 11 of 88

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFK200AM  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-133(6.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-133(4.1)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	RSS-133(6.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
<b>RADIATED</b>	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 12 of 88	

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

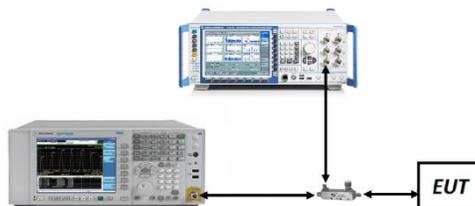


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 13 of 88

## LTE Band 2

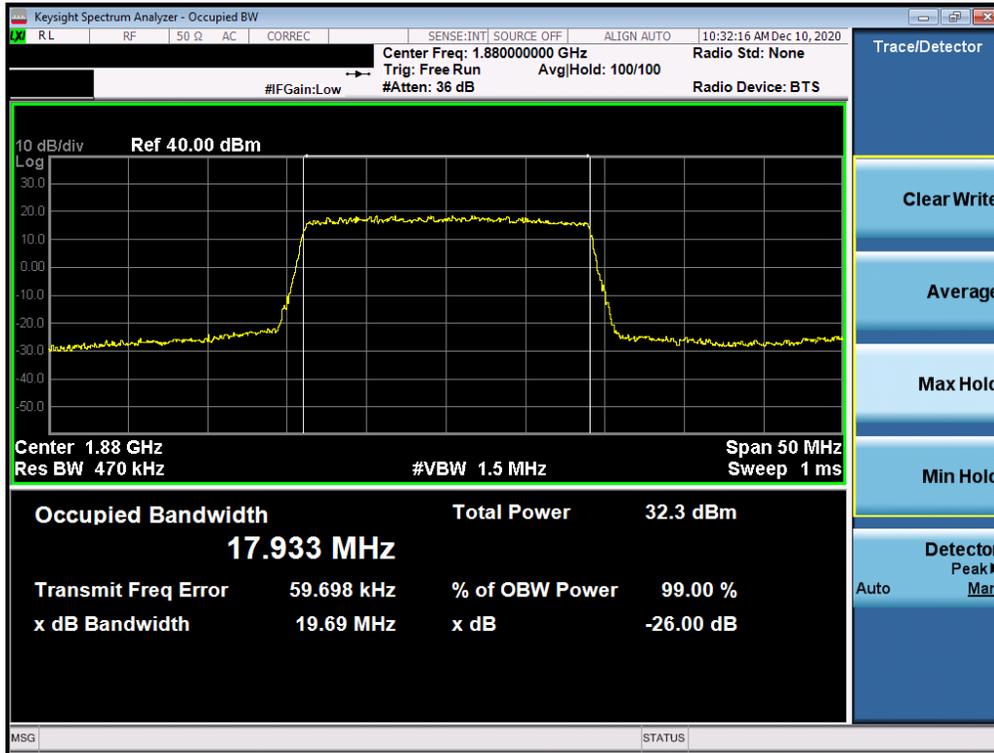


Plot 7-1. Occupied Bandwidth Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

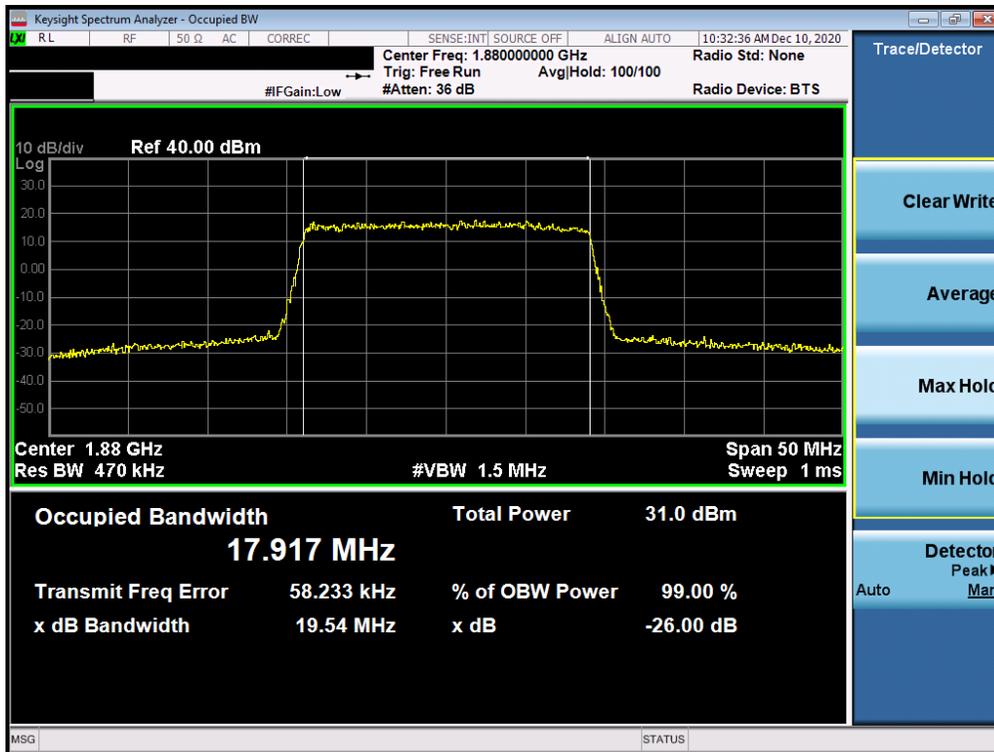


Plot 7-2. Occupied Bandwidth Plot (LTE Band 2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 14 of 88

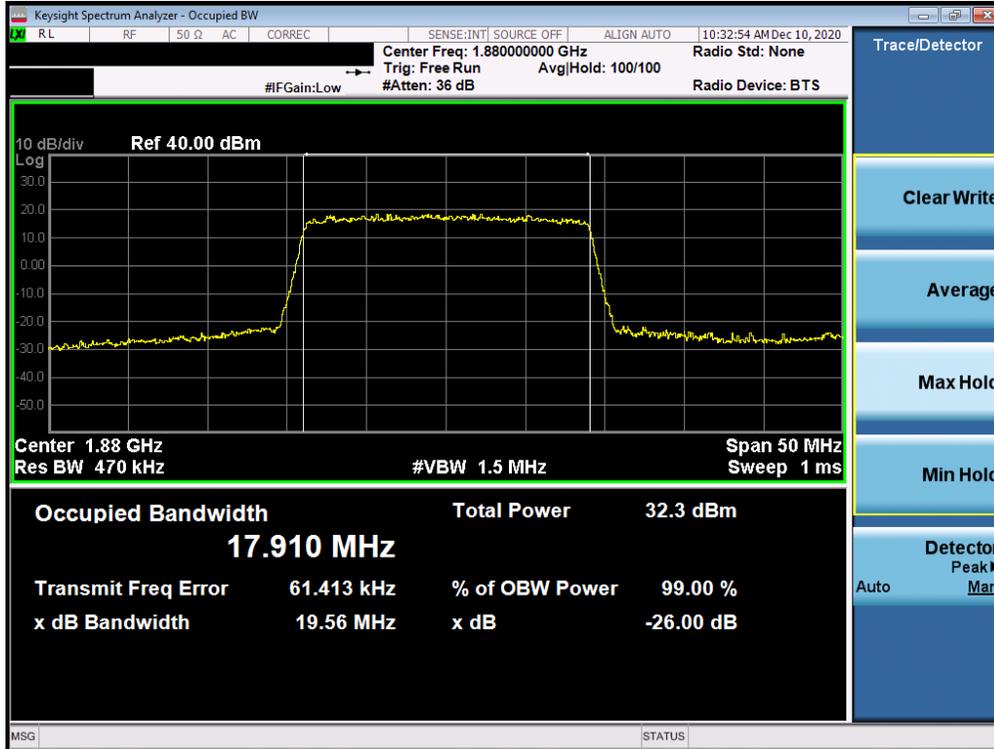


Plot 7-3. Occupied Bandwidth Plot (LTE Band 2 - 20MHz 64-QAM - Full RB Configuration)

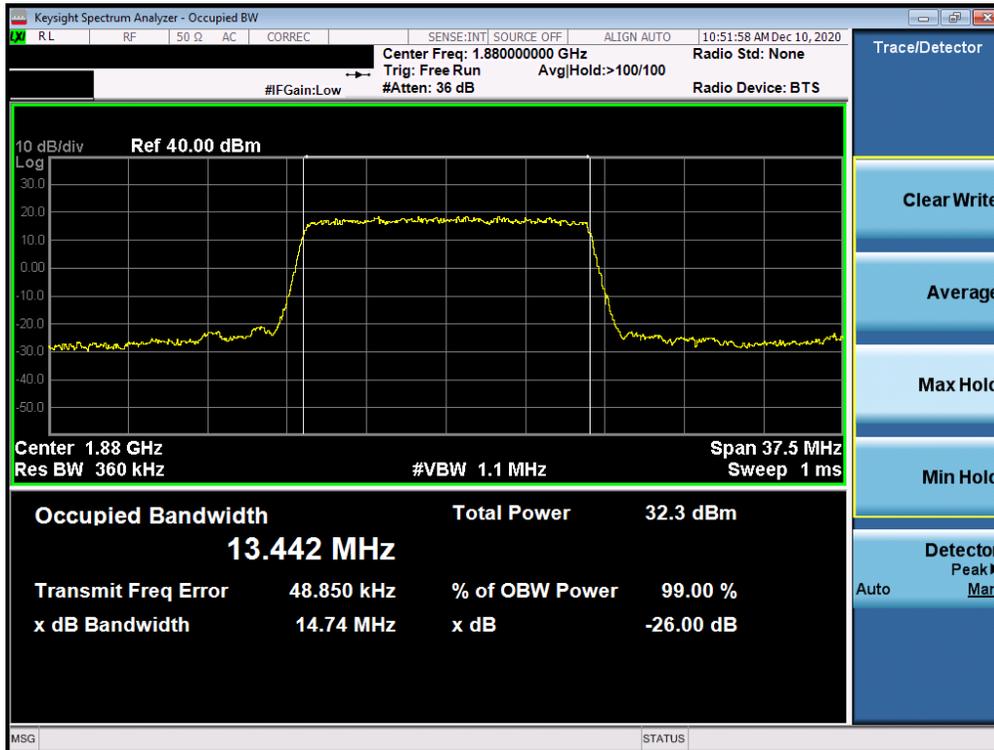


Plot 7-4. Occupied Bandwidth Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 15 of 88

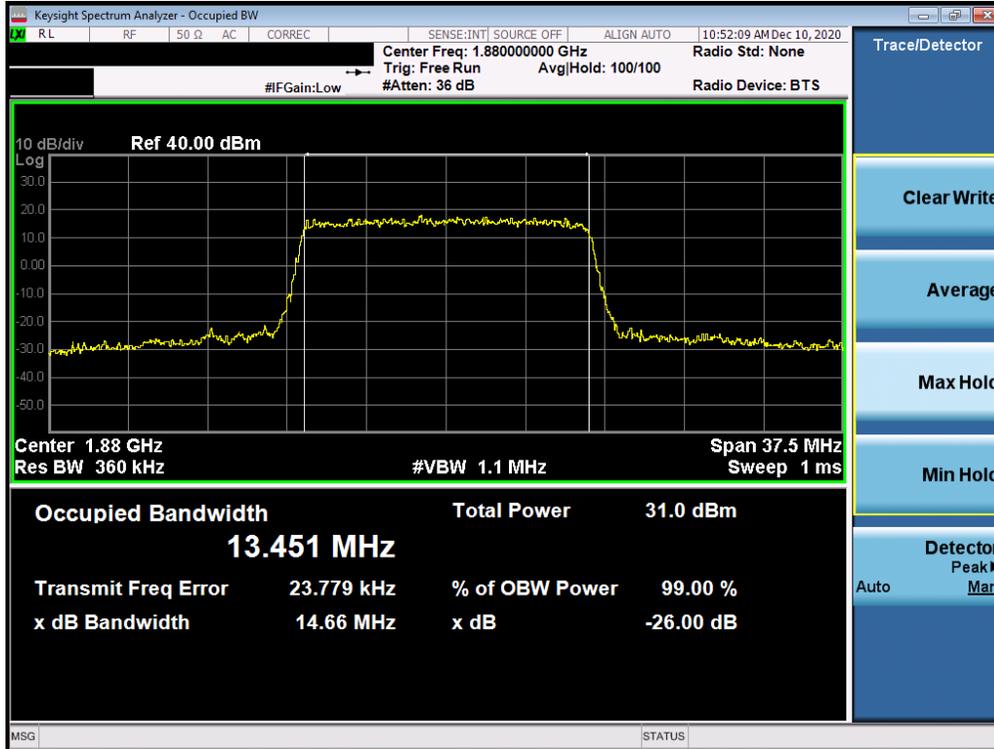


Plot 7-5. Occupied Bandwidth Plot (LTE Band 2 - 15MHz 16-QAM - Full RB Configuration)

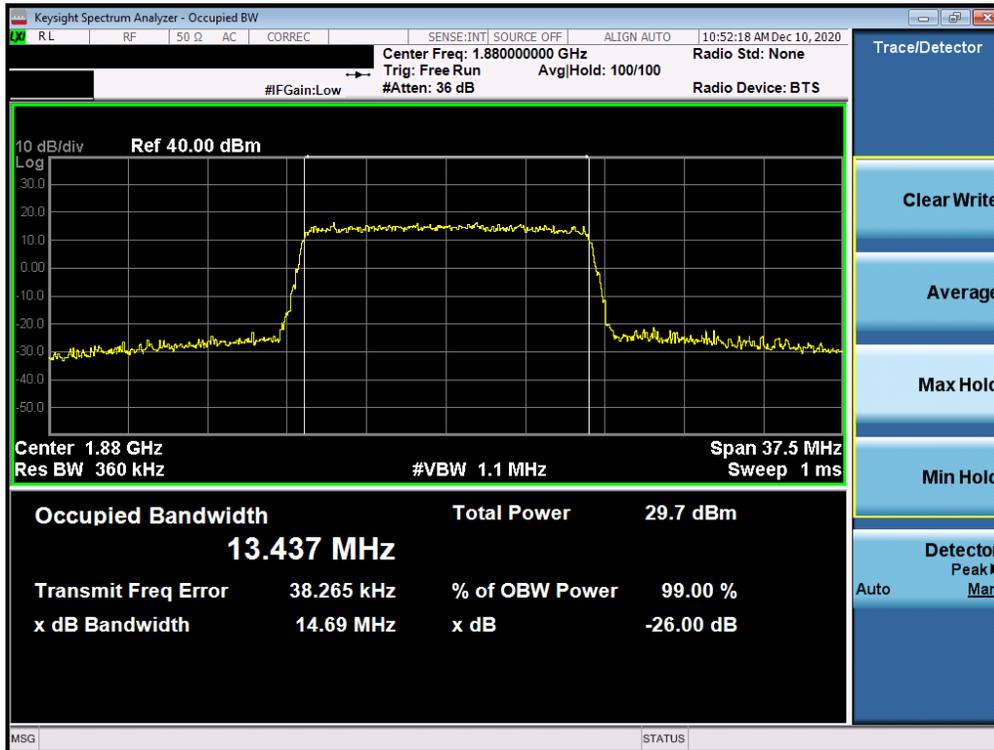


Plot 7-6. Occupied Bandwidth Plot (LTE Band 2 - 15MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 16 of 88

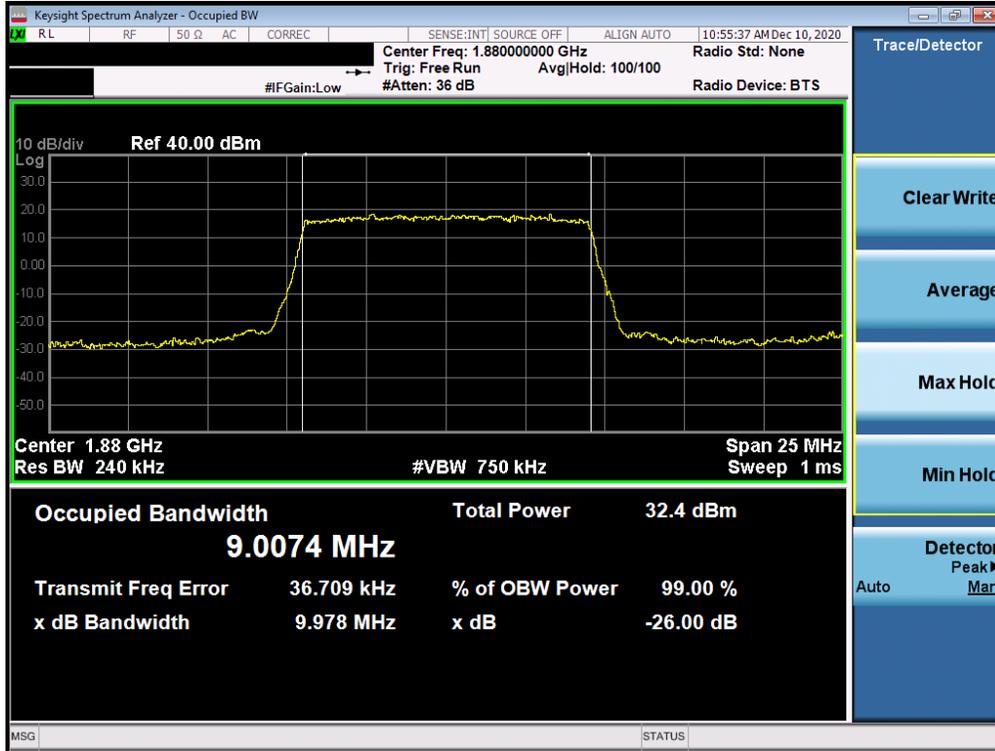


Plot 7-7. Occupied Bandwidth Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

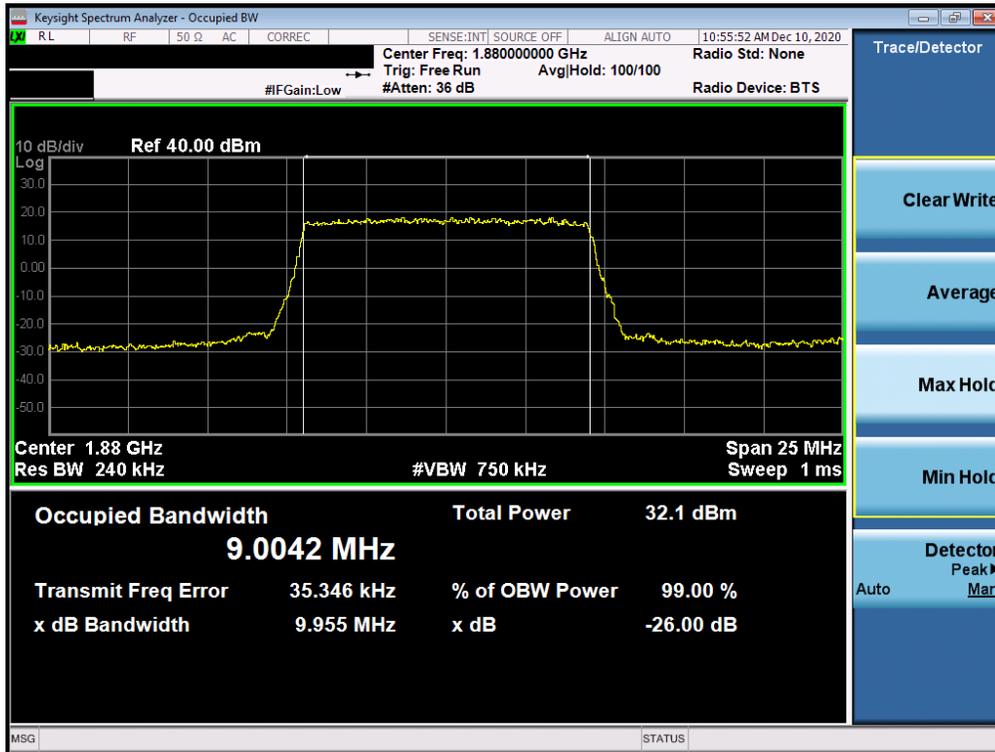


Plot 7-8. Occupied Bandwidth Plot (LTE Band 2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 17 of 88

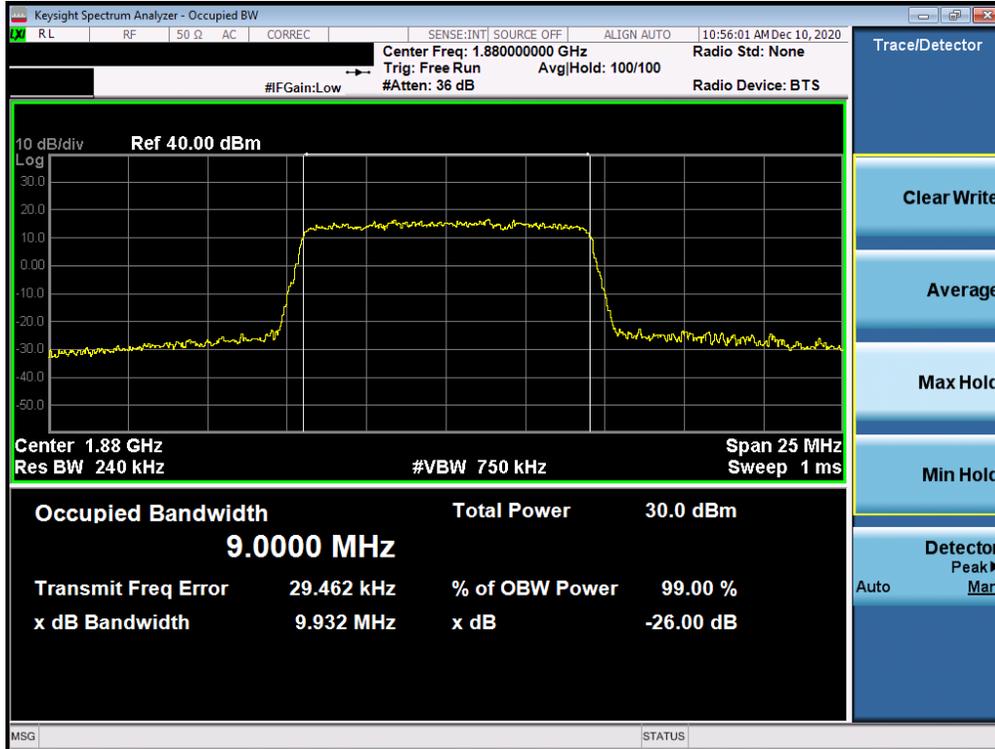


Plot 7-9. Occupied Bandwidth Plot (LTE Band 2 - 10MHz 64-QAM - Full RB Configuration)

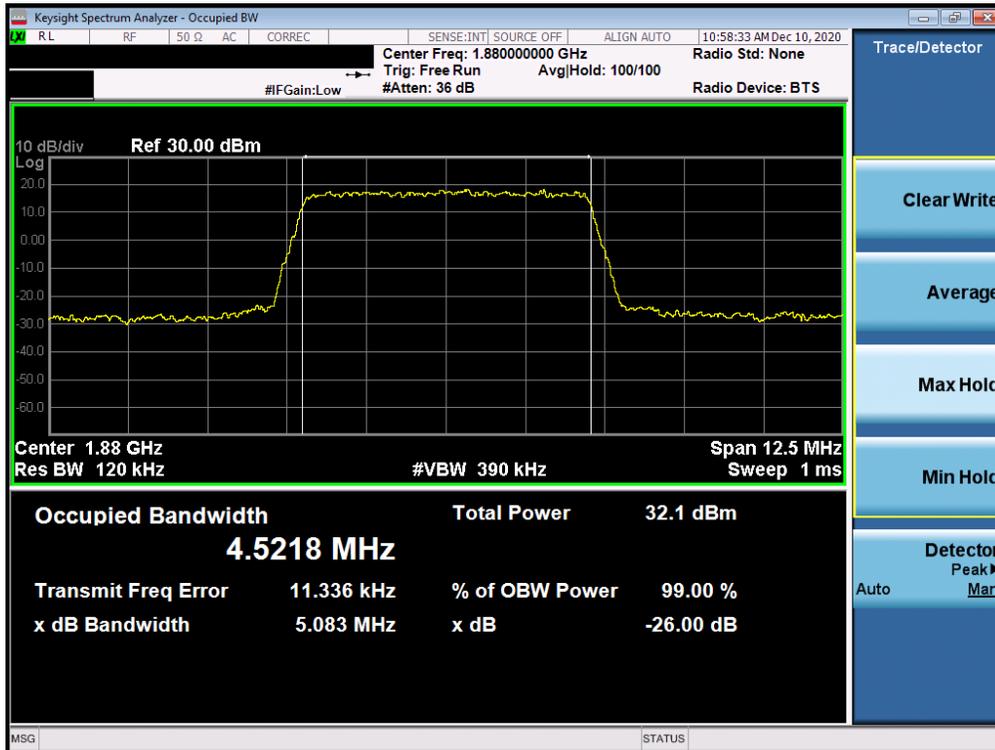


Plot 7-10. Occupied Bandwidth Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 18 of 88

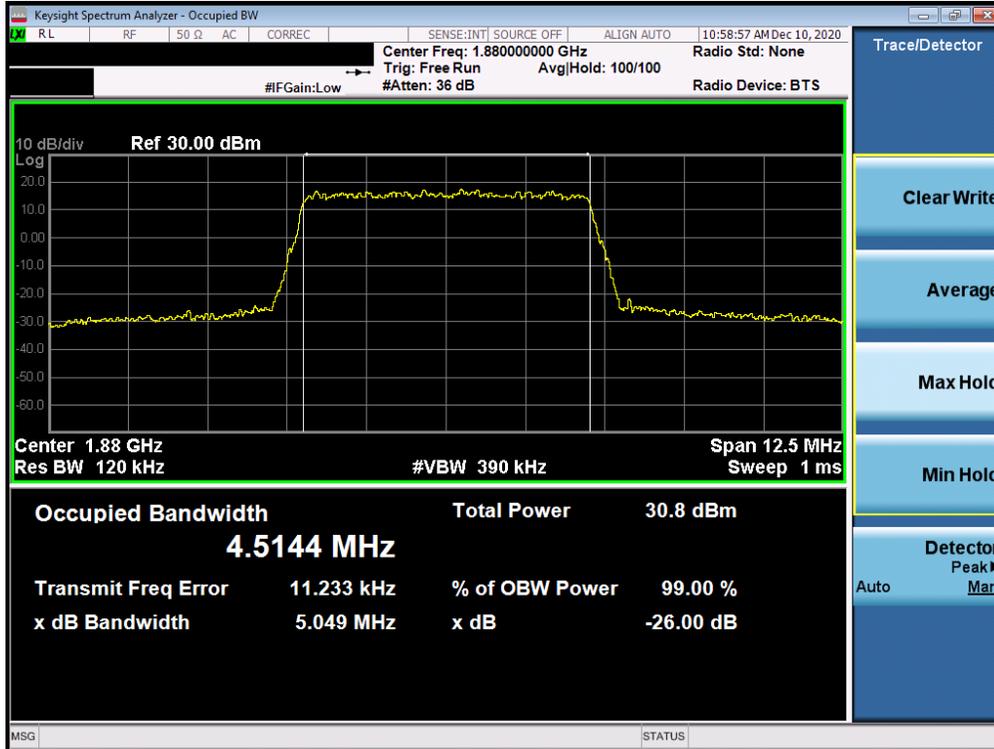


Plot 7-11. Occupied Bandwidth Plot (LTE Band 2 - 5MHz 16-QAM - Full RB Configuration)

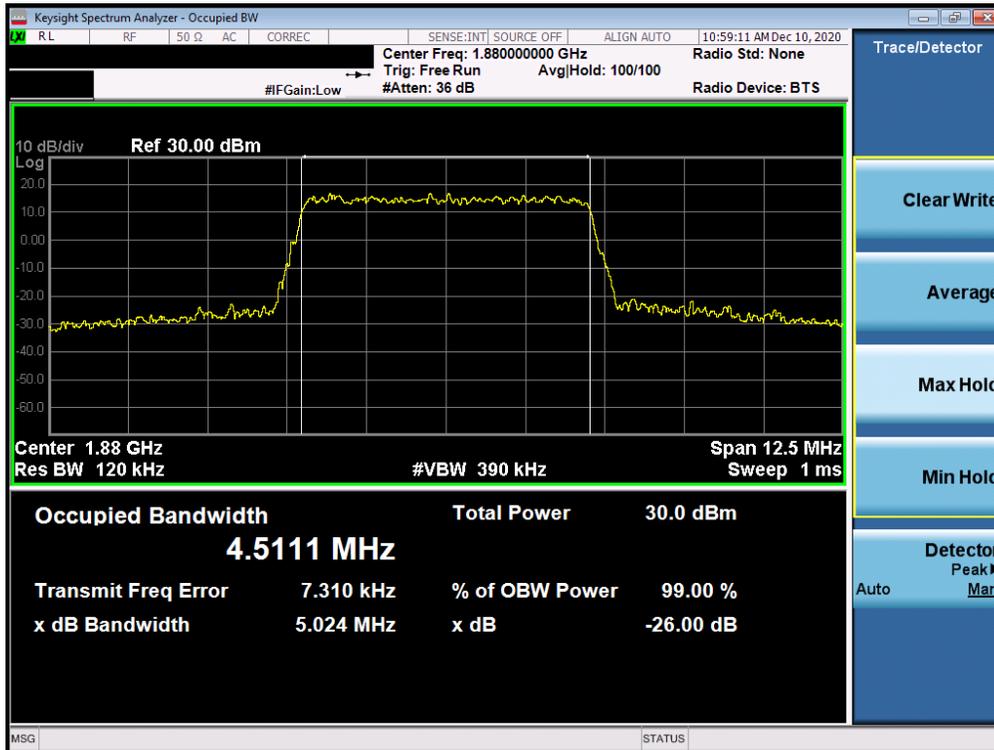


Plot 7-12. Occupied Bandwidth Plot (LTE Band 2 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 19 of 88

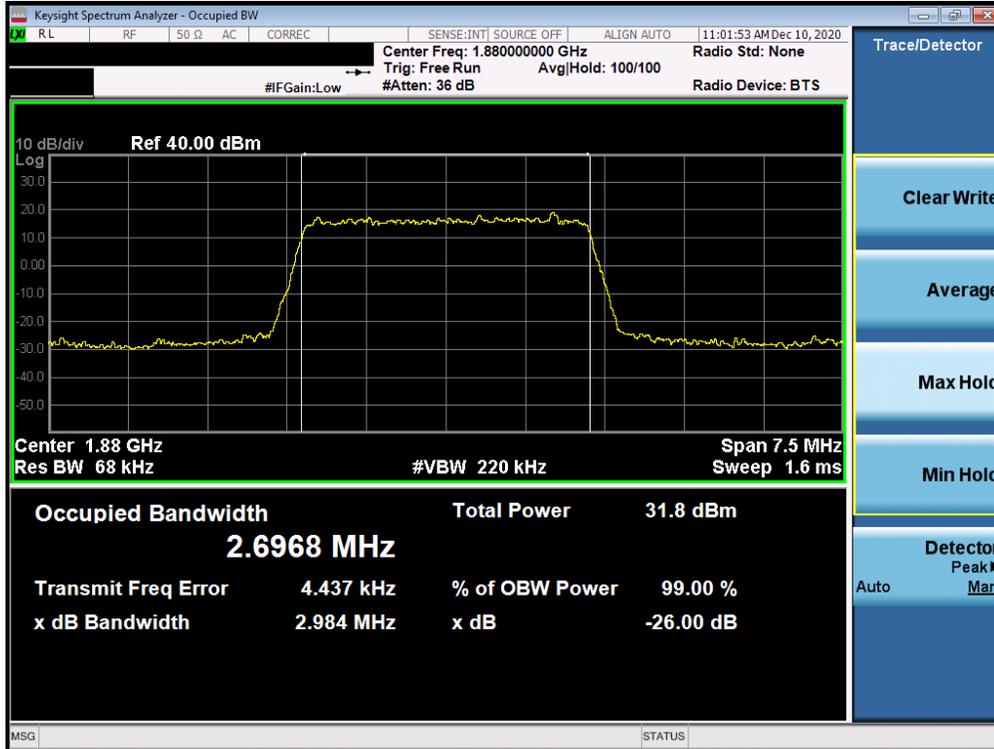


Plot 7-13. Occupied Bandwidth Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

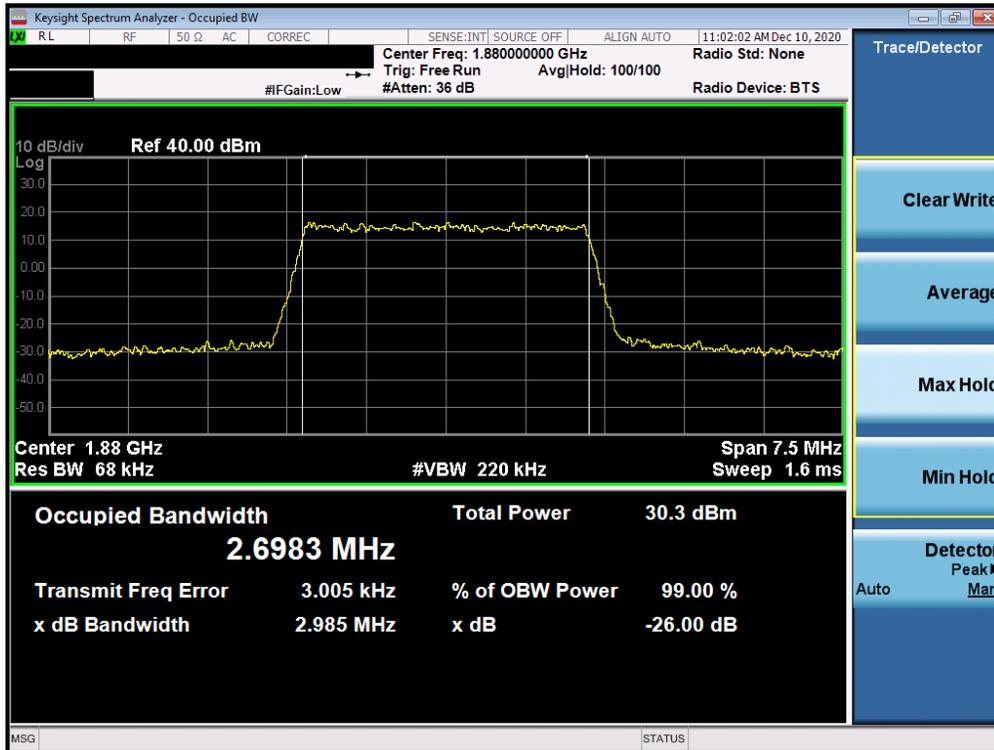


Plot 7-14. Occupied Bandwidth Plot (LTE Band 2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 20 of 88

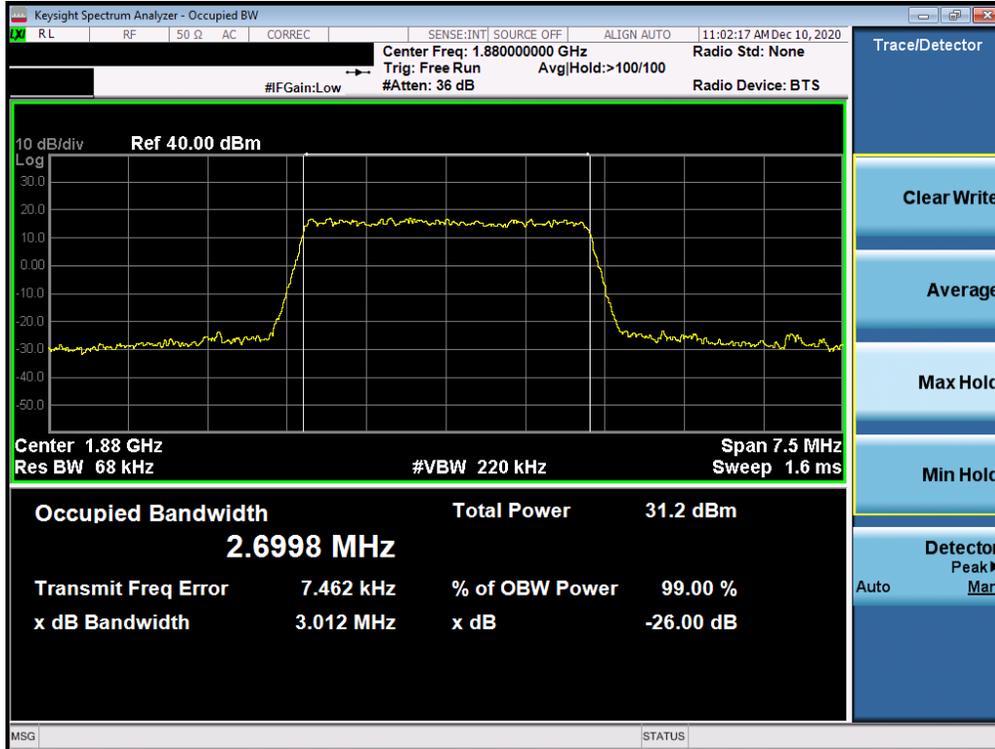


Plot 7-15. Occupied Bandwidth Plot (LTE Band 2 - 3MHz 64-QAM - Full RB Configuration)

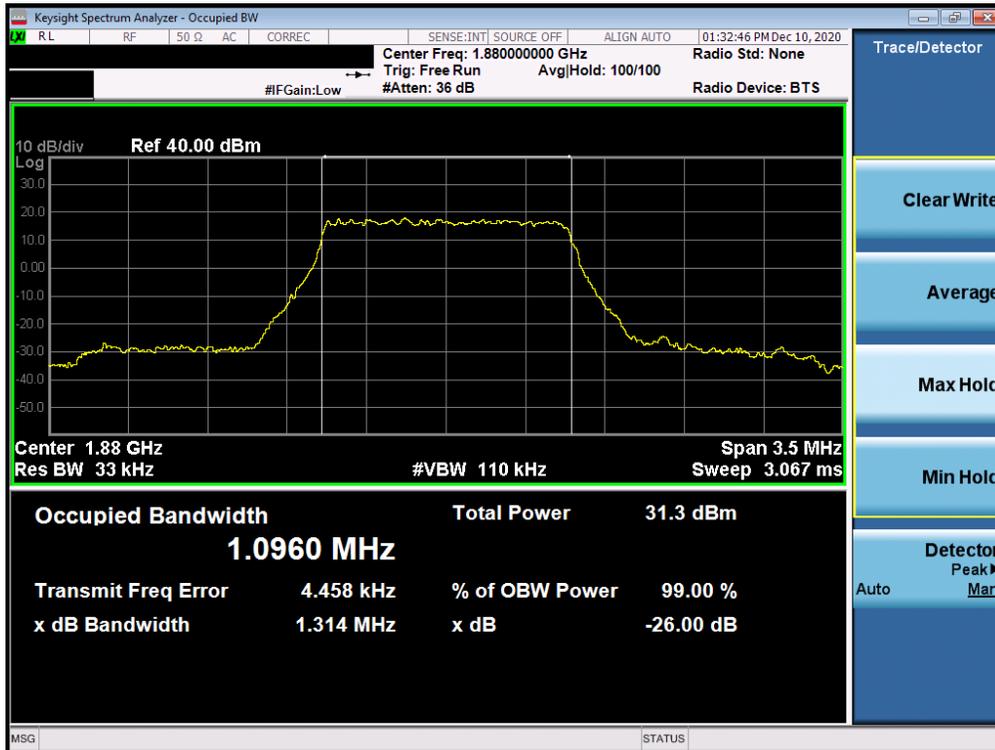


Plot 7-16. Occupied Bandwidth Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 21 of 88

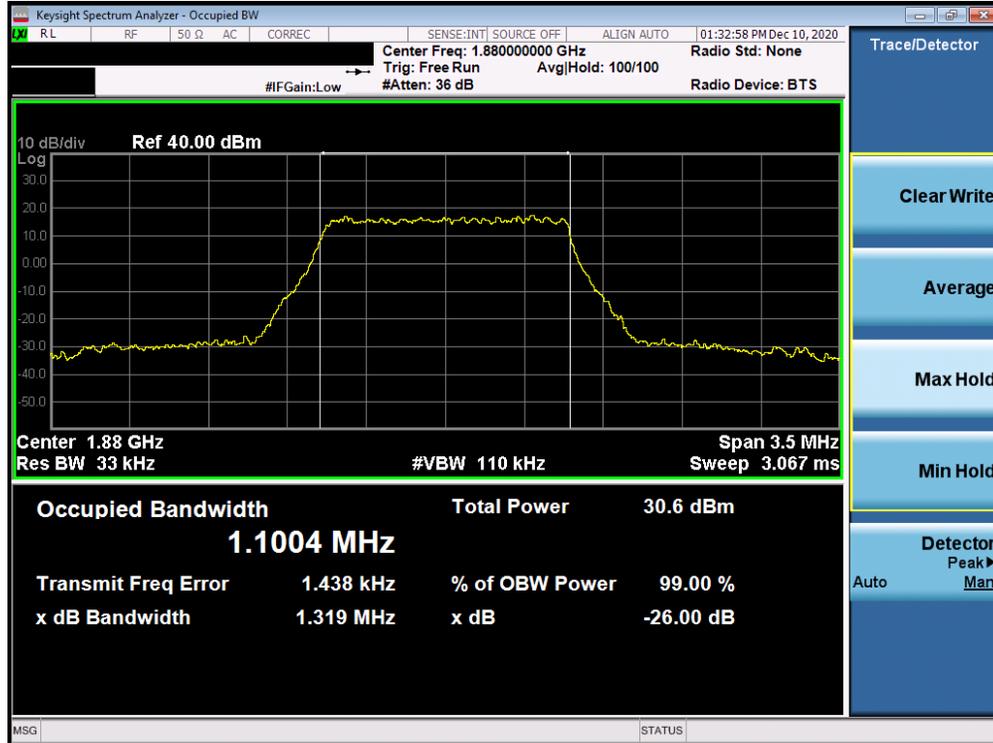


Plot 7-17. Occupied Bandwidth Plot (LTE Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

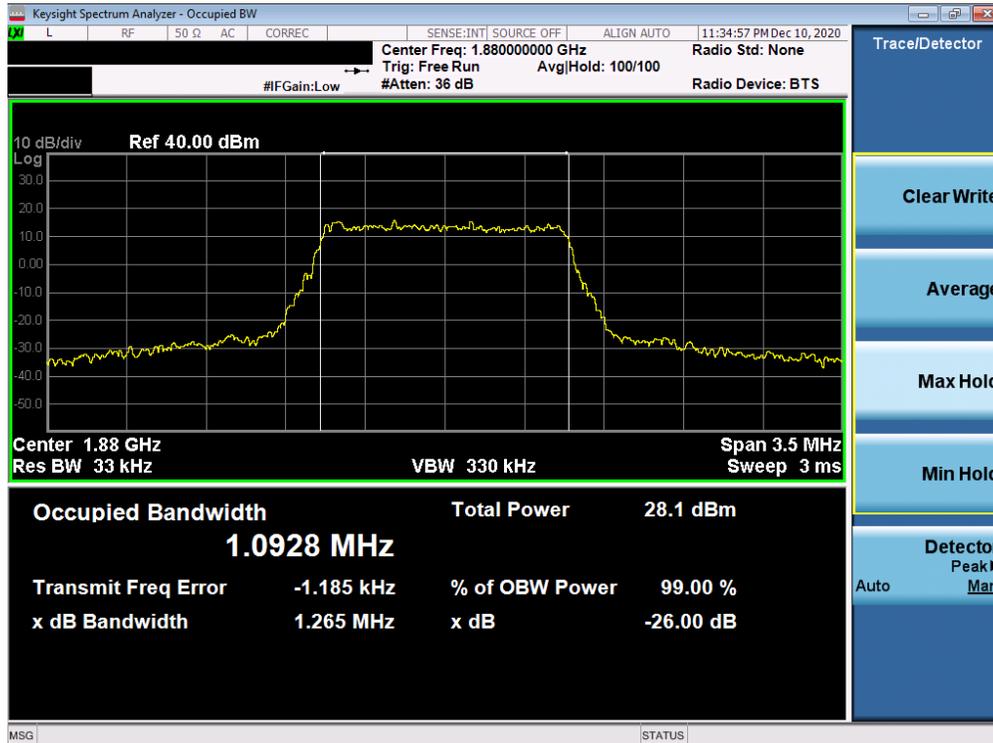


Plot 7-18. Occupied Bandwidth Plot (LTE Band 2 - 1.4MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 22 of 88

**GSM/GPRS PCS**

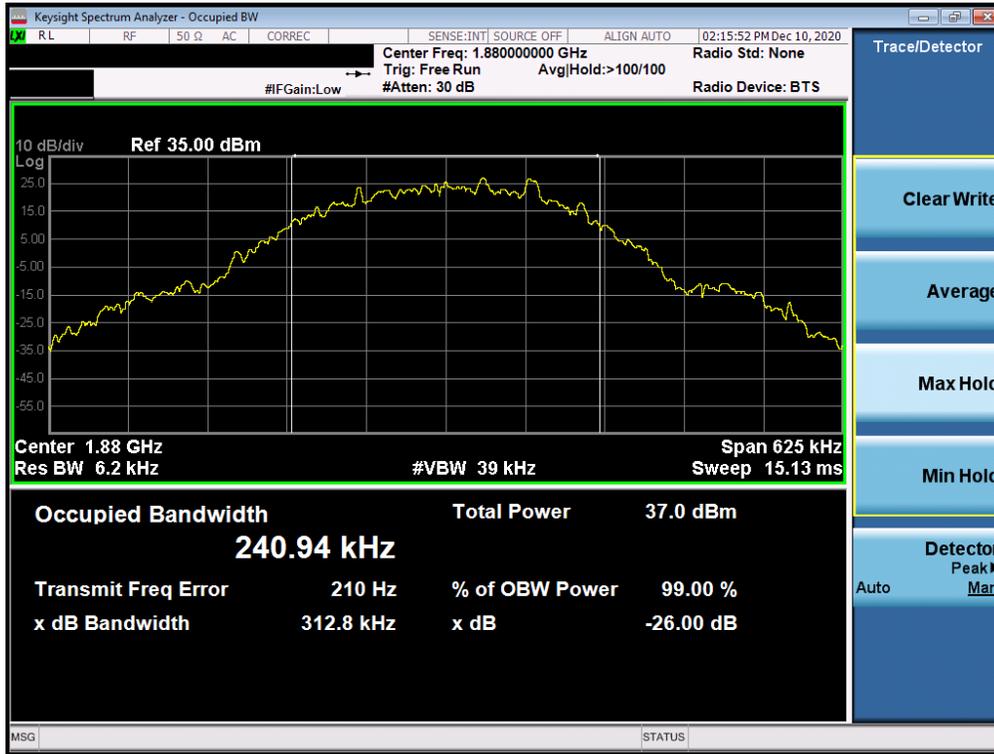


Plot 7-19. Occupied Bandwidth Plot (GPRS, Ch. 661)

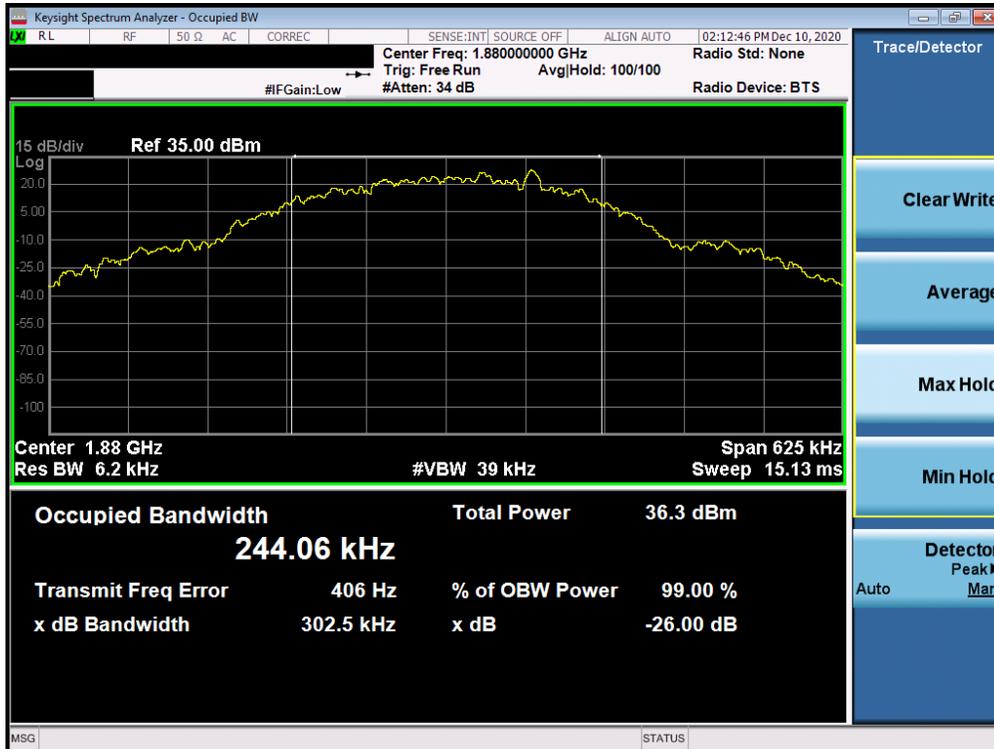

Plot 7-20. Occupied Bandwidth Plot (EDGE, Ch. 661)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 23 of 88

**WCDMA PCS**

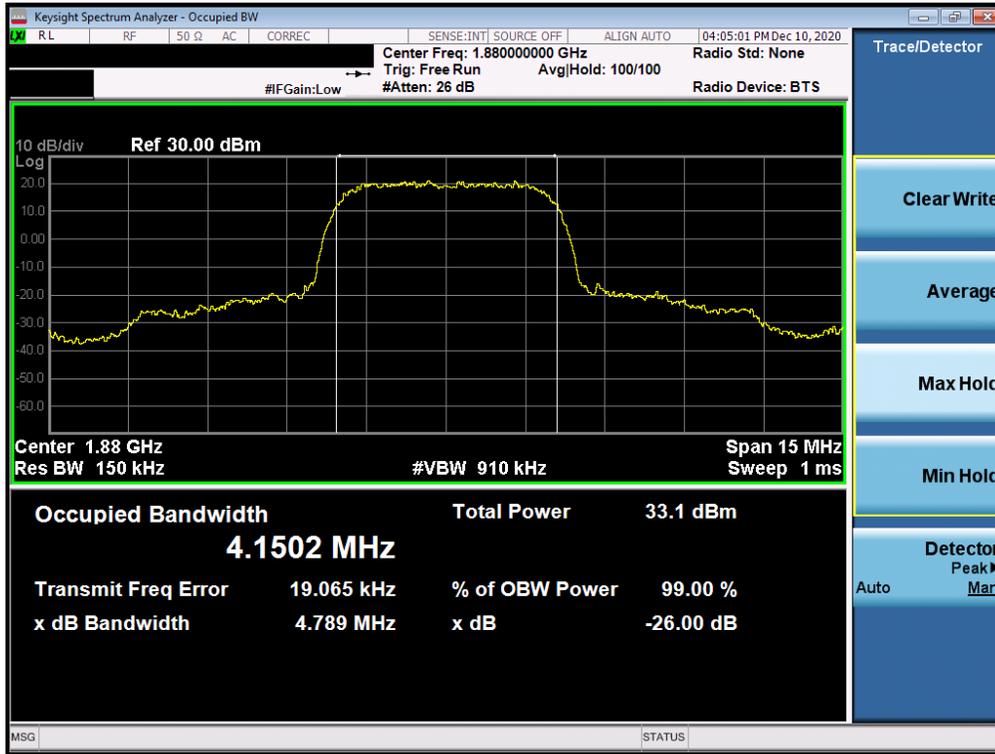

**Plot 7-21. Occupied Bandwidth Plot (WCDMA, Ch. 9400)**

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 24 of 88

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

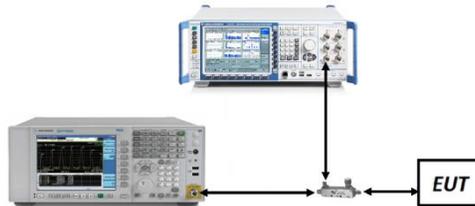


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Note


Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 25 of 88

## LTE Band 2

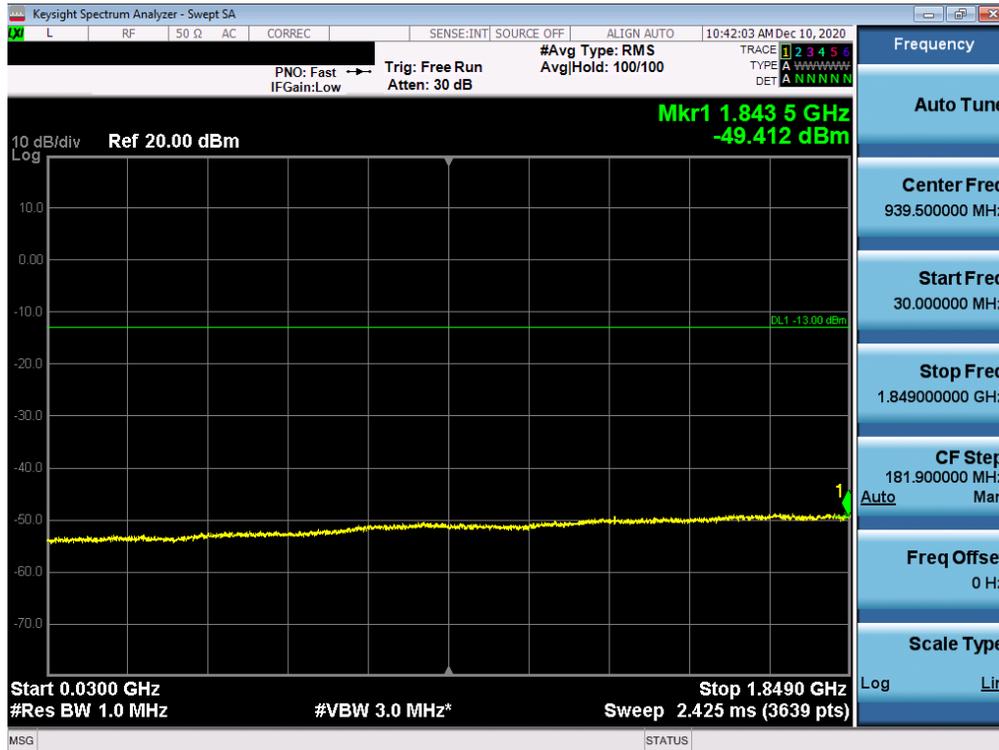


Plot 7-22. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

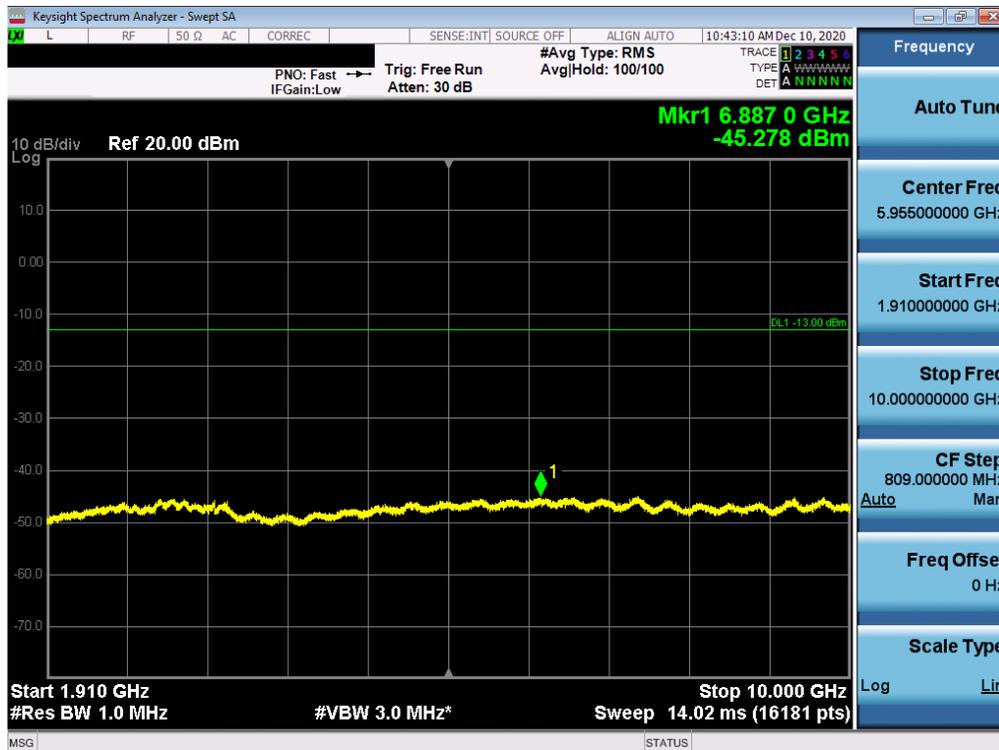


Plot 7-23. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 26 of 88

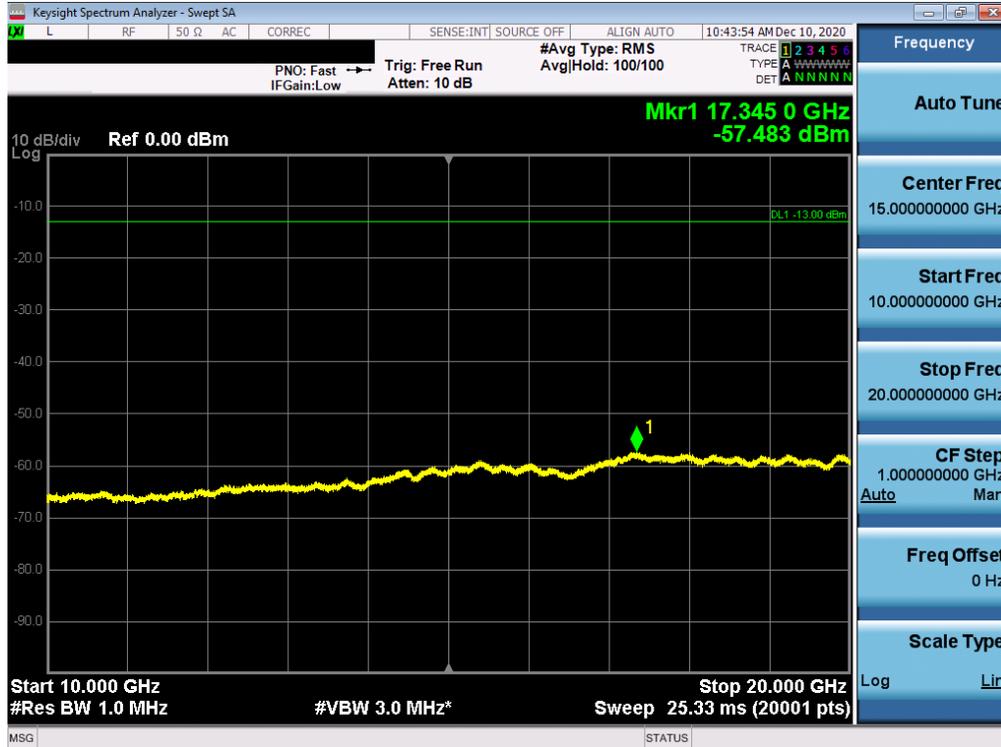


Plot 7-24. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

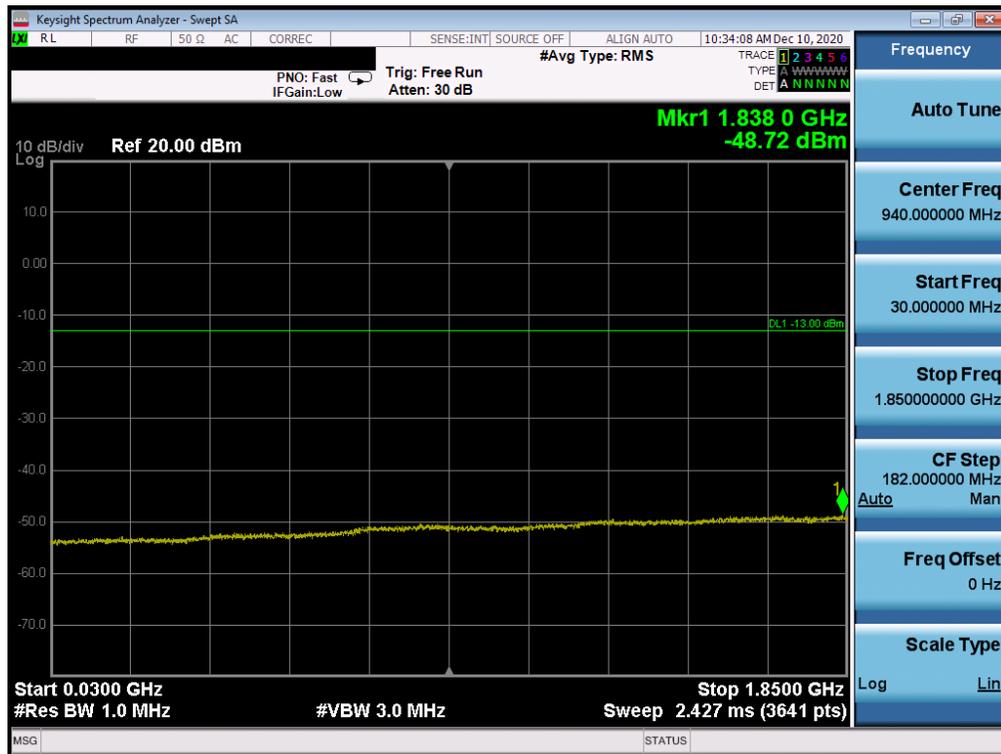


Plot 7-25. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 27 of 88

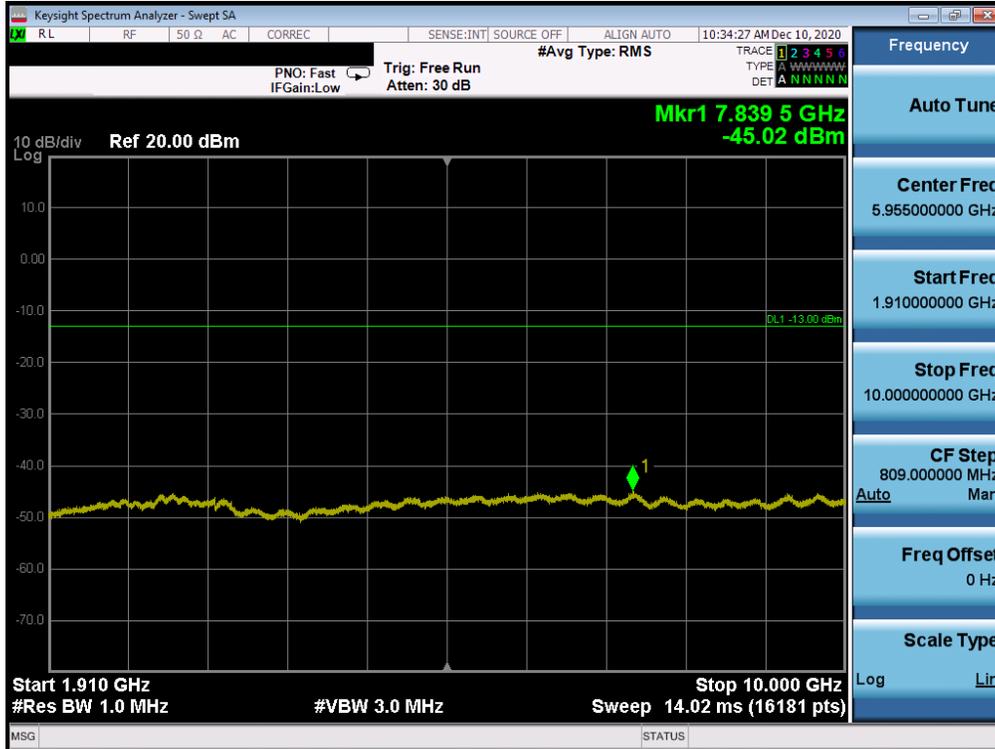


Plot 7-26. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

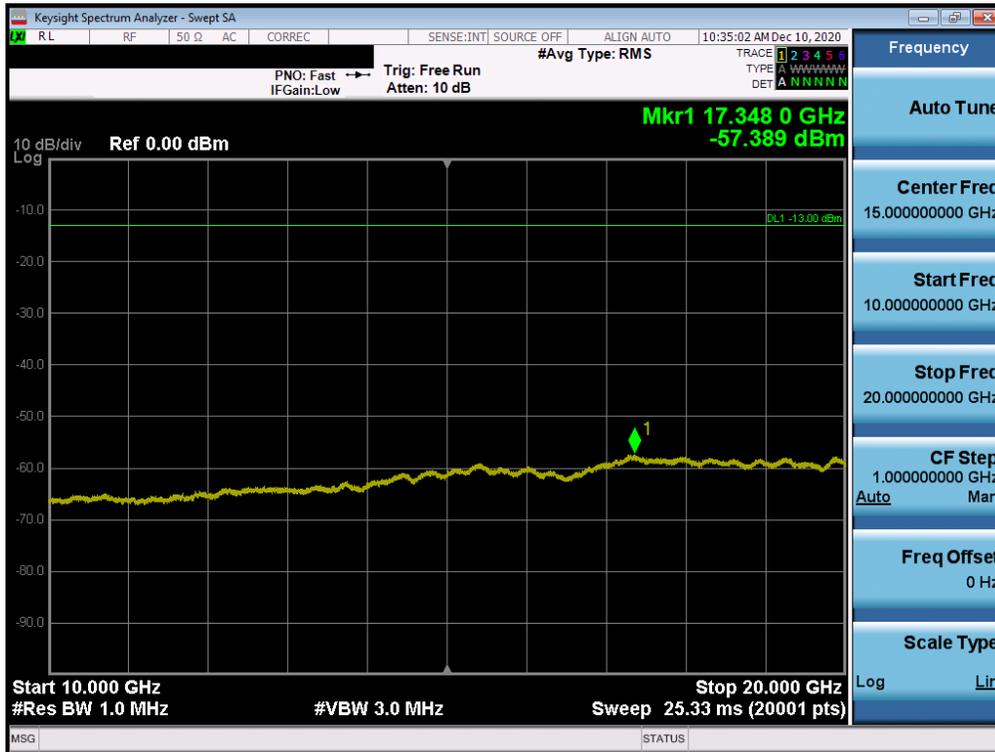


Plot 7-27. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 28 of 88

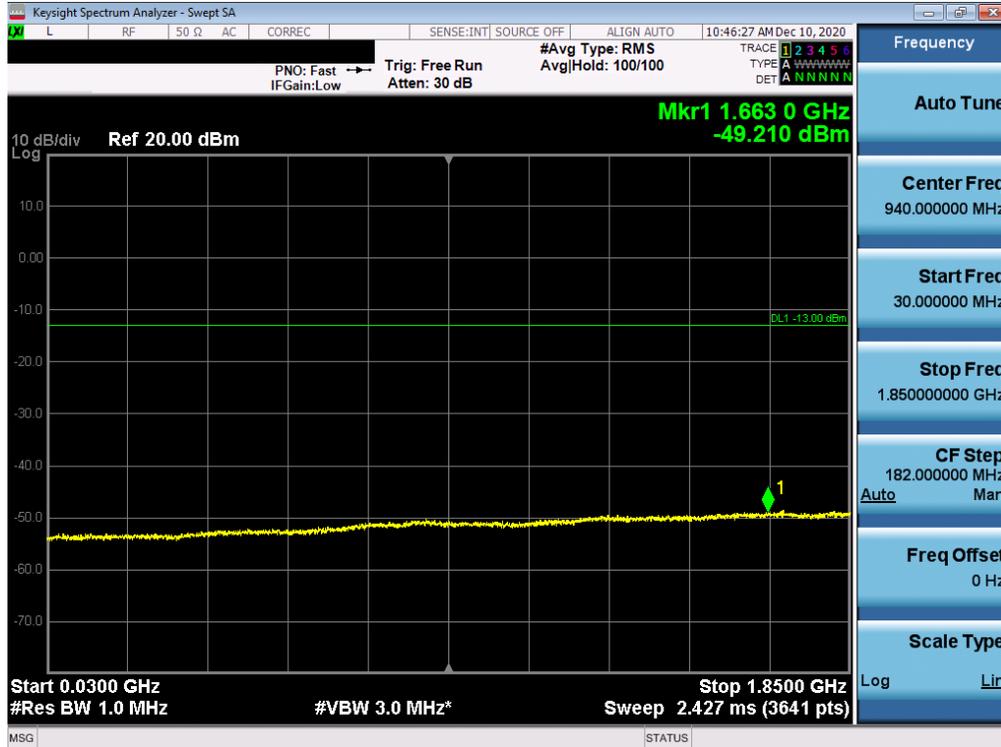


Plot 7-28. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

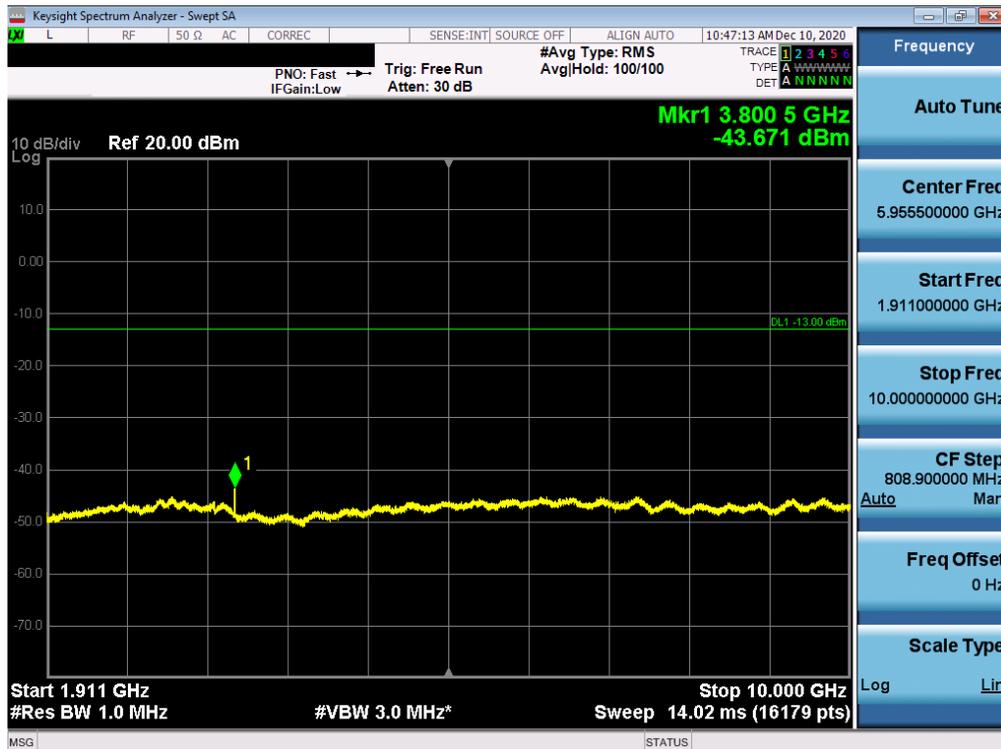

Plot 7-29. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 29 of 88

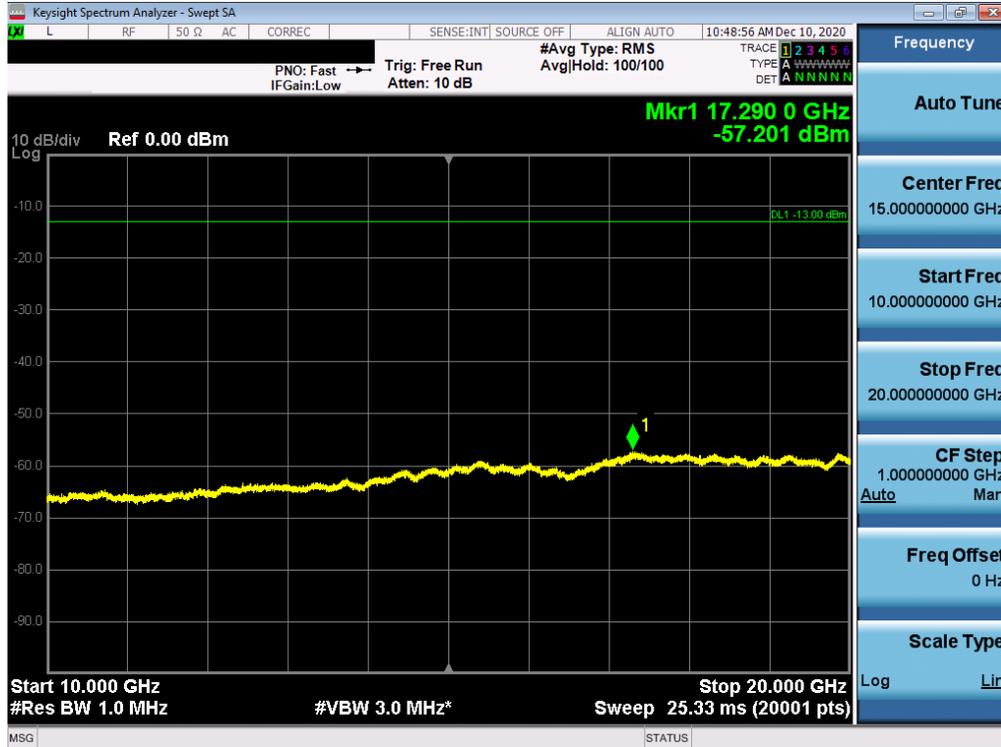


Plot 7-30. Conducted Spurious Plot (LTE Band 2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 30 of 88

## GSM/GPRS PCS

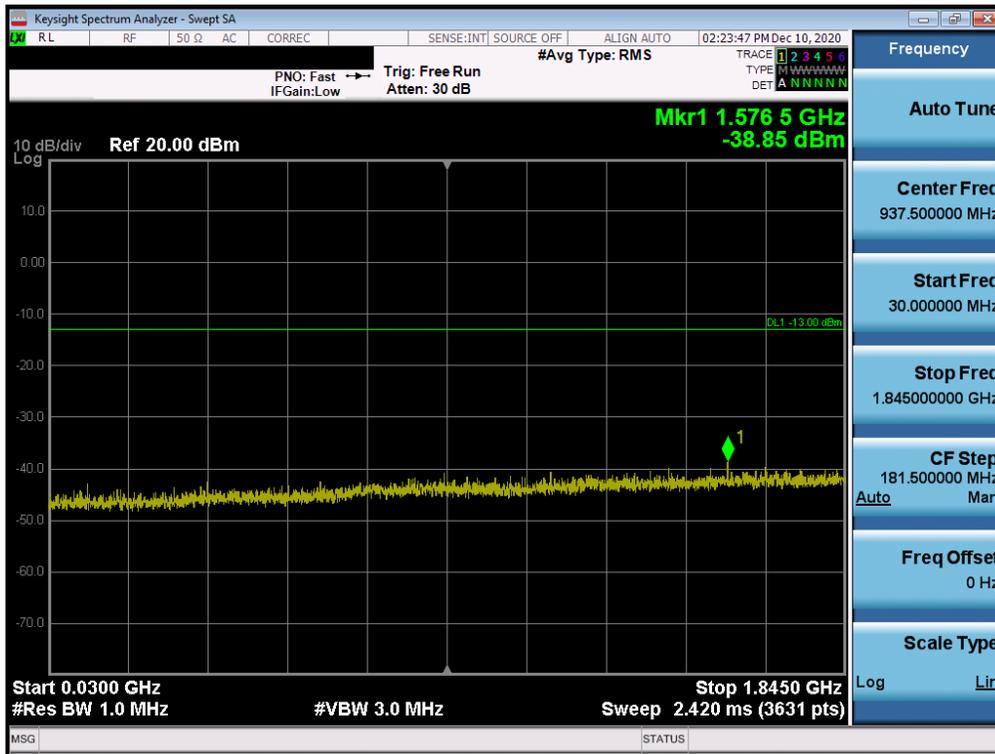


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 512)

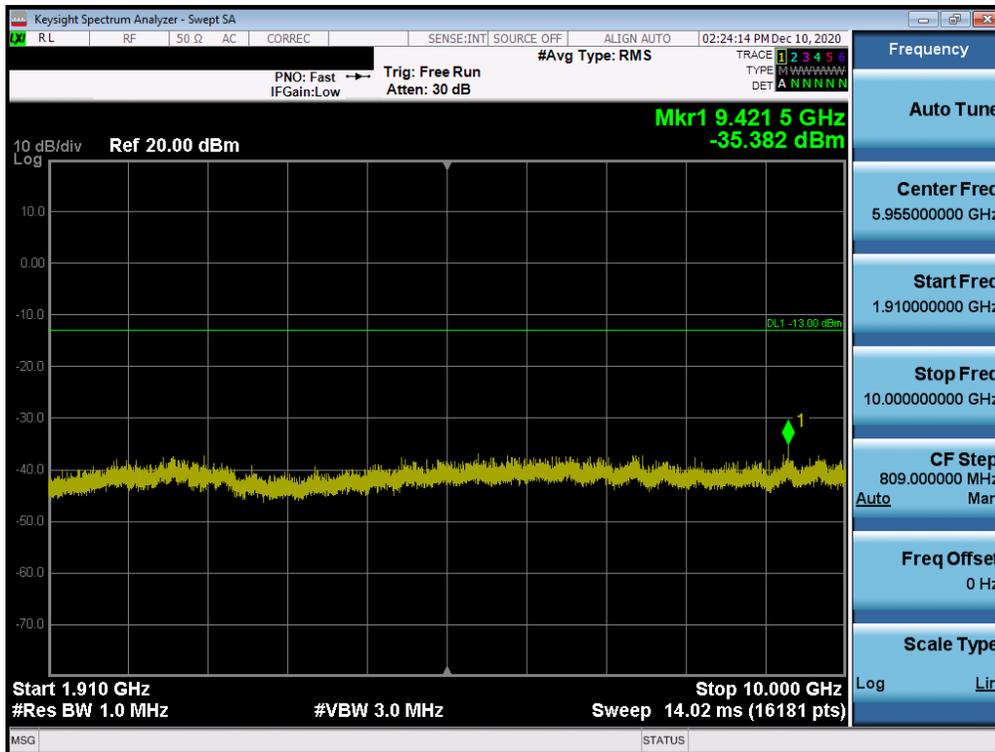


Plot 7-32. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 31 of 88

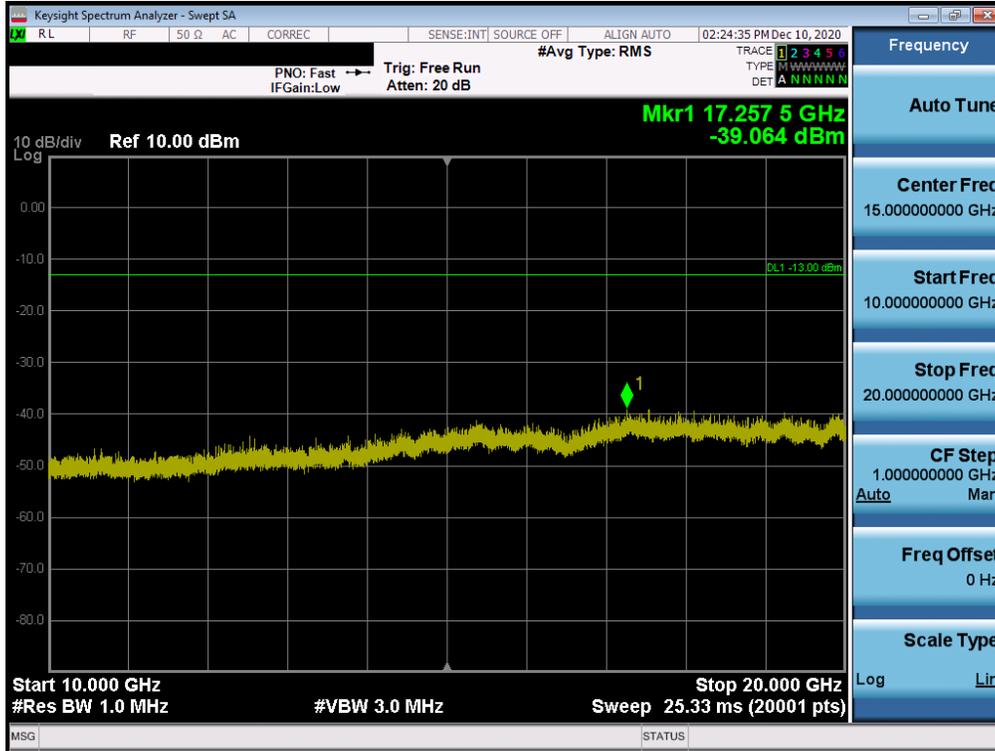


Plot 7-33. Conducted Spurious Plot (GPRS Ch. 512)

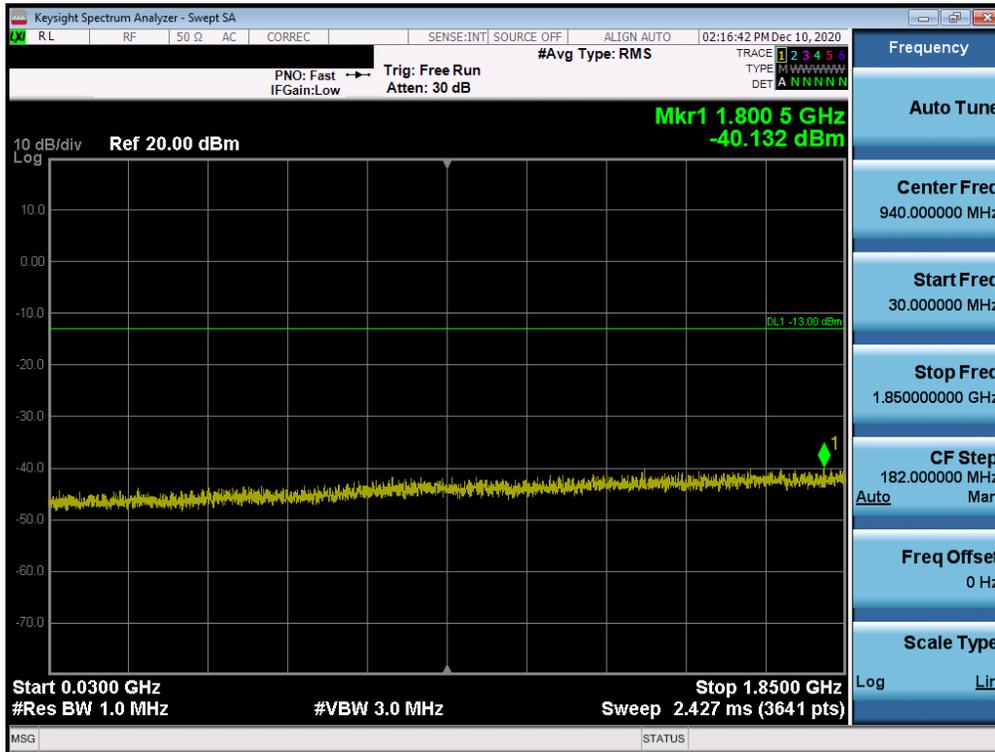


Plot 7-34. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 32 of 88

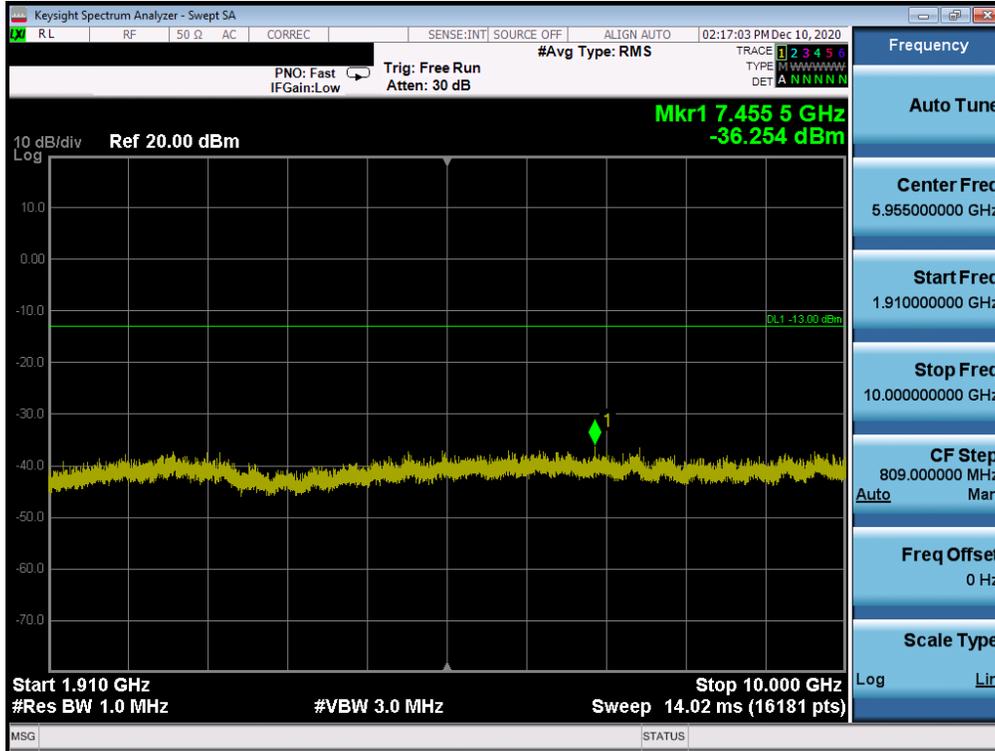


Plot 7-35. Conducted Spurious Plot (GPRS Ch. 661)

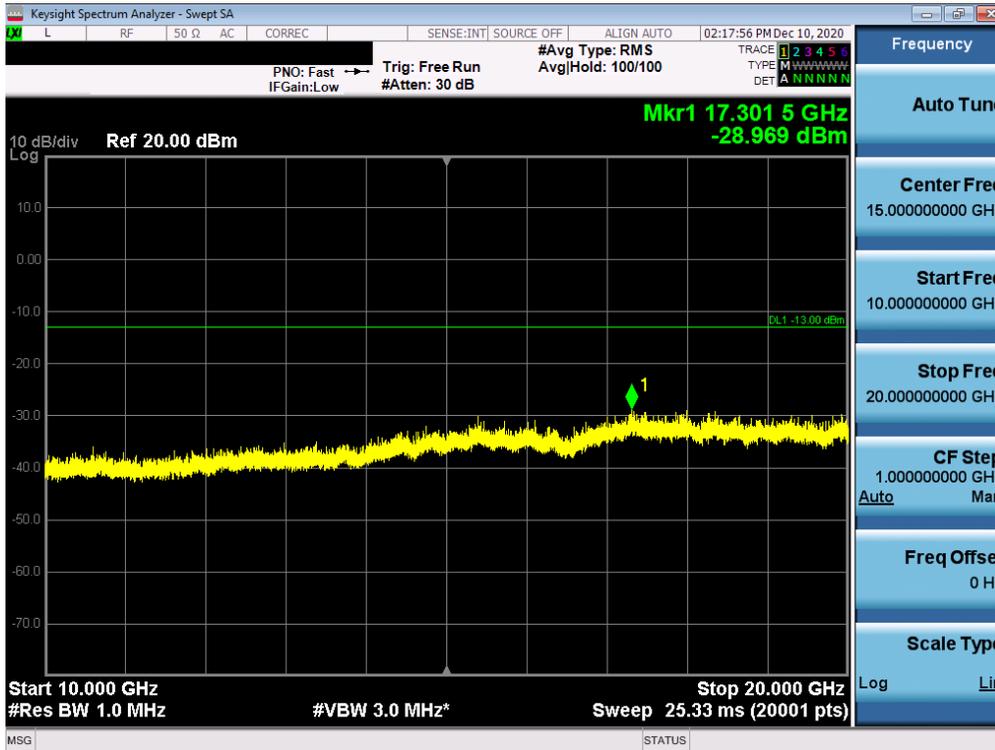


Plot 7-36. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 33 of 88

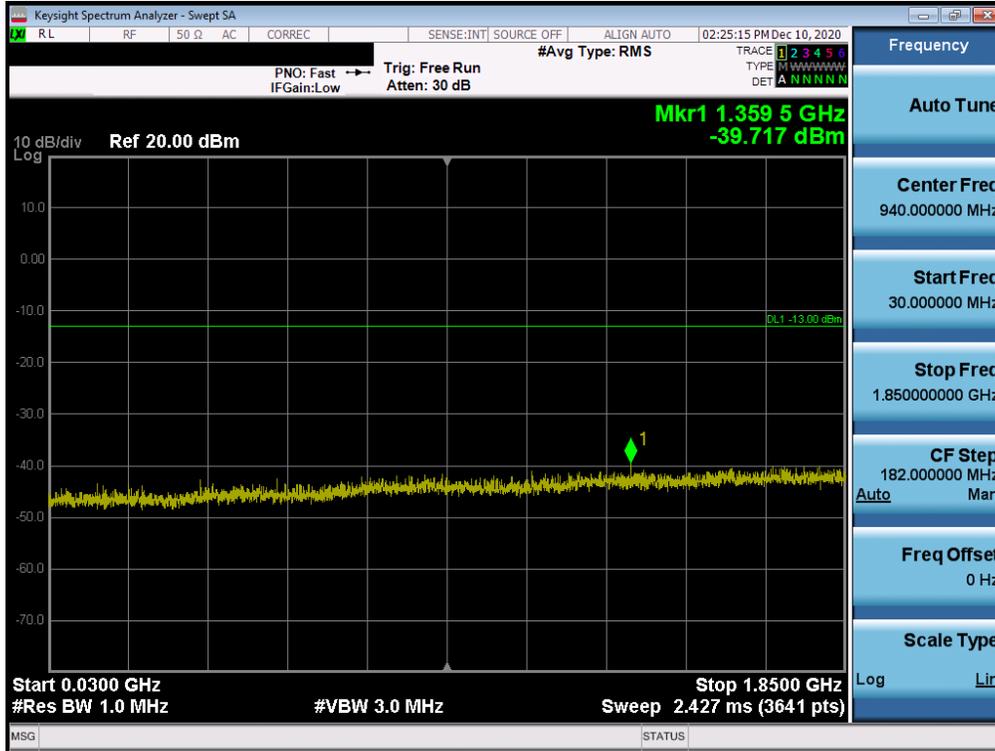


Plot 7-37. Conducted Spurious Plot (GPRS Ch. 810)

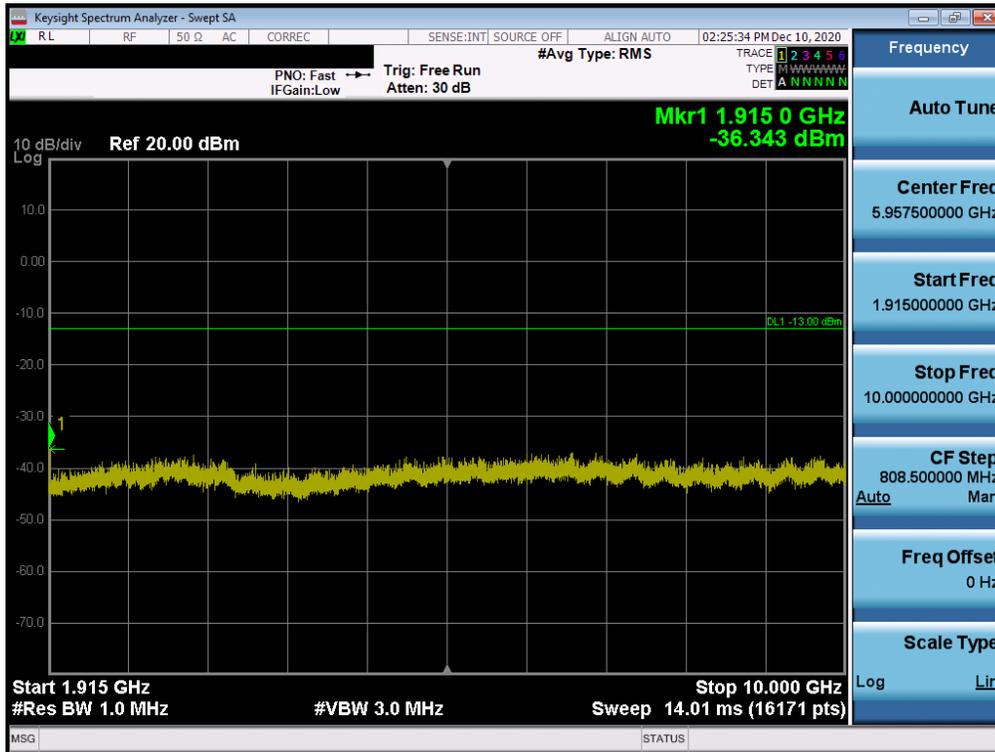

Plot 7-38. Conducted Spurious Plot (GPRS Ch. 810)


FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 34 of 88

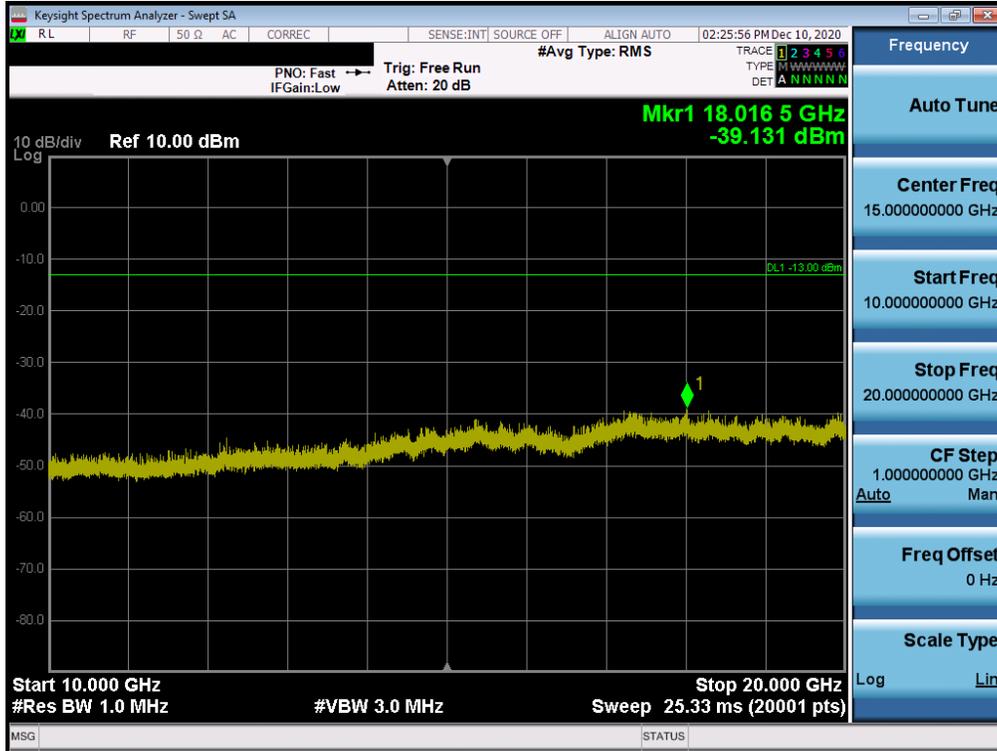


Plot 7-39. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: ZNFK200AM	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 35 of 88

**WCDMA PCS**

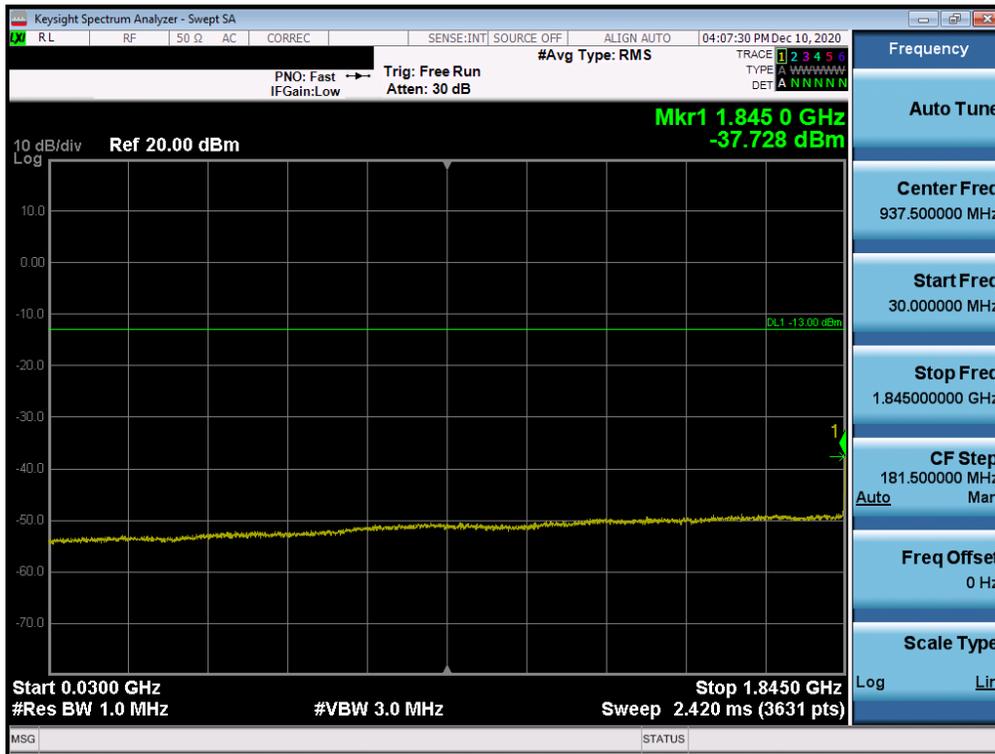


**Plot 7-40. Conducted Spurious Plot (WCDMA Ch. 9262)**

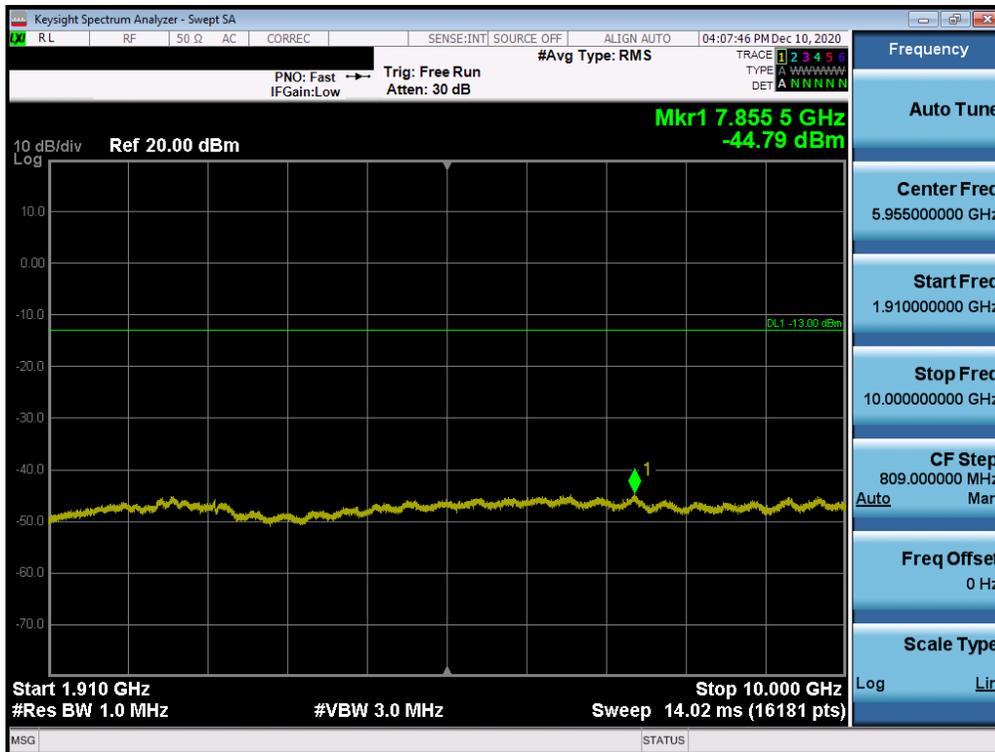


**Plot 7-41. Conducted Spurious Plot (WCDMA Ch. 9262)**

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 36 of 88

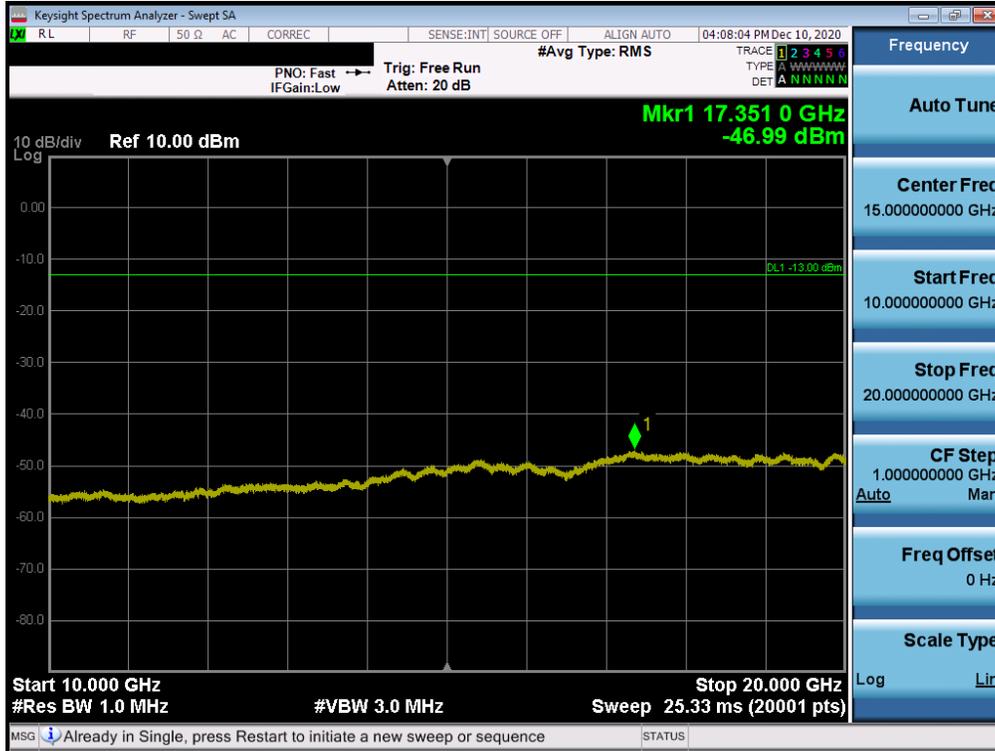


Plot 7-42. Conducted Spurious Plot (WCDMA Ch. 9262)

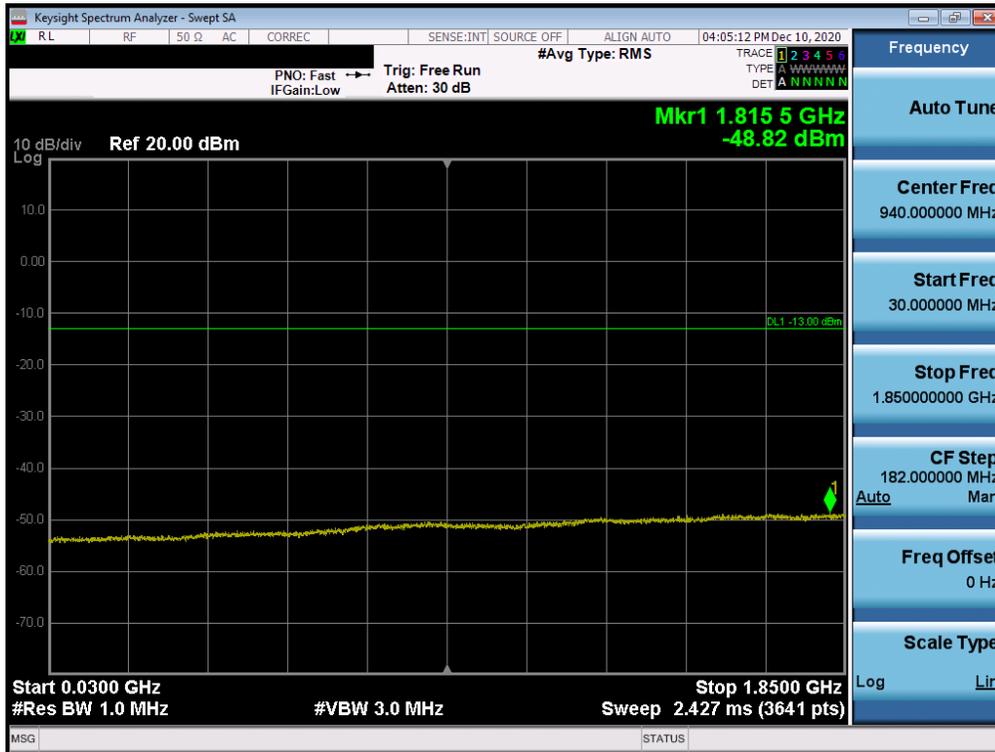


Plot 7-43. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 37 of 88

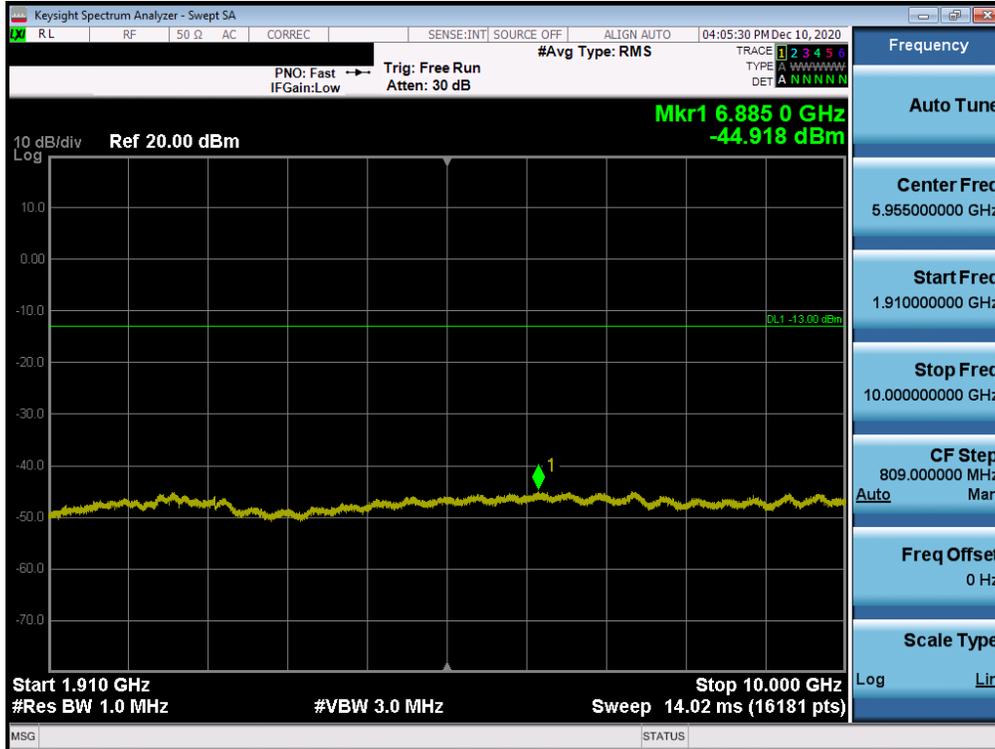


Plot 7-44. Conducted Spurious Plot (WCDMA Ch. 9400)

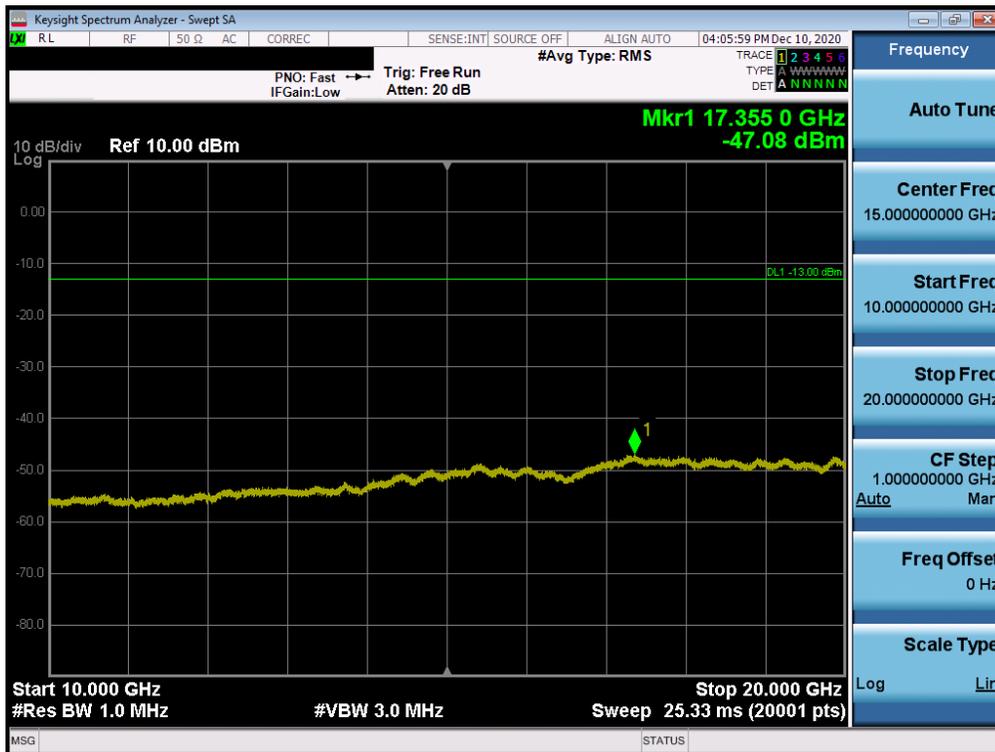


Plot 7-45. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 38 of 88

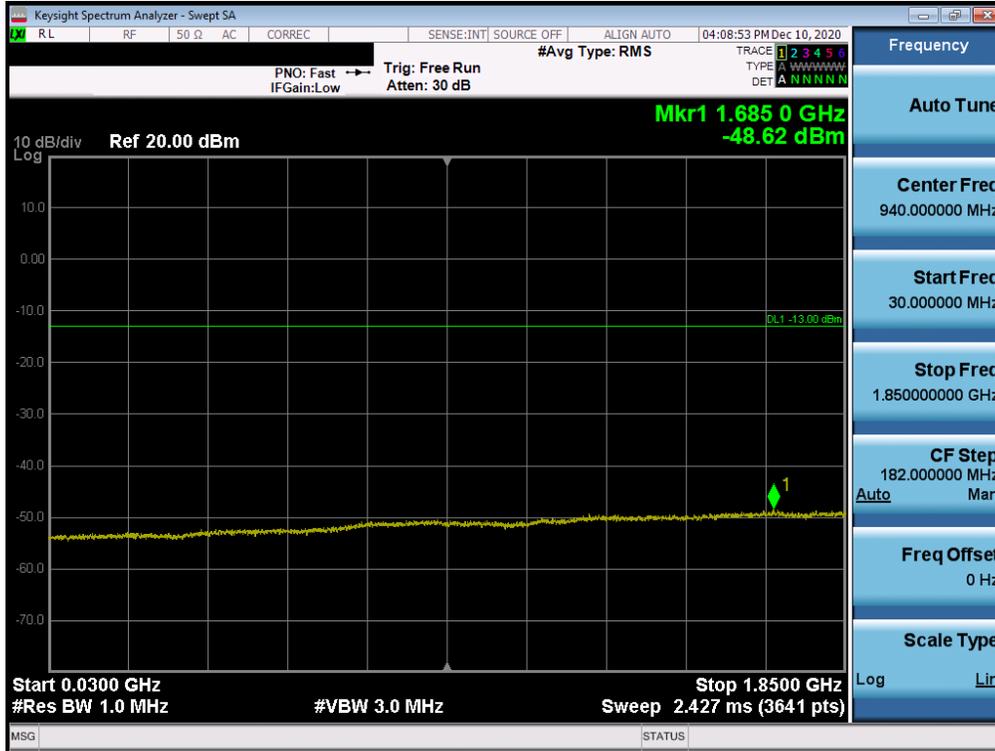


Plot 7-46. Conducted Spurious Plot (WCDMA Ch. 9538)

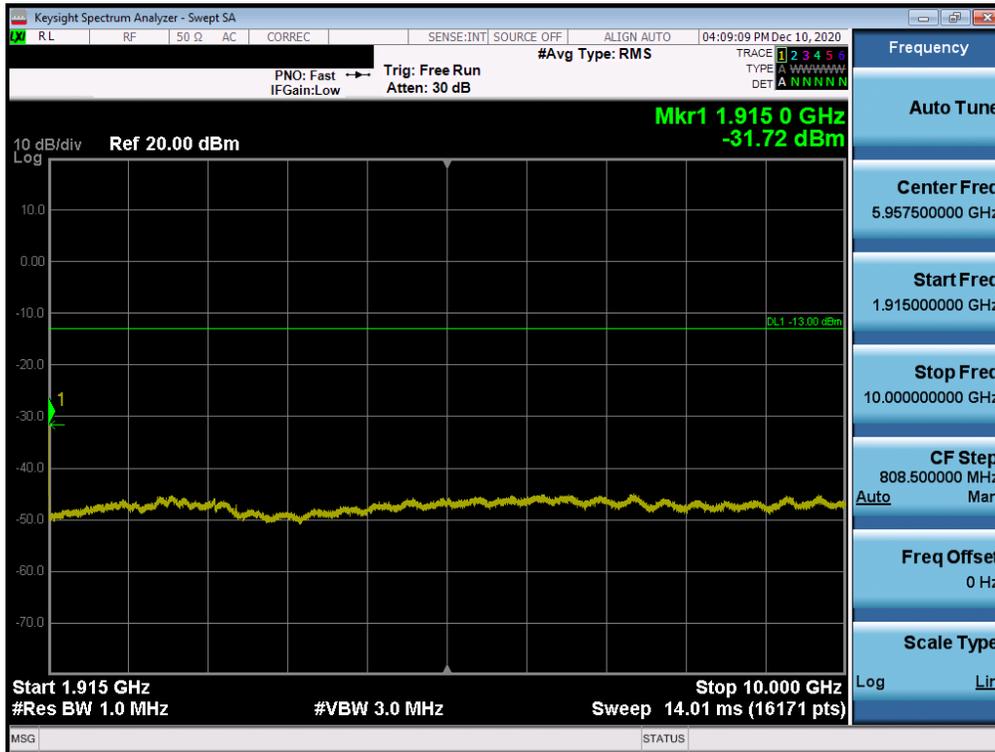

Plot 7-47. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 - 1/4/2021	EUT Type: Portable Handset		Page 39 of 88

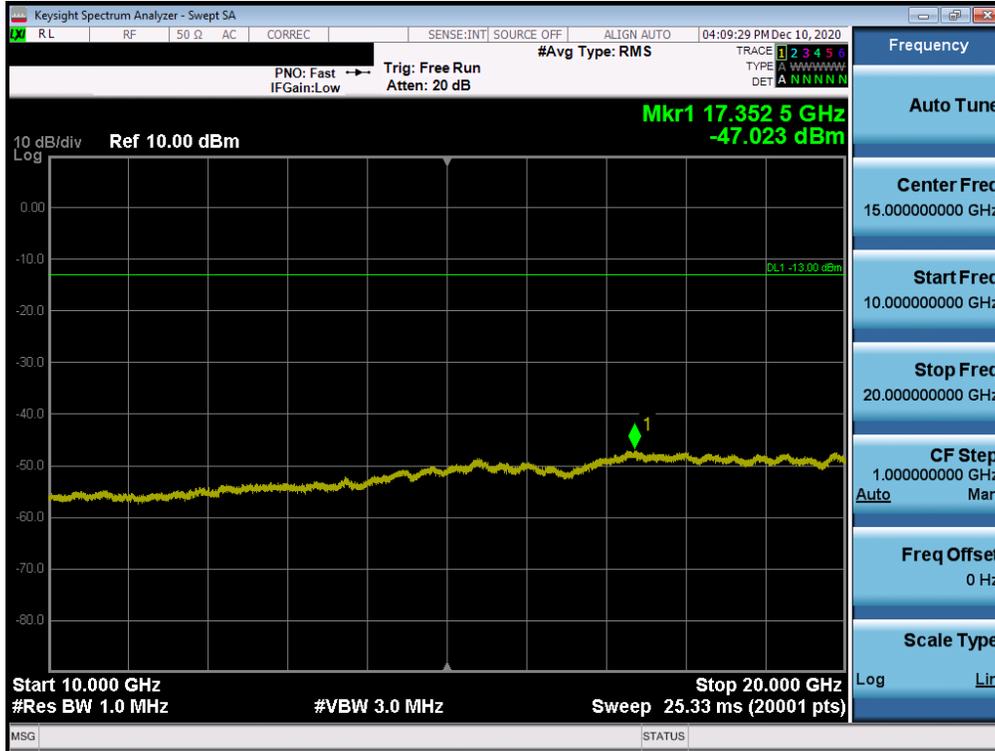

Plot 7-48. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 40 of 88

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3.  $RBW \geq 1\%$  of the emission bandwidth
4.  $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

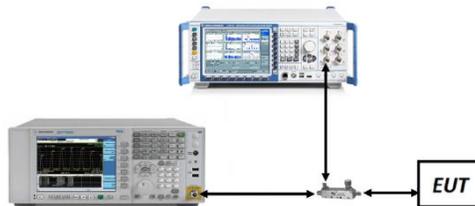


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Note


Per 24.238(a) and RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 41 of 88

## LTE Band 2

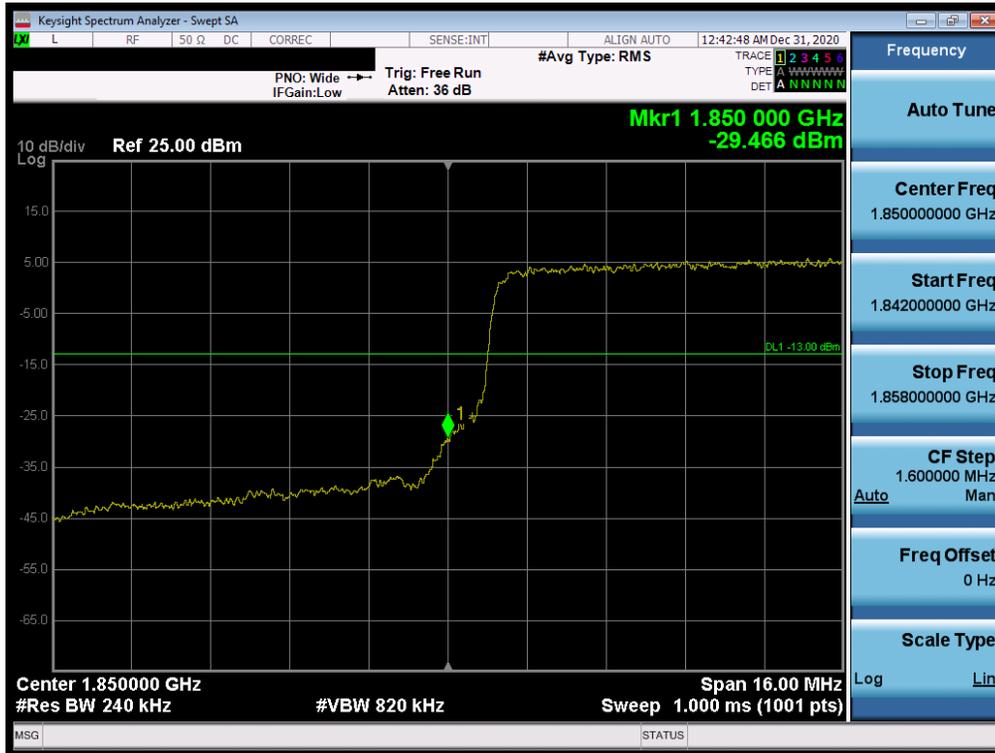

Plot 7-49. Lower Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB Configuration)

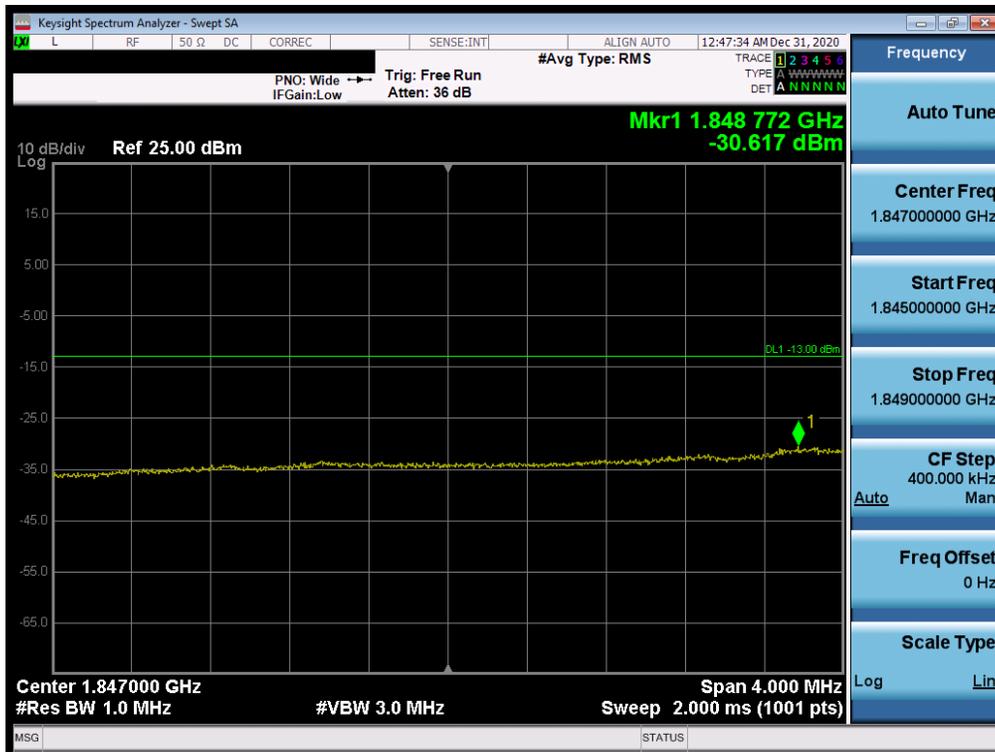

Plot 7-50. Lower Extended Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 42 of 88




Plot 7-51. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB Configuration)




Plot 7-52. Upper Extended Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 43 of 88

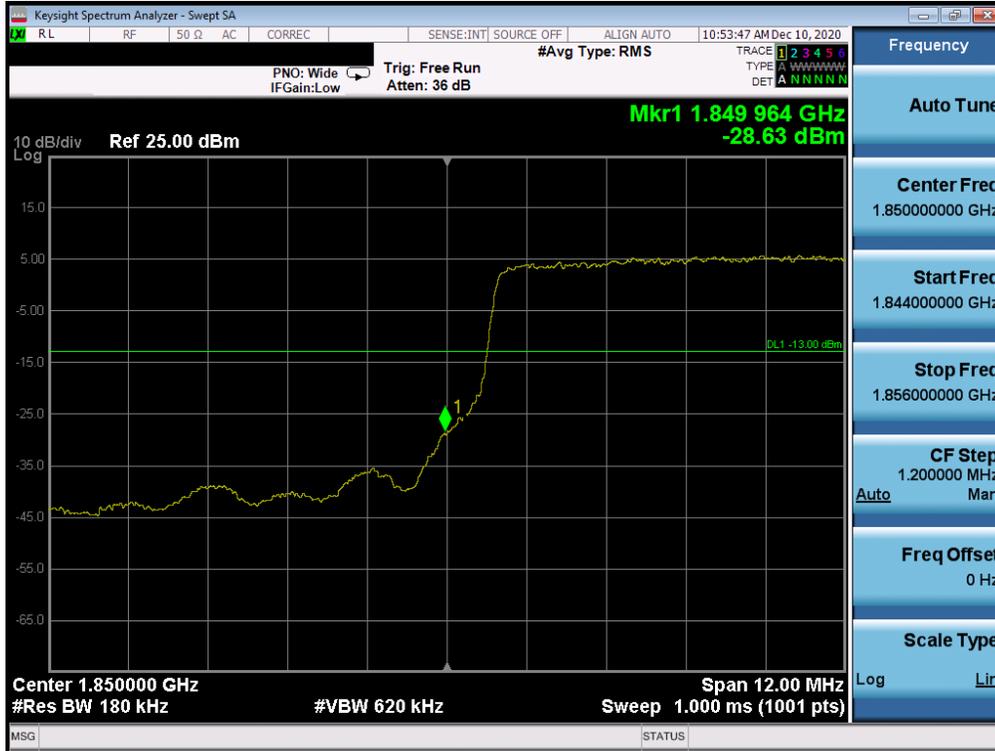


Plot 7-53. Lower Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB Configuration)

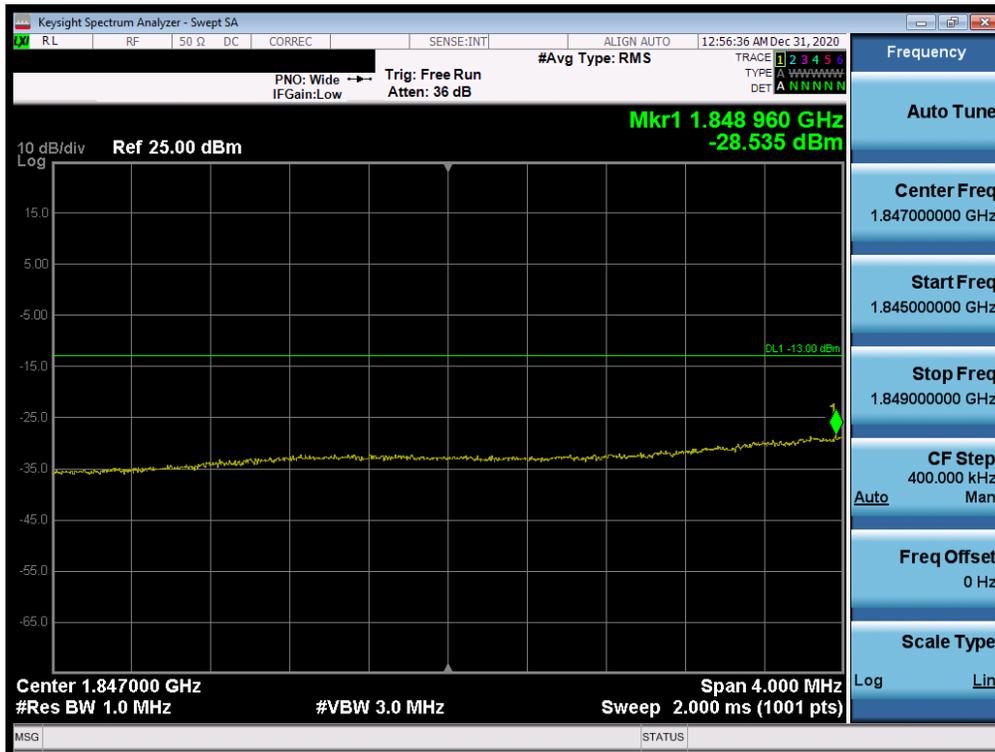

Plot 7-54. Lower Extended Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 44 of 88

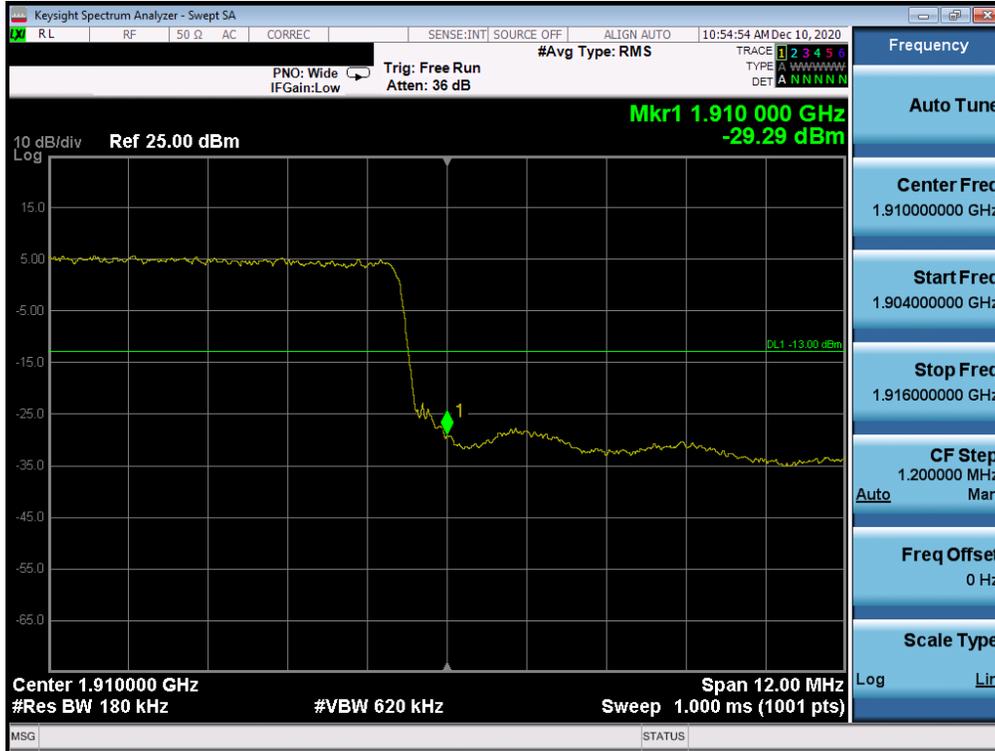


Plot 7-55. Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB Configuration)



Plot 7-56. Upper Extended Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 45 of 88

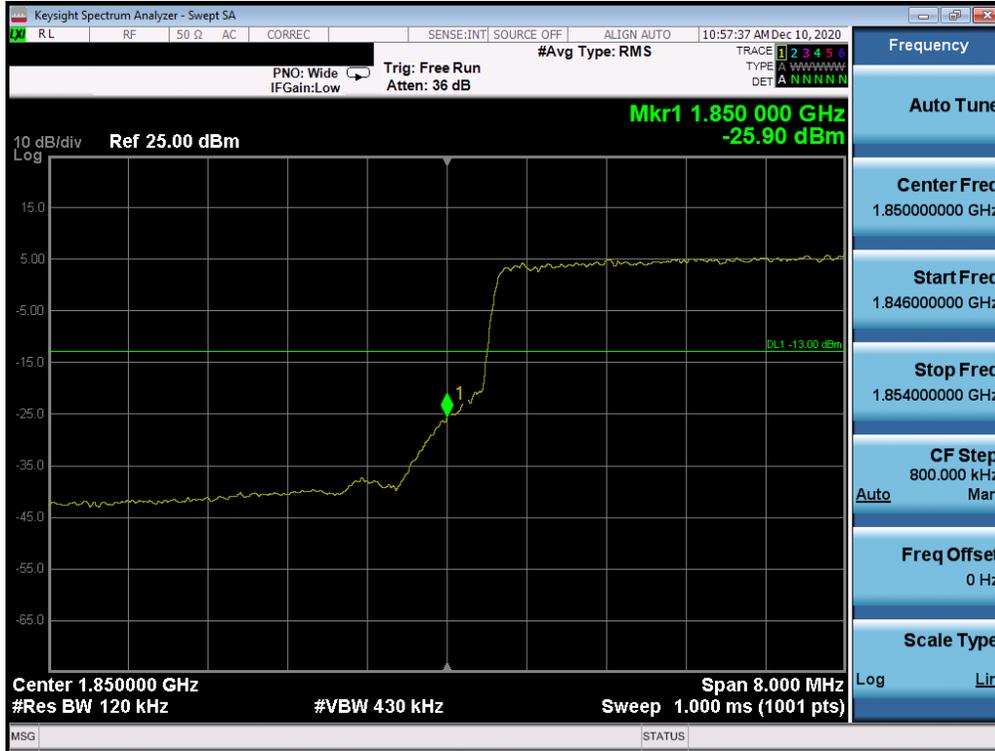


Plot 7-57. Lower Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB Configuration)



Plot 7-58. Lower Extended Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 46 of 88

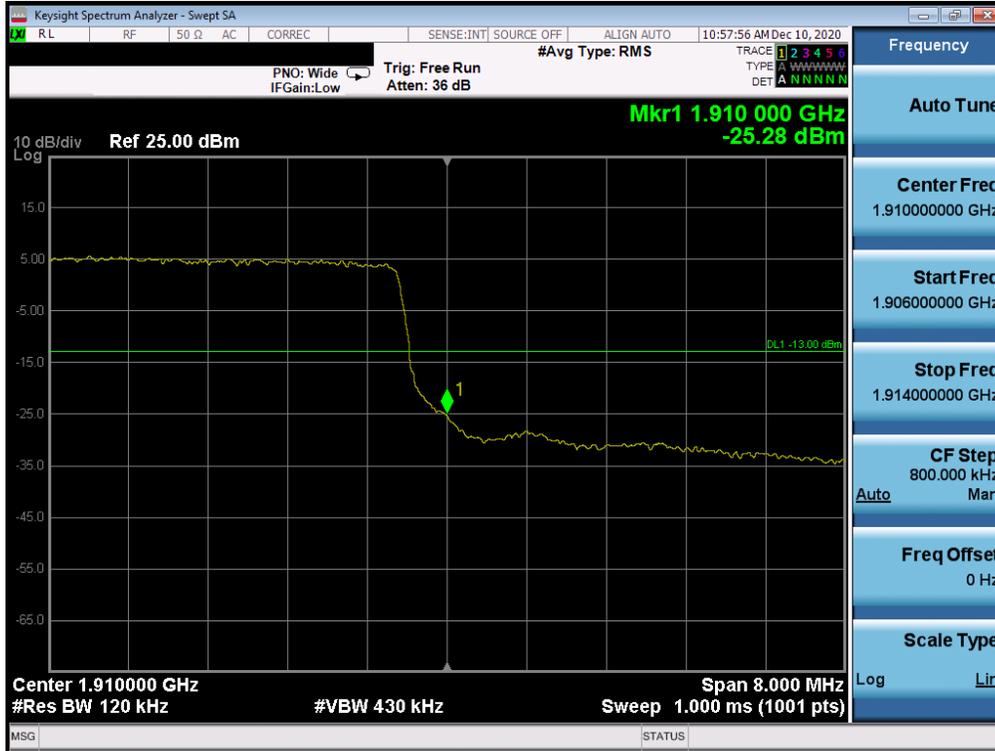


Plot 7-59. Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB Configuration)




Plot 7-60. Upper Extended Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 47 of 88

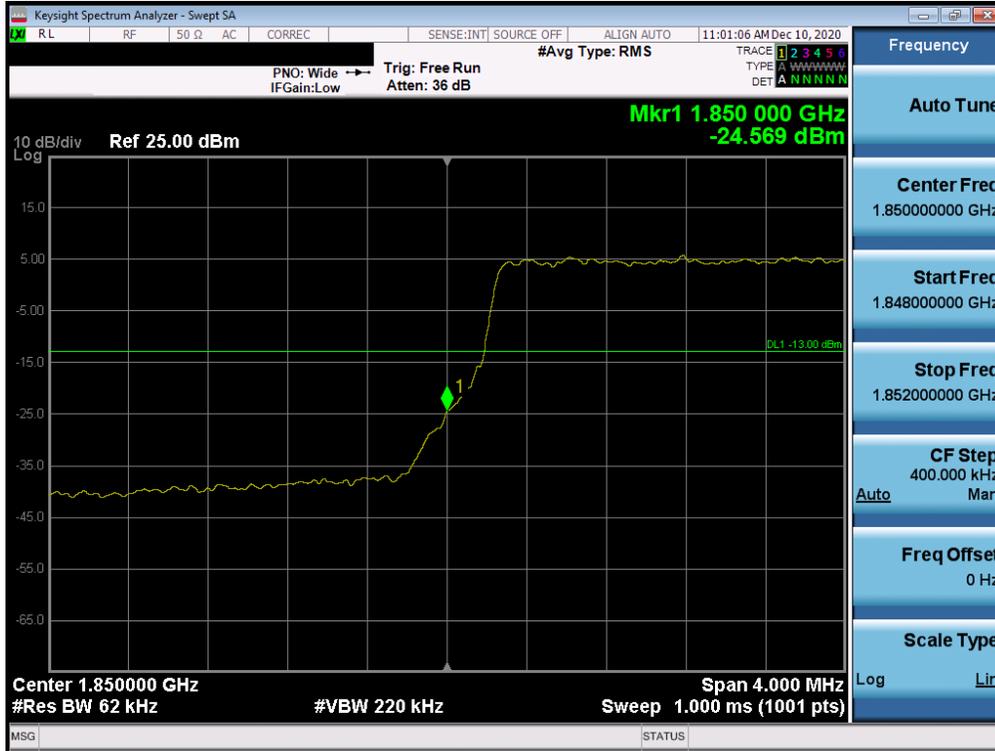

Plot 7-61. Lower Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB Configuration)

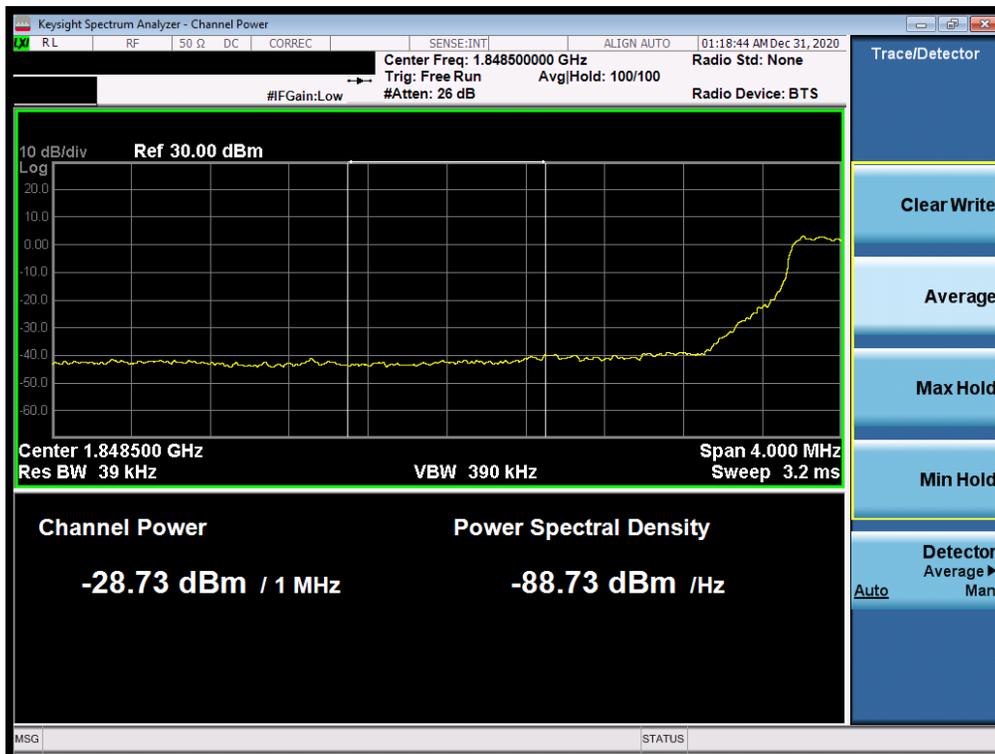


Plot 7-62. Lower Extended Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 48 of 88




Plot 7-63. Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB Configuration)

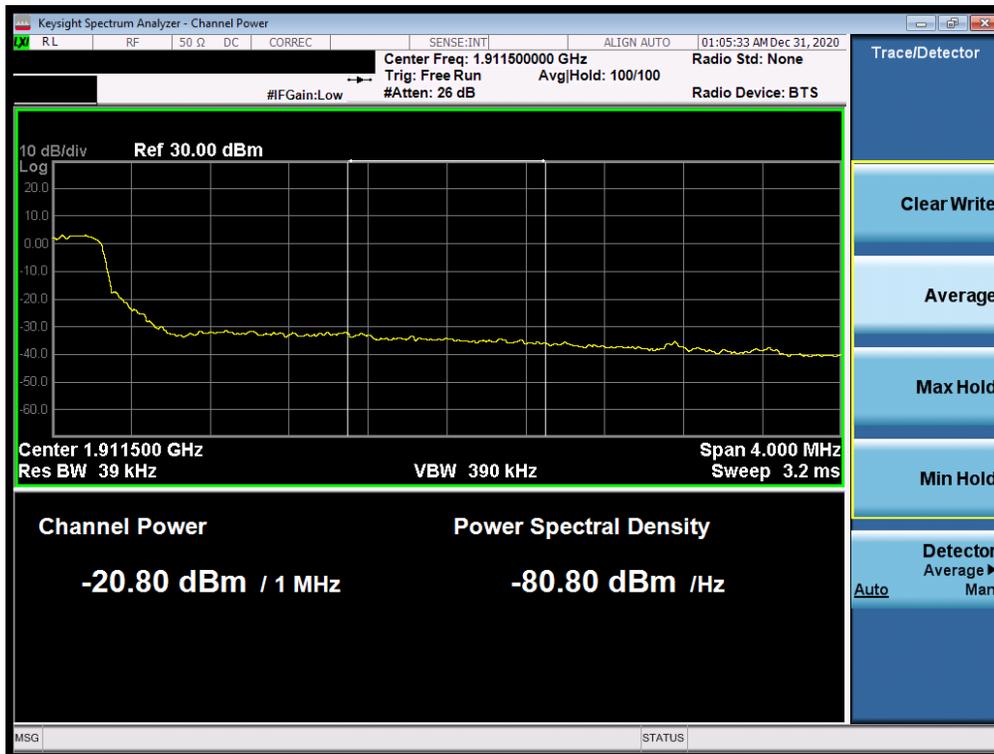


Plot 7-64. Upper Extended Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 49 of 88

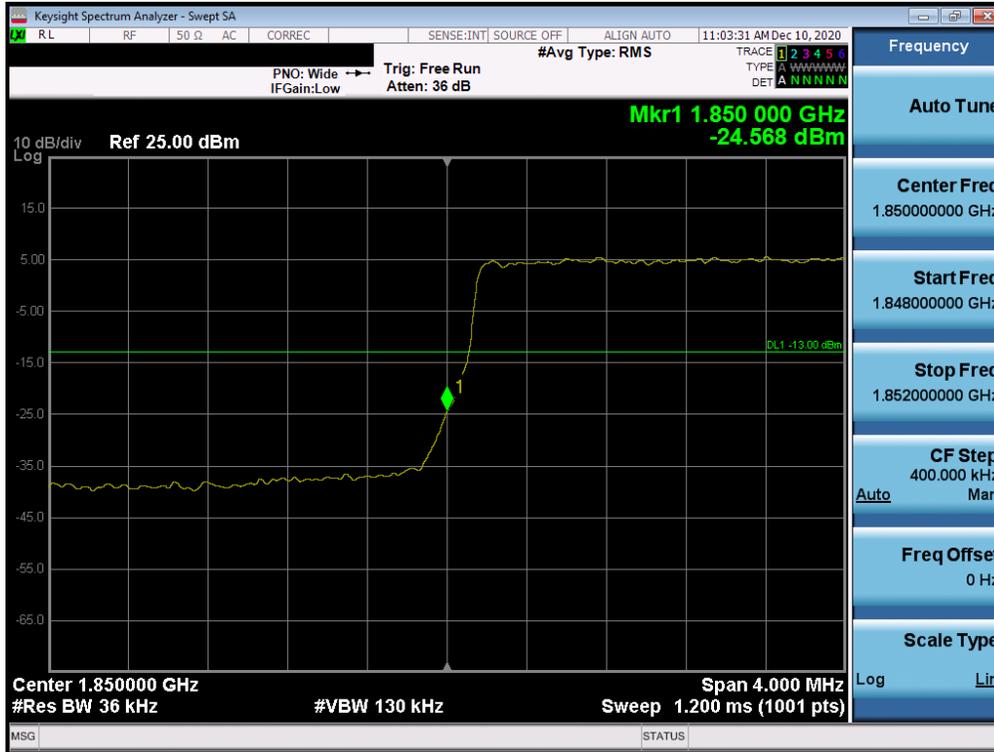


Plot 7-65. Lower Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB Configuration)

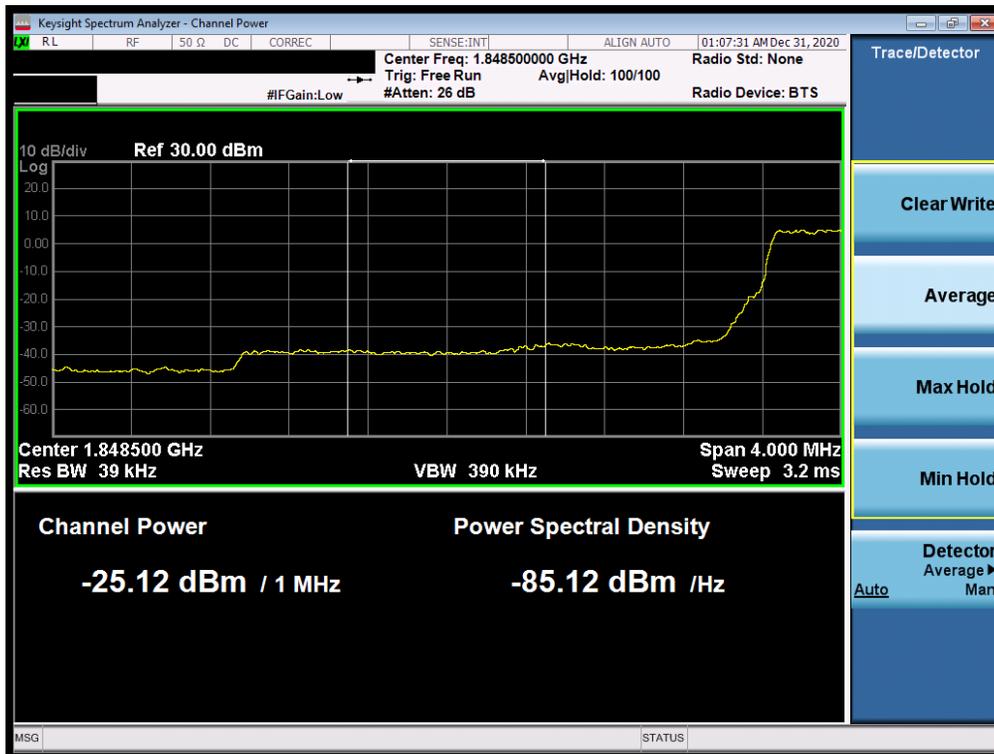


Plot 7-66. Lower Extended Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 50 of 88

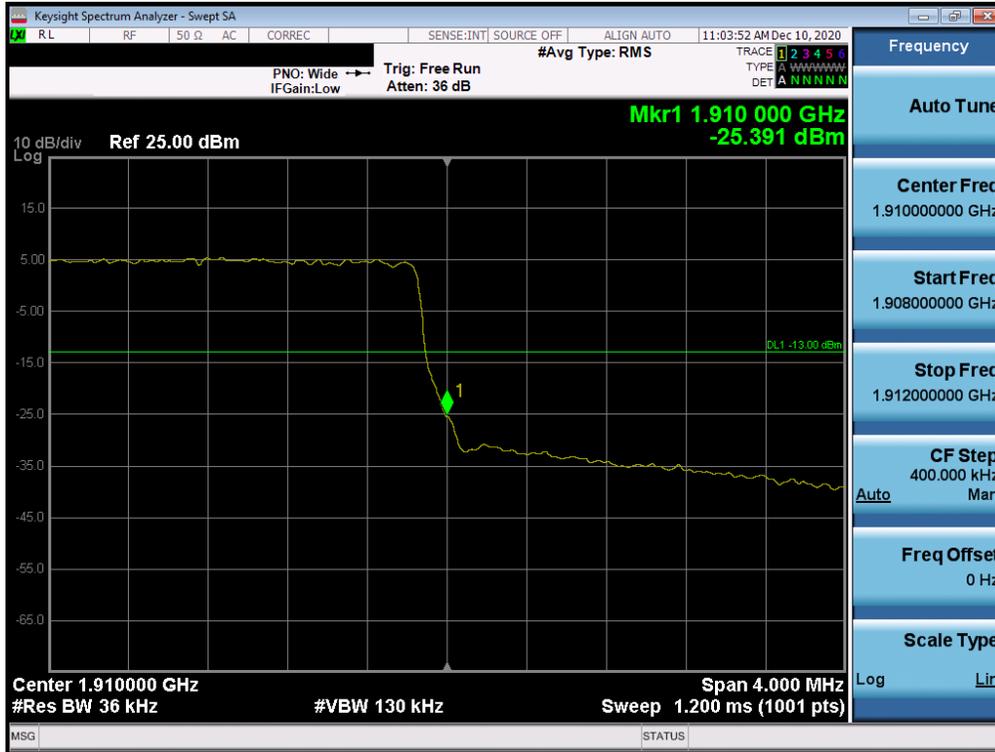

Plot 7-67. Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB Configuration)

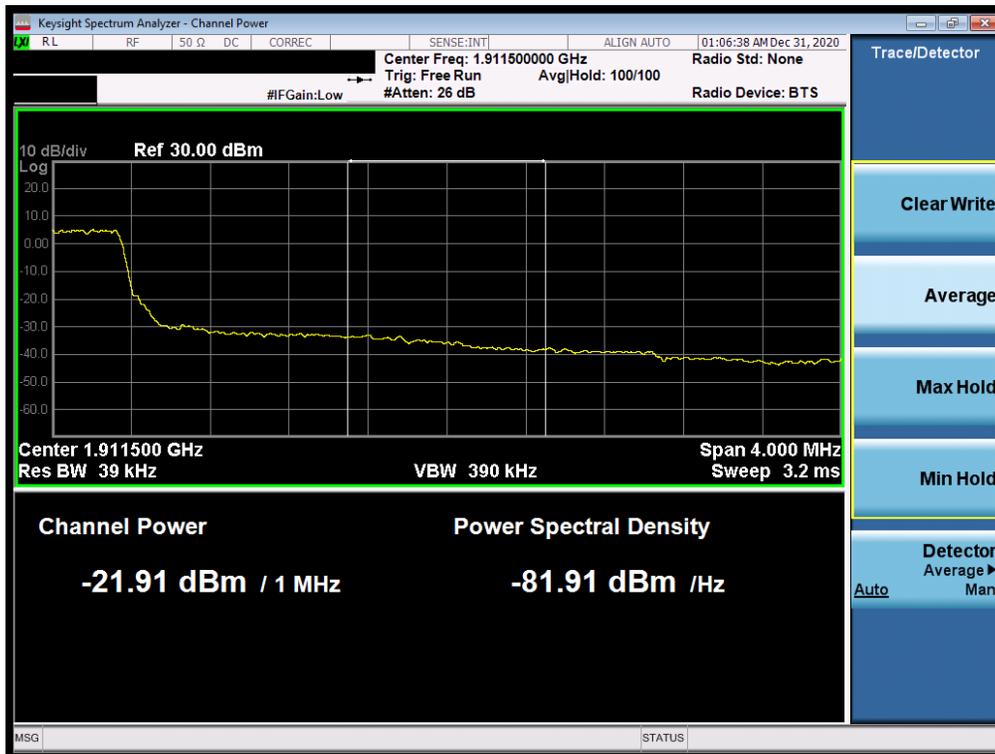


Plot 7-68. Upper Extended Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 51 of 88



Plot 7-69. Lower Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

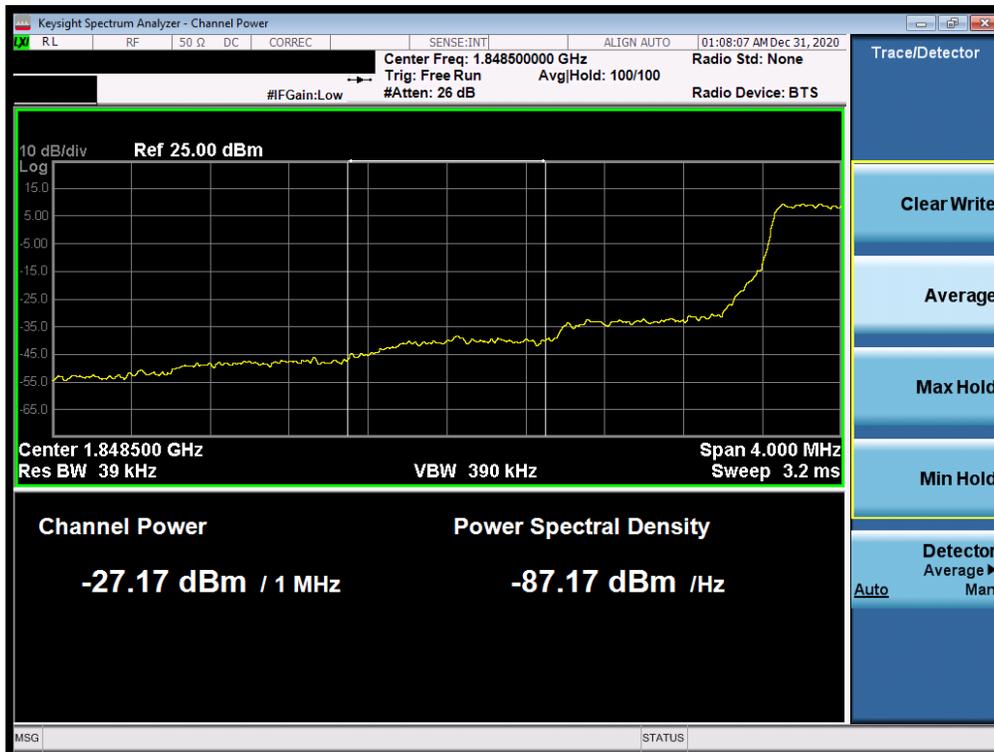


Plot 7-70. Lower Extended Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 52 of 88



Plot 7-71. Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

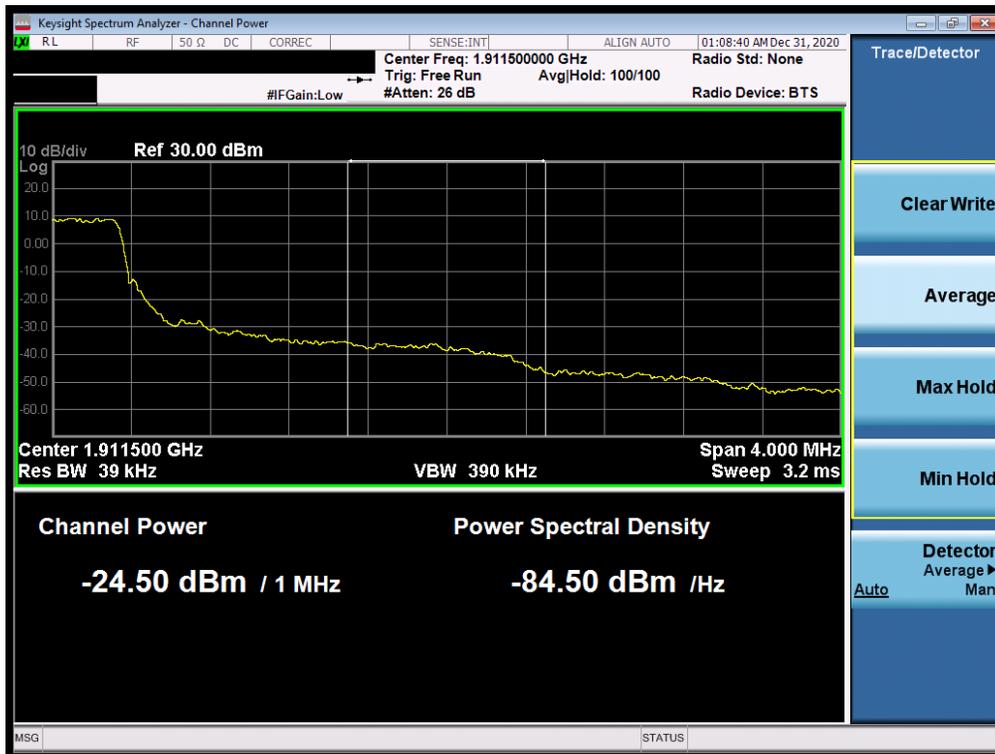

Plot 7-72. Upper Extended Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 53 of 88



**WCDMA PCS**



**Plot 7-75. Lower Band Edge Plot (WCDMA PCS – Ch. 9262)**

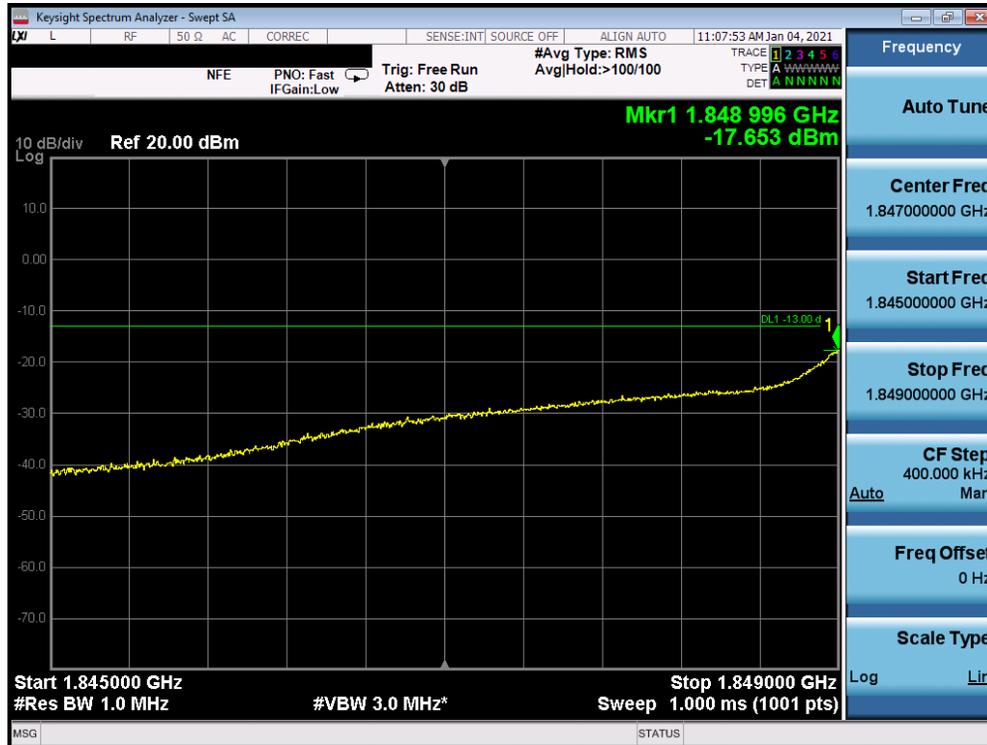


**Plot 7-76. Lower Extended Band Edge Plot (WCDMA PCS – Ch. 9262)**

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 55 of 88



Plot 7-77. Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

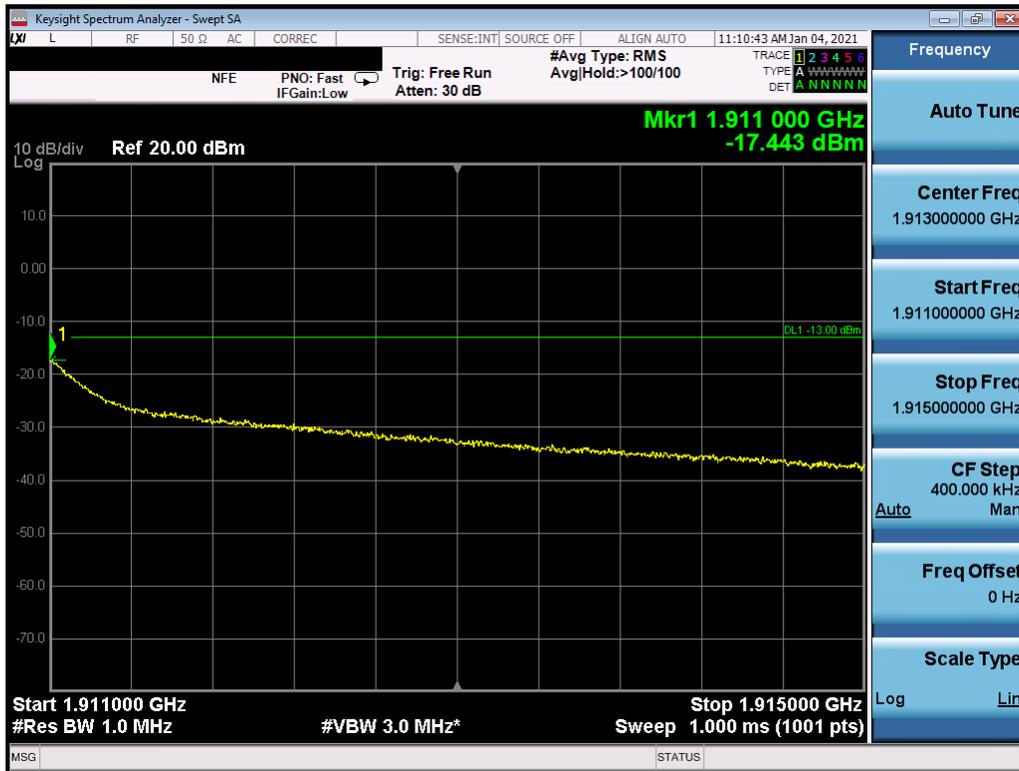

Plot 7-78. Upper Extended Band Edge Plot (WCDMA PCS – Ch. 9262)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 56 of 88

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

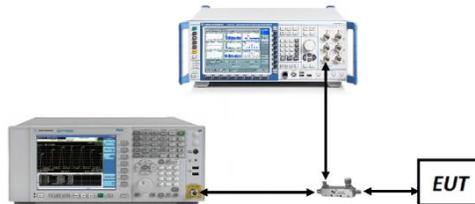


**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 57 of 88

## LTE Band 2

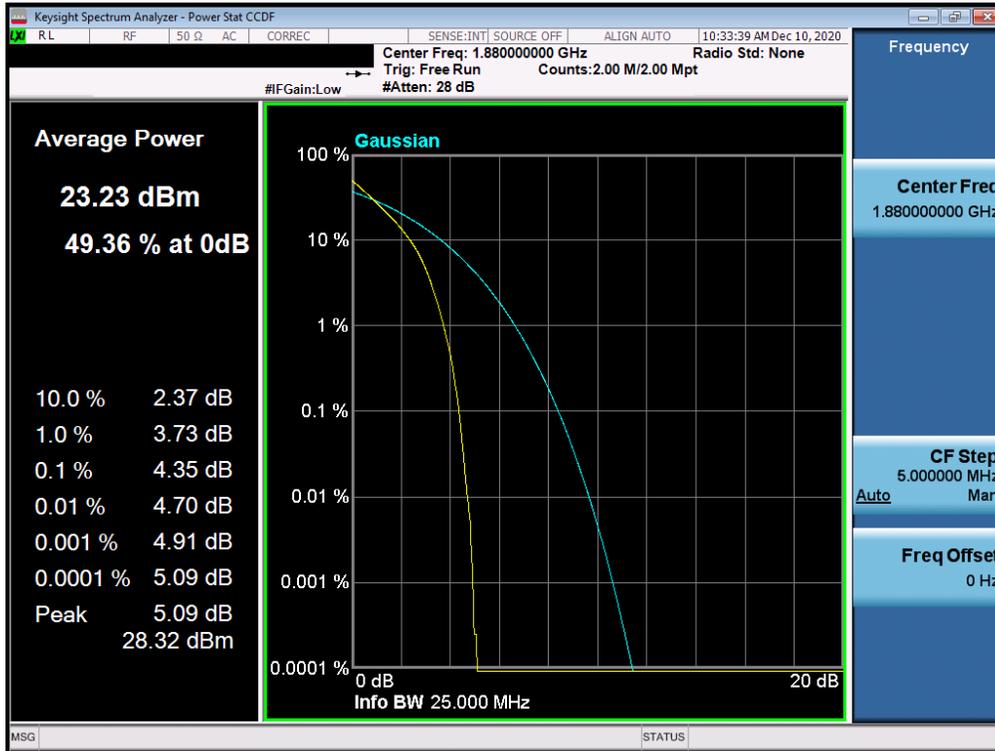


Plot 7-79. PAR Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

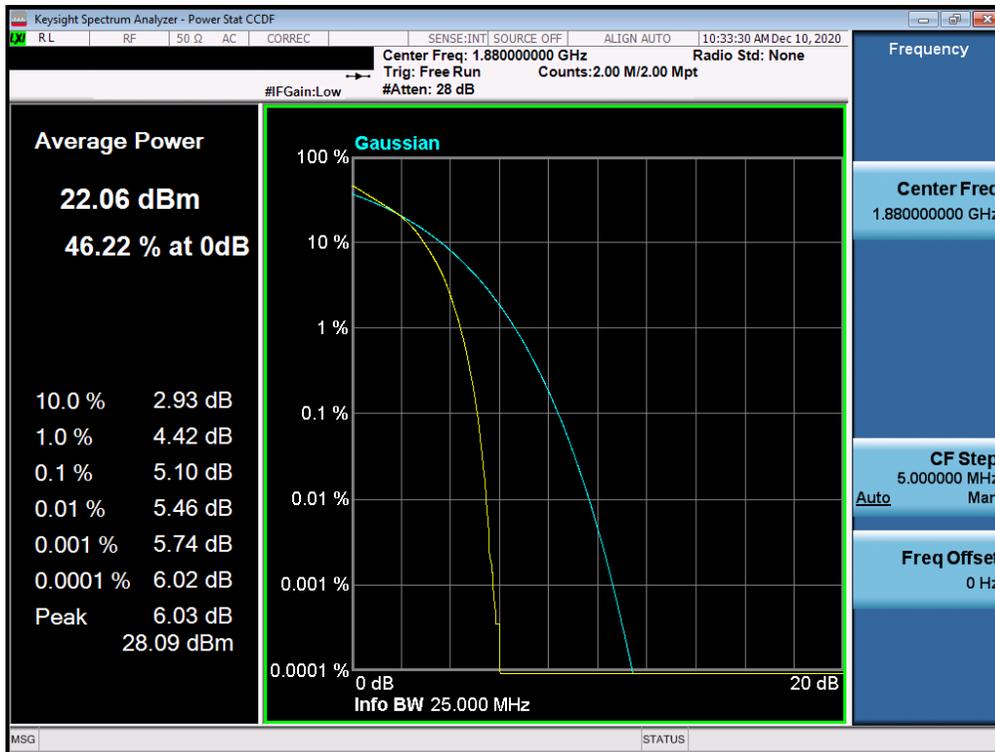


Plot 7-80. PAR Plot (LTE Band 2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 58 of 88

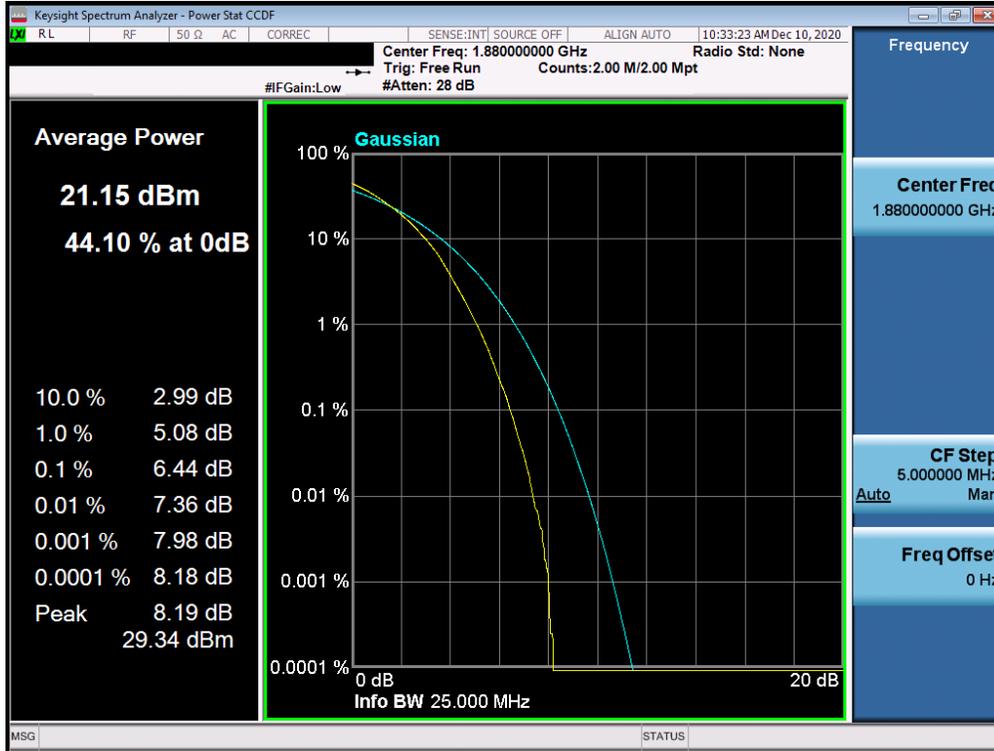


Plot 7-81. PAR Plot (LTE Band 2 - 20MHz 64-QAM - Full RB Configuration)

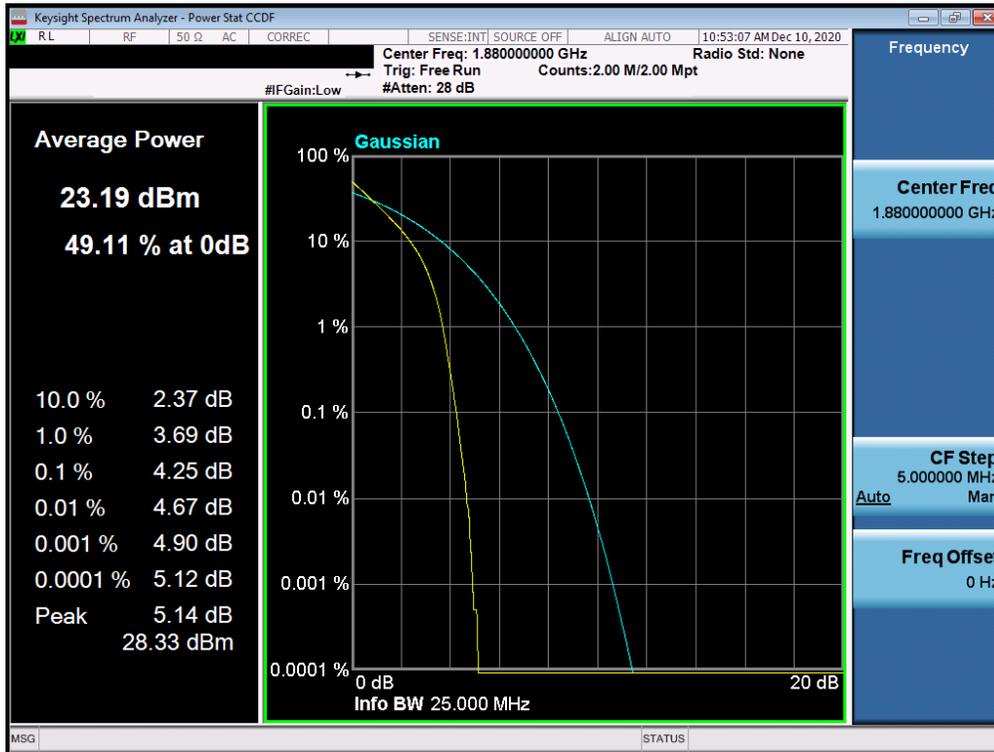


Plot 7-82. PAR Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 59 of 88

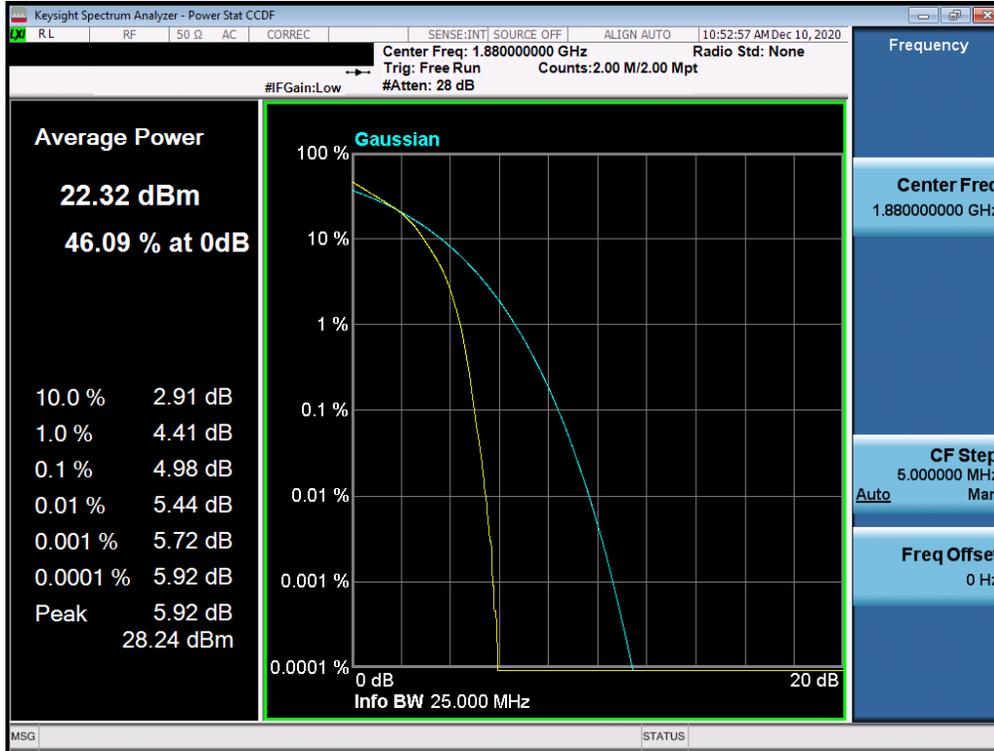


Plot 7-83. PAR Plot (LTE Band 2 - 15MHz 16-QAM - Full RB Configuration)

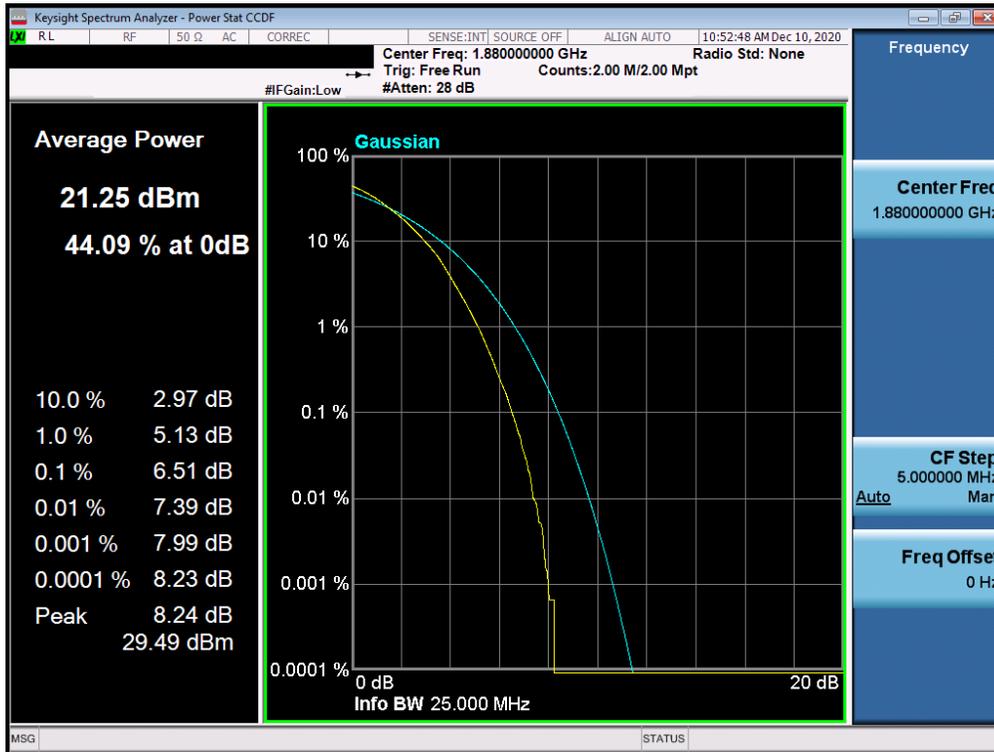


Plot 7-84. PAR Plot (LTE Band 2 - 15MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 60 of 88

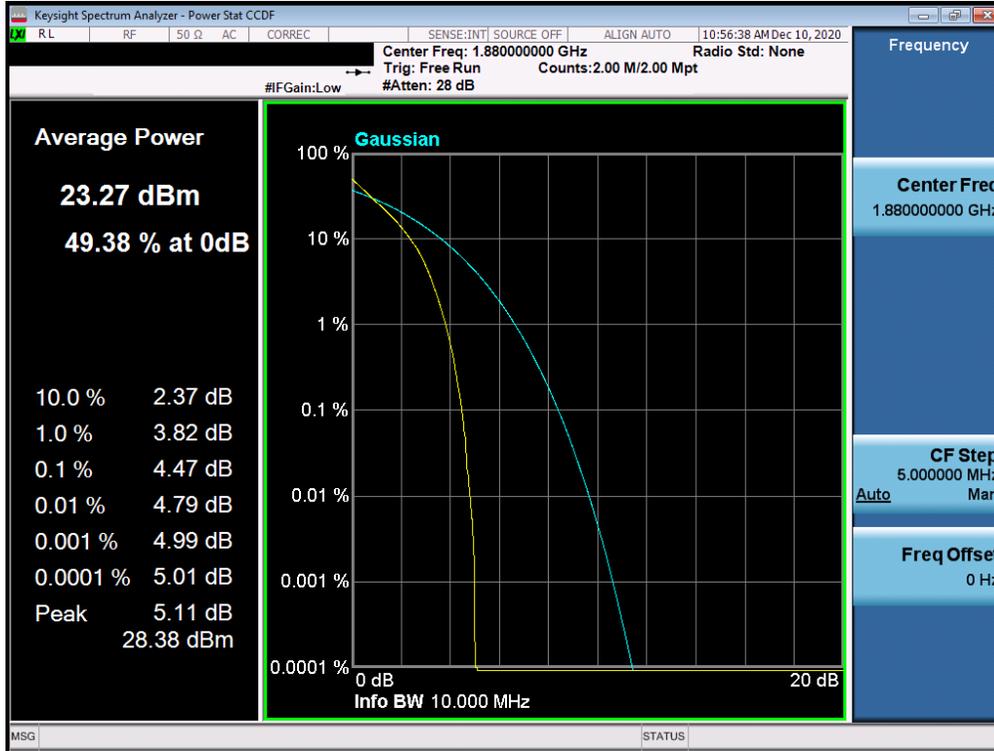


Plot 7-85. PAR Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

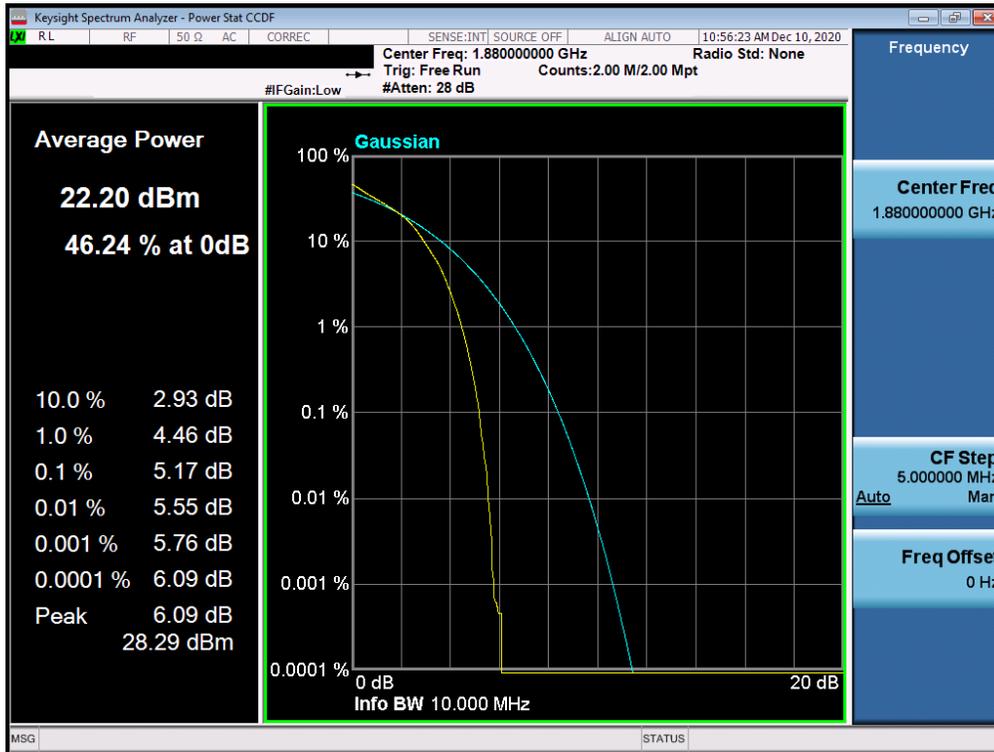


Plot 7-86. PAR Plot (LTE Band 2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 61 of 88

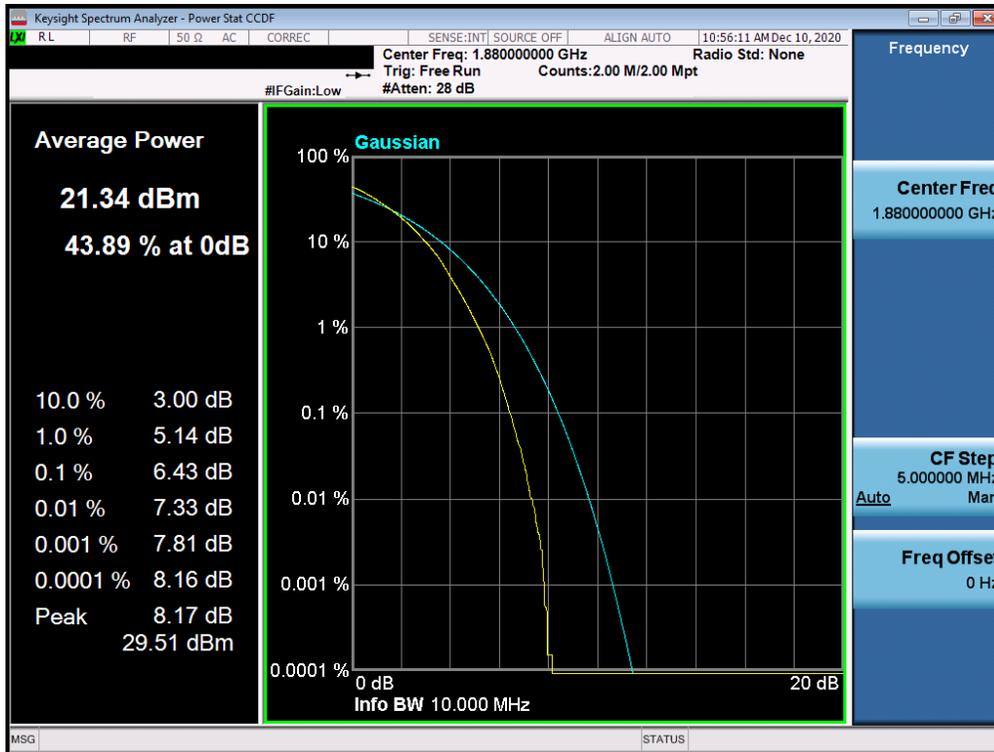


Plot 7-87. PAR Plot (LTE Band 2 - 10MHz 64-QAM - Full RB Configuration)

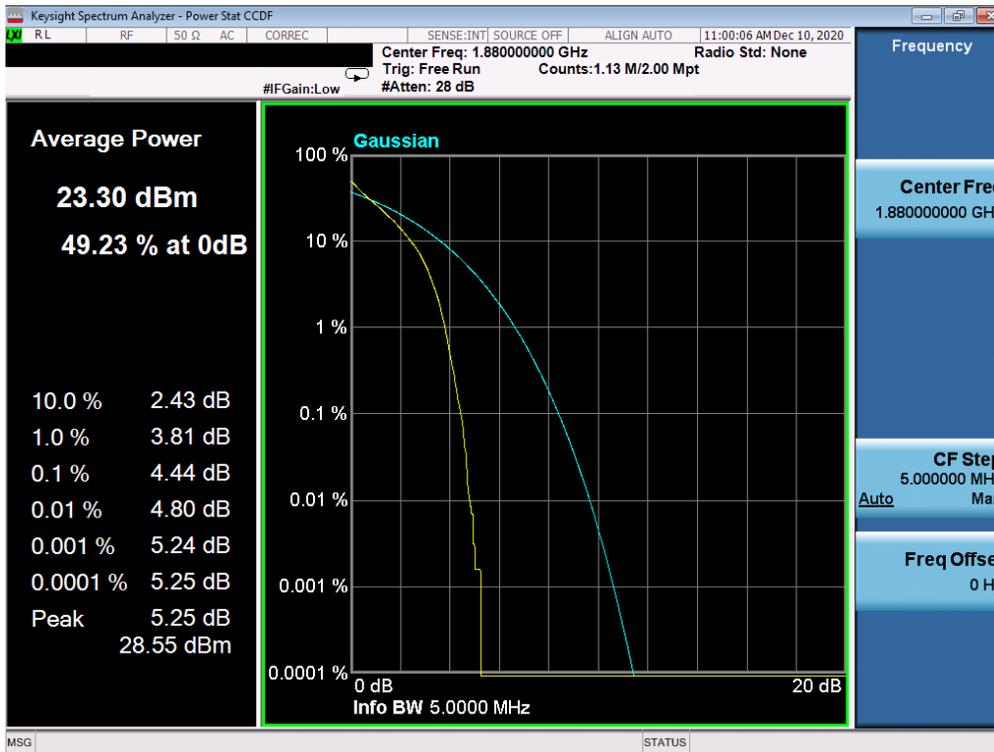


Plot 7-88. PAR Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 62 of 88

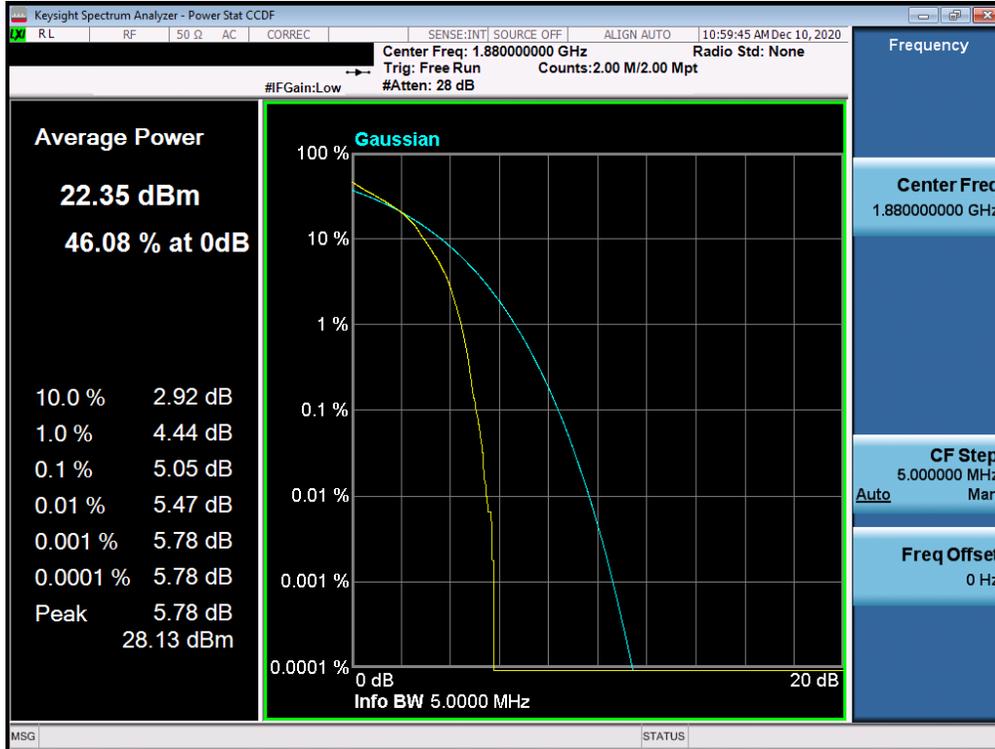


Plot 7-89. PAR Plot (LTE Band 2 - 5MHz 16-QAM - Full RB Configuration)

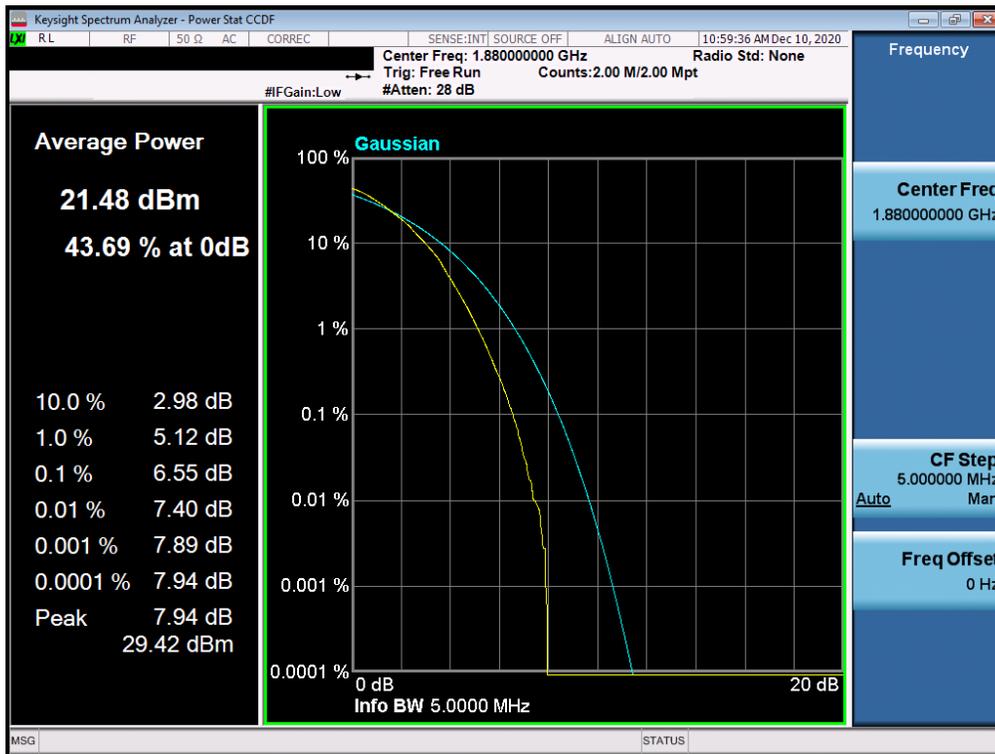


Plot 7-90. PAR Plot (LTE Band 2 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 63 of 88

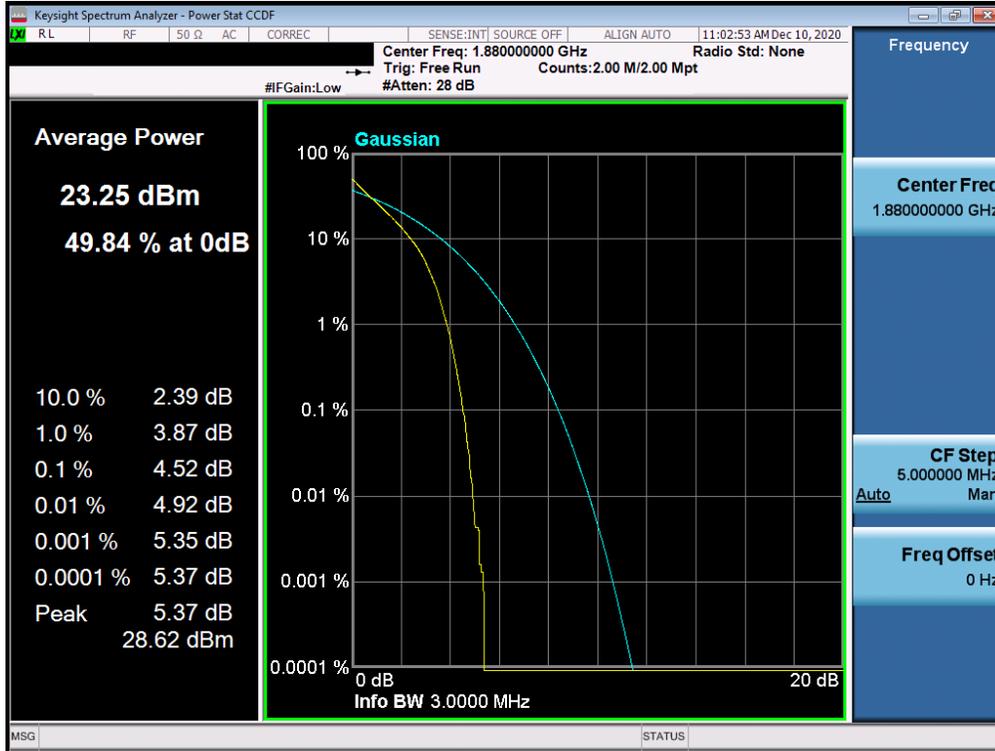


Plot 7-91. PAR Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

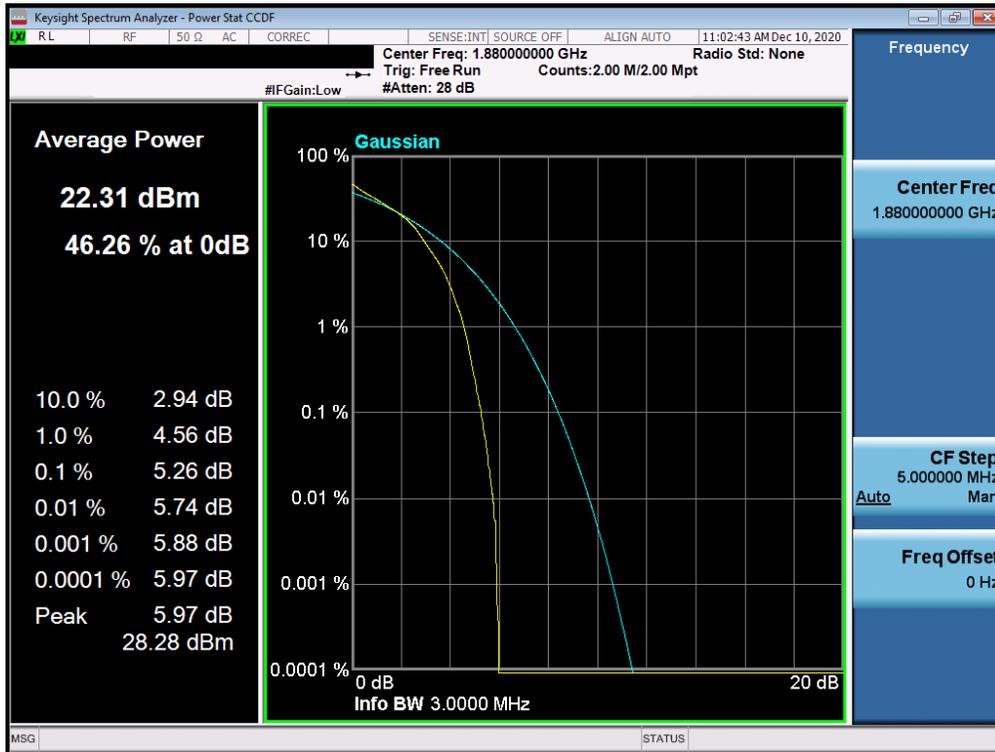


Plot 7-92. PAR Plot (LTE Band 2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 64 of 88

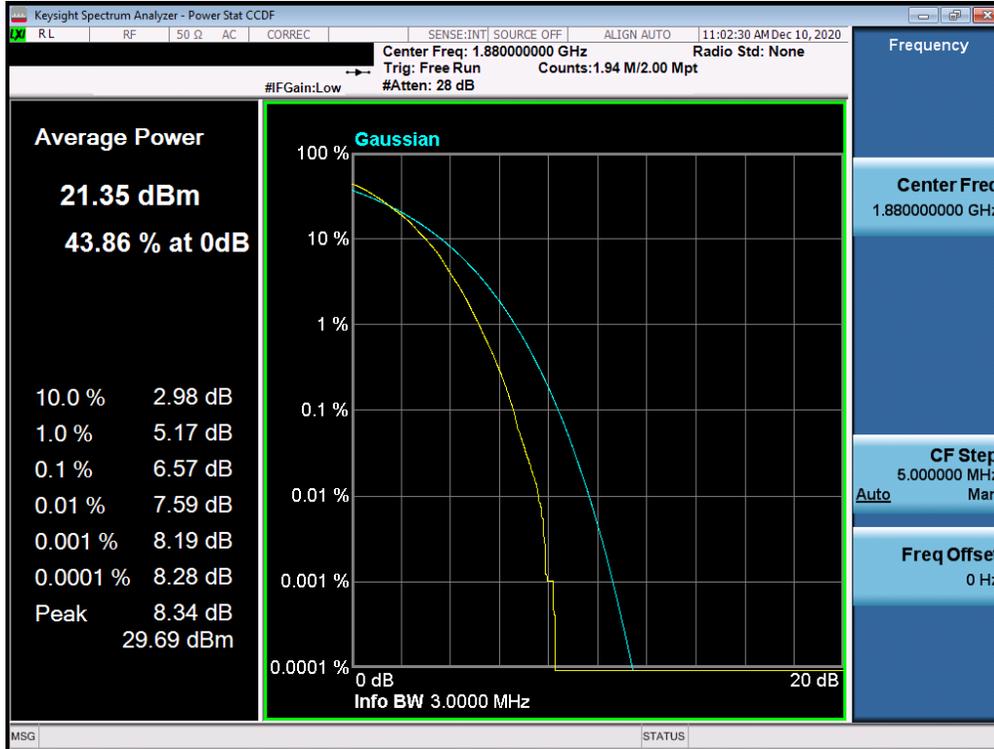


Plot 7-93. PAR Plot (LTE Band 2 - 3MHz 64-QAM - Full RB Configuration)

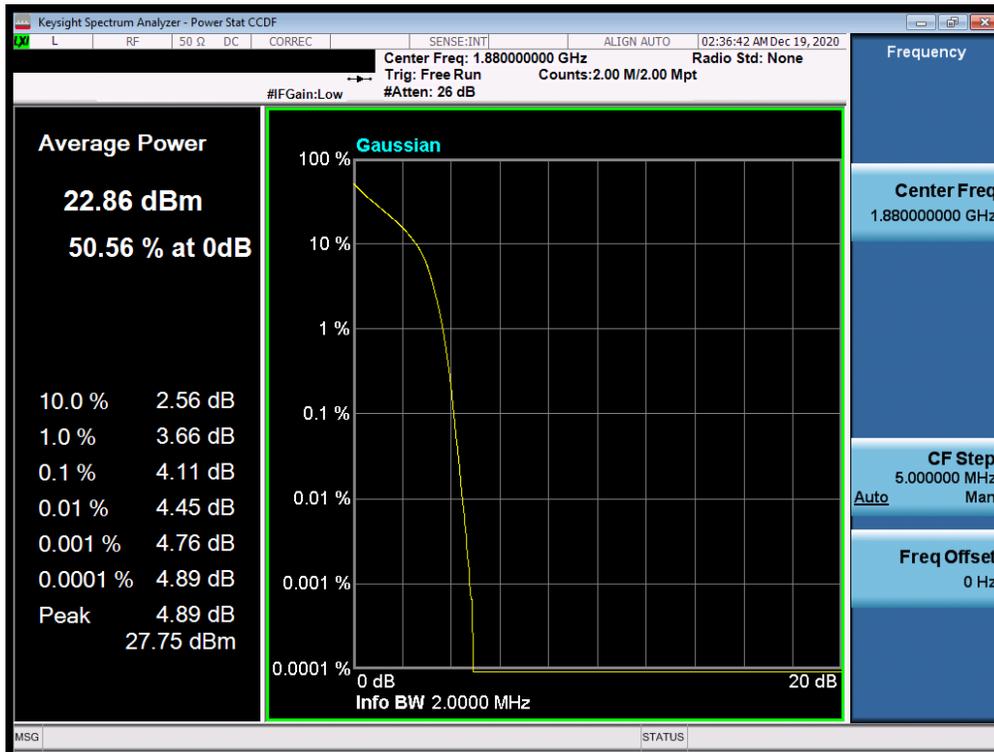


Plot 7-94. PAR Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 65 of 88

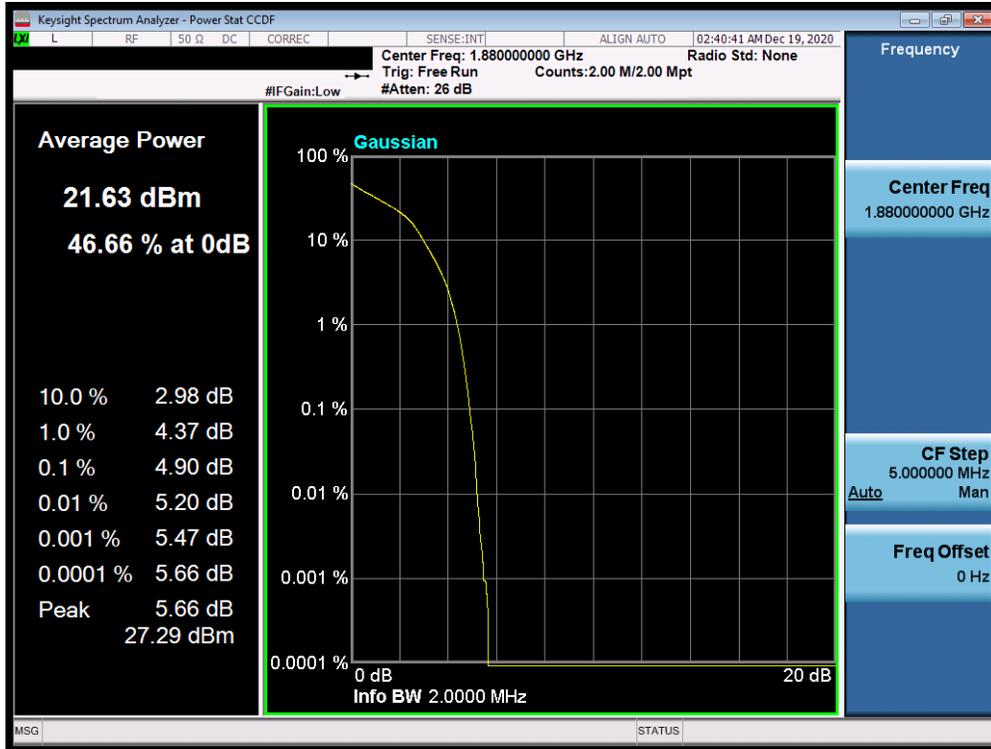


Plot 7-95. PAR Plot (LTE Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

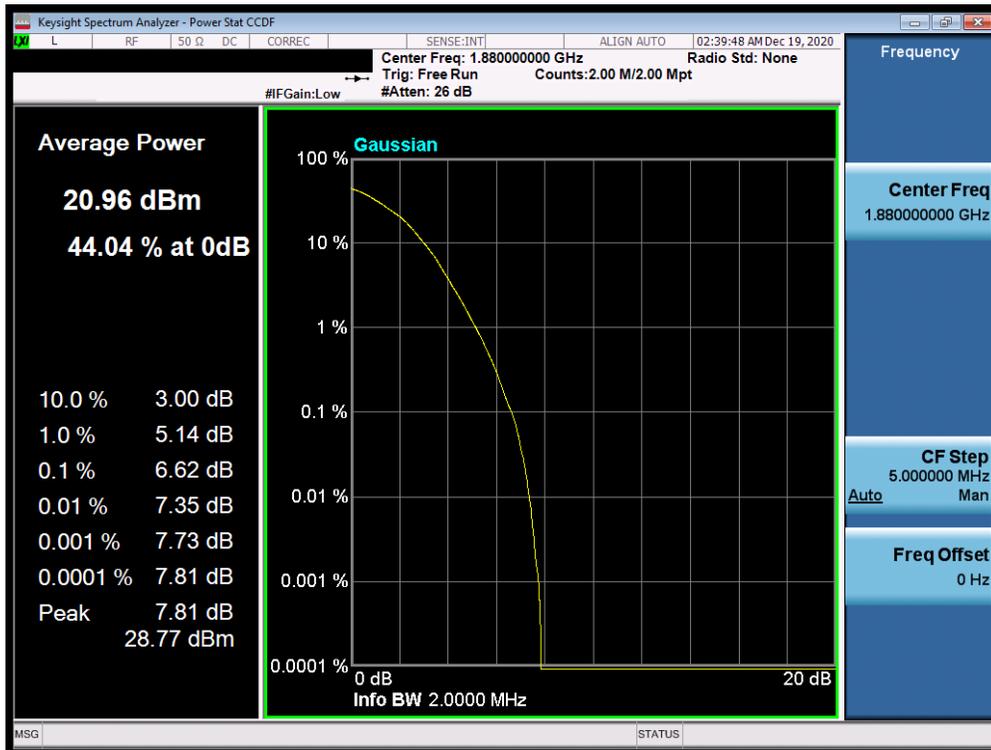


Plot 7-96. PAR Plot (LTE Band 2 - 1.4MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 66 of 88

**GSM/GPRS PCS**

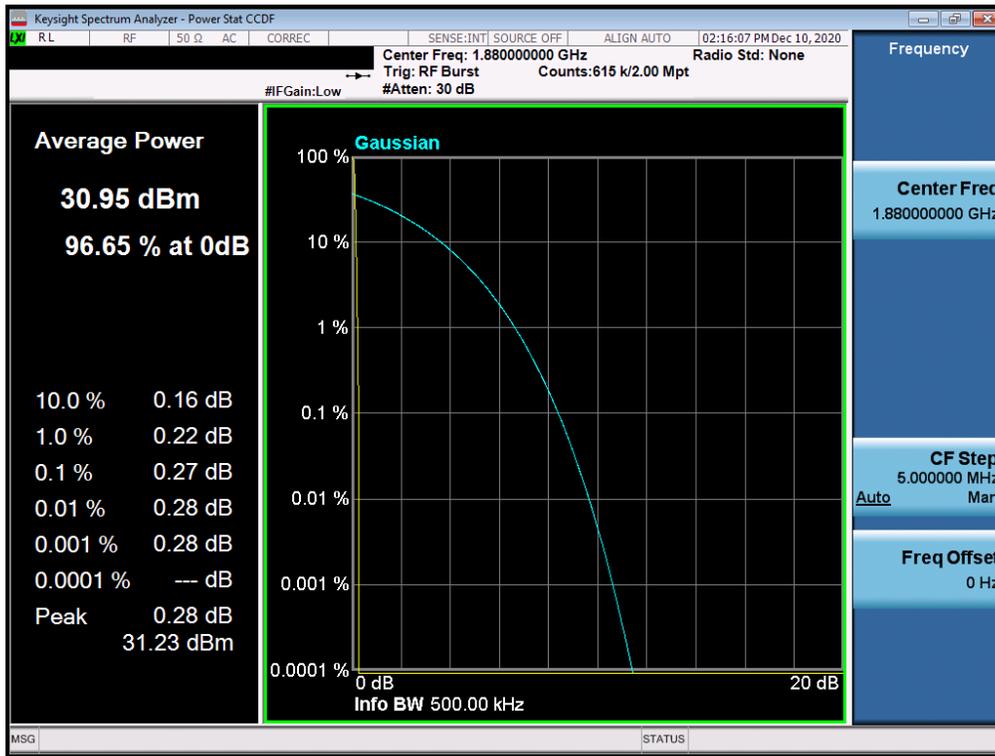


Plot 7-97. PAR Plot (GPRS, Ch. 661)

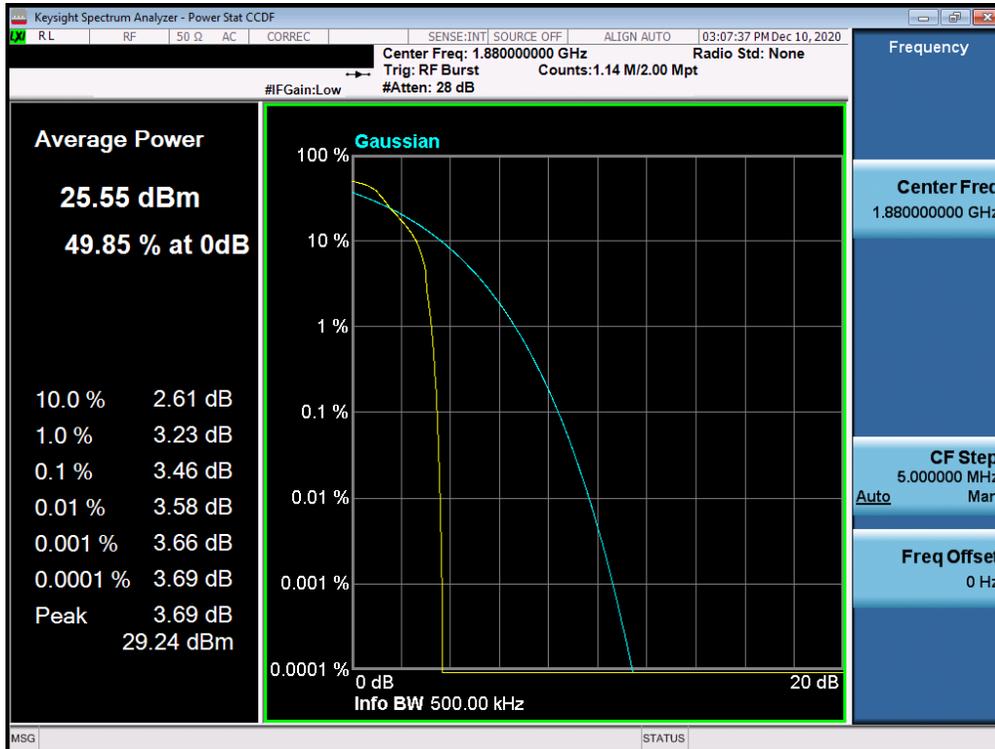

Plot 7-98. PAR Plot (EDGE, Ch. 661)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 67 of 88

**WCDMA PCS**

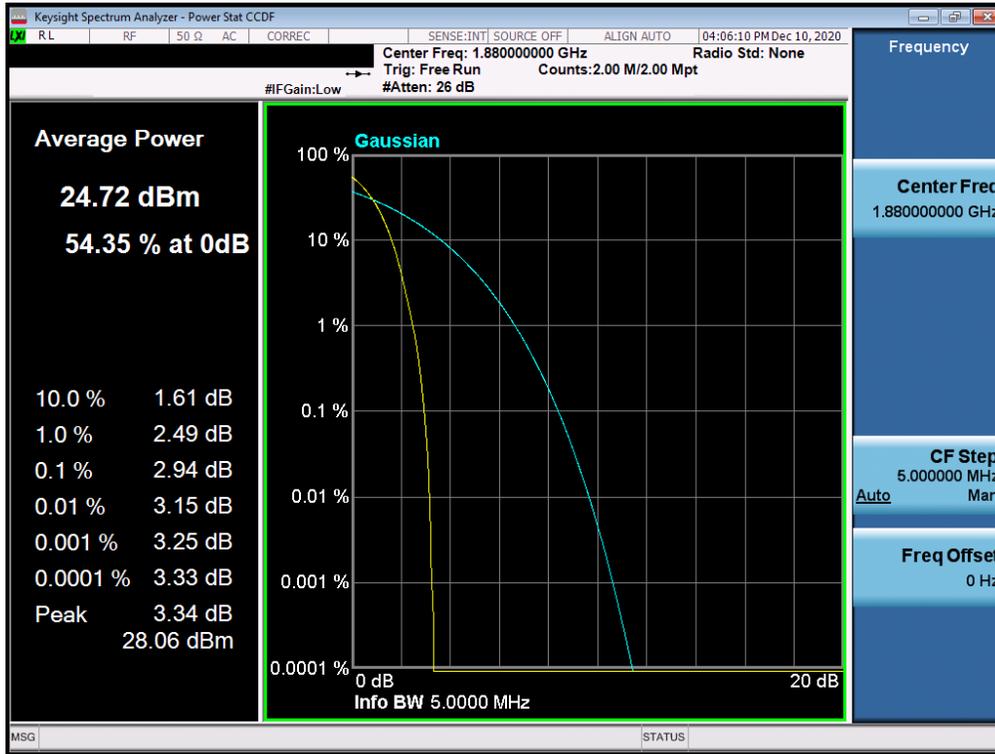

Plot 7-99. PAR Plot (WCDMA, Ch. 9400)

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 68 of 88

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFK200AM	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset		Page 69 of 88

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

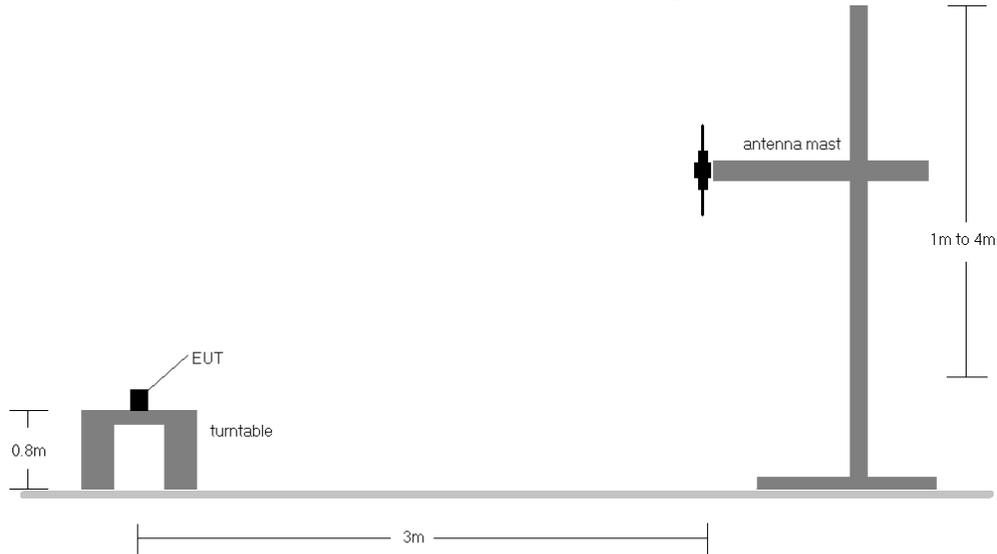

**Figure 7-5. Radiated Test Setup <1GHz**

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 70 of 88	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	EUT Pol.	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1860.0	H	X	135.0	29.0	9.64	1 / 50	13.21	22.85	0.193	33.01	-10.16
		1880.0	H	X	122.0	25.0	9.93	1 / 50	13.76	<b>23.69</b>	0.234	33.01	-9.32
		1900.0	H	X	107.0	24.0	10.20	1 / 50	13.23	23.43	0.221	33.01	-9.58
	16-QAM	1880.0	H	X	122.0	25.0	9.93	1 / 50	12.67	<b>22.60</b>	0.182	33.01	-10.41
64-QAM	1880.0	H	X	122.0	25.0	9.93	1 / 50	11.72	<b>21.65</b>	0.146	33.01	-11.36	
15 MHz	QPSK	1857.5	H	X	135.0	29.0	9.61	1/0	12.83	22.43	0.175	33.01	-10.58
		1880.0	H	X	122.0	25.0	9.93	1/36	13.80	<b>23.73</b>	0.236	33.01	-9.28
		1902.5	H	X	107.0	24.0	10.22	1/36	13.22	23.44	0.221	33.01	-9.57
	16-QAM	1880.0	H	X	122.0	25.0	9.93	1/74	12.55	<b>22.48</b>	0.177	33.01	-10.53
64-QAM	1880.0	H	X	122.0	25.0	9.93	1/36	11.68	<b>21.61</b>	0.145	33.01	-11.40	
10 MHz	QPSK	1855.0	H	X	135.0	29.0	9.57	1/0	13.37	22.94	0.197	33.01	-10.07
		1880.0	H	X	122.0	25.0	9.93	1/25	13.89	<b>23.82</b>	0.241	33.01	-9.19
		1905.0	H	X	107.0	24.0	10.24	1/0	13.17	23.41	0.220	33.01	-9.60
	16-QAM	1880.0	H	X	122.0	25.0	9.93	1/25	12.81	<b>22.74</b>	0.188	33.01	-10.27
64-QAM	1880.0	H	X	122.0	25.0	9.93	1/25	11.39	<b>21.32</b>	0.135	33.01	-11.69	
5 MHz	QPSK	1852.5	H	X	135.0	29.0	9.54	1/0	13.31	22.84	0.193	33.01	-10.17
		1880.0	H	X	122.0	25.0	9.93	1/12	14.01	<b>23.94</b>	0.248	33.01	-9.07
		1907.5	H	X	107.0	24.0	10.26	1/24	12.80	23.06	0.203	33.01	-9.95
	16-QAM	1880.0	H	X	122.0	25.0	9.93	1/24	12.61	<b>22.54</b>	0.179	33.01	-10.47
64-QAM	1880.0	H	X	122.0	25.0	9.93	1/24	11.84	<b>21.77</b>	0.150	33.01	-11.24	
3 MHz	QPSK	1851.5	H	X	135.0	29.0	9.52	1/14	13.23	22.75	0.189	33.01	-10.26
		1880.0	H	X	122.0	25.0	9.93	1/7	13.78	<b>23.71</b>	0.235	33.01	-9.30
		1908.5	H	X	107.0	24.0	10.27	1/7	12.99	23.26	0.212	33.01	-9.75
	16-QAM	1880.0	H	X	122.0	25.0	9.93	1/7	12.50	<b>22.43</b>	0.175	33.01	-10.58
64-QAM	1880.0	H	X	122.0	25.0	9.93	1/7	11.65	<b>21.58</b>	0.144	33.01	-11.43	
1.4 MHz	QPSK	1850.7	H	X	135.0	29.0	9.51	3/2	13.21	22.72	0.187	33.01	-10.29
		1880.0	H	X	122.0	25.0	9.93	1/2	13.84	<b>23.77</b>	0.238	33.01	-9.24
		1909.3	H	X	107.0	24.0	10.28	1/2	13.11	23.38	0.218	33.01	-9.63
	16-QAM	1880.0	H	X	122.0	25.0	9.93	3/3	12.53	<b>22.46</b>	0.176	33.01	-10.55
64-QAM	1880.0	H	X	122.0	25.0	9.93	3/2	11.86	<b>21.79</b>	0.151	33.01	-11.22	
20 MHz	Opposite Pol.	1880.0	V	Y	111.0	130.0	10.13	1 / 50	11.91	22.04	0.160	33.01	-10.97

Table 7-2. EIRP Data (LTE Band 2)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	146	32	18.49	9.51	28.00	0.630	33.01	-5.01
1880.00	GPRS1900	H	119	19	19.02	9.93	<b>28.95</b>	<b>0.785</b>	33.01	-4.06
1909.80	GPRS1900	H	157	31	18.14	10.28	28.42	0.695	33.01	-4.59
1880.00	GPRS1900	V	107	125	17.99	10.13	28.12	0.649	33.01	-4.89
1880.00	EDGE1900	H	119	19	15.16	9.93	<b>25.09</b>	0.323	33.01	-7.92

Table 7-3. EIRP Data (GPRS PCS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	150	29	13.05	9.54	22.59	0.181	33.01	-10.42
1880.00	WCDMA1900	H	124	23	13.56	9.93	<b>23.49</b>	<b>0.223</b>	33.01	-9.52
1907.60	WCDMA1900	H	111	34	13.02	10.26	23.28	0.213	33.01	-9.73
1880.00	WCDMA1900	V	108	125	12.36	10.13	22.49	0.177	33.01	-10.52

Table 7-4. EIRP Data (WCDMA PCS)

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 71 of 88	

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: ZNFK200AM	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 72 of 88	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

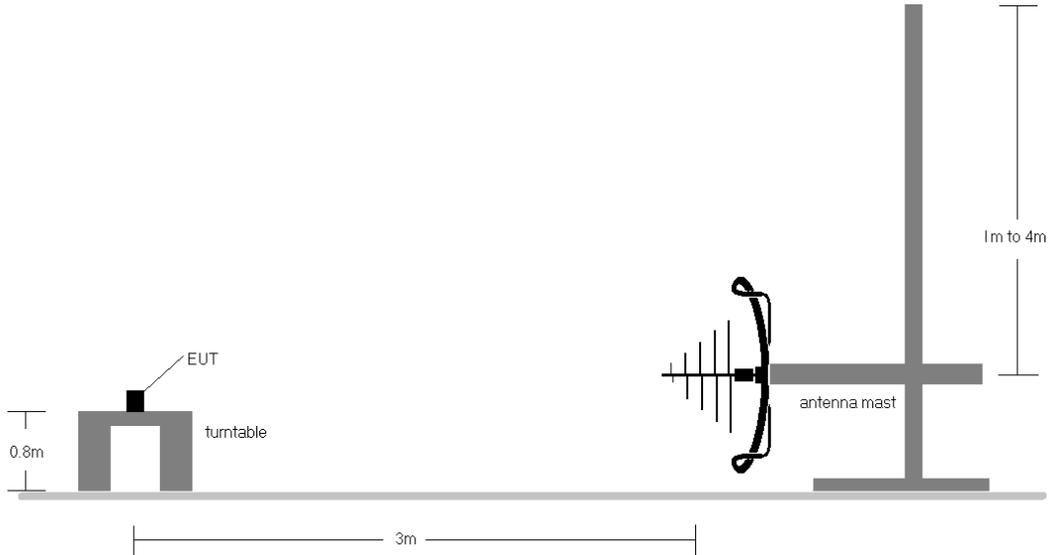

**Figure 7-6. Test Instrument & Measurement Setup < 1GHz**

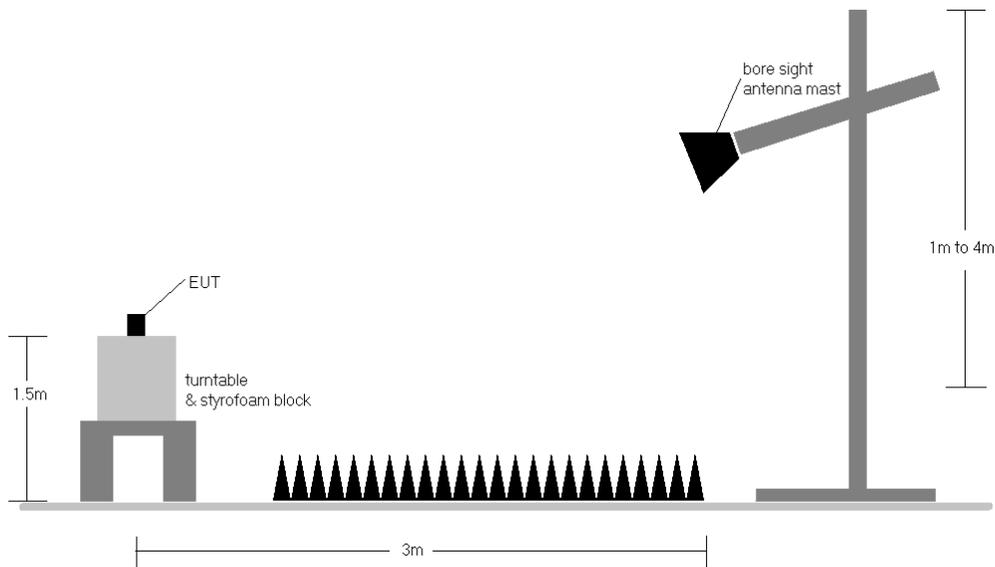

**Figure 7-7. Test Instrument & Measurement Setup >1 GHz**


FCC ID: ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 73 of 88	

## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 7) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 8) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 9) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFK200AM	 <b>PART 24 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 74 of 88

## LTE Band 2

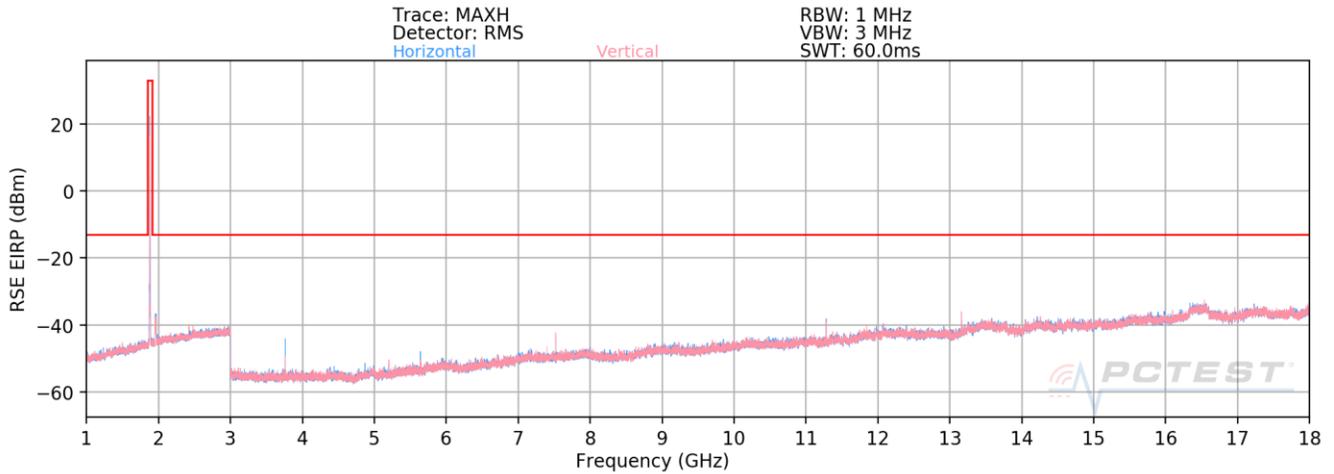

Plot 7-100. Radiated Spurious Plot (LTE Band 2)

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	V	285	364	-73.29	7.82	41.53	-53.73	-13.00	-40.73
5580.0	V	-	-	-82.06	11.90	36.84	-58.42	-13.00	-45.42
7440.0	V	289	356	-80.85	16.00	42.15	-53.11	-13.00	-40.11
9300.0	V	-	-	-83.33	18.79	42.46	-52.80	-13.00	-39.80
11160.0	V	100	267	-79.20	20.95	48.75	-46.51	-13.00	-33.51
13020.0	V	101	252	-79.67	24.10	51.43	-43.83	-13.00	-30.83
14880.0	V	-	-	-85.13	27.76	49.63	-45.63	-13.00	-32.63
16740.0	V	-	-	-84.69	30.44	52.75	-42.51	-13.00	-29.51

Table 7-5. Radiated Spurious Data (LTE Band 2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1880.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	V	103	284	-71.22	8.26	44.04	-51.22	-13.00	-38.22
5640.0	V	101	55	-81.27	11.02	36.75	-58.51	-13.00	-45.51
7520.0	V	111	26	-74.59	15.78	48.19	-47.07	-13.00	-34.07
9400.0	V	102	106	-81.97	19.12	44.15	-51.11	-13.00	-38.11
11280.0	V	104	288	-75.71	22.00	53.29	-41.97	-13.00	-28.97
13160.0	V	101	38	-75.96	24.79	55.83	-39.43	-13.00	-26.43
15040.0	V	-	-	-85.12	27.96	49.84	-45.42	-13.00	-32.42
16920.0	V	-	-	-84.67	28.97	51.30	-43.96	-13.00	-30.96

Table 7-6. Radiated Spurious Data (LTE Band 2 – Mid Channel)

FCC ID: ZNFK200AM	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 75 of 88


Bandwidth (MHz):	20
Frequency (MHz):	1900.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3800.00	V	375	282	-74.34	8.22	40.88	-54.38	-13.00	-41.38
5700.00	V	124	52	-78.96	11.10	39.14	-56.11	-13.00	-43.11
7600.00	V	102	28	-76.55	16.34	46.79	-48.47	-13.00	-35.47
9500.00	V	106	161	-82.80	19.06	43.26	-51.99	-13.00	-38.99
11400.00	V	103	285	-78.05	21.79	50.74	-44.52	-13.00	-31.52
13300.00	V	101	37	-76.53	25.00	55.47	-39.78	-13.00	-26.78
15200.00	V	-	-	-85.35	27.73	49.38	-45.87	-13.00	-32.87
17100.00	V	-	-	-84.45	30.17	52.72	-42.54	-13.00	-29.54

**Table 7-7. Radiated Spurious Data (LTE Band 2 – High Channel)**

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 76 of 88	

# GSM/GPRS PCS

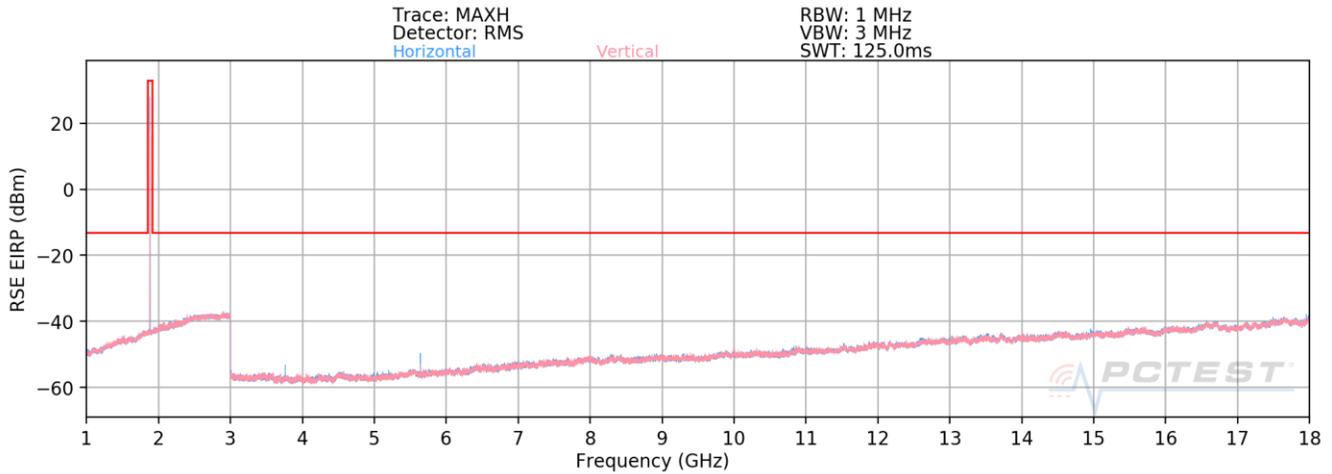

**Plot 7-101. Radiated Spurious Plot (GPRS PCS)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	512
<b>Frequency (MHz):</b>	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.4	H	175	44	-72.50	5.40	39.90	-55.36	-13.00	-42.36
5550.6	H	101	97	-66.57	8.78	49.21	-46.04	-13.00	-33.04
7400.8	H	116	82	-76.44	12.03	42.59	-52.67	-13.00	-39.67
9251.0	H	-	-	-79.09	13.88	41.79	-53.47	-13.00	-40.47
11101.2	H	-	-	-78.74	16.35	44.61	-50.65	-13.00	-37.65
12951.4	H	-	-	-79.48	18.82	46.34	-48.91	-13.00	-35.91

**Table 7-8. Radiated Spurious Data (GPRS PCS – Low Channel)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	661
<b>Frequency (MHz):</b>	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	H	234	321	-67.76	6.14	45.38	-49.88	-13.00	-36.88
5640.0	H	150	359	-65.92	8.08	49.16	-46.10	-13.00	-33.10
7520.0	H	237	97	-77.52	12.45	41.93	-53.32	-13.00	-40.32
9400.0	H	-	-	-79.73	14.66	41.93	-53.33	-13.00	-40.33
11280.0	H	-	-	-79.77	16.55	43.78	-51.48	-13.00	-38.48
13160.0	H	-	-	-80.52	20.33	46.81	-48.45	-13.00	-35.45

**Table 7-9. Radiated Spurious Data (GPRS PCS – Mid Channel)**

<b>FCC ID:</b> ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 77 of 88	


Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.6	H	109	284	-69.76	5.64	42.88	-52.38	-13.00	-39.38
5729.4	H	103	240	-66.50	8.44	48.94	-46.31	-13.00	-33.31
7639.2	H	-	-	-78.38	12.41	41.03	-54.23	-13.00	-41.23
9549.0	H	-	-	-79.50	14.51	42.01	-53.25	-13.00	-40.25
11458.8	H	-	-	-80.09	16.96	43.87	-51.39	-13.00	-38.39

**Table 7-10. Radiated Spurious Data (GPRS PCS – High Channel)**

FCC ID: ZNFK200AM	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset		Page 78 of 88

## WCDMA PCS

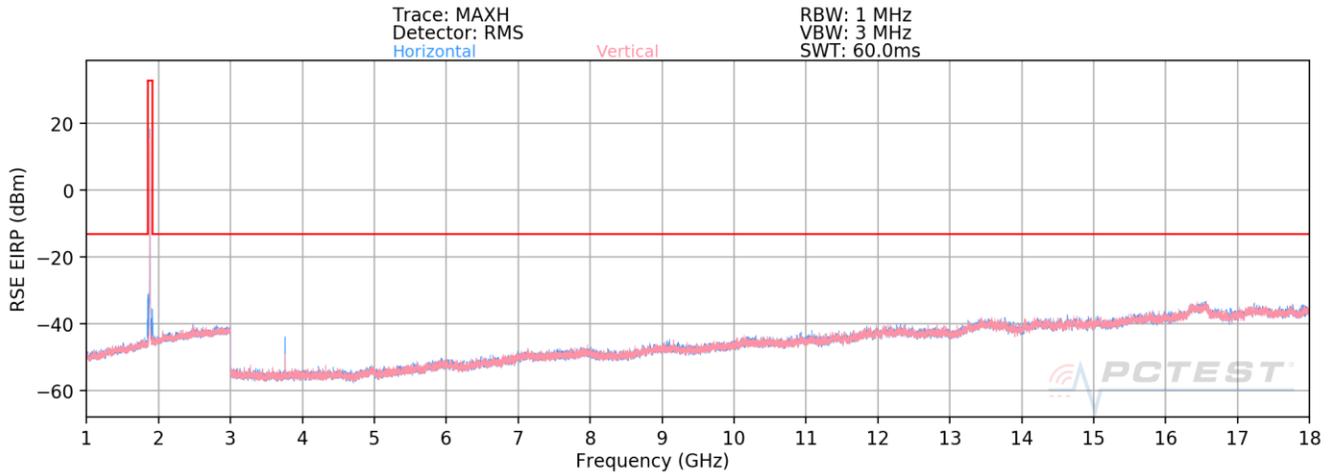

**Plot 7-102. Radiated Spurious Plot (WCDMA PCS)**

Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.8	V	180	174	-73.28	7.78	41.50	-53.76	-13.00	-40.76
5557.2	V	-	-	-82.04	11.86	36.82	-58.44	-13.00	-45.44
7409.6	V	104	345	-81.77	15.91	41.14	-54.12	-13.00	-41.12
9262.0	V	-	-	-82.94	18.37	42.43	-52.83	-13.00	-39.83

**Table 7-11. Radiated Spurious Data (WCDMA PCS – Low Channel)**

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	V	294	349	-70.75	8.26	44.51	-50.75	-13.00	-37.75
5640.0	V	-	-	-81.50	11.02	36.52	-58.74	-13.00	-45.74
7520.0	V	101	224	-81.37	15.78	41.41	-53.85	-13.00	-40.85
9400.0	V	-	-	-83.68	19.12	42.44	-52.82	-13.00	-39.82

**Table 7-12. Radiated Spurious Data (WCDMA PCS – Mid Channel)**

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 79 of 88

Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.2	V	104	356	-73.25	8.51	42.26	-52.99	-13.00	-39.99
5722.8	V	-	-	-81.78	12.05	37.27	-57.99	-13.00	-44.99
7630.4	V	-	-	-83.04	16.54	40.50	-54.75	-13.00	-41.75

**Table 7-13. Radiated Spurious Data (WCDMA PCS – High Channel)**

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 80 of 88

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes


None

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 81 of 88

LTE Band 2					
Operating Frequency (Hz):		1,880,000,000			
Ref. Voltage (VDC):		4.25			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	1,879,999,908	291	0.0000155
		- 20	1,879,999,905	288	0.0000153
		- 10	1,879,999,896	279	0.0000148
		0	1,880,000,251	634	0.0000337
		+ 10	1,880,000,203	586	0.0000312
		+ 20 (Ref)	1,879,999,617	0	0.0000000
		+ 30	1,880,000,226	609	0.0000324
		+ 40	1,880,000,041	424	0.0000226
		+ 50	1,880,000,022	405	0.0000215
Battery Endpoint	3.49	+ 20	1,880,000,191	574	0.0000305

Table 7-14. LTE Band 2 Frequency Stability Data

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset		Page 82 of 88

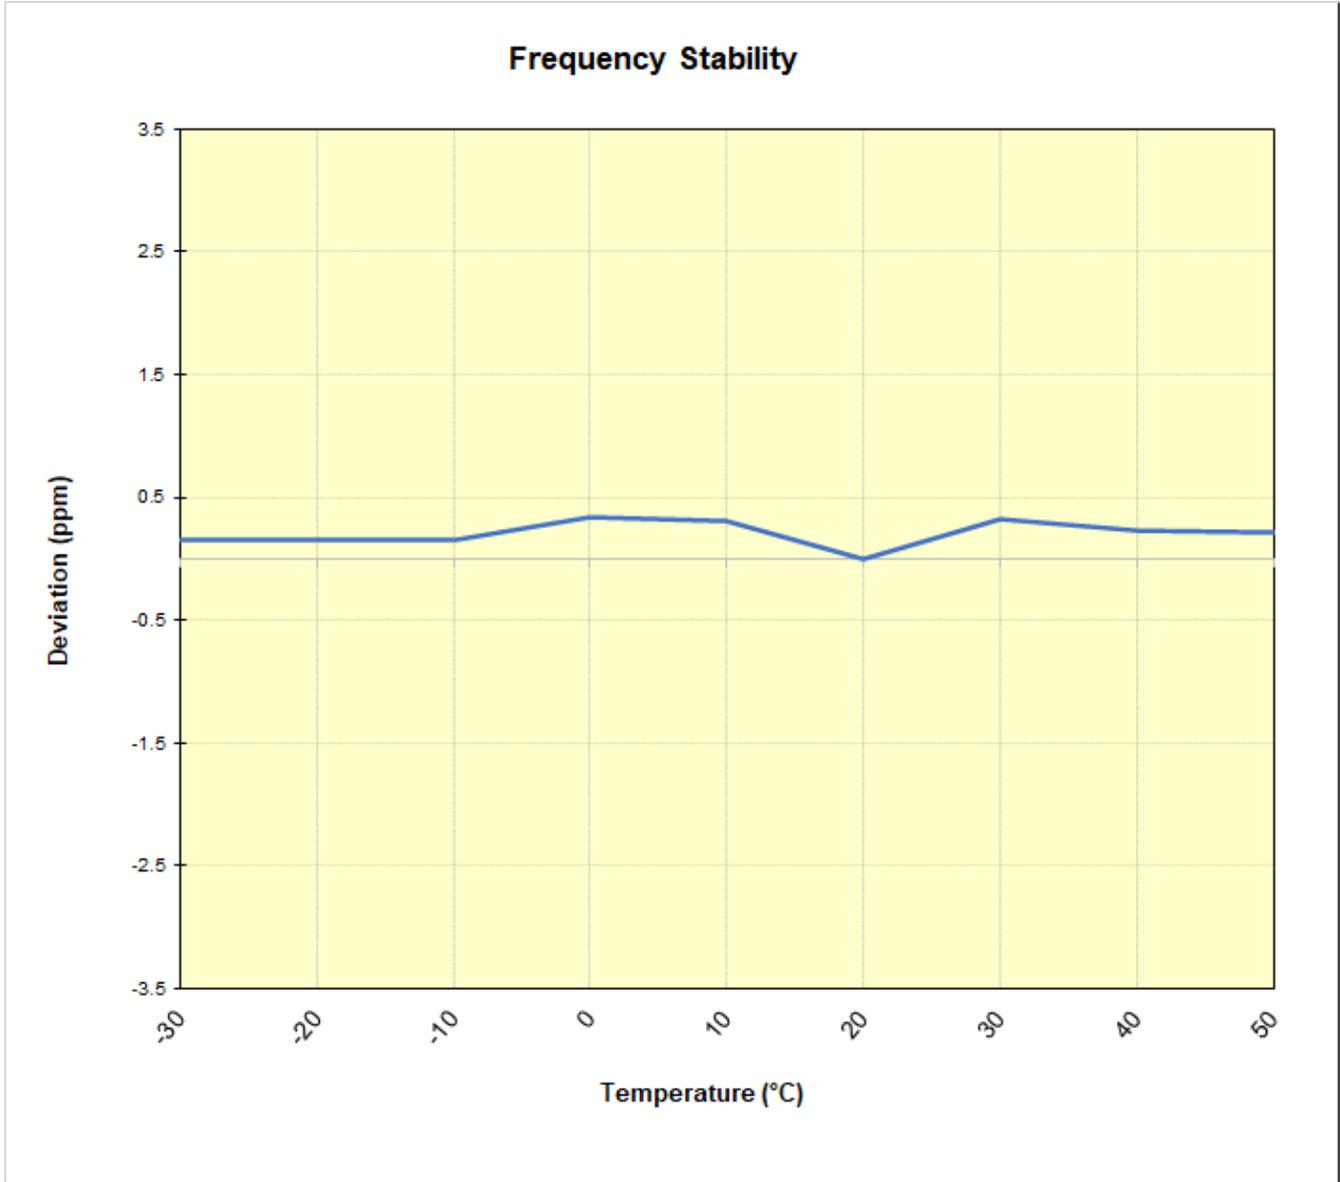


**Plot 7-103. LTE Band 2 Frequency Stability Chart**

FCC ID: ZNFK200AM		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 83 of 88	

<b>GSM/GPRS PCS</b>					
Operating Frequency (Hz):		1,880,000,000			
Ref. Voltage (VDC):		4.25			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	1,879,999,734	-393	-0.0000209
		- 20	1,879,999,701	-426	-0.0000227
		- 10	1,880,000,016	-111	-0.0000059
		0	1,879,999,825	-302	-0.0000161
		+ 10	1,879,999,902	-225	-0.0000120
		+ 20 (Ref)	1,880,000,127	0	0.0000000
		+ 30	1,879,999,808	-319	-0.0000170
		+ 40	1,879,999,994	-133	-0.0000071
		+ 50	1,879,999,710	-417	-0.0000222
Battery Endpoint	3.49	+ 20	1,880,000,312	185	0.0000098

**Table 7-15. GSM/GPRS PCS Frequency Stability Data**

FCC ID: ZNFK200AM	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 84 of 88	

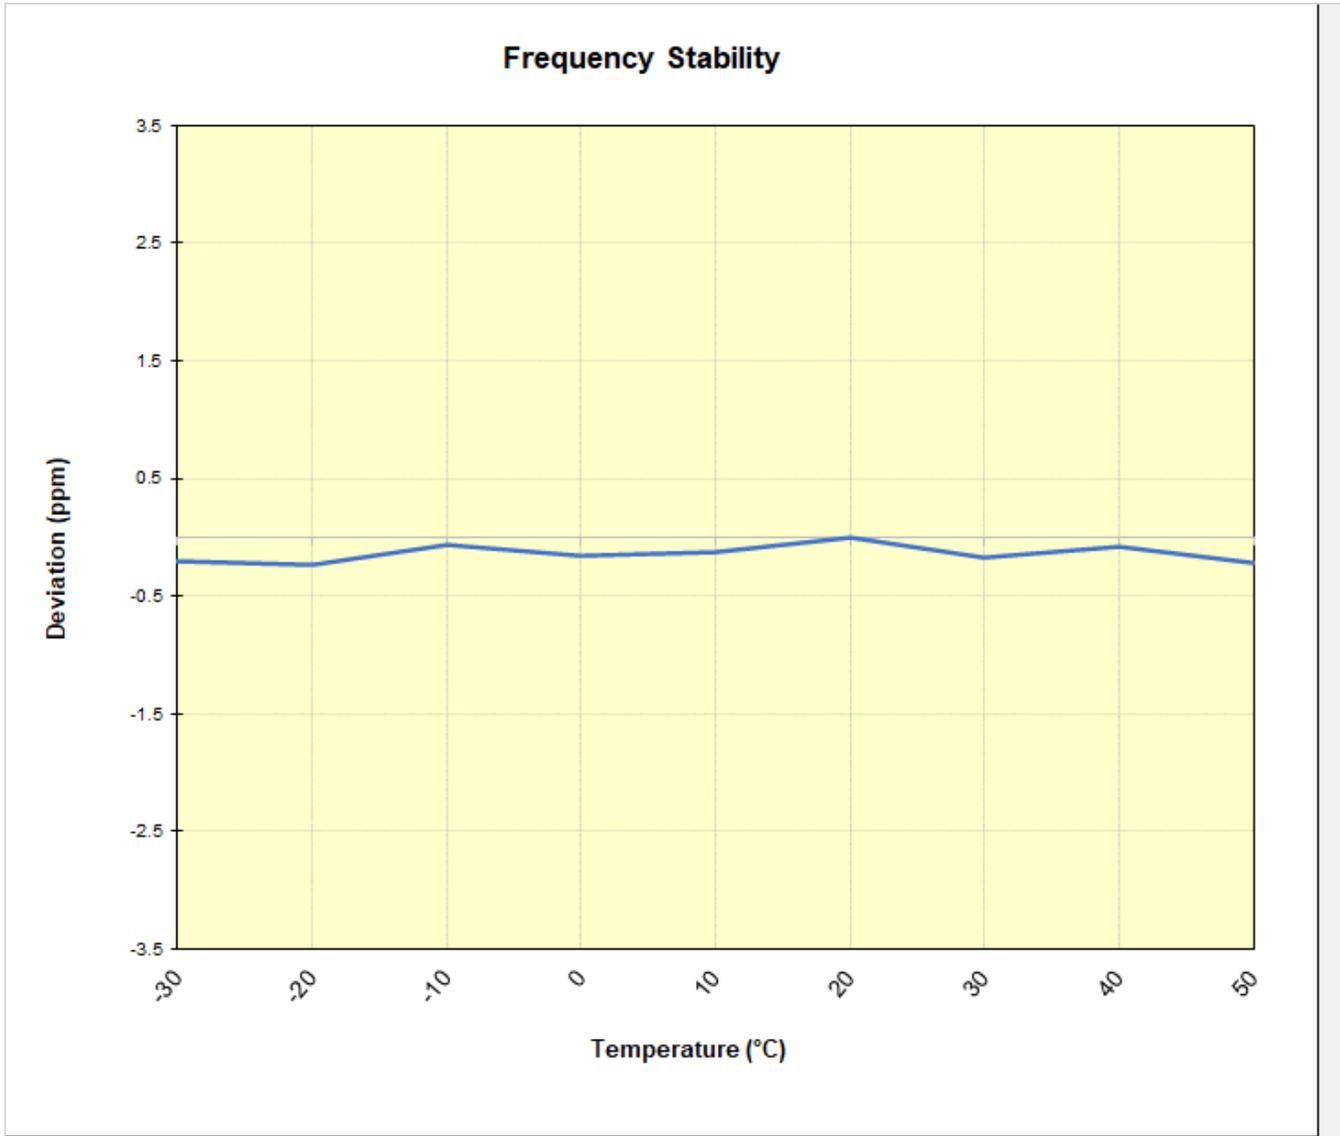


**Plot 7 90. GSM/GPRS PCS Frequency Stability Chart**

<b>FCC ID:</b> ZNFK200AM		<b>PART 24 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset	Page 85 of 88

WCDMA PCS					
		Operating Frequency (Hz):		1,880,000,000	
		Ref. Voltage (VDC):		4.25	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	1,880,000,017	-60	-0.0000032
		- 20	1,879,999,855	-222	-0.0000118
		- 10	1,880,000,286	209	0.0000111
		0	1,880,000,425	348	0.0000185
		+ 10	1,879,999,949	-128	-0.0000068
		+ 20 (Ref)	1,880,000,077	0	0.0000000
		+ 30	1,880,000,225	148	0.0000079
		+ 40	1,880,000,068	-9	-0.0000005
		+ 50	1,880,000,137	60	0.0000032
Battery Endpoint	3.49	+ 20	1,880,000,003	-74	-0.0000039

Table 7-16. WCDMA PCS Frequency Stability Data

FCC ID: ZNFK200AM	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 86 of 88	

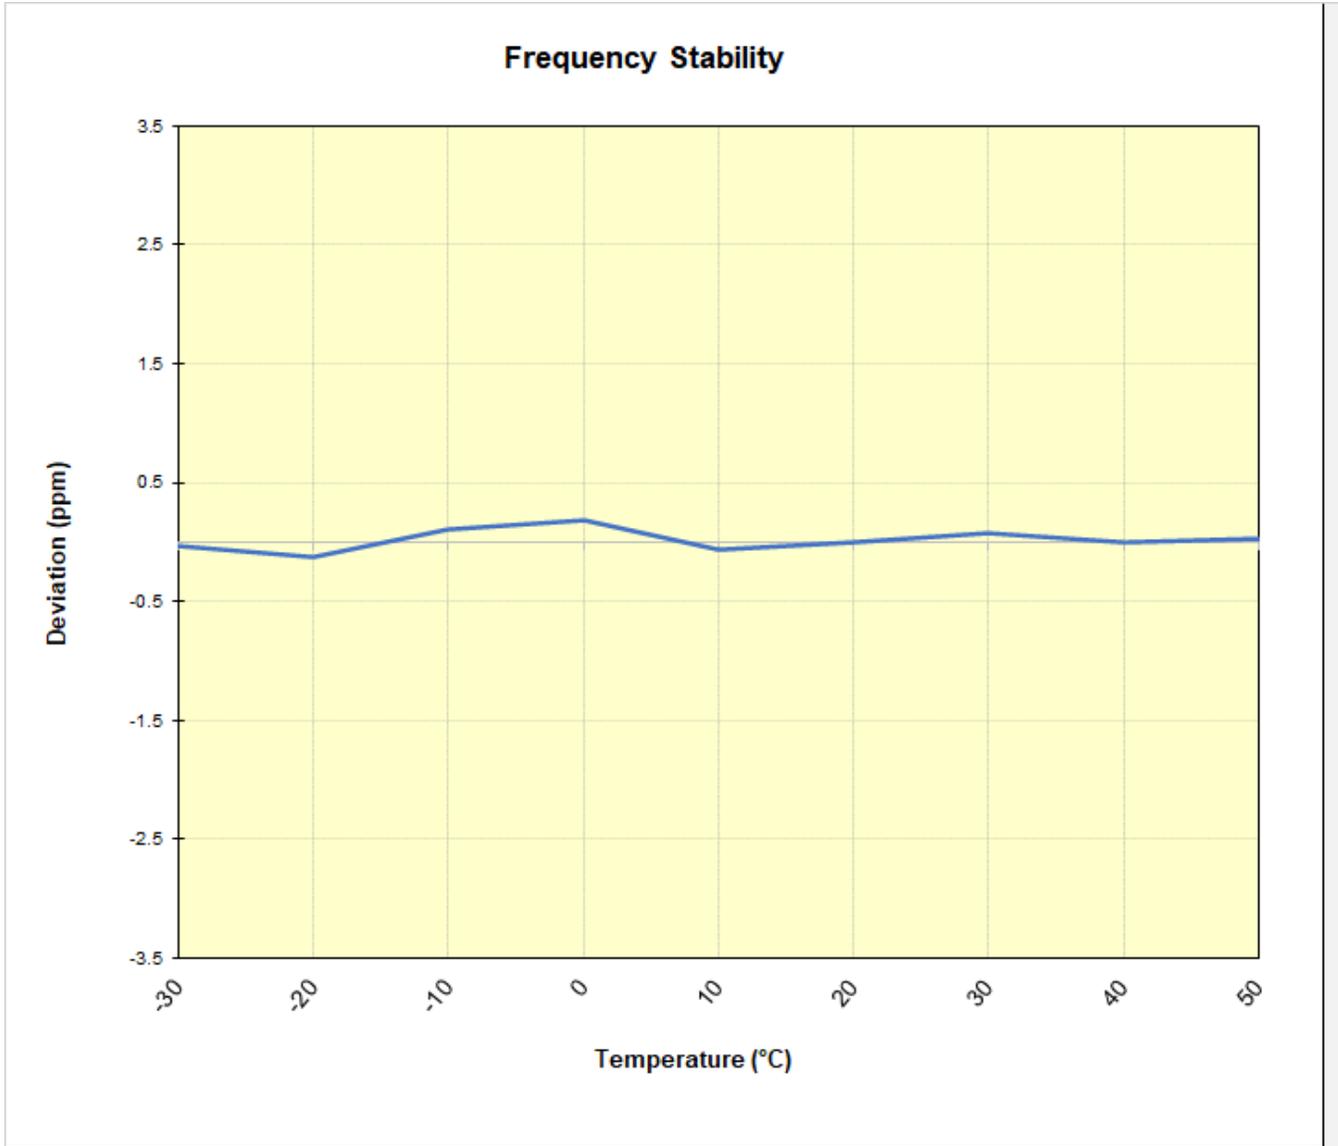

**Plot 7-104. WCDMA PCS Frequency Stability Chart**

<b>FCC ID:</b> ZNFK200AM	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011240185-02.ZNF	<b>Test Dates:</b> 11/24/2020 – 1/4/2021	<b>EUT Type:</b> Portable Handset		Page 87 of 88

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the LG **Portable Handset** **FCC ID: ZNFK200AM** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: ZNFK200AM	 <b>PART 24 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2011240185-02.ZNF	Test Dates: 11/24/2020 – 1/4/2021	EUT Type: Portable Handset	Page 88 of 88