

**PART 22 MEASUREMENT REPORT**

**Applicant Name:**  
 LG Electronics USA, Inc.  
 111 Sylvan Avenue, North Building  
 Englewood Cliffs, NJ 07632  
 United States


**Date of Testing:**  
 11/18/2020 - 12/23/2020  
**Test Site/Location:**  
 PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2011170181-02.ZNF

<b>FCC ID:</b>	<b>ZNFK330PM</b>
<b>Applicant Name:</b>	<b>LG Electronics USA, Inc.</b>

**Application Type:** Certification  
**Model:** LM-K330PM  
**Additional Model(s):** LM-K330TM, LM-K330MM, LG L460DL, LM-K330QM, LM-K330QM6, LM-K330QN, LM-K330VM, LMK330PM, LMK330TM, LMK330MM, LGL460DL, LMK330QM, LMK330QM6, LMK330QN, LMK330VM, K330PM, K330TM, K330MM, L460DL, K330QM, K330QM6, K330QN, K330VM  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 22  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 Randy Ortanez  
 President




<b>FCC ID:</b> ZNFK330PM	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 1 of 79


# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Cellular - Base Frequency Blocks .....	6
3.3	Cellular - Mobile Frequency Blocks .....	6
3.4	Radiated Power and Radiated Spurious Emissions .....	7
4.0	MEASUREMENT UNCERTAINTY .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	SAMPLE CALCULATIONS .....	10
7.0	TEST RESULTS .....	12
7.1	Summary .....	12
7.2	Occupied Bandwidth .....	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	25
7.4	Band Edge Emissions at Antenna Terminal .....	46
7.5	Radiated Power (ERP) .....	55
7.6	Radiated Spurious Emissions Measurements .....	59
7.7	Frequency Stability / Temperature Variation .....	70
8.0	CONCLUSION.....	79

FCC ID: ZNFK330PM	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 2 of 79



## PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 26	15MHz	QPSK	831.5 - 841.5	0.055	17.41	13M5G7D
		16QAM	831.5 - 841.5	0.045	16.55	13M5W7D
		64QAM	831.5 - 841.5	0.035	15.48	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.055	17.37	9M01G7D
		16QAM	829.0 - 844.0	0.045	16.50	8M99W7D
		64QAM	829.0 - 844.0	0.034	15.38	9M01W7D
	5 MHz	QPSK	826.5 - 846.5	0.055	17.41	4M51G7D
		16QAM	826.5 - 846.5	0.045	16.50	4M51W7D
		64QAM	826.5 - 846.5	0.035	15.40	4M52W7D
	3 MHz	QPSK	825.5 - 847.5	0.055	17.41	2M69G7D
		16QAM	825.5 - 847.5	0.045	16.55	2M68W7D
		64QAM	825.5 - 847.5	0.035	15.47	2M70W7D
1.4 MHz	QPSK	824.7 - 848.3	0.054	17.31	1M10G7D	
	16QAM	824.7 - 848.3	0.044	16.45	1M10W7D	
	64QAM	824.7 - 848.3	0.034	15.32	1M10W7D	

Mode	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	824.2 - 848.8	0.134	21.26	245KGXW
EDGE	8-PSK	824.2 - 848.8	0.058	17.66	241KG7W
WCDMA	Spread Spectrum	826.4 - 846.6	0.055	17.42	4M19F9W
CDMA	Spread Spectrum	824.70 - 848.31	0.047	16.77	1M28F9W

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 3 of 79

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFK330PM	 <b>PART 22 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 4 of 79

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID:ZNFK330PM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** 21251, 21269, 21202, 21194

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, CDMA/EvDO Rev. 0/A 800/850/1900 (BC10/BC0/BC1), Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)CDMA, GSM/GPRS/EDGE, WCDMA/HSPA, Multi-band LTE, WLAN, UNII, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset		Page 5 of 79


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None


### 3.2 Cellular - Base Frequency Blocks

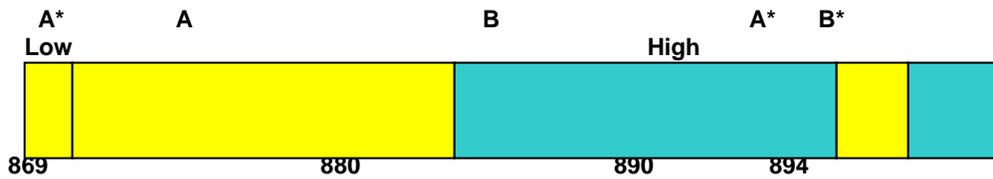

BLOCK 1: 869 – 880 MHz (A\* Low + A)  
 BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A\* High)  
 BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

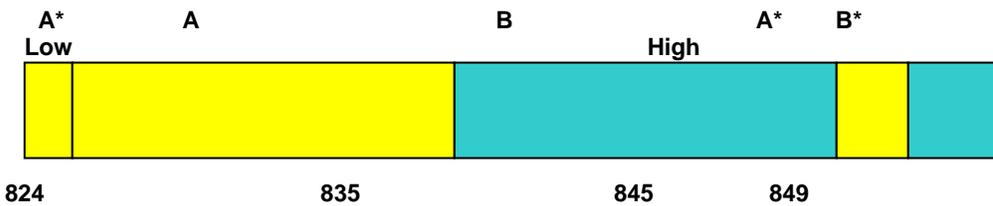

BLOCK 1: 824 – 835 MHz (A\* Low + A)  
 BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A\* High)  
 BLOCK 4: 846.5 – 849 MHz (B\*)

FCC ID: ZNFK330PM		PART 22 MEASUREMENT REPORT	
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Approved by: Technical Manager
Page 6 of 79			

### 3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 7 of 79

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 8 of 79	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	9/16/2020	Annual	9/16/2021	LTx2
-	LTx3	Licensed Transmitter Cable Set	8/28/2020	Annual	8/28/2021	LTx3
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	MY54500644
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			833855/0010
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/3/2020	Annual	3/3/2021	A042511
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 9 of 79	

## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### CDMA Emission Designator

#### **Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

#### **Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### QAM Modulation

#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 10 of 79

## Spurious Radiated Emission

### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFK330PM	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 11 of 79

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFK330PM  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/WCDMA/CDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	<b>PASS</b>	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions	<b>PASS</b>	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	<b>PASS</b>	See RF Exposure Report
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	<b>PASS</b>	Section 7.7
<b>RADIATED</b>	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	<b>PASS</b>	Section 7.5
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions	<b>PASS</b>	Section 7.6

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 12 of 79

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

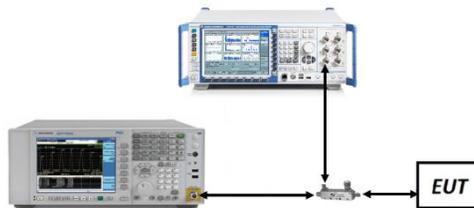


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 13 of 79

## LTE Band 26/5

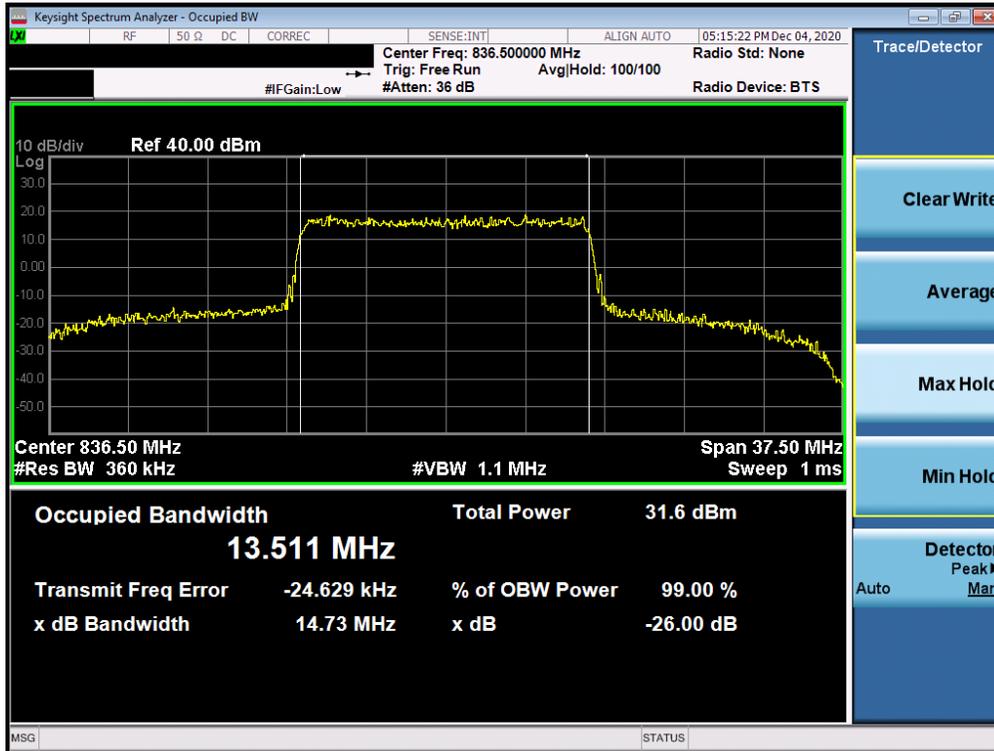

Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration)

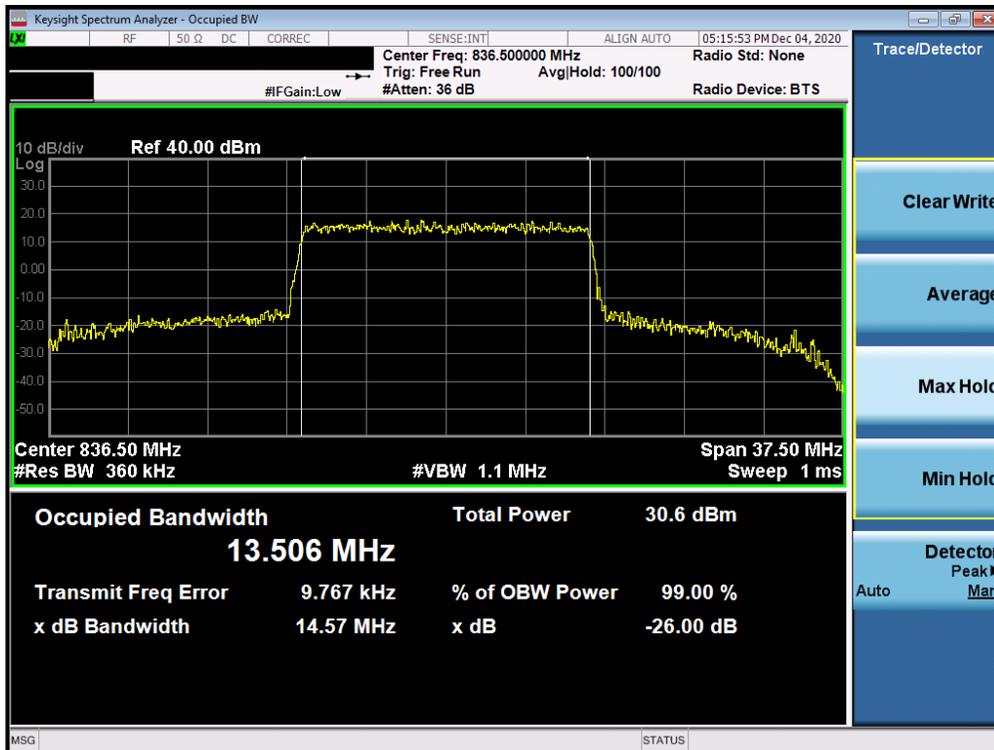

Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 14 of 79




Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 64-QAM - Full RB Configuration)




Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 15 of 79

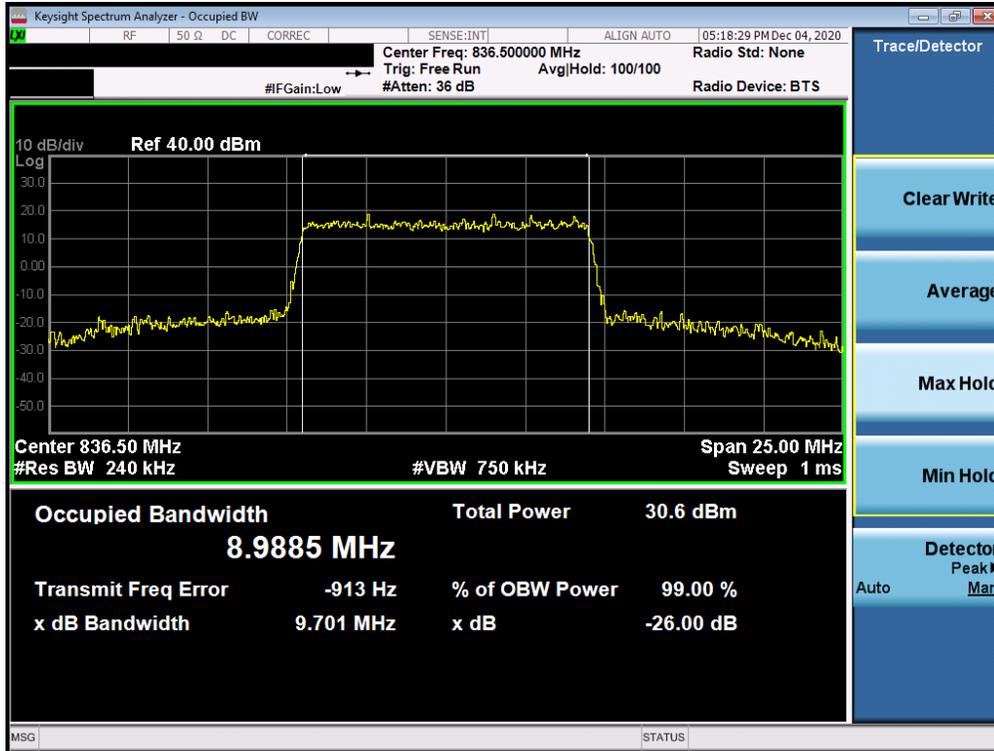


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB Configuration)

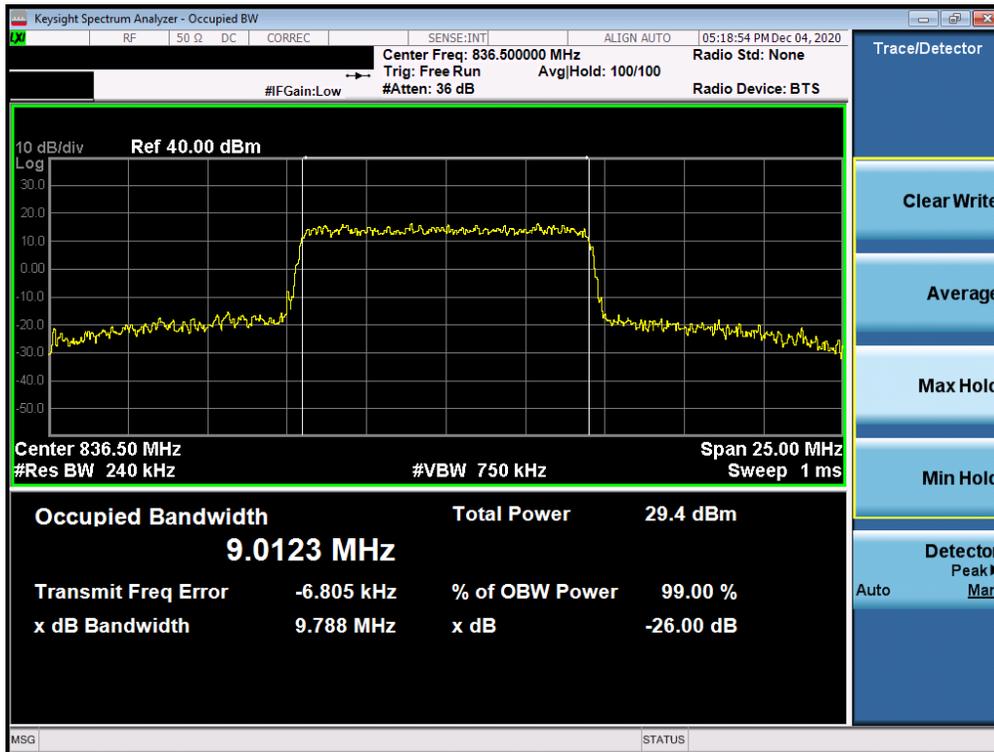


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 16 of 79

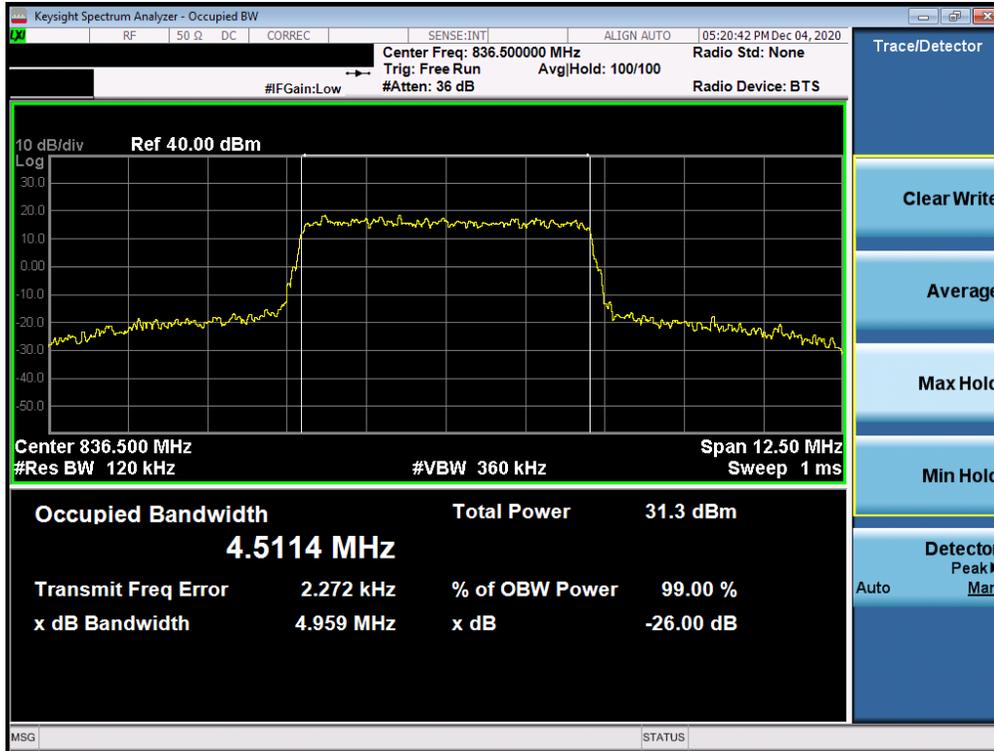


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)

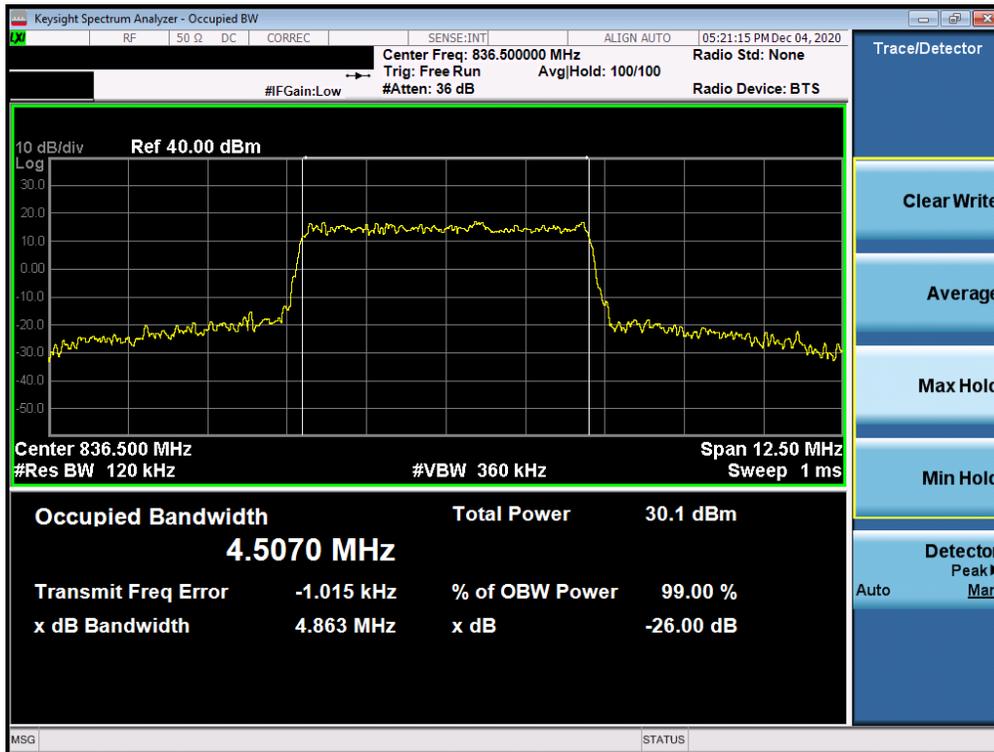


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of  element	<b>PART 22 MEASUREMENT REPORT</b>	<b>LG</b>	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 17 of 79

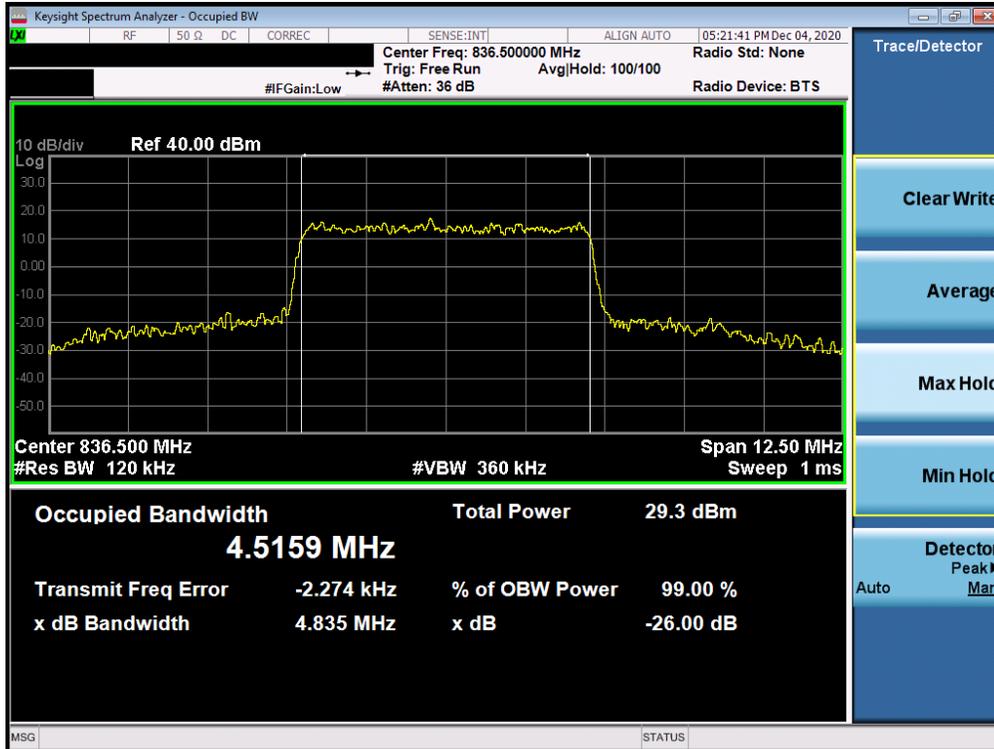


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 64-QAM - Full RB Configuration)

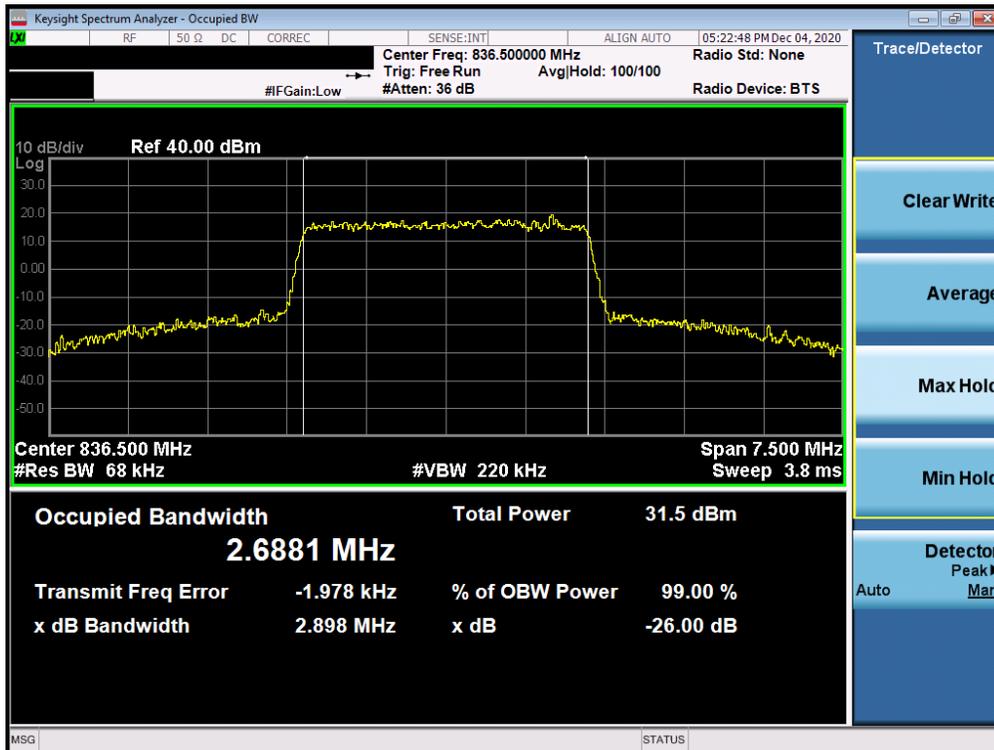


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 18 of 79

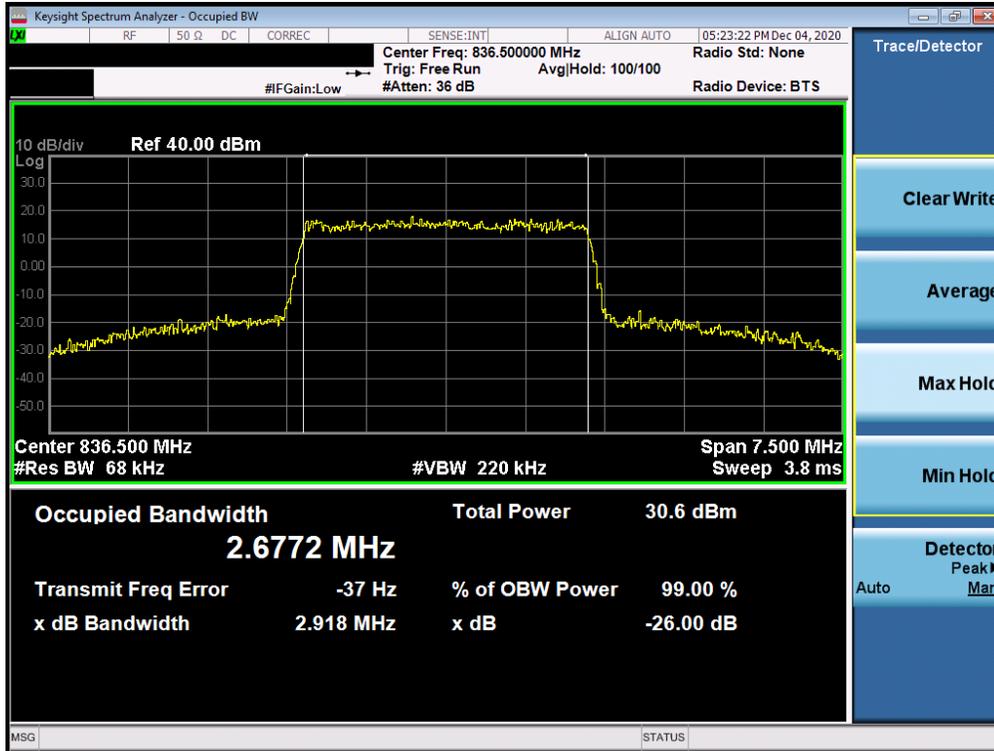

Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB Configuration)

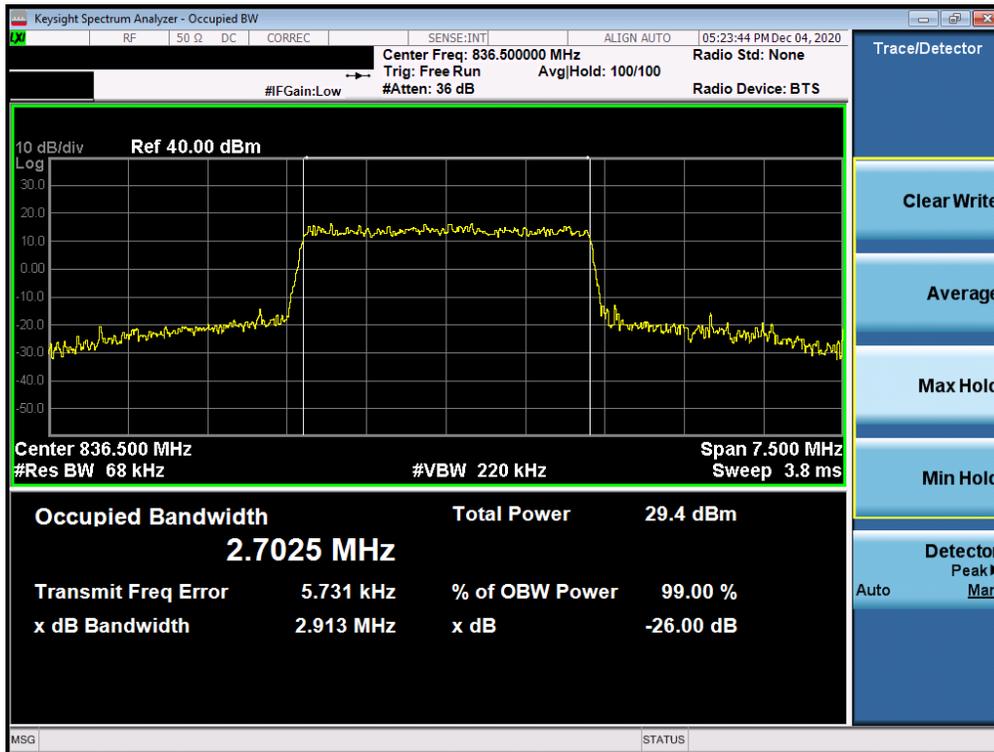


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 19 of 79



Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

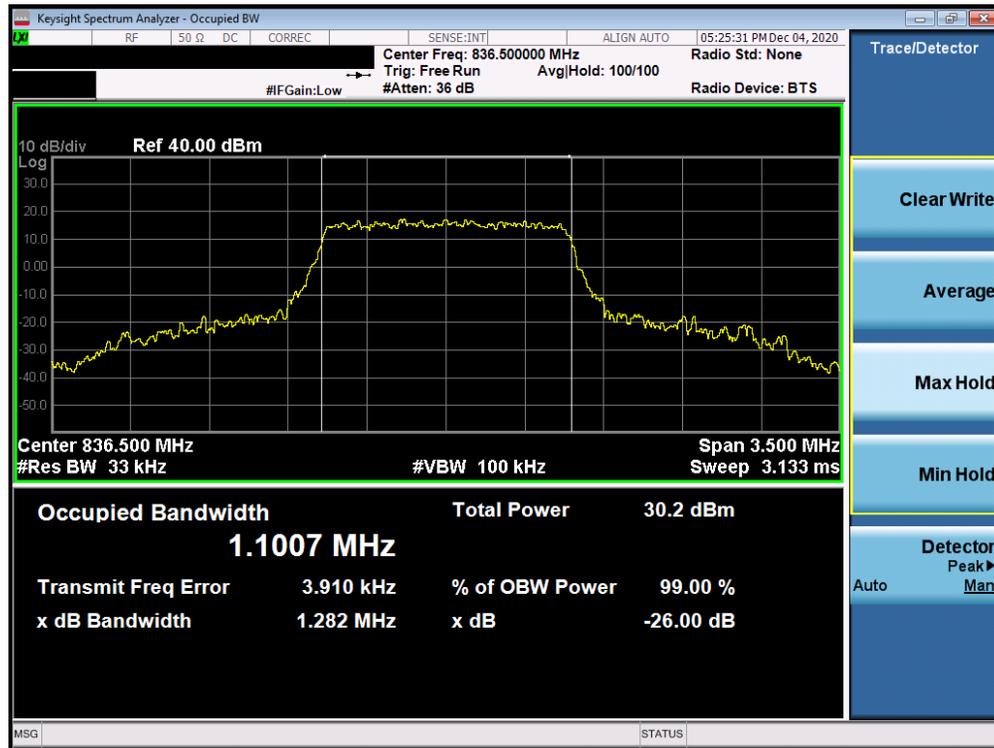

Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 20 of 79



## GPRS Cell




Plot 7-16. Occupied Bandwidth Plot (GPRS, Ch. 190)



Plot 7-17. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 22 of 79


## WCDMA Cell

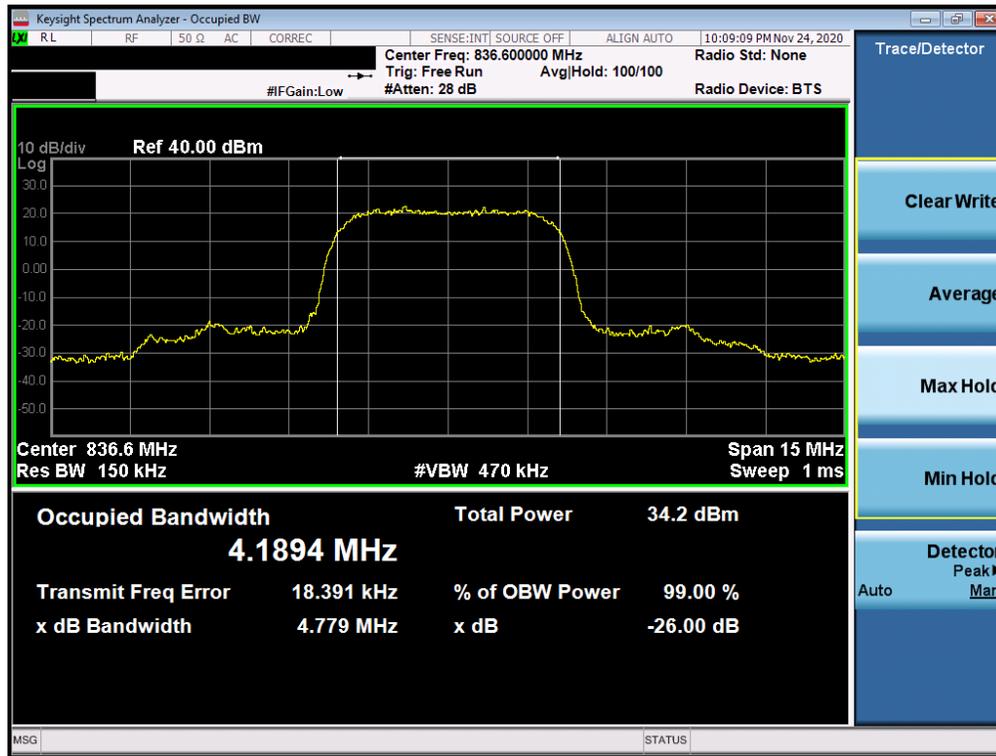

Plot 7-18. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 23 of 79

# CDMA Cell

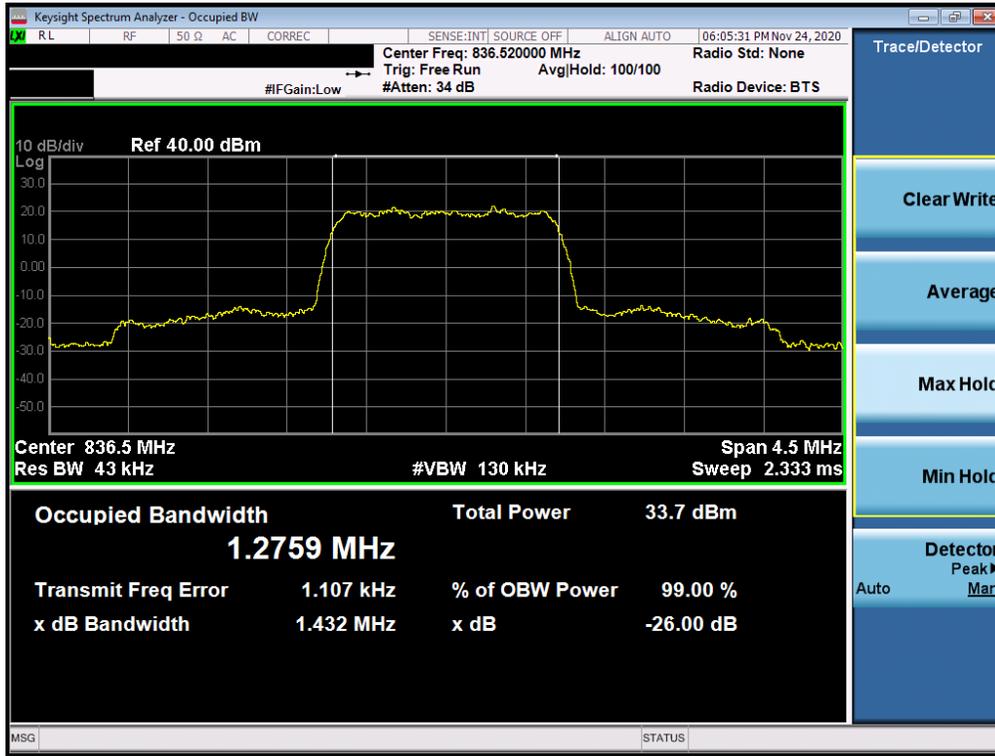

Plot 7-19. Occupied Bandwidth Plot (CDMA, Ch. 384)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 24 of 79

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

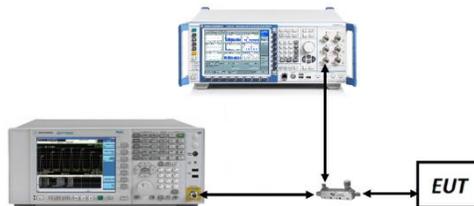


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 25 of 79

### LTE Band 26/5

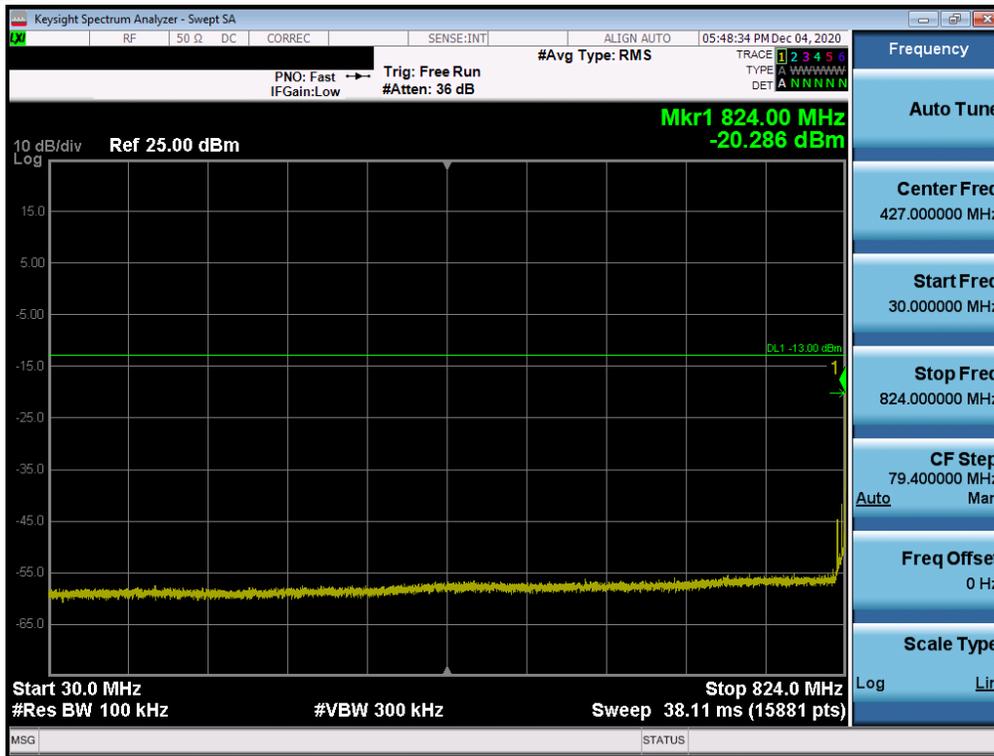


Plot 7-20. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

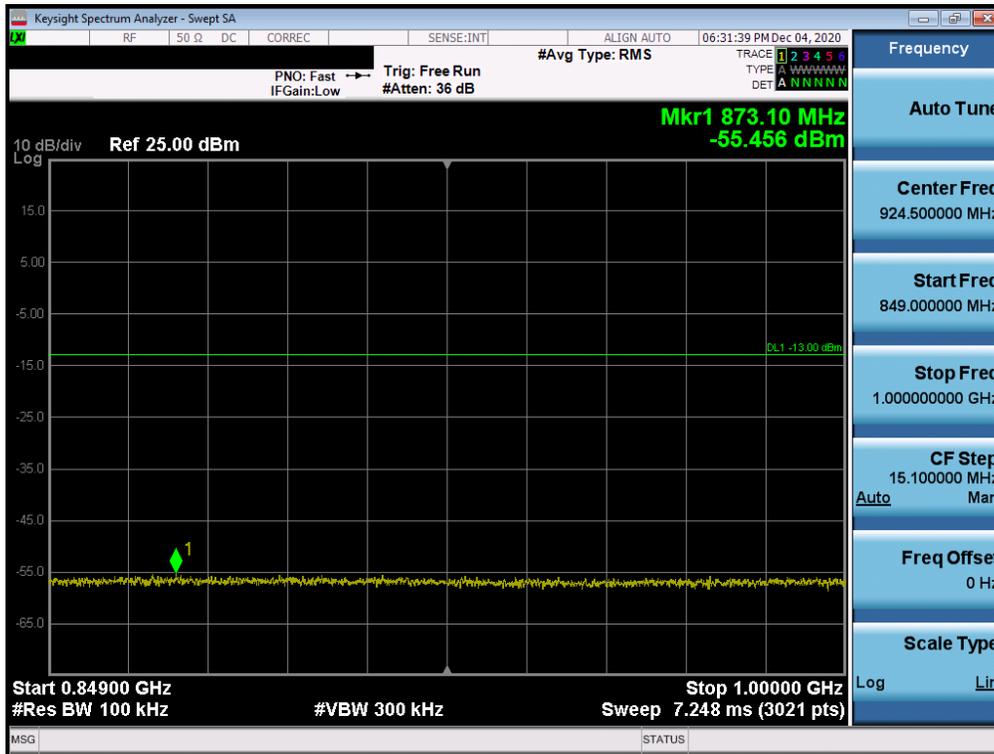


Plot 7-21. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 26 of 79

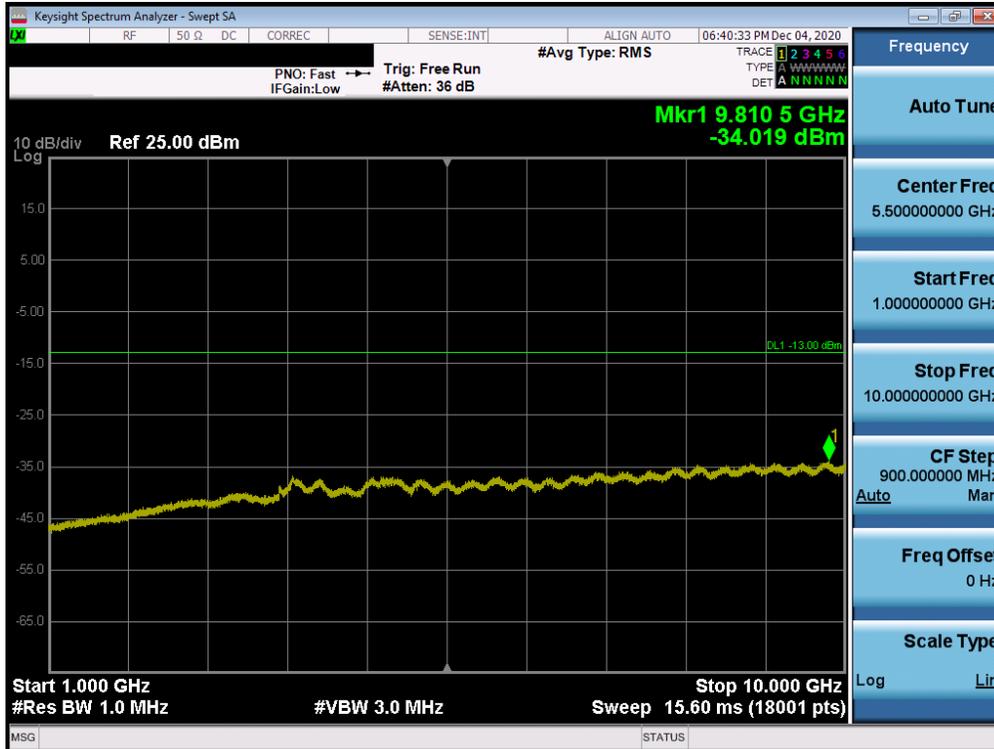


Plot 7-22. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

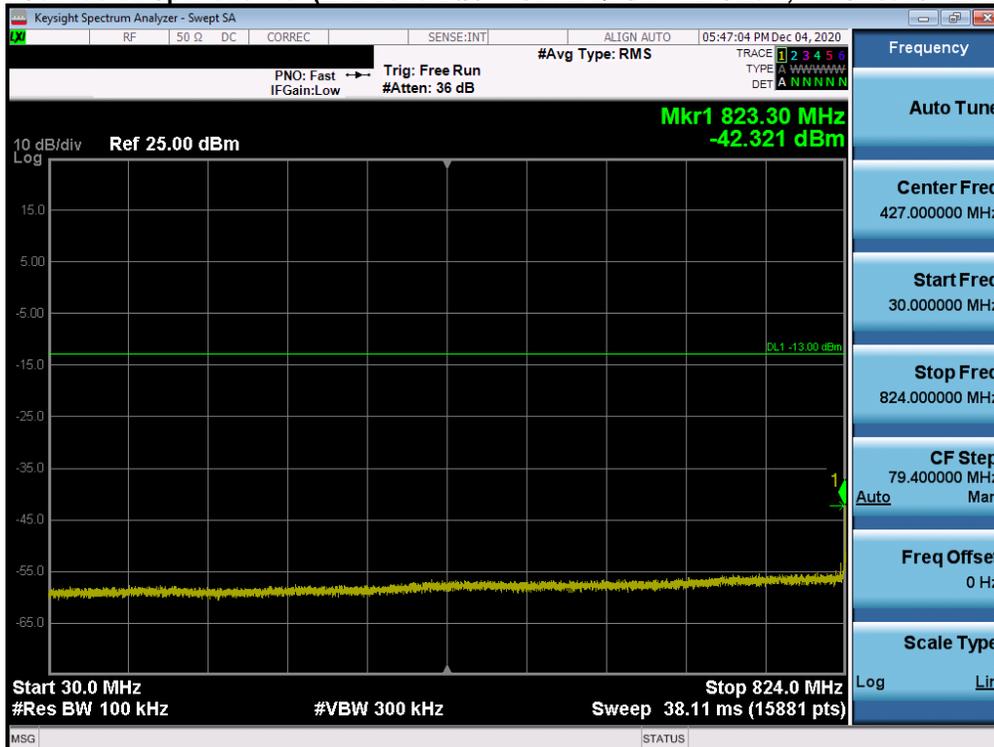


Plot 7-23. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 27 of 79

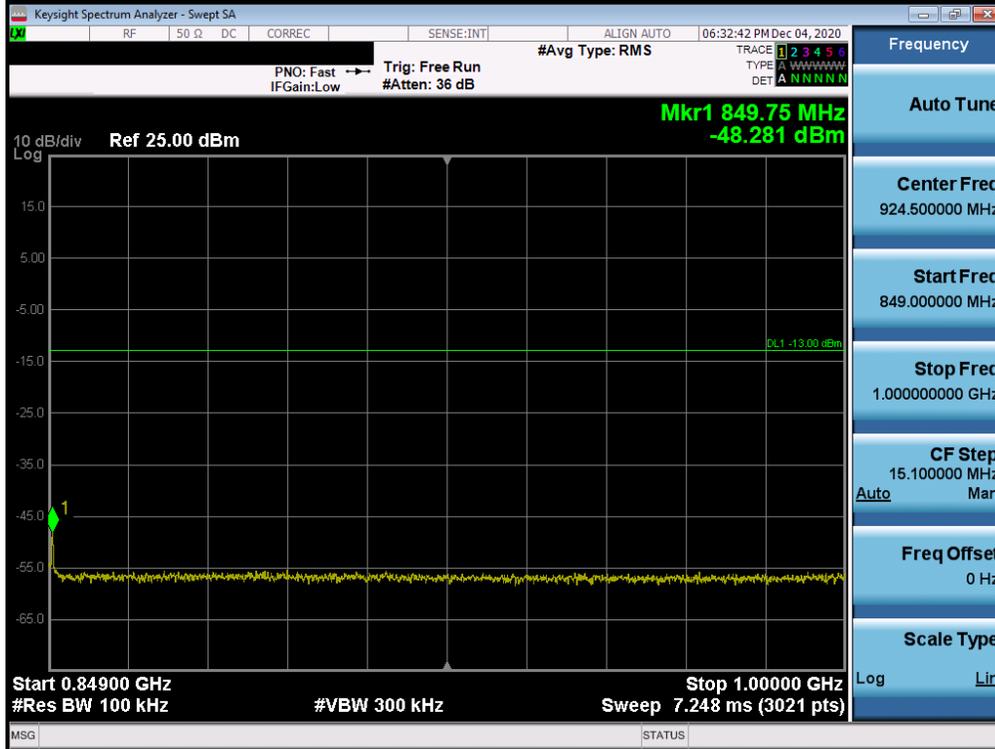


Plot 7-24. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

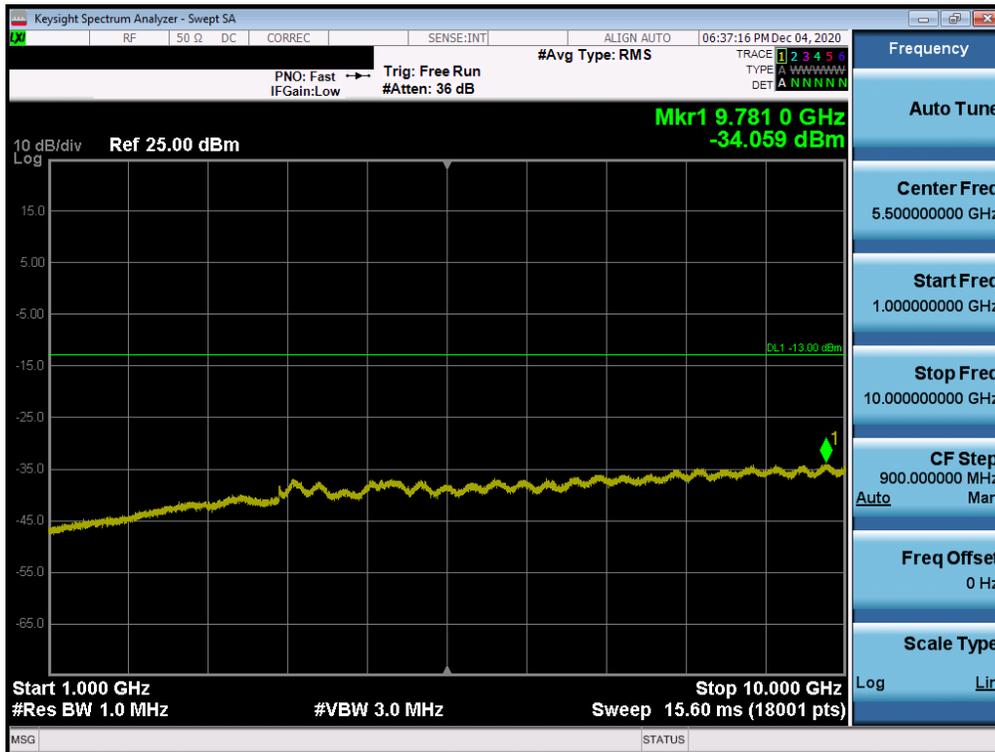


Plot 7-25. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 28 of 79

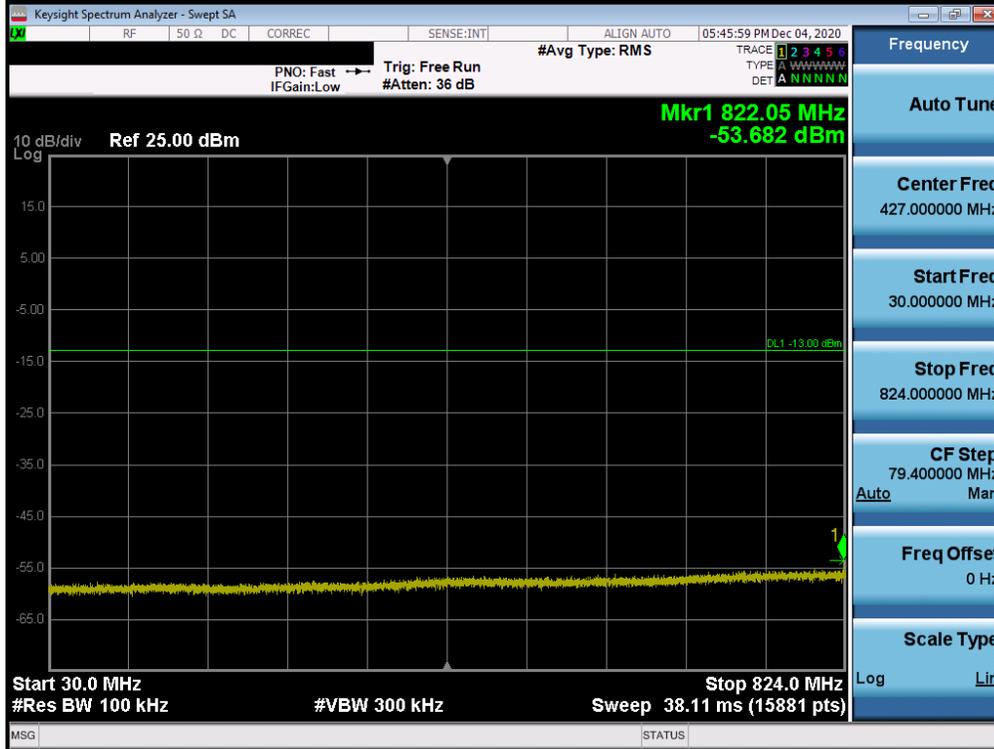

Plot 7-26. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

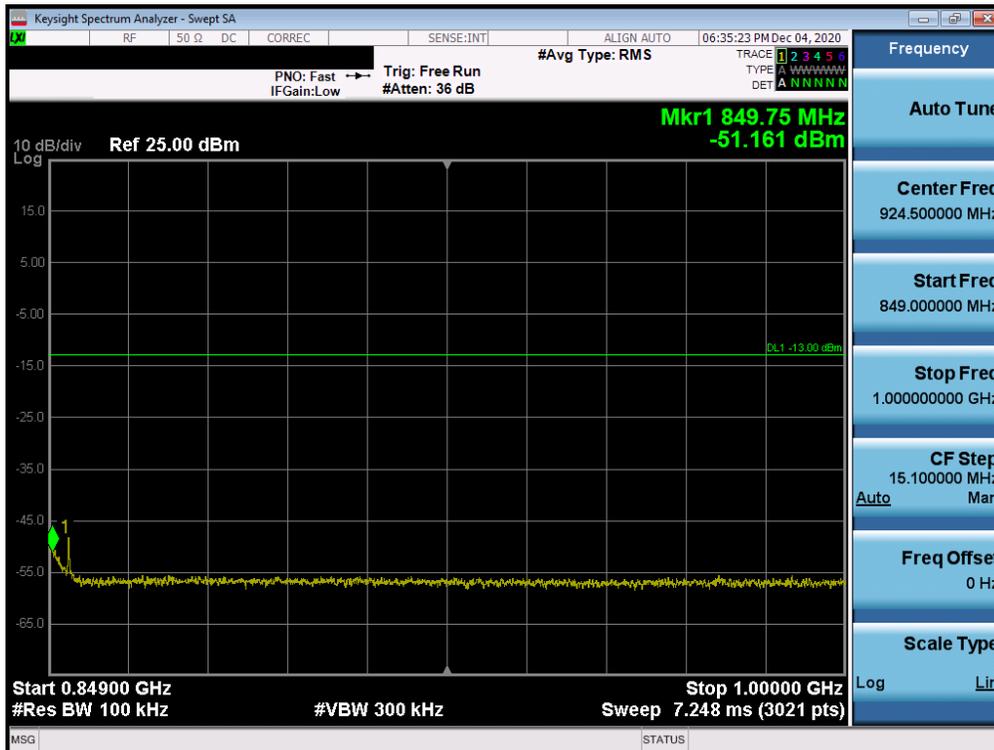

Plot 7-27. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 29 of 79




Plot 7-28. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 30 of 79

## GSM/GPRS Cell

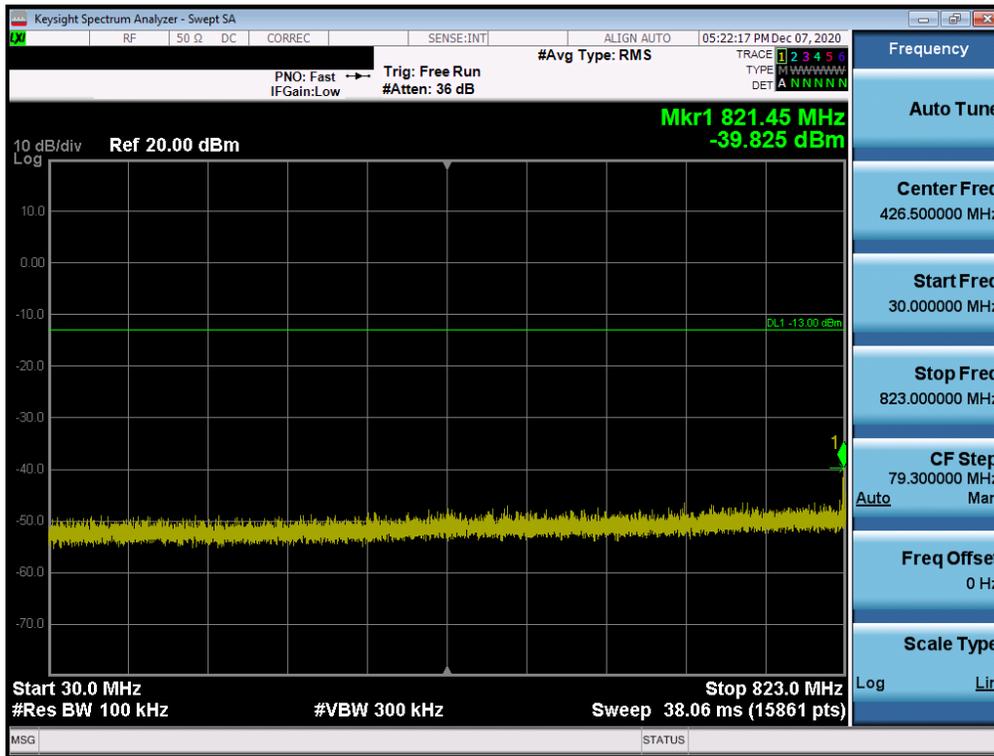


Plot 7-29. Conducted Spurious Plot (GPRS Ch. 128)

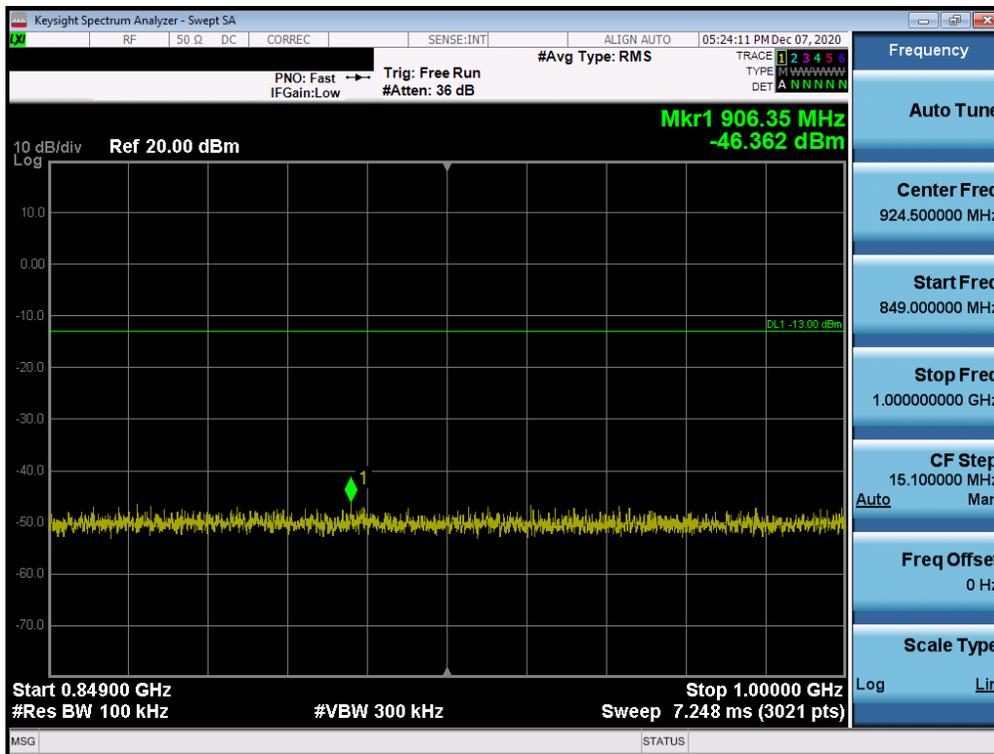


Plot 7-30. Conducted Spurious Plot (GPRS Ch. 128)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 31 of 79

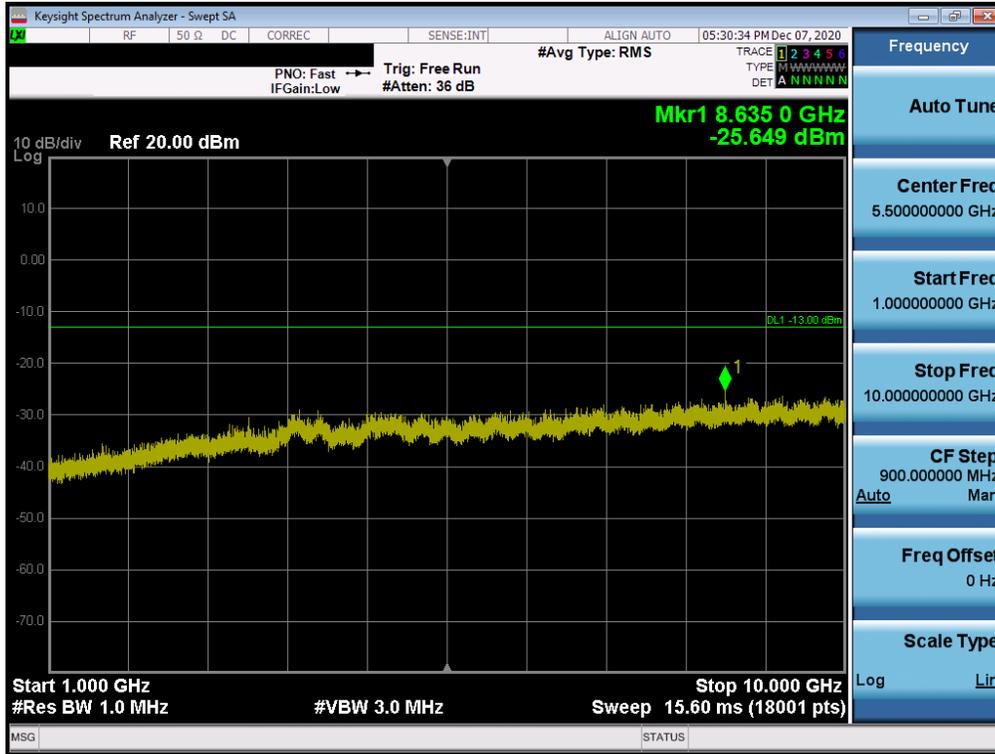


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 128)

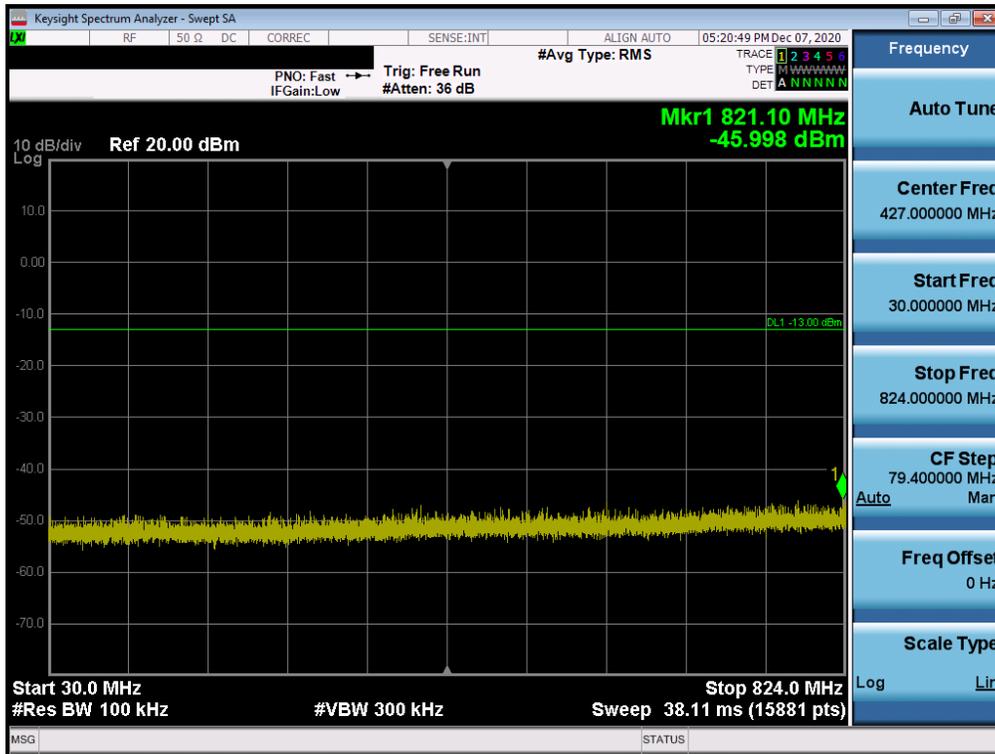


Plot 7-32. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 32 of 79

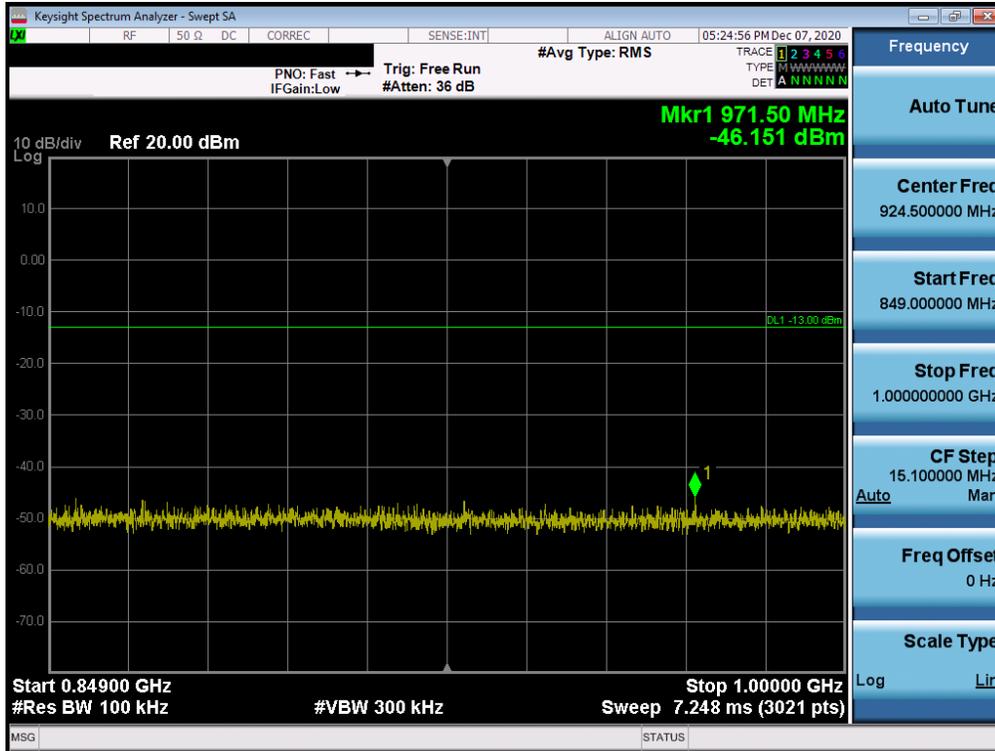


Plot 7-33. Conducted Spurious Plot (GPRS Ch. 190)

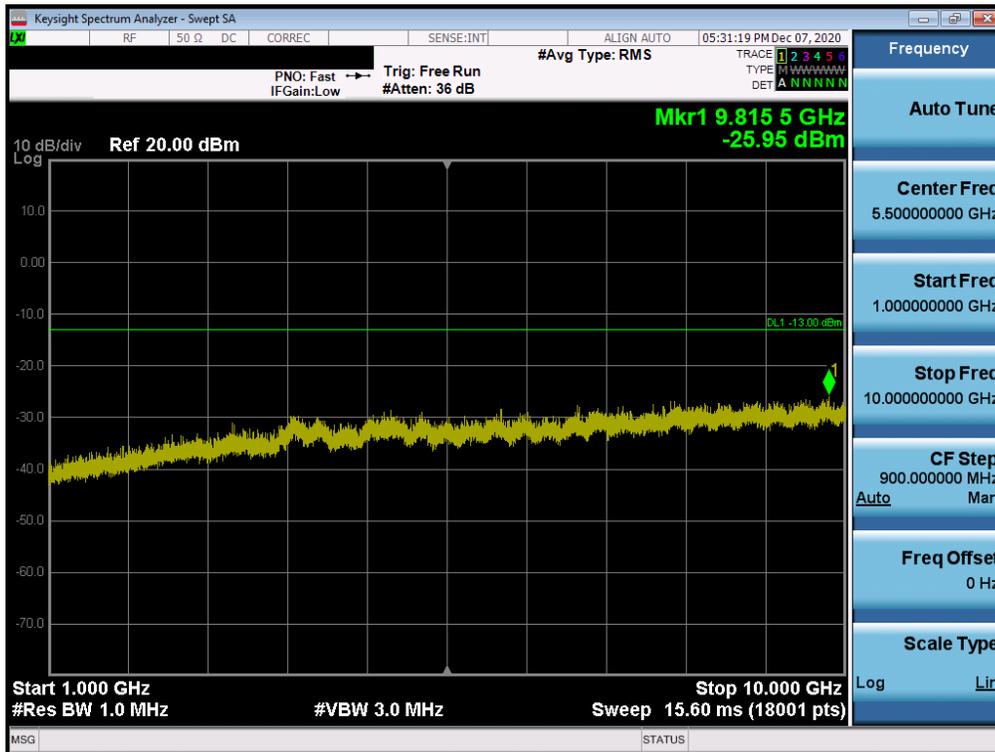


Plot 7-34. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 33 of 79

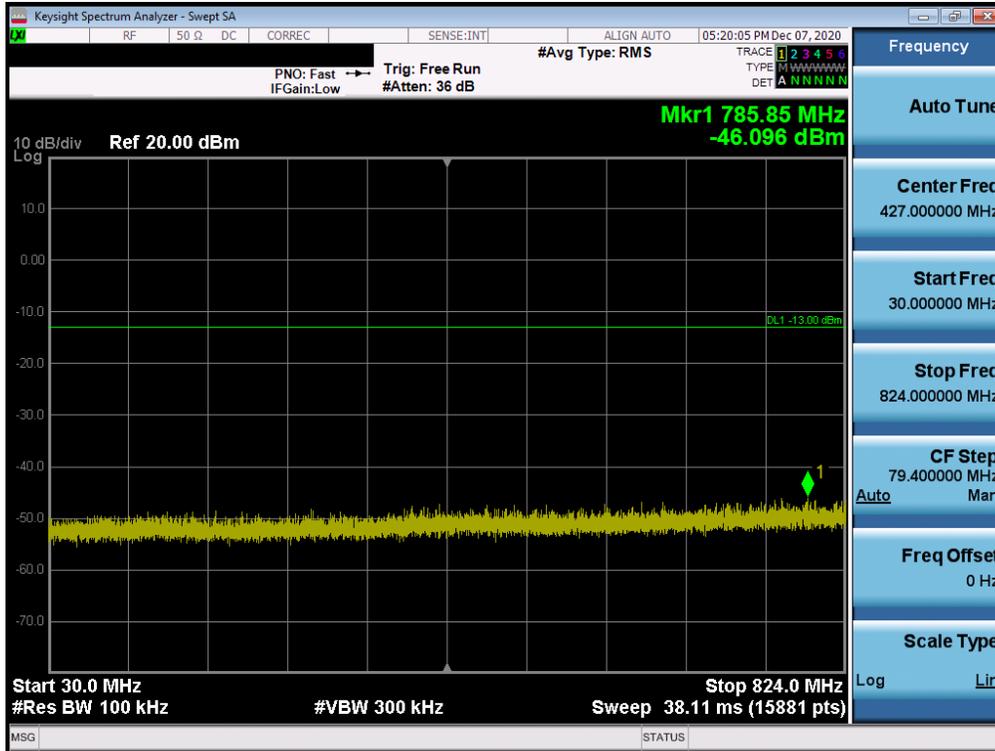


Plot 7-35. Conducted Spurious Plot (GPRS Ch. 251)

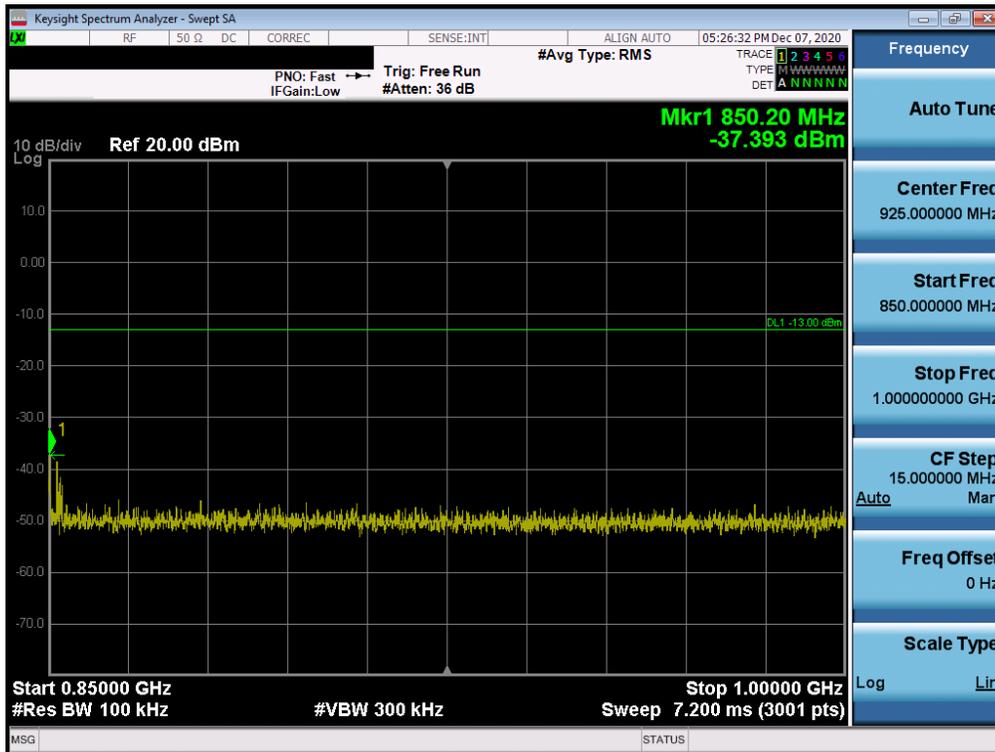

Plot 7-36. Conducted Spurious Plot (GPRS Ch. 251)


FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 34 of 79

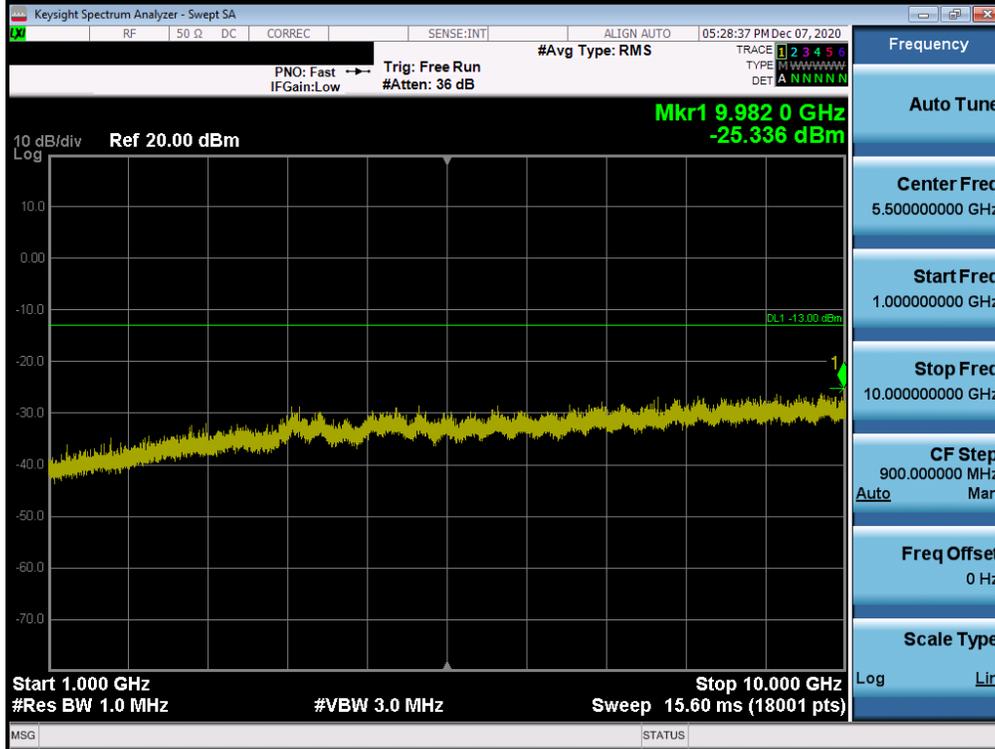


Plot 7-37. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 35 of 79



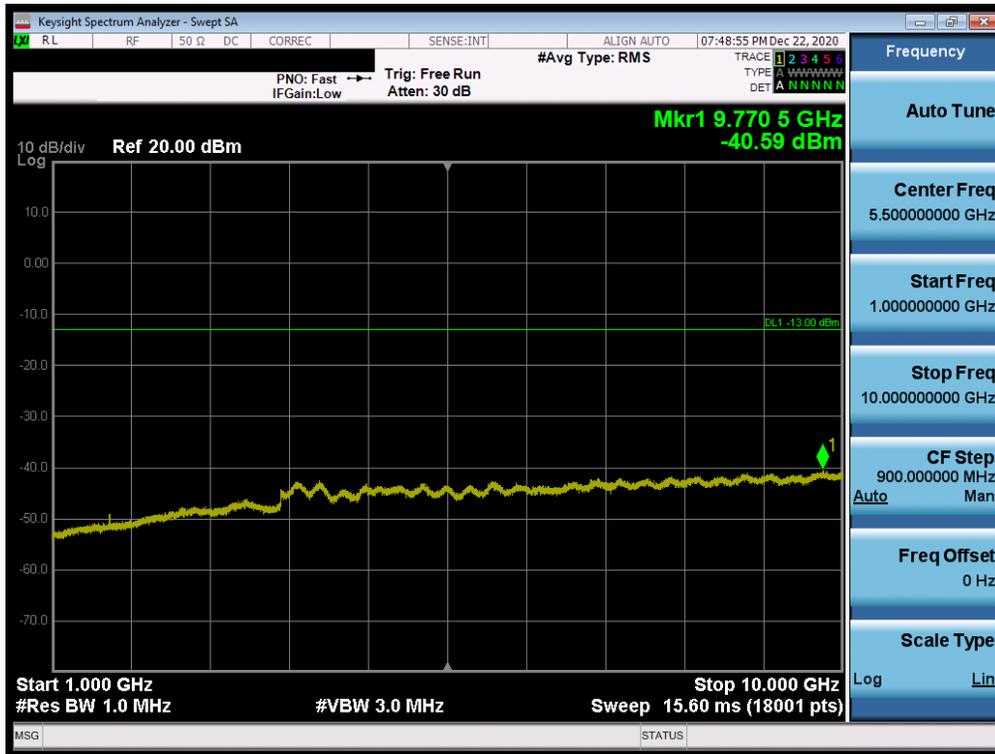


Plot 7-40. Conducted Spurious Plot (WCDMA Ch. 4132)

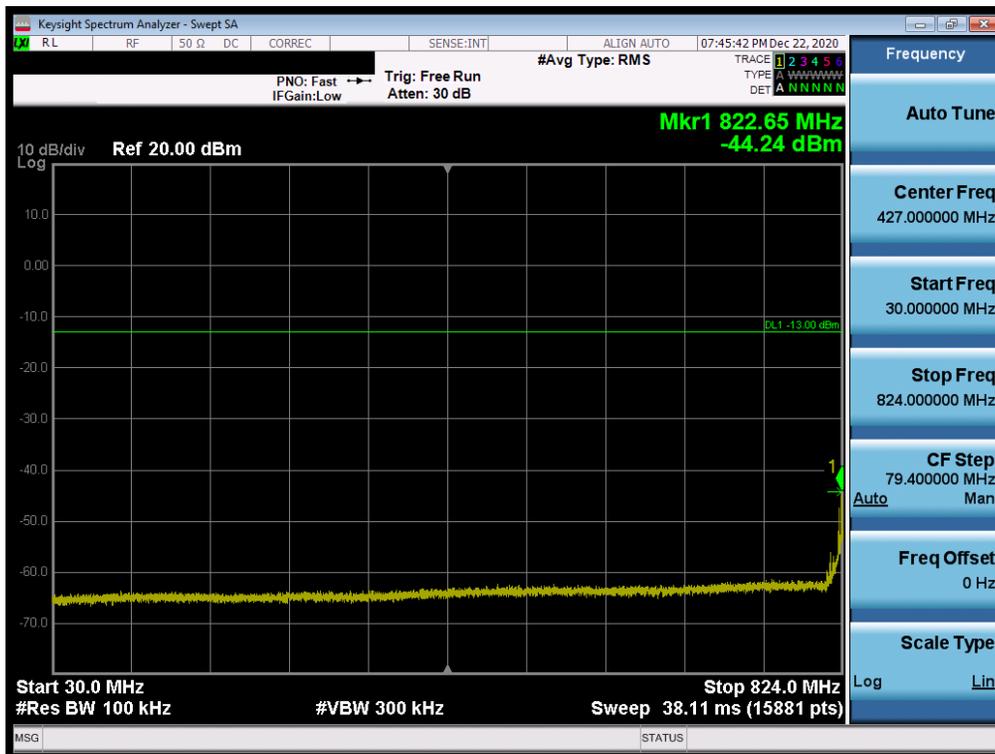

Plot 7-41. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 37 of 79

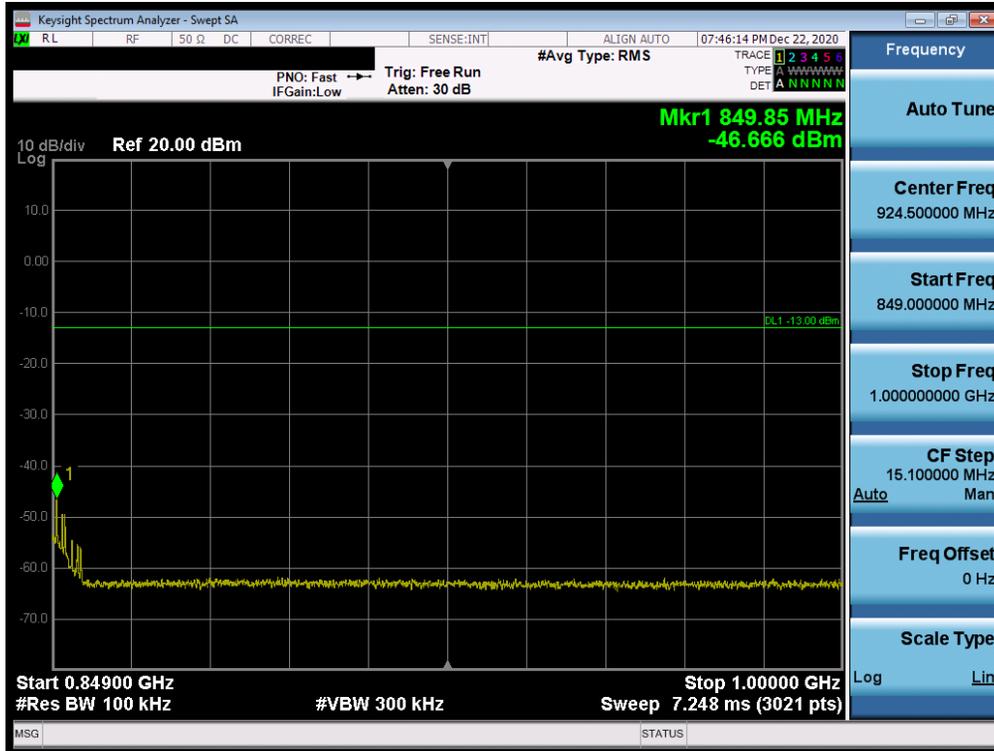


Plot 7-42. Conducted Spurious Plot (WCDMA Ch. 4183)




Plot 7-43. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 38 of 79

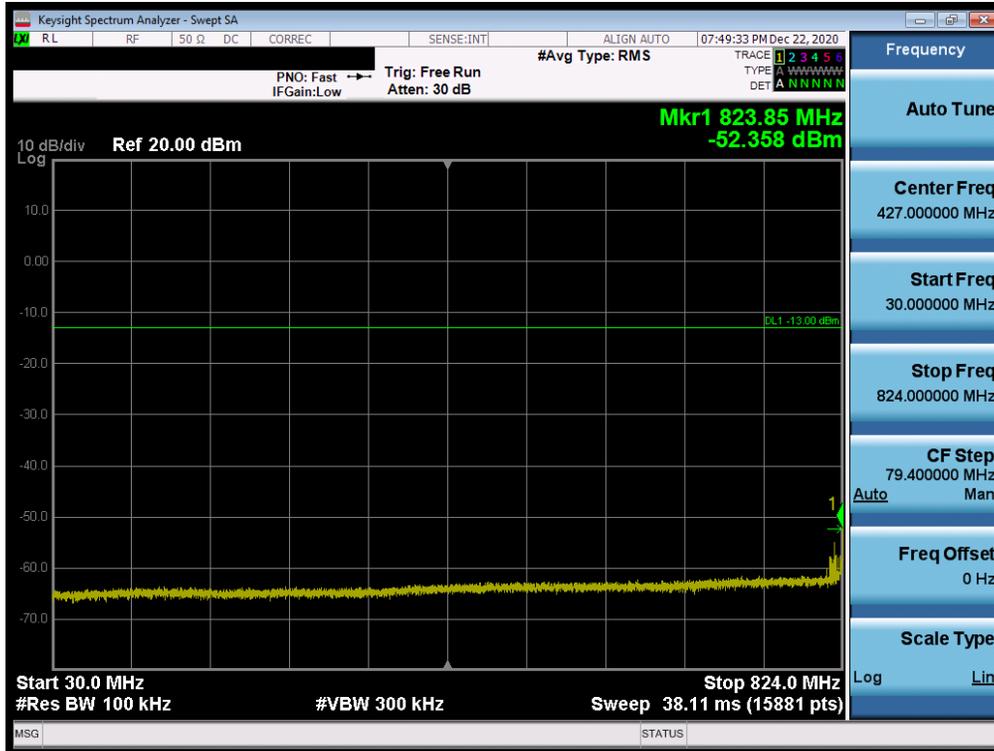


Plot 7-44. Conducted Spurious Plot (WCDMA Ch. 4233)

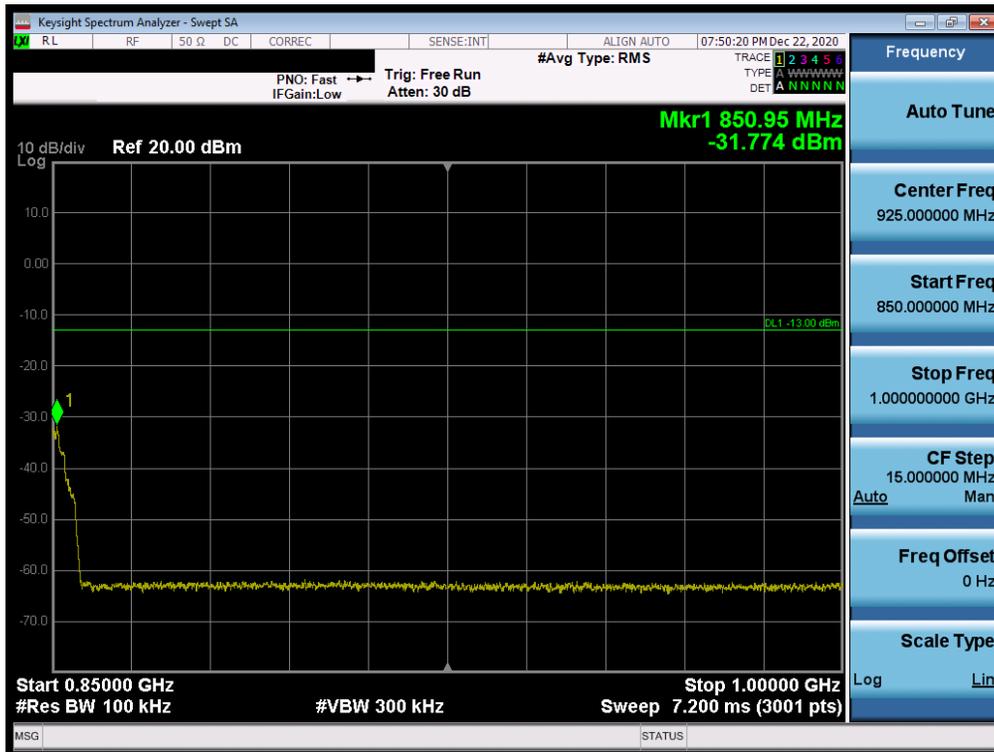

Plot 7-45. Conducted Spurious Plot (WCDMA Ch. 4233)


FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 39 of 79

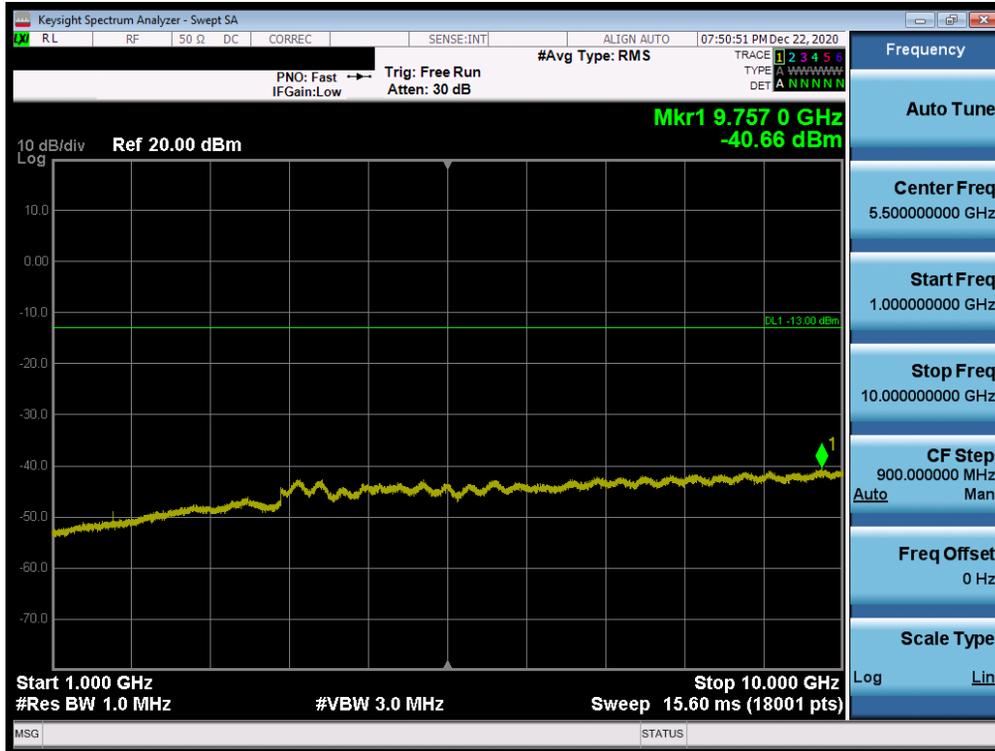


Plot 7-46. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 40 of 79

### CDMA Cell

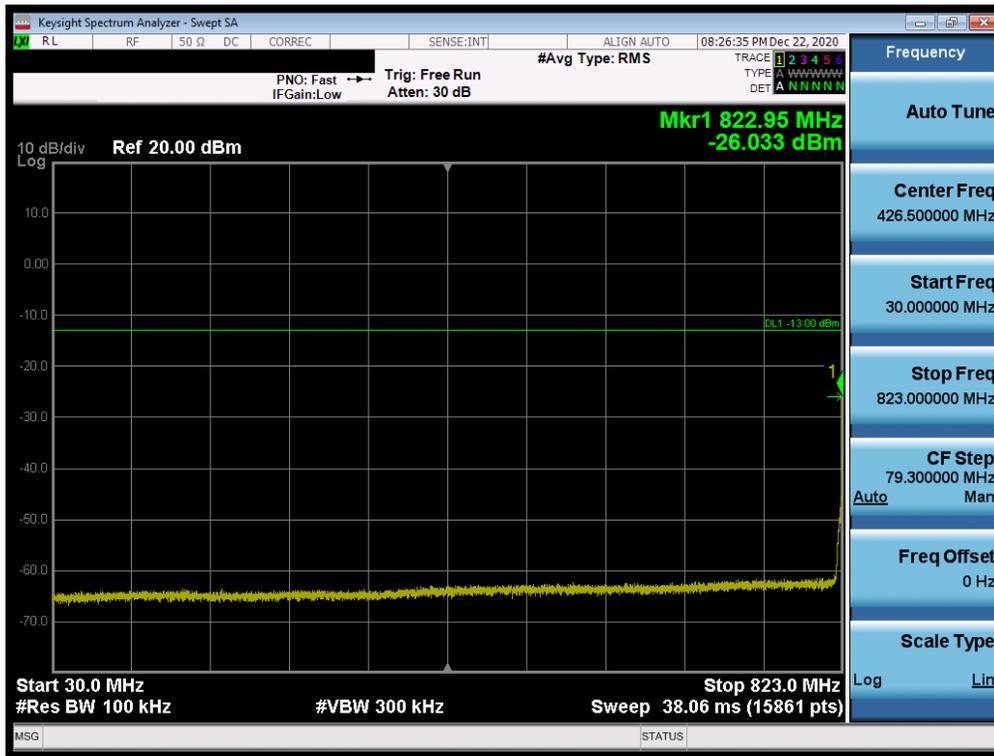


Plot 7-47. Conducted Spurious Plot (CDMA Ch. 1013)

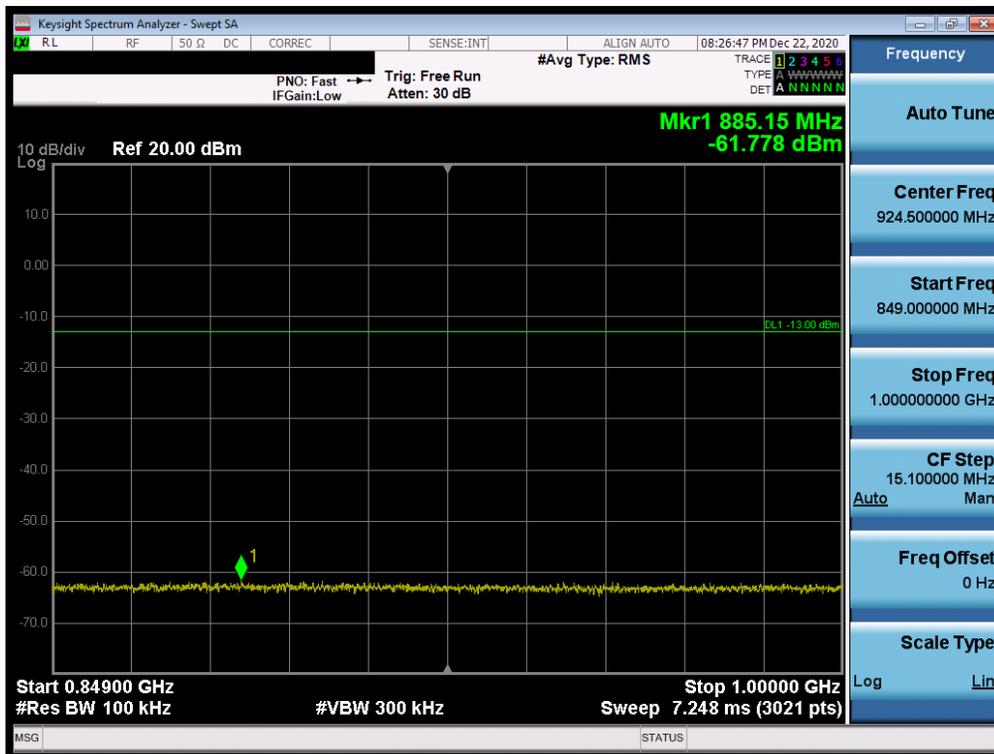


Plot 7-48. Conducted Spurious Plot (CDMA Ch. 1013)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 41 of 79



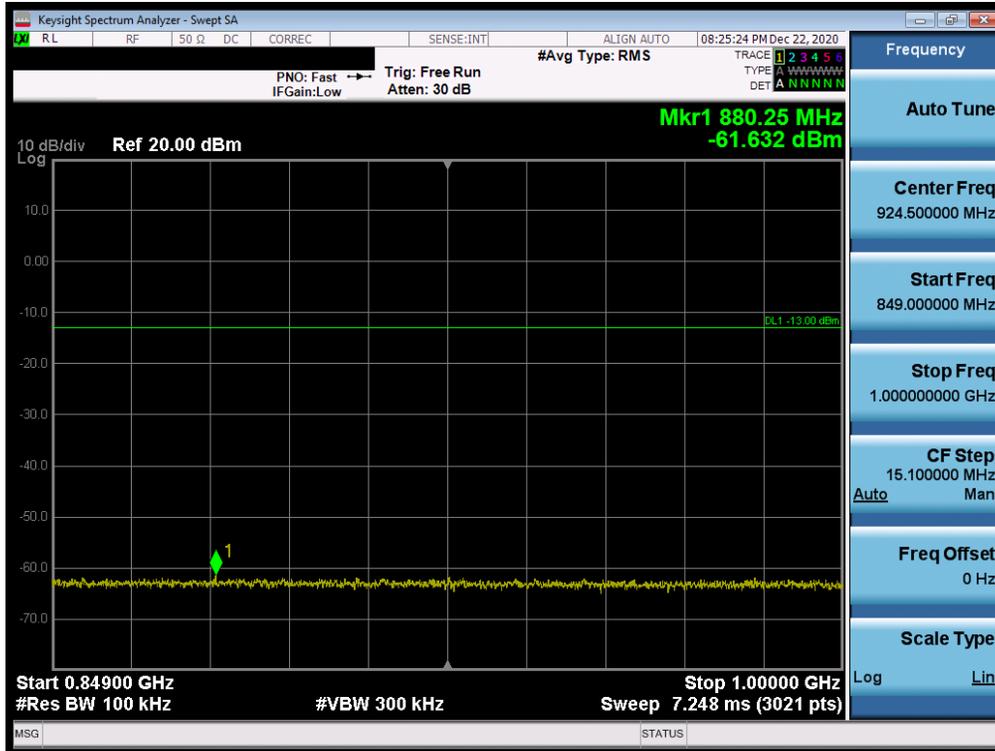


Plot 7-51. Conducted Spurious Plot (CDMA Ch. 384)

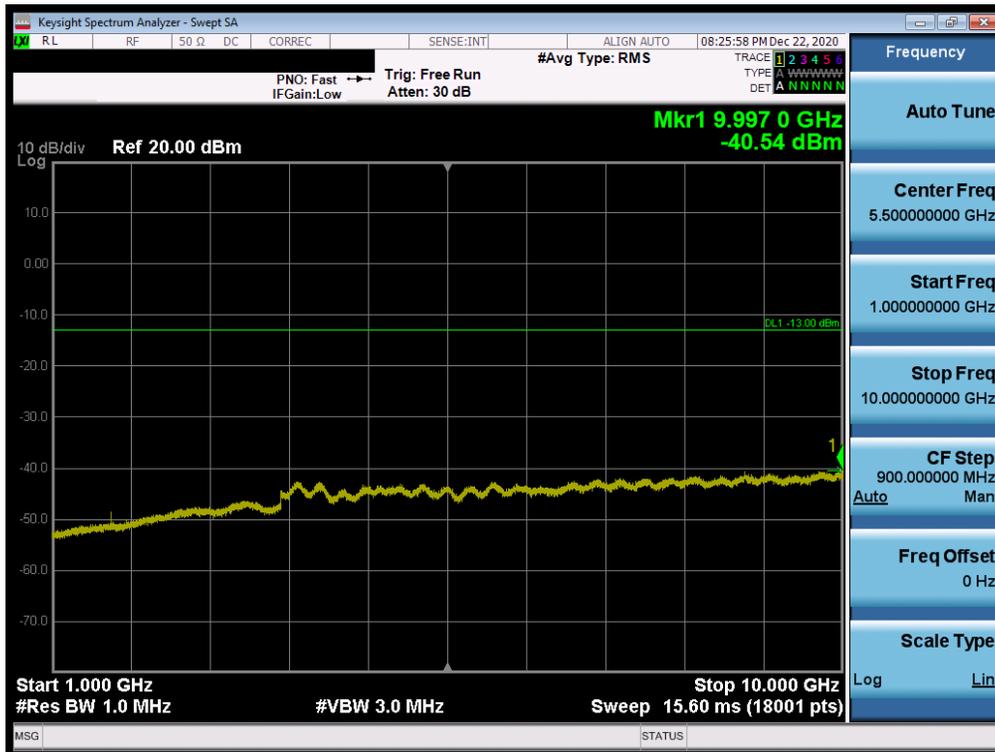


Plot 7-52. Conducted Spurious Plot (CDMA Ch. 384)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 43 of 79

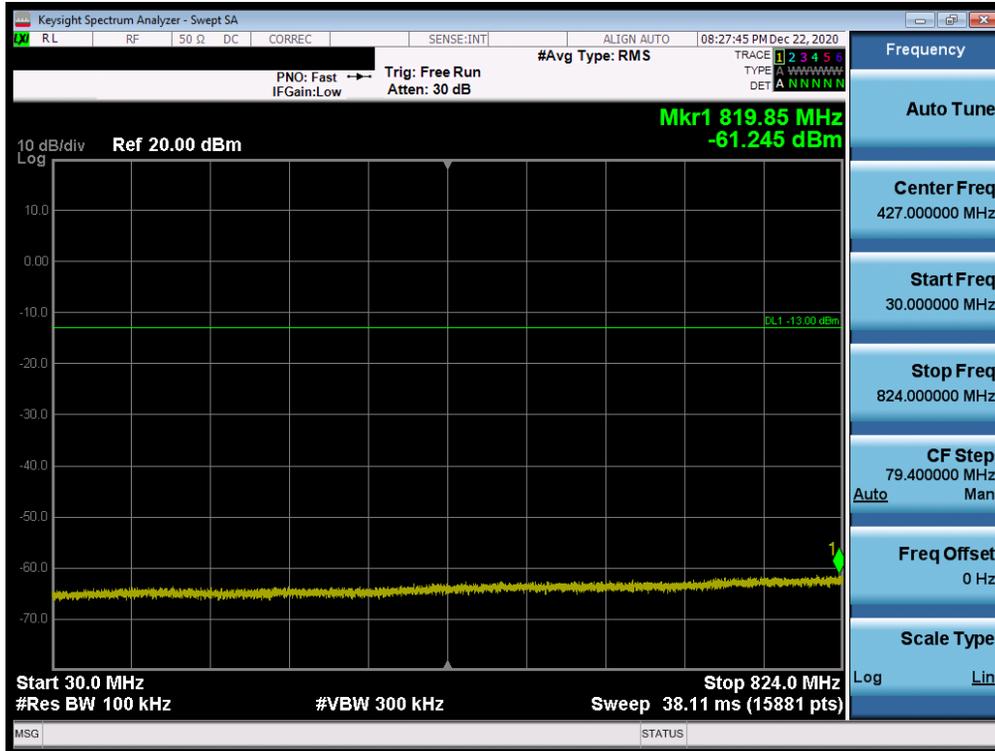


Plot 7-53. Conducted Spurious Plot (CDMA Ch. 777)

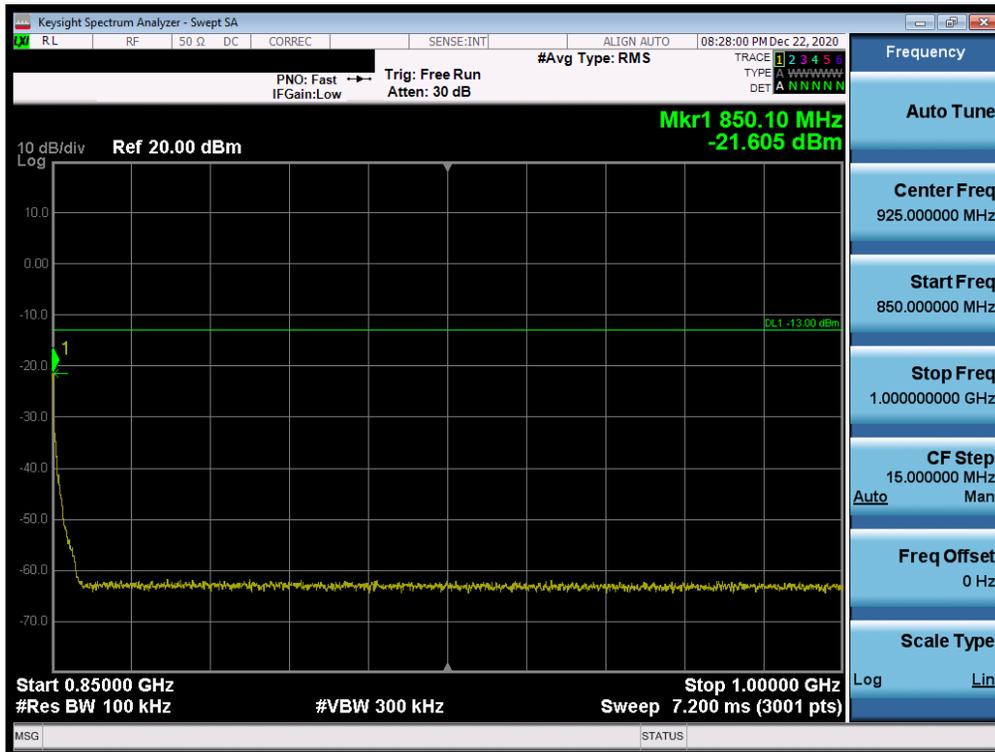

Plot 7-54. Conducted Spurious Plot (CDMA Ch. 777)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 44 of 79

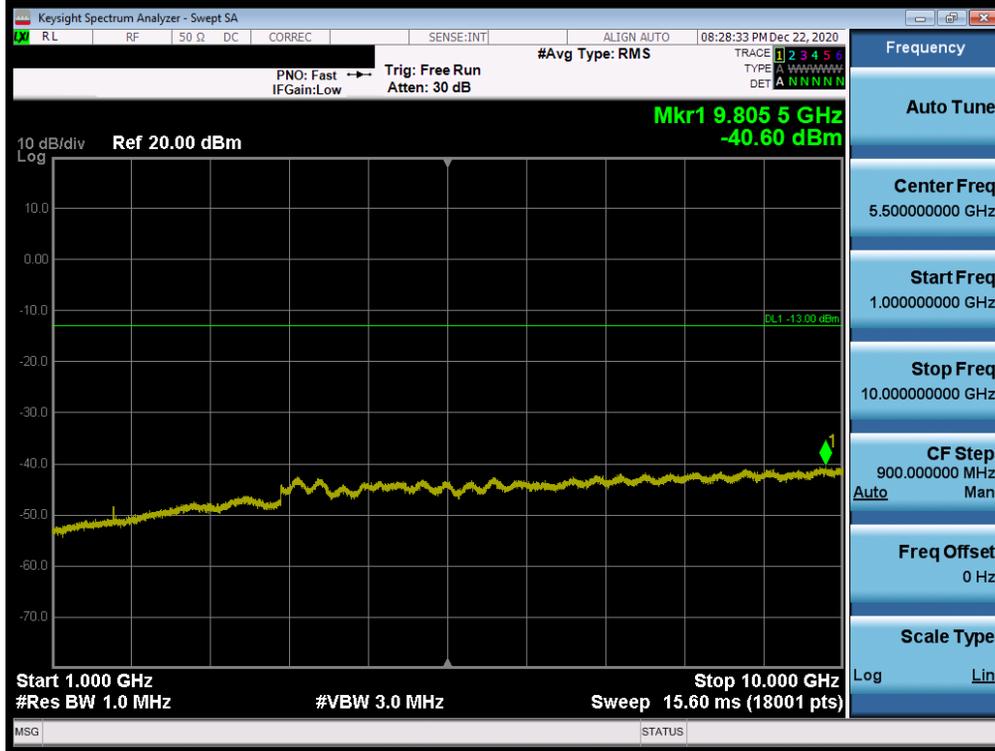

Plot 7-55. Conducted Spurious Plot (CDMA Ch. 777)

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 45 of 79

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

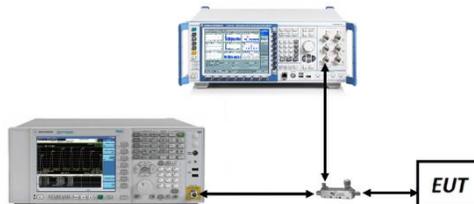


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 46 of 79



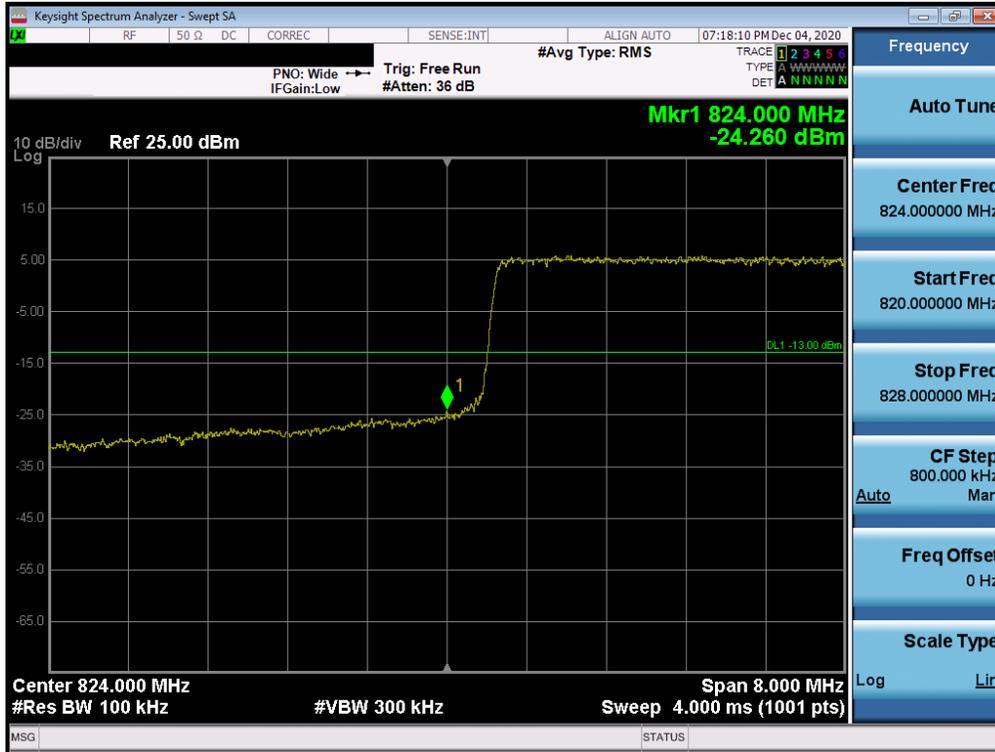


Plot 7-58. Lower Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB Configuration)

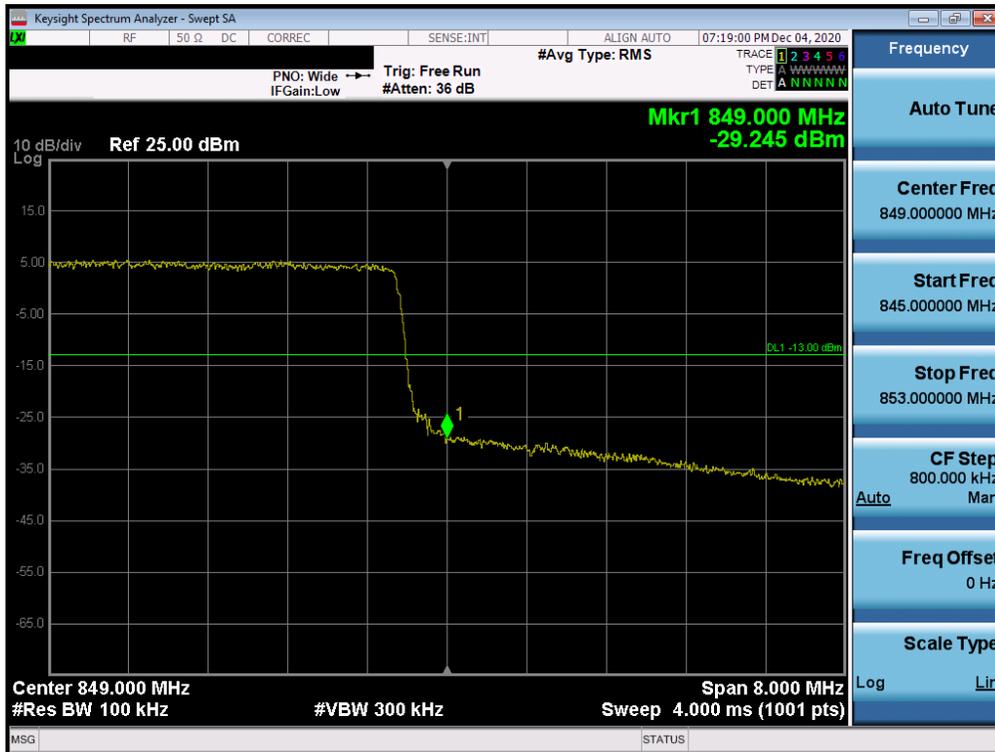


Plot 7-59. Upper Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB Configuration)

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 48 of 79

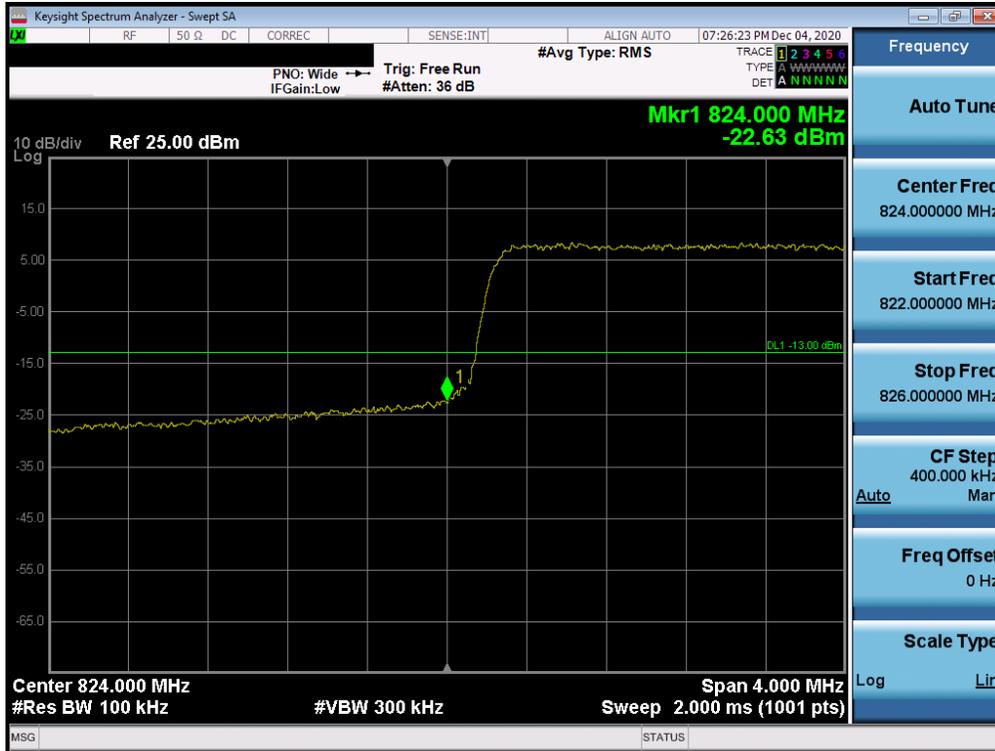


Plot 7-60. Lower Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB Configuration)

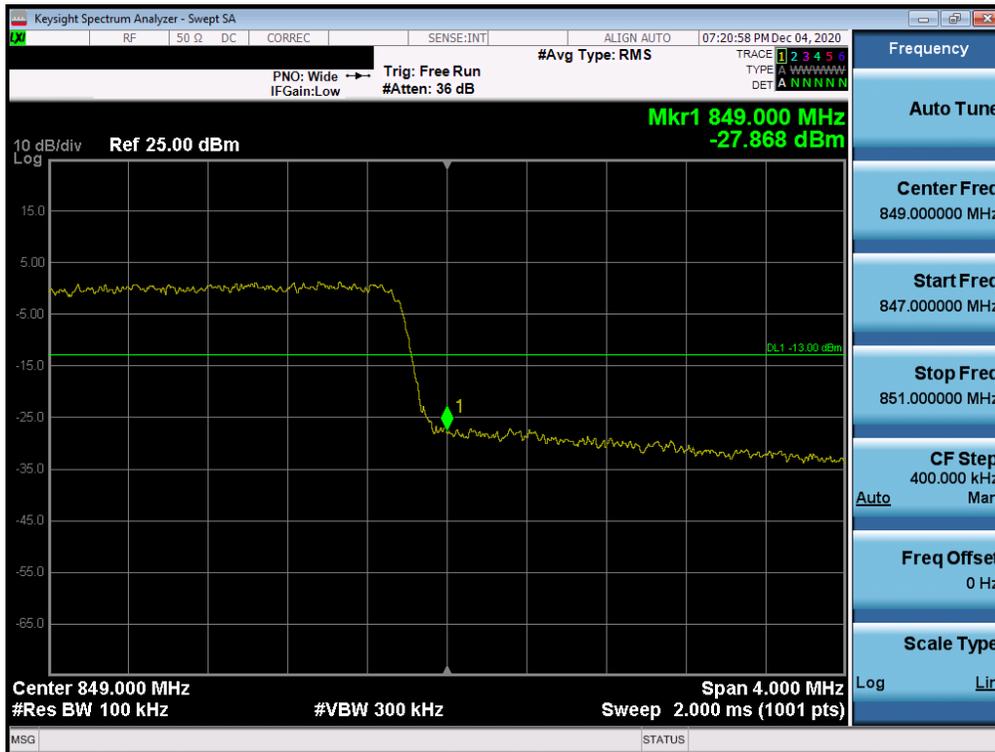

Plot 7-61. Upper Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 49 of 79

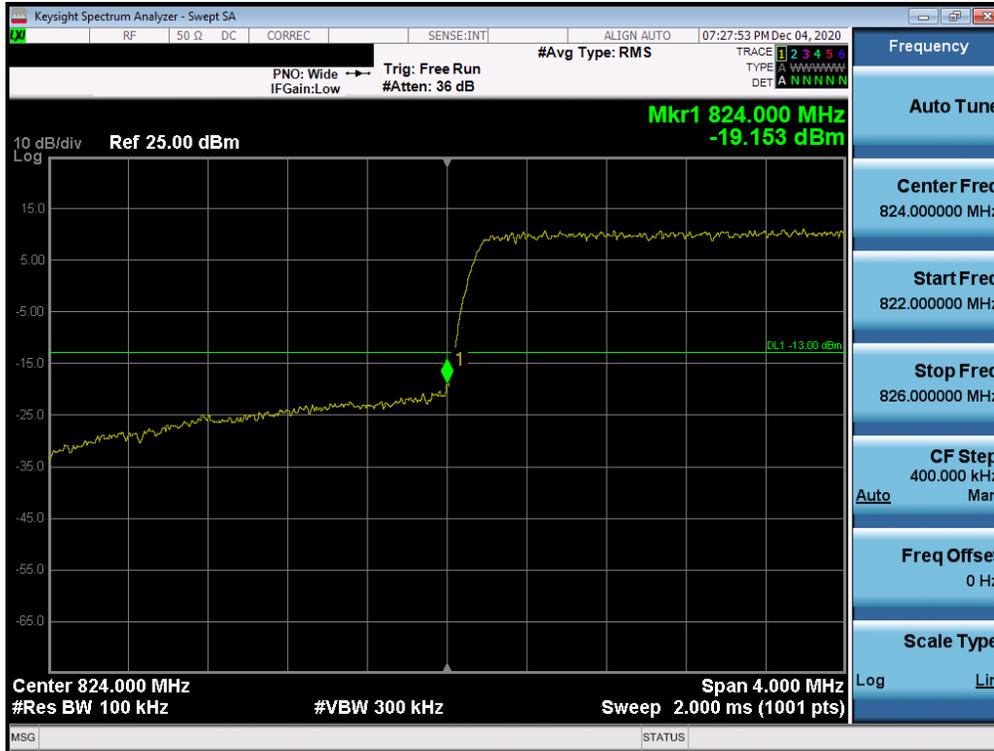


Plot 7-62. Lower Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB Configuration)



Plot 7-63. Upper Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 50 of 79

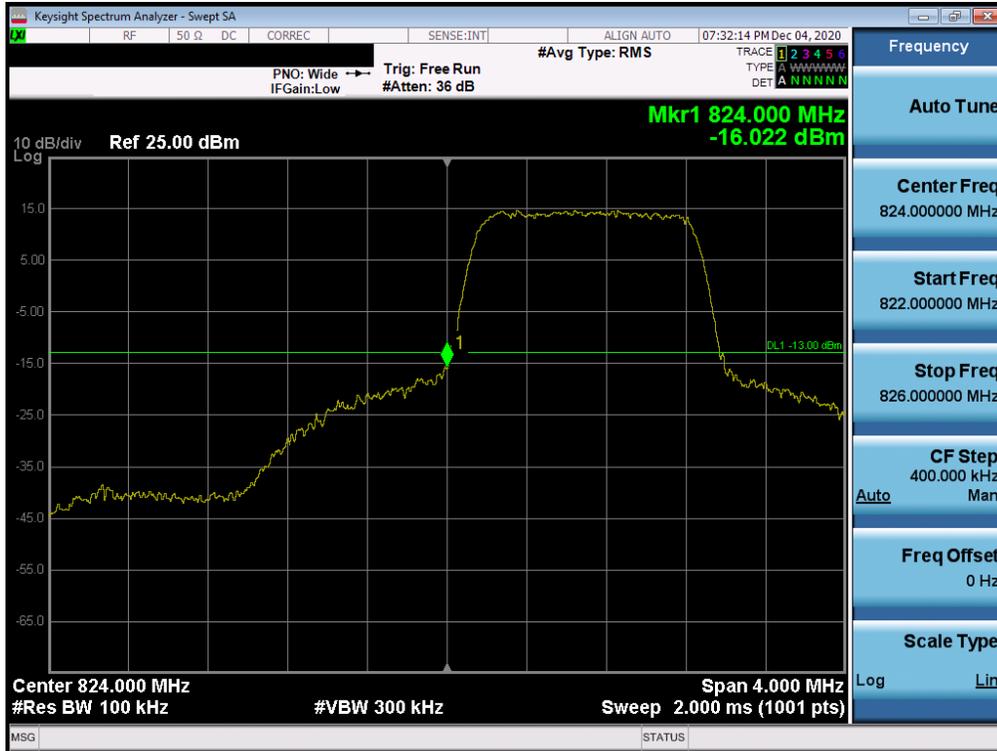

Plot 7-64. Lower Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB Configuration)




Plot 7-65. Upper Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 51 of 79

## GSM/GPRS Cell



Plot 7-66. Lower Band Edge Plot (GPRS Cell – Ch. 128)

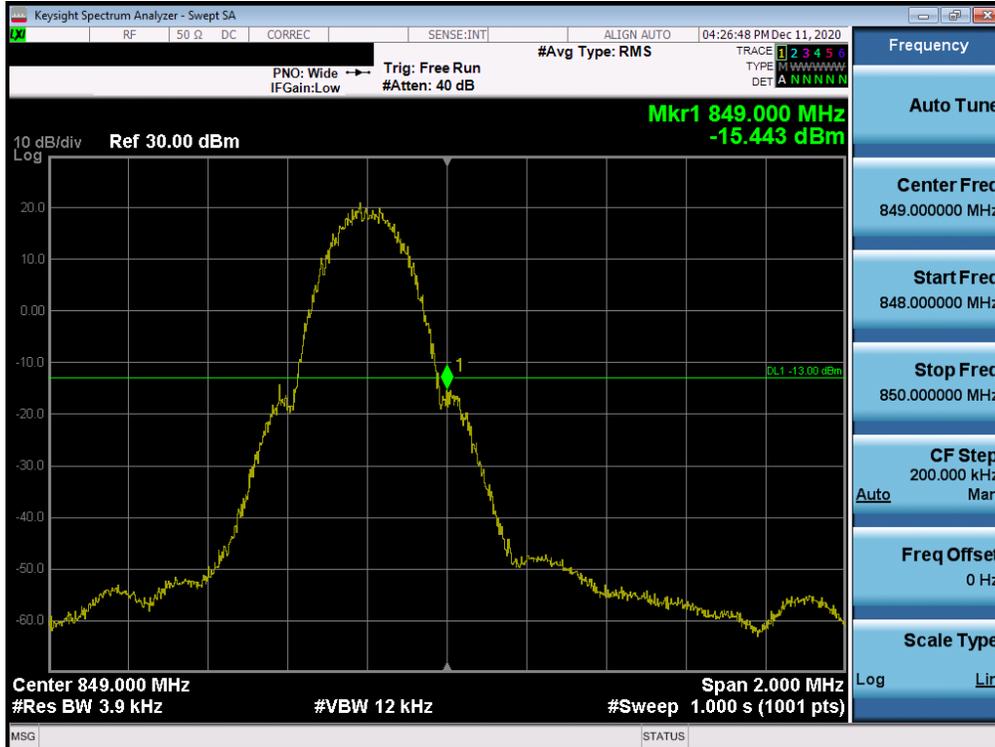


Plot 7-67. Upper Band Edge Plot (GPRS Cell – Ch. 251)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 52 of 79

## WCDMA Cell



Plot 7-68. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)

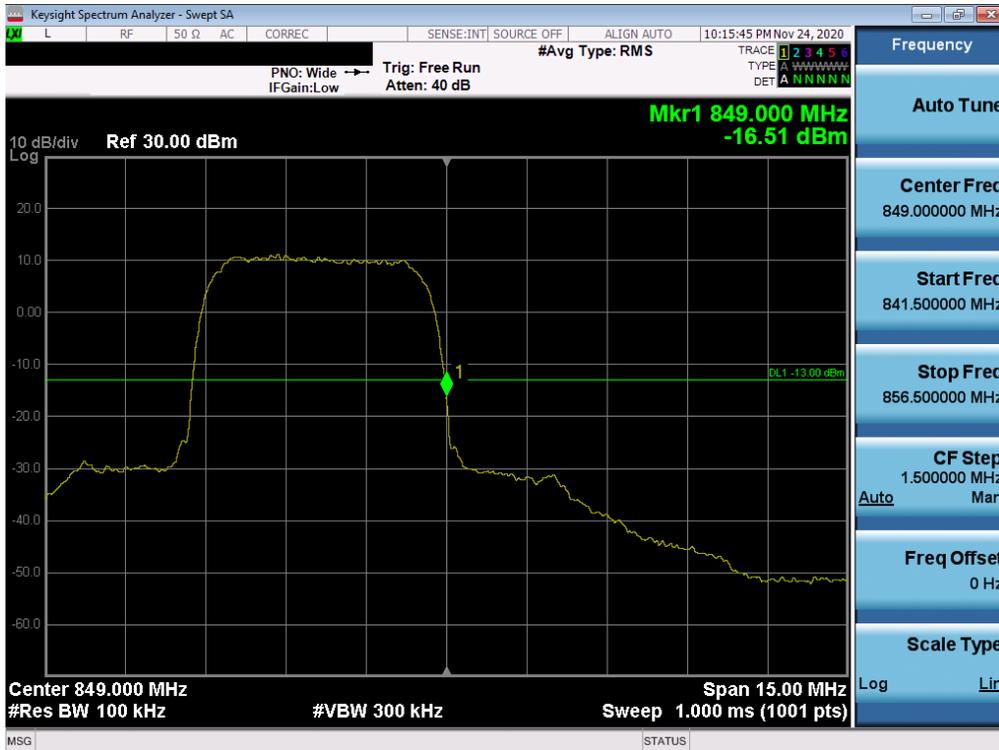

Plot 7-69. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 53 of 79

## CDMA Cell



Plot 7-70. Lower Band Edge Plot (CDMA Cell – Ch. 1013)



Plot 7-71. Upper Band Edge Plot (CDMA Cell – Ch. 777)

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 54 of 79

## 7.5 Radiated Power (ERP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 55 of 79

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

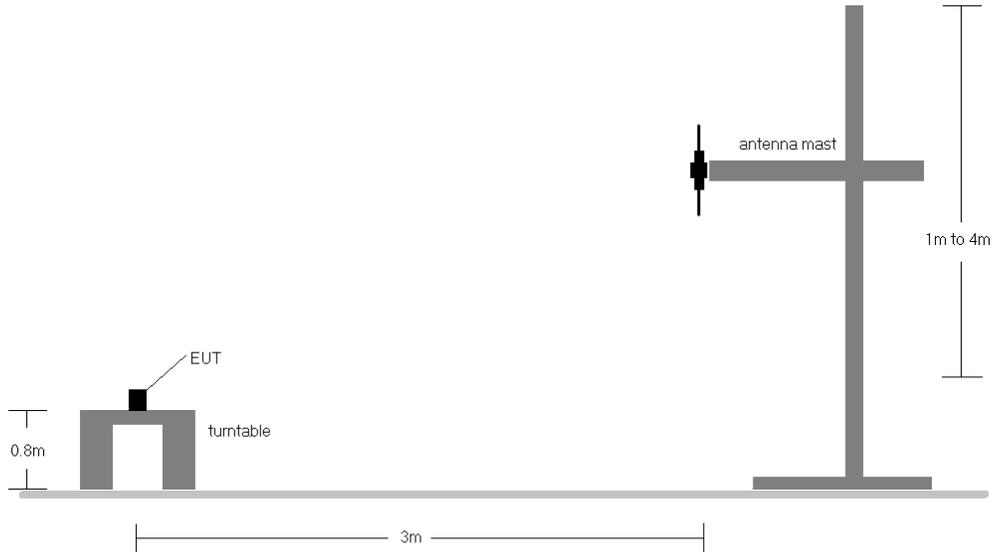

**Figure 7-4. Radiated Test Setup <1GHz**

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 56 of 79	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15MHz	QPSK	831.5	V	134.0	292.0	6.43	1 / 37	13.08	17.36	0.054	38.45	-21.09
		836.5	V	139.0	286.0	6.38	1 / 37	13.18	<b>17.41</b>	0.055	38.45	-21.04
		841.5	V	150.0	292.0	6.43	1 / 37	12.65	16.93	0.049	38.45	-21.52
	16-QAM	831.5	V	134.0	292.0	6.43	1 / 37	12.27	16.55	0.045	38.45	-21.90
		836.5	V	139.0	286.0	6.38	1 / 37	12.32	<b>16.55</b>	0.045	38.45	-21.90
		841.5	V	150.0	292.0	6.43	1 / 37	11.85	16.13	0.041	38.45	-22.32
	64-QAM	831.5	V	134.0	292.0	6.43	1 / 37	11.20	<b>15.48</b>	0.035	38.45	-22.97
		836.5	V	139.0	286.0	6.38	1 / 37	11.17	15.40	0.035	38.45	-23.05
		841.5	V	150.0	292.0	6.43	1 / 37	10.74	15.02	0.032	38.45	-23.43
10 MHz	QPSK	829.0	V	134.0	292.0	6.40	1 / 25	13.04	17.29	0.054	38.45	-21.16
		836.5	V	139.0	286.0	6.38	1 / 25	13.14	<b>17.37</b>	0.055	38.45	-21.08
		844.0	V	150.0	292.0	6.46	1 / 25	12.64	16.95	0.050	38.45	-21.50
	16-QAM	829.0	V	134.0	292.0	6.40	1 / 25	12.25	<b>16.50</b>	0.045	38.45	-21.95
		836.5	V	139.0	286.0	6.38	1 / 49	12.26	16.49	0.045	38.45	-21.96
		844.0	V	150.0	292.0	6.46	1 / 25	11.89	16.20	0.042	38.45	-22.25
	64-QAM	829.0	V	134.0	292.0	6.40	1 / 25	11.13	<b>15.38</b>	0.034	38.45	-23.07
		836.5	V	139.0	286.0	6.38	1 / 25	11.09	15.32	0.034	38.45	-23.13
		844.0	V	150.0	292.0	6.46	1 / 25	10.80	15.11	0.032	38.45	-23.34
5 MHz	QPSK	826.5	V	134.0	292.0	6.37	1 / 12	13.05	17.28	0.053	38.45	-21.17
		836.5	V	139.0	286.0	6.38	1 / 12	13.18	<b>17.41</b>	0.055	38.45	-21.04
		846.5	V	150.0	292.0	6.48	1 / 12	12.69	17.02	0.050	38.45	-21.43
	16-QAM	826.5	V	134.0	292.0	6.37	1 / 12	12.25	16.48	0.044	38.45	-21.97
		836.5	V	139.0	286.0	6.38	1 / 12	12.27	<b>16.50</b>	0.045	38.45	-21.95
		846.5	V	150.0	292.0	6.48	1 / 12	11.82	16.15	0.041	38.45	-22.30
	64-QAM	826.5	V	134.0	292.0	6.37	1 / 12	11.17	<b>15.40</b>	0.035	38.45	-23.05
		836.5	V	139.0	286.0	6.38	1 / 12	11.08	15.31	0.034	38.45	-23.14
		846.5	V	150.0	292.0	6.48	1 / 24	10.70	15.03	0.032	38.45	-23.42
3 MHz	QPSK	825.5	V	134.0	292.0	6.36	1 / 7	13.14	17.36	0.054	38.45	-21.09
		836.5	V	139.0	286.0	6.38	1 / 7	13.18	<b>17.41</b>	0.055	38.45	-21.04
		847.5	V	150.0	292.0	6.49	1 / 7	12.77	17.11	0.051	38.45	-21.34
	16-QAM	825.5	V	134.0	292.0	6.36	1 / 7	12.31	16.53	0.045	38.45	-21.92
		836.5	V	139.0	286.0	6.38	1 / 7	12.32	<b>16.55</b>	0.045	38.45	-21.90
		847.5	V	150.0	292.0	6.49	1 / 0	11.92	16.26	0.042	38.45	-22.19
	64-QAM	825.5	V	134.0	292.0	6.36	1 / 7	11.25	<b>15.47</b>	0.035	38.45	-22.98
		836.5	V	139.0	286.0	6.38	1 / 7	11.15	15.38	0.035	38.45	-23.07
		847.5	V	150.0	292.0	6.49	1 / 7	10.88	15.22	0.033	38.45	-23.23
1.4 MHz	QPSK	824.7	V	134.0	292.0	6.36	1 / 2	13.00	17.21	0.053	38.45	-21.24
		836.5	V	139.0	286.0	6.38	1 / 2	13.08	<b>17.31</b>	0.054	38.45	-21.14
		848.3	V	150.0	292.0	6.50	1 / 2	12.62	16.97	0.050	38.45	-21.48
	16-QAM	824.7	V	134.0	292.0	6.36	1 / 2	12.16	16.37	0.043	38.45	-22.08
		836.5	V	139.0	286.0	6.38	1 / 2	12.22	<b>16.45</b>	0.044	38.45	-22.00
		848.3	V	150.0	292.0	6.50	1 / 2	11.91	16.26	0.042	38.45	-22.19
	64-QAM	824.7	V	134.0	292.0	6.36	1 / 2	11.11	<b>15.32</b>	0.034	38.45	-23.13
		836.5	V	139.0	286.0	6.38	1 / 2	11.04	15.27	0.034	38.45	-23.18
		848.3	V	150.0	292.0	6.50	1 / 2	10.77	15.12	0.033	38.45	-23.33
15MHz	Opposite Pol.	836.5	H	186.0	280.0	6.38	1 / 37	10.64	17.02	0.050	38.45	-21.43

Table 7-2. ERP Data (LTE Band 26/5)

FCC ID: ZNFK330PM	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 57 of 79

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	V	137	216	14.96	6.35	19.16	0.082	38.45	-19.29
836.60	GSM850	V	134	227	16.89	6.38	21.12	0.129	38.45	-17.33
848.80	GSM850	V	137	220	16.90	6.51	<b>21.26</b>	<b>0.134</b>	38.45	-17.20
848.80	GSM850	H	360	275	14.80	6.68	19.33	0.086	38.45	-19.12
848.80	EDGE850	V	137	220	13.13	6.68	<b>17.66</b>	0.058	38.45	-20.79

Table 7-3. ERP Data (GPRS Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	132	250	12.56	6.37	16.78	0.048	38.45	-21.67
836.60	WCDMA850	V	138	248	13.19	6.38	<b>17.42</b>	<b>0.055</b>	38.45	-21.03
846.60	WCDMA850	V	135	250	12.23	6.48	16.56	0.045	38.45	-21.89
836.60	WCDMA850	H	202	307	12.05	6.38	16.28	0.042	38.45	-22.17

Table 7-4. ERP Data (WCDMA Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	H	199	305	12.56	6.36	<b>16.77</b>	<b>0.047</b>	38.45	-21.69
836.52	CDMA850	H	205	303	12.43	6.38	16.66	0.046	38.45	-21.79
848.31	CDMA850	H	191	302	12.31	6.50	16.66	0.046	38.45	-21.79
824.70	CDMA850	V	100	230	11.04	6.36	15.25	0.033	38.45	-23.21

Table 7-5. ERP Data (CDMA Cell)

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 58 of 79

## 7.6 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 59 of 79

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

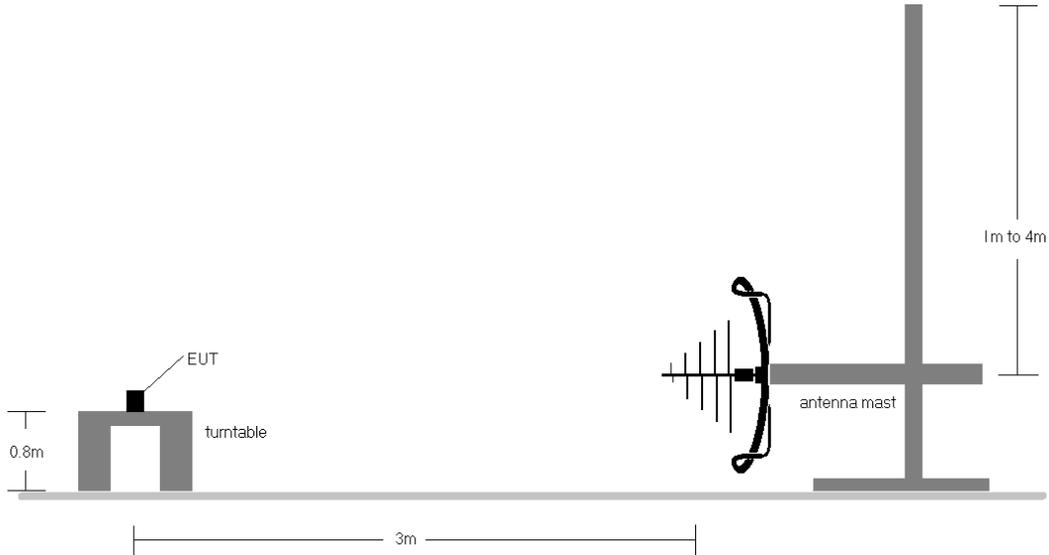

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

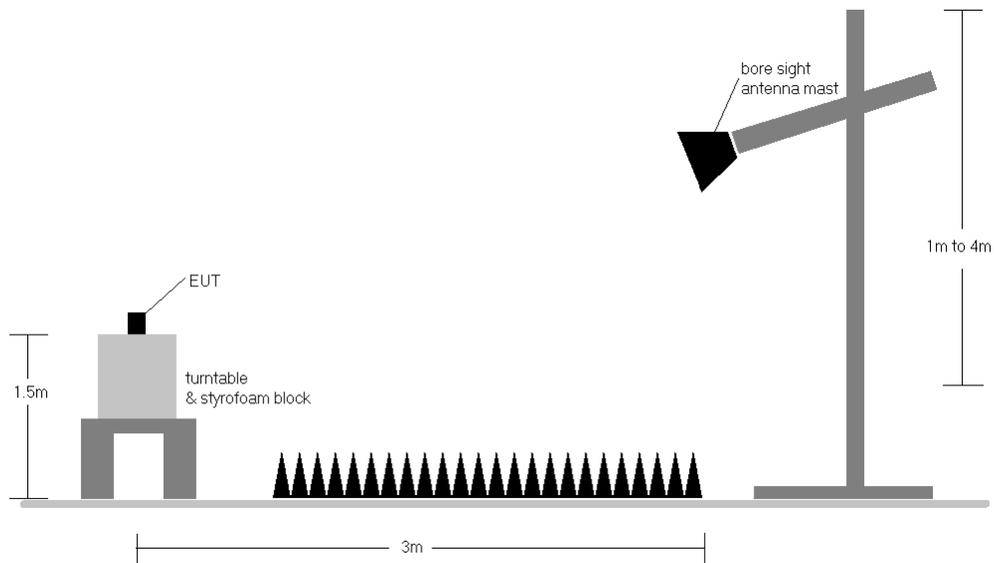

**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**


FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 60 of 79	

## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - b)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - d)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) For CDMA, this device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 6) This unit was tested with its standard battery.
- 7) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 8) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 9) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 10) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 61 of 79

# LTE Band 26/5

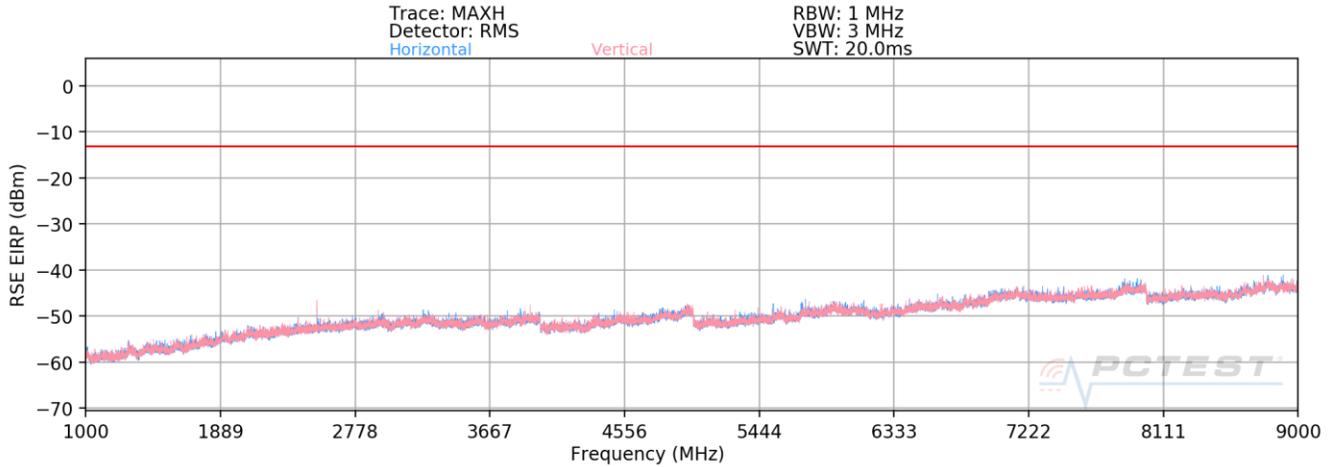

**Plot 7-72. Radiated Spurious Plot (LTE Band 26/5)**

Bandwidth (MHz):	15
Frequency (MHz):	831.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1663.0	H	126	49	-76.93	0.88	30.95	-64.30	-13.00	-51.30
2494.5	H	104	228	-71.43	5.13	40.70	-54.56	-13.00	-41.56
3326.0	H	-	-	-81.26	6.61	32.35	-62.91	-13.00	-49.91
4157.5	H	-	-	-82.07	8.48	33.41	-61.84	-13.00	-48.84
4989.0	H	-	-	-82.12	10.74	35.62	-59.64	-13.00	-46.64

**Table 7-6. Radiated Spurious Data (LTE Band 26/5 – Low Channel)**

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	H	100	52	-76.82	1.02	31.20	-64.06	-13.00	-51.06
2509.5	H	113	308	-73.31	5.17	38.86	-56.39	-13.00	-43.39
3346.0	H	-	-	-81.20	6.75	32.55	-62.71	-13.00	-49.71
4182.5	H	-	-	-82.85	8.62	32.77	-62.49	-13.00	-49.49
5019.0	H	-	-	-82.62	10.78	35.16	-60.10	-13.00	-47.10

**Table 7-7. Radiated Spurious Data (LTE Band 26/5 – Mid Channel)**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 62 of 79	


Bandwidth (MHz):	15
Frequency (MHz):	841.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1683.00	H	275	-2	-77.71	1.13	30.42	-64.84	-13.00	-51.84
2524.50	H	154	304	-71.80	5.57	40.77	-54.49	-13.00	-41.49
3366.00	H	-	-	-81.74	7.01	32.27	-62.98	-13.00	-49.98
4207.50	H	-	-	-82.82	8.35	32.53	-62.73	-13.00	-49.73
5049.00	H	-	-	-82.30	10.07	34.77	-60.49	-13.00	-47.49

**Table 7-8. Radiated Spurious Data (LTE Band 26/5 – High Channel)**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 63 of 79

## GSM/GPRS Cell

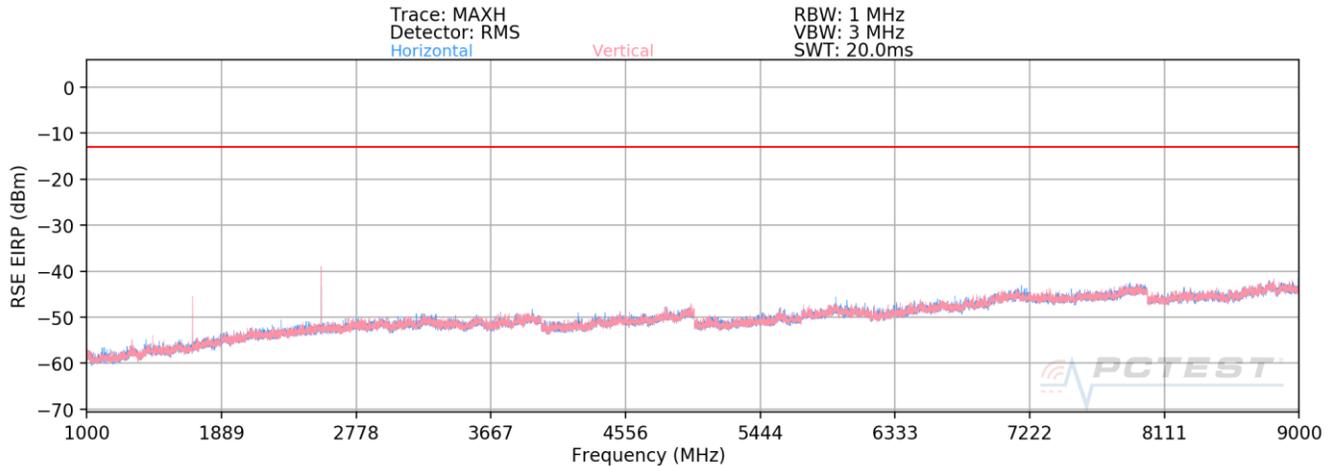

Plot 7-73. Radiated Spurious Plot (GPRS Cell)

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	V	112	178	-63.09	0.55	44.46	-50.79	-13.00	-37.79
2472.6	V	246	103	-69.09	5.17	43.08	-52.18	-13.00	-39.18
3296.8	V	-	-	-75.36	7.01	38.65	-56.61	-13.00	-43.61
4121.0	V	-	-	-75.13	8.07	39.94	-55.32	-13.00	-42.32
4945.2	V	-	-	-77.59	9.88	39.29	-55.96	-13.00	-42.96

Table 7-9. Radiated Spurious Data (GPRS Cell – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	V	327	100	-66.70	1.02	41.32	-53.93	-13.00	-40.93
2509.8	V	101	322	-63.32	5.18	48.86	-46.40	-13.00	-33.40
3346.4	V	-	-	-74.21	6.76	39.55	-55.71	-13.00	-42.71
4183.0	V	-	-	-75.89	8.61	39.72	-55.54	-13.00	-42.54
5019.6	V	-	-	-80.82	10.78	36.96	-58.30	-13.00	-45.30

Table 7-10. Radiated Spurious Data (GPRS Cell – Mid Channel)

FCC ID: ZNFK330PM	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 64 of 79


<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	V	114	218	-58.26	1.46	50.20	-45.06	-13.00	-32.06
2546.4	V	100	47	-55.76	5.44	56.68	-38.57	-13.00	-25.57
3395.2	V	-	-	-71.79	7.36	42.57	-52.69	-13.00	-39.69
4244.0	V	-	-	-70.91	8.12	44.21	-51.05	-13.00	-38.05
5092.8	V	-	-	-72.82	10.31	44.49	-50.77	-13.00	-37.77

**Table 7-11. Radiated Spurious Data (GPRS Cell – High Channel)**

<b>FCC ID:</b> ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset		Page 65 of 79

## WCDMA Cell

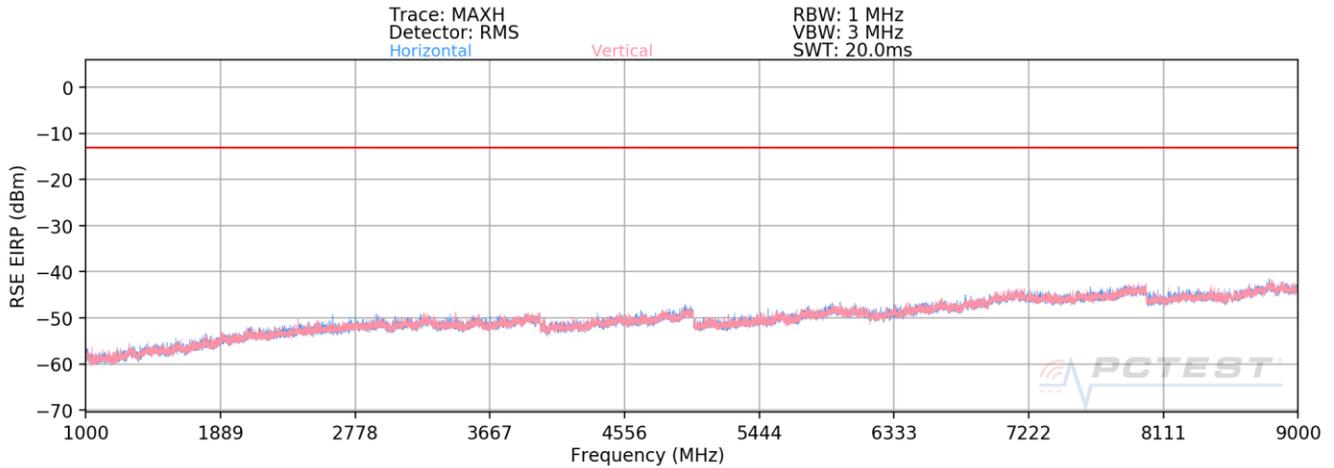

**Plot 7-74. Radiated Spurious Plot (WCDMA Cell)**

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.8	V	129	187	-79.20	0.64	28.44	-66.82	-13.00	-53.82
2479.2	V	-	-	-80.62	5.17	31.55	-63.71	-13.00	-50.71
3305.6	V	-	-	-80.96	6.91	32.95	-62.31	-13.00	-49.31
4132.0	V	-	-	-80.75	8.19	34.44	-60.82	-13.00	-47.82

**Table 7-12. Radiated Spurious Data (WCDMA Cell – Low Channel)**

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	V	122	176	-76.77	1.02	31.25	-64.00	-13.00	-51.00
2509.8	V	-	-	-78.96	5.18	33.22	-62.04	-13.00	-49.04
3346.4	V	-	-	-81.14	6.76	32.62	-62.64	-13.00	-49.64
4183.0	V	-	-	-82.18	8.61	33.43	-61.83	-13.00	-48.83

**Table 7-13. Radiated Spurious Data (WCDMA Cell – Mid Channel)**

FCC ID: ZNFK330PM	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 66 of 79


<b>Mode:</b>	WCDMA RMC
<b>Channel:</b>	4233
<b>Frequency (MHz):</b>	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.2	V	102	172	-77.19	1.36	31.17	-64.09	-13.00	-51.09
2539.8	V	-	-	-79.28	5.51	33.23	-62.03	-13.00	-49.03
3386.4	V	-	-	-80.35	7.25	33.90	-61.35	-13.00	-48.35
4233.0	V	-	-	-80.61	8.17	34.56	-60.70	-13.00	-47.70

**Table 7-14. Radiated Spurious Data (WCDMA Cell – High Channel)**

<b>FCC ID:</b> ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset		Page 67 of 79

## CDMA Cell

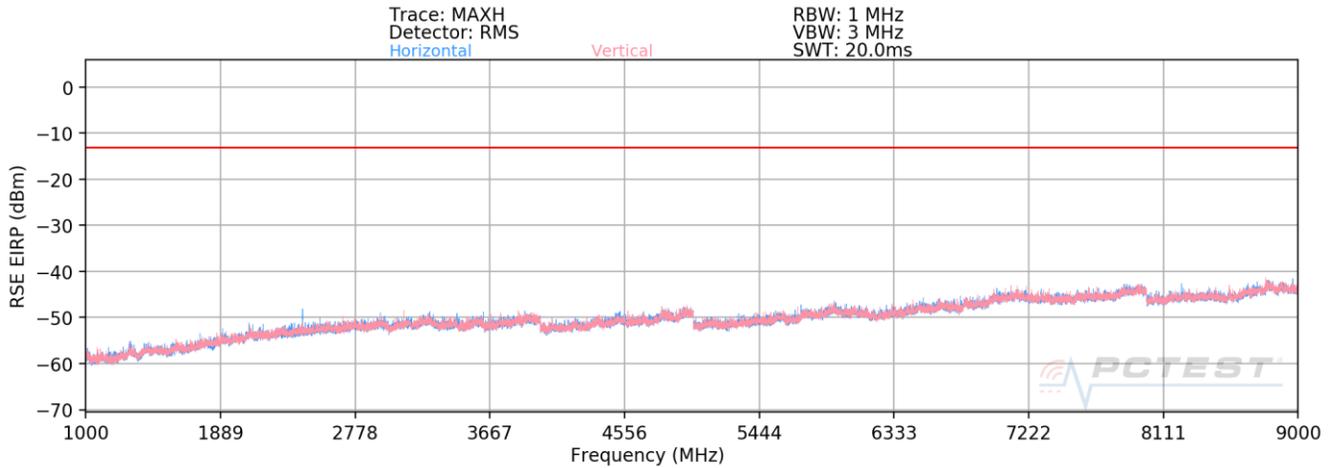

**Plot 7-75. Radiated Spurious Plot (CDMA Cell)**

Mode:	CDMA
Channel:	1013
Frequency (MHz):	824.7

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1649.40	V	372	275	-79.55	0.57	28.02	-67.24	-13.00	-54.24
2474.10	V	359	197	-78.75	5.19	33.44	-61.82	-13.00	-48.82
3298.80	V	-	-	-79.55	6.99	34.44	-60.82	-13.00	-47.82
4123.50	V	-	-	-80.01	8.07	35.06	-60.20	-13.00	-47.20
4948.20	V	-	-	-80.72	9.94	36.22	-59.03	-13.00	-46.03

**Table 7-15. Radiated Spurious Data (CDMA Cell – Low Channel)**

Mode:	CDMA
Channel:	384
Frequency (MHz):	836.52

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.04	V	147	328	-77.74	1.02	30.28	-64.98	-13.00	-51.98
2509.56	V	139	354	-78.20	5.17	33.97	-61.28	-13.00	-48.28
3346.08	V	-	-	-80.01	6.75	33.74	-61.52	-13.00	-48.52
4182.60	V	-	-	-80.78	8.61	34.83	-60.42	-13.00	-47.42
5019.12	V	-	-	-81.18	10.78	36.60	-58.66	-13.00	-45.66

**Table 7-16. Radiated Spurious Data (CDMA Cell – Mid Channel)**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 68 of 79

Mode:	CDMA
Channel:	777
Frequency (MHz):	848.31

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1696.62	V	200	215	-76.58	1.44	31.86	-63.40	-13.00	-50.40
2544.93	V	128	358	-78.10	5.45	34.35	-60.91	-13.00	-47.91
3393.24	V	-	-	-80.54	7.34	33.80	-61.46	-13.00	-48.46
4241.55	V	-	-	-80.73	8.13	34.40	-60.86	-13.00	-47.86
5089.86	V	-	-	-80.93	10.22	36.29	-58.96	-13.00	-45.96

**Table 7-17. Radiated Spurious Data (CDMA Cell – High Channel)**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 69 of 79

## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 70 of 79	


## LTE Band 26/5

OPERATING FREQUENCY: 831,500,000 Hz  
 CHANNEL: 26865  
 REFERENCE VOLTAGE: 4.4V VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.4V	+ 20 (Ref)	831,499,757	0	0.0000000
100 %		- 30	831,499,777	20	0.0000024
100 %		- 20	831,499,504	-253	-0.0000304
100 %		- 10	831,499,622	-135	-0.0000162
100 %		0	831,499,701	-56	-0.0000067
100 %		+ 10	831,499,865	108	0.0000130
100 %		+ 20	831,499,832	75	0.0000090
100 %		+ 30	831,499,627	-130	-0.0000156
100 %		+ 40	831,499,595	-162	-0.0000195
100 %		+ 50	831,499,680	-77	-0.0000093
85 %		+ 20	831,499,555	-202	-0.0000243
BATT. ENDPOINT		2.5V	+ 20	831,500,033	276

**Table 7-18. LTE Band 26/5 Frequency Stability Data**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 71 of 79

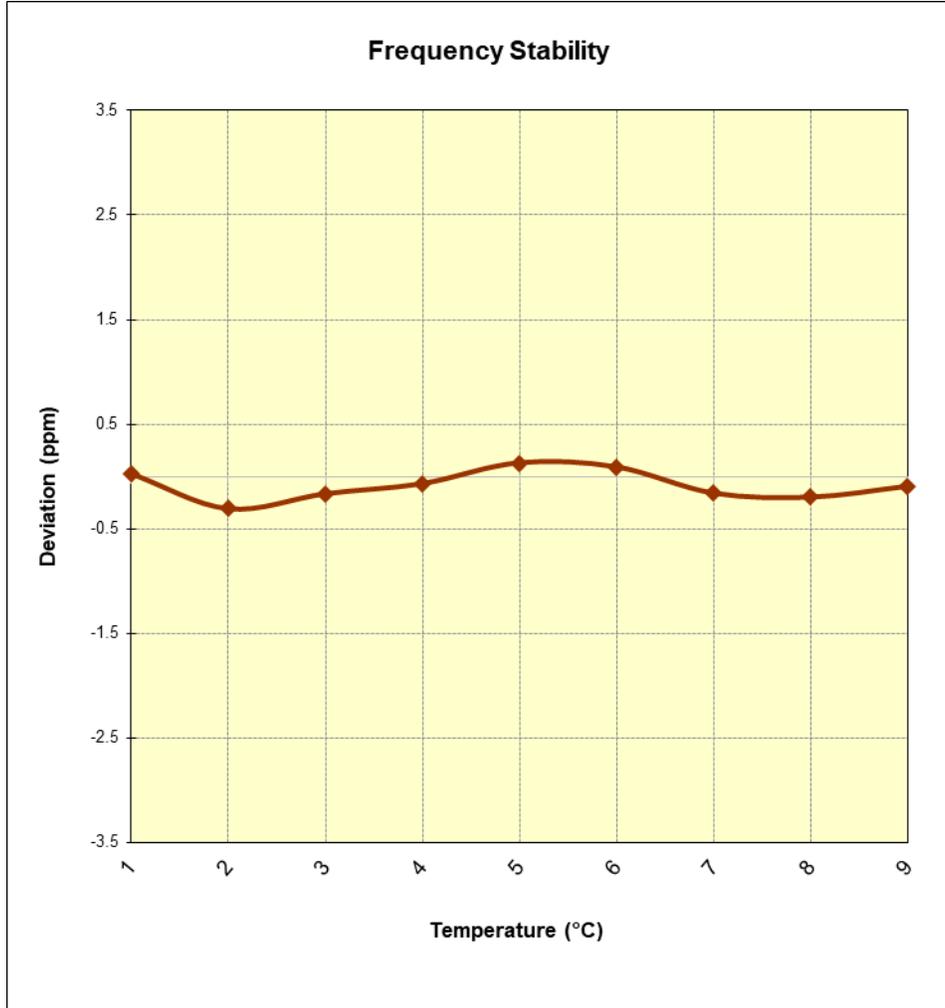

**Plot 7-76. LTE Band 26/5 Frequency Stability Chart**

<b>FCC ID:</b> ZNFK330PM	<b>PCTEST</b> Proud to be part of element	<b>PART 22 MEASUREMENT REPORT</b>	<b>LG</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 72 of 79	


## GSM/GPRS Cell

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	4.4V	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.4V	+ 20 (Ref)	836,600,161	0	0.0000000
100 %		- 30	836,600,457	296	0.0000354
100 %		- 20	836,600,238	77	0.0000092
100 %		- 10	836,600,340	179	0.0000214
100 %		0	836,600,126	-35	-0.0000042
100 %		+ 10	836,600,260	99	0.0000118
100 %		+ 20	836,600,459	298	0.0000356
100 %		+ 30	836,599,921	-240	-0.0000287
100 %		+ 40	836,599,811	-350	-0.0000418
100 %		+ 50	836,600,262	101	0.0000121
85 %		+ 20	836,600,130	-31	-0.0000037
BATT. ENDPOINT		2.5V	+ 20	836,599,912	-249

Table 7-19. GSM/GPRS Cell Frequency Stability Data

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 73 of 79

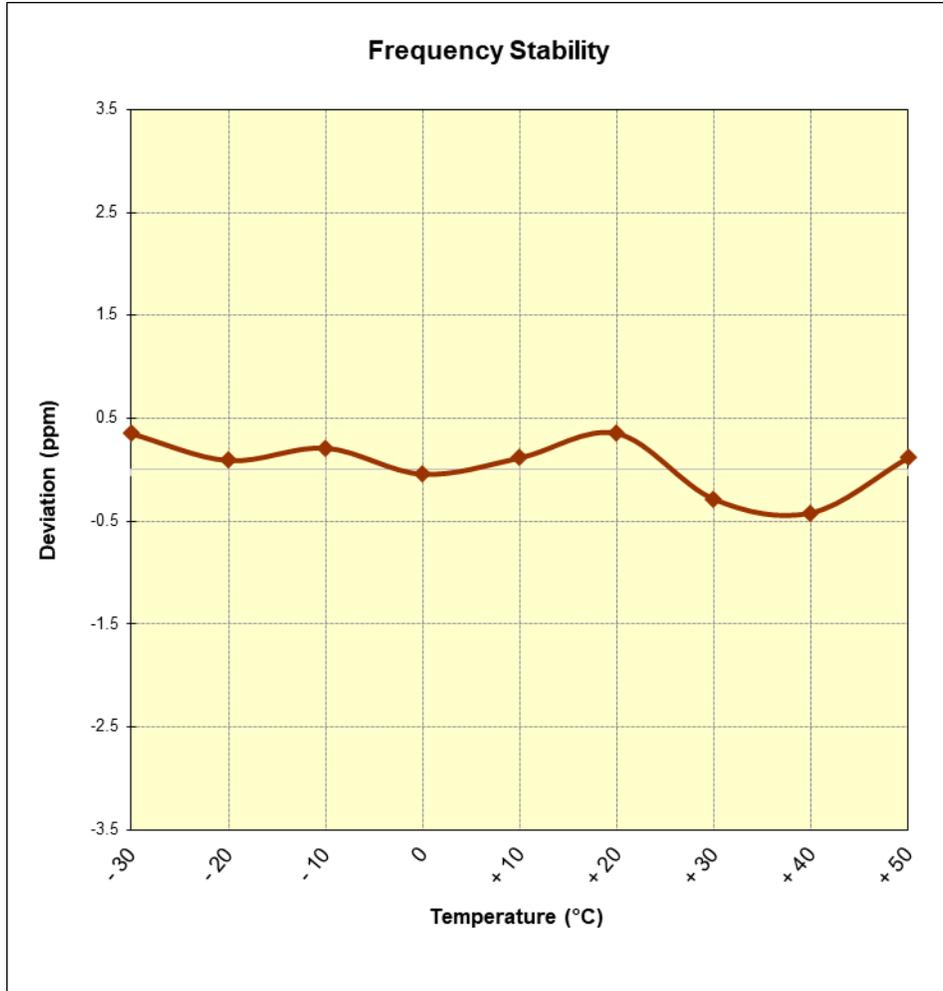

**Plot 7-77. GSM/GPRS Cell Frequency Stability Chart**

<b>FCC ID:</b> ZNFK330PM		<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 74 of 79	


## WCDMA Cell

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	4.4V	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.4V	+ 20 (Ref)	836,599,951	0	0.0000000
100 %		- 30	836,599,956	5	0.0000006
100 %		- 20	836,600,202	251	0.0000300
100 %		- 10	836,599,811	-140	-0.0000167
100 %		0	836,599,668	-283	-0.0000338
100 %		+ 10	836,599,598	-353	-0.0000422
100 %		+ 20	836,599,953	2	0.0000002
100 %		+ 30	836,599,733	-218	-0.0000261
100 %		+ 40	836,600,004	53	0.0000063
100 %		+ 50	836,599,544	-407	-0.0000486
85 %		+ 20	836,599,974	23	0.0000027
BATT. ENDPOINT		2.5V	+ 20	836,599,644	-307

**Table 7-20. WCDMA Cell Frequency Stability Data**

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 75 of 79

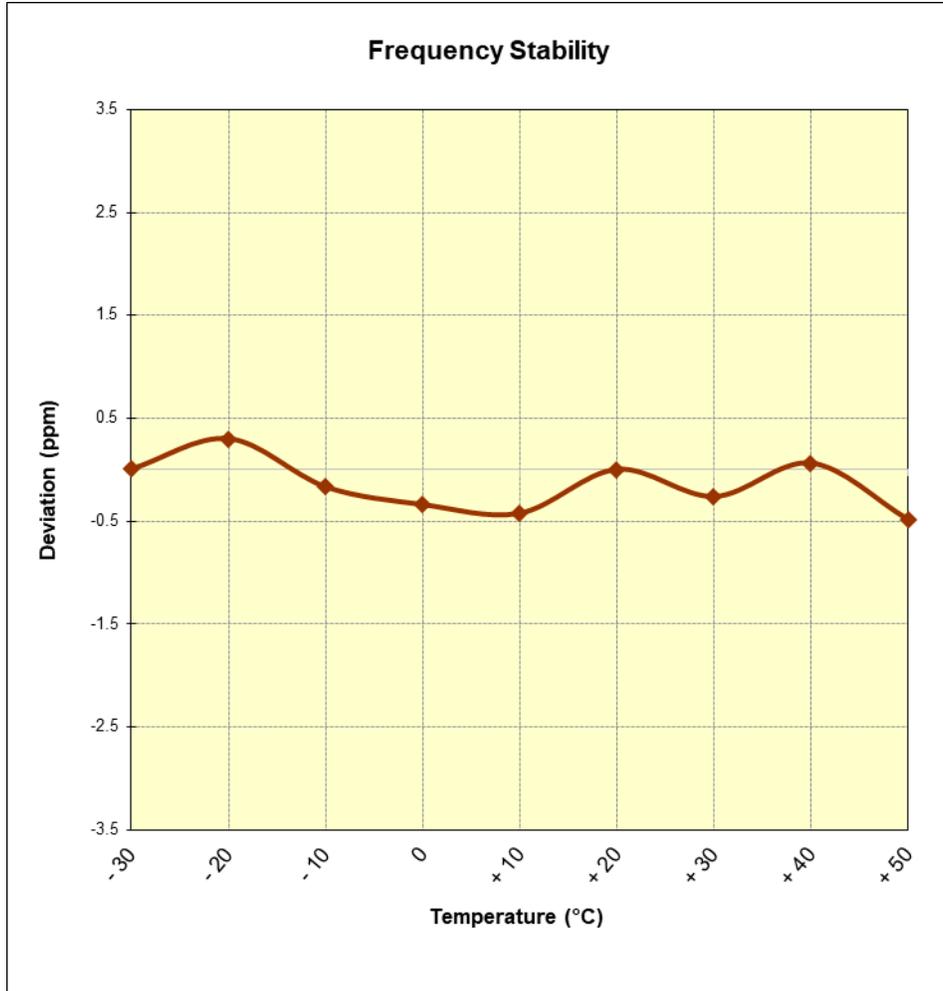

**Plot 7-78. WCDMA Cell Frequency Stability Chart**

<b>FCC ID:</b> ZNFK330PM		<b>PART 22 MEASUREMENT REPORT</b>	 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 76 of 79


## CDMA Cell

OPERATING FREQUENCY:	836,520,000	Hz
CHANNEL:	384	
REFERENCE VOLTAGE:	4.4V	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.4V	+ 20 (Ref)	836,519,854	0	0.0000000
100 %		- 30	836,520,145	291	0.0000348
100 %		- 20	836,519,741	-113	-0.0000135
100 %		- 10	836,519,957	103	0.0000123
100 %		0	836,519,800	-54	-0.0000065
100 %		+ 10	836,520,048	194	0.0000232
100 %		+ 20	836,519,839	-15	-0.0000018
100 %		+ 30	836,519,863	9	0.0000011
100 %		+ 40	836,519,784	-70	-0.0000084
100 %		+ 50	836,520,072	218	0.0000261
85 %			+ 20	836,519,797	-57
BATT. ENDPOINT	2.5V	+ 20	836,519,705	-149	-0.0000178

Table 7-21. CDMA Cell Frequency Stability Data

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset		Page 77 of 79

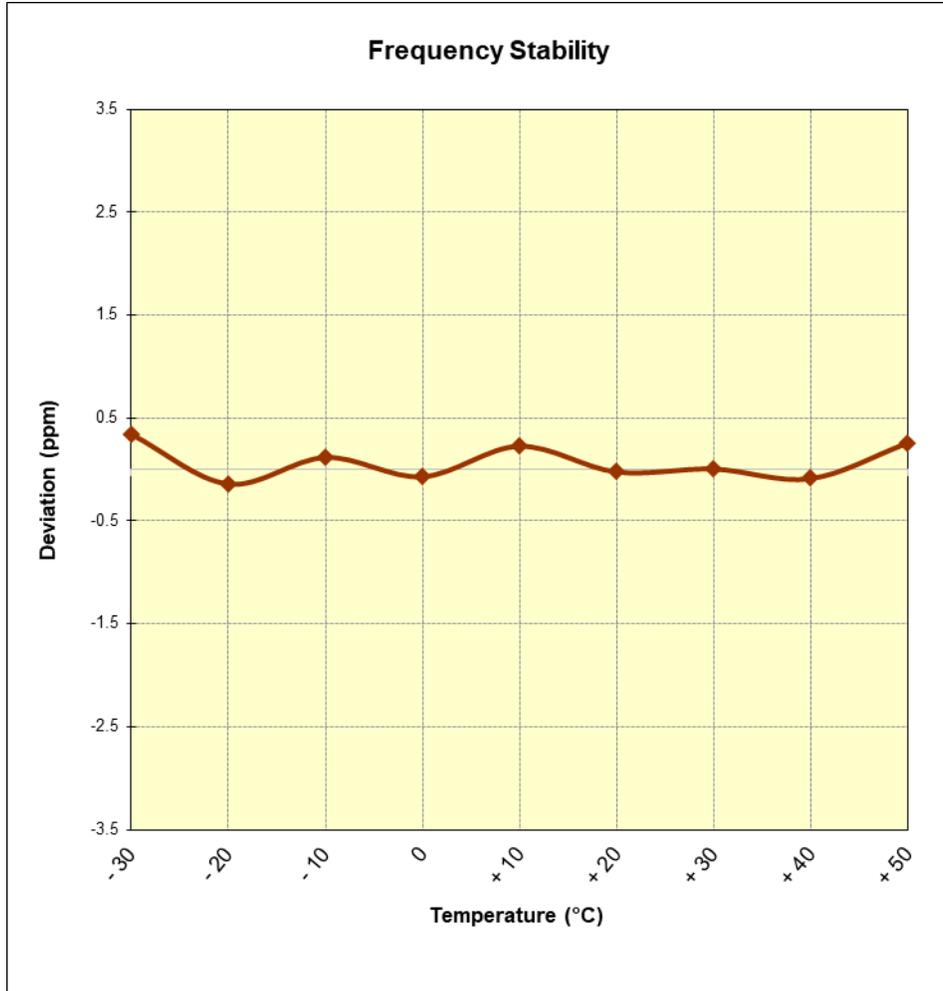

**Plot 7-79. CDMA Cell Frequency Stability Chart**

<b>FCC ID:</b> ZNFK330PM		<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2011170181-02.ZNF	<b>Test Dates:</b> 11/18/2020 - 12/23/2020	<b>EUT Type:</b> Portable Handset	Page 78 of 79	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFK330PM** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: ZNFK330PM	 <b>PART 22 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2011170181-02.ZNF	Test Dates: 11/18/2020 - 12/23/2020	EUT Type: Portable Handset	Page 79 of 79