



## SAR EVALUATION REPORT

**Applicant Name:**  
LG Electronics U.S.A., Inc.  
111 Sylvan Avenue, North Building  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
11/18/20 - 1/6/21  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
1M2011170181-01-R1.ZNF

**FCC ID:** ZNFK330PM

**APPLICANT:** LG ELECTRONICS U.S.A., INC.

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** LM-K330PM  
**Additional Model(s):** LM-K330TM, LM-K330MM, LM-K330QM, LM-K330VM, LG L460DL, LM-K330QM6, LM-K330QN, LMK330PM, LMK330TM, LMK330MM, LMK330QM, LMK330VM, LGL460DL, LMK330QM6, LMK330QN, K330PM, K330TM, K330MM, K330QM, K330VM, L460DL, K330QM6, K330QN

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Preamble (W/kg)
PCE	COMMERCIAL ISM (9025)	817.36 - 823.10 MHz	0.24	0.25	0.25	N/A
PCE	COMMERCIAL ISM (9225)	824.70 - 848.31 MHz	0.29	0.33	0.75	N/A
PCE	PCS COMMERCIAL	1881.25 - 1908.75 MHz	0.24	0.58	1.03	2.56
PCE	CSMA/SS/PS/EDGE 850	824.25 - 848.30 MHz	0.26	0.57	0.57	N/A
PCE	CSMA/SS/PS/EDGE 1900	1885.20 - 1909.80 MHz	0.16	0.81	0.81	N/A
PCE	UMTS 850	824.40 - 846.60 MHz	0.23	0.57	0.57	N/A
PCE	UMTS 1900	1712.4 - 1728 MHz	0.23	1.03	1.03	2.86
PCE	UMTS 1900	1852.4 - 1807.6 MHz	0.25	1.19	1.19	2.79
PCE	LTE Band 71	662.5 - 695.5 MHz	0.21	0.34	0.45	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.23	0.45	0.45	N/A
PCE	LTE Band 13	779.5 - 784.3 MHz	0.24	0.38	0.43	N/A
PCE	LTE Band 26 (CBT)	814.7 - 848.3 MHz	0.22	0.58	0.58	N/A
PCE	LTE Band 25 (CBT)	824.7 - 848.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.22	0.89	0.89	3.15
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1852.7 - 1914.3 MHz	0.31	1.25	1.25	N/A
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2685.5 - 2687.5 MHz	0.13	1.15	1.22	1.49
DTS	2.4 GHz WLAN	2412 - 2482 MHz	0.94	0.42	0.42	N/A
NI	U-NB1	5180 - 5240 MHz	N/A	N/A	1.05	N/A
NI	U-NB2A	5250 - 5250 MHz	0.95	0.83	N/A	2.06
NI	U-NB2C	5580 - 5720 MHz	0.94	0.28	N/A	1.73
NI	U-NB3	5745 - 5820 MHz	1.10	0.42	0.94	N/A
USSDTS	Bluetooth	2402 - 2480 MHz	0.18	0.21	0.21	N/A
Simultaneous SAR per KDB 690783 D01v01r03			1.54	1.59	1.52	3.92

Note: This revised Test Report (S/N: 1M2011170181-01-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortanez  
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: ZNFK330PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 - 1/6/21	DUT Type: Portable Handset	Page 1 of 126	

# TABLE OF CONTENTS

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	13
3	INTRODUCTION .....	14
4	DOSIMETRIC ASSESSMENT .....	15
5	DEFINITION OF REFERENCE POINTS .....	16
6	TEST CONFIGURATION POSITIONS .....	17
7	RF EXPOSURE LIMITS .....	21
8	FCC MEASUREMENT PROCEDURES.....	22
9	RF CONDUCTED POWERS .....	29
10	SYSTEM VERIFICATION.....	66
11	SAR DATA SUMMARY .....	72
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	98
13	SAR MEASUREMENT VARIABILITY .....	115
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	117
15	EQUIPMENT LIST.....	122
16	MEASUREMENT UNCERTAINTIES.....	123
17	CONCLUSION.....	124
18	REFERENCES .....	125
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	SAR TISSUE SPECIFICATIONS	
APPENDIX D:	SAR SYSTEM VALIDATION	
APPENDIX E:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX F:	DOWNLINK LTE CA RF CONDUCTED POWERS	
APPENDIX G:	POWER REDUCTION VERIFICATION	
APPENDIX H:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	

FCC ID: ZNFK330PM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 2 of 126	

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

## 1.2 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 3 of 126	

### 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.3.1 2G/3G/4G Maximum Output Power

CDMA BC10 (815 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
CDMA BC0 (835 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
CDMA BC1 (1900 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	25.3	25.3	25.3
	Nominal	24.3	24.3	24.3
Grip Sensor Active	Max allowed power	23.8	23.8	23.8
	Nominal	22.8	22.8	22.8

GSM/GPRS/EDGE 850									
	Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
	1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Max allowed power	34.0	34.0	33.0	31.0	30.0	28.0	27.0	25.0	24.0
Nominal	33.0	33.0	32.0	30.0	29.0	27.0	26.0	24.0	23.0
GSM/GPRS/EDGE 1900									
	Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
	1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Max allowed power	31.2	31.2	30.0	28.0	27.0	27.0	26.0	24.0	23.0
Nominal	30.2	30.2	29.0	27.0	26.0	26.0	25.0	23.0	22.0

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 4 of 126

Band/Mode		Modulated Average Output Power	
UMTS Band 5 (850 MHz)		Max	
		Nominal	Max allowed power
3GPP WCDMA		24.5	25.5
3GPP HSDPA Rel 5	Subtest 1	24.5	25.5
	Subtest 2	24.5	25.5
	Subtest 3	24.0	25.0
	Subtest 4	24.0	25.0
3GPP HSUPA Rel 6	Subtest 1	22.5	23.5
	Subtest 2	22.5	23.5
	Subtest 3	23.5	24.5
	Subtest 4	22.0	23.0
	Subtest 5	23.5	24.5

Band/Mode		Modulated Average Output Power			
UMTS Band 4 (1750 MHz)		Max		Grip Sensor Active	
		Nominal	Max allowed power	Nominal	Max allowed power
3GPP WCDMA		24.3	25.3	21.8	22.8
3GPP HSDPA Rel 5	Subtest 1	24.3	25.3	21.8	22.8
	Subtest 2	24.3	25.3	21.8	22.8
	Subtest 3	23.8	24.8	21.3	22.3
	Subtest 4	23.8	24.8	21.3	22.3
3GPP HSUPA Rel 6	Subtest 1	22.3	23.3	20.3	21.3
	Subtest 2	22.3	23.3	19.8	20.8
	Subtest 3	23.3	24.3	20.8	21.8
	Subtest 4	21.8	22.8	19.3	20.3
	Subtest 5	23.3	24.3	20.8	21.8

Band/Mode		Modulated Average Output Power			
UMTS Band 2 (1900 MHz)		Power Level			
		Max		Grip Sensor Active	
		Nominal	Max allowed power	Nominal	Max allowed power
3GPP WCDMA		24.3	25.3	22.8	23.8
3GPP HSDPA Rel 5	Subtest 1	24.3	25.3	22.8	23.8
	Subtest 2	24.3	25.3	22.8	23.8
	Subtest 3	23.8	24.8	22.3	23.3
	Subtest 4	23.8	24.8	22.3	23.3
3GPP HSUPA Rel 6	Subtest 1	22.3	23.3	21.3	22.3
	Subtest 2	22.3	23.3	20.8	21.8
	Subtest 3	23.3	24.3	21.8	22.8
	Subtest 4	21.8	22.8	20.3	21.3
	Subtest 5	23.3	24.3	21.8	22.8

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 5 of 126	

Mode / Band		Modulated Average Output Power (in dBm)		
		Max	Hotspot Mode Active	Grip Sensor Active
LTE FDD Band 71	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
LTE FDD Band 12	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
LTE FDD Band 13	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
LTE FDD Band 5	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
LTE FDD Band 26	Max allowed power	25.5	25.5	25.5
	Nominal	24.5	24.5	24.5
LTE FDD Band 4	Max allowed power	25.3	25.3	22.8
	Nominal	24.3	24.3	21.8
LTE FDD Band 66	Max allowed power	25.3	25.3	22.8
	Nominal	24.3	24.3	21.8
LTE FDD Band 2	Max allowed power	25.3	25.3	23.8
	Nominal	24.3	24.3	22.8
LTE FDD Band 25	Max allowed power	25.3	25.3	23.8
	Nominal	24.3	24.3	22.8
LTE TDD Band 41 (PC3)	Max allowed power	25.7	23.7	23.7
	Nominal	24.7	22.7	22.7
LTE TDD Band 41 (PC2)	Max allowed power	27.7	25.7	25.7
	Nominal	26.7	24.7	24.7

### 1.3.2 Maximum Bluetooth and SISO WLAN Output Power

Mode	Band	IEEE 802.11 (in dBm)					
		SISO					
		b		g		n	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	21.0	20.0	18.5	17.5	18.0	17.0
				ch. 1: 16.5	15.5	ch. 1: 16.0	15.0
				ch. 2: 17.5	16.5	ch. 2: 17.0	16.0
				ch. 10: 16.5	15.5	ch. 10: 16.0	15.0
				ch. 11: 15.5	14.5	ch. 11: 15.0	14.0

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 6 of 126

Mode	Band	IEEE 802.11 (in dBm)					
		SISO					
		a		n		ac	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	5200 MHz	18.0	17.0	17.5	16.5	17.5	16.5
	5300 MHz	18.0	17.0	17.5	16.5	17.5	16.5
	5500 MHz	18.0	17.0	17.5	16.5	17.5	16.5
		ch. 100: 17.5	16.5	ch. 100: 17.0	16.0	ch. 100: 17.0	16.0
		ch. 140: 17.5	16.5	ch. 140: 17.0	16.0	ch. 140: 17.0	16.0
ch. 144: 17.0	16.0	ch. 144: 16.5	15.5	ch. 144: 16.5	15.5		
5800 MHz	17.0	16.0	16.5	15.5	16.5	15.5	
5 GHz WIFI (40MHz BW)	5200 MHz	[REDACTED]		16.0	15.0	16.0	15.0
				ch. 38: 13.0	12.0	ch. 38: 13.0	12.0
	5300 MHz			16.0	15.0	16.0	15.0
				ch. 62: 13.0	12.0	ch. 62: 13.0	12.0
5500 MHz	16.0	15.0	16.0	15.0			
	ch. 102: 13.0	12.0	ch. 102: 13.0	12.0			
ch. 142: 15.5	14.5	ch. 142: 15.5	14.5				
5800 MHz	15.5	14.5	15.5	14.5			
5 GHz WIFI (80MHz BW)	5200 MHz	[REDACTED]				11.5	10.5
	5300 MHz					11.5	10.5
	5500 MHz					14.0	13.0
						ch. 106: 11.5	10.5
5800 MHz	14.0	13.0					

Bluetooth (in dBm)	
Max	Nom
10.5	9.5

Bluetooth LE (in dBm)	
Max	Nom
5.0	4.0

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 7 of 126

### 1.3.3 Reduced SISO WLAN Output Power

Mode	Band	IEEE 802.11 (in dBm)					
		SISO					
		b		g		n	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	18.5	17.5	18.5	17.5	18.0	17.0
		ch. 1: 16.5	15.5	ch. 1: 16.5	15.5	ch. 1: 16.0	15.0
		ch. 2: 17.5	16.5	ch. 2: 17.5	16.5	ch. 2: 17.0	16.0
		ch.10: 16.5	15.5	ch. 10: 16.0	15.0	ch. 10: 16.0	15.0
		ch.11: 15.5	14.5	ch. 11: 15.0	14.0	ch. 11: 15.0	14.0

Mode	Band	IEEE 802.11 (in dBm)					
		SISO					
		a		n		ac	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	5200 MHz	12.0	11.0	12.0	11.0	12.0	11.0
	5300 MHz	12.0	11.0	12.0	11.0	12.0	11.0
	5500 MHz	12.0	11.0	12.0	11.0	12.0	11.0
		ch. 140: 11.5	10.5	ch. 140: 11.5	10.5	ch. 140: 11.5	10.5
	ch. 144: 11.5	10.5	ch. 144: 11.5	10.5	ch. 144: 11.5	10.5	
5800 MHz	11.5	10.5	11.5	10.5	11.5	10.5	
5 GHz WIFI (40MHz BW)	5200 MHz			11.5	10.5	11.5	10.5
	5300 MHz			11.5	10.5	11.5	10.5
	5500 MHz			11.5	10.5	11.5	10.5
				ch. 142: 11.0	10.0	ch. 142: 11.0	10.0
5800 MHz	11.0	10.0	11.0	10.0	11.0	10.0	
5 GHz WIFI (80MHz BW)	5200 MHz					11.0	10.0
	5300 MHz					11.0	10.0
	5500 MHz					11.0	10.0
						ch. 122: 10.5	9.5
5800 MHz	10.5	9.5	10.5	9.5	10.5	9.5	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 8 of 126

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1  
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No
Bluetooth	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-2A, U-NII-2C operations are disabled.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 9 of 126

## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2  
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz WI-FI	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz WI-FI	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes <sup>^</sup>	Yes	N/A	Yes	<sup>^</sup> Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes <sup>^</sup>	Yes	N/A	Yes	<sup>^</sup> Bluetooth Tethering is considered
5	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	Yes	
6	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Bluetooth	Yes <sup>^</sup>	Yes	N/A	Yes	<sup>^</sup> Bluetooth Tethering is considered
8	GSM voice + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes <sup>^</sup>	Yes	N/A	Yes	<sup>^</sup> Bluetooth Tethering is considered
9	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes	
10	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	Yes	
11	UMTS + 2.4 GHz Bluetooth	Yes <sup>^</sup>	Yes	Yes <sup>^</sup>	Yes	<sup>^</sup> Bluetooth Tethering is considered
12	UMTS + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes <sup>^</sup>	Yes	Yes <sup>^</sup>	Yes	<sup>^</sup> Bluetooth Tethering is considered
13	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes	
14	LTE + 5 GHz WI-FI	Yes	Yes	Yes	Yes	
15	LTE + 2.4 GHz Bluetooth	Yes <sup>^</sup>	Yes	Yes <sup>^</sup>	Yes	<sup>^</sup> Bluetooth Tethering is considered
16	LTE + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes <sup>^</sup>	Yes	Yes <sup>^</sup>	Yes	<sup>^</sup> Bluetooth Tethering is considered
17	CDMA/EVDO data + 2.4 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
18	CDMA/EVDO data + 5 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
19	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes* <sup>^</sup>	Yes*	Yes <sup>^</sup>	Yes	* Pre-installed VOIP applications are considered <sup>^</sup> Bluetooth Tethering is considered
20	CDMA/EVDO data + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes* <sup>^</sup>	Yes*	Yes <sup>^</sup>	Yes	* Pre-installed VOIP applications are considered <sup>^</sup> Bluetooth Tethering is considered
21	GPRS/EDGE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
22	GPRS/EDGE + 5 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
23	GPRS/EDGE + 2.4 GHz Bluetooth	Yes* <sup>^</sup>	Yes*	Yes <sup>^</sup>	Yes	* Pre-installed VOIP applications are considered <sup>^</sup> Bluetooth Tethering is considered
24	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes* <sup>^</sup>	Yes*	Yes <sup>^</sup>	Yes	* Pre-installed VOIP applications are considered <sup>^</sup> Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, therefore U-NII-2A, and U-NII-2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VOWIFI.
- This device supports Bluetooth Tethering.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 10 of 126	

## 1.6 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, head and body-worn SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1, and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN, 2.4 GHz Bluetooth, U-NII-1, and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix F.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 11 of 126	

has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).

This device supports LTE Carrier Aggregation (CA) for LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

## 1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 12 of 126	

LTE Information				
Form Factor	Portable Handset			
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)			
	LTE Band 12 (699.7 - 715.3 MHz)			
	LTE Band 13 (779.5 - 784.5 MHz)			
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)			
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)			
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)			
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)			
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)			
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)			
	LTE Band 41 (2498.5 - 2687.5 MHz)			
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 13: 5 MHz, 10 MHz			
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz			
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)	695.5 (133447)
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)	693 (133422)
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)	690.5 (133397)
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)	688 (133372)
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)	713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)	711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)	784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)	N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)	848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)	847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)	846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)	844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)	841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)	844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)	1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)	1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)	1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)	1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)	1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)	1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)	1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)	1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)	1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)	1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
UE Category	DL UE Cat 7, UL UE Cat 13			
Modulations Supported in UL	QPSK, 16QAM, 64QAM			
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES			
A-MPR (Additional MPR) disabled for SAR Testing?	YES			
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations			
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			

FCC ID: ZNFK330PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 13 of 126

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 14 of 126

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1** point  
**Sample SAR Area**  
**Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\***

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22


\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 15 of 126

## 5 DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT


Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

### 5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

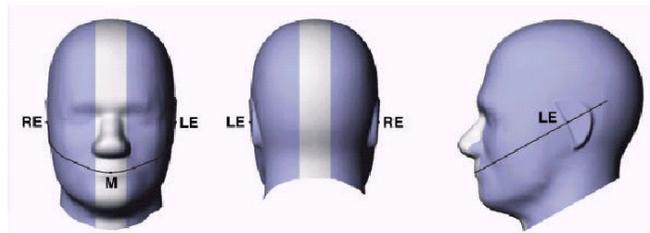

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom

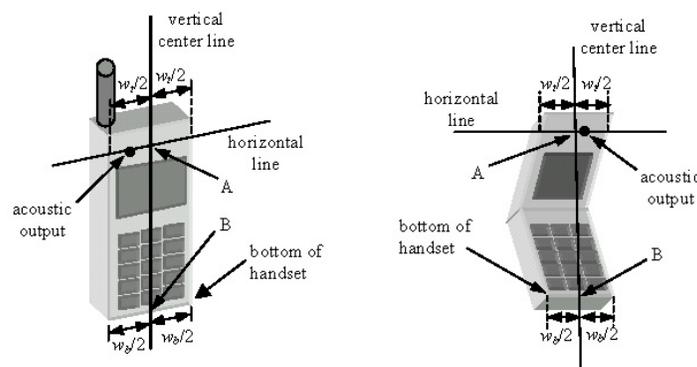

**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFK330PM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 16 of 126

## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

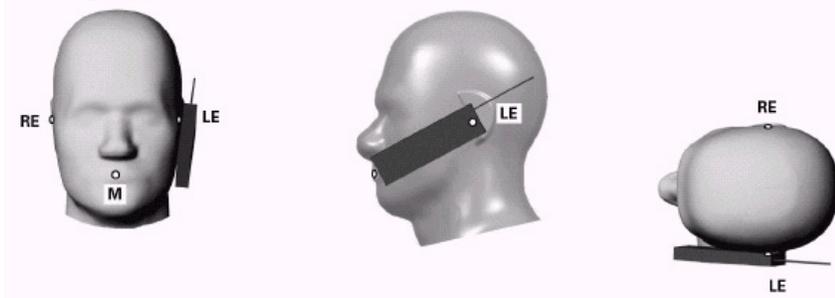


Figure 6-1 Front, Side and Top View of Cheek Position


2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 17 of 126

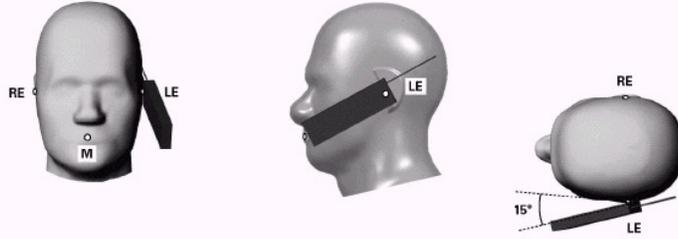

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**


## 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

## 6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

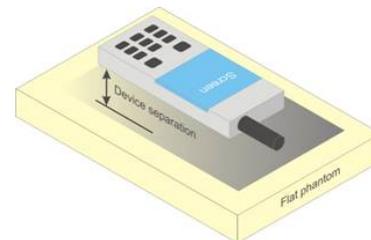

**Figure 6-4 Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 18 of 126

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

### 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

### 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

### 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 19 of 126	

support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR  $> 1.2$  W/kg.

## 6.9 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

## 6.10 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 20 of 126	

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 21 of 126

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

#### 8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 22 of 126

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$\overline{I_{or}}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$\overline{I_{or}}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

## 8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

## 8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 23 of 126	

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

### 8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

## 8.5 SAR Measurement Conditions for UMTS

### 8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH<sub>n</sub> and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

### 8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

### 8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

### 8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 24 of 126	

### 8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

### 8.5.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

## 8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 25 of 126

required test channels using the RB offset configuration with highest output power for that channel.

- iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to ½ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is <1.45 W/kg.

### 8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

## 8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 26 of 126	

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 27 of 126

required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

## 8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

## 8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 28 of 126

## 9.1 CDMA Conducted Powers


**Table 9-1  
Maximum Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	24.78	24.84	24.82	24.85	24.81	24.83
Cellular	1013	22H	824.7	24.47	24.62	24.38	24.42	24.45	24.45
	384	22H	836.52	24.48	24.54	24.45	24.55	24.54	24.55
	777	22H	848.31	24.56	24.58	24.39	24.50	24.51	24.50
PCS	25	24E	1851.25	25.11	25.04	25.05	25.09	25.11	25.14
	600	24E	1880	25.16	25.07	25.11	25.18	25.18	25.19
	1175	24E	1908.75	25.14	25.10	25.14	25.20	25.20	25.19

**Table 9-2  
Reduced Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	23.66	23.69	23.63	23.65	23.65	23.64
	600	24E	1880	23.67	23.61	23.64	23.66	23.67	23.68
	1175	24E	1908.75	23.71	23.74	23.70	23.70	23.70	23.69

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



**Figure 9-1  
Power Measurement Setup**

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 29 of 126

## 9.2 GSM Conducted Powers

**Table 9-3**  
**Maximum Conducted Power**

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.76	33.76	32.36	29.79	<b>28.69</b>	27.28	26.73	24.40	23.06
	190	33.70	33.72	32.32	29.73	<b>28.65</b>	27.08	26.39	24.30	23.12
	251	33.67	33.70	32.30	29.71	<b>28.63</b>	27.50	26.25	24.44	23.64
GSM 1900	512	30.79	30.80	29.30	27.02	<b>25.93</b>	26.39	25.07	22.69	21.67
	661	30.91	30.93	29.27	26.98	<b>25.84</b>	26.00	25.23	22.40	21.49
	810	31.03	31.02	29.77	27.10	<b>26.00</b>	25.77	24.68	22.70	21.10

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.56	24.56	26.17	25.36	<b>25.51</b>	18.08	20.54	19.97	19.88
	190	24.50	24.52	26.13	25.30	<b>25.47</b>	17.88	20.20	19.87	19.94
	251	24.47	24.50	26.11	25.28	<b>25.45</b>	18.30	20.06	20.01	20.46
GSM 1900	512	21.59	21.60	23.11	22.59	<b>22.75</b>	17.19	18.88	18.26	18.49
	661	21.71	21.73	23.08	22.55	<b>22.66</b>	16.80	19.04	17.97	18.31
	810	21.83	21.82	23.58	22.67	<b>22.82</b>	16.57	18.49	18.27	17.92


<b>GSM 850</b>	<b>Frame</b>	23.80	23.80	25.81	25.57	<b>25.82</b>	17.80	19.81	19.57	19.82
<b>GSM 1900</b>	<b>Avg. Targets:</b>	21.00	21.00	22.81	22.57	<b>22.82</b>	16.80	18.81	18.57	18.82

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 30 of 126

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 12 (Max 4 Tx uplink slots)**  
**EDGE Multislot class: 12 (Max 4 Tx uplink slots)**  
**DTM Multislot Class: N/A**



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 31 of 126

### 9.3 UMTS Conducted Powers

**Table 9-4  
Maximum Conducted Power**


3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.23	25.25	25.32	25.11	25.13	25.15	25.05	25.02	25.08	-
99		12.2 kbps AMR	25.25	25.24	25.31	25.13	25.19	25.14	25.04	25.04	25.04	-
6	HSDPA	Subtest 1	25.27	25.28	25.35	25.14	25.16	25.14	25.08	25.05	25.09	0
6		Subtest 2	25.25	25.26	25.33	25.10	25.13	25.13	25.05	25.03	25.07	0
6		Subtest 3	24.72	24.74	24.80	24.61	24.61	24.58	24.53	24.51	24.55	0.5
6		Subtest 4	24.71	24.71	24.79	24.58	24.62	24.59	24.52	24.50	24.52	0.5
6	HSUPA	Subtest 1	23.36	23.33	23.38	23.26	23.18	23.16	23.05	23.02	22.99	2
6		Subtest 2	23.35	23.29	23.37	23.24	23.19	23.14	23.01	23.05	23.03	2
6		Subtest 3	24.34	23.96	23.97	24.23	24.20	24.19	24.04	24.08	24.11	1
6		Subtest 4	22.87	22.82	22.91	22.78	22.74	22.79	22.60	22.62	22.65	2.5
6		Subtest 5	24.30	24.28	24.34	24.22	24.20	24.18	24.02	23.98	24.00	1

**Table 9-5  
Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.76	22.78	22.70	23.68	23.66	23.68	-
99		12.2 kbps AMR	22.76	22.80	22.73	23.67	23.66	23.70	-
6	HSDPA	Subtest 1	22.79	22.60	22.73	23.66	23.68	23.70	0
6		Subtest 2	22.50	22.70	22.65	23.64	23.63	23.66	0
6		Subtest 3	22.18	22.20	22.19	23.13	23.13	23.16	0.5
6		Subtest 4	22.25	22.17	22.24	23.11	23.11	23.13	0.5
6	HSUPA	Subtest 1	21.27	21.21	21.17	22.05	22.03	22.00	1.5
6		Subtest 2	20.73	20.63	20.72	21.55	21.54	21.56	2
6		Subtest 3	20.71	20.69	20.72	21.60	21.55	21.51	1
6		Subtest 4	20.22	20.24	20.25	21.04	21.02	21.05	2.5
6		Subtest 5	21.72	21.65	21.70	22.56	22.53	22.58	1

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



**Figure 9-3  
Power Measurement Setup**

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 32 of 126

## 9.4 LTE Conducted Powers

### 9.4.1 LTE Band 71

**Table 9-6**  
**LTE Band 71 Conducted Powers - 20 MHz Bandwidth**

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.10	0	0
	1	50	<b>25.30</b>		0
	1	99	25.08		0
	50	0	24.15	0-1	1
	50	25	24.13		1
	50	50	<b>24.16</b>		1
	100	0	24.15		1
16QAM	1	0	24.02	0-1	1
	1	50	24.24		1
	1	99	23.99		1
	50	0	23.10	0-2	2
	50	25	23.22		2
	50	50	23.10		2
	100	0	23.18		2
64QAM	1	0	23.17	0-2	2
	1	50	23.43		2
	1	99	23.15		2
	50	0	22.11	0-3	3
	50	25	22.18		3
	50	50	22.15		3
	100	0	22.06		3

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 33 of 126

**Table 9-7  
LTE Band 71 Conducted Powers - 15 MHz Bandwidth**

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.09	0	0
	1	36	25.13		0
	1	74	25.00		0
	36	0	24.24	0-1	1
	36	18	24.28		1
	36	37	24.28		1
	75	0	24.25		1
16QAM	1	0	24.41	0-1	1
	1	36	24.40		1
	1	74	24.27		1
	36	0	23.20	0-2	2
	36	18	23.21		2
	36	37	23.22		2
	75	0	23.21		2
64QAM	1	0	23.35	0-2	2
	1	36	23.32		2
	1	74	23.20		2
	36	0	22.18	0-3	3
	36	18	22.21		3
	36	37	22.21		3
	75	0	22.20		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>	 LG	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 34 of 126

**Table 9-8  
LTE Band 71 Conducted Powers - 10 MHz Bandwidth**

LTE Band 71 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.25	25.15	25.21	0	0	
	1	25	25.28	25.20	25.27		0	
	1	49	25.21	25.09	25.15		0	
	25	0	24.27	24.29	24.46	0-1	1	
	25	12	24.31	24.26	24.38		1	
	25	25	24.35	24.27	24.32		1	
16QAM	50	0	24.35	24.32	24.40	0-1	1	
	1	0	24.48	24.48	24.49		0-1	1
	1	25	24.48	24.45	24.48			1
	1	49	24.50	24.46	24.43	0-2		1
	25	0	23.25	23.35	23.39		2	
	25	12	23.29	23.33	23.32		2	
64QAM	25	25	23.29	23.32	23.27	0-2	2	
	50	0	23.28	23.35	23.33		2	
	1	0	23.50	23.49	23.41		0-2	2
	1	25	23.50	23.50	23.46	2		
	1	49	23.49	23.44	23.33	2		
	64QAM	25	0	22.23	22.31	22.34	0-3	3
25		12	22.28	22.27	22.28	3		
25		25	22.29	22.28	22.22	3		
50		0	22.30	22.33	22.30	0-3	3	
							3	

**Table 9-9  
LTE Band 71 Conducted Powers - 5 MHz Bandwidth**

LTE Band 71 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.11	25.10	25.09	0	0	
	1	12	25.35	25.31	25.32		0	
	1	24	25.07	25.07	25.02		0	
	12	0	24.16	24.28	24.31	0-1	1	
	12	6	24.30	24.30	24.33		1	
	12	13	24.25	24.27	24.24		1	
16QAM	25	0	24.21	24.30	24.29	0-1	1	
	1	0	24.42	24.42	24.35		0-1	1
	1	12	24.45	24.47	24.37			1
	1	24	24.36	24.38	24.32	0-2		1
	12	0	23.19	23.29	23.29		2	
	12	6	23.31	23.33	23.30		2	
64QAM	12	13	23.28	23.24	23.24	0-2	2	
	25	0	23.20	23.28	23.24		2	
	1	0	23.38	23.35	23.32		0-2	2
	1	12	23.36	23.33	23.25	2		
	1	24	23.28	23.32	23.23	2		
	64QAM	12	0	22.16	22.23	22.23	0-3	3
12		6	22.31	22.25	22.26	3		
12		13	22.24	22.21	22.18	3		
25		0	22.18	22.23	22.19	0-3	3	
							3	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 35 of 126

## 9.4.2 LTE Band 12

**Table 9-10**  
**LTE Band 12 Conducted Powers - 10 MHz Bandwidth**

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.26	0	0
	1	25	<b>25.28</b>		0
	1	49	25.27		0
	25	0	24.20	0-1	1
	25	12	<b>24.21</b>		1
	25	25	24.20		1
	50	0	24.14		1
16QAM	1	0	24.29	0-1	1
	1	25	24.36		1
	1	49	24.16		1
	25	0	23.17	0-2	2
	25	12	23.19		2
	25	25	23.18		2
	50	0	23.11		2
64QAM	1	0	23.20	0-2	2
	1	25	23.20		2
	1	49	23.02		2
	25	0	22.07	0-3	3
	25	12	22.11		3
	25	25	22.05		3
	50	0	22.05		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 36 of 126

**Table 9-11**  
**LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.93	24.95	24.86	0	0
	1	12	25.20	25.16	25.09		0
	1	24	24.90	24.85	24.81		0
	12	0	24.16	24.16	24.12	0-1	1
	12	6	24.17	24.16	24.12		1
	12	13	24.11	24.10	24.01		1
	25	0	24.15	24.16	24.11		1
16QAM	1	0	24.20	24.20	24.13	0-1	1
	1	12	24.47	24.43	24.38		1
	1	24	24.16	24.11	24.15		1
	12	0	23.12	23.13	23.12	0-2	2
	12	6	23.14	23.14	23.14		2
	12	13	23.06	23.08	23.00		2
	25	0	23.07	23.11	23.06		2
64QAM	1	0	23.12	23.17	23.04	0-2	2
	1	12	23.41	23.36	23.32		2
	1	24	23.09	23.05	23.09		2
	12	0	22.08	22.12	22.08	0-3	3
	12	6	22.11	22.13	22.07		3
	12	13	22.04	22.08	21.98		3
	25	0	22.06	22.08	22.06		3

**Table 9-12**  
**LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.03	25.01	24.94	0	0
	1	7	25.21	25.14	25.12		0
	1	14	25.07	24.95	24.92		0
	8	0	24.13	24.09	24.06	0-1	1
	8	4	24.19	24.11	24.11		1
	8	7	24.13	24.08	24.08		1
	15	0	24.17	24.12	24.06		1
16QAM	1	0	24.24	24.26	24.23	0-1	1
	1	7	24.46	24.42	24.44		1
	1	14	24.25	24.21	24.25		1
	8	0	23.14	23.14	23.15	0-2	2
	8	4	23.21	23.12	23.18		2
	8	7	23.13	23.11	23.14		2
	15	0	23.09	23.06	23.04		2
64QAM	1	0	23.22	23.20	23.18	0-2	2
	1	7	23.35	23.35	23.40		2
	1	14	23.48	23.12	23.19		2
	8	0	22.08	22.08	22.10	0-3	3
	8	4	22.12	22.08	22.12		3
	8	7	22.08	22.03	22.07		3
	15	0	22.09	22.07	22.03		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 37 of 126

**Table 9-13**  
**LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.92	24.94	24.86	0	0
	1	2	25.05	25.07	24.99		0
	1	5	24.93	24.92	24.84		0
	3	0	25.02	25.03	24.94		0
	3	2	25.05	25.06	24.97		0
	3	3	25.03	25.02	24.95		0
16QAM	1	0	24.17	24.19	24.23	0-1	1
	1	2	24.27	24.34	24.27		1
	1	5	24.22	24.19	24.26		1
	3	0	24.07	24.09	24.10		1
	3	2	24.09	24.17	24.11		1
	3	3	24.08	24.08	24.08		1
64QAM	1	0	23.10	23.13	23.15	0-2	2
	1	2	23.23	23.23	23.27		2
	1	5	23.10	23.08	23.11		2
	3	0	23.04	23.07	23.06		2
	3	2	23.10	23.09	23.11		2
	3	3	23.07	23.04	23.04		2
	6	0	22.03	22.06	22.03	0-3	3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 38 of 126	

### 9.4.3 LTE Band 13

**Table 9-14  
LTE Band 13 Conducted Powers - 10 MHz Bandwidth**

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.19	0	0
	1	25	25.18		0
	1	49	25.15		0
	25	0	24.12	0-1	1
	25	12	24.11		1
	25	25	24.17		1
	50	0	24.16		1
16QAM	1	0	24.27	0-1	1
	1	25	24.28		1
	1	49	24.28		1
	25	0	23.18	0-2	2
	25	12	23.17		2
	25	25	23.15		2
	50	0	23.24		2
64QAM	1	0	23.26	0-2	2
	1	25	23.33		2
	1	49	23.11		2
	25	0	22.04	0-3	3
	25	12	22.08		3
	25	25	22.13		3
	50	0	22.07		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 39 of 126

**Table 9-15  
LTE Band 13 Conducted Powers - 5 MHz Bandwidth**

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.93	0	0
	1	12	25.14		0
	1	24	24.91		0
	12	0	24.02	0-1	1
	12	6	24.07		1
	12	13	24.03		1
	25	0	24.05		1
16QAM	1	0	24.22	0-1	1
	1	12	24.42		1
	1	24	24.22		1
	12	0	23.10	0-2	2
	12	6	23.16		2
	12	13	23.13		2
	25	0	23.09		2
64QAM	1	0	23.18	0-2	2
	1	12	23.41		2
	1	24	23.13		2
	12	0	21.98	0-3	3
	12	6	22.04		3
	12	13	22.01		3
	25	0	22.00		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 40 of 126

## 9.4.4 LTE Band 26 (Cell)

**Table 9-16**  
**LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth**

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.10	0	0
	1	36	<b>25.13</b>		0
	1	74	25.12		0
	36	0	24.30	0-1	1
	36	18	<b>24.32</b>		1
	36	37	24.31		1
	75	0	24.27		1
16QAM	1	0	24.33	0-1	1
	1	36	24.33		1
	1	74	24.32		1
	36	0	23.22	0-2	2
	36	18	23.23		2
	36	37	23.22		2
	75	0	23.17		2
64QAM	1	0	23.13	0-2	2
	1	36	23.30		2
	1	74	23.14		2
	36	0	22.11	0-3	3
	36	18	22.13		3
	36	37	22.13		3
	75	0	22.12		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 41 of 126

**Table 9-17**  
**LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth**

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.94	24.95	25.06	0	0
	1	25	25.06	25.09	25.15		0
	1	49	24.90	25.00	25.07		0
	25	0	24.04	24.18	24.17	0-1	1
	25	12	24.03	24.12	24.13		1
	25	25	24.07	24.06	24.05		1
16QAM	50	0	24.08	24.13	24.13	0-1	1
	1	0	24.12	24.15	24.33		1
	1	25	24.28	24.24	24.40		1
	1	49	24.15	24.27	24.34	0-2	1
	25	0	23.02	23.14	23.20		2
	25	12	23.02	23.08	23.18		2
64QAM	25	25	23.07	23.03	23.05	0-2	2
	50	0	23.06	23.09	23.09		2
	1	0	23.07	23.06	23.31		0-2
	1	25	23.20	23.22	23.39	2	
	1	49	23.03	23.17	23.30	2	
	64QAM	25	0	21.97	22.08	22.16	0-3
25		12	21.96	22.02	22.13	3	
25		25	22.02	22.00	22.05	3	
50		0	22.05	22.06	22.12	3	

**Table 9-18**  
**LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.80	24.82	24.96	0	0
	1	12	25.05	25.13	25.22		0
	1	24	24.82	24.85	24.97		0
	12	0	23.93	24.00	24.17	0-1	1
	12	6	23.98	24.04	24.19		1
	12	13	23.95	23.97	24.09		1
16QAM	25	0	23.97	23.99	24.22	0-1	1
	1	0	24.02	24.01	24.34		1
	1	12	24.26	24.28	24.35		1
	1	24	24.02	24.03	24.32	0-2	1
	12	0	22.95	22.98	23.27		2
	12	6	22.99	23.05	23.30		2
64QAM	12	13	22.94	22.94	23.17	0-2	2
	25	0	22.94	22.96	23.21		2
	1	0	22.98	22.91	23.29		0-2
	1	12	23.22	23.21	23.27	2	
	1	24	22.98	23.00	23.31	0-3	
	12	0	21.87	21.92	22.24		3
12	6	21.93	21.98	22.30	3		
64QAM	12	13	21.90	21.89	22.19	0-3	3
	25	0	21.89	21.92	22.23		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 42 of 126

**Table 9-19**  
**LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	25.03	25.16	0	0
	1	7	25.13	25.13	25.31		0
	1	14	24.96	25.05	25.14		0
	8	0	24.01	24.08	24.24	0-1	1
	8	4	24.04	24.09	24.25		1
	8	7	24.00	24.07	24.23		1
	15	0	24.02	24.12	24.21		1
16QAM	1	0	24.13	24.20	24.46	0-1	1
	1	7	24.31	24.33	24.39		1
	1	14	24.13	24.25	24.46		1
	8	0	23.07	23.13	23.32	0-2	2
	8	4	23.10	23.12	23.33		2
	8	7	23.04	23.15	23.32		2
	15	0	22.99	23.09	23.23		2
64QAM	1	0	23.15	23.17	23.36	0-2	2
	1	7	23.29	23.28	23.50		2
	1	14	23.11	23.18	23.39		2
	8	0	21.98	22.04	22.32	0-3	3
	8	4	22.00	22.03	22.29		3
	8	7	21.97	22.02	22.27		3
	15	0	21.95	22.06	22.28		3

**Table 9-20**  
**LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.87	24.90	25.05	0	0
	1	2	24.98	25.03	25.17		0
	1	5	24.86	24.91	25.03		0
	3	0	24.95	25.00	25.15		0
	3	2	24.98	25.02	25.18		0
	3	3	24.95	24.98	25.16		0
16QAM	6	0	23.97	24.03	24.21	0-1	1
	1	0	24.08	24.05	24.30	0-1	1
	1	2	24.15	24.23	24.46		1
	1	5	24.10	24.12	24.30		1
	3	0	23.95	23.96	24.20		1
	3	2	23.97	24.01	24.19		1
3	3	23.94	24.01	24.17	1		
64QAM	6	0	22.99	23.01	23.22	0-2	2
	1	0	23.02	23.03	23.25	0-2	2
	1	2	23.14	23.17	23.40		2
	1	5	22.97	23.00	23.22		2
	3	0	22.94	23.01	23.25		2
	3	2	23.00	23.05	23.23		2
3	3	22.89	22.98	23.20	2		
	6	0	21.90	21.95	22.23	0-3	3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 43 of 126

## 9.4.5 LTE Band 66 (AWS)

**Table 9-21**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.94	24.95	24.90	0	0
	1	50	24.91	24.93	24.86		0
	1	99	24.91	24.97	24.90		0
	50	0	24.01	24.09	24.08	0-1	1
	50	25	24.02	24.00	24.08		1
	50	50	24.02	24.01	24.07		1
100	0	24.01	24.00	24.02		1	
16QAM	1	0	24.20	24.09	23.71	0-1	1
	1	50	24.22	24.08	23.96		1
	1	99	24.16	24.09	23.60		1
	50	0	23.02	23.04	22.88	0-2	2
	50	25	23.03	23.03	22.82		2
	50	50	23.02	23.06	22.76		2
100	0	23.03	23.02	22.83		2	
64QAM	1	0	22.92	22.71	22.79	0-2	2
	1	50	22.98	22.96	22.98		2
	1	99	22.85	22.75	22.70		2
	50	0	21.79	21.73	21.81	0-3	3
	50	25	21.85	21.79	21.82		3
	50	50	21.77	21.71	21.72		3
100	0	21.76	21.69	21.75		3	

**Table 9-22**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.73	24.67	24.63	0	0
	1	36	24.78	24.74	24.71		0
	1	74	24.71	24.64	24.65		0
	36	0	23.66	23.64	23.67	0-1	1
	36	18	23.68	23.63	23.63		1
	36	37	23.69	23.61	23.62		1
75	0	23.64	23.60	23.63		1	
16QAM	1	0	24.08	23.96	23.94	0-1	1
	1	36	24.07	24.04	24.06		1
	1	74	24.08	23.93	23.90		1
	36	0	22.70	22.67	22.72	0-2	2
	36	18	22.69	22.68	22.71		2
	36	37	22.71	22.63	22.67		2
75	0	22.69	22.63	22.68		2	
64QAM	1	0	22.87	22.77	22.72	0-2	2
	1	36	22.86	22.80	22.86		2
	1	74	22.82	22.73	22.70		2
	36	0	21.68	21.65	21.70	0-3	3
	36	18	21.69	21.67	21.71		3
	36	37	21.68	21.63	21.67		3
75	0	21.65	21.63	21.67		3	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 44 of 126	

**Table 9-23**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.77	24.68	24.70	0	0
	1	25	24.80	24.78	24.79		0
	1	49	24.71	24.66	24.71		0
	25	0	23.65	23.63	23.62	0-1	1
	25	12	23.67	23.64	23.63		1
	25	25	23.67	23.60	23.60		1
16QAM	50	0	23.68	23.65	23.64	0-1	1
	1	0	23.90	23.81	23.78		1
	1	25	23.88	23.85	23.92		1
	1	49	23.81	23.70	23.73	0-2	1
	25	0	22.71	22.67	22.71		2
	25	12	22.72	22.69	22.68		2
64QAM	25	25	22.71	22.66	22.67	0-2	2
	50	0	22.72	22.68	22.69		2
	1	0	22.91	22.81	22.82		0-2
	1	25	22.91	22.87	22.92	2	
	1	49	22.78	22.74	22.79	0-3	
	25	0	21.68	21.65	21.67		3
25	12	21.68	21.65	21.66	3		
25	25	21.62	21.62	21.63	3		
50	0	21.69	21.64	21.68	3		

**Table 9-24**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.66	24.60	24.79	0	0	
	1	12	24.89	24.86	24.85		0	
	1	24	24.57	24.58	24.60		0	
	12	0	23.61	23.57	23.58	0-1	1	
	12	6	23.68	23.62	23.62		1	
	12	13	23.61	23.58	23.55		1	
16QAM	25	0	23.62	23.57	23.56	0-1	1	
	1	0	23.81	23.67	23.67		1	
	1	12	24.01	23.92	23.90		0-1	1
	1	24	23.65	23.66	23.63	1		
	12	0	22.72	22.66	22.68	0-2		2
	12	6	22.80	22.72	22.71		2	
12	13	22.69	22.64	22.64	2			
64QAM	25	0	22.70	22.63	22.61	0-2	2	
	1	0	22.83	22.72	22.67		0-2	2
	1	12	22.98	22.90	22.92			2
	1	24	22.68	22.65	22.60	0-3		2
	12	0	21.67	21.59	21.60		3	
	12	6	21.74	21.65	21.64		3	
12	13	21.64	21.59	21.57	3			
25	0	21.65	21.59	21.58	3			

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 45 of 126

**Table 9-25**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.68	24.73	24.75	0	0
	1	7	24.83	24.88	24.90		0
	1	14	24.72	24.72	24.73		0
	8	0	23.71	23.77	23.78	0-1	1
	8	4	23.78	23.80	23.81		1
	8	7	23.70	23.76	23.78		1
	15	0	23.68	23.73	23.76		1
16QAM	1	0	24.16	23.88	23.90	0-1	1
	1	7	24.23	24.00	24.03		1
	1	14	24.07	23.81	23.83		1
	8	0	22.85	22.78	22.83	0-2	2
	8	4	22.91	22.84	22.88		2
	8	7	22.83	22.76	22.80		2
	15	0	22.80	22.67	22.71		2
64QAM	1	0	23.30	22.63	22.71	0-2	2
	1	7	23.27	22.75	22.87		2
	1	14	23.25	22.55	22.71		2
	8	0	21.80	21.72	21.81	0-3	3
	8	4	21.82	21.75	21.83		3
	8	7	21.76	21.71	21.74		3
	15	0	21.71	21.73	21.72		3

**Table 9-26**  
**LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.66	24.81	24.61	0	0
	1	2	24.81	24.94	24.74		0
	1	5	24.70	24.82	24.64		0
	3	0	24.80	24.83	24.78	0-1	0
	3	2	24.83	24.82	24.83		0
	3	3	24.79	24.79	24.79		0
	6	0	23.78	23.83	23.85		1
16QAM	1	0	23.80	23.96	23.95	0-1	1
	1	2	23.91	24.05	24.05		1
	1	5	23.80	23.99	23.95		1
	3	0	23.83	23.89	23.77	0-2	1
	3	2	23.89	23.91	23.76		1
	3	3	23.86	23.89	23.74		1
	6	0	22.77	22.94	22.85		2
64QAM	1	0	22.62	23.12	22.88	0-2	2
	1	2	22.73	23.23	22.95		2
	1	5	22.55	23.13	22.88		2
	3	0	22.84	22.93	22.88	0-3	2
	3	2	22.86	22.92	22.83		2
	3	3	22.85	22.92	22.84		2
	6	0	21.73	21.70	21.76		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 46 of 126

**Table 9-27**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.05	22.13	22.01	0	0
	1	50	22.30	22.47	22.39		0
	1	99	22.17	22.17	22.10		0
	50	0	22.27	22.23	22.24	0-1	0
	50	25	22.30	22.33	22.28		0
	50	50	22.29	22.23	22.21		0
16QAM	100	0	22.31	22.21	22.20	0-1	0
	1	0	22.36	22.51	22.53		0
	1	50	22.55	22.76	22.80		0
	1	99	22.43	22.55	22.56	0-2	0
	50	0	22.30	22.27	22.29		0
	50	25	22.34	22.26	22.29		0
64QAM	50	50	22.33	22.22	22.24	0-2	0
	100	0	22.33	22.24	22.23		0
	1	0	22.40	22.21	22.07		0-2
	1	50	22.61	22.49	22.35	0	
	1	99	22.46	22.24	22.09	0	
	64QAM	50	0	21.78	21.80	21.88	0-3
50		25	21.77	21.81	21.84	0.5	
50		50	21.76	21.74	21.75	0.5	
100		0	21.74	21.73	21.76	0.5	

**Table 9-28**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.03	22.05	22.16	0	0
	1	36	22.13	22.10	22.27		0
	1	74	22.08	22.01	22.15		0
	36	0	22.26	22.19	22.25	0-1	0
	36	18	22.26	22.24	22.26		0
	36	37	22.26	22.25	22.24		0
16QAM	75	0	22.28	22.25	22.26	0-1	0
	1	0	22.26	22.59	22.48		0
	1	36	22.30	22.68	22.54		0
	1	74	22.26	22.57	22.40	0-2	0
	36	0	22.16	22.19	22.25		0
	36	18	22.18	22.21	22.27		0
64QAM	36	37	22.18	22.20	22.22	0-2	0
	75	0	22.24	22.25	22.26		0
	1	0	21.97	22.68	22.58		0-2
	1	36	22.02	22.77	22.71	0	
	1	74	21.98	22.65	22.50	0	
	64QAM	36	0	21.76	21.71	21.75	0-3
36		18	21.75	21.74	21.77	0.5	
36		37	21.74	21.75	21.71	0.5	
75		0	21.70	21.70	21.73	0.5	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 47 of 126

**Table 9-29**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS)							
10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.05	22.10	22.16	0	0
	1	25	22.23	22.31	22.33		0
	1	49	22.09	22.10	22.10		0
	25	0	22.15	22.18	22.29	0-1	0
	25	12	22.19	22.22	22.29		0
	25	25	22.12	22.19	22.21		0
16QAM	50	0	22.13	22.21	22.24	0-1	0
	1	0	22.47	22.30	22.77		0
	1	25	22.58	22.50	22.71		0
	1	49	22.40	22.32	22.66	0-2	0
	25	0	22.27	22.23	22.37		0
	25	12	22.29	22.29	22.35		0
64QAM	25	25	22.22	22.26	22.30	0-2	0
	50	0	22.18	22.24	22.28		0
	1	0	22.33	22.03	22.72		0-2
	1	25	22.45	22.23	22.80	0	
	1	49	22.25	22.06	22.71	0-3	
	25	0	21.71	21.75	21.81		0.5
25	12	21.69	21.78	21.82	0.5		
25	25	21.64	21.75	21.73	0.5		
50	0	21.68	21.73	21.75	0.5		

**Table 9-30**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS)							
5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.06	22.10	22.03	0	0
	1	12	22.35	22.37	22.28		0
	1	24	22.05	22.08	22.00		0
	12	0	22.15	22.16	22.18	0-1	0
	12	6	22.21	22.23	22.24		0
	12	13	22.17	22.16	22.19		0
16QAM	25	0	22.13	22.17	22.19	0-1	0
	1	0	22.50	22.42	22.38		0
	1	12	22.70	22.71	22.61		0
	1	24	22.45	22.42	22.33	0-2	0
	12	0	22.06	22.34	22.22		0
	12	6	22.12	22.40	22.26		0
64QAM	12	13	22.10	22.34	22.20	0-2	0
	25	0	22.18	22.18	22.28		0
	1	0	22.35	22.52	22.20		0-2
	1	12	22.55	22.76	22.42	0	
	1	24	22.24	22.53	22.18	0-3	
	12	0	21.69	21.57	21.74		0.5
12	6	21.74	21.67	21.78	0.5		
12	13	21.67	21.58	21.67	0.5		
25	0	21.62	21.65	21.65	0.5		

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 48 of 126

**Table 9-31**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.14	22.17	22.18	0	0
	1	7	22.25	22.30	22.33		0
	1	14	22.09	22.12	22.15		0
	8	0	22.18	22.20	22.23	0-1	0
	8	4	22.19	22.21	22.28		0
	8	7	22.21	22.22	22.20		0
16QAM	15	0	22.15	22.18	22.20	0-1	0
	1	0	22.73	22.35	22.40		0
	1	7	22.77	22.52	22.52		0
	1	14	22.62	22.30	22.34	0-2	0
	8	0	22.32	22.22	22.26		0
	8	4	22.35	22.26	22.29		0
64QAM	8	7	22.31	22.20	22.20	0-2	0
	15	0	22.24	22.12	22.14		0
	1	0	22.78	22.36	22.08		0-2
	1	7	22.69	22.48	22.22	0	
	1	14	22.73	22.32	22.04	0-3	
	8	0	21.76	21.65	21.74		0.5
	8	4	21.80	21.69	21.78		0.5
	8	7	21.75	21.63	21.76	0.5	
15	0	21.64	21.66	21.80	0.5		

**Table 9-32**  
**LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	22.10	22.22	22.13	0	0	
	1	2	22.22	22.37	22.22		0	
	1	5	22.09	22.22	22.09		0	
	3	0	22.23	22.27	22.28	0-1	0	
	3	2	22.27	22.37	22.30		0	
	3	3	22.26	22.25	22.26		0	
16QAM	6	0	22.23	22.20	22.27	0-1	0	
	1	0	22.30	22.49	22.53		0-1	0
	1	2	22.45	22.55	22.60			0
	1	5	22.32	22.47	22.50	0-2		0
	3	0	22.41	22.45	22.34		0	
	3	2	22.40	22.46	22.32		0	
64QAM	3	3	22.43	22.42	22.27	0-2	0	
	6	0	22.21	22.36	22.32		0	
	1	0	22.04	22.58	22.34		0-2	0
	1	2	22.17	22.70	22.45	0		
	1	5	22.02	22.60	22.38	0		
	3	0	22.31	22.39	22.34	0-3	0	
	3	2	22.32	22.38	22.35		0	
	3	3	22.31	22.37	22.33		0	
6	0	21.70	21.63	21.76	0.5			

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 49 of 126

## 9.4.6 LTE Band 25 (PCS)

**Table 9-33**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.44	24.48	24.43	0	0
	1	50	24.62	24.72	24.69		0
	1	99	24.43	24.51	24.49		0
	50	0	23.63	23.73	23.70	0-1	1
	50	25	23.66	23.72	23.69		1
	50	50	23.66	23.65	23.55		1
16QAM	100	0	23.66	23.68	23.61	0-1	1
	1	0	23.65	23.68	23.69		1
	1	50	23.86	23.90	23.90		1
	1	99	23.66	23.71	23.77	0-2	1
	50	0	22.64	22.72	22.70		2
	50	25	22.68	22.73	22.68		2
64QAM	50	50	22.65	22.63	22.55	0-2	2
	100	0	22.61	22.64	22.59		2
	1	0	22.54	22.67	22.60		0-2
	1	50	22.80	22.80	22.82	2	
	1	99	22.59	22.71	22.70	2	
	64QAM	50	0	21.57	21.65	21.72	0-3
50		25	21.59	21.65	21.72	3	
50		50	21.58	21.56	21.58	3	
100		0	21.55	21.59	21.62	3	

**Table 9-34**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.38	24.31	24.35	0	0
	1	36	24.43	24.39	24.45		0
	1	74	24.36	24.34	24.44		0
	36	0	23.52	23.48	23.54	0-1	1
	36	18	23.50	23.49	23.57		1
	36	37	23.51	23.48	23.52		1
16QAM	75	0	23.48	23.46	23.52	0-1	1
	1	0	23.80	23.79	23.74		1
	1	36	23.89	23.85	23.84		1
	1	74	23.80	23.80	23.78	0-2	1
	36	0	22.53	22.51	22.51		2
	36	18	22.52	22.52	22.54		2
64QAM	36	37	22.53	22.48	22.52	0-2	2
	75	0	22.52	22.49	22.56		2
	1	0	22.86	22.80	22.69		0-2
	1	36	22.90	22.89	22.81	2	
	1	74	22.80	22.80	22.76	0-3	
	36	0	21.49	21.47	21.53		3
36	18	21.51	21.47	21.52	3		
64QAM	36	37	21.55	21.49	21.53	0-3	3
	75	0	21.48	21.46	21.50		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 50 of 126	

**Table 9-35**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.84	24.63	0	0
	1	25	24.96	25.00	24.86		0
	1	49	24.83	24.86	24.68		0
	25	0	23.75	23.70	23.79	0-1	1
	25	12	23.70	23.71	23.73		1
	25	25	23.69	23.67	23.72		1
	50	0	23.70	23.70	23.74		1
16QAM	1	0	24.05	24.08	24.18	0-1	1
	1	25	24.04	24.26	24.22		1
	1	49	24.02	24.11	24.19		1
	25	0	22.73	22.75	22.82	0-2	2
	25	12	22.71	22.74	22.78		2
	25	25	22.69	22.74	22.75		2
	50	0	22.74	22.76	22.72		2
64QAM	1	0	22.73	22.94	23.07	0-2	2
	1	25	22.92	23.15	23.29		2
	1	49	22.69	22.96	23.10		2
	25	0	21.75	21.74	21.82	0-3	3
	25	12	21.71	21.71	21.78		3
	25	25	21.72	21.71	21.76		3
	50	0	21.73	21.70	21.80		3

**Table 9-36**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.70	24.78	24.70	0	0
	1	12	24.98	25.08	25.22		0
	1	24	24.62	24.77	24.73		0
	12	0	23.68	23.70	23.67	0-1	1
	12	6	23.70	23.75	23.73		1
	12	13	23.60	23.68	23.66		1
	25	0	23.63	23.65	23.72		1
16QAM	1	0	24.11	23.85	24.07	0-1	1
	1	12	24.25	24.01	24.18		1
	1	24	24.03	23.84	24.13		1
	12	0	22.76	22.73	22.70	0-2	2
	12	6	22.79	22.79	22.76		2
	12	13	22.68	22.71	22.74		2
	25	0	22.64	22.69	22.65		2
64QAM	1	0	22.97	23.11	22.92	0-2	2
	1	12	23.17	23.16	23.14		2
	1	24	22.92	23.12	22.93		2
	12	0	21.66	21.73	21.66	0-3	3
	12	6	21.72	21.72	21.70		3
	12	13	21.62	21.67	21.65		3
	25	0	21.62	21.72	21.63		3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 51 of 126	

**Table 9-37**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.88	24.65	0	0
	1	7	25.04	24.96	25.06		0
	1	14	24.79	24.92	24.74		0
	8	0	23.67	23.68	23.71	0-1	1
	8	4	23.68	23.71	23.80		1
	8	7	23.63	23.62	23.71		1
	15	0	23.63	23.65	23.68		1
16QAM	1	0	24.28	23.85	24.18	0-1	1
	1	7	24.26	24.30	24.20		1
	1	14	24.29	23.85	24.16		1
	8	0	22.65	22.71	22.78	0-2	2
	8	4	22.62	22.77	22.81		2
	8	7	22.58	22.72	22.75		2
	15	0	22.67	22.68	22.72		2
64QAM	1	0	22.71	22.97	23.08	0-2	2
	1	7	22.93	23.02	23.13		2
	1	14	22.65	22.97	23.12		2
	8	0	21.63	21.59	21.72	0-3	3
	8	4	21.63	21.64	21.82		3
	8	7	21.57	21.60	21.71		3
	15	0	21.64	21.59	21.69		3

**Table 9-38**  
**LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.74	24.68	24.72	0	0
	1	2	25.04	24.82	24.91		0
	1	5	24.79	24.70	24.74		0
	3	0	24.72	24.69	24.68		0
	3	2	24.77	24.73	24.69		0
	3	3	24.68	24.67	24.65		0
	6	0	23.68	23.60	23.65	0-1	1
16QAM	1	0	24.14	23.65	23.80	0-1	1
	1	2	24.20	24.14	23.86		1
	1	5	24.10	23.94	23.79		1
	3	0	23.76	23.71	23.74		1
	3	2	23.81	23.71	23.88		1
	3	3	23.77	23.66	23.62		1
	6	0	22.71	22.56	22.71	0-2	2
64QAM	1	0	22.60	22.86	23.10	0-2	2
	1	2	22.71	22.97	23.11		2
	1	5	22.60	22.84	23.12		2
	3	0	22.72	22.63	22.68		2
	3	2	22.77	22.72	22.65		2
	3	3	22.65	22.57	22.60		2
	6	0	21.70	21.51	21.46	0-3	3

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 52 of 126

**Table 9-39**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.92	23.04	23.12	0	0
	1	50	23.20	23.24	23.34		0
	1	99	22.95	23.09	23.15		0
	50	0	23.14	23.20	23.23	0-1	0
	50	25	23.17	23.24	23.25		0
	50	50	23.19	23.19	23.16		0
	100	0	23.16	23.17	23.15		0
16QAM	1	0	22.98	22.94	23.36	0-1	0
	1	50	23.23	23.22	23.58		0
	1	99	23.13	23.03	23.39		0
	50	0	22.69	22.77	22.78	0-2	0.5
	50	25	22.65	22.78	22.70		0.5
	50	50	22.68	22.75	22.64		0.5
	100	0	22.72	22.72	22.69		0.5
64QAM	1	0	22.87	22.96	22.72	0-2	0.5
	1	50	23.18	23.18	22.88		0.5
	1	99	23.02	23.04	22.75		0.5
	50	0	21.61	21.98	21.77	0-3	1.5
	50	25	21.61	21.70	21.75		1.5
	50	50	21.66	21.67	21.70		1.5
	100	0	21.52	21.66	21.66		1.5

**Table 9-40**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.00	23.01	23.04	0	0
	1	36	23.06	23.10	23.11		0
	1	74	23.02	23.03	23.18		0
	36	0	23.11	23.17	23.22	0-1	0
	36	18	23.05	23.18	23.23		0
	36	37	23.13	23.16	23.20		0
	75	0	23.12	23.17	23.19		0
16QAM	1	0	23.34	23.40	23.44	0-1	0
	1	36	23.47	23.42	23.48		0
	1	74	23.60	23.38	23.50		0
	36	0	22.56	22.65	22.66	0-2	0.5
	36	18	22.60	22.67	22.62		0.5
	36	37	22.63	22.63	22.66		0.5
	75	0	22.61	22.67	22.72		0.5
64QAM	1	0	22.71	22.79	22.81	0-2	0.5
	1	36	22.91	22.84	22.85		0.5
	1	74	22.85	22.87	22.80		0.5
	36	0	21.53	21.60	21.70	0-3	1.5
	36	18	21.57	21.63	21.68		1.5
	36	37	21.60	21.62	21.67		1.5
	75	0	21.54	21.60	21.66		1.5

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 53 of 126	

**Table 9-41**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.05	23.04	23.08	0	0
	1	25	23.12	23.12	23.21		0
	1	49	23.03	23.09	23.10		0
	25	0	23.04	23.20	23.30	0-1	0
	25	12	23.08	23.19	23.25		0
	25	25	23.11	23.11	23.23		0
16QAM	50	0	23.14	23.21	23.25	0-1	0
	1	0	23.36	23.44	23.46		0
	1	25	23.73	23.47	23.45		0
	1	49	23.42	23.41	22.81	0-2	0
	25	0	22.75	22.72	22.73		0.5
	25	12	22.61	22.73	22.70		0.5
64QAM	25	25	22.67	22.69	22.74	0-2	0.5
	50	0	22.65	22.72	22.71		0.5
	1	0	22.78	22.79	22.82		0.5
	1	25	22.78	22.91	22.93	0-2	0.5
	1	49	22.84	22.85	22.81		0.5
	25	0	21.58	21.65	21.77		0-3
25	12	21.51	21.59	21.75	1.5		
25	25	21.55	21.64	21.66	1.5		
	50	0	21.57	21.64	21.72		1.5

**Table 9-42**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.94	23.00	22.99	0	0
	1	12	23.12	23.25	23.22		0
	1	24	22.89	22.96	23.01		0
	12	0	23.02	23.09	23.12	0-1	0
	12	6	23.04	23.11	23.19		0
	12	13	22.99	23.07	23.16		0
16QAM	25	0	23.01	23.01	23.15	0-1	0
	1	0	22.95	23.27	23.27		0
	1	12	23.17	23.26	23.46		0
	1	24	22.94	23.46	23.27	0-2	0
	12	0	23.06	22.57	22.90		0.5
	12	6	23.05	22.60	22.75		0.5
64QAM	12	13	22.98	22.75	22.67	0-2	0.5
	25	0	23.01	22.74	22.74		0.5
	1	0	22.89	22.82	22.81		0-2
	1	12	22.91	22.95	22.90	0.5	
	1	24	22.70	22.74	22.77	0-3	
	12	0	21.82	21.87	21.78		1.5
12	6	21.85	21.86	21.92	1.5		
	12	13	21.43	21.90	21.96		1.5
	25	0	21.71	21.87	22.00		1.5

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 54 of 126

**Table 9-43**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.03	23.07	23.12	0	0
	1	7	23.15	23.27	23.20		0
	1	14	23.00	23.10	23.16		0
	8	0	23.04	23.09	23.17	0-1	0
	8	4	23.04	23.13	23.15		0
	8	7	23.00	23.09	23.20		0
16QAM	15	0	23.02	23.38	23.47	0-1	0
	1	0	23.45	23.44	23.45		0
	1	7	23.52	23.49	23.53		0
	1	14	23.23	23.41	23.20	0-2	0
	8	0	22.65	22.75	22.35		0.5
	8	4	22.66	22.73	22.34		0.5
64QAM	8	7	22.59	22.68	22.30	0-2	0.5
	15	0	22.56	22.64	22.32		0.5
	1	0	22.77	22.84	22.52		0.5
	1	7	22.94	22.88	22.50	0-3	0.5
	1	14	22.55	22.60	22.66		0.5
	8	0	21.53	21.57	21.33		1.5
64QAM	8	4	21.60	21.58	21.41	0-3	1.5
	8	7	21.45	21.55	21.32		1.5
	15	0	21.40	21.43	21.65		1.5

**Table 9-44**  
**LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.00	23.00	23.10	0	0
	1	2	23.08	23.10	23.20		0
	1	5	23.01	23.03	23.16		0
	3	0	23.05	23.06	23.13	0-1	0
	3	2	23.07	23.09	23.19		0
	3	3	22.98	23.05	22.95		0
16QAM	6	0	23.09	23.04	23.22	0-1	0
	1	0	23.27	23.33	23.38		0
	1	2	23.50	23.53	23.20		0
	1	5	23.22	23.32	22.95	0-1	0
	3	0	23.05	23.08	22.65		0
	3	2	23.22	23.07	22.80		0
64QAM	3	3	22.99	23.19	22.70	0-2	0
	6	0	22.65	22.70	22.40		0.5
	1	0	22.64	22.75	22.22		0-2
	1	2	22.70	22.89	22.50	0.5	
	1	5	22.64	22.85	22.34	0.5	
	3	0	22.60	22.61	22.50	0-3	0.5
3	2	22.50	22.75	22.33	0.5		
3	3	22.63	22.71	22.36	0.5		
6	0	21.50	21.45	21.20	1.5		

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 55 of 126	

## 9.4.7 LTE Band 41

**Table 9-45**  
**LTE Band 41 PC3 Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.68	24.64	24.81	24.92	24.65	0	0
	1	50	24.91	24.95	25.04	25.14	24.90		0
	1	99	24.74	24.69	24.95	24.93	24.63		0
	50	0	23.82	23.81	24.00	24.17	23.91	0-1	1
	50	25	23.85	23.83	24.05	24.12	23.89		1
	50	50	23.79	23.80	24.07	24.11	23.82		1
16QAM	100	0	23.78	23.78	24.04	24.09	23.84	0-1	1
	1	0	23.64	23.48	23.46	23.89	23.73		1
	1	50	23.93	23.83	23.68	24.12	24.01		1
	1	99	23.72	23.60	23.63	23.89	23.65	0-2	1
	50	0	22.90	22.86	23.03	23.13	22.90		2
	50	25	22.91	22.88	23.02	23.16	22.91		2
64QAM	50	50	22.84	22.87	23.04	23.13	22.86	0-2	2
	100	0	22.87	22.85	23.02	23.14	22.88		2
	1	0	22.67	22.42	22.98	22.94	22.59		0-3
	1	50	22.96	22.84	23.29	23.24	22.94	2	
	1	99	22.60	22.66	23.16	22.90	22.57	2	
	50	0	21.88	21.85	22.01	22.19	21.96	0-3	3
50	25	21.91	21.93	21.99	22.22	21.97	3		
50	50	21.86	21.88	22.01	22.18	21.90	3		
100	0	21.86	21.85	22.00	22.15	21.89	3		

**Table 9-46**  
**LTE Band 41 PC3 Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.58	24.79	25.00	24.87	24.50	0	0
	1	36	24.77	25.00	25.17	24.99	24.63		0
	1	74	24.53	24.92	25.14	24.83	24.39		0
	36	0	23.65	23.69	24.08	24.02	23.68	0-1	1
	36	18	23.74	23.79	24.09	24.05	23.67		1
	36	37	23.68	23.77	24.11	24.02	23.68		1
16QAM	75	0	23.68	23.69	24.08	24.04	23.64	0-1	1
	1	0	23.67	23.69	23.81	24.07	23.63		1
	1	36	23.78	23.93	24.35	24.23	23.74		1
	1	74	23.60	23.81	24.20	23.98	23.52	0-2	1
	36	0	22.72	22.80	23.03	23.04	22.74		2
	36	18	22.78	22.87	23.06	23.07	22.68		2
64QAM	36	37	22.75	22.89	23.14	23.03	22.68	0-2	2
	75	0	22.69	22.77	23.01	23.03	22.64		2
	1	0	22.94	23.06	22.86	23.08	22.96		0-2
	1	36	22.84	23.26	23.03	23.17	23.00	2	
	1	74	22.70	23.14	22.95	23.07	22.81	2	
	36	0	21.63	21.70	22.05	21.99	21.68	0-3	3
36	18	21.69	21.72	22.07	22.03	21.63	3		
36	37	21.59	21.75	22.06	21.95	21.61	3		
75	0	21.68	21.73	22.03	22.04	21.63	3		

FCC ID: ZNFK330PM	 PCTEST <sup>®</sup> Proud to be part of  element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 56 of 126	

**Table 9-47**  
**LTE Band 41 PC3 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.64	24.72	25.00	24.88	24.46	0	0
	1	25	24.80	24.69	25.19	25.06	24.70		0
	1	49	24.58	24.60	25.01	24.84	24.40		0
	25	0	23.69	23.84	24.22	24.11	23.67	0-1	1
	25	12	23.74	23.93	24.20	24.08	23.66		1
	25	25	23.70	23.87	24.18	24.07	23.64		1
16QAM	50	0	23.68	23.84	24.11	24.09	23.61	0-1	1
	1	0	23.88	23.85	24.25	24.05	23.66		1
	1	25	24.12	23.90	24.18	24.11	23.32		1
	1	49	23.83	23.84	24.16	23.92	23.10	0-2	1
	25	0	22.76	22.91	23.08	23.10	22.49		2
	25	12	22.74	22.92	23.18	23.08	22.48		2
64QAM	25	25	22.73	22.91	23.21	23.06	22.41	0-2	2
	50	0	22.73	22.81	23.06	23.03	22.39		2
	1	0	22.77	22.87	23.09	23.06	22.44		0-3
	1	25	23.22	23.48	23.57	23.59	22.64	2	
	1	49	22.73	22.93	23.12	23.00	22.37	2	
	25	0	21.65	21.82	22.08	22.02	21.45	0-3	3
25	12	21.63	21.85	22.11	22.00	21.45	3		
25	25	21.63	21.83	22.08	22.00	21.38	3		
50	0	21.71	21.88	22.12	22.06	21.38		3	

**Table 9-48**  
**LTE Band 41 PC3 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.44	24.74	25.02	24.89	24.57	0	0
	1	12	24.73	24.70	25.10	25.10	24.90		0
	1	24	24.48	24.54	25.02	24.89	24.49		0
	12	0	23.57	23.64	24.08	23.91	23.60	0-1	1
	12	6	23.61	23.83	24.11	23.98	23.68		1
	12	13	23.57	23.80	24.07	23.94	23.58		1
16QAM	25	0	23.59	23.75	24.10	24.00	23.59	0-1	1
	1	0	23.79	23.88	24.21	24.21	23.77		1
	1	12	24.24	24.46	24.49	24.66	24.22		1
	1	24	23.72	23.77	24.32	24.18	23.70	0-2	1
	12	0	22.60	22.75	23.01	22.93	22.63		2
	12	6	22.65	22.83	23.07	23.01	22.72		2
64QAM	12	13	22.58	22.76	23.04	22.94	22.63	0-2	2
	25	0	22.54	22.72	22.95	23.10	22.54		2
	1	0	22.76	22.62	23.56	23.19	22.69		0-3
	1	12	23.15	22.68	23.68	23.29	23.18	2	
	1	24	22.72	22.90	23.54	23.11	22.64	2	
	12	0	21.68	21.76	22.06	22.00	21.57	0-3	3
12	6	21.77	21.74	22.10	22.07	21.62	3		
12	13	21.67	21.64	22.05	21.90	21.55	3		
25	0	21.63	21.70	21.92	21.99	21.54		3	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 57 of 126	

**Table 9-49**  
**LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.96	21.92	22.00	22.10	21.93	0	0
	1	50	21.91	22.07	22.06	22.24	22.03		0
	1	99	21.78	21.85	21.94	22.06	21.85		0
	50	0	22.09	22.01	22.07	22.26	22.02	0-1	0
	50	25	22.12	22.08	22.12	22.33	22.02		0
	50	50	22.05	22.00	22.11	22.21	21.95		0
16QAM	100	0	22.07	22.01	22.09	22.19	21.97	0-1	0
	1	0	22.37	21.87	22.28	22.11	21.96		0
	1	50	22.45	22.11	22.53	22.38	22.24		0
	1	99	22.27	21.84	22.34	22.04	21.81	0-2	0
	50	0	22.12	22.09	22.13	22.30	22.07		0
	50	25	22.16	22.16	22.17	22.33	22.09		0
64QAM	50	50	22.13	22.07	22.14	22.25	21.99	0-2	0
	100	0	22.12	22.05	22.19	22.29	22.01		0
	1	0	21.95	21.75	22.23	22.14	21.94		0-3
	1	50	22.25	22.12	22.52	22.44	22.00	0	
	1	99	21.81	21.70	22.28	21.94	21.71	0	
	50	0	21.19	21.10	21.13	21.34	21.10	1	
50	25	21.23	21.15	21.14	21.34	21.09	1		
50	50	21.13	21.08	21.12	21.30	21.04	1		
100	0	21.14	21.05	21.11	21.26	21.03	1		

**Table 9-50**  
**LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.05	22.06	22.08	22.06	21.88	0	0
	1	36	22.14	22.15	22.16	22.22	22.04		0
	1	74	22.04	22.07	22.01	22.11	21.82		0
	36	0	22.06	22.03	22.21	22.26	22.10	0-1	0
	36	18	22.16	22.09	22.23	22.32	22.09		0
	36	37	22.14	22.07	22.25	22.28	22.07		0
16QAM	75	0	22.11	21.99	22.20	22.23	22.04	0-1	0
	1	0	21.90	21.92	21.99	21.86	21.78		0
	1	36	21.94	22.03	22.03	21.83	21.91		0
	1	74	21.81	21.82	21.98	21.69	21.76	0-2	0
	36	0	22.12	22.03	22.23	22.29	22.09		0
	36	18	22.19	22.08	22.21	22.33	22.06		0
64QAM	36	37	22.14	22.03	22.23	22.31	22.05	0-2	0
	75	0	22.16	21.93	22.20	22.29	22.04		0
	1	0	22.38	21.73	22.10	22.58	22.34		0-3
	1	36	22.45	21.89	22.26	22.68	22.51	0	
	1	74	21.98	21.74	22.15	22.52	22.23	0	
	36	0	21.16	21.06	21.22	21.32	21.10	1	
36	18	21.20	21.11	21.26	21.29	20.98	1		
36	37	21.14	21.08	21.24	21.27	21.00	1		
75	0	21.17	20.99	21.18	21.24	21.04	1		

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 58 of 126	

**Table 9-51  
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.14	22.09	22.15	22.33	22.06	0	0
	1	25	22.29	22.23	22.24	22.44	22.14		0
	1	49	22.11	22.08	22.16	22.26	21.99		0
	25	0	22.15	22.14	22.27	22.29	22.08	0-1	0
	25	12	22.19	22.21	22.33	22.37	22.16		0
	25	25	22.17	22.14	22.30	22.30	22.08		0
16QAM	50	0	22.16	22.08	22.26	22.35	22.10	0-1	0
	1	0	22.10	21.98	22.31	22.26	22.06		0
	1	25	22.18	22.10	22.30	22.15	21.99		0
	1	49	22.01	21.92	22.37	22.65	21.97	0-2	0
	25	0	22.19	22.23	22.28	22.30	22.17		0
	25	12	22.15	22.22	22.37	22.40	22.18		0
64QAM	25	25	22.18	22.19	22.33	22.48	22.11	0-2	0
	50	0	22.22	22.23	22.27	22.38	22.14		0
	1	0	22.25	21.95	22.36	22.36	22.13		0
	1	25	22.66	22.50	22.64	22.70	22.28	0-3	0
	1	49	22.30	22.00	22.43	22.33	22.00		0
	25	0	21.06	21.11	21.26	21.30	21.09		1
25	12	21.02	21.10	21.32	21.31	21.03	1		
25	25	21.20	21.16	21.27	21.29	21.01	1		
50	0	21.19	21.14	21.28	21.31	21.07	1		

**Table 9-52  
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.05	21.93	22.11	22.20	21.99	0	0
	1	12	22.43	22.17	22.22	22.52	22.40		0
	1	24	22.12	21.91	22.09	22.37	22.35		0
	12	0	22.10	22.13	22.21	22.20	22.15	0-1	0
	12	6	22.13	22.16	22.16	22.28	22.19		0
	12	13	22.15	22.11	22.24	22.29	22.09		0
16QAM	25	0	22.20	22.18	22.29	22.27	22.04	0-1	0
	1	0	22.30	22.12	22.45	22.50	21.83		0
	1	12	22.09	22.60	22.70	22.72	21.96		0
	1	24	21.83	22.13	22.45	22.50	21.82	0-2	0
	12	0	22.06	22.11	22.11	22.05	22.02		0
	12	6	22.10	22.15	22.20	22.09	22.05		0
64QAM	12	13	22.13	22.09	22.26	22.30	22.04	0-2	0
	25	0	22.16	22.06	22.32	22.20	21.96		0
	1	0	21.85	21.74	22.43	22.55	21.84		0
	1	12	22.13	22.30	22.51	22.70	21.90	0-3	0
	1	24	21.56	21.78	22.38	22.40	21.99		0
	12	0	21.30	21.36	21.26	21.32	21.06		1
12	6	21.35	21.48	21.33	21.36	21.02	1		
12	13	21.20	21.28	21.23	21.26	20.97	1		
25	0	21.19	21.30	21.24	21.31	20.99	1		

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 59 of 126	

**Table 9-53**  
**LTE Band 41 PC2 Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	26.65	26.53	26.83	26.85	26.69	0	0
	1	50	26.90	27.08	27.21	27.14	26.95		0
	1	99	26.67	26.71	26.95	27.08	26.66		0
	50	0	25.79	25.75	26.04	26.11	25.88	0-1	1
	50	25	25.82	25.86	26.13	26.08	25.89		1
	50	50	25.81	25.82	26.06	26.06	25.84		1
	100	0	25.79	25.78	26.05	26.08	25.85		1

**Table 9-54**  
**LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	23.93	23.70	23.89	24.09	23.83	0	0
	1	50	24.15	24.07	24.26	24.34	24.24		0
	1	99	23.76	23.72	23.90	23.83	23.70		0
	50	0	24.03	23.92	24.10	24.19	23.98	0-1	0
	50	25	24.05	24.00	24.12	24.20	23.99		0
	50	50	23.99	23.92	24.12	24.18	23.90		0
	100	0	24.04	23.91	24.12	24.14	23.92		0

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 60 of 126

9.4.8

LTE Uplink Carrier Aggregation Conducted Powers

Table 9-55  
LTE B41 Uplink Carrier Aggregation Maximum Conducted Powers

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40185	2549.5	QPSK	1	99	LTE B41	20	40383	2569.3	QPSK	1	0	24.68	24.69
CA_41C	LTE B41	20	41055	2636.5	QPSK	1	99	LTE B41	20	41253	2656.3	QPSK	1	0	24.85	24.93

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	40185	2549.5	QPSK	1	99	LTE B41 PC2	20	40383	2569.3	QPSK	1	0	26.83	26.71
CA_41C	LTE B41 PC2	20	41055	2636.5	QPSK	1	99	LTE B41 PC2	20	41253	2656.3	QPSK	1	0	26.98	27.08

Table 9-56  
LTE B41 Uplink Carrier Aggregation Reduced Conducted Powers

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	22.06	22.00

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	40620	2593.0	QPSK	1	0	LTE B41 PC2	20	40422	2573.2	QPSK	1	99	24.12	23.89

Notes:

- This device supports uplink carrier aggregation for LTE CA\_41C with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
- Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.



Figure 9-4  
Power Measurement Setup

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 61 of 126	

## 9.5 WLAN Conducted Powers

**Table 9-57**  
**2.4 GHz WLAN Maximum Average RF Power**

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	20.29	16.28	15.59
2417	2		17.37	16.70
2422	3		18.21	17.64
2437	6	20.44	18.49	17.74
2452	9		18.47	17.87
2457	10		16.18	15.56
2462	11	20.10	15.09	14.47

**Table 9-58**  
**5 GHz WLAN Maximum Average RF Power**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	17.75	16.90	16.94
5200	40	17.68	17.20	17.12
5220	44	17.72	17.18	17.23
5240	48	17.81	17.23	17.29
5260	52	17.35	16.74	16.58
5280	56	17.24	16.61	16.80
5300	60	17.28	16.73	16.64
5320	64	17.33	16.71	16.76
5500	100	16.78	16.23	16.40
5520	104	17.41	16.72	16.39
5600	120	17.42	16.92	16.92
5620	124	17.44	16.86	16.97
5680	136	17.21	16.58	16.71
5720	144	16.78	16.27	16.19
5745	149	16.67	16.04	16.08
5785	157	16.73	16.08	16.25
5825	165	16.88	16.29	16.24

**Table 9-59**  
**2.4 GHz WLAN Reduced Average RF Power**

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	17.99	16.28	15.59
2417	2		17.37	16.70
2437	6	18.12	18.49	17.74
2457	10		16.18	15.56
2462	11	17.66	15.09	14.47


FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 62 of 126

**Table 9-60  
5 GHz WLAN Reduced Average RF Power**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	11.88	11.83	11.77
5200	40	11.89	11.78	11.72
5220	44	11.91	11.74	11.68
5240	48	11.86	11.62	11.66
5260	52	11.72	11.68	11.62
5280	56	11.82	11.77	11.74
5300	60	11.67	11.52	11.55
5320	64	11.64	11.53	11.50
5500	100	11.58	11.43	11.42
5600	120	11.88	11.76	11.77
5620	124	11.83	11.80	11.72
5680	136	11.54	11.43	11.55
5720	144	11.35	11.46	11.30
5745	149	11.29	11.34	11.28
5785	157	11.21	11.25	11.16
5825	165	11.21	11.20	11.18

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

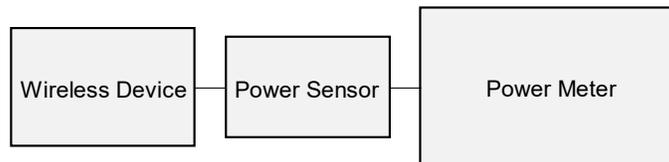

**Figure 9-5  
Power Measurement Setup**

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 63 of 126	

## 9.6 Bluetooth Conducted Powers

Table 9-61  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	8.28	6.733
2441	1.0	39	9.48	8.865
2480	1.0	78	9.97	9.939
2402	2.0	0	6.09	4.062
2441	2.0	39	6.98	4.985
2480	2.0	78	7.21	5.257
2402	3.0	0	6.16	4.128
2441	3.0	39	7.05	5.069
2480	3.0	78	7.25	5.312


FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  LG	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 64 of 126

**Figure 9-6  
Bluetooth Transmission Plot**



**Equation 9-1  
Bluetooth Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.874ms}{3.75ms} * 100\% = 76.6\%$$

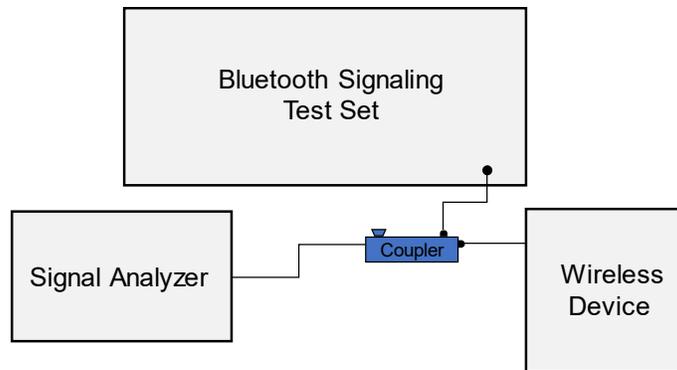

**Figure 9-7  
Power Measurement Setup**

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 65 of 126

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
11/24/2020	750 Head	19.4	680	0.855	41.947	0.888	42.305	-3.72%	-0.85%
			695	0.861	41.917	0.889	42.227	-3.15%	-0.73%
			700	0.863	41.906	0.889	42.201	-2.92%	-0.70%
			710	0.866	41.882	0.890	42.149	-2.70%	-0.63%
			725	0.871	41.834	0.891	42.071	-2.24%	-0.56%
			740	0.876	41.777	0.893	41.994	-1.90%	-0.52%
			750	0.880	41.742	0.894	41.942	-1.57%	-0.48%
			755	0.882	41.724	0.894	41.916	-1.34%	-0.46%
			770	0.888	41.684	0.895	41.838	-0.78%	-0.37%
			785	0.893	41.647	0.896	41.760	-0.33%	-0.27%
11/18/2020	835 Head	21.6	800	0.898	41.609	0.897	41.682	0.11%	-0.18%
			820	0.878	41.410	0.899	41.578	-2.34%	-0.40%
			835	0.893	41.193	0.900	41.500	-0.78%	-0.74%
11/23/2020	835 Head	22.2	850	0.907	40.983	0.916	41.500	-0.98%	-1.25%
			820	0.864	41.269	0.899	41.578	-3.89%	-0.74%
11/25/2020	835 Head	21.4	835	0.877	41.070	0.900	41.500	-2.56%	-1.04%
			850	0.892	40.852	0.916	41.500	-2.62%	-1.56%
			820	0.943	41.492	0.899	41.578	4.89%	-0.21%
11/24/2020	1750 Head	20.6	835	0.944	41.449	0.900	41.500	4.89%	-0.12%
			850	0.947	41.397	0.916	41.500	3.38%	-0.25%
			1710	1.370	40.321	1.348	40.142	1.63%	0.45%
			1720	1.375	40.310	1.354	40.126	1.55%	0.46%
			1745	1.391	40.276	1.368	40.087	1.68%	0.47%
			1750	1.395	40.269	1.371	40.079	1.75%	0.47%
12/17/2020	1750 Head	20.6	1770	1.409	40.247	1.383	40.047	1.88%	0.50%
			1790	1.423	40.229	1.394	40.016	2.08%	0.53%
			1710	1.369	38.763	1.348	40.142	1.56%	-3.44%
			1720	1.379	38.716	1.354	40.126	1.85%	-3.51%
			1745	1.405	38.590	1.368	40.087	2.70%	-3.73%
			1750	1.410	38.564	1.371	40.079	2.84%	-3.78%
11/25/2020	1900 Head	24	1770	1.431	38.465	1.383	40.047	3.47%	-3.95%
			1790	1.452	38.368	1.394	40.016	4.16%	-4.12%
			1850	1.351	40.290	1.400	40.000	-3.50%	0.72%
			1860	1.361	40.258	1.400	40.000	-2.79%	0.65%
			1880	1.382	40.189	1.400	40.000	-1.29%	0.47%
			1900	1.402	40.110	1.400	40.000	0.14%	0.27%
12/3/2020	2450 Head	20.4	1905	1.407	40.090	1.400	40.000	0.50%	0.23%
			1910	1.411	40.069	1.400	40.000	0.79%	0.17%
			2400	1.802	39.395	1.756	39.289	2.62%	0.27%
12/14/2020	2450 Head	20.1	2450	1.839	39.318	1.800	39.200	2.17%	0.30%
			2500	1.877	39.256	1.855	39.136	1.19%	0.31%
			2400	1.794	39.111	1.756	39.289	2.16%	-0.45%
12/20/2020	2600 Head	23.8	2450	1.832	39.001	1.800	39.200	1.78%	-0.51%
			2500	1.873	38.933	1.855	39.136	0.97%	-0.52%
			2600	2.049	38.643	1.964	39.009	4.33%	-0.94%
			2650	2.107	38.458	2.018	38.945	4.41%	-1.25%
			2680	2.142	38.316	2.051	38.907	4.44%	-1.52%
			2700	2.165	38.223	2.073	38.882	4.44%	-1.69%

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 66 of 126

**Table 10-2  
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
12/14/2020	5200-5800 Head	23.5	5180	4.412	35.599	4.635	36.009	-4.81%	-1.14%
			5190	4.426	35.579	4.645	35.998	-4.71%	-1.16%
			5200	4.439	35.569	4.655	35.986	-4.64%	-1.16%
			5210	4.450	35.567	4.666	35.975	-4.63%	-1.13%
			5220	4.460	35.560	4.676	35.963	-4.62%	-1.12%
			5240	4.478	35.510	4.696	35.940	-4.64%	-1.20%
			5250	4.490	35.483	4.706	35.929	-4.59%	-1.24%
			5260	4.501	35.461	4.717	35.917	-4.58%	-1.27%
			5270	4.511	35.441	4.727	35.906	-4.57%	-1.30%
			5280	4.522	35.429	4.737	35.894	-4.54%	-1.30%
			5290	4.533	35.418	4.748	35.883	-4.53%	-1.30%
			5300	4.544	35.411	4.758	35.871	-4.50%	-1.28%
			5310	4.553	35.389	4.768	35.860	-4.51%	-1.31%
			5320	4.562	35.377	4.778	35.849	-4.52%	-1.32%
			5500	4.747	35.115	4.963	35.643	-4.35%	-1.48%
			5510	4.758	35.097	4.973	35.632	-4.32%	-1.50%
			5520	4.772	35.078	4.983	35.620	-4.23%	-1.52%
			5530	4.788	35.056	4.994	35.609	-4.12%	-1.55%
			5540	4.803	35.040	5.004	35.597	-4.02%	-1.56%
			5550	4.815	35.034	5.014	35.586	-3.97%	-1.55%
			5560	4.825	35.029	5.024	35.574	-3.96%	-1.53%
			5580	4.834	34.977	5.045	35.551	-4.18%	-1.61%
			5600	4.855	34.926	5.065	35.529	-4.15%	-1.70%
			5610	4.872	34.913	5.076	35.518	-4.02%	-1.70%
			5620	4.887	34.899	5.086	35.506	-3.91%	-1.71%
			5640	4.913	34.873	5.106	35.483	-3.78%	-1.72%
			5660	4.929	34.863	5.127	35.460	-3.86%	-1.68%
			5670	4.933	34.836	5.137	35.449	-3.97%	-1.73%
			5680	4.940	34.807	5.147	35.437	-4.02%	-1.78%
			5690	4.954	34.787	5.158	35.426	-3.96%	-1.80%
			5700	4.970	34.776	5.168	35.414	-3.83%	-1.80%
			5710	4.983	34.764	5.178	35.403	-3.77%	-1.80%
			5720	4.995	34.752	5.188	35.391	-3.72%	-1.81%
			5745	5.026	34.711	5.214	35.363	-3.61%	-1.84%
5750	5.031	34.700	5.219	35.357	-3.60%	-1.86%			
5755	5.035	34.688	5.224	35.351	-3.62%	-1.88%			
5765	5.043	34.678	5.234	35.340	-3.65%	-1.87%			
5775	5.053	34.656	5.245	35.329	-3.66%	-1.90%			
5785	5.065	34.634	5.255	35.317	-3.62%	-1.93%			
5795	5.079	34.616	5.265	35.305	-3.53%	-1.95%			
5805	5.093	34.598	5.275	35.294	-3.45%	-1.97%			
5825	5.115	34.564	5.296	35.271	-3.42%	-2.00%			
5550	5.155	34.441	5.014	35.586	2.81%	-3.22%			
5560	5.165	34.429	5.024	35.574	2.81%	-3.22%			
5580	5.180	34.383	5.045	35.551	2.68%	-3.29%			
5600	5.201	34.329	5.065	35.529	2.69%	-3.38%			
5610	5.216	34.313	5.076	35.518	2.76%	-3.39%			
5620	5.231	34.293	5.086	35.506	2.85%	-3.42%			
5640	5.261	34.265	5.106	35.483	3.04%	-3.43%			
5660	5.282	34.238	5.127	35.460	3.02%	-3.45%			
5670	5.288	34.207	5.137	35.449	2.94%	-3.50%			
5680	5.293	34.180	5.147	35.437	2.84%	-3.55%			
5690	5.304	34.159	5.158	35.426	2.83%	-3.58%			
5700	5.318	34.139	5.168	35.414	2.90%	-3.60%			
5710	5.332	34.113	5.178	35.403	2.97%	-3.64%			
5720	5.345	34.092	5.188	35.391	3.03%	-3.67%			
5745	5.381	34.052	5.214	35.363	3.20%	-3.71%			
5750	5.388	34.043	5.219	35.357	3.24%	-3.72%			
5755	5.392	34.035	5.224	35.351	3.22%	-3.72%			
5765	5.398	34.026	5.234	35.340	3.13%	-3.72%			
5775	5.408	34.012	5.245	35.329	3.11%	-3.73%			
5785	5.418	33.985	5.255	35.317	3.10%	-3.77%			
5795	5.431	33.949	5.265	35.305	3.15%	-3.84%			
5805	5.446	33.921	5.275	35.294	3.24%	-3.89%			
5825	5.472	33.888	5.296	35.271	3.32%	-3.92%			

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 67 of 126	

**Table 10-3  
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$			
11/24/2020	750 Body	20.4	680	0.926	54.079	0.958	55.804	-3.34%	-3.09%			
			695	0.931	54.058	0.959	55.745	-2.92%	-3.03%			
			700	0.933	54.049	0.959	55.726	-2.71%	-3.01%			
			710	0.937	54.030	0.960	55.687	-2.40%	-2.98%			
			725	0.942	53.988	0.961	55.629	-1.96%	-2.95%			
			740	0.948	53.938	0.963	55.570	-1.56%	-2.94%			
			755	0.954	53.895	0.964	55.512	-1.04%	-2.91%			
			770	0.959	53.867	0.965	55.453	-0.62%	-2.86%			
			785	0.965	53.836	0.966	55.395	-0.10%	-2.81%			
			800	0.970	53.804	0.967	55.336	0.31%	-2.77%			
11/30/2020	835 Body	20.5	820	0.949	54.852	0.969	55.258	-2.06%	-0.73%			
			835	0.966	54.682	0.970	55.200	-0.41%	-0.94%			
			850	0.983	54.525	0.988	55.154	-0.51%	-1.14%			
11/30/2020	835 Body	21.4	820	0.994	54.502	0.969	55.258	2.58%	-1.37%			
			835	1.000	54.453	0.970	55.200	3.09%	-1.35%			
			850	1.006	54.410	0.988	55.154	1.82%	-1.35%			
11/23/2020	1750 Body	24.5	1710	1.477	51.416	1.463	53.537	0.96%	-3.96%			
			1720	1.488	51.374	1.469	53.511	1.29%	-3.99%			
			1745	1.516	51.277	1.485	53.445	2.09%	-4.06%			
			1750	1.522	51.261	1.488	53.432	2.28%	-4.06%			
			1770	1.544	51.205	1.501	53.379	2.86%	-4.07%			
			1790	1.565	51.141	1.514	53.326	3.37%	-4.10%			
12/02/2020	1750 Body	23.4	1710	1.465	51.045	1.463	53.537	0.14%	-4.65%			
			1720	1.476	50.997	1.469	53.511	0.48%	-4.70%			
			1745	1.502	50.888	1.485	53.445	1.14%	-4.78%			
			1750	1.508	50.869	1.488	53.432	1.34%	-4.80%			
			1770	1.528	50.797	1.501	53.379	1.80%	-4.84%			
			1790	1.547	50.729	1.514	53.326	2.18%	-4.87%			
12/28/2020	1750 Body	23.0	1710	1.485	51.684	1.463	53.537	1.50%	-3.46%			
			1720	1.495	51.637	1.469	53.511	1.77%	-3.50%			
			1745	1.524	51.531	1.485	53.445	2.63%	-3.58%			
			1750	1.529	51.512	1.488	53.432	2.76%	-3.59%			
			1770	1.551	51.444	1.501	53.379	3.33%	-3.63%			
			1790	1.571	51.369	1.514	53.326	3.76%	-3.67%			
11/29/2020	1900 Body	24.2	1850	1.510	51.664	1.520	53.300	-0.66%	-3.07%			
			1860	1.520	51.639	1.520	53.300	0.00%	-3.12%			
			1880	1.542	51.581	1.520	53.300	1.45%	-3.23%			
			1900	1.565	51.514	1.520	53.300	2.96%	-3.35%			
			1905	1.571	51.498	1.520	53.300	3.36%	-3.38%			
			1910	1.576	51.481	1.520	53.300	3.68%	-3.41%			
12/7/2020	1900 Body	24.2	1850	1.526	51.543	1.520	53.300	0.39%	-3.30%			
			1860	1.537	51.518	1.520	53.300	1.12%	-3.34%			
			1880	1.558	51.46	1.520	53.300	2.50%	-3.45%			
			1900	1.581	51.396	1.520	53.300	4.01%	-3.57%			
			1905	1.587	51.381	1.520	53.300	4.41%	-3.60%			
			1910	1.593	51.365	1.520	53.300	4.80%	-3.63%			
12/10/2020	1900 Body	24.0	1850	1.508	52.690	1.520	53.300	-0.79%	-1.14%			
			1860	1.519	52.660	1.520	53.300	-0.07%	-1.20%			
			1880	1.541	52.592	1.520	53.300	1.38%	-1.33%			
			1900	1.563	52.524	1.520	53.300	2.83%	-1.46%			
			1905	1.569	52.508	1.520	53.300	3.22%	-1.49%			
			1910	1.575	52.493	1.520	53.300	3.62%	-1.51%			
11/30/2020	2450 Body	21.6	2400	1.991	51.843	1.902	52.767	4.68%	-1.75%			
			2450	2.041	51.778	1.950	52.700	4.67%	-1.75%			
			2500	2.082	51.716	2.021	52.636	3.02%	-1.75%			
12/3/2020	2450 Body	22.2	2400	1.980	51.094	1.902	52.767	4.10%	-3.17%			
			2450	2.023	51.023	1.950	52.700	3.74%	-3.18%			
			2500	2.068	50.971	2.021	52.636	2.33%	-3.16%			
12/21/2020	2450 Body	23.1	2300	1.840	52.259	1.809	52.900	1.71%	-1.21%			
			2310	1.851	52.239	1.816	52.887	1.93%	-1.23%			
			2320	1.863	52.214	1.826	52.873	2.03%	-1.25%			
			2400	1.955	52.018	1.902	52.767	2.79%	-1.42%			
			2450	2.015	51.885	1.950	52.700	3.33%	-1.55%			
			2480	2.049	51.820	1.993	52.662	2.81%	-1.60%			
			2500	2.068	51.762	2.021	52.636	2.33%	-1.66%			
			2510	2.077	51.718	2.035	52.623	2.06%	-1.72%			
			2535	2.115	51.624	2.071	52.592	2.12%	-1.84%			
			2550	2.131	51.597	2.092	52.573	1.86%	-1.86%			
			2560	2.146	51.577	2.106	52.560	1.90%	-1.87%			
			2600	2.188	51.455	2.163	52.509	1.16%	-2.01%			
			2650	2.249	51.280	2.234	52.445	0.67%	-2.22%			
			2680	2.288	51.211	2.277	52.407	0.48%	-2.28%			
			2700	2.310	51.139	2.305	52.382	0.22%	-2.37%			
			01/06/2021	2450 Body	21.4	2300	1.870	51.608	1.809	52.900	3.37%	-2.44%
						2310	1.881	51.581	1.816	52.887	3.58%	-2.47%
						2320	1.892	51.555	1.826	52.873	3.61%	-2.49%
2400	1.982	51.334				1.902	52.767	4.21%	-2.72%			
2450	2.040	51.171				1.950	52.700	4.62%	-2.90%			
2480	2.075	51.099				1.993	52.662	4.11%	-2.97%			
2500	2.097	51.036				2.021	52.636	3.76%	-3.04%			
2510	2.108	50.999				2.035	52.623	3.59%	-3.09%			
2535	2.139	50.910				2.071	52.592	3.28%	-3.20%			
2550	2.159	50.870				2.092	52.573	3.20%	-3.24%			
2560	2.171	50.847				2.106	52.560	3.09%	-3.26%			
2600	2.215	50.736				2.163	52.509	2.40%	-3.38%			
2650	2.278	50.572				2.234	52.445	1.97%	-3.57%			
2680	2.314	50.498				2.277	52.407	1.62%	-3.64%			
2700	2.337	50.427				2.305	52.382	1.39%	-3.73%			

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 68 of 126	

**Table 10-4  
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
11/24/2020	5200-5800 Body	21.1	5180	5.359	47.427	5.276	49.041	1.57%	-3.29%
			5200	5.384	47.381	5.299	49.014	1.60%	-3.33%
			5220	5.408	47.340	5.323	48.987	1.60%	-3.36%
			5240	5.438	47.301	5.346	48.960	1.72%	-3.39%
			5260	5.463	47.281	5.369	48.933	1.75%	-3.38%
			5280	5.485	47.239	5.393	48.906	1.71%	-3.41%
			5300	5.514	47.204	5.416	48.879	1.81%	-3.43%
			5320	5.544	47.165	5.439	48.851	1.93%	-3.45%
			5500	5.772	46.873	5.650	48.607	2.16%	-3.57%
			5520	5.806	46.820	5.673	48.580	2.34%	-3.62%
			5540	5.834	46.798	5.696	48.553	2.42%	-3.61%
			5560	5.860	46.765	5.720	48.526	2.45%	-3.63%
			5580	5.887	46.725	5.743	48.499	2.51%	-3.66%
			5600	5.911	46.686	5.766	48.471	2.51%	-3.68%
			5620	5.943	46.648	5.790	48.444	2.64%	-3.71%
			5640	5.973	46.613	5.813	48.417	2.75%	-3.73%
			5660	6.003	46.589	5.837	48.390	2.84%	-3.72%
			5680	6.028	46.561	5.860	48.363	2.87%	-3.73%
			5700	6.052	46.527	5.883	48.336	2.87%	-3.74%
			5745	6.118	46.434	5.936	48.275	3.07%	-3.81%
			5765	6.149	46.413	5.959	48.248	3.19%	-3.80%
			5785	6.178	46.39	5.982	48.220	3.28%	-3.80%
			5800	6.198	46.363	6.000	48.200	3.30%	-3.81%
			5805	6.203	46.358	6.006	48.193	3.28%	-3.81%
			5825	6.228	46.327	6.029	48.166	3.30%	-3.82%
12/17/2020	5200-5800 Body	22.3	5180	5.412	48.385	5.276	49.041	2.58%	-1.34%
			5200	5.439	48.361	5.299	49.014	2.64%	-1.33%
			5220	5.465	48.328	5.323	48.987	2.67%	-1.35%
			5240	5.489	48.284	5.346	48.960	2.67%	-1.38%
			5260	5.516	48.228	5.369	48.933	2.74%	-1.44%
			5280	5.543	48.201	5.393	48.906	2.78%	-1.44%
			5300	5.569	48.161	5.416	48.879	2.82%	-1.47%
			5320	5.596	48.142	5.439	48.851	2.89%	-1.45%
			5500	5.832	47.826	5.650	48.607	3.22%	-1.61%
			5520	5.864	47.776	5.673	48.580	3.37%	-1.66%
			5540	5.896	47.765	5.696	48.553	3.51%	-1.62%
			5560	5.918	47.750	5.720	48.526	3.46%	-1.60%
			5580	5.945	47.709	5.743	48.499	3.52%	-1.63%
			5600	5.973	47.659	5.766	48.471	3.59%	-1.68%
			5620	6.005	47.607	5.790	48.444	3.71%	-1.73%
			5640	6.033	47.586	5.813	48.417	3.78%	-1.72%
			5660	6.060	47.569	5.837	48.390	3.82%	-1.70%
			5680	6.091	47.548	5.860	48.363	3.94%	-1.69%
			5700	6.112	47.507	5.883	48.336	3.89%	-1.72%
			5745	6.185	47.425	5.936	48.275	4.19%	-1.76%
			5765	6.210	47.407	5.959	48.248	4.21%	-1.74%
			5785	6.236	47.366	5.982	48.220	4.25%	-1.77%
			5800	6.256	47.334	6.000	48.200	4.27%	-1.80%
			5805	6.263	47.328	6.006	48.193	4.28%	-1.79%
			5825	6.294	47.280	6.029	48.166	4.40%	-1.84%
12/21/2020	5200-5800 Body	20.6	5180	5.398	47.825	5.276	49.041	2.31%	-2.48%
			5200	5.428	47.787	5.299	49.014	2.43%	-2.50%
			5220	5.454	47.761	5.323	48.987	2.46%	-2.50%
			5240	5.478	47.726	5.346	48.960	2.47%	-2.52%
			5260	5.507	47.681	5.369	48.933	2.57%	-2.56%
			5280	5.533	47.634	5.393	48.906	2.60%	-2.60%
			5300	5.554	47.606	5.416	48.879	2.55%	-2.60%
			5320	5.578	47.586	5.439	48.851	2.56%	-2.59%
			5500	5.821	47.274	5.650	48.607	3.03%	-2.74%
			5520	5.851	47.224	5.673	48.580	3.14%	-2.79%
			5540	5.877	47.195	5.696	48.553	3.18%	-2.80%
			5560	5.908	47.171	5.720	48.526	3.29%	-2.79%
			5580	5.937	47.122	5.743	48.499	3.38%	-2.84%
			5600	5.965	47.104	5.766	48.471	3.45%	-2.82%
			5620	5.995	47.062	5.790	48.444	3.54%	-2.85%
			5640	6.019	47.041	5.813	48.417	3.54%	-2.84%
			5660	6.051	46.978	5.837	48.390	3.67%	-2.92%
			5680	6.081	46.946	5.860	48.363	3.77%	-2.93%
			5700	6.110	46.939	5.883	48.336	3.86%	-2.89%
			5745	6.170	46.860	5.936	48.275	3.94%	-2.93%
			5765	6.196	46.813	5.959	48.248	3.98%	-2.97%
			5785	6.233	46.764	5.982	48.220	4.20%	-3.02%
			5800	6.255	46.742	6.000	48.200	4.25%	-3.02%
			5805	6.260	46.733	6.006	48.193	4.23%	-3.03%
			5825	6.286	46.704	6.029	48.166	4.26%	-3.04%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 69 of 126	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.


**Table 10-5  
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
AM7	750	HEAD	11/24/2020	22.1	20.8	0.200	1034	7420	1.660	8.320	8.300	-0.24%
D	835	HEAD	11/18/2020	22.7	21.6	0.200	4d047	7488	1.920	9.420	9.600	1.91%
D	835	HEAD	11/23/2020	22.9	22.2	0.200	4d133	7488	1.900	9.430	9.500	0.74%
AM7	835	HEAD	11/25/2020	23.5	21.5	0.200	4d180	7420	2.040	9.600	10.200	6.25%
L	1750	HEAD	11/24/2020	24.3	20.7	0.100	1148	7539	3.490	35.900	34.900	-2.79%
P	1750	HEAD	12/17/2020	22.0	20.6	0.100	1008	7308	3.410	36.200	34.100	-5.80%
L	1900	HEAD	11/25/2020	21.9	24.0	0.100	5d148	7539	4.070	39.100	40.700	4.09%
AM2	2450	HEAD	12/03/2020	22.6	20.4	0.100	921	7416	5.100	53.100	51.000	-3.95%
AM2	2450	HEAD	12/14/2020	22.2	21.7	0.100	921	7416	5.020	53.100	50.200	-5.46%
E	2600	HEAD	12/20/2020	23.9	22.8	0.100	1004	3589	5.550	55.900	55.500	-0.72%
H	5250	HEAD	12/14/2020	24.0	23.5	0.050	1057	7357	3.830	79.200	76.600	-3.28%
H	5600	HEAD	12/14/2020	24.0	23.5	0.050	1057	7357	3.890	84.100	77.800	-7.49%
H	5600	HEAD	12/21/2020	20.0	20.1	0.050	1057	7357	3.830	84.100	76.600	-8.92%
H	5750	HEAD	12/14/2020	24.0	23.5	0.050	1057	7357	3.640	80.500	72.800	-9.57%
H	5750	HEAD	12/21/2020	20.0	20.1	0.050	1057	7357	3.820	80.500	76.400	-5.09%
AM4	750	BODY	11/24/2020	23.1	21.3	0.200	1034	7421	1.850	8.570	9.250	7.93%
P	835	BODY	11/30/2020	22.3	21.5	0.200	4d132	7308	1.970	9.960	9.850	-1.10%
AM7	835	BODY	11/30/2020	21.1	21.3	0.200	4d180	7420	1.990	9.590	9.950	3.75%
H	1750	BODY	11/23/2020	23.8	23.1	0.100	1150	7357	3.500	36.600	35.000	-4.37%
H	1750	BODY	12/28/2020	22.4	23.0	0.100	1008	7357	3.890	37.400	38.900	4.01%
J	1900	BODY	11/29/2020	22.9	24.2	0.100	5d080	7571	3.950	39.200	39.500	0.77%
J	1900	BODY	12/07/2020	24.9	24.2	0.100	5d080	7410	4.040	39.200	40.400	3.06%
J	1900	BODY	12/10/2020	24.9	24.0	0.100	5d080	7410	4.170	39.200	41.700	6.38%
AM6	2450	BODY	11/30/2020	20.8	20.5	0.100	945	7546	5.220	49.400	52.200	5.67%
AM6	2450	BODY	12/03/2020	21.9	21.0	0.100	945	7546	5.200	49.400	52.000	5.26%
K	2450	BODY	12/21/2020	23.0	23.0	0.100	981	7409	5.270	50.900	52.700	3.54%
K	2450	BODY	01/06/2021	22.9	21.4	0.100	981	7409	5.340	50.900	53.400	4.91%
K	2600	BODY	12/21/2020	23.0	23.0	0.100	1004	7409	5.570	54.800	55.700	1.64%
K	2600	BODY	01/06/2021	22.9	21.4	0.100	1004	7409	5.420	54.800	54.200	-1.09%
AM2	5250	BODY	11/24/2020	19.9	19.8	0.050	1123	7416	3.460	74.000	69.200	-6.49%
AM2	5250	BODY	12/17/2020	22.2	20.4	0.050	1163	7416	3.570	77.700	71.400	-8.11%
AM2	5600	BODY	11/24/2020	19.9	19.8	0.050	1123	7416	3.740	77.600	74.800	-3.61%
AM2	5750	BODY	11/24/2020	19.9	19.8	0.050	1123	7416	3.730	74.700	74.600	-0.13%
AM2	5750	BODY	12/17/2020	22.2	20.4	0.050	1163	7416	3.750	77.800	75.000	-3.60%

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 70 of 126	

**Table 10-6  
System Verification Results – 10g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
H	1750	BODY	12/02/2020	24.2	23.4	0.100	1150	7357	2.030	19.400	20.300	4.64%
J	1900	BODY	11/29/2020	22.9	24.2	0.100	5d080	7571	2.000	20.600	20.000	-2.91%
J	1900	BODY	12/07/2020	24.9	24.2	0.100	5d080	7410	2.080	20.600	20.800	0.97%
K	2450	BODY	12/21/2020	23.0	23.0	0.100	981	7409	2.410	24.200	24.100	-0.41%
K	2600	BODY	12/21/2020	23.0	23.0	0.100	1004	7409	2.450	24.700	24.500	-0.81%
AM2	5250	BODY	12/21/2020	21.6	20.6	0.050	1163	7416	1.070	21.500	21.400	-0.47%
AM2	5600	BODY	12/21/2020	21.6	20.6	0.050	1163	7416	1.130	22.300	22.600	1.35%

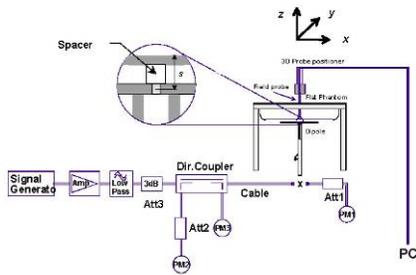

**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 71 of 126

# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

**Table 11-1  
CDMA BC10 (§90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.5	24.84	0.04	Right	Cheek	21129	1:1	0.192	1.164	0.223	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.5	24.84	0.08	Right	Tilt	21129	1:1	0.087	1.164	0.101	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.5	24.84	0.08	Left	Cheek	21129	1:1	0.165	1.164	0.192	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.5	24.84	0.11	Left	Tilt	21129	1:1	0.084	1.164	0.098	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.5	24.83	0.07	Right	Cheek	21129	1:1	0.202	1.167	0.236	A1
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.5	24.83	-0.01	Right	Tilt	21129	1:1	0.089	1.167	0.104	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.5	24.83	0.08	Left	Cheek	21129	1:1	0.165	1.167	0.193	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.5	24.83	0.10	Left	Tilt	21129	1:1	0.082	1.167	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
CDMA BC0 (§22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	24.54	0.17	Right	Cheek	21129	1:1	0.203	1.247	0.253	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	24.54	0.12	Right	Tilt	21129	1:1	0.088	1.247	0.110	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	24.54	0.13	Left	Cheek	21129	1:1	0.167	1.247	0.208	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	24.54	0.13	Left	Tilt	21129	1:1	0.084	1.247	0.105	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	24.55	-0.01	Right	Cheek	21129	1:1	0.229	1.245	0.285	A2
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	24.55	0.10	Right	Tilt	21129	1:1	0.098	1.245	0.122	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	24.55	0.04	Left	Cheek	21129	1:1	0.190	1.245	0.237	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	24.55	0.11	Left	Tilt	21129	1:1	0.088	1.245	0.110	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 72 of 126

**Table 11-3  
PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.3	25.07	-0.07	Right	Cheek	21137	1:1	0.207	1.054	0.218	
1880.00	600	PCS CDMA	RC3 / SO55	25.3	25.07	-0.16	Right	Tilt	21137	1:1	0.131	1.054	0.138	
1880.00	600	PCS CDMA	RC3 / SO55	25.3	25.07	-0.04	Left	Cheek	21137	1:1	0.222	1.054	0.234	
1880.00	600	PCS CDMA	RC3 / SO55	25.3	25.07	-0.01	Left	Tilt	21137	1:1	0.147	1.054	0.155	
1880.00	600	PCS CDMA	EVDO Rev. A	25.3	25.19	-0.15	Right	Cheek	21137	1:1	0.219	1.026	0.225	
1880.00	600	PCS CDMA	EVDO Rev. A	25.3	25.19	-0.06	Right	Tilt	21137	1:1	0.136	1.026	0.140	
1880.00	600	PCS CDMA	EVDO Rev. A	25.3	25.19	-0.21	Left	Cheek	21137	1:1	0.235	1.026	0.241	A3
1880.00	600	PCS CDMA	EVDO Rev. A	25.3	25.19	-0.13	Left	Tilt	21137	1:1	0.143	1.026	0.147	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4  
GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.70	-0.05	Right	Cheek	21129	1	1:8.3	0.147	1.072	0.158	
836.60	190	GSM 850	GSM	34.0	33.70	-0.14	Right	Tilt	21129	1	1:8.3	0.069	1.072	0.074	
836.60	190	GSM 850	GSM	34.0	33.70	0.06	Left	Cheek	21129	1	1:8.3	0.116	1.072	0.124	
836.60	190	GSM 850	GSM	34.0	33.70	0.05	Left	Tilt	21129	1	1:8.3	0.059	1.072	0.063	
836.60	190	GSM 850	GPRS	30.0	28.65	0.07	Right	Cheek	21129	4	1:2.076	0.189	1.365	0.258	A4
836.60	190	GSM 850	GPRS	30.0	28.65	0.16	Right	Tilt	21129	4	1:2.076	0.084	1.365	0.115	
836.60	190	GSM 850	GPRS	30.0	28.65	0.13	Left	Cheek	21129	4	1:2.076	0.147	1.365	0.201	
836.60	190	GSM 850	GPRS	30.0	28.65	-0.14	Left	Tilt	21129	4	1:2.076	0.069	1.365	0.094	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 73 of 126

**Table 11-5  
GSM 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	31.2	30.91	-0.13	Right	Cheek	21137	1	1:8.3	0.089	1.069	0.095	
1880.00	661	GSM 1900	GSM	31.2	30.91	0.13	Right	Tilt	21137	1	1:8.3	0.057	1.069	0.061	
1880.00	661	GSM 1900	GSM	31.2	30.91	-0.14	Left	Cheek	21137	1	1:8.3	0.092	1.069	0.098	
1880.00	661	GSM 1900	GSM	31.2	30.91	-0.21	Left	Tilt	21137	1	1:8.3	0.064	1.069	0.068	
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.19	Right	Cheek	21137	4	1:2.076	0.111	1.306	0.145	
1880.00	661	GSM 1900	GPRS	27.0	25.84	0.02	Right	Tilt	21137	4	1:2.076	0.074	1.306	0.097	
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.15	Left	Cheek	21137	4	1:2.076	0.122	1.306	0.159	A5
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.12	Left	Tilt	21137	4	1:2.076	0.082	1.306	0.107	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-6  
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.5	25.25	0.00	Right	Cheek	21129	1:1	0.216	1.059	0.229	A6
836.60	4183	UMTS 850	RMC	25.5	25.25	0.13	Right	Tilt	21129	1:1	0.092	1.059	0.097	
836.60	4183	UMTS 850	RMC	25.5	25.25	-0.10	Left	Cheek	21129	1:1	0.195	1.059	0.207	
836.60	4183	UMTS 850	RMC	25.5	25.25	0.06	Left	Tilt	21129	1:1	0.095	1.059	0.101	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.10	Right	Cheek	21137	1:1	0.189	1.040	0.197	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.04	Right	Tilt	21137	1:1	0.135	1.040	0.140	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.01	Left	Cheek	21137	1:1	0.220	1.040	0.229	A7
1732.40	1412	UMTS 1750	RMC	25.3	25.13	-0.06	Left	Tilt	21137	1:1	0.150	1.040	0.156	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFK330PM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 74 of 126

**Table 11-8  
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.06	Right	Cheek	21137	1:1	0.225	1.067	0.240	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	0.10	Right	Tilt	21137	1:1	0.141	1.067	0.150	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.12	Left	Cheek	21137	1:1	0.232	1.067	0.248	A8
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.15	Left	Tilt	21137	1:1	0.165	1.067	0.176	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-9  
LTE Band 71 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	0.00	0	Right	Cheek	QPSK	1	50	21152	1:1	0.202	1.047	0.211	A9
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.06	1	Right	Cheek	QPSK	50	50	21152	1:1	0.161	1.081	0.174	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	-0.13	0	Right	Tilt	QPSK	1	50	21152	1:1	0.100	1.047	0.105	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.03	1	Right	Tilt	QPSK	50	50	21152	1:1	0.077	1.081	0.083	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	0.04	0	Left	Cheek	QPSK	1	50	21152	1:1	0.166	1.047	0.174	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.03	1	Left	Cheek	QPSK	50	50	21152	1:1	0.137	1.081	0.148	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	0.14	0	Left	Tilt	QPSK	1	50	21152	1:1	0.098	1.047	0.103	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.05	1	Left	Tilt	QPSK	50	50	21152	1:1	0.074	1.081	0.080	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-10  
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	0.04	0	Right	Cheek	QPSK	1	25	21152	1:1	0.222	1.052	0.234	A10
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.05	1	Right	Cheek	QPSK	25	12	21152	1:1	0.173	1.069	0.185	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	0.03	0	Right	Tilt	QPSK	1	25	21152	1:1	0.126	1.052	0.133	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.09	1	Right	Tilt	QPSK	25	12	21152	1:1	0.097	1.069	0.104	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	0.17	0	Left	Cheek	QPSK	1	25	21152	1:1	0.177	1.052	0.186	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.08	1	Left	Cheek	QPSK	25	12	21152	1:1	0.142	1.069	0.152	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	-0.04	0	Left	Tilt	QPSK	1	25	21152	1:1	0.101	1.052	0.106	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.03	1	Left	Tilt	QPSK	25	12	21152	1:1	0.079	1.069	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: ZNFK330PM	 PCTEST Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 75 of 126

**Table 11-11  
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.19	0	Right	Cheek	QPSK	1	0	21152	1:1	0.226	1.074	0.243	A11
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	-0.01	1	Right	Cheek	QPSK	25	25	21152	1:1	0.197	1.079	0.213	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	-0.02	0	Right	Tilt	QPSK	1	0	21152	1:1	0.130	1.074	0.140	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	-0.20	1	Right	Tilt	QPSK	25	25	21152	1:1	0.116	1.079	0.125	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.12	0	Left	Cheek	QPSK	1	0	21152	1:1	0.183	1.074	0.197	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	0.06	1	Left	Cheek	QPSK	25	25	21152	1:1	0.170	1.079	0.183	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.07	0	Left	Tilt	QPSK	1	0	21152	1:1	0.107	1.074	0.115	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	0.05	1	Left	Tilt	QPSK	25	25	21152	1:1	0.091	1.079	0.098	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12  
LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.02	0	Right	Cheek	QPSK	1	36	21152	1:1	0.204	1.089	0.222	A12
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.00	1	Right	Cheek	QPSK	36	18	21152	1:1	0.168	1.042	0.175	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.13	0	Right	Tilt	QPSK	1	36	21152	1:1	0.093	1.089	0.101	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.05	1	Right	Tilt	QPSK	36	18	21152	1:1	0.078	1.042	0.081	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	0.12	0	Left	Cheek	QPSK	1	36	21152	1:1	0.204	1.089	0.222	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.03	1	Left	Cheek	QPSK	36	18	21152	1:1	0.169	1.042	0.176	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.21	0	Left	Tilt	QPSK	1	36	21152	1:1	0.100	1.089	0.109	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.15	1	Left	Tilt	QPSK	36	18	21152	1:1	0.081	1.042	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-13  
LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.14	0	Right	Cheek	QPSK	1	99	21178	1:1	0.193	1.079	0.208	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.03	1	Right	Cheek	QPSK	50	0	21178	1:1	0.153	1.050	0.161	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.17	0	Right	Tilt	QPSK	1	99	21178	1:1	0.136	1.079	0.147	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.06	1	Right	Tilt	QPSK	50	0	21178	1:1	0.111	1.050	0.117	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.20	0	Left	Cheek	QPSK	1	99	21178	1:1	0.200	1.079	0.216	A13
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.18	1	Left	Cheek	QPSK	50	0	21178	1:1	0.162	1.050	0.170	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.04	0	Left	Tilt	QPSK	1	99	21178	1:1	0.154	1.079	0.166	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.12	1	Left	Tilt	QPSK	50	0	21178	1:1	0.122	1.050	0.128	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFK330PM	 PCTEST Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 76 of 126

**Table 11-14  
LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	0.06	0	Right	Cheek	QPSK	1	50	21178	1:1	0.217	1.143	0.248	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.12	1	Right	Cheek	QPSK	50	0	21178	1:1	0.177	1.140	0.202	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.03	0	Right	Tilt	QPSK	1	50	21178	1:1	0.144	1.143	0.165	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	0.07	1	Right	Tilt	QPSK	50	0	21178	1:1	0.108	1.140	0.123	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	0.04	0	Left	Cheek	QPSK	1	50	21178	1:1	0.272	1.143	0.311	A14
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.04	1	Left	Cheek	QPSK	50	0	21178	1:1	0.207	1.140	0.236	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.06	0	Left	Tilt	QPSK	1	50	21178	1:1	0.180	1.143	0.206	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.02	1	Left	Tilt	QPSK	50	0	21178	1:1	0.121	1.140	0.138	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-15  
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink - Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.15	0	Right	Cheek	QPSK	1	50	21186	1:1.58	0.005	1.138	0.006	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	25.7	24.93	-0.19	0	Right	Cheek	QPSK	1	99	21186	1:1.58	0.003	1.194	0.004	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.11	1	Right	Cheek	QPSK	50	0	21186	1:1.58	0.001	1.130	0.001	
1 CC Uplink - Power Class 2	NA	2636.50	41055	Mid-High	LTE Band 41	20	27.7	27.14	0.19	0	Right	Cheek	QPSK	1	50	21186	1:2.31	0.006	1.138	0.007	A15
1 CC Uplink - Power Class 2	NA	2636.50	41055	Mid-High	LTE Band 41	20	27.7	27.08	-0.19	0	Right	Cheek	QPSK	1	99	21186	1:2.31	0.004	1.153	0.005	
2 CC Uplink - Power Class 3	PCC	2636.50	41055	Mid-High	LTE Band 41	20	25.7	24.85	0.14	0	Right	Cheek	QPSK	1	99	21186	1:1.58	0.004	1.216	0.005	
	SCC	2656.30	41253											1	0						
2 CC Uplink - Power Class 2	PCC	2636.50	41055	Mid-High	LTE Band 41	20	27.7	26.98	0.12	0	Right	Cheek	QPSK	1	99	21186	1:2.31	0.005	1.180	0.006	
	SCC	2656.30	41253											1	0						
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.12	0	Right	Tilt	QPSK	1	50	21186	1:1.58	0.000	1.138	0.000	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.13	1	Right	Tilt	QPSK	50	0	21186	1:1.58	0.000	1.130	0.000	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.12	0	Left	Cheek	QPSK	1	50	21186	1:1.58	0.001	1.138	0.001	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.18	1	Left	Cheek	QPSK	50	0	21186	1:1.58	0.000	1.130	0.000	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.13	0	Left	Tilt	QPSK	1	50	21186	1:1.58	0.002	1.138	0.002	
1 CC Uplink - Power Class 3	NA	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.19	1	Left	Tilt	QPSK	50	0	21186	1:1.58	0.002	1.130	0.002	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 77 of 126

**Table 11-16  
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	18.5	18.12	-0.01	Right	Cheek	21319	1	99.0	0.404	-	1.091	1.010	-	
2437	6	802.11b	DSSS	22	18.5	18.12	0.02	Right	Tilt	21319	1	99.0	0.390	-	1.091	1.010	-	
2412	1	802.11b	DSSS	22	18.5	17.99	-0.07	Left	Cheek	21319	1	99.0	0.963	0.664	1.125	1.010	0.754	
2437	6	802.11b	DSSS	22	18.5	18.12	-0.03	Left	Cheek	21319	1	99.0	1.183	0.856	1.091	1.010	0.943	A16
2462	11	802.11b	DSSS	22	18.5	17.66	-0.10	Left	Cheek	21319	1	99.0	1.099	0.734	1.213	1.010	0.899	
2437	6	802.11b	DSSS	22	18.5	18.12	-0.01	Left	Tilt	21319	1	99.0	0.875	0.679	1.091	1.010	0.748	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-17  
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	12.0	11.82	0.10	Right	Cheek	21293	6	96.9	0.683	-	1.042	1.032	-	
5280	56	802.11a	OFDM	20	12.0	11.82	0.18	Right	Tilt	21293	6	96.9	0.894	0.380	1.042	1.032	0.409	
5280	56	802.11a	OFDM	20	12.0	11.82	0.21	Left	Cheek	21293	6	96.9	0.853	-	1.042	1.032	-	
5260	52	802.11a	OFDM	20	12.0	11.72	0.12	Left	Tilt	21293	6	96.9	0.909	0.839	1.067	1.032	0.924	
5280	56	802.11a	OFDM	20	12.0	11.82	0.16	Left	Tilt	21293	6	96.9	1.553	0.880	1.042	1.032	0.946	
5600	120	802.11a	OFDM	20	12.0	11.88	0.10	Right	Cheek	21293	6	96.9	0.596	-	1.028	1.032	-	
5600	120	802.11a	OFDM	20	12.0	11.88	0.10	Right	Tilt	21293	6	96.9	0.787	0.338	1.028	1.032	0.359	
5600	120	802.11a	OFDM	20	12.0	11.88	0.14	Left	Cheek	21293	6	96.9	1.020	0.653	1.028	1.032	0.693	
5600	120	802.11a	OFDM	20	12.0	11.88	0.14	Left	Tilt	21293	6	96.9	1.002	0.834	1.028	1.032	0.885	
5620	124	802.11a	OFDM	20	12.0	11.83	0.19	Left	Tilt	21293	6	96.9	2.051	0.872	1.040	1.032	0.936	
5620	124	802.11a	OFDM	20	12.0	11.83	-0.16	Left	Tilt	21293	6	96.9	1.464	0.808	1.040	1.032	0.867	
5745	149	802.11a	OFDM	20	11.5	11.29	0.18	Right	Cheek	21293	6	96.9	0.716	-	1.050	1.032	-	
5745	149	802.11a	OFDM	20	11.5	11.29	0.17	Right	Tilt	21293	6	96.9	0.950	0.479	1.050	1.032	0.519	
5745	149	802.11a	OFDM	20	11.5	11.29	0.13	Left	Cheek	21293	6	96.9	1.529	0.819	1.050	1.032	0.887	
5785	157	802.11a	OFDM	20	11.5	11.21	0.14	Left	Cheek	21293	6	96.9	1.837	0.881	1.069	1.032	0.972	
5745	149	802.11a	OFDM	20	11.5	11.29	0.18	Left	Tilt	21293	6	96.9	2.266	0.958	1.050	1.032	1.038	
5785	157	802.11a	OFDM	20	11.5	11.21	-0.16	Left	Tilt	21293	6	96.9	2.354	0.996	1.069	1.032	1.099	A17
5825	165	802.11a	OFDM	20	11.5	11.21	0.12	Left	Tilt	21293	6	96.9	2.343	0.979	1.069	1.032	1.080	
5785	157	802.11a	OFDM	20	11.5	11.21	0.13	Left	Tilt	21293	6	96.9	1.939	0.928	1.069	1.032	1.024	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 78 of 126	

**Table 11-18  
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480.00	78	Bluetooth	FHSS	10.5	9.97	0.14	Right	Cheek	21319	1	76.6	0.033	1.130	1.305	0.049	
2480.00	78	Bluetooth	FHSS	10.5	9.97	0.06	Right	Tilt	21319	1	76.6	0.037	1.130	1.305	0.055	
2480.00	78	Bluetooth	FHSS	10.5	9.97	0.02	Left	Cheek	21319	1	76.6	0.086	1.130	1.305	0.127	A18
2480.00	78	Bluetooth	FHSS	10.5	9.97	0.07	Left	Tilt	21319	1	76.6	0.065	1.130	1.305	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 79 of 126	

## 11.2 Standalone Body-Worn SAR Data

**Table 11-19  
GSM/UMTS/CDMA Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	25.5	24.85	-0.08	10 mm	21129	N/A	1:1	back	0.336	1.161	0.390	A19
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	25.5	24.55	0.00	10 mm	21129	N/A	1:1	back	0.427	1.245	0.532	A21
1851.25	25	PCS CDMA	TDSO / SO32	25.3	25.09	-0.12	10 mm	21137	N/A	1:1	back	0.936	1.050	0.983	
1880.00	600	PCS CDMA	TDSO / SO32	25.3	25.18	-0.12	10 mm	21137	N/A	1:1	back	0.938	1.028	0.964	A23
1908.75	1175	PCS CDMA	TDSO / SO32	25.3	25.20	-0.08	10 mm	21137	N/A	1:1	back	0.911	1.023	0.932	
836.60	190	GSM 850	GSM	34.0	33.70	0.04	10 mm	21129	1	1:8.3	back	0.322	1.072	0.345	
836.60	190	GSM 850	GPRS	30.0	28.65	-0.06	10 mm	21129	4	1:2.076	back	0.414	1.365	0.565	A25
1880.00	661	GSM 1900	GSM	31.2	30.91	-0.12	10 mm	21137	1	1:8.3	back	0.446	1.069	0.477	
1850.20	512	GSM 1900	GPRS	27.0	25.93	-0.13	10 mm	21137	4	1:2.076	back	0.636	1.279	0.813	A26
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.12	10 mm	21137	4	1:2.076	back	0.583	1.306	0.761	
1909.80	810	GSM 1900	GPRS	27.0	26.00	-0.13	10 mm	21137	4	1:2.076	back	0.534	1.259	0.672	
836.60	4183	UMTS 850	RMC	25.5	25.25	-0.01	10 mm	21129	N/A	1:1	back	0.538	1.059	0.570	A27
1712.40	1312	UMTS 1750	RMC	25.3	25.11	-0.01	10 mm	21137	N/A	1:1	back	0.865	1.045	0.904	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.01	10 mm	21137	N/A	1:1	back	0.930	1.040	0.967	
1752.60	1513	UMTS 1750	RMC	25.3	25.15	-0.01	10 mm	21137	N/A	1:1	back	0.993	1.035	1.028	A28
1752.60	1513	UMTS 1750	RMC	25.3	25.15	-0.12	10 mm	21137	N/A	1:1	back	0.977	1.035	1.011	
1852.40	9262	UMTS 1900	RMC	25.3	25.05	-0.12	10 mm	21137	N/A	1:1	back	1.120	1.059	1.186	A29
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.13	10 mm	21137	N/A	1:1	back	1.110	1.067	1.184	
1907.60	9538	UMTS 1900	RMC	25.3	25.08	-0.12	10 mm	21137	N/A	1:1	back	1.080	1.052	1.136	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 80 of 126	

**Table 11-20  
LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Accessory	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	0.00	0	21145	QPSK	1	50	10 mm	N/A	back	1:1	0.322	1.047	0.337	A30
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.04	1	21145	QPSK	50	50	10 mm	N/A	back	1:1	0.263	1.081	0.284	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	-0.03	0	21145	QPSK	1	25	10 mm	N/A	back	1:1	0.384	1.052	0.404	A32
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.00	1	21145	QPSK	25	12	10 mm	N/A	back	1:1	0.315	1.069	0.337	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.00	0	21145	QPSK	1	0	10 mm	N/A	back	1:1	0.358	1.074	0.384	A33
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	-0.01	1	21145	QPSK	25	25	10 mm	N/A	back	1:1	0.303	1.079	0.327	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	0.19	0	21145	QPSK	1	36	10 mm	N/A	back	1:1	0.530	1.089	0.577	A35
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	-0.14	1	21145	QPSK	36	18	10 mm	N/A	back	1:1	0.427	1.042	0.445	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.3	24.94	0.00	0	21160	QPSK	1	0	10 mm	N/A	back	1:1	0.628	1.086	0.682	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.01	0	21160	QPSK	1	99	10 mm	N/A	back	1:1	0.737	1.079	0.795	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.3	24.90	0.01	0	21160	QPSK	1	0	10 mm	N/A	back	1:1	0.782	1.096	0.857	A36
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.02	1	21160	QPSK	50	0	10 mm	N/A	back	1:1	0.568	1.050	0.596	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.3	24.02	0.01	1	21160	QPSK	100	0	10 mm	N/A	back	1:1	0.562	1.067	0.600	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.3	24.62	-0.11	0	21160	QPSK	1	50	10 mm	N/A	back	1:1	1.040	1.169	1.216	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.12	0	21160	QPSK	1	50	10 mm	N/A	back	1:1	0.928	1.143	1.061	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.12	0	21160	QPSK	1	50	10 mm	N/A	back	1:1	1.120	1.151	1.289	A37
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.15	0	21160	QPSK	1	50	10 mm	Headphones	back	1:1	0.332	1.151	0.382	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.3	23.66	-0.10	1	21160	QPSK	50	25	10 mm	N/A	back	1:1	0.866	1.159	1.004	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.20	1	21160	QPSK	50	0	10 mm	N/A	back	1:1	0.719	1.140	0.820	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.3	23.70	-0.12	1	21160	QPSK	50	0	10 mm	N/A	back	1:1	0.906	1.148	1.040	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.68	-0.11	1	21160	QPSK	100	0	10 mm	N/A	back	1:1	0.880	1.153	1.015	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.21	0	21160	QPSK	1	50	10 mm	N/A	back	1:1	0.965	1.151	1.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram										
Uncontrolled Exposure/General Population																				

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 81 of 126	

**Table 11-21  
LTE Band 41 Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink / 2 CC Uplink Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.7	24.91	-0.11	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.889	1.199	1.066	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.7	24.95	-0.06	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.898	1.189	1.068	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.7	24.69	-0.08	0	21186	QPSK	1	99	10 mm	back	1:1.58	0.833	1.262	1.051	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.7	25.04	-0.17	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.894	1.164	1.041	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.07	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.590	1.138	0.671	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.7	24.90	0.06	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.418	1.202	0.502	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	-0.03	1	21186	QPSK	50	0	10 mm	back	1:1.58	0.494	1.130	0.558	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.09	-0.05	1	21186	QPSK	100	0	10 mm	back	1:1.58	0.531	1.151	0.611	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	27.08	-0.02	0	21186	QPSK	1	50	10 mm	back	1:2.31	0.919	1.153	1.060	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	26.71	0.00	0	21186	QPSK	1	99	10 mm	back	1:2.31	0.859	1.256	1.079	
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	25.7	24.68	-0.17	0	21186	QPSK	1	99	10 mm	back	1:1.58	0.864	1.265	1.093	
	SCC	2569.30	40383										1	0							
2 CC Uplink - Power Class 2	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	26.83	0.01	0	21186	QPSK	1	99	10 mm	back	1:2.31	0.899	1.222	1.099	
	SCC	2569.30	40383										1	0							
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.7	24.91	-0.11	0	21186	QPSK	1	50	10 mm	back	1:1.58	0.889	1.199	1.066	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	27.08	-0.02	0	21186	QPSK	1	50	10 mm	back	1:2.31	0.998	1.153	1.151	A38
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 82 of 126

**Table 11-22  
DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	21.0	20.44	0.14	10 mm	21327	1	back	99.0	0.604	0.400	1.138	1.010	0.460	A40
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-23  
NII Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	18.0	17.35	-0.12	10 mm	21319	6	back	96.9	0.890	0.442	1.161	1.032	0.530	A41
5620	124	802.11a	OFDM	20	18.0	17.44	0.11	10 mm	21319	6	back	96.9	0.517	0.235	1.138	1.032	0.276	
5825	165	802.11a	OFDM	20	17.0	16.88	0.08	10 mm	21319	6	back	96.9	0.850	0.393	1.028	1.032	0.417	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-24  
DSS Body-Worn SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #	
MHz	Ch.											(W/kg)			(W/kg)		
2480	78	Bluetooth	FHSS	10.5	9.97	0.11	10 mm	21319	1	back	76.6	0.024	1.130	1.305	0.035	A43	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 83 of 126

# 11.3 Standalone Hotspot SAR Data

**Table 11-25  
GPRS/UMTS/CDMA Hotspot SAR**

MEASUREMENT RESULTS															
FREQUENCY MHz	Ch.	Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
												(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (900S)	EVDO Rev. 0	25.5	24.81	-0.03	10 mm	21129	N/A	1:1	back	0.385	1.172	0.451	A20
820.10	564	CDMA BC10 (900S)	EVDO Rev. 0	25.5	24.81	-0.04	10 mm	21129	N/A	1:1	front	0.257	1.172	0.301	
820.10	564	CDMA BC10 (900S)	EVDO Rev. 0	25.5	24.81	0.16	10 mm	21129	N/A	1:1	bottom	0.333	1.172	0.390	
820.10	564	CDMA BC10 (900S)	EVDO Rev. 0	25.5	24.81	0.18	10 mm	21129	N/A	1:1	right	0.275	1.172	0.322	
820.10	564	CDMA BC10 (900S)	EVDO Rev. 0	25.5	24.81	0.07	10 mm	21129	N/A	1:1	left	0.129	1.172	0.151	
824.70	1013	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.45	-0.04	10 mm	21129	N/A	1:1	back	0.442	1.274	0.563	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.54	-0.01	10 mm	21129	N/A	1:1	back	0.514	1.247	0.641	
848.31	777	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.51	-0.02	10 mm	21129	N/A	1:1	back	0.621	1.256	0.780	A22
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.54	0.00	10 mm	21129	N/A	1:1	front	0.376	1.247	0.469	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.54	0.01	10 mm	21129	N/A	1:1	bottom	0.479	1.247	0.597	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.54	0.02	10 mm	21129	N/A	1:1	right	0.284	1.247	0.354	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.5	24.54	0.03	10 mm	21129	N/A	1:1	left	0.167	1.247	0.208	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.3	25.11	-0.21	10 mm	21137	N/A	1:1	back	0.984	1.045	1.028	A24
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.12	10 mm	21137	N/A	1:1	back	0.974	1.028	1.001	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.3	25.20	-0.12	10 mm	21137	N/A	1:1	back	0.971	1.023	0.993	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.01	10 mm	21137	N/A	1:1	front	0.451	1.028	0.464	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.3	25.11	0.05	10 mm	21137	N/A	1:1	bottom	0.876	1.045	0.915	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.03	10 mm	21137	N/A	1:1	bottom	0.929	1.028	0.955	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.3	25.20	-0.17	10 mm	21137	N/A	1:1	bottom	0.862	1.023	0.882	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	0.02	10 mm	21137	N/A	1:1	left	0.536	1.028	0.551	
836.60	190	GSM 850	GPRS	30.0	28.65	-0.06	10 mm	21129	4	1:2.076	back	0.414	1.365	0.565	A25
836.60	190	GSM 850	GPRS	30.0	28.65	-0.03	10 mm	21129	4	1:2.076	front	0.252	1.365	0.344	
836.60	190	GSM 850	GPRS	30.0	28.65	0.00	10 mm	21129	4	1:2.076	bottom	0.367	1.365	0.501	
836.60	190	GSM 850	GPRS	30.0	28.65	-0.06	10 mm	21129	4	1:2.076	right	0.255	1.365	0.348	
836.60	190	GSM 850	GPRS	30.0	28.65	0.06	10 mm	21129	4	1:2.076	left	0.127	1.365	0.173	
1850.20	512	GSM 1900	GPRS	27.0	25.93	-0.13	10 mm	21137	4	1:2.076	back	0.636	1.279	0.813	A26
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.12	10 mm	21137	4	1:2.076	back	0.583	1.306	0.761	
1909.80	810	GSM 1900	GPRS	27.0	26.00	-0.13	10 mm	21137	4	1:2.076	back	0.534	1.259	0.672	
1880.00	661	GSM 1900	GPRS	27.0	25.84	0.11	10 mm	21137	4	1:2.076	front	0.222	1.306	0.290	
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.03	10 mm	21137	4	1:2.076	bottom	0.503	1.306	0.657	
1880.00	661	GSM 1900	GPRS	27.0	25.84	-0.01	10 mm	21137	4	1:2.076	left	0.289	1.306	0.377	
836.60	4183	UMTS 850	RMC	25.5	25.25	-0.01	10 mm	21129	N/A	1:1	back	0.538	1.059	0.570	A27
836.60	4183	UMTS 850	RMC	25.5	25.25	-0.03	10 mm	21129	N/A	1:1	front	0.391	1.059	0.414	
836.60	4183	UMTS 850	RMC	25.5	25.25	0.00	10 mm	21129	N/A	1:1	bottom	0.482	1.059	0.510	
836.60	4183	UMTS 850	RMC	25.5	25.25	0.01	10 mm	21129	N/A	1:1	right	0.324	1.059	0.343	
836.60	4183	UMTS 850	RMC	25.5	25.25	0.01	10 mm	21129	N/A	1:1	left	0.152	1.059	0.161	
1712.40	1312	UMTS 1750	RMC	25.3	25.11	-0.01	10 mm	21137	N/A	1:1	back	0.865	1.045	0.904	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.01	10 mm	21137	N/A	1:1	back	0.930	1.040	0.967	
1752.80	1513	UMTS 1750	RMC	25.3	25.15	-0.01	10 mm	21137	N/A	1:1	back	0.993	1.035	1.028	A28
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.02	10 mm	21137	N/A	1:1	front	0.563	1.040	0.586	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	-0.02	10 mm	21137	N/A	1:1	bottom	0.677	1.040	0.704	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	-0.05	10 mm	21137	N/A	1:1	left	0.607	1.040	0.631	
1752.80	1513	UMTS 1750	RMC	25.3	25.15	-0.12	10 mm	21137	N/A	1:1	back	0.977	1.035	1.011	
1852.40	9262	UMTS 1900	RMC	25.3	25.05	-0.12	10 mm	21137	N/A	1:1	back	1.120	1.059	1.186	A29
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.13	10 mm	21137	N/A	1:1	back	1.110	1.067	1.184	
1907.60	9538	UMTS 1900	RMC	25.3	25.08	-0.12	10 mm	21137	N/A	1:1	back	1.080	1.052	1.136	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	0.04	10 mm	21137	N/A	1:1	front	0.401	1.067	0.428	
1852.40	9262	UMTS 1900	RMC	25.3	25.05	-0.05	10 mm	21137	N/A	1:1	bottom	0.937	1.059	0.992	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.04	10 mm	21137	N/A	1:1	bottom	0.968	1.067	1.033	
1907.60	9538	UMTS 1900	RMC	25.3	25.08	0.01	10 mm	21137	N/A	1:1	bottom	0.913	1.052	0.960	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.07	10 mm	21137	N/A	1:1	left	0.582	1.067	0.621	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body					
Spatial Peak										1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population										averaged over 1 gram					

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 84 of 126

**Table 11-26  
LTE Band 71 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	0.00	0	21145	QPSK	1	50	10 mm	back	1:1	0.322	1.047	0.337	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.04	1	21145	QPSK	50	50	10 mm	back	1:1	0.263	1.081	0.284	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	-0.01	0	21145	QPSK	1	50	10 mm	front	1:1	0.241	1.047	0.252	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.03	1	21145	QPSK	50	50	10 mm	front	1:1	0.193	1.081	0.209	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	-0.04	0	21145	QPSK	1	50	10 mm	bottom	1:1	0.178	1.047	0.186	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	-0.03	1	21145	QPSK	50	50	10 mm	bottom	1:1	0.158	1.081	0.171	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	-0.01	0	21145	QPSK	1	50	10 mm	right	1:1	0.434	1.047	0.454	A31
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	0.01	1	21145	QPSK	50	50	10 mm	right	1:1	0.343	1.081	0.371	
680.50	133297	Mid	LTE Band 71	20	25.5	25.30	-0.09	0	21145	QPSK	1	50	10 mm	left	1:1	0.216	1.047	0.226	
680.50	133297	Mid	LTE Band 71	20	24.5	24.16	-0.04	1	21145	QPSK	50	50	10 mm	left	1:1	0.161	1.081	0.174	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-27  
LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	-0.03	0	21145	QPSK	1	25	10 mm	back	1:1	0.384	1.052	0.404	A32
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.00	1	21145	QPSK	25	12	10 mm	back	1:1	0.315	1.069	0.337	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	0.00	0	21145	QPSK	1	25	10 mm	front	1:1	0.238	1.052	0.250	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.00	1	21145	QPSK	25	12	10 mm	front	1:1	0.183	1.069	0.196	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	-0.01	0	21145	QPSK	1	25	10 mm	bottom	1:1	0.266	1.052	0.280	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.02	1	21145	QPSK	25	12	10 mm	bottom	1:1	0.218	1.069	0.233	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	0.02	0	21145	QPSK	1	25	10 mm	right	1:1	0.293	1.052	0.308	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.01	1	21145	QPSK	25	12	10 mm	right	1:1	0.238	1.069	0.254	
707.50	23095	Mid	LTE Band 12	10	25.5	25.28	-0.02	0	21145	QPSK	1	25	10 mm	left	1:1	0.235	1.052	0.247	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.02	1	21145	QPSK	25	12	10 mm	left	1:1	0.182	1.069	0.195	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 85 of 126

**Table 11-28  
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.00	0	21145	QPSK	1	0	10 mm	back	1:1	0.358	1.074	0.384	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	-0.01	1	21145	QPSK	25	25	10 mm	back	1:1	0.303	1.079	0.327	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.02	0	21145	QPSK	1	0	10 mm	front	1:1	0.273	1.074	0.293	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	0.00	1	21145	QPSK	25	25	10 mm	front	1:1	0.255	1.079	0.275	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.01	0	21145	QPSK	1	0	10 mm	bottom	1:1	0.368	1.074	0.395	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	-0.13	1	21145	QPSK	25	25	10 mm	bottom	1:1	0.338	1.079	0.365	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	0.05	0	21145	QPSK	1	0	10 mm	right	1:1	0.403	1.074	0.433	A34
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	0.04	1	21145	QPSK	25	25	10 mm	right	1:1	0.327	1.079	0.353	
782.00	23230	Mid	LTE Band 13	10	25.5	25.19	-0.01	0	21145	QPSK	1	0	10 mm	left	1:1	0.243	1.074	0.261	
782.00	23230	Mid	LTE Band 13	10	24.5	24.17	0.01	1	21145	QPSK	25	25	10 mm	left	1:1	0.221	1.079	0.238	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-29  
LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	0.19	0	21145	QPSK	1	36	10 mm	back	1:1	0.530	1.089	0.577	A35
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	-0.14	1	21145	QPSK	36	18	10 mm	back	1:1	0.427	1.042	0.445	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	0.04	0	21145	QPSK	1	36	10 mm	front	1:1	0.312	1.089	0.340	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	-0.01	1	21145	QPSK	36	18	10 mm	front	1:1	0.256	1.042	0.267	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.03	0	21145	QPSK	1	36	10 mm	bottom	1:1	0.461	1.089	0.502	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	-0.03	1	21145	QPSK	36	18	10 mm	bottom	1:1	0.378	1.042	0.394	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.02	0	21145	QPSK	1	36	10 mm	right	1:1	0.321	1.089	0.350	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.02	1	21145	QPSK	36	18	10 mm	right	1:1	0.262	1.042	0.273	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.13	-0.04	0	21145	QPSK	1	36	10 mm	left	1:1	0.135	1.089	0.147	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.32	0.05	1	21145	QPSK	36	18	10 mm	left	1:1	0.107	1.042	0.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 86 of 126

**Table 11-30  
LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.3	24.94	0.00	0	21160	QPSK	1	0	10 mm	back	1:1	0.628	1.086	0.682	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.01	0	21160	QPSK	1	99	10 mm	back	1:1	0.737	1.079	0.795	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.3	24.90	0.01	0	21160	QPSK	1	0	10 mm	back	1:1	0.782	1.096	0.857	A36
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.02	1	21160	QPSK	50	0	10 mm	back	1:1	0.568	1.050	0.596	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.3	24.02	0.01	1	21160	QPSK	100	0	10 mm	back	1:1	0.562	1.067	0.600	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	0.00	0	21160	QPSK	1	99	10 mm	front	1:1	0.484	1.079	0.522	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.01	1	21160	QPSK	50	0	10 mm	front	1:1	0.420	1.050	0.441	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	0.01	0	21160	QPSK	1	99	10 mm	bottom	1:1	0.647	1.079	0.698	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.00	1	21160	QPSK	50	0	10 mm	bottom	1:1	0.538	1.050	0.565	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.01	0	21160	QPSK	1	99	10 mm	left	1:1	0.560	1.079	0.604	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.02	1	21160	QPSK	50	0	10 mm	left	1:1	0.449	1.050	0.471	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-31  
LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.3	24.62	-0.11	0	21160	QPSK	1	50	10 mm	back	1:1	1.040	1.169	1.216	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.12	0	21160	QPSK	1	50	10 mm	back	1:1	0.928	1.143	1.061	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.12	0	21160	QPSK	1	50	10 mm	back	1:1	1.120	1.151	1.289	A37
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.3	23.66	-0.10	1	21160	QPSK	50	25	10 mm	back	1:1	0.866	1.159	1.004	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.20	1	21160	QPSK	50	0	10 mm	back	1:1	0.719	1.140	0.820	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.3	23.70	-0.12	1	21160	QPSK	50	0	10 mm	back	1:1	0.906	1.148	1.040	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.68	-0.11	1	21160	QPSK	100	0	10 mm	back	1:1	0.880	1.153	1.015	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	0.02	0	21160	QPSK	1	50	10 mm	front	1:1	0.430	1.143	0.491	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	0.06	1	21160	QPSK	50	0	10 mm	front	1:1	0.358	1.140	0.408	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.3	24.62	-0.01	0	21160	QPSK	1	50	10 mm	bottom	1:1	0.893	1.169	1.044	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.09	0	21160	QPSK	1	50	10 mm	bottom	1:1	0.949	1.143	1.085	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.12	0	21160	QPSK	1	50	10 mm	bottom	1:1	1.020	1.151	1.174	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.3	23.66	-0.07	1	21160	QPSK	50	25	10 mm	bottom	1:1	0.739	1.159	0.857	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	0.16	1	21160	QPSK	50	0	10 mm	bottom	1:1	0.785	1.140	0.895	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.3	23.70	-0.09	1	21160	QPSK	50	0	10 mm	bottom	1:1	0.815	1.148	0.936	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.68	-0.04	1	21160	QPSK	100	0	10 mm	bottom	1:1	0.788	1.153	0.909	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.12	0	21160	QPSK	1	50	10 mm	left	1:1	0.641	1.143	0.733	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.07	1	21160	QPSK	50	0	10 mm	left	1:1	0.494	1.140	0.563	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.21	0	21160	QPSK	1	50	10 mm	back	1:1	0.965	1.151	1.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 87 of 126	

**Table 11-32  
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink / 2 CC Uplink / Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	23.7	21.96	-0.01	0	21160	QPSK	1	0	10 mm	back	1.158	0.454	1.493	0.678	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	22.07	0.01	0	21160	QPSK	1	50	10 mm	back	1.158	0.617	1.455	0.898	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	23.7	22.06	0.13	0	21160	QPSK	1	50	10 mm	back	1.158	0.655	1.459	0.956	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	0.04	0	21160	QPSK	1	50	10 mm	back	1.158	0.432	1.400	0.605	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	23.7	22.03	0.05	0	21160	QPSK	1	50	10 mm	back	1.158	0.262	1.469	0.385	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	0.02	0	21160	QPSK	50	25	10 mm	back	1.158	0.427	1.371	0.585	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.19	0.05	0	21160	QPSK	100	0	10 mm	back	1.158	0.425	1.416	0.602	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	0.14	0	21186	QPSK	1	50	10 mm	front	1.158	0.251	1.400	0.351	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	-0.12	0	21186	QPSK	50	25	10 mm	front	1.158	0.247	1.371	0.339	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	23.7	21.96	-0.09	0	21160	QPSK	1	0	10 mm	bottom	1.158	0.517	1.493	0.772	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	22.07	-0.12	0	21160	QPSK	1	50	10 mm	bottom	1.158	0.687	1.455	1.000	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	23.7	22.00	0.13	0	21160	QPSK	1	0	10 mm	bottom	1.158	0.734	1.479	1.086	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	23.7	22.06	-0.11	0	21160	QPSK	1	50	10 mm	bottom	1.158	0.761	1.459	1.110	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	-0.12	0	21160	QPSK	1	50	10 mm	bottom	1.158	0.527	1.400	0.738	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	23.7	22.03	0.15	0	21160	QPSK	1	50	10 mm	bottom	1.158	0.683	1.469	1.003	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	23.7	22.12	-0.10	0	21160	QPSK	50	25	10 mm	bottom	1.158	0.543	1.439	0.781	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	22.08	-0.11	0	21160	QPSK	50	25	10 mm	bottom	1.158	0.682	1.452	0.990	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	23.7	22.12	-0.10	0	21160	QPSK	50	25	10 mm	bottom	1.158	0.659	1.439	0.948	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	-0.15	0	21160	QPSK	50	25	10 mm	bottom	1.158	0.532	1.371	0.729	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	23.7	22.02	0.12	0	21160	QPSK	50	25	10 mm	bottom	1.158	0.672	1.472	0.989	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.19	-0.12	0	21160	QPSK	100	0	10 mm	bottom	1.158	0.504	1.416	0.714	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	25.7	23.89	0.12	0	21160	QPSK	1	0	10 mm	bottom	1.231	0.773	1.517	1.173	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	25.7	24.26	0.12	0	21160	QPSK	1	50	10 mm	bottom	1.231	0.876	1.393	1.220	A39
2 CC Uplink - Power Class 3	PCC	2593.00	40620	Mid	LTE Band 41	20	23.7	22.06	0.12	0	21160	QPSK	1	0	10 mm	bottom	1.158	0.736	1.459	1.074	
	SCC	2573.20	40422										1	99							
2 CC Uplink - Power Class 2	PCC	2593.00	40620	Mid	LTE Band 41	20	25.7	24.12	0.12	0	21160	QPSK	1	0	10 mm	bottom	1.231	0.776	1.439	1.117	
	SCC	2573.20	40422										1	99							
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	0.12	0	21186	QPSK	1	50	10 mm	right	1.158	0.055	1.400	0.077	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	-0.14	0	21186	QPSK	50	25	10 mm	right	1.158	0.052	1.371	0.071	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	0.12	0	21186	QPSK	1	50	10 mm	left	1.158	0.000	1.400	0.000	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	0.17	0	21186	QPSK	50	25	10 mm	left	1.158	0.001	1.371	0.001	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 88 of 126	

**Table 11-33  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	21.0	20.44	0.14	10 mm	21327	1	back	99.0	0.604	0.400	1.138	1.010	0.460	A40
2437	6	802.11b	DSSS	22	21.0	20.44	0.14	10 mm	21327	1	front	99.0	0.488	-	1.138	1.010	-	
2437	6	802.11b	DSSS	22	21.0	20.44	-0.02	10 mm	21327	1	top	99.0	0.310	-	1.138	1.010	-	
2437	6	802.11b	DSSS	22	21.0	20.44	0.20	10 mm	21327	1	right	99.0	0.602	0.370	1.138	1.010	0.425	
5240	48	802.11a	OFDM	20	18.0	17.81	-0.17	10 mm	21319	6	back	96.9	0.795	0.378	1.045	1.032	0.408	
5240	48	802.11a	OFDM	20	18.0	17.81	-0.03	10 mm	21319	6	front	96.9	0.805	0.403	1.045	1.032	0.435	
5180	36	802.11a	OFDM	20	18.0	17.75	-0.18	10 mm	21319	6	top	96.9	2.153	0.929	1.059	1.032	1.015	
5220	44	802.11a	OFDM	20	18.0	17.72	-0.11	10 mm	21319	6	top	96.9	2.088	0.936	1.067	1.032	1.031	A42
5240	48	802.11a	OFDM	20	18.0	17.81	-0.03	10 mm	21319	6	top	96.9	2.036	0.876	1.045	1.032	0.945	
5240	48	802.11a	OFDM	20	18.0	17.81	-0.09	10 mm	21319	6	right	96.9	0.368	-	1.045	1.032	-	
5220	44	802.11a	OFDM	20	18.0	17.72	-0.02	10 mm	21319	6	top	96.9	2.026	0.849	1.067	1.032	0.935	
5825	165	802.11a	OFDM	20	17.0	16.88	0.08	10 mm	21319	6	back	96.9	0.850	0.393	1.028	1.032	0.417	
5825	165	802.11a	OFDM	20	17.0	16.88	0.18	10 mm	21319	6	front	96.9	0.735	-	1.028	1.032	-	
5785	157	802.11a	OFDM	20	17.0	16.73	0.00	10 mm	21319	6	top	96.9	1.926	0.859	1.064	1.032	0.943	
5825	165	802.11a	OFDM	20	17.0	16.88	0.01	10 mm	21319	6	top	96.9	2.098	0.875	1.028	1.032	0.928	
5825	165	802.11a	OFDM	20	17.0	16.88	0.10	10 mm	21319	6	right	96.9	0.741	-	1.028	1.032	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability measurement.

**Table 11-34  
DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480	78	Bluetooth	FHSS	10.5	9.97	0.11	10 mm	21319	1	back	76.6	0.024	1.130	1.305	0.035	A43
2480	78	Bluetooth	FHSS	10.5	9.97	0.10	10 mm	21319	1	front	76.6	0.006	1.130	1.305	0.009	
2480	78	Bluetooth	FHSS	10.5	9.97	0.21	10 mm	21319	1	top	76.6	0.014	1.130	1.305	0.021	
2480	78	Bluetooth	FHSS	10.5	9.97	0.19	10 mm	21319	1	right	76.6	0.021	1.130	1.305	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFK330PM	 Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 89 of 126

# 11.4 Standalone Phablet SAR Data

**Table 11-35  
UMTS/CDMA Phablet SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.3	25.11	-0.13	3 mm	21137	1:1	back	2.100	1.045	2.195	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.13	3 mm	21137	1:1	back	2.000	1.028	2.056	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.3	25.20	-0.13	3 mm	21137	1:1	back	1.850	1.023	1.893	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	0.16	0 mm	21137	1:1	front	1.580	1.028	1.624	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.01	3 mm	21137	1:1	bottom	1.460	1.028	1.501	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.3	25.11	-0.10	0 mm	21137	1:1	left	2.390	1.045	2.498	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.3	25.18	-0.12	0 mm	21137	1:1	left	2.240	1.028	2.303	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.3	25.20	-0.15	0 mm	21137	1:1	left	2.100	1.023	2.148	
1851.25	25	PCS CDMA	EVDO Rev. 0	23.8	23.65	-0.06	0 mm	21137	1:1	back	2.470	1.035	2.556	A44
1880.00	600	PCS CDMA	EVDO Rev. 0	23.8	23.67	-0.08	0 mm	21137	1:1	back	2.290	1.030	2.359	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.8	23.70	-0.06	0 mm	21137	1:1	back	2.140	1.023	2.189	
1851.25	25	PCS CDMA	EVDO Rev. 0	23.8	23.65	0.01	0 mm	21137	1:1	bottom	2.190	1.035	2.267	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.8	23.67	0.01	0 mm	21137	1:1	bottom	2.000	1.030	2.060	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.8	23.70	-0.05	0 mm	21137	1:1	bottom	1.770	1.023	1.811	
1712.40	1312	UMTS 1750	RMC	25.3	25.11	0.00	3 mm	21137	1:1	back	2.410	1.045	2.518	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.00	3 mm	21137	1:1	back	2.460	1.040	2.558	
1752.60	1513	UMTS 1750	RMC	25.3	25.15	-0.01	3 mm	21137	1:1	back	2.520	1.035	2.608	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.17	0 mm	21137	1:1	front	1.610	1.040	1.674	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	-0.03	3 mm	21137	1:1	bottom	1.300	1.040	1.352	
1712.40	1312	UMTS 1750	RMC	25.3	25.11	0.01	0 mm	21137	1:1	left	2.280	1.045	2.383	
1732.40	1412	UMTS 1750	RMC	25.3	25.13	0.00	0 mm	21137	1:1	left	2.410	1.040	2.506	
1752.60	1513	UMTS 1750	RMC	25.3	25.15	-0.01	0 mm	21137	1:1	left	2.540	1.035	2.629	
1712.40	1312	UMTS 1750	RMC	22.8	22.76	-0.01	0 mm	21137	1:1	back	2.820	1.009	2.845	A45
1732.40	1412	UMTS 1750	RMC	22.8	22.78	-0.01	0 mm	21137	1:1	back	2.780	1.005	2.794	
1752.60	1513	UMTS 1750	RMC	22.8	22.70	-0.01	0 mm	21137	1:1	back	2.740	1.023	2.803	
1732.40	1412	UMTS 1750	RMC	22.8	22.78	-0.17	0 mm	21137	1:1	bottom	1.600	1.005	1.608	
1712.40	1312	UMTS 1750	RMC	22.8	22.76	-0.01	0 mm	21137	1:1	back	2.820	1.009	2.845	
1852.40	9262	UMTS 1900	RMC	25.3	25.05	-0.12	3 mm	21137	1:1	back	2.310	1.059	2.446	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.13	3 mm	21137	1:1	back	2.200	1.067	2.347	
1907.60	9538	UMTS 1900	RMC	25.3	25.08	-0.13	3 mm	21137	1:1	back	2.030	1.052	2.136	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	0.13	0 mm	21137	1:1	front	1.760	1.067	1.878	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.05	3 mm	21137	1:1	bottom	1.720	1.067	1.835	
1880.00	9400	UMTS 1900	RMC	25.3	25.02	-0.04	0 mm	21137	1:1	left	1.820	1.067	1.942	
1852.40	9262	UMTS 1900	RMC	23.8	23.68	-0.09	0 mm	21137	1:1	back	2.710	1.028	2.786	A46
1880.00	9400	UMTS 1900	RMC	23.8	23.66	-0.09	0 mm	21137	1:1	back	2.460	1.033	2.541	
1907.60	9538	UMTS 1900	RMC	23.8	23.68	-0.11	0 mm	21137	1:1	back	2.290	1.028	2.354	
1852.40	9262	UMTS 1900	RMC	23.8	23.68	-0.15	0 mm	21137	1:1	bottom	2.230	1.028	2.292	
1880.00	9400	UMTS 1900	RMC	23.8	23.66	-0.14	0 mm	21137	1:1	bottom	2.140	1.033	2.211	
1907.60	9538	UMTS 1900	RMC	23.8	23.68	-0.17	0 mm	21137	1:1	bottom	1.930	1.028	1.984	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 90 of 126	

**Table 11-36  
LTE Band 66 (AWS) Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.3	24.94	0.01	0	21160	QPSK	1	0	3 mm	back	1:1	2.140	1.086	2.324	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.03	0	21160	QPSK	1	99	3 mm	back	1:1	1.980	1.079	2.136	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.3	24.90	0.01	0	21160	QPSK	1	0	3 mm	back	1:1	2.070	1.096	2.269	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.03	1	21160	QPSK	50	0	3 mm	back	1:1	1.670	1.050	1.754	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.3	24.02	-0.01	1	21160	QPSK	100	0	3 mm	back	1:1	1.740	1.067	1.857	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.3	24.94	0.19	0	21160	QPSK	1	0	0 mm	front	1:1	1.900	1.086	2.063	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	0.12	0	21160	QPSK	1	99	0 mm	front	1:1	1.920	1.079	2.072	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.3	24.90	0.12	0	21160	QPSK	1	0	0 mm	front	1:1	2.020	1.096	2.214	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.21	1	21160	QPSK	50	0	0 mm	front	1:1	1.570	1.050	1.649	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.3	24.02	0.12	1	21160	QPSK	100	0	0 mm	front	1:1	1.630	1.067	1.739	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	-0.04	0	21160	QPSK	1	99	3 mm	bottom	1:1	1.340	1.079	1.446	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	-0.03	1	21160	QPSK	50	0	3 mm	bottom	1:1	1.020	1.050	1.071	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.3	24.94	-0.14	0	21160	QPSK	1	0	0 mm	left	1:1	2.100	1.086	2.281	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.3	24.97	0.02	0	21160	QPSK	1	99	0 mm	left	1:1	2.320	1.079	2.503	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.3	24.90	-0.19	0	21160	QPSK	1	0	0 mm	left	1:1	2.400	1.096	2.630	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.3	24.09	0.00	1	21160	QPSK	50	0	0 mm	left	1:1	1.890	1.050	1.985	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.3	24.02	0.08	1	21160	QPSK	100	0	0 mm	left	1:1	2.060	1.067	2.198	
1720.00	132072	Low	LTE Band 66 (AWS)	20	22.8	22.30	-0.05	0	21178	QPSK	1	50	0 mm	back	1:1	2.810	1.122	3.153	A47
1745.00	132322	Mid	LTE Band 66 (AWS)	20	22.8	22.47	-0.02	0	21178	QPSK	1	50	0 mm	back	1:1	2.730	1.079	2.946	
1770.00	132572	High	LTE Band 66 (AWS)	20	22.8	22.39	-0.02	0	21178	QPSK	1	50	0 mm	back	1:1	2.570	1.099	2.824	
1720.00	132072	Low	LTE Band 66 (AWS)	20	22.8	22.30	-0.04	0	21178	QPSK	50	25	0 mm	back	1:1	2.790	1.122	3.130	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	22.8	22.33	-0.02	0	21178	QPSK	50	25	0 mm	back	1:1	2.670	1.114	2.974	
1770.00	132572	High	LTE Band 66 (AWS)	20	22.8	22.28	-0.03	0	21178	QPSK	50	25	0 mm	back	1:1	2.550	1.127	2.874	
1720.00	132072	Low	LTE Band 66 (AWS)	20	22.8	22.31	-0.01	0	21178	QPSK	100	0	0 mm	back	1:1	2.810	1.119	3.144	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	22.8	22.47	-0.04	0	21178	QPSK	1	50	0 mm	bottom	1:1	1.710	1.079	1.845	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	22.8	22.33	-0.04	0	21178	QPSK	50	25	0 mm	bottom	1:1	1.690	1.114	1.883	
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								<b>Phablet</b>											
<b>Spatial Peak</b>								<b>4.0 W/kg (mW/g)</b>											
<b>Uncontrolled Exposure/General Population</b>								<b>averaged over 10 grams</b>											

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1-ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 91 of 126	

**Table 11-37  
LTE Band 25 (PCS) Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.3	24.62	-0.12	0	21160	QPSK	1	50	3 mm	back	1:1	2.330	1.169	2.724	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.12	0	21160	QPSK	1	50	3 mm	back	1:1	2.250	1.143	2.572	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	-0.12	0	21160	QPSK	1	50	3 mm	back	1:1	2.200	1.151	2.532	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.3	23.66	-0.12	1	21160	QPSK	50	25	3 mm	back	1:1	1.890	1.159	2.191	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.13	1	21160	QPSK	50	0	3 mm	back	1:1	1.830	1.140	2.086	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.3	23.70	-0.12	1	21160	QPSK	50	0	3 mm	back	1:1	1.830	1.148	2.101	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.68	-0.12	1	21160	QPSK	100	0	3 mm	back	1:1	1.810	1.153	2.087	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	0.11	0	21160	QPSK	1	50	0 mm	front	1:1	1.690	1.143	1.932	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	0.11	1	21160	QPSK	50	0	0 mm	front	1:1	1.390	1.140	1.585	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	-0.07	0	21160	QPSK	1	50	3 mm	bottom	1:1	1.570	1.143	1.795	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	-0.14	1	21160	QPSK	50	0	3 mm	bottom	1:1	1.270	1.140	1.448	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.3	24.62	0.09	0	21160	QPSK	1	50	0 mm	left	1:1	2.520	1.169	2.946	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.3	24.72	0.14	0	21160	QPSK	1	50	0 mm	left	1:1	2.540	1.143	2.903	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.3	24.69	0.07	0	21160	QPSK	1	50	0 mm	left	1:1	2.410	1.151	2.774	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.3	23.66	0.10	1	21160	QPSK	50	25	0 mm	left	1:1	2.070	1.159	2.399	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.73	0.17	1	21160	QPSK	50	0	0 mm	left	1:1	2.040	1.140	2.326	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.3	23.70	0.03	1	21160	QPSK	50	0	0 mm	left	1:1	2.040	1.148	2.342	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.3	23.68	0.11	1	21160	QPSK	100	0	0 mm	left	1:1	2.020	1.153	2.329	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.8	23.20	-0.04	0	21160	QPSK	1	50	0 mm	back	1:1	2.740	1.148	3.146	A48
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.24	-0.03	0	21160	QPSK	1	50	0 mm	back	1:1	2.600	1.138	2.959	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.8	23.34	-0.06	0	21160	QPSK	1	50	0 mm	back	1:1	2.460	1.112	2.736	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.8	23.19	-0.05	0	21160	QPSK	50	50	0 mm	back	1:1	2.630	1.151	3.027	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.24	-0.04	0	21160	QPSK	50	25	0 mm	back	1:1	2.630	1.138	2.993	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.8	23.25	-0.05	0	21160	QPSK	50	25	0 mm	back	1:1	2.470	1.135	2.803	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.17	-0.04	0	21160	QPSK	100	0	0 mm	back	1:1	2.570	1.156	2.971	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.8	23.20	-0.13	0	21160	QPSK	1	50	0 mm	bottom	1:1	2.220	1.148	2.549	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.24	-0.20	0	21160	QPSK	1	50	0 mm	bottom	1:1	2.170	1.138	2.469	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.8	23.34	0.03	0	21160	QPSK	1	50	0 mm	bottom	1:1	2.270	1.112	2.524	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.8	23.19	-0.14	0	21160	QPSK	50	50	0 mm	bottom	1:1	2.170	1.151	2.498	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.24	0.00	0	21160	QPSK	50	25	0 mm	bottom	1:1	2.270	1.138	2.583	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.8	23.25	0.09	0	21160	QPSK	50	25	0 mm	bottom	1:1	2.160	1.135	2.452	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.8	23.17	-0.04	0	21160	QPSK	100	0	0 mm	bottom	1:1	2.210	1.156	2.555	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.8	23.20	-0.01	0	21160	QPSK	1	50	0 mm	back	1:1	2.490	1.148	2.859	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Phablet									
Spatial Peak										4.0 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 10 grams									

Note: Blue entry represents variability measurement.

FCC ID: ZNFK330PM	 Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 92 of 126

**Table 11-38  
LTE Band 41 Phablet SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	-0.16	0	21160	QPSK	1	50	3 mm	back	1:1.58	1.150	1.138	1.309	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	-0.16	1	21160	QPSK	50	0	3 mm	back	1:1.58	0.949	1.130	1.072	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	-0.06	0	21160	QPSK	1	50	0 mm	front	1:1.58	0.998	1.138	1.136	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	-0.12	1	21160	QPSK	50	0	0 mm	front	1:1.58	0.636	1.130	0.719	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	-0.18	0	21160	QPSK	1	50	3 mm	bottom	1:1.58	1.260	1.138	1.434	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	24.93	-0.17	0	21160	QPSK	1	99	3 mm	bottom	1:1.58	1.050	1.194	1.254	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	-0.21	1	21160	QPSK	50	0	3 mm	bottom	1:1.58	1.150	1.130	1.300	
1 CC Uplink - Power Class 2	N/A	2636.50	41055	Mid-High	LTE Band 41	20	27.7	27.14	-0.15	0	21160	QPSK	1	50	3 mm	bottom	1:2.31	1.300	1.138	1.479	A49
1 CC Uplink - Power Class 2	N/A	2636.50	41055	Mid-High	LTE Band 41	20	27.7	27.08	-0.12	0	21160	QPSK	1	99	3 mm	bottom	1:2.31	1.100	1.153	1.268	
2 CC Uplink - Power Class 3	PCC	2636.50	41055	Mid-High	LTE Band 41	20	25.7	24.85	-0.16	0	21160	QPSK	1	99	3 mm	bottom	1:1.58	1.080	1.216	1.313	
	SCC	2656.30	41253										1	0							
2 CC Uplink - Power Class 2	PCC	2636.50	41055	Mid-High	LTE Band 41	20	27.7	26.98	-0.17	0	21160	QPSK	1	99	3 mm	bottom	1:2.31	1.120	1.180	1.322	
	SCC	2656.30	41253										1	0							
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.03	0	21160	QPSK	1	50	0 mm	right	1:1.58	0.431	1.138	0.490	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.09	1	21160	QPSK	50	0	0 mm	right	1:1.58	0.351	1.130	0.397	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.7	25.14	0.15	0	21160	QPSK	1	50	0 mm	left	1:1.58	0.021	1.138	0.024	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.7	24.17	0.17	1	21160	QPSK	50	0	0 mm	left	1:1.58	0.014	1.130	0.016	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	-0.07	0	21160	QPSK	1	50	0 mm	back	1:1.58	0.947	1.400	1.326	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	-0.03	0	21160	QPSK	50	25	0 mm	back	1:1.58	0.947	1.371	1.298	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.24	-0.05	0	21160	QPSK	1	50	0 mm	bottom	1:1.58	1.020	1.400	1.428	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	23.7	22.33	-0.08	0	21160	QPSK	50	25	0 mm	bottom	1:1.58	1.040	1.371	1.426	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 93 of 126

**Table 11-39  
WLAN Phablet SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	18.0	17.35	-0.02	0 mm	21319	6	back	96.9	7.900	-	1.161	1.032	-	
5260	52	802.11a	OFDM	20	18.0	17.35	-0.06	0 mm	21319	6	front	96.9	11.721	1.010	1.161	1.032	1.210	
5260	52	802.11a	OFDM	20	18.0	17.35	-0.12	0 mm	21319	6	top	96.9	23.017	1.610	1.161	1.032	1.929	
5300	60	802.11a	OFDM	20	18.0	17.28	-0.21	0 mm	21319	6	top	96.9	33.247	1.690	1.180	1.032	2.058	A50
5320	64	802.11a	OFDM	20	18.0	17.33	-0.05	0 mm	21319	6	top	96.9	28.012	1.570	1.167	1.032	1.891	
5260	52	802.11a	OFDM	20	18.0	17.35	-0.11	0 mm	21319	6	right	96.9	1.511	-	1.161	1.032	-	
5620	124	802.11a	OFDM	20	18.0	17.44	-0.03	0 mm	21319	6	back	96.9	15.085	1.080	1.138	1.032	1.268	
5620	124	802.11a	OFDM	20	18.0	17.44	-0.02	0 mm	21319	6	front	96.9	7.553	-	1.138	1.032	-	
5620	124	802.11a	OFDM	20	18.0	17.44	0.17	0 mm	21319	6	top	96.9	28.143	1.470	1.138	1.032	1.726	
5620	124	802.11a	OFDM	20	18.0	17.44	-0.13	0 mm	21319	6	right	96.9	2.353	-	1.138	1.032	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams									

## 11.5 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
- FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
- The orange highlights throughout the report represents the highest SAR per FCC Equipment Class reflected on the FCC Grant.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 94 of 126

- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated with a headset connected to the device when the standalone reported body-worn SAR was  $\geq 1.2$  W/kg.

#### GSM Test Notes:

- Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
- GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

#### CDMA Notes:

- Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
- Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
- CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
- Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### UMTS Notes:

- UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### LTE Notes:

- LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 95 of 126

2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.
8. For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

**WLAN Notes:**

1. For held-to-ear, and hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 96 of 126	

**Bluetooth Notes**

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.
2. Head and Hotspot Bluetooth SAR were evaluated for BT BR tethering applications.

FCC ID: ZNFK330PM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 97 of 126

# 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

## 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

## 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.236	0.943	1.179
	CDMA/EVDO BC0 (§22H)	0.285	0.943	1.228
	PCS CDMA/EVDO	0.241	0.943	1.184
	GSM/GPRS 850	0.258	0.943	1.201
	GSM/GPRS 1900	0.159	0.943	1.102
	UMTS 850	0.229	0.943	1.172
	UMTS 1750	0.229	0.943	1.172
	UMTS 1900	0.248	0.943	1.191
	LTE Band 71	0.211	0.943	1.154
	LTE Band 12	0.234	0.943	1.177
	LTE Band 13	0.243	0.943	1.186
	LTE Band 26 (Cell)	0.222	0.943	1.165
	LTE Band 66 (AWS)	0.216	0.943	1.159
	LTE Band 25 (PCS)	0.311	0.943	<b>1.254</b>
LTE Band 41	0.007	0.943	0.950	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 98 of 126	

**Table 12-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.236	1.099	1.335
	CDMA/EVDO BC0 (§22H)	0.285	1.099	1.384
	PCS CDMA/EVDO	0.241	1.099	1.340
	GSM/GPRS 850	0.258	1.099	1.357
	GSM/GPRS 1900	0.159	1.099	1.258
	UMTS 850	0.229	1.099	1.328
	UMTS 1750	0.229	1.099	1.328
	UMTS 1900	0.248	1.099	1.347
	LTE Band 71	0.211	1.099	1.310
	LTE Band 12	0.234	1.099	1.333
	LTE Band 13	0.243	1.099	1.342
	LTE Band 26 (Cell)	0.222	1.099	1.321
	LTE Band 66 (AWS)	0.216	1.099	1.315
	LTE Band 25 (PCS)	0.311	1.099	<b>1.410</b>
LTE Band 41	0.007	1.099	1.106	

**Table 12-3**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.236	0.127	0.363
	CDMA/EVDO BC0 (§22H)	0.285	0.127	0.412
	PCS CDMA/EVDO	0.241	0.127	0.368
	GSM/GPRS 850	0.258	0.127	0.385
	GSM/GPRS 1900	0.159	0.127	0.286
	UMTS 850	0.229	0.127	0.356
	UMTS 1750	0.229	0.127	0.356
	UMTS 1900	0.248	0.127	0.375
	LTE Band 71	0.211	0.127	0.338
	LTE Band 12	0.234	0.127	0.361
	LTE Band 13	0.243	0.127	0.370
	LTE Band 26 (Cell)	0.222	0.127	0.349
	LTE Band 66 (AWS)	0.216	0.127	0.343
	LTE Band 25 (PCS)	0.311	0.127	<b>0.438</b>
LTE Band 41	0.007	0.127	0.134	

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 99 of 126

**Table 12-4  
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.236	0.127	1.099	1.462
	CDMA/EVDO BC0 (§22H)	0.285	0.127	1.099	1.511
	PCS CDMA/EVDO	0.241	0.127	1.099	1.467
	GSM/GPRS 850	0.258	0.127	1.099	1.484
	GSM/GPRS 1900	0.159	0.127	1.099	1.385
	UMTS 850	0.229	0.127	1.099	1.455
	UMTS 1750	0.229	0.127	1.099	1.455
	UMTS 1900	0.248	0.127	1.099	1.474
	LTE Band 71	0.211	0.127	1.099	1.437
	LTE Band 12	0.234	0.127	1.099	1.460
	LTE Band 13	0.243	0.127	1.099	1.469
	LTE Band 26 (Cell)	0.222	0.127	1.099	1.448
	LTE Band 66 (AWS)	0.216	0.127	1.099	1.442
	LTE Band 25 (PCS)	0.311	0.127	1.099	<b>1.537</b>
LTE Band 41	0.007	0.127	1.099	1.233	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 100 of 126

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-5**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	CDMA BC10 (§90S)	0.390	0.460	0.850	N/A
	CDMA BC0 (§22H)	0.532	0.460	0.992	N/A
	PCS CDMA	0.983	0.460	1.443	N/A
	GSM/GPRS 850	0.565	0.460	1.025	N/A
	GSM/GPRS 1900	0.813	0.460	1.273	N/A
	UMTS 850	0.570	0.460	1.030	N/A
	UMTS 1750	1.028	0.460	<b>1.488</b>	N/A
	UMTS 1900	1.186	0.460	See Note 1	0.01
	LTE Band 71	0.337	0.460	0.797	N/A
	LTE Band 12	0.404	0.460	0.864	N/A
	LTE Band 13	0.384	0.460	0.844	N/A
	LTE Band 26 (Cell)	0.577	0.460	1.037	N/A
	LTE Band 66 (AWS)	0.857	0.460	1.317	N/A
	LTE Band 25 (PCS)	1.289	0.460	See Note 1	0.01
LTE Band 41	1.151	0.460	See Note 1	0.01	

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

**Table 12-6**  
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2+3	1+2
Body-Worn	CDMA BC10 (§90S)	0.390	0.530	0.920	N/A
	CDMA BC0 (§22H)	0.532	0.530	1.062	N/A
	PCS CDMA	0.983	0.530	1.513	N/A
	GSM/GPRS 850	0.565	0.530	1.095	N/A
	GSM/GPRS 1900	0.813	0.530	1.343	N/A
	UMTS 850	0.570	0.530	1.100	N/A
	UMTS 1750	1.028	0.530	<b>1.558</b>	N/A
	UMTS 1900	1.186	0.530	See Note 1	0.01
	LTE Band 71	0.337	0.530	0.867	N/A
	LTE Band 12	0.404	0.530	0.934	N/A
	LTE Band 13	0.384	0.530	0.914	N/A
	LTE Band 26 (Cell)	0.577	0.530	1.107	N/A
	LTE Band 66 (AWS)	0.857	0.530	1.387	N/A
	LTE Band 25 (PCS)	1.289	0.530	See Note 1	0.01
LTE Band 41	1.151	0.530	See Note 1	0.01	

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 101 of 126	

**Table 12-7**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.390	0.035	0.425
	CDMA BC0 (§22H)	0.532	0.035	0.567
	PCS CDMA	0.983	0.035	1.018
	GSM/GPRS 850	0.565	0.035	0.600
	GSM/GPRS 1900	0.813	0.035	0.848
	UMTS 850	0.570	0.035	0.605
	UMTS 1750	1.028	0.035	1.063
	UMTS 1900	1.186	0.035	1.221
	LTE Band 71	0.337	0.035	0.372
	LTE Band 12	0.404	0.035	0.439
	LTE Band 13	0.384	0.035	0.419
	LTE Band 26 (Cell)	0.577	0.035	0.612
	LTE Band 66 (AWS)	0.857	0.035	0.892
	LTE Band 25 (PCS)	1.289	0.035	<b>1.324</b>
LTE Band 41	1.151	0.035	1.186	

**Table 12-8**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3	1+2	1+3	2+3
Body-Worn	CDMA BC10 (§90S)	0.390	0.035	0.530	0.955	N/A	N/A	N/A
	CDMA BC0 (§22H)	0.532	0.035	0.530	1.097	N/A	N/A	N/A
	PCS CDMA	0.983	0.035	0.530	1.548	N/A	N/A	N/A
	GSM/GPRS 850	0.565	0.035	0.530	1.130	N/A	N/A	N/A
	GSM/GPRS 1900	0.813	0.035	0.530	1.378	N/A	N/A	N/A
	UMTS 850	0.570	0.035	0.530	1.135	N/A	N/A	N/A
	UMTS 1750	1.028	0.035	0.530	<b>1.593</b>	N/A	N/A	N/A
	UMTS 1900	1.186	0.035	0.530	See Note 1	0.01	0.01	0.03
	LTE Band 71	0.337	0.035	0.530	0.902	N/A	N/A	N/A
	LTE Band 12	0.404	0.035	0.530	0.969	N/A	N/A	N/A
	LTE Band 13	0.384	0.035	0.530	0.949	N/A	N/A	N/A
	LTE Band 26 (Cell)	0.577	0.035	0.530	1.142	N/A	N/A	N/A
	LTE Band 66 (AWS)	0.857	0.035	0.530	1.422	N/A	N/A	N/A
	LTE Band 25 (PCS)	1.289	0.035	0.530	See Note 1	0.01	0.01	0.03
LTE Band 41	1.151	0.035	0.530	See Note 1	0.01	0.01	0.03	

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLSR ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLSR ratio analysis.

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 102 of 126

FCC ID: ZNFK330PM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 103 of 126

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

**Table 12-9**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	EVDO BC10 (§90S)	0.451	0.460	0.911
	EVDO BC0 (§22H)	0.780	0.460	1.240
	PCS EVDO	1.028	0.460	<b>1.488</b>
	GPRS 850	0.565	0.460	1.025
	GPRS 1900	0.813	0.460	1.273
	UMTS 850	0.570	0.460	1.030
	UMTS 1750	1.028	0.460	<b>1.488</b>
	UMTS 1900	1.186	0.460	See Table Below
	LTE Band 71	0.454	0.460	0.914
	LTE Band 12	0.404	0.460	0.864
	LTE Band 13	0.433	0.460	0.893
	LTE Band 26 (Cell)	0.577	0.460	1.037
	LTE Band 66 (AWS)	0.857	0.460	1.317
	LTE Band 25 (PCS)	1.289	0.460	See Table Below
LTE Band 41	1.220	0.460	See Table Below	

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	1.186	0.460	See Note 1	0.01	Hotspot SAR	Back	1.289	0.460	See Note 1	0.01
	Front	0.428	0.460*	0.888	N/A		Front	0.491	0.460*	0.951	N/A
	Top	-	0.460*	0.460	N/A		Top	-	0.460*	0.460	N/A
	Bottom	1.033	-	<b>1.033</b>	N/A		Bottom	1.174	-	<b>1.174</b>	N/A
	Right	-	0.425	0.425	N/A		Right	-	0.425	0.425	N/A
	Left	0.621	-	0.621	N/A		Left	0.733	-	0.733	N/A

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	Back	0.956	0.460	<b>1.416</b>
	Front	0.351	0.460*	0.811
	Top	-	0.460*	0.460
	Bottom	1.220	-	1.220
	Right	0.077	0.425	0.502
	Left	0.001	-	0.001

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 104 of 126

**Table 12-10**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Simult Tx	Configuration	EVDO BC10 (\$90S) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (\$22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.451	0.417	0.868	Hotspot SAR	Back	0.780	0.417	1.197
	Front	0.301	0.435	0.736		Front	0.469	0.435	0.904
	Top	-	1.031	1.031		Top	-	1.031	1.031
	Bottom	0.390	-	0.390		Bottom	0.597	-	0.597
	Right	0.322	1.031*	1.353		Right	0.354	1.031*	1.385
	Left	0.151	-	0.151		Left	0.208	-	0.208

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	1.028	0.417	1.445	Hotspot SAR	Back	0.565	0.417	0.982
	Front	0.464	0.435	0.899		Front	0.344	0.435	0.779
	Top	-	1.031	1.031		Top	-	1.031	1.031
	Bottom	0.955	-	0.955		Bottom	0.501	-	0.501
	Right	-	1.031*	1.031		Right	0.348	1.031*	1.379
	Left	0.551	-	0.551		Left	0.173	-	0.173

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.813	0.417	1.230	Hotspot SAR	Back	0.570	0.417	0.987
	Front	0.290	0.435	0.725		Front	0.414	0.435	0.849
	Top	-	1.031	1.031		Top	-	1.031	1.031
	Bottom	0.657	-	0.657		Bottom	0.510	-	0.510
	Right	-	1.031*	1.031		Right	0.343	1.031*	1.374
	Left	0.377	-	0.377		Left	0.161	-	0.161

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	1.028	0.417	1.445	Hotspot SAR	Back	1.186	0.417	See Note 1	0.01
	Front	0.586	0.435	1.021		Front	0.428	0.435	0.863	N/A
	Top	-	1.031	1.031		Top	-	1.031	1.031	N/A
	Bottom	0.704	-	0.704		Bottom	1.033	-	1.033	N/A
	Right	-	1.031*	1.031		Right	-	1.031*	1.031	N/A
	Left	0.631	-	0.631		Left	0.621	-	0.621	N/A

Simult Tx	Configuration	LTE Band 71 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 12 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.337	0.417	0.754	Hotspot SAR	Back	0.404	0.417	0.821
	Front	0.252	0.435	0.687		Front	0.250	0.435	0.685
	Top	-	1.031	1.031		Top	-	1.031	1.031
	Bottom	0.186	-	0.186		Bottom	0.280	-	0.280
	Right	0.454	1.031*	1.485		Right	0.308	1.031*	1.339
	Left	0.226	-	0.226		Left	0.247	-	0.247

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 105 of 126

Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.384	0.417	0.801	Hotspot SAR	Back	0.577	0.417	0.994
	Front	0.293	0.435	0.728		Front	0.340	0.435	0.775
	Top	-	1.031	1.031		Top	-	1.031	1.031
	Bottom	0.395	-	0.395		Bottom	0.502	-	0.502
	Right	0.433	1.031*	<b>1.464</b>		Right	0.350	1.031*	<b>1.381</b>
	Left	0.261	-	0.261		Left	0.147	-	0.147

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	0.857	0.417	<b>1.274</b>	Hotspot SAR	Back	1.289	0.417	See Note 1	0.01
	Front	0.522	0.435	0.957		Front	0.491	0.435	0.926	N/A
	Top	-	1.031	1.031		Top	-	1.031	1.031	N/A
	Bottom	0.698	-	0.698		Bottom	1.174	-	<b>1.174</b>	N/A
	Right	-	1.031*	1.031		Right	-	1.031*	1.031	N/A
	Left	0.604	-	0.604		Left	0.733	-	0.733	N/A

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.956	0.417	<b>1.373</b>
	Front	0.351	0.435	0.786
	Top	-	1.031	1.031
	Bottom	1.220	-	1.220
	Right	0.077	1.031*	1.108
	Left	0.001	-	0.001

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 106 of 126

**Table 12-11**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	EVDO BC10 (§90S)	0.451	0.035	0.486
	EVDO BC0 (§22H)	0.780	0.035	0.815
	PCS EVDO	1.028	0.035	1.063
	GPRS 850	0.565	0.035	0.600
	GPRS 1900	0.813	0.035	0.848
	UMTS 850	0.570	0.035	0.605
	UMTS 1750	1.028	0.035	1.063
	UMTS 1900	1.186	0.035	1.221
	LTE Band 71	0.454	0.035	0.489
	LTE Band 12	0.404	0.035	0.439
	LTE Band 13	0.433	0.035	0.468
	LTE Band 26 (Cell)	0.577	0.035	0.612
	LTE Band 66 (AWS)	0.857	0.035	0.892
	LTE Band 25 (PCS)	1.289	0.035	<b>1.324</b>
LTE Band 41	1.220	0.035	1.255	

**Table 12-12**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Hotspot at 1.0 cm)**

Simult Tx	Configuration	EVDO BC10 (§90S) SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (§22H) SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.451	0.035	0.417	0.903	Hotspot SAR	Back	0.780	0.035	0.417	1.232
	Front	0.301	0.009	0.435	0.745		Front	0.469	0.009	0.435	0.913
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052
	Bottom	0.390	-	-	0.390		Bottom	0.597	-	-	0.597
	Right	0.322	0.031	1.031*	<b>1.384</b>		Right	0.354	0.031	1.031*	<b>1.416</b>
	Left	0.151	-	-	0.151		Left	0.208	-	-	0.208
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	1.028	0.035	0.417	<b>1.480</b>	Hotspot SAR	Back	0.565	0.035	0.417	1.017
	Front	0.464	0.009	0.435	0.908		Front	0.344	0.009	0.435	0.788
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052
	Bottom	0.955	-	-	0.955		Bottom	0.501	-	-	0.501
	Right	-	0.031	1.031*	1.062		Right	0.348	0.031	1.031*	<b>1.410</b>
	Left	0.551	-	-	0.551		Left	0.173	-	-	0.173

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 107 of 126

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.813	0.035	0.417	1.265	Hotspot SAR	Back	0.570	0.035	0.417	1.022
	Front	0.290	0.009	0.435	0.734		Front	0.414	0.009	0.435	0.858
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052
	Bottom	0.657	-	-	0.657		Bottom	0.510	-	-	0.510
	Right	-	0.031	1.031*	1.062		Right	0.343	0.031	1.031*	1.405
	Left	0.377	-	-	0.377		Left	0.161	-	-	0.161

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3			1	2	3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	1.028	0.035	0.417	1.480	Hotspot SAR	Back	1.186	0.035	0.417	See Note 1	0.01	0.01	0.02
	Front	0.586	0.009	0.435	1.030		Front	0.428	0.009	0.435	0.872	N/A	N/A	N/A
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052	N/A	N/A	N/A
	Bottom	0.704	-	-	0.704		Bottom	1.033	-	-	1.033	N/A	N/A	N/A
	Right	-	0.031	1.031*	1.062		Right	-	0.031	1.031*	1.062	N/A	N/A	N/A
	Left	0.631	-	-	0.631		Left	0.621	-	-	0.621	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 71 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 12 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.337	0.035	0.417	0.789	Hotspot SAR	Back	0.404	0.035	0.417	0.856
	Front	0.252	0.009	0.435	0.696		Front	0.250	0.009	0.435	0.694
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052
	Bottom	0.186	-	-	0.186		Bottom	0.280	-	-	0.280
	Right	0.454	0.031	1.031*	1.516		Right	0.308	0.031	1.031*	1.370
	Left	0.226	-	-	0.226		Left	0.247	-	-	0.247

Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.384	0.035	0.417	0.836	Hotspot SAR	Back	0.577	0.035	0.417	1.029
	Front	0.293	0.009	0.435	0.737		Front	0.340	0.009	0.435	0.784
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052
	Bottom	0.395	-	-	0.395		Bottom	0.502	-	-	0.502
	Right	0.433	0.031	1.031*	1.495		Right	0.350	0.031	1.031*	1.412
	Left	0.261	-	-	0.261		Left	0.147	-	-	0.147

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3			1	2	3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	0.857	0.035	0.417	1.309	Hotspot SAR	Back	1.289	0.035	0.417	See Note 1	0.01	0.01	0.02
	Front	0.522	0.009	0.435	0.966		Front	0.491	0.009	0.435	0.935	N/A	N/A	N/A
	Top	-	0.021	1.031	1.052		Top	-	0.021	1.031	1.052	N/A	N/A	N/A
	Bottom	0.698	-	-	0.698		Bottom	1.174	-	-	1.174	N/A	N/A	N/A
	Right	-	0.031	1.031*	1.062		Right	-	0.031	1.031*	1.062	N/A	N/A	N/A
	Left	0.604	-	-	0.604		Left	0.733	-	-	0.733	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.956	0.035	0.417	1.408
	Front	0.351	0.009	0.435	0.795
	Top	-	0.021	1.031	1.052
	Bottom	1.220	-	-	1.220
	Right	0.077	0.031	1.031*	1.139
	Left	0.001	-	-	0.001

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLSR ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLSR ratio analysis.

FCC ID: ZNFK330PM	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 108 of 126	

## 12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

**Table 12-13**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)**

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2			1	2	1+2	
Phablet SAR	Back	2.556	1.268	<b>3.824</b>	Phablet SAR	Back	2.845	1.268	See Note 1	0.05
	Front	1.624	1.210	2.834		Front	1.674	1.210	<b>2.884</b>	N/A
	Top	-	2.058	2.058		Top	-	2.058	2.058	N/A
	Bottom	2.267	-	2.267		Bottom	1.608	-	1.608	N/A
	Right	-	2.058*	2.058		Right	-	2.058*	2.058	N/A
	Left	2.498	-	2.498		Left	2.629	-	2.629	N/A

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	2.786	1.268	See Note 1	0.05	Phablet SAR	Back	3.153	1.268	See Note 1	0.06
	Front	1.878	1.210	<b>3.088</b>	N/A		Front	2.214	1.210	<b>3.424</b>	N/A
	Top	-	2.058	2.058	N/A		Top	-	2.058	2.058	N/A
	Bottom	2.292	-	2.292	N/A		Bottom	1.883	-	1.883	N/A
	Right	-	2.058*	2.058	N/A		Right	-	2.058*	2.058	N/A
	Left	1.942	-	1.942	N/A		Left	2.630	-	2.630	N/A

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2	1+2			1	2	1+2
Phablet SAR	Back	3.146	1.268	See Note 1	0.06	Phablet SAR	Back	1.326	1.268	<b>2.594</b>
	Front	1.932	1.210	<b>3.142</b>	N/A		Front	1.136	1.210	2.346
	Top	-	2.058	2.058	N/A		Top	-	2.058	2.058
	Bottom	2.583	-	2.583	N/A		Bottom	1.479	-	1.479
	Right	-	2.058*	2.058	N/A		Right	0.490	2.058*	2.548
	Left	2.946	-	2.946	N/A		Left	0.024	-	0.024

Note 1: No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLSR ratio between the antenna pairs was not greater than 0.10 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLSR ratio analysis.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 109 of 126

## 12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is  $\leq 0.04$  for 1g and  $\leq 0.10$  for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} \text{ (Body-Worn, Hotspot, Phablet)}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

### 12.7.1 Body-worn Back Side SPLSR Evaluation and Analysis

**Table 12-14**  
**Peak SAR Locations for Body-worn Back Side**


Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
2.4GHz WLAN	-47.80	76.40	0.460
5GHz WLAN	-59.00	82.00	0.530
Bluetooth	-51.40	70.20	0.035
UMTS 1900	11.50	-70.50	1.186
LTE Band 25 (PCS)	11.50	-69.00	1.289
LTE Band 41	-51.40	-78.40	1.151

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 110 of 126	

**Table 12-15**  
**Body-worn Back Side SAR to Peak Location Separation Ratio Calculations**

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
UMTS 1900	2.4GHz WLAN	1.186	0.460	1.646	158.42	0.01	1
UMTS 1900	Bluetooth	1.186	0.035	1.221	154.12	0.01	2
UMTS 1900	5GHz WLAN	1.186	0.530	1.716	168.01	0.01	
	Bluetooth	0.035	0.530	0.565	14.04	0.03	3
LTE Band 25 (PCS)	2.4GHz WLAN	1.289	0.460	1.749	157.03	0.01	
LTE Band 25 (PCS)	Bluetooth	1.289	0.035	1.324	152.75	0.01	4
LTE Band 25 (PCS)	5GHz WLAN	1.289	0.530	1.819	166.65	0.01	
	Bluetooth	0.035	0.530	0.565	14.04	0.03	5
LTE Band 41	2.4GHz WLAN	1.151	0.460	1.611	154.84	0.01	
LTE Band 41	Bluetooth	1.151	0.035	1.186	148.60	0.01	6
LTE Band 41	5GHz WLAN	1.151	0.530	1.681	160.58	0.01	
	Bluetooth	0.035	0.530	0.565	14.04	0.03	

**Table 12-16**  
**Body-worn Back Side SAR to Peak Location Separation Ratio Plots**

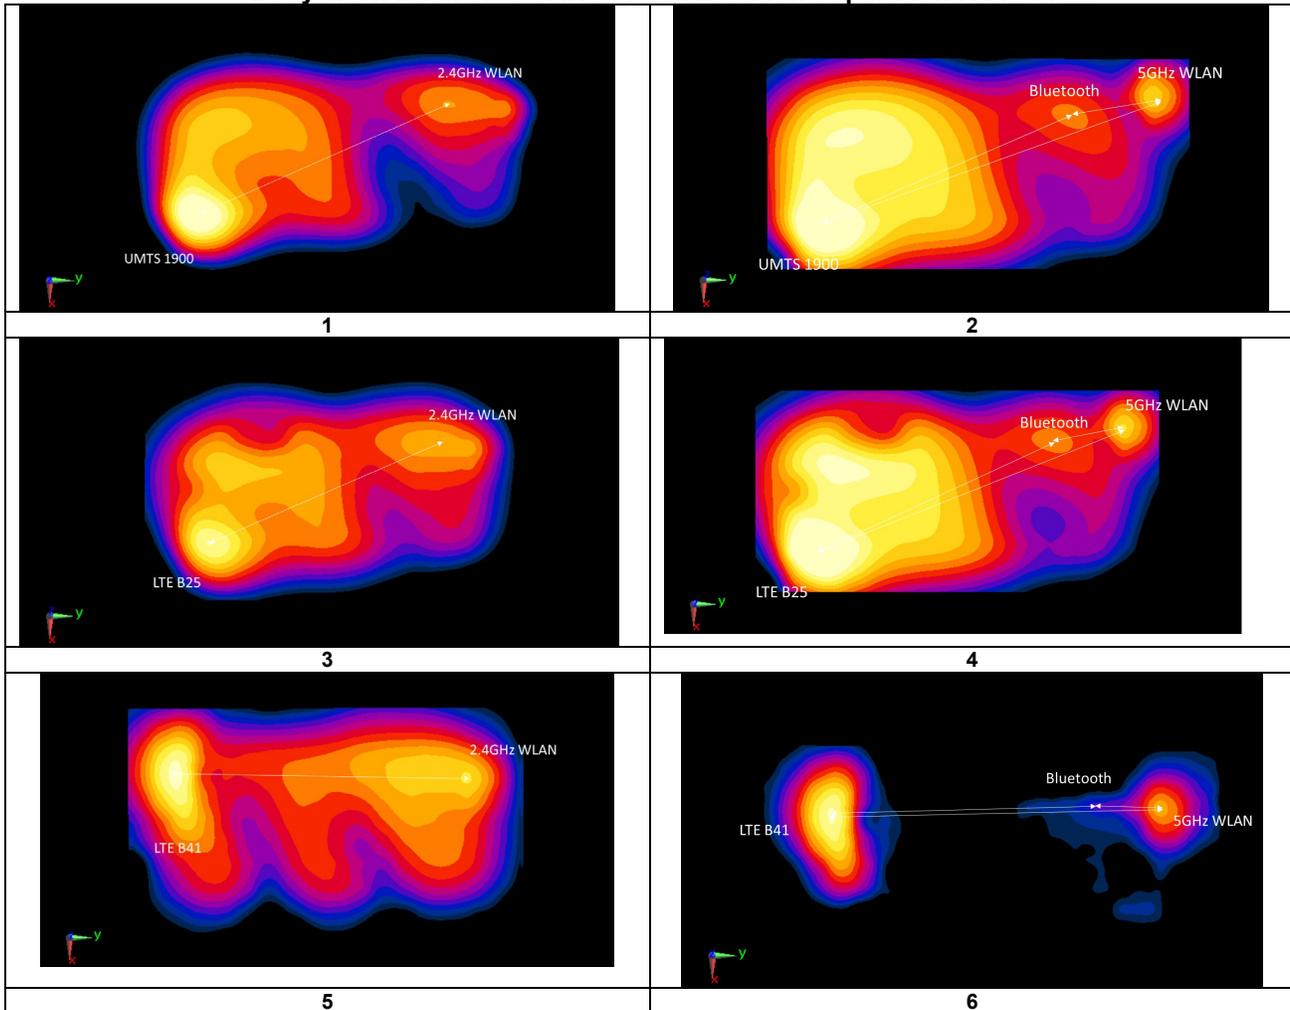

FCC ID: ZNFK330PM	<b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 111 of 126

## 12.7.1 Hotspot Back Side SPLSR Evaluation and Analysis


**Table 12-17**  
**Peak SAR Locations for Hotspot Back Side**

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5GHz WLAN	-62.09	81.96	0.417
Bluetooth	-51.40	70.20	0.035
UMTS 1900	11.50	-70.50	1.186
LTE Band 25 (PCS)	11.50	-69.00	1.289

**Table 12-18**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Calculations**

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	$D_{a-b}$	$(a+b)^{1.5}/D_{a-b}$	
UMTS 1900	Bluetooth	1.186	0.035	1.221	154.12	0.01	1
UMTS 1900	5GHz WLAN	1.186	0.417	1.603	169.29	0.01	
Bluetooth	5GHz WLAN	0.035	0.417	0.452	15.89	0.02	
LTE Band 25 (PCS)	Bluetooth	1.289	0.035	1.324	152.75	0.01	2
LTE Band 25 (PCS)	5GHz WLAN	1.289	0.417	1.706	167.94	0.01	
Bluetooth	5GHz WLAN	0.035	0.417	0.452	15.89	0.02	

**Table 12-19**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Plots**

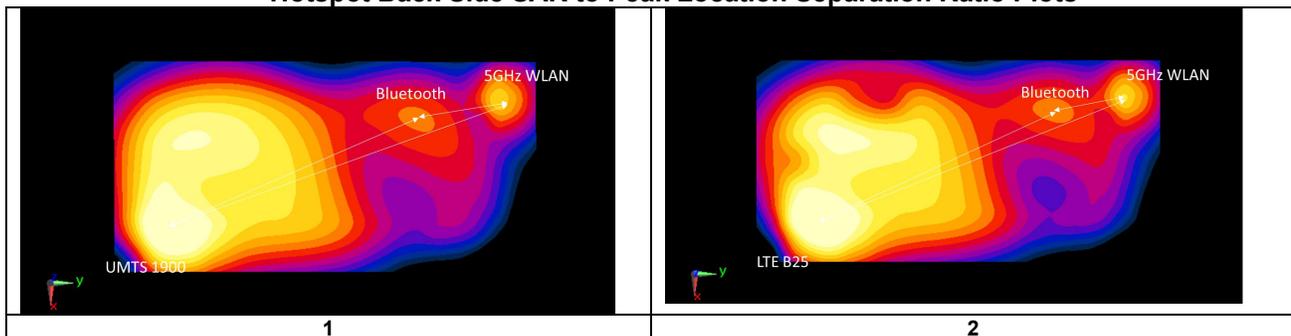

FCC ID: ZNFK330PM	PCTEST Proud to be part of  element	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 112 of 126

12.7.2

Phablet Back Side SPLSR Evaluation and Analysis


**Table 12-20**  
Peak SAR Locations for Phablet Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
UMTS 1750	0.90	-74.70	2.845
LTE B66	-0.60	-74.70	3.153
UMTS 1900	11.90	-72.40	2.786
LTE B25	11.90	-72.40	3.146
5 GHz WLAN	-53.02	83.00	1.268

**Table 12-21**  
Phablet Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
UMTS 1750	5 GHz WLAN	2.845	1.268	4.113	166.66	0.05	1
LTE B66	5 GHz WLAN	3.153	1.268	4.421	166.18	0.06	2
UMTS 1900	5 GHz WLAN	2.786	1.268	4.054	168.42	0.05	3
LTE B25	5 GHz WLAN	3.146	1.268	4.414	168.42	0.06	4

**Table 12-22**  
Phablet Back Side SAR to Peak Location Separation Ratio Plots

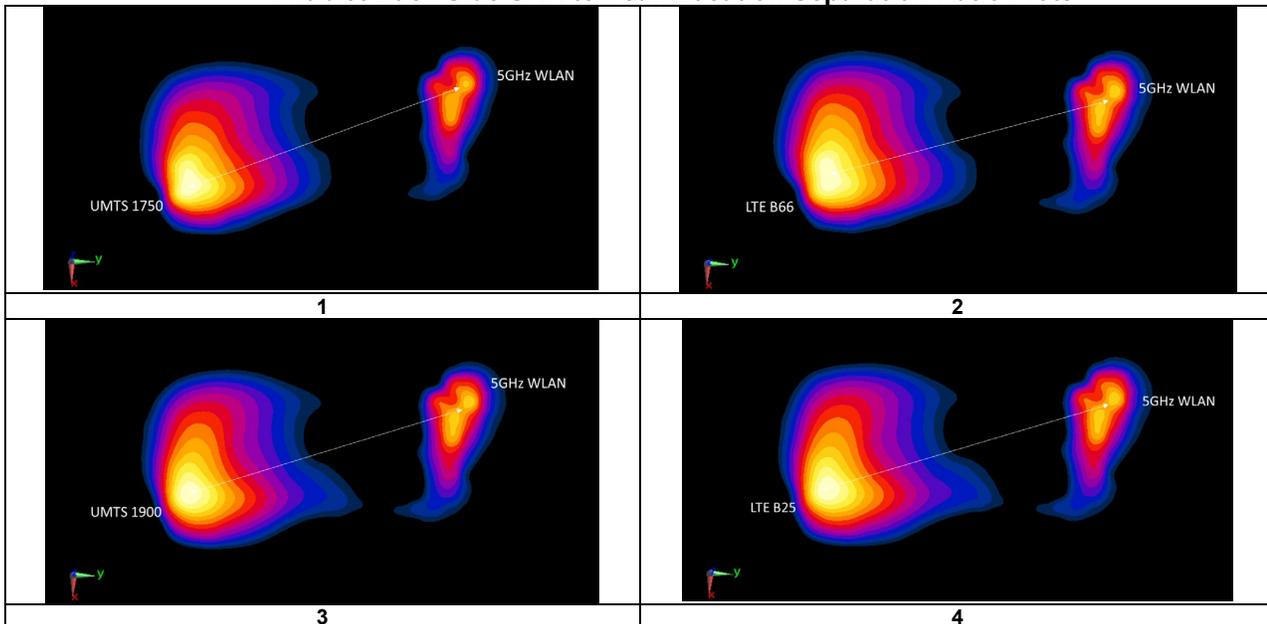

FCC ID: ZNFK330PM	PCTEST Proud to be part of element	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 113 of 126

## 12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR and SPLSR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: ZNFK330PM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 114 of 126

# 13 SAR MEASUREMENT VARIABILITY

## 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1  
Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5600	5620.00	124	802.11a, 20 MHz Bandwidth	OFDM	Left	Tilt	6	0.872	0.808	1.08	N/A	N/A	N/A	N/A
5750	5785.00	157	802.11a, 20 MHz Bandwidth	OFDM	Left	Tilt	6	0.996	0.928	1.07	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 115 of 126	

**Table 13-2  
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1752.60	1513	UMTS 1750	RMC	N/A	back	10 mm	0.993	0.977	1.02	N/A	N/A	N/A	N/A
1900	1905.00	26590	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	N/A	back	10 mm	1.120	0.965	1.16	N/A	N/A	N/A	N/A
2450	2506.00	39750	LTE Band 41 PC3, 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	N/A	back	10 mm	0.889	0.889	1.00	N/A	N/A	N/A	N/A
2600	2549.50	40185	LTE Band 41 PC2, 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	N/A	back	10 mm	0.919	0.998	1.09	N/A	N/A	N/A	N/A
5250	5220.00	44	802.11a, 20 MHz Bandwidth	OFDM	6	top	10 mm	0.936	0.849	1.10	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 13-3  
Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1712.40	1312	UMTS 1750	RMC	back	0 mm	2.820	2.820	1.00	N/A	N/A	N/A	N/A
1900	1860.00	26140	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	back	0 mm	2.740	2.490	1.10	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams						

### 13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: ZNFK330PM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 116 of 126

# 14 ADDITIONAL TESTING PER FCC GUIDANCE


## 14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. When ULCA is active, the linearity between the Power Class 2 with ULCA active and Power Class 3 with ULCA active SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

**Table 14-1  
LTE Band 41 Head Linearity Data**

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.93	27.08
Measured SAR (W/kg)	0.003	0.004
Measured Power (mW)	311.17	510.50
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	196.97	221.05
% deviation from expected linearity		9.81%

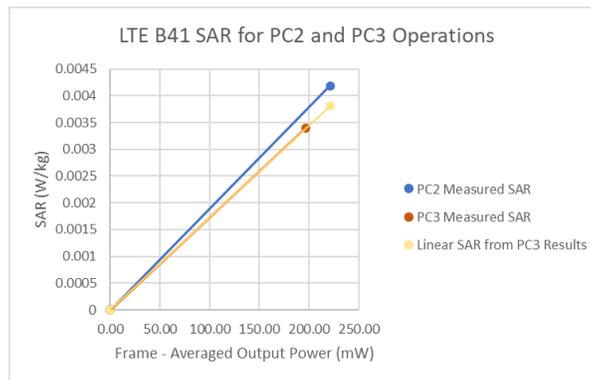


**Figure 14-1  
LTE Band 41 Head Linearity**

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 117 of 126

**Table 14-2  
LTE Band 41 ULCA Head Linearity Data**


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.85	26.98
Measured SAR (W/kg)	0.004	0.005
Measured Power (mW)	305.49	498.88
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	193.38	216.02
% deviation from expected linearity		9.71%

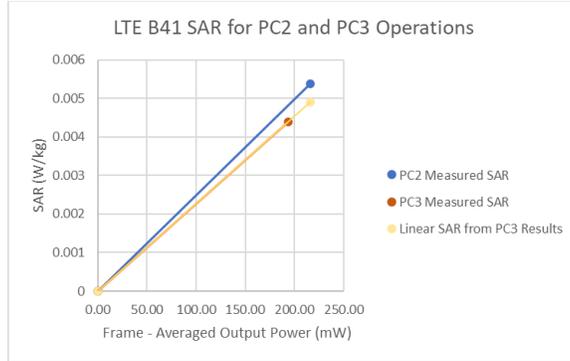

**Figure 14-2  
LTE Band 41 ULCA Head Linearity**

**Table 14-3  
LTE Band 41 Body-Worn Linearity Data**

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.95	27.08
Measured SAR (W/kg)	0.898	0.919
Measured Power (mW)	312.61	510.50
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	197.88	221.05
% deviation from expected linearity		-8.39%

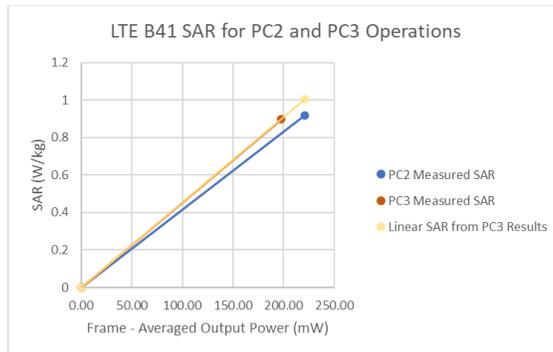


**Figure 14-3  
LTE Band 41 Body-Worn Linearity**

FCC ID: ZNFK330PM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 118 of 126

**Table 14-4**  
**LTE Band 41 ULCA Body-Worn Linearity Data**


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.68	26.83
Measured SAR (W/kg)	0.864	0.899
Measured Power (mW)	293.76	481.95
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	185.95	208.68
% deviation from expected linearity		-7.28%

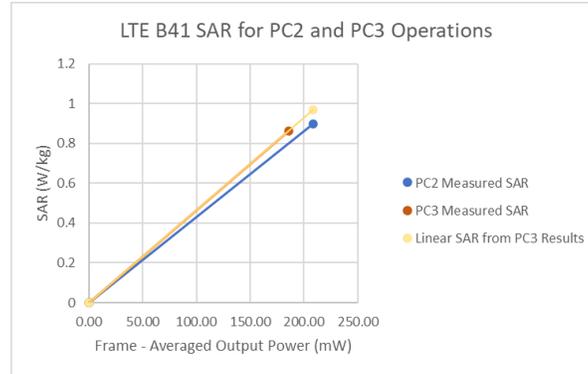

**Figure 14-4**  
**LTE Band 41 ULCA Body-Worn Linearity**

**Table 14-5**  
**LTE Band 41 Hotspot Linearity Data**

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	23.7	25.7
Measured Output Power (dBm)	22.06	24.26
Measured SAR (W/kg)	0.761	0.876
Measured Power (mW)	160.69	266.69
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	101.72	115.47
% deviation from expected linearity		1.40%

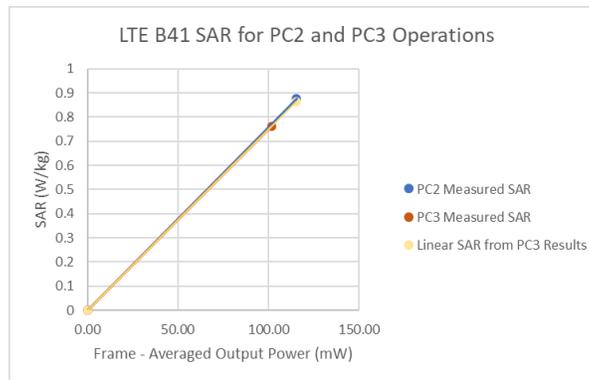


**Figure 14-5**  
**LTE Band 41 Hotspot Linearity**

FCC ID: ZNFK330PM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 119 of 126

**Table 14-6**  
**LTE Band 41 ULCA Hotspot Linearity Data**


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	23.7	25.7
Measured Output Power (dBm)	22.06	24.12
Measured SAR (W/kg)	0.736	0.776
Measured Power (mW)	160.69	258.23
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	101.72	111.81
% deviation from expected linearity		-4.08%

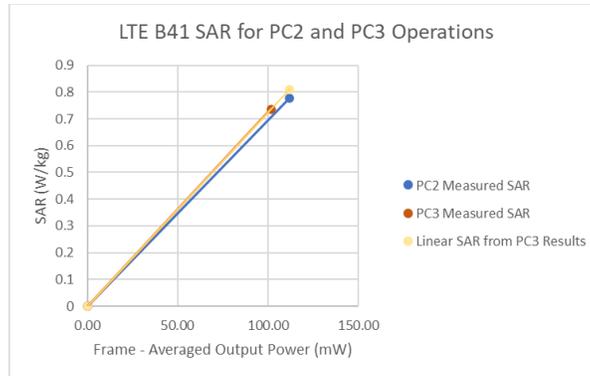

**Figure 14-6**  
**LTE Band 41 ULCA Hotspot Linearity**

**Table 14-7**  
**LTE Band 41 Phablet Linearity Data**

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.93	27.08
Measured SAR (W/kg)	1.050	1.100
Measured Power (mW)	311.17	510.50
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	196.97	221.05
% deviation from expected linearity		-6.65%

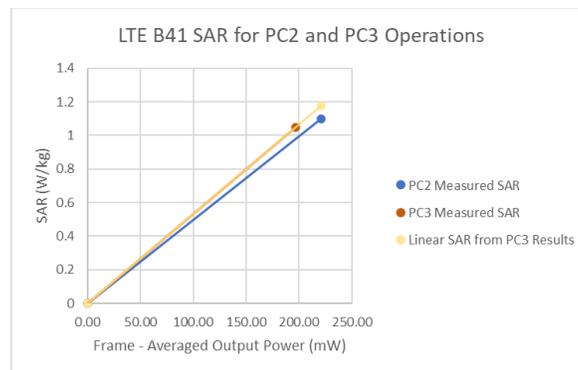


**Figure 14-7**  
**LTE Band 41 Phablet Linearity**

FCC ID: ZNFK330PM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 120 of 126	

**Table 14-8**  
**LTE Band 41 ULCA Phablet Linearity Data**

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.7	27.7
Measured Output Power (dBm)	24.85	26.98
Measured SAR (W/kg)	1.080	1.120
Measured Power (mW)	305.49	498.88
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	193.38	216.02
% deviation from expected linearity		-7.17%

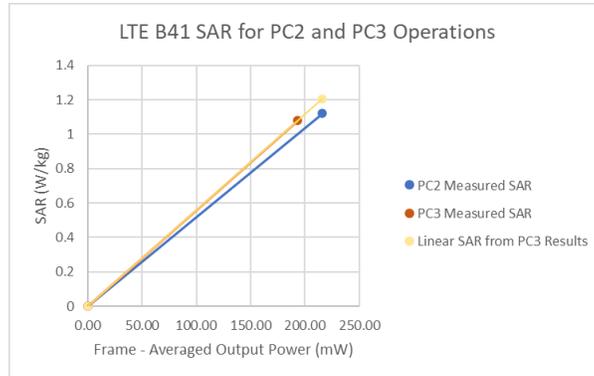

**Figure 14-8**  
**LTE Band 41 ULCA Phablet Linearity**

FCC ID: ZNFK330PM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset	Page 121 of 126	

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85033E	3.5mm Standard Calibration Kit	6/6/2020	Annual	6/6/2021	MY53002352
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753ES	Network Analyzer	3/5/2020	Annual	3/5/2021	MY40001472
Agilent	8753ES	S-Parameter Network Analyzer	12/31/2019	Annual	12/31/2020	US39170122
Agilent	8753ES	S-Parameter Vector Network Analyzer	12/15/2020	Annual	12/15/2021	MY40003841
Agilent	E4438C	ESG Vector Signal Generator	9/29/2020	Annual	9/29/2021	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	12/14/2020	Biennial	12/14/2022	MY42082385
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	2/10/2020	Annual	2/10/2021	GB42230325
Agilent	E5515C	Wireless Communications Test Set	2/26/2020	Annual	2/26/2021	GB44400860
Agilent	N4101A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46570664
Agilent	NS182A	MKG Vector Signal Generator	2/19/2020	Annual	2/19/2021	MY47420651
Agilent	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY5250166
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	MA24106A	USB Power Sensor	9/15/2020	Annual	9/15/2021	1244515
Anritsu	MA24106A	USB Power Sensor	2/27/2020	Annual	2/27/2021	1244524
Anritsu	MA2411B	Pulse Power Sensor	6/12/2020	Annual	6/12/2021	1207364
Anritsu	MA2411B	Pulse Power Sensor	1/21/2020	Annual	1/21/2021	1207470
Anritsu	ML2495A	Power Meter	11/3/2020	Annual	11/3/2021	1039008
Anritsu	ML2495A	Power Meter	1/15/2020	Annual	1/15/2021	1328004
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Anritsu	MT8821C	Radio Communication Analyzer	6/15/2020	Annual	6/15/2021	6201381794
Anritsu	MT8821C	Radio Communication Analyzer	2/22/2020	Annual	2/22/2021	6261895213
Anritsu	MT8821C	Radio Communication Analyzer	9/11/2020	Annual	9/11/2021	6201524637
Control Company	4040	Therm./Clock/Humidity Monitor	2/17/2020	Biennial	2/17/2022	200113269
Control Company	4040	Therm./Clock/Humidity Monitor	2/17/2020	Biennial	2/17/2022	200113274
Control Company	4040	Therm./Clock/Humidity Monitor	3/6/2020	Biennial	3/6/2022	200170313
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282744
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282739
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
KEYSIGHT	E4438C	VECTOR SIGNAL GENERATOR	6/22/2020	Annual	6/22/2021	MY45092078
Keysight Technologies	AT/N6705B	DC Power Supply	N/A	N/A	N/A	MY53001315
Keysight Technologies	N6705B	DC Power Analyzer	4/27/2019	Biennial	4/27/2021	MY53004959
Keysight Technologies	U3401A	Digital Multimeter	5/14/2020	Biennial	5/14/2022	MY57201070
Insate	1108-150	Digital Calliper	1/17/2020	Biennial	1/17/2022	409193536
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	88979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1200 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2900 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	NC-100	Torque Wrench	8/4/2020	Biennial	8/4/2022	N/A
Pasternack	NC-100	Torque Wrench	8/4/2020	Biennial	8/4/2022	1445
Pasternack	PE2208-6	Bi-directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bi-directional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	11/4/2020	Annual	11/4/2021	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	11/5/2020	Annual	11/5/2021	112347
Rohde & Schwarz	CMW500	Radio Communication Tester	3/27/2020	Annual	3/27/2021	128633
Rohde & Schwarz	CMW500	Radio Communication Tester	5/21/2020	Annual	5/21/2021	128635
Rohde & Schwarz	ZNLE6	Vector Network Analyzer	9/29/2020	Annual	9/29/2021	101307
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	11/12/2020	Annual	11/12/2021	1121
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/12/2020	Annual	5/12/2021	1070
SPEAG	D750V3	750 MHz SAR Dipole	5/18/2018	Triennial	5/18/2021	1034
SPEAG	D835V2	835 MHz SAR Dipole	3/13/2019	Biennial	3/13/2021	40447
SPEAG	D835V2	835 MHz SAR Dipole	10/9/2018	Triennial	10/9/2021	4d133
SPEAG	D835V2	835 MHz SAR Dipole	5/18/2018	Triennial	5/18/2021	4d180
SPEAG	D1750V2	1750 MHz SAR Dipole	5/12/2020	Annual	5/12/2021	1148
SPEAG	D1765V2	1765 MHz SAR Dipole	5/23/2018	Triennial	5/23/2021	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2019	Biennial	2/21/2021	5d148
SPEAG	D2450V2	2450 MHz SAR Dipole	11/12/2018	Triennial	11/12/2021	921
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Triennial	4/11/2021	1004
SPEAG	D5GHV2	5 GHz SAR Dipole	1/16/2018	Triennial	1/16/2021	1057
SPEAG	D835V2	835 MHz SAR Dipole	1/13/2020	Annual	1/13/2021	4d132
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2018	Triennial	10/22/2021	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Triennial	10/23/2021	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	5/16/2018	Triennial	5/16/2021	945
SPEAG	D2450V2	2450 MHz SAR Dipole	8/16/2018	Triennial	8/16/2021	981
SPEAG	D5GHV2	5 GHz SAR Dipole	3/13/2018	Triennial	3/13/2021	1123
SPEAG	D5GHV2	5 GHz SAR Dipole	9/13/2018	Triennial	9/13/2021	1163
SPEAG	EX3DV4	SAR Probe	10/21/2020	Annual	10/21/2021	7420
SPEAG	EX3DV4	SAR Probe	1/21/2020	Annual	1/21/2021	7488
SPEAG	EX3DV4	SAR Probe	10/20/2020	Annual	10/20/2021	7539
SPEAG	EX3DV4	SAR Probe	7/31/2020	Annual	7/31/2021	7508
SPEAG	EX3DV4	SAR Probe	6/22/2020	Annual	6/22/2021	7416
SPEAG	EX3DV4	SAR Probe	1/21/2020	Annual	1/21/2021	3589
SPEAG	EX3DV4	SAR Probe	4/21/2020	Annual	4/21/2021	7557
SPEAG	EX3DV4	SAR Probe	3/20/2020	Annual	3/20/2021	7421
SPEAG	EX3DV4	SAR Probe	12/11/2019	Annual	12/11/2020	7571
SPEAG	EX3DV4	SAR Probe	7/20/2020	Annual	7/20/2021	7410
SPEAG	EX3DV4	SAR Probe	7/16/2020	Annual	7/16/2021	7546
SPEAG	EX3DV4	SAR Probe	6/23/2020	Annual	6/23/2021	7409
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/12/2020	Annual	10/12/2021	1213
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2020	Annual	1/13/2021	1530
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/20/2020	Annual	5/20/2021	728
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/11/2020	Annual	8/11/2021	1450
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/11/2020	Annual	6/11/2021	701
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2020	Annual	1/13/2021	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/15/2020	Annual	4/15/2021	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/19/2020	Annual	3/19/2021	604
SPEAG	DAE4	Data Acquisition Electronics	12/7/2020	Annual	12/7/2021	1533
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/15/2020	Annual	7/15/2021	1322
SPEAG	DAE4	Data Acquisition Electronics	4/14/2020	Annual	4/14/2021	1532
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2020	Annual	6/18/2021	1334

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFK330PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 122 of 126

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>	RSS					11.5	11.3	60
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 123 of 126

# 17 CONCLUSION

## 17.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of  element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2011170181-01-R1.ZNF	Test Dates: 11/18/20 – 1/6/21	DUT Type: Portable Handset		Page 124 of 126

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFK330PM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset	Page 125 of 126	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFK330PM	 <b>PCTEST</b> <small>Proud to be part of element</small>		SAR EVALUATION REPORT		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2011170181-01-R1.ZNF	<b>Test Dates:</b> 11/18/20 – 1/6/21	<b>DUT Type:</b> Portable Handset		Page 126 of 126	