

**PART 27 MEASUREMENT REPORT**

**Applicant Name:**  
 LG Electronics USA, Inc.  
 111 Sylvan Avenue, North Building  
 Englewood Cliffs, NJ 07632  
 United States


**Date of Testing:**  
 12/30/2020 - 1/13/2021  
**Test Site/Location:**  
 PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2012140197-04.ZNF

|                   |                                 |
|-------------------|---------------------------------|
| <b>FCC ID:</b>    | <b>ZNFK330PM</b>                |
| <b>APPLICANT:</b> | <b>LG Electronics USA, Inc.</b> |

**Application Type:** Class II Permissive change  
**Model:** LM-K330PM  
**Additional Model(s):** LM-K330TM, LM-K330MM, LG L460DL, LM-K330QM, LM-K330QM6, LM-K330QN, LM-K330VM, LMK330PM, LMK330TM, LMK330MM, LGL460DL, LMK330QM, LMK330QM6, LMK330QN, LMK330VM, K330PM, K330TM, K330MM, L460DL, K330QM, K330QM6, K330QN, K330VM  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 27  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 01/12/2021



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.





Randy Ortanez  
 President



|  |   |  |   |  |
|--|---|--|---|--|
| <b>FCC ID:</b> ZNFK330PM                       |  | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2012140197-04.ZNF | <b>Test Dates:</b><br>12/30/2020 - 1/13/2021  | <b>EUT Type:</b><br>Portable Handset                               | Page 1 of 25  |  |

## TABLE OF CONTENTS

|     |  |    |
|-----|--|----|
| 1.0 | INTRODUCTION .....                                   | 3  |
| 1.1 | Scope .....  | 3  |
| 1.2 | PCTEST Test Location.....                            | 3  |
| 1.3 | Test Facility / Accreditations.....                  | 3  |
| 2.0 | PRODUCT INFORMATION.....                             | 4  |
| 2.1 | Equipment Description .....                          | 4  |
| 2.2 | Device Capabilities.....                             | 4  |
| 2.3 | Test Configuration .....                             | 4  |
| 2.4 | EMI Suppression Device(s)/Modifications .....        | 4  |
| 3.0 | DESCRIPTION OF TESTS .....                           | 5  |
| 3.1 | Evaluation Procedure .....                           | 5  |
| 3.2 | Radiated Power and Radiated Spurious Emissions ..... | 5  |
| 4.0 | MEASUREMENT UNCERTAINTY .....                        | 6  |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA .....                | 7  |
| 6.0 | SAMPLE CALCULATIONS .....                            | 8  |
| 7.0 | TEST RESULTS.....                                    | 9  |
| 7.1 | Summary.....   | 9  |
| 7.2 | Radiated Power (EIRP).....                           | 10 |
| 7.3 | Radiated Spurious Emissions Measurements.....        | 14 |
| 8.0 | CONCLUSION.....                                      | 25 |

|  |  |  |   |  |
|--|--|--|---|--|
| <b>FCC ID:</b> ZNFK330PM                       | <br><b>PCTEST</b><br><small>Proud to be part of element</small> | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2012140197-04.ZNF | <b>Test Dates:</b><br>12/30/2020 - 1/13/2021   | <b>EUT Type:</b><br>Portable Handset                               | Page 2 of 25  |  |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

|   |  |  |   |                                   |
|---|--|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST®<br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021  | EUT Type:<br>Portable Handset                              |   | Page 3 of 25                      |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFK330PM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

**Test Device Serial No.:** 21392, 21384

### 2.2 Device Capabilities

This device contains the following capabilities:



850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, CDMA/EvDO Rev. 0/A 800/850/1900 (BC10/BC0/BC1), Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

|   |   |  |  |                                   |
|---|---|--|--|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST<br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 4 of 25   |                                   |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .



For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E[dB\mu V/m] = \text{Measured amplitude level}[dBm] + 107 + \text{Cable Loss}[dB] + \text{Antenna Factor}[dB/m]$$

And

$$\text{EIRP}[dBm] = E[dB\mu V/m] + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$



All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |   | Page 5 of 25                      |

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

|   |  |  |  |                                   |
|---|--|--|--|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST <sup>®</sup><br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021  | EUT Type:<br>Portable Handset                              |  | Page 6 of 25                      |

## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer          | Model      | Description                  | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------------|------------|------------------------------|-----------|--------------|-----------|---------------|
| Anritsu               | MT8820C    | Radio Communication Analyzer | N/A       |              |           | 6201300731    |
| Anritsu               | MT8821C    | Radio Communication Analyzer | N/A       |              |           | 6200901190    |
| Emco                  | 3115       | Horn Antenna (1-18GHz)       | 6/18/2020 | Biennial     | 6/18/2022 | 9704-5182     |
| Keysight Technologies | N9020A     | MXA Signal Analyzer          | 4/29/2019 | Annual       | 8/14/2021 | MY54500644    |
| Mini-Circuits         | SSG-4000HP | Synthesized Signal Generator | N/A       |              |           | 11208010032   |
| Rohde & Schwarz       | CMW500     | Radio Communication Tester   | N/A       |              |           | 112347        |
| Rohde & Schwarz       | SFUNIT-Rx  | Shielded Filter Unit         | 2/10/2020 | Annual       | 2/10/2021 | 102134        |

**Table 5-1. Summary of Test Results**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 7 of 25  |                                   |

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated



7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm  $- (-24.80)$ .

|   |   |  |  |                                   |
|---|---|--|--|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST<br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |  | Page 8 of 25                      |



## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFK330PM  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): WCDMA/LTE

| Test Condition  | Test Description   | FCC Part Section(s) | RSS Section(s)   | Test Limit   | Test Result | Reference   |
|---|--|---------------------|--|--|-------------|-------------|
| RADIATED  | Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 71) | 27.50(b)(10)        | RSS-130(4.4)   | < 3 Watts max. ERP<br>< 5 Watts max. EIRP  | PASS        | Section 7.2 |
|   | Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 12) |                     |  |  | PASS        |             |
|   | Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 13) | 27.50(c)(10)        | RSS-130(4.4)   | < 3 Watts max. ERP<br>< 5 Watts max. EIRP  | PASS        |             |
|   | Equivalent Isotropic Radiated Power (WCDMA)                                  | 27.50(d)(4)         | RSS-139(6.5)   | < 1 Watts max. EIRP  | PASS        |             |
|   | Equivalent Isotropic Radiated Power (LTE Band 4/66)                          |                     |  |  | PASS        |             |
|   | Radiated Spurious Emissions (LTE Band 13)                                    | 2.1053, 27.53(f)    | RSS-139(6.6)   | < -70 dBW/MHz (for wideband signals)<br>< -80 dBW (for discrete emissions less than 700Hz BW)<br>For all emissions in the band 1559 - 1610 MHz | PASS        |             |
| Radiated Spurious Emissions (LTE B4/66, B71, B12, B13 and WCDMA B4) | 2.1053, 27.53  | RSS-139(6.6)        | > 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions | PASS   |             |             |

Table 7-1. Summary of Test Results

#### Notes:

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 9 of 25  |                                   |

## 7.2 Radiated Power (EIRP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |   | Page 10 of 25                     |

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

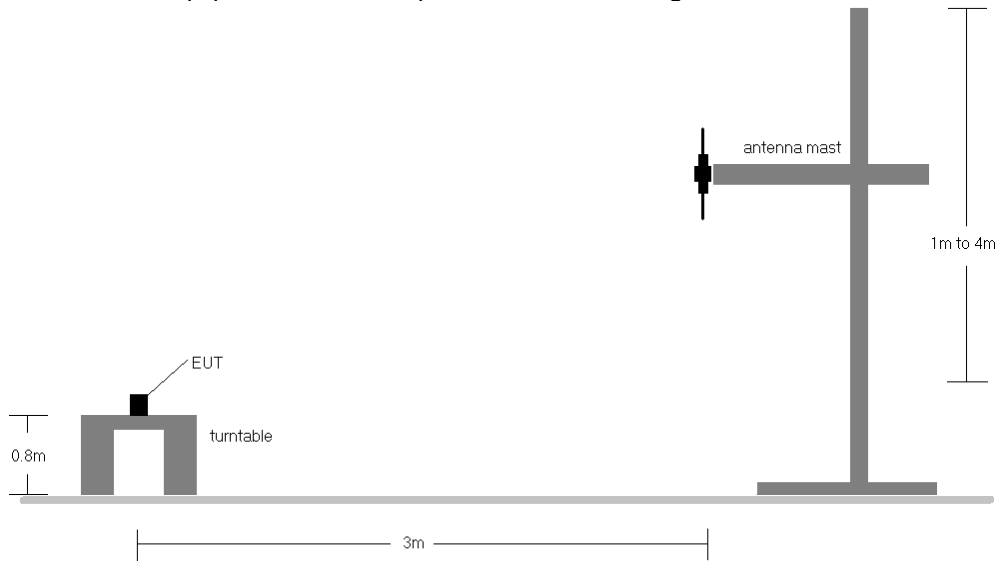

**Figure 7-1. Radiated Test Setup <1GHz**

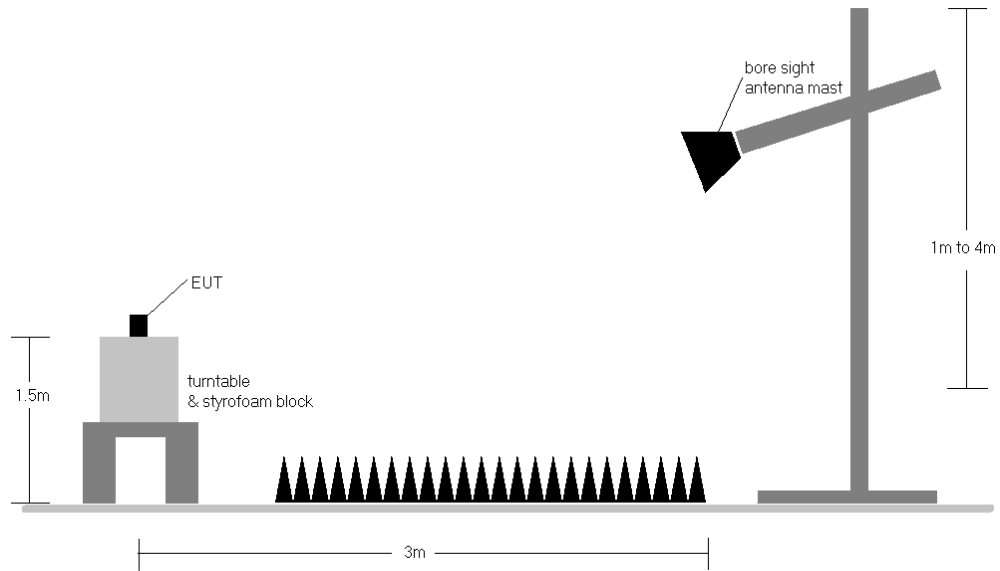



**Figure 7-2. Radiated Test Setup >1GHz**

|   |   |  |   |
|---|---|--|---|
| <p>FCC ID: ZNFK330PM</p>                        |   | <p>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</p> | <p>Approved by:<br/>Technical Manager</p> |
| <p>Test Report S/N:<br/>1M2012140197-04.ZNF</p> | <p>Test Dates:<br/>12/30/2020 - 1/13/2021</p> | <p>EUT Type:<br/>Portable Handset</p>                              | <p>Page 11 of 25</p>                      |

**Test Notes**

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

|  |   |  |  |
|--|---|--|--|
| FCC ID: ZNFK330PM                              |  | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2012140197-04.ZNF | <b>Test Dates:</b><br>12/30/2020 - 1/13/2021  | <b>EUT Type:</b><br>Portable Handset                               | Page 12 of 25  |

| Bandwidth | Mod.          | Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Ant. Gain [dBi] | RB Size/Offset | Substitute Level [dBm] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------|---------------|-----------------|-----------------|---------------------|----------------------------|-----------------|----------------|------------------------|--------------|--------------|------------------|-------------|
| 20 MHz    | QPSK          | 1720.0          | H               | 250.0               | 1.0                        | 9.41            | 1 / 50         | 13.15                  | <b>22.56</b> | 0.180        | 30.00            | -7.44       |
|           |               | 1745.0          | H               | 239.0               | 4.0                        | 9.26            | 1 / 50         | 12.57                  | 21.83        | 0.152        | 30.00            | -8.17       |
|           |               | 1770.0          | H               | 232.0               | 12.0                       | 9.27            | 1 / 99         | 12.82                  | 22.09        | 0.162        | 30.00            | -7.91       |
|           | 16-QAM        | 1720.0          | H               | 250.0               | 1.0                        | 9.41            | 1 / 0          | 12.32                  | <b>21.73</b> | 0.149        | 30.00            | -8.27       |
| 20 MHz    | 64-QAM        | 1720.0          | H               | 250.0               | 1.0                        | 9.41            | 1 / 50         | 11.26                  | <b>20.67</b> | 0.117        | 30.00            | -9.33       |
| 20 MHz    | Opposite Pol. | 1720.0          | V               | 163.0               | 309.0                      | 9.31            | 1 / 50         | 12.78                  | 22.09        | 0.162        | 30.00            | -7.91       |

Table 7-1. EIRP Data (LTE Band 66/4)

| Bandwidth | Mod.          | Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Ant. Gain [dBi] | RB Size/Offset | Substitute Level [dBm] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] | ERP [dBm]    | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------|---------------|-----------------|-----------------|---------------------|----------------------------|-----------------|----------------|------------------------|--------------|--------------|------------------|-------------|--------------|-------------|-----------------|-------------|
| 10 MHz    | QPSK          | 704.0           | V               | 153.0               | 359.0                      | 4.58            | 1 / 49         | 17.24                  | 21.82        | 0.152        | 36.99            | -15.17      | 19.67        | 0.093       | 34.77           | -15.10      |
|           |               | 707.5           | V               | 144.0               | 205.0                      | 4.62            | 1 / 49         | 17.90                  | 22.52        | 0.179        | 36.99            | -14.47      | 20.37        | 0.109       | 34.77           | -14.40      |
|           |               | 711.0           | V               | 153.0               | 240.0                      | 4.67            | 1 / 49         | 18.58                  | <b>23.25</b> | 0.211        | 36.99            | -13.74      | <b>21.10</b> | 0.129       | 34.77           | -13.67      |
|           | 16-QAM        | 711.0           | V               | 153.0               | 240.0                      | 4.67            | 1 / 49         | 17.49                  | <b>22.16</b> | 0.164        | 36.99            | -14.83      | <b>20.01</b> | 0.100       | 34.77           | -14.76      |
| 10 MHz    | 64-QAM        | 711.0           | V               | 153.0               | 240.0                      | 4.67            | 1 / 49         | 16.64                  | <b>21.31</b> | 0.135        | 36.99            | -15.68      | <b>19.16</b> | 0.082       | 34.77           | -15.61      |
| 10 MHz    | Opposite Pol. | 711.0           | H               | 262.0               | 271.0                      | 4.67            | 1 / 49         | 15.87                  | 20.54        | 0.113        | 36.99            | -16.45      | 18.39        | 0.069       | 34.77           | -16.38      |

Table 7-2. ERP Data (LTE Band 12)

| Bandwidth | Mod.          | Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Ant. Gain [dBi] | RB Size/Offset | Substitute Level [dBm] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] | ERP [dBm]    | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------|---------------|-----------------|-----------------|---------------------|----------------------------|-----------------|----------------|------------------------|--------------|--------------|------------------|-------------|--------------|-------------|-----------------|-------------|
| 10 MHz    | QPSK          | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 25         | 16.60                  | <b>22.49</b> | 0.178        | 36.99            | -14.50      | <b>20.34</b> | 0.108       | 34.77           | -14.43      |
|           | 16-QAM        | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 25         | 15.78                  | <b>21.67</b> | 0.147        | 36.99            | -15.32      | <b>19.52</b> | 0.090       | 34.77           | -15.25      |
|           | 64-QAM        | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 25         | 14.72                  | <b>20.61</b> | 0.115        | 36.99            | -16.38      | <b>18.46</b> | 0.070       | 34.77           | -16.31      |
| 5 MHz     | QPSK          | 779.5           | H               | 246.0               | 296.0                      | 5.82            | 1 / 12         | 16.49                  | 22.30        | 0.170        | 36.99            | -14.69      | 20.15        | 0.104       | 34.77           | -14.62      |
|           |               | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 12         | 16.46                  | <b>22.35</b> | 0.172        | 36.99            | -14.64      | <b>20.20</b> | 0.105       | 34.77           | -14.57      |
|           |               | 784.5           | H               | 246.0               | 296.0                      | 5.92            | 1 / 12         | 16.35                  | 22.27        | 0.169        | 36.99            | -14.72      | 20.12        | 0.103       | 34.77           | -14.65      |
|           | 16-QAM        | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 12         | 15.91                  | <b>21.80</b> | 0.151        | 36.99            | -15.19      | <b>19.65</b> | 0.092       | 34.77           | -15.12      |
| 10 MHz    | 64-QAM        | 782.0           | H               | 246.0               | 296.0                      | 5.89            | 1 / 12         | 15.04                  | <b>20.93</b> | 0.124        | 36.99            | -16.06      | <b>18.78</b> | 0.076       | 34.77           | -15.99      |
| 10 MHz    | Opposite Pol. | 784.5           | V               | 137.0               | 109.0                      | 5.79            | 1 / 12         | 14.65                  | 20.44        | 0.111        | 36.99            | -16.55      | 18.29        | 0.068       | 34.77           | -16.48      |



Table 7-3. ERP Data (LTE Band 13)

| Bandwidth | Mod.          | Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Ant. Gain [dBi] | RB Size/Offset | Substitute Level [dBm] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] | ERP [dBm]    | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------|---------------|-----------------|-----------------|---------------------|----------------------------|-----------------|----------------|------------------------|--------------|--------------|------------------|-------------|--------------|-------------|-----------------|-------------|
| 20 MHz    | QPSK          | 673.0           | V               | 182.0               | 324.0                      | 4.09            | 1 / 50         | 16.74                  | 20.83        | 0.121        | 36.99            | -16.16      | 18.68        | 0.074       | 34.77           | -16.09      |
|           |               | 680.5           | V               | 172.0               | 312.0                      | 4.24            | 1 / 50         | 17.42                  | <b>21.66</b> | 0.146        | 36.99            | -15.33      | <b>19.51</b> | 0.089       | 34.77           | -15.27      |
|           |               | 688.0           | V               | 174.0               | 311.0                      | 4.48            | 1 / 50         | 16.66                  | 21.14        | 0.130        | 36.99            | -15.85      | 18.99        | 0.079       | 34.77           | -15.78      |
|           | 16-QAM        | 680.5           | V               | 172.0               | 312.0                      | 4.24            | 1 / 50         | 16.39                  | <b>20.63</b> | 0.116        | 36.99            | -16.36      | <b>18.48</b> | 0.070       | 34.77           | -16.30      |
| 20 MHz    | 64-QAM        | 680.5           | V               | 172.0               | 312.0                      | 4.24            | 1 / 50         | 15.38                  | <b>19.62</b> | 0.092        | 36.99            | -17.37      | <b>17.47</b> | 0.056       | 34.77           | -17.31      |
| 20 MHz    | Opposite Pol. | 680.5           | H               | 306.0               | 97.0                       | 4.24            | 1 / 50         | 15.88                  | 20.12        | 0.103        | 36.99            | -16.87      | 17.97        | 0.063       | 34.77           | -16.81      |

Table 7-4. ERP Data (LTE Band 71)

| Frequency [MHz] | Mode      | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-----------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|------------------|-------------|
| 1712.40         | WCDMA1700 | V               | 158                 | 236                        | 13.88                  | 9.37            | 23.25        | 0.211        | 30.00            | -6.75       |
| 1732.60         | WCDMA1700 | V               | 152                 | 221                        | 14.23                  | 9.22            | <b>23.45</b> | <b>0.222</b> | 30.00            | -6.55       |
| 1752.60         | WCDMA1700 | V               | 160                 | 227                        | 13.89                  | 9.11            | 23.00        | 0.200        | 30.00            | -7.00       |
| 1732.60         | WCDMA1700 | H               | 136                 | 7                          | 14.02                  | 9.34            | 23.36        | 0.217        | 30.00            | -6.64       |

Table 7-5. EIRP Data (WCDMA AWS)

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 13 of 25   |                                   |

## 7.3 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the direct field strength calculation method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 14 of 25   |                                   |

## Test Setup

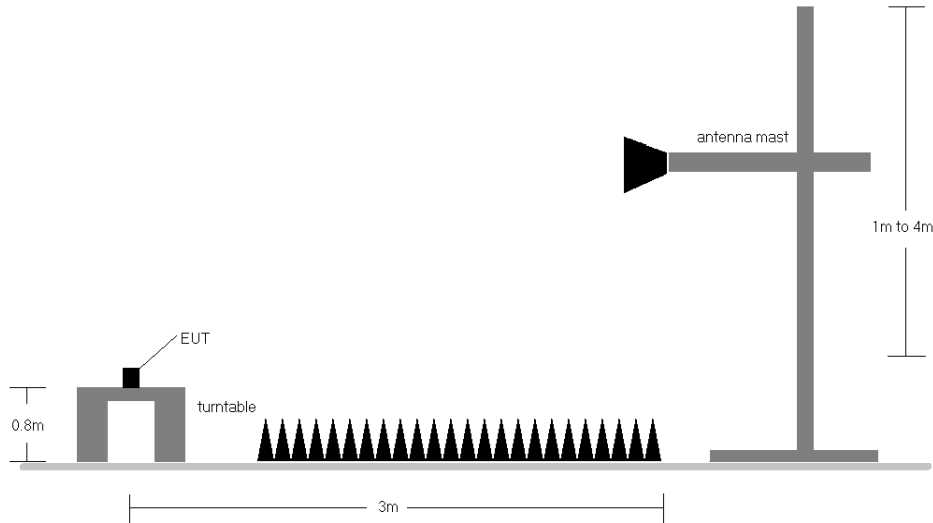

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-3. Test Instrument & Measurement Setup**

## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - b)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - d)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |   | Page 15 of 25                     |

# LTE Band 66/4

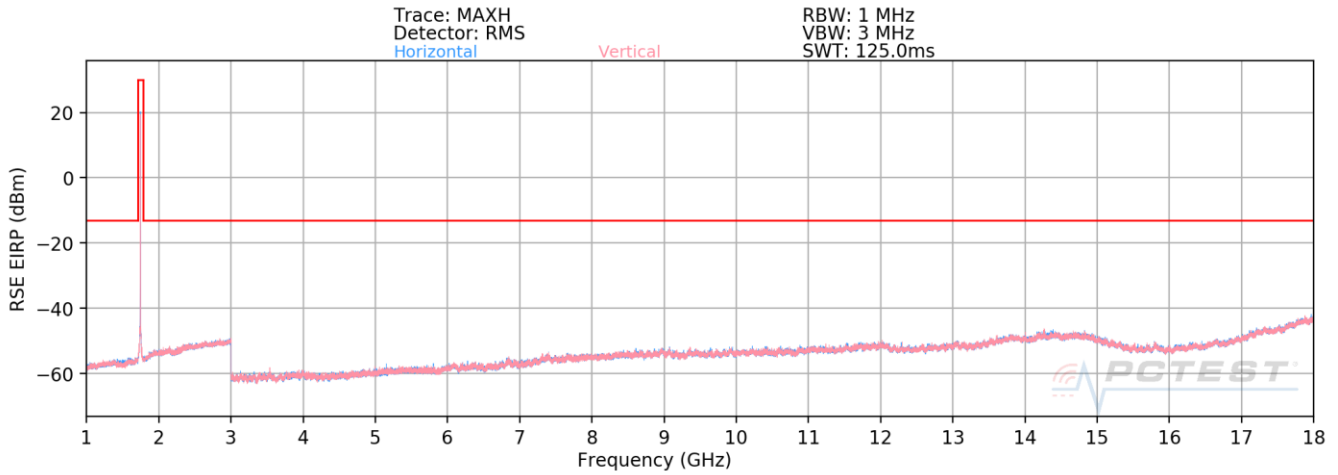

**Plot 7-6. Radiated Spurious Plot (LTE Band 66/4)**

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 1720.0 |
| RB / Offset:     | 1 / 50 |



| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 3440.0          | V               | 180                 | 268                        | -78.03               | 1.69        | 30.66                   | -64.60                             | -13.00      | -51.60      |
| 5160.0          | V               | 126                 | 39                         | -77.81               | 4.50        | 33.69                   | -61.57                             | -13.00      | -48.57      |
| 6880.0          | V               | -                   | -                          | -81.56               | 8.67        | 34.11                   | -61.14                             | -13.00      | -48.14      |
| 8600.0          | V               | -                   | -                          | -80.91               | 11.00       | 37.09                   | -58.16                             | -13.00      | -45.16      |
| 10320.0         | V               | -                   | -                          | -81.47               | 11.75       | 37.28                   | -57.98                             | -13.00      | -44.98      |

**Table 7-2. Radiated Spurious Data (LTE Band 66/4 – Low Channel)**

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 1745.0 |
| RB / Offset:     | 1 / 50 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 3490.0          | V               | 356                 | 267                        | -77.40               | 1.24        | 30.84                   | -64.41                             | -13.00      | -51.41      |
| 5235.0          | V               | -                   | -                          | -79.81               | 4.52        | 31.71                   | -63.55                             | -13.00      | -50.55      |
| 6980.0          | V               | -                   | -                          | -80.14               | 7.19        | 34.05                   | -61.20                             | -13.00      | -48.20      |
| 8725.0          | V               | -                   | -                          | -80.76               | 10.69       | 36.93                   | -58.33                             | -13.00      | -45.33      |

**Table 7-3. Radiated Spurious Data (LTE Band 66/4 – Mid Channel)**



|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 16 of 25   |                                   |




|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 1770.0 |
| RB / Offset:     | 1 / 50 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB $\mu$ V/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|------------------------------------|-------------|-------------|
| 3540.00         | V               | 400                 | 236                        | -77.28               | 1.34        | 31.06                         | -64.20                             | -13.00      | -51.20      |
| 5310.00         | V               | 385                 | 238                        | -78.82               | 4.46        | 32.64                         | -62.62                             | -13.00      | -49.62      |
| 7080.00         | V               | -                   | -                          | -79.82               | 7.64        | 34.82                         | -60.44                             | -13.00      | -47.44      |
| 8850.00         | V               | -                   | -                          | -80.87               | 11.22       | 37.35                         | -57.91                             | -13.00      | -44.91      |
| 10620.00        | V               | -                   | -                          | -81.88               | 12.68       | 37.80                         | -57.45                             | -13.00      | -44.45      |

**Table 7-4. Radiated Spurious Data (LTE Band 66/4 – High Channel)**

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST<br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 17 of 25   |                                   |

## LTE Band 12

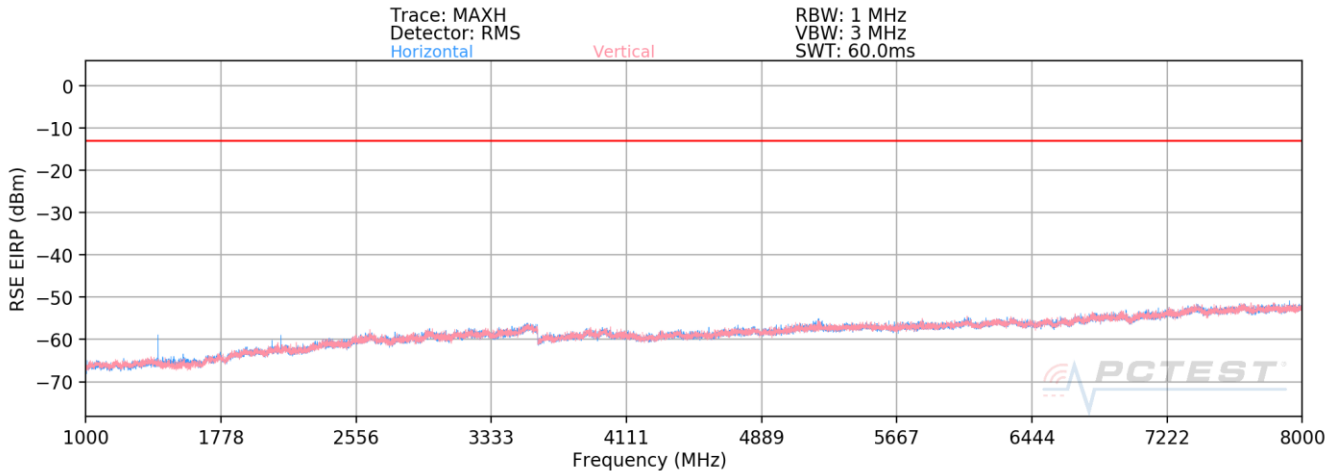

Plot 7-7. Radiated Spurious Plot (LTE Band 12)

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 10     |
| Frequency (MHz): | 704.0  |
| RB / Offset:     | 1 / 25 |



| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB $\mu$ V/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|------------------------------------|-------------|-------------|
| 1408.0          | V               | 277                 | 78                         | -74.74               | -5.29       | 26.97                         | -68.28                             | -13.00      | -55.28      |
| 2112.0          | V               | -                   | -                          | -77.63               | -2.85       | 26.52                         | -68.73                             | -13.00      | -55.73      |
| 2816.0          | V               | -                   | -                          | -78.64               | -1.28       | 27.08                         | -68.18                             | -13.00      | -55.18      |
| 3520.0          | V               | -                   | -                          | -78.13               | 1.37        | 30.24                         | -65.01                             | -13.00      | -52.01      |

Table 7-5. Radiated Spurious Data (LTE Band 12 – Low Channel)

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 10     |
| Frequency (MHz): | 707.5  |
| RB / Offset:     | 1 / 25 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB $\mu$ V/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|------------------------------------|-------------|-------------|
| 1415.0          | V               | 340                 | 280                        | -77.49               | -5.37       | 24.14                         | -71.12                             | -13.00      | -58.12      |
| 2122.5          | V               | -                   | -                          | -80.47               | -2.88       | 23.65                         | -71.61                             | -13.00      | -58.61      |
| 2830.0          | V               | -                   | -                          | -80.19               | -1.15       | 25.66                         | -69.60                             | -13.00      | -56.60      |
| 3537.5          | V               | -                   | -                          | -77.98               | 1.53        | 30.55                         | -64.71                             | -13.00      | -51.71      |



Table 7-6. Radiated Spurious Data (LTE Band 12 – Mid Channel)

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |   | Page 18 of 25                     |


|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 10     |
| Frequency (MHz): | 711.0  |
| RB / Offset:     | 1 / 25 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB $\mu$ V/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|------------------------------------|-------------|-------------|
| 1422.0          | V               | 186                 | 168                        | -76.44               | -5.35       | 25.21                         | -70.05                             | -13.00      | -57.05      |
| 2133.0          | V               | 112                 | 226                        | -76.94               | -2.88       | 27.18                         | -68.07                             | -13.00      | -55.07      |
| 2844.0          | V               | -                   | -                          | -78.13               | -1.09       | 27.78                         | -67.48                             | -13.00      | -54.48      |
| 3555.0          | V               | -                   | -                          | -77.41               | 1.45        | 31.04                         | -64.22                             | -13.00      | -51.22      |
| 4266.0          | V               | -                   | -                          | -78.68               | 2.26        | 30.58                         | -64.68                             | -13.00      | -51.68      |

**Table 7-7. Radiated Spurious Data (LTE Band 12 – High Channel)**

|   |  |  |   |                                   |
|---|--|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST <sup>®</sup><br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021  | EUT Type:<br>Portable Handset                              | Page 19 of 25   |                                   |

## LTE Band 13

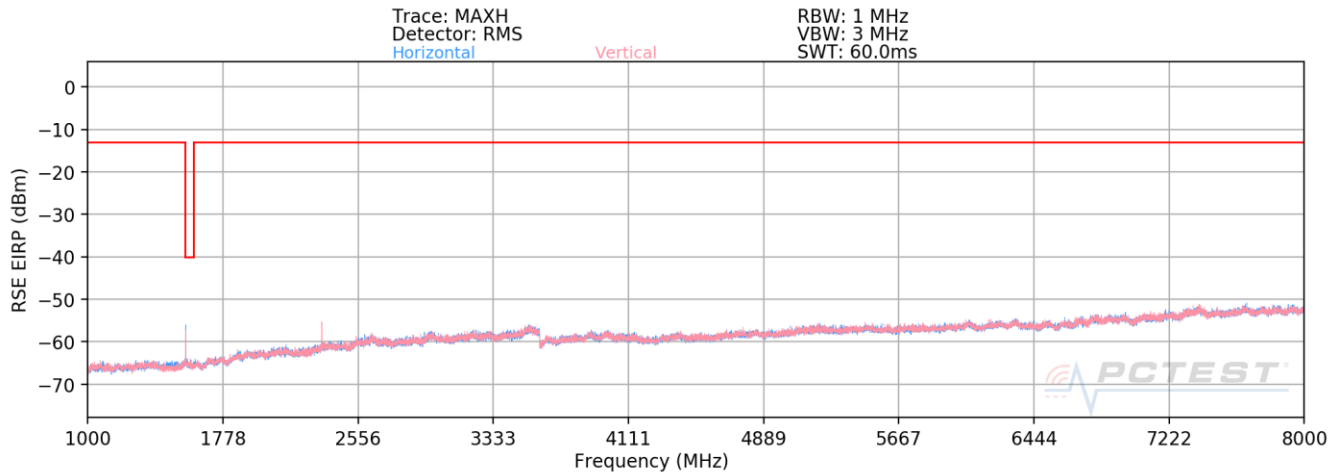



Plot 7-8. Radiated Spurious Plot (LTE Band 13)


|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 10     |
| Frequency (MHz): | 782.0  |
| RB / Offset:     | 1 / 25 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1564.0          | H               | 257                 | 169                        | -71.35               | -5.05       | 30.60                   | -64.66                             | -40.00      | -24.66      |
| 2346.0          | H               | 117                 | 171                        | -68.00               | -2.12       | 36.88                   | -58.38                             | -13.00      | -45.38      |
| 3128.0          | H               | -                   | -                          | -78.02               | 0.05        | 29.03                   | -66.22                             | -13.00      | -53.22      |
| 3910.0          | H               | -                   | -                          | -78.90               | 2.85        | 30.95                   | -64.31                             | -13.00      | -51.31      |
| 4692.0          | H               | -                   | -                          | -78.68               | 2.70        | 31.02                   | -64.24                             | -13.00      | -51.24      |

Plot 7-9. Radiated Spurious Data (LTE Band 13)

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              |   | Page 20 of 25                     |

## LTE Band 71

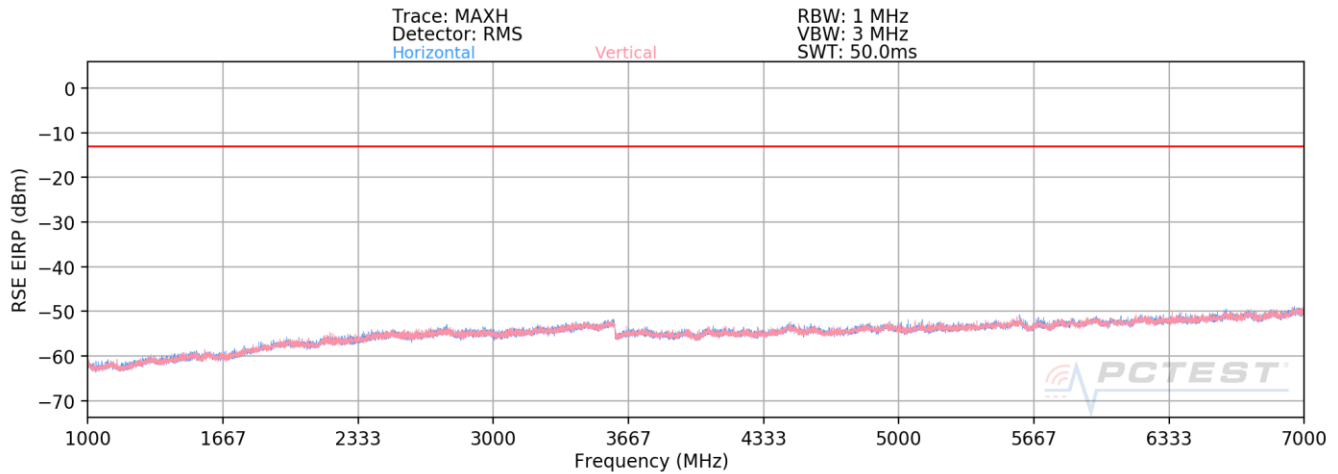

Plot 7-10. Radiated Spurious Plot (LTE Band 71)

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 673.0  |
| RB / Offset:     | 1 / 50 |



| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1346.0          | V               | 346                 | 17                         | -79.70               | -1.84       | 25.46                   | -69.80                             | -13.00      | -56.80      |
| 2019.0          | V               | -                   | -                          | -81.02               | 2.05        | 28.03                   | -67.23                             | -13.00      | -54.23      |
| 2692.0          | V               | -                   | -                          | -80.59               | 3.67        | 30.08                   | -65.17                             | -13.00      | -52.17      |
| 3365.0          | V               | -                   | -                          | -81.08               | 5.28        | 31.20                   | -64.06                             | -13.00      | -51.06      |

Table 7-8. Radiated Spurious Data (LTE Band 71 – Low Channel)

|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 680.5  |
| RB / Offset:     | 1 / 50 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1361.0          | V               | 116                 | 351                        | -76.70               | -1.96       | 28.34                   | -66.92                             | -13.00      | -53.92      |
| 2041.5          | V               | 393                 | 352                        | -72.55               | 1.79        | 36.24                   | -59.02                             | -13.00      | -46.02      |
| 2722.0          | V               | -                   | -                          | -78.72               | 3.95        | 32.23                   | -63.03                             | -13.00      | -50.03      |
| 3402.5          | V               | -                   | -                          | -78.92               | 4.90        | 32.98                   | -62.28                             | -13.00      | -49.28      |
| 4083.0          | V               | -                   | -                          | -80.02               | 5.85        | 32.83                   | -62.43                             | -13.00      | -49.43      |



Table 7-9. Radiated Spurious Data (LTE Band 71 – Mid Channel)

|   |   |  |   |                                   |
|---|---|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021   | EUT Type:<br>Portable Handset                              | Page 21 of 25   |                                   |


|                  |        |
|------------------|--------|
| Bandwidth (MHz): | 20     |
| Frequency (MHz): | 688.0  |
| RB / Offset:     | 1 / 50 |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB $\mu$ V/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|------------------------------------|-------------|-------------|
| 1376.0          | V               | 152                 | 284                        | -79.62               | -1.72       | 25.66                         | -69.60                             | -13.00      | -56.60      |
| 2064.0          | V               | -                   | -                          | -80.36               | 1.91        | 28.55                         | -66.71                             | -13.00      | -53.71      |
| 2752.0          | V               | -                   | -                          | -80.95               | 4.43        | 30.48                         | -64.78                             | -13.00      | -51.78      |
| 3440.0          | V               | -                   | -                          | -81.12               | 4.73        | 30.61                         | -64.65                             | -13.00      | -51.65      |

**Table 7-10. Radiated Spurious Data (LTE Band 71 – High Channel)**

|   |  |  |   |                                   |
|---|--|--|---|-----------------------------------|
| FCC ID: ZNFK330PM                       |  PCTEST <sup>®</sup><br>Proud to be part of element | PART 27 MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021  | EUT Type:<br>Portable Handset                              |   | Page 22 of 25                     |

# WCDMA AWS

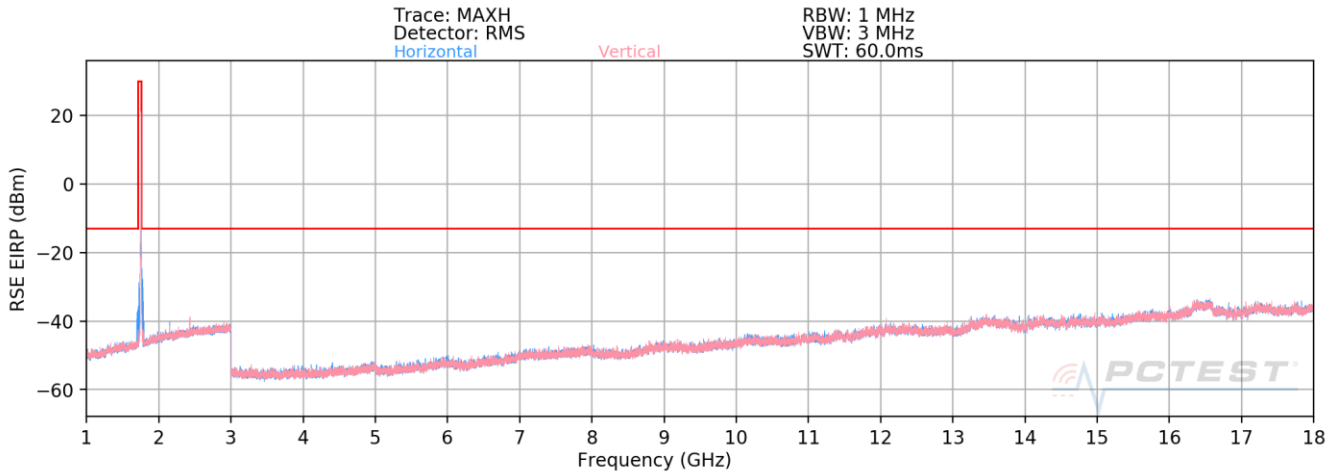

**Plot 7-11. Radiated Spurious Plot (WCDMA AWS)**

|                  |           |
|------------------|-----------|
| Mode:            | WCDMA RMC |
| Channel:         | 1312      |
| Frequency (MHz): | 1712.4    |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 3424.8          | H               | 273                 | 186                        | -78.59               | 5.46        | 33.87                   | -61.39                             | -13.00      | -48.39      |
| 5137.2          | H               | -                   | -                          | -80.35               | 7.68        | 34.33                   | -60.92                             | -13.00      | -47.92      |
| 6849.6          | H               | -                   | -                          | -81.21               | 10.85       | 36.64                   | -58.62                             | -13.00      | -45.62      |
| 8562.0          | H               | -                   | -                          | -82.29               | 12.68       | 37.39                   | -57.87                             | -13.00      | -44.87      |

**7-11. Radiated Spurious Data (WCDMA AWS – Low Channel)**

|                  |           |
|------------------|-----------|
| Mode:            | WCDMA RMC |
| Channel:         | 1413      |
| Frequency (MHz): | 1732.6    |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 3424.8          | H               | 101                 | 119                        | -78.44               | 5.46        | 34.02                   | -61.24                             | -13.00      | -48.24      |
| 5137.2          | H               | -                   | -                          | -79.41               | 7.68        | 35.27                   | -59.98                             | -13.00      | -46.98      |
| 6849.6          | H               | -                   | -                          | -79.45               | 10.85       | 38.40                   | -56.86                             | -13.00      | -43.86      |
| 8562.0          | H               | -                   | -                          | -80.79               | 12.68       | 38.89                   | -56.37                             | -13.00      | -43.37      |



**Table 7-12. Radiated Spurious Data (WCDMA AWS – Mid Channel)**

|   |  |  |  |                                   |
|---|--|--|--|-----------------------------------|
| FCC ID: ZNFK330PM                       | <b>PCTEST</b><br>Proud to be part of element | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2012140197-04.ZNF | Test Dates:<br>12/30/2020 - 1/13/2021        | EUT Type:<br>Portable Handset                                      |  | Page 23 of 25                     |

|                         |           |
|-------------------------|-----------|
| <b>Mode:</b>            | WCDMA RMC |
| <b>Channel:</b>         | 1513      |
| <b>Frequency (MHz):</b> | 1752.6    |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 3505.2          | H               | 107                 | 270                        | -77.50               | 5.11        | 34.61                   | -60.65                             | -13.00      | -47.65      |
| 5257.8          | H               | -                   | -                          | -79.25               | 7.24        | 34.99                   | -60.27                             | -13.00      | -47.27      |
| 7010.4          | H               | -                   | -                          | -79.64               | 10.70       | 38.06                   | -57.20                             | -13.00      | -44.20      |
| 8763.0          | H               | -                   | -                          | -80.68               | 13.12       | 39.44                   | -55.82                             | -13.00      | -42.82      |



**Table 7-13. Radiated Spurious Data (WCDMA AWS – High Channel)**

|  |  |  |   |  |
|--|--|--|---|--|
| <b>FCC ID:</b> ZNFK330PM                       |  <b>PCTEST<sup>®</sup></b><br>Proud to be part of element | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2012140197-04.ZNF | <b>Test Dates:</b><br>12/30/2020 - 1/13/2021   | <b>EUT Type:</b><br>Portable Handset                               | Page 24 of 25   |  |



## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFK330PM** complies with all the requirements of Part 27 of the FCC rules.

|  |   |  |  |
|--|---|--|--|
| FCC ID: ZNFK330PM                              |  | <b>PART 27 MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2012140197-04.ZNF | <b>Test Dates:</b><br>12/30/2020 - 1/13/2021  | <b>EUT Type:</b><br>Portable Handset                               | Page 25 of 25  |