

FCC CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: November 05, 2015**Date of Issue: November 25, 2015****Test Report No. HCT-E-1511-F026****HCT FRN: 0005866421****FCC ID:****ZNFK410F****Rule Part(s) / Standard(s):** FCC CFR 47 PART 15 Subpart B Class B**FCC Classification:** JBP (Part 15 B – Class B Computing Device Peripheral)**EUT Type:** GSM/WCDMA Phone with Bluetooth4.1LE,
WIFI802.11b/g/n(2.4GHz-HT20&40), VoIP, Hotspot support**Model Name:** LG-K410f**Additional Model Name:** LGK410f, K410f**Test Port:** USB / Earphone Port**Date of Test:** November 23, 2015 - November 24, 2015

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Gu-Cheol Yoon
Test Engineer
EMC Team
Certification Division**Reviewed By**

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1511-F026	November 25, 2015	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	5
1.3 Test Facility	5
1.4 Tested System Details.....	6
1.5 Cable Description	7
1.6 Noise Suppression Parts on Cable. (I/O Cable)	8
2. DESCRIPTION OF TEST.....	9
3. PRELIMINARY TEST	12
3.1 Conducted Emission Test	12
3. 2 Radiated Emission Test	12
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
4.1 Conducted Emission Test	13
4.2 Radiated Emission Test	20
5. LIST OF TEST EQUIPMENT	22
6. CONCLUSION	23

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model	LG-K410f
FCC ID	ZNFK410F
Additional Model	LGK410f, K410f
EUT Type	GSM/WCDMA Phone with Bluetooth4.1LE, WIFI802.11b/g/n(2.4GHz-HT20&40), VoIP, Hotspot support
TX Frequency	824.20 MHz to 848.80 MHz (GSM850) 826.40 MHz to 846.60 MHz (WCDMA850) 1 850.20 MHz to 1 909.80 MHz (GSM1900) 1 852.4 MHz to 1 907.6 MHz (WCDMA1900) 1 712.4 MHz to 1 752.6 MHz (WCDMA1700)
RX Frequency	869.20 MHz to 893.80 MHz (GSM850) 871.40 MHz to 891.60 MHz (WCDMA850) 1 930.20 MHz to 1 989.80 MHz (GSM1900) 1 932.4 MHz to 1 987.6 MHz (WCDMA1900) 2 112.4 MHz to 2 152.6 MHz (WCDMA1700)



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2003.

Measurement Facilities	Reg. No.
HCT FRN: 0005866421 Radiated Field strength measurement facility (3 m)	90661 (February 28, 2014)
HCT FRN: 0005866421 Radiated Field strength measurement facility (10 m)	90661 (February 28, 2014)



1.4 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-K410f	LG	ZNFK410F	USB Cable, Earphone
USB cable	EAD62377902	Ningbo Broad	-	EUT, Notebook PC
Earphone	EAB62808214	I-SOUND	-	EUT
Notebook PC	ProBook6560b	HP	DoC	Notebook PC Adaptor, RJ45 Cable, Serial Mouse
Notebook PC adaptor	PPP009D	DELTA Electronics (Jiangsu) LTD	-	Notebook PC, Power
Gateway	TL-WR747N	TP-LINK	-	RJ45 cable, Gateway adaptor
Gateway adaptor	T120150-2H1	TP-LINK	-	Gateway, Power
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	16 GB	Samsung	-	EUT



1.5 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.1
Notebook PC	RJ 45	N/A	N	(D)2.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.



1.6 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	EUT End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

***NOTE:** This device does not contain the minimum number of ports required for personal computer testing per ANSI C63.4, but the EUT is attached to a computer through its only available port, which represents worst case emissions. All other aspects of ANSI C63.4 testing requirements were maintained.



2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 7

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

*Decreases with the logarithm of the frequency.



2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 8

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. The antenna height scans apply for both horizontal and vertical polarizations, except that for vertical polarization, the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the lowest antenna element clears the site reference ground plane by at least 25 cm. (below 1 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength (μ V/m)	Quasi-Peak (dB μ V/m)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak (dB μ V/m)	Average (dB μ V/m)
Above 1 000	3	74	54




2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System

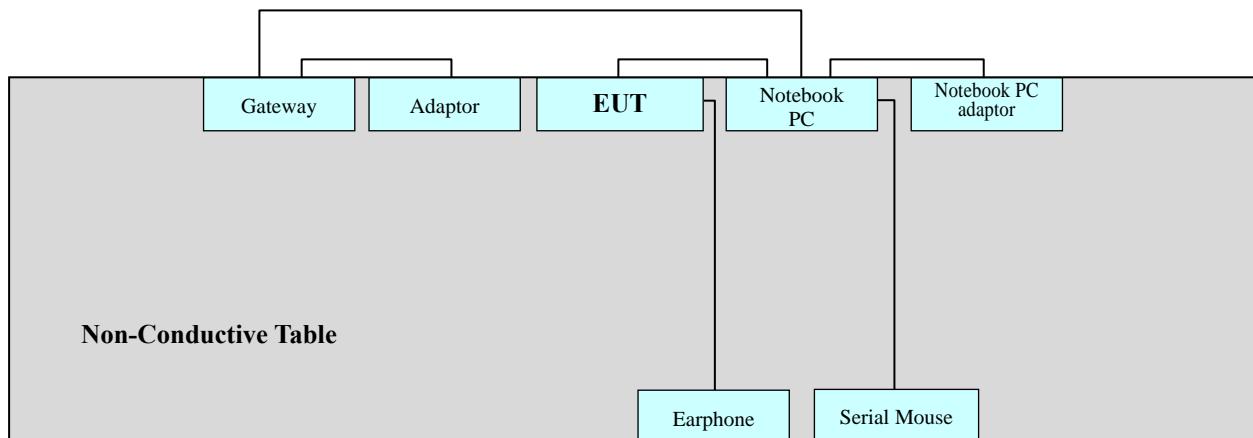



3. PRELIMINARY TEST

3.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

3.2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY


4.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
Kind of Test Site	Shielded Room
Temperature	21.4 °C
Relative Humidity	41.2 %
Test Date	November 23, 2015

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage = Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

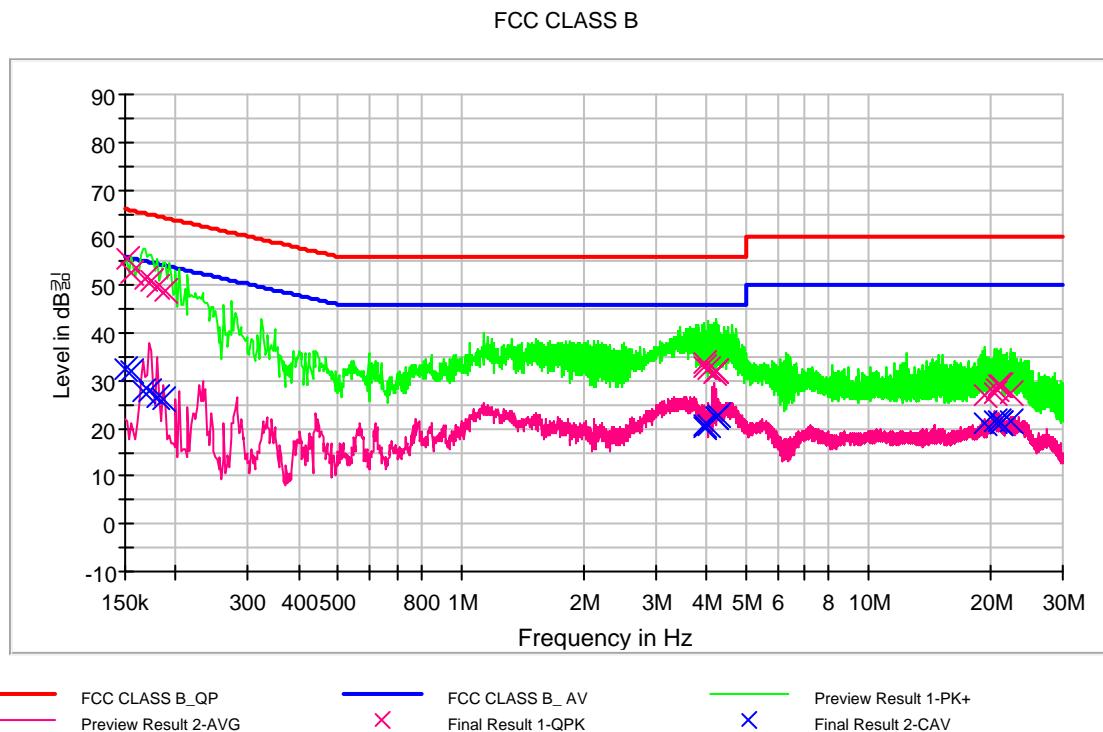Figure 1: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)



QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.152000	55.4	9.000	L1	9.6	10.5	65.9
0.156000	52.8	9.000	L1	9.6	12.9	65.7
0.168000	51.2	9.000	L1	9.6	13.9	65.1
0.174000	50.8	9.000	L1	9.6	14.0	64.8
0.180000	49.7	9.000	L1	9.6	14.8	64.5
0.188000	48.8	9.000	L1	9.6	15.3	64.1
3.938000	32.8	9.000	L1	9.8	23.2	56.0
3.962000	33.6	9.000	L1	9.8	22.4	56.0
4.060000	32.5	9.000	L1	9.8	23.5	56.0
4.200000	31.8	9.000	L1	9.8	24.2	56.0
4.242000	32.1	9.000	L1	9.8	23.9	56.0
4.250000	32.2	9.000	L1	9.8	23.8	56.0
19.338000	27.2	9.000	L1	10.3	32.8	60.0
20.334000	27.4	9.000	L1	10.3	32.6	60.0
20.642000	28.4	9.000	L1	10.3	31.6	60.0
20.950000	29.0	9.000	L1	10.3	31.0	60.0
21.236000	28.9	9.000	L1	10.3	31.1	60.0
22.388000	27.6	9.000	L1	10.3	32.4	60.0




CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.6	9.000	L1	9.6	23.4	56.0
0.156000	31.9	9.000	L1	9.6	23.8	55.7
0.166000	27.7	9.000	L1	9.6	27.5	55.2
0.172000	27.7	9.000	L1	9.6	27.2	54.9
0.180000	26.7	9.000	L1	9.6	27.8	54.5
0.186000	26.2	9.000	L1	9.6	28.0	54.2
3.938000	20.6	9.000	L1	9.8	25.4	46.0
3.962000	20.2	9.000	L1	9.8	25.8	46.0
4.060000	20.8	9.000	L1	9.8	25.2	46.0
4.240000	22.4	9.000	L1	9.8	23.6	46.0
4.250000	22.3	9.000	L1	9.8	23.7	46.0
4.258000	22.7	9.000	L1	9.8	23.3	46.0
19.338000	21.0	9.000	L1	10.3	29.0	50.0
20.334000	21.4	9.000	L1	10.3	28.6	50.0
20.950000	21.5	9.000	L1	10.3	28.5	50.0
21.162000	21.1	9.000	L1	10.3	28.9	50.0
21.236000	21.2	9.000	L1	10.3	28.8	50.0
22.388000	21.4	9.000	L1	10.3	28.6	50.0



Figure 2: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)

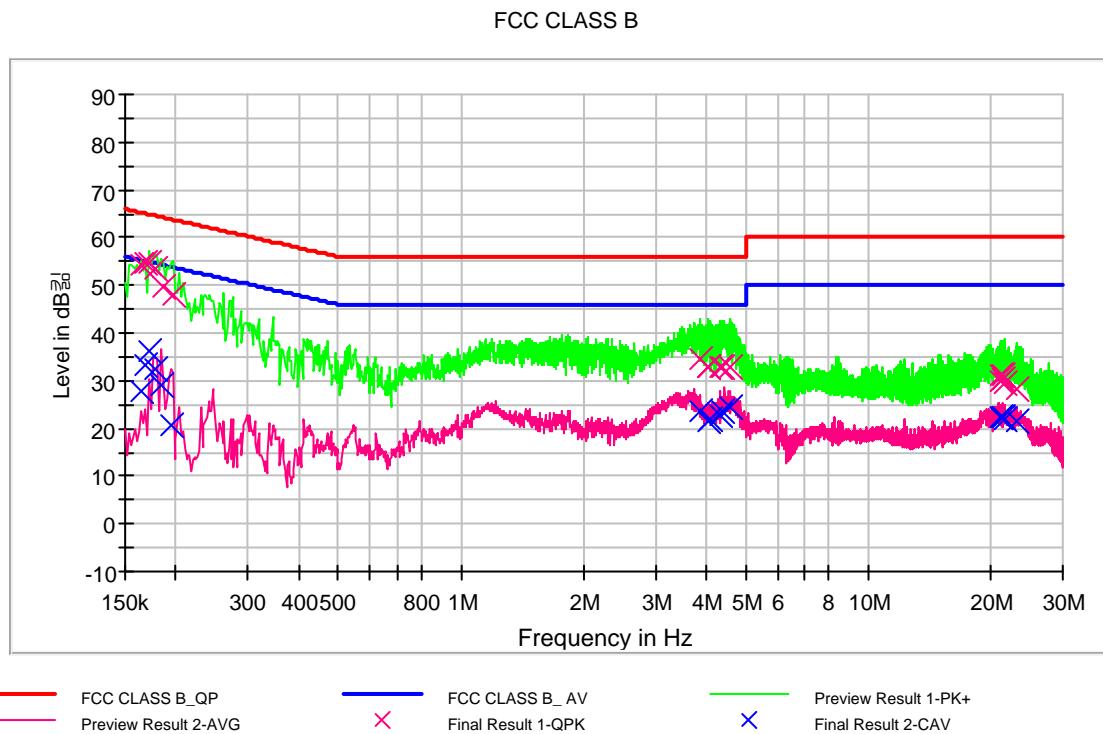



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.164000	54.1	9.000	N	9.6	11.2	65.3
0.168000	54.9	9.000	N	9.6	10.2	65.1
0.172000	54.7	9.000	N	9.6	10.2	64.9
0.178000	53.6	9.000	N	9.6	11.0	64.6
0.186000	49.9	9.000	N	9.6	14.3	64.2
0.196000	47.9	9.000	N	9.6	15.9	63.8
3.858000	34.6	9.000	N	9.8	21.4	56.0
4.044000	33.0	9.000	N	9.8	23.0	56.0
4.064000	33.0	9.000	N	9.8	23.0	56.0
4.308000	33.0	9.000	N	9.8	23.0	56.0
4.392000	32.7	9.000	N	9.8	23.3	56.0
4.582000	32.8	9.000	N	9.8	23.2	56.0
21.084000	30.1	9.000	N	10.3	29.9	60.0
21.232000	31.1	9.000	N	10.3	28.9	60.0
21.302000	31.2	9.000	N	10.3	28.8	60.0
21.376000	30.5	9.000	N	10.3	29.5	60.0
21.652000	29.3	9.000	N	10.3	30.7	60.0
23.072000	28.1	9.000	N	10.3	31.9	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.164000	27.8	9.000	N	9.6	27.5	55.3
0.168000	33.2	9.000	N	9.6	21.9	55.1
0.172000	36.2	9.000	N	9.6	18.7	54.9
0.178000	32.6	9.000	N	9.6	22.0	54.6
0.184000	29.2	9.000	N	9.6	25.1	54.3
0.194000	20.5	9.000	N	9.6	33.4	53.9
3.858000	23.7	9.000	N	9.8	22.3	46.0
4.064000	21.5	9.000	N	9.8	24.5	46.0
4.104000	21.7	9.000	N	9.8	24.3	46.0
4.308000	22.9	9.000	N	9.8	23.1	46.0
4.392000	23.6	9.000	N	9.8	22.4	46.0
4.556000	24.4	9.000	N	9.8	21.6	46.0
21.084000	22.2	9.000	N	10.3	27.8	50.0
21.232000	22.2	9.000	N	10.3	27.8	50.0
21.302000	22.2	9.000	N	10.3	27.8	50.0
21.376000	22.3	9.000	N	10.3	27.7	50.0
21.652000	22.0	9.000	N	10.3	28.0	50.0
23.072000	21.5	9.000	N	10.3	28.5	50.0



4.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.0 °C
Relative Humidity	36.8 %
Test Date	November 24, 2015

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
42.663327	25.9	100.0	V	1.0	15.6	14.1	40.0
54.830541	29.4	100.0	V	154.0	15.7	10.6	40.0
85.972745	26.0	322.0	H	95.0	11.6	14.0	40.0
266.554309	35.2	100.0	H	128.0	16.9	10.8	46.0
801.003447	27.3	135.0	H	30.0	28.4	18.7	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.3 GHz
Testing Frequency Range	1 GHz to 6.5 GHz
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.0 °C
Relative Humidity	36.8 %
Test Date	November 24, 2015

Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1332.014028	46.7	122.0	V	132.0	-9.7	27.3	74.0
1399.949900	49.7	194.0	V	15.0	-9.6	24.3	74.0
2001.252505	45.9	122.0	V	213.0	-7.9	28.1	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1332.014028	27.3	122.0	V	132.0	-9.7	26.7	54.0
1399.949900	47.3	194.0	V	15.0	-9.6	6.7	54.0
2001.252505	29.0	122.0	V	213.0	-7.9	25.0	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss -Amplifier Gain
4. Margin = Limit - Peak or CAverage



5. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	CAL Date
------	--------------	------------	---------------	-------------------	----------

Conducted Emission

<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	01.13.2015
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	100073	1 year	01.13.2015
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	06.11.2015
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

Radiated Emission

-For measurement below 1 GHz

<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.01.2015
<input checked="" type="checkbox"/>	Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	11.17.2014
<input checked="" type="checkbox"/>	Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/>	Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/>	Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.05.2015
<input type="checkbox"/>	Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/>	Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

-For measurement above 1 GHz

<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.01.2015
<input checked="" type="checkbox"/>	Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/>	Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/>	Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/>	Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.06.2015
<input checked="" type="checkbox"/>	Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.15.2015
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.07.2014
<input type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.05.2015
<input type="checkbox"/>	Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-



6. CONCLUSION

The data collected shows that the **EUT Type: GSM/WCDMA Phone with Bluetooth4.1LE, WIFI802.11b/g/n(2.4GHz-HT20&40), VoIP, Hotspot support, Model: LG-K410f, FCC ID: ZNFK410F** complies with §15.107 and §15.109 of the FCC rules.