
Branch



FCC TEST REPORT

Application No.:	ZR/2020/60017
Applicant:	LG Electronics USA, Inc.
Address of Applicant	111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
Manufacturer:	Huaqin Telecom Technology Co.,Ltd.
Address of Manufacturer	No.1 Building, No.9 Building, No.399,Keyuan Road,Zhangjiang Hi-tech Park,Shanghai,P.R.China
EUT Description:	Mobile handset
Model No.:	LM-K420EMW
Trade Mark:	LG
FCC ID:	ZNFK420EMW
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01
	C63.26 (2015)
Date of Receipt:	2020/6/22
Date of Test:	2020/7/22 to 2020/7/29
Date of Issue:	2020/7/29
Test Result:	PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City,	110000	www.sysgroup.com.cn
Xi'an, Shaanxi, China		
中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元一层 邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 2 of 26

Version

	Revision Record						
Version	Remark						
01		2020/7/29		Original			

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction is subject to Terms and Conditions/Terms-enDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong Ner	N City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 3 of 26

IS Band S			
FCC Rule No.	Requirements	Test Result	Verdict
§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass
	Limit≤13 dB	Section 2 of Appendix B	Pass
§2.1047	Digital modulation	Section 3 of Appendix B	Pass
§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass
	FCC Rule No. §2.1046, §22.913 §2.1047 §2.1047 §2.1051, §2.917 §2.1051, §2.917 §2.1053, §2.1055,	FCC Rule No.Requirements $\S2.1046$, $\S22.913$ FCC: ERP \leq 7 WLimit \leq 13 dB \sim Limit \leq 13 dB $\S2.1047$ Digital modulation $\S2.1049$ OBW: No limit. EBW: No limit. $\S2.1051$, $\S22.917$ \leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block. $\S2.1051$, $\S22.917$ FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. $\S2.1053$, $\S22.917$ FCC: \leq -13 dBm/100 kHz. $\S2.1055$, \leq +2 5ppm	FCC Rule No.RequirementsTest Result $\S2.1046$, $\S22.913$ FCC: ERP \leq 7 WSection 1 of Appendix BLimit \leq 13 dBSection 2 of Appendix BDigital modulationSection 3 of Appendix B $\S2.1047$ Digital modulationSection 4 of Appendix B $\S2.1049$ OBW: No limit. EBW: No limit. frequency block.Section 5 of Appendix B $\S2.1051$, $\S2.2917$ \leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.Section 5 of Appendix B $\S2.1051$, $\S2.2917$ FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.Section 7 of Appendix B $\S2.1053$, $\S2.1055$,FCC: \leq -13 dBm/100 kHz.Section 7 of Appendix B

Test Summary

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

GSM 1900/UMTS Band 2

GSM850/UMTS Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	 ≤ -13 dBm/1 MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. 	Section 6 of Appendix B	Pass
Field Strength of	§2.1053,	≤ -13 dBm/1 MHz.	Section 7 of	Pass

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of the second secon Its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com 2.12.2.2.2

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	v City,	710086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

> Report No.: ZR/2020/6001701 Page: 4 of 26

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Spurious Radiation	§24.238		Appendix B	
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

Checked By

David Chen

David Chen Reviewer

Test By

forit

Daniel Wang Project Engineer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction is subject to Terms and Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	/ City,	710086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 5 of 26

Content

Branch

1	GEN	NERAL INFORMATION	7
	1.1	CLIENT INFORMATION	7
	1.2	TEST LOCATION	7
	1.3	TEST FACILITY	8
	1.4	GENERAL DESCRIPTION OF EUT	9
	1.5	TEST MODE	9
	1.6	TEST ENVIRONMENT	10
	1.7	TECHNICAL SPECIFICATION	11
	1.8	TEST FREQUENCIES	12
2	DES	CRIPTION OF TESTS	
	2.1	CONDUCTED OUTPUT POWER	
	2.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	13
	2.3	EIRP Power Density	14
	2.4	OCCUPIED BANDWIDTH	
	2.5	BAND EDGE AT ANTENNA TERMINALS	16
	2.6	Spurious And Harmonic Emissions at Antenna Terminal	16
	2.7	PEAK-AVERAGE RATIO	17
	2.8	FIELD STRENGTH OF SPURIOUS RADIATION	17
	2.9	FREQUENCY STABILITY / TEMPERATURE VARIATION	19
	2.10	TEST SETUPS	20
	2.10	0.1 Test Setup 1	20
	2.10	0.2 Test Setup 2	20
	2.10	0.3 Test Setup 3	21
	2.10	0.4 Test Setup 4	22
	2.11	TEST CONDITIONS	
3	MAI	N TEST INSTRUMENTS	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com 1/ E. Unit D. Building 1. Kanghong Orange Technology Park, No 137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn

17 F, Unit D, Building T, Kangnong Orange lechnology Park, No.137, Keyuan 3rd Road, Fengdong Ne	ew City,	110000	www.sgsgroup.com.cn	
Xi'an, Shaanxi, China				
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com	

Report No.: ZR/2020/6001701 Page: 6 of 26

4	MEASUREMENT UNCERTAINTY	26
_		
5	APPENDIXES	26

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	/ City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 7 of 26

1 General Information

1.1 Client Information

Applicant:	LG Electronics USA, Inc.				
Address of Applicant:	111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632				
Manufacturer:	Huaqin Telecom Technology Co.,Ltd.				
Address of Manufacturer:	No.1 Building, No.9 Building, No.399,Keyuan Road,Zhangjiang Hi-tech Park,Shanghai,P.R.China				

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Xi'an Branch
Address:	Single floor D, building 1, Kanghong orange square science and technology park, No.137 keyuan 3rd road, fengdong new town, Xi 'an city, Shaanxi China
Post code:	710000
Telephone:	+86 (0) 29 6282 7885
Fax:	+86 (0) 29 6282 7885
E-mail:	ee.xian@sgs.com

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 8 of 26

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES CO., LTD. XIAN BRANCH is accredited by the American

Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

Test Site No.:	SGS Xi	an Site No.	FCC Designation No.
	CO01-XA	03CH01-XA	CN1271

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 9 of 26

1.4 General Description of EUT

Branch

EUT Description::	Mobile handset
Model No.:	LM-K420EMW
Trade Mark:	LG
Sample Type:	☑ Portable Device, □ Module
Antenna Type:	External, Integrated
	GSM850: -5.0dBi;
Antenna Gain:	GSM1900:-2.5dBi;
Antenna Gain.	WCDMA Band II:-2.5dBi;
	WCDMA Band V: -5.0dBi;

1.5 Test Mode

Test Mode	Test Modes Description	
GSM/TM1 GSM system, GSM/GPRS, GMSK modulation		
GSM/TM2	GSM system, EGPRS, 8PSK modulation	
UMTS/TM1 UMTS system, WCDMA, QPSK modulation		
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation	

Remark: The test mode(s) are selected according to relevant radio technology specifications.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction is subject to Terms and Conditions/Terms-enDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 10 of 26

1.6 Test Environment

Environment Parameter	ment Parameter Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	1	01.32 KPa	
Temperature	NT	25 °C	
	LV	3.50	
Voltage:	NV	3.87	
	HV	4.25	

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	w City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 11 of 26

1.7 Technical Specification

Characteristics	Description			
Radio System Type	GSM			
Radio System Type	🖂 UMTS			
	Band	ТХ	RX	
0	GSM850	824 to 849 MHz	869 to 894 MHz	
Supported Frequency Range	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band V	824 to 849 MHz	869 to 894 MHz	
Supported Channel	GSM system:	🖂 0.2 MHz		
Bandwidth	UMTS system:	⊠ 5 MHz		
Designation of Emissions	GSM850	250KGXW; 249KG7W		
(Remark: the necessary bandwidth of which is the worst value from	GSM1900	249KGXW; 249KG7W		
the measured occupied bandwidths for each type of channel bandwidth	UMTS Band II	4M20F9W;		
configuration.)	UMTS Band V	4M17F9W;		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	v City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 12 of 26

1.8 Test Frequencies

Test Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	тх	Channel 128	Channel 190	Channel 251
GSM850		824.2MHz	836.6 MHz	848.8 MHz
GSIVIOSU	RX	Channel 128	Channel 190	Channel 251
	٢A	869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	ТХ	Channel 512	Channel 661	Channel 810
CSM1000		1850.2MHz	1880.0 MHz	1909.8 MHz
GSM1900	υV	Channel 512	Channel 661	Channel 810
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	ТХ	Channel 9262	Channel 9400	Channel 9538
WCDMA		1852.4 MHz	1880.0 MHz	1907.6 MHz
Band II	RX	Channel 9662	Channel 9800	Channel 9938
	ΓΛ.	1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	ТХ	Channel 4132	Channel 4182	Channel 4233
WCDMA	IA	826.4MHz	836.4 MHz	846.6 MHz
Band V	RX	Channel 4357	Channel 4407	Channel 4458
	ΓΛ	871.4 MHz	881.4 MHz	891.6 MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ggs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New Ci	ity,	710086	www.sgsgroup.com.cn
	Xi'an, Shaanxi, China			
	中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1号楼 D单元一层	『编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 13 of 26

2 **Description of Tests**

2.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

2.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; ANSI/C63.26 (2015)

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com 710086

www.sgsgroup.com.cn 1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi, China 邮编 710086 sgs.china@sgs.com

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

> Report No.: ZR/2020/6001701 Page: 14 of 26

8). Calculate power in dBm by the following formula:

ERP (dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pg is the generator output power into the substitution antenna.

Above 1GHz test procedure as below:

- 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2). Calculate power in dBm by the following formula: EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete.

Remark: Reference test setup 2

2.3 EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

Test Settings

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW \geq 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- 7. Sweep time = auto couple.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fen	ngdong New City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·洋东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—— 层	邮编	710086	sgs.china@sgs.com

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

> Report No.: ZR/2020/6001701 Page: 15 of 26

8. Employ trace averaging (RMS) mode over a minimum of 100 traces.

9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

2.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com 710086 www.sgsgroup.com.cn 1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi, China 邮编 710086 sgs.china@sgs.com

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

Member of the SGS Group(SGS SA)

> Report No.: ZR/2020/6001701 Page: 16 of 26

2.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

2.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency

	erwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for
Electronic D	Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification
its interventi parties to a without prior and offende	tion issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of ion only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, r written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful rs may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone CN.Doccheck@sqs.com	e:(86-7	(55) 8307	1443, or email:
1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	710086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 17 of 26

and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency
- (separated into at least two plots per channel)
- 2 Detector = RMS
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5 The trace was allowed to stabilize
- 6 Please see test notes below for RBW and VBW settings

2.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

2.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

	Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone CN.Doccheck@sgs.com	:(86-7	(55) 8307	1443, or email:
1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	710086	www.sgsgroup.com.cn
	Xi'an, Shaanxi, China			
	中国·西安·注东新城科源三路 137 号康鸿樽方科技园 1 号楼 D 单元———————————————————————————————————	邮编	710086	sgs.china@sgs.com

中国·西安·注东新城科源三路137号康鸿橙方科技园1号楼D单元一层

> Report No.: ZR/2020/6001701 Page: 18 of 26

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

	Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone CN.Doccheck@sqs.com	:(86-7	755) 8307	1443, or email:
1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	710086	www.sgsgroup.com.cn
	Xi'an, Shaanxi, China			
	山園,西央,注左新城利酒三路,137,县庫池橋方利井園,1,县楼 D. 单元,二月	邮编	710086	sgs.china@sgs.com

中国·西安·注东新城科源三路137号康鸿橙方科技园1号楼D单元一层

Report No.: ZR/2020/6001701 Page: 19 of 26

2.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元一层	邮编	710086	sgs.china@sgs.com

Report No.: ZR/2020/6001701 Page: 20 of 26

2.10 Test Setups

2.10.1 Test Setup 1

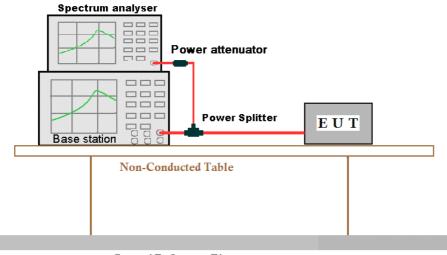

Ground Reference Plane

2.10.2 Test Setup 2


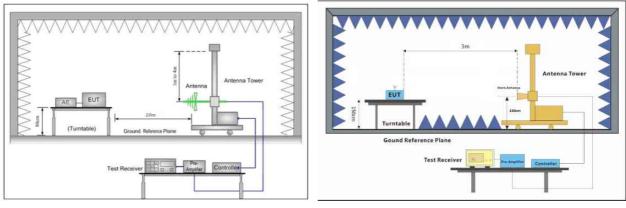


Figure 1. 30MHz to 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	/ City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com



Report No.: ZR/2020/6001701 Page: 21 of 26



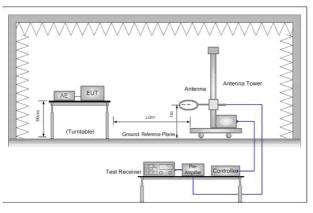


Figure 1. Below 30MHz

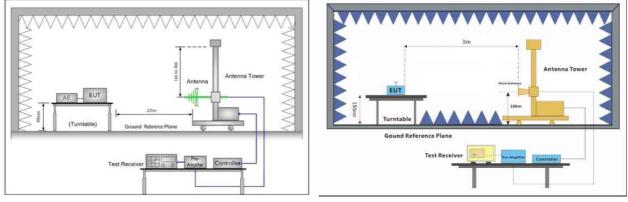


Figure 2. 30MHz to 1GHz


Figure 3. above 1GHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.spx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New	City,	710086	www.sgsgroup.com.cn	
	Xi'an, Shaanxi, China				
	中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层	邮编	710086	sgs.china@sgs.com	

Report No.: ZR/2020/6001701 Page: 22 of 26

2.10.4 Test Setup 4

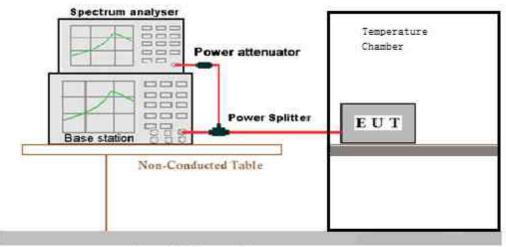

Ground Reference Plane

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for and jurisdiction is subject to Terms and Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong Ner	w City,	/10086	www.sgsgroup.com.cn
Xi'an, Shaanxi, China			
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元—层	邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 23 of 26

2.11 Test Conditions

Test Case		Test Conditions		
		Test Environment	Ambient Climate & Rated Voltage	
	Average	Test Setup	Test Setup 1	
Transmit	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	
Power	Average	Test Environment	Ambient Climate & Rated Voltage	
Data	Power,	Test Setup	Test Setup 1	
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	
		Test Environment	Ambient Climate & Rated Voltage	
Peak-to-Ave	erage Ratio	Test Setup	Test Setup 1	
(if required)		(if required) RF Channels (TX) L, M, H (L= low channel, M= middle channel)		L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	
		Test Environment	Ambient Climate & Rated Voltage	
Modulation		Test Setup	Test Setup 1	
Characteris	tics	RF Channels (TX)	M (M= middle channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	
		Test Environment	Ambient Climate & Rated Voltage	
	Occupied	Test Setup	Test Setup 1	
	Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Bandwidth		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	
Danuwiutii	Emission	Test Environment	Ambient Climate & Rated Voltage	
	Bandwidth	Test Setup	Test Setup 1	
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of Its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection	on report & certificate, please	contact us at telephone: (86-7	(55) 8307	1443, or email:
CN.Doccheck@sgs.com				
1/ F, Unit D, Building 1, Kanghong Orange Technolog	y Park, No.137, Keyuan 3rd	Road, Fengdong New City,	710086	www.sgsgroup.con

om.cn Xi'an, Shaanxi, China 邮编 710086 sgs.china@sgs.com

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

Branch

Report No.: ZR/2020/6001701 Page: 24 of 26

	Test Environment	Ambient Climate & Rated Voltage			
Band Edges	Test Setup	Test Setup 1			
Compliance	RF Channels (TX)	L, H (L= low channel, H= high channel)			
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;			
	Test Environment	Ambient Climate & Rated Voltage			
Spurious Emission at	Test Setup	Test Setup 1			
Antenna Terminals	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)			
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;			
Field Strength of Spurious Radiation	Test Environment	Ambient Climate & Rated Voltage			
	Test Setup	Test Setup 2			
		GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;			
	Test Mode	Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.			
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
		(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;			
	Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.			
Frequency Stability	Test Setup	Test Setup 4			
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2;			

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong Ner	N City,	/10066	www.sysgroup.com.cn	
Xi'an, Shaanxi, China				
中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元一层	邮编	710086	sgs.china@sgs.com	

Report No.: ZR/2020/6001701 Page: 25 of 26

3 Main Test Instruments

GSM&WCDMA<E RF Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Radio communication analyzer	ROHDE&SCHWARZ	CMW500	XAW01-03-07	2019-11-18	2020-11-18
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	XAW01-13-02	2019-11-18	2020-11-18
Signal Generator	ROHDE&SCHWARZ	SMR20	XAW01-07-02	2020-04-02	2021-04-02
MXG Vector Signal Generator	Keysight	N5182A	XAW01-07-01	2020-06-28	2021-06-28
power supply	Angilent	66311B	XAW01-17-01	2020-06-20	2021-06-20
temperature chamber	Votsch	VT4002	XAW01-18-01	2020-06-28	2021-06-28
Band Reject Filter Group	Tonscend	JS0806-F	XAW03-05-03	NCR	NCR
RF Control Unit	Tonscend	JS0806-1	XAW03-37-02	NCR	NCR
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2019-11-28	2020-11-28
Measurement Software	Tonscend	JS1120	XAW02-06-01	NCR	NCR
	BE in	Chamber			
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	966	XAW03-35-01	NCR	NCR
	Keysight	N9020A	XAW03-35-01 XAW01-06-01	2020-04-02	2021-04-02
MXA signal analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-08-01 XAW01-03-02	2020-04-02	2021-04-02
Radio communication analyzer				1 1	
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06
Receiving antenna	Rosenberger	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna	Rosenberger	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna	Rosenberger	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-18
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-18
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-03
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-18
5G UXM	Keysight	E7515B	XAW01-04-01	2019-09-04	2020-09-03
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-11-28	2020-11-28
Measurement Software	Tonscend	TS+ RSE&RE	XAW02-05-01	NCR	NCR
Measurement Software	Tonscend	TS+ CE	XAW02-05-02	NCR	NCR

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ggs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City,	710086	www.sgsgroup.com.cn
	Xi'an, Shaanxi, China		
	中国·西安洋东新城科源三路 137 号康鸿橙方科技园 1号楼 D单元一层 邮编	710086	sgs.china@sgs.com

> Report No.: ZR/2020/6001701 Page: 26 of 26

4 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.21 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = ±2.0 dB
		±4.8dB (30MHz-1GHz)
Field Strength of Spurious	ERP[dBm]/EIRP [dBm]	±5.2dB (1GHz-6GHz)
Radiation		±5.5dB (6GHz-18GHz)
		±5.02dB (18GHz-40GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm
Modulation Characteristics	± 4 kHz	±4kHz

5 Appendixes

Appendix A	Photographs of EUT Constructional Details for ZR202060017.
Appendix B.1	GSM 850 & 1900
Appendix B.2	WCDMA Band II & V

The End

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1	1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong No.	ew City,	710086	www.sgsgroup.com.cn
	Xi'an, Shaanxi, China			
	中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层	邮编	710086	sgs.china@sgs.com