

PART 27 MEASUREMENT REPORT

Applicant Name:

LG Electronics USA, Inc.
111 Sylvan Avenue, North Building
Englewood Cliffs, NJ 07632
United States

Date of Testing:

12/10/2020 - 02/08/2021

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2012100195-16.ZNF

FCC ID:

ZNFK735MM

Applicant Name:

LG Electronics USA, Inc.

Application Type:

Certification

Model:

LM-K735MM

Additional Model(s):

LM-K735PM, LMK735MM, LMK735PM, K735MM, K735PM

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:


27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 1 of 68	

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	24
7.4	Uplink Carrier Aggregation	35
7.5	Band Edge Emissions at Antenna Terminal.....	44
7.6	Conducted Power Output Data.....	53
7.7	Radiated Power (EIRP)	55
7.8	Radiated Spurious Emissions Measurements.....	58
7.9	Frequency Stability / Temperature Variation	66
8.0	CONCLUSION.....	68

FCC ID: ZNFK735MM		PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 2 of 68



PART 27 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 41(PC2)	20 MHz	QPSK	2506.0 - 2680.0	0.341	25.32	18M1G7D
		16QAM	2506.0 - 2680.0	0.291	24.63	18M0W7D
		64QAM	2506.0 - 2680.0	0.195	22.89	18M0W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.338	25.29	13M5G7D
		16QAM	2503.5 - 2682.5	0.294	24.68	13M5W7D
		64QAM	2503.5 - 2682.5	0.176	22.45	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.351	25.45	9M00G7D
		16QAM	2501.0 - 2685.0	0.304	24.83	8M99W7D
		64QAM	2501.0 - 2685.0	0.184	22.65	9M01W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.357	25.52	4M53G7D
		16QAM	2498.5 - 2687.5	0.328	25.15	4M52W7D
		64QAM	2498.5 - 2687.5	0.196	22.93	4M52W7D
LTE Band 41(PC3)	20 MHz	QPSK	2506.0 - 2680.0	0.134	21.26	18M2G7D
		16QAM	2506.0 - 2680.0	0.122	20.87	18M0W7D
		64QAM	2506.0 - 2680.0	0.076	18.81	18M0W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.133	21.23	13M5G7D
		16QAM	2503.5 - 2682.5	0.124	20.92	13M5W7D
		64QAM	2503.5 - 2682.5	0.069	18.37	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.138	21.39	9M02G7D
		16QAM	2501.0 - 2685.0	0.128	21.07	9M00W7D
		64QAM	2501.0 - 2685.0	0.072	18.57	9M00W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.140	21.46	4M51G7D
		16QAM	2498.5 - 2687.5	0.128	21.08	4M52W7D
		64QAM	2498.5 - 2687.5	0.074	18.71	4M51W7D

EUT Overview

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 3 of 68

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 4 of 68

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID:ZNFK735MM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 05280, 05371, 05298

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.2 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 5 of 68

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFK735MM		PART 27 MEASUREMENT REPORT	
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Approved by: Technical Manager
Page 6 of 68			

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 7 of 68

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
-	LTx4	Licensed Transmitter Cable Set	7/9/2020	Annual	7/9/2021	LTx4
-	LTx5	Licensed Transmitter Cable Set	4/9/2020	Annual	4/6/2021	LTx5
Agilent	N9020A	MXA Signal Analyzer	8/4/2020	Annual	8/4/2021	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/17/2020	Annual	7/17/2021	MY52350166
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511
Sunol	J85	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 8 of 68

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 9 of 68

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFK735MM
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/ULCA

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions (LTE Band 41)	2.1051, 27.53(m)	RSS-199(4.5)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-199(4.4)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 27.54	RSS-199(4.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 41)	27.50(h)(2)	RSS-199(4.4)	<2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions (LTE Band 41)	2.1053, 27.53(m)	RSS-199(4.5)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 10 of 68	

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

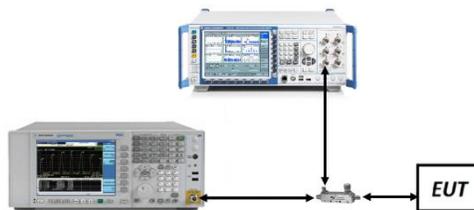


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 11 of 68

LTE Band 41(PC2)




Plot 7-1. Occupied Bandwidth Plot (LTE Band 41(PC2) - 20MHz QPSK - Full RB)



Plot 7-2. Occupied Bandwidth Plot (LTE Band 41(PC2) - 20MHz 16-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 12 of 68

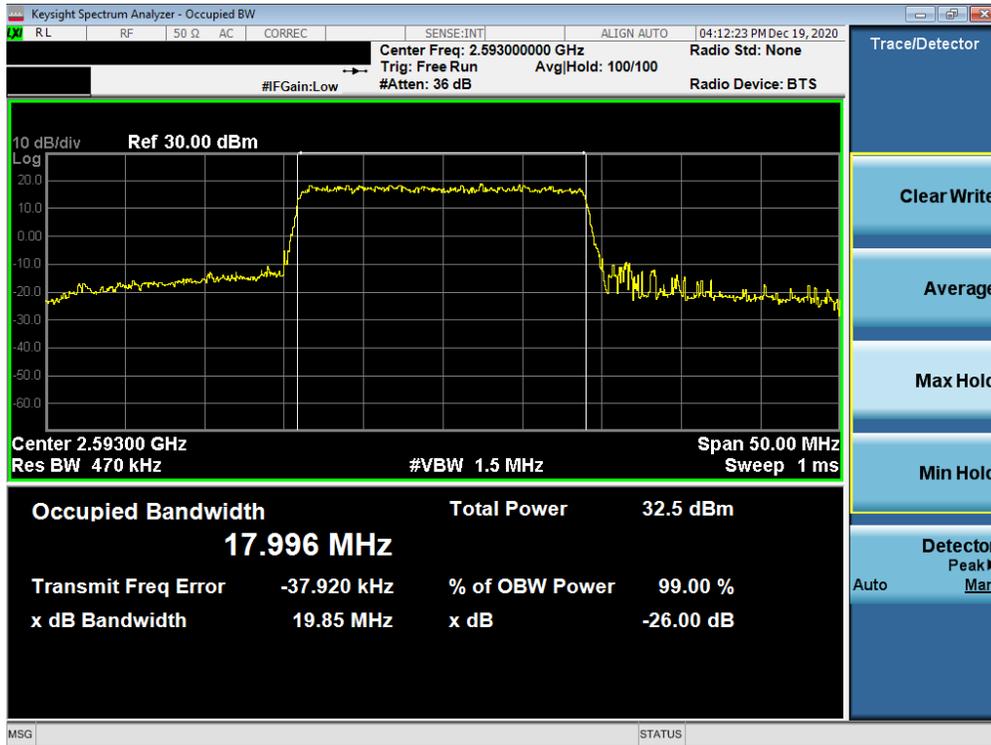


Plot 7-3. Occupied Bandwidth Plot (LTE Band 41(PC2) - 20MHz 64-QAM - Full RB)



Plot 7-4. Occupied Bandwidth Plot (LTE Band 41(PC2) - 15MHz QPSK - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 13 of 68

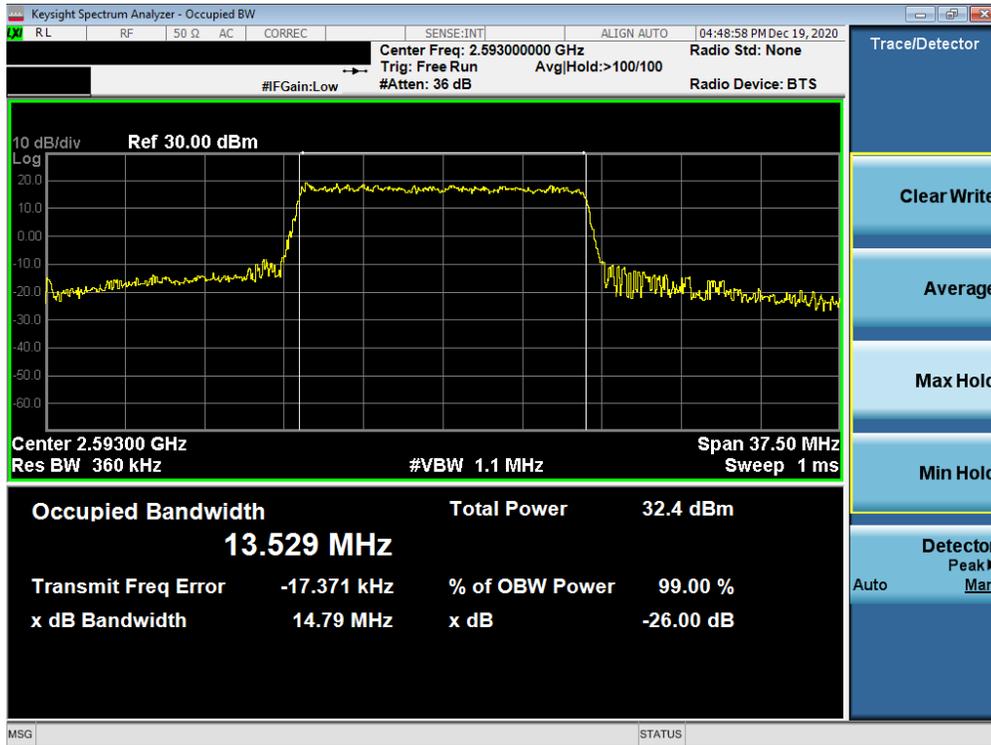


Plot 7-5. Occupied Bandwidth Plot (LTE Band 41(PC2) - 15MHz 16-QAM - Full RB)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 41(PC2) - 15MHz 64-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 14 of 68

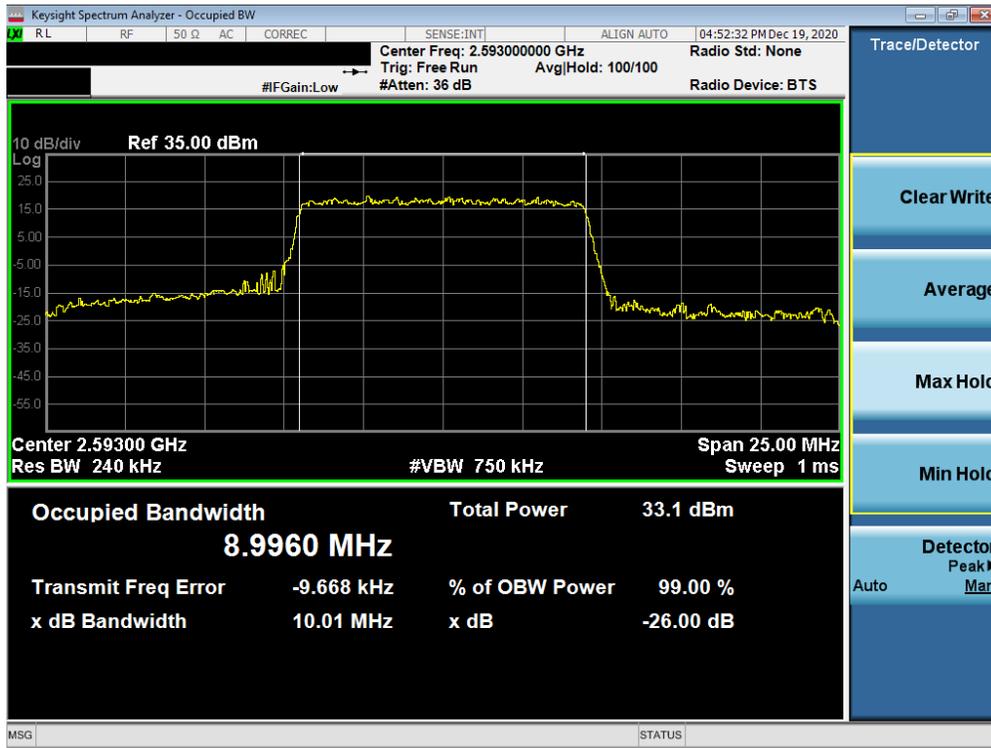


Plot 7-7. Occupied Bandwidth Plot (LTE Band 41(PC2) - 10MHz QPSK - Full RB)

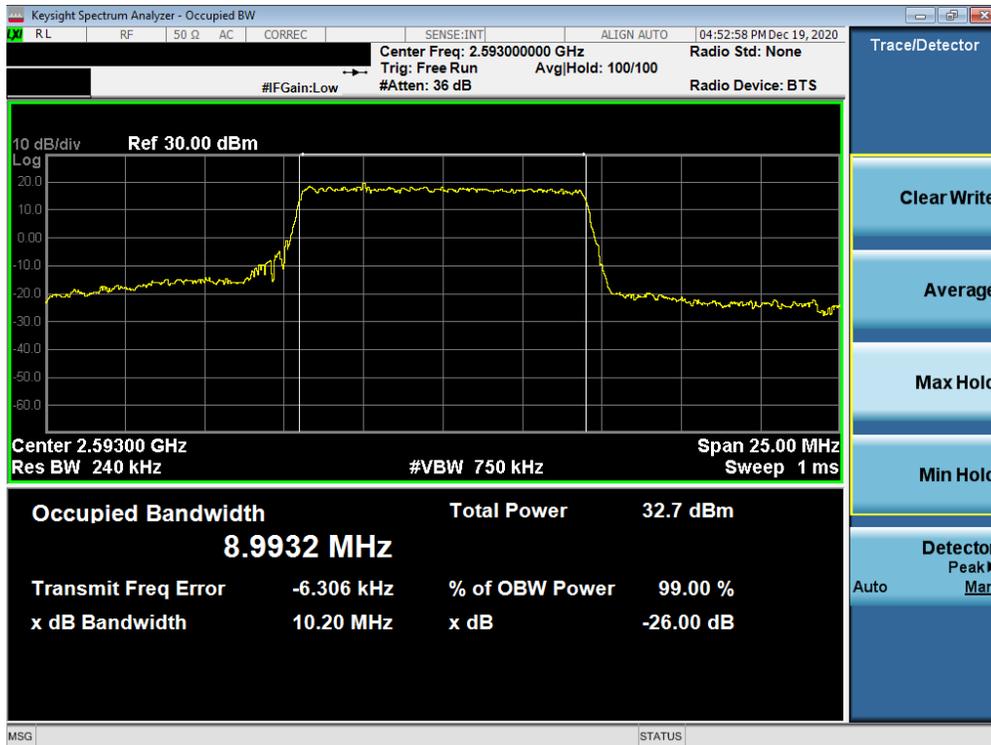

Plot 7-8. Occupied Bandwidth Plot (LTE Band 41(PC2) - 10MHz 16-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 15 of 68

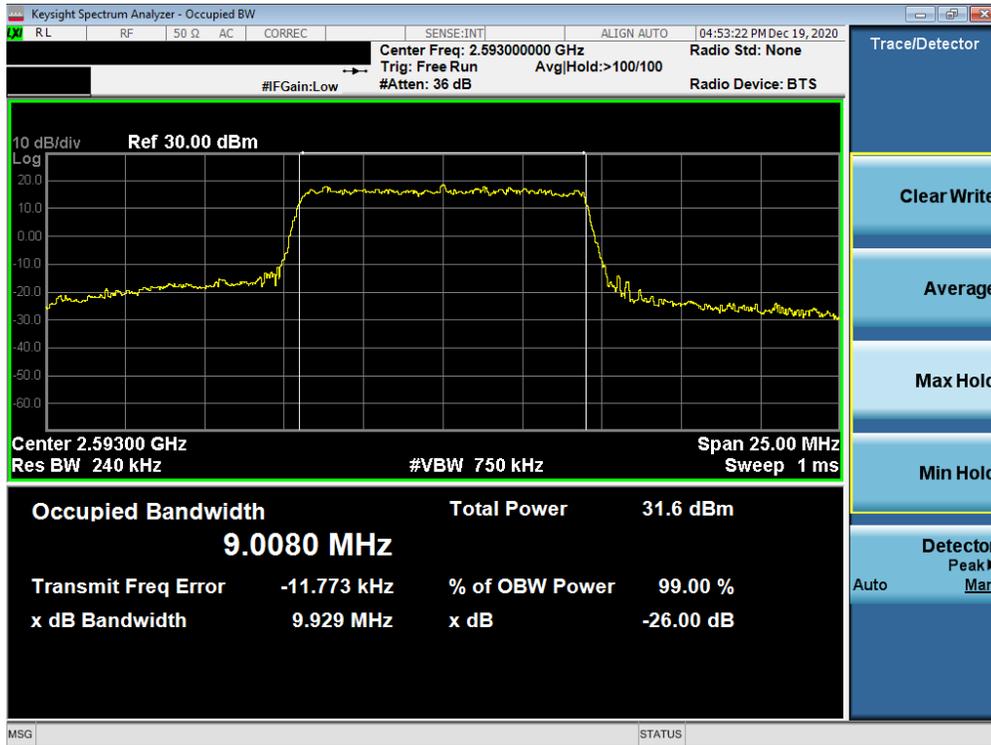


Plot 7-9. Occupied Bandwidth Plot (LTE Band 41(PC2) - 10MHz 64-QAM - Full RB)



Plot 7-10. Occupied Bandwidth Plot (LTE Band 41(PC2) - 5MHz QPSK - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 16 of 68

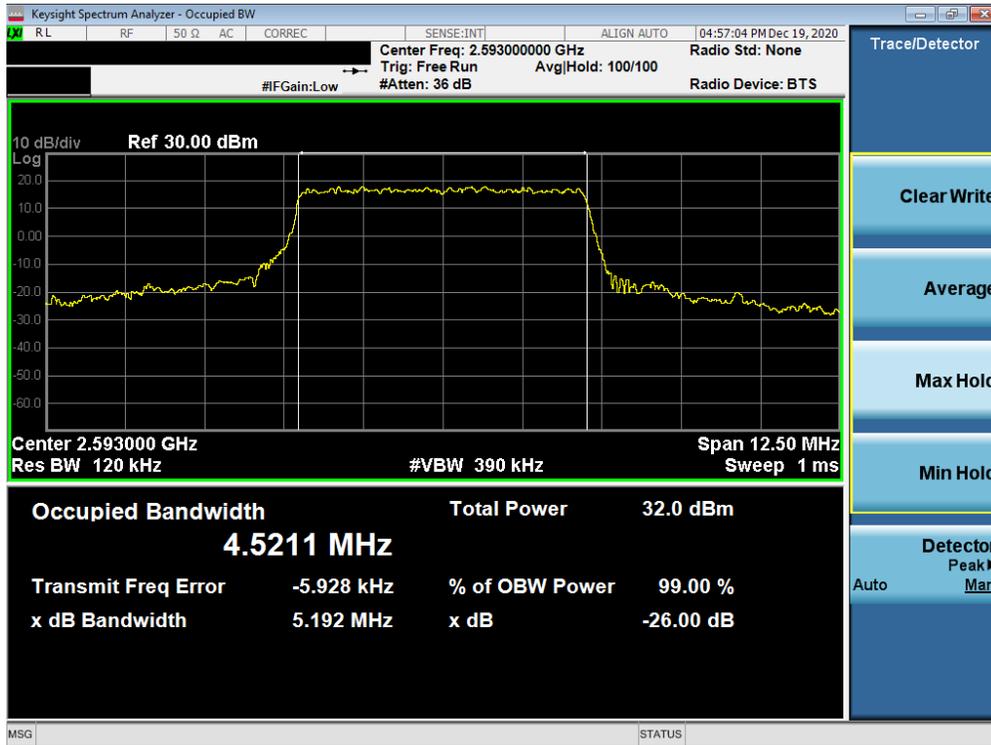

Plot 7-11. Occupied Bandwidth Plot (LTE Band 41(PC2) - 5MHz 16-QAM - Full RB)



Plot 7-12. Occupied Bandwidth Plot (LTE Band 41(PC2) - 5MHz 64-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 17 of 68

LTE Band 41(PC3)




Plot 7-13. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz QPSK - Full RB)




Plot 7-14. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz 16-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 18 of 68

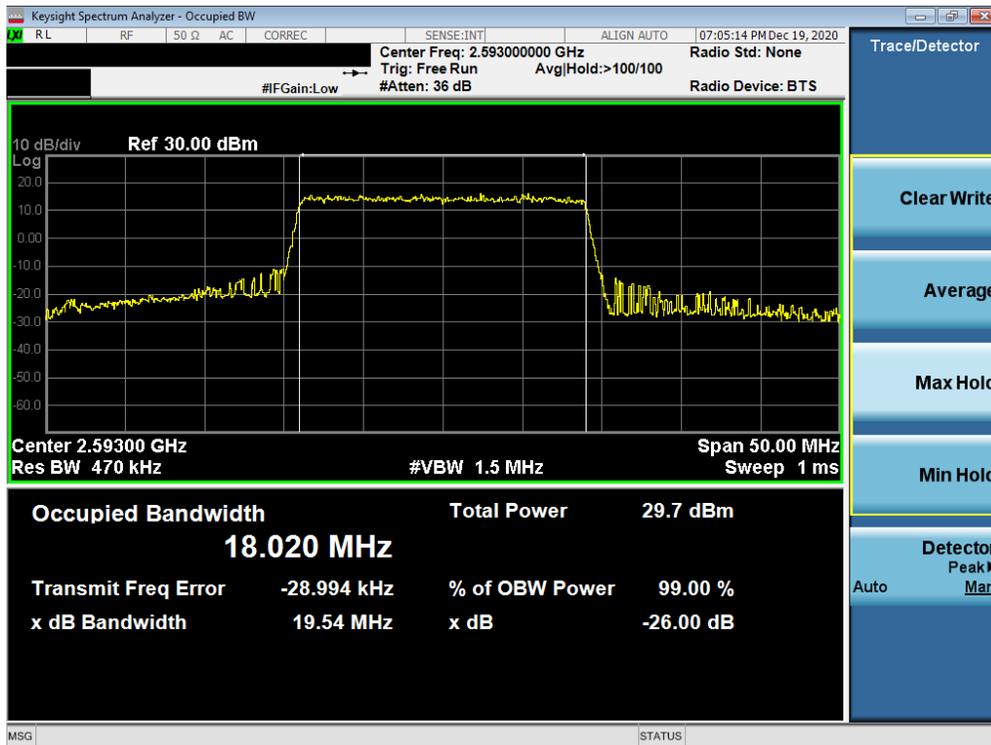


Plot 7-15. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz 64-QAM - Full RB)

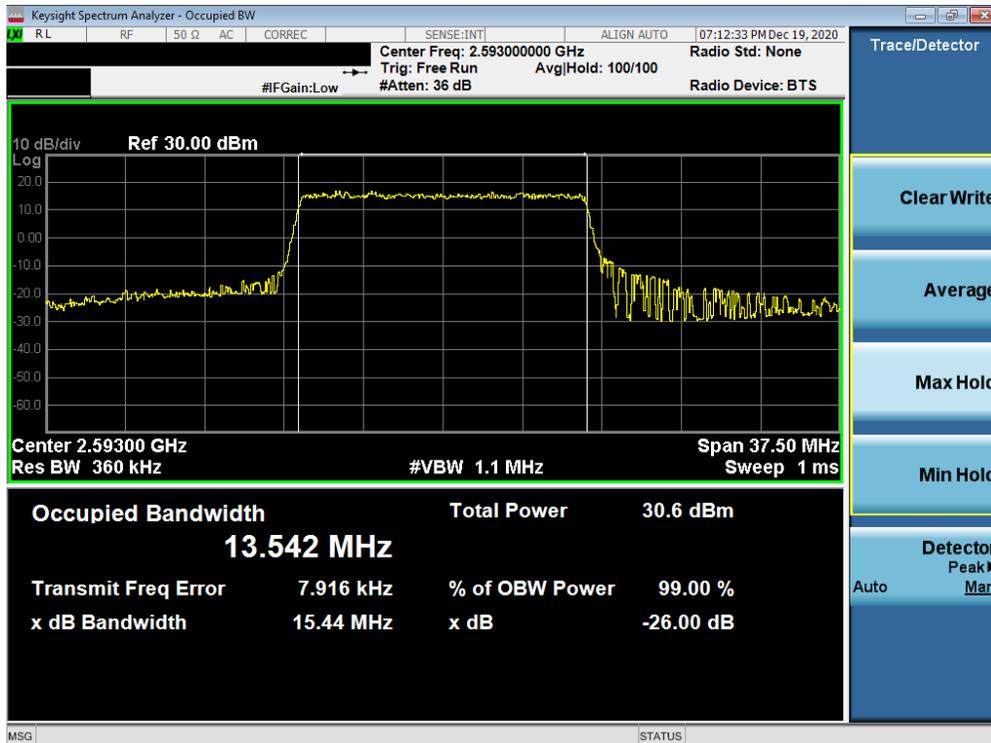

Plot 7-16. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz QPSK - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 19 of 68

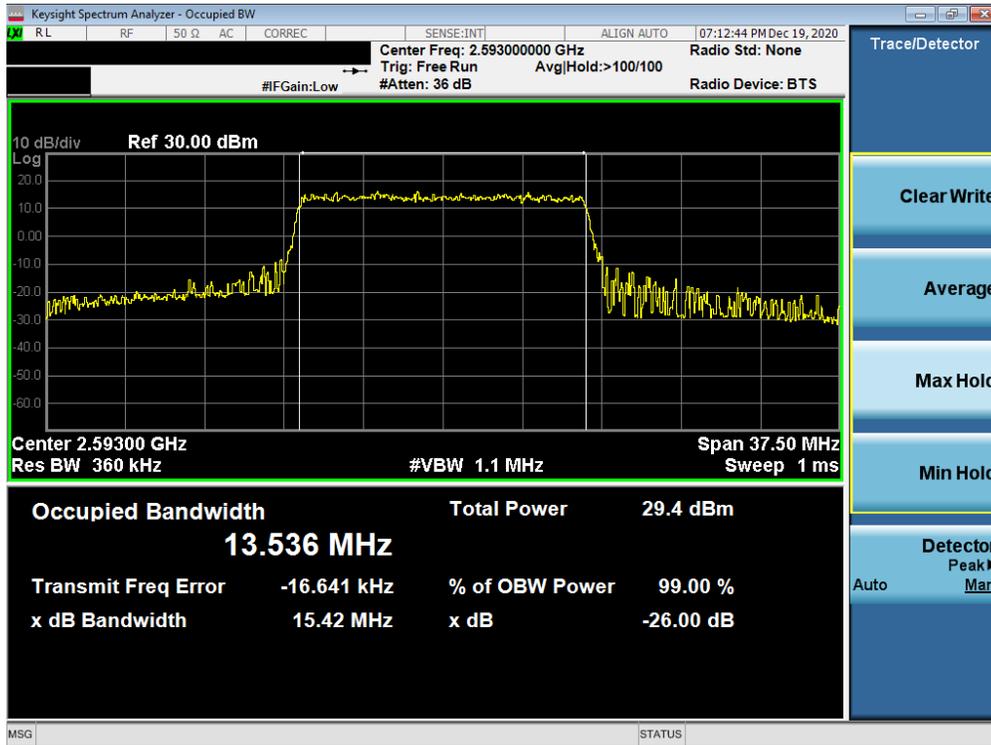


Plot 7-17. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz 16-QAM - Full RB)




Plot 7-18. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz 64-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 20 of 68

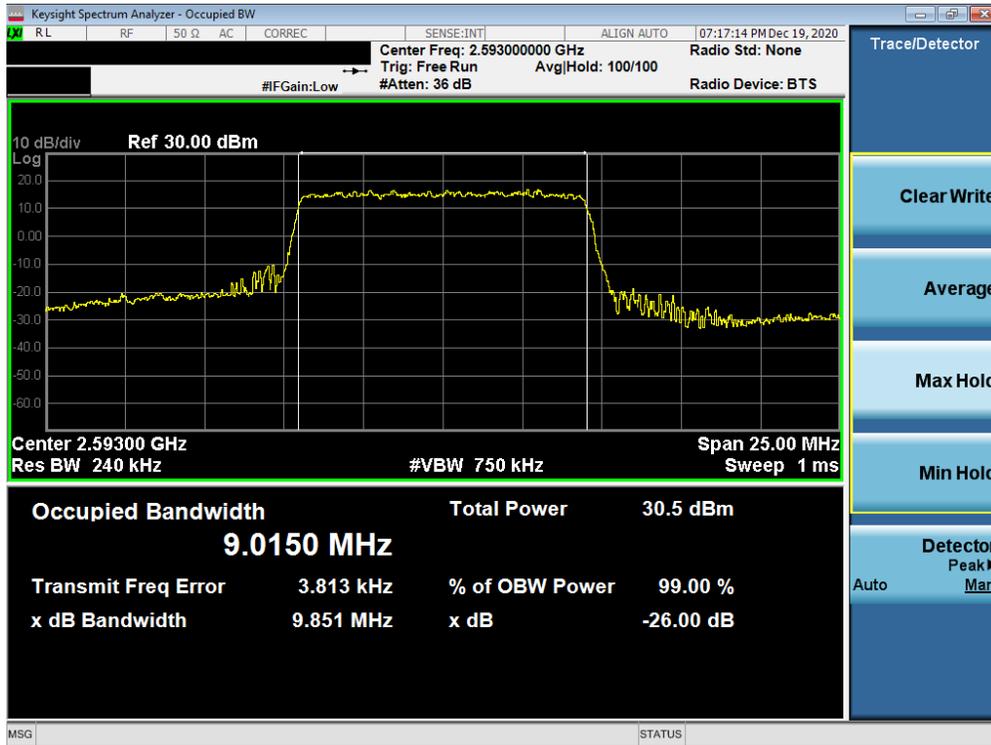

Plot 7-19. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz QPSK - Full RB)

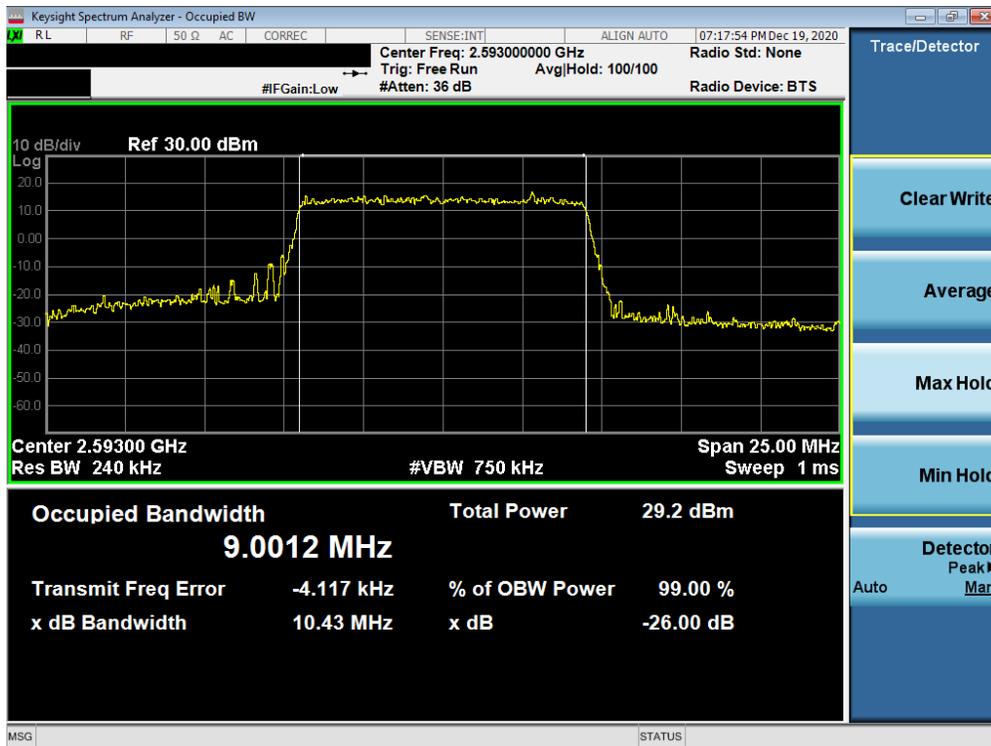


Plot 7-20. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz 16-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 21 of 68




Plot 7-21. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz 64-QAM - Full RB)

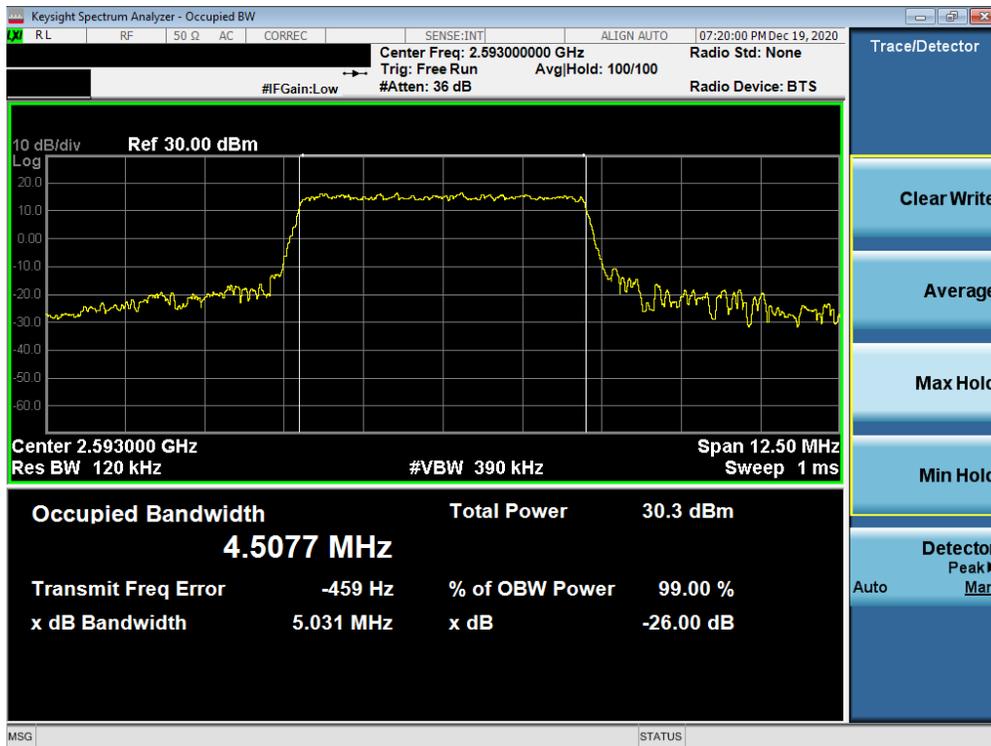


Plot 7-22. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 22 of 68

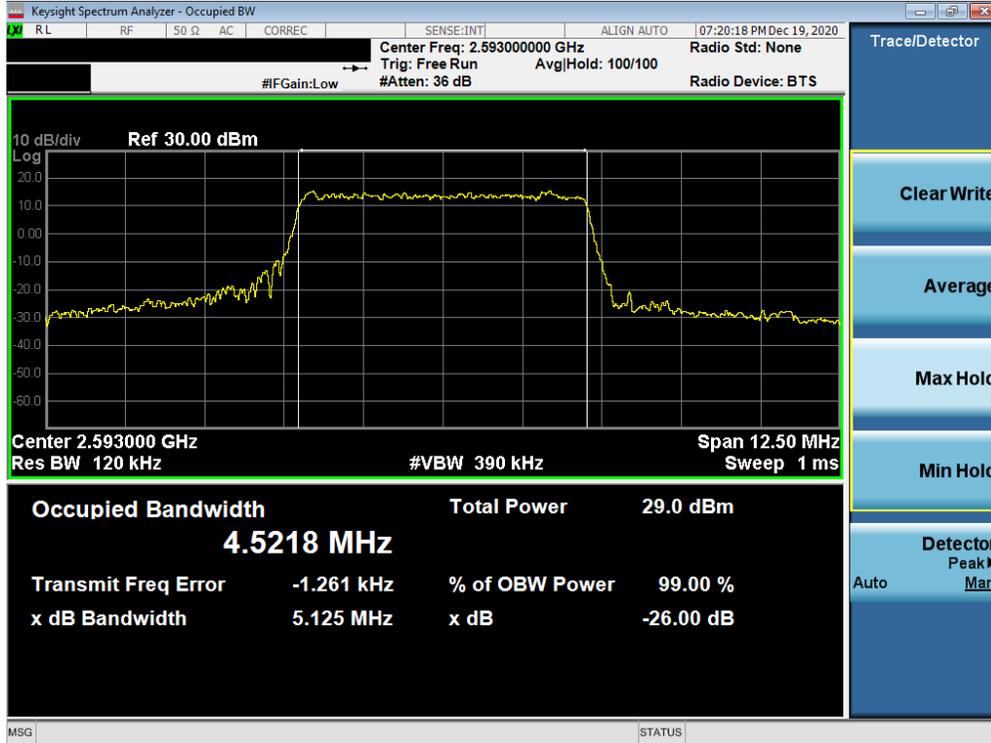

Plot 7-23. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 16-QAM - Full RB)

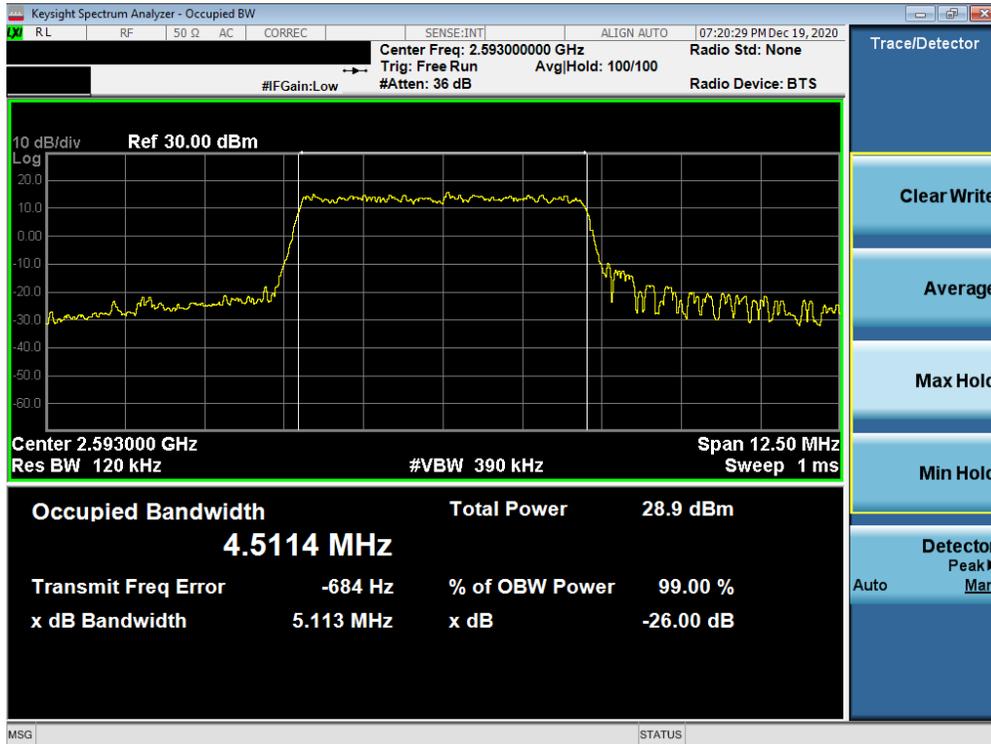

Plot 7-24. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 64-QAM - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 23 of 68

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For Band 41, the minimum permissible attenuation level of any spurious emission is $55 + 10\log_{10}(P_{[Watts]})$.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

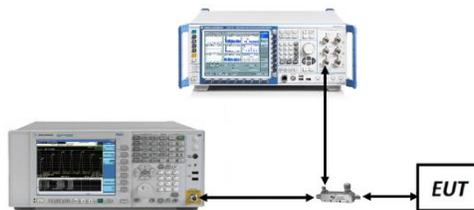



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per Part 27, RSS-195 and RSS-199, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 24 of 68	

LTE Band 41(PC2)

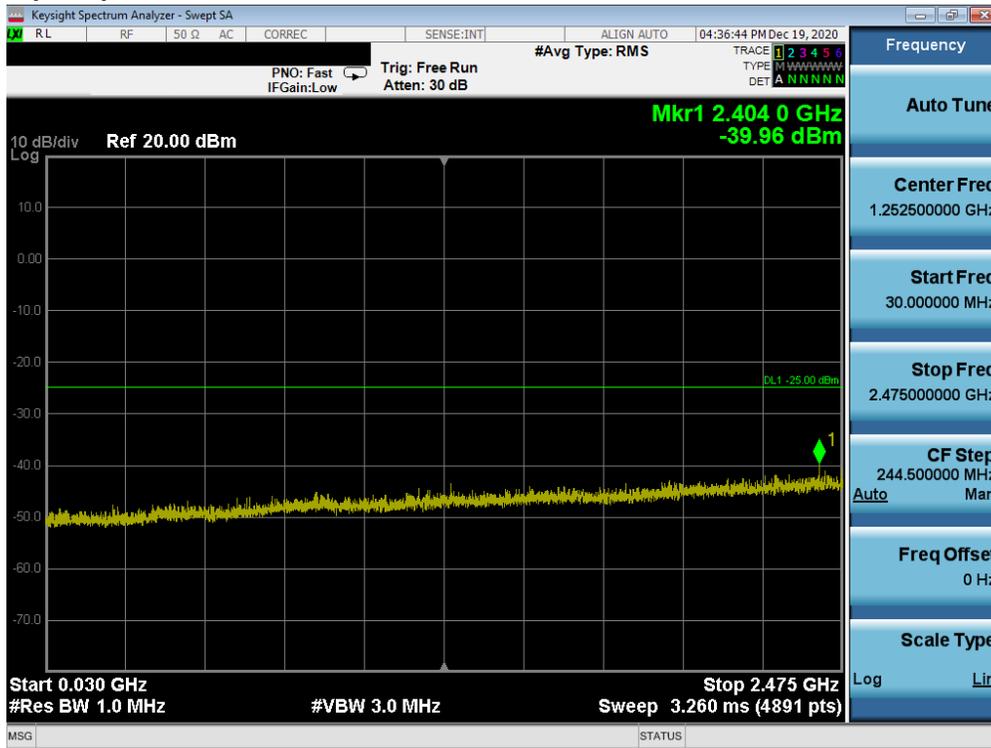


Plot 7-25. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

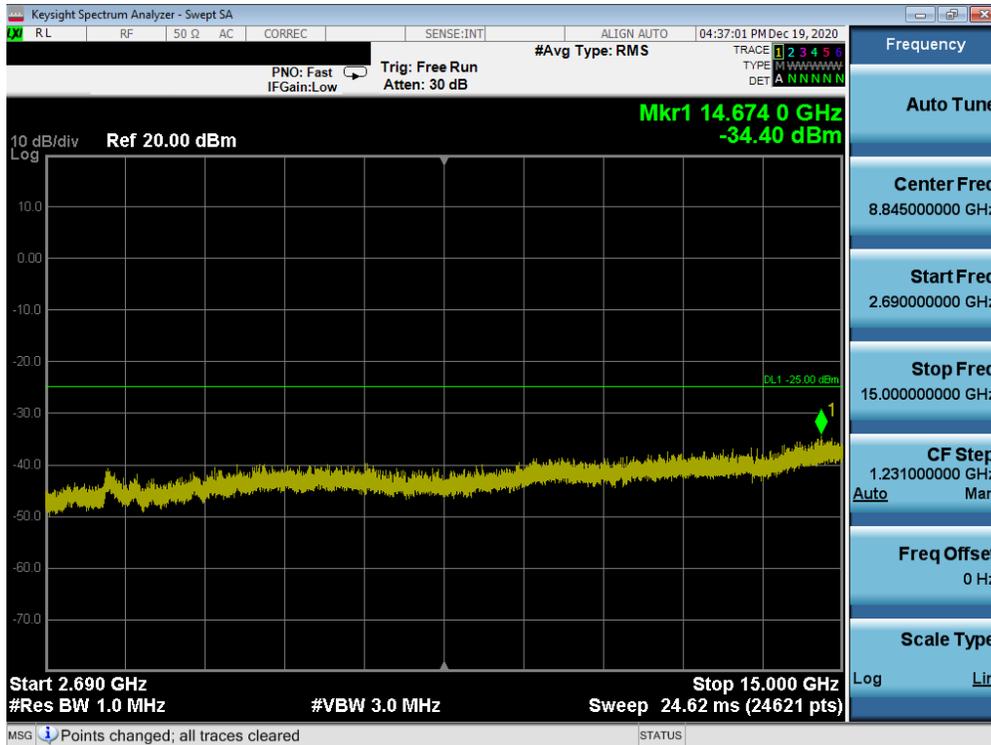


Plot 7-26. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 25 of 68

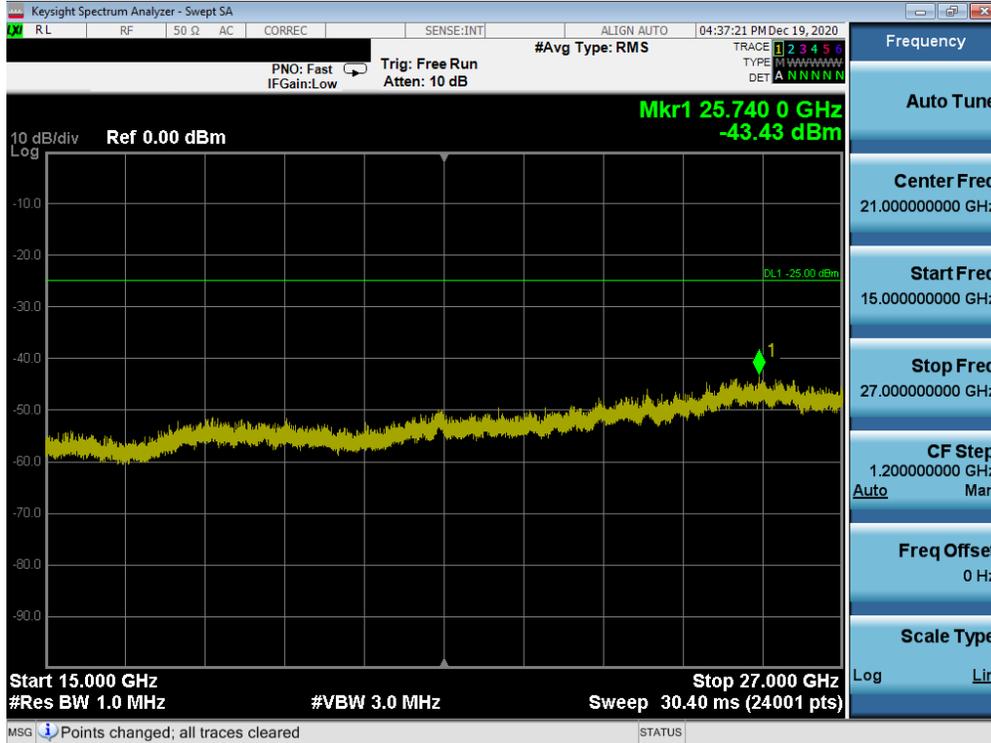


Plot 7-27. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

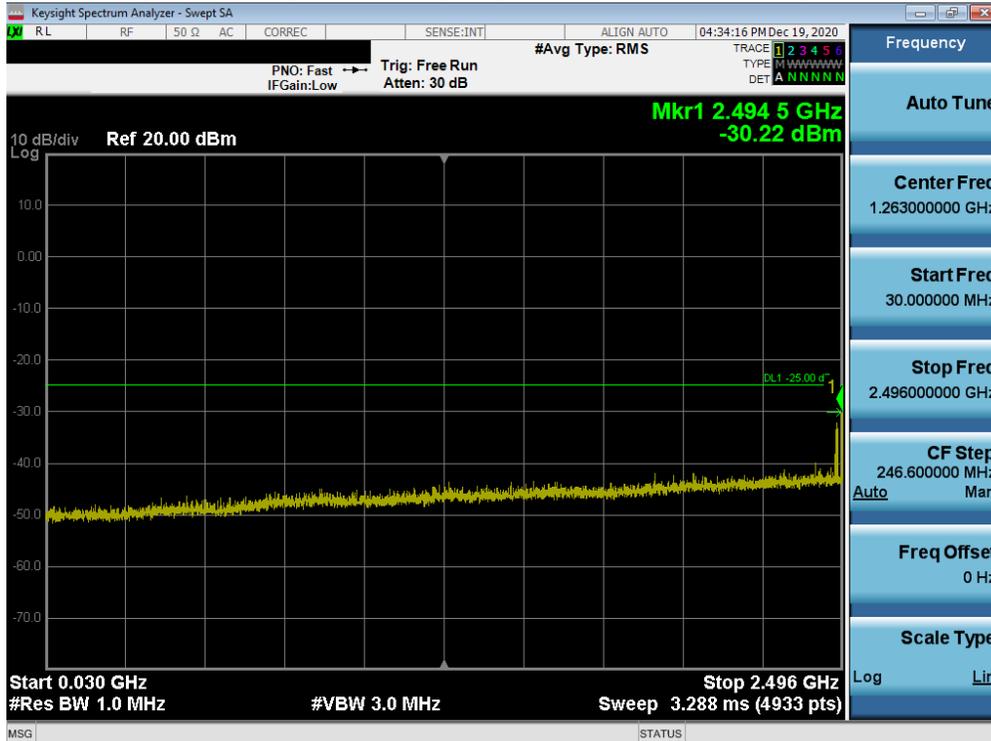


Plot 7-28. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 26 of 68

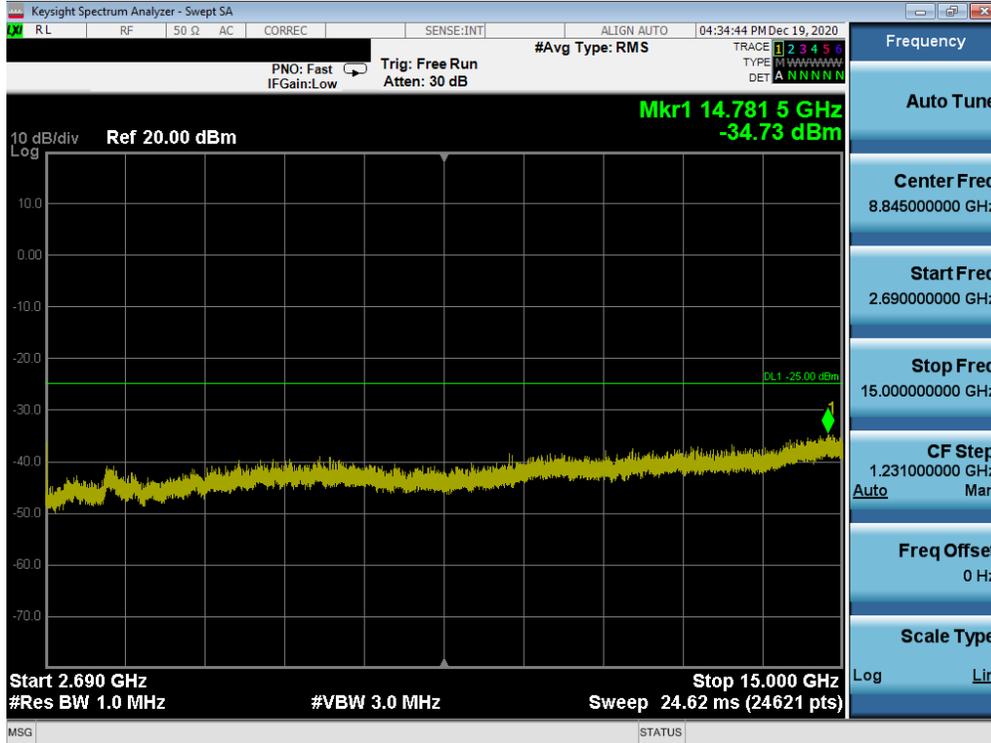


Plot 7-29. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

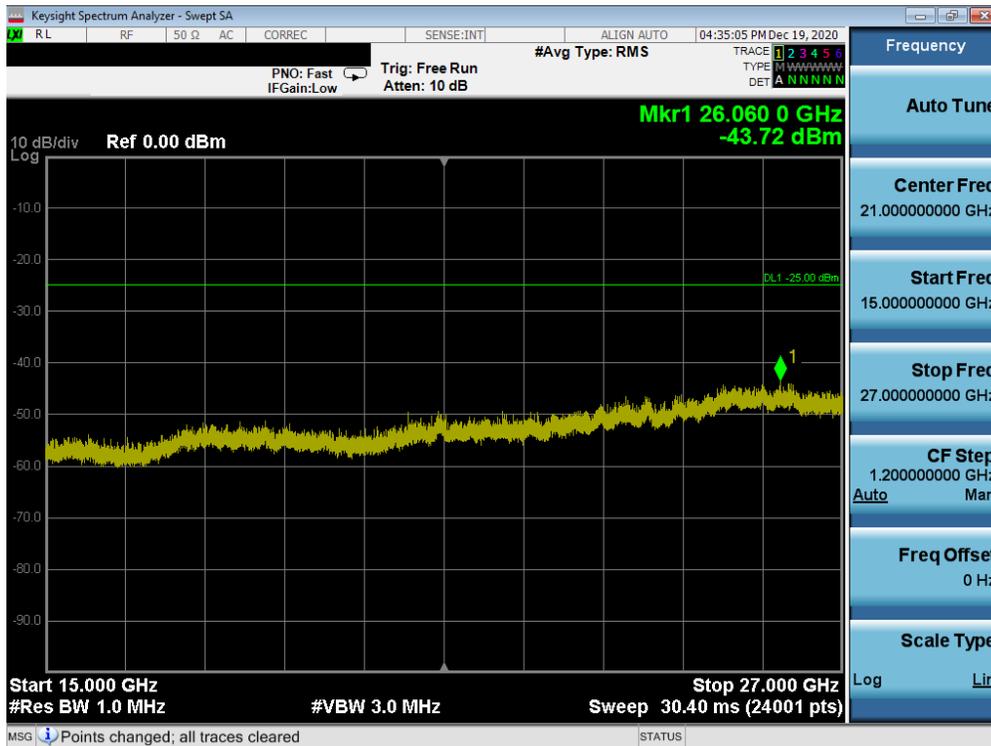


Plot 7-30. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 27 of 68

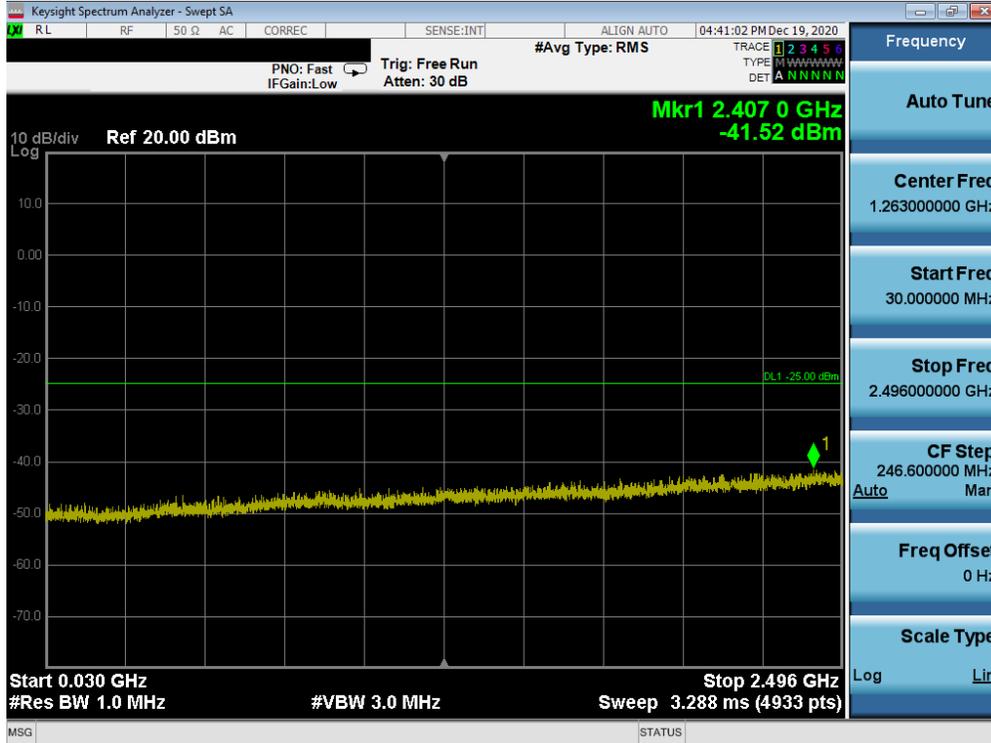

Plot 7-31. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

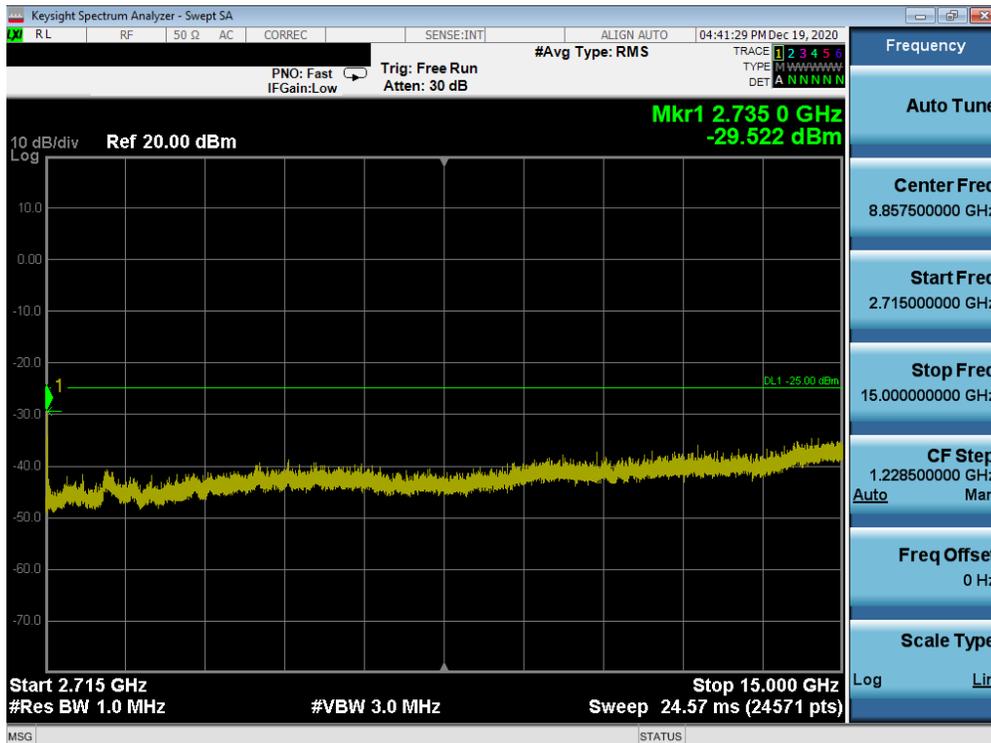

Plot 7-32. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 28 of 68




Plot 7-33. Conducted Spurious Plot (LTE Band 41(PC2) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 29 of 68

LTE Band 41(PC3)

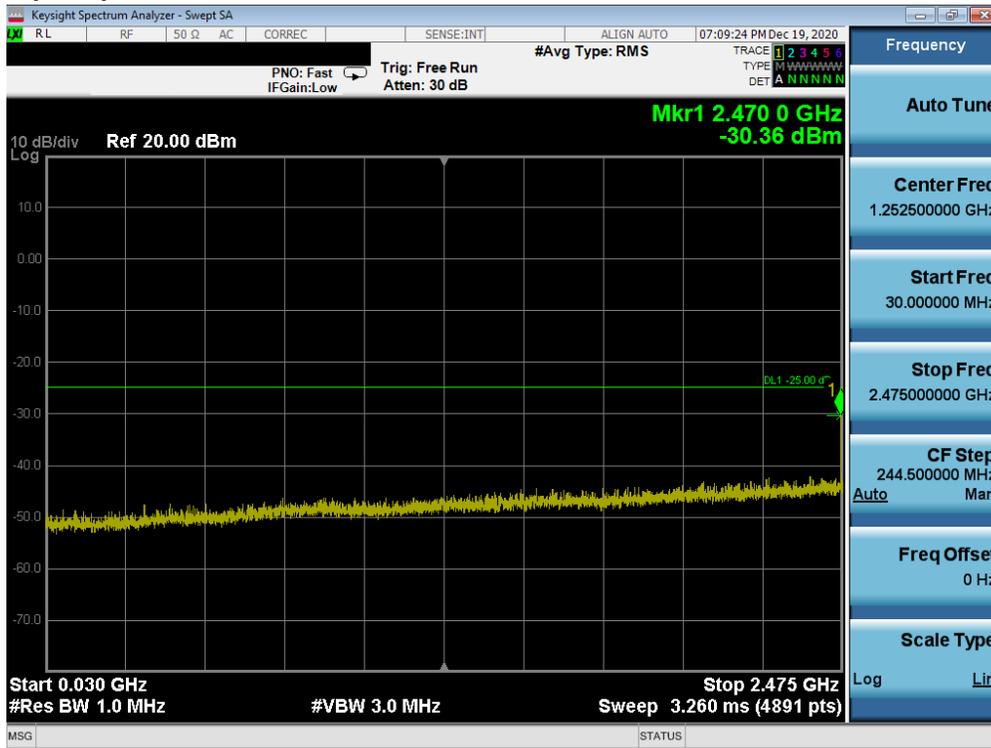


Plot 7-34. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

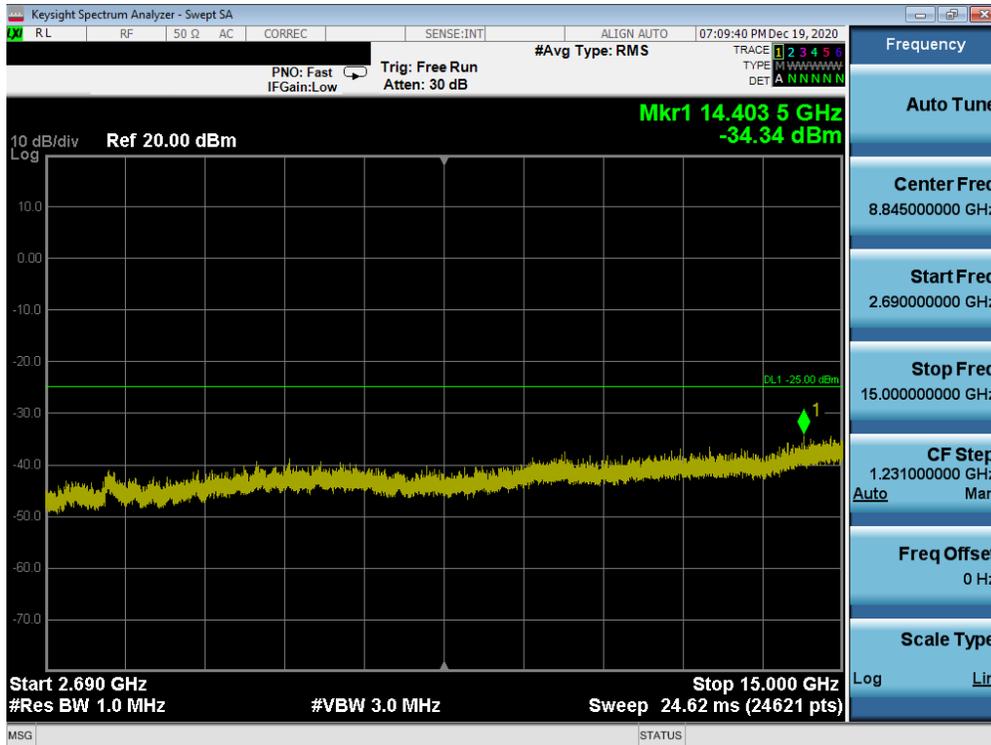


Plot 7-35. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 30 of 68

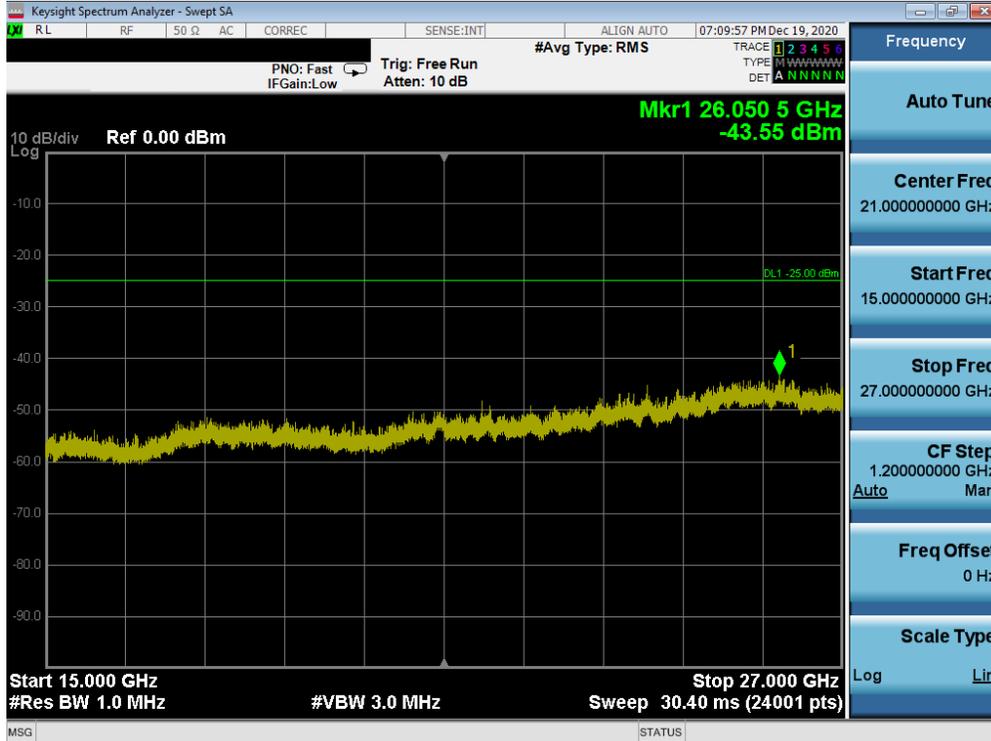


Plot 7-36. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

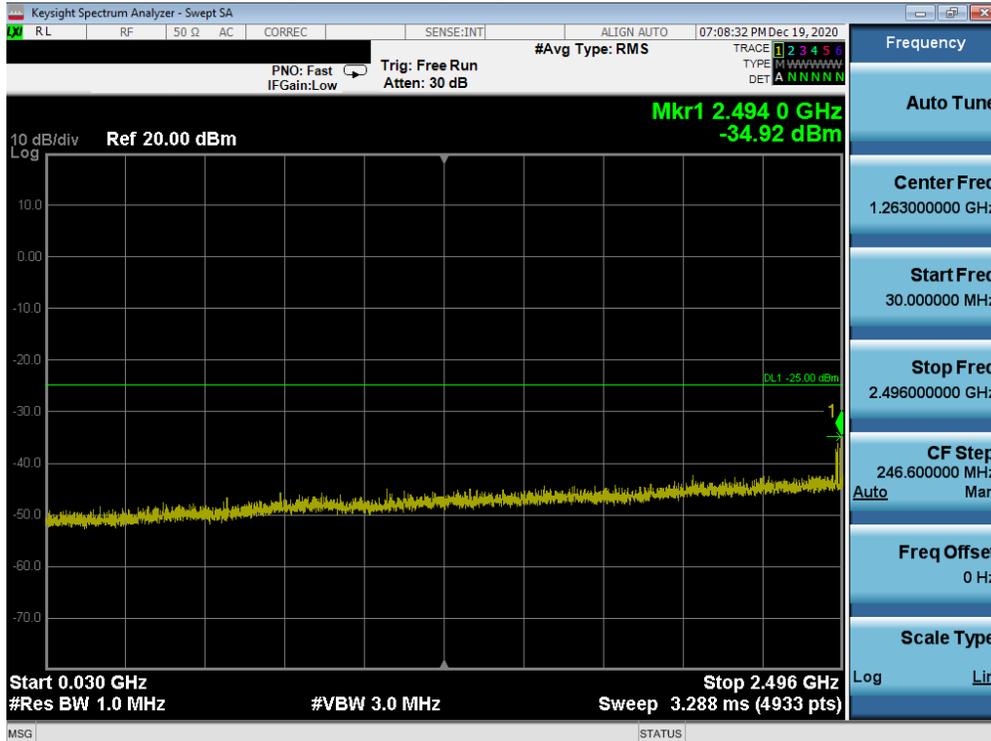


Plot 7-37. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 31 of 68

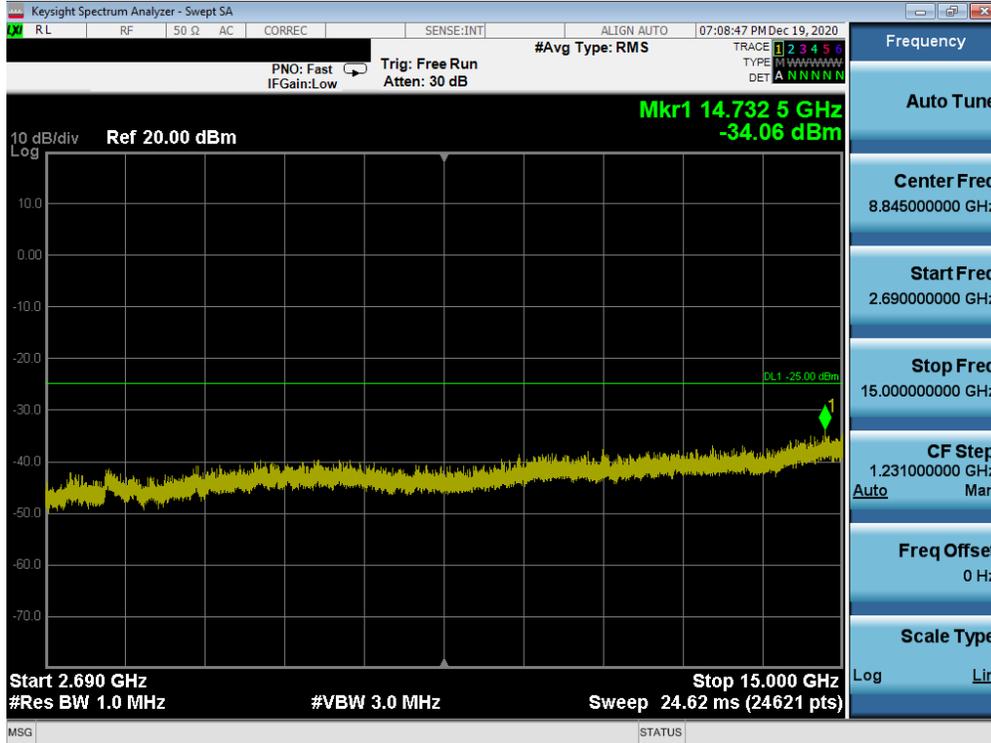


Plot 7-38. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

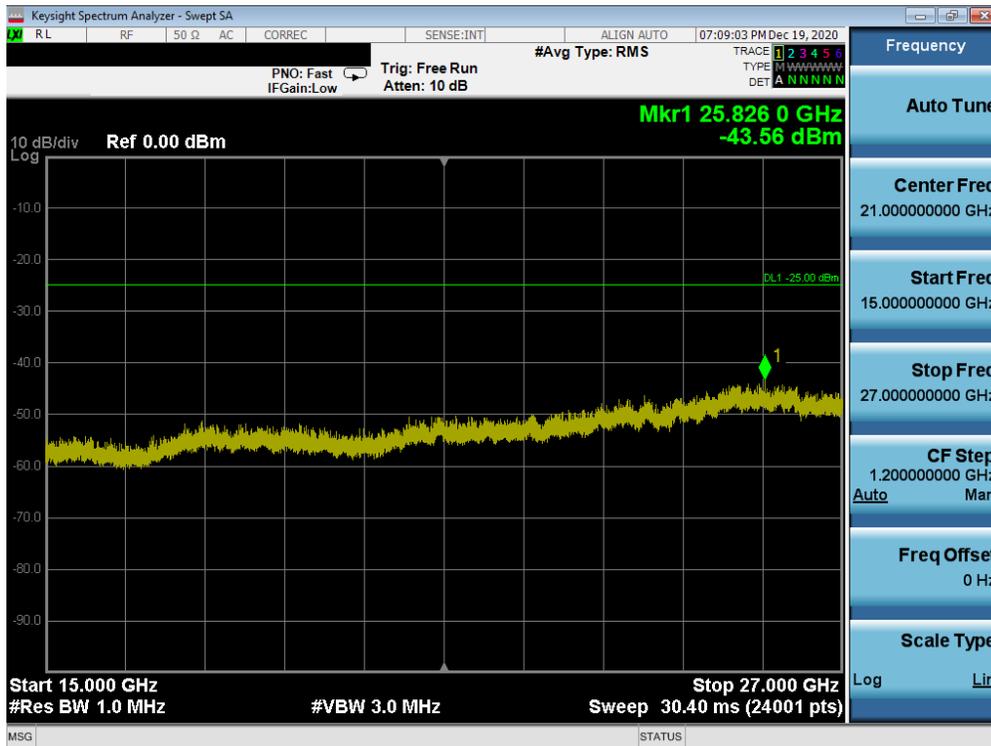


Plot 7-39. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 32 of 68

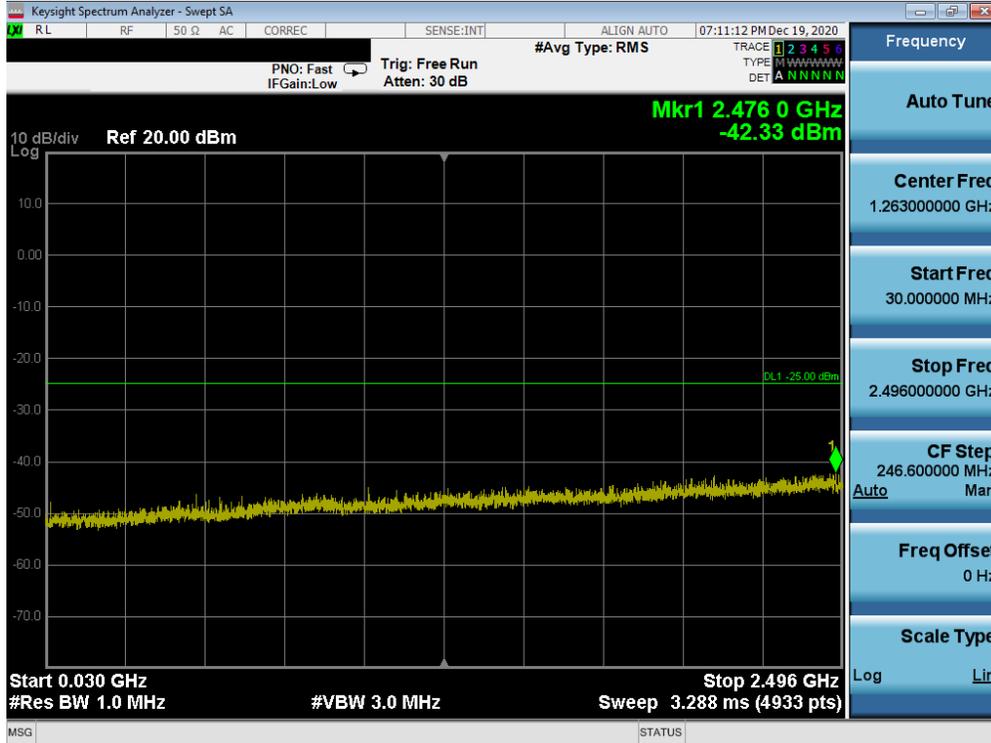

Plot 7-40. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

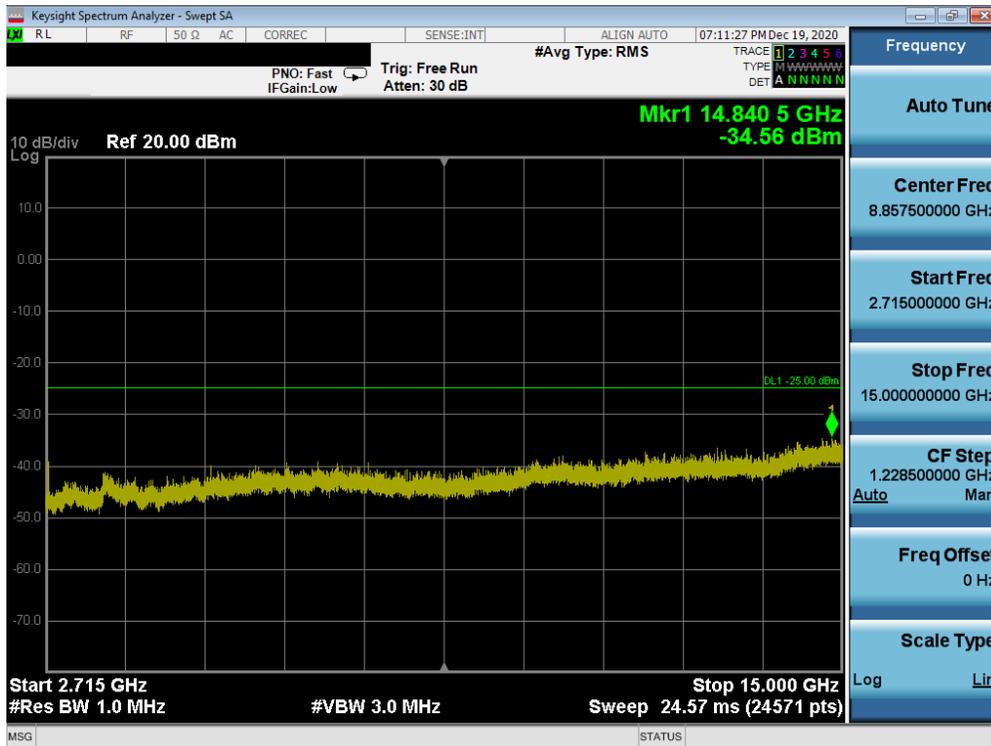

Plot 7-41. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 33 of 68



Plot 7-42. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 34 of 68	

7.4 Uplink Carrier Aggregation

§27.53(m)

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For Band 41/38 the minimum permissible attenuation level of any spurious emission is 55 + 10 log₁₀(P_[Watts]).

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

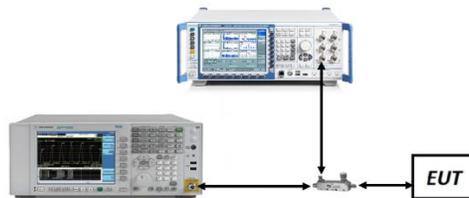


Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Conducted power and spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device. The worst case (highest) powers were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
2. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 35 of 68	

Uplink CA Configuration 41C


Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Tx. Power [dBm]	
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset		
Max	LTE B41 (PC3)	20MHz + 20MHz	QPSK	39750	2506.0	1	99	QPSK	39948	2525.8	1	0	21.99	
				40620	2593.0	1	99		40818	2612.8	1	0	21.67	
				41490	2680.0	1	0		41292	2660.2	1	99	22.34	
				41490	2680	100	0		41292	2660.2	100	0	19.65	
			16-QAM	41490	2680	100	0	16-QAM	41292	2660.2	100	0	18.64	
				64-QAM	41490	2680	100	0	64-QAM	41292	2660.2	100	0	18.48

Table 7-43. Conducted Power Data (ULCA LTE B41(PC3))

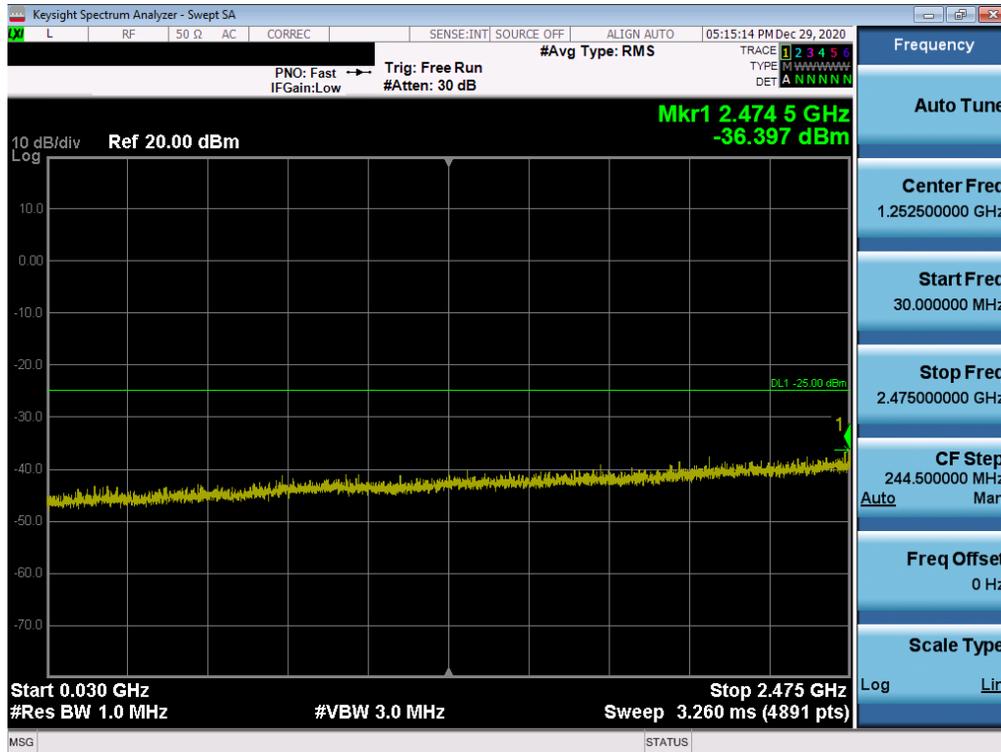


Plot 7-44. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - - Left Carrier 1/99 Right Carrier 1/0- Low Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 36 of 68

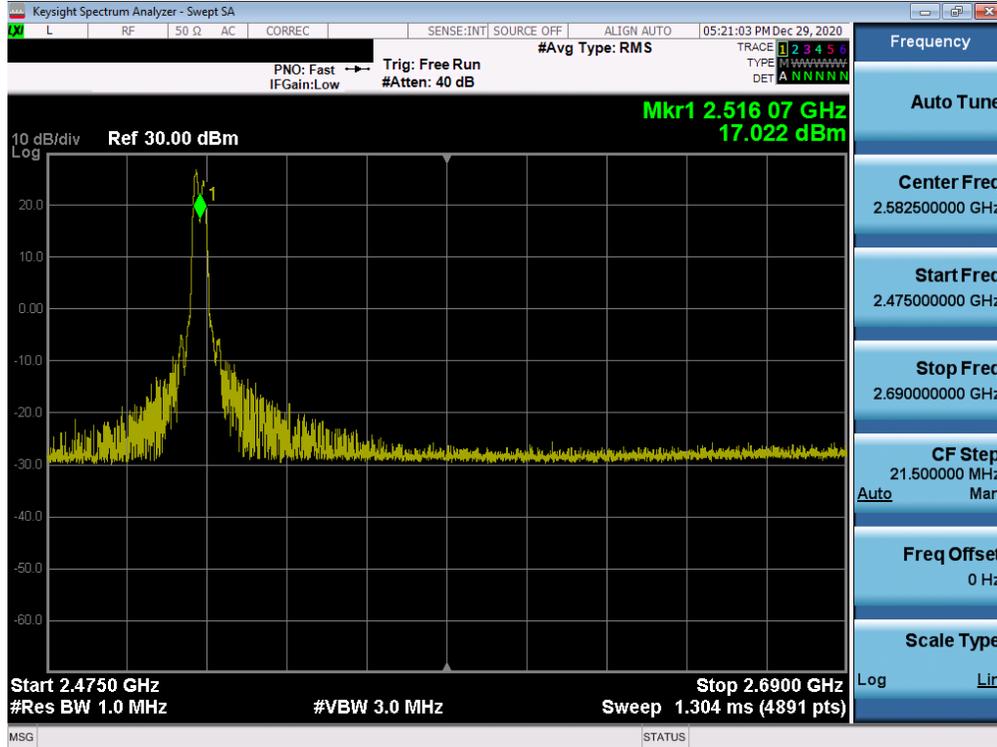


Plot 7-45. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - -- Left Carrier 1/99 Right Carrier 1/0- Low Channel)

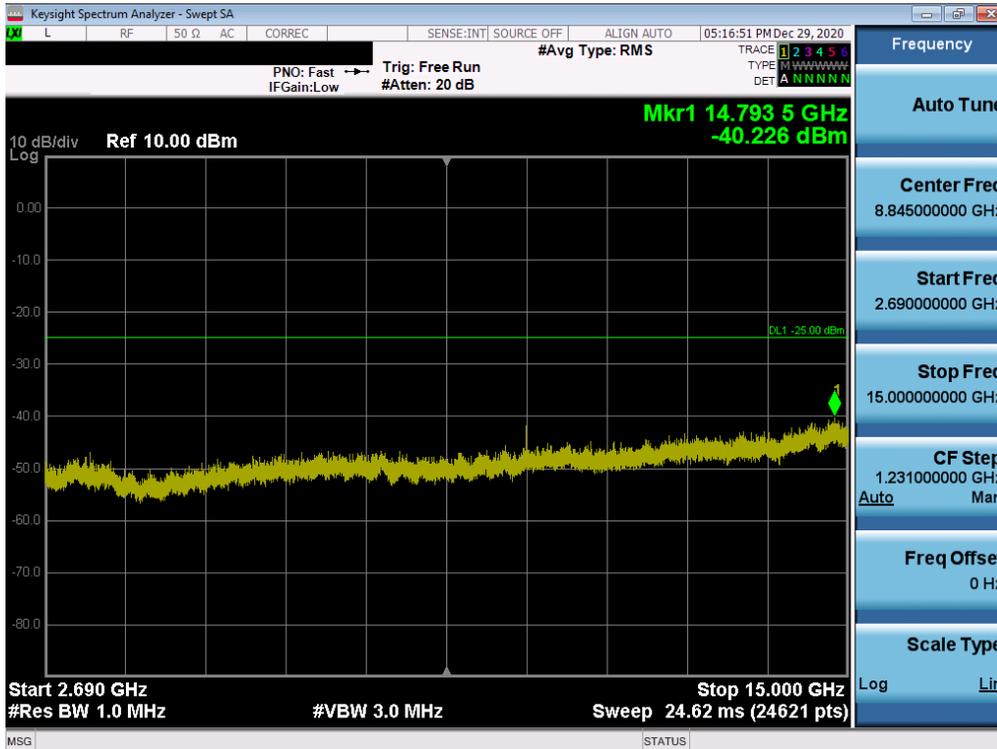


Plot 7-46. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - -- Left Carrier 1/99 Right Carrier 1/0- Low Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 37 of 68

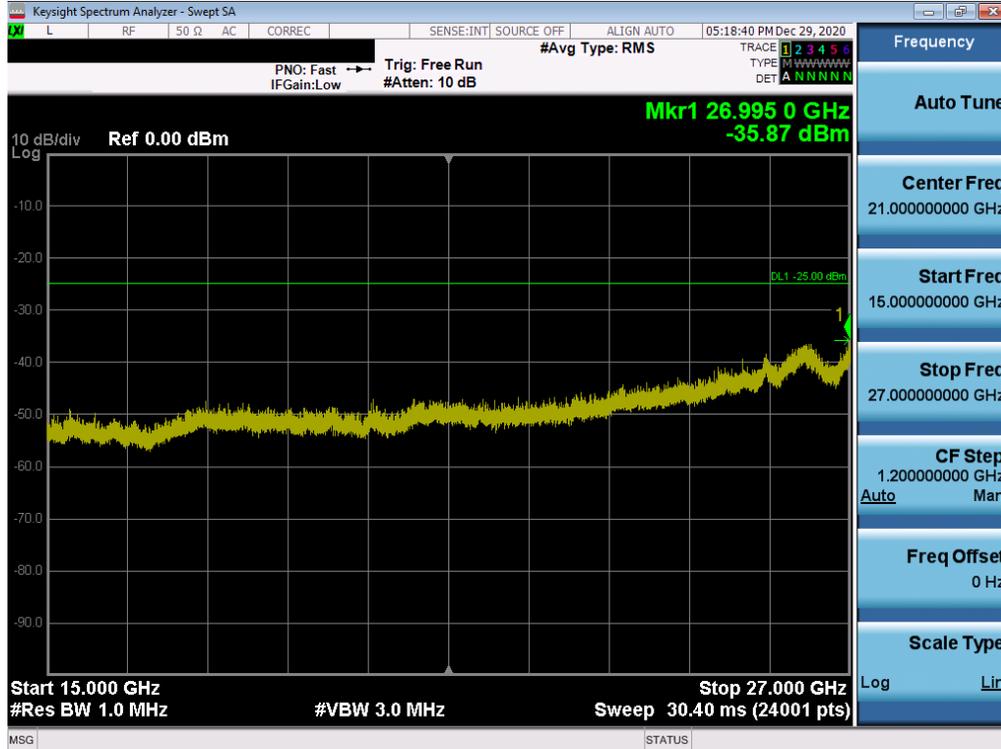


Plot 7-47. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK -- Left Carrier 1/99 Right Carrier 1/0- Low Channel)

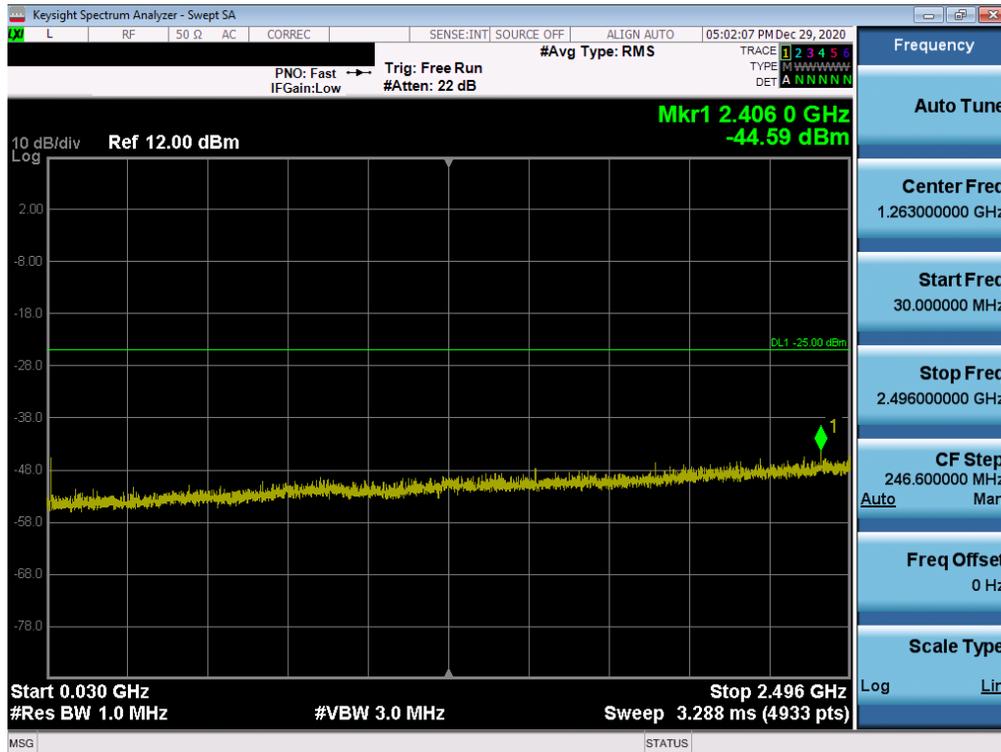


Plot 7-48. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 38 of 68

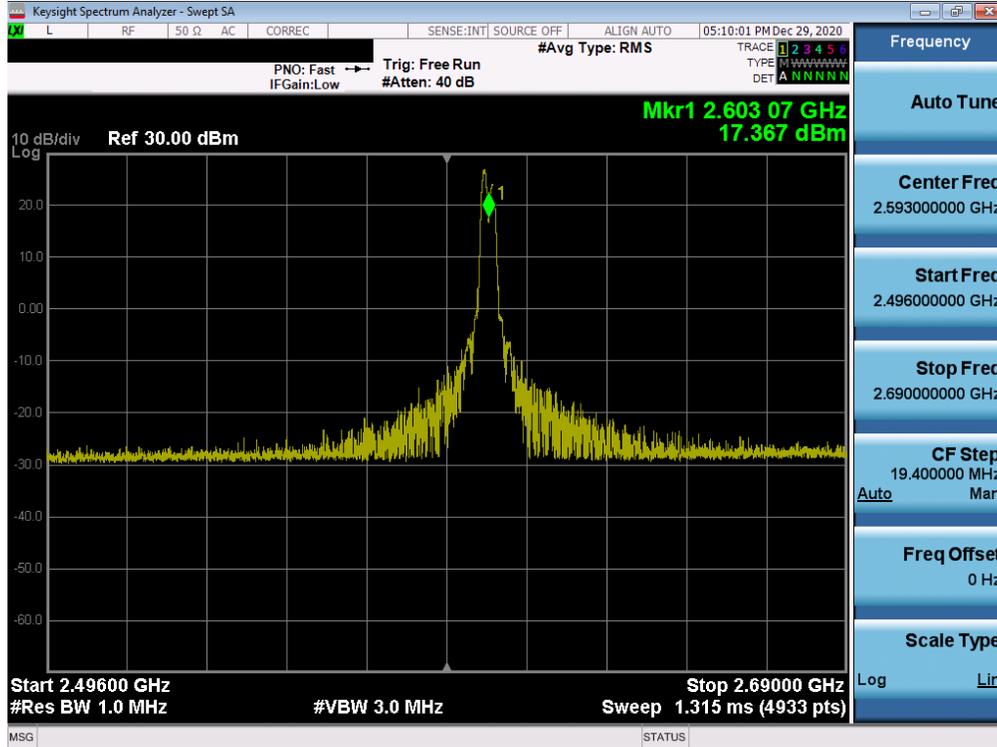


Plot 7-49. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0 - Mid Channel)

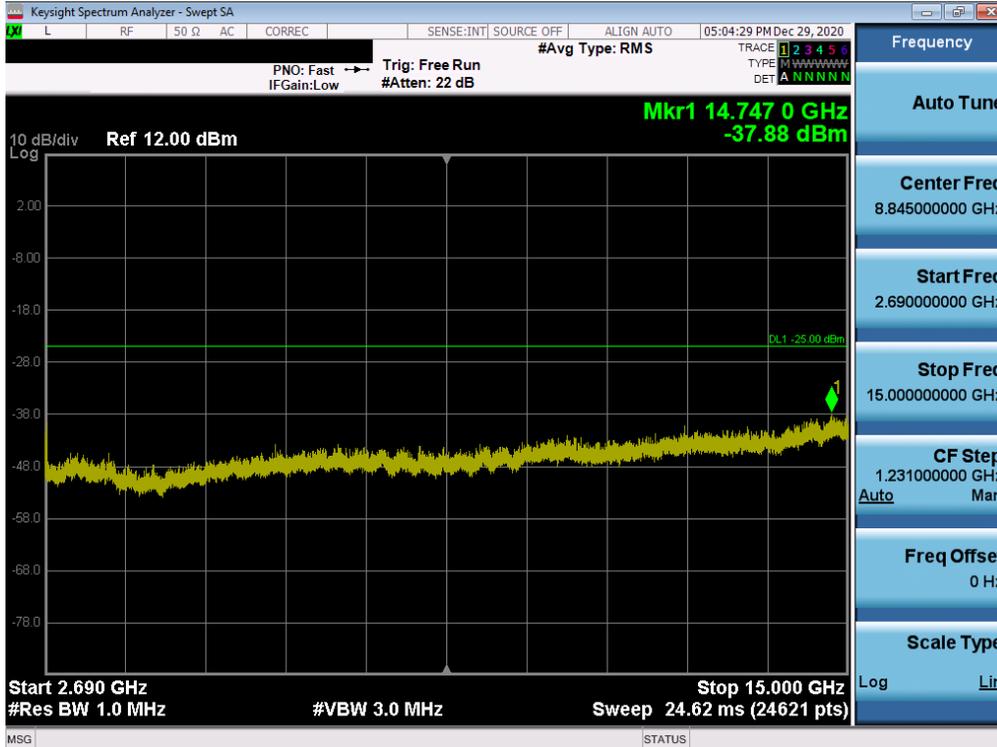


Plot 7-50. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0 - Mid Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 39 of 68

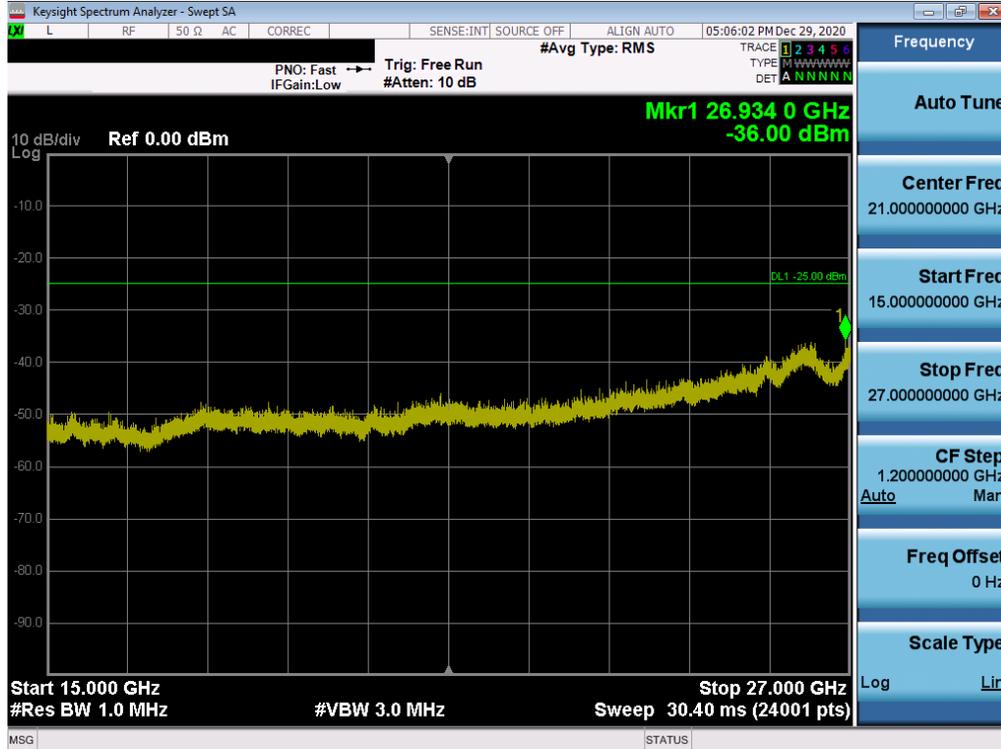


Plot 7-51. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0 - Mid Channel)

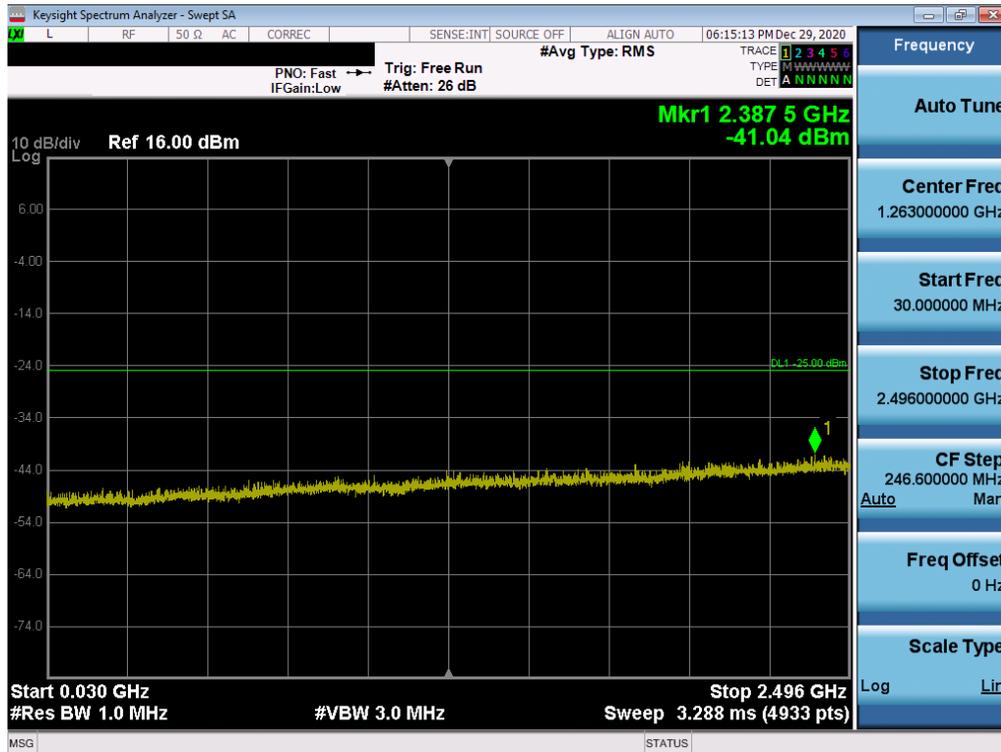


Plot 7-52. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0- High Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 40 of 68

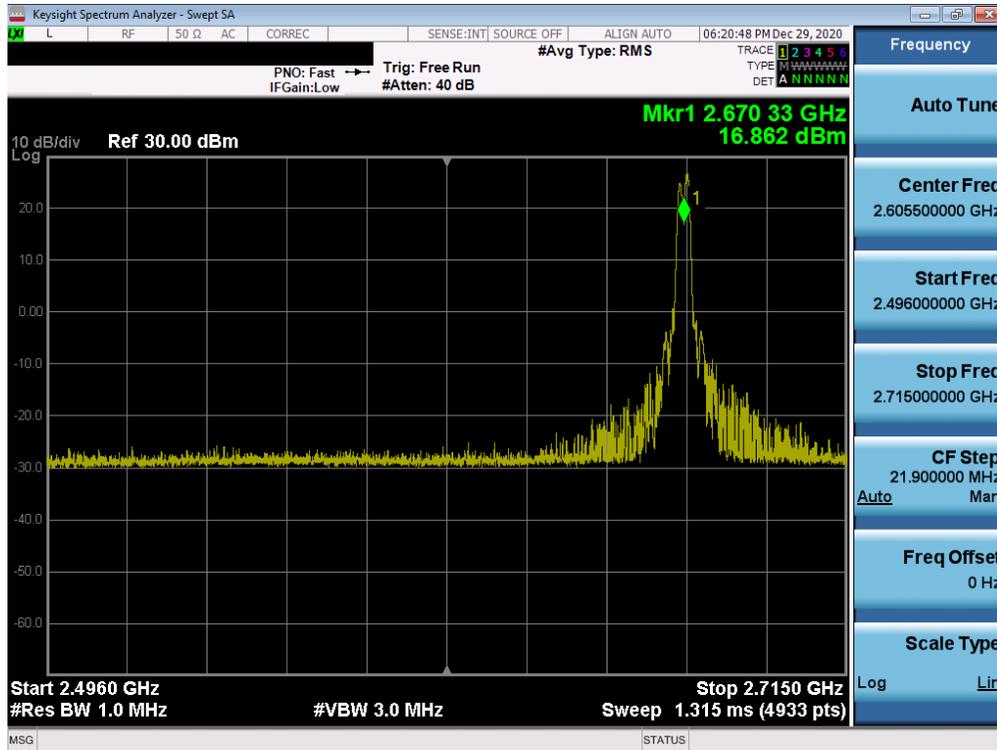

Plot 7-53. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0- High Channel)

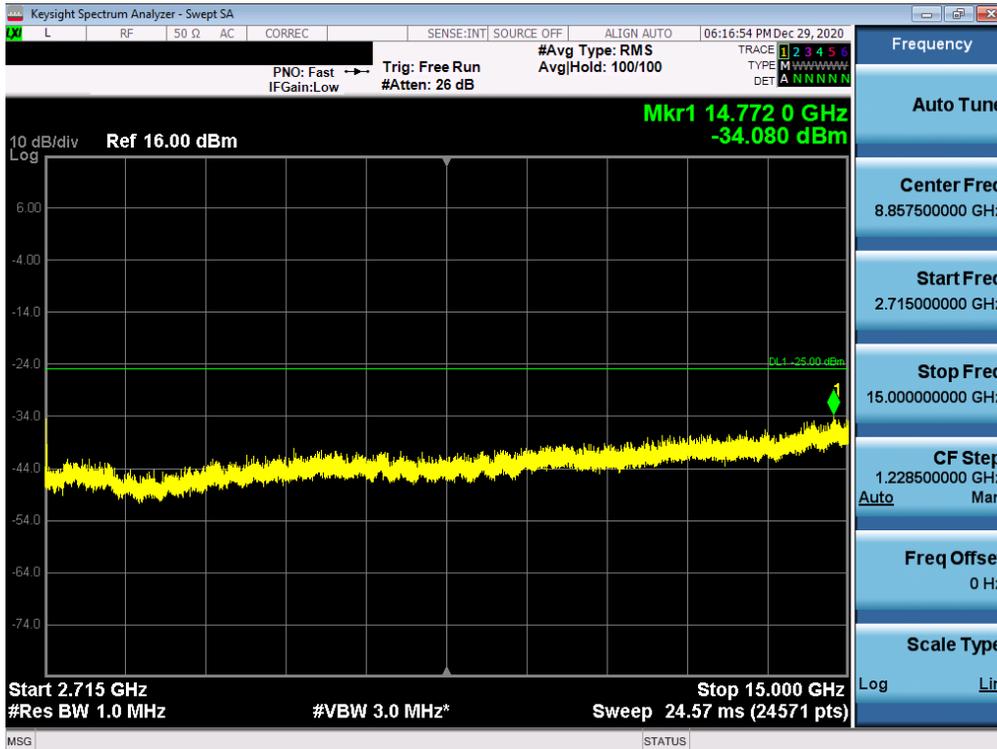


Plot 7-54. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0- High Channel)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 41 of 68




Plot 7-55. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - Left Carrier 1/99 Right Carrier 1/0- High Channel)

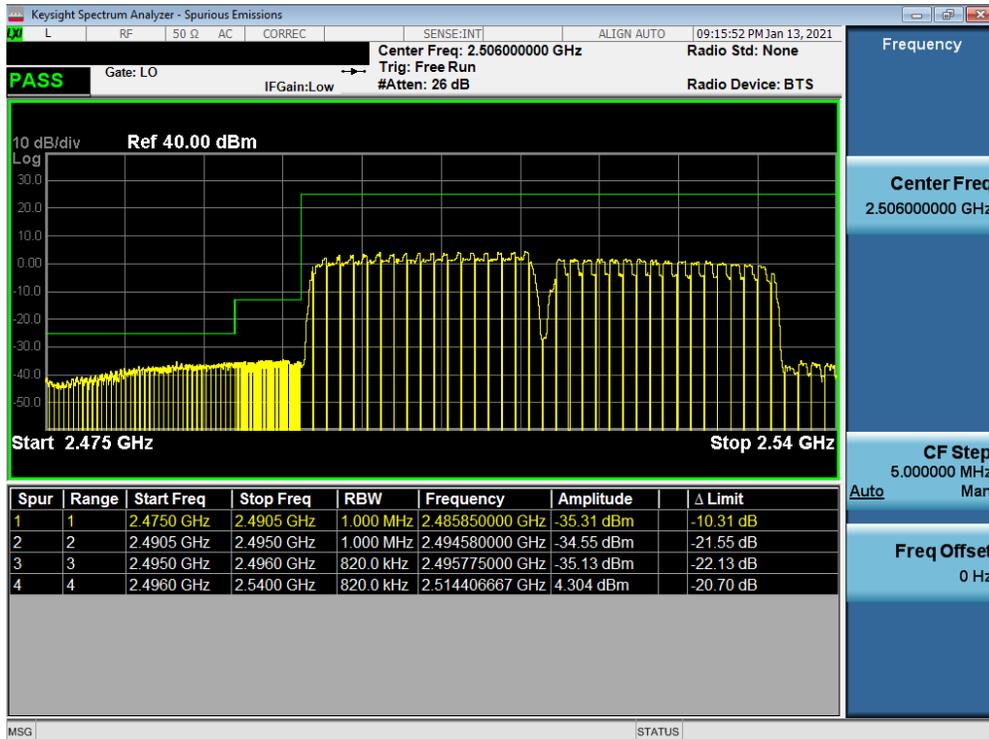

Plot 7-56. Lower ACP Plot (Band 41 QPSK – Left Carrier:20 MHz Right Carrier:20 MHz – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 42 of 68

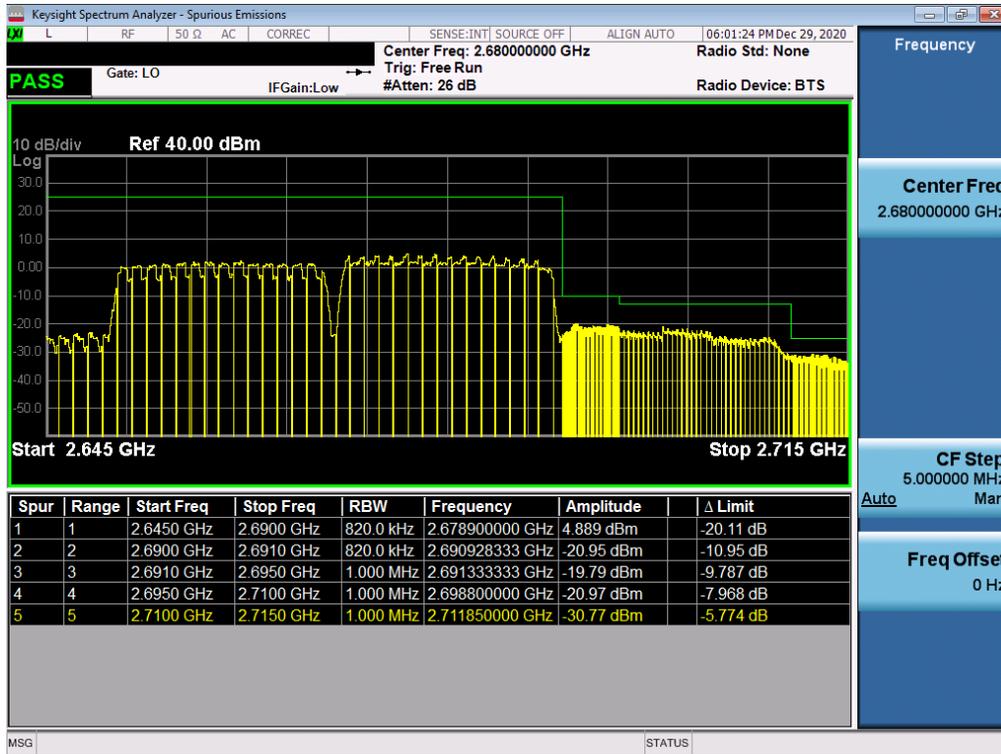

Plot 7-57. Upper ACP Plot (Band 41 QPSK – Left Carrier:20 MHz Right Carrier:20 MHz – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 43 of 68

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level for 41 is as noted in the Test Notes on the following page.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

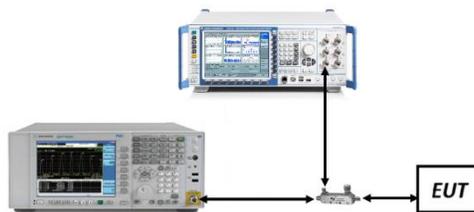



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


1. Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 44 of 68	

LTE Band 41(PC2)

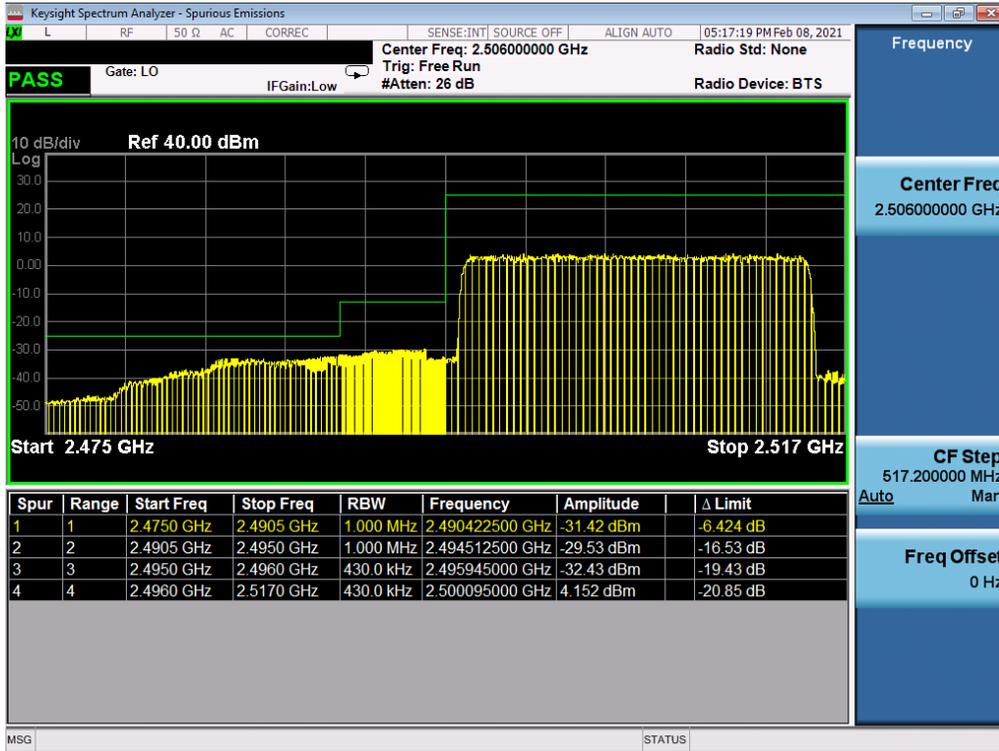


Plot 7-58. Lower ACP Plot (LTE Band 41(PC2) - 20MHz QPSK-A-MPR – Full RB)

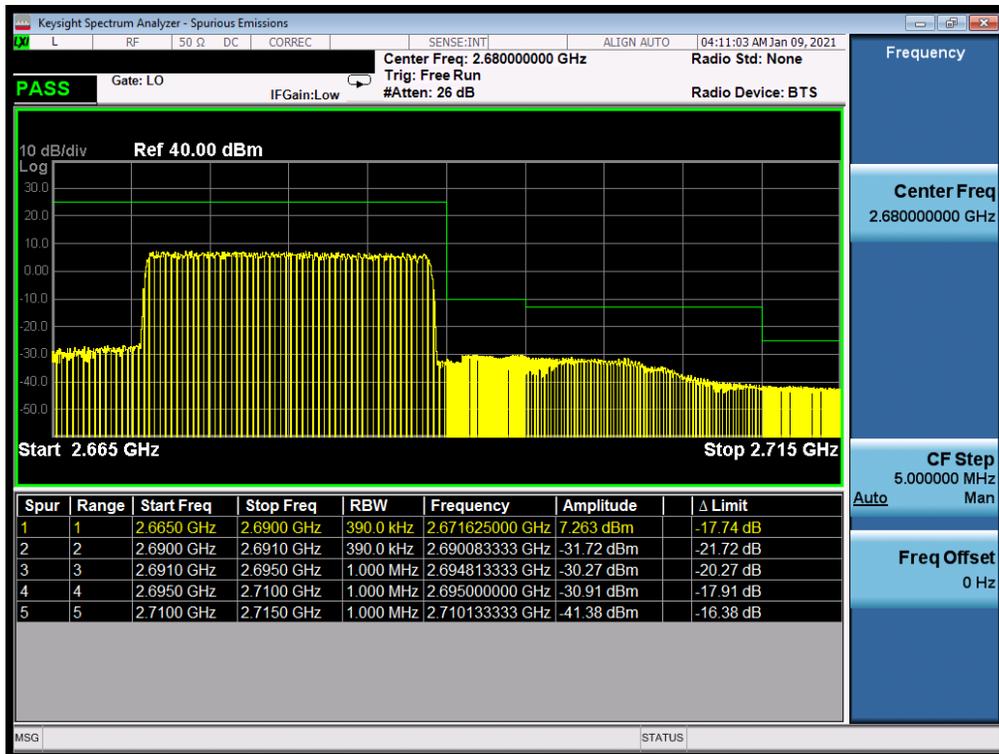


Plot 7-59. Upper ACP Plot (LTE Band 41(PC2) - 20MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 45 of 68

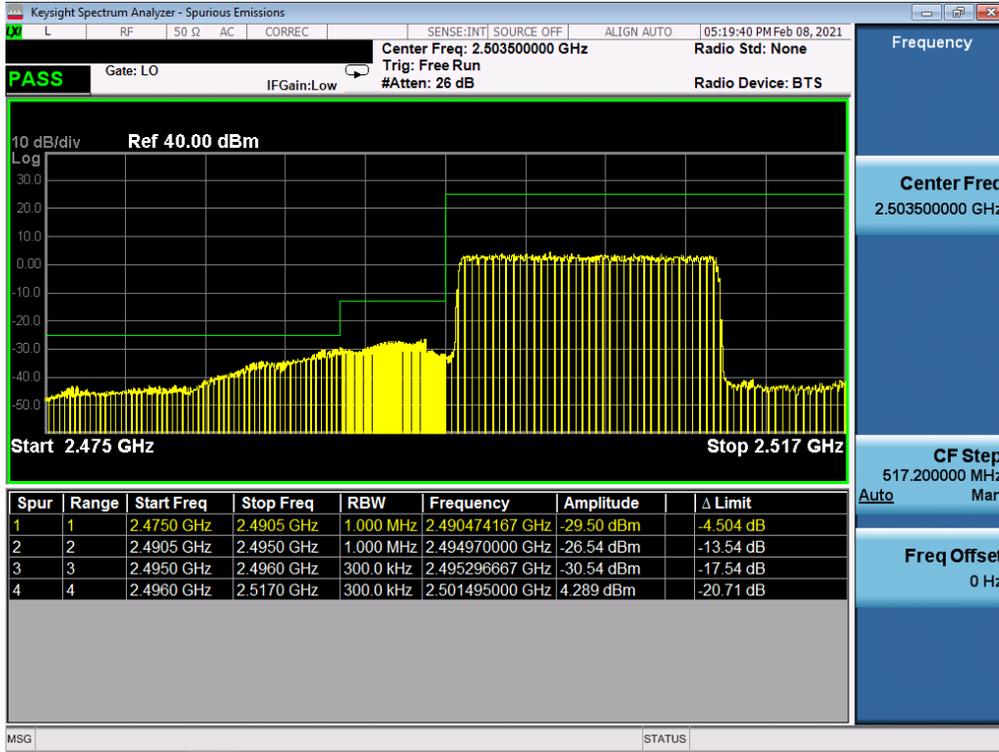


Plot 7-60. Lower ACP Plot (LTE Band 41(PC2) - 15MHz QPSK-A-MPR – Full RB)

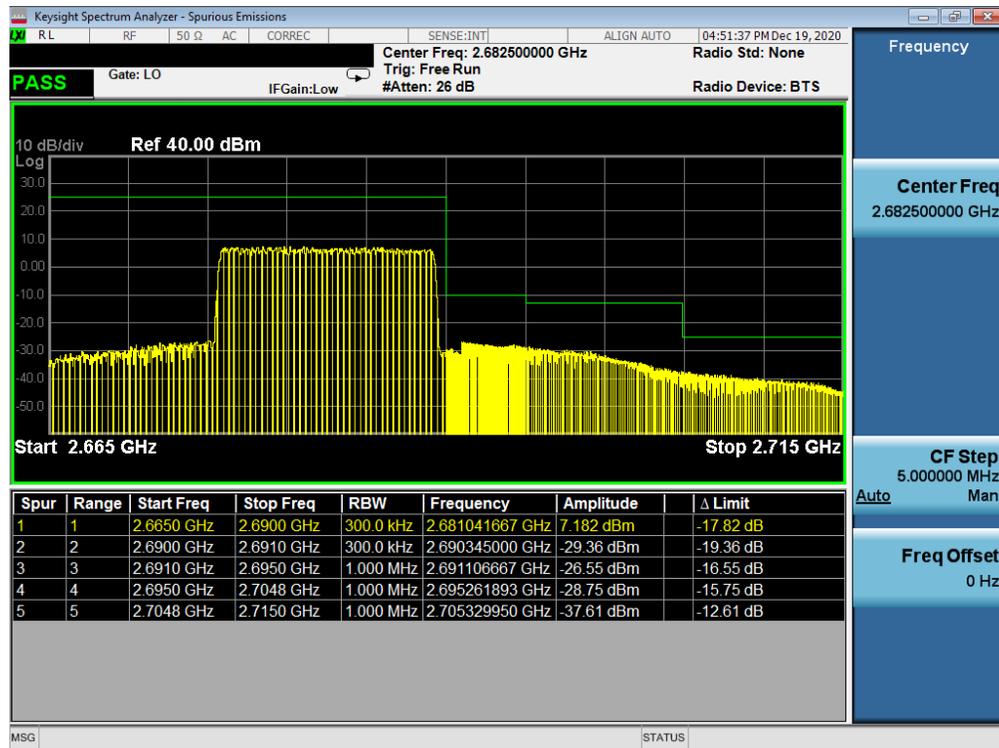


Plot 7-61. Upper ACP Plot (LTE Band 41(PC2) - 15MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 46 of 68

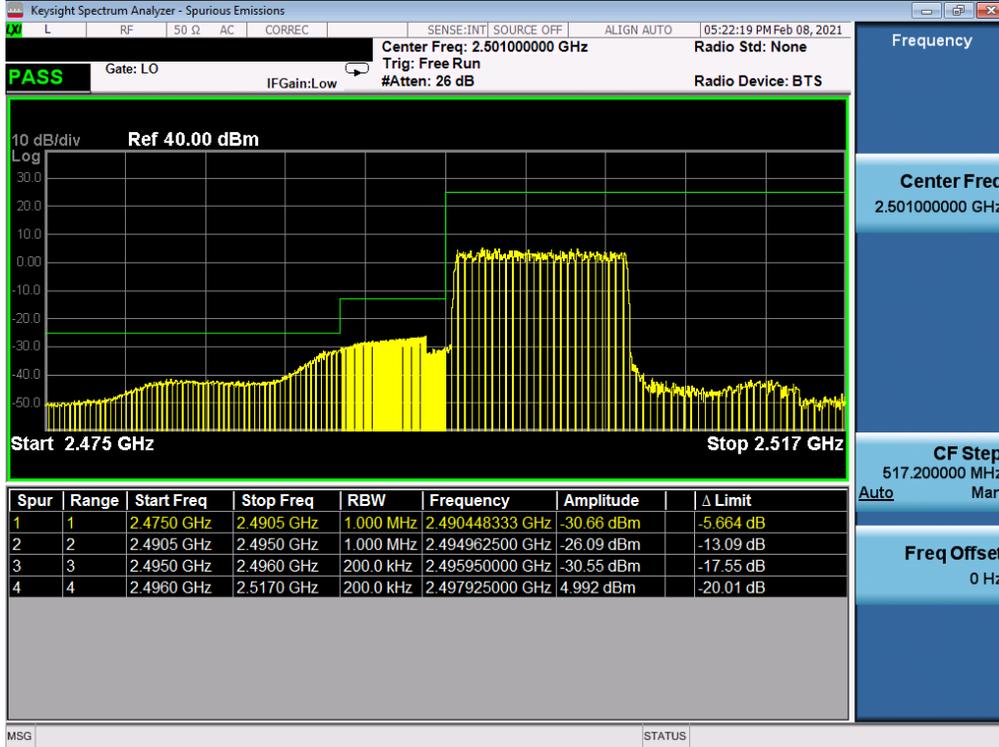


Plot 7-62. Lower ACP Plot (LTE Band 41(PC2) - 10MHz QPSK-A-MPR – Full RB)

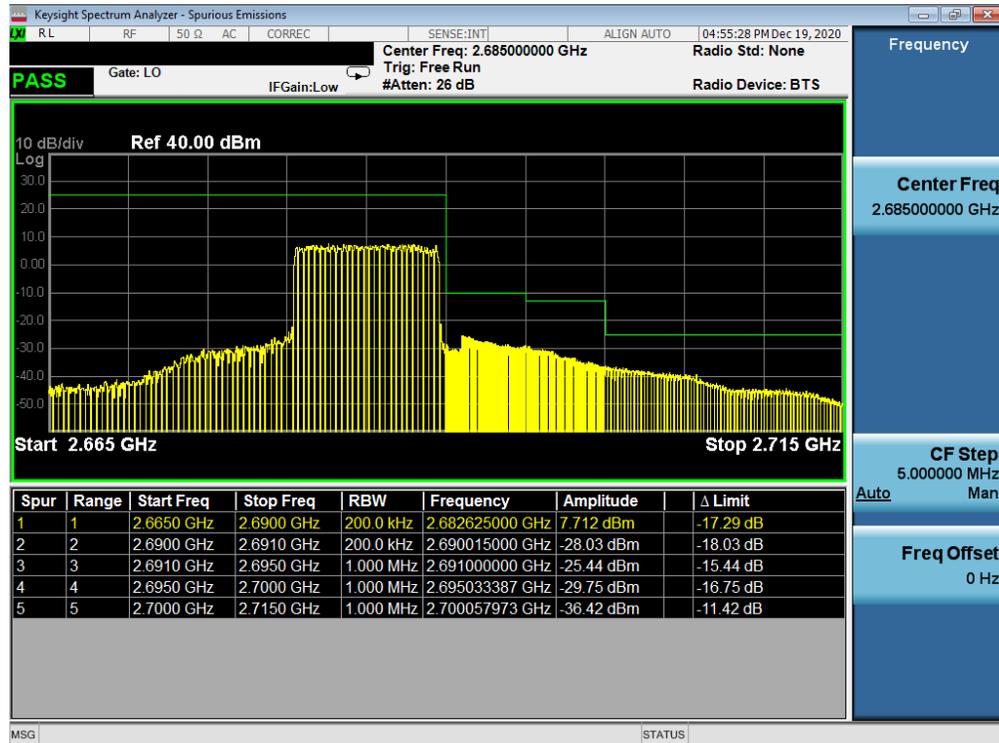


Plot 7-63. Upper ACP Plot (LTE Band 41(PC2) - 10MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 47 of 68

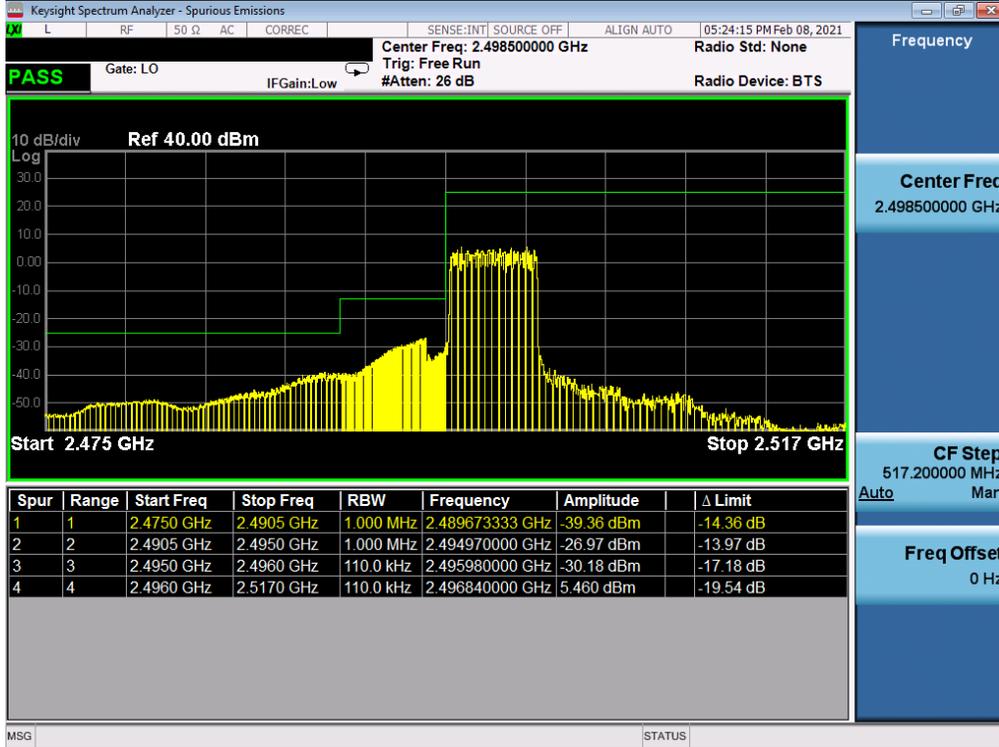


Plot 7-64. Lower ACP Plot (LTE Band 41(PC2) - 5MHz QPSK-A-MPR – Full RB)

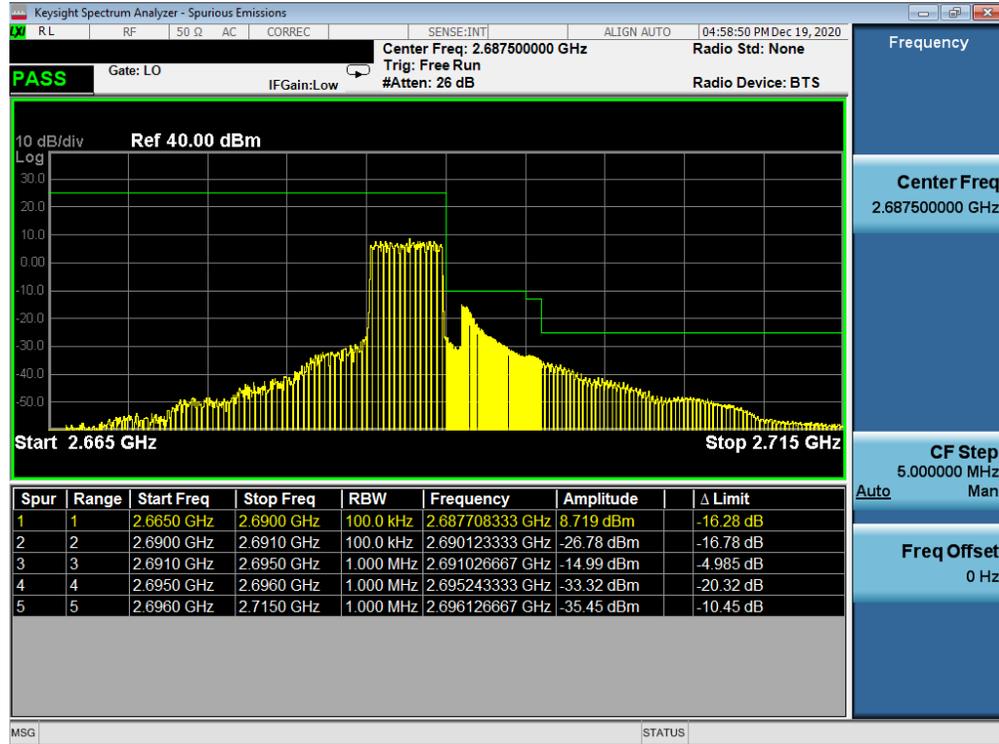


Plot 7-65. Upper ACP Plot (LTE Band 41(PC2) - 5MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 48 of 68

LTE Band 41(PC3)

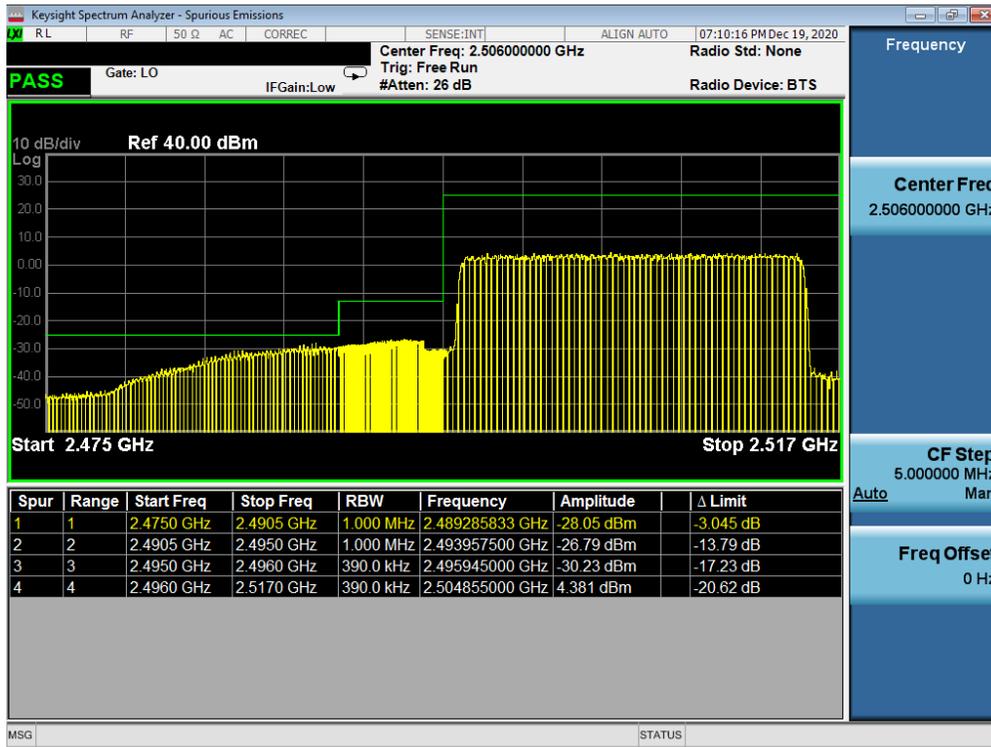


Plot 7-66. Lower ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB)

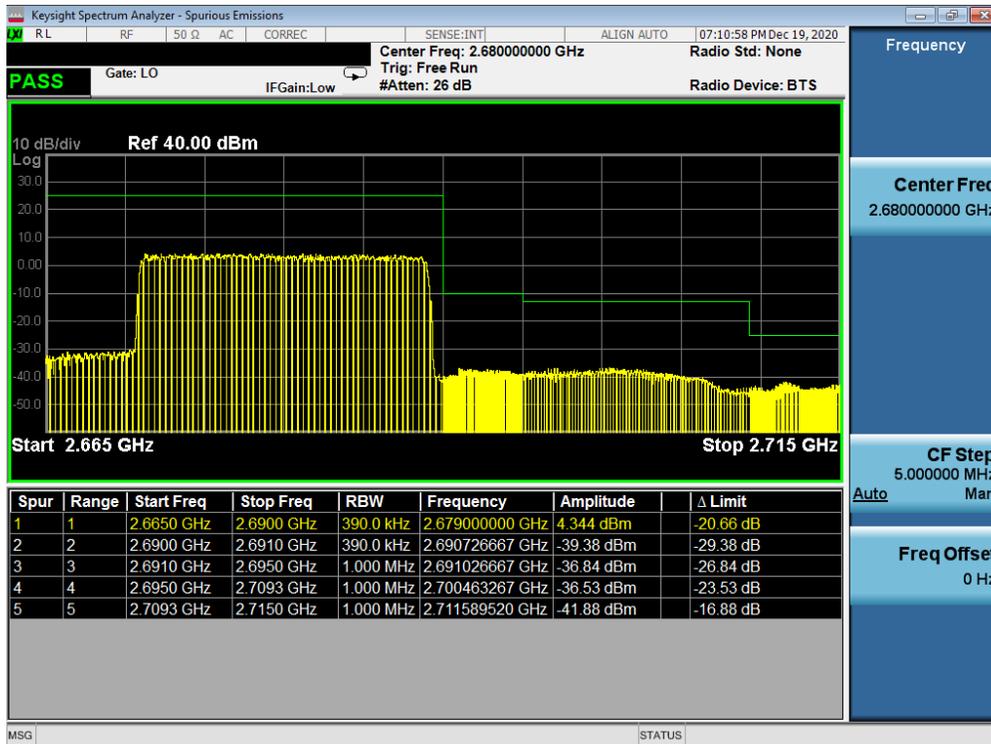


Plot 7-67. Upper ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 49 of 68

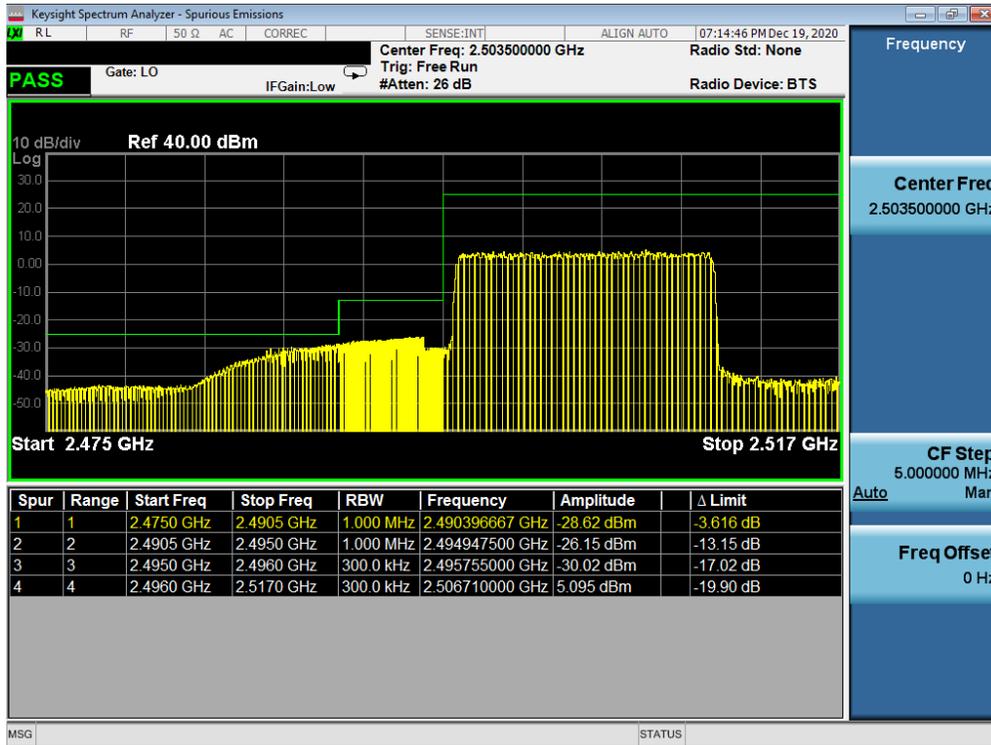


Plot 7-68. Lower ACP Plot (LTE Band 41(PC3) - 15MHz QPSK - Full RB)

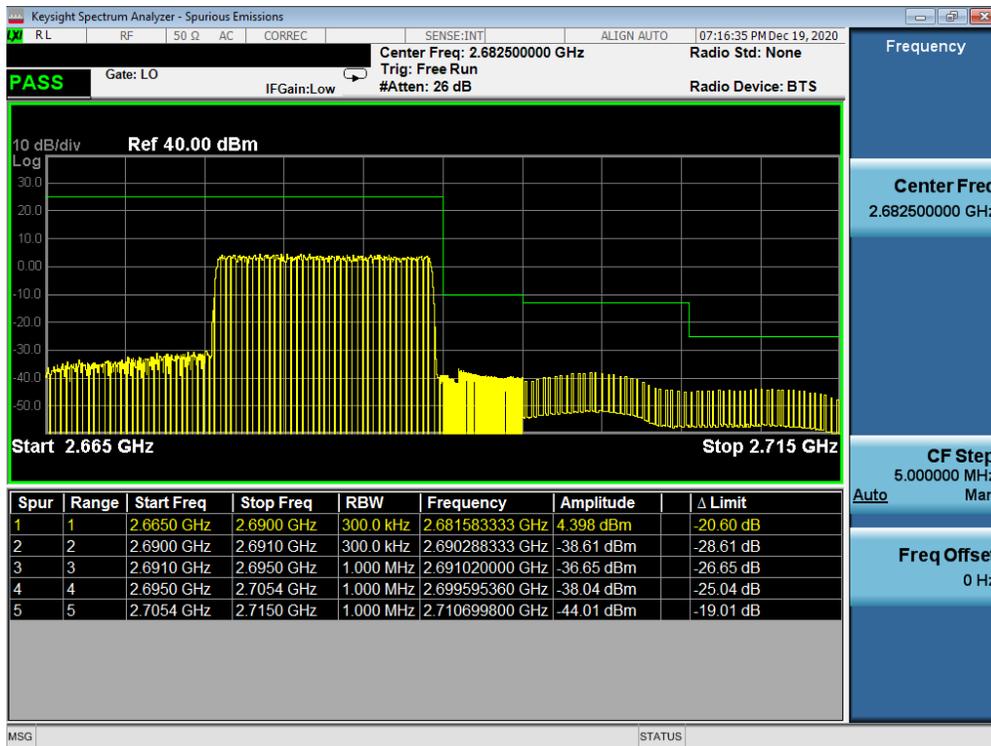


Plot 7-69. Upper ACP Plot (LTE Band 41(PC3) - 15MHz QPSK - Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 50 of 68

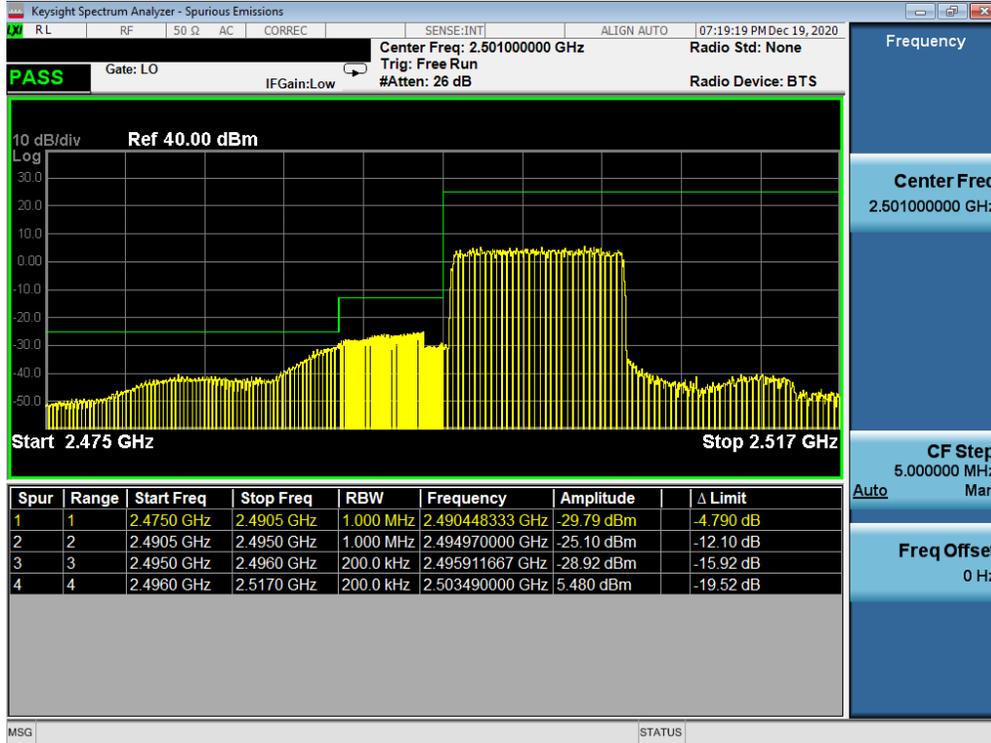


Plot 7-70. Lower ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB)

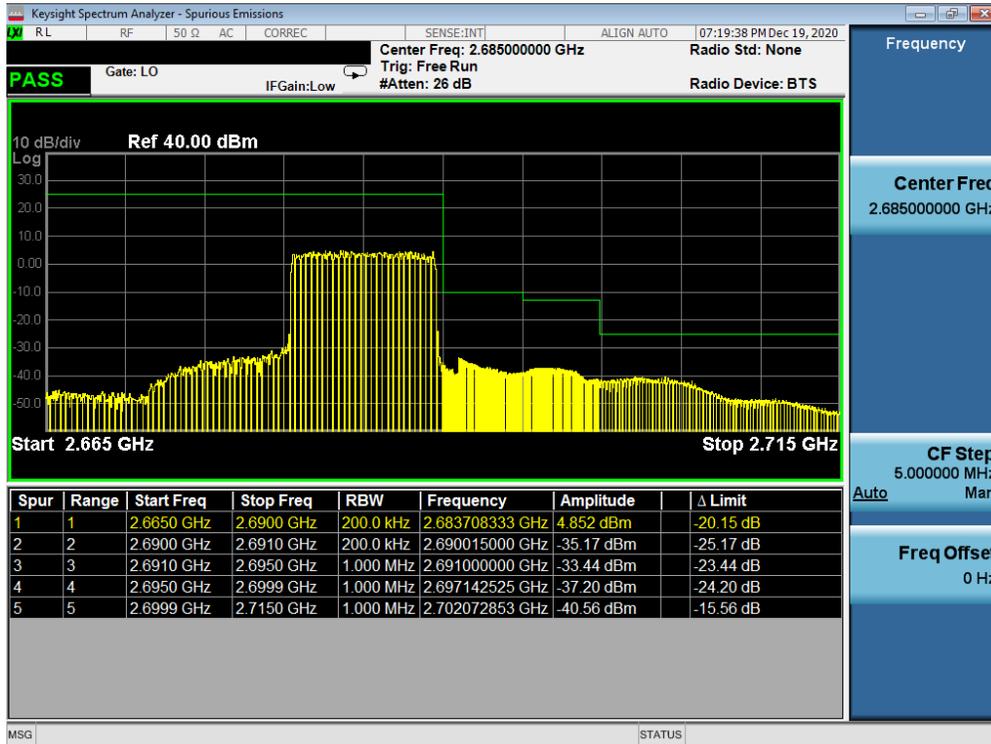


Plot 7-71. Upper ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 51 of 68

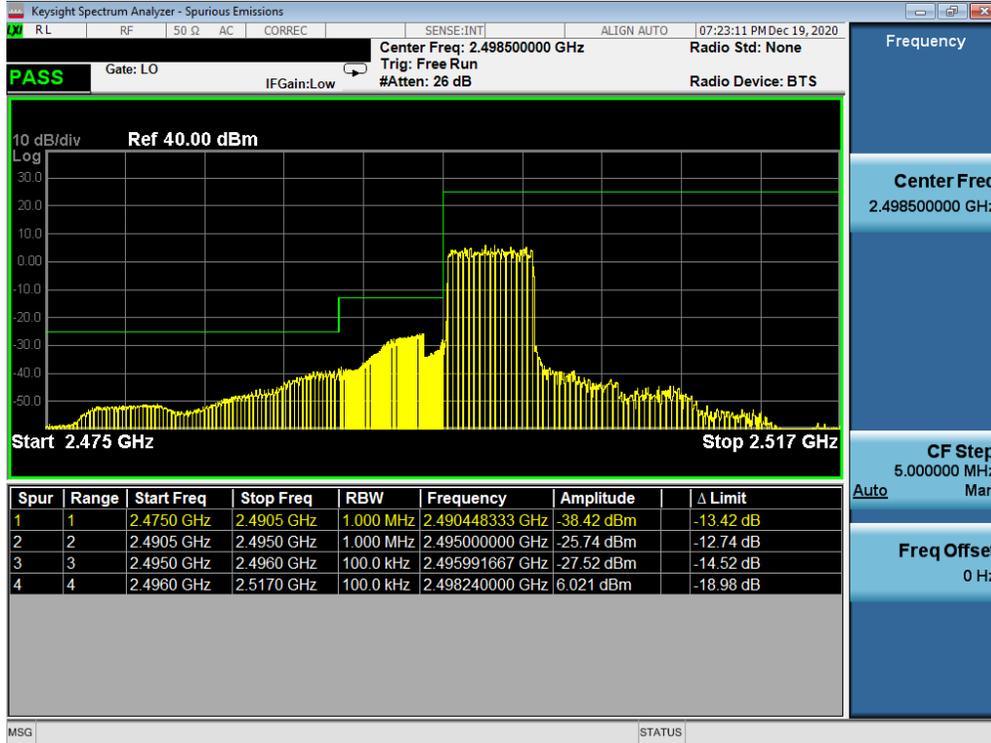

Plot 7-72. Lower ACP Plot (LTE Band 41(PC3) - 5MHz QPSK – Full RB)

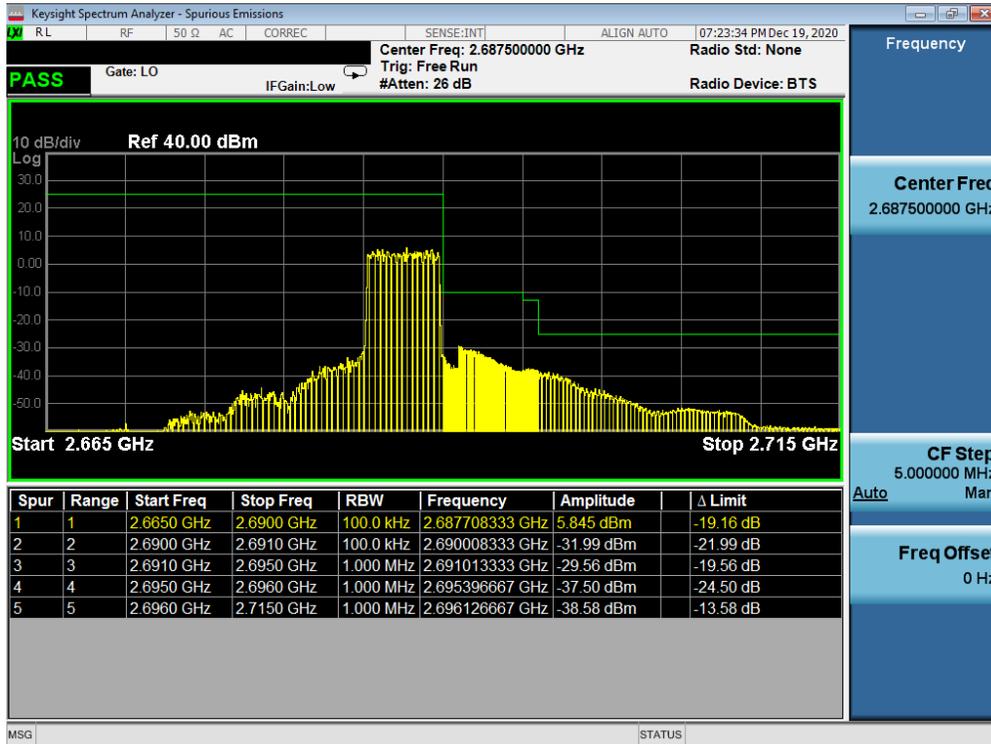

Plot 7-73. Upper ACP Plot (LTE Band 41(PC3) - 5MHz QPSK – Full RB)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 52 of 68

7.6 Conducted Power Output Data

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers is measured by means of a calibrated spectrum analyzer. All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

A-MPR is implemented in this device when operating at Power Class 2 in LTE Band 41 per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Measurement equipment was set up with triggering/gating on the spectrum analyzer such that powers were measured only during the on-time of the signal.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

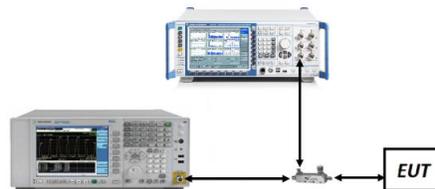


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. Uplink carrier aggregation is only supported in this EUT while operating in Power Class 3.
2. For ULCA, conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
3. For ULCA, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz.
4. For A-MPR conducted power measurements, RBW is set to: $RBW = 1\% \text{ to } 5\% \text{ of the OBW}$.
5. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 53 of 68	

Test Case	NS	MCC	MNC	Channel BW [MHz]	Channel Number	Channel Frequency [MHz]	RB Size	RB Offset	A-MPR [dB]	Modulation	MPR [dB]	Measured Power [dBm]	Lowest Typical Power [dBm]	Delta [dB]
1	01	310	120	5	39675	2498.5	1	0	3	QPSK	0	22.56	22.0	0.56
										16-QAM	1	21.70	21.0	0.70
										64-QAM	2	20.66	20.0	0.66
2				5	39675	2498.5	1	9	0	QPSK	0	25.64	25.0	0.64
										16-QAM	1	24.60	24.0	0.60
										64-QAM	2	23.69	23.0	0.69
3				10	39700	2501	1	0	5	QPSK	0	20.69	20.0	0.69
										16-QAM	1	19.55	19.0	0.55
										64-QAM	2	18.54	23.0	-4.46
4				10	39700	2501	20	0	2	QPSK	0	22.66	23.0	-0.34
										16-QAM	1	21.65	22.0	-0.35
										64-QAM	2	20.72	21.0	-0.28
5				10	39700	2501	50	0	3	QPSK	0	21.69	22.0	-0.31
										16-QAM	1	20.58	21.0	-0.42
										64-QAM	2	19.62	23.0	-3.38
6	10	39700	2501	25	20	1	QPSK	0	24.74	24.0	0.74			
							16-QAM	1	23.73	23.0	0.73			
							64-QAM	2	22.71	22.0	0.71			
7	10	39700	2501	1	36	0	QPSK	0	25.67	25.0	0.67			
							16-QAM	1	24.56	24.0	0.56			
							64-QAM	2	23.60	23.0	0.60			
8	15	39725	2503.5	1	0	5	QPSK	0	20.02	20.0	0.02			
							16-QAM	1	19.35	19.0	0.35			
							64-QAM	2	17.96	18.0	-0.04			
9	15	39725	2503.5	20	0	2	QPSK	0	22.57	23.0	-0.43			
							16-QAM	1	21.60	22.0	-0.40			
							64-QAM	2	20.58	21.0	-0.42			
10	15	39725	2503.5	75	0	4	QPSK	0	20.64	21.0	-0.36			
							16-QAM	1	19.43	20.0	-0.57			
							64-QAM	2	18.45	19.0	-0.55			
11	15	39725	2503.5	50	15	3	QPSK	0	21.81	22.0	-0.19			
							16-QAM	1	20.73	21.0	-0.27			
							64-QAM	2	19.67	20.0	-0.33			
12	15	39725	2503.5	1	60	0	QPSK	0	25.86	25.0	0.86			
							16-QAM	1	24.93	24.0	0.93			
							64-QAM	2	23.87	23.0	0.87			
13	20	39750	2506	1	0	5	QPSK	0	20.58	20.0	0.58			
							16-QAM	1	19.62	19.0	0.62			
							64-QAM	2	19.15	18.0	1.15			
14	20	39750	2506	20	0	2	QPSK	0	22.56	23.0	-0.44			
							16-QAM	1	21.64	22.0	-0.36			
							64-QAM	2	20.61	21.0	-0.39			
15	20	39750	2506	100	0	4	QPSK	0	20.64	21.0	-0.36			
							16-QAM	1	19.62	20.0	-0.38			
							64-QAM	2	18.52	19.0	-0.48			
16	20	39750	2506	75	24	3	QPSK	0	21.52	22.0	-0.48			
							16-QAM	1	20.56	21.0	-0.44			
							64-QAM	2	19.52	20.0	-0.48			
17	20	39750	2506	1	77	0	QPSK	0	25.68	25.0	0.68			
							16-QAM	1	24.71	24.0	0.71			
							64-QAM	2	24.34	23.0	1.34			
18	01	312	190	5	39675	2498.5	1	0	3	QPSK	0	22.70	22.0	0.70
										16-QAM	1	21.66	21.0	0.66
										64-QAM	2	20.74	20.0	0.74
19	01	001	01	5	39675	2498.5	1	0	0	QPSK	0	26.15	25.0	1.15
										16-QAM	1	25.31	24.0	1.31
										64-QAM	2	24.41	23.0	1.41

Table 7-74. A-MPR Conducted Power Data (LTE Band 41(PC2))

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 54 of 68	

7.7 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 55 of 68

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

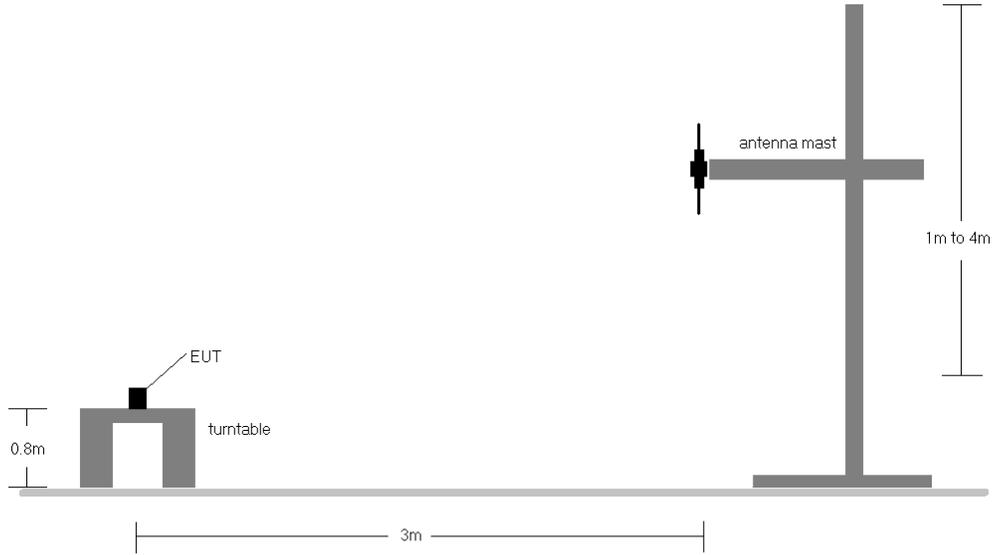


Figure 7-6. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 56 of 68

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	EUT Pol.	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	X	254.0	163.0	9.45	1 / 50	15.87	25.32	0.341	33.01	-7.69
		2593.0	H	X	239.0	157.0	9.58	1 / 50	14.04	23.62	0.230	33.01	-9.39
		2680.0	H	X	225.0	143.0	9.86	1 / 50	11.72	21.58	0.144	33.01	-11.43
	16-QAM	2506.0	H	X	254.0	163.0	9.45	1 / 50	15.18	24.63	0.291	33.01	-8.38
	64-QAM	2506.0	H	X	254.0	163.0	9.45	1 / 99	13.44	22.89	0.195	33.01	-10.12
15 MHz	QPSK	2503.5	H	X	254.0	163.0	9.45	1/36	15.84	25.29	0.338	33.01	-7.72
		2593.0	H	X	239.0	157.0	9.58	1/36	14.13	23.71	0.235	33.01	-9.30
		2682.5	H	X	225.0	143.0	9.86	1/36	11.77	21.62	0.145	33.01	-11.39
	16-QAM	2503.5	H	X	254.0	163.0	9.45	1/36	15.23	24.68	0.294	33.01	-8.33
	64-QAM	2503.5	H	X	254.0	163.0	9.45	1/36	13.00	22.45	0.176	33.01	-10.56
10 MHz	QPSK	2501.0	H	X	254.0	163.0	9.46	1/25	16.00	25.45	0.351	33.01	-7.56
		2593.0	H	X	239.0	157.0	9.58	1/25	14.28	23.86	0.243	33.01	-9.15
		2685.0	H	X	225.0	143.0	9.85	1/25	12.07	21.92	0.156	33.01	-11.09
	16-QAM	2501.0	H	X	254.0	163.0	9.46	1/25	15.38	24.83	0.304	33.01	-8.18
	64-QAM	2501.0	H	X	254.0	163.0	9.46	1/25	13.20	22.65	0.184	33.01	-10.36
5 MHz	QPSK	2498.5	H	X	254.0	163.0	9.46	1/12	16.06	25.52	0.357	33.01	-7.49
		2593.0	H	X	239.0	157.0	9.58	1/12	14.33	23.91	0.246	33.01	-9.10
		2687.5	H	X	225.0	143.0	9.85	1/0	11.94	21.78	0.151	33.01	-11.23
	16-QAM	2498.5	H	X	254.0	163.0	9.46	1/0	15.69	25.15	0.328	33.01	-7.86
	64-QAM	2498.5	H	X	254.0	163.0	9.46	1/12	13.47	22.93	0.196	33.01	-10.08
Opposite Pol.	2506.0	V	Y	109.0	270.0	9.42	1 / 50	14.84	24.26	0.267	33.01	-8.75	

Table 7-2. EIRP Data (LTE Band 41(PC2))

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	EUT Pol.	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	X	116.0	162.0	9.45	1 / 0	11.81	21.26	0.134	33.01	-11.75
		2593.0	H	X	103.0	159.0	9.58	1 / 50	11.31	20.89	0.123	33.01	-12.12
		2680.0	H	X	119.0	153.0	9.86	1 / 50	8.71	18.57	0.072	33.01	-14.44
	16-QAM	2506.0	H	X	116.0	162.0	9.45	1 / 50	11.42	20.87	0.122	33.01	-12.14
	64-QAM	2506.0	H	X	116.0	162.0	9.45	1 / 0	9.36	18.81	0.076	33.01	-14.20
15 MHz	QPSK	2503.5	H	X	116.0	162.0	9.45	1/36	11.78	21.23	0.133	33.01	-11.78
		2593.0	H	X	103.0	159.0	9.58	1/36	11.40	20.98	0.125	33.01	-12.03
		2682.5	H	X	119.0	153.0	9.86	1/36	8.75	18.60	0.072	33.01	-14.41
	16-QAM	2503.5	H	X	116.0	162.0	9.45	1/36	11.47	20.92	0.124	33.01	-12.09
	64-QAM	2503.5	H	X	116.0	162.0	9.45	1/36	8.92	18.37	0.069	33.01	-14.64
10 MHz	QPSK	2501.0	H	X	116.0	162.0	9.46	1/25	11.94	21.39	0.138	33.01	-11.62
		2593.0	H	X	103.0	159.0	9.58	1/25	11.55	21.13	0.130	33.01	-11.88
		2685.0	H	X	119.0	153.0	9.85	1/25	9.06	18.91	0.078	33.01	-14.10
	16-QAM	2501.0	H	X	116.0	162.0	9.46	1/25	11.62	21.07	0.128	33.01	-11.94
	64-QAM	2501.0	H	X	116.0	162.0	9.46	1/25	9.12	18.57	0.072	33.01	-14.44
5 MHz	QPSK	2498.5	H	X	116.0	162.0	9.46	1/12	12.00	21.46	0.140	33.01	-11.55
		2593.0	H	X	103.0	159.0	9.58	1/12	11.60	21.18	0.131	33.01	-11.83
		2687.5	H	X	119.0	153.0	9.85	1/0	8.92	18.76	0.075	33.01	-14.25
	16-QAM	2498.5	H	X	116.0	162.0	9.46	1/0	11.62	21.08	0.128	33.01	-11.93
	64-QAM	2498.5	H	X	116.0	162.0	9.46	1/12	9.25	18.71	0.074	33.01	-14.30
Opposite Pol.	2506.0	V	Y	112.0	219.0	9.42	1 / 0	11.68	21.10	0.129	33.01	-11.91	

Table 7-3. EIRP Data (LTE Band 41(PC3))

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 57 of 68

7.8 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 58 of 68

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

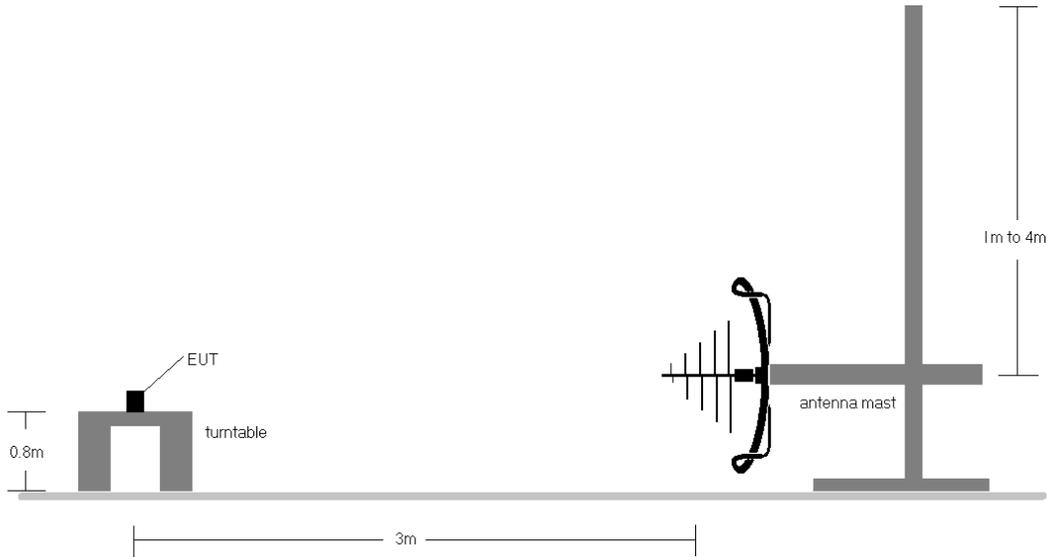


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

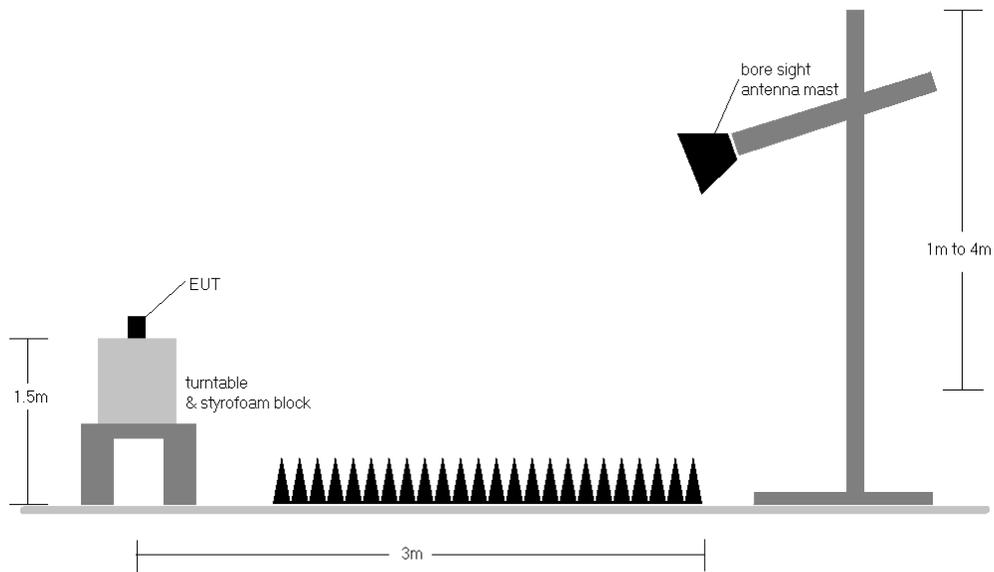


Figure 7-8. Test Instrument & Measurement Setup >1 GHz


FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 59 of 68	

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) ULCA spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 60 of 68

LTE Band 41(PC2)

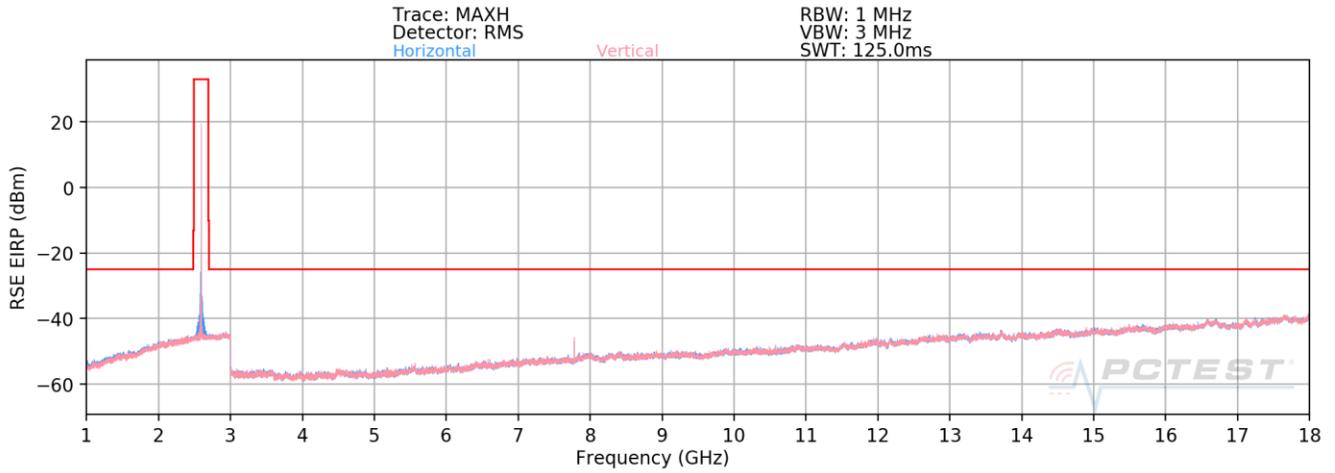

Plot 7-75. Radiated Spurious Plot (LTE Band 41(PC2))

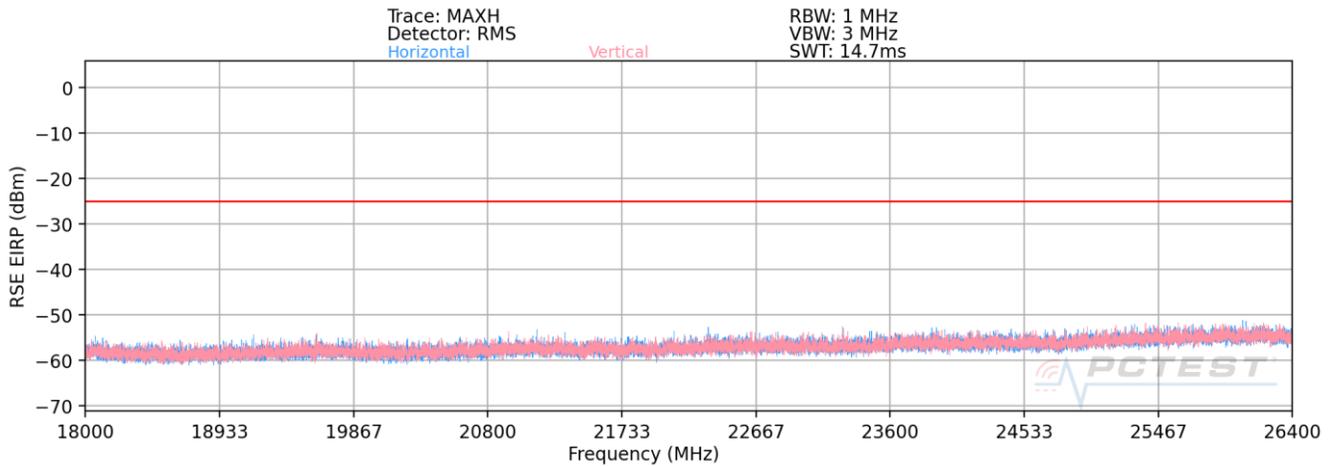

Plot 7-76. Radiated Spurious Plot (LTE Band 41(PC2))

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 61 of 68

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-78.54	7.58	36.04	-59.22	-25.00	-34.22
7518.0	V	102	28	-70.23	12.47	49.24	-46.01	-25.00	-21.01
10024.0	V	-	-	-79.43	14.66	42.23	-53.02	-25.00	-28.02
12530.0	V	-	-	-80.83	18.29	44.46	-50.79	-25.00	-25.79
15036.0	V	-	-	-81.36	22.26	47.90	-47.36	-25.00	-22.36

Table 7-4. Radiated Spurious Data (LTE Band 41(PC2) – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	203	357	-77.04	7.33	37.29	-57.97	-25.00	-32.97
7779.0	V	101	323	-65.84	12.27	53.43	-41.82	-25.00	-16.82
10372.0	V	-	-	-80.19	15.37	42.18	-53.07	-25.00	-28.07
12965.0	V	-	-	-80.00	19.13	46.13	-49.13	-25.00	-24.13
15558.0	V	-	-	-84.34	22.44	45.10	-50.16	-25.00	-25.16

Table 7-5. Radiated Spurious Data (LTE Band 41(PC2) – Mid Channel)


Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	V	315	33	-75.37	8.08	39.71	-55.55	-25.00	-30.55
8040.0	V	104	2	-65.45	12.75	54.30	-40.96	-25.00	-15.96
10720.0	V	-	-	-80.04	15.97	42.93	-52.33	-25.00	-27.33
13400.0	V	-	-	-78.72	20.12	48.40	-46.86	-25.00	-21.86
16080.0	V	-	-	-81.02	23.30	49.28	-45.97	-25.00	-20.97


Table 7-6. Radiated Spurious Data (LTE Band 41(PC2) – High Channel)

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 62 of 68

LTE Band 41(PC3)

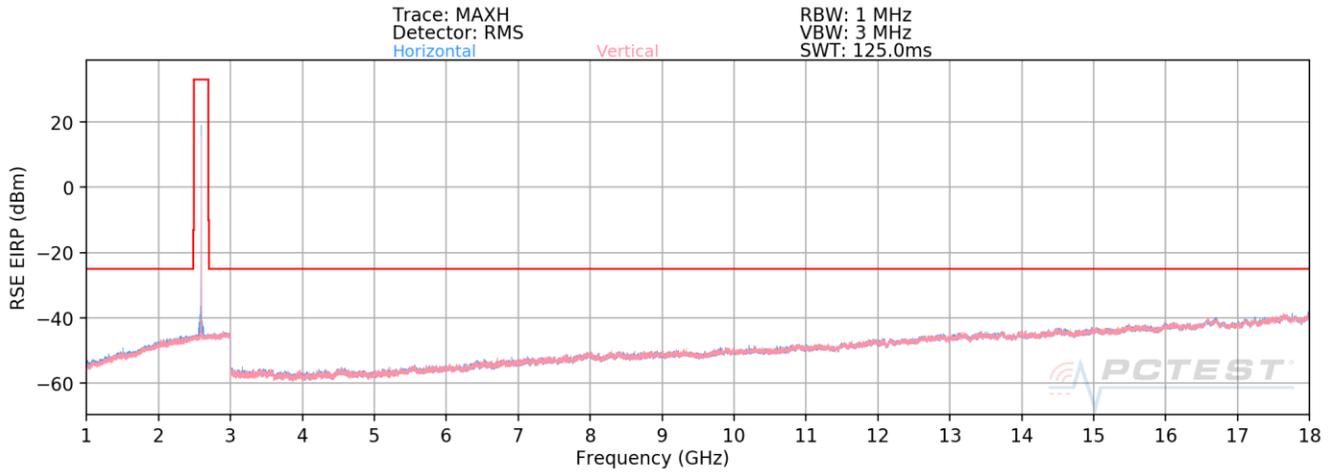


Plot 7-77. Radiated Spurious Plot (LTE Band 41(PC3))

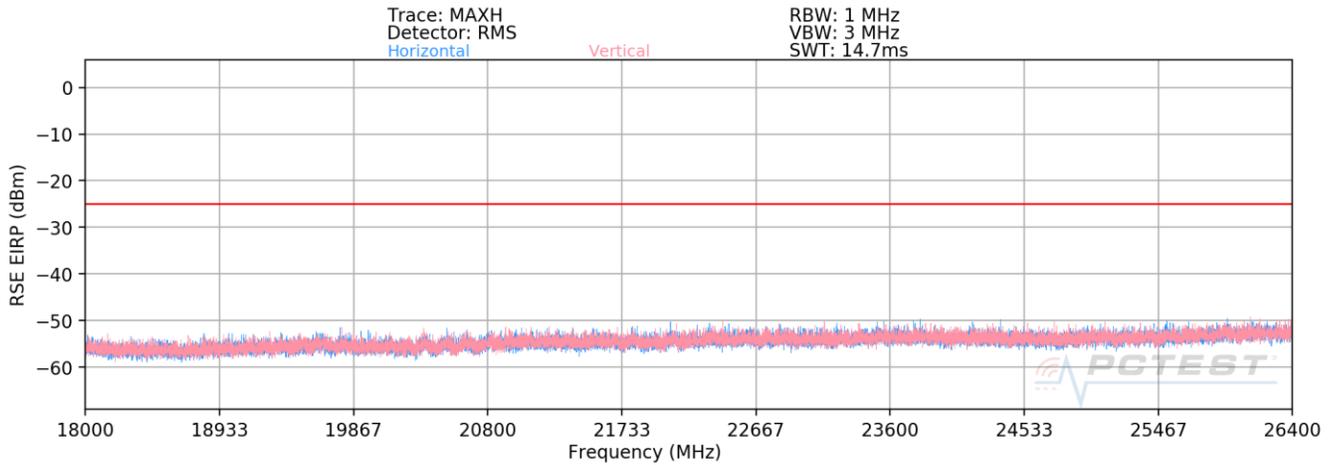


Plot 7-78. Radiated Spurious Plot (LTE Band 41(PC3))

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 63 of 68	


ULCA-LTE B41 (PC3)

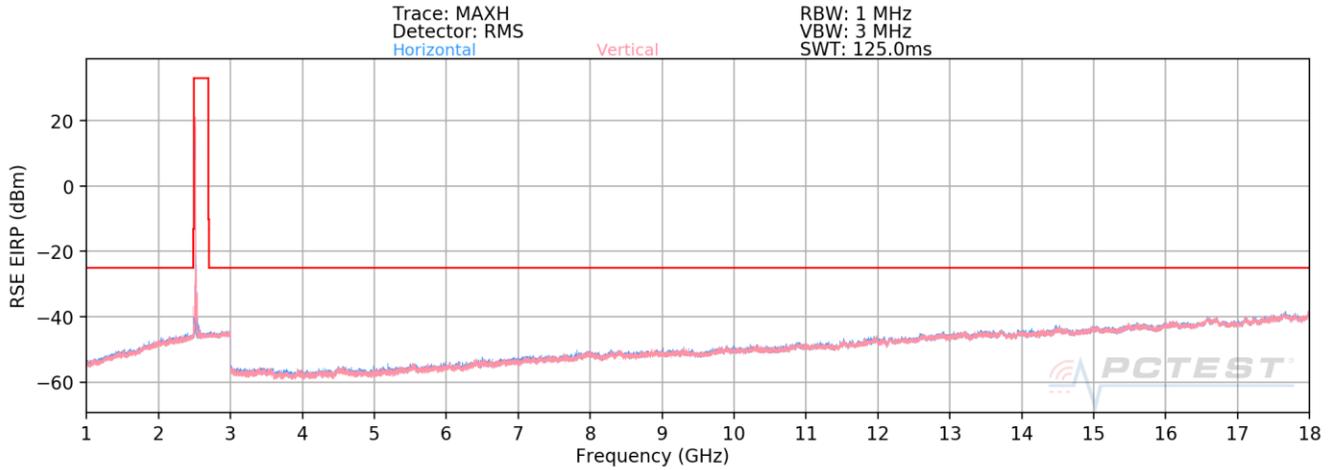

Plot 7-79. Radiated Spurious Plot (ULCA LTE Band 41(PC3)-Low)

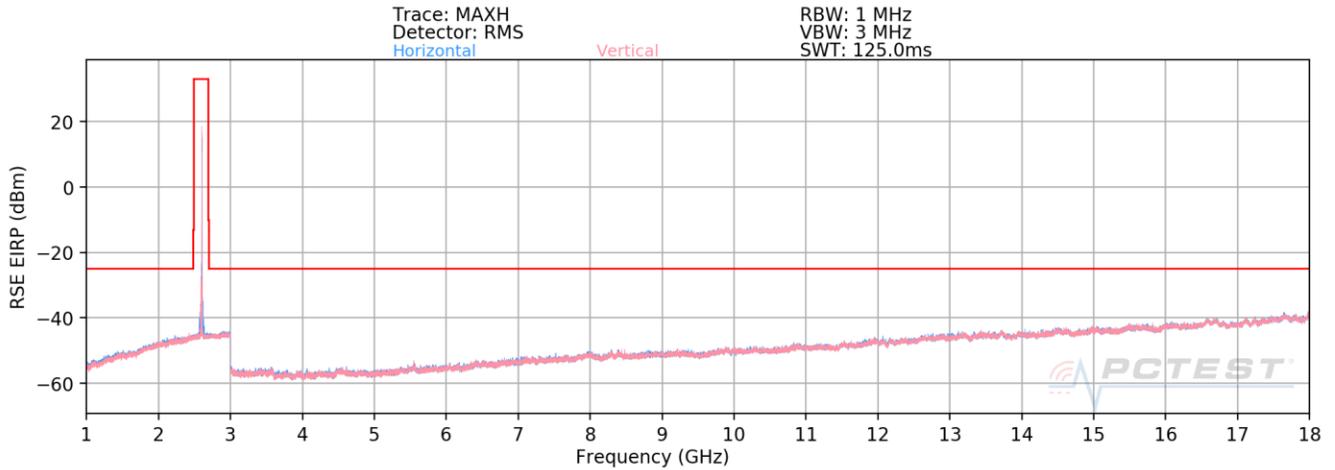

Plot 7-80. Radiated Spurious Plot (ULCA LTE Band 41(PC3)-Mid)

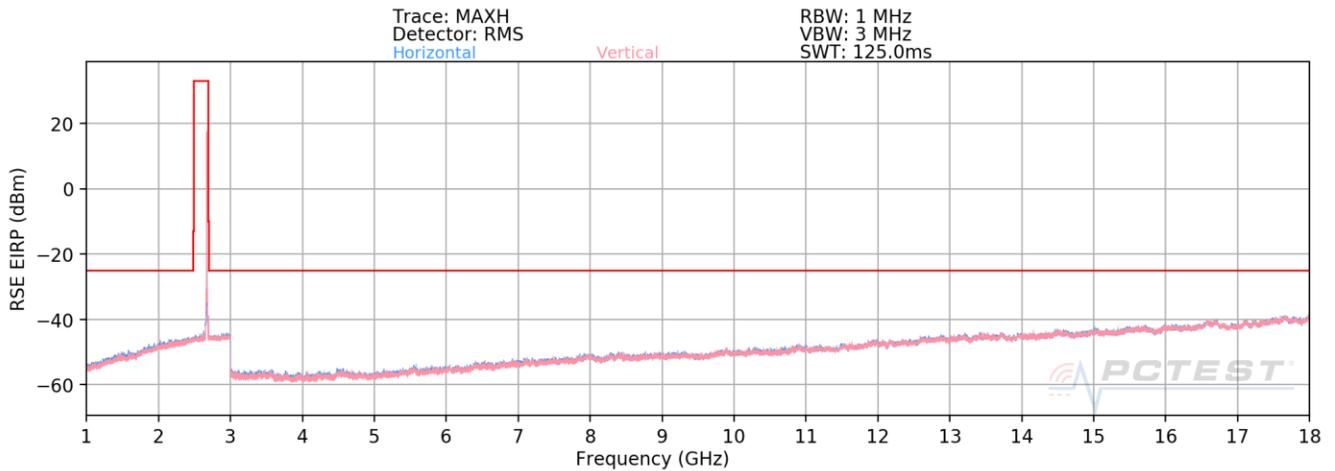

Plot 7-81. Radiated Spurious Plot (ULCA LTE Band 41(PC3)-High)

FCC ID: ZNFK735MM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 64 of 68

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2506.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2525.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	H	-	-	-77.23	7.58	37.35	-57.91	-25.00	-32.91
7518.0	H	-	-	-77.24	12.47	42.23	-53.02	-25.00	-28.02
10024.0	H	-	-	-77.94	14.66	43.72	-51.53	-25.00	-26.53

Table 7-7. Radiated Spurious Data (ULCA LTE Band 41(PC3) – Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	H	-	-	-79.76	7.33	34.57	-60.69	-25.00	-35.69
7779.0	H	328	359	-79.69	12.27	39.58	-55.67	-25.00	-30.67
10372.0	H	-	-	-82.31	15.37	40.06	-55.19	-25.00	-30.19
12965.0	H	-	-	-82.03	19.13	44.10	-51.16	-25.00	-26.16

Table 7-8. Radiated Spurious Data (ULCA LTE Band 41(PC3) – Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1 / 0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	H	-	-	-77.00	8.08	38.08	-57.18	-25.00	-32.18
8040.0	H	-	-	-77.69	12.75	42.06	-53.20	-25.00	-28.20
10720.0	H	-	-	-78.13	15.97	44.84	-50.42	-25.00	-25.42

Table 7-9. Radiated Spurious Data ULCA LTE Band 41(PC3) – High Channel)

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 65 of 68	

7.9 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset		Page 66 of 68

LTE Band 41

LTE Band 41					
Operating Frequency (Hz):		2,593,000,000			
Ref. Voltage (VDC):		4.50			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.50	- 30	2,592,999,810	-242	-0.0000093
		- 20	2,592,999,923	-129	-0.0000050
		- 10	2,593,000,410	358	0.0000138
		0	2,593,000,110	58	0.0000022
		+ 10	2,593,000,063	11	0.0000004
		+ 20 (Ref)	2,593,000,052	0	0.0000000
		+ 30	2,592,999,820	-232	-0.0000089
		+ 40	2,592,999,898	-154	-0.0000059
Battery Endpoint	2.90	+ 20	2,593,000,105	53	0.0000020

Table 7-10. LTE Band 41(PC2) Frequency Stability Data

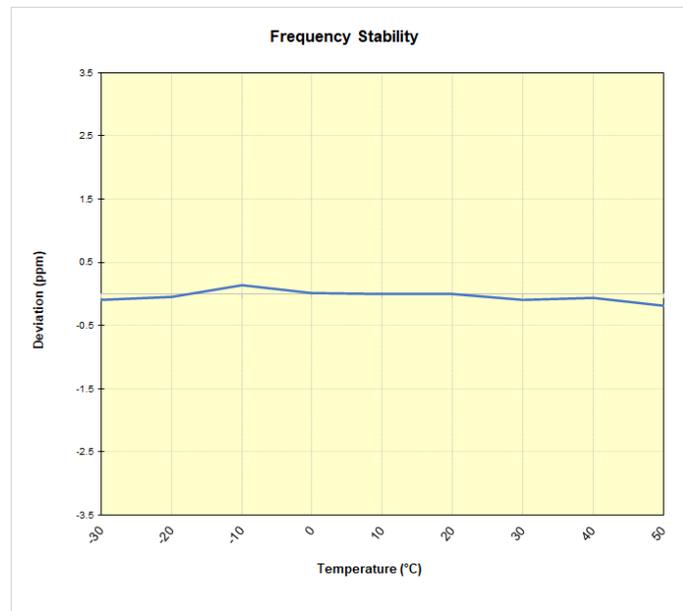

Plot 7-82. LTE Band 41(PC2) Frequency Stability Chart

FCC ID: ZNFK735MM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT	 LG	Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 67 of 68	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the LG **Portable Handset** **FCC ID: ZNFK735MM** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: ZNFK735MM	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2012100195-16.ZNF	Test Dates: 12/10/2020 - 02/08/2021	EUT Type: Portable Handset	Page 68 of 68