



FCC ID: ZNFL01G

Report No.: DRTFCC1411-1529

Total 102 Pages

RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS
Cellular WCDMA/HSDPA/HSUPA Router with WLAN
Model No. : L-01G
Order No. : DTNC1410-04542
Date of receipt : 2014-10-16
Test duration : 2014-11-13 ~ 2014-11-25
Date of issue : 2014-11-28
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : DT&C Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15 Subpart C 247
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and
the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full,
without the written approval of DT&C Co., Ltd.

Tested by:


Engineer
Chulmin Kim

Reviewed by:


Technical Manager
Geunki Son

Test Report Version

Test Report No.	Date	Description
DRTFCC1411-1529	Nov. 28, 2014	Initial issue

Table of Contents

1. EUT DESCRIPTION	4
2. INFORMATION ABOUT TESTING	5
2.1 Test mode.....	5
2.3 Auxiliary equipment	5
2.4 Tested environment	5
2.5 EMI suppression Device(s) / Modifications	5
3. SUMMARY OF TESTS	6
4. TEST METHODOLOGY	7
4.1 EUT configuration	7
4.2 EUT exercise	7
4.3 General test procedures	7
4.4 Description of test modes	7
5. INSTRUMENT CALIBRATION	8
6. FACILITIES AND ACCREDITATIONS.....	8
6.1 Facilities	8
6.2 Equipment	8
7. ANTENNA REQUIREMENTS.....	8
8. TEST RESULT	9
8.1 6dB bandwidth	9
8.2 Maximum peak conducted output power.....	23
8.3 Maximum power spectral density	27
8.4 Out of band emissions at the band edge / conducted spurious emissions.....	41
8.5 Radiated spurious emissions.....	90
8.6 Power-line conducted emissions	96
8.7 Occupied bandwidth	99
9. LIST OF TEST EQUIPMENT.....	100
APPENDIX I	101

1. EUT DESCRIPTION

FCC Equipment Class	Digital Transmission System(DTS)
Product	Cellular/PCS GSM/GPRS Cellular WCDMA/HSDPA/HSUPA Router with WLAN
Model Name	L-01G
Add Model Name	NA
Power Supply	DC 3.8 V
Frequency Range	<p>2.4 GHz Band</p> <ul style="list-style-type: none"> ▪ 802.11b/g/n(HT20): 2412 MHz ~ 2462 MHz ▪ 802.11n(HT40): 2422 MHz ~ 2452 MHz
Modulation Type	<ul style="list-style-type: none"> ▪ 802.11b: CCK/DSSS ▪ 802.11g/n: OFDM
Transmissions category	Completely uncorrelated signal
Antenna Specification	<p>Antenna type: Internal Antenna</p> <p>Antenna gain</p> <ul style="list-style-type: none"> ▪ 2.4 GHz Band: ANT 1 : -0.070 dBi & ANT 2 : -4.940 dBi <p>Antenna configuration</p> <ul style="list-style-type: none"> ▪ 802.11b/g: Single Transmitting (ANT 1) ▪ 802.11n(MCS0 ~ 7) : Single Transmitting (ANT 1) ▪ 802.11n(MCS8 ~ 15): Multiple Transmitting (ANT 1 and ANT 2)

2. INFORMATION ABOUT TESTING

2.1 Test mode

Test mode	Worst case data rate	Tested Frequency(MHz)		
		Lowest	Middle	Highest
TM 1	802.11b 1 Mbps	2412	2437	2462
TM 2	802.11g 6 Mbps	2412	2437	2462
TM 3	802.11n(HT20) MCS 8	2412	2437	2462
TM 4	802.11n(HT40) MCS 8	2422	2437	2452

The worst case data rate for each modulation is determined as above test mode. And all tests conducted in this report were made at the worst case data rate of each modulation.

2.3 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2.4 Tested environment

Temperature	: 21 ~ 24 °C
Relative humidity content	: 39 ~ 45 % R.H.
Details of power supply	: DC 3.8 V

2.5 EMI suppression Device(s) / Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.247(a)	RSS-210 [A8.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-210 [A8.4]	Transmitter Output Power	< 1 Watt		C
15.247(d)	RSS-210 [A8.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8 dBm / 3 kHz		C
-	RSS Gen [6.6]	Occupied Bandwidth (99%)	RSS-Gen		C
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	C Note 2
15.207	RSS-Gen [8.8]	AC Conducted Emissions	FCC 15.207 limits	AC Line Conducted	C
15.203	RSS-Gen [6.7]	Antenna Requirements	FCC 15.203 limits	-	C

Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable

Note 2: This test item was performed in each axis and the worst case data was reported.

4. TEST METHODOLOGY

Generally the tests were performed according to the KDB 558074 D01 meas Guidance v03r2. And ANSI C63.10-2009 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB 558074 D01 meas Guidance v03r2. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB 558074 D01 meas Guidance v03r2. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB 558074 D01 meas Guidance v03r2.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

4.4 Description of test modes

A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 Facilities

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935 The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number : 678747

6.2 Equipment

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

7.1 According to FCC 47 CFR §15.203& RSS-Gen [6.7]:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The internal antenna of this E.U.T is permanently attached on the main PCB.(Refer to Internal Photo.)

Therefore this module Complies with the requirement of §15.203

7.2 Directional antenna gain for MIMO:

Bands	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain for uncorrelated signals [dBi]
2.4 GHz	-0.070	-4.940	-1.855

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi for MIMO uncorrelated signal

8. TEST RESULT


8.1 6dB bandwidth

Test Requirements and limit, §15.247(a) & RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

□ TEST CONFIGURATION

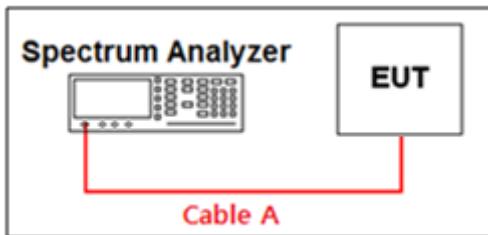

□ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB 558074 D01 meas Guidance v03r2**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
(RBW:100kHz/VBW:300 kHz)
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

□ TEST RESULTS: Comply(Refer to next page.)


- Measurement Data:

Test Mode	Frequency	Test Results[MHz]	
		ANT 1	ANT 2
TM 1	Lowest	8.527	-
	Middle	8.102	-
	Highest	8.087	-
TM 2	Lowest	16.070	-
	Middle	15.970	-
	Highest	16.330	-
TM 3	Lowest	16.920	17.180
	Middle	15.980	16.690
	Highest	16.670	16.780
TM 4	Lowest	35.500	35.760
	Middle	35.210	35.740
	Highest	35.360	35.790

□ RESULT PLOTS


6 dB Bandwidth

TM 1 & ANT 1 & Lowest

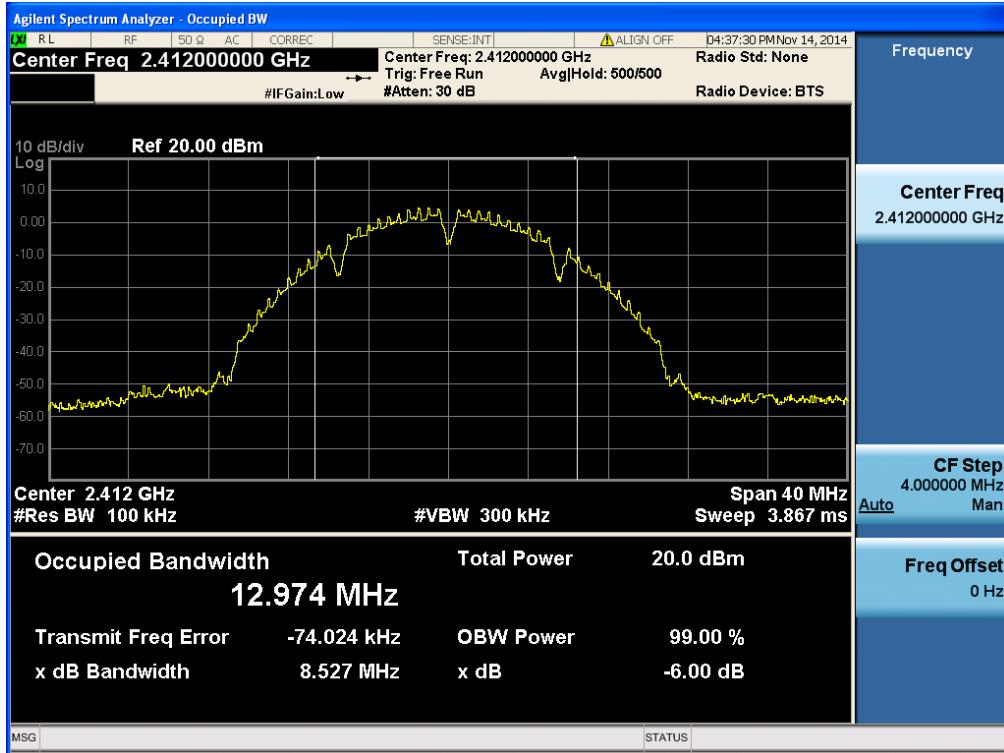


6 dB Bandwidth

TM 1 & ANT 1 & Middle

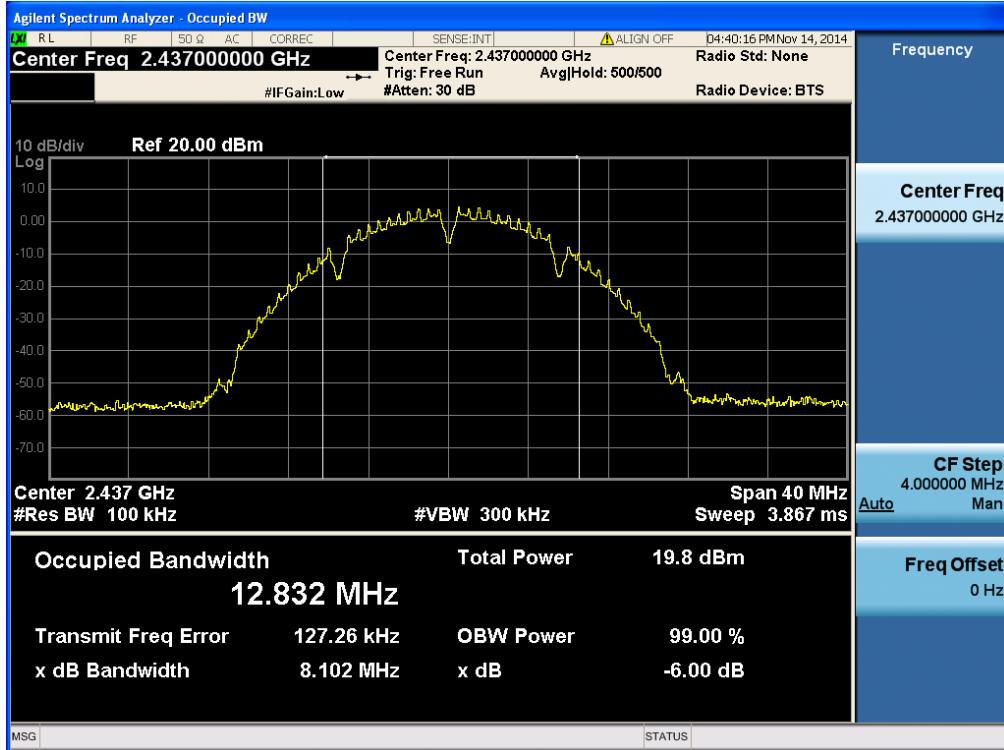


6 dB Bandwidth

TM 1 & ANT 1 & Highest

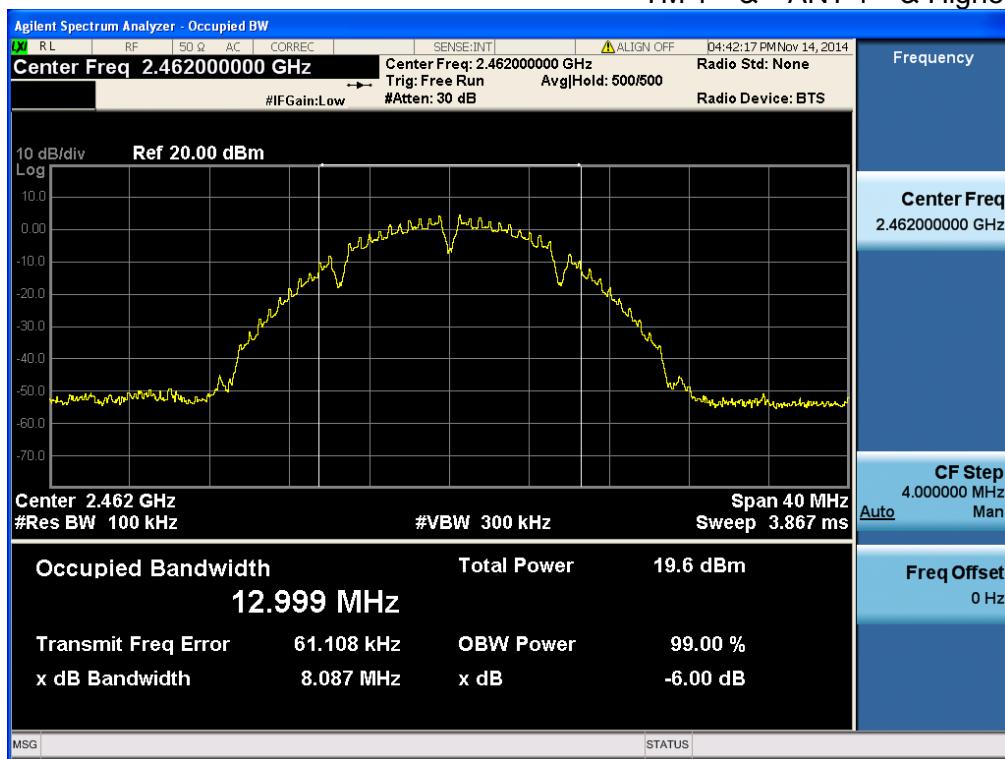


6 dB Bandwidth

TM 2 & ANT 1 & Lowest

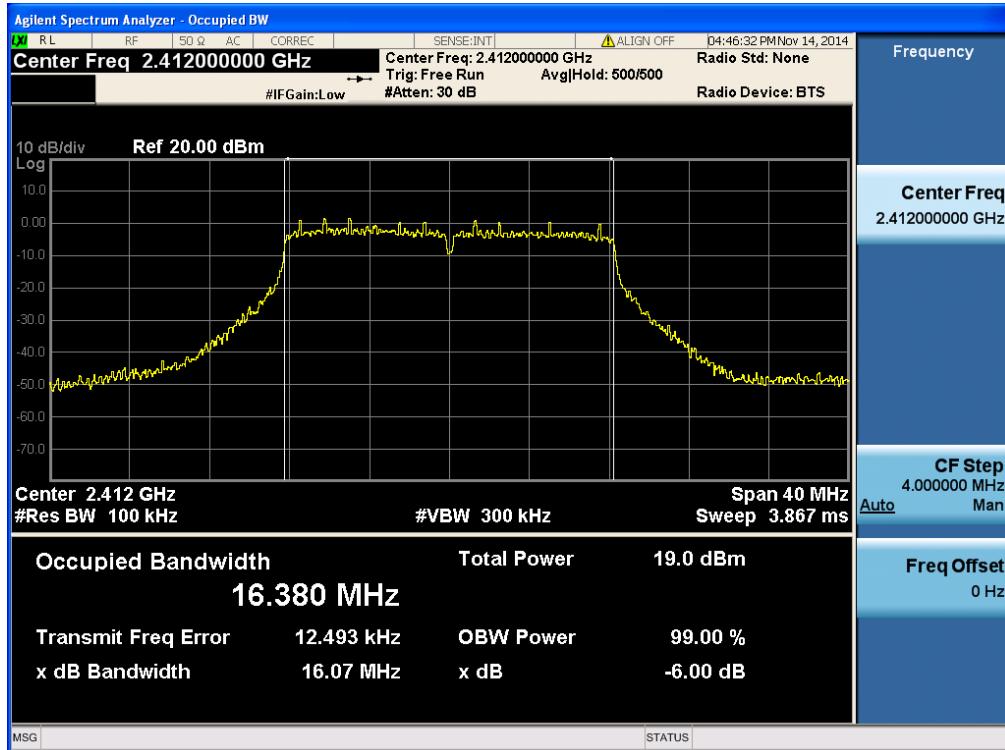
**6 dB Bandwidth**

TM 2 & ANT 1 & Middle

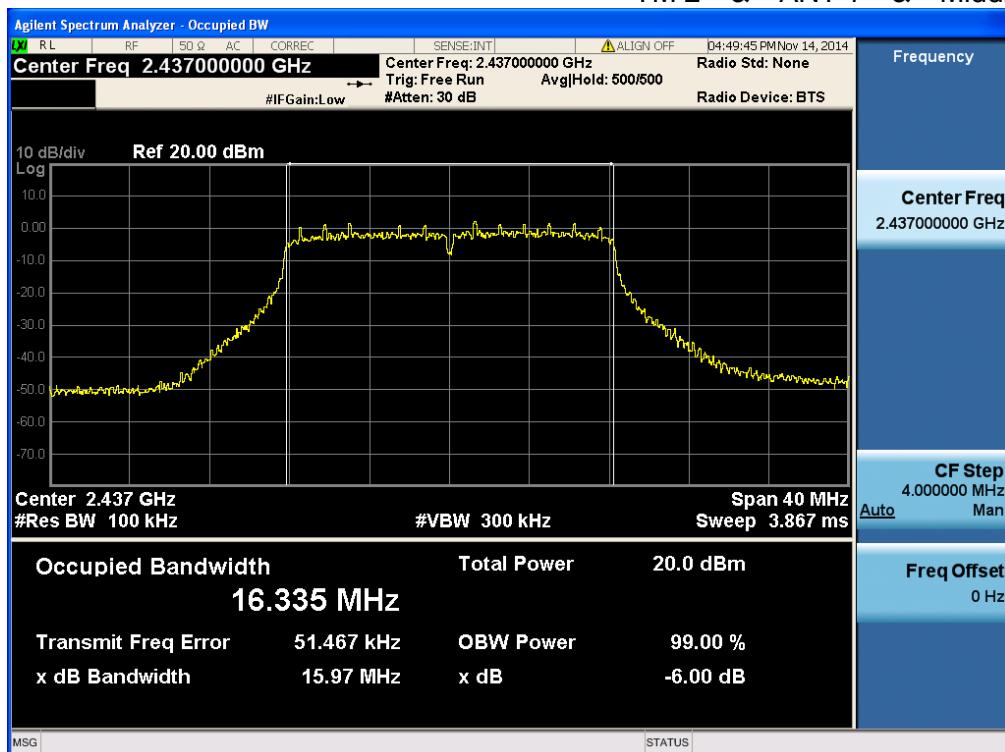


6 dB Bandwidth

TM 2 & ANT 1 & Highest

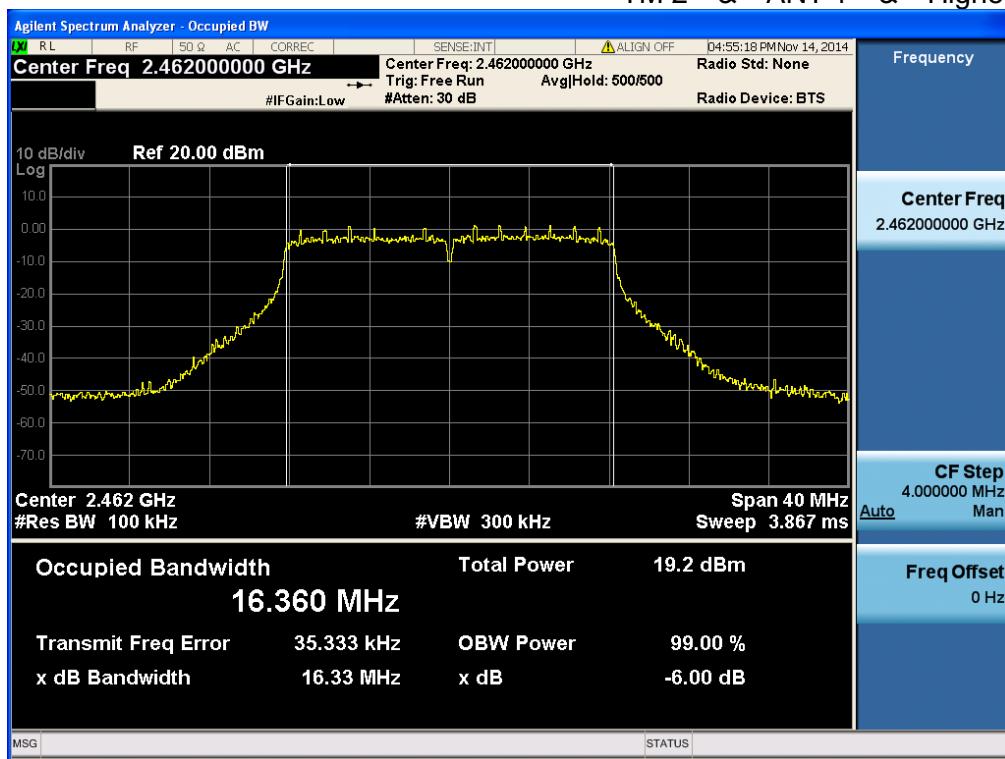


6 dB Bandwidth

TM 3 & ANT 1 & Lowest

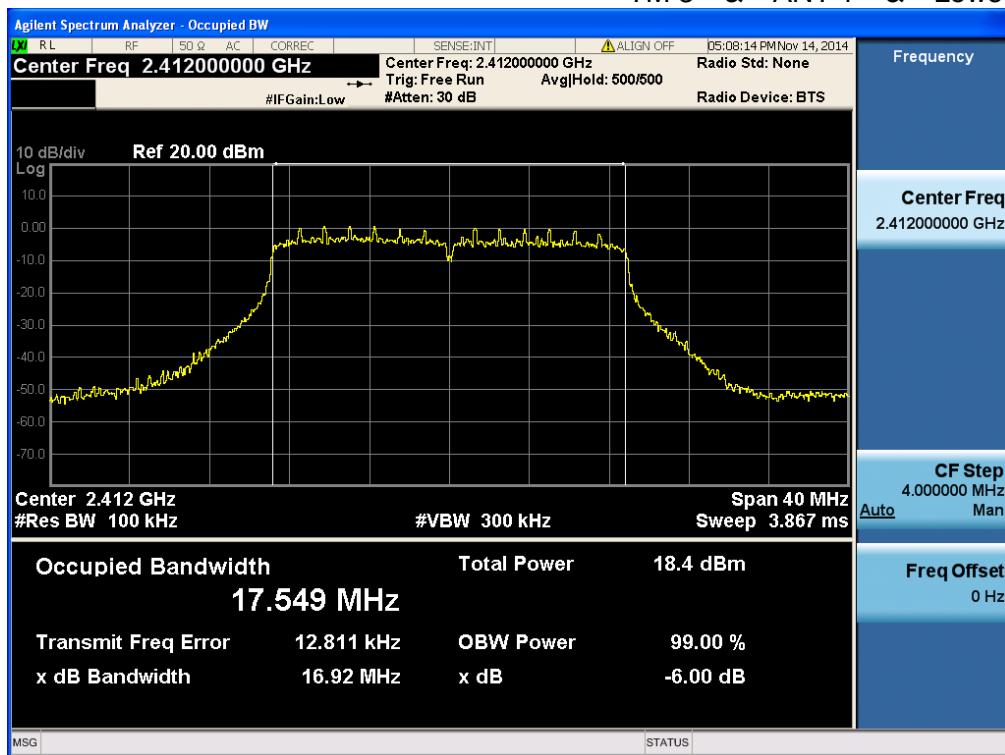
**6 dB Bandwidth**

TM 3 & ANT 1 & Middle

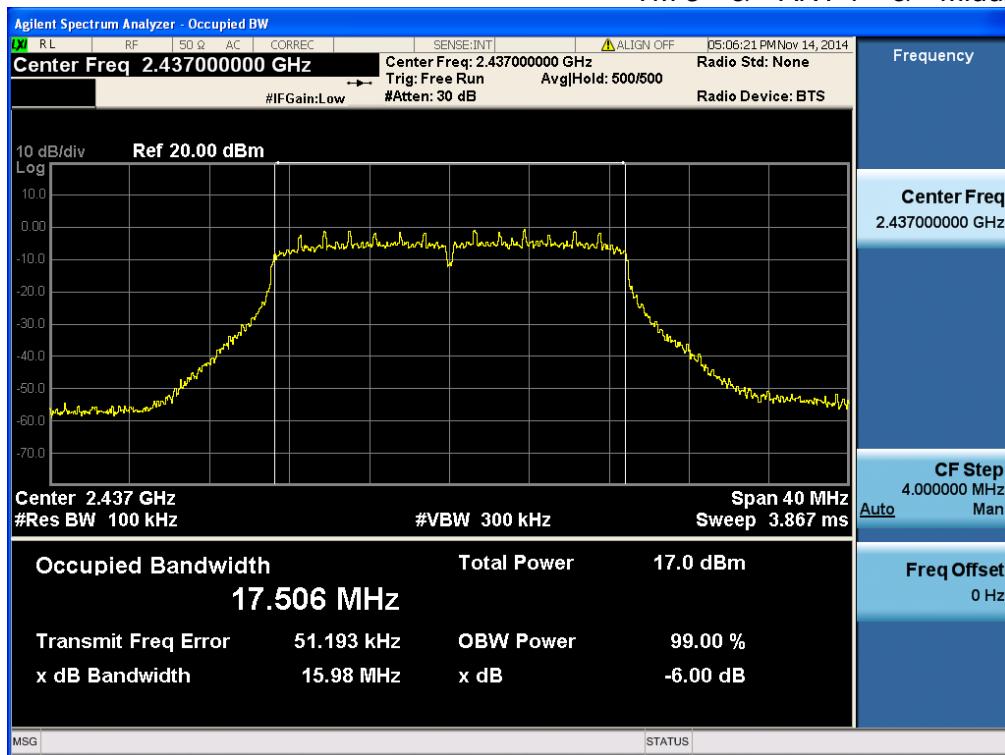


6 dB Bandwidth

TM 3 & ANT 1 & Highest

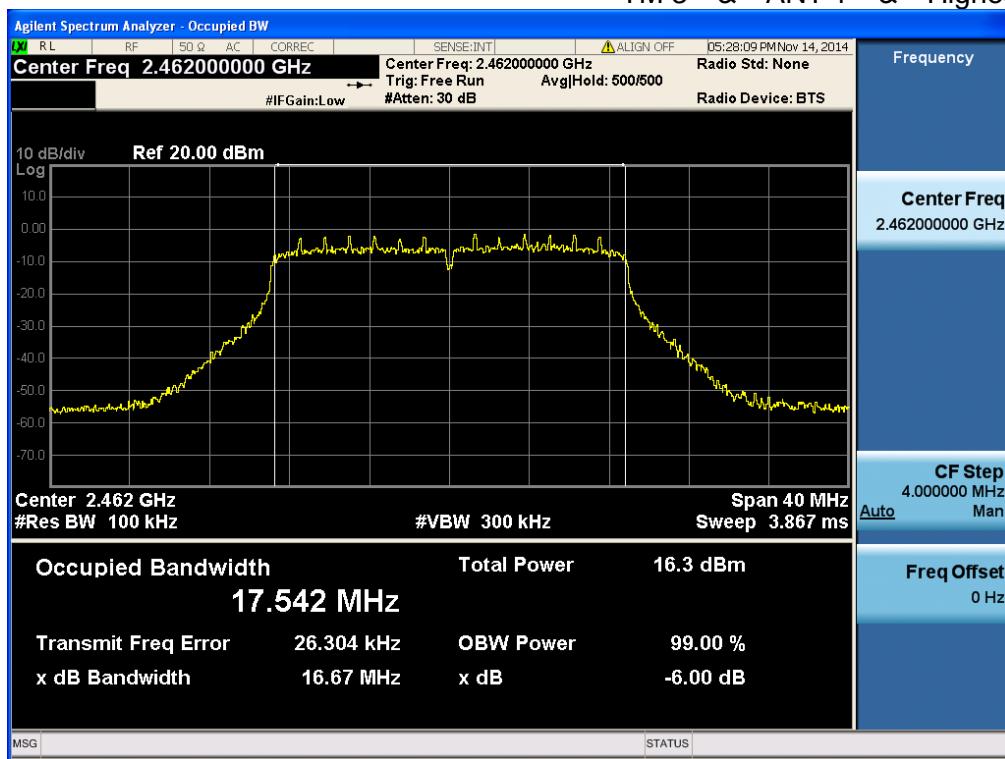


6 dB Bandwidth

TM 3 & ANT 2 & Lowest

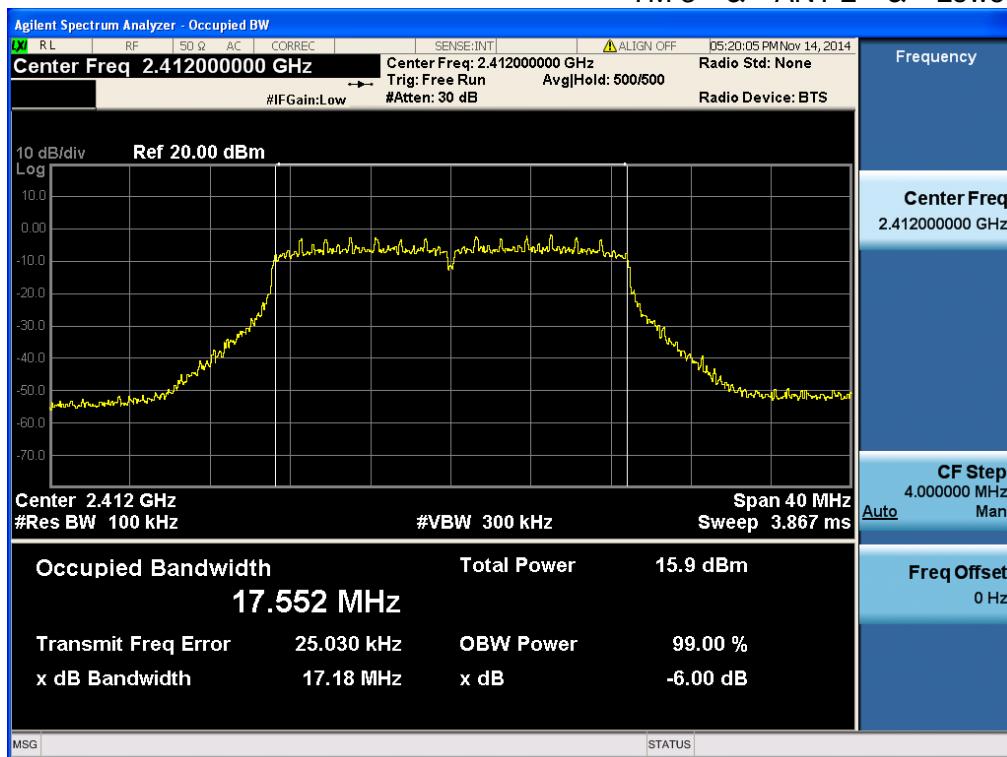
**6 dB Bandwidth**

TM 3 & ANT 2 & Middle

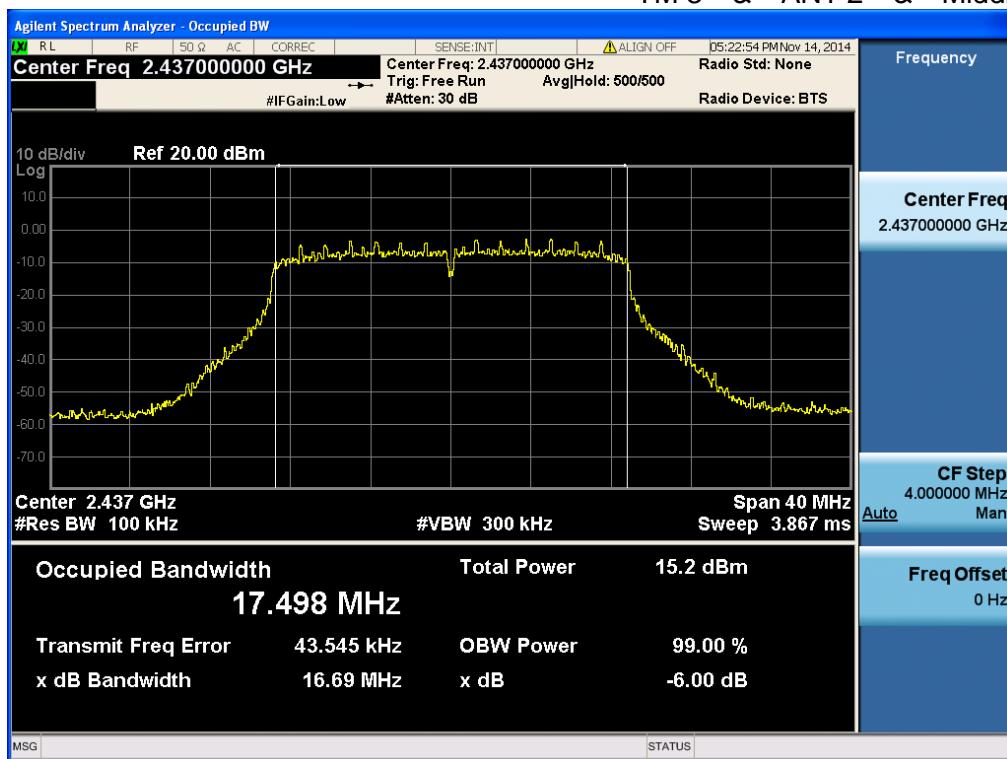


6 dB Bandwidth

TM 3 & ANT 2 & Highest

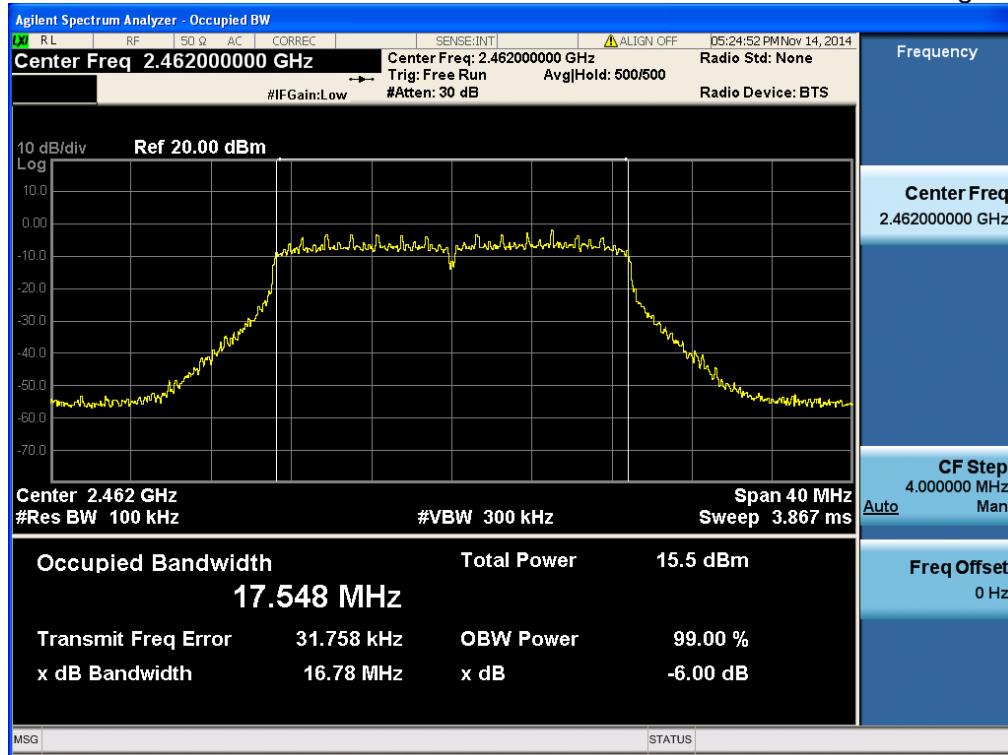


6 dB Bandwidth

TM 4 & ANT 1 & Lowest

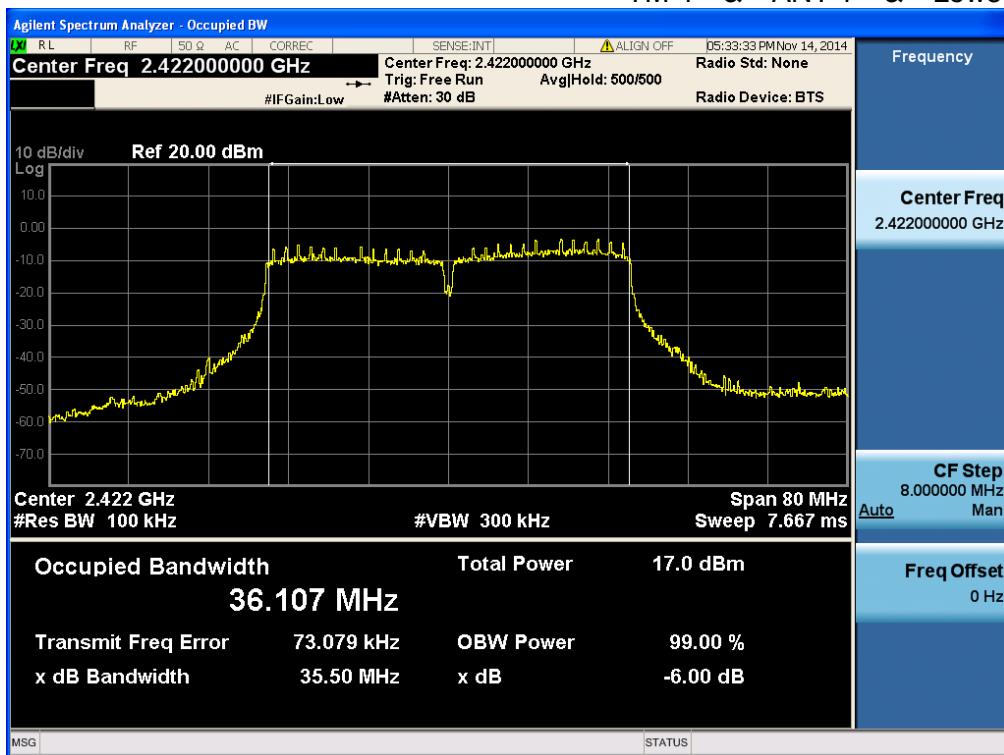
**6 dB Bandwidth**

TM 4 & ANT 1 & Middle

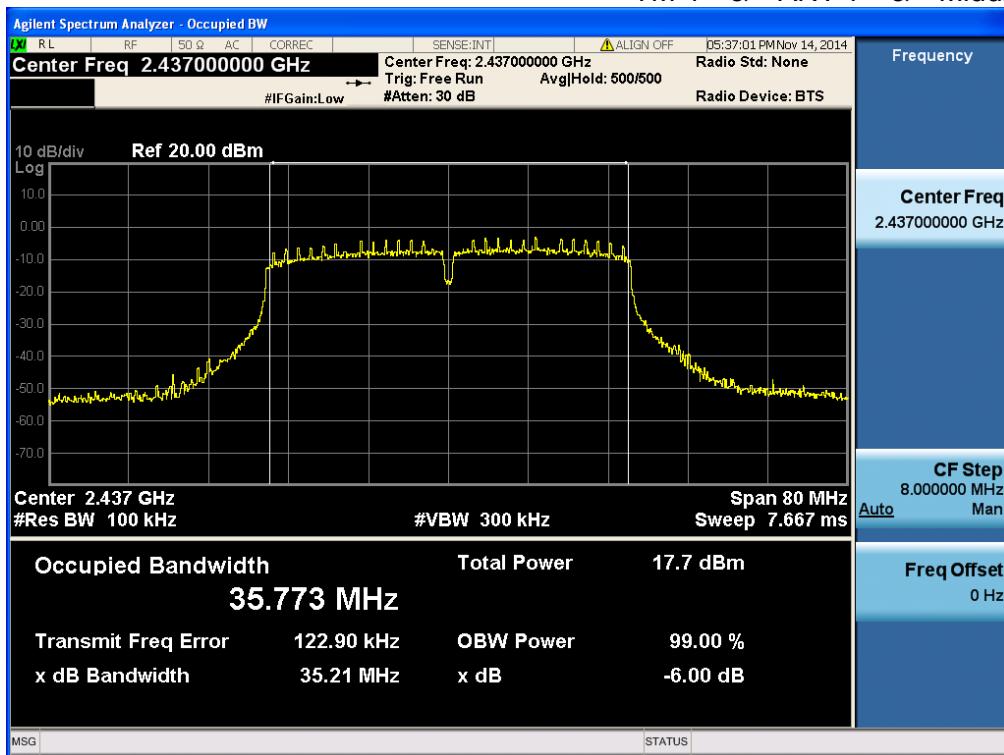


6 dB Bandwidth

TM 4 & ANT 1 & Highest

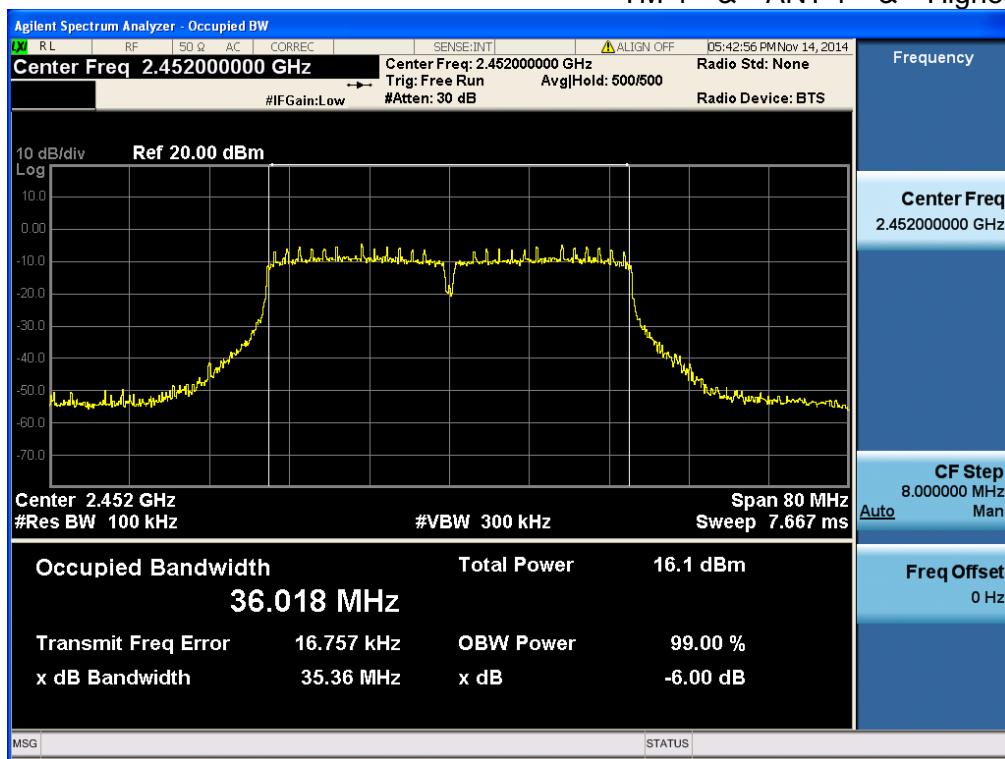


6 dB Bandwidth

TM 4 & ANT 2 & Lowest

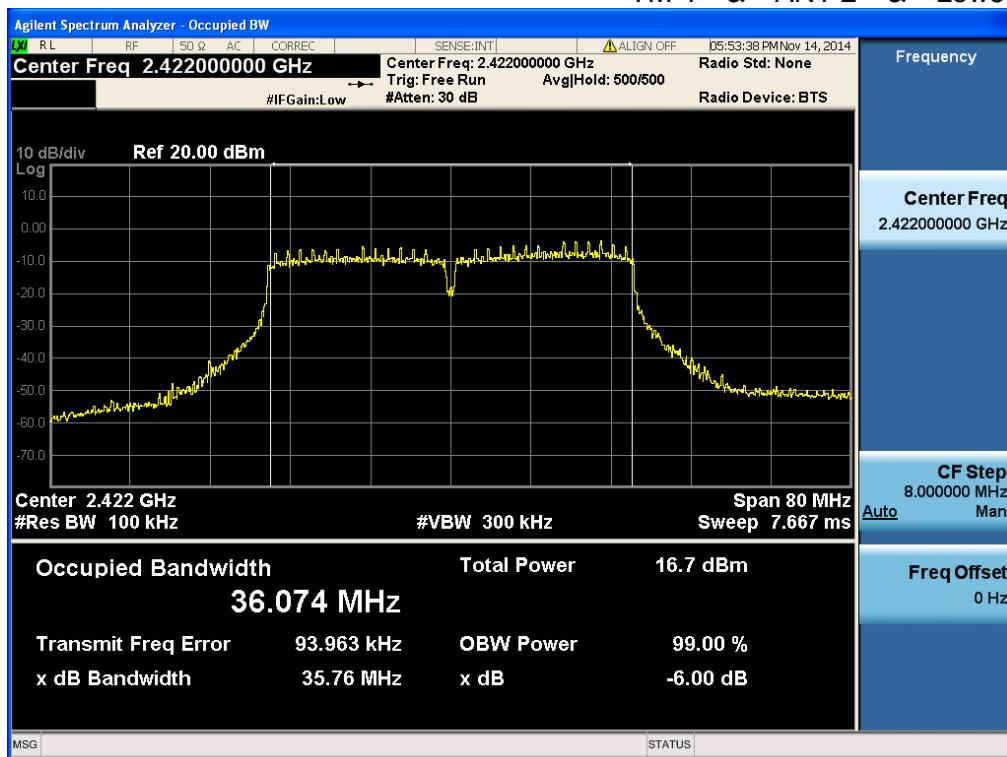
**6 dB Bandwidth**

TM 4 & ANT 2 & Middle

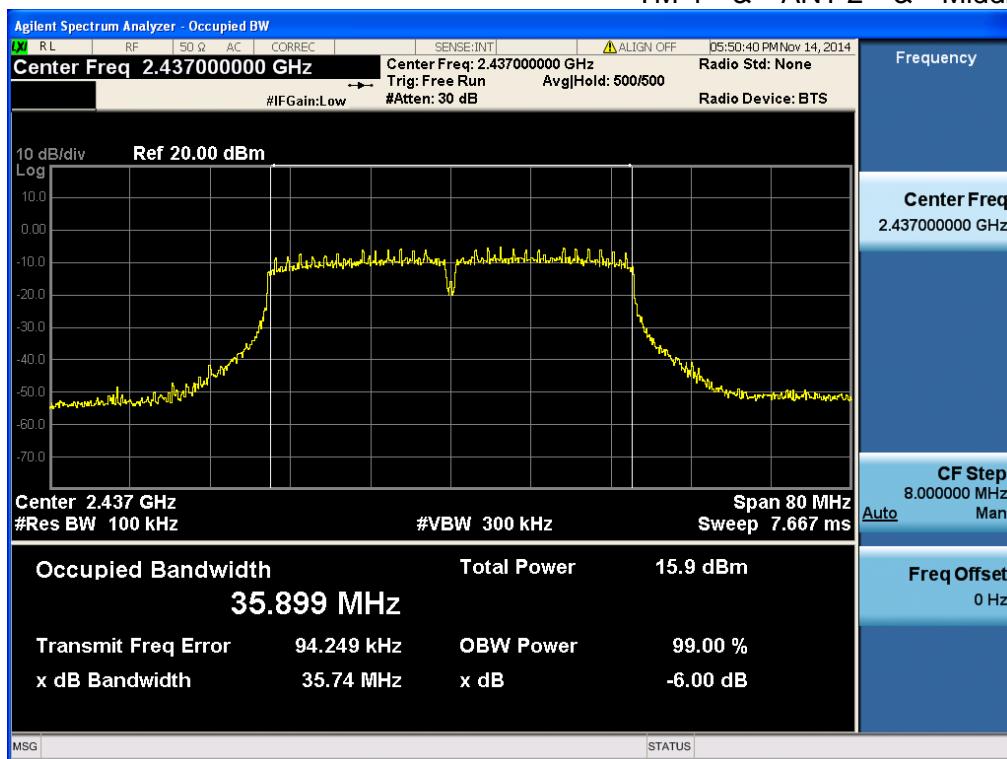

6 dB Bandwidth

TM 4 & ANT 2 & Highest

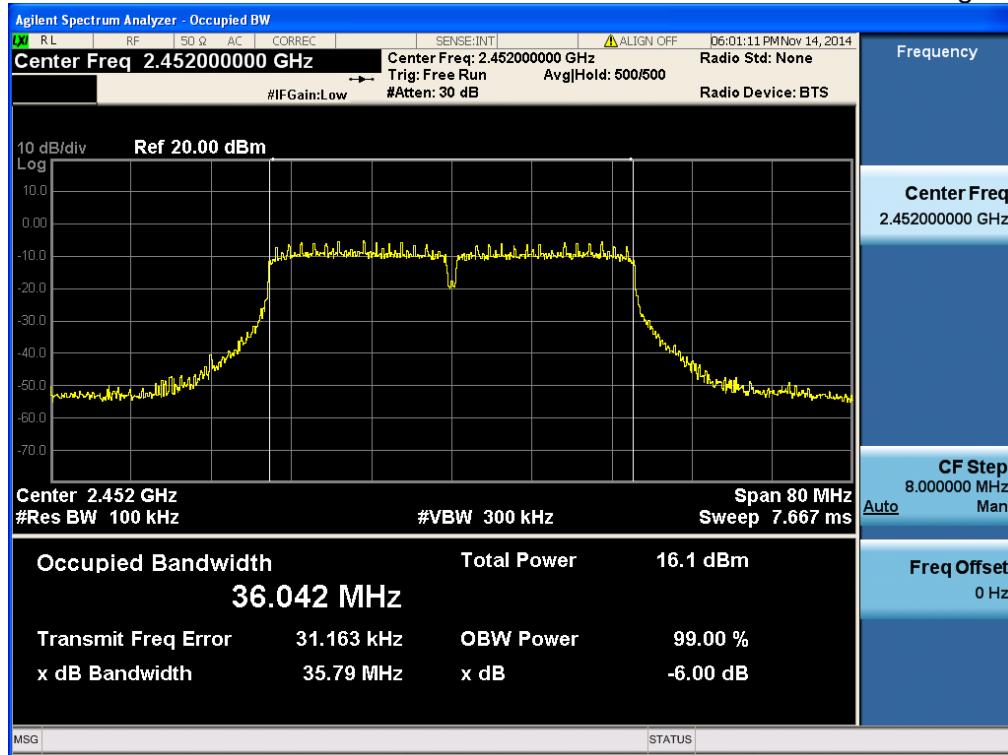


8.2 Maximum peak conducted output power

Test Requirements and limit, §15.247(b) & RSS-210 [A8.4]

The maximum permissible conducted output power is **1 Watt**.

TEST CONFIGURATION

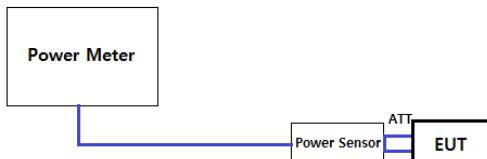

TEST PROCEDURE:

1. PKPM1 Peak power meter method of KDB 558074 D01 meas Guidance v03r2

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB 558074 D01 meas Guidance v03r2

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

TEST RESULTS: Comply

▪ Single transmitting

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11b</u>			
			Data Rate [Mbps]			
			1	2	5.5	11
ANT 1	2412	PK	14.8	14.7	14.5	14.6
		AV	12.2	12.0	12.1	12.1
	2437	PK	15.0	14.8	14.7	14.7
		AV	12.3	12.1	12.2	12.1
	2462	PK	14.7	14.6	14.5	14.5
		AV	12.2	12.0	12.1	12.0

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11g</u>							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
ANT 1	2412	PK	18.7	18.6	18.5	18.6	18.4	18.3	18.2	18.4
		AV	11.9	11.8	11.8	11.8	11.7	11.7	11.6	11.6
	2437	PK	18.9	18.6	18.5	18.6	18.5	18.6	18.5	18.3
		AV	12.1	12.0	12.0	12.0	11.9	11.9	11.8	11.7
	2462	PK	18.4	18.2	18.3	18.3	18.2	18.1	18.1	18.0
		AV	12.0	11.9	11.9	11.9	11.8	11.8	11.7	11.7

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>							
			Modulation and Coding Scheme [MCS]							
			0	1	2	3	4	5	6	7
ANT 1	2412	PK	17.3	17.2	17.2	17	17.1	17.1	17.1	17.2
		AV	10.7	10.6	10.6	10.5	10.4	10.5	10.4	10.6
	2437	PK	18.1	18.0	18.0	17.9	17.9	17.8	17.9	17.8
		AV	11.5	11.4	11.3	11.1	11.3	11.2	11.2	11.5
	2462	PK	17.3	17.2	17.2	17.1	17.2	17.1	17.1	17.2
		AV	10.8	10.7	10.6	10.6	10.6	10.6	10.7	10.7
ANT 2	2412	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-
	2437	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-
	2462	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT40)</u>							
			Modulation and Coding Scheme [MCS]							
			0	1	2	3	4	5	6	7
ANT 1	2422	PK	17.2	17.1	17	17	16.9	17	16.8	17
		AV	10.9	10.8	10.7	10.7	10.5	10.6	10.4	10.4
	2437	PK	18.6	18.5	18.4	18.5	18.3	18.4	18.2	18.3
		AV	11.5	11.4	11.3	11.4	11.4	11.3	11.4	11.4
	2452	PK	16.6	16.4	16.5	16.5	16.4	16.5	16.3	16.3
		AV	10.0	9.9	9.9	9.8	9.8	9.9	9.7	9.6
ANT 2	2422	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-
	2437	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-
	2452	PK	-	-	-	-	-	-	-	-
		AV	-	-	-	-	-	-	-	-

- Multiple transmitting

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>							
			Modulation and Coding Scheme [MCS]							
			8	9	10	11	12	13	14	15
ANT 1	2412	PK	15.6	15.5	15.4	15.2	15.3	15.1	15.1	15.2
		AV	9	8.9	8.9	8.8	8.8	8.7	8.6	8.6
	2437	PK	15.9	15.2	15.1	15.3	15.4	15.5	15.2	15.6
		AV	9.4	9.1	9.2	9	9.1	8.9	8.8	9.2
	2462	PK	14.9	14.6	14.7	14.6	14.4	14.5	14.5	14.3
		AV	8.4	8.3	8.2	8.3	8.1	8.2	8.2	8.1
ANT 2	2412	PK	13.9	13.7	13.8	13.8	13.6	13.7	13.6	13.7
		AV	7.1	6.9	7	7	6.8	6.7	6.7	6.7
	2437	PK	14.5	14.2	14.2	14	14.2	13.8	13.9	13.7
		AV	7.9	7.6	7.7	7.6	7.5	7.4	7.3	7.6
	2462	PK	13.8	13.7	13.7	13.6	13.4	13.4	13.3	13.4
		AV	7.4	7.3	7.3	7.2	7.1	7.2	7	7
Sum (ANT 1+2)	2412	PK	17.8	17.7	17.7	17.6	17.5	17.5	17.4	17.5
	2437	PK	18.3	17.7	17.7	17.7	17.9	17.7	17.6	17.8
	2462	PK	17.4	17.2	17.2	17.1	16.9	17.0	17.0	16.9

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT40)</u>							
			Modulation and Coding Scheme [MCS]							
			8	9	10	11	12	13	14	15
ANT 1	2422	PK	15.5	15.3	15.4	15.3	15.2	15.2	15.1	15.1
		AV	9.1	8.9	8.9	9.0	8.9	8.8	8.7	8.7
	2437	PK	16.1	15.5	15.6	15.2	15.4	15.3	15.2	15.6
		AV	9.6	9.2	9.1	9.4	9.3	9.2	9.1	9.0
	2452	PK	13.7	13.5	13.6	13.6	13.4	13.4	13.3	13.3
		AV	7.2	7.0	7.1	7.1	7.1	7.0	6.9	6.9
ANT 2	2422	PK	14.2	13.9	13.8	14	13.8	13.8	13.7	13.6
		AV	7.8	7.6	7.6	7.7	7.5	7.5	7.3	7.3
	2437	PK	15.2	14.8	14.7	14.6	14.5	14.9	15.0	14.7
		AV	7.7	7.6	7.6	7.5	7.4	7.5	7.5	7.3
	2452	PK	14.3	14.1	14.2	14.1	14.0	14.0	13.8	13.8
		AV	7.3	7.2	7.2	7.1	7.1	7.0	6.9	6.9
Sum (ANT 1+2)	2422	PK	17.9	17.7	17.7	17.7	17.6	17.6	17.5	17.4
	2437	PK	18.7	18.2	18.2	17.9	18.0	18.1	18.1	18.2
	2452	PK	17.0	16.8	16.9	16.9	16.7	16.7	16.6	16.6


8.3 Maximum power spectral density

Test requirements and limit, §15.247(e) & RSS-210 [A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

TEST CONFIGURATION

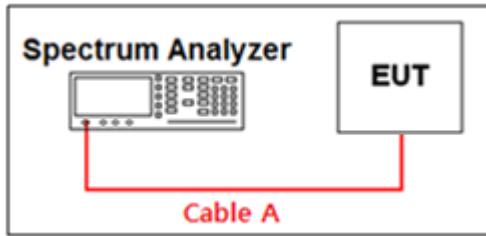

TEST PROCEDURE:

The Measurement Procedure **Method PKPSD of KDB 558074 D01 meas Guidance v03r2** is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to: **3 kHz ≤ RBW ≤ 100 kHz**
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Detector = **peak**
6. Sweep time = **auto couple**
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST RESULTS: Comply

Test Mode	Frequency	RBW	PKPSD [dBm]		
			ANT 1	ANT 2	SUM (ANT 1 + ANT 2)
TM 1	Lowest	3 kHz	-9.370	-	-
	Middle	3 kHz	-9.720	-	-
	Highest	3 kHz	-10.480	-	-
TM 2	Lowest	3 kHz	-12.810	-	-
	Middle	3 kHz	-12.460	-	-
	Highest	3 kHz	-13.370	-	-
TM 3	Lowest	3 kHz	-14.010	-16.200	-11.959
	Middle	3 kHz	-15.260	-18.660	-13.626
	Highest	3 kHz	-16.050	-17.050	-13.511
TM 4	Lowest	3 kHz	-18.930	-19.200	-16.053
	Middle	3 kHz	-18.500	-19.770	-16.079
	Highest	3 kHz	-19.630	-20.290	-16.938

RESULT PLOTS


Maximum PPSD

TM 1 & ANT 1 & Lowest

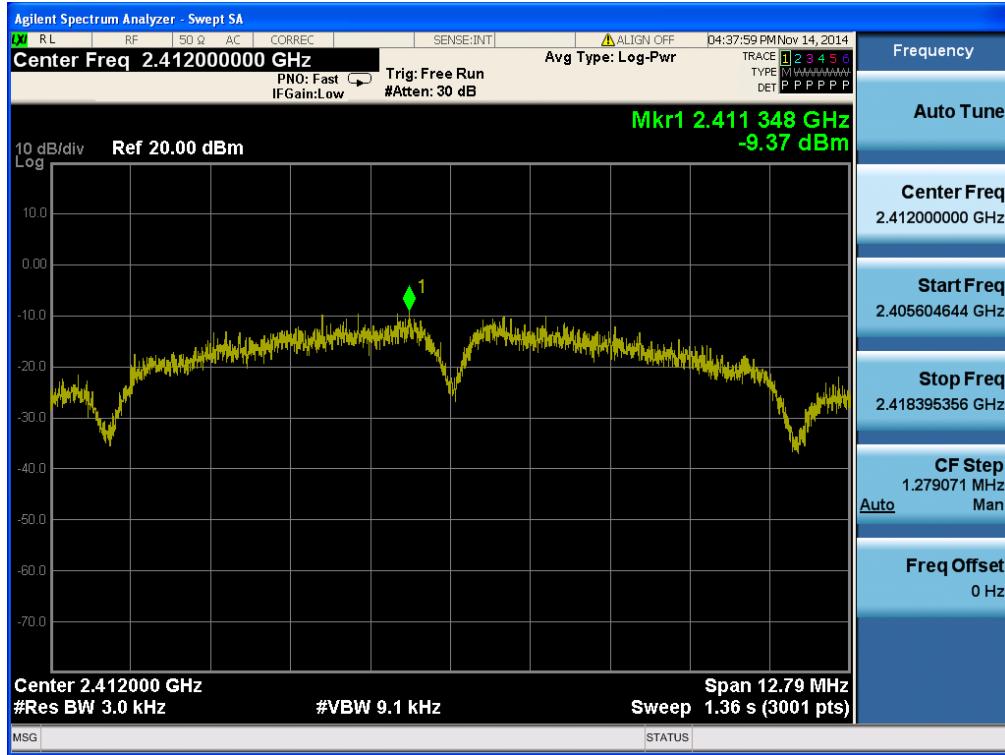


Maximum PPSD

TM 1 & ANT 1 & Middle

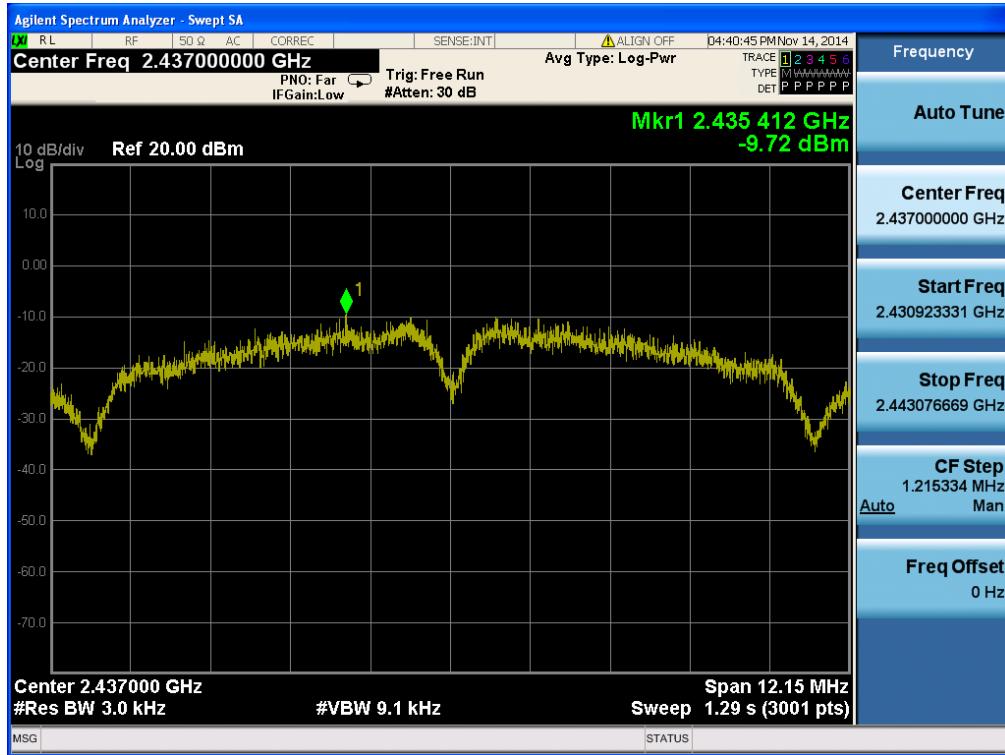


Maximum PPSD

TM 1 & ANT 1 & Highest

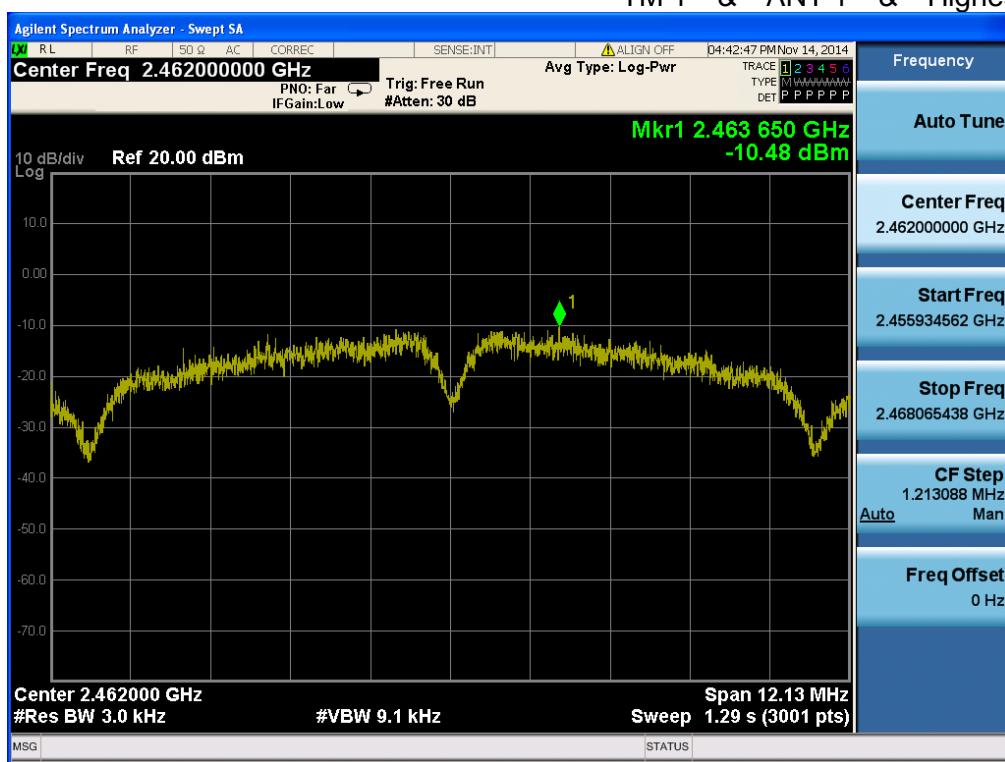


Maximum PPSD

TM 2 & ANT 1 & Lowest

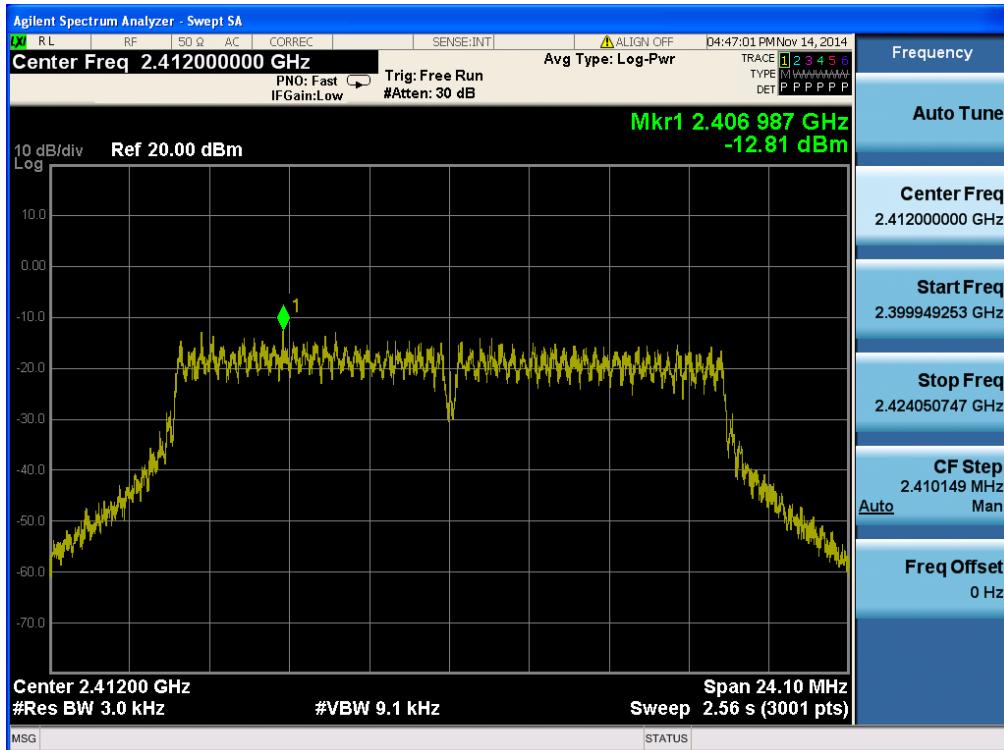
**Maximum PPSD**

TM 2 & ANT 1 & Middle

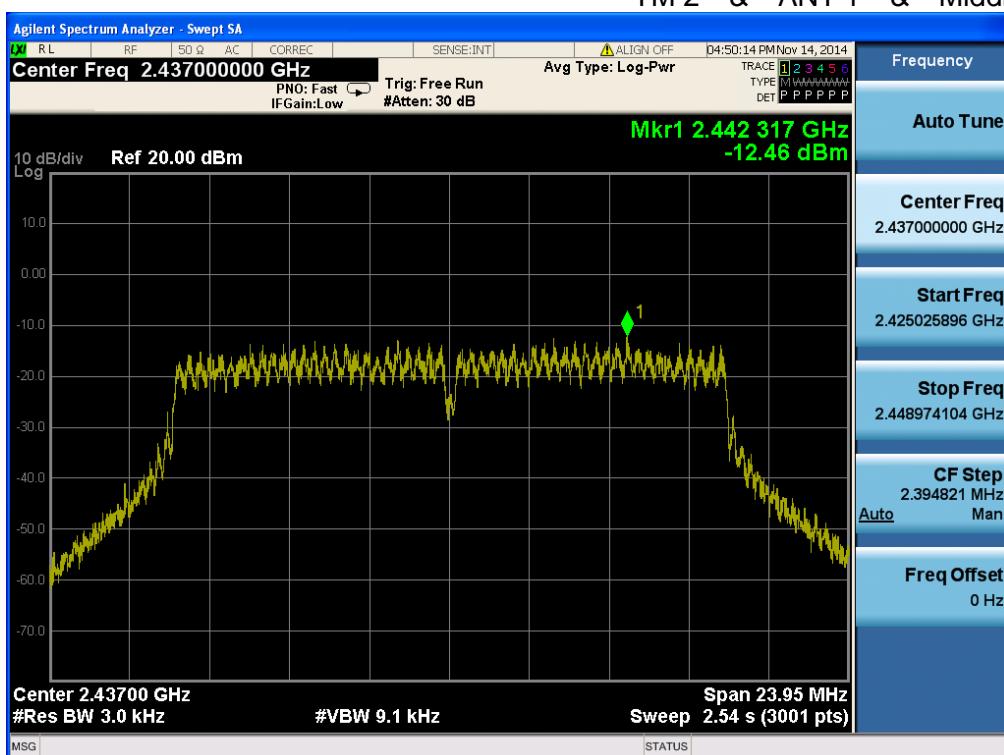


Maximum PPSD

TM 2 & ANT 1 & Highest

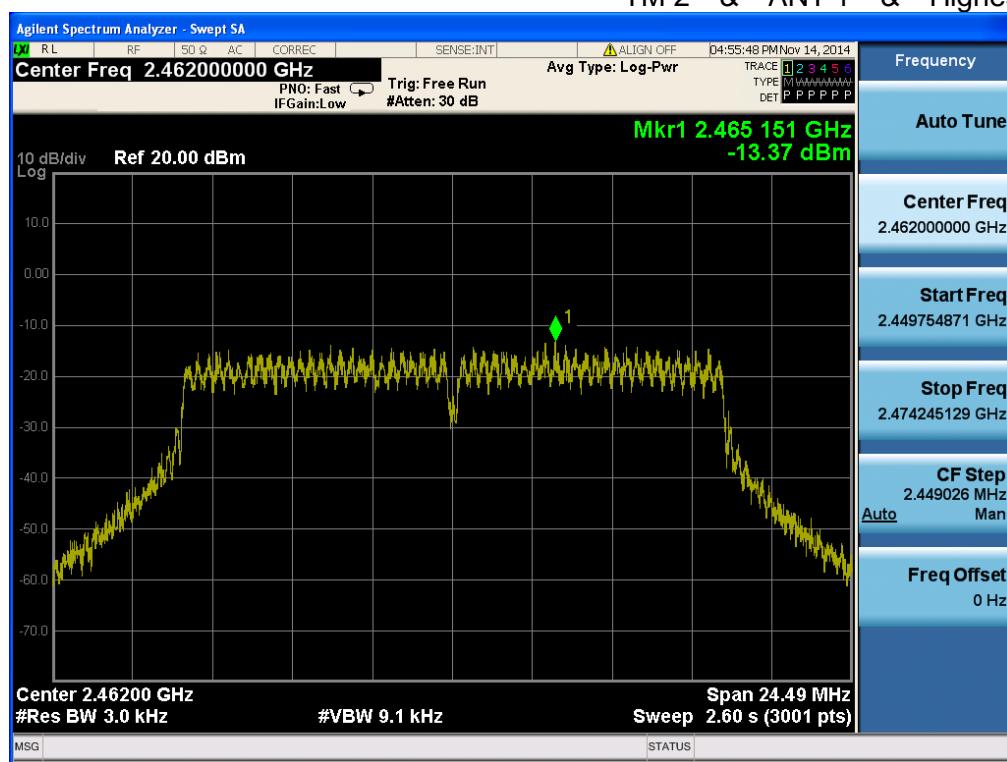


Maximum PPSD

TM 3 & ANT 1 & Lowest

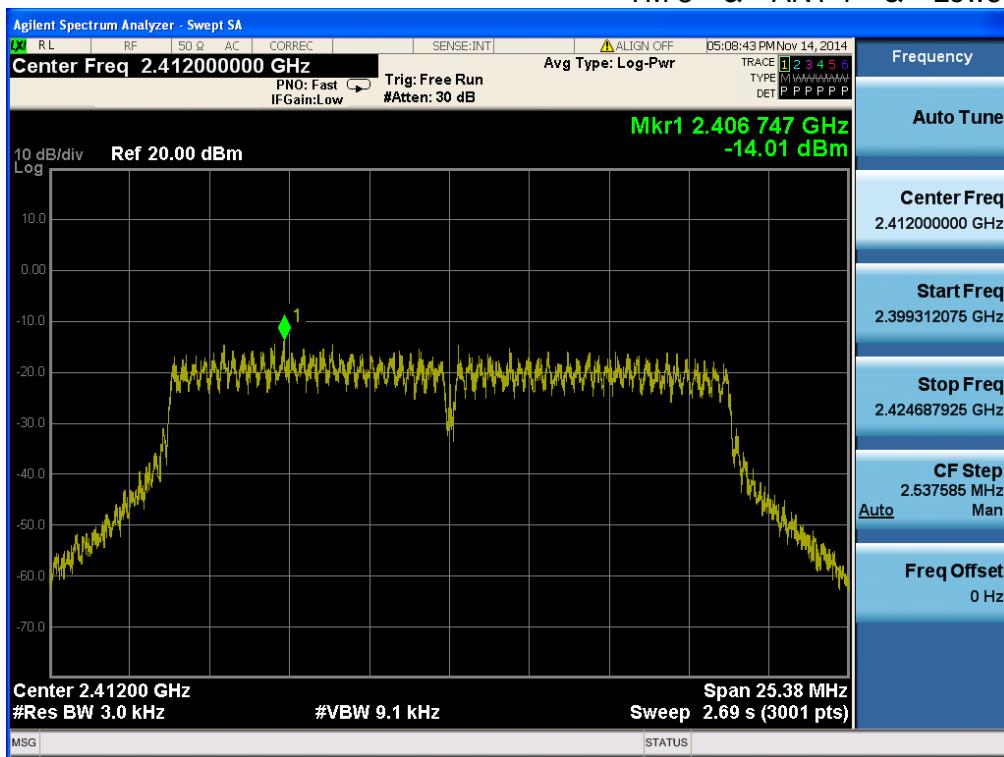
**Maximum PPSD**

TM 3 & ANT 1 & Middle

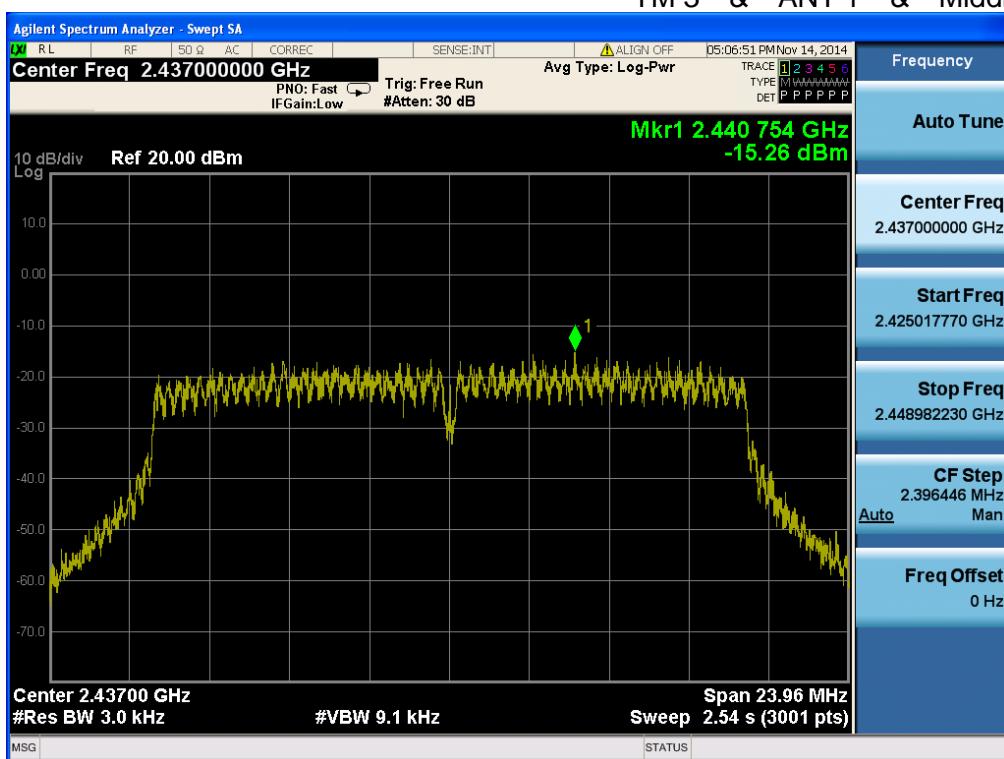


Maximum PPSD

TM 3 & ANT 1 & Highest

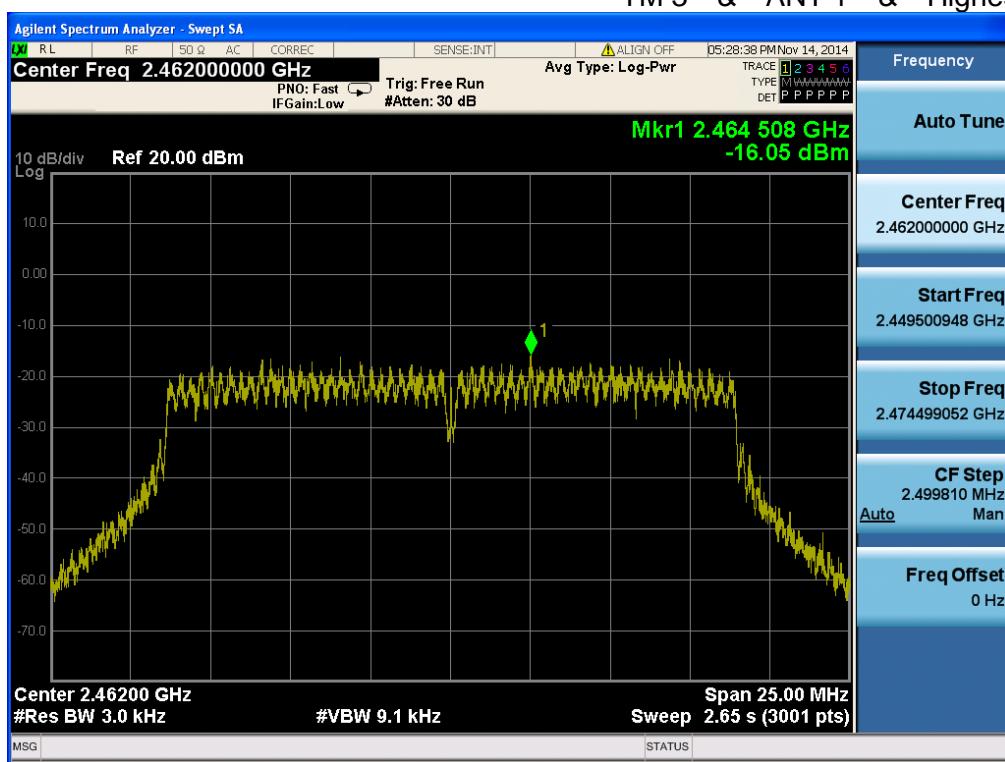


Maximum PPSD

TM 3 & ANT 2 & Lowest

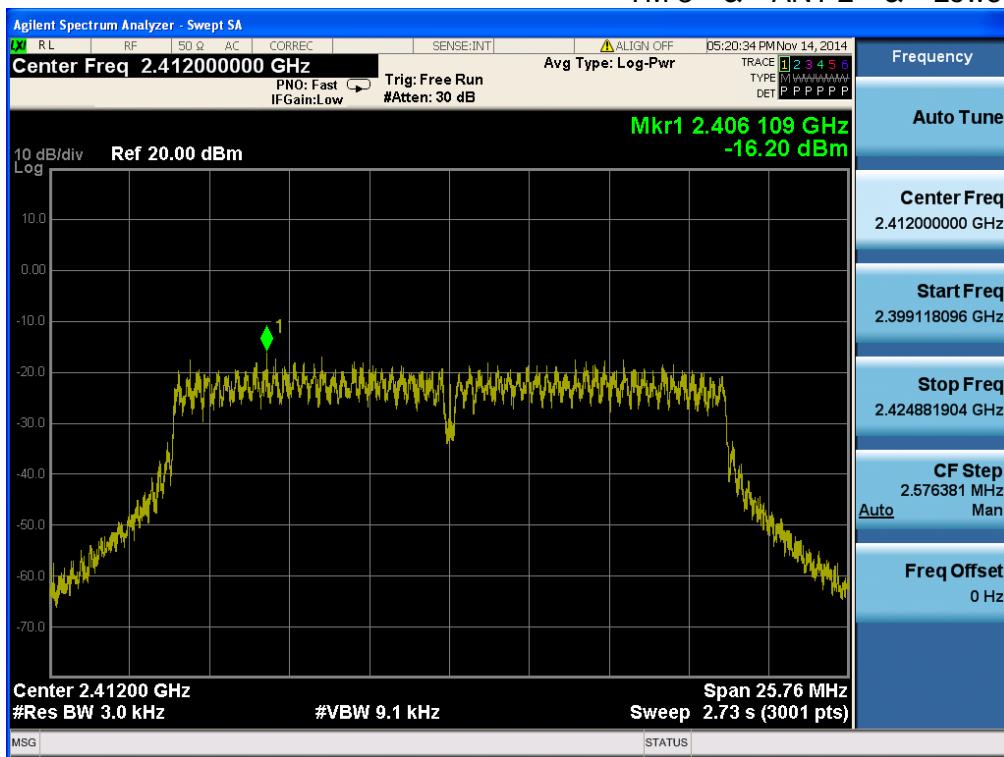
**Maximum PPSD**

TM 3 & ANT 2 & Middle

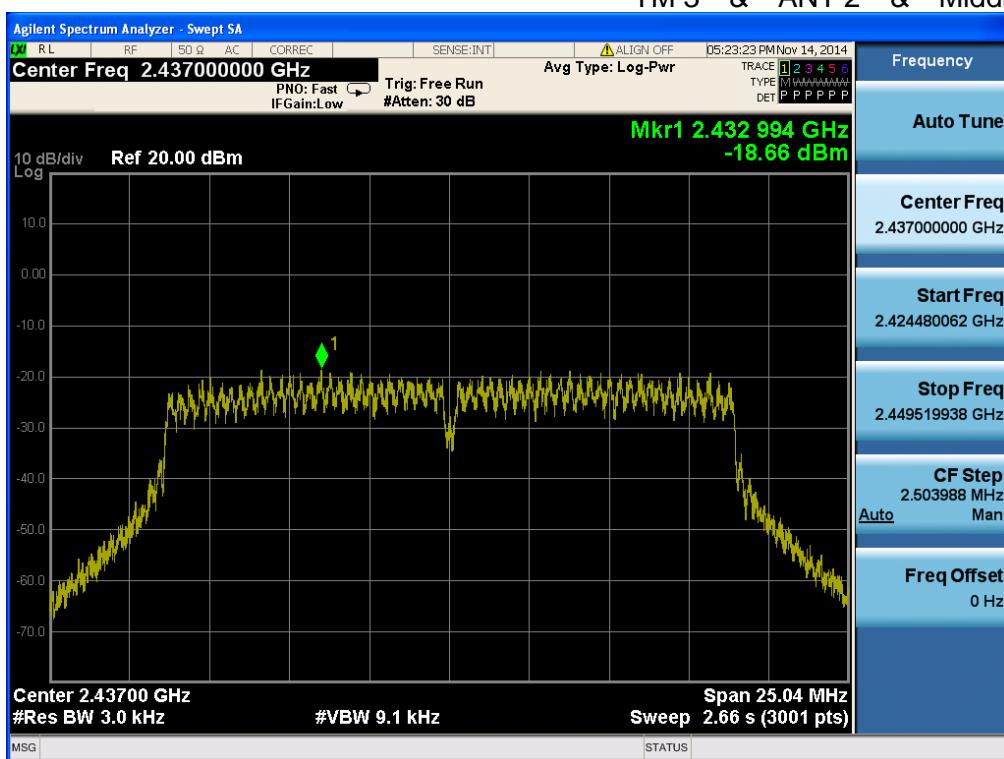


Maximum PPSD

TM 3 & ANT 2 & Highest

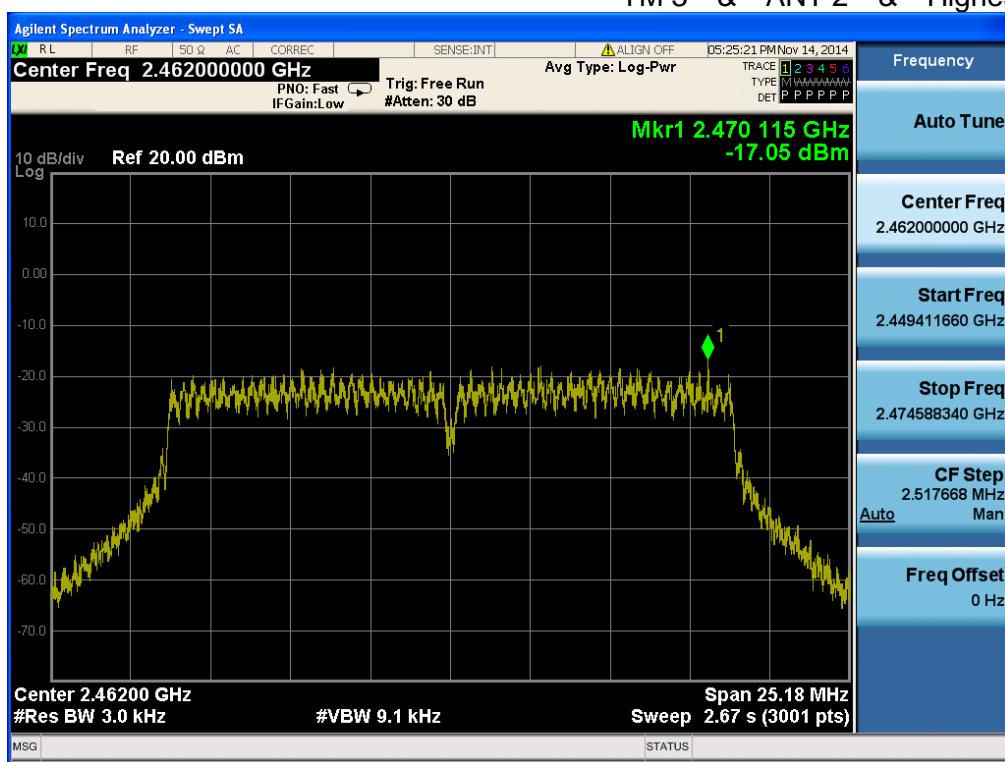


Maximum PPSD

TM 4 & ANT 1 & Lowest

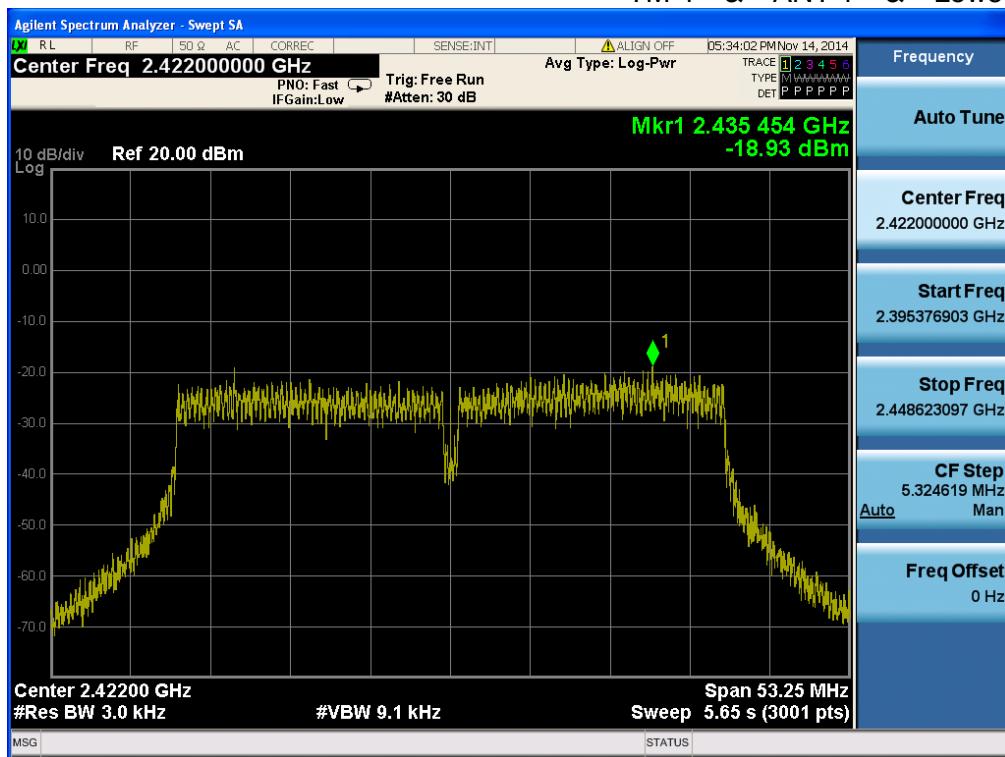
**Maximum PPSD**

TM 4 & ANT 1 & Middle

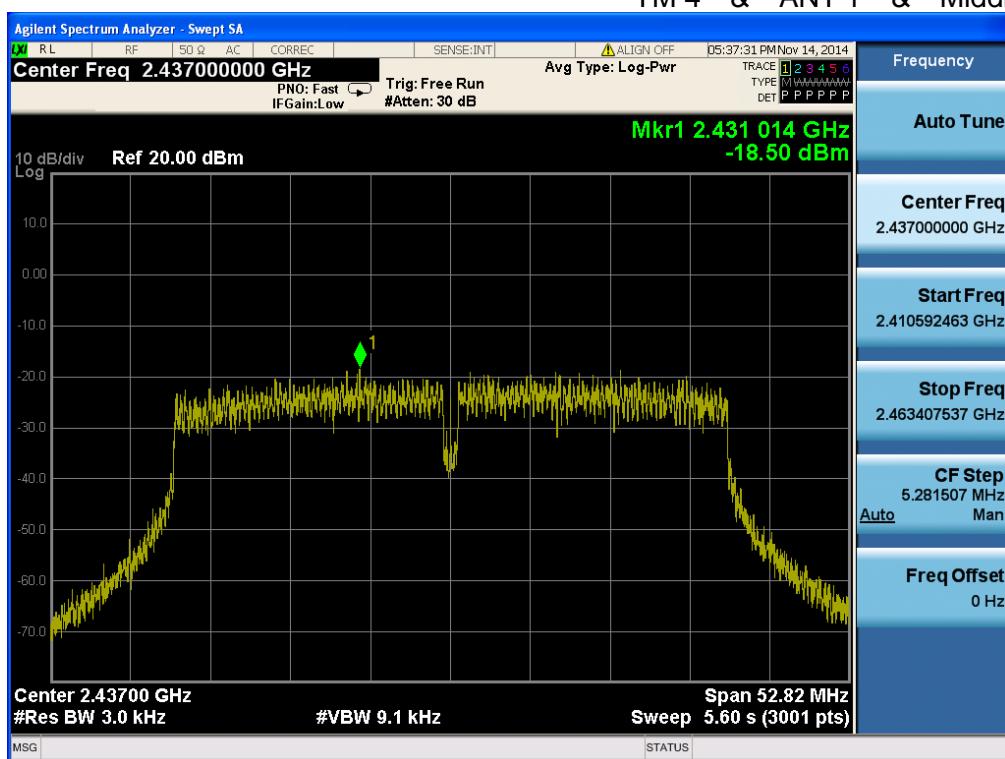


Maximum PPSD

TM 4 & ANT 1 & Highest

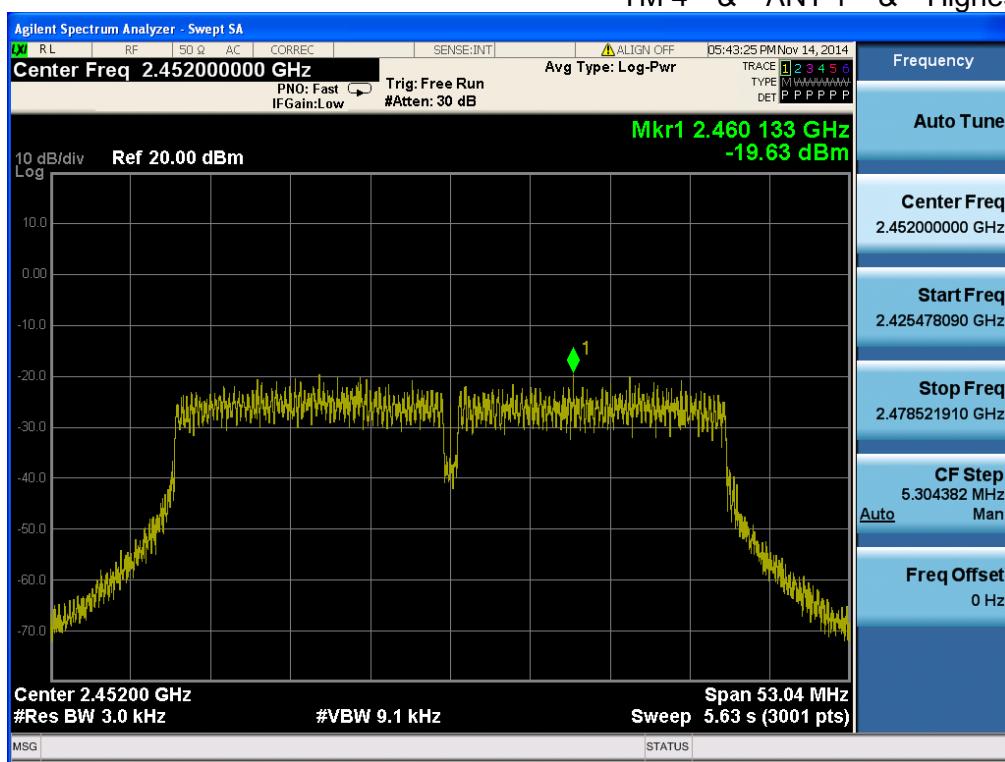


Maximum PPSD

TM 4 & ANT 2 & Lowest

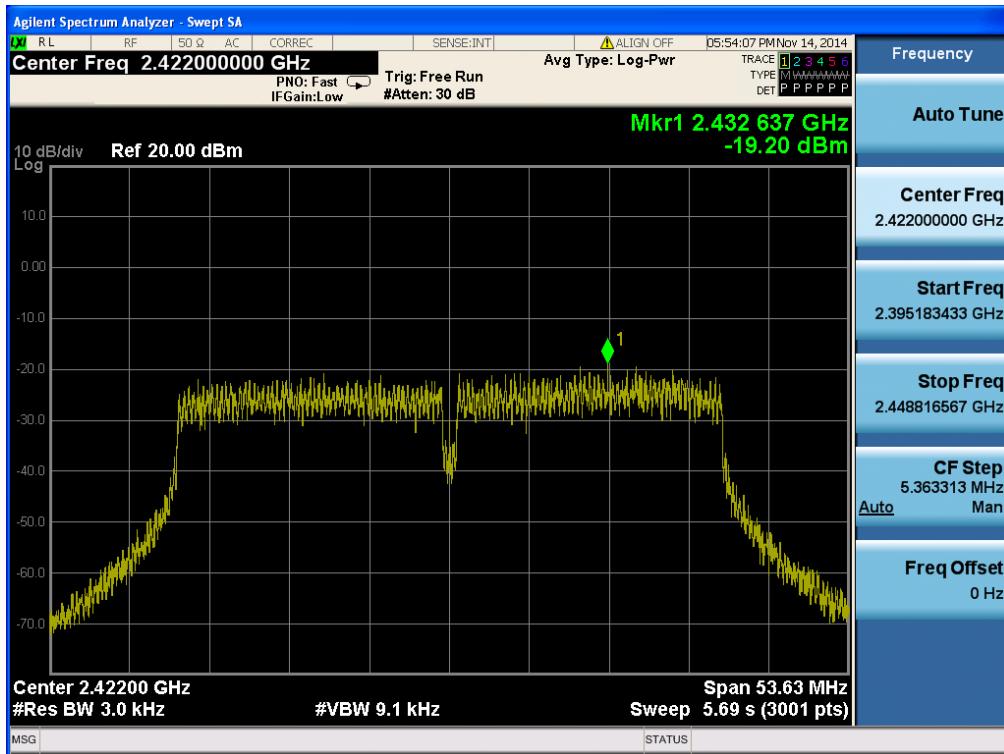**Maximum PPSD**

TM 4 & ANT 2 & Middle

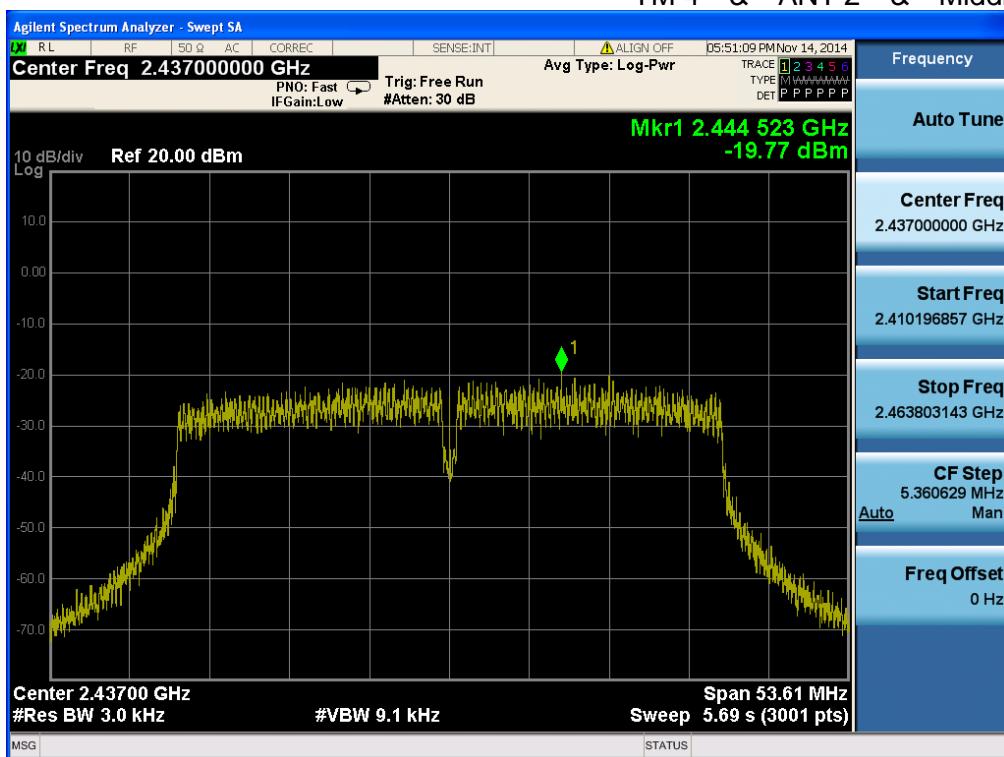

Maximum PPSD

TM 4 & ANT 2 & Highest

