

**■ Straddle channels TEST RESULTS**

Conducted Output Power Measurements (802.11a/n\_HT20/ac\_VHT20 Mode: UNII 2C Band 5720MHz)


Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720	144	8.62	0.036	8.66	22.68
802.11n			8.08	0.201	8.28	22.68
802.11ac			7.96	0.075	8.04	22.68

Conducted Output Power Measurements (802.11a/n\_HT20/ac\_VHT20 Mode: UNII 3 Band 5720MHz)


Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720	144	1.21	0.036	1.25	24.14
802.11n			1.22	0.201	1.42	24.14
802.11ac			1.12	0.075	1.20	24.14

**Straddle channels TEST Plot for 802.11a/n\_HT20**


**802.11a UNII 2C Band Average Power CH.144**

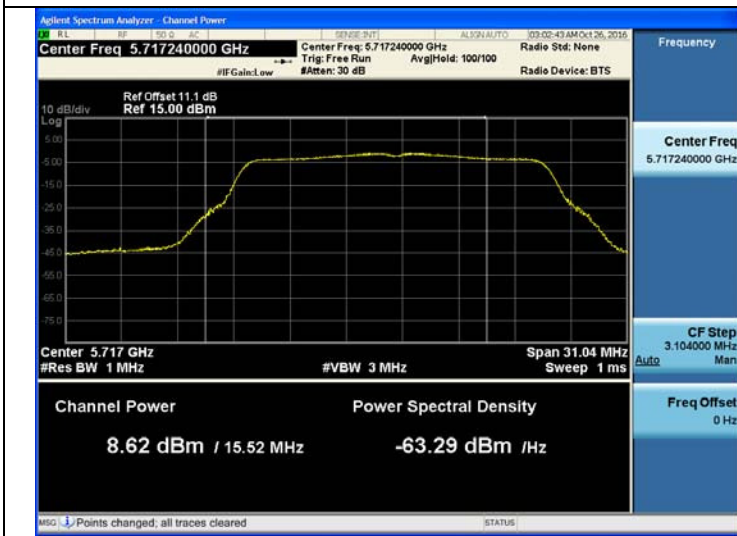

**802.11a UNII 3 Band Average Power CH.144**

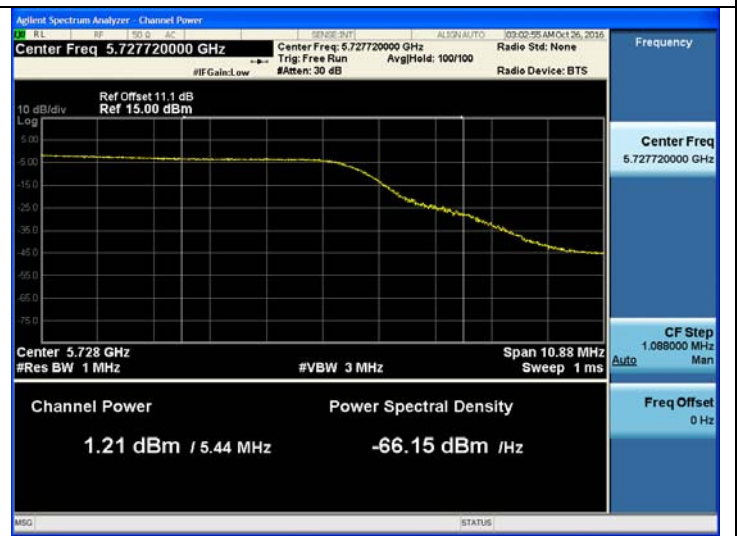

**802.11n\_HT20 UNII 2C Band Average Power CH.144**

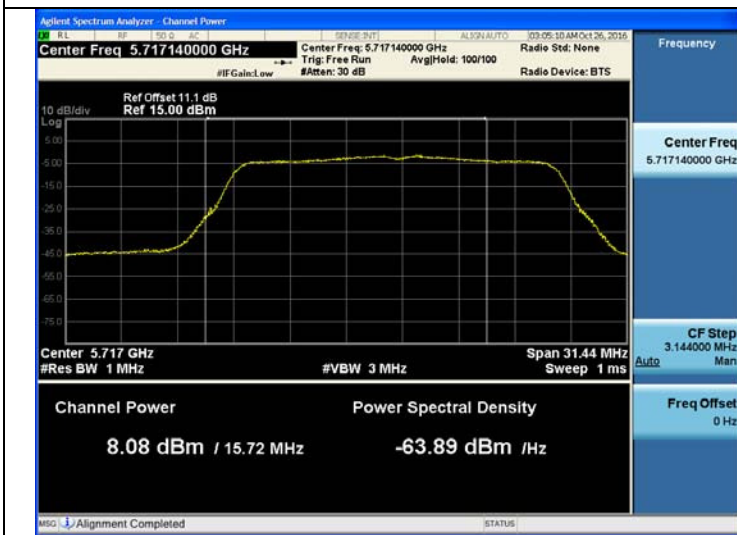

**802.11n\_HT20 UNII 3 Band Average Power CH.144**



▣ Straddle channels TEST Plot for 802.11ac\_VHT20

802.11ac\_VHT20 UNII 2C Band Average Power CH.144



802.11ac\_VHT20 UNII 3 Band Average Power CH.144



**■ Straddle channels TEST RESULTS**


Conducted Output Power Measurements (802.11n\_HT40/ac\_VHT40 Mode: UNII 2C Band 5710MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n	5710	142	8.28	0.111	8.39	22.68
802.11ac			7.94	0.320	8.26	22.68

Conducted Output Power Measurements (802.11n\_HT40/ac\_VHT40 Mode: UNII 3 Band 5710MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n	5710	142	-2.98	0.111	-2.87	24.14
802.11ac			-3.18	0.320	-2.86	24.14

**Straddle channels TEST Plot for 802.11n\_HT40/ac\_VHT40**

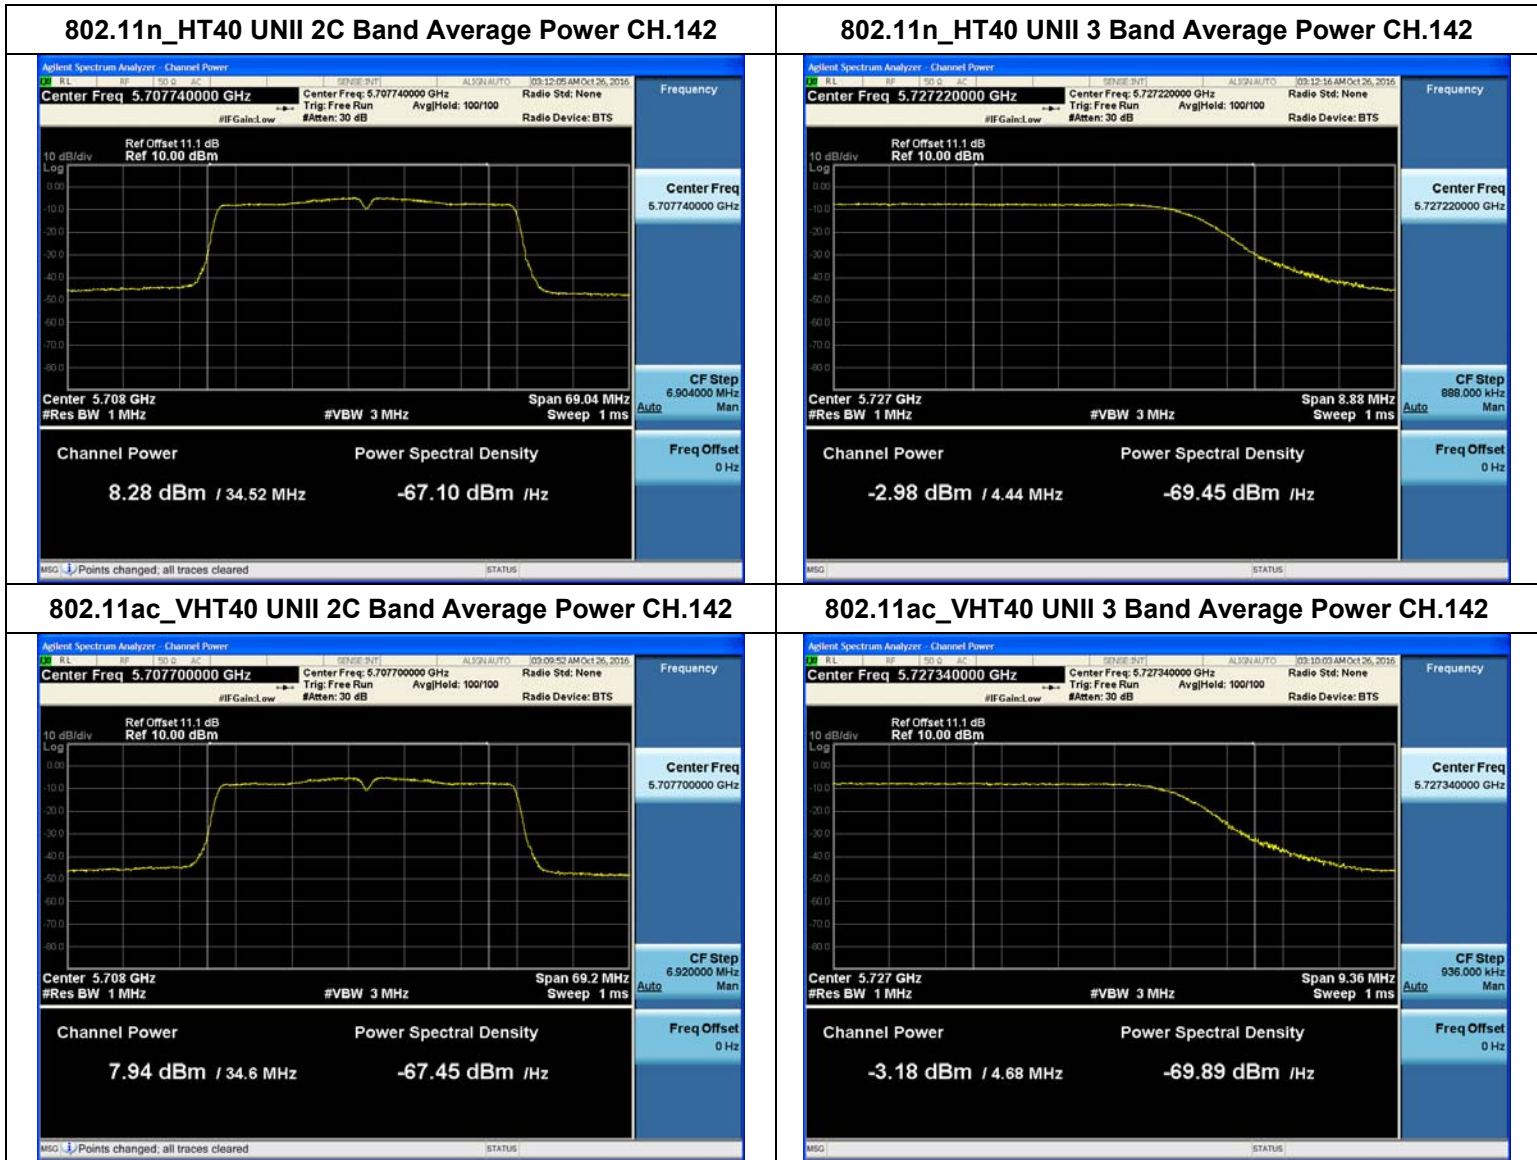

**Straddle channels TEST RESULTS**


**Conducted Output Power Measurements (802.11ac\_VHT80 Mode: UNII 2C Band 5690MHz)**

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac	5690	138	7.79	0.241	8.03	22.68

**Conducted Output Power Measurements (802.11ac\_VHT80 Mode: UNII 3 Band 5690MHz)**

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac	5690	138	-6.93	0.241	-6.69	24.14

**Straddle channels TEST Plot for 802.11ac\_VHT80**

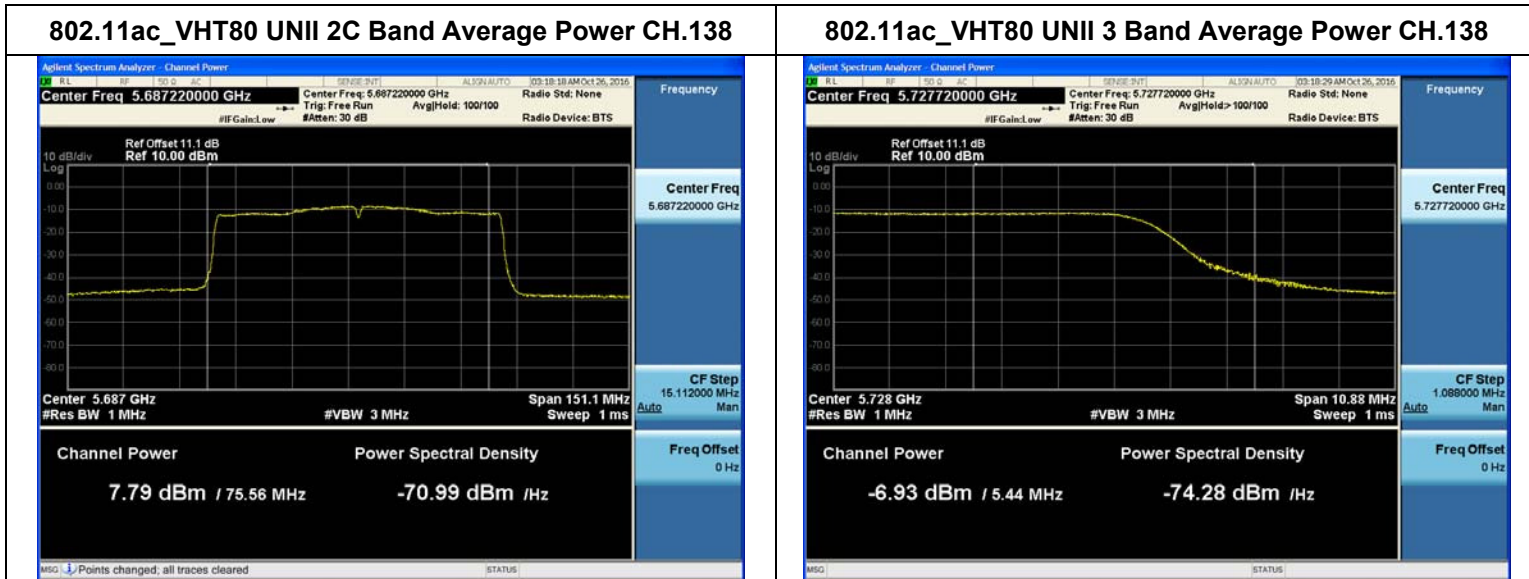

## 9.4 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 11 dBm/ MHz for UNII 1,2A, 2C and 30 dBm/500 kHz for UNII 3.


### ■ Limit

#### Power Spectral Density

Band	Mode	Limit
UNII 1	802.11 a,n,ac	11 dBm/MHz
UNII 2A	802.11a,n,ac	11 dBm/MHz
UNII 2C	802.11a,n,ac	11 dBm/MHz
UNII 3	802.11a,n,ac	30 dBm/500 kHz

Note : Note : According to KDB644545 D03 v01, emission for straddle channels in each band shall comply with the PSD limits applicable to that band under the appropriate rule section.

■ **TEST CONFIGURATION**

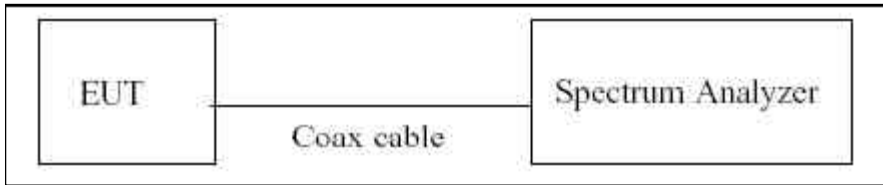

■ **TEST PROCEDURE**

We tested according to Method in KDB 789033 D02 v01r03.

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW ≥ 3 MHz
4. Number of points in sweep ≥ 2\*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

■ **Sample Calculation**

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A , 2C, 3	11.1

(Actual value of loss for the attenuator and cable combination)



■ 802.11a


■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	-2.426	0.053	-2.373	11	Pass
5200	40		-2.531	0.144	-2.387		Pass
5240	48		-2.120	0.036	-2.084		Pass
5260	52		-0.679	0.036	-0.643		Pass
5300	60		-0.741	0.105	-0.636		Pass
5320	64		-0.494	0.036	-0.458		Pass
5500	100		0.151	0.144	0.295		Pass
5580	116		-0.193	0.036	-0.157		Pass
5720	144		-1.169	0.036	-1.133		Pass
5745	149		-2.319	0.053	-2.266	30	Pass
5785	157		-3.047	0.211	-2.836		Pass
5825	165		-3.080	0.036	-3.044		Pass

■ TEST Plot for 802.11a


802.11a UNII 1 BAND PSD CH 48

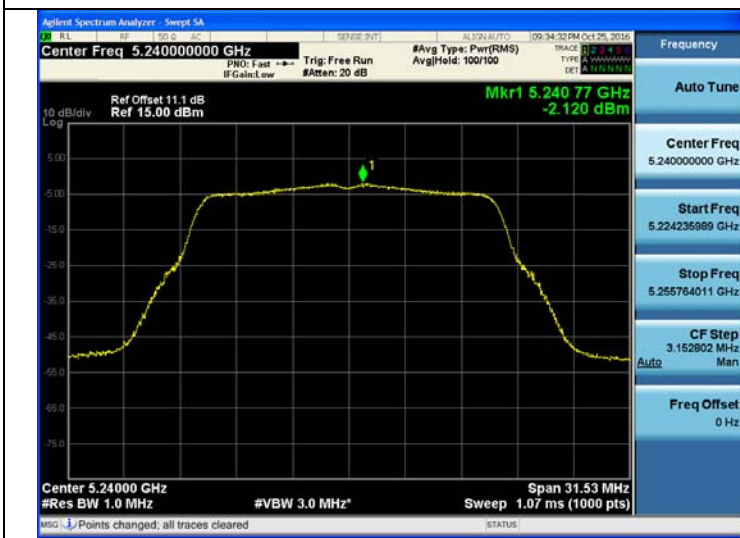


802.11a UNII 2A BAND PSD CH 64

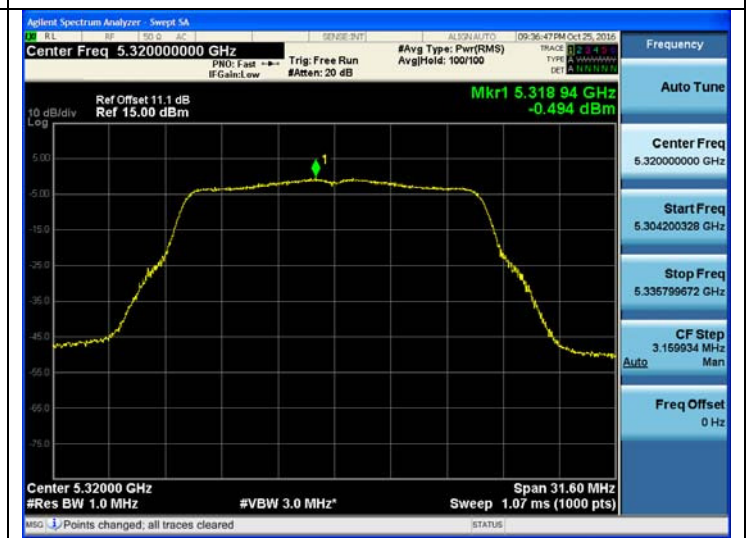

802.11a UNII 2C BAND PSD CH 100

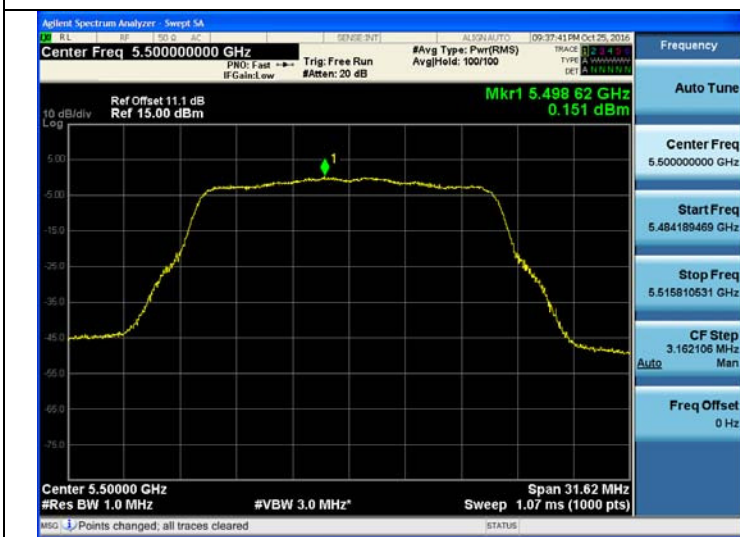

802.11a UNII 3 BAND PSD CH 149

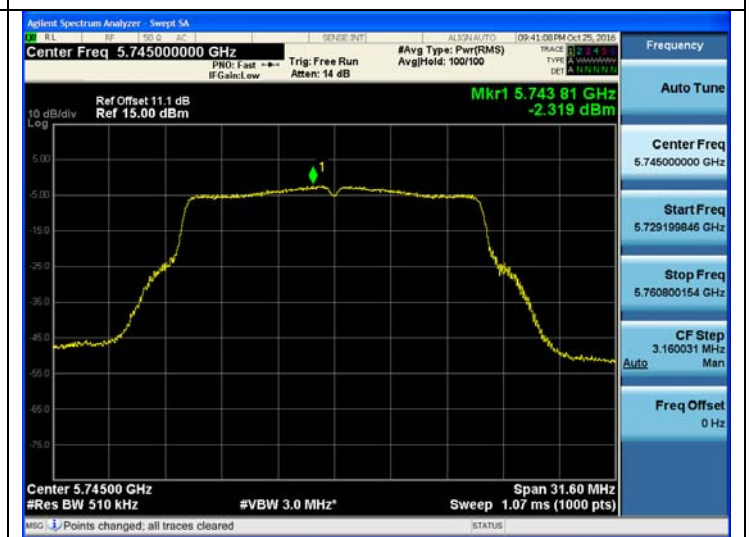

■802.11n\_HT20


■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11n _HT20	-3.083	0.126	-2.957	11	Pass
5200	40		-2.870	0.038	-2.832		Pass
5240	48		-2.653	0.201	-2.452		Pass
5260	52		-1.870	0.201	-1.669		Pass
5300	60		-1.328	0.201	-1.127		Pass
5320	64		-1.210	0.201	-1.009		Pass
5500	100		-0.530	0.038	-0.492		Pass
5580	116		-0.825	0.201	-0.624		Pass
5720	144		-1.596	0.201	-1.395		Pass
5745	149		-2.968	0.126	-2.842	30	Pass
5785	157		-3.472	0.201	-3.271		Pass
5825	165		-3.412	0.126	-3.286		Pass

TEST Plot for 802.11n\_HT20


802.11n\_HT20 UNII 1 BAND PSD CH 48

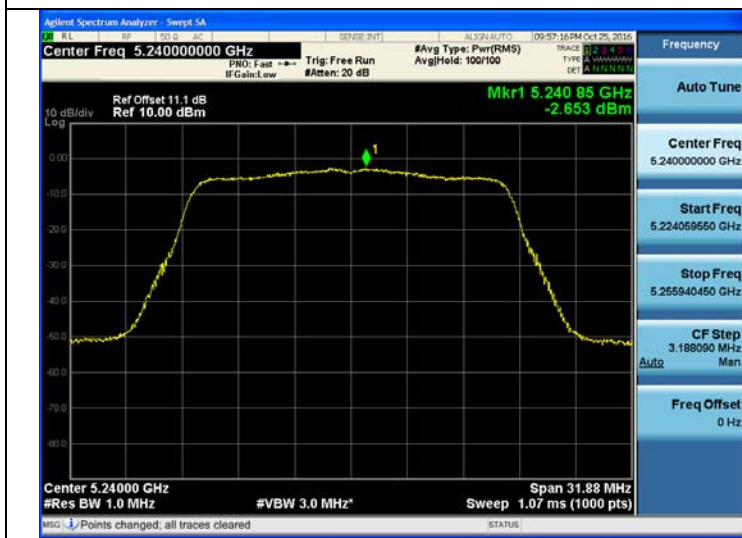


802.11n\_HT20 UNII 2A BAND PSD CH 64

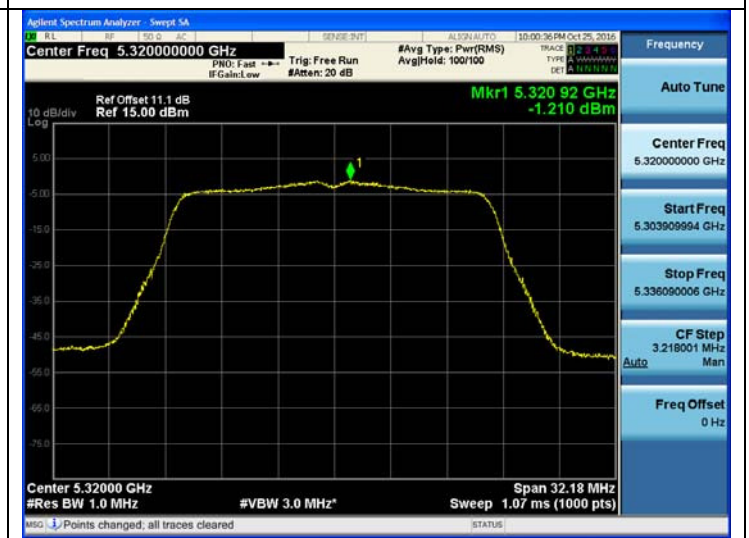

802.11n\_HT20 UNII 2C BAND PSD CH 100

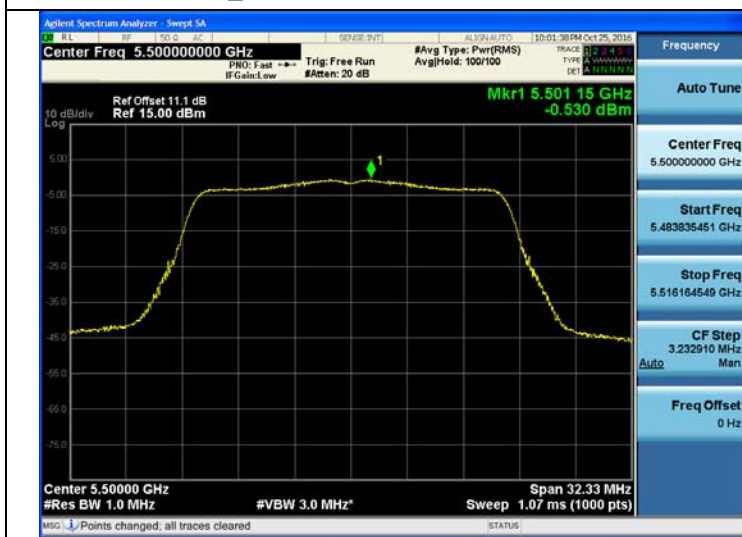

802.11n\_HT20 UNII 3 BAND PSD CH 149

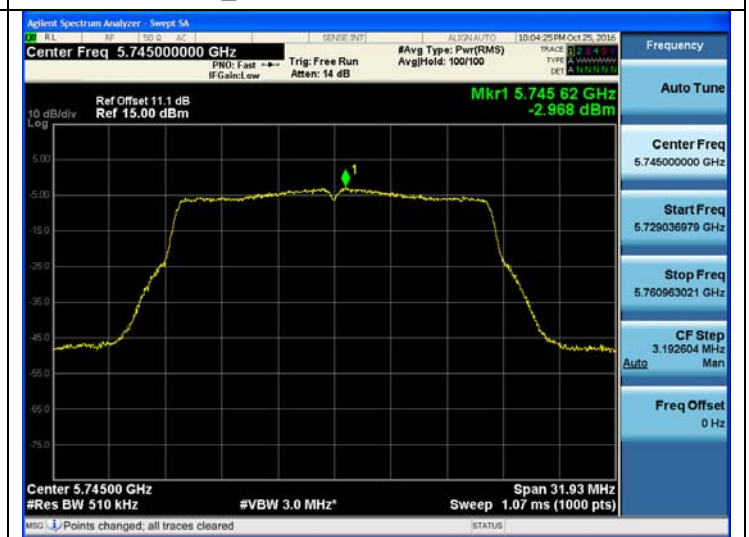


■802.11ac\_VHT20

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11ac_VHT20	-3.217	0.125	-3.092	11	Pass
5200	40		-3.191	0.125	-3.066		Pass
5240	48		-3.137	0.181	-2.956		Pass
5260	52		-1.725	0.181	-1.544	11	Pass
5300	60		-1.519	0.075	-1.444		Pass
5320	64		-1.377	0.075	-1.302		Pass
5500	100		-0.557	0.181	-0.376	11	Pass
5580	116		-1.198	0.181	-1.017		Pass
5720	144		-1.758	0.075	-1.683		Pass
5745	149		-3.055	0.125	-2.930	30	Pass
5785	157		-3.211	0.025	-3.186		Pass
5825	165		-3.338	0.125	-3.213		Pass

TEST Plot for 802.11ac\_VHT20

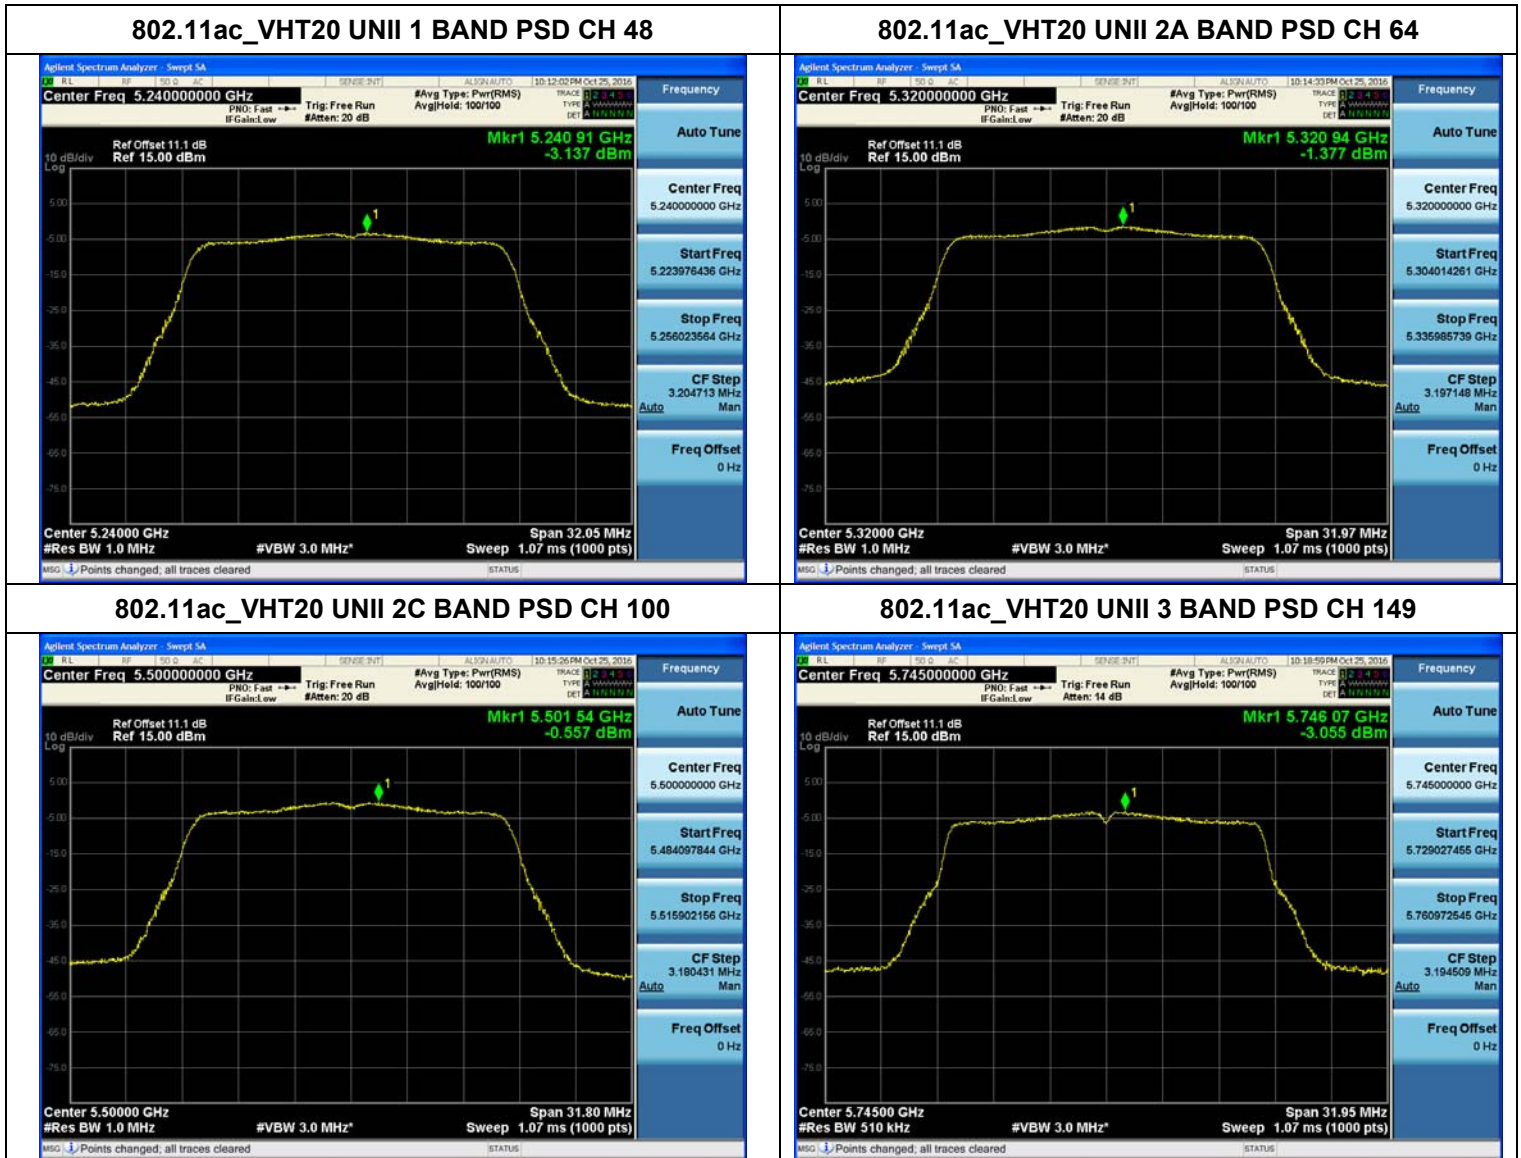

■ 802.11n\_HT40

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11n _HT40	-6.978	0.139	-6.839	11	Pass
5230	46		-6.655	0.286	-6.369		Pass
5270	54		-5.270	0.079	-5.191		Pass
5310	62		-5.055	0.258	-4.797		Pass
5510	102		-3.489	0.111	-3.378		Pass
5550	110		-3.670	0.111	-3.559		Pass
5710	142		-4.618	0.111	-4.507	Pass	
5755	151		-6.566	0.111	-6.455	30	Pass
5795	159		-6.714	0.079	-6.635		Pass

TEST Plot for 802.11n\_HT40


802.11n\_HT40 UNII 1 BAND PSD CH 46




802.11n\_HT40 UNII 2A BAND PSD CH 62



802.11n\_HT40 UNII 2C BAND PSD CH 102

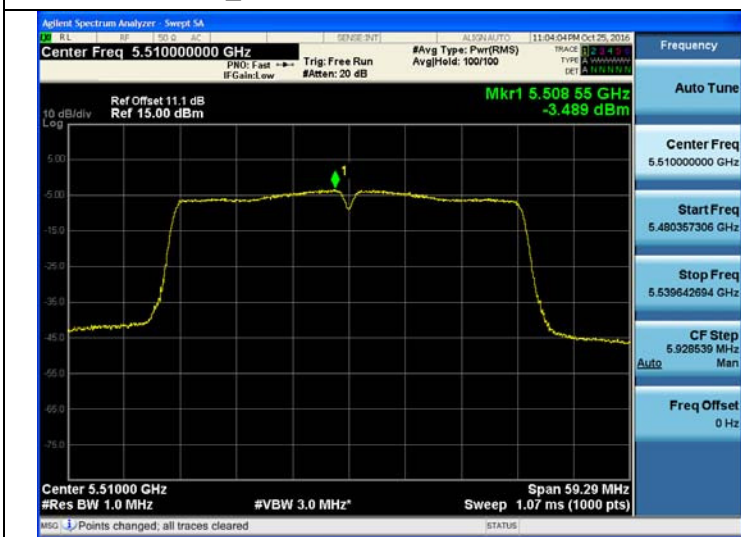

802.11n\_HT40 UNII 3 BAND PSD CH 151

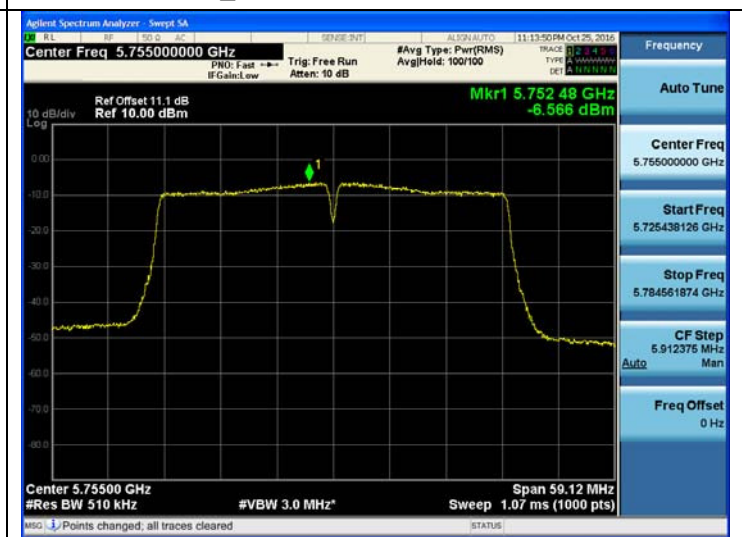




■ 802.11ac\_VHT40

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11ac_VHT40	-7.092	0.407	-6.685	11	Pass
5230	46		-6.393	0.040	-6.353		Pass
5270	54		-5.326	0.320	-5.006		Pass
5310	62		-4.800	0.040	-4.760		Pass
5510	102		-3.755	0.144	-3.611		Pass
5550	110		-3.547	0.040	-3.507		Pass
5710	142		-4.827	0.320	-4.507	Pass	
5755	151		-6.230	0.144	-6.086	30	Pass
5795	159		-7.086	0.407	-6.679		Pass

TEST Plot for 802.11ac\_VHT40

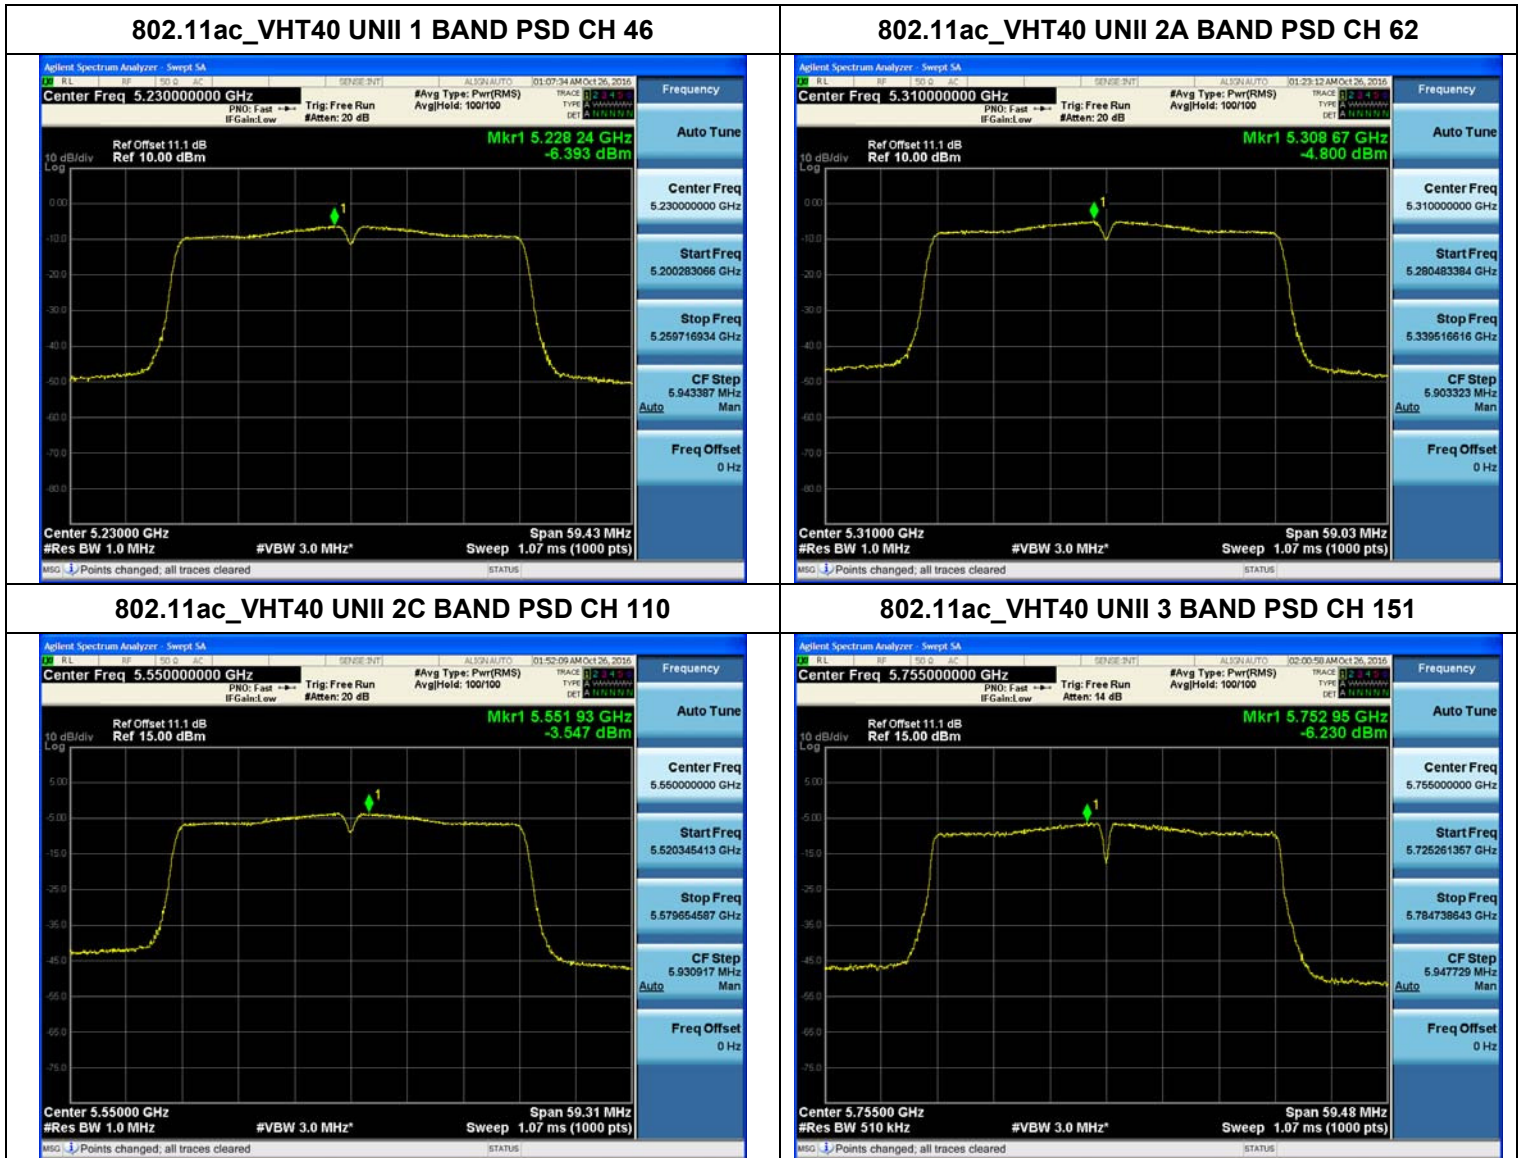

■ 802.11ac\_VHT80

■ TEST RESULTS

**Conducted Power Density Measurements**

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5210	42	802.11ac_VHT80	-10.395	0.393	-10.002	11	Pass
5290	58		-8.816	0.147	-8.669		Pass
5530	106		-7.491	0.393	-7.098		Pass
5690	138		-8.129	0.241	-7.888		Pass
5775	155		-11.418	0.241	-11.177	30	Pass

TEST Plot for 802.11ac\_VHT80


802.11ac\_VHT80 UNII 1 BAND PSD CH 42



802.11ac\_VHT80 UNII 2A BAND PSD CH 58



802.11ac\_VHT80 UNII 2C BAND PSD CH 106

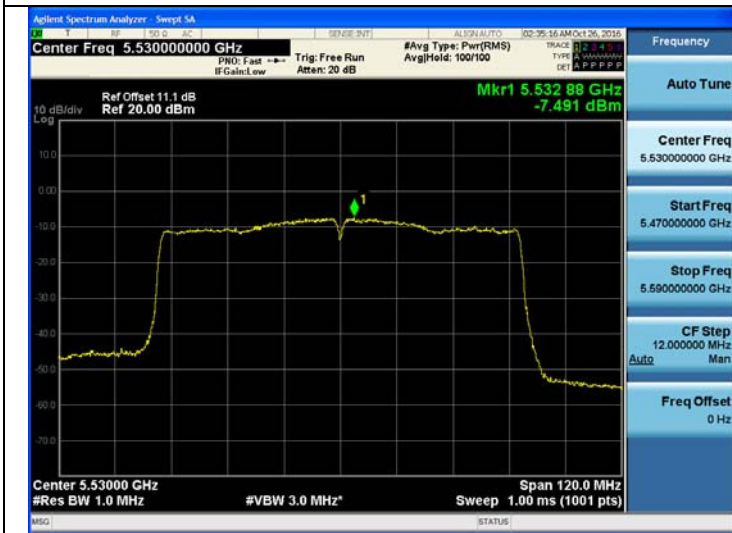

802.11ac\_VHT80 UNII 3 BAND PSD CH 155



■ **Straddle channels TEST RESULTS for 802.11a/n\_HT20/ac\_VHT20**

**Conducted Power Density Measurements (UNII 2C Band 5720MHz)**

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5720	144	802.11a	-0.603	0.036	-0.567	11	Pass
		802.11n	-1.480	0.201	-1.279	11	Pass
		802.11ac	-1.564	0.075	-1.489	11	Pass

**Conducted Power Density Measurements (UNII 3 Band 5720MHz)**

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5720	144	802.11a	-5.965	0.036	-5.929	30	Pass
		802.11n	-6.508	0.201	-6.307	30	Pass
		802.11ac	-6.822	0.075	-6.747	30	Pass

▣ Straddle channels TEST Plot for 802.11a/n\_HT20/ac\_VHT20

802.11a UNII 2C Band PSD CH.144



802.11a UNII 3 Band PSD CH.144




802.11n\_HT20 UNII 2C Band PSD CH.144



802.11n\_HT20 UNII 3 Band PSD CH.144



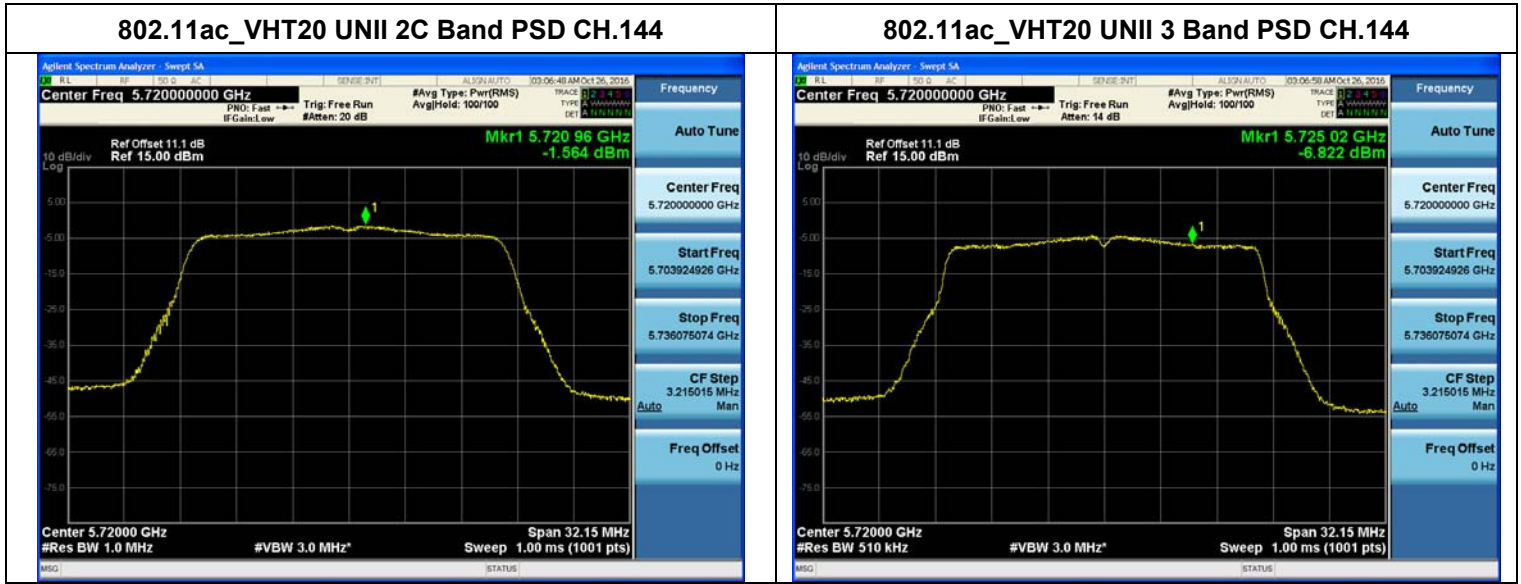

■ **Straddle channels TEST RESULTS for 802.11n\_HT40/ac\_VHT40**

**Conducted Power Density Measurements (UNII 2C Band 5710MHz)**


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5710	142	802.11n	-4.794	0.111	-4.683	11	Pass
		802.11ac	-4.889	0.320	-4.569	11	Pass

**Conducted Power Density Measurements (UNII 3 Band 5710MHz)**

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5710	142	802.11n	-10.340	0.111	-10.229	30	Pass
		802.11ac	-10.377	0.320	-10.057	30	Pass



▣ Straddle channels TEST Plot for 802.11n\_HT40/ac\_VHT40

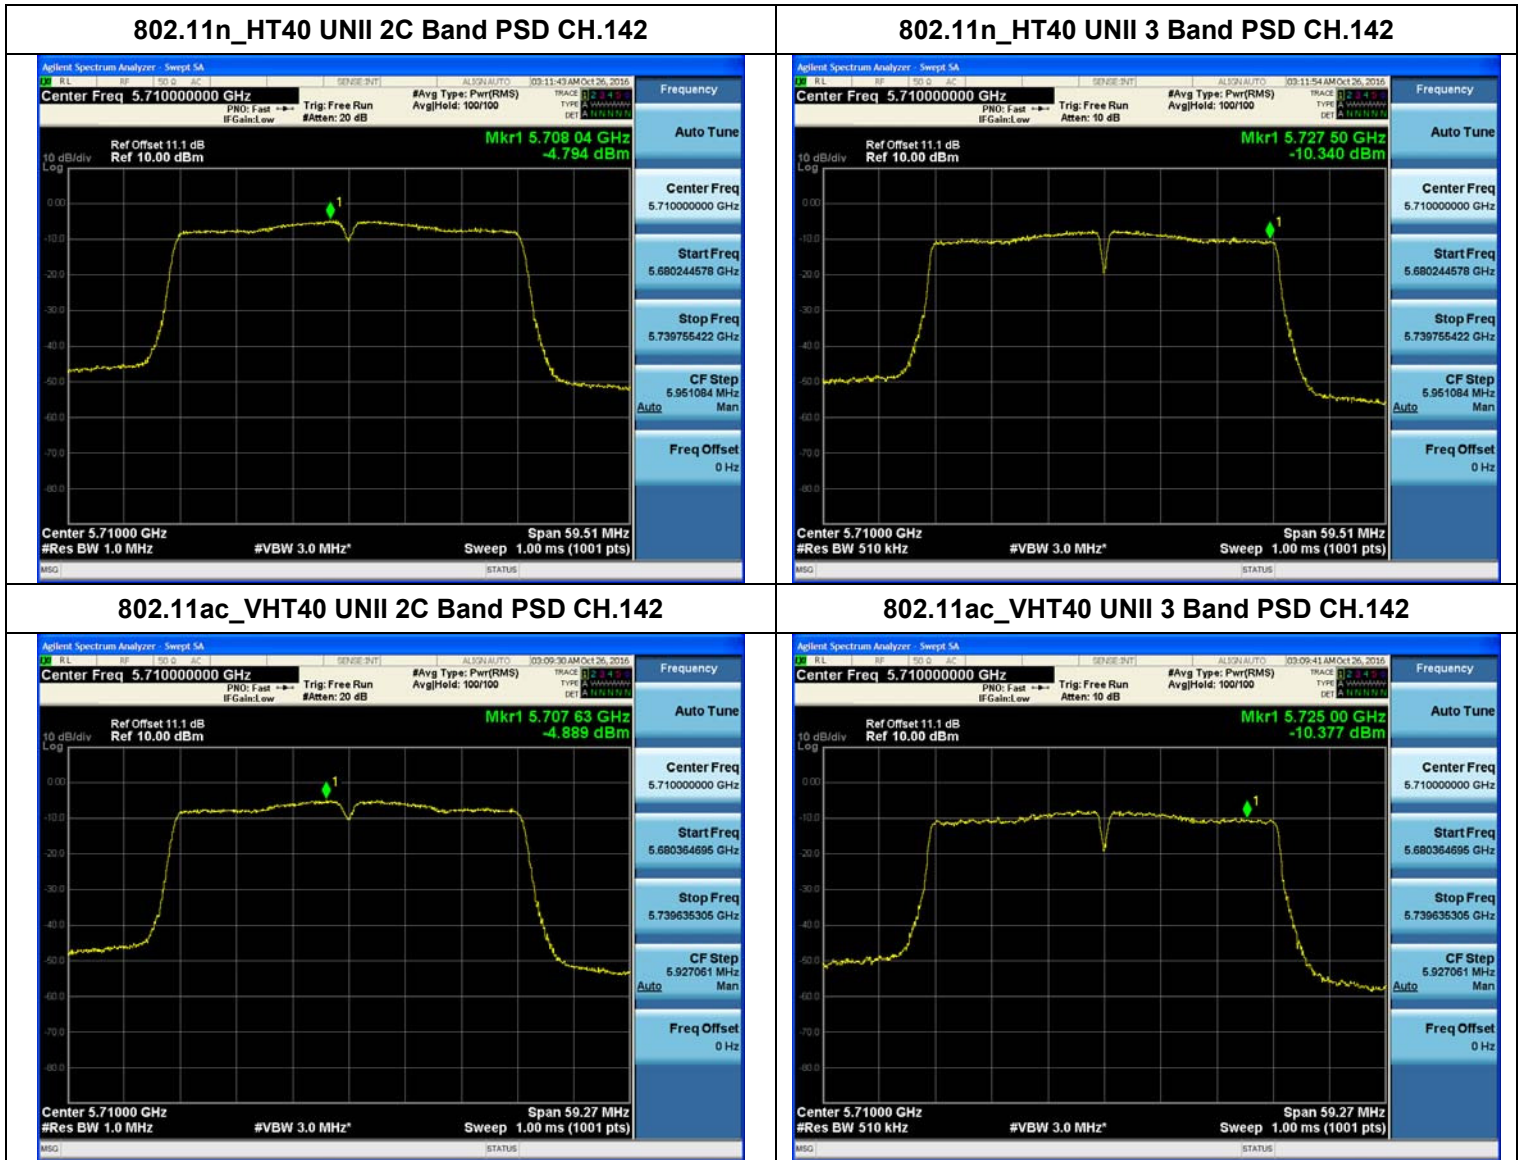

▣ Straddle channels TEST RESULTS


Conducted Power Density Measurements (UNII 2C Band 5690MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5690	138	802.11ac	-8.227	0.241	-7.986	11	Pass

Conducted Power Density Measurements (UNII 3 Band 5690MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5690	138	802.11ac	-14.211	0.241	-13.970	30	Pass

▣ Straddle channels TEST Plot for 802.11ac\_VHT80

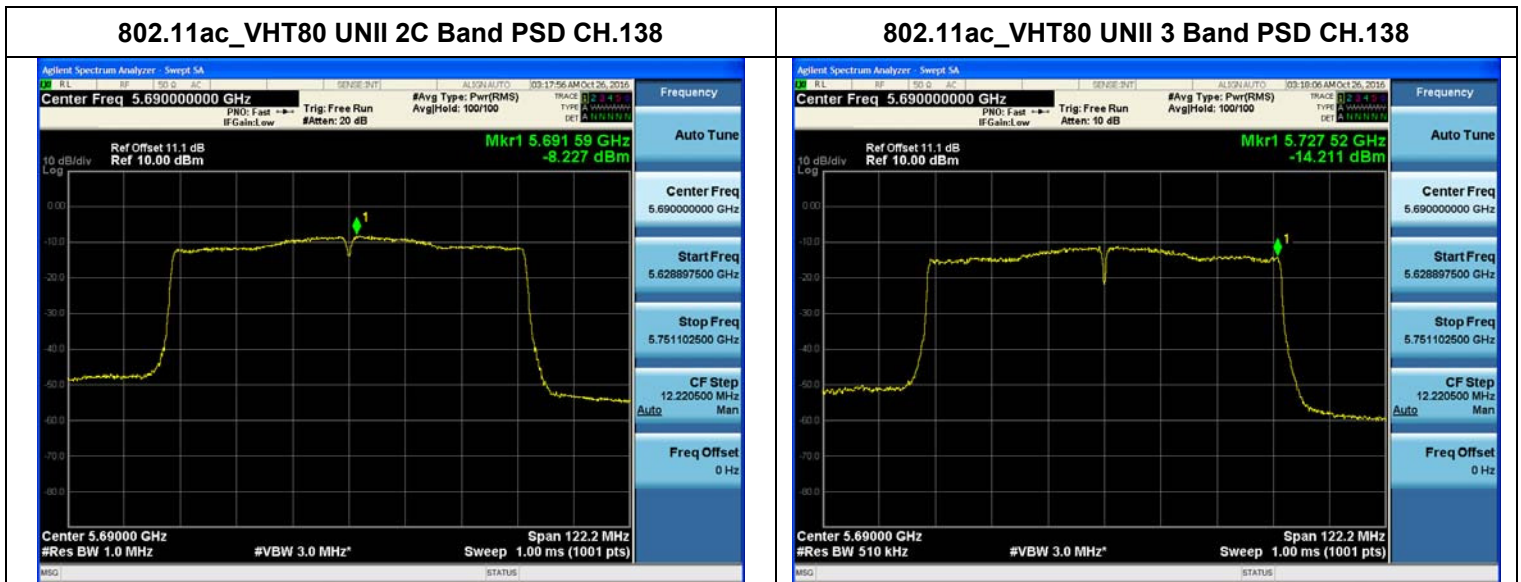

### 9.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

#### 20 MHz BW

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5179963.19	-36.81
100%		-30	5179948.77	-51.23
100%		-20	5179951.48	-48.52
100%		-10	5179955.38	-44.62
100%		0	5179959.37	-40.63
100%		+10	5179961.43	-38.57
100%		+30	5179966.88	-33.12
100%		+40	5179969.33	-30.67
100%		+50	5179972.06	-27.94
115%	4.40	+20	5179964.84	-35.16
Batt. Endpoint	3.60	+20	5179965.02	-34.98

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,260,000,000 Hz  
 CHANNEL: 52  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5259962.13	-37.87
100%		-30	5259948.86	-51.14
100%		-20	5259951.48	-48.52
100%		-10	5259955.38	-44.62
100%		0	5259959.11	-40.89
100%		+10	5259964.74	-35.26
100%		+30	5259967.52	-32.48
100%		+40	5259970.48	-29.52
100%		+50	5259972.51	-27.49
115%	4.40	+20	5259964.71	-35.29
Batt. Endpoint	3.60	+20	5259963.77	-36.23

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,500,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5499960.55	-39.45
100%		-30	5499946.64	-53.36
100%		-20	5499949.74	-50.26
100%		-10	5499952.49	-47.51
100%		0	5499956.71	-43.29
100%		+10	5499959.15	-40.85
100%		+30	5499965.44	-34.56
100%		+40	5499968.78	-31.22
100%		+50	5499971.12	-28.88
115%		4.40	+20	5499962.55
Batt. Endpoint	3.60	+20	5499960.49	-39.51

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,745,000,000 Hz  
 CHANNEL: 149  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5744958.88	-41.12
100%		-30	5744944.88	-55.12
100%		-20	5744948.74	-51.26
100%		-10	5744951.44	-48.56
100%		0	5744953.68	-46.32
100%		+10	5744956.80	-43.2
100%		+30	5744961.53	-38.47
100%		+40	5744964.38	-35.62
100%		+50	5744966.71	-33.29
115%		4.40	+20	5744959.81
Batt. Endpoint	3.60	+20	5744958.88	-41.12

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**40 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,190,000,000 Hz  
 CHANNEL: 38  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5189964.68	-35.32
100%		-30	5189949.88	-50.12
100%		-20	5189951.48	-48.52
100%		-10	5189954.33	-45.67
100%		0	5189956.06	-43.94
100%		+10	5189961.11	-38.89
100%		+30	5189967.85	-32.15
100%		+40	5189969.41	-30.59
100%		+50	5189971.23	-28.77
115%	4.40	+20	5189965.84	-34.16
Batt. Endpoint	3.60	+20	5189966.05	-33.95

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,270,000,000 Hz  
 CHANNEL: 54  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5269965.11	-34.89
100%		-30	5269948.89	-51.11
100%		-20	5269951.38	-48.62
100%		-10	5269953.72	-46.28
100%		0	5269955.89	-44.11
100%		+10	5269961.52	-38.48
100%		+30	5269968.85	-31.15
100%		+40	5269972.52	-27.48
100%		+50	5269974.85	-25.15
115%	4.40	+20	5269964.74	-35.26
Batt. Endpoint	3.60	+20	5269963.73	-36.27

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,510,000,000 Hz  
 CHANNEL: 102  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5509965.11	-34.89
100%		-30	5509949.88	-50.12
100%		-20	5509952.48	-47.52
100%		-10	5509956.81	-43.19
100%		0	5509959.78	-40.22
100%		+10	5509963.41	-36.59
100%		+30	5509967.85	-32.15
100%		+40	5509971.05	-28.95
100%		+50	5509973.53	-26.47
115%	4.40	+20	5509965.74	-34.26
Batt. Endpoint	3.60	+20	5509962.52	-37.48

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,755,000,000 Hz  
 CHANNEL: 151  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5754964.21	-35.79
100%		-30	5754950.41	-49.59
100%		-20	5754953.43	-46.57
100%		-10	5754956.82	-43.18
100%		0	5754958.88	-41.12
100%		+10	5754961.49	-38.51
100%		+30	5754966.72	-33.28
100%		+40	5754970.05	-29.95
100%		+50	5754971.16	-28.84
115%	4.40	+20	5754966.32	-33.68
Batt. Endpoint	3.60	+20	5754963.26	-36.74

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**80 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5209964.88	-35.12
100%		-30	5209948.88	-51.12
100%		-20	5209951.49	-48.51
100%		-10	5209954.73	-45.27
100%		0	5209958.85	-41.15
100%		+10	5209962.22	-37.78
100%		+30	5209965.81	-34.19
100%		+40	5209967.05	-32.95
100%		+50	5209970.44	-29.56
115%	4.40	+20	5209965.16	-34.84
Batt. Endpoint	3.60	+20	5209964.98	-35.02

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5289965.14	-34.86
100%		-30	5289949.86	-50.14
100%		-20	5289952.43	-47.57
100%		-10	5289954.98	-45.02
100%		0	5289958.38	-41.62
100%		+10	5289961.85	-38.15
100%		+30	5289967.38	-32.62
100%		+40	5289969.85	-30.15
100%		+50	5289969.90	-30.10
115%	4.40	+20	5289964.01	-35.99
Batt. Endpoint	3.60	+20	5289963.74	-36.26

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5529964.45	-35.55
100%		-30	5529950.05	-49.95
100%		-20	5529951.75	-48.25
100%		-10	5529953.88	-46.12
100%		0	5529956.85	-43.15
100%		+10	5529961.42	-38.58
100%		+30	5529966.74	-33.26
100%		+40	5529968.85	-31.15
100%		+50	5529970.41	-29.59
115%	4.40	+20	5529965.85	-34.15
Batt. Endpoint	3.60	+20	5529966.38	-33.62

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5774965.58	-34.42
100%		-30	5774948.87	-51.13
100%		-20	5774951.74	-48.26
100%		-10	5774954.78	-45.22
100%		0	5774957.16	-42.84
100%		+10	5774961.51	-38.49
100%		+30	5774966.05	-33.95
100%		+40	5774969.85	-30.15
100%		+50	5774971.49	-28.51
115%		4.40	+20	5774965.05
Batt. Endpoint	3.60	+20	5774964.88	-35.12

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 9.6 RADIATED MEASUREMENT

### 9.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### ■ §15.407, KDB 789033 D02

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBµV/m.


#### §15.407 (5)(b)(4)(i)

(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**Test Configuration**


**Below 30 MHz**

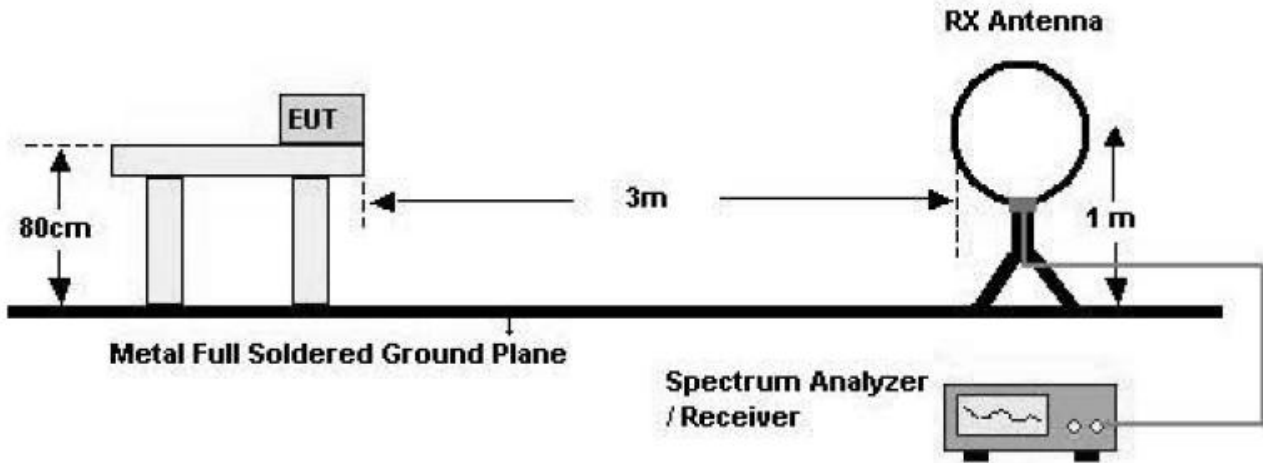

**30 MHz - 1 GHz**

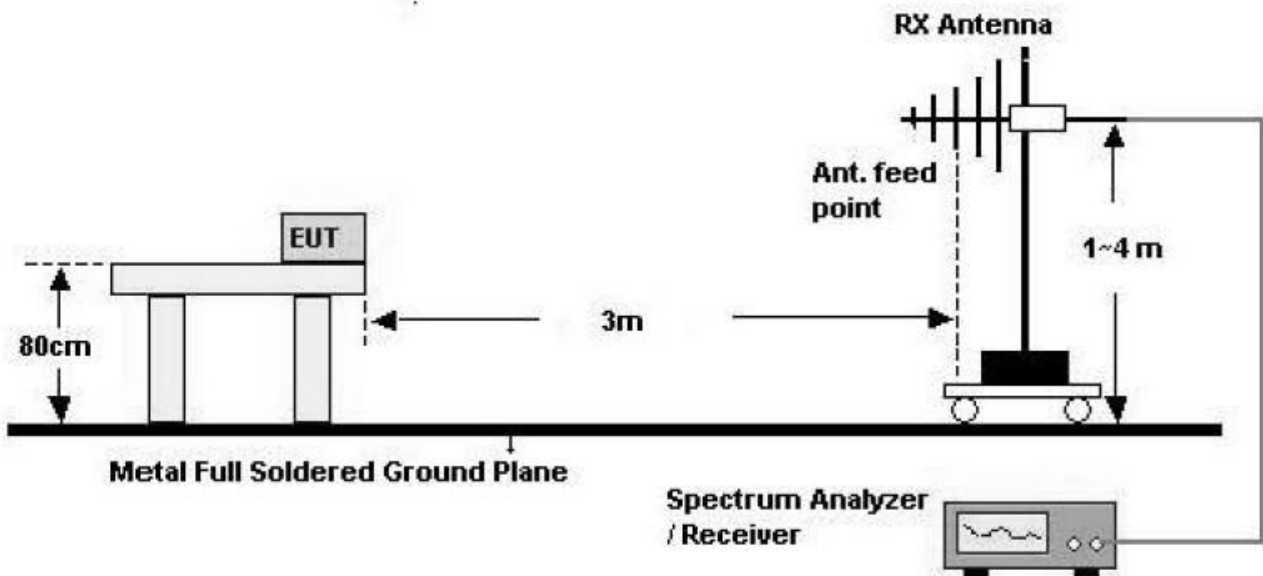

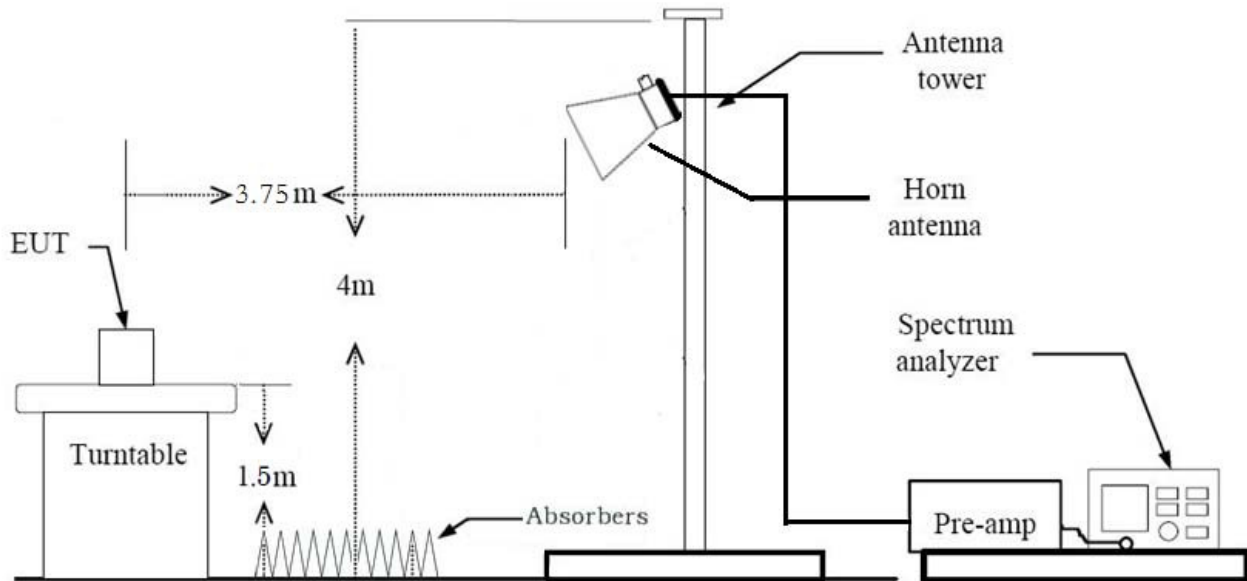

**Above 1 GHz****TEST PROCEDURE USED**

ANSI C63.10:2013

Method G)5) in KDB 789033 D02 v01r03 (Peak)

Method G)6)d) in KDB 789033 D02 v01r03 (Average)

## . Spectrum setting:

- Peak.

1. RBW = 1 MHz

2. VBW  $\geq$  3 MHz

3. Detector = Peak

4. Sweep Time = auto

5. Trace mode = max hold

6. Allow sweeps to continue until the trace stabilizes.

7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

- Average (Method VB :Averaging using reduced video bandwidth)

1. RBW = 1 MHz

2. VBW

2.1. If the EUT is configured to transmit with duty cycle  $\geq 98$  percent, set  $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.

2.2. If the EUT duty cycle is  $< 98$  percent, set  $VBW \geq 1/T$ , where T is the minimum transmission duration.

3. The analyzer is set to linear detector mode.

4. Detector = Peak.

5. Sweep time = auto.

6. Trace mode = max hold.

7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where x is the duty cycle.

**Note :**

1. We used the Method VB for 802.11a/n\_HT20, n\_HT40, ac\_VHT20, 40, 80 mode to perform the average filed strength measurements.

2. The actual setting value of VBW for 802.11a/n\_HT20, n\_HT40, ac\_VHT20, 40, 80

3. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).

4. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

Mode	Worst Data rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	2.787	2.810	99.18	359	1000
n_HT20	MCS 0	2.591	2.614	99.12	386	1000
ac_VHT20	MCS 0	2.607	2.622	99.43	384	1000
n_HT40	MCS 0	2.486	2.509	99.08	402	3000
ac_VHT40	MCS 0	2.486	2.509	99.08	402	3000
ac_VHT80	MCS 0	1.173	1.194	98.24	853	10000

**TEST RESULTS****9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distace extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**Above 1 GHz**

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	53.25	-2.75	V	50.50	68.20	17.70	PK
15540	52.73	-1.23	V	51.50	73.98	22.48	PK
15540	38.79	-1.23	V	37.56	53.98	16.42	AV
10360	53.60	-2.75	H	50.85	68.20	17.35	PK
15540	52.85	-1.23	H	51.62	73.98	22.36	PK
15540	39.05	-1.23	H	37.82	53.98	16.16	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	53.47	-2.60	V	50.87	68.20	17.33	PK
15600	52.48	-2.26	V	50.22	73.98	23.76	PK
15600	38.63	-2.26	V	36.37	53.98	17.61	AV
10400	53.89	-2.60	H	51.29	68.20	16.91	PK
15600	52.55	-2.26	H	50.29	73.98	23.69	PK
15600	38.71	-2.26	H	36.45	53.98	17.53	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	53.48	-3.54	V	49.94	68.20	18.26	PK
15720	52.51	-2.64	V	49.87	73.98	24.11	PK
15720	39.16	-2.64	V	36.52	53.98	17.46	AV
10480	54.10	-3.54	H	50.56	68.20	17.64	PK
15720	53.29	-2.64	H	50.65	73.98	23.33	PK
15720	39.24	-2.64	H	36.60	53.98	17.38	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	53.36	-2.75	V	50.61	68.20	17.59	PK
15540	52.67	-1.23	V	51.44	73.98	22.54	PK
15540	38.78	-1.23	V	37.55	53.98	16.43	AV
10360	53.56	-2.75	H	50.81	68.20	17.39	PK
15540	53.05	-1.23	H	51.82	73.98	22.16	PK
15540	38.99	-1.23	H	37.76	53.98	16.22	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	53.58	-2.60	V	50.98	68.20	17.22	PK
15600	52.42	-2.26	V	50.16	73.98	23.82	PK
15600	38.62	-2.26	V	36.36	53.98	17.62	AV
10400	53.85	-2.60	H	51.25	68.20	16.95	PK
15600	52.75	-2.26	H	50.49	73.98	23.49	PK
15600	38.65	-2.26	H	36.39	53.98	17.59	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	53.59	-3.54	V	50.05	68.20	18.15	PK
15720	52.45	-2.64	V	49.81	73.98	24.17	PK
15720	39.15	-2.64	V	36.51	53.98	17.47	AV
10480	54.06	-3.54	H	50.52	68.20	17.68	PK
15720	53.49	-2.64	H	50.85	73.98	23.13	PK
15720	39.18	-2.64	H	36.54	53.98	17.44	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	53.16	-2.75	V	50.41	68.20	17.79	PK
15540	52.93	-1.23	V	51.70	73.98	22.28	PK
15540	38.82	-1.23	V	37.59	53.98	16.39	AV
10360	53.63	-2.75	H	50.88	68.20	17.32	PK
15540	52.78	-1.23	H	51.55	73.98	22.43	PK
15540	39.15	-1.23	H	37.92	53.98	16.06	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	53.38	-2.60	V	50.78	68.20	17.42	PK
15600	52.68	-2.26	V	50.42	73.98	23.56	PK
15600	38.66	-2.26	V	36.40	53.98	17.58	AV
10400	53.92	-2.60	H	51.32	68.20	16.88	PK
15600	52.48	-2.26	H	50.22	73.98	23.76	PK
15600	38.81	-2.26	H	36.55	53.98	17.43	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	53.39	-3.54	V	49.85	68.20	18.35	PK
15720	52.71	-2.64	V	50.07	73.98	23.91	PK
15720	39.19	-2.64	V	36.55	53.98	17.43	AV
10480	54.13	-3.54	H	50.59	68.20	17.61	PK
15720	53.22	-2.64	H	50.58	73.98	23.40	PK
15720	39.34	-2.64	H	36.70	53.98	17.28	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	53.74	-2.74	V	51.00	68.20	17.20	PK
15570	52.33	-1.95	V	50.38	73.98	23.60	PK
15570	39.34	-1.95	V	37.39	53.98	16.59	AV
10380	54.27	-2.74	H	51.53	68.20	16.67	PK
15570	52.73	-1.95	H	50.78	73.98	23.20	PK
15570	39.51	-1.95	H	37.56	53.98	16.42	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	53.93	-3.07	V	50.86	68.20	17.34	PK
15690	52.59	-0.73	V	51.86	73.98	22.12	PK
15690	39.60	-0.73	V	38.87	53.98	15.11	AV
10460	54.58	-3.07	H	51.51	68.20	16.69	PK
15690	52.94	-0.73	H	52.21	73.98	21.77	PK
15690	39.86	-0.73	H	39.13	53.98	14.85	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	53.80	-2.74	V	51.06	68.20	17.14	PK
15570	52.24	-1.95	V	50.29	73.98	23.69	PK
15570	39.28	-1.95	V	37.33	53.98	16.65	AV
10380	54.12	-2.74	H	51.38	68.20	16.82	PK
15570	52.81	-1.95	H	50.86	73.98	23.12	PK
15570	39.57	-1.95	H	37.62	53.98	16.36	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	53.99	-3.07	V	50.92	68.20	17.28	PK
15690	52.50	-0.73	V	51.77	73.98	22.21	PK
15690	39.54	-0.73	V	38.81	53.98	15.17	AV
10460	54.43	-3.07	H	51.36	68.20	16.84	PK
15690	53.02	-0.73	H	52.29	73.98	21.69	PK
15690	39.92	-0.73	H	39.19	53.98	14.79	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 1
Operation Mode:	802.11ac_80 MHz BW
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	53.85	-2.88	V	50.97	68.20	17.23	PK
15630	52.05	-1.88	V	50.17	73.98	23.81	PK
15630	41.16	-1.88	V	39.28	53.98	14.70	AV
10420	54.12	-2.88	H	51.24	68.20	16.96	PK
15630	52.87	-1.88	H	50.99	73.98	22.99	PK
15630	41.33	-1.88	H	39.45	53.98	14.53	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT80. Worst case is MCS0 in 802.11ac\_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer MCS Index:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.46	-2.97	V	50.49	68.20	17.71	PK
15780	53.69	-1.86	V	51.83	73.98	22.15	PK
15780	39.35	-1.86	V	37.49	53.98	16.49	AV
10520	54.21	-2.97	H	51.24	68.20	16.96	PK
15780	53.14	-1.86	H	51.28	73.98	22.70	PK
15780	39.45	-1.86	H	37.59	53.98	16.39	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	52.91	-3.22	V	49.69	73.98	24.29	PK
10600	39.58	-3.22	V	36.36	53.98	17.62	AV
15900	52.58	-2.44	V	50.14	73.98	23.84	PK
15900	39.05	-2.44	V	36.61	53.98	17.37	AV
10600	53.45	-3.22	H	50.23	73.98	23.75	PK
10600	39.74	-3.22	H	36.52	53.98	17.46	AV
15900	52.69	-2.44	H	50.25	73.98	23.73	PK
15900	39.14	-2.44	H	36.70	53.98	17.28	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	53.41	-3.27	V	50.14	73.98	23.84	PK
10640	39.71	-3.27	V	36.44	53.98	17.54	AV
15960	51.50	-2.89	V	48.61	73.98	25.37	PK
15960	37.89	-2.89	V	35.00	53.98	18.98	AV
10640	53.58	-3.27	H	50.31	73.98	23.67	PK
10640	39.72	-3.27	H	36.45	53.98	17.53	AV
15960	52.04	-2.89	H	49.15	73.98	24.83	PK
15960	38.22	-2.89	H	35.33	53.98	18.65	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.57	-2.97	V	50.60	68.20	17.60	PK
15780	53.63	-1.86	V	51.77	73.98	22.21	PK
15780	39.34	-1.86	V	37.48	53.98	16.50	AV
10520	54.17	-2.97	H	51.20	68.20	17.00	PK
15780	53.34	-1.86	H	51.48	73.98	22.50	PK
15780	39.39	-1.86	H	37.53	53.98	16.45	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	53.02	-3.22	V	49.80	73.98	24.18	PK
10600	39.46	-3.22	V	36.24	53.98	17.74	AV
15900	52.52	-2.44	V	50.08	73.98	23.90	PK
15900	39.04	-2.44	V	36.60	53.98	17.38	AV
10600	53.41	-3.22	H	50.19	73.98	23.79	PK
10600	39.78	-3.22	H	36.56	53.98	17.42	AV
15900	52.89	-2.44	H	50.45	73.98	23.53	PK
15900	39.08	-2.44	H	36.64	53.98	17.34	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	53.52	-3.27	V	50.25	73.98	23.73	PK
10640	39.59	-3.27	V	36.32	53.98	17.66	AV
15960	51.44	-2.89	V	48.55	73.98	25.43	PK
15960	37.88	-2.89	V	34.99	53.98	18.99	AV
10640	53.54	-3.27	H	50.27	73.98	23.71	PK
10640	39.76	-3.27	H	36.49	53.98	17.49	AV
15960	52.24	-2.89	H	49.35	73.98	24.63	PK
15960	38.16	-2.89	H	35.27	53.98	18.71	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5260MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.37	-2.97	V	50.40	68.20	17.80	PK
15780	53.89	-1.86	V	52.03	73.98	21.95	PK
15780	39.38	-1.86	V	37.52	53.98	16.46	AV
10520	54.24	-2.97	H	51.27	68.20	16.93	PK
15780	53.07	-1.86	H	51.21	73.98	22.77	PK
15780	39.55	-1.86	H	37.69	53.98	16.29	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	52.82	-3.22	V	49.60	73.98	24.38	PK
10600	39.50	-3.22	V	36.28	53.98	17.70	AV
15900	52.78	-2.44	V	50.34	73.98	23.64	PK
15900	39.08	-2.44	V	36.64	53.98	17.34	AV
10600	53.48	-3.22	H	50.26	73.98	23.72	PK
10600	39.69	-3.22	H	36.47	53.98	17.51	AV
15900	52.62	-2.44	H	50.18	73.98	23.80	PK
15900	39.24	-2.44	H	36.80	53.98	17.18	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	53.32	-3.27	V	50.05	73.98	23.93	PK
10640	39.63	-3.27	V	36.36	53.98	17.62	AV
15960	51.70	-2.89	V	48.81	73.98	25.17	PK
15960	37.92	-2.89	V	35.03	53.98	18.95	AV
10640	53.61	-3.27	H	50.34	73.98	23.64	PK
10640	39.67	-3.27	H	36.40	53.98	17.58	AV
15960	51.97	-2.89	H	49.08	73.98	24.90	PK
15960	38.32	-2.89	H	35.43	53.98	18.55	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	53.78	-2.73	V	51.05	68.20	17.15	PK
15810	52.84	-2.52	V	50.32	73.98	23.66	PK
15810	39.83	-2.52	V	37.31	53.98	16.67	AV
10540	54.16	-2.73	H	51.43	68.20	16.77	PK
15810	53.35	-2.52	H	50.83	73.98	23.15	PK
15810	40.09	-2.52	H	37.57	53.98	16.41	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	53.50	-3.38	V	50.12	73.98	23.86	PK
10620	40.89	-3.38	V	37.51	53.98	16.47	AV
15930	51.43	-2.78	V	48.65	73.98	25.33	PK
15930	38.35	-2.78	V	35.57	53.98	18.41	AV
10620	53.89	-3.38	H	50.51	73.98	23.47	PK
10620	41.10	-3.38	H	37.72	53.98	16.26	AV
15930	52.41	-2.78	H	49.63	73.98	24.35	PK
15930	38.71	-2.78	H	35.93	53.98	18.05	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	53.84	-2.73	V	51.11	68.20	17.09	PK
15810	52.75	-2.52	V	50.23	73.98	23.75	PK
15810	39.77	-2.52	V	37.25	53.98	16.73	AV
10540	54.01	-2.73	H	51.28	68.20	16.92	PK
15810	53.43	-2.52	H	50.91	73.98	23.07	PK
15810	40.15	-2.52	H	37.63	53.98	16.35	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	53.56	-3.38	V	50.18	73.98	23.80	PK
10620	40.94	-3.38	V	37.56	53.98	16.42	AV
15930	51.34	-2.78	V	48.56	73.98	25.42	PK
15930	38.29	-2.78	V	35.51	53.98	18.47	AV
10620	53.74	-3.38	H	50.36	73.98	23.62	PK
10620	41.07	-3.38	H	37.69	53.98	16.29	AV
15930	52.49	-2.78	H	49.71	73.98	24.27	PK
15930	38.77	-2.78	H	35.99	53.98	17.99	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10580	52.27	-3.21	V	49.06	68.20	19.14	PK
15870	51.86	-2.62	V	49.24	73.98	24.74	PK
15870	40.04	-2.62	V	37.42	53.98	16.56	AV
10580	53.36	-3.21	H	50.15	68.20	18.05	PK
15870	51.98	-2.62	H	49.36	73.98	24.62	PK
15870	40.15	-2.62	H	37.53	53.98	16.45	AV

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT80. Worst case is MCS0 in 802.11ac\_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	52.95	-1.60	V	51.35	73.98	22.63	PK
11000	39.21	-1.60	V	37.61	53.98	16.37	AV
16500	51.81	-0.86	V	50.95	68.20	17.25	PK
11000	53.28	-1.60	H	51.68	73.98	22.30	PK
11000	39.29	-1.60	H	37.69	53.98	16.29	AV
16500	52.32	-0.86	H	51.46	68.20	16.74	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	52.37	-2.03	V	50.34	73.98	23.64	PK
11160	38.52	-2.03	V	36.49	53.98	17.49	AV
16740	52.21	0.18	V	52.39	68.20	15.81	PK
11160	53.34	-2.03	H	51.31	73.98	22.67	PK
11160	38.64	-2.03	H	36.61	53.98	17.37	AV
16740	52.73	0.18	H	52.91	68.20	15.29	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	52.92	-1.92	V	51.00	73.98	22.98	PK
11440	39.13	-1.92	V	37.21	53.98	16.77	AV
17160	51.44	2.19	V	53.63	68.20	14.57	PK
11440	53.37	-1.92	H	51.45	73.98	22.53	PK
11440	39.18	-1.92	H	37.26	53.98	16.72	AV
17160	51.89	2.19	H	54.08	68.20	14.12	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	53.06	-1.60	V	51.46	73.98	22.52	PK
11000	39.09	-1.60	V	37.49	53.98	16.49	AV
16500	51.75	-0.86	V	50.89	68.20	17.31	PK
11000	53.24	-1.60	H	51.64	73.98	22.34	PK
11000	39.33	-1.60	H	37.73	53.98	16.25	AV
16500	52.52	-0.86	H	51.66	68.20	16.54	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	52.48	-2.03	V	50.45	73.98	23.53	PK
11160	38.40	-2.03	V	36.37	53.98	17.61	AV
16740	52.15	0.18	V	52.33	68.20	15.87	PK
11160	53.30	-2.03	H	51.27	73.98	22.71	PK
11160	38.68	-2.03	H	36.65	53.98	17.33	AV
16740	52.93	0.18	H	53.11	68.20	15.09	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	53.03	-1.92	V	51.11	73.98	22.87	PK
11440	39.01	-1.92	V	37.09	53.98	16.89	AV
17160	51.38	2.19	V	53.57	68.20	14.63	PK
11440	53.33	-1.92	H	51.41	73.98	22.57	PK
11440	39.22	-1.92	H	37.30	53.98	16.68	AV
17160	52.09	2.19	H	54.28	68.20	13.92	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5500MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	52.86	-1.60	V	51.26	73.98	22.72	PK
11000	39.13	-1.60	V	37.53	53.98	16.45	AV
16500	52.01	-0.86	V	51.15	68.20	17.05	PK
11000	53.31	-1.60	H	51.71	73.98	22.27	PK
11000	39.24	-1.60	H	37.64	53.98	16.34	AV
16500	52.25	-0.86	H	51.39	68.20	16.81	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	52.28	-2.03	V	50.25	73.98	23.73	PK
11160	38.44	-2.03	V	36.41	53.98	17.57	AV
16740	52.41	0.18	V	52.59	68.20	15.61	PK
11160	53.37	-2.03	H	51.34	73.98	22.64	PK
11160	38.59	-2.03	H	36.56	53.98	17.42	AV
16740	52.66	0.18	H	52.84	68.20	15.36	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	52.83	-1.92	V	50.91	73.98	23.07	PK
11440	39.05	-1.92	V	37.13	53.98	16.85	AV
17160	51.64	2.19	V	53.83	68.20	14.37	PK
11440	53.40	-1.92	H	51.48	73.98	22.50	PK
11440	39.13	-1.92	H	37.21	53.98	16.77	AV
17160	51.82	2.19	H	54.01	68.20	14.19	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	53.10	-1.98	V	51.12	73.98	22.86	PK
11020	40.95	-1.98	V	38.97	53.98	15.01	AV
16530	51.87	-1.57	V	50.30	68.20	17.90	PK
11020	53.67	-1.98	H	51.69	73.98	22.29	PK
11020	41.35	-1.98	H	39.37	53.98	14.61	AV
16530	52.58	-1.57	H	51.01	68.20	17.19	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5550 MHz
Channel No.	110 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11100	53.04	-2.32	V	50.72	73.98	23.26	PK
11100	40.29	-2.32	V	37.97	53.98	16.01	AV
16650	52.66	-1.17	V	51.49	68.20	16.71	PK
11100	53.62	-2.32	H	51.30	73.98	22.68	PK
11100	40.48	-2.32	H	38.16	53.98	15.82	AV
16650	53.14	-1.17	H	51.97	68.20	16.23	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	53.20	-2.23	V	50.97	73.98	23.01	PK
11420	40.94	-2.23	V	38.71	53.98	15.27	AV
17130	52.39	1.75	V	54.14	68.20	14.06	PK
11420	53.81	-2.23	H	51.58	73.98	22.40	PK
11420	41.05	-2.23	H	38.82	53.98	15.16	AV
17130	52.50	1.75	H	54.25	68.20	13.95	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	53.16	-1.98	V	51.18	73.98	22.80	PK
11020	41.00	-1.98	V	39.02	53.98	14.96	AV
16530	51.78	-1.57	V	50.21	68.20	17.99	PK
11020	53.52	-1.98	H	51.54	73.98	22.44	PK
11020	41.32	-1.98	H	39.34	53.98	14.64	AV
16530	52.66	-1.57	H	51.09	68.20	17.11	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5550 MHz
Channel No.	110 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11100	53.10	-2.32	V	50.78	73.98	23.20	PK
11100	40.34	-2.32	V	38.02	53.98	15.96	AV
16650	52.57	-1.17	V	51.40	68.20	16.80	PK
11100	53.47	-2.32	H	51.15	73.98	22.83	PK
11100	40.45	-2.32	H	38.13	53.98	15.85	AV
16650	53.22	-1.17	H	52.05	68.20	16.15	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	53.26	-2.23	V	51.03	73.98	22.95	PK
11420	40.99	-2.23	V	38.76	53.98	15.22	AV
17130	52.30	1.75	V	54.05	68.20	14.15	PK
11420	53.66	-2.23	H	51.43	73.98	22.55	PK
11420	41.02	-2.23	H	38.79	53.98	15.19	AV
17130	52.58	1.75	H	54.33	68.20	13.87	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11060	52.94	-2.21	V	50.73	73.98	23.25	PK
11060	41.13	-2.21	V	38.92	53.98	15.06	AV
16590	52.00	-0.60	V	51.40	68.20	16.80	PK
11060	53.39	-2.21	H	51.18	73.98	22.80	PK
11060	41.35	-2.21	H	39.14	53.98	14.84	AV
16590	52.35	-0.60	H	51.75	68.20	16.45	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT80. Worst case is MCS0 in 802.11ac\_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 2C
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5690 MHz
Channel No.	138 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11380	53.08	-2.08	V	51.00	73.98	22.98	PK
11380	41.30	-2.08	V	39.22	53.98	14.76	AV
17070	50.94	1.67	V	52.61	68.20	15.59	PK
11380	53.51	-2.08	H	51.43	73.98	22.55	PK
11380	41.68	-2.08	H	39.60	53.98	14.38	AV
17070	51.38	1.67	H	53.05	68.20	15.15	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT80. Worst case is MCS0 in 802.11ac\_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	53.52	-2.50	V	51.02	73.98	22.96	PK
11490	39.65	-2.50	V	37.15	53.98	16.83	AV
17235	51.81	3.09	V	54.90	68.20	13.30	PK
11490	53.77	-2.50	H	51.27	73.98	22.71	PK
11490	39.73	-2.50	H	37.23	53.98	16.75	AV
17235	52.32	3.09	H	55.41	68.20	12.79	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	52.90	-2.87	V	50.03	73.98	23.95	PK
11570	39.40	-2.87	V	36.53	53.98	17.45	AV
17355	50.25	3.45	V	53.70	68.20	14.50	PK
11570	53.88	-2.87	H	51.01	73.98	22.97	PK
11570	39.52	-2.87	H	36.65	53.98	17.33	AV
17355	51.53	3.45	H	54.98	68.20	13.22	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	52.93	-2.84	V	50.09	73.98	23.89	PK
11650	39.37	-2.84	V	36.53	53.98	17.45	AV
17475	51.26	5.68	V	56.94	68.20	11.26	PK
11650	53.71	-2.84	H	50.87	73.98	23.11	PK
11650	39.75	-2.84	H	36.91	53.98	17.07	AV
17475	52.15	5.68	H	57.83	68.20	10.37	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	53.63	-2.50	V	51.13	73.98	22.85	PK
11490	39.53	-2.50	V	37.03	53.98	16.95	AV
17235	51.74	3.09	V	54.83	68.20	13.37	PK
11490	53.73	-2.50	H	51.23	73.98	22.75	PK
11490	39.77	-2.50	H	37.27	53.98	16.71	AV
17235	52.52	3.09	H	55.61	68.20	12.59	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	53.01	-2.87	V	50.14	73.98	23.84	PK
11570	39.28	-2.87	V	36.41	53.98	17.57	AV
17355	50.19	3.45	V	53.64	68.20	14.56	PK
11570	53.84	-2.87	H	50.97	73.98	23.01	PK
11570	39.56	-2.87	H	36.69	53.98	17.29	AV
17355	51.73	3.45	H	55.18	68.20	13.02	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	53.04	-2.84	V	50.20	73.98	23.78	PK
11650	39.25	-2.84	V	36.41	53.98	17.57	AV
17475	50.54	5.68	V	56.22	68.20	11.98	PK
11650	53.67	-2.84	H	50.83	73.98	23.15	PK
11650	39.79	-2.84	H	36.95	53.98	17.03	AV
17475	51.37	5.68	H	57.05	68.20	11.15	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT20. Worst case is MCS0 in 802.11n\_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	53.43	-2.50	V	50.93	73.98	23.05	PK
11490	39.57	-2.50	V	37.07	53.98	16.91	AV
17235	52.00	3.09	V	55.09	68.20	13.11	PK
11490	53.80	-2.50	H	51.30	73.98	22.68	PK
11490	39.68	-2.50	H	37.18	53.98	16.80	AV
17235	52.25	3.09	H	55.34	68.20	12.86	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)



Band :	UNII 3
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	52.81	-2.87	V	49.94	73.98	24.04	PK
11570	39.32	-2.87	V	36.45	53.98	17.53	AV
17355	50.45	3.45	V	53.90	68.20	14.30	PK
11570	53.91	-2.87	H	51.04	73.98	22.94	PK
11570	39.47	-2.87	H	36.60	53.98	17.38	AV
17355	51.46	3.45	H	54.91	68.20	13.29	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	52.84	-2.84	V	50.00	73.98	23.98	PK
11650	39.29	-2.84	V	36.45	53.98	17.53	AV
17475	51.30	5.68	V	56.98	68.20	11.22	PK
11650	53.74	-2.84	H	50.90	73.98	23.08	PK
11650	39.70	-2.84	H	36.86	53.98	17.12	AV
17475	52.08	5.68	H	57.76	68.20	10.44	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT20. Worst case is MCS0 in 802.11ac\_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII3
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	53.69	-2.55	V	51.14	73.98	22.84	PK
11510	40.62	-2.55	V	38.07	53.98	15.91	AV
17265	51.18	3.10	V	54.28	68.20	13.92	PK
11510	53.91	-2.55	H	51.36	73.98	22.62	PK
11510	40.85	-2.55	H	38.30	53.98	15.68	AV
17265	51.65	3.10	H	54.75	68.20	13.45	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	53.69	-3.29	V	50.40	73.98	23.58	PK
11590	40.93	-3.29	V	37.64	53.98	16.34	AV
17385	51.08	4.19	V	55.27	68.20	12.93	PK
11590	53.90	-3.29	H	50.61	73.98	23.37	PK
11590	41.15	-3.29	H	37.86	53.98	16.12	AV
17385	51.73	4.19	H	55.92	68.20	12.28	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_HT40. Worst case is MCS0 in 802.11n\_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	53.75	-2.55	V	51.20	73.98	22.78	PK
11510	40.67	-2.55	V	38.12	53.98	15.86	AV
17265	51.09	3.10	V	54.19	68.20	14.01	PK
11510	53.76	-2.55	H	51.21	73.98	22.77	PK
11510	40.82	-2.55	H	38.27	53.98	15.71	AV
17265	51.73	3.10	H	54.83	68.20	13.37	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	53.75	-3.29	V	50.46	73.98	23.52	PK
11590	40.98	-3.29	V	37.69	53.98	16.29	AV
17385	51.35	4.19	V	55.54	68.20	12.66	PK
11590	53.75	-3.29	H	50.46	73.98	23.52	PK
11590	41.12	-3.29	H	37.83	53.98	16.15	AV
17385	51.61	4.19	H	55.80	68.20	12.40	PK

\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT40. Worst case is MCS0 in 802.11ac\_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5775 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11550	52.62	-2.71	V	49.91	73.98	24.07	PK
11550	41.23	-2.71	V	38.52	53.98	15.46	AV
17325	51.68	3.44	V	55.12	68.20	13.08	PK
11550	52.97	-2.71	H	50.26	73.98	23.72	PK
11550	41.54	-2.71	H	38.83	53.98	15.15	AV
17325	52.09	3.44	H	55.53	68.20	12.67	PK


\*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_VHT80. Worst case is MCS0 in 802.11ac\_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)


■ **RESULT PLOTS**

**Radiated Spurious Emissions plot –Peak Reading (802.11a, Ch.165 3rd Harmonic, X-H)**

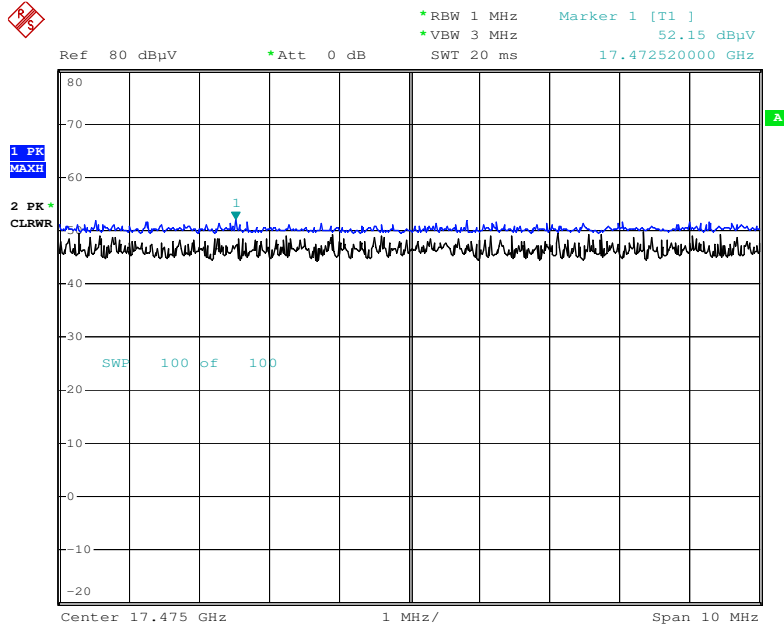

Date: 8.NOV.2016 16:29:29


**Radiated Spurious Emissions plot – Peak Reading(802.11n\_HT20, Ch.165 3rd Harmonic, X-H)**

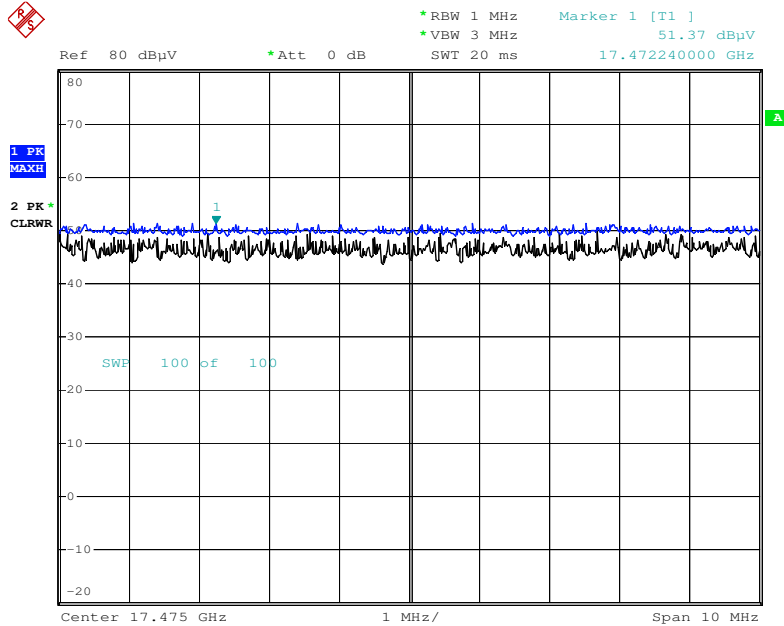

Date: 8.NOV.2016 16:28:43




**Radiated Spurious Emissions plot – Peak Reading (802.11ac\_VHT20, Ch.165 3rd Harmonic, X-H)**

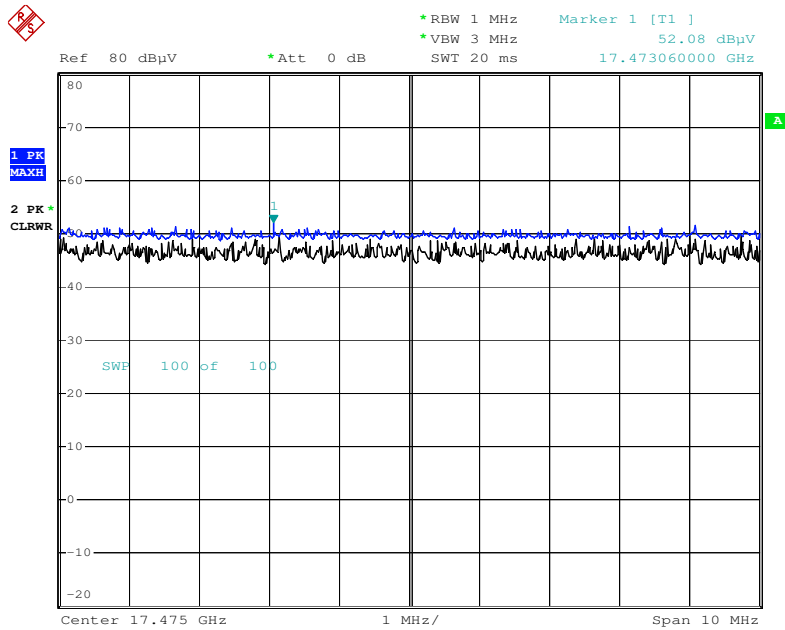


Date: 8.NOV.2016 16:28:06

**Radiated Spurious Emissions plot – Peak Reading (802.11n\_HT40, Ch.159 3rd Harmonic, X-H)**

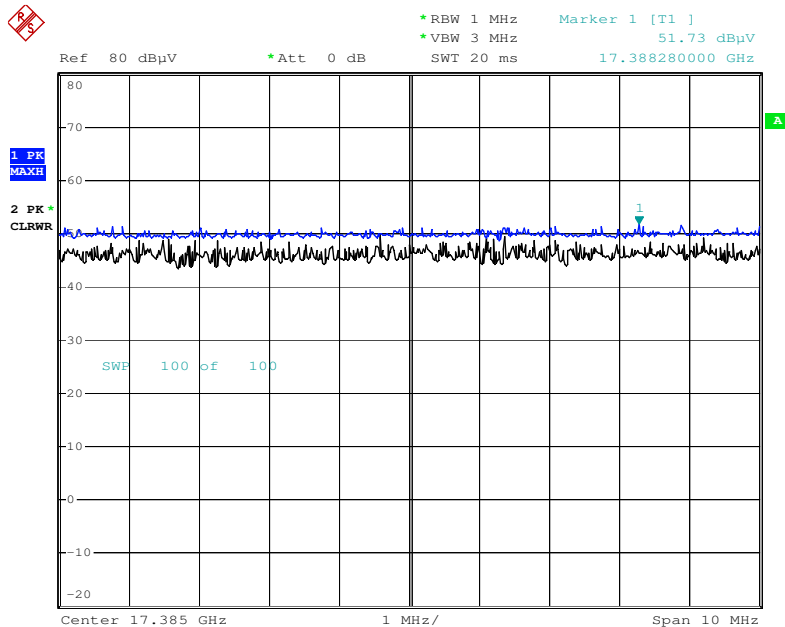


Date: 8.NOV.2016 16:27:31

**Radiated Spurious Emissions plot –Peak Reading (802.11ac\_VHT40, Ch.159 3rd Harmonic, X-H)**

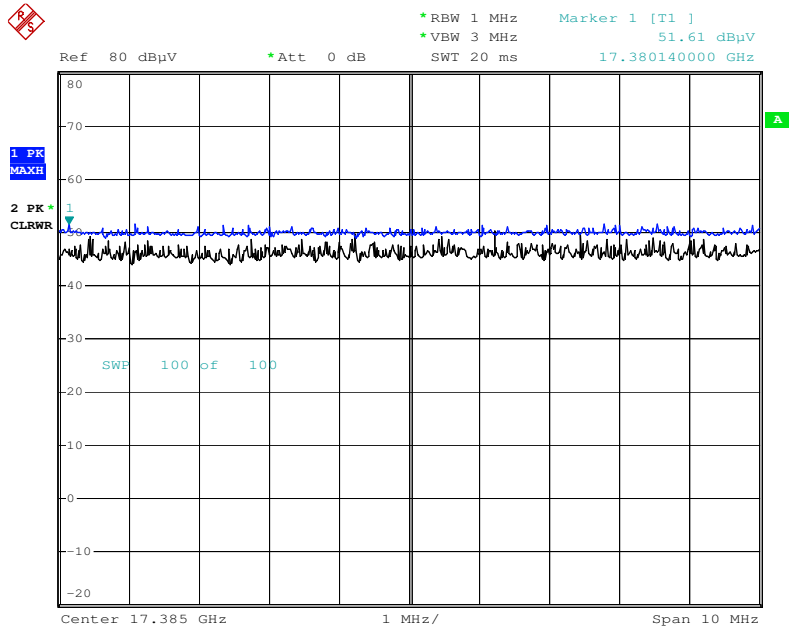

Date: 8.NOV.2016 16:26:48

**Radiated Spurious Emissions plot –Peak Reading (802.11ac\_VHT80, Ch.155 3rd Harmonic, X-H)**

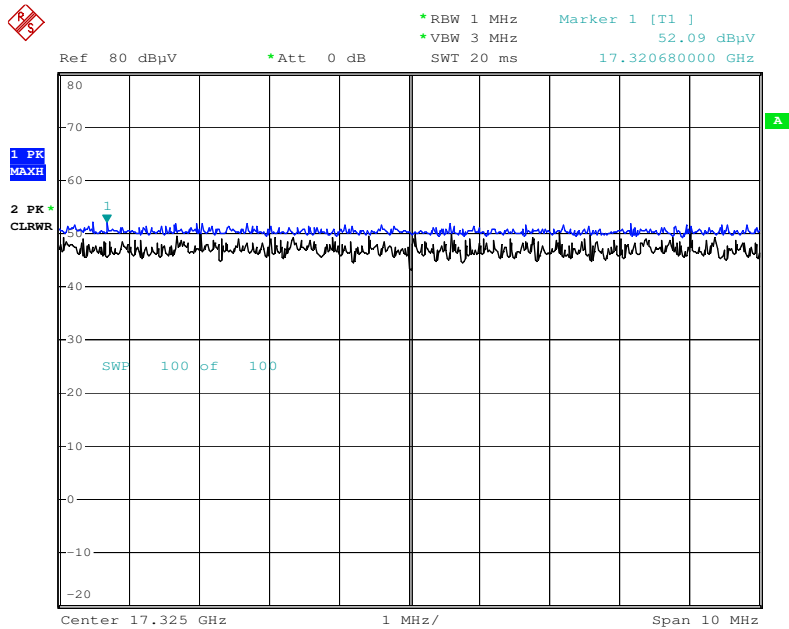

Date: 8.NOV.2016 16:25:24

**Note : Only the worst case plots for Radiated Spurious Emissions.**

## 9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.407, §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	50.64	2.81	H	53.45	73.98	20.53	PK
5150	38.08	2.81	H	40.89	53.98	13.09	AV
5150	50.08	2.81	V	52.89	73.98	21.09	PK
5150	37.98	2.81	V	40.79	53.98	13.19	AV

Band : UNII 1  
 Operation Mode: 802.11 n\_HT20  
 Transfer MCS Index: 0  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	52.79	2.81	H	55.60	73.98	18.38	PK
5150	38.34	2.81	H	41.15	53.98	12.83	AV
5150	52.28	2.81	V	55.09	73.98	18.89	PK
5150	38.06	2.81	V	40.87	53.98	13.11	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_VHT20  
 Transfer MCS Index: 0  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	51.37	2.81	H	54.18	73.98	19.80	PK
5150	37.99	2.81	H	40.8	53.98	13.18	AV
5150	50.80	2.81	V	53.61	73.98	20.37	PK
5150	37.67	2.81	V	40.48	53.98	13.50	AV

Band : UNII 1  
 Operation Mode: 802.11 n\_HT40  
 Transfer MCS Index: 0  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.09	2.81	H	58.90	73.98	15.08	PK
5150	41.94	2.81	H	44.75	53.98	9.23	AV
5150	55.10	2.81	V	57.91	73.98	16.07	PK
5150	41.35	2.81	V	44.16	53.98	9.82	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_VHT40  
 Transfer MCS Index: 0  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	57.11	2.81	H	59.92	73.98	14.06	PK
5150	41.83	2.81	H	44.64	53.98	9.34	AV
5150	56.35	2.81	V	59.16	73.98	14.82	PK
5150	41.39	2.81	V	44.2	53.98	9.78	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_VHT80  
 Transfer MCS Index: 0  
 Operating Frequency 5210 MHz  
 Channel No. 42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	57.93	2.81	H	60.74	73.98	13.24	PK
5150	43.10	2.81	H	45.91	53.98	8.07	AV
5150	57.30	2.81	V	60.11	73.98	13.87	PK
5150	42.62	2.81	V	45.43	53.98	8.55	AV

Band : UNII 2A  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	50.81	3.86	H	54.67	73.98	19.31	PK
5350	37.55	3.86	H	41.41	53.98	12.57	AV
5350	50.09	3.86	V	53.95	73.98	20.03	PK
5350	37.29	3.86	V	41.15	53.98	12.83	AV

Band : UNII 2A  
 Operation Mode: 802.11 n\_HT20  
 Transfer MCS Index: 0  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	51.04	3.86	H	54.90	73.98	19.08	PK
5350	37.42	3.86	H	41.28	53.98	12.70	AV
5350	50.36	3.86	V	54.22	73.98	19.76	PK
5350	37.24	3.86	V	41.1	53.98	12.88	AV

Band : UNII 2A  
 Operation Mode: 802.11 ac\_VHT20  
 Transfer MCS Index: 0  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	50.97	3.86	H	54.83	73.98	19.15	PK
5350	37.55	3.86	H	41.41	53.98	12.57	AV
5350	50.44	3.86	V	54.3	73.98	19.68	PK
5350	37.36	3.86	V	41.22	53.98	12.76	AV

Band : UNII 2A  
 Operation Mode: 802.11 n\_HT40  
 Transfer MCS Index: 0  
 Operating Frequency 5310 MHz  
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	55.46	3.86	H	59.32	73.98	14.66	PK
5350	39.81	3.86	H	43.67	53.98	10.31	AV
5350	54.39	3.86	V	58.25	73.98	15.73	PK
5350	39.34	3.86	V	43.2	53.98	10.78	AV

Band : UNII 2A  
 Operation Mode: 802.11 ac\_VHT40  
 Transfer MCS Index: 0  
 Operating Frequency 5310 MHz  
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.51	3.86	H	58.37	73.98	15.61	PK
5350	39.20	3.86	H	43.06	53.98	10.92	AV
5350	53.89	3.86	V	57.75	73.98	16.23	PK
5350	38.74	3.86	V	42.6	53.98	11.38	AV



Band : UNII 2A  
 Operation Mode: 802.11 ac\_VHT80  
 Transfer MCS Index: 0  
 Operating Frequency 5290 MHz  
 Channel No. 58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.26	3.86	H	58.12	73.98	15.86	PK
5350	39.77	3.86	H	43.63	53.98	10.35	AV
5350	53.39	3.86	V	57.25	73.98	16.73	PK
5350	39.24	3.86	V	43.1	53.98	10.88	AV

Band : UNII 2C  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	49.46	5.10	H	54.56	73.98	19.42	PK
5460	36.03	5.10	H	41.13	53.98	12.85	AV
*5470	50.94	5.18	H	56.12	68.20	12.08	PK
5460	49.26	5.10	V	54.36	73.98	19.62	PK
5460	35.73	5.10	V	40.83	53.98	13.15	AV
*5470	50.20	5.18	V	55.38	68.20	12.82	PK

Band : UNII 2C  
 Operation Mode: 802.11 n\_HT20  
 Transfer MCS Index: 0  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	50.02	5.10	H	55.12	73.98	18.86	PK
5460	36.01	5.10	H	41.11	53.98	12.87	AV
*5470	52.21	5.18	H	57.39	68.20	10.81	PK
5460	49.75	5.10	V	54.85	73.98	19.13	PK
5460	35.67	5.10	V	40.77	53.98	13.21	AV
*5470	51.45	5.18	V	56.63	68.20	11.57	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_VHT20  
 Transfer MCS Index: 0  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	49.91	5.10	H	55.01	73.98	18.97	PK
5460	36.03	5.10	H	41.13	53.98	12.85	AV
*5470	53.63	5.18	H	58.81	68.20	9.39	PK
5460	49.71	5.10	V	54.81	73.98	19.17	PK
5460	35.83	5.10	V	40.93	53.98	13.05	AV
*5470	53.08	5.18	V	58.26	68.20	9.94	PK

Band : UNII 2C  
 Operation Mode: 802.11 n\_HT40  
 Transfer MCS Index: 0  
 Operating Frequency 5510 MHz  
 Channel No. 102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	51.19	5.10	H	56.29	73.98	17.69	PK
5460	36.94	5.10	H	42.04	53.98	11.94	AV
*5470	58.66	5.18	H	63.84	68.20	4.36	PK
5460	50.66	5.10	V	55.76	73.98	18.22	PK
5460	36.51	5.10	V	41.61	53.98	12.37	AV
*5470	57.65	5.18	V	62.83	68.20	5.37	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_VHT40  
 Transfer MCS Index: 0  
 Operating Frequency 5510 MHz  
 Channel No. 102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	51.13	5.10	H	56.23	73.98	17.75	PK
5460	36.38	5.10	H	41.48	53.98	12.50	AV
*5470	57.40	5.18	H	62.58	68.20	5.62	PK
5460	50.28	5.10	V	55.38	73.98	18.60	PK
5460	36.21	5.10	V	41.31	53.98	12.67	AV
*5470	56.74	5.18	V	61.92	68.20	6.28	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_VHT80  
 Transfer MCS Index: 0  
 Operating Frequency 5530 MHz  
 Channel No. 106 Ch


Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.83	5.10	H	59.93	73.98	14.05	PK
5460	39.78	5.10	H	44.88	53.98	9.10	AV
*5470	56.59	5.18	H	61.77	68.20	6.43	PK
5460	54.23	5.10	V	59.33	73.98	14.65	PK
5460	39.29	5.10	V	44.39	53.98	9.59	AV
*5470	55.80	5.18	V	60.98	68.20	7.22	PK

**Notes:**

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT + D.F.
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “\*” is radiated band edge test frequency.(not restricted band emissions)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor


■ RESULT PLOTS

**Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.100, X-H)**

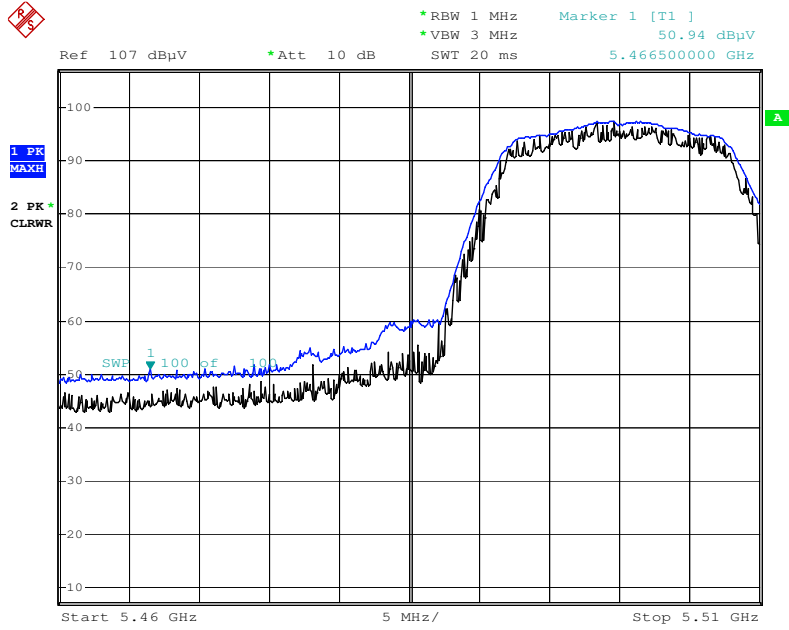


Date: 24.OCT.2016 16:15:22

**Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20, Ch.100, X-H)**

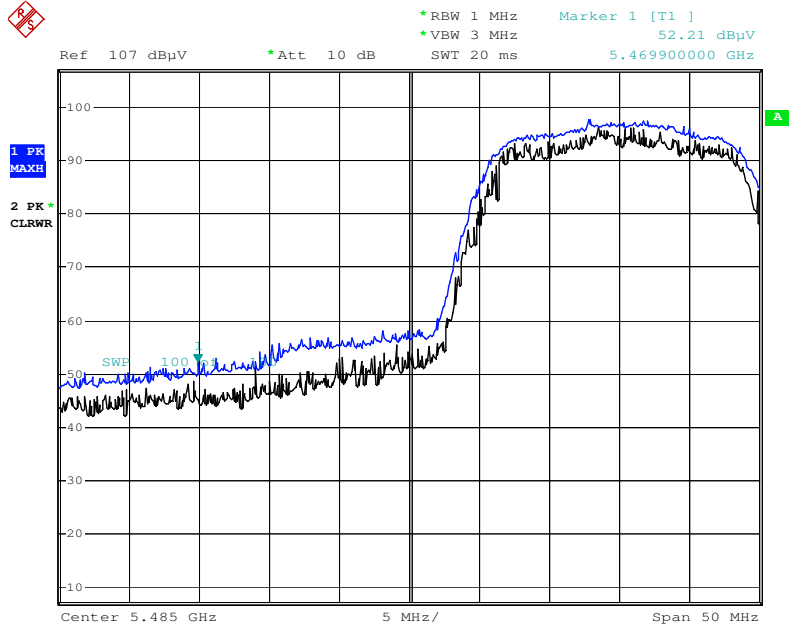


Date: 24.OCT.2016 15:42:23

**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT20, Ch.100, X-H)**

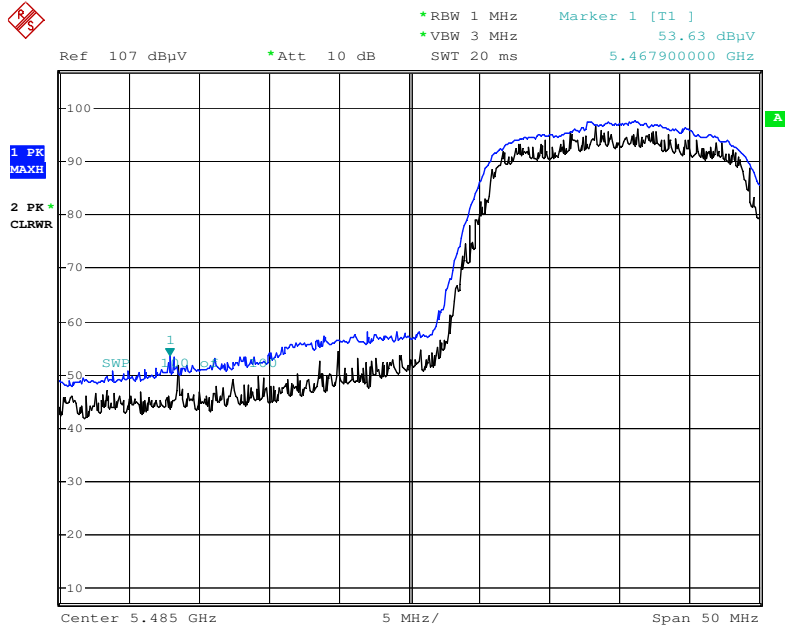


Date: 24.OCT.2016 16:05:26

**Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT40, Ch.102, X-H)**

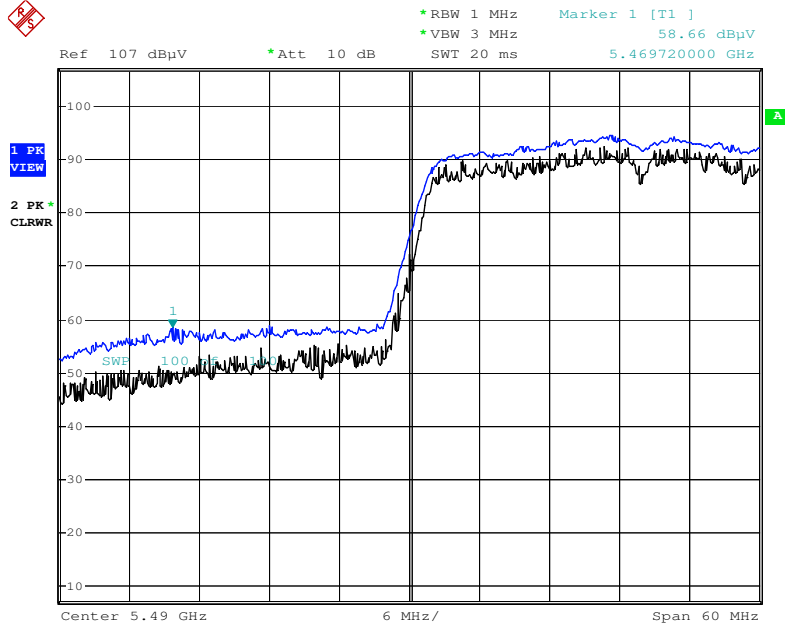


Date: 18.OCT.2016 17:34:42

**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT40, Ch.102, X-H)**

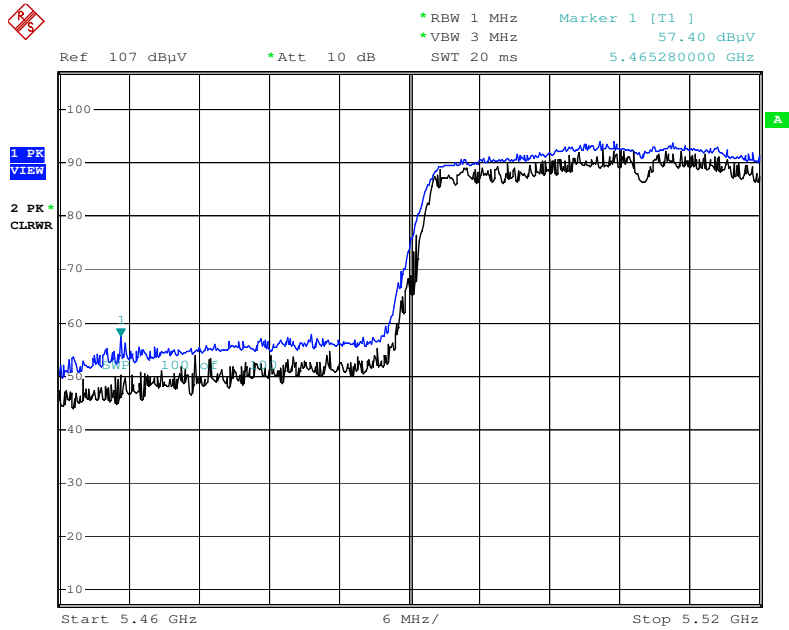

Date: 18.OCT.2016 17:37:13


**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT80, Ch.106, X-H)**

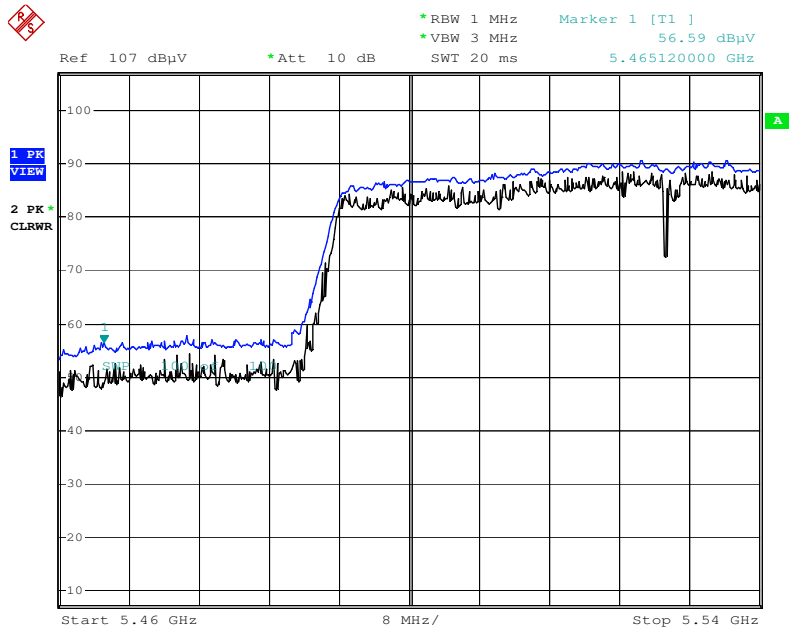

Date: 18.OCT.2016 17:47:28


■ RESULT PLOTS(UNII 3)

**Radiated Restricted Band Edges plot – Peak Reading (802.11a)**

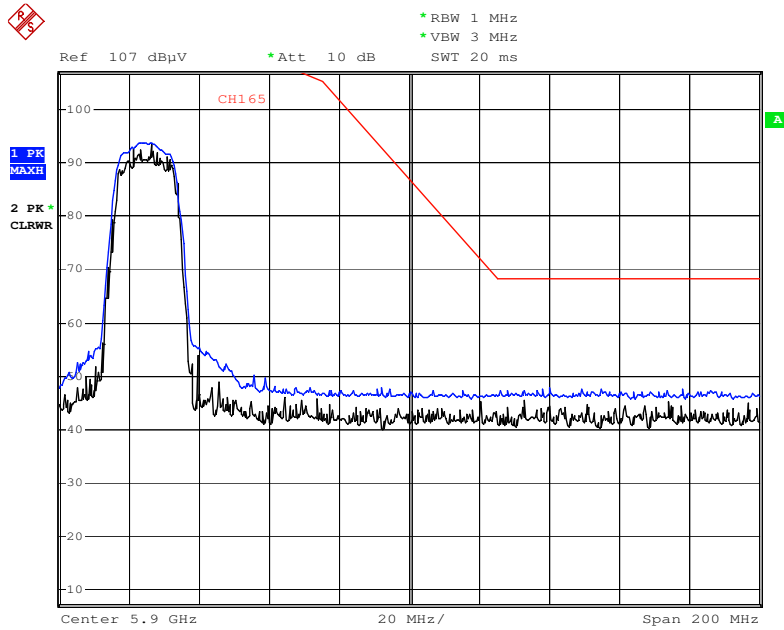

Date: 24.OCT.2016 16:55:25


**Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT20)**

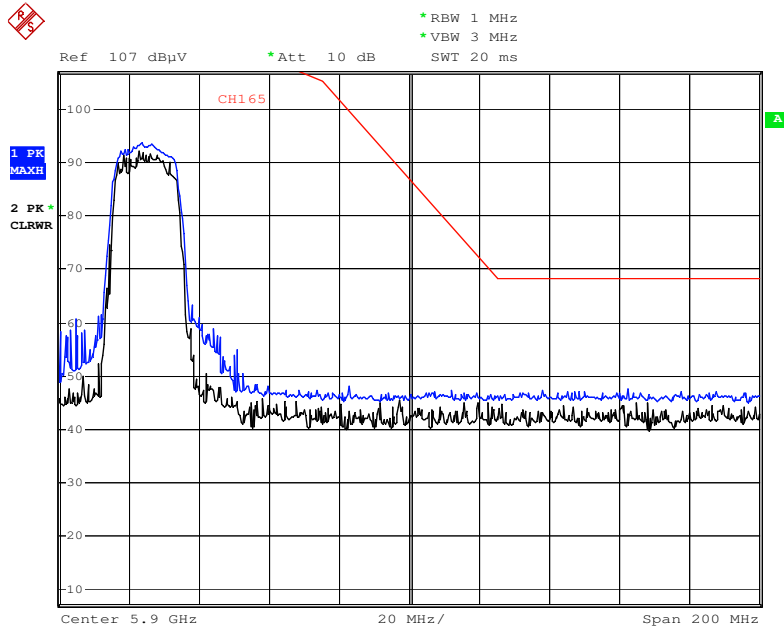

Date: 24.OCT.2016 17:03:58




**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT20)**

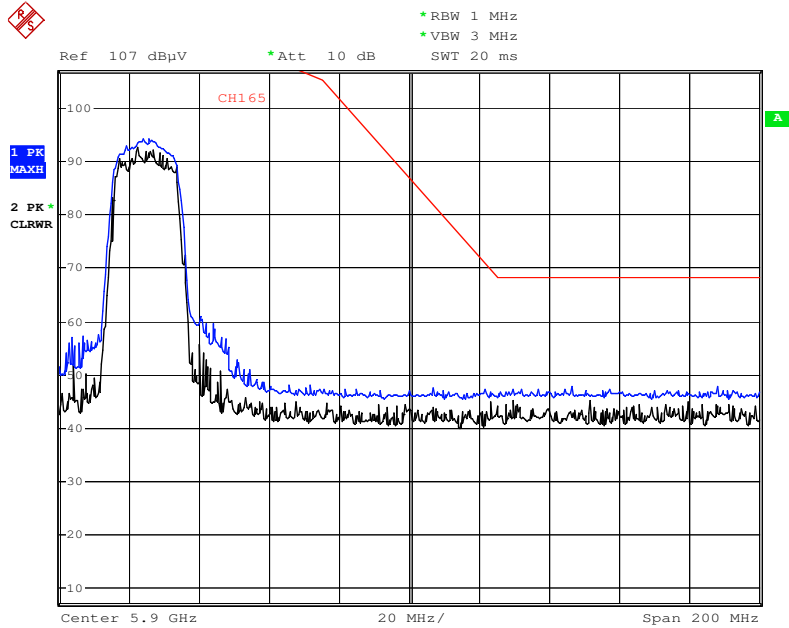


Date: 24.OCT.2016 17:07:47

**Radiated Restricted Band Edges plot – Peak Reading (802.11n\_HT40)**

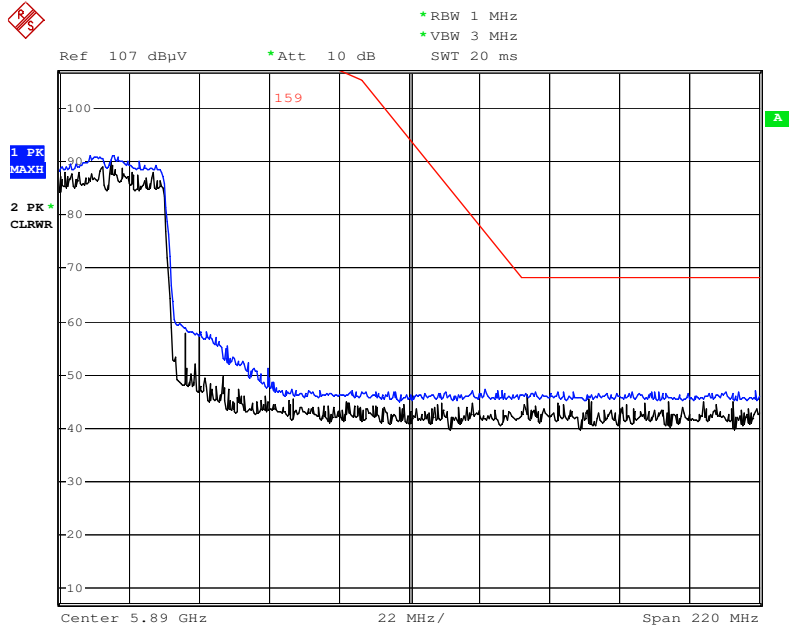


Date: 24.OCT.2016 17:10:33

**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT40)**

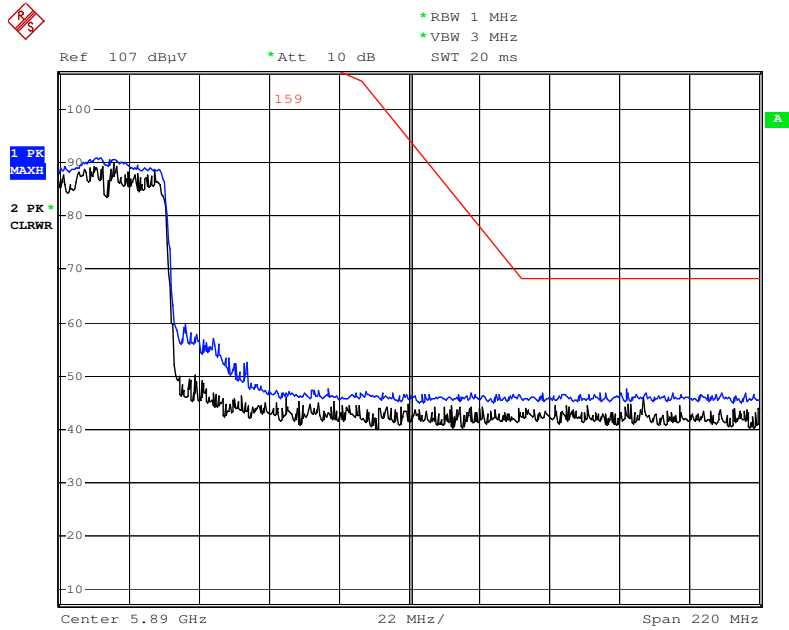

Date: 24.OCT.2016 17:11:52

**Radiated Restricted Band Edges plot – Peak Reading (802.11ac\_VHT80)**

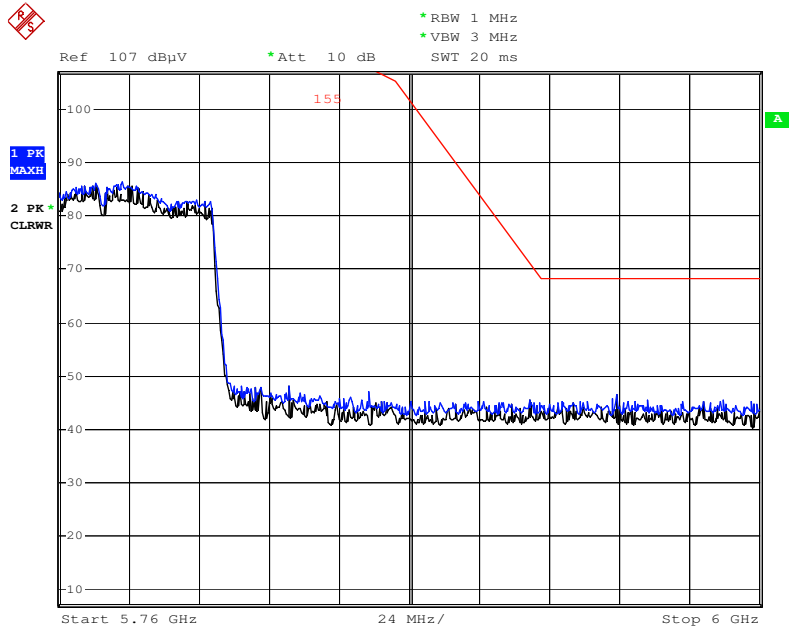

Date: 24.OCT.2016 17:12:54

## 9.7 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(3)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: L-01J  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE \_ 5G

FCC CLASS B

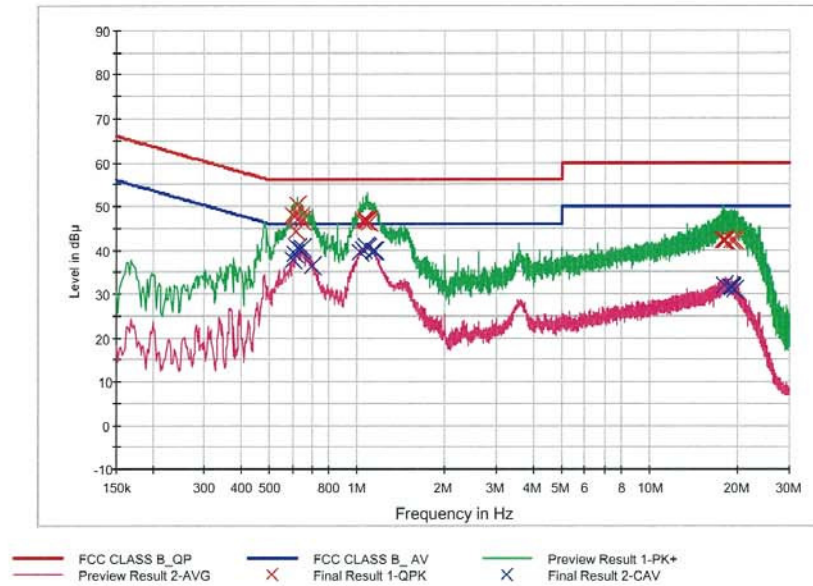

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.600000	47.9	9.000	Off	L1	9.7	8.1	56.0
0.612000	47.5	9.000	Off	L1	9.7	8.5	56.0
0.618000	44.2	9.000	Off	L1	9.7	11.8	56.0
0.624000	50.3	9.000	Off	L1	9.7	5.7	56.0
0.638000	47.5	9.000	Off	L1	9.7	8.5	56.0
0.650000	46.5	9.000	Off	L1	9.7	9.5	56.0
1.046000	46.5	9.000	Off	L1	9.8	9.5	56.0
1.066000	46.6	9.000	Off	L1	9.8	9.4	56.0
1.072000	47.1	9.000	Off	L1	9.8	8.9	56.0
1.076000	46.6	9.000	Off	L1	9.8	9.4	56.0
1.082000	46.7	9.000	Off	L1	9.8	9.3	56.0
1.092000	46.2	9.000	Off	L1	9.8	9.8	56.0
17.810000	42.3	9.000	Off	L1	10.3	17.7	60.0
17.902000	42.3	9.000	Off	L1	10.3	17.7	60.0
17.938000	42.2	9.000	Off	L1	10.3	17.8	60.0
18.044000	42.3	9.000	Off	L1	10.3	17.7	60.0
19.116000	42.2	9.000	Off	L1	10.3	17.8	60.0
19.376000	42.1	9.000	Off	L1	10.3	17.9	60.0

2016-11-01

오후 5:06:31

EMI Auto Test(3)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.602000	37.9	9.000	Off	L1	9.7	8.1	46.0
0.612000	39.0	9.000	Off	L1	9.7	7.0	46.0
0.624000	40.6	9.000	Off	L1	9.7	5.4	46.0
0.638000	40.1	9.000	Off	L1	9.7	5.9	46.0
0.648000	40.5	9.000	Off	L1	9.7	5.5	46.0
0.706000	36.5	9.000	Off	L1	9.7	9.5	46.0
1.022000	39.5	9.000	Off	L1	9.8	6.5	46.0
1.046000	40.2	9.000	Off	L1	9.8	5.8	46.0
1.066000	40.7	9.000	Off	L1	9.8	5.3	46.0
1.082000	40.5	9.000	Off	L1	9.8	5.5	46.0
1.130000	39.8	9.000	Off	L1	9.8	6.2	46.0
1.142000	39.9	9.000	Off	L1	9.8	6.1	46.0
17.848000	32.0	9.000	Off	L1	10.3	18.0	50.0
18.888000	31.6	9.000	Off	L1	10.3	18.4	50.0
18.990000	31.6	9.000	Off	L1	10.3	18.4	50.0
19.112000	31.5	9.000	Off	L1	10.3	18.5	50.0
19.116000	31.5	9.000	Off	L1	10.3	18.5	50.0
19.376000	31.0	9.000	Off	L1	10.3	19.0	50.0

2016-11-01

오후 5:06:31

**Conducted Emissions (Line 2)**

EMI Auto Test(3)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: L-01J  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE \_ 5G

FCC CLASS B

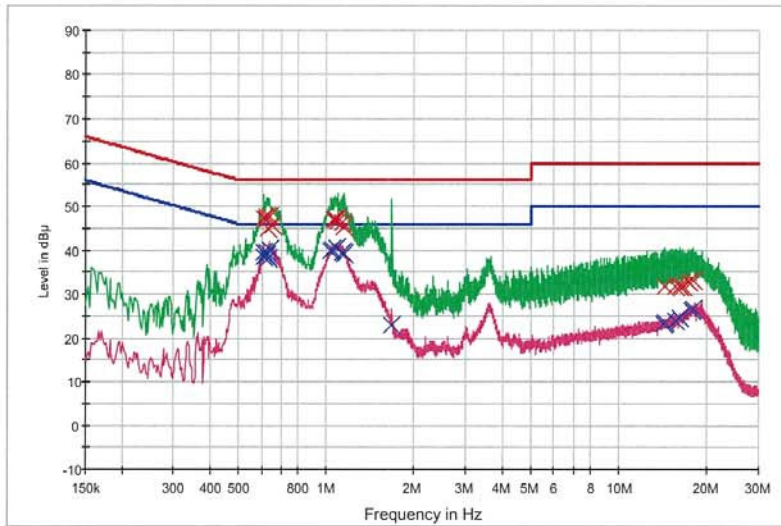

— FCC CLASS B\_QP     — FCC CLASS B\_AV     — Preview Result 1-PK+  
— Preview Result 2-AVG     x Final Result 1-QPK     x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.612000	47.5	9.000	Off	N	9.7	8.5	56.0
0.622000	47.0	9.000	Off	N	9.7	9.0	56.0
0.626000	47.7	9.000	Off	N	9.7	8.3	56.0
0.630000	45.0	9.000	Off	N	9.7	11.0	56.0
0.636000	47.7	9.000	Off	N	9.7	8.3	56.0
0.658000	45.7	9.000	Off	N	9.7	10.3	56.0
1.056000	46.9	9.000	Off	N	9.7	9.1	56.0
1.076000	47.0	9.000	Off	N	9.7	9.0	56.0
1.082000	47.0	9.000	Off	N	9.7	9.0	56.0
1.098000	46.5	9.000	Off	N	9.7	9.5	56.0
1.140000	46.4	9.000	Off	N	9.7	9.6	56.0
1.154000	45.2	9.000	Off	N	9.7	10.8	56.0
14.398000	31.5	9.000	Off	N	10.2	28.5	60.0
15.664000	31.6	9.000	Off	N	10.2	28.4	60.0
16.078000	31.8	9.000	Off	N	10.2	28.2	60.0
16.572000	31.7	9.000	Off	N	10.2	28.3	60.0
17.268000	32.6	9.000	Off	N	10.2	27.4	60.0
17.872000	33.2	9.000	Off	N	10.3	26.8	60.0

2016-11-01

오후 4:55:03

EMI Auto Test(3)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.610000	38.4	9.000	Off	N	9.7	7.6	46.0
0.614000	39.6	9.000	Off	N	9.7	6.4	46.0
0.622000	39.0	9.000	Off	N	9.7	7.0	46.0
0.626000	39.5	9.000	Off	N	9.7	6.5	46.0
0.630000	38.2	9.000	Off	N	9.7	7.8	46.0
0.638000	40.1	9.000	Off	N	9.7	5.9	46.0
1.038000	39.8	9.000	Off	N	9.7	6.2	46.0
1.046000	40.1	9.000	Off	N	9.7	5.9	46.0
1.082000	40.5	9.000	Off	N	9.7	5.5	46.0
1.140000	39.5	9.000	Off	N	9.7	6.5	46.0
1.150000	39.2	9.000	Off	N	9.7	6.8	46.0
1.678000	22.7	9.000	Off	N	9.8	23.3	46.0
14.124000	23.3	9.000	Off	N	10.2	26.7	50.0
14.398000	23.4	9.000	Off	N	10.2	26.6	50.0
15.664000	23.9	9.000	Off	N	10.2	26.1	50.0
16.078000	24.5	9.000	Off	N	10.2	25.5	50.0
17.712000	26.2	9.000	Off	N	10.3	23.8	50.0
17.872000	26.6	9.000	Off	N	10.3	23.4	50.0

2016-11-01

오후 4:55:03

**10. LIST OF TEST EQUIPMENT****10.1 LIST OF TEST EQUIPMENT(Conducted Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/28/2015	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/28/2015	Annual	100584
Agilent	N9020A / Signal Analyzer	06/24/2016	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/24/2015	Annual	MY49431210
Agilent	N1911A / Power Meter	03/11/2016	Annual	MY45100523
Agilent	N1921A / Power Sensor	03/11/2016	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/14/2016	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/15/2016	Annual	07560



**10.2 LIST OF TEST EQUIPMENT(Radiated Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Rohde & Schwarz	Loop Antenna	02/23/2016	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/15/2015	Biennial	255
Schwarzbeck	BBHA 9120D / Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/03/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	09/10/2016	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2016	Annual	101068-SZ
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/24/2016	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/13/2016	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	07/06/2016	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/26/2016	Annual	2
Agilent	8493C-10 / Attenuator(10 dB)	08/11/2016	Annual	76649
CERNEX	CBLU1183540 / Power Amplifier	07/15/2016	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/15/2016	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	07/11/2016	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	07/11/2016	Annual	25956