

TEST REPORT





DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042

Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1710-0119
2. Customer
 - Name : LG Electronics MobileComm USA, Inc.
 - Address : 1000 Sylvan Ave., Englewood Cliffs, New Jersey, United States, 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / L-01K
FCC ID : ZNFL01K
5. Test Method Used : IEEE 1528-2013 , FCC SAR KDB Publications (Details in test report)
Test Specification : CFR §2.1093
6. Date of Test : 2017.09.15 ~ 2017.10.10
7. Testing Environment : Refer to attached test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by	Technical Manager
	Name : HoSik Sim  (Signature)	Name : HakMin Kim  (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 10 . 16 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1710-0119	Oct. 16, 2017	Initial issue

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 Guidance Applied.....	7
1.2 Device Overview.....	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations.....	10
1.5 Near Field Communications (NFC) Antenna.....	10
1.6 SAR Test Exclusions Applied	10
1.7 Power Reduction for SAR.....	10
1.8 Device Serial Numbers.....	11
1.9 LTE Information	11
2. INTROCUCTION	12
3. DESCRIPTION OF TEST EQUIPMENT	13
3.1 SAR MEASUREMENT SETUP.....	13
3.2 ES3DV3/EX3DV4Probe Specification	14
3.3 Probe Calibration Process	15
3.3.1 E-Probe Calibration	15
3.4 Data Extrapolation	16
3.5 SAM Twin PHANTOM.....	17
3.6 Device Holder for Transmitters	17
3.7 Brain & Muscle Simulation Mixture Characterization	18
3.8 SAR TEST EQUIPMENT	20
4. TEST SYSTEM SPECIFICATIONS	21
5. SAR MEASUREMENT PROCEDURE	22
5.1 Measurement Procedure	22
6. DEFINITION OF REFERENCE POINTS	24
6.1 Ear Reference Point	24
6.2 Handset Reference Points.....	24
7. TEST CONFIGURATION POSITIONS FOR HANDSETS	25
7.1 Device Holder	25
7.2 Positioning for Cheek/Touch	25
7.3 Positioning for Ear / 15 ° Tilt	25
7.4 Body-Worn Accessory Configurations	26
7.5 Extremity Exposure Configurations.....	26
7.6 Wireless Router Configurations	27
8. RF EXPOSURE LIMITS	28
9. FCC MEASUREMENT PROCEDURES	29
9.1 Measured and Reported SAR.....	29
9.2 Procedures Used to Establish RF Signal for SAR	29
9.3 SAR Measurement Conditions for WCDMA (UMTS)	29
9.3.1 Output Power Verification	29
9.3.2 Head SAR Measurements for Handsets.....	29
9.3.3 Body SAR Measurements	30
9.3.4 Release 5 HSDPA Data Devices	30
9.3.5 Release 6 HSUPA Data Devices	30
9.4 SAR Measurement Conditions for LTE	31
9.4.1 Spectrum Plots for RB Configurations	31
9.4.2 MPR.....	31
9.4.3 A-MPR	31
9.4.4 Required RB Size and RB Offsets for SAR Testing	31
9.5 SAR Testing with 802.11 Transmitters	32
9.5.1 General Device Setup.....	32
9.5.2 U-NII and U-NII-2A	32

9.5.3 U-NII-2C and U-NII-3	32
9.5.4 Initial Test Position Procedure.....	33
9.5.5 2.4 GHz SAR Test Requirements	33
9.5.6 OFDM Transmission Mode and SAR Test Channel Selection	33
9.5.7 Initial Test Configuration Procedure	33
9.5.8 Subsequent Test Configuration Procedures	34
9.5.9 MIMO SAR Considerations.....	34
10. RF CONDUCTED POWERS	35
10.1 GSM Conducted Powers	35
10.2 WCDMA Conducted Powers.....	36
10.3 LTE Conducted Powers	37
10.4 WLAN Conducted Powers	45
10.5 Bluetooth Conducted Powers	55
11. SYSTEM VERIFICATION	57
11.1 Tissue Verification	57
11.2 Test System Verification	59
12. SAR TEST RESULTS	60
12.1 Head SAR Results.....	60
12.2 Standalone Body-Worn SAR Worn SAR Results.....	66
12.3 Standalone Hotspot SAR Results.....	70
12.4 Standalone Phablet SAR Results	75
12.5 SAR Test Notes	77
13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	80
13.1 Introduction.....	80
13.2 Simultaneous Transmission Procedures.....	80
13.3 Simultaneous Transmission Capabilities	80
13.4 Head SAR Simultaneous Transmission Analysis	82
13.5 Body-Worn Simultaneous Transmission Analysis	99
13.6 Hotspot SAR Simultaneous Transmission Analysis	114
13.7 Phablet SAR Simultaneous Transmission Analysis	126
13.8 Simultaneous Transmission Conclusion	126
14. SAR MEASUREMENT VARIABILITY	127
14.1 Measurement Variability	127
15. IEEE Std 1528 –MEASUREMENT UNCERTAINTIES	128
16. CONCLUSION	146
17. REFERENCES	147
Attachment 1. – Probe Calibration Data	149
Attachment 2. – Dipole Calibration Data.....	198
Attachment 3. – SAR SYSTEM VALIDATION	247

1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

General Information

EUT type	Mobile Phone			
FCC ID	ZNFL01K			
Equipment model name	L-01K			
Equipment add model name	N/A			
Equipment serial no.	Identical prototype			
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, LTE Band 12, 17, 5, 2.4 G W-LAN (802.11b/g/n-HT20/ac-VHT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/VHT80), Bluetooth			
TX Frequency Range	Band	Mode	Bandwidth	Frequency
	GSM 850	GSM/GPRS	-	824.2 ~ 848.8 MHz
	GSM 1900	GSM/GPRS	-	1850.2 ~ 1909.8 MHz
	WCDMA 850	WCDMA	-	826.4 ~ 846.6 MHz
	LTE Band 12	LTE	1.4/3/5/10MHz	699.7 ~ 715.3 MHz
	LTE Band 17	LTE	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 5	LTE	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	2.4 GHz W-LAN	802.11b/g/n/ac	HT20/VHT20	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	VHT80	5775 MHz
Bluetooth	-	-	2402 ~ 2480 MHz	
RX Frequency Range	GSM 850	GSM/GPRS	-	869.2 ~ 893.8 MHz
	GSM 1900	GSM/GPRS	-	1930.2 ~ 1989.8 MHz
	WCDMA 850	WCDMA	-	871.4 ~ 891.6 MHz
	LTE Band 12	LTE	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
	LTE Band 17	LTE	5/10MHz	736.5 ~ 743.5 MHz
	LTE Band 5	LTE	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
	2.4 GHz W-LAN	802.11b/g/n/ac	HT20/VHT20	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	VHT80	5775 MHz
	Bluetooth	-	-	2402 ~ 2480 MHz

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.16	0.54	-	-
PCE	GPRS 850	0.18	0.60	0.60	-
PCE	GSM 1900	< 0.1	0.21	-	-
PCE	GPRS 1900	< 0.1	0.24	0.25	-
PCE	WCDMA 850	0.25	0.87	0.87	-
PCE	LTE Band 12	0.13	0.49	0.49	-
PCE	LTE Band 17	N/A	N/A	N/A	-
PCE	LTE Band 5	0.21	0.67	0.67	-
DTS	2.4 GHz W-LAN	0.91	0.17	0.17	-
U-NII-1	5.2 GHz W-LAN	-	-	0.66	-
U-NII-2A	5.3 GHz W-LAN	0.80	0.64	-	2.07
U-NII-2C	5.6 GHz W-LAN	0.60	0.66	-	2.46
U-NII-3	5.8 GHz W-LAN	0.40	0.55	0.55	-
DSS	Bluetooth	0.34	< 0.1	< 0.1	N/A
Simultaneous SAR per KDB 690783 D01v01r03		1.53	1.50	1.50	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2017.09.15 ~ 2017.10.10				
Antenna Type	Internal Type Antenna				
Functions	<ul style="list-style-type: none"> ● GSM/GPRS (GPRS Class: 12) supported. * DTM not supported. ● No simultaneous transmission between BT & 2.4GHz WLAN ● Simultaneous transmission between GSM, WCDMA voice & WLAN / GPRS, WCDMA & WLAN / LTE & WLAN. ● VoIP is supported. ● W-LAN 2.4GHz is supported Hotspot. ● W-LAN 5 GHz is supported Hotspot in UNII B1, B3. 				

1.1 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)

1.2 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS 850	Voice/Data	824.2 ~ 848.8 MHz
GSM/GPRS 1900	Voice/Data	1850.2 ~ 1909.8 MHz
WCDMA 850	Voice/Data	826.4 ~ 846.6 MHz
LTE Band 12	Voice/Data	699.7 ~ 715.3 MHz
LTE Band 17	Voice/Data	706.5 ~ 713.5 MHz
LTE Band 5	Voice/Data	824.7 ~ 848.3 MHz
2.4 GHz WLAN	Voice/Data	2412 ~ 2462 MHz
5.2 GHz WLAN (U-NII-1)	Voice/Data	5180 ~ 5240 MHz
5.3 GHz WLAN (U-NII-2A)	Voice/Data	5260 ~ 5320 MHz
5.6 GHz WLAN (U-NII-2C)	Voice/Data	5500 ~ 5720 MHz
5.8 GHz WLAN (U-NII-3)	Voice/Data	5745 ~ 5825 MHz
Bluetooth	Data	2402 ~ 2480 MHz
NFC	Data	13.56 MHz

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

(A) GSM/GPRS 850/1900

Band & Mode		Voice [dBm]	Burst Average GMSK [dBm]			
			1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot
GSM/GPRS 850	Maximum	33.7	33.7	31.7	30.2	28.7
	Nominal	33.2	33.2	31.2	29.7	28.2
GSM/GPRS 1900	Maximum	31.7	31.7	29.7	28.2	26.7
	Nominal	31.2	31.2	29.2	27.7	26.2

(B) WCDMA/HSDPA/HSUPA/DC-HSDPA

Band & Mode		Modulated Average [dBm]		
		3GPP WCDMA (Rel.99)	3GPP HSDPA	3GPP HSUPA
WCDMA 850	Maximum	25.2	25.2	25.2
	Nominal	24.7	24.7	24.7

Note : This device supports HSDPA and HSUPA but the manufacturer declares on the tune-up procedure that the HSDPA and HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solution.

(C) LTE

Band & Mode		Modulated Average [dBm]
LTE Band 12	Maximum	25.2
	Nominal	24.7
LTE Band 17	Maximum	25.2
	Nominal	24.7
LTE Band 5(Cell)	Maximum	25.2
	Nominal	24.7

(D) 2.4G WLAN

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1~2	16.0	15.0	16.0	15.0	19.0	18.0
		3~9	16.0	15.0	16.0	15.0	19.0	18.0
		10~11	16.0	15.0	16.0	15.0	19.0	18.0
	802.11g	1~2	16.0	15.0	16.0	15.0	19.0	18.0
		3~9	16.0	15.0	16.0	15.0	19.0	18.0
		10~11	16.0	15.0	16.0	15.0	19.0	18.0
	802.11n	1~2	15.0	14.0	15.0	14.0	18.0	17.0
		3~9	15.0	14.0	15.0	14.0	18.0	17.0
		10~11	15.0	14.0	15.0	14.0	18.0	17.0
	802.11ac	1~2	15.0	14.0	15.0	14.0	18.0	17.0
		3~9	15.0	14.0	15.0	14.0	18.0	17.0
		10~11	15.0	14.0	15.0	14.0	18.0	17.0

Note: This device doesn't support SDM in WIFI 2.4G 802.11b/g mode.

(E) 5G WLAN

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
5	802.11a	36	16.0	15.0	16.0	15.0	19.0	18.0
		40-48	16.0	15.0	16.0	15.0	19.0	18.0
		52-60	16.0	15.0	16.0	15.0	19.0	18.0
		64	16.0	15.0	16.0	15.0	19.0	18.0
		100	16.0	15.0	16.0	15.0	19.0	18.0
		104-144	16.0	15.0	16.0	15.0	19.0	18.0
		149-161	16.0	15.0	16.0	15.0	19.0	18.0
		165	16.0	15.0	16.0	15.0	19.0	18.0
	802.11n/ac (20MHz)	36	15.0	14.0	15.0	14.0	18.0	17.0
		40-48	15.0	14.0	15.0	14.0	18.0	17.0
		52-60	15.0	14.0	15.0	14.0	18.0	17.0
		64	15.0	14.0	15.0	14.0	18.0	17.0
		100	15.0	14.0	15.0	14.0	18.0	17.0
		104-144	15.0	14.0	15.0	14.0	18.0	17.0
		149-161	15.0	14.0	15.0	14.0	18.0	17.0
		165	15.0	14.0	15.0	14.0	18.0	17.0
	802.11n/ac (40MHz)	38	15.0	14.0	15.0	14.0	18.0	17.0
		46	15.0	14.0	15.0	14.0	18.0	17.0
		54	15.0	14.0	15.0	14.0	18.0	17.0
		62	15.0	14.0	15.0	14.0	18.0	17.0
		102	15.0	14.0	15.0	14.0	18.0	17.0
		110	15.0	14.0	15.0	14.0	18.0	17.0
		134	15.0	14.0	15.0	14.0	18.0	17.0
		142	15.0	14.0	15.0	14.0	18.0	17.0
		151	15.0	14.0	15.0	14.0	18.0	17.0
		159	15.0	14.0	15.0	14.0	18.0	17.0
	802.11ac (80MHz)	42	15.0	14.0	15.0	14.0	18.0	17.0
		58	15.0	14.0	15.0	14.0	18.0	17.0
106		15.0	14.0	15.0	14.0	18.0	17.0	
138		15.0	14.0	15.0	14.0	18.0	17.0	
155		15.0	14.0	15.0	14.0	18.0	17.0	

Note: This device doesn't support SDM in WIFI 5G 802.11a mode.

(F) BT

Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	11.5
	Nominal	10.5
Bluetooth 2 Mbps	Maximum	11.0
	Nominal	10.0
Bluetooth 3 Mbps	Maximum	11.0
	Nominal	10.0
Bluetooth LE	Maximum	2.0
	Nominal	1.0

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFL01K_Antenna Location.pdf. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a “phablet”.

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM 850	X	O	O	O	O	O
GSM 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	O
LTE Band 12	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
2.4G W-LAN Ant.1	O	X	O	O	X	O
2.4G W-LAN Ant.2	O	X	O	O	X	O
2.4G W-LAN MIMO	O	X	O	O	X	O
5G W-LAN Ant.1	O	X	O	O	X	O
5G W-LAN Ant.2	O	X	O	O	X	O
5G W-LAN MIMO	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the back side. The SAR tests were performed with NFC antenna already incorporated. A diagram showing the location of the device of the device antenna can be found in ZNFL01K_Antenna Location.pdf.

1.6 SAR Test Exclusions Applied

(A) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE Band 12, LTE Band 17 target power is equal to LTE Band 12 target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 12.

1.7 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.8 Device Serial Numbers

Band & Mode	Head Serial Number	Body Serial Number	Hotspot Serial Number	Phablet Serial Number
GSM/GPRS 850	FCC #1	FCC #1	FCC #1	-
GSM/GPRS 1900	FCC #1	FCC #1	FCC #1	-
WCDMA 850	FCC #1	FCC #1	FCC #1	-
LTE Band 12	FCC #1	FCC #1	FCC #1	-
LTE Band 5	FCC #1	FCC #1	FCC #1	-
2.4 GHz WLAN	FCC #2	FCC #2	FCC #2	-
5 GHz WLAN	FCC #2	FCC #2	FCC #2	FCC #2

1.9 LTE Information

LTE Information					
FCC ID	ZNFL01K				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz)				
Channel Bandwidths	LTE Band 12 (699.7 ~ 715.3 MHz): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 (706.5 ~ 713.5 MHz): 5 MHz, 10 MHz LTE Band 5: (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note2}	N/A	844.0 (20600)
UE Category	LTE Rel.11, UL Category 3, DL Category 16				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	LTE A-MPR is disabled.				
Power reduction explanation	This device doesn't implements power reduction.				
LTE Carrier Aggregation Possible Combinations	LTE Carrier Aggregation is not supported.				
LTE Release 11 Additional Information	This device does not support CA features on 3GPP Release 11. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

- Note(s)
- LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
 - LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller each pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-3770 3.40 GHz desktop computer with Windows 7 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

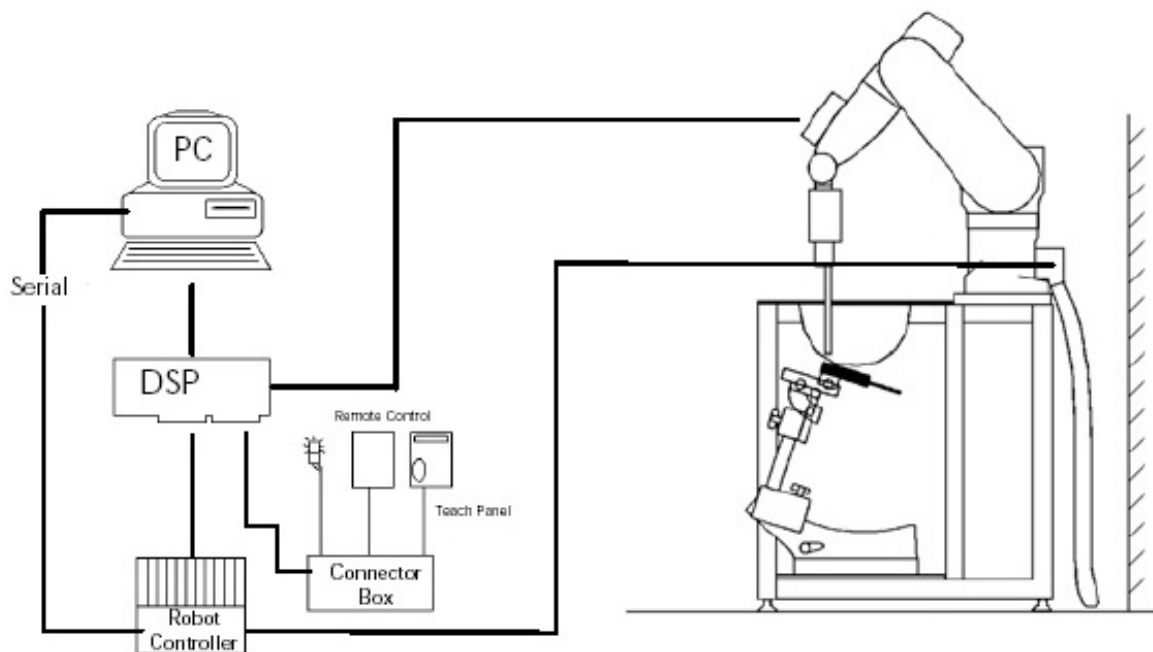


Figure 3.1 SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

3.2 ES3DV3/EX3DV4 Probe Specification

Calibration	In air from 10 MHz to 4 GHz/10 MHz to 6 GHz In brain and muscle simulating tissue at Frequencies of 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz/ 2450 MHz, 2600 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz
Frequency	10 MHz to 4 GHz/10 MHz to 6 GHz
Linearity	± 0.2 dB(30 MHz to 4 GHz/30 MHz to 6 GHz)
Dynamic	10 µW/g to > 100 mW/g
Range	Linearity : ±0.2dB
Dimensions	Overall length : 337 mm
Tip length	20 mm
Body diameter	12 mm
Tip diameter	3.9 mm/2.5 mm
Distance from probe tip to sensor center	2.0 mm/1.0 mm
Application	SAR Dosimetry Testing Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe ES3DV3 and EX3DV4, designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 Probe Calibration Process

3.3.1 E-Probe Calibration

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

Δt = exposure time (30 seconds),

σ = simulated tissue conductivity,

C = heat capacity of tissue (brain or muscle),

ρ = Tissue density (1.25 g/cm³ for brain tissue)

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

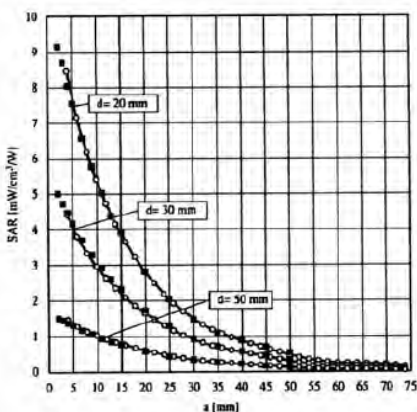


Figure 3.4 E-Field and Temperature Measurements at 900MHz

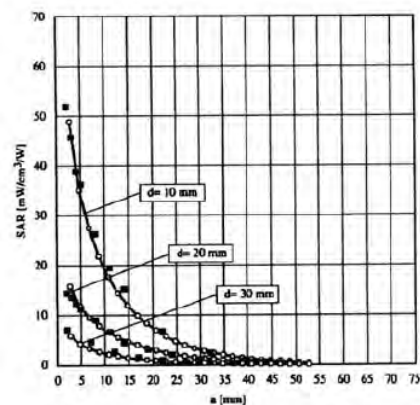


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i=x,y,z$)
 U_i = input signal of channel i ($i=x,y,z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i ($i = x,y,z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x,y,z$)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm^2
 E_{tot} = total electric field strength in V/m

3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

SAM Twin Phantom Specification:

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet

Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.

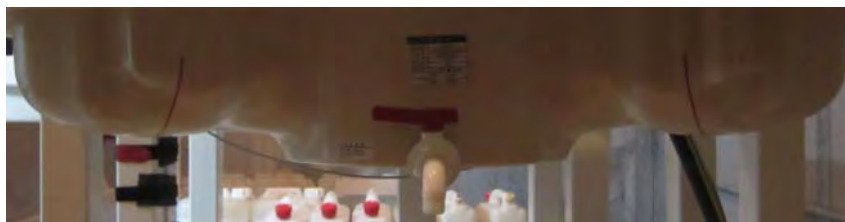


Figure 3.7 Sam Twin Phantom shell

3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table3.1 Composition of the Tissue Equivalent Matter

Ingredients (% by weight)	Frequency (MHz)							
	835		1900		2450		5200 ~ 5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.19	50.75	55.24	70.23	71.88	73.40	65.52	80.00
Salt (NaCl)	1.480	0.940	0.310	0.290	0.160	0.060	-	-
Sugar	57.90	48.21	-	-	-	-	-	-
HEC	0.250	-	-	-	-	-	-	-
Bactericide	0.180	0.100	-	-	-	-	-	-
Triton X-100	-	-	-	-	19.97	-	17.24	-
DGBE	-	-	44.45	29.48	7.990	26.54	-	-
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	-
Polysorbate (Tween) 80	-	-	-	-	-	-	-	20.00
Target for Dielectric Constant	41.5	55.2	40.0	53.3	39.2	52.7	-	-
Target for Conductivity (S/m)	0.90	0.97	1.40	1.52	1.80	1.95	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Table3.2 HSL/MSL750 (Head and Body liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750
	Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075, SL AAM 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ² O	Water, 35 – 58%
Sucrose	Sucrose, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), < 0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.6%

3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SCHMID	TX90XL	N/A	N/A	F13/5P9GA1/A/01
<input checked="" type="checkbox"/>	Robot	SCHMID	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SCHMID	CS8C	N/A	N/A	F13/5P9GA1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SCHMID	CS8C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/>	Joystick	SCHMID	N/A	N/A	N/A	S-12450905
<input checked="" type="checkbox"/>	Joystick	SCHMID	N/A	N/A	N/A	S-13200990
<input checked="" type="checkbox"/>	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Device Holder	SCHMID	Holder	N/A	N/A	SD000H01HA
<input checked="" type="checkbox"/>	Device Holder	SCHMID	Holder	N/A	N/A	SD000H01HA
<input checked="" type="checkbox"/>	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1783
<input checked="" type="checkbox"/>	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1782
<input checked="" type="checkbox"/>	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1786
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SCHMID	DAE3V1	2017-01-20	2018-01-20	519
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SCHMID	DAE4V1	2017-07-24	2018-07-24	1335
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SCHMID	ES3DV3	2017-03-21	2018-03-21	3328
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SCHMID	EX3DV4	2017-07-26	2018-07-26	3930
<input checked="" type="checkbox"/>	750MHz SAR Dipole	SCHMID	D750V3	2017-01-18	2019-01-18	1049
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SCHMID	D835V2	2016-09-28	2018-09-28	4d159
<input checked="" type="checkbox"/>	1900MHz SAR Dipole	SCHMID	D1900V2	2016-09-28	2018-09-28	5d176
<input checked="" type="checkbox"/>	2450MHz SAR Dipole	SCHMID	D2450V2	2017-09-19	2019-09-19	726
<input checked="" type="checkbox"/>	5GHz SAR Dipole	SCHMID	D5GHzV2	2017-03-17	2019-03-17	1103
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2016-12-02	2017-12-02	MY46111534
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	2017-09-05	2018-09-05	US41461520
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2017-09-06	2018-09-06	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2016-10-18	2017-10-18	1005
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2017-01-04	2018-01-04	GB37170267
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2017-04-11	2018-04-11	GB37170413
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2017-01-04	2018-01-04	3318A96566
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2017-01-04	2018-01-04	2702A65976
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2017-04-11	2018-04-11	3318A96332
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2017-01-05	2018-01-05	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	772D	2017-07-26	2018-07-26	2889A01064
<input checked="" type="checkbox"/>	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2017-09-05	2018-09-05	165
<input checked="" type="checkbox"/>	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2017-01-04	2018-01-04	N/A
<input checked="" type="checkbox"/>	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2017-09-05	2018-09-05	N/A
<input checked="" type="checkbox"/>	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2017-01-04	2018-01-04	03942
<input checked="" type="checkbox"/>	Attenuators(3 dB)	Agilent	8491B	2017-04-11	2018-04-11	MY39260700
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHL	23-10-34	2017-01-04	2018-01-04	BP4387
<input checked="" type="checkbox"/>	Dielectric Probe kit	SCHMID	DAK-3.5	2016-11-17	2017-11-17	1092
<input checked="" type="checkbox"/>	Dielectric Probe kit	SCHMID	DAK-3.5	2017-07-26	2018-07-26	1046
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2017-09-05	2018-09-05	GB41321164
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2017-08-04	2018-08-04	152048
<input checked="" type="checkbox"/>	Power Splitter	Anritsu	K241B	2017-01-11	2018-01-11	1301183
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000B	2017-01-04	2018-01-04	3000B770243

NOTE: The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. Each equipment item was used solely within its respective calibration period.

4. TEST SYSTEM SPECIFICATIONS

Automated TEST SYSTEM SPECIFICATIONS:

Positioner

Robot	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	0.02 mm
No. of axis	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	Intel Core i7-3770
Clock Speed	3.40 GHz
Operating System	Windows 7 Professional
Data Card	DASY5 PC-Board

Data Converter

Features	Signal, multiplexer, A/D converter. & control logic
Software	DASY5
Connecting Lines	Optical downlink for data and status info Optical uplink for commands and clock

PC Interface Card

Function	24 bit (64 MHz) DSP for real time processing Link to DAE 4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot
-----------------	--

E-Field Probes

Model	ES3DV3 S/N: 3328/ EX3DV4 S/N: 3930
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 4 GHz/10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 4 GHz/30 MHz to 6 GHz)

Phantom

Phantom	SAM Twin Phantom (V5.0)
Shell Material	Composite
Thickness	2.0 ± 0.2 mm



Figure 4.1 DASY5 Test System

5. SAR MEASUREMENT PROCEDURE

5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 5.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 5.1
Sample SAR Area Scan

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

6. DEFINITION OF REFERENCE POINTS

6.1 Ear Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 6.1
Close-up side view of ERP

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 6.2 Front, back and side view SAM Twin Phantom

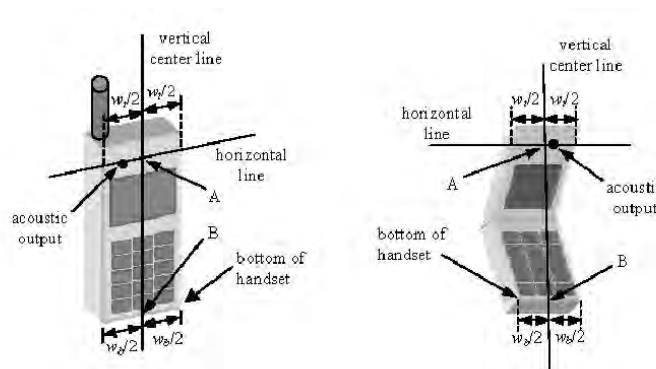


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

7. TEST CONFIGURATION POSITIONS FOR HANDSETS

7.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

7.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 7.2)

7.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 7.3).




Figure 7.2 Side view w/relevant markings



Figure 7.3 Front, Side and Top View of Ear/15° Position

7.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

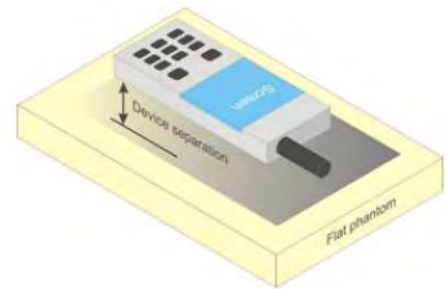


Figure 7.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

7.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498D01v06 should be applied to determine SAR test requirements.

7.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

9. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

9.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

9.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

9.3 SAR Measurement Conditions for WCDMA (UMTS)

9.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

9.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

9.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

9.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 9.1 Table 1

9.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_a (SF)	β_e/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
 Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
 Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
 Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
 Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

9.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The R&S CMW500 was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

9.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

9.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

9.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

9.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 4.2.1.
- c. Per Section 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 4.2.4 and 4.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 4.2.1 through 4.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

9.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

9.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

9.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

9.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

9.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

9.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

9.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

9.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

9.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

9.5.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

10. RF CONDUCTED POWERS

10.1 GSM Conducted Powers

Band	Channel	Maximum Burst-Averaged Output Power(dBm)				
		Voice	GPRS Data (GMSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM850	128	33.3	33.3	31.3	29.9	28.2
	190	33.5	33.5	31.3	29.9	28.2
	251	33.5	33.5	31.4	29.8	28.3
PCS 1900	512	31.6	31.6	29.4	27.7	26.4
	661	31.5	31.5	29.3	27.6	26.3
	810	31.7	31.7	29.3	27.6	26.3
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)				
		Voice	GPRS Data (GMSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM850	128	24.27	24.27	25.28	25.64	25.19
	190	24.47	24.47	25.28	25.64	25.19
	251	24.47	24.47	25.38	25.54	25.29
PCS 1900	512	22.57	22.57	23.38	23.44	23.39
	661	22.47	22.47	23.28	23.34	23.29
	810	22.67	22.67	23.28	23.34	23.29
GSM850	Frame Avg. Targets:	24.17	24.17	25.18	25.44	25.19
PCS 1900		22.17	22.17	23.18	23.44	23.19

Table 10.1 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
DTM Multislot Class: N/A




Figure 10.1 Power Measurement Setup

10.2 WCDMA Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	25.12	25.18	25.19	-
99		12.2 kbps AMR	25.12	25.18	25.19	-
5	HSDPA	Subtest 1	24.12	24.19	24.25	0
5		Subtest 2	24.13	24.20	24.27	0
5		Subtest 3	23.61	23.72	23.79	0.5
5		Subtest 4	23.63	23.74	23.78	0.5
6	HSUPA	Subtest 1	24.20	24.19	24.27	0
6		Subtest 2	22.13	22.21	22.29	2
6		Subtest 3	23.12	23.23	23.27	1
6		Subtest 4	22.13	22.21	22.26	2
6		Subtest 5	24.20	24.20	24.38	0

Table 10.2.1 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA and HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

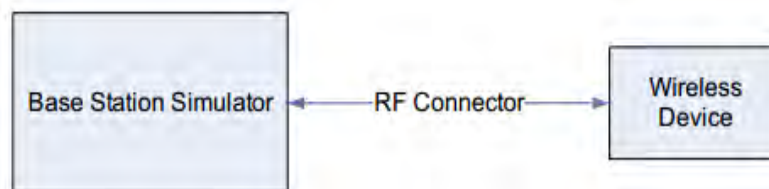


Figure 10.2 Power Measurement Setup

10.3 LTE Conducted Powers

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.81	0	0
	1	25	24.82		
	1	49	24.80		
	25	0	23.78	0-1	1
	25	12	23.80		
	25	25	23.77		
	50	0	23.75	0-1	1
16QAM	1	0	24.06	0-1	1
	1	25	24.08		
	1	49	24.03		
	25	0	22.66	0-2	2
	25	12	22.68		
	25	25	22.67		
	50	0	22.61	0-2	2

Table 10.3.1 LTE Conducted Power

Note 1: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Note 2: The applicant declared that MPR transmission power will not exceed the non MPR maximum transmit power in devices and this device is applied MPR based on 3GPP standard.

LTE Band 12 Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.63	24.80	24.71	0	0	
	1	12	24.75	24.81	24.81			
	1	24	24.68	24.77	24.85			
	16QAM	12	0	23.69	23.77	23.69	0-1	1
		12	6	23.72	23.81	23.82		
		12	13	23.81	23.73	23.69		
		25	0	23.65	23.79	23.62	0-1	1
16QAM	1	0	23.98	24.09	24.01	0-1	1	
	1	12	24.08	24.10	24.13			
	1	24	23.98	24.01	24.03			
	16QAM	12	0	22.61	22.67	22.60	0-2	2
		12	6	22.64	22.69	22.69		
		12	13	22.69	22.61	22.55		
		25	0	22.63	22.67	22.60	0-2	2

Table 10.3.2 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.63	24.77	24.77	0	0
	1	7	24.73	24.74	24.65		
	1	14	24.73	24.74	24.72		
	8	0	23.65	23.76	23.74	0-1	1
	8	4	23.73	23.78	23.68		
	8	7	23.71	23.73	23.63		
	15	0	23.67	23.76	23.75	0-1	1
16QAM	1	0	23.99	24.05	24.19	0-1	1
	1	7	24.04	24.08	23.94		
	1	14	24.03	23.99	23.97		
	8	0	22.66	22.71	22.71	0-2	2
	8	4	22.68	22.73	22.63		
	8	7	22.66	22.72	22.63		
	15	0	22.70	22.69	22.68	0-2	2

Table 10.3.3 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.55	24.67	24.65	0	0	
	1	2	24.72	24.71	24.85			
	1	5	24.65	24.68	24.75			
	QPSK	3	0	24.58	24.71	24.56	0	0
		3	2	24.78	24.71	24.73		
		3	3	24.68	24.64	24.63		
		6	0	23.62	23.68	23.69	0-1	1
16QAM	1	0	23.84	23.94	23.83	0-1	1	
	1	2	24.04	24.05	23.98			
	1	5	24.02	23.90	23.91			
	16QAM	3	0	23.50	23.58	23.46	0-1	1
		3	2	23.64	23.63	23.58		
		3	3	23.54	23.55	23.54		
		6	0	22.62	22.70	22.66	0-2	2

Table 10.3.4 LTE Conducted Power

2) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.78	0	0
	1	25	24.79		
	1	49	24.76		
	25	0	23.82	0-1	1
	25	12	23.80		
	25	25	23.78		
	50	0	23.80	0-1	1
16QAM	1	0	24.08	0-1	1
	1	25	24.19		
	1	49	24.14		
	25	0	22.74	0-2	2
	25	12	22.73		
	25	25	22.75		
	50	0	22.70	0-2	2

Table 10.3.5 LTE Conducted Power

Note 1: LTE Band 5(Cell) at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Note 2: The applicant declared that MPR transmission power will not exceed the non MPR maximum transmit power in devices and this device is applied MPR based on 3GPP standard.

LTE Band 5 (Cell) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.74	24.87	24.86	0	0	
	1	12	24.75	24.86	24.84			
	1	24	24.79	24.85	24.82			
	16QAM	12	0	23.71	23.77	23.73	0-1	1
		12	6	23.72	23.81	23.73		
		12	13	23.68	23.82	23.73		
		25	0	23.68	23.79	23.73	0-1	1
16QAM	1	0	24.06	24.10	24.10	0-1	1	
	1	12	24.08	24.18	24.09			
	1	24	24.11	24.16	24.06			
	16QAM	12	0	22.63	22.68	22.68	0-2	2
		12	6	22.64	22.71	22.66		
		12	13	22.54	22.73	22.57		
		25	0	22.60	22.70	22.65	0-2	2

Table 10.3.6 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.72	24.83	24.83	0	0
	1	7	24.70	24.75	24.74		
	1	14	24.68	24.80	24.75		
	8	0	23.67	23.76	23.69	0-1	1
	8	4	23.72	23.76	23.73		
	8	7	23.65	23.75	23.68		
	15	0	23.71	23.76	23.69	0-1	1
16QAM	1	0	24.03	24.15	24.03	0-1	1
	1	7	24.07	24.12	24.04		
	1	14	23.97	24.17	24.01		
	8	0	22.64	22.75	22.67	0-2	2
	8	4	22.72	22.78	22.75		
	8	7	22.63	22.74	22.67		
	15	0	22.69	22.68	22.67	0-2	2

Table 10.3.7 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.77	24.79	24.71	0	0	
	1	2	24.71	24.82	24.76			
	1	5	24.62	24.65	24.73			
	QPSK	3	0	24.64	24.69	24.67	0	0
		3	2	24.65	24.74	24.70		
		3	3	24.63	24.68	24.67		
		6	0	23.63	23.70	23.64	0-1	1
16QAM	1	0	23.96	24.03	24.02	0-1	1	
	1	2	24.04	24.10	23.99			
	1	5	23.93	23.95	23.99			
	16QAM	3	0	23.58	23.64	23.57	0-1	1
		3	2	23.61	23.65	23.58		
		3	3	23.55	23.61	23.57		
		6	0	22.62	22.74	22.63	0-2	2

Table 10.3.8 LTE Conducted Power

10.4 WLAN Conducted Powers

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power
	(MHz)		(dBm)
802.11b	2412	1	15.23
	2437	6	15.38
	2462	11	<u>15.39</u>
802.11g	2412	1	12.66
	2437	6	15.44
	2462	11	12.76
802.11n (HT-20)	2412	1	11.54
	2437	6	14.27
	2462	11	11.58
802.11ac (VHT-20)	2412	1	11.55
	2437	6	14.29
	2462	11	11.59

Table 10.4.1 IEEE 802.11 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power
	(MHz)		(dBm)
802.11b	2412	1	<u>15.53</u>
	2437	6	<u>15.30</u>
	2462	11	15.29
802.11g	2412	1	12.69
	2437	6	15.34
	2462	11	12.65
802.11n (HT-20)	2412	1	11.59
	2437	6	14.33
	2462	11	11.48
802.11ac (VHT-20)	2412	1	11.59
	2437	6	14.32
	2462	11	11.47

Table 10.4.2 IEEE 802.11 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11b	2412	1	<u>18.39</u>	-
	2437	6	<u>18.35</u>	-
	2462	11	18.35	-
802.11g	2412	1	15.69	-
	2437	6	18.40	-
	2462	11	15.72	-
802.11n (HT-20)	2412	1	14.58	14.47
	2437	6	17.31	17.17
	2462	11	14.54	14.42
802.11ac (VHT-20)	2412	1	14.58	14.47
	2437	6	17.32	17.21
	2462	11	14.54	14.41

Table 10.4.3 IEEE 802.11 Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11a (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11a	5180	36	15.16
	5200	40	15.23
	5220	44	15.26
	5240	48	15.23
	5260	52	15.40
	5280	56	15.11
	5300	60	15.03
	5320	64	15.01
	5500	100	15.04
	5580	116	15.10
	5660	132	14.90
	5720	144	15.00
	5745	149	15.25
	5785	157	15.24
5825	165	15.18	

Table 10.4.4 IEEE 802.11a Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11a (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11a	5180	36	15.39
	5200	40	15.59
	5220	44	15.50
	5240	48	15.63
	5260	52	15.65
	5280	56	15.50
	5300	60	15.60
	5320	64	15.46
	5500	100	15.51
	5580	116	15.41
	5660	132	15.64
	5720	144	14.94
	5745	149	15.18
	5785	157	15.53
5825	165	15.96	

Table 10.4.5 IEEE 802.11a Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11a (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11a	5180	36	18.29	-
	5200	40	18.42	-
	5220	44	18.39	-
	5240	48	18.44	-
	5260	52	18.54	-
	5280	56	18.32	-
	5300	60	18.33	-
	5320	64	18.25	-
	5500	100	18.29	-
	5580	116	18.27	-
	5660	132	18.30	-
	5720	144	17.98	-
	5745	149	18.23	-
	5785	157	18.40	-
5825	165	18.60	-	

Table 10.4.6 IEEE 802.11a Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11n (HT-20)	5180	36	13.82
	5200	40	13.85
	5220	44	13.88
	5240	48	13.87
	5260	52	14.10
	5280	56	13.97
	5300	60	13.89
	5320	64	13.96
	5500	100	13.92
	5580	116	14.07
	5660	132	13.76
	5720	144	13.91
	5745	149	14.19
	5785	157	14.25
5825	165	14.18	

Table 10.4.7 IEEE 802.11n HT20 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11n (HT-20)	5180	36	14.23
	5200	40	14.37
	5220	44	14.48
	5240	48	14.46
	5260	52	14.58
	5280	56	14.48
	5300	60	14.47
	5320	64	14.26
	5500	100	14.45
	5580	116	14.38
	5660	132	14.54
	5720	144	13.87
	5745	149	14.03
	5785	157	14.47
	5825	165	14.89

Table 10.4.8 IEEE 802.11n HT20 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11n (HT-20)	5180	36	17.04	17.15
	5200	40	17.13	17.14
	5220	44	17.20	17.30
	5240	48	17.19	17.25
	5260	52	17.36	17.29
	5280	56	17.24	17.22
	5300	60	17.20	17.22
	5320	64	17.12	17.12
	5500	100	17.20	17.33
	5580	116	17.24	17.29
	5660	132	17.18	17.19
	5720	144	16.90	16.95
	5745	149	17.12	17.01
	5785	157	17.37	17.38
	5825	165	17.56	17.45

Table 10.4.9 IEEE 802.11n HT20 Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11ac (VHT-20)	5180	36	13.90
	5200	40	13.89
	5220	44	13.94
	5240	48	13.89
	5260	52	14.06
	5280	56	13.99
	5300	60	13.90
	5320	64	13.99
	5500	100	13.95
	5580	116	14.08
	5660	132	13.80
	5720	144	13.96
	5745	149	14.17
	5785	157	14.21
	5825	165	14.14

Table 10.4.10 IEEE 802.11ac VHT20 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11ac (VHT-20)	5180	36	14.31
	5200	40	14.46
	5220	44	14.59
	5240	48	14.51
	5260	52	14.57
	5280	56	14.52
	5300	60	14.53
	5320	64	14.36
	5500	100	14.51
	5580	116	14.43
	5660	132	14.59
	5720	144	13.90
	5745	149	14.06
	5785	157	14.55
	5825	165	14.86

Table 10.4.11 IEEE 802.11ac VHT20 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11ac (VHT-20)	5180	36	17.12	17.11
	5200	40	17.19	17.17
	5220	44	17.29	17.24
	5240	48	17.22	17.22
	5260	52	17.33	17.31
	5280	56	17.27	17.19
	5300	60	17.24	17.13
	5320	64	17.19	17.06
	5500	100	17.25	17.30
	5580	116	17.27	17.25
	5660	132	17.22	17.22
	5720	144	16.94	16.91
	5745	149	17.13	17.04
	5785	157	17.39	17.33
	5825	165	17.53	17.44

Table 10.4.12 IEEE 802.11ac VHT20 Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11n (HT-40)	5190	38	12.04
	5230	46	14.09
	5270	54	14.40
	5310	62	11.25
	5510	102	12.21
	5550	110	14.23
	5670	134	13.98
	5710	142	14.15
	5755	151	14.61
	5795	159	14.50

Table 10.4.13 IEEE 802.11n HT40 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11n (HT-40)	5190	38	12.26
	5230	46	14.46
	5270	54	14.62
	5310	62	11.43
	5510	102	12.40
	5550	110	14.25
	5670	134	14.40
	5710	142	13.88
	5755	151	14.10
	5795	159	14.60

Table 10.4.14 IEEE 802.11n HT40 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11n (HT-40)	5190	38	15.16	15.24
	5230	46	17.29	17.33
	5270	54	17.52	17.35
	5310	62	14.35	14.20
	5510	102	15.32	15.29
	5550	110	17.25	17.23
	5670	134	17.21	17.19
	5710	142	17.03	16.90
	5755	151	17.37	17.23
	5795	159	17.56	17.45

Table 10.4.15 IEEE 802.11n HT40 Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11ac (VHT-40)	5190	38	12.27
	5230	46	14.22
	5270	54	14.27
	5310	62	11.22
	5510	102	12.17
	5550	110	14.25
	5670	134	13.97
	5710	142	14.13
	5755	151	14.59
	5795	159	14.52

Table 10.4.16 IEEE 802.11ac VHT40 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power
	(MHz)		(dBm)
802.11ac (VHT-40)	5190	38	12.28
	5230	46	14.51
	5270	54	14.60
	5310	62	11.49
	5510	102	12.45
	5550	110	14.28
	5670	134	14.55
	5710	142	13.89
	5755	151	14.11
	5795	159	14.52

Table 10.4.17 IEEE 802.11ac VHT40 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11ac (VHT-40)	5190	38	15.29	15.28
	5230	46	17.38	17.31
	5270	54	17.45	17.32
	5310	62	14.37	14.27
	5510	102	15.32	15.29
	5550	110	17.28	17.19
	5670	134	17.28	17.14
	5710	142	17.02	16.89
	5755	151	17.37	17.18
	5795	159	17.53	17.44

Table 10.4.18 IEEE 802.11ac VHT40 Average RF Power (MIMO)

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power	
	(MHz)		(dBm)	
802.11ac (VHT-80)	5210	42	11.83	
	5290	58	10.87	
	5530	106	11.71	
	5690	138	13.84	
	5775	155	13.95	

Table 10.4.19 IEEE 802.11ac VHT80 Average RF Power (Ant.1)

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power	
	(MHz)		(dBm)	
802.11ac (VHT-80)	5210	42	12.05	
	5290	58	11.03	
	5530	106	11.76	
	5690	138	13.61	
	5775	155	14.04	

Table 10.4.20 IEEE 802.11ac VHT80 Average RF Power (Ant.2)

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power	
	(MHz)		CDD(dBm)	SDM(dBm)
802.11ac (VHT-80)	5210	42	14.95	14.89
	5290	58	13.96	13.90
	5530	106	14.75	14.73
	5690	138	16.74	16.64
	5775	155	17.01	16.87

Table 10.4.21 IEEE 802.11ac VHT80 Average RF Power (MIMO)

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, duo to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 10.4 Power Measurement Setup

10.5 Bluetooth Conducted Powers

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	10.12	8.98	9.67	8.53	9.67	8.53
Mid	2441	11.45	10.31	10.80	9.66	10.84	9.70
High	2480	9.97	8.83	9.34	8.20	9.35	8.21

Table 10.5.1 Bluetooth Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	0.18	-0.51	0.20	-2.21
Mid	2440	1.53	0.84	1.44	-0.97
High	2480	0.57	-0.12	0.54	-1.87

Table 10.5.2 Bluetooth LE Frame Average RF Power

● Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(A).

3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(B).

3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

4) Power levels were measured by a Power Meter.

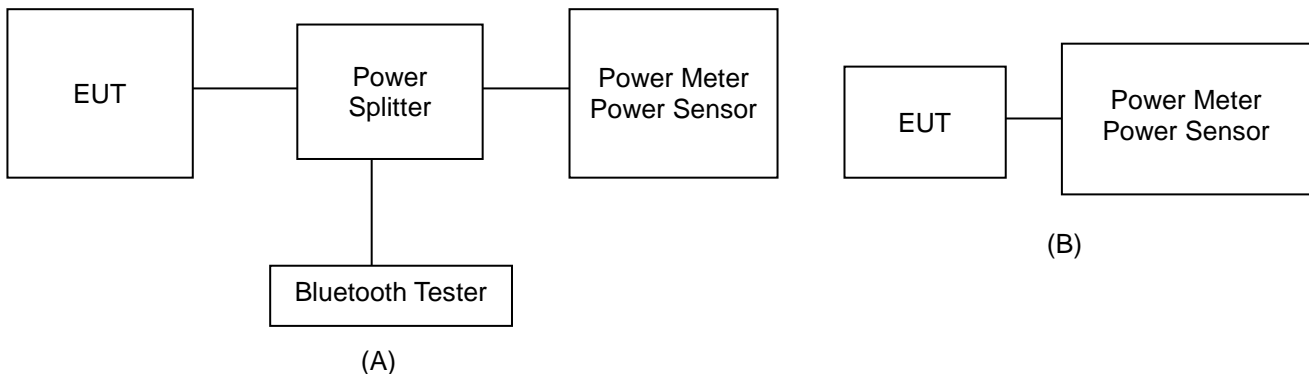


Figure 10.5 Average Power Measurement Setup

The average conducted output powers of Bluetooth were measured using above test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.

Bluetooth Transmission Plot

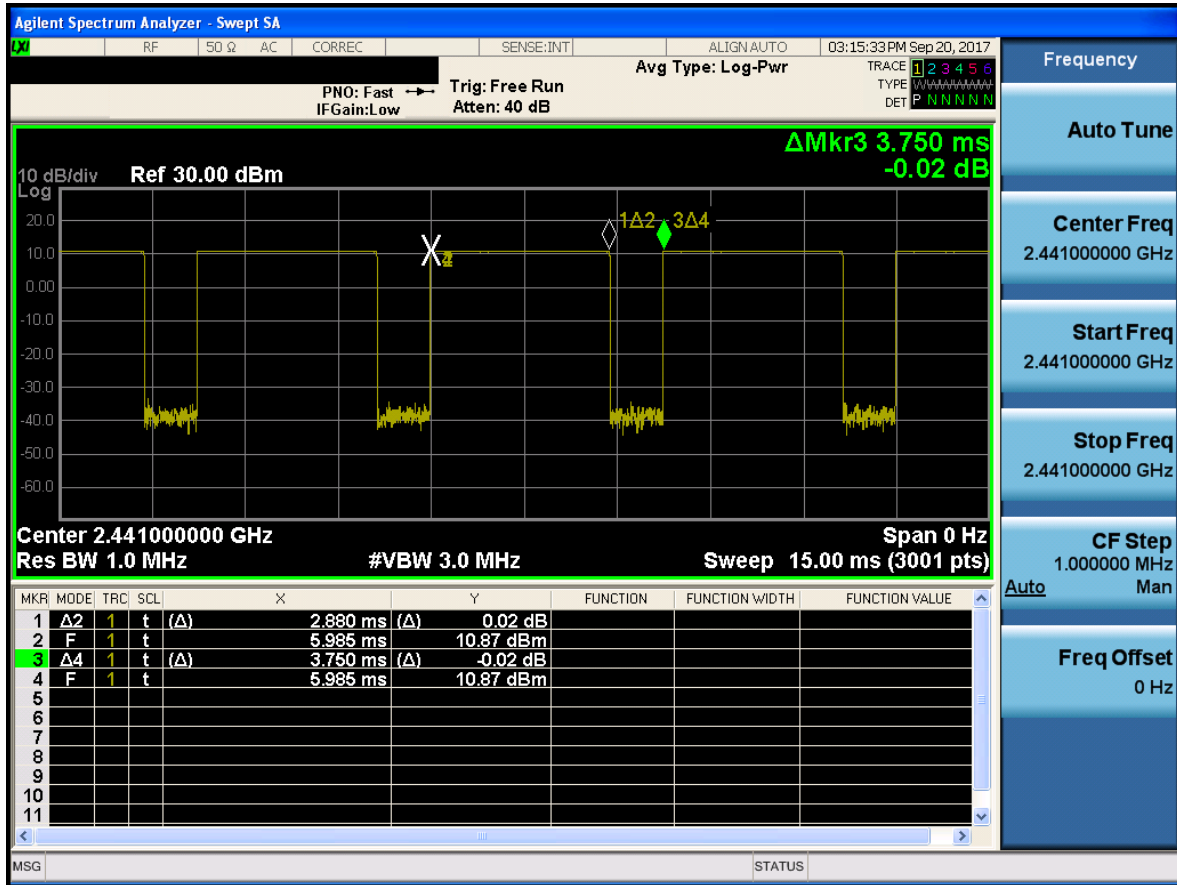


Figure 10.2.2 Bluetooth Transmission Plot

Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

11. SYSTEM VERIFICATION

11.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Sep. 21. 2017	750 Head	22.4	22.1	707.5	42.129	0.887	42.635	0.881	1.20	-0.68
				750.0	41.900	0.890	42.050	0.919	0.36	3.26
Sep. 21. 2017	750 Body	22.4	22.3	707.5	55.699	0.960	55.769	0.940	0.13	-2.08
				750.0	55.531	0.963	55.351	0.977	-0.32	1.45
Sep. 15. 2017	835 Head	22.1	22.0	824.2	41.552	0.899	41.822	0.888	0.65	-1.22
				826.4	41.542	0.899	41.792	0.890	0.60	-1.00
				835.0	41.500	0.900	41.684	0.899	0.44	-0.11
				836.6	41.500	0.901	41.664	0.901	0.40	0.00
				846.6	41.500	0.912	41.543	0.910	0.10	-0.22
				848.8	41.500	0.914	41.508	0.912	0.02	-0.22
Sep. 18. 2017	835 Body	21.9	21.7	824.2	55.243	0.969	53.160	0.997	-3.77	2.89
				826.4	55.235	0.969	53.145	0.999	-3.78	3.10
				835.0	55.200	0.970	53.092	1.007	-3.82	3.81
				836.6	55.197	0.971	53.079	1.008	-3.84	3.81
				846.6	55.166	0.984	53.011	1.017	-3.91	3.35
				848.8	55.160	0.986	52.988	1.019	-3.94	3.35
Sep. 19. 2017	835 Head	21.7	21.6	835.0	41.500	0.900	40.732	0.888	-1.85	-1.33
				836.5	41.500	0.901	40.717	0.890	-1.89	-1.22
Sep. 19. 2017	835 Body	21.7	21.5	835.0	55.200	0.970	53.306	0.982	-3.43	1.24
				836.5	55.197	0.971	53.291	0.983	-3.45	1.24
Sep. 20. 2017	1900 Head	21.9	21.6	1850.2	40.000	1.400	39.998	1.359	-0.01	-2.93
				1880.0	40.000	1.400	39.813	1.385	-0.47	-1.07
				1900.0	40.000	1.400	39.694	1.405	-0.76	0.36
				1909.8	40.000	1.400	39.640	1.415	-0.90	1.07
Sep. 20. 2017	1900 Body	21.9	21.8	1850.2	53.300	1.520	52.197	1.514	-2.07	-0.39
				1880.0	53.300	1.520	52.093	1.542	-2.26	1.45
				1900.0	53.300	1.520	51.998	1.564	-2.44	2.89
				1909.8	53.300	1.520	51.956	1.574	-2.52	3.55
Oct. 09. 2017	2450 Head	21.5	22.0	2402.0	39.282	1.757	39.320	1.810	0.10	3.02
				2412.0	39.265	1.766	39.287	1.820	0.06	3.06
				2437.0	39.222	1.788	39.210	1.850	-0.03	3.47
				2441.0	39.215	1.792	39.198	1.855	-0.04	3.52
				2450.0	39.200	1.800	39.174	1.865	-0.07	3.61
				2462.0	39.184	1.813	39.145	1.877	-0.10	3.53
Oct. 10. 2017	2450 Body	21.7	22.3	2480.0	39.160	1.832	39.080	1.895	-0.20	3.44
				2402.0	52.764	1.904	51.257	1.912	-2.86	0.42
				2412.0	52.751	1.914	51.232	1.921	-2.88	0.37
				2437.0	52.717	1.938	51.166	1.947	-2.94	0.46
				2441.0	52.712	1.941	51.156	1.952	-2.95	0.57
				2450.0	52.700	1.950	51.136	1.962	-2.97	0.62
				2462.0	52.685	1.967	51.113	1.974	-2.98	0.36
2480.0	52.662	1.993	51.062	1.993	-3.04	0.00				

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Sep. 25. 2017	5200 Body	21.6	22.1	5180.0	49.041	5.276	47.970	5.399	-2.18	2.33
				5190.0	49.028	5.288	47.949	5.412	-2.20	2.34
				5200.0	49.014	5.299	47.928	5.426	-2.22	2.40
				5220.0	48.987	5.323	47.887	5.456	-2.25	2.50
				5230.0	48.974	5.334	47.868	5.470	-2.26	2.55
				5240.0	48.960	5.346	47.846	5.483	-2.28	2.56
Sep. 26. 2017	5300 Head	21.4	21.9	5260.0	35.940	4.720	36.079	4.793	0.39	1.55
				5270.0	35.930	4.730	36.058	4.805	0.36	1.59
				5280.0	35.920	4.740	36.039	4.818	0.33	1.65
				5300.0	35.900	4.760	36.009	4.842	0.30	1.72
				5310.0	35.890	4.770	35.992	4.855	0.28	1.78
				5320.0	35.880	4.780	35.976	4.867	0.27	1.82
Sep. 27. 2017	5300 Body	21.1	21.7	5260.0	48.933	5.369	48.032	5.480	-1.84	2.07
				5270.0	48.919	5.381	48.005	5.495	-1.87	2.12
				5280.0	48.906	5.393	47.981	5.509	-1.89	2.15
				5300.0	48.879	5.416	47.939	5.537	-1.92	2.23
				5310.0	48.865	5.428	47.919	5.553	-1.94	2.30
				5320.0	48.851	5.439	47.904	5.568	-1.94	2.37
Sep. 28. 2017	5600 Head	21.3	22.0	5500.0	35.650	4.965	35.483	4.977	-0.47	0.24
				5510.0	35.635	4.976	35.468	4.986	-0.47	0.20
				5550.0	35.575	5.018	35.390	5.033	-0.52	0.30
				5580.0	35.530	5.049	35.338	5.071	-0.54	0.44
				5600.0	35.500	5.070	35.309	5.096	-0.54	0.51
				5660.0	35.440	5.130	35.211	5.162	-0.65	0.62
				5670.0	35.430	5.140	35.190	5.173	-0.68	0.64
				5710.0	35.390	5.180	35.114	5.223	-0.78	0.83
				5720.0	35.380	5.190	35.101	5.236	-0.79	0.89
				5800.0	35.300	5.270	34.969	5.326	-0.94	1.06
Sep. 29. 2017	5600 Body	21.5	21.9	5500.0	48.607	5.650	46.886	5.738	-3.54	1.56
				5510.0	48.594	5.661	46.871	5.751	-3.55	1.59
				5550.0	48.539	5.708	46.802	5.804	-3.58	1.68
				5580.0	48.499	5.743	46.740	5.845	-3.63	1.78
				5600.0	48.471	5.766	46.702	5.876	-3.65	1.91
				5660.0	48.390	5.836	46.603	5.955	-3.69	2.04
				5670.0	48.376	5.848	46.581	5.968	-3.71	2.05
				5710.0	48.322	5.895	46.507	6.029	-3.76	2.27
				5720.0	48.309	5.907	46.494	6.043	-3.76	2.30
				5800.0	48.200	6.000	46.345	6.153	-3.85	2.55
Oct. 03. 2017	5800 Head	21.6	22.1	5745.0	35.355	5.215	34.411	5.215	-2.67	0.00
				5755.0	35.345	5.225	34.393	5.227	-2.69	0.04
				5785.0	35.315	5.255	34.337	5.258	-2.77	0.06
				5795.0	35.305	5.265	34.317	5.271	-2.80	0.11
				5800.0	35.300	5.270	34.309	5.277	-2.81	0.13
				5825.0	35.275	5.296	34.268	5.307	-2.85	0.21
Oct. 05. 2017	5800 Body	21.4	21.9	5745.0	48.275	5.936	46.672	6.006	-3.32	1.18
				5755.0	48.261	5.947	46.655	6.021	-3.33	1.24
				5785.0	48.220	5.982	46.599	6.060	-3.36	1.30
				5795.0	48.207	5.994	46.582	6.075	-3.37	1.35
				5800.0	48.200	6.000	46.575	6.082	-3.37	1.37
				5825.0	48.166	6.029	46.536	6.118	-3.38	1.48

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Extremity SAR was tested using body-equivalent tissue dielectric parameters found in KDB Publication 648474D04v01r03.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Mtsra).

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{\ln(b/a)} \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

11.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 750 MHz, 835 MHz, 1900 MHz, 2450 MHz and 5GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 11.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
C	750	D750V3, SN:1049	Sep. 21. 2017	Head	22.4	22.1	3328	250	8.51	2.11	8.44	-0.82
C	750	D750V3, SN:1049	Sep. 21. 2017	Body	22.4	22.3	3328	250	8.63	2.02	8.08	-6.37
C	835	D835V2, SN:4d159	Sep. 15. 2017	Head	22.1	22.0	3328	250	9.33	2.50	10.00	7.18
C	835	D835V2, SN:4d159	Sep. 18. 2017	Body	21.9	21.7	3328	250	9.57	2.37	9.48	-0.94
C	835	D835V2, SN:4d159	Sep. 19. 2017	Head	21.7	21.6	3328	250	9.33	2.48	9.92	6.32
C	835	D835V2, SN:4d159	Sep. 19. 2017	Body	21.7	21.5	3328	250	9.57	2.39	9.56	-0.10
C	1900	D1900V2, SN:5d176	Sep. 20. 2017	Head	21.9	21.6	3328	250	40.9	10.60	42.40	3.67
C	1900	D1900V2, SN: 5d176	Sep. 20. 2017	Body	21.9	21.8	3328	250	39.3	9.95	39.80	1.27
D	2450	D2450V2, SN: 726	Oct. 09. 2017	Head	21.5	22.0	3328	250	51.9	13.10	52.40	0.96
D	2450	D2450V2, SN: 726	Oct. 10. 2017	Body	21.7	22.3	3328	250	50.3	12.60	50.40	0.20
D	5200	D5GHzV2, SN:1103	Sep. 25. 2017	Body	21.6	22.1	3930	100	74.1	7.40	74.00	-0.13
D	5300	D5GHzV2, SN:1103	Sep. 26. 2017	Head	21.4	21.9	3930	100	84.1	8.65	86.50	2.85
D	5300	D5GHzV2, SN:1103	Sep. 27. 2017	Body	21.1	21.7	3930	100	76.7	8.10	81.00	5.61
D	5600	D5GHzV2, SN:1103	Sep. 28. 2017	Head	21.3	22.0	3930	100	84.5	8.46	84.60	0.12
D	5600	D5GHzV2, SN:1103	Sep. 29. 2017	Body	21.5	21.9	3930	100	80.1	8.32	83.20	3.87
D	5800	D5GHzV2, SN:1103	Oct. 03. 2017	Head	21.6	22.1	3930	100	81.1	7.70	77.00	-5.06
D	5800	D5GHzV2, SN:1103	Oct. 05. 2017	Body	21.4	21.9	3930	100	77.5	7.89	78.90	1.81

Table 11.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
D	5300	D5GHzV2, SN:1103	Sep. 27. 2017	Body	21.1	21.7	3930	100	21.6	2.25	22.50	4.17
D	5600	D5GHzV2, SN:1103	Sep. 29. 2017	Body	21.5	21.9	3930	100	22.4	2.30	23.00	2.68

Note1 : System Verification was measured with input 250 mW, 100 mW (5200-5800 MHz) and normalized to 1W.

Note2 : To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.

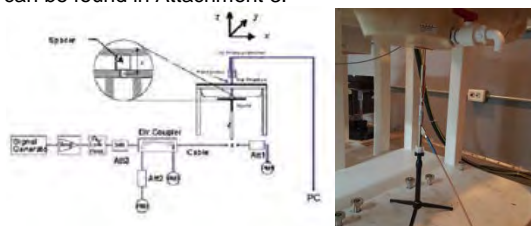


Figure 11.1 Dipole Verification Test Setup Diagram & Photo

12. SAR TEST RESULTS

12.1 Head SAR Results

Table 12.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.7	33.50	0.100	Left Touch	FCC #1	1	1:8.3	0.152	1.047	0.159	A1
836.6	190	GSM850	GSM	33.7	33.50	-0.020	Right Touch	FCC #1	1	1:8.3	0.098	1.047	0.103	
836.6	190	GSM850	GSM	33.7	33.50	0.010	Left Tilt	FCC #1	1	1:8.3	0.070	1.047	0.073	
836.6	190	GSM850	GSM	33.7	33.50	0.110	Right Tilt	FCC #1	1	1:8.3	0.055	1.047	0.058	
836.6	190	GSM850	GPRS	30.2	29.90	0.090	Left Touch	FCC #1	3	1:2.77	0.171	1.072	0.183	A2
836.6	190	GSM850	GPRS	30.2	29.90	0.110	Right Touch	FCC #1	3	1:2.77	0.106	1.072	0.114	
836.6	190	GSM850	GPRS	30.2	29.90	-0.130	Left Tilt	FCC #1	3	1:2.77	0.076	1.072	0.081	
836.6	190	GSM850	GPRS	30.2	29.90	0.060	Right Tilt	FCC #1	3	1:2.77	0.061	1.072	0.065	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	31.7	31.50	0.050	Left Touch	FCC #1	1	1:8.3	0.047	1.047	0.049	A3
1880.0	661	PCS1900	PCS	31.7	31.50	0.150	Right Touch	FCC #1	1	1:8.3	0.043	1.047	0.045	
1880.0	661	PCS1900	PCS	31.7	31.50	0.110	Left Tilt	FCC #1	1	1:8.3	0.038	1.047	0.040	
1880.0	661	PCS1900	PCS	31.7	31.50	0.120	Right Tilt	FCC #1	1	1:8.3	0.018	1.047	0.019	
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.040	Left Touch	FCC #1	3	1:2.77	0.051	1.148	0.059	A4
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.090	Right Touch	FCC #1	3	1:2.77	0.045	1.148	0.052	
1880.0	661	PCS1900	GPRS	28.2	27.60	0.080	Left Tilt	FCC #1	3	1:2.77	0.037	1.148	0.042	
1880.0	661	PCS1900	GPRS	28.2	27.60	0.170	Right Tilt	FCC #1	3	1:2.77	0.019	1.148	0.022	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	25.2	25.18	0.170	Left Touch	FCC #1	1:1	0.249	1.005	0.250	A5
836.6	4183	WCDMA 850	RMC	25.2	25.18	0.150	Right Touch	FCC #1	1:1	0.151	1.005	0.152	
836.6	4183	WCDMA 850	RMC	25.2	25.18	0.170	Left Tilt	FCC #1	1:1	0.116	1.005	0.117	
836.6	4183	WCDMA 850	RMC	25.2	25.18	0.020	Right Tilt	FCC #1	1:1	0.093	1.005	0.093	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 12.1.4 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.2	24.82	-0.170	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.117	1.091	0.128	A6
707.5	23095	LTE B12	10	24.2	23.80	-0.170	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.095	1.096	0.104	
707.5	23095	LTE B12	10	25.2	24.82	0.180	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.098	1.091	0.107	
707.5	23095	LTE B12	10	24.2	23.80	0.130	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.077	1.096	0.084	
707.5	23095	LTE B12	10	25.2	24.82	0.170	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.062	1.091	0.068	
707.5	23095	LTE B12	10	24.2	23.80	0.130	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.046	1.096	0.050	
707.5	23095	LTE B12	10	25.2	24.82	0.110	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.045	1.091	0.049	
707.5	23095	LTE B12	10	24.2	23.80	-0.020	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.050	1.096	0.055	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.5 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.2	24.79	0.180	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.192	1.099	0.211	A7
836.5	20525	LTE B5	10	24.2	23.82	0.090	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.146	1.091	0.159	
836.5	20525	LTE B5	10	25.2	24.79	-0.080	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.123	1.099	0.135	
836.5	20525	LTE B5	10	24.2	23.82	-0.180	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.099	1.091	0.108	
836.5	20525	LTE B5	10	25.2	24.79	0.040	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.086	1.099	0.095	
836.5	20525	LTE B5	10	24.2	23.82	0.120	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.066	1.091	0.072	
836.5	20525	LTE B5	10	25.2	24.79	0.060	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.085	1.099	0.093	
836.5	20525	LTE B5	10	24.2	23.82	0.040	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.075	1.091	0.082	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.6 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch														
2462	11	802.11b (Ant.1)	16.0	15.39	-0.040	Left Touch	FCC #2	0.119	1	98.8	0.113	1.151	1.012	0.132	
2462	11	802.11b (Ant.1)	16.0	15.39	0.190	Right Touch	FCC #2	0.503	1	98.8	0.536	1.151	1.012	0.624	A8
2462	11	802.11b (Ant.1)	16.0	15.39	0.060	Left Tilt	FCC #2	0.064	1	98.8	0.066	1.151	1.012	0.077	
2462	11	802.11b (Ant.1)	16.0	15.39	0.170	Right Tilt	FCC #2	0.221	1	98.8	0.229	1.151	1.012	0.267	
2412	1	802.11b (Ant.2)	16.0	15.53	-0.160	Left Touch	FCC #2	0.343	1	98.8	0.328	1.114	1.012	0.370	
2412	1	802.11b (Ant.1)	16.0	15.53	0.140	Right Touch	FCC #2	0.784	1	98.8	0.761	1.114	1.012	0.858	A9
2437	6	802.11b (Ant.2)	16.0	15.30	-0.120	Right Touch	FCC #2	0.702	1	98.8	0.660	1.175	1.012	0.785	
2412	1	802.11b (Ant.2)	16.0	15.53	0.150	Left Tilt	FCC #2	0.348	1	98.8	0.372	1.114	1.012	0.419	
2412	1	802.11b (Ant.2)	16.0	15.53	0.090	Right Tilt	FCC #2	0.678	1	98.8	0.720	1.114	1.012	0.812	
2437	6	802.11b (Ant.2)	16.0	15.30	-0.060	Right Tilt	FCC #2	0.668	1	98.8	0.700	1.175	1.012	0.832	
2412	1	802.11b (MIMO)	19.0	18.39	-0.090	Left Touch	FCC #2	0.364	1	98.8	0.370	1.175	1.012	0.440	
2412	1	802.11b (MIMO)	19.0	18.39	0.180	Right Touch	FCC #2	0.732	1	98.8	0.765	1.175	1.012	0.910	
2437	6	802.11b (MIMO)	19.0	18.35	0.070	Right Touch	FCC #2	0.810	1	98.8	0.762	1.175	1.012	0.906	
2412	1	802.11b (MIMO)	19.0	18.39	0.190	Left Tilt	FCC #2	0.336	1	98.8	0.364	1.175	1.012	0.433	
2412	1	802.11b (MIMO)	19.0	18.39	0.010	Right Tilt	FCC #2	0.754	1	98.8	0.767	1.175	1.012	0.912	A10
2437	6	802.11b (MIMO)	19.0	18.35	0.150	Right Tilt	FCC #2	0.760	1	98.8	0.743	1.175	1.012	0.884	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Highest reported SAR is > 0.8 W/kg. SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462	11	802.11b (Ant.1)	DSSS	16.0	0.624	2462	802.11g	OFDM	16.0	1.000	0.624	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.624	2462	802.11n	OFDM	15.0	0.794	0.495	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.624	2462	802.11ac	OFDM	15.0	0.794	0.495	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.858	2412	802.11g	OFDM	16.0	1.000	0.858	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.858	2412	802.11n	OFDM	15.0	0.794	0.681	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.858	2412	802.11ac	OFDM	15.0	0.794	0.681	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.912	2412	802.11g	OFDM	19.0	1.000	0.912	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.912	2412	802.11n	OFDM	18.0	0.794	0.724	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.912	2412	802.11ac	OFDM	18.0	0.794	0.724	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.1.7 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441	39	Bluetooth	11.5	10.31	-0.050	Left Touch	FCC #1	1	76.8	0.039	1.315	1.302	0.067	
2441	39	Bluetooth	11.5	10.31	-0.140	Right Touch	FCC #1	1	76.8	0.201	1.315	1.302	0.344	A11
2441	39	Bluetooth	11.5	10.31	-0.120	Left Tilt	FCC #1	1	76.8	0.019	1.315	1.302	0.033	
2441	39	Bluetooth	11.5	10.31	-0.050	Right Tilt	FCC #1	1	76.8	0.080	1.315	1.302	0.137	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 12.1.8 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch														
5260	52	802.11a (Ant.1)	16.0	15.40	0.150	Left Touch	FCC #2	0.091	6	98.1	0.057	1.148	1.020	0.067	
5260	52	802.11a (Ant.1)	16.0	15.40	-0.060	Right Touch	FCC #2	0.130	6	98.1	0.115	1.148	1.020	0.135	
5260	52	802.11a (Ant.1)	16.0	15.40	0.130	Left Tilt	FCC #2	0.087	6	98.1	0.075	1.148	1.020	0.088	
5260	52	802.11a (Ant.1)	16.0	15.40	-0.010	Right Tilt	FCC #2	0.134	6	98.1	0.149	1.148	1.020	0.174	A12
5260	52	802.11a (Ant.2)	16.0	15.65	-0.050	Left Touch	FCC #2	0.370	6	98.1	0.364	1.084	1.020	0.402	
5260	52	802.11a (Ant.2)	16.0	15.65	-0.070	Right Touch	FCC #2	0.589	6	98.1	0.679	1.084	1.020	0.751	A13
5260	52	802.11a (Ant.2)	16.0	15.65	0.060	Left Tilt	FCC #2	0.398	6	98.1	0.394	1.084	1.020	0.436	
5260	52	802.11a (Ant.2)	16.0	15.65	0.170	Right Tilt	FCC #2	0.543	6	98.1	0.576	1.084	1.020	0.637	
5260	52	802.11a (MIMO)	19.0	18.54	0.000	Left Touch	FCC #2	0.369	6	98.1	0.369	1.148	1.020	0.432	
5260	52	802.11a (MIMO)	19.0	18.54	0.100	Right Touch	FCC #2	0.478	6	98.1	0.545	1.148	1.020	0.638	
5260	52	802.11a (MIMO)	19.0	18.54	-0.060	Left Tilt	FCC #2	0.422	6	98.1	0.412	1.148	1.020	0.482	
5260	52	802.11a (MIMO)	19.0	18.54	0.040	Right Tilt	FCC #2	0.561	6	98.1	0.683	1.148	1.020	0.800	A14
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

- Note(s):
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
 - Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5260	52	802.11a (Ant.1)	OFDM	16.0	0.174	5220	802.11a	OFDM	16.0	1.000	0.174	X
5260	52	802.11a (Ant.2)	OFDM	16.0	0.751	5240	802.11a	OFDM	16.0	1.000	0.751	X
5260	52	802.11a (MIMO)	OFDM	19.0	0.800	5240	802.11a	OFDM	19.0	1.000	0.800	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram				

- Note(s):
- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 12.1.9 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5580	116	802.11a (Ant.1)	16.0	15.10	-0.000	Left Touch	FCC #2	0.127	6	98.1	0.082	1.230	1.020	0.103	
5580	116	802.11a (Ant.1)	16.0	15.10	-0.090	Right Touch	FCC #2	0.226	6	98.1	0.183	1.230	1.020	0.230	A15
5580	116	802.11a (Ant.1)	16.0	15.10	0.020	Left Tilt	FCC #2	0.121	6	98.1	0.086	1.230	1.020	0.108	
5580	116	802.11a (Ant.1)	16.0	15.10	-0.040	Right Tilt	FCC #2	0.130	6	98.1	0.144	1.230	1.020	0.181	
5660	132	802.11a (Ant.2)	16.0	15.64	0.100	Left Touch	FCC #2	0.212	6	98.1	0.186	1.086	1.020	0.206	
5660	132	802.11a (Ant.2)	16.0	15.64	0.060	Right Touch	FCC #2	0.370	6	98.1	0.485	1.086	1.020	0.537	A16
5660	132	802.11a (Ant.2)	16.0	15.64	0.110	Left Tilt	FCC #2	0.265	6	98.1	0.254	1.086	1.020	0.281	
5660	132	802.11a (Ant.2)	16.0	15.64	-0.110	Right Tilt	FCC #2	0.372	6	98.1	0.405	1.086	1.020	0.449	
5660	132	802.11a (MIMO)	19.0	18.30	0.120	Left Touch	FCC #2	0.226	6	98.1	0.192	1.230	1.020	0.241	
5660	132	802.11a (MIMO)	19.0	18.30	0.140	Right Touch	FCC #2	0.397	6	98.1	0.455	1.230	1.020	0.571	
5660	132	802.11a (MIMO)	19.0	18.30	-0.050	Left Tilt	FCC #2	0.280	6	98.1	0.275	1.230	1.020	0.345	
5660	132	802.11a (MIMO)	19.0	18.30	0.070	Right Tilt	FCC #2	0.380	6	98.1	0.474	1.230	1.020	0.595	A17
5745	149	802.11a (Ant.1)	16.0	15.25	-0.010	Left Touch	FCC #2	0.118	6	98.1	0.072	1.189	1.020	0.087	
5745	149	802.11a (Ant.1)	16.0	15.25	0.010	Right Touch	FCC #2	0.305	6	98.1	0.267	1.189	1.020	0.324	A18
5745	149	802.11a (Ant.1)	16.0	15.25	0.070	Left Tilt	FCC #2	0.083	6	98.1	0.068	1.189	1.020	0.082	
5745	149	802.11a (Ant.1)	16.0	15.25	0.160	Right Tilt	FCC #2	0.114	6	98.1	0.095	1.189	1.020	0.115	
5825	165	802.11a (Ant.2)	16.0	15.96	0.140	Left Touch	FCC #2	0.272	6	98.1	0.240	1.009	1.020	0.247	
5825	165	802.11a (Ant.2)	16.0	15.96	-0.150	Right Touch	FCC #2	0.185	6	98.1	0.277	1.009	1.020	0.285	
5825	165	802.11a (Ant.2)	16.0	15.96	0.120	Left Tilt	FCC #2	0.325	6	98.1	0.306	1.009	1.020	0.315	A19
5825	165	802.11a (Ant.2)	16.0	15.96	0.070	Right Tilt	FCC #2	0.272	6	98.1	0.258	1.009	1.020	0.266	
5825	165	802.11a (MIMO)	19.0	18.60	0.070	Left Touch	FCC #2	0.246	6	98.1	0.218	1.189	1.020	0.264	
5825	165	802.11a (MIMO)	19.0	18.60	-0.140	Right Touch	FCC #2	0.352	6	98.1	0.332	1.189	1.020	0.403	A20
5825	165	802.11a (MIMO)	19.0	18.60	-0.040	Left Tilt	FCC #2	0.274	6	98.1	0.271	1.189	1.020	0.329	
5825	165	802.11a (MIMO)	19.0	18.60	-0.140	Right Tilt	FCC #2	0.218	6	98.1	0.216	1.189	1.020	0.262	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

12.2 Standalone Body-Worn SAR Worn SAR Results

Table 12.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.7	33.50	-0.040	10 mm [Front]	FCC #1	1	1:8.3	0.491	1.047	0.514	
836.6	190	GSM850	GSM	33.7	33.50	-0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.518	1.047	0.542	A21
836.6	190	GSM850	GPRS	30.2	29.90	0.170	10 mm [Front]	FCC #1	3	1:2.77	0.541	1.072	0.580	
836.6	190	GSM850	GPRS	30.2	29.90	-0.070	10 mm [Rear]	FCC #1	3	1:2.77	0.560	1.072	0.600	A22
1880.0	661	PCS1900	PCS	31.7	31.50	-0.050	10 mm [Front]	FCC #1	1	1:8.3	0.199	1.047	0.208	A23
1880.0	661	PCS1900	PCS	31.7	31.50	-0.080	10 mm [Rear]	FCC #1	1	1:8.3	0.169	1.047	0.177	
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.020	10 mm [Front]	FCC #1	3	1:2.77	0.205	1.148	0.235	A24
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.040	10 mm [Rear]	FCC #1	3	1:2.77	0.182	1.148	0.209	
826.4	4132	WCDMA 850	RMC	25.2	25.12	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.704	1.019	0.717	
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.803	1.005	0.807	
846.6	4233	WCDMA 850	RMC	25.2	25.19	-0.010	10 mm [Front]	FCC #1	N/A	1:1	0.866	1.002	0.868	A25
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.771	1.005	0.775	
846.6	4233	WCDMA 850	RMC	25.2	25.19	-0.020	10 mm [Front]	FCC #1	N/A	1:1	0.865	1.002	0.867	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

- Blue entries represent variability measurements.

Table 12.2.2 LTE B12, LTE B5 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.2	24.82	-0.050	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.430	1.091	0.469	
707.5	23095	LTE B12	10	24.2	23.80	-0.030	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.344	1.096	0.377	
707.5	23095	LTE B12	10	25.2	24.82	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.445	1.091	0.485	A26
707.5	23095	LTE B12	10	24.2	23.80	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.361	1.096	0.396	
836.5	20525	LTE B5	10	25.2	24.79	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.567	1.099	0.623	
836.5	20525	LTE B5	10	24.2	23.82	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.408	1.091	0.445	
836.5	20525	LTE B5	10	25.2	24.79	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.609	1.099	0.669	A27
836.5	20525	LTE B5	10	24.2	23.82	-0.000	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.489	1.091	0.533	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.2.3 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2462	11	802.11b (Ant.1)	16.0	15.39	0.050	10 mm [Front]	FCC #2	0.056	1	98.8	0.057	1.151	1.012	0.066	
2462	11	802.11b (Ant.1)	16.0	15.39	0.020	10 mm [Rear]	FCC #2	0.085	1	98.8	0.093	1.151	1.012	0.108	A28
2412	1	802.11b (Ant.2)	16.0	15.53	0.050	10 mm [Front]	FCC #2	0.099	1	98.8	0.101	1.114	1.012	0.114	A29
2412	1	802.11b (Ant.2)	16.0	15.53	-0.130	10 mm [Rear]	FCC #2	0.078	1	98.8	0.066	1.114	1.012	0.074	
2412	1	802.11b (MIMO)	19.0	18.39	0.020	10 mm [Front]	FCC #2	0.103	1	98.8	0.104	1.175	1.012	0.124	
2412	1	802.11b (MIMO)	19.0	18.39	0.020	10 mm [Rear]	FCC #2	0.136	1	98.8	0.146	1.175	1.012	0.174	A30
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Model/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462	11	802.11b (Ant.1)	DSSS	16.0	0.108	2462	802.11g	OFDM	16.0	1.000	0.108	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.108	2462	802.11n	OFDM	15.0	0.794	0.086	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.108	2462	802.11ac	OFDM	15.0	0.794	0.086	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11g	OFDM	16.0	1.000	0.114	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11n	OFDM	15.0	0.794	0.091	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11ac	OFDM	15.0	0.794	0.091	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11g	OFDM	19.0	1.000	0.174	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11n	OFDM	18.0	0.794	0.138	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11ac	OFDM	18.0	0.794	0.138	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.2.4 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441	39	Bluetooth	11.5	10.31	0.090	10 mm [Front]	FCC #1	1	76.8	0.030	1.315	1.302	0.051	
2441	39	Bluetooth	11.5	10.31	0.000	10 mm [Rear]	FCC #1	1	76.8	0.036	1.315	1.302	0.062	A31
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5260	52	802.11a (Ant.1)	16.0	15.40	-0.010	10 mm [Front]	FCC #2	0.033	6	98.1	0.018	1.148	1.020	0.021	
5260	52	802.11a (Ant.1)	16.0	15.40	-0.070	10 mm [Rear]	FCC #2	0.272	6	98.1	0.266	1.148	1.020	0.311	A32
5260	52	802.11a (Ant.2)	16.0	15.65	0.040	10 mm [Front]	FCC #2	0.122	6	98.1	0.118	1.084	1.020	0.130	
5260	52	802.11a (Ant.2)	16.0	15.65	-0.000	10 mm [Rear]	FCC #2	0.437	6	98.1	0.430	1.084	1.020	0.475	A33
5260	52	802.11a (MIMO)	19.0	18.54	0.030	10 mm [Front]	FCC #2	0.107	6	98.1	0.109	1.148	1.020	0.128	
5260	52	802.11a (MIMO)	19.0	18.54	-0.000	10 mm [Rear]	FCC #2	0.576	6	98.1	0.546	1.148	1.020	0.639	A34
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

- Note(s):
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
 - Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5260	52	802.11a (Ant.1)	OFDM	16.0	0.311	5220	802.11a	OFDM	16.0	1.000	0.311	X
5260	52	802.11a (Ant.2)	OFDM	16.0	0.475	5240	802.11a	OFDM	16.0	1.000	0.475	X
5260	52	802.11a (MIMO)	OFDM	19.0	0.639	5240	802.11a	OFDM	19.0	1.000	0.639	X
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

- Note(s):
- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 12.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5580	116	802.11a (Ant.1)	16.0	15.10	0.180	10 mm [Front]	FCC #2	0.049	6	98.1	0.039	1.230	1.020	0.049	
5580	116	802.11a (Ant.1)	16.0	15.10	-0.090	10 mm [Rear]	FCC #2	0.334	6	98.1	0.342	1.230	1.020	0.429	A35
5660	132	802.11a (Ant.2)	16.0	15.64	0.040	10 mm [Front]	FCC #2	0.085	6	98.1	0.050	1.086	1.020	0.055	
5660	132	802.11a (Ant.2)	16.0	15.64	-0.190	10 mm [Rear]	FCC #2	0.527	6	98.1	0.547	1.086	1.020	0.606	A36
5660	132	802.11a (MIMO)	19.0	18.30	-0.060	10 mm [Front]	FCC #2	0.078	6	98.1	0.069	1.230	1.020	0.087	
5660	132	802.11a (MIMO)	19.0	18.30	-0.050	10 mm [Rear]	FCC #2	0.532	6	98.1	0.525	1.230	1.020	0.659	A37
5745	149	802.11a (Ant.1)	16.0	15.25	-0.150	10 mm [Front]	FCC #2	0.060	6	98.1	0.052	1.189	1.020	0.063	
5745	149	802.11a (Ant.1)	16.0	15.25	-0.010	10 mm [Rear]	FCC #2	0.422	6	98.1	0.448	1.189	1.020	0.543	A38
5825	165	802.11a (Ant.2)	16.0	15.96	-0.020	10 mm [Front]	FCC #2	0.034	6	98.1	0.017	1.009	1.020	0.017	
5825	165	802.11a (Ant.2)	16.0	15.96	-0.010	10 mm [Rear]	FCC #2	0.332	6	98.1	0.340	1.009	1.020	0.350	A39
5825	165	802.11a (MIMO)	19.0	18.60	0.070	10 mm [Front]	FCC #2	0.070	6	98.1	0.058	1.189	1.020	0.070	
5825	165	802.11a (MIMO)	19.0	18.60	-0.190	10 mm [Rear]	FCC #2	0.412	6	98.1	0.450	1.189	1.020	0.546	A40
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

12.3 Standalone Hotspot SAR Results

Table 12.3.1 GPRS Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	30.2	29.90	-0.030	10 mm [Bottom]	FCC #1	3	1:2.77	0.300	1.072	0.322	
836.6	190	GSM850	GPRS	30.2	29.90	0.170	10 mm [Front]	FCC #1	3	1:2.77	0.541	1.072	0.580	
836.6	190	GSM850	GPRS	30.2	29.90	-0.070	10 mm [Rear]	FCC #1	3	1:2.77	0.560	1.072	0.600	A22
836.6	190	GSM850	GPRS	30.2	29.90	-0.080	10 mm [Right]	FCC #1	3	1:2.77	0.075	1.072	0.080	
836.6	190	GSM850	GPRS	30.2	29.90	-0.130	10 mm [Left]	FCC #1	3	1:2.77	0.250	1.072	0.268	
1880.0	661	PCS1900	GPRS	28.2	27.60	0.040	10 mm [Bottom]	FCC #1	3	1:2.77	0.220	1.148	0.253	A41
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.020	10 mm [Front]	FCC #1	3	1:2.77	0.205	1.148	0.235	
1880.0	661	PCS1900	GPRS	28.2	27.60	-0.040	10 mm [Rear]	FCC #1	3	1:2.77	0.182	1.148	0.209	
1880.0	661	PCS1900	GPRS	28.2	27.60	0.060	10 mm [Left]	FCC #1	3	1:2.77	0.097	1.148	0.111	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.3.2 WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.000	10 mm [Bottom]	FCC #1	N/A	1:1	0.434	1.005	0.436	
826.4	4132	WCDMA 850	RMC	25.2	25.12	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.704	1.019	0.717	
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.803	1.005	0.807	
846.6	4233	WCDMA 850	RMC	25.2	25.19	-0.010	10 mm [Front]	FCC #1	N/A	1:1	0.866	1.002	0.868	A25
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.771	1.005	0.775	
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.080	10 mm [Right]	FCC #1	N/A	1:1	0.129	1.005	0.130	
836.6	4183	WCDMA 850	RMC	25.2	25.18	-0.020	10 mm [Left]	FCC #1	N/A	1:1	0.389	1.005	0.391	
846.6	4233	WCDMA 850	RMC	25.2	25.19	-0.020	10 mm [Front]	FCC #1	N/A	1:1	0.865	1.002	0.867	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent variability measurements.

Table 12.3.3 LTE B12, LTE B5 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.2	24.82	-0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.269	1.091	0.293	
707.5	23095	LTE B12	10	24.2	23.80	-0.000	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.213	1.096	0.233	
707.5	23095	LTE B12	10	25.2	24.82	-0.050	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.430	1.091	0.469	
707.5	23095	LTE B12	10	24.2	23.80	-0.030	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.344	1.096	0.377	
707.5	23095	LTE B12	10	25.2	24.82	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.445	1.091	0.485	A26
707.5	23095	LTE B12	10	24.2	23.80	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.361	1.096	0.396	
707.5	23095	LTE B12	10	25.2	24.82	-0.050	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.161	1.091	0.176	
707.5	23095	LTE B12	10	24.2	23.80	-0.060	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.128	1.096	0.140	
707.5	23095	LTE B12	10	25.2	24.82	-0.000	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.079	1.091	0.086	
707.5	23095	LTE B12	10	24.2	23.80	-0.000	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.064	1.096	0.070	
836.5	20525	LTE B5	10	25.2	24.79	-0.070	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.351	1.099	0.386	
836.5	20525	LTE B5	10	24.2	23.82	-0.080	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.282	1.091	0.308	
836.5	20525	LTE B5	10	25.2	24.79	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.567	1.099	0.623	
836.5	20525	LTE B5	10	24.2	23.82	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.480	1.091	0.524	
836.5	20525	LTE B5	10	25.2	24.79	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.609	1.099	0.669	A27
836.5	20525	LTE B5	10	24.2	23.82	-0.000	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.489	1.091	0.533	
836.5	20525	LTE B5	10	25.2	24.79	-0.140	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.103	1.099	0.113	
836.5	20525	LTE B5	10	24.2	23.82	-0.150	1	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.081	1.091	0.088	
836.5	20525	LTE B5	10	25.2	24.79	-0.040	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.303	1.099	0.333	
836.5	20525	LTE B5	10	24.2	23.82	-0.030	1	10 mm [Left]	FCC #1	QPSK	25	0	1:1	0.241	1.091	0.263	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 12.3.4 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2462	11	802.11b (Ant.1)	16.0	15.39	0.110	10 mm [Top]	FCC #2	0.031	1	98.8	0.031	1.151	1.012	0.036	
2462	11	802.11b (Ant.1)	16.0	15.39	0.050	10 mm [Front]	FCC #2	0.056	1	98.8	0.057	1.151	1.012	0.066	
2462	11	802.11b (Ant.1)	16.0	15.39	0.020	10 mm [Rear]	FCC #2	0.085	1	98.8	0.093	1.151	1.012	0.108	
2462	11	802.11b (Ant.1)	16.0	15.39	0.090	10 mm [Left]	FCC #2	0.131	1	98.8	0.144	1.151	1.012	0.168	A42
2412	1	802.11b (Ant.2)	16.0	15.53	-0.050	10 mm [Top]	FCC #2	0.096	1	98.8	0.096	1.114	1.012	0.108	
2412	1	802.11b (Ant.2)	16.0	15.53	0.050	10 mm [Front]	FCC #2	0.099	1	98.8	0.101	1.114	1.012	0.114	A29
2412	1	802.11b (Ant.2)	16.0	15.53	-0.130	10 mm [Rear]	FCC #2	0.078	1	98.8	0.066	1.114	1.012	0.074	
2412	1	802.11b (Ant.2)	16.0	15.53	0.140	10 mm [Left]	FCC #2	0.014	1	98.8	0.00791	1.114	1.012	0.009	
2412	1	802.11b (MIMO)	19.0	18.39	-0.120	10 mm [Top]	FCC #2	0.108	1	98.8	0.107	1.175	1.012	0.127	
2412	1	802.11b (MIMO)	19.0	18.39	0.020	10 mm [Front]	FCC #2	0.103	1	98.8	0.104	1.175	1.012	0.124	
2412	1	802.11b (MIMO)	19.0	18.39	0.020	10 mm [Rear]	FCC #2	0.136	1	98.8	0.146	1.175	1.012	0.174	A30
2412	1	802.11b (MIMO)	19.0	18.39	0.030	10 mm [Left]	FCC #2	0.120	1	98.8	0.133	1.175	1.012	0.158	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462	11	802.11b (Ant.1)	DSSS	16.0	0.168	2462	802.11g	OFDM	16.0	1.000	0.168	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.168	2462	802.11n	OFDM	15.0	0.794	0.133	X
2462	11	802.11b (Ant.1)	DSSS	16.0	0.168	2462	802.11ac	OFDM	15.0	0.794	0.133	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11g	OFDM	16.0	1.000	0.114	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11n	OFDM	15.0	0.794	0.091	X
2412	1	802.11b (Ant.2)	DSSS	16.0	0.114	2412	802.11ac	OFDM	15.0	0.794	0.091	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11g	OFDM	19.0	1.000	0.174	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11n	OFDM	18.0	0.794	0.138	X
2412	1	802.11b (MIMO)	DSSS	19.0	0.174	2412	802.11ac	OFDM	18.0	0.794	0.138	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.2.5 Bluetooth Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441	39	Bluetooth	11.5	10.31	0.140	10 mm [Top]	FCC #1	1	76.8	0.008	1.315	1.302	0.014	
2441	39	Bluetooth	11.5	10.31	0.090	10 mm [Front]	FCC #1	1	76.8	0.030	1.315	1.302	0.051	
2441	39	Bluetooth	11.5	10.31	0.000	10 mm [Rear]	FCC #1	1	76.8	0.036	1.315	1.302	0.062	
2441	39	Bluetooth	11.5	10.31	-0.120	10 mm [Left]	FCC #1	1	76.8	0.045	1.315	1.302	0.077	A43
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.3.6 UNII Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5220	44	802.11a (Ant.1)	16.0	15.26	-0.110	10 mm [Top]	FCC #2	0.060	6	98.1	0.049	1.186	1.020	0.059	
5220	44	802.11a (Ant.1)	16.0	15.26	-0.190	10 mm [Front]	FCC #2	0.023	6	98.1	0.017	1.186	1.020	0.021	
5220	44	802.11a (Ant.1)	16.0	15.26	-0.090	10 mm [Rear]	FCC #2	0.234	6	98.1	0.234	1.186	1.020	0.283	A44
5220	44	802.11a (Ant.1)	16.0	15.26	-0.170	10 mm [Left]	FCC #2	0.120	6	98.1	0.114	1.186	1.020	0.138	
5240	48	802.11a (Ant.2)	16.0	15.63	-0.100	10 mm [Top]	FCC #2	0.128	6	98.1	0.123	1.089	1.020	0.137	
5240	48	802.11a (Ant.2)	16.0	15.63	-0.010	10 mm [Front]	FCC #2	0.121	6	98.1	0.111	1.089	1.020	0.123	
5240	48	802.11a (Ant.2)	16.0	15.63	-0.090	10 mm [Rear]	FCC #2	0.417	6	98.1	0.417	1.089	1.020	0.463	A45
5240	48	802.11a (Ant.2)	16.0	15.63	0.040	10 mm [Left]	FCC #2	0.114	6	98.1	0.107	1.089	1.020	0.119	
5240	48	802.11a (MIMO)	19.0	18.44	-0.120	10 mm [Top]	FCC #2	0.171	6	98.1	0.159	1.186	1.020	0.192	
5240	48	802.11a (MIMO)	19.0	18.44	-0.170	10 mm [Front]	FCC #2	0.124	6	98.1	0.117	1.186	1.020	0.142	
5240	48	802.11a (MIMO)	19.0	18.44	-0.170	10 mm [Rear]	FCC #2	0.573	6	98.1	0.544	1.186	1.020	0.658	A46
5240	48	802.11a (MIMO)	19.0	18.44	0.000	10 mm [Left]	FCC #2	0.234	6	98.1	0.229	1.186	1.020	0.277	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

Table 12.3.7 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5745	149	802.11a (Ant.1)	16.0	15.25	-0.100	10 mm [Top]	FCC #2	0.053	6	98.1	0.041	1.189	1.020	0.050	
5745	149	802.11a (Ant.1)	16.0	15.25	-0.150	10 mm [Front]	FCC #2	0.060	6	98.1	0.052	1.189	1.020	0.063	
5745	149	802.11a (Ant.1)	16.0	15.25	-0.010	10 mm [Rear]	FCC #2	0.422	6	98.1	0.448	1.189	1.020	0.543	A38
5745	149	802.11a (Ant.1)	16.0	15.25	-0.070	10 mm [Left]	FCC #2	0.199	6	98.1	0.193	1.189	1.020	0.234	
5825	165	802.11a (Ant.2)	16.0	15.96	-0.060	10 mm [Top]	FCC #2	0.207	6	98.1	0.198	1.009	1.020	0.204	
5825	165	802.11a (Ant.2)	16.0	15.96	-0.020	10 mm [Front]	FCC #2	0.034	6	98.1	0.017	1.009	1.020	0.017	
5825	165	802.11a (Ant.2)	16.0	15.96	-0.010	10 mm [Rear]	FCC #2	0.332	6	98.1	0.340	1.009	1.020	0.350	A39
5825	165	802.11a (Ant.2)	16.0	15.96	-0.140	10 mm [Left]	FCC #2	0.013	6	98.1	0.011	1.009	1.020	0.011	
5825	165	802.11a (MIMO)	19.0	18.60	-0.080	10 mm [Top]	FCC #2	0.181	6	98.1	0.181	1.189	1.020	0.220	
5825	165	802.11a (MIMO)	19.0	18.60	0.070	10 mm [Front]	FCC #2	0.070	6	98.1	0.058	1.189	1.020	0.070	
5825	165	802.11a (MIMO)	19.0	18.60	-0.190	10 mm [Rear]	FCC #2	0.412	6	98.1	0.450	1.189	1.020	0.546	A40
5825	165	802.11a (MIMO)	19.0	18.60	-0.140	10 mm [Left]	FCC #2	0.245	6	98.1	0.249	1.189	1.020	0.302	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

12.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR scaled to maximum output power, including tolerance) < 1.2 W/kg.

Table 12.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5260	52	802.11a (Ant.1)	16.0	15.40	0.130	0 mm [Top]	FCC #2	0.142	6	98.1	0.136	1.148	1.020	0.159	
5260	52	802.11a (Ant.1)	16.0	15.40	0.030	0 mm [Front]	FCC #2	0.088	6	98.1	0.069	1.148	1.020	0.081	
5260	52	802.11a (Ant.1)	16.0	15.40	-0.080	0 mm [Rear]	FCC #2	0.635	6	98.1	0.978	1.148	1.020	1.145	A47
5260	52	802.11a (Ant.1)	16.0	15.40	-0.020	0 mm [Left]	FCC #2	0.270	6	98.1	0.287	1.148	1.020	0.336	
5260	52	802.11a (Ant.2)	16.0	15.65	0.110	0 mm [Top]	FCC #2	0.500	6	98.1	0.520	1.084	1.020	0.575	
5260	52	802.11a (Ant.2)	16.0	15.65	-0.080	0 mm [Front]	FCC #2	0.260	6	98.1	0.295	1.084	1.020	0.326	
5260	52	802.11a (Ant.2)	16.0	15.65	-0.130	0 mm [Rear]	FCC #2	1.040	6	98.1	0.989	1.084	1.020	1.094	A48
5260	52	802.11a (Ant.2)	16.0	15.65	-0.090	0 mm [Left]	FCC #2	0.165	6	98.1	0.146	1.084	1.020	0.161	
5260	52	802.11a (MIMO)	19.0	18.54	0.070	0 mm [Top]	FCC #2	0.633	6	98.1	0.639	1.148	1.020	0.748	
5260	52	802.11a (MIMO)	19.0	18.54	-0.080	0 mm [Front]	FCC #2	0.458	6	98.1	0.444	1.148	1.020	0.520	
5260	52	802.11a (MIMO)	19.0	18.54	-0.120	0 mm [Rear]	FCC #2	1.820	6	98.1	1.760	1.148	1.020	2.061	
5300	60	802.11a (MIMO)	19.0	18.33	-0.120	0 mm [Rear]	FCC #2	1.700	6	98.1	1.740	1.167	1.020	2.071	A49
5260	52	802.11a (MIMO)	19.0	18.54	0.180	0 mm [Left]	FCC #2	0.492	6	98.1	0.494	1.148	1.020	0.578	
ANSI / IEEE C95.1-1992- SAFETY LIMIT															
Spatial Peak								Hand							
Uncontrolled Exposure/General Population Exposure								4.0 W/kg (mW/g)							
								averaged over 10 gram							

Note(s):

- Highest reported SAR is ≤ 1.0 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 1.0 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 2.0 W/kg was reported.
- Highest reported SAR is > 2.0 W/kg. SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 3.0 W/kg or all required channels are tested.

Table 12.4.2 UNII Phablet SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5580	116	802.11a (Ant.1)	16.0	15.10	-0.140	0 mm [Top]	FCC #2	0.134	6	98.1	0.141	1.230	1.020	0.177	
5580	116	802.11a (Ant.1)	16.0	15.10	0.170	0 mm [Front]	FCC #2	0.134	6	98.1	0.123	1.230	1.020	0.154	
5580	116	802.11a (Ant.1)	16.0	15.10	-0.090	0 mm [Rear]	FCC #2	0.679	6	98.1	0.930	1.230	1.020	1.167	A50
5580	116	802.11a (Ant.1)	16.0	15.10	0.090	0 mm [Left]	FCC #2	0.393	6	98.1	0.411	1.230	1.020	0.516	
5660	132	802.11a (Ant.2)	16.0	15.64	-0.180	0 mm [Top]	FCC #2	0.377	6	98.1	0.390	1.086	1.020	0.432	
5660	132	802.11a (Ant.2)	16.0	15.64	-0.030	0 mm [Front]	FCC #2	0.132	6	98.1	0.161	1.086	1.020	0.178	
5660	132	802.11a (Ant.2)	16.0	15.64	-0.010	0 mm [Rear]	FCC #2	1.170	6	98.1	1.100	1.086	1.020	1.218	A51
5660	132	802.11a (Ant.2)	16.0	15.64	-0.190	0 mm [Left]	FCC #2	0.124	6	98.1	0.115	1.086	1.020	0.127	
5660	132	802.11a (MIMO)	19.0	18.30	-0.130	0 mm [Top]	FCC #2	0.438	6	98.1	0.449	1.230	1.020	0.563	
5660	132	802.11a (MIMO)	19.0	18.30	-0.120	0 mm [Front]	FCC #2	0.247	6	98.1	0.270	1.230	1.020	0.339	
5500	100	802.11a (MIMO)	19.0	18.29	0.080	0 mm [Rear]	FCC #2	1.530	6	98.1	1.820	1.230	1.020	2.283	
5660	132	802.11a (MIMO)	19.0	18.30	0.070	0 mm [Rear]	FCC #2	1.620	6	98.1	1.960	1.230	1.020	2.459	A52
5660	132	802.11a (MIMO)	19.0	18.30	-0.070	0 mm [Left]	FCC #2	0.588	6	98.1	0.607	1.230	1.020	0.762	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Hand 4.0 W/kg (mW/g) averaged over 10 gram							

Note(s):

- Highest reported SAR is ≤ 1.0 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 1.0 W/kg. Due to the highest reported SAR for this test position, other test position is Head exposure condition were evaluated until a SAR ≤ 2.0 W/kg was reported.
- Highest reported SAR is > 2.0 W/kg. SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 3.0 W/kg or all required channels are tested.
- Blue entries represent variability measurements.

12.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 14 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI was not activated).
10. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > $\frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 5.
2. According to FCC KDB 941225 D05v02r05.
When the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjusted SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 10.5 for the time-domain plot and calculation for the duty factor of the device.

13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

13.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

13.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

13.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 13.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

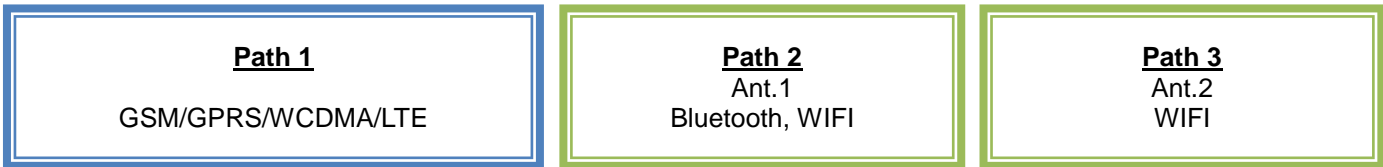


Figure 13.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 13.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	GSM850/1900 voice	GPRS 850/1900	WCDMA 850 Voice	WCDMA 850 data (HSDPA,HSUPA)	LTE B12,B17,B5	WIFI 2.4GHz 802.11b/g/n/ac	WIFI 5GHz 802.11a/n/ac	Bluetooth 2.4GHz
1	GSM850/1900 voice		No	No	No	No	Yes	Yes	Yes
2	GPRS 850/1900	No		No	No	No	Yes	Yes	Yes
3	WCDMA 850 Voice	No	No		No	No	Yes	Yes	Yes
4	WCDMA 850 data (HSDPA,HSUPA)	No	No	No		No	Yes	Yes	Yes
5	LTE B12,B17,B5	No	No	No	No		Yes	Yes	Yes
6	WIFI 2.4GHz 802.11b/g/n/ac	Yes	Yes	Yes	Yes	Yes		Yes	No
7	WIFI 5GHz 802.11a/n/ac	Yes	Yes	Yes	Yes	Yes	Yes		Yes
8	Bluetooth 2.4GHz	Yes	Yes	Yes	Yes	Yes	No	Yes	

Table 13.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	
3	GSM Voice + Bluetooth 2.4 GHz	Yes	Yes	N/A	
4	GSM Voice + Wi-Fi 2.4 GHz MIMO	Yes	Yes	N/A	
5	GSM Voice + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	
6	GSM Voice + Wi-Fi 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	N/A	
7	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz SISO	Yes	Yes	N/A	
8	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes	Yes	N/A	
9	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	
10	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes	
11	WCDMA + Bluetooth 2.4 GHz	Yes	Yes	Yes	
12	WCDMA + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	
13	WCDMA + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes	
14	WCDMA + Wi-Fi 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes	
15	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz SISO	Yes	Yes	Yes	
16	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes	Yes	Yes	
17	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	
18	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes	
19	LTE + Bluetooth 2.4 GHz	Yes	Yes	Yes	
20	LTE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	
21	LTE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes	
22	LTE + Wi-Fi 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes	
23	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz SISO	Yes	Yes	Yes	
24	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes	Yes	Yes	
25	GPRS + Wi-Fi 2.4 GHz	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
26	GPRS + Wi-Fi 5 GHz	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
27	GPRS + Bluetooth 2.4 GHz	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
28	GPRS + Wi-Fi 2.4 GHz MIMO	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
29	GPRS + Wi-Fi 5 GHz MIMO	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
30	GPRS + Wi-Fi 2.4 GHz + Wi-Fi 5GHz	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
31	GPRS + Bluetooth 2.4 GHz + Wi-Fi 5GHz SISO	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered
32	GPRS + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes	Yes *	Yes	* Pre-installed VOIP applications are considered

Notes:

1. Wi-Fi 2.4GHz is supported Hotspot and Wi-Fi-Direct(GO/GC).
2. Wi-Fi 5GHz is supported Hotspot in UNII B1,B3 and Wi-Fi-Direct(GO/GC) in UNII B1,B3.
3. Wi-Fi 2.4GHz and 5GHz are supported in the same time(DBS)
4. LTE, WCDMA, GPRS is supported Hotspot.
5. VoIP is supported in LTE, WCDMA, GSM
6. Bluetooth and Wi-Fi can not transmit simultaneously at 2.4G band.
7. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
8. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
9. Per the manufacturer, Wi-Fi Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving Wi-Fi direct beyond that listed in the above table.

13.4 Head SAR Simultaneous Transmission Analysis

All simultaneous cases were investigated and the worst case simultaneous results are reported for each band/mode/configuration.

Table 13.4.1 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.624	0.727
	GPRS 850	0.114	0.624	0.738
	GSM 1900	0.045	0.624	0.669
	GPRS 1900	0.052	0.624	0.676
	WCDMA 850	0.152	0.624	0.776
	LTE Band 12	0.107	0.624	0.731
	LTE Band 5	0.135	0.624	0.759

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.132	0.382
	Right Touch	0.152	0.624	0.776
	Left Tilt	0.117	0.077	0.194
	Right Tilt	0.093	0.267	0.360

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.2 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.858	0.961
	GPRS 850	0.114	0.858	0.972
	GSM 1900	0.045	0.858	0.903
	GPRS 1900	0.052	0.858	0.910
	WCDMA 850	0.152	0.858	1.010
	LTE Band 12	0.107	0.858	0.965
	LTE Band 5	0.135	0.858	0.993

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.370	0.620
	Right Touch	0.152	0.858	1.010
	Left Tilt	0.117	0.419	0.536
	Right Tilt	0.093	0.832	0.925

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.3 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.910	1.013
	GPRS 850	0.114	0.910	1.024
	GSM 1900	0.045	0.910	0.955
	GPRS 1900	0.052	0.910	0.962
	WCDMA 850	0.152	0.910	1.062
	LTE Band 12	0.107	0.910	1.017
	LTE Band 5	0.135	0.910	1.045

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.440	0.690
	Right Touch	0.152	0.910	1.062
	Left Tilt	0.117	0.433	0.550
	Right Tilt	0.093	0.912	1.005

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN MIMO simultaneous case for held to ear.

Table 13.4.4 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.135	0.238
	GPRS 850	0.183	0.067	0.250
	GSM 1900	0.019	0.174	0.193
	GPRS 1900	0.022	0.174	0.196
	WCDMA 850	0.250	0.067	0.317
	LTE Band 12	0.107	0.135	0.242
	LTE Band 5	0.211	0.067	0.278

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.067	0.317
	Right Touch	0.152	0.135	0.287
	Left Tilt	0.117	0.088	0.205
	Right Tilt	0.093	0.174	0.267

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.5 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.751	0.854
	GPRS 850	0.114	0.751	0.865
	GSM 1900	0.045	0.751	0.796
	GPRS 1900	0.052	0.751	0.803
	WCDMA 850	0.152	0.751	0.903
	LTE Band 12	0.107	0.751	0.858
	LTE Band 5	0.135	0.751	0.886

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.402	0.652
	Right Touch	0.152	0.751	0.903
	Left Tilt	0.117	0.436	0.553
	Right Tilt	0.093	0.637	0.730

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.6 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.058	0.800	0.858
	GPRS 850	0.065	0.800	0.865
	GSM 1900	0.019	0.800	0.819
	GPRS 1900	0.022	0.800	0.822
	WCDMA 850	0.093	0.800	0.893
	LTE Band 12	0.055	0.800	0.855
	LTE Band 5	0.093	0.800	0.893

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.432	0.682
	Right Touch	0.152	0.638	0.790
	Left Tilt	0.117	0.482	0.599
	Right Tilt	0.093	0.800	0.893

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN MIMO simultaneous case for held to ear.

Table 13.4.7 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.230	0.333
	GPRS 850	0.114	0.230	0.344
	GSM 1900	0.045	0.230	0.275
	GPRS 1900	0.052	0.230	0.282
	WCDMA 850	0.152	0.230	0.382
	LTE Band 12	0.107	0.230	0.337
	LTE Band 5	0.135	0.230	0.365

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.103	0.353
	Right Touch	0.152	0.230	0.382
	Left Tilt	0.117	0.108	0.225
	Right Tilt	0.093	0.181	0.274

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.8 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.537	0.640
	GPRS 850	0.114	0.537	0.651
	GSM 1900	0.045	0.537	0.582
	GPRS 1900	0.052	0.537	0.589
	WCDMA 850	0.152	0.537	0.689
	LTE Band 12	0.107	0.537	0.644
	LTE Band 5	0.135	0.537	0.672

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.206	0.456
	Right Touch	0.152	0.537	0.689
	Left Tilt	0.117	0.281	0.398
	Right Tilt	0.093	0.449	0.542

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.9 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.571	0.674
	GPRS 850	0.114	0.571	0.685
	GSM 1900	0.045	0.571	0.616
	GPRS 1900	0.052	0.571	0.623
	WCDMA 850	0.152	0.571	0.723
	LTE Band 12	0.107	0.571	0.678
	LTE Band 5	0.135	0.571	0.706

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.241	0.491
	Right Touch	0.152	0.571	0.723
	Left Tilt	0.117	0.345	0.462
	Right Tilt	0.093	0.595	0.688

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN MIMO simultaneous case for held to ear.

Table 13.4.10 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.324	0.427
	GPRS 850	0.114	0.324	0.438
	GSM 1900	0.045	0.324	0.369
	GPRS 1900	0.052	0.324	0.376
	WCDMA 850	0.152	0.324	0.476
	LTE Band 12	0.107	0.324	0.431
	LTE Band 5	0.135	0.324	0.459

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.087	0.337
	Right Touch	0.152	0.324	0.476
	Left Tilt	0.117	0.082	0.199
	Right Tilt	0.093	0.115	0.208

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.11 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.159	0.247	0.406
	GPRS 850	0.183	0.247	0.430
	GSM 1900	0.040	0.315	0.355
	GPRS 1900	0.042	0.315	0.357
	WCDMA 850	0.250	0.247	0.497
	LTE Band 12	0.107	0.285	0.392
	LTE Band 5	0.211	0.247	0.458

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.247	0.497
	Right Touch	0.152	0.285	0.437
	Left Tilt	0.117	0.315	0.432
	Right Tilt	0.093	0.266	0.359

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.12 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.403	0.506
	GPRS 850	0.114	0.403	0.517
	GSM 1900	0.045	0.403	0.448
	GPRS 1900	0.052	0.403	0.455
	WCDMA 850	0.152	0.403	0.555
	LTE Band 12	0.107	0.403	0.510
	LTE Band 5	0.135	0.403	0.538

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.264	0.514
	Right Touch	0.152	0.403	0.555
	Left Tilt	0.117	0.329	0.446
	Right Tilt	0.093	0.262	0.355

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN MIMO simultaneous case for held to ear.

Table 13.4.13 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.3 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.624	0.751	0.727	0.854	1.478
	GPRS 850	0.114	0.624	0.751	0.738	0.865	1.489
	GSM 1900	0.045	0.624	0.751	0.669	0.796	1.420
	GPRS 1900	0.052	0.624	0.751	0.676	0.803	1.427
	WCDMA 850	0.152	0.624	0.751	0.776	0.903	1.527
	LTE Band 12	0.107	0.624	0.751	0.731	0.858	1.482
	LTE Band 5	0.135	0.624	0.751	0.759	0.886	1.510

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.132	0.402	0.382	0.652	0.784
	Right Touch	0.152	0.624	0.751	0.776	0.903	1.527
	Left Tilt	0.117	0.077	0.436	0.194	0.553	0.630
	Right Tilt	0.093	0.267	0.637	0.360	0.730	0.997

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.3G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.14 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.6 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.624	0.537	0.727	0.64	1.264
	GPRS 850	0.114	0.624	0.537	0.738	0.651	1.275
	GSM 1900	0.045	0.624	0.537	0.669	0.582	1.206
	GPRS 1900	0.052	0.624	0.537	0.676	0.589	1.213
	WCDMA 850	0.152	0.624	0.537	0.776	0.689	1.313
	LTE Band 12	0.107	0.624	0.537	0.731	0.644	1.268
	LTE Band 5	0.135	0.624	0.537	0.759	0.672	1.296

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.132	0.206	0.382	0.456	0.588
	Right Touch	0.152	0.624	0.537	0.776	0.689	1.313
	Left Tilt	0.117	0.077	0.281	0.194	0.398	0.475
	Right Tilt	0.093	0.267	0.449	0.360	0.542	0.809

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.6G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.15 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.8 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.624	0.285	0.727	0.388	1.012
	GPRS 850	0.114	0.624	0.285	0.738	0.399	1.023
	GSM 1900	0.045	0.624	0.285	0.669	0.33	0.954
	GPRS 1900	0.052	0.624	0.285	0.676	0.337	0.961
	WCDMA 850	0.152	0.624	0.285	0.776	0.437	1.061
	LTE Band 12	0.107	0.624	0.285	0.731	0.392	1.016
	LTE Band 5	0.135	0.624	0.285	0.759	0.42	1.044

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.132	0.247	0.382	0.497	0.629
	Right Touch	0.152	0.624	0.285	0.776	0.437	1.061
	Left Tilt	0.117	0.077	0.315	0.194	0.432	0.509
	Right Tilt	0.093	0.267	0.266	0.360	0.359	0.626

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.8G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.16 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz Ant.1 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.135	0.447	0.238	0.582
	GPRS 850	0.114	0.344	0.135	0.458	0.249	0.593
	GSM 1900	0.045	0.344	0.135	0.389	0.18	0.524
	GPRS 1900	0.052	0.344	0.135	0.396	0.187	0.531
	WCDMA 850	0.152	0.344	0.135	0.496	0.287	0.631
	LTE Band 12	0.107	0.344	0.135	0.451	0.242	0.586
	LTE Band 5	0.135	0.344	0.135	0.479	0.270	0.614

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.067	0.317	0.317	0.384
	Right Touch	0.152	0.344	0.135	0.496	0.287	0.631
	Left Tilt	0.117	0.033	0.088	0.150	0.205	0.238
	Right Tilt	0.093	0.137	0.174	0.230	0.267	0.404

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.17 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz Ant.1 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.230	0.447	0.333	0.677
	GPRS 850	0.114	0.344	0.230	0.458	0.344	0.688
	GSM 1900	0.045	0.344	0.230	0.389	0.275	0.619
	GPRS 1900	0.052	0.344	0.230	0.396	0.282	0.626
	WCDMA 850	0.152	0.344	0.230	0.496	0.382	0.726
	LTE Band 12	0.107	0.344	0.230	0.451	0.337	0.681
	LTE Band 5	0.135	0.344	0.230	0.479	0.365	0.709

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.103	0.317	0.353	0.420
	Right Touch	0.152	0.344	0.230	0.496	0.382	0.726
	Left Tilt	0.117	0.033	0.108	0.150	0.225	0.258
	Right Tilt	0.093	0.137	0.181	0.230	0.274	0.411

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.18 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.1 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.324	0.447	0.427	0.771
	GPRS 850	0.114	0.344	0.324	0.458	0.438	0.782
	GSM 1900	0.045	0.344	0.324	0.389	0.369	0.713
	GPRS 1900	0.052	0.344	0.324	0.396	0.376	0.720
	WCDMA 850	0.152	0.344	0.324	0.496	0.476	0.820
	LTE Band 12	0.107	0.344	0.324	0.451	0.431	0.775
	LTE Band 5	0.135	0.344	0.324	0.479	0.459	0.803

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.087	0.317	0.337	0.404
	Right Touch	0.152	0.344	0.324	0.496	0.476	0.820
	Left Tilt	0.117	0.033	0.082	0.150	0.199	0.232
	Right Tilt	0.093	0.137	0.115	0.230	0.208	0.345

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.19 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.751	0.447	0.854	1.198
	GPRS 850	0.114	0.344	0.751	0.458	0.865	1.209
	GSM 1900	0.045	0.344	0.751	0.389	0.796	1.140
	GPRS 1900	0.052	0.344	0.751	0.396	0.803	1.147
	WCDMA 850	0.152	0.344	0.751	0.496	0.903	1.247
	LTE Band 12	0.107	0.344	0.751	0.451	0.858	1.202
	LTE Band 5	0.135	0.344	0.751	0.479	0.886	1.230

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.402	0.317	0.652	0.719
	Right Touch	0.152	0.344	0.751	0.496	0.903	1.247
	Left Tilt	0.117	0.033	0.436	0.150	0.553	0.586
	Right Tilt	0.093	0.137	0.637	0.230	0.730	0.867

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.20 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.537	0.447	0.640	0.984
	GPRS 850	0.114	0.344	0.537	0.458	0.651	0.995
	GSM 1900	0.045	0.344	0.537	0.389	0.582	0.926
	GPRS 1900	0.052	0.344	0.537	0.396	0.589	0.933
	WCDMA 850	0.152	0.344	0.537	0.496	0.689	1.033
	LTE Band 12	0.107	0.344	0.537	0.451	0.644	0.988
	LTE Band 5	0.135	0.344	0.537	0.479	0.672	1.016

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.206	0.317	0.456	0.523
	Right Touch	0.152	0.344	0.537	0.496	0.689	1.033
	Left Tilt	0.117	0.033	0.281	0.150	0.398	0.431
	Right Tilt	0.093	0.137	0.449	0.230	0.542	0.679

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN Ant.1 simultaneous case for held to ear.

Table 13.4.21 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.2 W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.285	0.447	0.388	0.732
	GPRS 850	0.114	0.344	0.285	0.458	0.399	0.743
	GSM 1900	0.045	0.344	0.285	0.389	0.33	0.674
	GPRS 1900	0.052	0.344	0.285	0.396	0.337	0.681
	WCDMA 850	0.152	0.344	0.285	0.496	0.437	0.781
	LTE Band 12	0.107	0.344	0.285	0.451	0.392	0.736
	LTE Band 5	0.135	0.344	0.285	0.479	0.420	0.764

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.247	0.317	0.497	0.564
	Right Touch	0.152	0.344	0.285	0.496	0.437	0.781
	Left Tilt	0.117	0.033	0.315	0.150	0.432	0.465
	Right Tilt	0.093	0.137	0.266	0.230	0.359	0.496

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.22 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz MIMO W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.638	0.447	0.741	1.085
	GPRS 850	0.114	0.344	0.638	0.458	0.752	1.096
	GSM 1900	0.045	0.344	0.638	0.389	0.683	1.027
	GPRS 1900	0.052	0.344	0.638	0.396	0.690	1.034
	WCDMA 850	0.152	0.344	0.638	0.496	0.790	1.134
	LTE Band 12	0.107	0.344	0.638	0.451	0.745	1.089
	LTE Band 5	0.135	0.344	0.638	0.479	0.773	1.117

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.432	0.317	0.682	0.749
	Right Touch	0.152	0.344	0.638	0.496	0.790	1.134
	Left Tilt	0.117	0.033	0.482	0.150	0.599	0.632
	Right Tilt	0.093	0.137	0.800	0.230	0.893	1.030

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN MIMO simultaneous case for held to ear.

Table 13.4.23 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz MIMO W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.571	0.447	0.674	1.018
	GPRS 850	0.114	0.344	0.571	0.458	0.685	1.029
	GSM 1900	0.045	0.344	0.571	0.389	0.616	0.960
	GPRS 1900	0.052	0.344	0.571	0.396	0.623	0.967
	WCDMA 850	0.152	0.344	0.571	0.496	0.723	1.067
	LTE Band 12	0.107	0.344	0.571	0.451	0.678	1.022
	LTE Band 5	0.135	0.344	0.571	0.479	0.706	1.050

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.241	0.317	0.491	0.558
	Right Touch	0.152	0.344	0.571	0.496	0.723	1.067
	Left Tilt	0.117	0.033	0.345	0.150	0.462	0.495
	Right Tilt	0.093	0.137	0.595	0.230	0.688	0.825

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN MIMO simultaneous case for held to ear.

Table 13.4.24 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz MIMO W-LAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.103	0.344	0.403	0.447	0.506	0.850
	GPRS 850	0.114	0.344	0.403	0.458	0.517	0.861
	GSM 1900	0.045	0.344	0.403	0.389	0.448	0.792
	GPRS 1900	0.052	0.344	0.403	0.396	0.455	0.799
	WCDMA 850	0.152	0.344	0.403	0.496	0.555	0.899
	LTE Band 12	0.107	0.344	0.403	0.451	0.510	0.854
	LTE Band 5	0.135	0.344	0.403	0.479	0.538	0.882

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Left Touch	0.250	0.067	0.264	0.317	0.514	0.581
	Right Touch	0.152	0.344	0.403	0.496	0.555	0.899
	Left Tilt	0.117	0.033	0.329	0.150	0.446	0.479
	Right Tilt	0.093	0.137	0.262	0.230	0.355	0.492

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN MIMO simultaneous case for held to ear.

Table 13.4.25 Simultaneous Transmission Scenario for 2.4 GHz Ant.1 and 5 GHz Ant.2 W-LAN (Held to Ear)

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.132	0.402	0.534
	Right Touch	0.624	0.751	1.375
	Left Tilt	0.077	0.436	0.513
	Right Tilt	0.267	0.637	0.904

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.132	0.206	0.338
	Right Touch	0.624	0.537	1.161
	Left Tilt	0.077	0.281	0.358
	Right Tilt	0.267	0.449	0.716

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.132	0.247	0.379
	Right Touch	0.624	0.285	0.909
	Left Tilt	0.077	0.315	0.392
	Right Tilt	0.267	0.266	0.533

Note : The above simultaneous result is the worst case result for 2.4G WLAN Ant1 + 5G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.26 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz Ant.1 W-LAN (Held to Ear)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.067	0.134
	Right Touch	0.344	0.135	0.479
	Left Tilt	0.033	0.088	0.121
	Right Tilt	0.137	0.174	0.311

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.103	0.170
	Right Touch	0.344	0.230	0.574
	Left Tilt	0.033	0.108	0.141
	Right Tilt	0.137	0.181	0.318

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.087	0.154
	Right Touch	0.344	0.324	0.668
	Left Tilt	0.033	0.082	0.115
	Right Tilt	0.137	0.115	0.252

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN Ant1 simultaneous case for held to ear.

Table 13.4.27 Simultaneous Transmission Scenario for Bluetooth Ant.2 and 5 GHz Ant.2 W-LAN (Held to Ear)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.402	0.469
	Right Touch	0.344	0.751	1.095
	Left Tilt	0.033	0.436	0.469
	Right Tilt	0.137	0.637	0.774

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.206	0.273
	Right Touch	0.344	0.537	0.881
	Left Tilt	0.033	0.281	0.314
	Right Tilt	0.137	0.449	0.586

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.247	0.314
	Right Touch	0.344	0.285	0.629
	Left Tilt	0.033	0.315	0.348
	Right Tilt	0.137	0.266	0.403

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN Ant2 simultaneous case for held to ear.

Table 13.4.28 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz MIMO W-LAN (Held to Ear)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.432	0.499
	Right Touch	0.344	0.638	0.982
	Left Tilt	0.033	0.482	0.515
	Right Tilt	0.137	0.800	0.937

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.241	0.308
	Right Touch	0.344	0.571	0.915
	Left Tilt	0.033	0.345	0.378
	Right Tilt	0.137	0.595	0.732

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.067	0.264	0.331
	Right Touch	0.344	0.403	0.747
	Left Tilt	0.033	0.329	0.362
	Right Tilt	0.137	0.262	0.399

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN MIMO simultaneous case for held to ear.

Table 13.4.29 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.103	0.344	0.447
	GPRS 850	0.114	0.344	0.458
	GSM 1900	0.045	0.344	0.389
	GPRS 1900	0.052	0.344	0.396
	WCDMA 850	0.152	0.344	0.496
	LTE Band 12	0.107	0.344	0.451
	LTE Band 5	0.135	0.344	0.479

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Left Touch	0.250	0.067	0.317
	Right Touch	0.152	0.344	0.496
	Left Tilt	0.117	0.033	0.150
	Right Tilt	0.093	0.137	0.230

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth simultaneous case for held to ear.

13.5 Body-Worn Simultaneous Transmission Analysis

All simultaneous cases were investigated and the worst case simultaneous results are reported for each band/mode/configuration.

Table 13.5.1 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1. SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.108	0.650
	GPRS 850	0.600	0.108	0.708
	GSM 1900	0.177	0.108	0.285
	GPRS 1900	0.209	0.108	0.317
	WCDMA 850	0.868	0.066	0.934
	LTE Band 12	0.485	0.108	0.593
	LTE Band 5	0.669	0.108	0.777

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1. SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.066	0.934
	Rear	0.775	0.108	0.883

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 simultaneous case for body worn.

Table 13.5.2 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2. SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.514	0.114	0.628
	GPRS 850	0.580	0.114	0.694
	GSM 1900	0.208	0.114	0.322
	GPRS 1900	0.235	0.114	0.349
	WCDMA 850	0.868	0.114	0.982
	LTE Band 12	0.469	0.114	0.583
	LTE Band 5	0.669	0.074	0.743

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.2. SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.114	0.982
	Rear	0.775	0.074	0.849

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant2 simultaneous case for body worn.

Table 13.5.3 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.174	0.716
	GPRS 850	0.600	0.174	0.774
	GSM 1900	0.177	0.174	0.351
	GPRS 1900	0.209	0.174	0.383
	WCDMA 850	0.868	0.124	0.992
	LTE Band 12	0.485	0.174	0.659
	LTE Band 5	0.669	0.174	0.843

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.124	0.992
	Rear	0.775	0.174	0.949

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN MIMO simultaneous case for body worn.

Table 13.5.4 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.311	0.853
	GPRS 850	0.600	0.311	0.911
	GSM 1900	0.177	0.311	0.488
	GPRS 1900	0.209	0.311	0.520
	WCDMA 850	0.775	0.311	1.086
	LTE Band 12	0.485	0.311	0.796
	LTE Band 5	0.669	0.311	0.980

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.021	0.889
	Rear	0.775	0.311	1.086

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN Ant1 simultaneous case for body worn.

Table 13.5.5 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.475	1.017
	GPRS 850	0.600	0.475	1.075
	GSM 1900	0.177	0.475	0.652
	GPRS 1900	0.209	0.475	0.684
	WCDMA 850	0.775	0.475	1.250
	LTE Band 12	0.485	0.475	0.960
	LTE Band 51	0.669	0.475	1.144

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.130	0.998
	Rear	0.775	0.475	1.250

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN Ant2 simultaneous case for body worn.

Table 13.5.6 Simultaneous Transmission Scenario for 2G/3G/4G with 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.639	1.181
	GPRS 850	0.600	0.639	1.239
	GSM 1900	0.177	0.639	0.816
	GPRS 1900	0.209	0.639	0.848
	WCDMA 850	0.775	0.639	1.414
	LTE Band 12	0.485	0.639	1.124
	LTE Band 5	0.669	0.639	1.308

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.128	0.996
	Rear	0.775	0.639	1.414

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.3G WLAN MIMO simultaneous case for body worn.

Table 13.5.7 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.429	0.971
	GPRS 850	0.600	0.429	1.029
	GSM 1900	0.177	0.429	0.606
	GPRS 1900	0.209	0.429	0.638
	WCDMA 850	0.775	0.429	1.204
	LTE Band 12	0.485	0.429	0.914
	LTE Band 5	0.669	0.429	1.098

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.049	0.917
	Rear	0.775	0.429	1.204

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN Ant1 simultaneous case for body worn.

Table 13.5.8 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.606	1.148
	GPRS 850	0.600	0.606	1.206
	GSM 1900	0.177	0.606	0.783
	GPRS 1900	0.209	0.606	0.815
	WCDMA 850	0.775	0.606	1.381
	LTE Band 12	0.485	0.606	1.091
	LTE Band 5	0.669	0.606	1.275

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.055	0.923
	Rear	0.775	0.606	1.381

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN Ant2 simultaneous case for body worn.

Table 13.5.9 Simultaneous Transmission Scenario for 2G/3G/4G with 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.659	1.201
	GPRS 850	0.600	0.659	1.259
	GSM 1900	0.177	0.659	0.836
	GPRS 1900	0.209	0.659	0.868
	WCDMA 850	0.775	0.659	1.434
	LTE Band 12	0.485	0.659	1.144
	LTE Band 5	0.669	0.659	1.328

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.087	0.955
	Rear	0.775	0.659	1.434

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.6G WLAN MIMO simultaneous case for body worn.

Table 13.5.10 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.543	1.085
	GPRS 850	0.600	0.543	1.143
	GSM 1900	0.177	0.543	0.720
	GPRS 1900	0.209	0.543	0.752
	WCDMA 850	0.775	0.543	1.318
	LTE Band 12	0.485	0.543	1.028
	LTE Band 5	0.669	0.543	1.212

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.063	0.931
	Rear	0.775	0.543	1.318

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant1 simultaneous case for body worn.

Table 13.5.11 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.350	0.892
	GPRS 850	0.600	0.350	0.950
	GSM 1900	0.177	0.350	0.527
	GPRS 1900	0.209	0.350	0.559
	WCDMA 850	0.775	0.350	1.125
	LTE Band 12	0.485	0.350	0.835
	LTE Band 5	0.669	0.350	1.019

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.017	0.885
	Rear	0.775	0.350	1.125

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant2 simultaneous case for body worn.

Table 13.5.12 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.546	1.088
	GPRS 850	0.600	0.546	1.146
	GSM 1900	0.177	0.546	0.723
	GPRS 1900	0.209	0.546	0.755
	WCDMA 850	0.775	0.546	1.321
	LTE Band 12	0.485	0.546	1.031
	LTE Band 5	0.669	0.546	1.215

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.070	0.938
	Rear	0.775	0.546	1.321

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN MIMO simultaneous case for body worn.

Table 13.5.13 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.3 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.108	0.475	0.650	1.017	1.125
	GPRS 850	0.600	0.108	0.475	0.708	1.075	1.183
	GSM 1900	0.177	0.108	0.475	0.285	0.652	0.760
	GPRS 1900	0.209	0.108	0.475	0.317	0.684	0.792
	WCDMA 850	0.775	0.108	0.475	0.883	1.250	1.358
	LTE Band 12	0.485	0.108	0.475	0.593	0.960	1.068
	LTE Band 5	0.669	0.108	0.475	0.777	1.144	1.252

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.066	0.130	0.934	0.998	1.064
	Rear	0.775	0.108	0.475	0.883	1.250	1.358

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.3G WLAN Ant2 simultaneous case for body worn.

Table 13.5.14 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.6 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.108	0.606	0.650	1.148	1.256
	GPRS 850	0.600	0.108	0.606	0.708	1.206	1.314
	GSM 1900	0.177	0.108	0.606	0.285	0.783	0.891
	GPRS 1900	0.209	0.108	0.606	0.317	0.815	0.923
	WCDMA 850	0.775	0.108	0.606	0.883	1.381	1.489
	LTE Band 12	0.485	0.108	0.606	0.593	1.091	1.199
	LTE Band 5	0.669	0.108	0.606	0.777	1.275	1.383

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.066	0.055	0.934	0.923	0.989
	Rear	0.775	0.108	0.606	0.883	1.381	1.489

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.6G WLAN Ant2 simultaneous case for body worn.

Table 13.5.15 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.8 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.108	0.350	0.650	0.892	1.000
	GPRS 850	0.600	0.108	0.350	0.708	0.950	1.058
	GSM 1900	0.177	0.108	0.350	0.285	0.527	0.635
	GPRS 1900	0.209	0.108	0.350	0.317	0.559	0.667
	WCDMA 850	0.775	0.108	0.350	0.883	1.125	1.233
	LTE Band 12	0.485	0.108	0.350	0.593	0.835	0.943
	LTE Band 5	0.669	0.108	0.350	0.777	1.019	1.127

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.066	0.017	0.934	0.885	0.951
	Rear	0.775	0.108	0.350	0.883	1.125	1.233

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.8G WLAN Ant2 simultaneous case for body worn.

Table 13.5.16 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz Ant.1 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.311	0.604	0.853	0.915
	GPRS 850	0.600	0.062	0.311	0.662	0.911	0.973
	GSM 1900	0.177	0.062	0.311	0.239	0.488	0.550
	GPRS 1900	0.209	0.062	0.311	0.271	0.520	0.582
	WCDMA 850	0.775	0.062	0.311	0.837	1.086	1.148
	LTE Band 12	0.485	0.062	0.311	0.547	0.796	0.858
	LTE Band 5	0.669	0.062	0.311	0.731	0.980	1.042

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.021	0.919	0.889	0.940
	Rear	0.775	0.062	0.311	0.837	1.086	1.148

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN Ant1 simultaneous case for body worn.

Table 13.5.17 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz Ant.1 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.429	0.604	0.971	1.033
	GPRS 850	0.600	0.062	0.429	0.662	1.029	1.091
	GSM 1900	0.177	0.062	0.429	0.239	0.606	0.668
	GPRS 1900	0.209	0.062	0.429	0.271	0.638	0.700
	WCDMA 850	0.775	0.062	0.429	0.837	1.204	1.266
	LTE Band 12	0.485	0.062	0.429	0.547	0.914	0.976
	LTE Band 5	0.669	0.062	0.429	0.731	1.098	1.160

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.049	0.919	0.917	0.968
	Rear	0.775	0.062	0.429	0.837	1.204	1.266

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN Ant1 simultaneous case for body worn.

Table 13.5.18 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.1 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.543	0.604	1.085	1.147
	GPRS 850	0.600	0.062	0.543	0.662	1.143	1.205
	GSM 1900	0.177	0.062	0.543	0.239	0.720	0.782
	GPRS 1900	0.209	0.062	0.543	0.271	0.752	0.814
	WCDMA 850	0.775	0.062	0.543	0.837	1.318	1.380
	LTE Band 12	0.485	0.062	0.543	0.547	1.028	1.090
	LTE Band 5	0.669	0.062	0.543	0.731	1.212	1.274

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.063	0.919	0.931	0.982
	Rear	0.775	0.062	0.543	0.837	1.318	1.380

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant1 simultaneous case for body worn.

Table 13.5.19 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.475	0.604	1.017	1.079
	GPRS 850	0.600	0.062	0.475	0.662	1.075	1.137
	GSM 1900	0.177	0.062	0.475	0.239	0.652	0.714
	GPRS 1900	0.209	0.062	0.475	0.271	0.684	0.746
	WCDMA 850	0.775	0.062	0.475	0.837	1.250	1.312
	LTE Band 12	0.485	0.062	0.475	0.547	0.960	1.022
	LTE Band 5	0.669	0.062	0.475	0.731	1.144	1.206

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.130	0.919	0.998	1.049
	Rear	0.775	0.062	0.475	0.837	1.250	1.312

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN Ant2 simultaneous case for body worn.

Table 13.5.20 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.606	0.604	1.148	1.210
	GPRS 850	0.600	0.062	0.606	0.662	1.206	1.268
	GSM 1900	0.177	0.062	0.606	0.239	0.783	0.845
	GPRS 1900	0.209	0.062	0.606	0.271	0.815	0.877
	WCDMA 850	0.775	0.062	0.606	0.837	1.381	1.443
	LTE Band 12	0.485	0.062	0.606	0.547	1.091	1.153
	LTE Band 5	0.669	0.062	0.606	0.731	1.275	1.337

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.055	0.919	0.923	0.974
	Rear	0.775	0.062	0.606	0.837	1.381	1.443

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN Ant2 simultaneous case for body worn.

Table 13.5.21 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.350	0.604	0.892	0.954
	GPRS 850	0.600	0.062	0.350	0.662	0.950	1.012
	GSM 1900	0.177	0.062	0.350	0.239	0.527	0.589
	GPRS 1900	0.209	0.062	0.350	0.271	0.559	0.621
	WCDMA 850	0.775	0.062	0.350	0.837	1.125	1.187
	LTE Band 12	0.485	0.062	0.350	0.547	0.835	0.897
	LTE Band 5	0.669	0.062	0.350	0.731	1.019	1.081

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.017	0.919	0.885	0.936
	Rear	0.775	0.062	0.350	0.837	1.125	1.187

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant2 simultaneous case for body worn.

Table 13.5.22 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.3 GHz MIMO W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.639	0.604	1.181	1.243
	GPRS 850	0.600	0.062	0.639	0.662	1.239	1.301
	GSM 1900	0.177	0.062	0.639	0.239	0.816	0.878
	GPRS 1900	0.209	0.062	0.639	0.271	0.848	0.910
	WCDMA 850	0.775	0.062	0.639	0.837	1.414	1.476
	LTE Band 12	0.485	0.062	0.639	0.547	1.124	1.186
	LTE Band 5	0.669	0.062	0.639	0.731	1.308	1.370

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.128	0.919	0.996	1.047
	Rear	0.775	0.062	0.639	0.837	1.414	1.476

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.3G WLAN MIMO simultaneous case for body worn.

Table 13.5.23 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.6 GHz MIMO W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.659	0.604	1.201	1.263
	GPRS 850	0.600	0.062	0.659	0.662	1.259	1.321
	GSM 1900	0.177	0.062	0.659	0.239	0.836	0.898
	GPRS 1900	0.209	0.062	0.659	0.271	0.868	0.930
	WCDMA 850	0.775	0.062	0.659	0.837	1.434	1.496
	LTE Band 12	0.485	0.062	0.659	0.547	1.144	1.206
	LTE Band 5	0.669	0.062	0.659	0.731	1.328	1.390

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.087	0.919	0.955	1.006
	Rear	0.775	0.062	0.659	0.837	1.434	1.496

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.6G WLAN MIMO simultaneous case for body worn.

Table 13.5.24 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz MIMO W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	0.542	0.062	0.546	0.604	1.088	1.150
	GPRS 850	0.600	0.062	0.546	0.662	1.146	1.208
	GSM 1900	0.177	0.062	0.546	0.239	0.723	0.785
	GPRS 1900	0.209	0.062	0.546	0.271	0.755	0.817
	WCDMA 850	0.775	0.062	0.546	0.837	1.321	1.383
	LTE Band 12	0.485	0.062	0.546	0.547	1.031	1.093
	LTE Band 5	0.669	0.062	0.546	0.731	1.215	1.277

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	Front	0.868	0.051	0.070	0.919	0.938	0.989
	Rear	0.775	0.062	0.546	0.837	1.321	1.383

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN MIMO simultaneous case for body worn.

Table 13.5.25 Simultaneous Transmission Scenario for 2.4 GHz Ant.1 and 5 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.066	0.130	0.196
	Rear	0.108	0.475	0.583

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.066	0.055	0.121
	Rear	0.108	0.606	0.714

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.066	0.017	0.083
	Rear	0.108	0.350	0.458

Note : The above simultaneous result is the worst case result for 2.4G WLAN Ant1 + 5G WLAN Ant2 simultaneous case for body worn.

Table 13.5.26 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz Ant.1 W-LAN (Body-Worn at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.021	0.072
	Rear	0.062	0.311	0.373

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.049	0.100
	Rear	0.062	0.429	0.491

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.063	0.114
	Rear	0.062	0.543	0.605

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN Ant1 simultaneous case for body worn.

Table 13.5.27 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz Ant.2 W-LAN (Body-Worn at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.130	0.181
	Rear	0.062	0.475	0.537

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.055	0.106
	Rear	0.062	0.606	0.668

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.017	0.068
	Rear	0.062	0.350	0.412

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN Ant2 simultaneous case for body worn.

Table 13.5.28 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz MIMO W-LAN (Body-Worn at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.128	0.179
	Rear	0.062	0.639	0.701

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.087	0.138
	Rear	0.062	0.659	0.721

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.051	0.070	0.121
	Rear	0.062	0.546	0.608

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5G WLAN MIMO simultaneous case for body worn.

Table 13.5.29 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	GSM 850	0.542	0.062	0.604
	GPRS 850	0.600	0.062	0.662
	GSM 1900	0.208	0.051	0.259
	GPRS 1900	0.235	0.051	0.286
	WCDMA 850	0.868	0.051	0.919
	LTE Band 12	0.485	0.062	0.547
	LTE Band 5	0.669	0.062	0.731

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body-Worn SAR	Front	0.868	0.051	0.919
	Rear	0.775	0.062	0.837

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth simultaneous case for body worn.

13.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("-").

All simultaneous cases were investigated and the worst case simultaneous results are reported for each band/mode/configuration.

Table 13.6.1 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.108	0.708
	GPRS 1900	0.209	0.108	0.317
	WCDMA 850	0.868	0.066	0.934
	LTE Band 12	0.485	0.108	0.593
	LTE Band 5	0.669	0.108	0.777

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.036	0.036
	Bottom	0.436	-	0.436
	Front	0.868	0.066	0.934
	Rear	0.775	0.108	0.883
	Right	0.130	-	0.130
	Left	0.391	0.168	0.559

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.2 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.580	0.114	0.694
	GPRS 1900	0.235	0.114	0.349
	WCDMA 850	0.868	0.114	0.982
	LTE Band 12	0.469	0.114	0.583
	LTE Band 5	0.669	0.074	0.743

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.108	0.108
	Bottom	0.436	-	0.436
	Front	0.868	0.114	0.982
	Rear	0.775	0.074	0.849
	Right	0.130	-	0.130
	Left	0.391	0.099	0.490

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.3 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.174	0.774
	GPRS 1900	0.209	0.174	0.383
	WCDMA 850	0.868	0.124	0.992
	LTE Band 12	0.485	0.174	0.659
	LTE Band 5	0.669	0.174	0.843

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.127	0.127
	Bottom	0.436	-	0.436
	Front	0.868	0.124	0.992
	Rear	0.775	0.174	0.949
	Right	0.130	-	0.130
	Left	0.391	0.158	0.549

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN MIMO simultaneous case for Hotspot.

Table 13.6.4 Simultaneous Transmission Scenario for 2G/3G/4G with 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.283	0.883
	GPRS 1900	0.209	0.283	0.492
	WCDMA 850	0.775	0.283	1.058
	LTE Band 12	0.485	0.283	0.768
	LTE Band 5	0.669	0.283	0.952

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.059	0.059
	Bottom	0.436	-	0.436
	Front	0.868	0.021	0.889
	Rear	0.775	0.283	1.058
	Right	0.130	-	0.130
	Left	0.391	0.138	0.529

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.2G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.5 Simultaneous Transmission Scenario for 2G/3G/4G with 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.463	1.063
	GPRS 1900	0.209	0.463	0.672
	WCDMA 850	0.775	0.463	1.238
	LTE Band 12	0.485	0.463	0.948
	LTE Band 5	0.669	0.463	1.132

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.137	0.137
	Bottom	0.436	-	0.436
	Front	0.868	0.123	0.991
	Rear	0.775	0.463	1.238
	Right	0.130	-	0.130
	Left	0.391	0.119	0.510

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.2G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.6 Simultaneous Transmission Scenario for 2G/3G/4G with 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.658	1.258
	GPRS 1900	0.209	0.658	0.867
	WCDMA 850	0.775	0.658	1.433
	LTE Band 12	0.485	0.658	1.143
	LTE Band 5	0.669	0.658	1.327

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.192	0.192
	Bottom	0.436	-	0.436
	Front	0.868	0.142	1.010
	Rear	0.775	0.658	1.433
	Right	0.130	-	0.130
	Left	0.391	0.277	0.668

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.2G WLAN MIMO simultaneous case for Hotspot.

Table 13.6.7 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.543	1.143
	GPRS 1900	0.209	0.543	0.752
	WCDMA 850	0.775	0.543	1.318
	LTE Band 12	0.485	0.543	1.028
	LTE Band 5	0.669	0.543	1.212

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.050	0.050
	Bottom	0.436	-	0.436
	Front	0.868	0.063	0.931
	Rear	0.775	0.543	1.318
	Right	0.130	-	0.130
	Left	0.391	0.234	0.625

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.8 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.350	0.950
	GPRS 1900	0.209	0.350	0.559
	WCDMA 850	0.775	0.350	1.125
	LTE Band 12	0.485	0.350	0.835
	LTE Band 5	0.669	0.350	1.019

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.204	0.204
	Bottom	0.436	-	0.436
	Front	0.868	0.017	0.885
	Rear	0.775	0.350	1.125
	Right	0.130	-	0.130
	Left	0.391	0.011	0.402

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.9 Simultaneous Transmission Scenario for 2G/3G/4G with 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.600	0.546	1.146
	GPRS 1900	0.209	0.546	0.755
	WCDMA 850	0.775	0.546	1.321
	LTE Band 12	0.485	0.546	1.031
	LTE Band 5	0.669	0.546	1.215

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.220	0.220
	Bottom	0.436	-	0.436
	Front	0.868	0.070	0.938
	Rear	0.775	0.546	1.321
	Right	0.130	-	0.130
	Left	0.391	0.302	0.693

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 5.8G WLAN MIMO simultaneous case for Hotspot.

Table 13.6.10 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.2 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.108	0.463	0.708	1.063	1.171
	GPRS 1900	0.209	0.108	0.463	0.317	0.672	0.780
	WCDMA 850	0.775	0.108	0.463	0.883	1.238	1.346
	LTE Band 12	0.485	0.108	0.463	0.593	0.948	1.056
	LTE Band 5	0.669	0.108	0.463	0.777	1.132	1.240

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.036	0.137	0.036	0.137	0.173
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.066	0.123	0.934	0.991	1.057
	Rear	0.775	0.108	0.463	0.883	1.238	1.346
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.168	0.119	0.559	0.51	0.678

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.2G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.11 Simultaneous Transmission Scenario for 2G/3G/4G with 2.4 GHz Ant.1 and 5.8 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.108	0.350	0.708	0.95	1.058
	GPRS 1900	0.209	0.108	0.350	0.317	0.559	0.667
	WCDMA 850	0.775	0.108	0.350	0.883	1.125	1.233
	LTE Band 12	0.485	0.108	0.350	0.593	0.835	0.943
	LTE Band 5	0.669	0.108	0.350	0.777	1.019	1.127

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.036	0.204	0.036	0.204	0.240
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.066	0.017	0.934	0.885	0.951
	Rear	0.775	0.108	0.350	0.883	1.125	1.233
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.168	0.011	0.559	0.402	0.570

Note : The above simultaneous result is the worst case result for 2G/3G/4G + 2.4G WLAN Ant1 + 5.8G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.12 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.2 GHz Ant.1 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.283	0.662	0.883	0.945
	GPRS 1900	0.209	0.062	0.283	0.271	0.492	0.554
	WCDMA 850	0.775	0.062	0.283	0.837	1.058	1.120
	LTE Band 12	0.485	0.062	0.283	0.547	0.768	0.830
	LTE Band 5	0.669	0.062	0.283	0.731	0.952	1.014

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.059	0.014	0.059	0.073
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.021	0.919	0.889	0.940
	Rear	0.775	0.062	0.283	0.837	1.058	1.120
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.138	0.468	0.529	0.606

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.2G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.13 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.1 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.543	0.662	1.143	1.205
	GPRS 1900	0.209	0.062	0.543	0.271	0.752	0.814
	WCDMA 850	0.775	0.062	0.543	0.837	1.318	1.380
	LTE Band 12	0.485	0.062	0.543	0.547	1.028	1.090
	LTE Band 5	0.669	0.062	0.543	0.731	1.212	1.274

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.050	0.014	0.05	0.064
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.063	0.919	0.931	0.982
	Rear	0.775	0.062	0.543	0.837	1.318	1.380
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.234	0.468	0.625	0.702

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.14 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.2 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.463	0.662	1.063	1.125
	GPRS 1900	0.209	0.062	0.463	0.271	0.672	0.734
	WCDMA 850	0.775	0.062	0.463	0.837	1.238	1.300
	LTE Band 12	0.485	0.062	0.463	0.547	0.948	1.010
	LTE Band 5	0.669	0.062	0.463	0.731	1.132	1.194

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.137	0.014	0.137	0.151
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.123	0.919	0.991	1.042
	Rear	0.775	0.062	0.463	0.837	1.238	1.300
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.119	0.468	0.510	0.587

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.2G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.15 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.350	0.662	0.95	1.012
	GPRS 1900	0.209	0.062	0.350	0.271	0.559	0.621
	WCDMA 850	0.775	0.062	0.350	0.837	1.125	1.187
	LTE Band 12	0.485	0.062	0.350	0.547	0.835	0.897
	LTE Band 5	0.669	0.062	0.350	0.731	1.019	1.081

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.204	0.014	0.204	0.218
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.017	0.919	0.885	0.936
	Rear	0.775	0.062	0.350	0.837	1.125	1.187
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.011	0.468	0.402	0.479

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.16 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.2 GHz MIMO W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.658	0.662	1.258	1.320
	GPRS 1900	0.209	0.062	0.658	0.271	0.867	0.929
	WCDMA 850	0.775	0.062	0.658	0.837	1.433	1.495
	LTE Band 12	0.485	0.062	0.658	0.547	1.143	1.205
	LTE Band 5	0.669	0.062	0.658	0.731	1.327	1.389

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.192	0.014	0.192	0.206
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.142	0.919	1.010	1.061
	Rear	0.775	0.062	0.658	0.837	1.433	1.495
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.277	0.468	0.668	0.745

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.2G WLAN MIMO simultaneous case for Hotspot.

Table 13.6.17 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth Ant.1 and 5.8 GHz MIMO W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.600	0.062	0.546	0.662	1.146	1.208
	GPRS 1900	0.209	0.062	0.546	0.271	0.755	0.817
	WCDMA 850	0.775	0.062	0.546	0.837	1.321	1.383
	LTE Band 12	0.485	0.062	0.546	0.547	1.031	1.093
	LTE Band 5	0.669	0.062	0.546	0.731	1.215	1.277

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Top	-	0.014	0.220	0.014	0.220	0.234
	Bottom	0.436	-	-	0.436	0.436	0.436
	Front	0.868	0.051	0.070	0.919	0.938	0.989
	Rear	0.775	0.062	0.546	0.837	1.321	1.383
	Right	0.130	-	-	0.130	0.130	0.130
	Left	0.391	0.077	0.302	0.468	0.693	0.770

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth Ant1 + 5.8G WLAN MIMO simultaneous case for Hotspot.

Table 13.6.18 Simultaneous Transmission Scenario for 2.4 GHz Ant.1 and 5 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.036	0.137	0.173
	Bottom	-	-	-
	Front	0.066	0.123	0.189
	Rear	0.108	0.463	0.571
	Right	-	-	-
	Left	0.168	0.119	0.287

Simul Tx	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.036	0.204	0.240
	Bottom	-	-	-
	Front	0.066	0.017	0.083
	Rear	0.108	0.350	0.458
	Right	-	-	-
	Left	0.168	0.011	0.179

Note : The above simultaneous result is the worst case result for 2.4 G WLAN Ant1 + 5 G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.19 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz Ant.1 W-LAN (Hotspot at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.059	0.073
	Bottom	-	-	-
	Front	0.051	0.021	0.072
	Rear	0.062	0.283	0.345
	Right	-	-	-
	Left	0.077	0.138	0.215

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.050	0.064
	Bottom	-	-	-
	Front	0.051	0.063	0.114
	Rear	0.062	0.543	0.605
	Right	-	-	-
	Left	0.077	0.234	0.311

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5 G WLAN Ant1 simultaneous case for Hotspot.

Table 13.6.20 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz Ant.2 W-LAN (Hotspot at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.137	0.151
	Bottom	-	-	-
	Front	0.051	0.123	0.174
	Rear	0.062	0.463	0.525
	Right	-	-	-
	Left	0.077	0.119	0.196

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.204	0.218
	Bottom	-	-	-
	Front	0.051	0.017	0.068
	Rear	0.062	0.350	0.412
	Right	-	-	-
	Left	0.077	0.011	0.088

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5 G WLAN Ant2 simultaneous case for Hotspot.

Table 13.6.21 Simultaneous Transmission Scenario for Bluetooth Ant.1 and 5 GHz MIMO W-LAN (Hotspot at 10 mm)

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.192	0.206
	Bottom	-	-	-
	Front	0.051	0.142	0.193
	Rear	0.062	0.658	0.720
	Right	-	-	-
	Left	0.077	0.277	0.354

Simul Tx	Configuration	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	0.014	0.220	0.234
	Bottom	-	-	-
	Front	0.051	0.070	0.121
	Rear	0.062	0.546	0.608
	Right	-	-	-
	Left	0.077	0.302	0.379

Note : The above simultaneous result is the worst case result for Bluetooth Ant1 + 5 G WLAN MIMO simultaneous case for Hotspot.

Table 13.5.22 Simultaneous Transmission Scenario for 2G/3G/4G with Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn SAR	GPRS 850	0.600	0.062	0.662
	GPRS 1900	0.235	0.051	0.286
	WCDMA 850	0.868	0.051	0.919
	LTE Band 12	0.485	0.062	0.547
	LTE Band 5	0.669	0.062	0.731

Simul Tx	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Top	-	0.014	0.014
	Bottom	0.436	-	0.436
	Front	0.868	0.051	0.919
	Rear	0.775	0.062	0.837
	Right	0.130	-	0.130
	Left	0.391	0.077	0.468

Note : The above simultaneous result is the worst case result for 2G/3G/4G + Bluetooth simultaneous case for Hotspot.

13.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR scaled to maximum output power, including tolerance < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

13.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

14. SAR MEASUREMENT VARIABILITY

14.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 14.1 Body-Worn SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
846.6	4233	WCDMA 850	RMC	-	10 mm [Front]	0.866	0.865	1.00	-	-	-	-
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 14.2 Hotspot SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
846.6	4233	WCDMA 850	RMC	-	10 mm [Front]	0.866	0.865	1.00	-	-	-	-
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram					

15. IEEE Std 1528 –MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.5	Normal	1	0.64	$\pm 4.5 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	$\pm 4.0 \%$	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.4	Normal	1	0.64	$\pm 4.4 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.64	$\pm 4.3 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.6	$\pm 3.7 \%$	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	$\pm 3.9 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	∞
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	$\pm 3.7 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	$\pm 4.0 \%$	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	$\pm 3.9 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	$\pm 3.9 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	∞
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	$\pm 3.9 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.