

Conducted Output Power (802.11n-CH 52) 121.5 Mbps



Conducted Output Power (802.11n-CH 60) 135 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



■ RESULT PLOTS (5510 MHz ~5670 MHz)

Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



- 1 - 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 121.5 Mbps



Conducted Output Power (802.11n-CH 100) 135 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 121.5 Mbps



Conducted Output Power (802.11n-CH 100) 135 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Conducted Output Power (802.11n-CH 100) 121.5 Mbps



Conducted Output Power (802.11n-CH 100) 135 Mbps




FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



8.3 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 4 dBm/ MHz in the 5.15 GHz – 5.25 GHz band and 11 dBm/ MHz in the 5.25 GHz – 5.35 GHz and 5.47 GHz – 5.725 GHz bands

TEST CONFIGURATION



TEST PROCEDURE

The spectrum analyzer is set to:

RBW = 1 MHz

VBW = 3 MHz

SPAN = to encompass the entire EBW of the signal

Sweep Time = auto

Sweep Point = 1001

Detector Mode = Average

Trace average at least 100 traces in power averaging (RMS) mode

Sample Calculation

Note:

- 1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



Band	Frequency(MHz)	Loss(dB)
	5180	10.26
	5190	10.22
UNII 1	5200	10.18
	5230	10.19
	5240	10.19
	5260	10.18
	5270	10.17
UNII 2	5300	10.14
	5310	10.11
	5320	10.09
	5500	10.20
	5510	10.20
UNII 3	5550	10.23
UNII 3	5580	10.24
	5670	10.36
	5700	10.40

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



■ TEST RESULTS

Conducted Power Density Measurements

			Test Result		
Frequency (MHz)	Channel No.	Mode	Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36		-0.160	4	Pass
5200	40	802.11a	-0.431	4	Pass
5240	48		-0.111	4	Pass
5260	52		-0.025	11	Pass
5300	60	802.11a	0.168	11	Pass
5320	64		0.429	11	Pass
5500	100		0.527	11	Pass
5580	116	802.11a	0.682	11	Pass
5700	140		0.384	11	Pass

Conducted Power Density Measurements

Francis			Test Result		
Frequency (MHz)	Channel No.	Mode	Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	902 44 - 20MH-	-0.745	4	Pass
5200	40	802.11n_20MHz BW	-0.887	4	Pass
5240	48		-0.549	4	Pass
5260	52	902 44m 20MH=	-0.678	11	Pass
5300	60	802.11n_20MHz	-0.789	11	Pass
5320	64		-0.743	11	Pass
5500	100	902 11n 20M⊔-	-0.296	11	Pass
5580	116	802.11n_20MHz BW	0.005	11	Pass
5700	140	DVV	-0.022	11	Pass

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



Conducted Power Density Measurements


			Test Result		
Frequency (MHz)	Channel No.	Mode	Power Density (dBm)	Limit	Pass/Fail
				(dBm)	
5190	38	802.11n_40	-3.615	4	Pass
5230	46	MHz BW	-3.436	4	Pass
5270	54	802.11n_40	-3.268	4	Pass
5310	62	MHz BW	-2.977	11	Pass
5510	102	902 11n 40	-2.807	11	Pass
5550	110	802.11n_40 MHz BW	-2.819	11	Pass
5670	134	IVITIZ DVV	-2.443	11	Pass

FCC PT.15 TEST REP	 FCC CERTIFICATION REPORT		www.hct.co.kr
Test Repo HCTR1301	 Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL04E



RESULT PLOTS

Power Spectral Density (802.11a-CH 36)

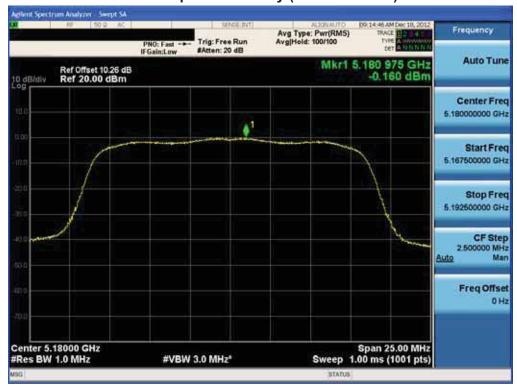

Power Spectral Density (802.11a-CH 40)



FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11a-CH 48)



Power Spectral Density (802.11a-CH 52)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



Power Spectral Density (802.11a-CH 60)



Power Spectral Density (802.11a-CH 64)



FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11a-CH 100)



Power Spectral Density (802.11a-CH 116)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11a-CH 140)



- 1 - 1	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Power Spectral Density (802.11n-CH 36)



Power Spectral Density (802.11n-CH 40)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 48)



Power Spectral Density (802.11n-CH 52)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 60)



Power Spectral Density (802.11n-CH 64)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 100)



Power Spectral Density (802.11n-CH 116)



- 1 - 1	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Power Spectral Density (802.11n-CH 140)



FCC PT.15 TEST REP	FCC CERTIFICATION REPORT		www.hct.co.kr	
Test Repo HCTR1301		Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL04E



Power Spectral Density (802.11n-CH 38)



Power Spectral Density (802.11n-CH 46)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 54)



Power Spectral Density (802.11n-CH 62)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 102)



Power Spectral Density (802.11n-CH 110)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Power Spectral Density (802.11n-CH 134)




FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID: ZNFL04E



8.4 PEAK EXCURSION RATIO

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. The largest permissible difference between the modulation envelope(measured using a peak hold function) and the maximum conducted output power 13 dB/MHz.

TEST CONFIGURATION



■ TEST PROCEDURE

We tested according to KDB 789033(issued 09/26/2012).

The spectrum analyzer is set to:

- 1. Span = Set the span to view the entire emission bandwidth.
- 2. RBW = 1 MHz
- 3. VBW = 3 MHz
- 4. Sweep = Auto couple
- 5. Detector Mode = Peak
- 6. Trace Mode = Max hold
- 7. Use the procedure to measure the PPSD
- 8. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

Note:

- 1. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Band	Frequency(MHz)	Loss(dB)
	5180	10.26
	5190	10.22
UNII 1	5200	10.18
	5230	10.19
	5240	10.19
	5260	10.18
	5270	10.17
UNII 2	5300	10.14
	5310	10.11
	5320	10.09
	5500	10.20
	5510	10.20
UNII 3	5550	10.23
UINII 3	5580	10.24
	5670	10.36
	5700	10.40

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



RESULT PLOTS

Peak Excursion Ratio (802.11a-CH 36)




Peak Excursion Ratio (802.11a-CH 40)




- 1 - 1	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11a-CH 48)

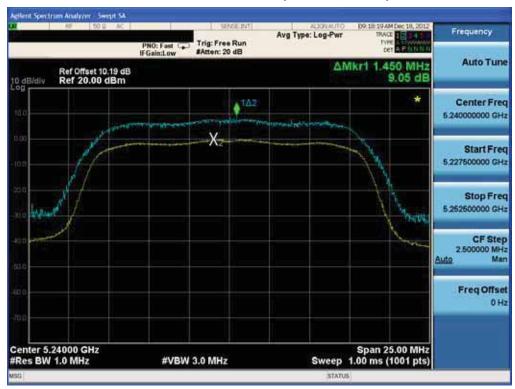


Peak Excursion Ratio (802.11a-CH 52)

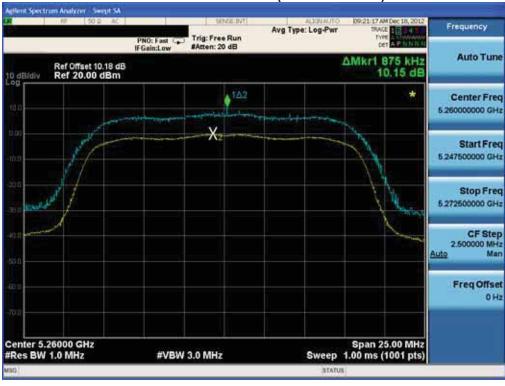

- 1 - 1	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11a-CH 60)

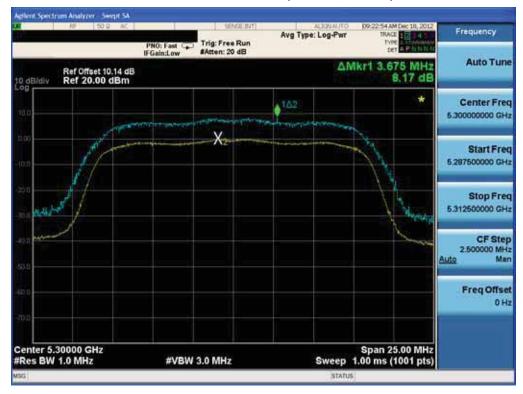

Peak Excursion Ratio (802.11a-CH 64)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11a-CH 100)




Peak Excursion Ratio (802.11a-CH 116)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11a-CH 140)

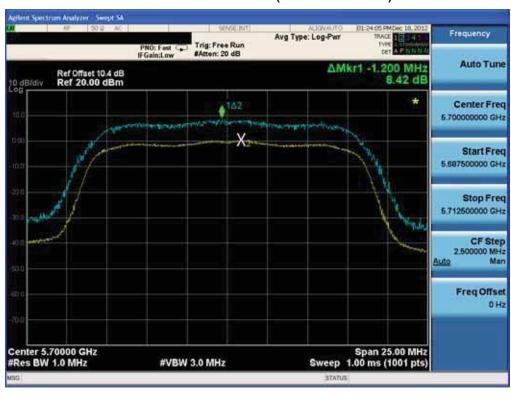

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT WWV	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11n-CH 36)



Peak Excursion Ratio (802.11n-CH 40)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11n-CH 48)



Peak Excursion Ratio (802.11n-CH 52)




- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT WWV	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11n-CH 60)



Peak Excursion Ratio (802.11n-CH 64)

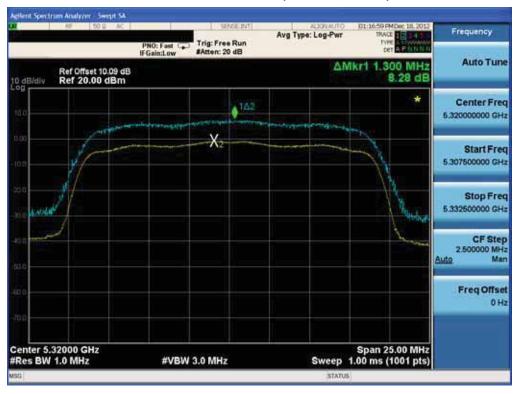


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11n-CH 100)




Peak Excursion Ratio (802.11n-CH 116)

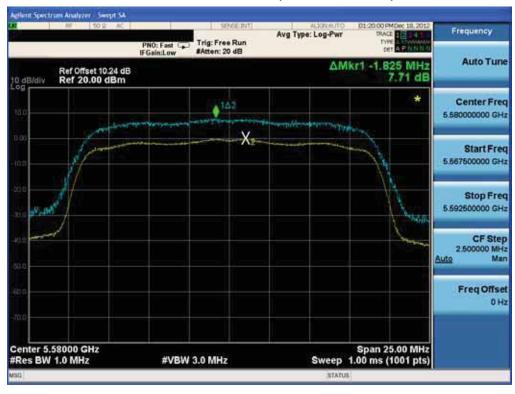

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11n-CH 140)

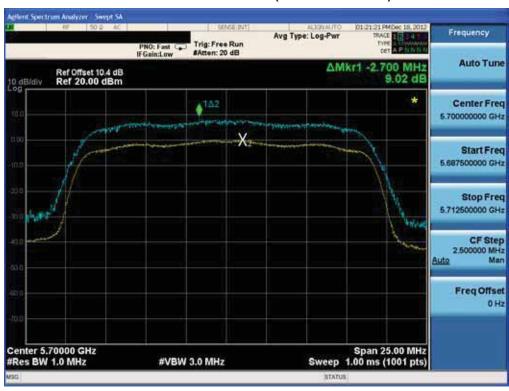

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT WWV	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11n-CH 38)



Peak Excursion Ratio (802.11n-CH 46)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11n-CH 54)



Peak Excursion Ratio (802.11n-CH 62)



- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT WWV	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Peak Excursion Ratio (802.11n-CH 102)




Peak Excursion Ratio (802.11n-CH 110)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Peak Excursion Ratio (802.11n-CH 134)

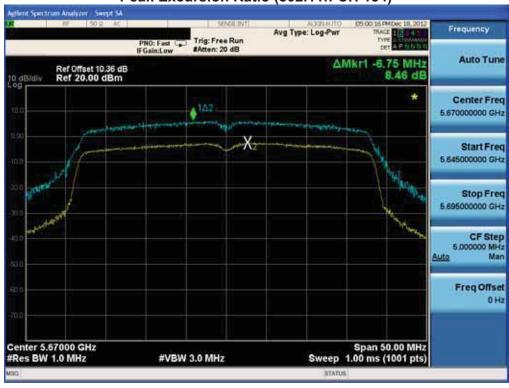

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT WWV	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



8.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 $^{\circ}$ C and 50 $^{\circ}$ C. The temperature was incremented by 10 $^{\circ}$ C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

20 MHz BW

OPERATING FREQUENCY: 5,200,000,000 Hz

CHANNEL: 40

REFERENCE VOLTAGE: 3.7 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 200 008	7.50
100%		-30	5 200 008	8.03
100%		-20	5 200 010	10.10
100%		-10	5 199 993	-6.92
100%	3.7	0	5 200 010	10.02
100%		+10	5 199 989	-11.02
100%		+30	5 200 010	9.54
100%		+40	5 200 006	6.46
100%		+50	5 199 992	-8.11
115%	3.3	+20	5 199 983	-17.21
Batt. Endpoint	4.7	+20	5 199 987	-13.04

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



OPERATING FREQUENCY: 5,300,000,000 Hz

CHANNEL: 60

REFERENCE VOLTAGE: 3.7 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 300 008	8.00
100%		-30	5 300 010	10.04
100%		-20	5 300 014	13.56
100%		-10	5 299 986	-14.05
100%	3.7	0	5 300 015	15.44
100%		+10	5 300 016	16.08
100%		+30	5 299 989	-10.72
100%		+40	5 299 990	-10.45
100%		+50	5 299 991	-8.94
115%	3.3	+20	5 299 986	-13.60
Batt. Endpoint	4.7	+20	5 299 983	-17.05

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



OPERATING FREQUENCY: 5,580,000,000 Hz

CHANNEL: 116

REFERENCE VOLTAGE: 3.7 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 580 007	7.00
100%		-30	5 579 990	-10.02
100%		-20	5 580 013	13.10
100%		-10	5 579 989	-11.04
100%	3.7	0	5 579 986	-14.20
100%		+10	5 579 986	-13.60
100%		+30	5 580 010	10.05
100%		+40	5 579 991	-9.05
100%		+50	5 580 010	10.44
115%	3.3	+20	5 580 012	12.43
Batt. Endpoint	4.7	+20	5 579 990	-9.56

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



40 MHz BW

OPERATING FREQUENCY: 5,190,000,000 Hz

CHANNEL: <u>38</u>

REFERENCE VOLTAGE: 3.8 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 190 009	9.00
100%		-30	5 190 009	9.13
100%		-20	5 189 988	-12.10
100%		-10	5 189 991	-8.61
100%	3.7	0	5 190 014	14.04
100%		+10	5 190 013	13.10
100%		+30	5 189 988	-12.04
100%		+40	5 190 008	8.01
100%		+50	5 190 011	10.54
115%	3.3	+20	5 190 016	15.70
Batt. Endpoint	4.7	+20	5 190 015	14.60

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



OPERATING FREQUENCY: 5,310,000,000 Hz
CHANNEL: 62
REFERENCE VOLTAGE: 3.8 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 310 007	6.50
100%		-30	5 310 008	8.40
100%		-20	5 310 013	12.60
100%		-10	5 309 988	-12.04
100%	3.7	0	5 310 010	10.05
100%		+10	5 310 010	9.52
100%		+30	5 310 007	7.45
100%		+40	5 310 010	10.03
100%		+50	5 309 992	-7.54
115%	3.3	+20	5 310 011	11.40
Batt. Endpoint	4.7	+20	5 309 985	-15.00

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



 OPERATING FREQUENCY:
 5,550,000,000 Hz

 CHANNEL:
 110

REFERENCE VOLTAGE: 3.8 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(℃)	(kHz)	Error (kHz)
100%		+20(Ref)	5 550 005	5.00
100%		-30	5 549 991	-8.54
100%		-20	5 550 009	9.49
100%		-10	5 550 009	8.66
100%	3.7	0	5 550 012	12.30
100%		+10	5 550 012	11.54
100%		+30	5 549 989	-11.13
100%		+40	5 550 009	8.55
100%		+50	5 550 010	9.87
115%	3.3	+20	5 549 989	-10.56
Batt. Endpoint	4.7	+20	5 550 008	8.42

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



8.6 RADIATED MEASUREMENT.

8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

■ §15.407, KDB 789033


All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dB μ V/m.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		




Test Configuration

Below 30 MHz

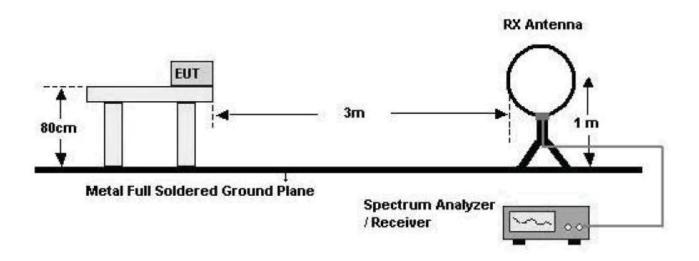


30 MHz - 1 GHz

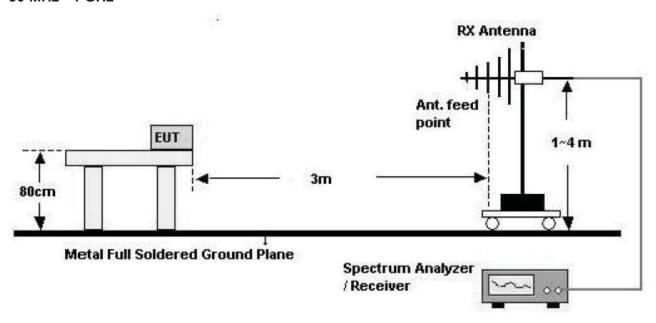

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Above 1 GHz

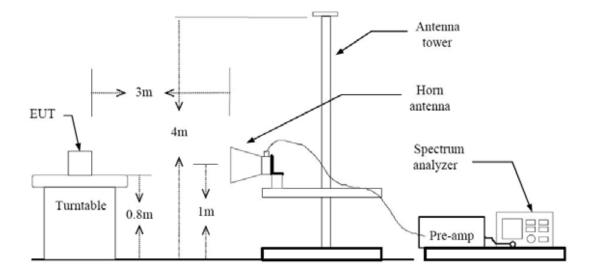

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



TEST RESULTS

9 kHz - 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBμV	dB /m	dB	(H/V)	dB <i>μ</i> V/m	dB <i>μ</i> V/m	dB
No Critical peaks found							

Notes:

- 1. Measuring frequencies from 9 kHz to the 30MHz.
- 2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- 4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15 TEST REP		FCC CERTIFICATION REPORT			
Test Repo HCTR1301	 Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL04E		



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin	
MHz	$dB\mu \! \! V$	dB /m	dB	(H/V)	dB <i>μ</i> V/m	dB <i>μ</i> V/m	dB	
	No Critical peaks found							

Notes:

- 1. Measuring frequencies from 30 MHz to the 1 GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Above 1 GHz

Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 1

802.11 a

6 Mbps

5180 MHz

36 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10360	53.31	9.33	V	62.64	68.2	5.56	PK
10360	37.53	9.33	V	46.86	54.0	7.14	AV
15540	46.11	14.61	V	60.72	74.0	13.28	PK
15540	31.77	14.61	V	46.38	54.0	7.62	AV
10360	53.93	9.33	Н	63.26	68.2	4.94	PK
10360	37.69	9.33	Н	47.02	54.0	6.98	AV
15540	45.48	14.61	Н	60.09	74.0	13.91	PK
15540	31.73	14.61	Н	46.34	54.0	7.66	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 1

802.11 a

6 Mbps

5200 MHz

40 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10400	51.53	10.13	V	61.66	68.2	6.54	PK
10400	36.43	10.13	V	46.56	54.0	7.44	AV
15600	45.33	14.60	V	59.93	74.0	14.07	PK
15600	31.72	14.60	V	46.32	54.0	7.68	AV
10400	52.23	10.13	Н	62.36	68.2	5.84	PK
10400	36.83	10.13	Н	46.96	54.0	7.04	AV
15600	45.65	14.60	Н	60.25	74.0	13.75	PK
15600	31.76	14.60	Н	46.36	54.0	7.64	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1 - 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 1

802.11 a

6 Mbps

5240 MHz

48 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10480	50.67	10.20	V	60.87	68.2	7.33	PK
10480	36.21	10.20	V	46.41	54.0	7.59	AV
15720	46.35	13.47	V	59.82	74.0	14.18	PK
15720	32.98	13.47	V	46.45	54.0	7.55	AV
10480	51.20	10.20	Н	61.40	68.2	6.80	PK
10480	36.35	10.20	Н	46.55	54.0	7.45	AV
15720	46.57	13.47	Н	60.04	74.0	13.96	PK
15720	32.92	13.47	Н	46.39	54.0	7.61	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Band: UNII 1

Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10380	49.45	9.33	V	58.78	68.2	9.42	PK
10380	34.33	9.33	V	43.66	54.0	10.34	AV
15570	45.57	14.61	V	60.18	74.0	13.82	PK
15570	31.76	14.61	V	46.37	54.0	7.63	AV
10380	49.79	9.33	Н	59.12	68.2	9.08	PK
10380	34.47	9.33	Н	43.80	54.0	10.20	AV
15570	45.99	14.61	Н	60.60	74.0	13.40	PK
15570	31.87	14.61	Н	46.48	54.0	7.52	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1 - 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Band: UNII 1

Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5230 MHz

Channel No. 46 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10460	49.52	10.13	V	59.65	68.2	8.55	PK
10460	34.19	10.13	V	44.32	54.0	9.68	AV
15690	46.89	14.60	V	61.49	74.0	12.51	PK
15690	32.73	14.60	V	47.33	54.0	6.67	AV
10460	49.39	10.13	Н	59.52	68.2	8.68	PK
10460	34.06	10.13	Н	44.19	54.0	9.81	AV
15690	46.51	14.60	Н	61.11	74.0	12.89	PK
15690	32.85	14.60	Н	47.45	54.0	6.55	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1 - 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 2

802.11 a

6 Mbps

5260 MHz

52 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10520	51.83	10.38	V	62.21	68.2	5.99	PK
10520	37.24	10.38	V	47.62	54.0	6.38	AV
15780	46.35	14.38	V	60.73	74.0	13.27	PK
15780	32.90	14.38	V	47.28	54.0	6.72	AV
10520	51.41	10.38	Н	61.79	68.2	6.41	PK
10520	36.76	10.38	Н	47.14	54.0	6.86	AV
15780	46.70	14.38	Н	61.08	74.0	12.92	PK
15780	32.91	14.38	Н	47.29	54.0	6.71	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1 - 1	FCC PT.15.247 TEST REPORT		www.hct.co.kr	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Band: UNII 2
Operation Mode: 802.11 a
Transfer Rate: 6 Mbps
Operating Frequency 5300 MHz
Channel No. 60 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10600	50.23	10.39	V	60.62	68.2	7.58	PK
10600	34.34	10.39	V	44.73	54.0	9.27	AV
15900	45.69	14.00	V	59.69	74.0	14.31	PK
15900	31.41	14.00	V	45.41	54.0	8.59	AV
10600	49.11	10.39	Н	59.50	68.2	8.70	PK
10600	33.61	10.39	Н	44.00	54.0	10.00	AV
15900	46.23	14.00	Н	60.23	74.0	13.77	PK
15900	31.51	14.00	Н	45.51	54.0	8.49	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1 - 1	FCC PT.15.247 TEST REPORT		www.hct.co.kr	
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 2

802.11 a

6 Mbps

5320 MHz

64 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10640	52.10	10.50	V	62.60	74	11.40	PK
10640	35.82	10.50	V	46.32	54	7.68	AV
15960	45.33	14.27	V	59.60	74	14.40	PK
15960	31.21	14.27	V	45.48	54	8.52	AV
10640	49.31	10.50	Н	59.81	74	14.19	PK
10640	33.40	10.50	Н	43.90	54	10.10	AV
15960	45.29	14.27	Н	59.56	74	14.44	PK
15960	31.14	14.27	Н	45.41	54	8.59	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E		



Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5270 MHz

Channel No. 54 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10540	48.48	10.55	V	59.03	68.2	9.17	PK
10540	32.88	10.55	V	43.43	54.0	10.57	AV
15810	45.96	14.26	V	60.22	74.0	13.78	PK
15810	32.26	14.26	V	46.52	54.0	7.48	AV
10540	47.95	10.55	Н	58.50	68.2	9.70	PK
10540	32.94	10.55	Н	43.49	54.0	10.51	AV
15810	45.59	14.26	Н	59.85	74.0	14.15	PK
15810	32.23	14.26	Н	46.49	54.0	7.51	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E		



Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5310 MHz

Channel No. 62 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
10620	48.10	10.25	V	58.35	74	15.65	PK
10620	33.21	10.25	V	43.46	54	10.54	AV
15930	44.55	13.62	V	58.17	74	15.83	PK
15930	30.89	13.62	V	44.51	54	9.49	AV
10620	45.63	10.25	Н	55.88	74	18.12	PK
10620	30.94	10.25	Н	41.19	54	12.81	AV
15930	44.41	13.62	Н	58.03	74	15.97	PK
15930	30.92	13.62	Н	44.54	54	9.46	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 3

802.11 a

6 Mbps

5500 MHz

100 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11000	45.20	11.28	V	56.48	74.0	17.52	PK
11000	30.52	11.28	V	41.80	54.0	12.20	AV
16500	45.79	14.19	V	59.98	68.2	8.22	PK
16500	32.25	14.19	V	46.44	54.0	7.56	AV
11000	45.21	11.28	Н	56.49	74.0	17.51	PK
11000	31.16	11.28	Н	42.44	54.0	11.56	AV
16500	45.55	14.19	Н	59.74	68.2	8.46	PK
16500	32.28	14.19	Н	46.47	54.0	7.53	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E		



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 3

802.11 a

6 Mbps

5580 MHz

116 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11160	43.21	11.10	V	54.31	74.0	19.69	PK
11160	29.30	11.10	V	40.40	54.0	13.60	AV
16740	45.96	15.70	V	61.66	68.2	6.54	PK
16740	32.24	15.70	V	47.94	54.0	6.06	AV
11160	46.80	11.10	Н	57.90	74.0	16.10	PK
11160	31.94	11.10	Н	43.04	54.0	10.96	AV
16740	46.12	15.70	Н	61.82	68.2	6.38	PK
16740	32.27	15.70	Н	47.97	54.0	6.03	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 3

802.11 a

6 Mbps

5700 MHz

140 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11400	40.70	10.97	V	51.67	74.0	22.33	PK
11400	27.18	10.97	V	38.15	54.0	15.85	AV
17100	45.25	17.82	V	63.07	68.2	5.13	PK
17100	32.12	17.82	V	49.94	54.0	4.06	AV
11400	39.16	10.97	Н	50.13	74.0	23.87	PK
11400	26.59	10.97	Н	37.56	54.0	16.44	AV
17100	45.51	17.82	Н	63.33	68.2	4.87	PK
17100	32.09	17.82	Н	49.91	54.0	4.09	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 6 Mbps in 802.11a.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:	
HCTR1301FR04-1	January 18, 2013		ZNFL04E	



Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5510 MHz

Channel No. 102 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11020	42.19	11.28	V	53.47	74.0	20.53	PK
11020	28.24	11.28	V	39.52	54.0	14.48	AV
16530	45.94	8.83	V	54.77	68.2	13.43	PK
16530	31.93	8.83	V	40.76	54.0	13.24	AV
11020	39.97	11.28	Н	51.25	74.0	22.75	PK
11020	26.94	11.28	Н	38.22	54.0	15.78	AV
16530	45.69	8.83	Н	54.52	68.2	13.68	PK
16530	31.95	8.83	Н	40.78	54.0	13.22	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E		



Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5550 MHz

Channel No. 110 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11100	39.69	11.56	V	51.25	74	22.75	PK
11100	27.36	11.56	V	38.92	54	15.08	AV
16650	46.03	14.98	V	61.01	74	12.99	PK
16650	31.88	14.98	V	46.86	54	7.14	AV
11100	39.08	11.56	Н	50.64	74	23.36	PK
11100	26.57	11.56	Н	38.13	54	15.87	AV
16650	45.41	14.98	Н	60.39	74	13.61	PK
16650	31.89	14.98	Н	46.87	54	7.13	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

- 1	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
	Test Report No. HCTR1301FR04-1	Date of Issue: January 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID: ZNFL04E		



Operation Mode: 802.11n_40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5670 MHz

Channel No. 134 Ch

Frequency	Reading	AN.+CL-Amp G.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
11340	39.55	10.86	V	50.41	74	23.59	PK
11340	26.43	10.86	V	37.29	54	16.71	AV
17010	44.49	18.15	V	62.64	74	11.36	PK
17010	31.59	18.15	V	49.74	54	4.26	AV
11340	39.18	10.86	Н	50.04	74	23.96	PK
11340	26.21	10.86	Н	37.07	54	16.93	AV
17010	44.99	18.15	Н	63.14	74	10.86	PK
17010	31.62	18.15	Н	49.77	54	4.23	AV

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Sweep Time = auto

Trace Mode = max hold

- 6. We have done 802.11a, 802.11n test. Worst case is 13.5 Mbps in 802.11n.
- 7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

 Band :
 UNII 1

 Operation Mode:
 802.11 a

 Transfer Rate:
 6 Mbps

 Operating Frequency
 5180 MHz

 Channel No.
 36 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5150	56.89	3.63	Н	60.52	74	13.48	PK
5150	39.88	3.63	Н	43.51	54	10.49	AV
5150	54.18	3.63	V	57.81	74	16.19	PK
5150	39.44	3.63	V	43.07	54	10.93	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Band: UNII 2
Operation Mode: 802.11 a
Transfer Rate: 6 Mbps
Operating Frequency 5320 MHz

Channel No. 64 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5350	52.62	4.45	Н	57.07	74	16.93	PK
5350	37.53	4.45	Н	41.98	54	12.02	AV
5350	52.26	4.45	V	56.71	74	17.29	PK
5350	37.28	4.45	V	41.73	54	12.27	AV

Band:
Operation Mode:
802.11 a

Transfer Rate:
6 Mbps
Operating Frequency
5500 MHz
Channel No.
100 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	DBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5460	52.05	5.54	Н	57.59	68.2	10.61	PK
5460	37.07	5.54	Н	42.61	54.0	11.39	AV
5460	52.22	5.54	V	57.76	68.2	10.44	PK
5460	36.80	5.54	V	42.34	54.0	11.66	AV

Notes:

- 1. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain + ATT
- 2. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

Detector = Peak

Sweep Time = auto

Trace Mode = max hold

Trace = 50 traces

3. We have done 802.11a/n mode test. . Worst case of EUT is 6 Mbps in 802.11a.

4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band: UNII 1

Operation Mode: 802.11n_40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5150	53.59	3.63	Н	57.22	74	16.78	PK
5150	39.26	3.63	Н	42.89	54	11.11	AV
5150	53.33	3.63	V	56.96	74	17.04	PK
5150	39.32	3.63	V	42.95	54	11.05	AV

Band:

Operation Mode:

Transfer Rate:

Operating Frequency

Channel No.

UNII 2

802.11n_40 MHz BW

13.5 Mbps

5310 MHz

62 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5350	51.43	4.45	Н	55.88	74	18.12	PK
5350	36.85	4.45	Н	41.30	54	12.70	AV
5350	51.64	4.45	V	56.09	74	17.91	PK
5350	36.97	4.45	V	41.42	54	12.58	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



Operation Mode: 802.11n 40 MHz BW

Transfer Rate: 13.5 Mbps

Operating Frequency 5510 MHz

Channel No. 102 Ch

Frequency	Reading	AN.+CL+AMP+ATT.	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
5460	50.19	5.54	Н	55.73	68.2	12.47	PK
5460	36.66	5.54	Н	42.20	54.0	11.80	AV
5460	49.25	5.54	V	54.79	68.2	13.41	PK
5460	36.23	5.54	V	41.77	54.0	12.23	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT

2. Spectrum setting:

Peak (Page 12 in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Sweep Time = auto

Trace mode = max hold

Average (Method VB in KDB 789033, issued 09/26/2012)

RBW = 1 MHz

VBW = 10 Hz.(Duty Cycle ≥ 98 percent)

Detector = Peak

Sweep Time = auto

Trace Mode = max hold

- 3. We have done 802.11a/n mode test. . Worst case of EUT is 13.5 Mbps in 802.11n.
- 4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC/Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Francisco Pones (MIII-)	Limits (dBμV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.
- 5. We are performed the AC Power Line Conducted Emission test for 6 Mbps, Ch.140 and 802.11a mode in UNII 1. Because 802.11a mode in UNII 1 is worst case.

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



RESULT PLOTS

Conducted Emissions (Line 1)

HCT


EMC

EUT: L-04E Manufacturer: LGE

Operating Condition: WLAN MODE(UNII)
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: FCC PART 15 B
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Desc	ription:		FCC PART 15	CLASS B		
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	500.0 kHz	1.0 kH	z MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kH	z MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kH	MaxPeak	10.0 ms	9 kHz	None
			Average			

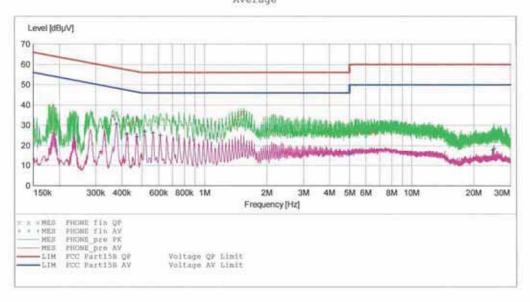

MEASUREMENT RESULT: "PHONE fin QP"

12/17/2012			CE PARTICIPATION	DE 2000-11-07-02-0-71		
Frequency MH:		Transd dB	Limit dBµV	Margin dB	Line	PE
0.36201	34.90	9.8	59	23.8		
0.429010	30.90	9.8	57	26.3	-	
0.471010	33.10	9.8	57	23.4		$(-1)^{-1} = (-1)^{-1}$
1.460000	33.90	9.9	56	22.1		
1.504000	36.20	9.9	56	19.8		
1.548000	36.20	9.9	56	19.8		
5.40000	26.40	10.2	60	33.6		
6.340000	26.40	10.2	60	33.6		
6.584000	27.50	10.3	60	32.5		

Page 1/2 12/17/2012 7:36PM PHONE

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
	Date of Issue: anuary 18, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL04E



MEASUREMENT RESULT: "PHONE_fin AV"

46.00	Berther Contractor	- War in the contract of	region for combination	Back Committee on Committee Com-	W	
PE	Line	Margin	Limit	Transd	Level	Frequency
		dB	dBµV	dB	dBµV	MHz
		17.6	48	9.8	30.70	0.376010
340.00		21.8	47	9.8	25.60	0.423010
		22.2	47	9.8	24.30	0,471010
222	77.7	19.1	46	9.8	26.90	0.516000
		19.7	46	9.8	26.30	0.564000
		21.0	4.6	9.8	25.00	0.612000
		30.4	46	10.2	15.60	5.000000
	$m \to \infty$	32.7	50	12.0	17.30	24.636000
		31.7	50	12.0	18.30	24.988000

Page 2/2 12/17/2012 7:36PM PHONE

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



Conducted Emissions (Line 2)

HCT

EMC

L-04E EUT: Manufacturer: LGE

Operating Condition: WLAN MODE (UNII)

SHIELD ROOM

Test Site: Operator:


JS LEE

Test Specification: FCC PART 15 CLASS B

Comment:

SCAN TABLE: "FCC PART 15 B(N)"

Short Desc	ription:		FCC PART 15	CLASS B		
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak Average	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak Average	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None

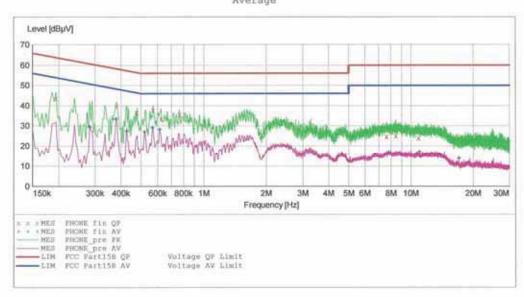

MEASUREMENT RESULT: "PHONE fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.194010	43.60	9.9	64	20.2		
0.382010	39.90	10.0	58	18.4		
0.478010	36.70	10.0	56	19.7		
0.572000	37.90	10.0	56	18.1		-
0.624000	33.50	10.0	56	22.5		
0.764000	35.50	10.0	56	20.5		
7.612000	24.60	10.5	60	35.4		
8.460000	25.10	10.6	60	34.9		
10.876000	23.90	10.8	60	36.1	-	

Page 1/2 12/17/2012 5:45PM PHONE

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:		
HCTR1301FR04-1	January 18, 2013		ZNFL04E		



MEASUREMENT RESULT: "PHONE_fin AV"

12/17/2012 5:	45PM					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.282010	29.40	10.0	51	21.3		
0.378010	33.30	10.0	48	15.0		***
0.426010	27.40	10.0	47	19.9		
0.520000	26.80	10.0	4.6	19.2		
0.568000	29.10	10.0	46	16.9		
0.616000	28.10	10.0	46	17.9		
7.812000	16.60	10.5	50	33.4		
10.988000	17.00	10.8	50	33.0		
17.028000	13.90	11.6	50	36.1		

Page 2/2 12/17/2012 5:45PM PHONE

FCC PT.15.247 TEST REPORT		www.hct.co.kr	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:
HCTR1301FR04-1	January 18, 2013		ZNFL04E



9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/09/2013	100073
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/03/2013	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2013	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	07/31/2013	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/11/2013	10094
MITEQ	AMF-6B-180265-35-10P / POWER AMP	Annual	04/16/2013	667624
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2013	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/30/2013	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4416A /Power Meter	Annual	11/07/2013	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2013	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	05/02/2013	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2013	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2013	11377
Hewlett Packard	11667B / Power Splitter	Annual	06/05/2013	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2013	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2013	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/07/2013	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2013	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536
MITEQ	AMF-6D-001180-35-20P/ POWER AMP	Annual	07/30/2013	990893
Agilent	8493C / Attenuator(10 dB)	Annual	07/30/2013	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	Annual	11/07/2013	BR0617
CERNEX	CBLU1183540 / POWER AMP	Annual	07/27/2013	21691

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID:	
HCTR1301FR04	January 18, 2013		ZNFL04E	