



# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**  
LG Electronics MobileComm U.S.A., Inc.

**Address:**  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue:**  
April 19, 2013

**Test Site/Location:**  
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,  
Icheon-si, Kyunggi-Do, Korea

**Report No.:** HCTR1304FR24

**HCT FRN:** 0005866421

**FCC ID : ZNFL05E**

**APPLICANT : LG Electronics MobileComm U.S.A., Inc.**

**FCC Model(s):** L-05E

**EUT Type:** Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct

**Max. RF Output Power:** 3.51 dBm (2.24 mW)

**Frequency Range:** 2402 MHz -2480 MHz(BT 4.0\_Low Energy Mode)

**Modulation type** GFSK

**FCC Classification:** Digital Transmission System(DTS)

**FCC Rule Part(s):** Part 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by**  
**: Jong Seok Lee**  
**Test engineer of RF Team**

**Approved by**  
**: Chang Seok Choi**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E	

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1304FR24	April 19, 2013	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. EUT DESCRIPTION .....	4
3. TEST METHODOLOGY .....	5
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 DESCRIPTION OF TEST MODES .....	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS .....	6
5.1 FACILITIES .....	6
5.2 EQUIPMENT .....	6
6. ANTENNA REQUIREMENTS .....	7
7. SUMMARY TEST OF RESULTS .....	8
7. SUMMARY TEST OF RESULTS .....	9
8. TEST RESULT .....	10
8.1 6dB BANDWIDTH MEASUREMENT .....	10
8.2 OUTPUT POWER MEASUREMENT.....	14
8.3 POWER SPECTRAL DENSITY .....	21
8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	25
8.5 RADIATED MEASUREMENT.....	33
8.5.1 RADIATED SPURIOUS EMISSIONS.....	33
8.5.2 RADIATED RESTRICTED BAND EDGES .....	41
8.6 POWERLINE CONDUCTED EMISSIONS .....	48
9. LIST OF TEST EQUIPMENT .....	53

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E



## 1. GENERAL INFORMATION

**Applicant:** LG Electronics MobileComm U.S.A., Inc.  
**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632  
**FCC ID:** ZNFL05E  
**EUT Type:** Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct  
**Model name(s):** L-05E  
**Date(s) of Tests:** March 30, 2013 ~ April 12, 2013  
**Place of Tests:** HCT Co., Ltd.  
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.  
 (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>EUT Type</b>	Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	
<b>FCC Model Name</b>	L-05E	
<b>Power Supply</b>	DC 3.8 V	
<b>Battery type</b>	Li-ion Battery(Standard)	
<b>Frequency Range</b>	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
<b>Max. RF Output Power</b>	Peak	3.51 dBm (2.24 mW)
	Average	2.34 dBm (1.71 mW)
<b>BT Operating Mode</b>	BT 4.0_Low Energy Mode	
<b>Modulation Type</b>	GFSK	
<b>Number of Channels</b>	40 Channels	
<b>Antenna Specification</b>	Manufacturer: acetechologyA Antenna type: Internal Antenna Peak Gain : -1.95 dBi	

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1304FR24	<b>Date of Issue:</b> April 19, 2013	<b>EUT Type:</b> Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	<b>FCC ID:</b> ZNFL05E

### 3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v02 dated October 04, 2012 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

##### Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 558074)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct		FCC ID: ZNFL05E



#### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

#### 5. FACILITIES AND ACCREDITATIONS

##### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

##### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1304FR24	<b>Date of Issue:</b> April 19, 2013	<b>EUT Type:</b> Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	<b>FCC ID:</b> ZNFL05E



## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1304FR24	<b>Date of Issue:</b> April 19, 2013	<b>EUT Type:</b> Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	<b>FCC ID:</b> ZNFL05E

## 7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS



## 7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

## 8. TEST RESULT


### 8.1 6dB BANDWIDTH MEASUREMENT

#### Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to ( Page 4 in KDB 558074, issued 10/04/2012)

RBW = 1 – 5 % of DTS BW, not to exceed 100 kHz

VBW = 3 \* RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct		FCC ID: ZNFL05E

■ TEST RESULTS

Conducted 6dB Bandwidth Measurements

LE Mode		Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2402	0	656.9	500	Pass
2440	19	656.2	500	Pass
2480	39	656.6	500	Pass

RESULT PLOTS


6dB Bandwidth plot (Low-CH 0)



6dB Bandwidth plot (Mid-CH 19)



### 6dB Bandwidth plot (High-CH 39)

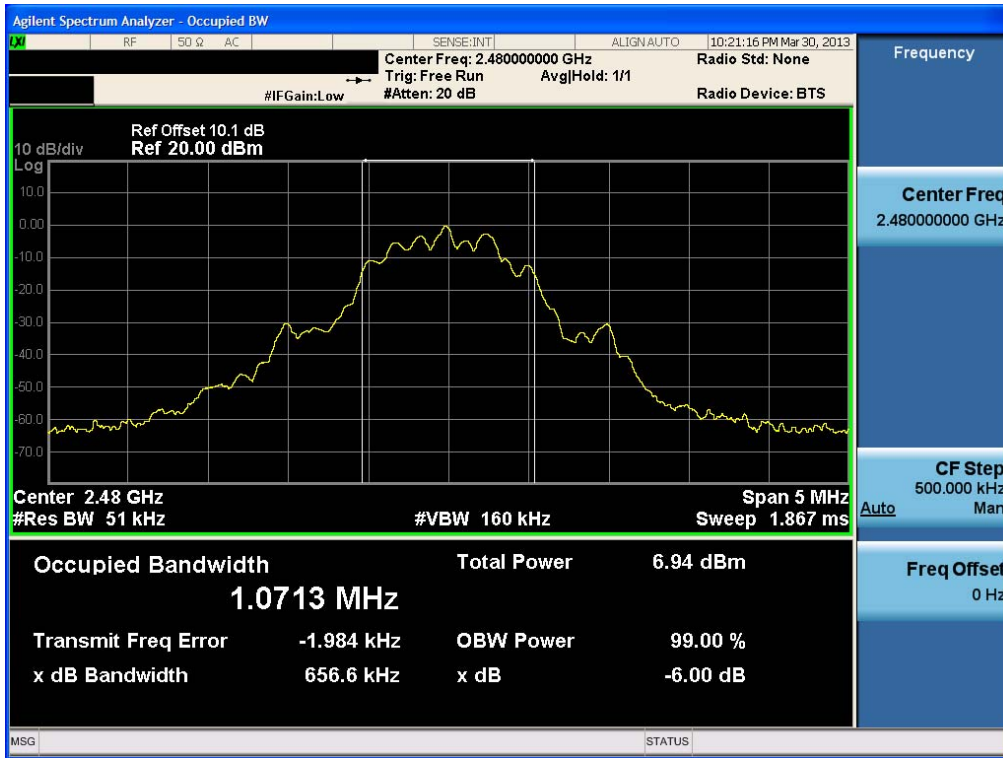

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E


## 8.2 OUTPUT POWER MEASUREMENT

### Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to ANSI 63.10.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power ( Procedure 8.1.2 Option2 in KDB 558074, issued 10/04/2012)

RBW = Maximum available (at least 1 MHz)

VBW = 3 x RBW or maximum available setting (must be  $\geq$  RBW)

SPAN = Set the span to fully encompass the DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

- Average Power ( Procedure 8.2.1 Option1 in KDB 558074, issued 10/04/2012)

RBW = 1 MHz

VBW  $\geq$  3 MHz

SPAN = Set the analyzer span to a minimum of 1.5 times the EBW

Ensure that the number of measurement points in the sweep  $\geq$  2 x span/RBW

Detector Mode = Power average (RMS) or sample detector when RMS not available

Sweep = auto couple

Trace average at least 100 traces in power averaging(RMS) mode

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E



Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.

■ **Sample Calculation**

$$\begin{aligned} \text{Output Power} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\ &= 10 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 20.8 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is 10.11 dB at 2402 MHz and is 10.13 dB at 2480 MHz. So, the offset is 10.1 dB. And the offset gap in the 2.4 GHz range do not affect the conducted output power final result.

Note : Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

where, Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$

LE Mode	$T_{\text{on}}$ (ms)	$T_{\text{total}}$ (ms)	Duty Cycle	Duty Cycle Factor
	<b>0.100</b>	<b>0.624</b>	<b>0.160256</b>	<b>7.952</b>

Note : Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

where, Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct		FCC ID: ZNFL05E

■ TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	2.10	30
2440	19	3.51	30
2480	39	1.09	30

■ TEST RESULTS-Average


Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.				
2402	0	-7.04	7.95	0.91	30
2440	19	-5.61	7.95	2.34	30
2480	39	-8.05	7.95	-0.10	30




RESULT PLOTS-Peak

Conducted Output Power (Low-CH 0)

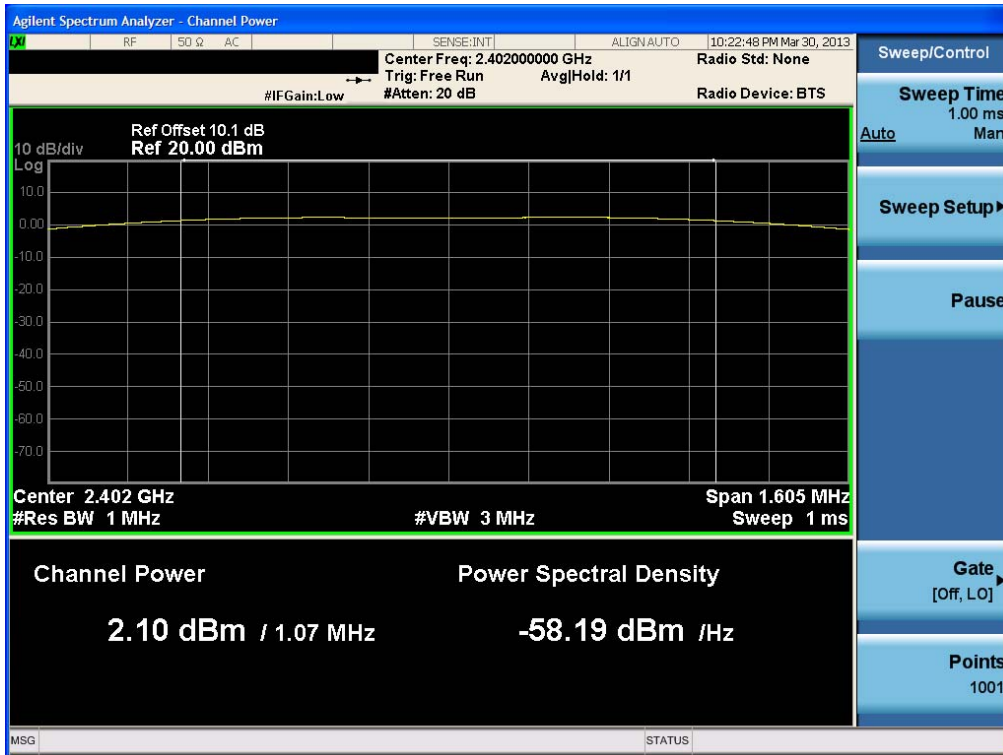


Conducted Output Power (Mid-CH 19)

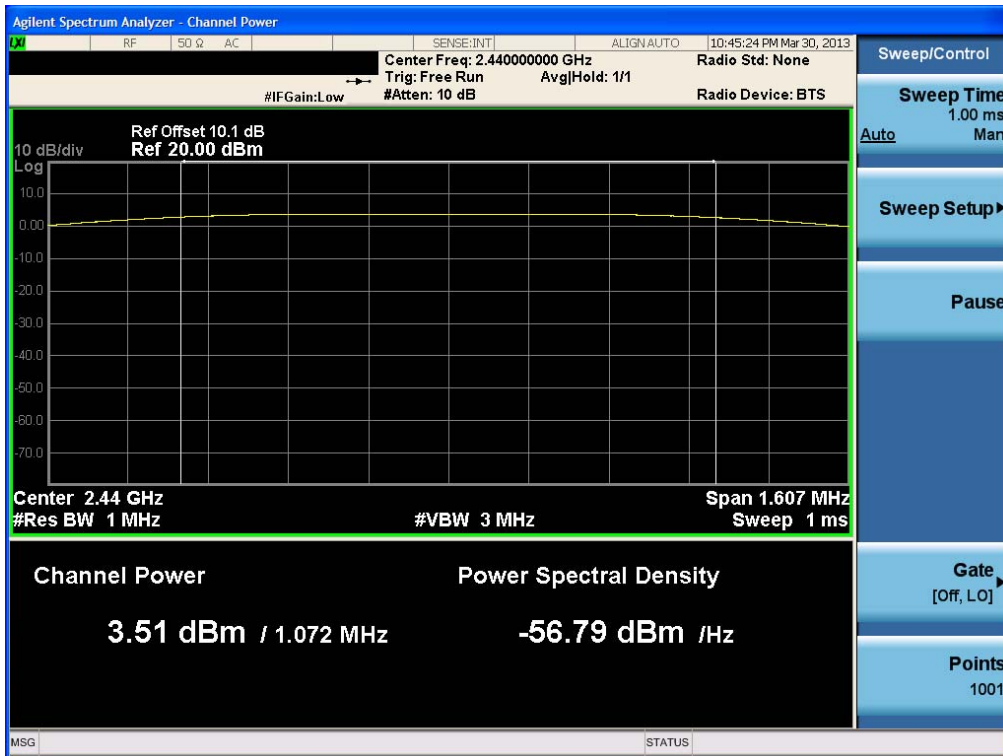

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E

### Conducted Output Power (High-CH 39)

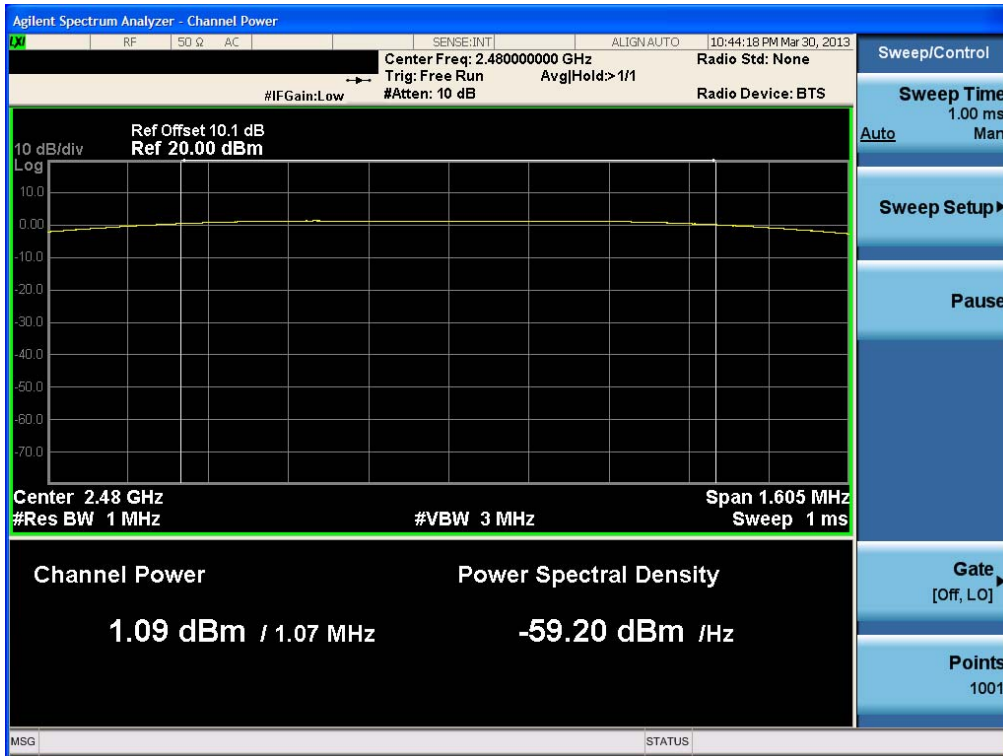

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E

RESULT PLOTS-Average

Conducted Output Power (Low-CH 0)



Conducted Output Power (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E

### Conducted Output Power (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct		FCC ID: ZNFL05E


### 8.3 POWER SPECTRAL DENSITY

#### Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

We tested according to Procedure 9.1 Option1 in KDB 558074, issued 10/04/2012

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth

RBW ≥ 3 kHz

VBW ≥ 9 kHz

Sweep = Auto couple

Detector Mode = Peak

Trace Mode = Max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### ■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 4.2 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is 10.11 dB at 2402 MHz and is 10.13 dB at 2480 MHz. So, the offset is 10.1 dB. And the offset gap in the 2.4 GHz range do not affect the power spectral density final result.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1304FR24	Date of Issue: April 19, 2013	EUT Type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct	FCC ID: ZNFL05E

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2402	0	LE	-15.283	8	Pass
2440	19		-13.910	8	Pass
2480	39		-16.345	8	Pass



