

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ mho/m; $\epsilon_r = 40.045$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (A); Type: QD000P40CC; Serial: 1602

Left Touch_R99_ch 9400 2/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.691 mW/g

Left Touch_R99_ch 9400 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 22.493 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.9390
SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.374 mW/g
 Maximum value of SAR (measured) = 0.751 mW/g

Left Touch_R99_ch 9400 2/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 22.493 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.6580
SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.188 mW/g
 Maximum value of SAR (measured) = 0.494 mW/g

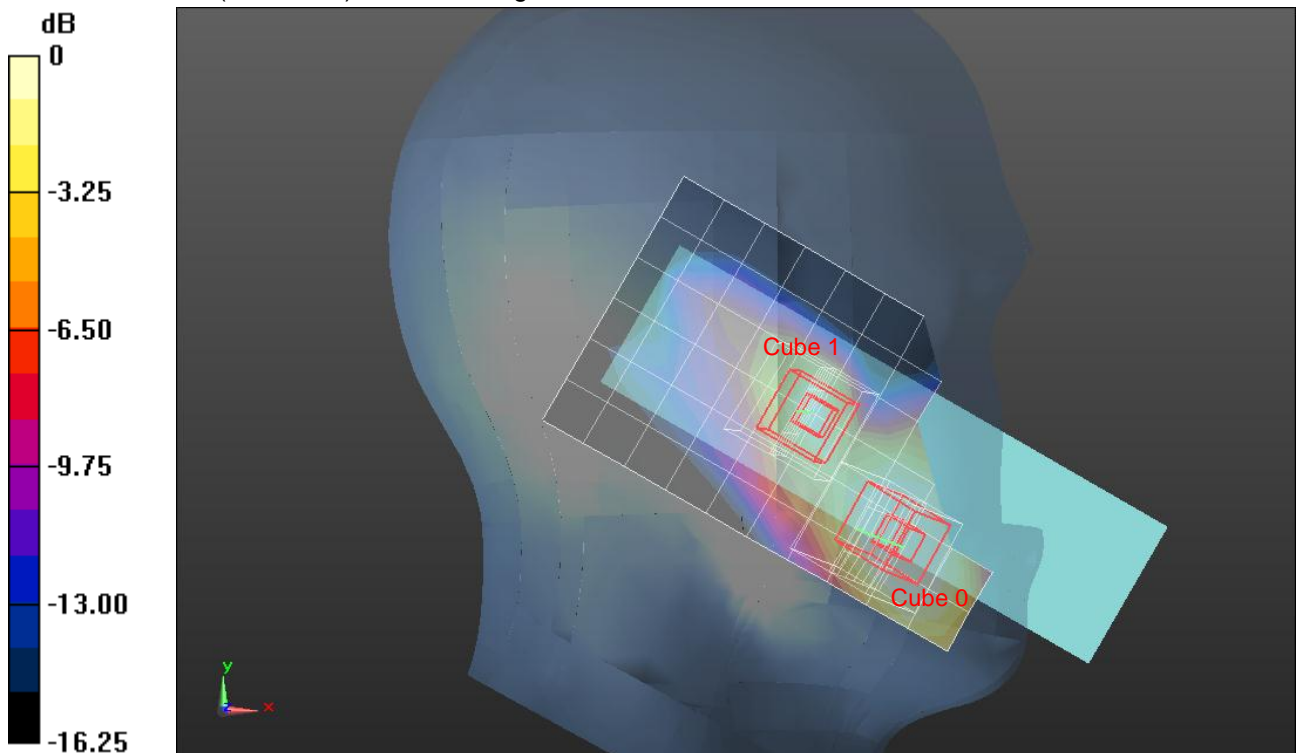


0 dB = 0.490mW/g = -6.20 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Left Touch_R99_ch 9400 2/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.698 mW/g

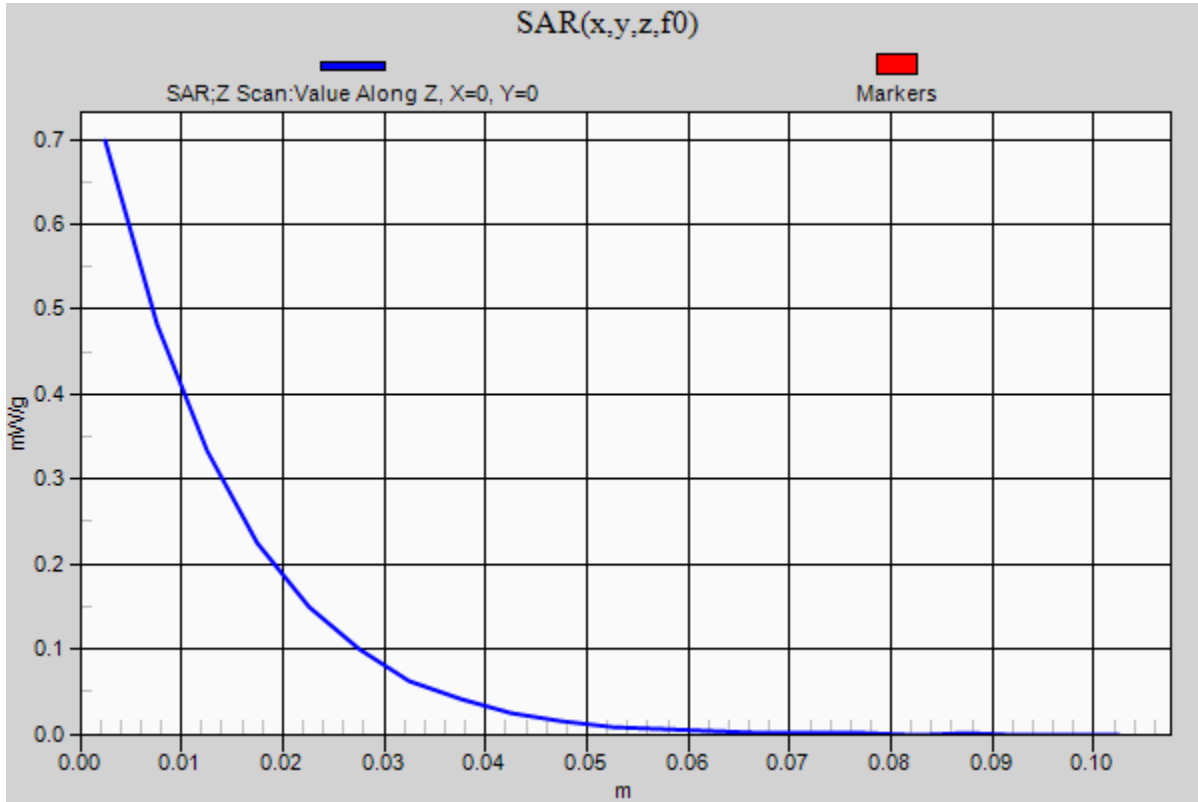

W-CDMA Band II


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.384 \text{ mho/m}$; $\epsilon_r = 40.045$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (A); Type: QD000P40CC; Serial: 1602

Left Tilt_R99_ch 9400/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.088 mW/g

Left Tilt_R99_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 8.085 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.1140
SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.047 mW/g
 Maximum value of SAR (measured) = 0.090 mW/g

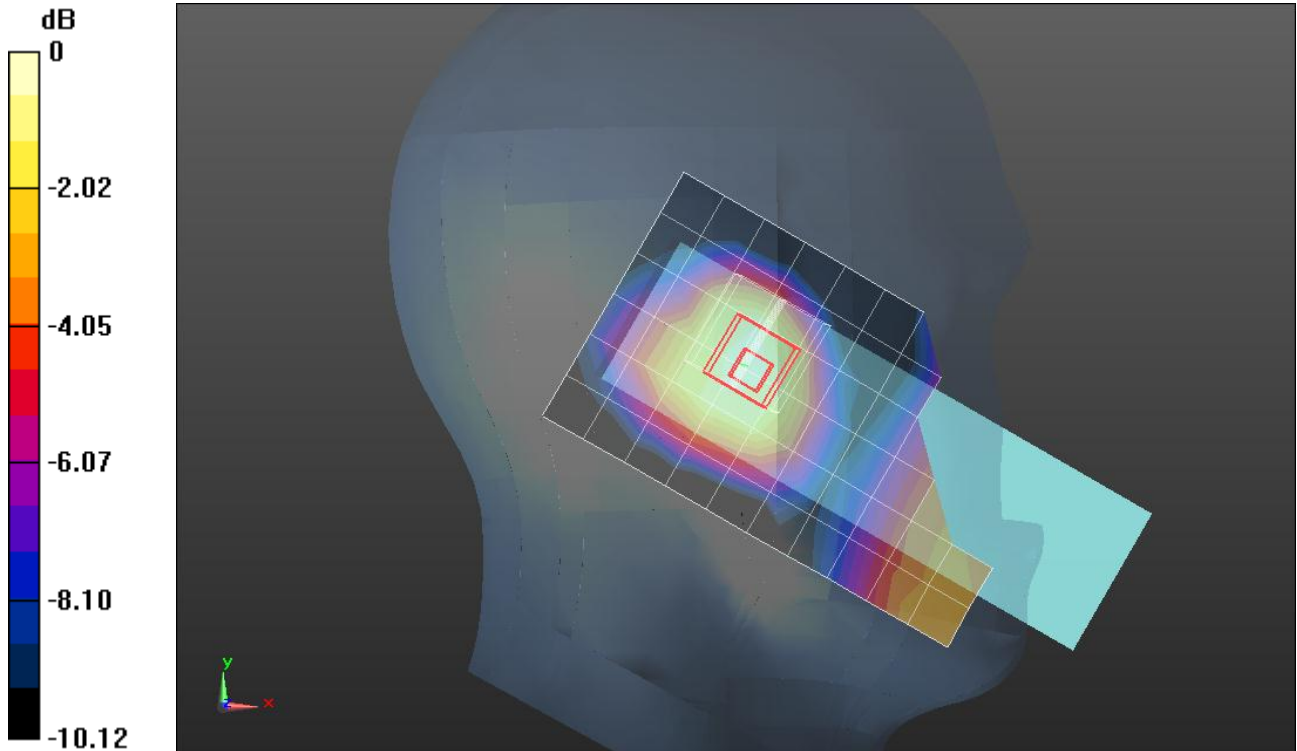

0 dB = 0.090mW/g = -20.92 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ mho/m; $\epsilon_r = 40.045$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (A); Type: QD000P40CC; Serial: 1602

Right Touch_R99_ch 9400/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.570 mW/g


Right Touch_R99_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.439 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.7160

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.586 mW/g

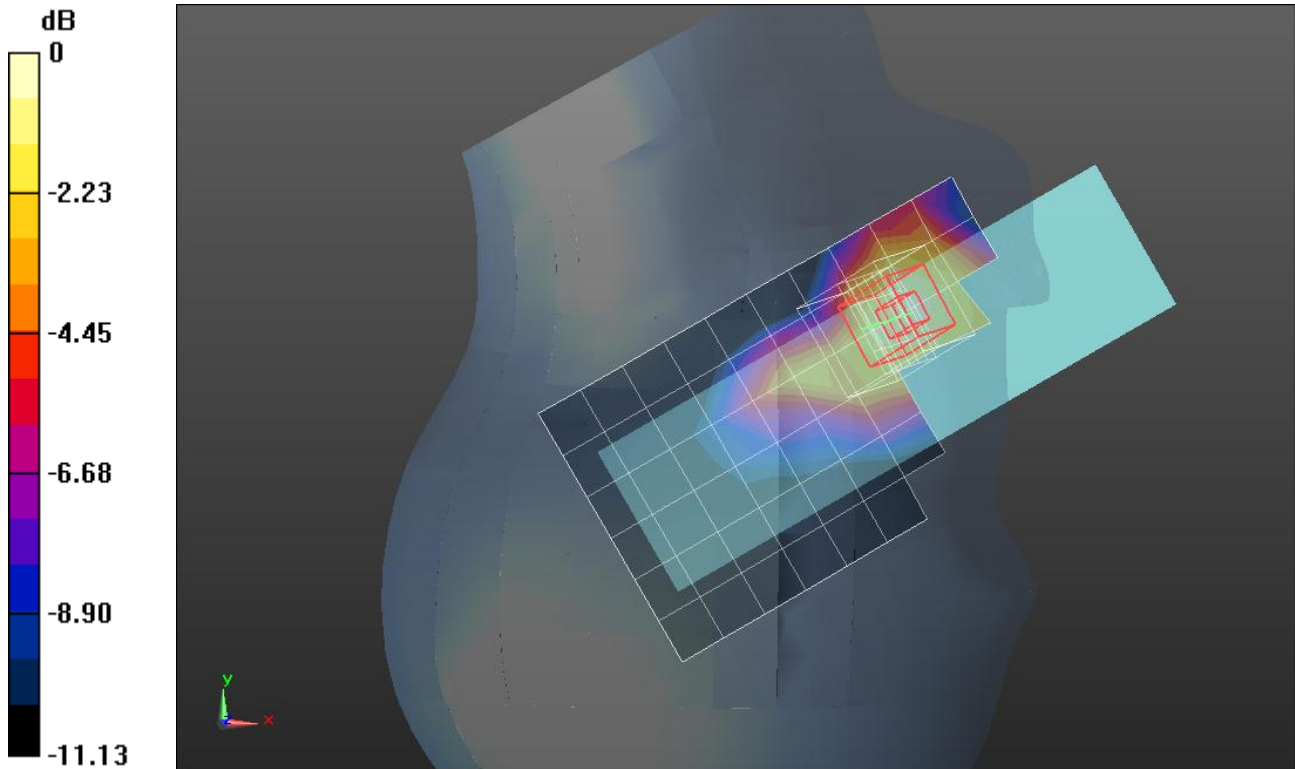

0 dB = 0.590mW/g = -4.58 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ mho/m; $\epsilon_r = 40.045$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (A); Type: QD000P40CC; Serial: 1602

Right Tilt_R99_ch 9400/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.080 mW/g


Right Tilt_R99_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.469 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0980

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

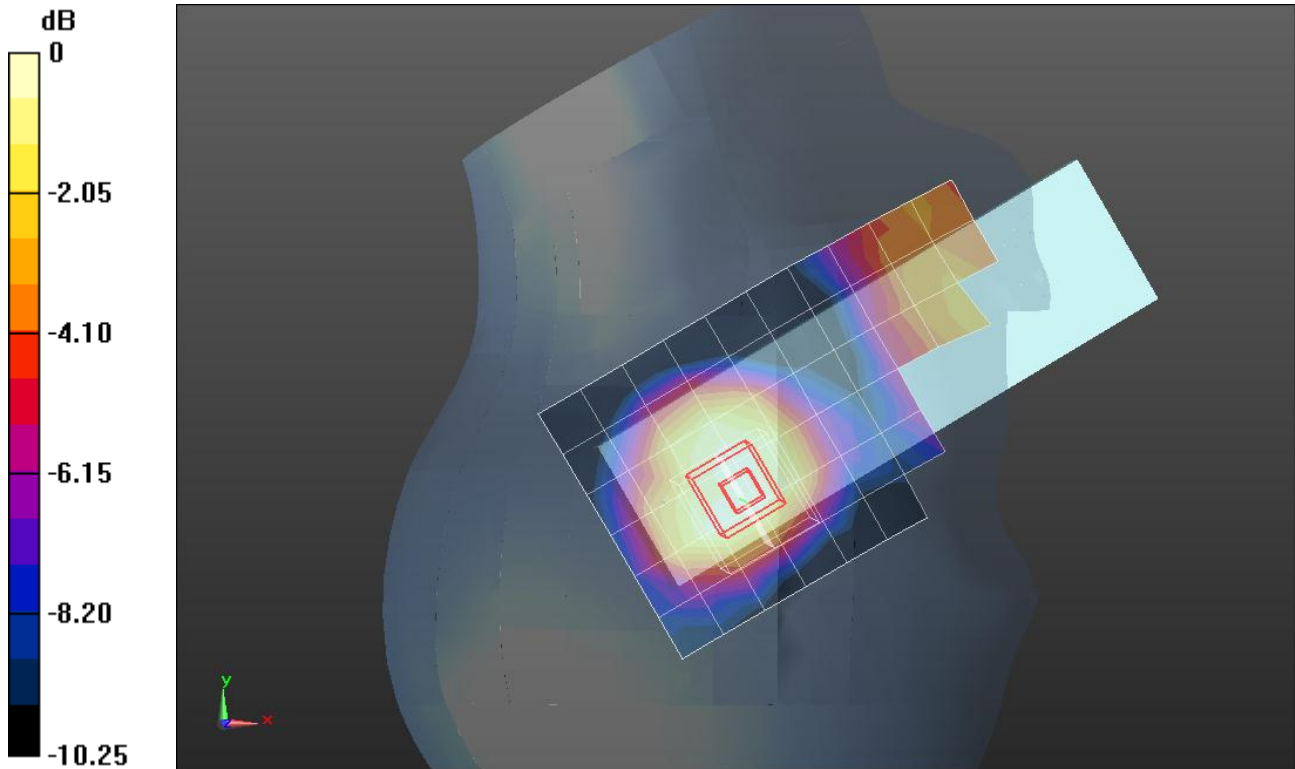

0 dB = 0.080mW/g = -21.94 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 50.987$; $\rho = 1000 \text{ kg/m}^3$


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Rel. 99_RMC_12.2kbps/Ch 9400/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.261 mW/g

Rear/Rel. 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.494 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.3370
SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.147 mW/g
 Maximum value of SAR (measured) = 0.274 mW/g

Rear/Rel. 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.494 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.3150
SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.111 mW/g
 Maximum value of SAR (measured) = 0.242 mW/g

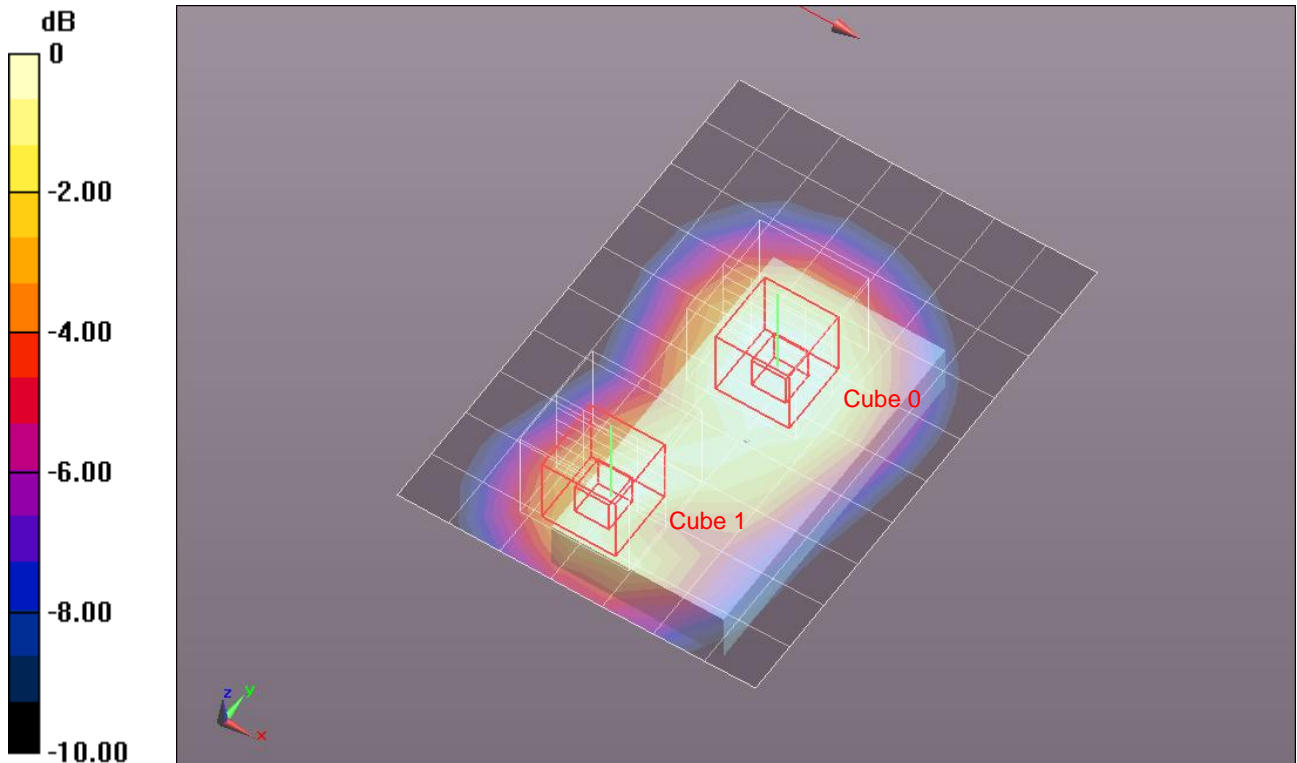


0 dB = 0.240mW/g = -12.40 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/Rel. 99_RMC_12.2kbps/Ch 9400/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.265 mW/g

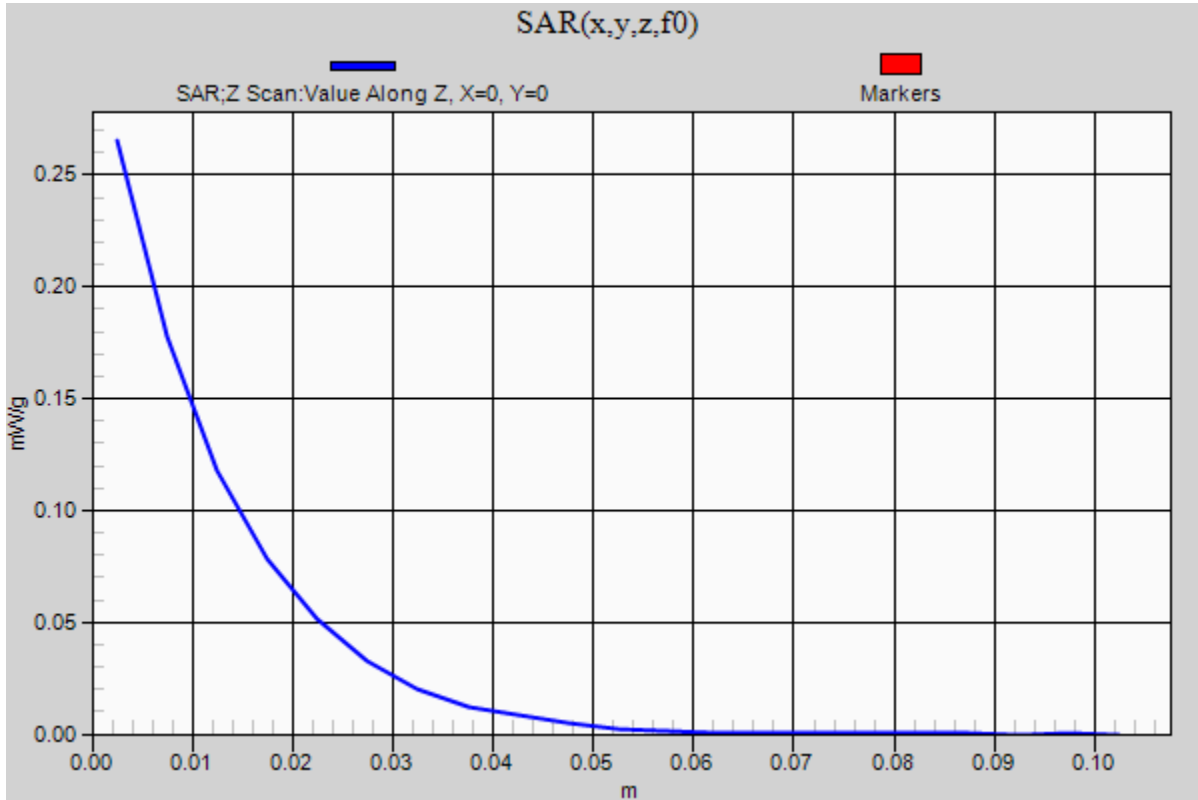

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 50.987$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/with Headset/Rel 99_RMC_12.2kbps/Ch 9400/Area Scan (8x11x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.247 mW/g

Rear/with Headset/Rel 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.797 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2870

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

Rear/with Headset/Rel 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.797 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2830

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

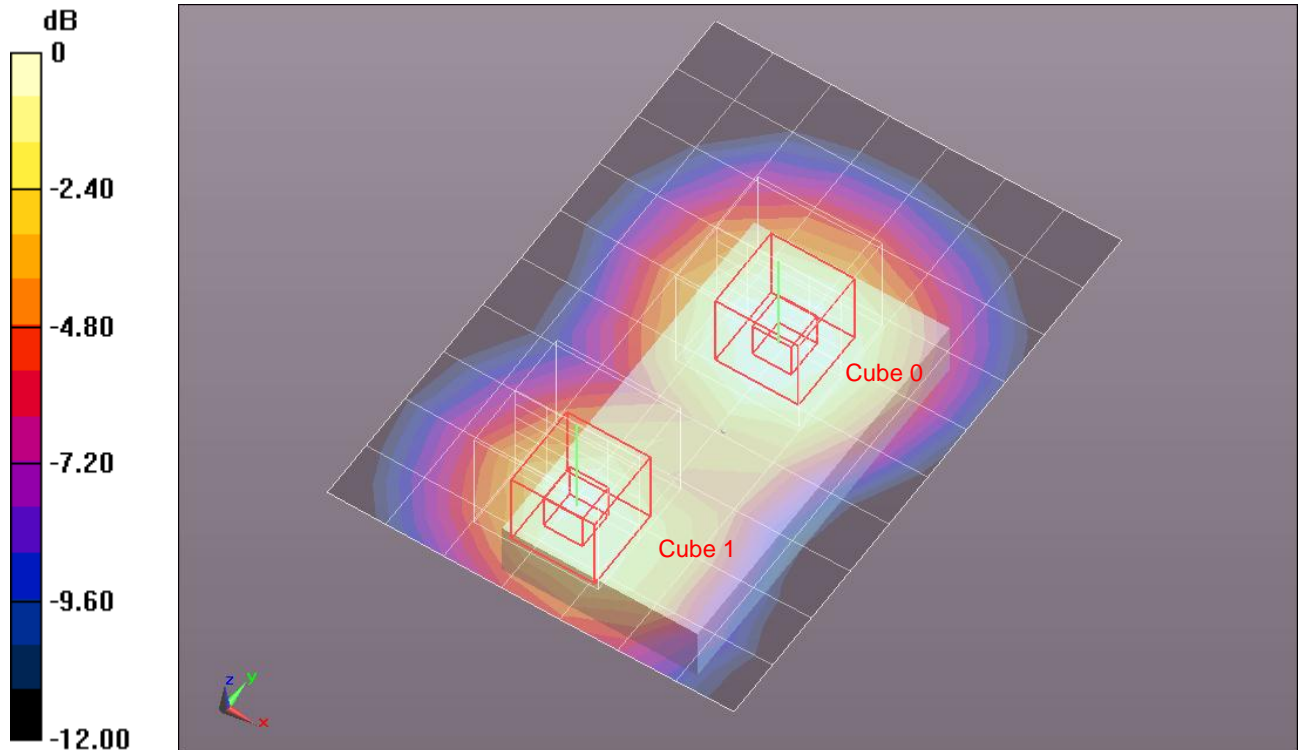

0 dB = 0.220mW/g = -13.15 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 50.987$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Front/Rel. 99_RMC_12.2kbps/Ch 9400/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.165 mW/g

Front/Rel. 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.785 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.2150
SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.090 mW/g
 Maximum value of SAR (measured) = 0.175 mW/g

Front/Rel. 99_RMC_12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.785 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.1630
SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.064 mW/g
 Maximum value of SAR (measured) = 0.131 mW/g

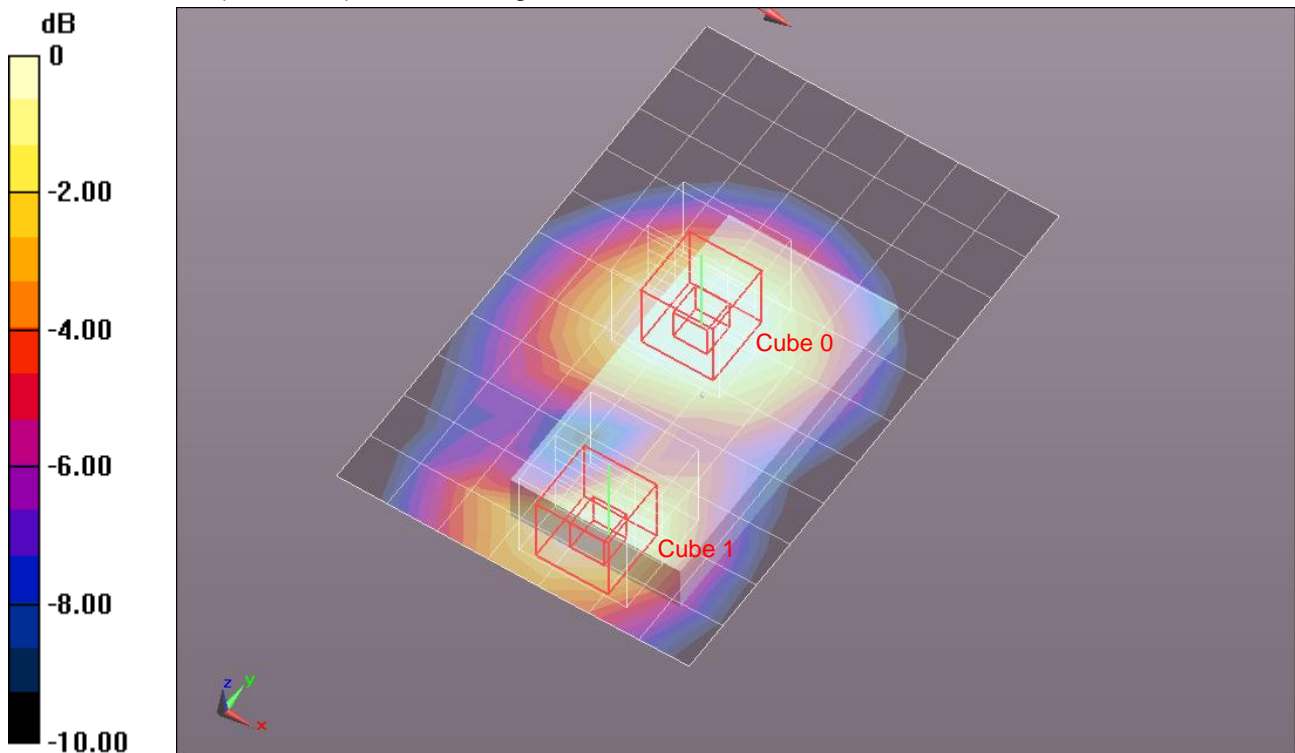

0 dB = 0.130mW/g = -17.72 dB mW/g