

SAR TEST REPORT

HCT CO., LTD

EUT Type:	Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
FCC ID:	ZNFLGL22
Model:	KS1204
Date of Issue:	Sep. 24, 2013
Test report No.:	HCTA1309FS01
Test Laboratory:	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea TEL: +82 31 645 6300 FAX: +82 31 645 6401
Applicant :	LG Electronics, MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
Testing has been carried out in accordance with:	RSS-102 Issue 4; Health Canada Safety Code 6 47CFR §2.1093 ANSI/ IEEE C95.1 – 1992 IEEE 1528-2003
Test result:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.
Signature	 Report prepared by : Yun-Jeang Heo Test Engineer of SAR Part
	 Approved by : Jae-Sang So Manager of SAR Part

Table of Contents

1. INTRODUCTION	4
2. TEST METHODOLOGY	5
3. DESCRIPTION OF DEVICE.....	6
4. DESCRIPTION OF TEST EQUIPMENT	7
5. SAR MEASUREMENT PROCEDURE.....	15
6. DESCRIPTION OF TEST POSITION.....	17
7. MEASUREMENT UNCERTAINTY	19
8. ANSI/ IEEE C95.1 - 1992 RF EXPOSURE LIMITS	21
9. SAR SYSTEM VALIDATION.....	22
10. SYSTEM VERIFICATION.....	23
11. RF CONDUCTED POWER MEASUREMENT	25
11.4 SAR Test Exclusions Applied	60
12. SAR Test configuration & Antenna Information	61
13. SAR TEST DATA SUMMARY	62
13.1-1 Measurement Results (GSM850 Head SAR)	62
13.1-2 Measurement Results (GSM1900 Head SAR)	62
13.1-3 Measurement Results (WCDMA850 Head SAR).....	63
13.1-4 Measurement Results (DTS Head SAR)	63
13.1-5 Measurement Results (NII Head SAR)	64
13.2-1 Measurement Results (GSM850 Hotspot SAR).....	65
13. 2-2 Measurement Results (GSM1900 Hotspot SAR).....	65
13. 2-3 Measurement Results (WCDMA850 Hotspot SAR).....	66
13. 2-4 Measurement Results (WLAN Hotspot SAR)	66
13.3-1 Measurement Results (DTS Body-worn SAR).....	67
13.3-2 Measurement Results (NII Body-worn SAR).....	67
13.3-3 Measurement Results (Body-worn SAR)	67
13.4 SAR Test Notes	68
14. SAR Measurement Variability and Uncertainty	70
15. SAR Summation Scenario	71
16. CONCLUSION.....	78
17. REFERENCES	79
Attachment 1. – SAR Test Plots	80
Attachment 2. – Dipole Verification Plots.....	96
Attachment 3. – Probe Calibration Data	111
Attachment 4. – Dipole Calibration Data	146

Revision History

Rev.	Issue DATE	DESCRIPTION
-	Sep. 13, 2013	Initial Issue
1	Sep. 23, 2013	Page 5 was revised
2	Sep. 24, 2013	Page 5 was revised

1. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (r). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$\boxed{S A R = \frac{d}{d t} \left(\frac{d U}{d m} \right) = \frac{d}{d t} \left(\frac{d U}{\rho d v} \right)}$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$\text{SAR} = \sigma E^2 / \rho$$

where:

σ = conductivity of the tissue-simulant material (S/m)

ρ = mass density of the tissue-simulant material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC KDB Procedure, IEEE Standard 1528-2003 & IEEE 1528a-2005 and the following published KDB procedures.

- FCC KDB Publication 941225 D01 SAR test for 3G devices v02
- FCC KDB Publication 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB Publication 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB Publication 941225 D06 Hot Spot SAR v01r01
- FCC KDB Publication 248227 D01v01r02(SAR Considerationa for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r01 (General SAR Guidance)
- FCC KDB Publication 648474 D04 Handset SAR v01r01
- FCC KDB Publication 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01
- FCC KDB Publication 865664 D02 SAR Reporting v01r01
- April 2013 TCB Workshop Notes (IEEE 802.11ac)

3. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

EUT Type	Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC					
FCC ID:	ZNFLGL22					
Model:	KS1204					
Trade Name	LG Electronics, MobileComm U.S.A., Inc.					
Application Type	Certification					
Mode(s) of Operation	GSM850/GSM1900 /WCDMA850 /802.11b/g/n/ac					
Tx Frequency	824.20 - 848.80 MHz (GSM850) /1 850.20 – 1 909.80 MHz (GSM1900) 826.4 - 846.6 MHz (WCDMA850) 2 412- 2 462 MHz (802.11b/g/n) 5180-5240MHz/ 5260-5320 MHz/ 5500-5700 MHz/ 5745-5825 MHz (802.11a/n/ac)					
Production Unit or Identical Prototype	Prototype					
Max SAR	Band	Tx Frequency (MHz)	Equipment Class	Reported 1g SAR (W/kg)		
	GSM850	824.2 - 848.8	PCE	0.015	0.089	0.080
	GSM1900	1 850.2 - 1 909.8	PCE	0.092	0.243	0.352
	WCDMA 850	826.4 - 846.6	PCE	0.014	0.051	0.051
	802.11b	2 412.0 - 2 462.0	DTS	0.106	0.026	0.026
	802.11a	5 745 - 5 825	DTS	0.046	0.011	0.022
	802.11a	5 180 - 5 240	UNII	0.112	0.032	
	802.11a	5 260 - 5 320	UNII	0.169	0.039	
	802.11a	5 500 - 5 700	UNII	0.156	0.018	
	Bluetooth	2402 – 2480	DSS/DTS	-	-	-
Simultaneous SAR per KDB 690783 D01			0.217	0.280	0.352	
Date(s) of Tests	Sep.01, 2013 ~ Sep.10, 2013					
Antenna Type	Integral Antenna					
GPRS	Multislot Class: 12 Mode Class : B					
Key Feature(s)	This device supports Mobile Hotspot.					

4. DESCRIPTION OF TEST EQUIPMENT

4.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.4.1).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium IV 3.0 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

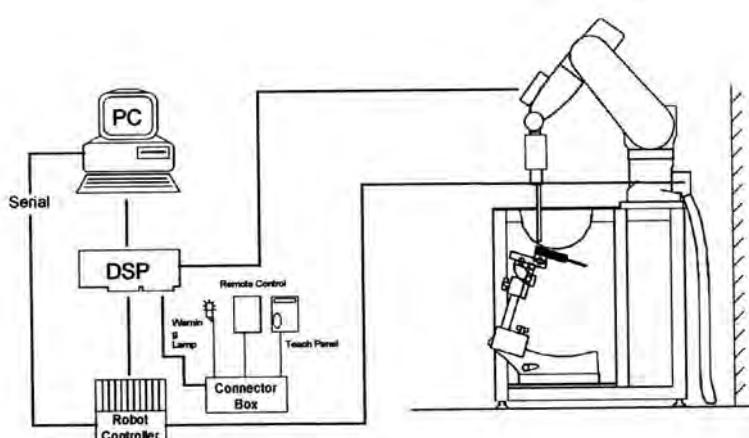


Figure 4.1 HCT SAR Lab. Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

4.2 DASY4 E-FIELD PROBE SYSTEM

4.1 ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy: 8 %)
Frequency	10 MHz to > 3 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal probe axis)
Dynamic	5 $\mu\text{W}/\text{g}$ to > 100 mW/g;
Range Linearity:	± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dissymmetry up to 3 GHz Compliance tests of WCDMA/LTE Phones Fast automatic scanning in arbitrary phantoms



Figure 4.1 Photograph of the probe and the Phantom



Figure 4.2 ET3DV6 E-field Probe

The SAR measurements were conducted with the dosimetric probe

ET3DV6, designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity

and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

4.2.1 EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1810 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

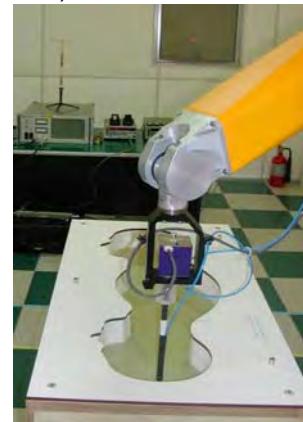


Figure 4.3 Photograph of the probe and the Phantom



Figure 4.4 EX3DV4 E-field Probe

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

4.3 PROBE CALIBRATION PROCESS

4.3.1 E-Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with an accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the proper procedure and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm^3 for brain tissue)

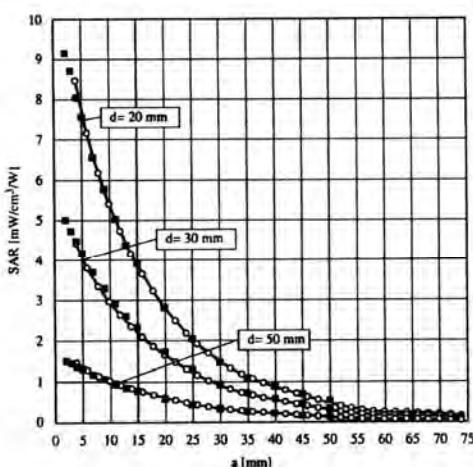


Figure 4.4 E-Field and Temperature measurements at 900 MHz

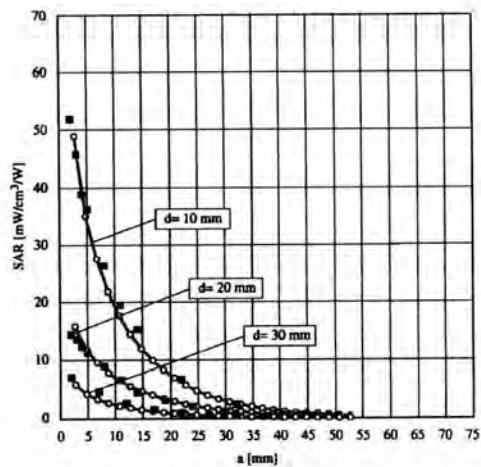


Figure 4.5 E-Field and temperature measurements at 1.8 GHz

4.3.2 Data Extrapolation

The DASY4 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i=x,y,z$)
 U_i = input signal of channel i ($i=x,y,z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i ($i = x,y,z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x,y,z$)
 $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

4.4 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.



Shell Thickness	2.0 mm \pm 0.2 mm (6 \pm 0.2 mm at ear point)
Filling Volume	about 25 L
Dimensions	810 mm x 1 000 mm x 500 mm (H x L x W)

Figure 4.6 SAM Phantom

Triple Modular Phantom consists of tree identical modules which can be installed and removed separately without emptying the liquid. It includes three reference points for phantom installation. Covers prevent evaporation of the liquid. Phantom material is resistant to DGBE based tissue simulating liquids. The MFP V5.1 will be delivered including wooden support only (**non**-standard SPEAG support).

Applicable for system performance check from 700 MHz to 6 GHz (MFP V5.1C) or 800 MHz - 6 GHz (MFP V5.1A) as well as dosimetric evaluations for body-worn operation.



Shell Thickness	2.0 mm \pm 0.2 mm
Filling Volume	approx. 9.2 L
Dimensions	830 mm x 500 mm (L x W)

Figure 4.7 Triple Modular Phantom

4.5 Device Holder for Transmitters

In combination with the SAM Phantom V 4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatable positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the Worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 4.8 Device Holder

4.6 Tissue Simulating Mixture Characterization

The mixture is characterized to obtain proper dielectric constant (permittivity) and conductivity of the tissue of interest. The tissue dielectric parameters recommended in IEEE 1528 and IEC 62209 have been used as targets for the compositions, and are to mach within 5%, per the FCC recommendations

Ingredients (% by weight)	Frequency (MHz)							
	835		1 900		2 450 - 2700		5200-5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.45	53.06	54.9	70.17	71.88	73.2	65.52	78.66
Salt (NaCl)	1.45	0.94	0.18	0.39	0.16	0.1	0.0	0.0
Sugar	57.0	44.9	0.0	0	0.0	0.0	0.0	0.0
HEC	1.0	1.0	0.0	0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	19.97	0.0	17.24	10.67
DGBE	0.0	0.0	44.92	29.44	7.99	26.7	0.0	0.0
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	10.67

Salt: 99 % Pure Sodium Chloride Sugar: 98 % Pure Sucrose
 Water: De-ionized, 16M resistivity HEC: Hydroxyethyl Cellulose
 DGBE: 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether

Table 4.1 Composition of the Tissue Equivalent Matter

4.7 SAR TEST EQUIPMENT

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	Robot RX90L	F01/5K09A1/A/01	N/A	N/A	N/A
Staubli	Robot ControllerCS7MB	F99/5A82A1/C/01	N/A	N/A	N/A
HP	Pavilion t000_puffer	KRJ51201TV	N/A	N/A	N/A
SPEAG	Light Alignment Sensor	265	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)	D221340.01	N/A	N/A	N/A
SPEAG	DAE3	446	Jan. 16, 2013	Annual	Jan. 16, 2014
SPEAG	DAE3	466	Feb. 21, 2013	Annual	Feb. 21, 2014
SPEAG	DAE4	648	Apr. 24, 2013	Annual	Apr. 24, 2014
SPEAG	DAE4	869	Sep. 18, 2012	Annual	Sep. 18, 2013
SPEAG	E-Field Probe ET3DV6	1630	Jan. 24, 2013	Annual	Jan. 24, 2014
SPEAG	E-Field Probe ET3DV6	1798	Apr. 29, 2013	Annual	Apr. 29, 2014
SPEAG	E-Field Probe EX3DV4	3797	Nov. 22, 2012	Annual	Nov. 22, 2013
SPEAG	E-Field Probe EX3DV4	3903	Mar. 18, 2013	Annual	Mar. 18, 2014
SPEAG	Dipole D835V2	441	Apr. 25, 2013	Annual	Apr. 25, 2014
SPEAG	Dipole D1900V2	5d038	May. 29, 2013	Annual	May. 29, 2014
SPEAG	Dipole D2450V2	743	Aug. 23, 2013	Annual	Aug. 23, 2014
SPEAG	Dipole D5GHzV2	1107	Feb. 21, 2013	Annual	Feb. 21, 2014
Agilent	Power Meter(F) E4419B	MY41291386	Nov. 02, 2012	Annual	Nov. 02, 2013
Agilent	Power Sensor(G) 8481	MY41090870	Nov. 02, 2012	Annual	Nov. 02, 2013
HP	Dielectric Probe Kit 85070C	00721521	CBT		
HP	Dual Directional Coupler 778D	16072	Nov. 02, 2012	Annual	Nov. 02, 2013
R&S	Base Station CMW500	1201.0002K50_116858	Jan. 17,2013	Annual	Jan. 17,2014
HP	Base Station E5515C	GB44400269	Feb. 14, 2013	Annual	Feb. 14, 2014
HP	Signal Generator 8664A	3744A02069	Nov. 02, 2012	Annual	Nov. 02, 2013
Hewlett Packard	11636B/Power Divider	11377	Nov. 11. 2012	Annual	Nov. 11. 2013
Agilent	N9020A/ SIGNAL ANALYZER	MY51110020	Apr. 25, 2013	Annual	Apr. 25, 2014
TESCOM	TC-3000C / BLUETOOTH TESTER	3000C000276	Apr. 24, 2013	Annual	Apr. 24, 2014

NOTE:

1. The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Verification measurement is performed by HCT Lab. before each test. The brain/body simulating material is calibrated by HCT using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain/body-equivalent material.

2. CBT(Calibrating Before Testing). Prior to testing, the dielectric probe kit was calibrated via the network analyzer, with the specified procedure(calibrated in pure water) and calibration kit(standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent

5. SAR MEASUREMENT PROCEDURE

The evaluation was performed with the following procedure:

1. The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
3. Around this point, a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR value, at the same location as procedure #1, was re-measured. If the value changed by more than 5 %, the evaluation is repeated.

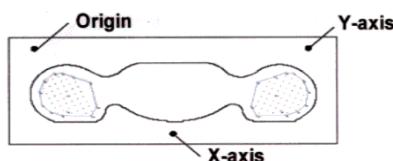


Figure 5.1 SAR Measurement Point in Area Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extend, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SASR-distribution over 10g.

Area scan and zoom scan resolution setting follow KDB 865664 D01v01 quoted below

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}}$ two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

6. DESCRIPTION OF TEST POSITION

6.1 HEAD POSITION

The device was placed in a normal operating position with the Point A on the device, as illustrated in following drawing, aligned with the location of the RE(ERP) on the phantom. With the ear-piece pressed against the head, the vertical center line of the body of the handset was aligned with an imaginary plane consisting of the RE, LE and M. While maintaining these alignments, the body of the handset was gradually moved towards the cheek until any point on the mouth-piece or keypad contacted the cheek. This is a cheek/touch position. For ear/tilt position, while maintain the device aligned with the BM and FN lines, the device was pivot against ERP back for 15° or until the device antenna touch the phantom. Please refer to IEEE 1528-2003 illustration below.

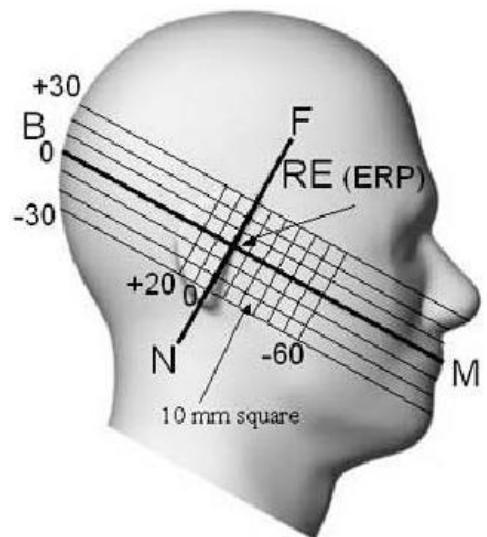


Figure 6.1 Side view of the phantom

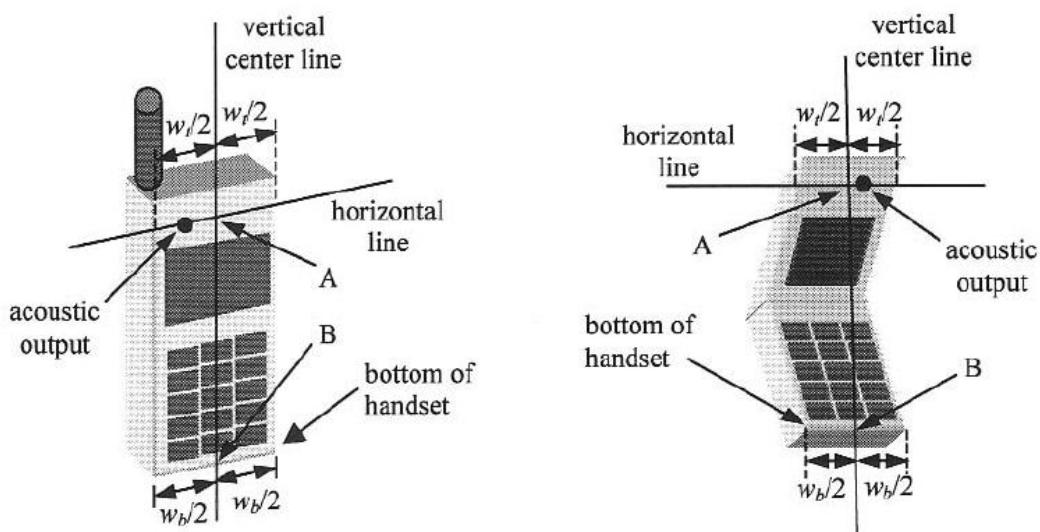


Figure 6.2 Handset vertical and horizontal reference lines

6.2 Body Holster/Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with each accessory. If multiple accessory share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used.

Since this EUT does not supply any body worn accessory to the end user a distance of 1.0 cm from the EUT back surface to the liquid interface is configured for the generic test.

"See the Test SET-UP Photo"

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), Including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worstcase positioning is then documented and used to perform Body SAR testing.

7. MEASUREMENT UNCERTAINTY

Error Description	Tol (± %)	Prob. dist.	Div.	c _i	Standard Uncertainty (± %)	v _{eff}
1. Measurement System						
Probe Calibration	6.00	N	1	1	6.00	∞
Axial Isotropy	4.70	R	1.73	0.7	1.90	∞
Hemispherical Isotropy	9.60	R	1.73	0.7	3.88	∞
Boundary Effects	1.00	R	1.73	1	0.58	∞
Linearity	4.70	R	1.73	1	2.71	∞
System Detection Limits	1.00	R	1.73	1	0.58	∞
Readout Electronics	0.30	N	1.00	1	0.30	∞
Response Time	0.8	R	1.73	1	0.46	∞
Integration Time	2.6	R	1.73	1	1.50	∞
RF Ambient Conditions	3.00	R	1.73	1	1.73	∞
Probe Positioner	0.40	R	1.73	1	0.23	∞
Probe Positioning	2.90	R	1.73	1	1.67	∞
Max SAR Eval	1.00	R	1.73	1	0.58	∞
2. Test Sample Related						
Device Positioning	2.90	N	1.00	1	2.90	145
Device Holder	3.60	N	1.00	1	3.60	5
Power Drift	5.00	R	1.73	1	2.89	∞
3. Phantom and Setup						
Phantom Uncertainty	4.00	R	1.73	1	2.31	∞
Liquid Conductivity(target)	5.00	R	1.73	0.64	1.85	∞
Liquid Conductivity(meas.)	2.07	N	1	0.64	1.32	9
Liquid Permitivity(target)	5.00	R	1.73	0.6	1.73	∞
Liquid Permitivity(meas.)	5.02	N	1	0.6	3.01	9
Combind Standard Uncertainty						11.13
Coverage Factor for 95 %						k=2
Expanded STD Uncertainty						22.25

Table 7.1 Uncertainty (800 MHz- 2700 MHz)

r Description	Tol (± %)	Prob. dist.	Div.	c_i	Standard Uncertainty (± %)	v_{eff}
1. Measurement System						
Probe Calibration	6.55	N	1	1	6.00	∞
Axial Isotropy	4.70	R	1.73	0.7	1.90	∞
Hemispherical Isotropy	9.60	R	1.73	0.7	3.88	∞
Boundary Effects	1.00	R	1.73	1	0.58	∞
Linearity	4.70	R	1.73	1	2.71	∞
System Detection Limits	1.00	R	1.73	1	0.58	∞
Readout Electronics	0.30	N	1.00	1	0.30	∞
Response Time	0.8	R	1.73	1	0.46	∞
Integration Time	2.6	R	1.73	1	1.50	∞
RF Ambient Conditions	3.00	R	1.73	1	1.73	∞
Probe Positioner	0.40	R	1.73	1	0.23	∞
Probe Positioning	2.90	R	1.73	1	1.67	∞
Max SAR Eval	1.00	R	1.73	1	0.58	∞
2. Test Sample Related						
Device Positioning	2.90	N	1.00	1	2.90	145
Device Holder	3.60	N	1.00	1	3.60	5
Power Drift	5.00	R	1.73	1	2.89	∞
3. Phantom and Setup						
Phantom Uncertainty	4.00	R	1.73	1	2.31	∞
Liquid Conductivity(target)	5.00	R	1.73	0.64	1.85	∞
Liquid Conductivity(meas.)	2.07	N	1	0.64	1.32	9
Liquid Permitivity(target)	5.00	R	1.73	0.6	1.73	∞
Liquid Permitivity(meas.)	5.02	N	1	0.6	3.01	9
Combind Standard Uncertainty						11.43
Coverage Factor for 95 %						k=2
Expanded STD Uncertainty						22.86

Table 7.2 Uncertainty (5000-5900 MHz)

8. ANSI/ IEEE C95.1 - 1992 RF EXPOSURE LIMITS

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 8.1 Safety Limits for Partial Body Exposure

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

9. SAR SYSTEM VALIDATION

Per FCC KCB 865664 D02v01, SAR system validation status should be document to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue-equivalent media for system validation, according to the procedures outlined in IEEE 1528-2003 and FCC KDB 865664 D01 v01. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

SAR System #	Probe	probe Type	Probe Calibration Point		Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation		
			Measured Permittivity	Measured Conductivity			Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR		
6	1798	ET3DV6	Head	835	441	May.06,2013	42.01	0.92	PASS	PASS	PASS	GMSK	PASS	N/A
5	3903	EX3DV4	Head	835	441	May.06,2013	42.01	0.92	PASS	PASS	PASS	GMSK	PASS	N/A
6	1798	ET3DV6	Head	1900	5d032	Aug.07,2013	39.8	1.4	PASS	PASS	PASS	GMSK	PASS	N/A
6	1798	ET3DV6	Body	1900	5d032	Aug.08,2013	51.8	1.54	PASS	PASS	PASS	GMSK	PASS	N/A
3	3797	EX3DV4	Head	2450	743	Sep.02,2013	38.91	1.81	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Body	2450	743	Sep.03,2013	52.32	1.96	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	5200	1107	Apr.4,2013	36.68	4.71	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	5300	1107	Apr.4,2013	36.41	4.83	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	5500	1107	Apr.4,2013	35.81	5.09	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	5600	1107	Apr.4,2013	35.63	5.14	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	5800	1107	Apr.4,2013	35.17	5.31	PASS	PASS	PASS	OFDM	N/A	PASS
5	3903	EX3DV4	Head	5200	1107	Apr.4,2013	36.68	4.71	PASS	PASS	PASS	OFDM	N/A	PASS
5	3903	EX3DV4	Head	5300	1107	Apr.4,2013	36.41	4.83	PASS	PASS	PASS	OFDM	N/A	PASS
5	3903	EX3DV4	Head	5500	1107	Apr.4,2013	35.81	5.09	PASS	PASS	PASS	OFDM	N/A	PASS
5	3903	EX3DV4	Head	5600	1107	Apr.4,2013	35.63	5.14	PASS	PASS	PASS	OFDM	N/A	PASS
5	3903	EX3DV4	Head	5800	1107	Apr.4,2013	35.17	5.31	PASS	PASS	PASS	OFDM	N/A	PASS

SAR System Validation Summary

Note:

All measurement were performed using probes calibrated for CW signal only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r01. SAR system were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

10. SYSTEM VERIFICATION

10.1 Tissue Verification

Freq. [MHz]	Date	Probe	Dipole	Liquid	Liquid Temp. [°C]	Parameters	Target Value	Measured Value	Deviation [%]	Limit [%]
835	Sep. 01, 2013	1798	441	Head	21.3	ϵ_r	41.5	40.5	- 2.41	\pm 5
						σ	0.90	0.919	+ 2.11	\pm 5
835	Sep. 02, 2013	3903		Body	21.1	ϵ_r	55.2	55.1	- 0.18	\pm 5
						σ	0.97	0.951	- 1.96	\pm 5
1 900	Sep. 03, 2013	1798	5d032	Head	21.2	ϵ_r	40.0	39.8	- 0.50	\pm 5
						σ	1.40	1.41	+ 0.71	\pm 5
1 900	Sep. 03, 2013	3903		Body	21.4	ϵ_r	53.3	53	- 0.56	\pm 5
						σ	1.52	1.5	- 1.32	\pm 5
2 450	Sep. 08, 2013	3797	743	Head	21.4	ϵ_r	39.2	39.5	+ 0.77	\pm 5
						σ	1.80	1.81	+ 0.56	\pm 5
2 450	Sep. 08, 2013	3797		Body	21.4	ϵ_r	52.7	51.7	- 1.90	\pm 5
						σ	1.95	1.89	- 3.08	\pm 5
5 200	Sep. 09, 2013	3797	1107	Head	21.1	ϵ_r	36	36.2	+ 0.56	\pm 5
						σ	4.66	4.55	- 2.36	\pm 5
5 300	Sep. 09, 2013	3797		Head	21.1	ϵ_r	35.9	35.8	- 0.28	\pm 5
						σ	4.76	4.7	- 1.26	\pm 5
5 500	Sep. 09, 2013	3797		Head	21.1	ϵ_r	35.64	35.3	- 0.95	\pm 5
						σ	4.963	4.87	- 1.87	\pm 5
5 800	Sep. 09, 2013	3797		Head	21.1	ϵ_r	35.3	34.5	- 2.27	\pm 5
						σ	5.27	5.27	+ 0.00	\pm 5
5 200	Sep. 10, 2013	3903		Body	21.2	ϵ_r	49.01	48	- 2.06	\pm 5
						σ	5.3	5.2	- 1.89	\pm 5
5 300	Sep. 10, 2013	3903		Body	21.2	ϵ_r	48.85	47.6	- 2.56	\pm 5
						σ	5.42	5.34	- 1.48	\pm 5
5 500	Sep. 10, 2013	3903		Body	21.2	ϵ_r	48.61	47.1	- 3.11	\pm 5
						σ	5.65	5.58	- 1.24	\pm 5
5 800	Sep. 10, 2013	3903		Body	21.2	ϵ_r	48.2	46.8	- 2.90	\pm 5
						σ	6.00	6.1	+ 1.67	\pm 5

The Tissue dielectronic parameters were measured prior to the SAR evaluation using an Agilent 85070C Dielectronic Probe Kit and Agilent Network Analyzer.

10.2 System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835 MHz / 1 900 MHz / 2 450MHz / 5 200 MHz / 5 300 MHz / 5 500 MHz / 5 800 MHz by using the system Verification kit. (Graphic Plots Attached)

Freq. [MHz]	Date	Probe (SN)	Dipole (SN)	Liquid	Amb. Temp. [°C]	Liquid Temp. [°C]	1 W Target SAR _{1g} (SPEAG) (mW/g)	Measured SAR _{1g} (mW/g)	1 W Normalized SAR _{1g} (mW/g)	Deviation [%]	Limit [%]
835	Sep. 01, 2013	1798	441	Head	20.8	20.6	9.68	1	10	+ 3.31	± 10
835	Sep. 02, 2013	3903		Body	20.6	20.4	9.69	0.987	9.87	+ 1.86	± 10
1 900	Sep. 03, 2013	1798	5d032	Head	20.4	20.2	40.1	3.95	39.5	- 1.50	± 10
1 900	Sep. 03, 2013	3903		Body	20.5	20.3	40.5	4.25	42.5	+ 4.94	± 10
2 450	Sep. 08, 2013	3797	743	Head	20.6	20.4	52.8	5.07	50.7	- 3.98	± 10
2 450	Sep. 08, 2013	3797		Body	20.6	20.4	50.5	5.28	52.8	+ 4.55	± 10
5 200	Sep. 09, 2013	3797	1107	Head	20.3	20.1	80.1	7.99	79.9	- 0.25	± 10
5 300	Sep. 09, 2013	3797		Head	20.3	20.1	81.0	8.42	84.2	+ 3.95	± 10
5 500	Sep. 09, 2013	3797		Head	20.3	20.1	80.0	7.68	76.8	- 4.00	± 10
5 800	Sep. 09, 2013	3797		Head	20.3	20.1	78.3	7.55	75.5	- 3.58	± 10
5 200	Sep. 10, 2013	3903		Body	20.3	20.1	74.3	7.79	77.9	+ 4.85	± 10
5 300	Sep. 10, 2013	3903		Body	20.3	20.1	76.0	7.91	79.1	+ 4.08	± 10
5 500	Sep. 10, 2013	3903		Body	20.3	20.1	78.4	7.93	79.3	+ 1.15	± 10
5 800	Sep. 10, 2013	3903		Body	20.3	20.1	74.3	7.61	76.1	+ 2.42	± 10

10.3 System Verification Procedure

SAR measurement was prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at each frequency band by using the system Verification kit. (Graphic Plots Attached)

- Cabling the system, using the Verification kit equipments.
- Generate about 100 mW Input Level from the Signal generator to the Dipole Antenna.
- Dipole Antenna was placed below the Flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

11. RF CONDUCTED POWER MEASUREMENT

Power measurements were performed using a base station simulator under digital average power. The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

11.1 Output Power Specifications.

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v05.

- GSM850: 32.5dBm, GSM1900: 29.5dBm, W850: 22.7dBm

*Tolerance: Max. average power +0.5dB/-1.5dB

- Multi slot Max. conducted average power

GSM850

GPRS 1tx ->32.5dBm	EGPRS 1tx ->26.5 dBm
GPRS 2tx ->30.5dBm	EGPRS 2tx ->25.5 dBm
GPRS 3tx ->29.0dBm	EGPRS 3tx ->24.5 dBm
GPRS 4tx ->28dBm	EGPRS 4tx ->23.5 dBm

PCS1900

GPRS 1tx -> 29.5 dBm	EGPRS 1tx -> 25.5 dBm
GPRS 2tx -> 28 dBm	EGPRS 2tx-> 24.5 dBm
GPRS 3tx -> 27.0 dBm	EGPRS 3tx -> 23.5 dBm
GPRS 4tx -> 26 dBm	EGPRS 4tx-> 22.5 dBm

* Tolerance: Max. average power +0.5dB/-1.5dB

- HSDPA / HSUPA Max. conducted average power

WCDMA850

HSDPA Sub-test1 : 22.7dBm
HSDPA Sub-test2 : 22.7dBm
HSDPA Sub-test3 : 22.2dBm
HSDPA Sub-test4 : 22.2dBm

* MPR Tolerance : +0.5dB/-0.5dB

* The HSUPA transmitter power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions

- WiFi power

Mode/Band		Average power
802.11b (2.4Ghz)	Maximum	17 dBm
	Nominal	16 dBm
802.11g (2.4Ghz)	Maximum	14 dBm
	Nominal	13 dBm
802.11n (2.4Ghz)	Maximum	13 dBm
	Nominal	12 dBm
802.11a (5Ghz)	Maximum	13 dBm
	Nominal	12 dBm
802.11n (5Ghz 20Mhz)	Maximum	12 dBm
	Nominal	11 dBm
802.11n (5Ghz 40Mhz)	Maximum	12 dBm
	Nominal	11 dBm
802.11ac (5Ghz 20Mhz)	Maximum	11 dBm
	Nominal	10 dBm
802.11ac (5Ghz 40Mhz)	Maximum	11 dBm
	Nominal	10 dBm
802.11ac (5Ghz 80Mhz)	Maximum	11 dBm
	Nominal	10 dBm

- Bluetooth Power

Mode/Band		Average power
1Mbps(GFSK)	Maximum	9 dBm
	Nominal	7.5 dBm
2Mbps(DPSK)	Maximum	8 dBm
	Nominal	6.5 dBm
3Mbps(8DPSK)	Maximum	8 dBm
	Nominal	6.5 dBm
LE	Maximum	5 dBm
	Nominal	4 dBm

11.2 GSM

Conducted output power measurements were performed using a base station simulator under digital average power.



SAR Test for WWAN were performed with a base station simulator Agilent E5515C. Communication between the device and the emulator was established by air link. Set base station emulator to allow DUT to radiate maximum output power during all tests. Please refer to the below worst case SAR operation setup.

- GSM voice: Head SAR
- GPRS Multi-slots : Body SAR with GPRS Multi-slot Class12 with CS 1 (GMSK)

Note:

CS1/MCS7 coding scheme was used in GPRS/EDGE output power measurements and SAR Testing, as a condition where GMSK/8PSK modulation was ensured. Investigation has shown that CS1 - CS4/ MCS5 – MCS9 settings do not have any impact on the output levels in the GPRS/EDGE modes.

GSM Conducted output powers (Burst-Average)

Band	Channel	Voice	GPRS(GMSK) Data – CS1				EDGE Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)	EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	32.4	32.34	30.57	29.36	28.48	26.7	25.65	24.56	23.44
	190	32.41	32.76	30.5	29.26	28.46	26.65	25.63	24.5	23.36
	251	32.38	32.67	30.69	29.31	28.47	26.59	25.52	24.47	23.33
GSM 1900	512	29.69	29.57	28.24	27.34	26.18	25.28	24.22	23.15	22.03
	661	29.71	29.67	28.1	27.3	26.24	25.17	24.08	23.01	21.99
	810	29.65	29.65	28.23	27.36	26.32	25.18	24.14	23.05	21.96

GSM Conducted output powers (Frame-Average)

Band	Channel	Voice	GPRS(GMSK) Data – CS1				EDGE Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)	EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	23.37	23.31	24.55	25.1	25.47	17.67	19.63	20.3	20.43
	190	23.38	23.73	24.48	25	25.45	17.62	19.61	20.24	20.35
	251	23.35	23.64	24.67	25.05	25.46	17.56	19.5	20.21	20.32
GSM 1900	512	20.66	20.54	22.22	23.08	23.17	16.25	18.2	18.89	19.02
	661	20.68	20.64	22.08	23.04	23.23	16.14	18.06	18.75	18.98
	810	20.62	20.62	22.21	23.1	23.31	16.15	18.12	18.79	18.95

Note:

Time slot average factor is as follows:

1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB

2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB

3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB

4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB

11.2 WCDMA

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than $\frac{1}{4}$ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

11.2.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3 GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all "1s".

11.2.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than $\frac{1}{4}$ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

11.2.3 Body SAR Measurement

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

11.2.4 Handsets with Release 5 HSDPA

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than $\frac{1}{4}$ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

Sub-Test 1 Setup for Release 5 HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽²⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

11.2.5 Handsets with Release 6 HSPA (HSDPA/HSUPA)

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than $\frac{1}{4}$ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.1 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than $\frac{1}{4}$ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurement should be used to test for head exposure.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

WCDMA 850

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]						MPR	
			UL 4132 (826.4)	Power reduction (dB)	UL 4183 (836.6)	Power reduction (dB)	UL 4233 (846.6)	Power reduction (dB)		
			DL 4357		DL 4408		DL 4458			
99	WCDMA	12.2 kbps RMC	23.1	-	22.91	-	22.9	-		
99	WCDMA	12.2 kbps AMR	23.1	-	22.9	-	22.86	-		
5	HSDPA	Subtest 1	23.01	0	22.95	0	22.8	0	0	
5		Subtest 2	23	0.01	22.89	0.06	22.77	0.03	0	
5		Subtest 3	22.49	0.52	22.42	0.53	22.26	0.54	-0.5	
5		Subtest 4	22.44	0.57	22.44	0.51	22.27	0.53	-0.5	
6	HSUPA	Subtest 1	22.82	0	22.73	0	22.36	0.26	0	
6		Subtest 2	21.39	1.43	21.2	1.53	20.91	1.71	-2	
6		Subtest 3	21.7	1.12	21.44	1.29	21.66	0.96	-1	
6		Subtest 4	21.39	1.43	21.35	1.38	21.38	1.24	-2	
6		Subtest 5	22.4	0.42	21.96	0.77	22.62	0	0	

WCDMA Average Conducted output powers

11.4 WiFi

11.4.1 SAR Testing for 802.11b/g/n modes

General Device Setup

Normal Network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

Frequency Channel Configurations

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; Channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz § 15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels.

These are referred to as the "default test channels". 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

Mode	GHz	Channel	Turbo Channel	"Default Test Channels"			
				§15.247	802.11b	802.11g	UNII
802.11 b/g	2.412	1		✓	✓		
	2.437	6	6	✓	✓		
	2.462	11		✓	✓		
802.11a	5.18	36				✓	
	5.20	40	42 (5.21 GHz)				-
	5.22	44					-
	5.24	48	50 (5.25 GHz)			✓	
	5.26	52			✓		
	5.28	56	58 (5.29 GHz)				-
	5.30	60					-
	5.32	64			✓		
	5.500	100					-
	5.520	104			✓		
	5.540	108					-
	5.560	112					-
	5.580	116			✓		
	5.600	120					-
	5.620	124			✓		
	5.640	128					-
	5.660	132					-
	5.680	136			✓		
	5.700	140					-
UNII or §15.247	5.745	149		✓		✓	
	5.765	153	152 (5.76 GHz)		*		
	5.785	157		✓			*
	5.805	161	160 (5.80 GHz)		*	✓	
§15.247	5.825	165		✓			

802.11 Test Channels per FCC Requirements

TEST RESULTS-Average**Conducted Output Power Measurements (802.11b Mode)**

802.11b Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	15.82	30
		2 Mbps	15.81	30
		5.5 Mbps	15.78	30
		11 Mbps	15.79	30
2437	6	1 Mbps	15.84	30
		2 Mbps	15.78	30
		5.5 Mbps	15.81	30
		11 Mbps	15.84	30
2462	11	1 Mbps	15.64	30
		2 Mbps	15.54	30
		5.5 Mbps	15.57	30
		11 Mbps	15.62	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	13.24	30
		9 Mbps	13.25	30
		12 Mbps	13.26	30
		18 Mbps	13.33	30
		24 Mbps	13.29	30
		36 Mbps	13.27	30
		48 Mbps	13.44	30
		54 Mbps	13.40	30
2437	6	6 Mbps	13.17	30
		9 Mbps	13.21	30
		12 Mbps	13.14	30
		18 Mbps	13.27	30
		24 Mbps	13.18	30
		36 Mbps	13.25	30
		48 Mbps	13.41	30
		54 Mbps	13.36	30
2462	11	6 Mbps	12.92	30
		9 Mbps	13.01	30
		12 Mbps	13.03	30
		18 Mbps	13.07	30
		24 Mbps	13.09	30
		36 Mbps	13.10	30
		48 Mbps	13.27	30
		54 Mbps	13.24	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	12.15	30
		13 Mbps	12.26	30
		19.5 Mbps	12.24	30
		26 Mbps	12.30	30
		39 Mbps	12.31	30
		52 Mbps	12.33	30
		58.5 Mbps	12.32	30
		65 Mbps	12.32	30
2437	6	6.5 Mbps	12.05	30
		13 Mbps	12.16	30
		19.5 Mbps	12.16	30
		26 Mbps	12.23	30
		39 Mbps	12.26	30
		52 Mbps	12.27	30
		58.5 Mbps	12.28	30
		65 Mbps	12.36	30
2462	11	6.5 Mbps	11.95	30
		13 Mbps	11.92	30
		19.5 Mbps	11.98	30
		26 Mbps	12.05	30
		39 Mbps	12.12	30
		52 Mbps	12.07	30
		58.5 Mbps	12.10	30
		65 Mbps	12.15	30

Note:

SAR testing was performed according to the FCC KDB 248227D01

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5180	36	6 Mbps	11.97	16.86
		9 Mbps	11.85	16.86
		12 Mbps	11.84	16.86
		18 Mbps	11.74	16.86
		24 Mbps	11.72	16.86
		36 Mbps	11.75	16.86
		48 Mbps	11.78	16.86
		54 Mbps	11.70	16.86
5200	40	6 Mbps	11.84	16.86
		9 Mbps	11.73	16.86
		12 Mbps	11.70	16.86
		18 Mbps	11.68	16.86
		24 Mbps	11.67	16.86
		36 Mbps	11.62	16.86
		48 Mbps	11.75	16.86
		54 Mbps	11.68	16.86
5220	44	6 Mbps	11.78	16.86
		9 Mbps	11.72	16.86
		12 Mbps	11.70	16.86
		18 Mbps	11.67	16.86
		24 Mbps	11.65	16.86
		36 Mbps	11.64	16.86
		48 Mbps	11.62	16.86
		54 Mbps	11.54	16.86
5240	48	6 Mbps	11.72	16.86
		9 Mbps	11.63	16.86
		12 Mbps	11.63	16.86
		18 Mbps	11.59	16.86
		24 Mbps	11.60	16.86
		36 Mbps	11.55	16.86
		48 Mbps	11.66	16.86
		54 Mbps	11.59	16.86

Conducted Output Power Measurements (802.11a Mode: 5260~5320)

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5260	52	6 Mbps	12.00	23.84
		9 Mbps	11.95	23.84
		12 Mbps	11.93	23.84
		18 Mbps	11.92	23.84
		24 Mbps	11.88	23.84
		36 Mbps	11.85	23.84
		48 Mbps	11.95	23.84
		54 Mbps	11.87	23.84
5280	56	6 Mbps	11.93	23.84
		9 Mbps	11.90	23.84
		12 Mbps	11.87	23.84
		18 Mbps	11.91	23.84
		24 Mbps	11.88	23.84
		36 Mbps	11.83	23.84
		48 Mbps	11.85	23.84
		54 Mbps	11.82	23.84
5300	60	6 Mbps	11.92	23.84
		9 Mbps	11.85	23.84
		12 Mbps	11.86	23.84
		18 Mbps	11.79	23.84
		24 Mbps	11.77	23.84
		36 Mbps	11.78	23.84
		48 Mbps	11.90	23.84
		54 Mbps	11.79	23.84
5320	64	6 Mbps	11.86	23.84
		9 Mbps	11.83	23.84
		12 Mbps	11.80	23.84
		18 Mbps	11.81	23.84
		24 Mbps	11.74	23.84
		36 Mbps	11.72	23.84
		48 Mbps	11.83	23.84
		54 Mbps	11.77	23.84

Conducted Output Power Measurements (802.11a Mode: 5500~5720)

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5500	100	6 Mbps	11.76	23.84
		9 Mbps	11.78	23.84
		12 Mbps	11.79	23.84
		18 Mbps	11.81	23.84
		24 Mbps	11.76	23.84
		36 Mbps	11.69	23.84
		48 Mbps	11.90	23.84
		54 Mbps	11.71	23.84
5520	104	6 Mbps	11.68	23.84
		9 Mbps	11.62	23.84
		12 Mbps	11.58	23.84
		18 Mbps	11.60	23.84
		24 Mbps	11.54	23.84
		36 Mbps	11.51	23.84
		48 Mbps	11.50	23.84
		54 Mbps	11.47	23.84
5540	108	6 Mbps	11.53	23.84
		9 Mbps	11.51	23.84
		12 Mbps	11.49	23.84
		18 Mbps	11.48	23.84
		24 Mbps	11.45	23.84
		36 Mbps	11.42	23.84
		48 Mbps	11.43	23.84
		54 Mbps	11.44	23.84
5560	112	6 Mbps	11.62	23.84
		9 Mbps	11.58	23.84
		12 Mbps	11.59	23.84
		18 Mbps	11.53	23.84
		24 Mbps	11.51	23.84
		36 Mbps	11.48	23.84
		48 Mbps	11.44	23.84
		54 Mbps	11.42	23.84
5580	116	6 Mbps	11.41	23.84
		9 Mbps	11.42	23.84
		12 Mbps	11.45	23.84
		18 Mbps	11.48	23.84
		24 Mbps	11.51	23.84
		36 Mbps	11.47	23.84
		48 Mbps	11.59	23.84
		54 Mbps	11.39	23.84

5660	132	6 Mbps	11.43	23.84
		9 Mbps	11.38	23.84
		12 Mbps	11.32	23.84
		18 Mbps	11.28	23.84
		24 Mbps	11.25	23.84
		36 Mbps	11.29	23.84
		48 Mbps	11.23	23.84
		54 Mbps	11.12	23.84
5680	136	6 Mbps	11.24	23.84
		9 Mbps	11.31	23.84
		12 Mbps	11.20	23.84
		18 Mbps	11.17	23.84
		24 Mbps	11.21	23.84
		36 Mbps	11.18	23.84
		48 Mbps	11.14	23.84
		54 Mbps	11.15	23.84
5700	140	6 Mbps	10.98	23.84
		9 Mbps	10.99	23.84
		12 Mbps	11.02	23.84
		18 Mbps	11.01	23.84
		24 Mbps	11.06	23.84
		36 Mbps	11.08	23.84
		48 Mbps	11.10	23.84
		54 Mbps	11.07	23.84

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5745	149	6 Mbps	11.04	30
		9 Mbps	11.15	30
		12 Mbps	11.18	30
		18 Mbps	11.18	30
		24 Mbps	11.18	30
		36 Mbps	11.11	30
		48 Mbps	11.20	30
		54 Mbps	11.15	30
5765	153	6 Mbps	11.01	30
		9 Mbps	10.99	30
		12 Mbps	11.04	30
		18 Mbps	10.97	30
		24 Mbps	10.91	30
		36 Mbps	10.94	30
		48 Mbps	10.95	30
		54 Mbps	10.98	30
5785	157	6 Mbps	10.77	30
		9 Mbps	10.91	30
		12 Mbps	10.99	30
		18 Mbps	10.94	30
		24 Mbps	10.92	30
		36 Mbps	10.91	30
		48 Mbps	11.08	30
		54 Mbps	10.94	30
5805	161	6 Mbps	10.75	30
		9 Mbps	10.65	30
		12 Mbps	10.63	30
		18 Mbps	10.52	30
		24 Mbps	10.57	30
		36 Mbps	10.53	30
		48 Mbps	10.58	30
		54 Mbps	10.55	30
5825	165	6 Mbps	10.59	30
		9 Mbps	10.74	30
		12 Mbps	10.72	30
		18 Mbps	10.80	30
		24 Mbps	10.75	30
		36 Mbps	10.72	30
		48 Mbps	10.84	30
		54 Mbps	10.75	30

20 MHz BW**Conducted Output Power Measurements (802.11n 20MHz Mode: 5180~5240)**

802.11n Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5180	36	6.5 Mbps	10.95	16.92
		13 Mbps	10.84	16.92
		19.5 Mbps	10.74	16.92
		26 Mbps	10.81	16.92
		39 Mbps	10.79	16.92
		52 Mbps	10.77	16.92
		58.5 Mbps	10.70	16.92
		65 Mbps	10.76	16.92
5200	40	6.5 Mbps	10.74	16.92
		13 Mbps	10.74	16.92
		19.5 Mbps	10.85	16.92
		26 Mbps	10.86	16.92
		39 Mbps	10.78	16.92
		52 Mbps	10.79	16.92
		58.5 Mbps	10.67	16.92
		65 Mbps	10.64	16.92
5220	44	6.5 Mbps	10.72	16.92
		13 Mbps	10.67	16.92
		19.5 Mbps	10.63	16.92
		26 Mbps	10.60	16.92
		39 Mbps	10.71	16.92
		52 Mbps	10.67	16.92
		58.5 Mbps	10.59	16.92
		65 Mbps	10.54	16.92
5240	48	6.5 Mbps	10.51	16.92
		13 Mbps	10.65	16.92
		19.5 Mbps	10.66	16.92
		26 Mbps	10.71	16.92
		39 Mbps	10.59	16.92
		52 Mbps	10.66	16.92
		58.5 Mbps	10.67	16.92
		65 Mbps	10.59	16.92

Conducted Output Power Measurements (802.11n 20MHz Mode: 5260~5320)

802.11n Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5260	52	6.5 Mbps	10.85	23.90
		13 Mbps	10.92	23.90
		19.5 Mbps	10.95	23.90
		26 Mbps	11.03	23.90
		39 Mbps	11.00	23.90
		52 Mbps	11.01	23.90
		58.5 Mbps	10.95	23.90
		65 Mbps	10.97	23.90
5280	56	6.5 Mbps	10.78	23.90
		13 Mbps	10.75	23.90
		19.5 Mbps	10.82	23.90
		26 Mbps	10.85	23.90
		39 Mbps	10.79	23.90
		52 Mbps	10.73	23.90
		58.5 Mbps	10.83	23.90
		65 Mbps	10.87	23.90
5300	60	6.5 Mbps	10.74	23.90
		13 Mbps	10.91	23.90
		19.5 Mbps	10.86	23.90
		26 Mbps	10.88	23.90
		39 Mbps	10.89	23.90
		52 Mbps	10.92	23.90
		58.5 Mbps	10.91	23.90
		65 Mbps	10.93	23.90
5320	64	6.5 Mbps	10.76	23.90
		13 Mbps	10.84	23.90
		19.5 Mbps	10.84	23.90
		26 Mbps	10.92	23.90
		39 Mbps	10.78	23.90
		52 Mbps	10.86	23.90
		58.5 Mbps	10.85	23.90
		65 Mbps	10.87	23.90

Conducted Output Power Measurements (802.11n 20MHz Mode: 5500~5700)

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5500	100	6.5 Mbps	10.70	23.91
		13 Mbps	10.83	23.91
		19.5 Mbps	10.80	23.91
		26 Mbps	10.85	23.91
		39 Mbps	10.89	23.91
		52 Mbps	10.83	23.91
		58.5 Mbps	10.84	23.91
		65 Mbps	10.88	23.91
5520	104	6.5 Mbps	10.68	23.91
		13 Mbps	10.59	23.91
		19.5 Mbps	10.53	23.91
		26 Mbps	10.67	23.91
		39 Mbps	10.68	23.91
		52 Mbps	10.55	23.91
		58.5 Mbps	10.62	23.91
		65 Mbps	10.57	23.91
5540	108	6.5 Mbps	10.63	23.91
		13 Mbps	10.66	23.91
		19.5 Mbps	10.58	23.91
		26 Mbps	10.67	23.91
		39 Mbps	10.54	23.91
		52 Mbps	10.53	23.91
		58.5 Mbps	10.62	23.91
		65 Mbps	10.64	23.91
5560	112	6.5 Mbps	10.61	23.91
		13 Mbps	10.67	23.91
		19.5 Mbps	10.58	23.91
		26 Mbps	10.53	23.91
		39 Mbps	10.50	23.91
		52 Mbps	10.64	23.91
		58.5 Mbps	10.61	23.91
		65 Mbps	10.57	23.91
5580	116	6.5 Mbps	10.57	23.91
		13 Mbps	10.56	23.91
		19.5 Mbps	10.57	23.91
		26 Mbps	10.62	23.91
		39 Mbps	10.60	23.91
		52 Mbps	10.56	23.91
		58.5 Mbps	10.59	23.91
		65 Mbps	10.61	23.91

		6.5 Mbps	10.34	23.91
		13 Mbps	10.41	23.91
		19.5 Mbps	10.32	23.91
		26 Mbps	10.35	23.91
		39 Mbps	10.38	23.91
		52 Mbps	10.32	23.91
		58.5 Mbps	10.30	23.91
		65 Mbps	10.39	23.91
5660	132	6.5 Mbps	10.42	23.91
		13 Mbps	10.34	23.91
		19.5 Mbps	10.38	23.91
		26 Mbps	10.43	23.91
		39 Mbps	10.46	23.91
		52 Mbps	10.33	23.91
		58.5 Mbps	10.37	23.91
		65 Mbps	10.29	23.91
5680	136	6.5 Mbps	10.16	23.91
		13 Mbps	10.13	23.91
		19.5 Mbps	10.15	23.91
		26 Mbps	10.21	23.91
		39 Mbps	10.13	23.91
		52 Mbps	10.20	23.91
		58.5 Mbps	10.23	23.91
		65 Mbps	10.11	23.91
5700	140	6.5 Mbps	10.16	23.91
		13 Mbps	10.13	23.91
		19.5 Mbps	10.15	23.91
		26 Mbps	10.21	23.91
		39 Mbps	10.13	23.91
		52 Mbps	10.20	23.91
		58.5 Mbps	10.23	23.91
		65 Mbps	10.11	23.91

Conducted Output Power Measurements (802.11n 20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5745	149	6.5 Mbps	10.11	30
		13 Mbps	10.25	30
		19.5 Mbps	10.30	30
		26 Mbps	10.34	30
		39 Mbps	10.19	30
		52 Mbps	10.25	30
		58.5 Mbps	10.30	30
		65 Mbps	10.27	30
5765	153	6.5 Mbps	10.02	30
		13 Mbps	10.12	30
		19.5 Mbps	9.97	30
		26 Mbps	9.93	30
		39 Mbps	9.91	30
		52 Mbps	10.01	30
		58.5 Mbps	10.07	30
		65 Mbps	9.92	30
5785	157	6.5 Mbps	9.98	30
		13 Mbps	10.06	30
		19.5 Mbps	10.09	30
		26 Mbps	10.13	30
		39 Mbps	10.01	30
		52 Mbps	10.06	30
		58.5 Mbps	10.07	30
		65 Mbps	10.09	30
5805	161	6.5 Mbps	9.93	30
		13 Mbps	10.01	30
		19.5 Mbps	10.08	30
		26 Mbps	9.97	30
		39 Mbps	9.94	30
		52 Mbps	9.88	30
		58.5 Mbps	9.91	30
		65 Mbps	9.87	30
5825	165	6.5 Mbps	9.74	30
		13 Mbps	9.84	30
		19.5 Mbps	9.86	30
		26 Mbps	9.90	30
		39 Mbps	9.84	30
		52 Mbps	9.83	30
		58.5 Mbps	9.83	30
		65 Mbps	9.91	30

40 MHz BW**Conducted Output Power Measurements (802.11n 40 MHz Mode: 5190~5230)**

802.11a Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5190	38	13.5 Mbps	11.06	16.99
		27 Mbps	11.11	16.99
		40.5 Mbps	10.69	16.99
		54 Mbps	10.98	16.99
		81 Mbps	11.07	16.99
		108 Mbps	10.98	16.99
		121.5 Mbps	10.73	16.99
		135 Mbps	10.70	16.99
5230	46	13.5 Mbps	10.76	16.99
		27 Mbps	10.87	16.99
		40.5 Mbps	10.41	16.99
		54 Mbps	10.49	16.99
		81 Mbps	10.51	16.99
		108 Mbps	10.85	16.99
		121.5 Mbps	10.63	16.99
		135 Mbps	10.77	16.99
5270	54	13.5 Mbps	11.03	23.98
		27 Mbps	11.07	23.98
		40.5 Mbps	11.23	23.98
		54 Mbps	11.23	23.98
		81 Mbps	11.27	23.98
		108 Mbps	11.25	23.98
		121.5 Mbps	11.11	23.98
		135 Mbps	11.24	23.98
5310	62	13.5 Mbps	11.16	23.98
		27 Mbps	11.19	23.98
		40.5 Mbps	11.13	23.98
		54 Mbps	11.11	23.98
		81 Mbps	11.22	23.98
		108 Mbps	11.08	23.98
		121.5 Mbps	10.93	23.98
		135 Mbps	10.72	23.98
5510	102	13.5 Mbps	10.70	23.98
		27 Mbps	10.67	23.98
		40.5 Mbps	10.61	23.98
		54 Mbps	10.73	23.98
		81 Mbps	10.63	23.98
		108 Mbps	10.60	23.98
		121.5 Mbps	10.60	23.98
		135 Mbps	10.70	23.98

5550	110	13.5 Mbps	10.87	23.98
		27 Mbps	10.61	23.98
		40.5 Mbps	10.70	23.98
		54 Mbps	10.79	23.98
		81 Mbps	10.88	23.98
		108 Mbps	10.87	23.98
		121.5 Mbps	10.81	23.98
		135 Mbps	10.66	23.98
5670	134	13.5 Mbps	10.15	23.98
		27 Mbps	10.03	23.98
		40.5 Mbps	10.23	23.98
		54 Mbps	10.11	23.98
		81 Mbps	10.08	23.98
		108 Mbps	10.19	23.98
		121.5 Mbps	10.27	23.98
		135 Mbps	10.09	23.98

Conducted Output Power Measurements (802.11n 40 MHz BW Mode: 5755~5795)

5755	151	13.5 Mbps	9.88	30
		27 Mbps	9.89	30
		40.5 Mbps	9.72	30
		54 Mbps	9.78	30
		81 Mbps	9.82	30
		108 Mbps	9.65	30
		121.5 Mbps	9.68	30
		135 Mbps	9.75	30
5795	159	13.5 Mbps	9.96	30
		27 Mbps	9.94	30
		40.5 Mbps	10.02	30
		54 Mbps	9.39	30
		81 Mbps	9.44	30
		108 Mbps	9.39	30
		121.5 Mbps	9.37	30
		135 Mbps	9.35	30

20 MHz BW**Conducted Output Power Measurements (802.11ac 20 MHz Mode: 5180~5240)**

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5180	36	6.5	9.63	16.99
		13	9.67	16.99
		19.5	9.65	16.99
		26	9.65	16.99
		39	9.67	16.99
		52	9.74	16.99
		58.5	9.74	16.99
		65	9.73	16.99
		78	9.77	16.99
5200	40	6.5	9.58	16.99
		13	9.61	16.99
		19.5	9.63	16.99
		26	9.63	16.99
		39	9.71	16.99
		52	9.72	16.99
		58.5	9.76	16.99
		65	9.79	16.99
		78	9.82	16.99
5220	44	6.5	9.54	16.99
		13	9.57	16.99
		19.5	9.49	16.99
		26	9.52	16.99
		39	9.50	16.99
		52	9.47	16.99
		58.5	9.58	16.99
		65	9.51	16.99
		78	9.58	16.99
5240	48	6.5	9.84	16.99
		13	9.66	16.99
		19.5	9.66	16.99
		26	9.69	16.99
		39	9.74	16.99
		52	9.79	16.99
		58.5	9.80	16.99
		65	9.55	16.99
		78	9.58	16.99

Conducted Output Power Measurements (802.11ac 20 MHz Mode: 5260~5320)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5260	52	6.5	10.27	23.98
		13	9.98	23.98
		19.5	10.06	23.98
		26	9.93	23.98
		39	9.98	23.98
		52	9.99	23.98
		58.5	10.02	23.98
		65	10.05	23.98
		78	10.08	23.98
5280	56	6.5	10.18	23.98
		13	10.10	23.98
		19.5	10.03	23.98
		26	9.97	23.98
		39	9.87	23.98
		52	9.93	23.98
		58.5	9.90	23.98
		65	9.89	23.98
		78	9.92	23.98
5300	60	6.5	10.27	23.98
		13	10.02	23.98
		19.5	9.87	23.98
		26	9.86	23.98
		39	9.93	23.98
		52	9.91	23.98
		58.5	9.89	23.98
		65	9.84	23.98
		78	9.89	23.98
5320	64	6.5	10.14	23.98
		13	9.78	23.98
		19.5	9.69	23.98
		26	9.81	23.98
		39	9.92	23.98
		52	9.92	23.98
		58.5	9.93	23.98
		65	9.89	23.98
		78	9.94	23.98

Conducted Output Power Measurements (802.11ac 20 MHz Mode: 5500~5720)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5500	100	6.5	10.18	23.98
		13	9.88	23.98
		19.5	9.92	23.98
		26	9.97	23.98
		39	9.95	23.98
		52	9.99	23.98
		58.5	9.90	23.98
		65	9.92	23.98
		78	9.94	23.98
5520	104	6.5	10.08	23.98
		13	9.92	23.98
		19.5	9.83	23.98
		26	9.97	23.98
		39	9.95	23.98
		52	9.90	23.98
		58.5	9.87	23.98
		65	9.93	23.98
		78	9.95	23.98
5540	108	6.5	10.02	23.98
		13	9.98	23.98
		19.5	9.92	23.98
		26	9.88	23.98
		39	9.83	23.98
		52	9.89	23.98
		58.5	9.93	23.98
		65	9.87	23.98
		78	9.82	23.98
5560	112	6.5	10.07	23.98
		13	9.88	23.98
		19.5	9.93	23.98
		26	9.91	23.98
		39	9.95	23.98
		52	9.87	23.98
		58.5	9.92	23.98
		65	9.87	23.98
		78	9.79	23.98
5580	116	6.5	10.10	23.98
		13	9.66	23.98
		19.5	9.73	23.98
		26	9.65	23.98
		39	9.79	23.98
		52	9.69	23.98
		58.5	9.69	23.98
		65	9.69	23.98
		78	9.70	23.98

		6.5	9.78	23.98
		13	9.62	23.98
		19.5	9.82	23.98
		26	9.87	23.98
		39	9.73	23.98
		52	9.80	23.98
		58.5	9.72	23.98
		65	9.65	23.98
		78	9.58	23.98
5660	132	6.5	9.67	23.98
		13	9.53	23.98
		19.5	9.58	23.98
		26	9.65	23.98
		39	9.57	23.98
		52	9.61	23.98
		58.5	9.54	23.98
		65	9.53	23.98
		78	9.43	23.98
5680	136	6.5	9.50	23.98
		13	9.61	23.98
		19.5	9.60	23.98
		26	9.54	23.98
		39	9.43	23.98
		52	9.51	23.98
		58.5	9.53	23.98
		65	9.43	23.98
		78	9.41	23.98
5700	140	6.5	9.22	23.98
		13	9.22	23.98
		19.5	9.26	23.98
		26	9.28	23.98
		39	9.24	23.98
		52	9.29	23.98
		58.5	9.27	23.98
		65	9.24	23.98
		78	9.23	23.98
5720	144	6.5	9.22	23.98
		13	9.22	23.98
		19.5	9.26	23.98
		26	9.28	23.98
		39	9.24	23.98
		52	9.29	23.98
		58.5	9.27	23.98
		65	9.24	23.98
		78	9.23	23.98

Conducted Output Power Measurements (802.11ac 20 MHz Mode: 5745~5825)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5745	149	6.5	9.16	30
		13	9.23	30
		19.5	9.18	30
		26	9.20	30
		39	9.26	30
		52	9.29	30
		58.5	9.27	30
		65	9.26	30
		78	9.26	30
5765	153	6.5	9.07	30
		13	9.13	30
		19.5	9.10	30
		26	9.08	30
		39	9.28	30
		52	9.25	30
		58.5	9.17	30
		65	9.13	30
		78	9.10	30
5785	157	6.5	9.00	30
		13	9.06	30
		19.5	9.13	30
		26	9.05	30
		39	9.07	30
		52	9.11	30
		58.5	9.08	30
		65	9.11	30
		78	9.15	30
5805	161	6.5	8.92	30
		13	9.02	30
		19.5	9.05	30
		26	8.93	30
		39	8.97	30
		52	9.01	30
		58.5	8.97	30
		65	8.99	30
		78	9.03	30
5825	165	6.5	8.81	30
		13	8.91	30
		19.5	8.90	30
		26	8.87	30
		39	8.91	30
		52	8.95	30
		58.5	8.92	30
		65	8.84	30
		78	8.88	30

40 MHz BW**Conducted Output Power Measurements (802.11ac 40 MHz Mode: 5190~5230)**

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5190	38	13.5	10.13	16.99
		27	10.13	16.99
		40.5	10.12	16.99
		54	10.20	16.99
		81	10.20	16.99
		108	10.18	16.99
		121.5	10.15	16.99
		135	10.15	16.99
		162	10.05	16.99
		180	9.61	16.99
5230	46	13.5	9.93	16.99
		27	10.02	16.99
		40.5	10.03	16.99
		54	10.14	16.99
		81	9.97	16.99
		108	9.72	16.99
		121.5	9.61	16.99
		135	9.72	16.99
		162	9.86	16.99
		180	9.65	16.99

Conducted Output Power Measurements (802.11ac 40MHz Mode: 5270~5310)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5270	54	13.5	10.36	23.98
		27	10.53	23.98
		40.5	10.21	23.98
		54	10.11	23.98
		81	9.85	23.98
		108	10.05	23.98
		121.5	10.40	23.98
		135	10.47	23.98
		162	10.01	23.98
		180	10.48	23.98
5310	62	13.5	10.27	23.98
		27	10.29	23.98
		40.5	10.42	23.98
		54	10.36	23.98
		81	10.38	23.98
		108	10.32	23.98
		121.5	9.84	23.98
		135	9.81	23.98
		162	9.98	23.98
		180	9.89	23.98

Conducted Output Power Measurements (802.11ac 40 MHz Mode: 5510~5670)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5510	102	13.5	9.88	23.98
		27	9.86	23.98
		40.5	9.78	23.98
		54	9.70	23.98
		81	9.74	23.98
		108	9.81	23.98
		121.5	9.74	23.98
		135	9.82	23.98
		162	9.81	23.98
		180	9.79	23.98
5550	110	13.5	10.03	23.98
		27	9.96	23.98
		40.5	9.81	23.98
		54	10.04	23.98
		81	9.91	23.98
		108	9.83	23.98
		121.5	9.83	23.98
		135	9.91	23.98
		162	9.88	23.98
		180	9.78	23.98
5710	142	13.5	9.52	23.98
		27	9.20	23.98
		40.5	9.71	23.98
		54	9.21	23.98
		81	9.12	23.98
		108	9.16	23.98
		121.5	9.18	23.98
		135	9.15	23.98
		162	9.03	23.98
		180	9.12	23.98

Conducted Output Power Measurements (802.11ac 40 MHz BW Mode: 5755~5795)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5755	151	13.5	8.80	30
		27	8.75	30
		40.5	9.05	30
		54	8.78	30
		81	8.79	30
		108	9.01	30
		121.5	8.81	30
		135	8.96	30
		162	9.00	30
		180	8.98	30
5795	159	13.5	8.64	30
		27	8.64	30
		40.5	8.58	30
		54	8.60	30
		81	8.52	30
		108	8.57	30
		121.5	8.47	30
		135	8.54	30
		162	8.47	30
		180	8.49	30

80 MHz BW**Conducted Output Power Measurements (802.11ac 80MHz Mode: 5210)**

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5210	42	29.3	9.50	16.99
		58.5	9.51	16.99
		87.8	9.45	16.99
		117	9.45	16.99
		175.5	9.51	16.99
		234	9.46	16.99
		263.3	9.46	16.99
		292.5	9.52	16.99
		351	9.48	16.99
		390	9.59	16.99

Conducted Output Power Measurements (802.11ac 80MHz Mode: 5290)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5290	58	29.3	9.42	23.98
		58.5	9.41	23.98
		87.8	9.40	23.98
		117	9.36	23.98
		175.5	9.43	23.98
		234	9.43	23.98
		263.3	9.35	23.98
		292.5	9.37	23.98
		351	9.39	23.98
		390	9.38	23.98

Conducted Output Power Measurements (802.11ac 80MHz Mode: 5530~5690)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.			
5530	106	29.3	9.69	23.98
		58.5	9.77	23.98
		87.8	9.74	23.98
		117	9.67	23.98
		175.5	9.73	23.98
		234	9.68	23.98
		263.3	9.68	23.98
		292.5	9.72	23.98
		351	9.72	23.98
		390	9.73	23.98
5690	138	29.3	9.24	23.98
		58.5	9.26	23.98
		87.8	9.26	23.98
		117	9.16	23.98
		175.5	9.14	23.98
		234	9.11	23.98
		263.3	9.10	23.98
		292.5	9.12	23.98
		351	9.13	23.98
		390	9.21	23.98

Conducted Output Power Measurements (802.11ac 80 MHz BW Mode: 5775)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.			
5775	155	29.3	9.09	30
		58.5	9.03	30
		87.8	8.96	30
		117	9.08	30
		175.5	8.96	30
		234	9.20	30
		263.3	8.97	30
		292.5	9.09	30
		351	9.08	30
		390	9.14	30

11.4 SAR Test Exclusions Applied

11.4.1 Wi-Fi/BT

Per FCC KDB 447498 D01v05, The SAR exclusion threshold for distance < 50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel}(mW)}{\text{Test Separation Distance (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

. Mode	Frequency	Maximum Allowed Power	Separatuin Distance	≤ 3.0
	[MHz]	[mW]	[mm]	
Bluetooth	2441	8	10	1.24

Based on the maximum conducted power of Bluetooth and antenna to use separation distance, Bluetooth SAR was not required $[(8/10) * \sqrt{2.441}] = 1.24 < 3.0$.

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is $\leq 1.6\text{W/kg}$. When standalone SAR is not required to be measured per FCC KDB 447498 D01v05 4.3.22, the following equation must be used to estimate the standalone 1-g SAR for simultaneous transmission assessment involving that transmitter

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHZ})}}{7.5} * \frac{(\text{Max Power of channel mW})}{\text{Min Seperation Distance}}$$

. Mode	Frequency	Maximum Allowed Power	Separatuin Distance (Body)	Estimated SAR (Body)
	[MHz]	[mW]	[mm]	[W/kg]
Bluetooth	2441	8	10	0.17


Note : Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. The Estimated SAR results were determined according to FCC KDB447498 D01v05

12. SAR Test configuration & Antenna Information

12.1 Mobile Hotspot sides for SAR Testing configurations

Mode	Rear	Front	Left	Right	Bottom	Top
GSM 850	Yes	Yes	No	Yes	Yes	No
GSM 1900	Yes	Yes	No	Yes	Yes	No
WCDMA 850	Yes	Yes	No	Yes	Yes	No
2.4 GHz WLAN	Yes	Yes	No	Yes	No	Yes
5 GHz WLAN	Yes	Yes	No	Yes	No	Yes

12.2 Antenna and Device Information

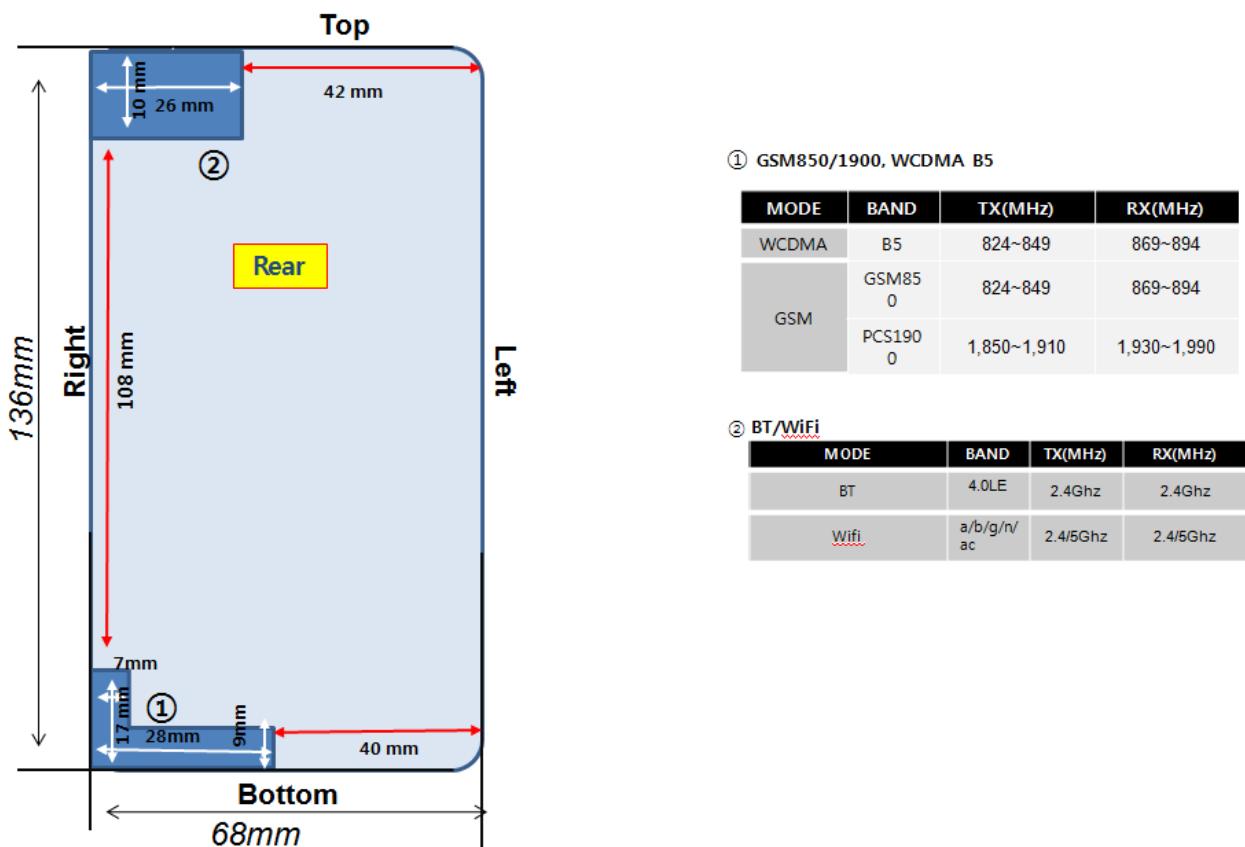

Note;

Per FCC KDB Publication 941225 D06v01, we performed the SAR testing at 1 cm from the top & bottom surfaces and also from side edges with a transmitting antenna \leq 2.5 cm from an edge.

*Please see the KS1204_Antenna distance for further information.

13. SAR TEST DATA SUMMARY

13.1-1 Measurement Results (GSM850 Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel									
836.6	190	GSM850	32.76	0.116	Standard	Left Ear	0.012	1.057	0.013	-
836.6	190		32.76	- 0.060	Standard	Left Tilt	0.006	1.057	0.006	-
836.6	190		32.76	- 0.082	Standard	Right Ear	0.012	1.057	0.013	-
836.6	190		32.76	0.142	Standard	Right Tilt	0.005	1.057	0.005	-
836.6	190	GPRS 4Tx	28.46	0.154	Standard	Left Ear	0.012	1.009	0.012	-
836.6	190		28.46	0.096	Standard	Left Tilt	0.009	1.009	0.009	-
836.6	190		28.46	0.111	Standard	Right Ear	0.015	1.009	0.015	1
836.6	190		28.46	- 0.191	Standard	Right Tilt	0.008	1.009	0.008	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram				

13.1-2 Measurement Results (GSM1900 Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel									
1 880.0	661	GSM 1900	29.71	- 0.056	Standard	Left Ear	0.037	1.069	0.040	-
1 880.0	661		29.71	0.061	Standard	Left Tilt	0.016	1.069	0.017	-
1 880.0	661		29.71	0.160	Standard	Right Ear	0.074	1.069	0.079	-
1 880.0	661		29.71	0.159	Standard	Right Tilt	0.023	1.069	0.025	-
1 880.0	661	GPRS 4Tx	26.24	0.182	Standard	Left Ear	0.045	1.062	0.048	-
1 880.0	661		26.24	- 0.094	Standard	Left Tilt	0.025	1.062	0.027	-
1 880.0	661		26.24	- 0.043	Standard	Right Ear	0.087	1.062	0.092	2
1 880.0	661		26.24	0.150	Standard	Right Tilt	0.024	1.062	0.025	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram				

13.1-3 Measurement Results (WCDMA850 Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel									
836.6	4183	WCDMA850	22.91	0.145	Standard	Left Ear	0.011	1.069	0.012	-
836.6	4183		22.91	0.039	Standard	Left Tilt	0.008	1.069	0.009	-
836.6	4183		22.91	0.129	Standard	Right Ear	0.013	1.069	0.014	3
836.6	4183		22.91	0.081	Standard	Right Tilt	0.009	1.069	0.010	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram				

13.1-4 Measurement Results (DTS Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	Data Rate	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel										
2 437	6	802.11b	15.84	0.194	Standard	Left Ear	1Mbps	0.081	1.306	0.106	4
			15.84	0.160	Standard	Left Tilt	1Mbps	0.069	1.306	0.090	-
			15.84	0.022	Standard	Right Ear	1Mbps	0.049	1.306	0.064	-
			15.84	0.135	Standard	Right Tilt	1Mbps	0.037	1.306	0.048	-
5 745	149	802.11a	11.04	0.176	Standard	Left Ear	6Mbps	0.029	1.570	0.046	5
			11.04	0.110	Standard	Left Tilt	6Mbps	0.025	1.570	0.039	-
			11.04	0.118	Standard	Right Ear	6Mbps	0.023	1.570	0.036	-
			11.04	0.108	Standard	Right Tilt	6Mbps	0.016	1.570	0.025	-
5 775	155	802.11ac	9.09	0.139	Standard	Left Ear	29.3M bps	0.029	1.552	0.045	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

13.1-5 Measurement Results (NII Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	Data Rate	Measured SAR (mW/g)	Scaling Facor	Scaled SAR (mW/g)	Plot No.
MHz	Ch										
5 180	36	802.11a	11.97	0.129	Standard	Left Ear	6Mbps	0.088	1.268	0.112	-
5 180	36	802.11a	11.97	-0.187	Standard	Left Tilt	6Mbps	0.072	1.268	0.091	-
5 180	36	802.11a	11.97	-0.178	Standard	Right Ear	6Mbps	0.038	1.268	0.048	-
5 180	36	802.11a	11.97	0.105	Standard	Right Tilt	6Mbps	0.038	1.268	0.048	-
5 210	42	802.11ac	9.50	0.194	Standard	Right Tilt	29.3Mbps	0.073	1.413	0.103	-
5 260	52	802.11a	12.00	0.144	Standard	Left Ear	6Mbps	0.134	1.259	0.169	6
5 260	52	802.11a	12.00	0.107	Standard	Left Tilt	6Mbps	0.094	1.259	0.119	-
5 260	52	802.11a	12.00	0.152	Standard	Right Ear	6Mbps	0.048	1.259	0.060	-
5 260	52	802.11a	12.00	-0.118	Standard	Right Tilt	6Mbps	0.053	1.259	0.067	-
5 290	58	802.11ac	9.42	0.099	Standard	Left Tilt	29.3Mbps	0.085	1.439	0.122	-
5 500	100	802.11a	11.76	0.147	Standard	Left Ear	6Mbps	0.117	1.330	0.156	-
5 500	100	802.11a	11.76	-0.147	Standard	Left Tilt	6Mbps	0.076	1.330	0.101	-
5 500	100	802.11a	11.76	0.122	Standard	Right Ear	6Mbps	0.061	1.330	0.081	-
5 500	100	802.11a	11.76	-0.137	Standard	Right Tilt	6Mbps	0.053	1.330	0.071	-
5 530	106	802.11a	9.69	-0.120	Standard	Left Tilt	29.3Mbps	0.061	1.352	0.082	-
ANSI/ IEEE C95.1 - 1992– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

13.2-1 Measurement Results (GSM850 Hotspot SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel									
836.6	190	GPRS 4Tx	28.46	-0.009	Rear	1.0 cm	0.079	1.009	0.080	7
836.6	190		28.46	-0.060	Front	1.0 cm	0.019	1.009	0.019	-
836.6	190		28.46	0.104	Right	1.0 cm	0.051	1.009	0.051	-
836.6	190		28.46	0.163	Bottom	1.0 cm	0.006	1.009	0.006	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram				

13.2-2 Measurement Results (GSM1900 Hotspot SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	Measured SAR (mW/g)	Scaling Facor	Scaled SAR (mW/g)	Plot No.
MHz	Channel									
1 880.0	661	GPRS 4Tx	26.24	0.020	Rear	1.0 cm	0.229	1.062	0.243	15
1 880.0	661		26.24	0.085	Front	1.0 cm	0.224	1.062	0.238	-
1 880.0	661		26.24	-0.069	Right	1.0 cm	0.041	1.062	0.044	-
1 880.0	661		26.24	0.051	Bottom	1.0 cm	0.332	1.062	0.352	8
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram				

13. 2-3 Measurement Results (WCDMA850 Hotspot SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	Measured SAR(mW/g)	Scaling Facor	Scaled SAR(mW/g)	Plot No.
MHz	Channel		(dBm)	(dB)						
836.6	4183	WCDMA850	22.91	0.167	Rear	1.0 cm	0.048	1.069	0.051	9
836.6	4183		22.91	0.043	Front	1.0 cm	0.012	1.069	0.013	-
836.6	4183		22.91	0.185	Right	1.0 cm	0.023	1.069	0.025	-
836.6	4183		22.91	0.113	Bottom	1.0 cm	0.005	1.069	0.005	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						0.093Body 1.6 W/kg (mW/g) Averaged over 1 gram				

13. 2-4 Measurement Results (WLAN Hotspot SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Data Rate	Separation Distance	Measure d SAR (mW/g)	Scaling Facor	Scaled SAR (mW/g)	Plot No.
MHz	Ch		(dBm)	(dB)							
2 437	6	802.11b	15.84	-0.075	Rear	1Mbps	1.0 cm	0.020	1.306	0.026	10
			15.84	0.188	Front	1Mbps	1.0 cm	0.011	1.306	0.014	-
			15.84	-0.133	Right	1Mbps	1.0 cm	0.005	1.306	0.007	-
			15.84	0.149	Top	1Mbps	1.0 cm	0.014	1.306	0.018	-
5 745	149	802.11a	11.04	0.150	Rear	6Mbps	1.0 cm	0.002	1.570	0.003	-
			11.04	0.099	Front	6Mbps	1.0 cm	0.014	1.570	0.022	11
			11.04	0.172	Right	6Mbps	1.0 cm	0.011	1.570	0.017	-
			11.04	0.182	Top	6Mbps	1.0 cm	0.012	1.570	0.019	-
5 775	155	802.11ac	9.09	-0.145	Front	29.3Mbps	1.0 cm	0.011	1.552	0.017	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram					

13.3-1 Measurement Results (DTS Body-worn SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Data Rate	Separation Distance	Measured SAR (mW/g)	Scaling Factor	Scaled SAR (mW/g)	Plot No.
MHz	Ch.										
2.437	6	802.11b	15.84	-0.075	Rear	1Mbps	1.0 cm	0.02	1.306	0.026	10
5.740	149	802.11a	11.04	0.150	Rear	6Mbps	1.0 cm	0.002	1.570	0.003	-
5.775	155	802.11ac	9.09	0.173	Rear	29.3Mbps	1.0 cm	0.007	1.552	0.011	12
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram					

13.3-2 Measurement Results (NII Body-worn SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Data Rate	Separation Distance	Measured SAR(mW/g)	Scaling Factor	Scaled SAR(mW/g)	Plot No.
MHz	Ch.										
5.180	36	802.11a	11.97	0.102	Rear	6Mbps	1.0 cm	0.014	1.268	0.018	-
5.210	42	802.11ac	9.50	-0.011	Rear	29.3Mbps	1.0 cm	0.023	1.413	0.032	-
5.260	52	802.11a	12.00	0.067	Rear	6Mbps	1.0 cm	0.023	1.259	0.029	-
5.290	58	802.11ac	9.42	0.112	Rear	29.3Mbps	1.0 cm	0.026	1.439	0.037	13
5.500	100	802.11a	11.76	0.152	Rear	6Mbps	1.0 cm	0.008	1.330	0.011	-
5.530	106	802.11a	9.69	0.140	Rear	29.3Mbps	1.0 cm	0.013	1.352	0.018	-
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram					

13.3-3 Measurement Results (Body-worn SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	Measured SAR(mW/g)	Scaling Factor	Scaled SAR(mW/g)	Plot No.
MHz	Channel									
836.6	190	GSM850	32.76	0.089	Rear	1.0 cm	0.084	1.057	0.089	14
836.6	190	GPRS 4Tx	28.46	-0.009	Rear	1.0 cm	0.079	1.009	0.080	7
1.880.0	661	GSM1900	29.71	0.127	Rear	1.0 cm	0.086	1.069	0.092	-
1.880.0	661	GPRS 4Tx	26.24	0.020	Rear	1.0 cm	0.229	1.062	0.243	15
836.6	4183	WCDMA850	22.91	0.167	Rear	1.0 cm	0.048	1.069	0.051	9
ANSI/ IEEE C95.1 - 1992- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg (mW/g) Averaged over 1 gram				

13.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, FCC KDB Procedure.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 648474 D04v01, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was \leq 1.2 W/kg, no additional SAR evaluation using a headset cable were required.
8. Per FCC KDB 865664 D01v01, variability SAR tests were not performed since the measured SAR results for all frequency bands were less than 0.8 W/kg. Please see Section 14 for variability analysis information.

GSM/GPRS Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB 941225 D03v01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power was evaluated for SAR.
4. Per FCC KDB 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is \leq 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is 1/2 dB, instead of the middle channel, the highest output power channel must be used.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA inactive per KDB 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is \leq 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the channel highest output power channel was used.

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB 248227 D01v01r02 and Oct. 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11 g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB 248227 D01v01r02 and Oct. 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11 n 20MHz and 40 MHz bandwidths) were not investigated since the average output power over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data of IEEE 802.11a mode.
3. Per Apr. 2013 TCB Workshop notes, full SAR test for all IEEE 802.11 ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11 a mode. IEEE 802.11 ac was evaluated for the highest IEEE 802.11 a configuration in each 5 GHz band and exposure condition.
4. When wireless router is enabled, 5.2, 5.3 and 5.5 GHz bands are disabled. Only 5.8 GHz WIFI Wireless Router SAR Data was required.
5. This device can operate in the 2.4 GHz and 5.8 GHz bands using WIFI Direct Go capability. Per FCC KDB 941225, 5.8 GHz WIFI Direct Go is evaluated for SAR using wireless router SAR evaluation procedures.
6. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel was $\leq 1.6 \text{ W/kg}$ and the reported 1g averaged SAR was $< 0.8 \text{ W/kg}$, SAR testing on other default channels was not required.

14. SAR Measurement Variability and Uncertainty

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01.

These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is $>$ 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (\sim 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is \geq 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $>$ 1.20.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not $>$ 1.20.
2. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.

15. SAR Summation Scenario

	Position	Applicable Combination	Note
Simultaneous Transmission	Head	GSM 850 Voice/Data + 2.4 GHz WiFi	
		GSM 1900 Voice/Data + 2.4 GHz WiFi	
		WCDMA850 Voice + 2.4 GHz WiFi	
		GSM 850 Voice/Data + 5 GHz WiFi	
		GSM 1900 Voice/Data + 5 GHz WiFi	
		WCDMA850 Voice +5 GHz WiFi	
	Hotspot	GPRS 850 Data + 2.4 GHz WiFi	
		GPRS 1900 Data + 2.4 GHz WiFi	
		WCDMA850 Data + 2.4 GHz WiFi	
		GPRS 850 Data + 5 GHz WiFi	
		GPRS 1900 Data + 5 GHz WiFi	Wifi Direct GO
		WCDMA850 Data + 5 GHz WiFi	

	Position	Applicable Combination	Note
Simultaneous Transmission	Body-worn	GSM 850 Voice/Data + 2.4 GHz WiFi	
		GSM 1900 Voice/Data + 2.4 GHz WiFi	
		WCDMA850 Voice + 2.4 GHz WiFi	
		GSM 850 Voice/Data + 5 GHz WiFi	
		GSM 1900 Voice/Data + 5 GHz WiFi	
		WCDMA850 Voice + 5 GHz WiFi	
		GSM 850 Voice + 2.4 GHz Bluetooth	
		GSM 1900 Voice + 2.4 GHz Bluetooth	
		WCDMA850 Voice+ 2.4 GHz Bluetooth	

* BT and WLAN are not simultaneous transmission.

15.1 Simultaneous Transmission Summation for Head

Simultaneous Transmission Summation with 2.4 GHz WIFI

Band	configuration	Scaled SAR (W/kg)	2.4 GHz WIFI Scaled SAR (W/kg)	$\sum 1\text{-g}$ SAR (W/kg)	Band	configuration	Scaled SAR (W/kg)	2.4 GHz WIFI Scaled SAR (W/kg)	$\sum 1\text{-g}$ SAR (W/kg)
GSM850	Left Cheek	0.013	0.106	0.119	GSM 1900	Left Cheek	0.040	0.106	0.146
	Left Tilt	0.006	0.090	0.096		Left Tilt	0.017	0.090	0.107
	Right Cheek	0.013	0.064	0.077		Right Cheek	0.079	0.064	0.143
	Right Tilt	0.005	0.048	0.053		Right Tilt	0.025	0.048	0.073
GPRS 850	Left Cheek	0.012	0.106	0.118	GPRS 1900	Left Cheek	0.048	0.106	0.154
	Left Tilt	0.009	0.090	0.099		Left Tilt	0.027	0.090	0.117
	Right Cheek	0.015	0.064	0.079		Right Cheek	0.092	0.064	0.156
	Right Tilt	0.008	0.048	0.056		Right Tilt	0.025	0.048	0.073
WCDMA 850	Left Cheek	0.012	0.106	0.118		Left Cheek	0.048	0.106	0.154
	Left Tilt	0.009	0.090	0.099		Left Tilt	0.027	0.090	0.117
	Right Cheek	0.014	0.064	0.078		Right Cheek	0.092	0.064	0.156
	Right Tilt	0.010	0.048	0.058		Right Tilt	0.025	0.048	0.073

Simultaneous Transmission Summation with 5 GHz WIFI

Band	configuration	Scaled SAR (W/kg)	5 GHz WIFI Scaled SAR (W/kg)	Σ 1-g SAR (W/kg)	Band	configuration	Scaled SAR (W/kg)	5 GHz WIFI Scaled SAR (W/kg)	Σ 1-g SAR (W/kg)
GSM850	Left Cheek	0.013	0.169	0.182	GSM 1900	Left Cheek	0.040	0.169	0.209
	Left Tilt	0.006	0.119	0.125		Left Tilt	0.017	0.119	0.136
	Right Cheek	0.013	0.081	0.094		Right Cheek	0.079	0.081	0.160
	Right Tilt	0.005	0.071	0.076		Right Tilt	0.025	0.071	0.096
GPRS 850	Left Cheek	0.012	0.169	0.181	GPRS 1900	Left Cheek	0.048	0.169	0.217
	Left Tilt	0.009	0.119	0.128		Left Tilt	0.027	0.119	0.146
	Right Cheek	0.015	0.081	0.096		Right Cheek	0.092	0.081	0.173
	Right Tilt	0.008	0.071	0.079		Right Tilt	0.025	0.071	0.096
WCDMA 850	Left Cheek	0.012	0.169	0.181					
	Left Tilt	0.009	0.119	0.128					
	Right Cheek	0.014	0.081	0.095					
	Right Tilt	0.010	0.071	0.081					

15.2 Simultaneous Transmission Summation for Body-Worn

Simultaneous Transmission Summation with 2.4 GHz WIFI (1 cm)

Band	configuration	Scaled SAR (W/kg)	2.4 GHz WIFI Scaled SAR (W/kg)	Σ 1-g SAR (W/kg)
GSM 850	Rear	0.089	0.026	0.115
GSM 1900	Rear	0.243	0.026	0.269
WCDMA850	Rear	0.051	0.026	0.077

Simultaneous Transmission Summation with 5 GHz WIFI (1 cm)

Band	configuration	Scaled SAR (W/kg)	5 GHz WIFI Scaled SAR (W/kg)	Σ 1-g SAR (W/kg)
GSM 850	Rear	0.089	0.037	0.126
GSM 1900	Rear	0.243	0.037	0.280
WCDMA850	Rear	0.051	0.037	0.088

Simultaneous Transmission Summation with Bluetooth (1 cm)

Band	configuration	Scaled SAR (W/kg)	BT SAR (W/kg)	Σ 1-g SAR (W/kg)
GSM 850	Rear	0.089	0.17	0.259
GSM 1900	Rear	0.243	0.17	0.413
WCDMA850	Rear	0.051	0.17	0.221

15.3 Simultaneous Transmission Summation for Hotspot

Simultaneous Transmission Summation with 2.4 GHz WIFI (1 cm)

Band	configuration	Scaled SAR (W/kg)	2.4 GHz WIFI Scaled SAR (W/kg)	\sum 1-g SAR (W/kg)	Band	configuration	Scaled SAR (W/kg)	2.4 GHz WIFI Scaled SAR (W/kg)	\sum 1-g SAR (W/kg)
GSM 850	Rear	0.080	0.026	0.106	GSM 1900	Rear	0.243	0.026	0.269
	Front	0.019	0.014	0.033		Front	0.238	0.014	0.252
	Left			0.000		Left			0.044
	Right	0.051	0.007	0.058		Right	0.044	0.007	0.007
	Bottom	0.006		0.006		Bottom	0.352		0.352
	Top		0.018	0.018		Top		0.018	0.018
WCDMA 850	Rear	0.051	0.026	0.077					
	Front	0.013	0.014	0.027					
	Left			0.000					
	Right	0.025	0.007	0.032					
	Bottom	0.005		0.005					
	Top		0.018	0.018					

Simultaneous Transmission Summation with 5 GHz WIFI (1 cm)

Band	configuration	Scaled SAR (W/kg)	5 GHz WIFI Scaled SAR (W/kg)	\sum 1-g SAR (W/kg)	Band	configuration	Scaled SAR (W/kg)	5 GHz WIFI Scaled SAR (W/kg)	\sum 1-g SAR (W/kg)
GSM 850	Rear	0.080	0.003	0.083	GSM 1900	Rear	0.243	0.003	0.246
	Front	0.019	0.022	0.041		Front	0.238	0.022	0.260
	Left			0.000		Left			0.000
	Right	0.051	0.017	0.068		Right	0.044	0.017	0.061
	Bottom	0.006		0.006		Bottom	0.352		0.352
	Top		0.019	0.019		Top		0.019	0.019
WCDMA 850	Rear	0.051	0.003	0.054					
	Front	0.013	0.022	0.035					
	Left			0.000					
	Right	0.025	0.017	0.042					
	Bottom	0.005		0.005					
	Top		0.019	0.019					

15.4 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. And therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05

16. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/IEEE C95.1 1992.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests.

17. REFERENCES

- [1] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields, July 2001.
- [2] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, IEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices.
- [3] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [4] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 100 GHz, New York: IEEE, Aug. 1992
- [5] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovi^o, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [21] SAR Evaluation of Handsets with Multiple Transmitters and Antennas #648474.
- [22] SAR Measurement Procedure for 802.11 a/b/g Transmitters #KDB 248227.

Attachment 1. – SAR Test Plots

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Sep.01, 2013
Plot NO. 1

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: ET3DV6 – SN1798; ConvF(6.64, 6.64, 6.64); Calibrated: 2013-04-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: 1800/1900 Phantom; Type: SAM

GSM850 Right Touch GPRS 4Tx 190/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.015 mW/g


GSM850 Right Touch GPRS 4Tx 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.87 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

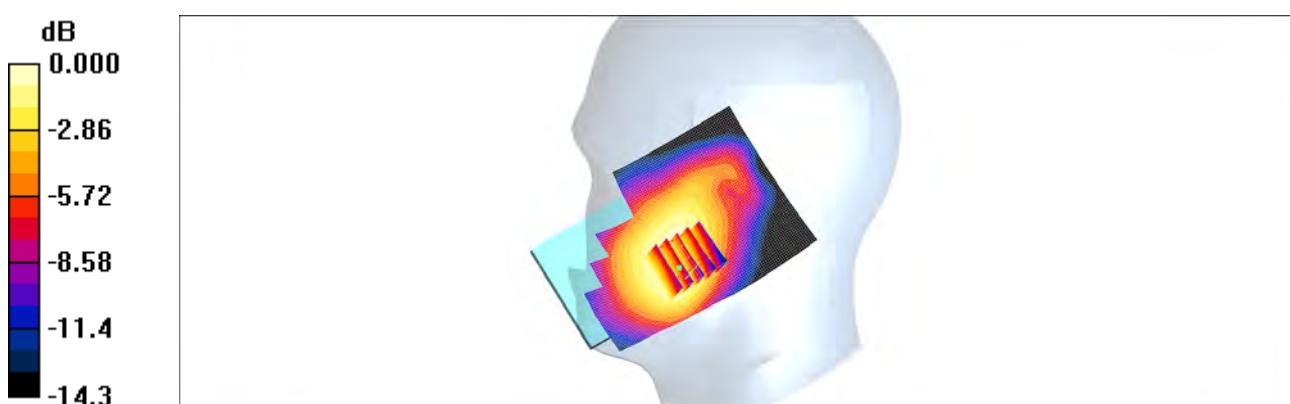

0 dB = 0.015mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Sep.03, 2013
Plot NO. 2

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: ET3DV6 – SN1798; ConvF(5.29, 5.29, 5.29); Calibrated: 2013-04-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: 835/900 Phamtom ; Type: SAM

GSM1900 Right Touch GPRS 4Tx 661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.094 mW/g


GSM1900 Right Touch GPRS 4Tx 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.04 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

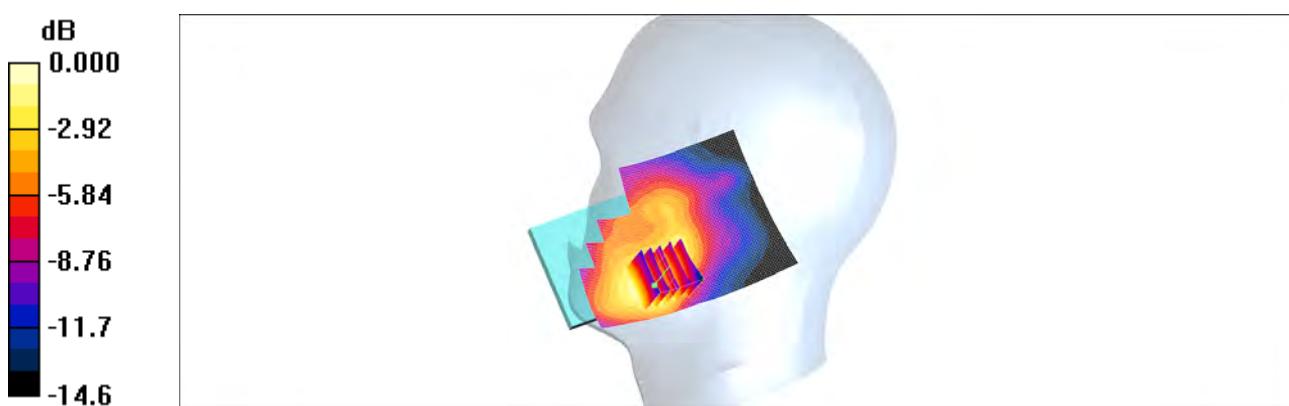

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: Sep.01, 2013
Plot NO. 3

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: ET3DV6 – SN1798; ConvF(6.64, 6.64, 6.64); Calibrated: 2013-04-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: 1800/1900 Phantom; Type: SAM

WCDMA850 Right Touch 4183/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.013 mW/g


WCDMA850 Right Touch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.17 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.017 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00973 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

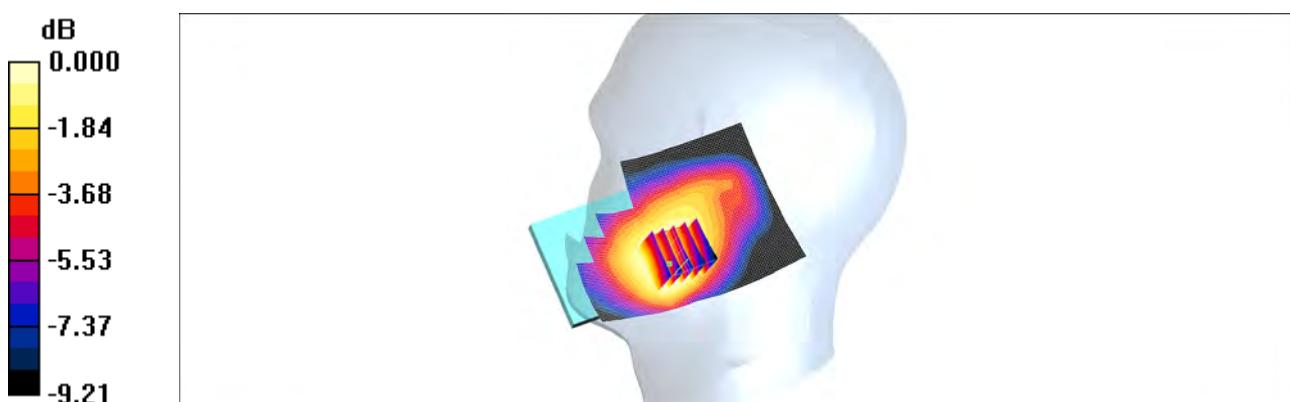

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: Sep.08, 2013
Plot NO. 4

DUT: KS1204; Type: Bar; Serial: #1

Communication System: 2450MHz FCC; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.79 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(6.76, 6.76, 6.76); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 800/900 Phantom; Type: SAM

802.11b Left Touch 6ch 1Mbps/Area Scan (81x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.124 mW/g


802.11b Left Touch 6ch 1Mbps/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.96 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

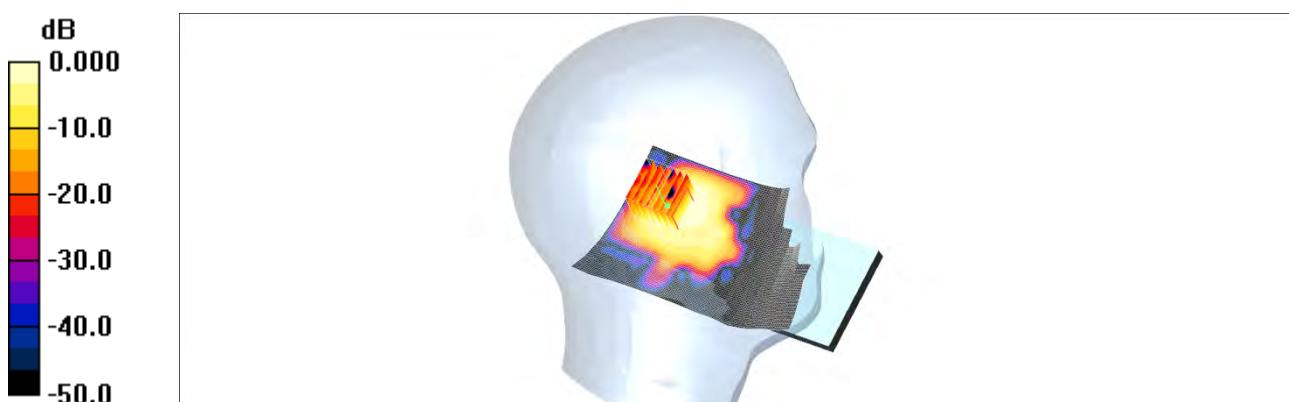

0 dB = 0.131mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.3 °C
Test Date: Sep.09, 2013
Plot NO. 5

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WIFI 5GHz; Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 5.22 \text{ mho/m}$; $\epsilon_r = 34.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(4.5, 4.5, 4.5); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 800/900 Phantom; Type: SAM

802.11a Left touch 149ch 6Mbps/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.118 mW/g


802.11a Left touch 149ch 6Mbps/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.76 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.0063 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

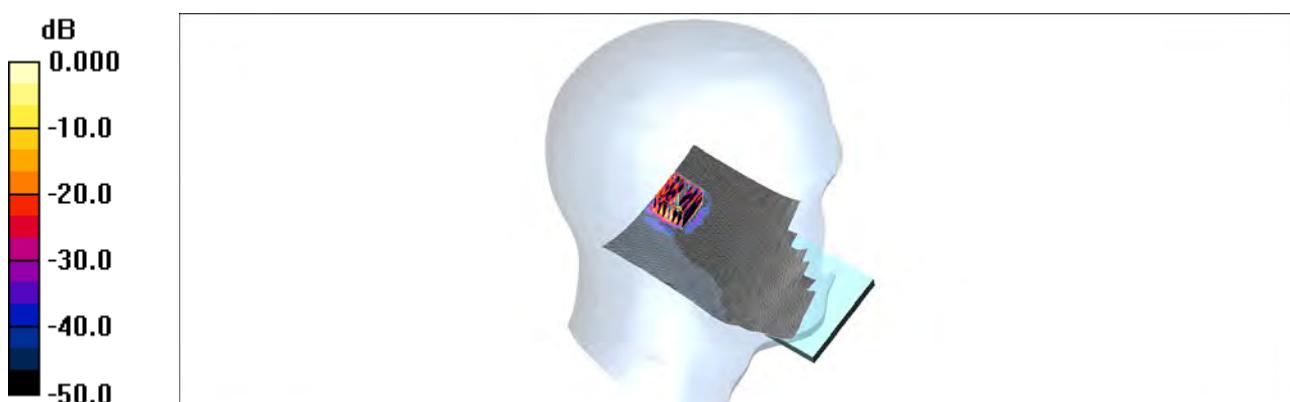

0 dB = 0.089mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.3 °C
Test Date: Sep.09, 2013
Plot NO. 6

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WIFI 5GHz; Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5260 \text{ MHz}$; $\sigma = 4.59 \text{ mho/m}$; $\epsilon_r = 35.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(4.61, 4.61, 4.61); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 800/900 Phantom; Type: SAM

802.11a Left touch 52ch 6Mbps/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.240 mW/g


802.11a Left touch 52ch 6Mbps/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.56 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

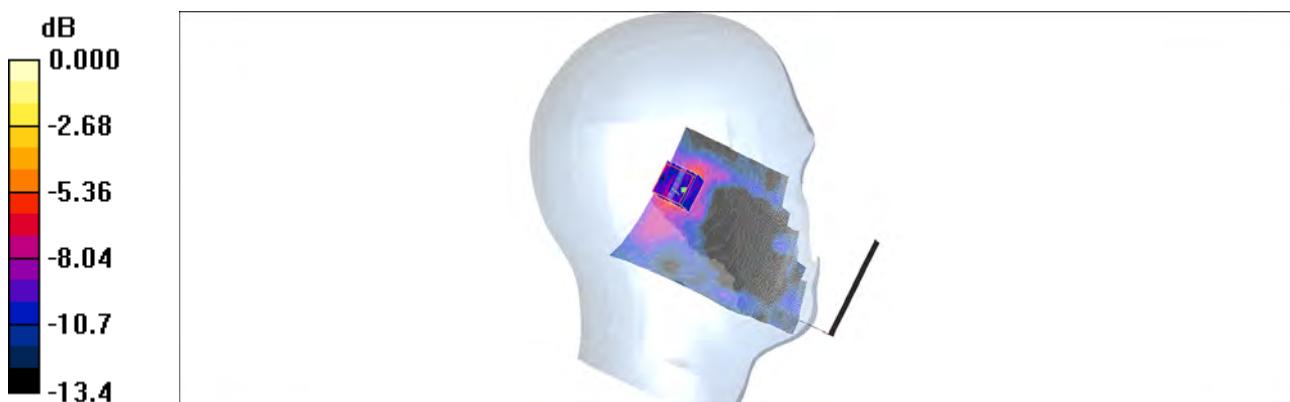

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.3 °C
Test Date: Sep.02, 2013
Plot NO. 7

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.952 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

GSM850 Body Rear 4tx 190/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.093 mW/g


GSM850 Body Rear 4tx 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.69 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

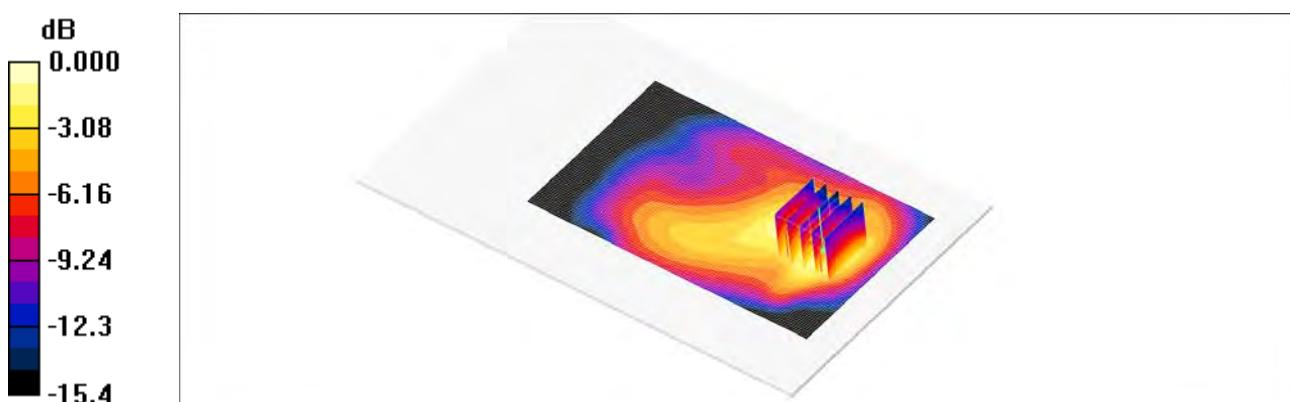

0 dB = 0.086mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: Sep.04, 2013
Plot NO. 8

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(7.53, 7.53, 7.53); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

GSM1900 Body Bottom 4tx 661/Area Scan (71x51x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.407 mW/g


GSM1900 Body Bottom 4tx 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.364 mW/g

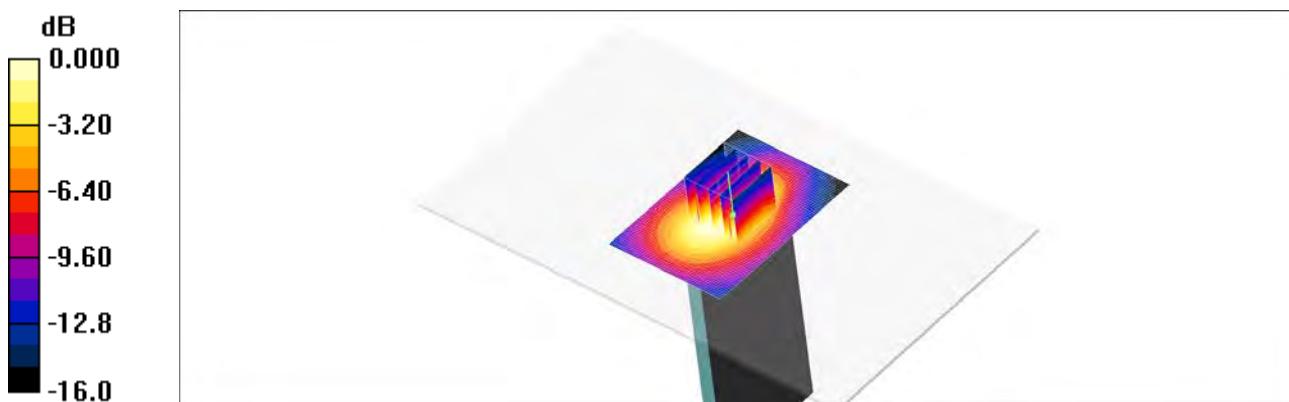

0 dB = 0.364mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.3 °C
Test Date: Sep.02, 2013
Plot NO. 9

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.952 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

WCDMA850 Body Rear 4183/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g


WCDMA850 Body Rear 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.73 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

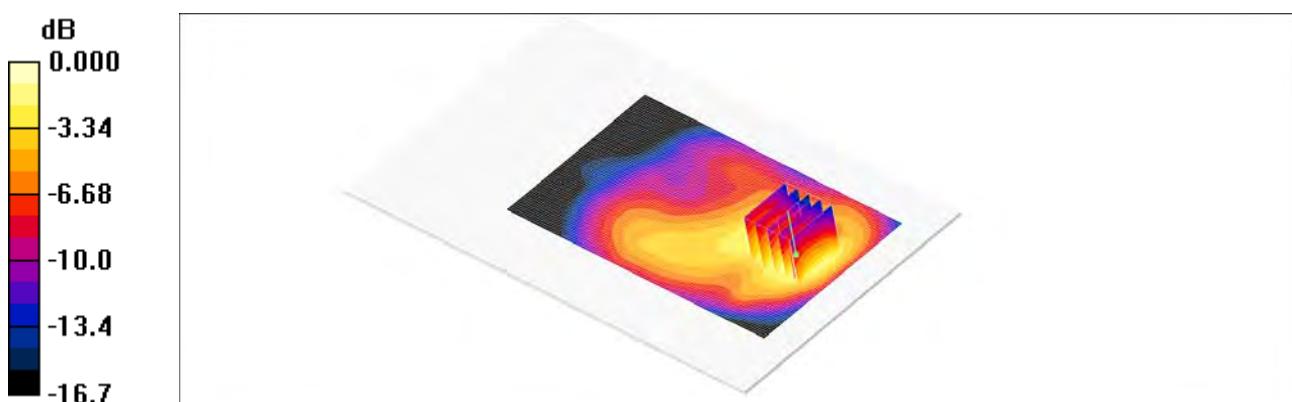

0 dB = 0.052mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: Sep.08, 2013
Plot NO. 10

DUT: KS1204; Type: Bar; Serial: #1

Communication System: 2450MHz FCC; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(6.98, 6.98, 6.98); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

802.11b Body Rear 6ch 1Mbps/Area Scan (81x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.033 mW/g


802.11b Body Rear 6ch 1Mbps/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.67 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00814 mW/g

Maximum value of SAR (measured) = 0.031 mW/g

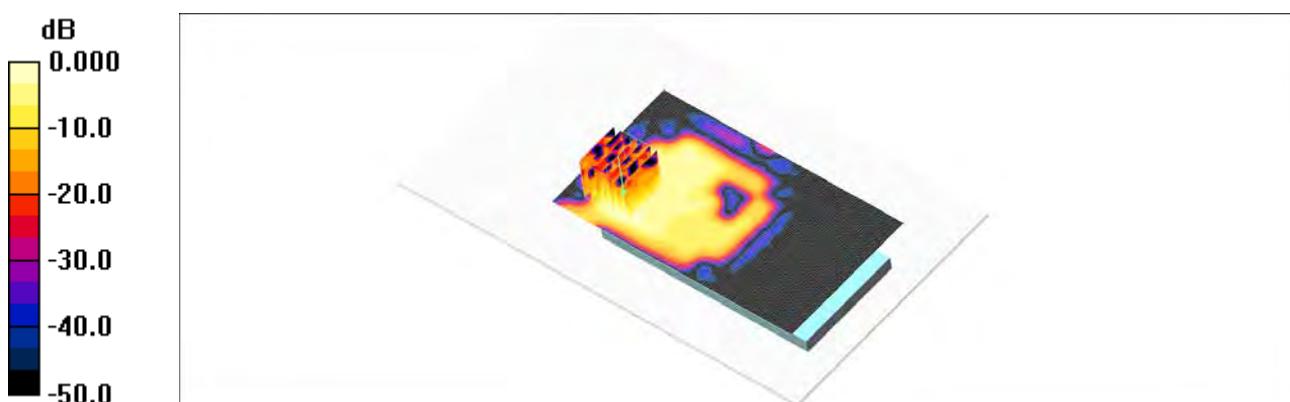

0 dB = 0.031mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Sep.10, 2013
Plot NO. 11

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WIFI 5GHz; Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 6.15 \text{ mho/m}$; $\epsilon_r = 46.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(4.01, 4.01, 4.01); Calibrated: 2013-03-18
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

802.11a Body front 149ch 6Mbps/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.098 mW/g


802.11a Body front 149ch 6Mbps/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.000 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

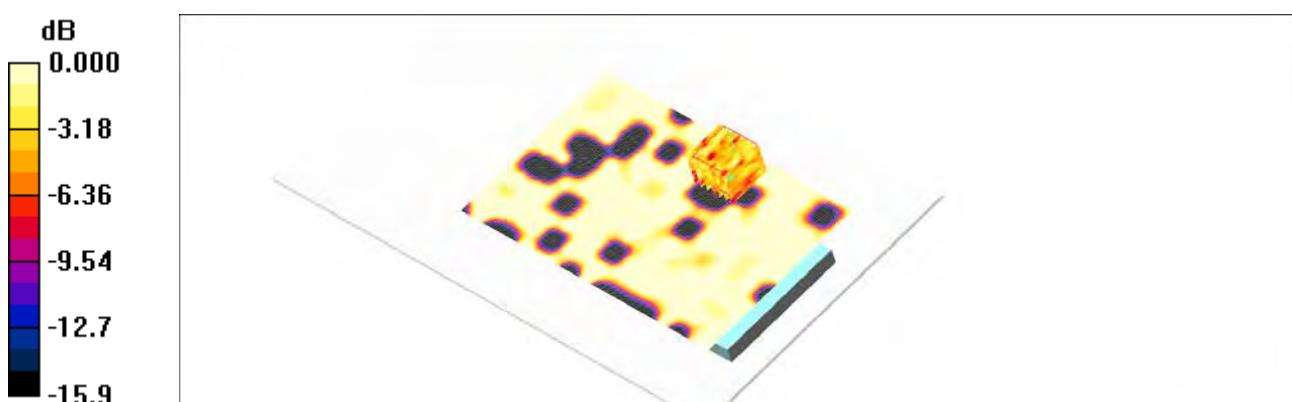

0 dB = 0.028mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Sep.10, 2013
Plot NO. 12

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WIFI 5GHz; Frequency: 5775 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.14 \text{ mho/m}$; $\epsilon_r = 46.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(4.01, 4.01, 4.01); Calibrated: 2013-03-18
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

802.11ac Body rear 155ch MCS0/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.038 mW/g


802.11ac Body rear 155ch MCS0/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.732 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.00703 mW/g; SAR(10 g) = 0.00436 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

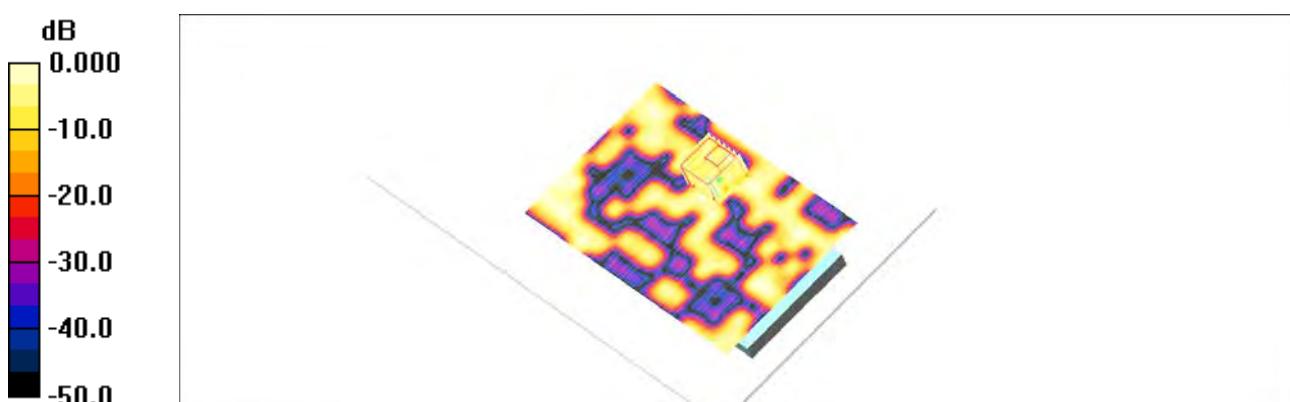

0 dB = 0.027mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: Sep.10, 2013
Plot NO. 13

DUT: KS1204; Type: Bar; Serial: #1

Communication System: WIFI 5GHz; Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5290 \text{ MHz}$; $\sigma = 5.33 \text{ mho/m}$; $\epsilon_r = 47.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(4.24, 4.24, 4.24); Calibrated: 2013-03-18
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C_20120905; Type: QD 000 P51 CA

802.11ac Body rear 58ch MCS0/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.050 mW/g


802.11ac Body rear 58ch MCS0/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.945 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.00849 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

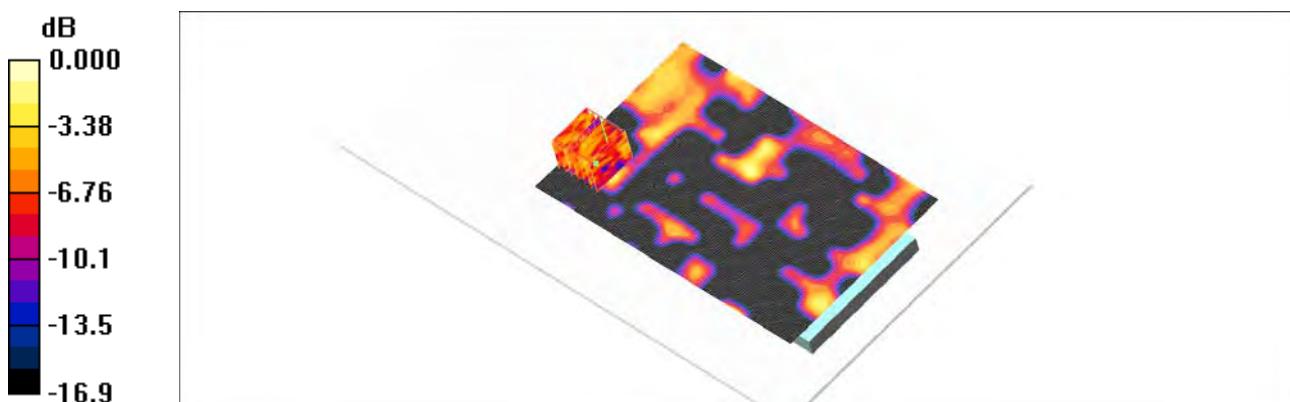

0 dB = 0.037mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.3 °C
Test Date: Sep.02, 2013
Plot NO. 14

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.952 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

GSM850 Body-worn Rear 190/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.096 mW/g


GSM850 Body-worn Rear 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.79 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

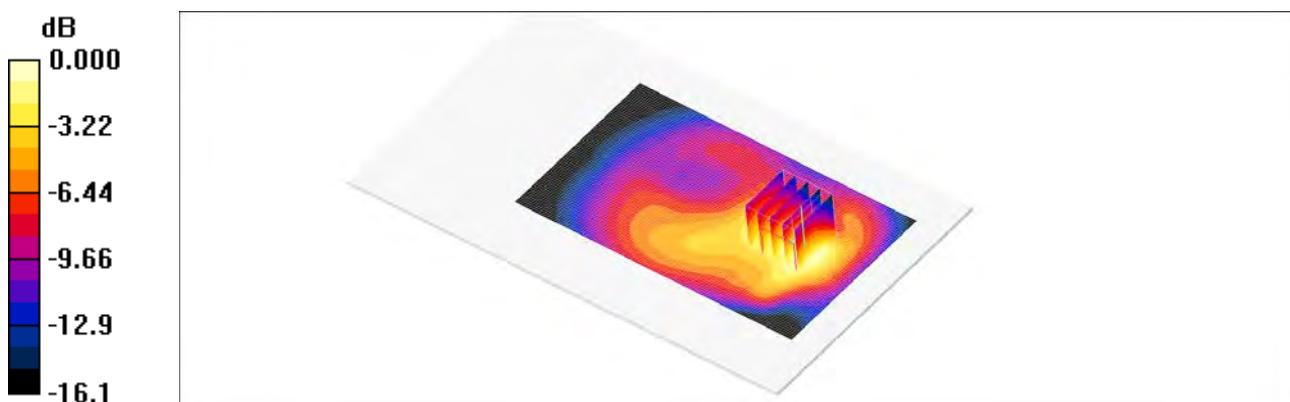

0 dB = 0.091mW/g

Test Laboratory: HCT CO., LTD
EUT Type: Cellular/PCS GSM/ GPRS/EDGE, Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: Sep.04, 2013
Plot NO. 15

DUT: KS1204; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(7.53, 7.53, 7.53); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

GSM1900 Body Rear 4tx 661/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm


GSM1900 Body Rear 4tx 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.51 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.261 mW/g

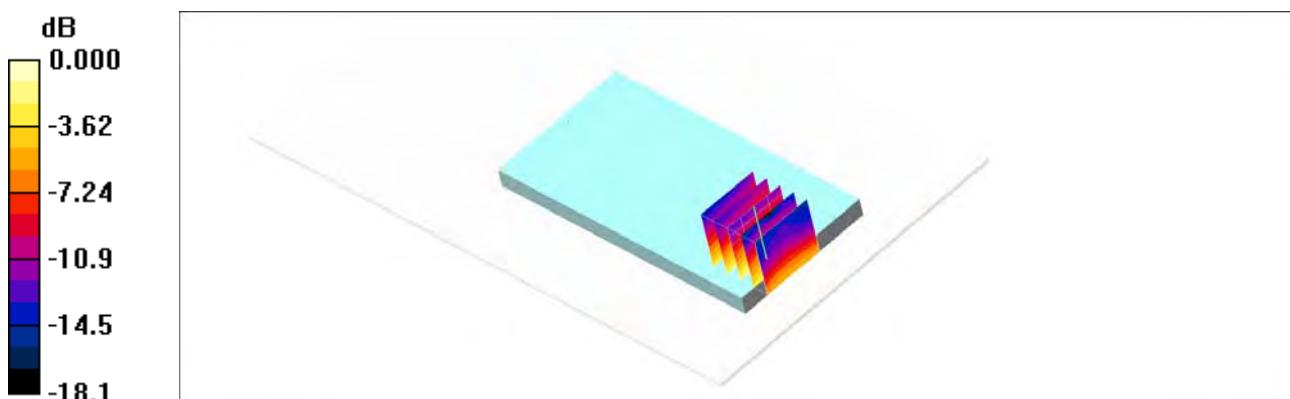

0 dB = 0.261mW/g

Attachment 2. – Dipole Verification Plots

■ Verification Data (835 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.6 °C

Test Date: Aug.20, 2013

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.919 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: ET3DV6 – SN1798; ConvF(6.64, 6.64, 6.64); Calibrated: 2013-04-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: SAM 835/900 MHz; Type: SAM

Verification 835 MHz/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 1.08 mW/g

Verification 835 MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 36.1 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.657 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

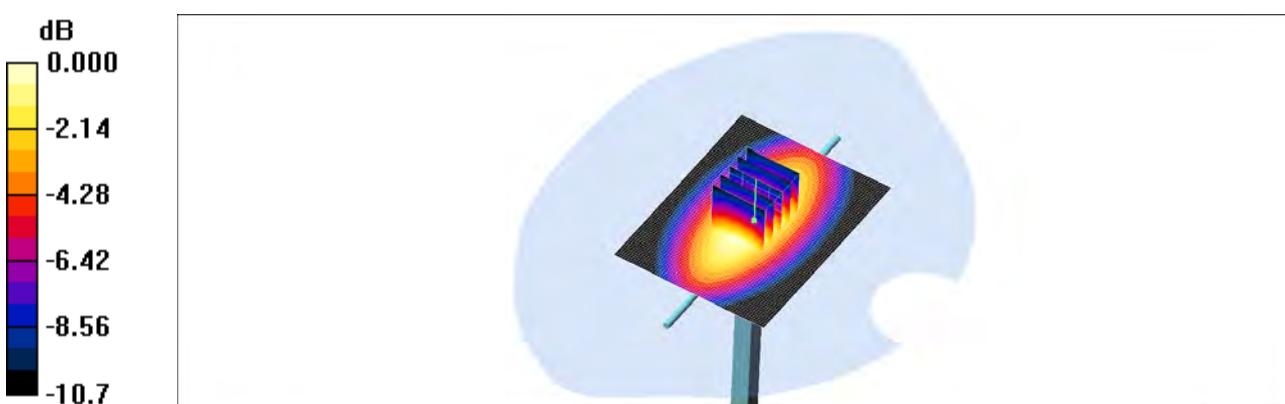

■ Verification Data (835 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.4 °C

Test Date: Aug.21, 2013

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

Verification 835 MHz/Area Scan (111x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g


Verification 835 MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.6 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.987 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

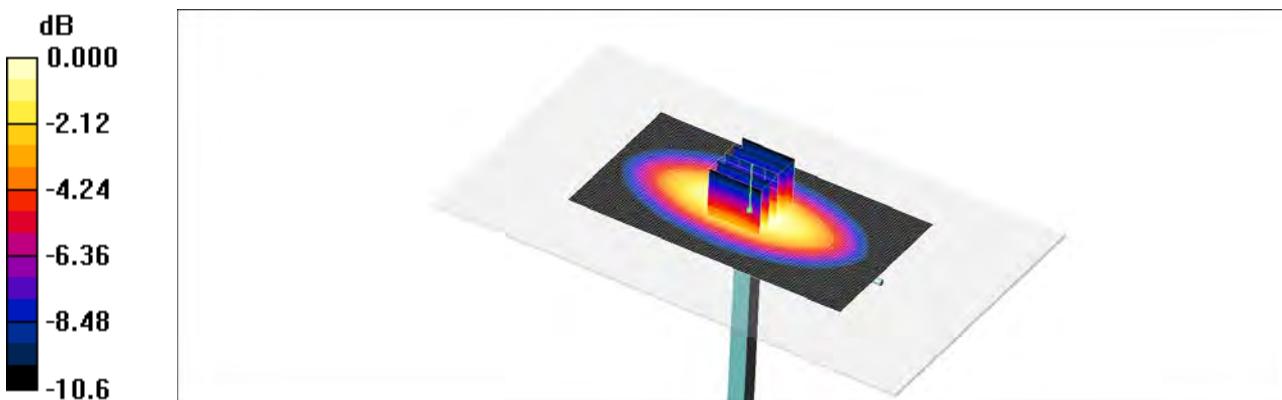

0 dB = 1.06mW/g

■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.2 °C

Test Date: Aug.27, 2013

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d032

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.29, 5.29, 5.29); Calibrated: 2013-04-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: SAM 1800/1900 MHz; Type: SAM

Verification 1900MHz /Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 4.77 mW/g

Verification 1900MHz /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 6.90 W/kg

SAR(1 g) = 3.95 mW/g; SAR(10 g) = 2.04 mW/g

Maximum value of SAR (measured) = 4.41 mW/g

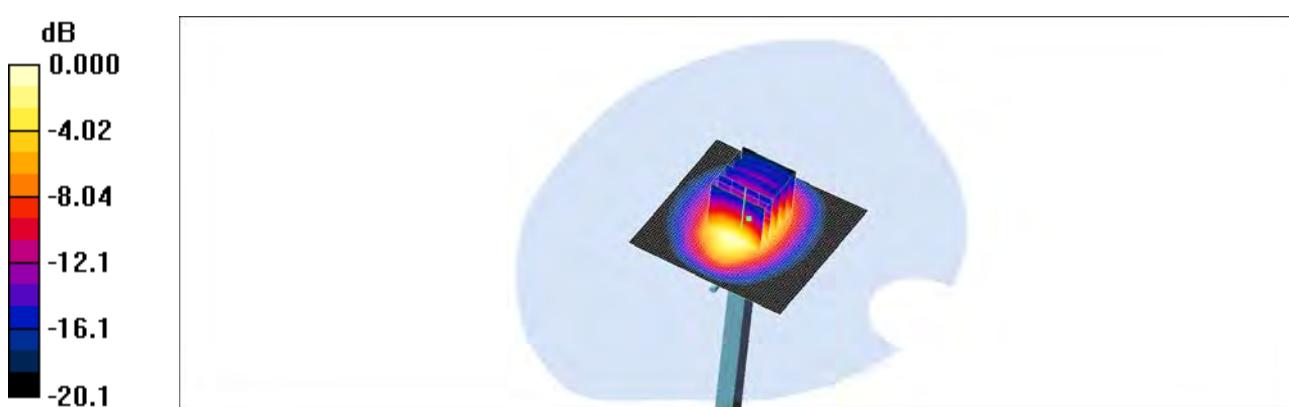

0 dB = 4.41mW/g

■ Verification Data (1 900 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.3 °C

Test Date: Aug.28, 2013

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 – SN:5d032

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(7.53, 7.53, 7.53); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA


Verification 1900 MHz/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 5.12 mW/g

Verification 1900 MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.6 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 7.62 W/kg

SAR(1 g) = 4.25 mW/g; SAR(10 g) = 2.25 mW/g

Maximum value of SAR (measured) = 4.67 mW/g

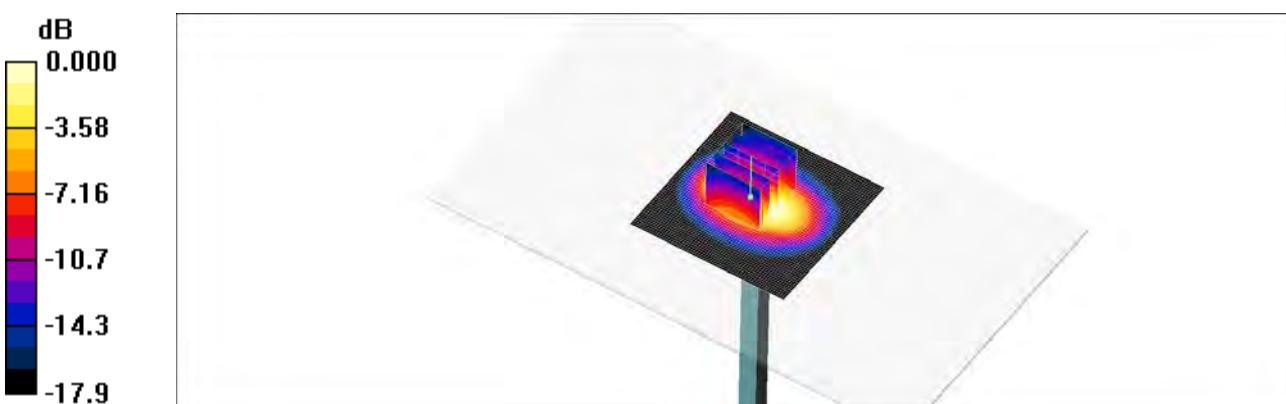

0 dB = 4.67mW/g

■ Verification Data (2 450 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.4 °C

Test Date: Sep.02, 2013

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 – SN:743

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.81 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(6.76, 6.76, 6.76); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 835/900 Phamtom ; Type: SAM

Verification 2450MHz/Area Scan (81x81x1): Measurement grid: dx=12mm, dy=12mm


Maximum value of SAR (interpolated) = 8.03 mW/g

Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.8 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.07 mW/g; SAR(10 g) = 2.26 mW/g

Maximum value of SAR (measured) = 8.01 mW/g

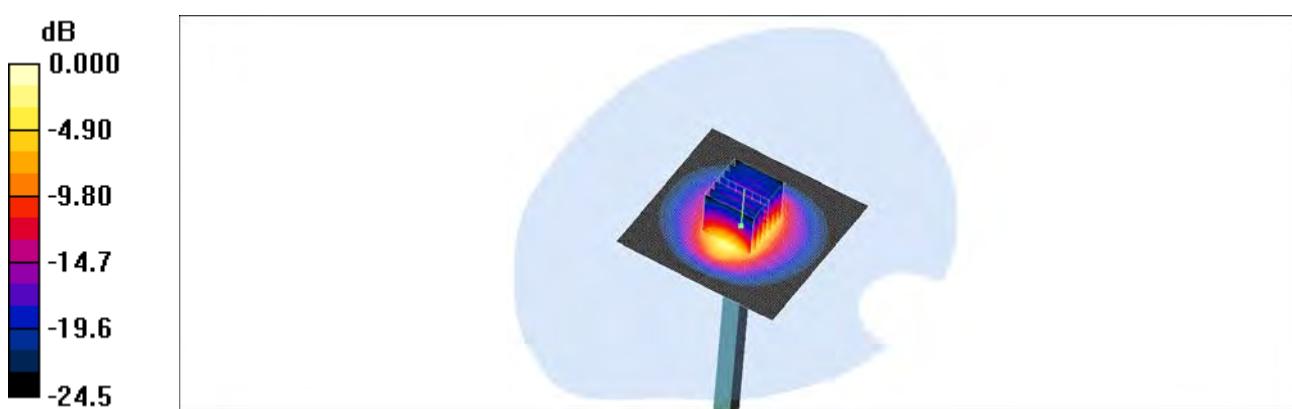

■ Verification Data (2 450 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.4 °C

Test Date: Sep.02, 2013

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:743

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(6.98, 6.98, 6.98); Calibrated: 2012-11-22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

Verification 2450MHz/Area Scan (81x81x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 8.48 mW/g


Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.7 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 5.28 mW/g; SAR(10 g) = 2.31 mW/g

Maximum value of SAR (measured) = 8.47 mW/g

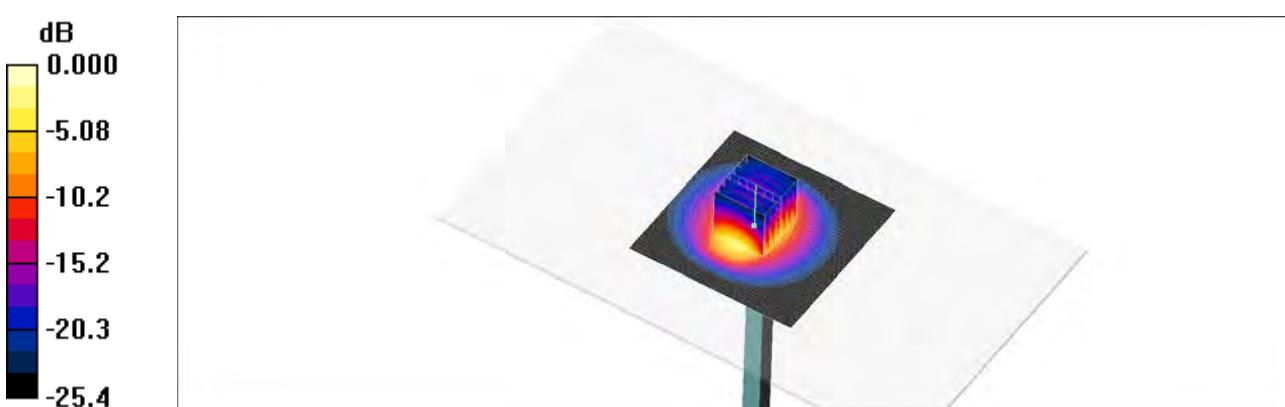

■ Verification Data (5 200 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 - SN:1107

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.55 \text{ mho/m}$; $\epsilon_r = 36.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(4.84, 4.84, 4.84); Calibrated: 2012-11-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 1800/1900 Phantom; Type: SAM

Verification 5200MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 9.52 mW/g


Verification 5200MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 43.9 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 7.99 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 16.4 mW/g

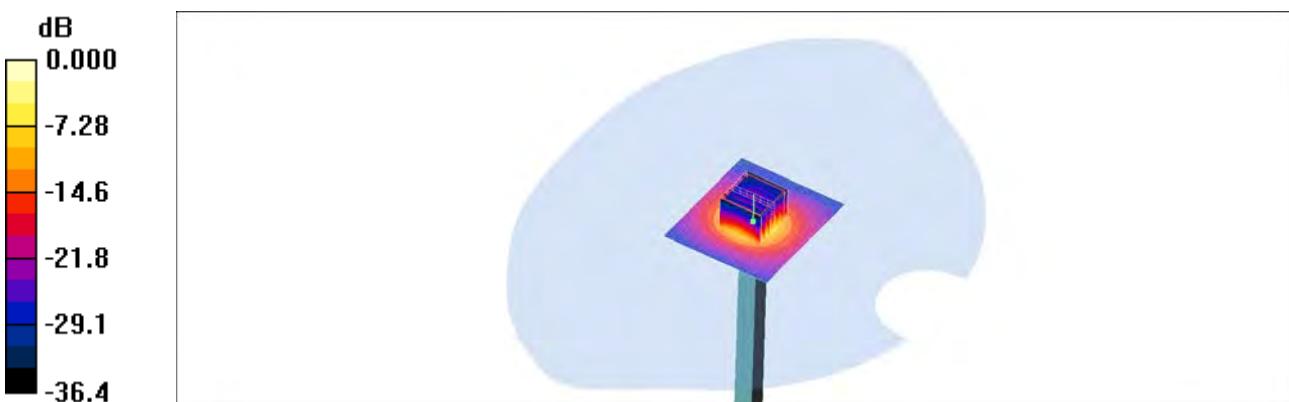

0 dB = 16.4mW/g

■ Verification Data (5 300 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 – SN:1107

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.55 \text{ mho/m}$; $\epsilon_r = 36.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(4.84, 4.84, 4.84); Calibrated: 2012-11-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 1800/1900 Phantom; Type: SAM

Verification 5200MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 9.83 mW/g


Verification 5200MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 45.8 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 8.42 mW/g; SAR(10 g) = 2.41 mW/g

Maximum value of SAR (measured) = 17.3 mW/g

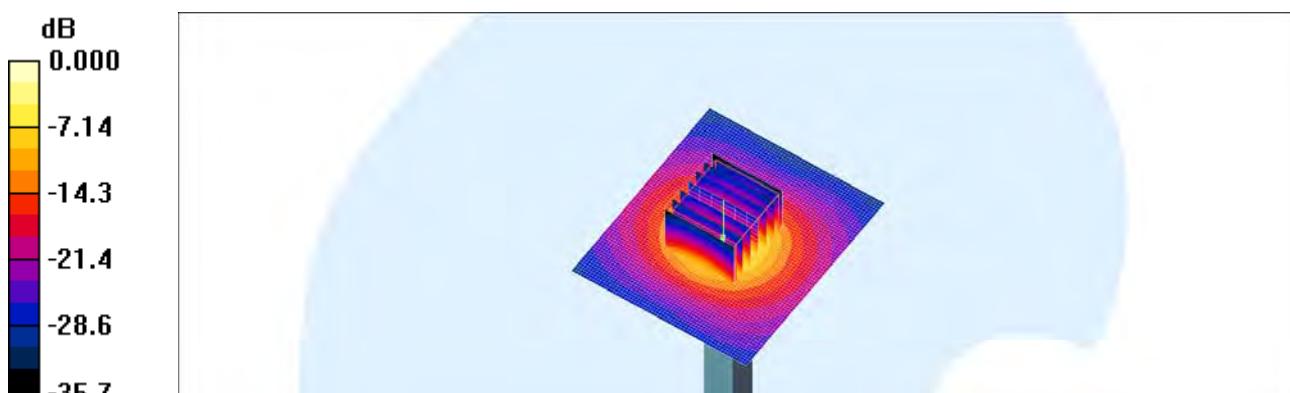

0 dB = 17.3mW/g

■ Verification Data (5 500 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 – SN:1107

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.87 \text{ mho/m}$; $\epsilon_r = 35.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3797; ConvF(4.58, 4.58, 4.58); Calibrated: 2012-11-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2012-09-18
- Phantom: 800/900 Phantom; Type: SAM


Verification 5500MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 8.32 mW/g

Verification 5500MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 40.5 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 40.6 W/kg

SAR(1 g) = 7.68 mW/g; SAR(10 g) = 2.07 mW/g

Maximum value of SAR (measured) = 16.8 mW/g

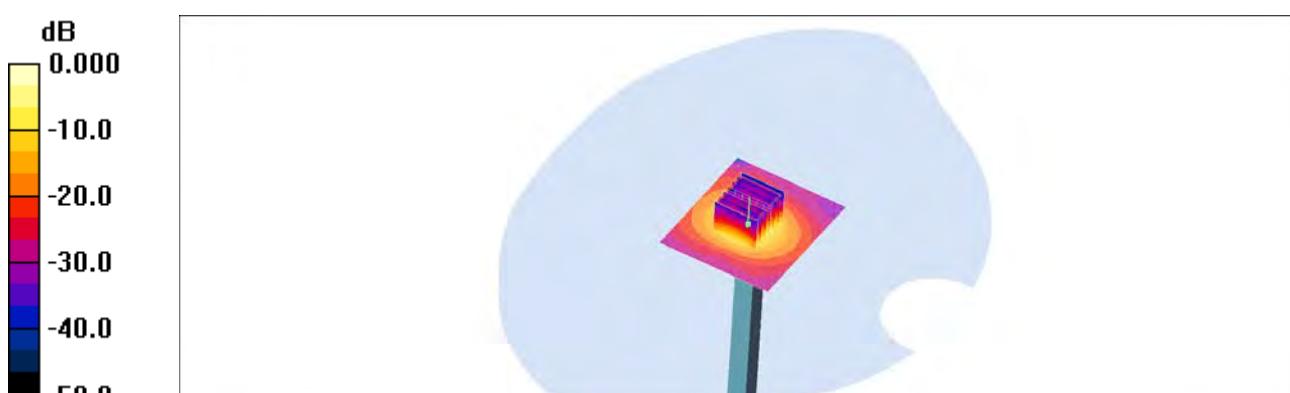

0 dB = 16.8mW/g

■ Verification Data (5 800 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 - SN:1107

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.27 \text{ mho/m}$; $\epsilon_r = 34.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(4.5, 4.5, 4.5); Calibrated: 2012-11-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn466; Calibrated: 2013-02-21
- Phantom: 1800/1900 Phantom; Type: SAM

Verification 5800MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 8.79 mW/g

Verification 5800MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 39.0 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 7.55 mW/g; SAR(10 g) = 2.11 mW/g

Maximum value of SAR (measured) = 15.8 mW/g



0 dB = 15.8mW/g

■ Verification Data (5 200 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 - SN:1107

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.2 \text{ mho/m}$; $\epsilon_r = 48$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(4.32, 4.32, 4.32); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: 800/900 Phantom; Type: SAM

Verification 5200MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (interpolated) = 8.96 mW/g

Verification 5200MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 38.9 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 7.79 mW/g; SAR(10 g) = 2.15 mW/g

Maximum value of SAR (measured) = 16.8 mW/g

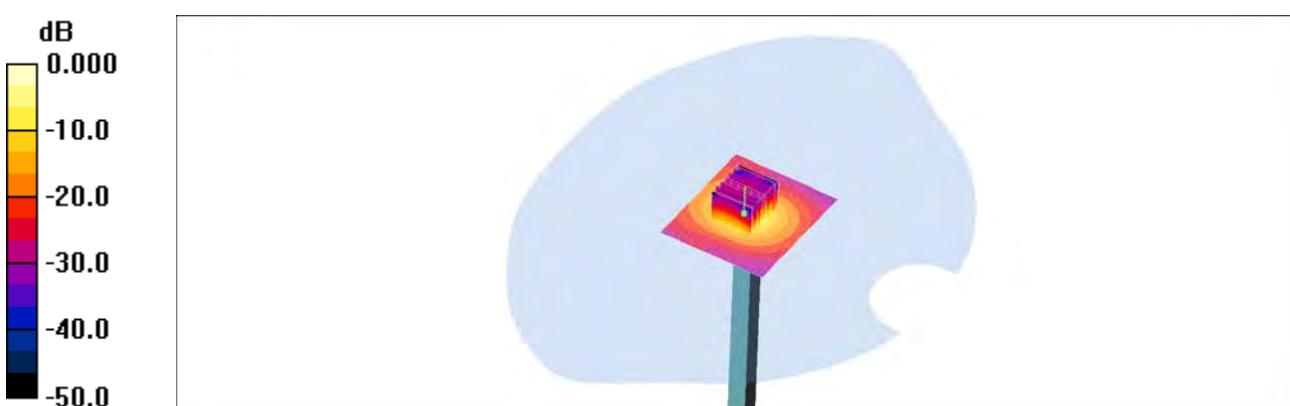

■ Verification Data (5 300 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 - SN:1107

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.34 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(4.24, 4.24, 4.24); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: 800/900 Phantom; Type: SAM

Verification 5300MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (interpolated) = 9.62 mW/g

Verification 5300MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 37.5 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 36.9 W/kg

SAR(1 g) = 7.91 mW/g; SAR(10 g) = 2.17 mW/g

Maximum value of SAR (measured) = 16.8 mW/g

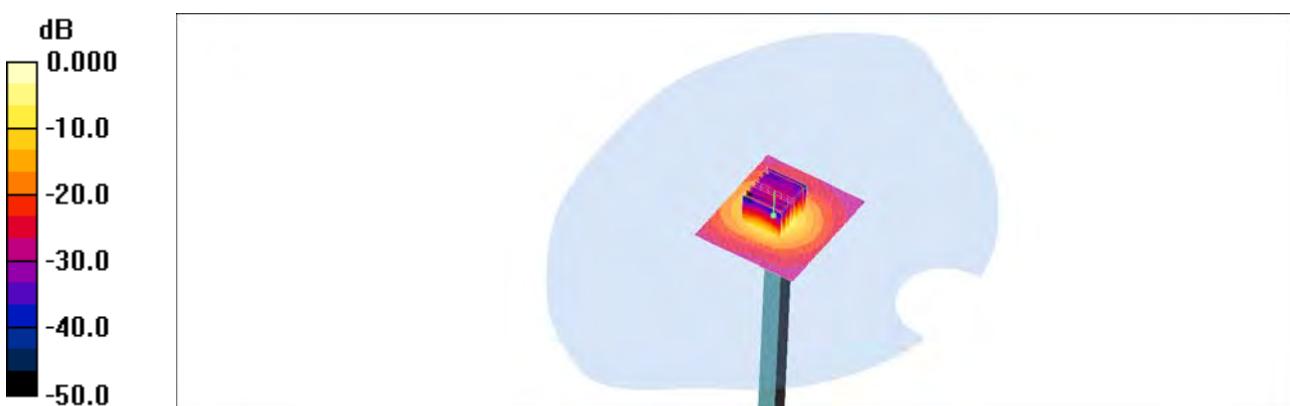

0 dB = 16.8mW/g

■ Verification Data (5 500 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 – SN:1107

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.58 \text{ mho/m}$; $\epsilon_r = 47.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 – SN3903; ConvF(3.86, 3.86, 3.86); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

Verification 5500MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 9.43 mW/g


Verification 5500MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 39.5 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.93 mW/g; SAR(10 g) = 2.24 mW/g

Maximum value of SAR (measured) = 16.4 mW/g

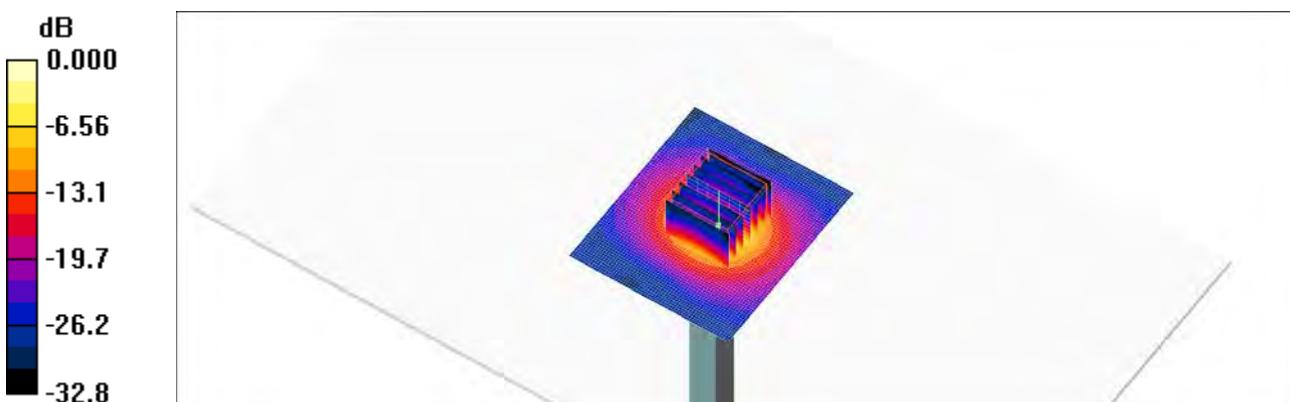

0 dB = 16.4mW/g

■ Verification Data (5 800 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 20.1 °C

Test Date: Sep. 03, 2013

DUT: Dipole 5GHz; Type: D5000V2; Serial: D5000V2 - SN:1107

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.1 \text{ mho/m}$; $\epsilon_r = 46.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section ; Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

DASY4 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(4.01, 4.01, 4.01); Calibrated: 2013-03-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2013-04-24
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA

Verification 5800MHz/Area Scan (61x71x1): Measurement grid: dx=10mm, dy=10mm


Maximum value of SAR (interpolated) = 8.41 mW/g

Verification 5800MHz/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 37.0 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 7.61 mW/g; SAR(10 g) = 2.14 mW/g

Maximum value of SAR (measured) = 16.0 mW/g

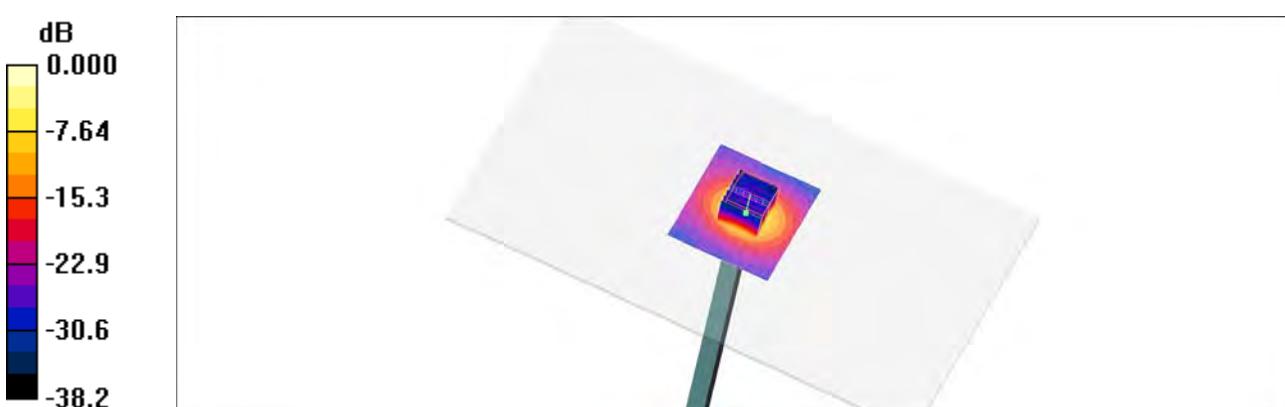

0 dB = 16.0mW/g

Attachment 3. – Probe Calibration Data