

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 27, 2014

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-
myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1405-F037

HCT FRN: 0005866421

FCC ID: ZNFLGL24

APPLICANT: LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LGL24

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2, §27

Tx Frequency: 706.5 MHz – 713.5 MHz (LTE – Band 17)

Max. RF Output Power:

| | |
|---------------------|------------------------------|
| Band 17 (5 MHz) : | 0.078 W (QPSK) (18.93 dBm) |
| | 0.075 W (16-QAM) (18.74 dBm) |
| Band 17 (10 MHz) : | 0.074 W (QPSK) (18.68 dBm) |
| | 0.075 W (16-QAM) (18.73 dBm) |

Emission Designator(s):

| | |
|--------------------|-----------------------------------|
| Band 17 (5 MHz) : | 4M49G7D (QPSK) / 4M49W7D (16-QAM) |
| Band 17 (10 MHz) : | 8M95G7D (QPSK) / 8M91W7D (16-QAM) |

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |

Version

| TEST REPORT NO. | DATE | DESCRIPTION |
|-----------------|--------------|-------------------------|
| HCT-R-1405-F037 | May 27, 2014 | - First Approval Report |
| | | |
| | | |
| | | |
| | | |

Table of Contents

| | |
|--|----|
| 1. GENERAL INFORMATION | 4 |
| 2. INTRODUCTION | 5 |
| 2.1. EUT DESCRIPTION..... | 5 |
| 2.2. MEASURING INSTRUMENT CALIBRATION | 5 |
| 2.3. TEST FACILITY | 5 |
| 3. DESCRIPTION OF TESTS | 6 |
| 3.1 CONDUCTED OUTPUT POWER | 6 |
| 3.2 ERP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS | 7 |
| 3.3 PEAK-AVERAGE RATIO | 8 |
| 3.4 OCCUPIED BANDWIDTH | 10 |
| 3.5 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz) | 10 |
| 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL..... | 11 |
| 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 12 |
| 4. LIST OF TEST EQUIPMENT | 13 |
| 5. SUMMARY OF TEST RESULTS | 14 |
| 6. SAMPLE CALCULATION | 15 |
| 7. TEST DATA | 16 |
| 7.1 EFFECTIVE RADIATED POWER OUTPUT | 16 |
| 7.2 RADIATED SPURIOUS EMISSIONS | 18 |
| 7.2.1 RADIATED SPURIOUS EMISSIONS (Band 17) | 18 |
| 7.3 PEAK-TO-AVERAGE RATIO | 20 |
| 7.4 OCCUPIED BANDWIDTH | 20 |
| 7.5 CONDUCTED SPURIOUS EMISSIONS | 21 |
| 7.5.1 BAND EDGE..... | 21 |
| 7.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 22 |
| 7.6.1 FREQUENCY STABILITY (LTE Band 17)..... | 22 |
| 8. TEST PLOTS..... | 24 |



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFLGL24

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

FCC Model(s): LGL24

Tx Frequency: 706.5 MHz – 713.5 MHz (LTE – Band 17)

Max. RF Output Power: Band 17 (5 MHz) : 0.078 W (QPSK) (18.93 dBm)
0.075 W (16-QAM) (18.74 dBm)
Band 17 (10 MHz) : 0.074 W (QPSK) (18.68 dBm)
0.075 W (16-QAM) (18.73 dBm)

Emission Designator(s): Band 17 (5 MHz) : 4M49G7D (QPSK) / 4M49W7D (16-QAM)
Band 17 (10 MHz) : 8M95G7D (QPSK) / 8M91W7D (16-QAM)

Date(s) of Tests: May 03, 2014 ~ May 27, 2014

Antenna Specification Manufacturer: acetechtechnologyA
Antenna type: Internal Antenna
Peak Gain: Band 17: -7.08 dBi

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LGL24 Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC consists of LTE 17.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |

3. DESCRIPTION OF TESTS

3.1 CONDUCTED OUTPUT POWER

Test Procedure

Conducted Output Power is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.2.

5.2.1 Procedure for use with a spectrum/signal analyzer when EUT can be configured to transmit continuously or when sweep triggering/signal gating can be properly implemented

The EUT is considered to transmit continuously if it can be configured to transmit at a burst duty cycle of greater than or equal to 98% throughout the duration of the measurement. If this condition can be achieved, then the following procedure can be used to measure the average output power of the EUT.

This procedure can also be used when the EUT cannot be configured to transmit continuously, provided that the measurement instrument can be configured to trigger a sweep at the beginning of each full-power transmission burst, and the sweep time is less than or equal to the minimum transmission time during each burst (*i.e.*, no burst off-time is to be included in the measurement).

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (*i.e.*, burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (*i.e.*, burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

3.2 ERP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

: Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.

3.3 PEAK-AVERAGE RATIO.

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

3.4 OCCUPIED BANDWIDTH.

Test set-up

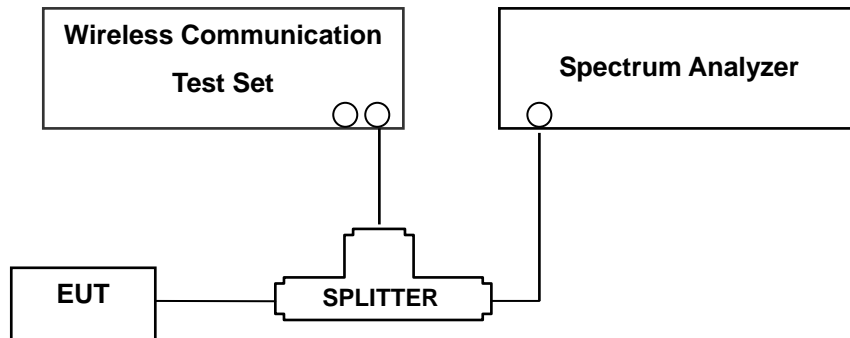

(Configuration of conducted Emission measurement)

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 4.2..

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

3.5 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;

Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency


NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 17, total offset 26.4 dBm = 20 dBm attenuator + 6 dBm Divider + 0.4 dBm RF cables.

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

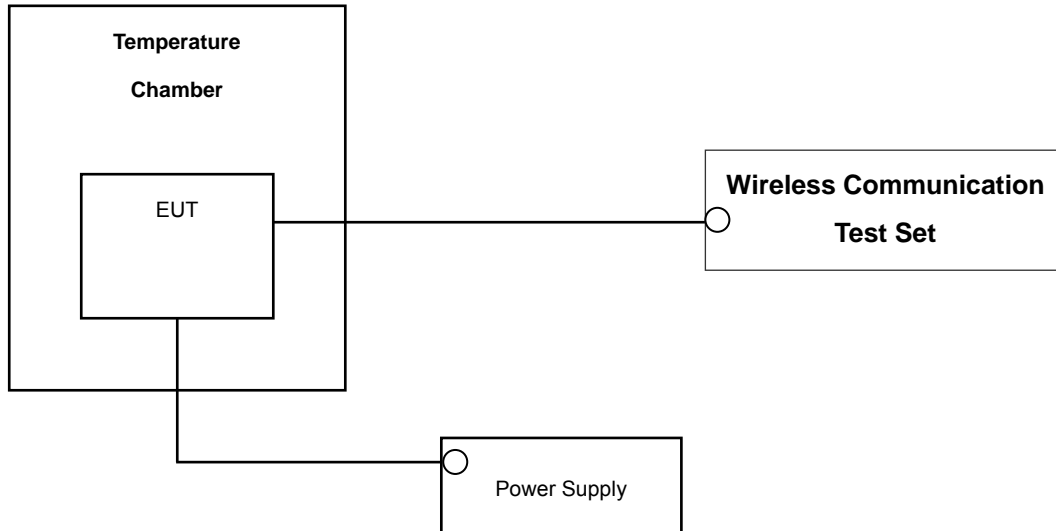

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification —The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\ \%$ ($\pm 2.5\ \text{ppm}$) of the center frequency (LTE Band17).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

| Manufacture | Model/ Equipment | Serial Number | Calibration Date | Calibration Interval | Calibration Due |
|--------------------|-------------------------------------|------------------------|------------------|----------------------|-----------------|
| LG Electronics USA | WCP-300/WCP (FCC ID : BEJWCP300) | 303HYR026898 | - | - | - |
| Agilent | N1921A/ Power Sensor | MY45241059 | 07/11/2013 | Annual | 07/11/2014 |
| Agilent | N1911A/ Power Meter | MY45100523 | 01/24/2014 | Annual | 01/24/2015 |
| MITEQ | AMF-6D-001180-35-20P/AMP | 1081666 | 09/12/2013 | Annual | 09/12/2014 |
| Wainwright | WHK1.2/15G-10EF/H.P.F | 4 | 06/24/2013 | Annual | 06/24/2014 |
| Wainwright | WHK3.3/18G-10EF/H.P.F | 2 | 06/24/2013 | Annual | 06/24/2014 |
| Hewlett Packard | 11667B / Power Splitter | 10545 | 02/22/2014 | Annual | 02/22/2015 |
| Digital | EP-3010/ Power Supply | 3110117 | 10/29/2013 | Annual | 10/29/2014 |
| Schwarzbeck | UHAP/ Dipole Antenna | 557 | 03/05/2013 | Biennial | 03/05/2015 |
| Schwarzbeck | UHAP/ Dipole Antenna | 558 | 05/03/2013 | Biennial | 05/03/2015 |
| Korea Engineering | KR-1005L / Chamber | KRAB05063-3CH | 10/30/2013 | Annual | 10/30/2014 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | 1191 | 12/03/2013 | Biennial | 12/03/2015 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | 1151 | 10/05/2013 | Biennial | 10/05/2015 |
| Agilent | E4440A/Spectrum Analyzer | US45303008 | 04/09/2014 | Annual | 04/09/2015 |
| WEINSCHL | ATTENUATOR | BR0592 | 10/28/2013 | Annual | 10/28/2014 |
| REOHDE&SCHWARZ | FSV40/Spectrum Analyzer | 1307.9002K40-100931-NK | 06/10/2013 | Annual | 06/10/2014 |
| Agilent | 8960 (E5515C)/ Base Station | GB45070669 | 08/31/2013 | Annual | 08/31/2014 |

5. SUMMARY OF TEST RESULTS

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result |
|-------------------------------|--|--|----------------|-------------|
| 2.1049, 27.53 | Occupied Bandwidth | N/A | CONDUCTED | PASS |
| 2.1051, 27.53(g), 27.53(h) | Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | < 43 +10 log ₁₀ (P[Watts]) at Band Edge and for all-of-band emissions | | PASS |
| 27.50(d)(5) | Peak-Average Ratio | < 13 dB | | PASS |
| 2.1046 | Conducted Output Power | N/A | | PASS |
| 2.1055, 27.54 | Frequency stability / variation of ambient temperature | < 2.5 ppm | | PASS |
| 27.50(c)(10) | Effective Radiated Power (Band 17) | < 3 Watts max. ERP | RADIATED | PASS |
| | | | | |
| | | | | PASS |
| 2.1053, 27.53(g), 27.53(h) | Undesirable Out-of-Band Emissions | < 43 +10 log ₁₀ (P[Watts]) for all out-of-band emissions | | PASS |

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

| Mode | Ch./ Freq. | | Measured Level(dBm) | Substitute LEVEL(dBm) | Ant. Gain (dBd) | C.L | Pol. | ERP | |
|------|------------|------------|---------------------|-----------------------|-----------------|------|------|-------|-------|
| | channel | Freq.(MHz) | | | | | | W | dBm |
| LTE | 23755 | 706.5 | -28.75 | 29.60 | -10.21 | 0.76 | V | 0.073 | 18.63 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBd) | C.L | Pol | ERP | |
|---------------|-----------|------------|-------------------------|---------------------------|-------------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 706.5 | 5 MHz | QPSK | -30.08 | 28.27 | -10.21 | 0.76 | V | 0.054 | 17.30 |
| | | 16-QAM | -29.65 | 28.70 | -10.21 | 0.76 | V | 0.059 | 17.73 |
| 710.0 | | QPSK | -30.01 | 28.38 | -10.22 | 0.77 | V | 0.055 | 17.39 |
| | | 16-QAM | -29.44 | 28.95 | -10.22 | 0.77 | V | 0.063 | 17.96 |
| 713.5 | | QPSK | -28.84 | 29.95 | -10.24 | 0.78 | V | 0.078 | 18.93 |
| | | 16-QAM | -29.03 | 29.76 | -10.24 | 0.78 | V | 0.075 | 18.74 |

Effective Radiated Power Data (Band 17 – 5 MHz)

Note: Worst case is 1 resource block

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBd) | C.L | Pol | ERP | |
|---------------|-----------|------------|-------------------------|---------------------------|-------------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 709.0 | 10 MHz | QPSK | -29.31 | 29.05 | -10.22 | 0.79 | V | 0.064 | 18.04 |
| | | 16-QAM | -29.11 | 29.25 | -10.22 | 0.79 | V | 0.067 | 18.24 |
| 710.0 | | QPSK | -29.11 | 29.28 | -10.22 | 0.77 | V | 0.067 | 18.29 |
| | | 16-QAM | -28.91 | 29.48 | -10.22 | 0.77 | V | 0.071 | 18.49 |
| 711.0 | | QPSK | -28.89 | 29.68 | -10.23 | 0.77 | V | 0.074 | 18.68 |
| | | 16-QAM | -28.84 | 29.73 | -10.23 | 0.77 | V | 0.075 | 18.73 |

Effective Radiated Power Data (Band 17 – 10 MHz)

Note: Worst case is 1 resource block.

**NOTES:**Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |

7.2 RADIATED SPURIOUS EMISSIONS

7.2.1 RADIATED SPURIOUS EMISSIONS (Band 17)

OPERATING FREQUENCY : 706.50 MHz
 MEASURED OUTPUT POWER: 18.93 dBm = 0.078W
 MODULATION SIGNAL: 5 MHz 16 QAM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.93 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBd) | Substitute Level (dBm) | C.L | Pol | ERP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|-----------|-------|
| 23755 (706.50) | 1413.0 | -49.88 | 5.67 | -53.95 | 1.05 | V | -49.33 | 68.26 |
| | 2119.5 | -41.73 | 7.40 | -45.97 | 1.2 | V | -39.77 | 58.70 |
| | 2826.0 | -49.74 | 8.69 | -53.21 | 1.46 | V | -45.98 | 64.91 |
| 23790 (710.00) | 1420.0 | -52.93 | 5.71 | -57.70 | 1.05 | V | -53.04 | 71.97 |
| | 2130.0 | -41.66 | 7.34 | -45.78 | 1.24 | V | -39.68 | 58.61 |
| | 2840.0 | -50.29 | 8.75 | -54.11 | 1.48 | V | -46.84 | 65.77 |
| 23825 (713.50) | 1427.0 | -52.71 | 5.75 | -57.32 | 1.04 | V | -52.61 | 71.54 |
| | 2140.5 | -42.59 | 7.27 | -46.28 | 1.22 | V | -40.23 | 59.16 |
| | 2854.0 | -52.68 | 8.80 | -56.38 | 1.46 | V | -49.04 | 67.97 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block and 16 QAM.

OPERATING FREQUENCY : 710.00 MHz
 MEASURED OUTPUT POWER: 18.73 dBm = 0.075W
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.73 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBd) | Substitute Level (dBm) | C.L | Pol | ERP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|-----------|-------|
| 23780 (709.00) | 1418.0 | -48.04 | 5.70 | -52.14 | 1.05 | V | -47.49 | 66.22 |
| | 2127.0 | -42.09 | 7.36 | -46.24 | 1.23 | V | -40.11 | 58.84 |
| | 2836.0 | -49.52 | 8.69 | -52.98 | 1.47 | V | -45.76 | 64.49 |
| 23790 (710.00) | 1420.0 | -52.82 | 5.71 | -57.59 | 1.05 | V | -52.93 | 71.66 |
| | 2130.0 | -44.05 | 7.34 | -48.17 | 1.24 | V | -42.07 | 60.80 |
| | 2840.0 | -51.81 | 8.75 | -55.63 | 1.48 | V | -48.36 | 67.09 |
| 23800 (711.00) | 1422.0 | -52.86 | 5.72 | -57.43 | 1.05 | V | -52.76 | 71.49 |
| | 2133.0 | -43.19 | 7.33 | -47.28 | 1.24 | V | -41.19 | 59.92 |
| | 2844.0 | -52.02 | 8.77 | -55.70 | 1.47 | V | -48.40 | 67.13 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block and QPSK.

7.3 PEAK-TO-AVERAGE RATIO

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (dB) |
|---------|------------|-----------------|------------|---------------------|-----------------------|------------|
| Band 17 | 5 MHz | 710.0 | QPSK | 25 | 0 | 4.71 |
| | | | 16-QAM | 25 | 0 | 5.92 |
| | 10 MHz | 710.0 | QPSK | 50 | 0 | 5.28 |
| | | | 16-QAM | 50 | 0 | 5.95 |

- Plots of the EUT's Peak- to- Average Ratio are shown Page 27 ~ 28.

7.4 OCCUPIED BANDWIDTH

| Band | Band Width (MHz) | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (MHz) |
|---------|------------------|-----------------|------------|---------------------|-----------------------|--------------|
| Band 17 | 5 | 710.0 | QPSK | 25 | 0 | 4.4900 |
| | | | 16-QAM | 25 | 0 | 4.4944 |
| | 10 | 710.0 | QPSK | 50 | 0 | 8.9504 |
| | | | 16-QAM | 50 | 0 | 8.9079 |

- Plots of the EUT's Occupied Bandwidth are shown Page 25 ~ 26.

7.5 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Frequency of Maximum Harmonic (GHz) | Maximum Data [dBm] |
|---------|------------------|-----------------|------------|---------------------|-----------------------|-------------------------------------|--------------------|
| Band 17 | 5 | 706.5 | QPSK | 1 | 0 | 6.949750 | -26.16 |
| | | 710.0 | | 1 | 0 | 6.966250 | -26.79 |
| | | 713.5 | | 1 | 0 | 6.906250 | -27.10 |
| | 10 | 709.0 | | 1 | 0 | 6.951750 | -26.79 |
| | | 710.0 | | 1 | 0 | 6.964250 | -25.88 |
| | | 711.0 | | 1 | 0 | 5.578750 | -26.67 |
| | | | | | | | |

Note : Worst case is QPSK for 5 MHz BW and 10 MHz BW.

- Plots of the EUT's Conducted Spurious Emissions are shown Page 33~ 38.

7.5.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 29 ~ 32.

7.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.6.1 FREQUENCY STABILITY (LTE Band 17)


OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23790 (5 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: $\pm 0.00025\%$ or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. () | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|-----------|----------------|----------------------|---------------|--------|
| 100% | 3.80 | +20(Ref) | 710 000 002 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 710 000 003 | 0.60 | 0.000 000 | 0.001 |
| 100% | | -20 | 710 000 000 | -2.70 | 0.000 000 | -0.004 |
| 100% | | -10 | 710 000 001 | -1.00 | 0.000 000 | -0.001 |
| 100% | | 0 | 710 000 001 | -1.80 | 0.000 000 | -0.003 |
| 100% | | +10 | 710 000 001 | -1.50 | 0.000 000 | -0.002 |
| 100% | | +30 | 709 999 999 | -3.00 | 0.000 000 | -0.004 |
| 100% | | +40 | 710 000 000 | -2.00 | 0.000 000 | -0.003 |
| 100% | | +50 | 710 000 003 | 0.70 | 0.000 000 | 0.001 |
| 115% | 4.35 | +20 | 710 000 004 | 1.70 | 0.000 000 | 0.002 |
| Batt. Endpoint | 3.42 | +20 | 709 999 999 | -3.80 | -0.000 001 | -0.005 |

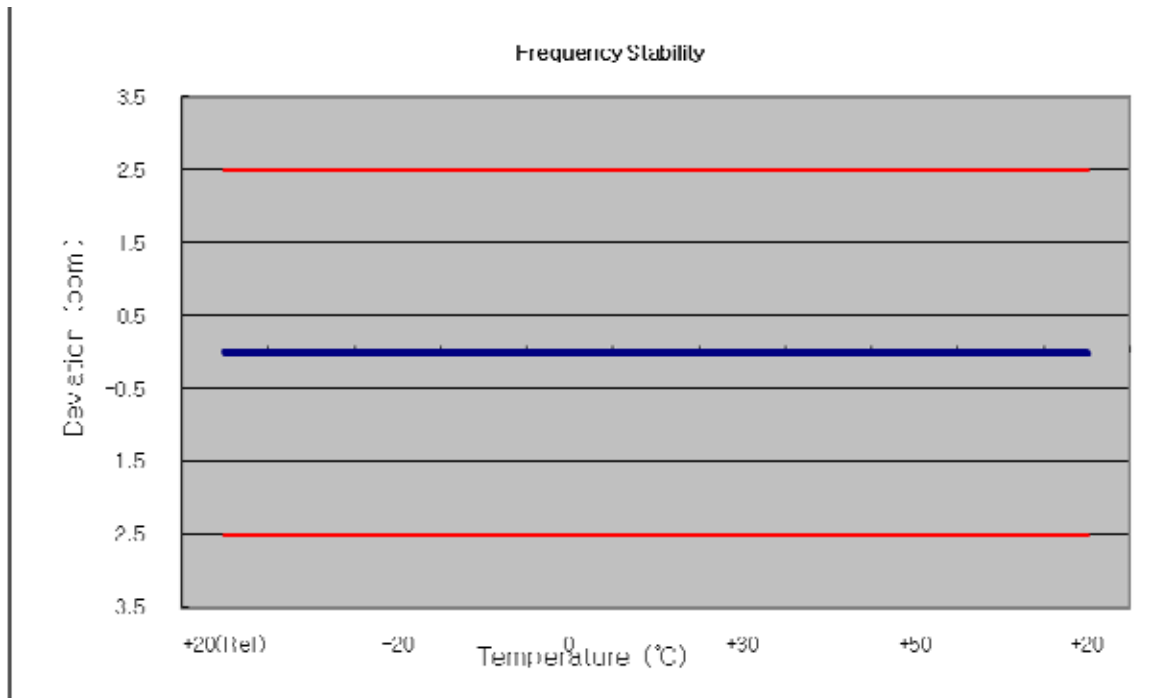

OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23790 (10 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. () | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|----------------|--------------|-------------------|-------------------------|------------------|--------|
| 100% | 3.80 | +20(Ref) | 710 000 003 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 710 000 003 | 0.60 | 0.000 000 | 0.001 |
| 100% | | -20 | 710 000 002 | -0.80 | 0.000 000 | -0.001 |
| 100% | | -10 | 710 000 000 | -3.00 | 0.000 000 | -0.004 |
| 100% | | 0 | 709 999 999 | -3.50 | 0.000 000 | -0.005 |
| 100% | | +10 | 710 000 003 | -0.20 | 0.000 000 | 0.000 |
| 100% | | +30 | 710 000 004 | 1.50 | 0.000 000 | 0.002 |
| 100% | | +40 | 710 000 001 | -2.10 | 0.000 000 | -0.003 |
| 100% | | +50 | 710 000 001 | -1.90 | 0.000 000 | -0.003 |
| 115% | 4.35 | +20 | 710 000 002 | -0.40 | 0.000 000 | -0.001 |
| Batt. Endpoint | 3.42 | +20 | 710 000 004 | 1.00 | 0.000 000 | 0.001 |

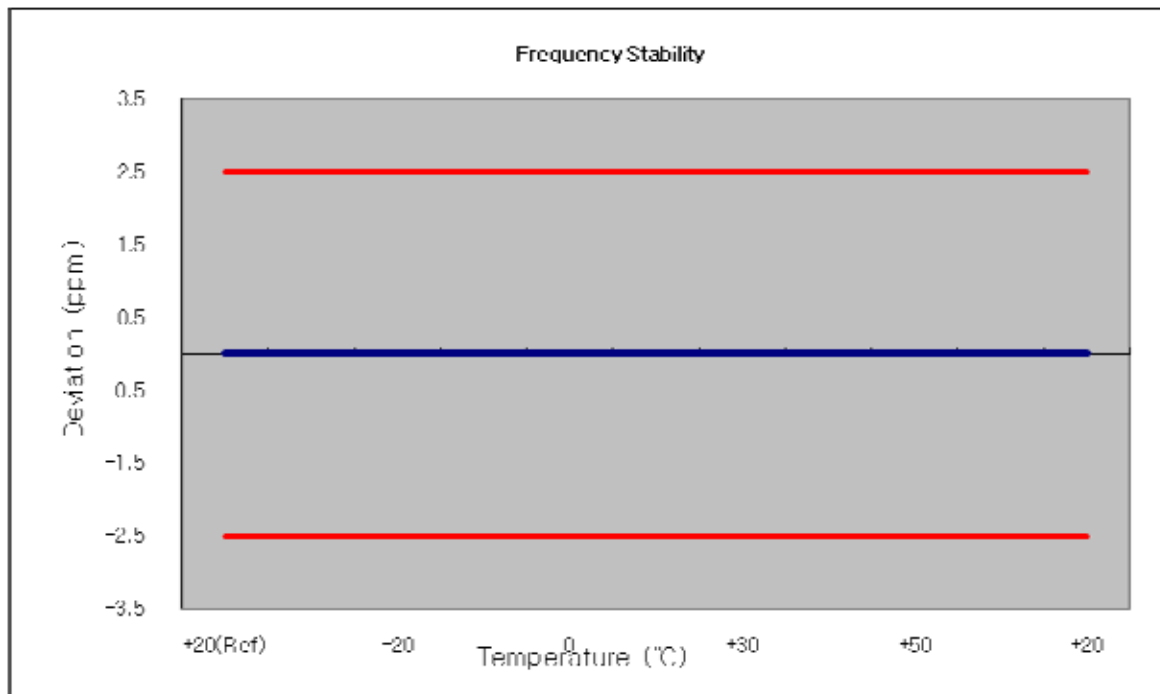




8. TEST PLOTS

| FCC CERTIFICATION REPORT | | | www.hct.co.kr |
|------------------------------------|--------------------------------|---|--|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | FCC ID: ZNFLGL24 |

BAND 17. Occpied Bandwidth Plot (5M BW Ch.23790 QPSK RB 25)



BAND 17. Occpied Bandwidth Plot (5M BW Ch.23790 16QAM RB 25)

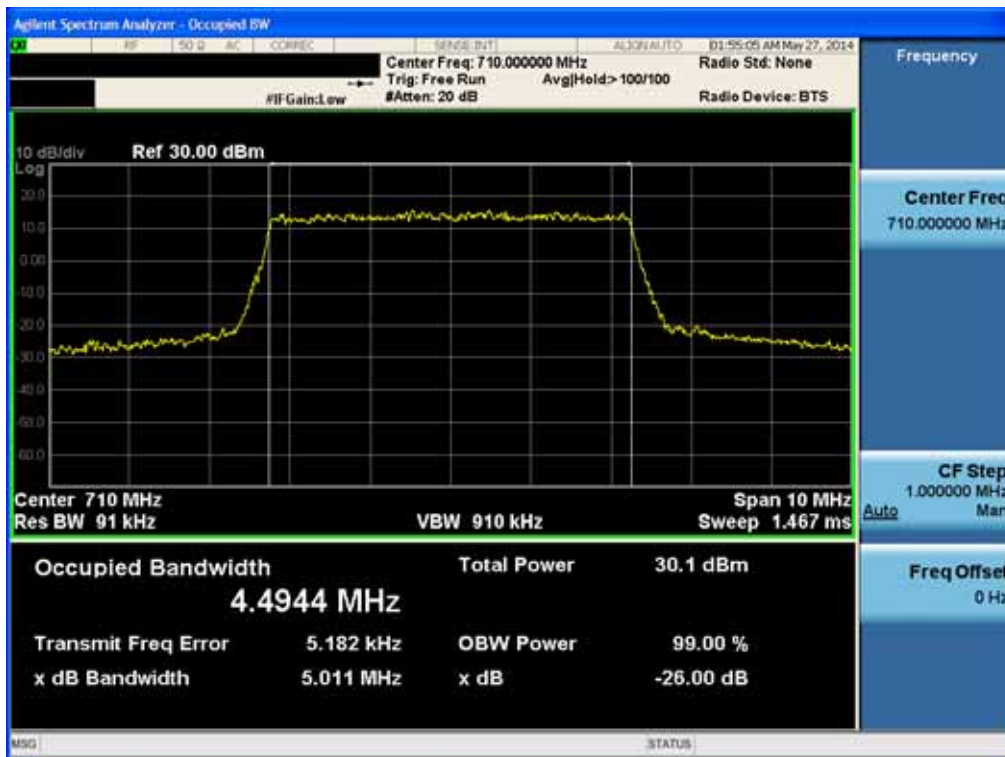


FCC CERTIFICATION REPORT

| | | | |
|------------------------------------|--------------------------------|---|---|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | www.hct.co.kr FCC ID: ZNFLGL24 |
|------------------------------------|--------------------------------|---|---|

BAND 17. Occpied Bandwidth Plot (10M BW Ch.23790 QPSK RB 50)



BAND 17. Occpied Bandwidth Plot (10M BW Ch.23790 16QAM RB 50)

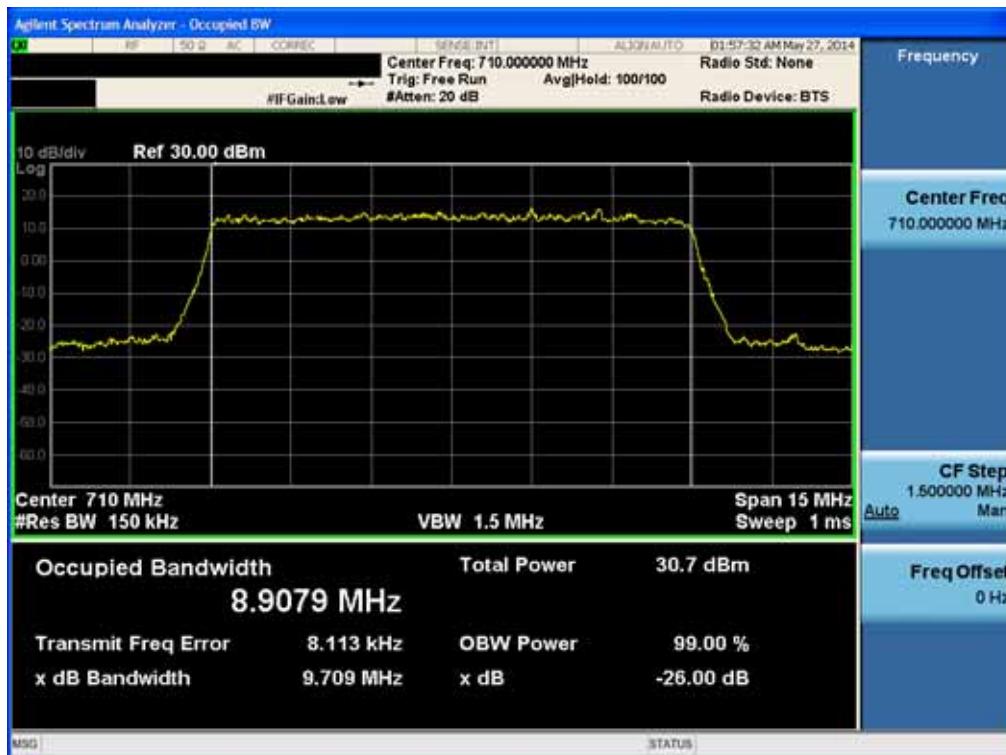

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Peak to Average Ratio Plot (5M BW Ch.23790 QPSK RB 25)

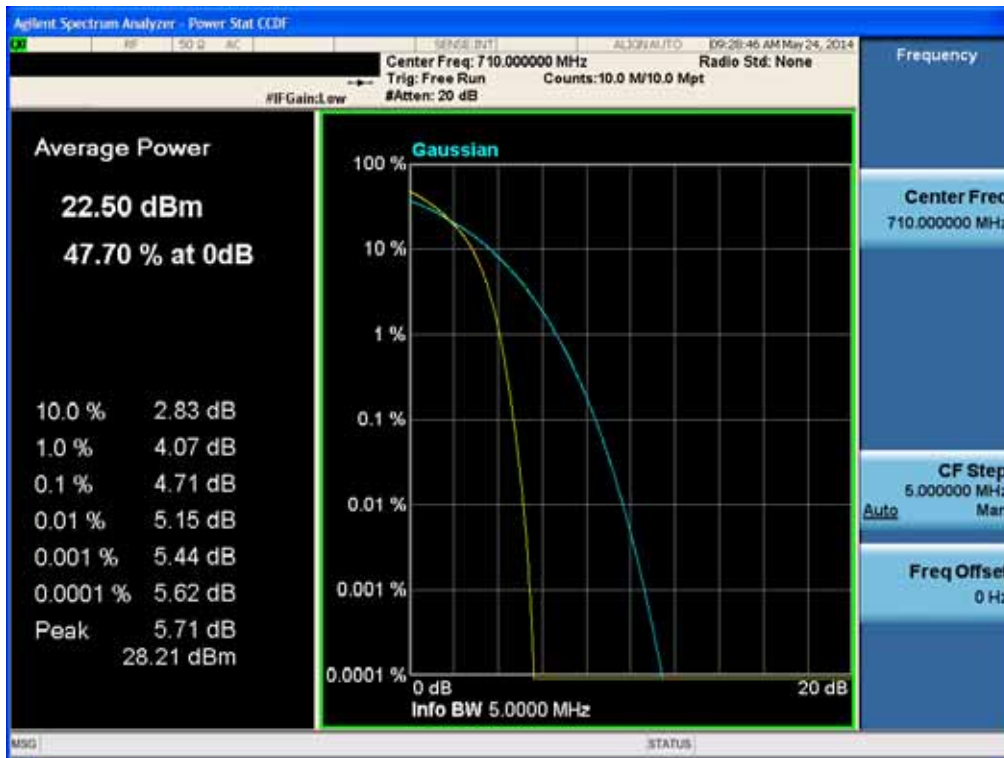


BAND 17. Peak to Average Ratio Plot (5M BW Ch.23790 16QAM RB 25)



FCC CERTIFICATION REPORT

| | | | |
|------------------------------------|--------------------------------|---|---|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | www.hct.co.kr FCC ID: ZNFLGL24 |
|------------------------------------|--------------------------------|---|---|

BAND 17. Peak to Average Ratio Plot (10M BW Ch.23790 QPSK RB 50)

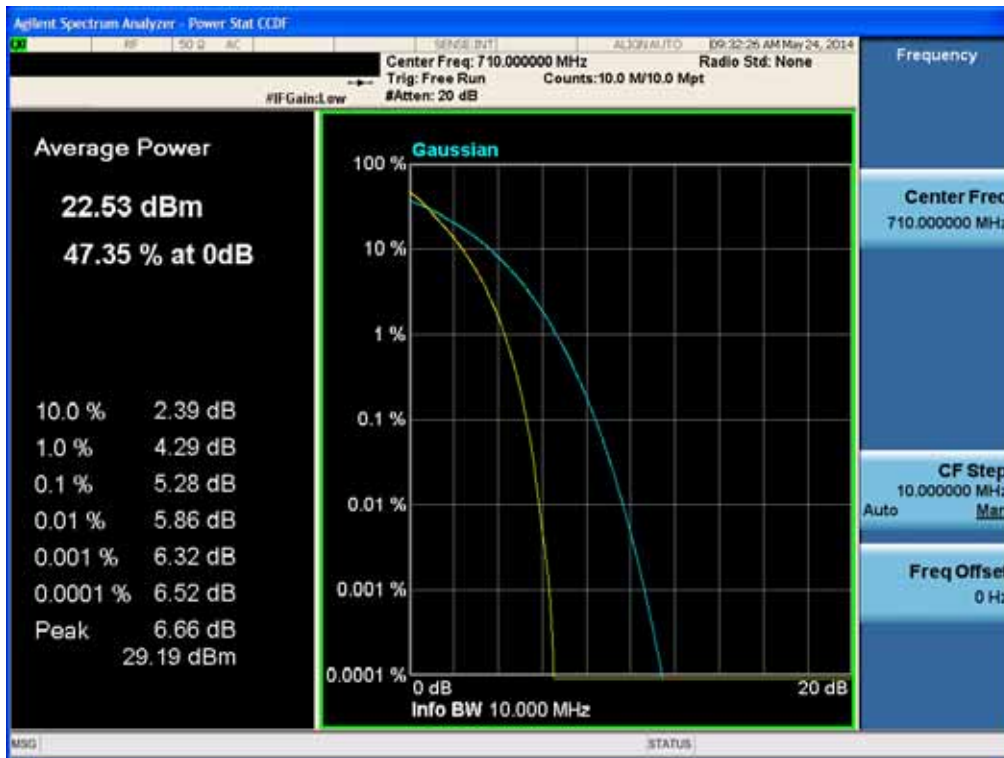


BAND 17. Peak to Average Ratio Plot (10M BW Ch.23790 16QAM RB 50)



FCC CERTIFICATION REPORT

| | | | |
|------------------------------------|--------------------------------|---|---|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | www.hct.co.kr FCC ID: ZNFLGL24 |
|------------------------------------|--------------------------------|---|---|

BAND 17. Lower Band Edge Plot (5M BW Ch.23755 QPSK RB 1, Offset 0) -1

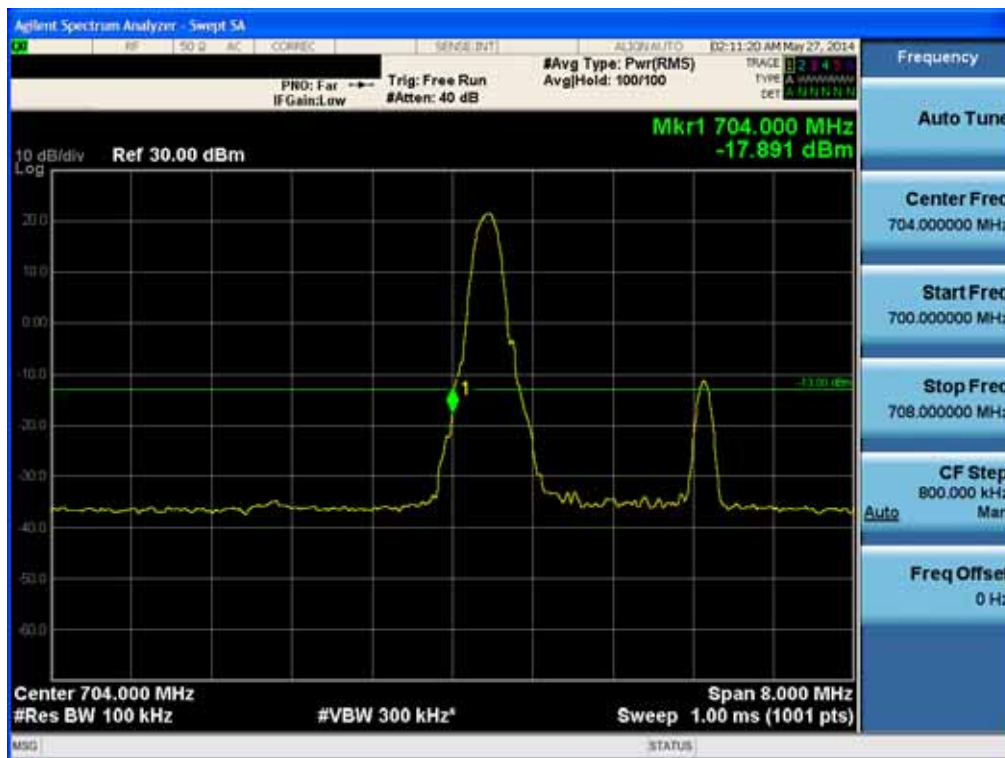

BAND 17. Lower Band Edge Plot (5M BW Ch.23755 QPSK RB 25) -2



FCC CERTIFICATION REPORT


Test Report No.
HCT-R-1405-F037

Date of Issue:
May 27, 2014


EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

www.hct.co.kr
FCC ID:
ZNFLGL24

BAND 17. Lower Band Edge Plot (10M BW Ch.23780 QPSK RB 1, Offset 0) -1

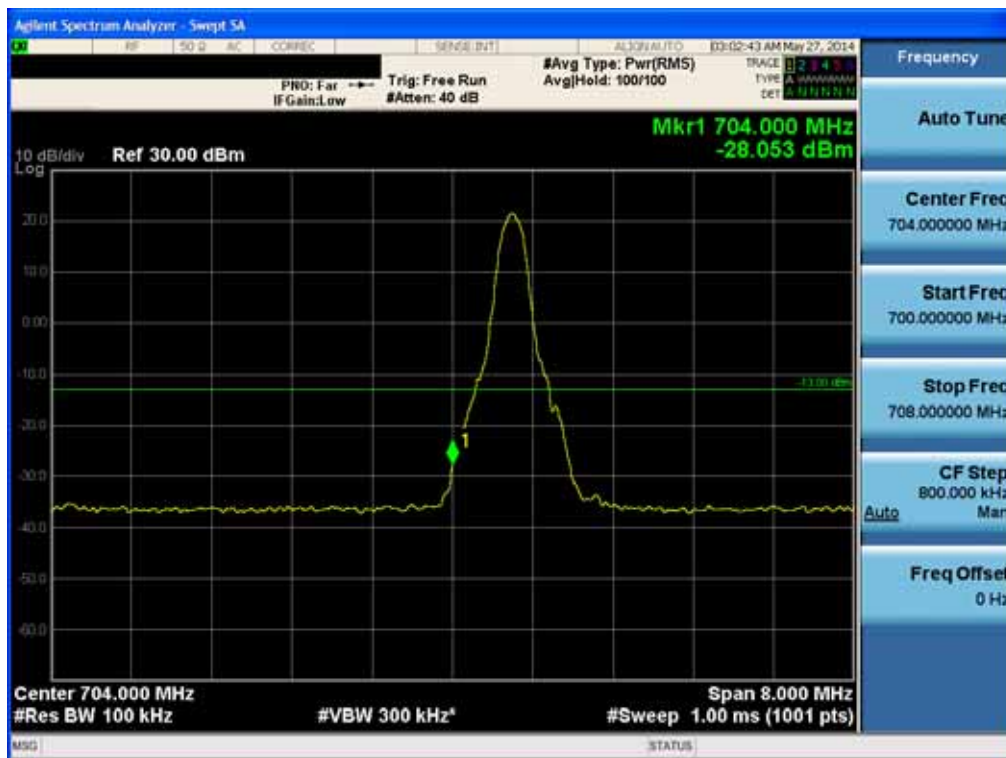

BAND 17. Lower Band Edge Plot (10M BW Ch.23780 QPSK RB 50) -2

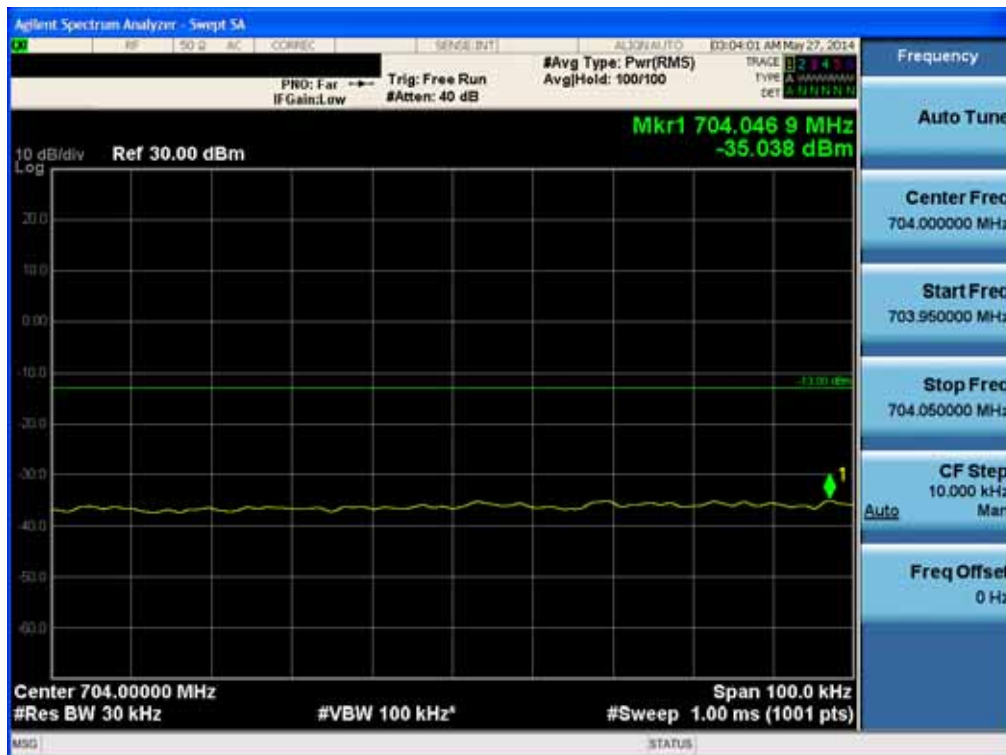

FCC CERTIFICATION REPORT


Test Report No.
HCT-R-1405-F037

Date of Issue:
May 27, 2014


EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

www.hct.co.kr
FCC ID:
ZNFLGL24

BAND 17. Upper Band Edge Plot (5M BW Ch.23825 QPSK RB 1, Offset 24) -1

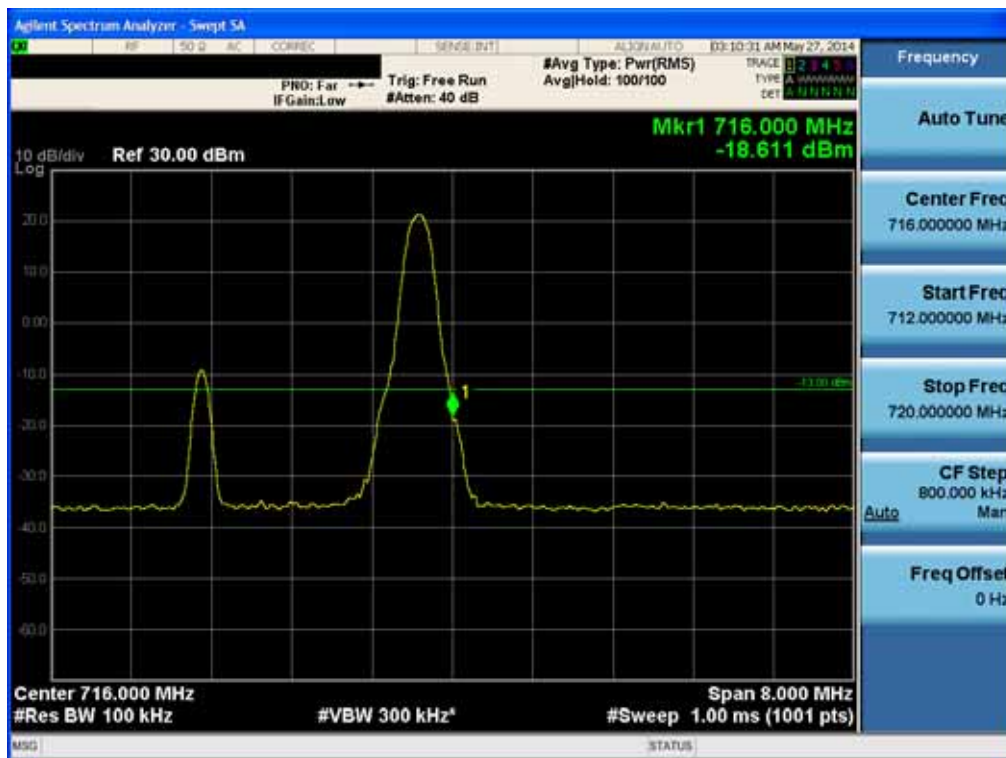

BAND 17. Upper Band Edge Plot (5M BW Ch.23825 QPSK RB 25) -2

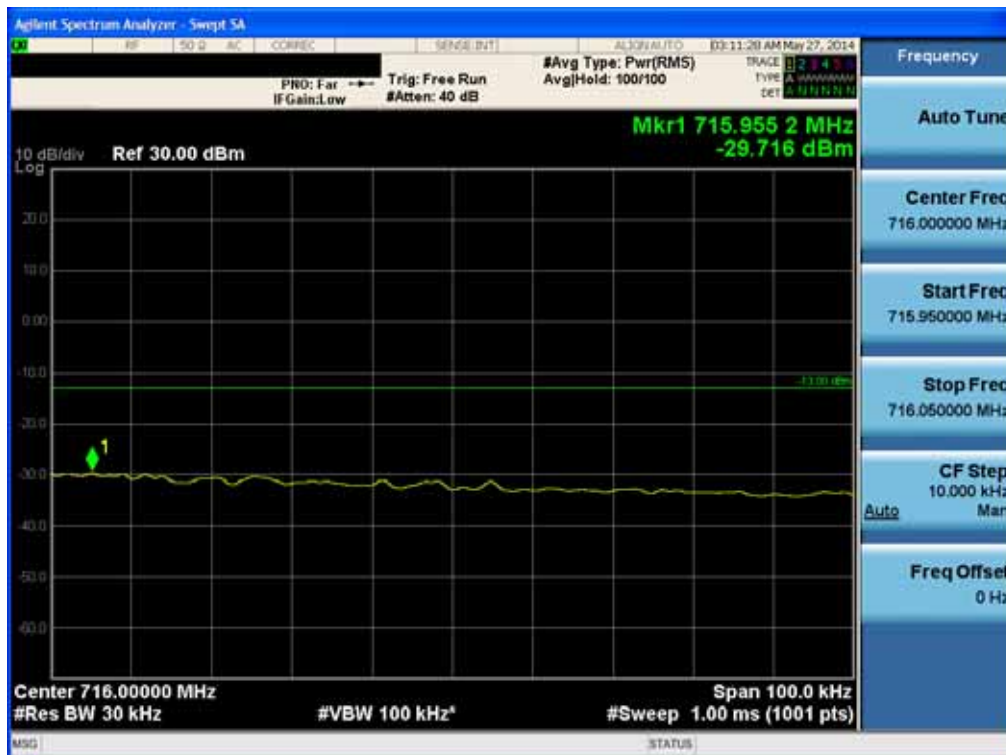

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Upper Band Edge Plot (10M BW Ch.23800 QPSK RB 1, Offset 49) -1

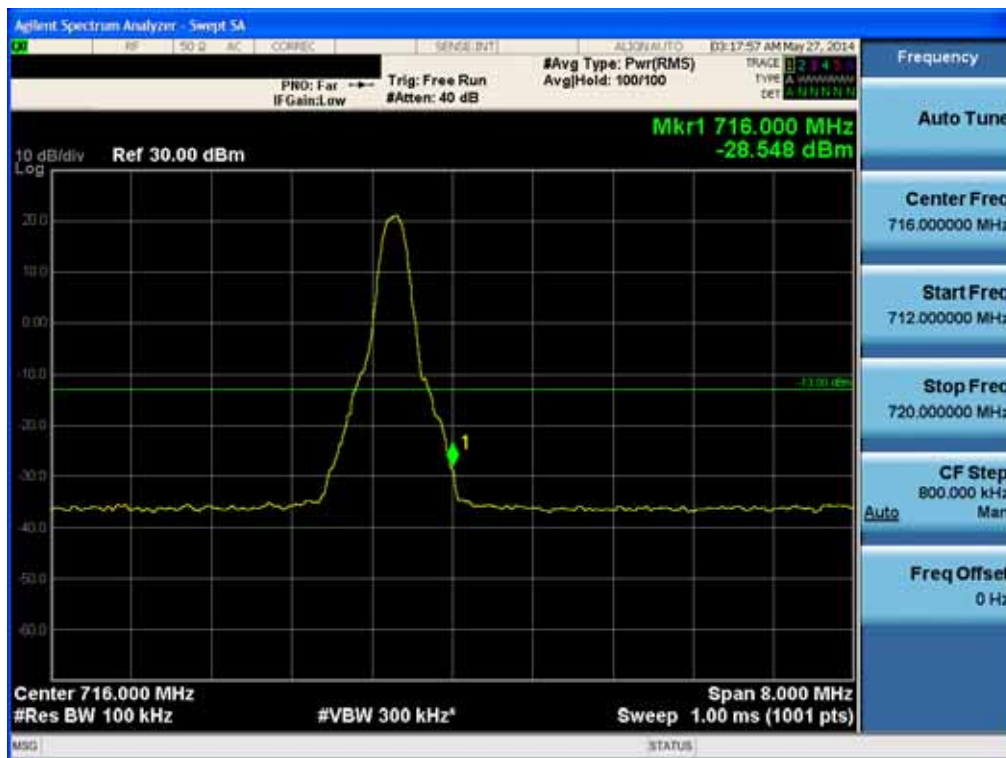

BAND 17. Upper Band Edge Plot (10M BW Ch.23800 QPSK RB 50) -2

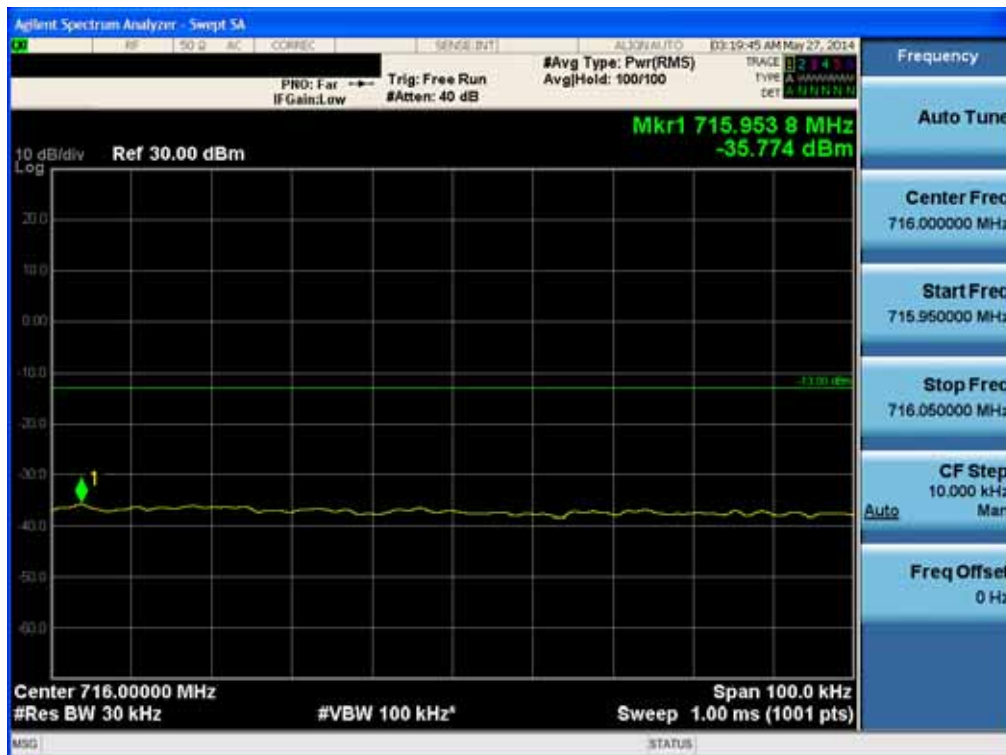

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Conducted Spurious Plot_1 (23755ch_5MHz_QPSK_RB 1_0)

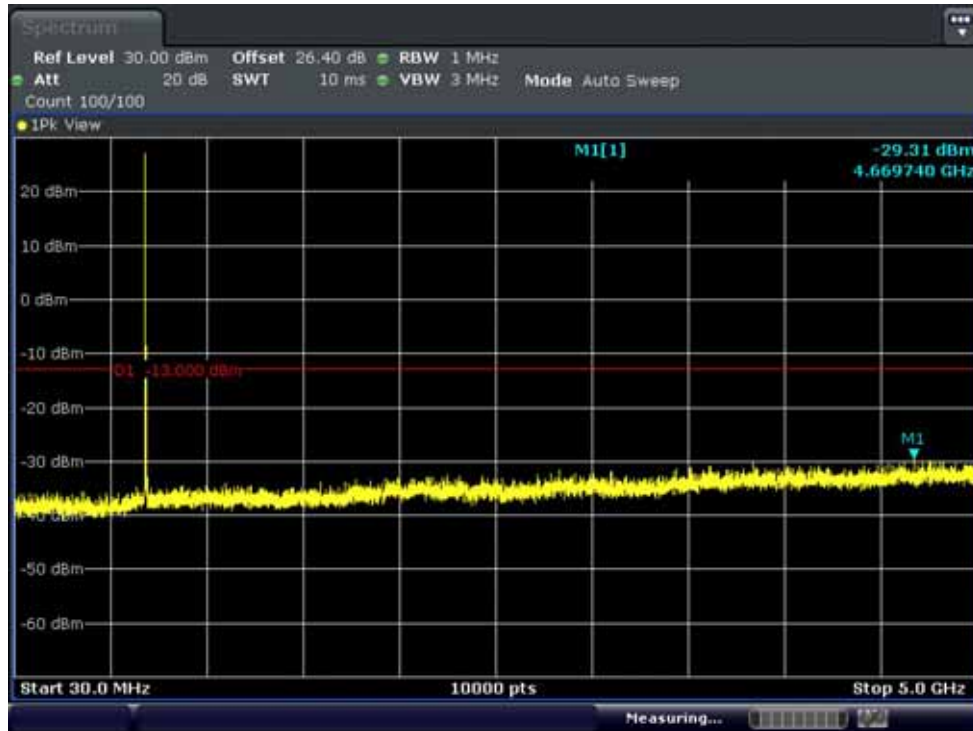

BAND 17. Conducted Spurious Plot_2 (23755ch_5MHz_QPSK_RB 1_0)

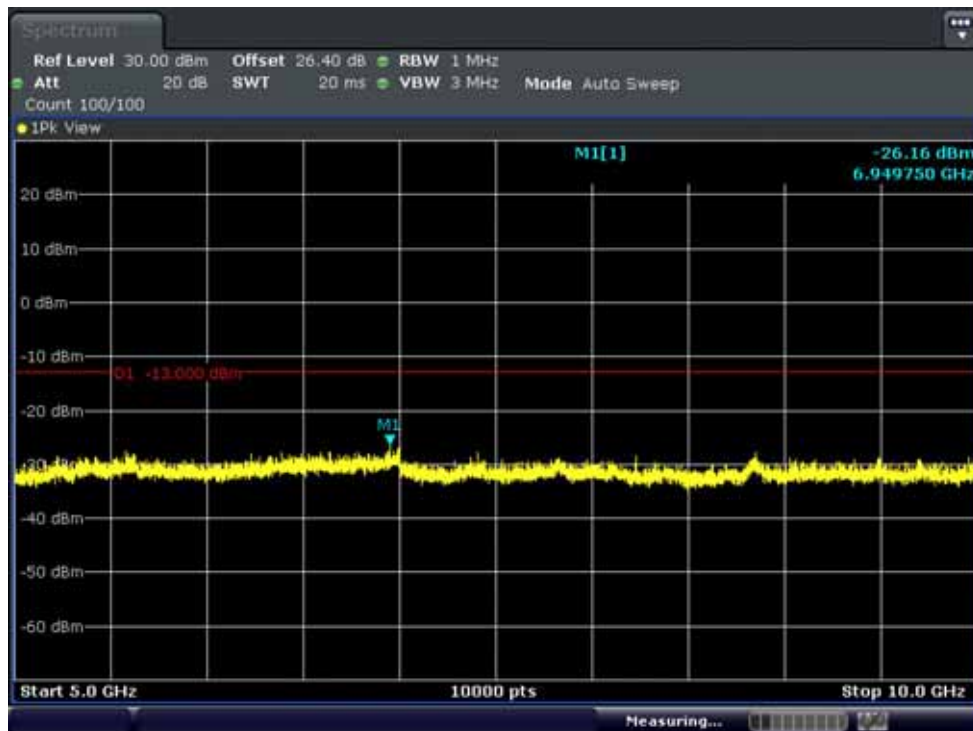

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Conducted Spurious Plot_1 (23790ch_5MHz_QPSK_RB 1_0)

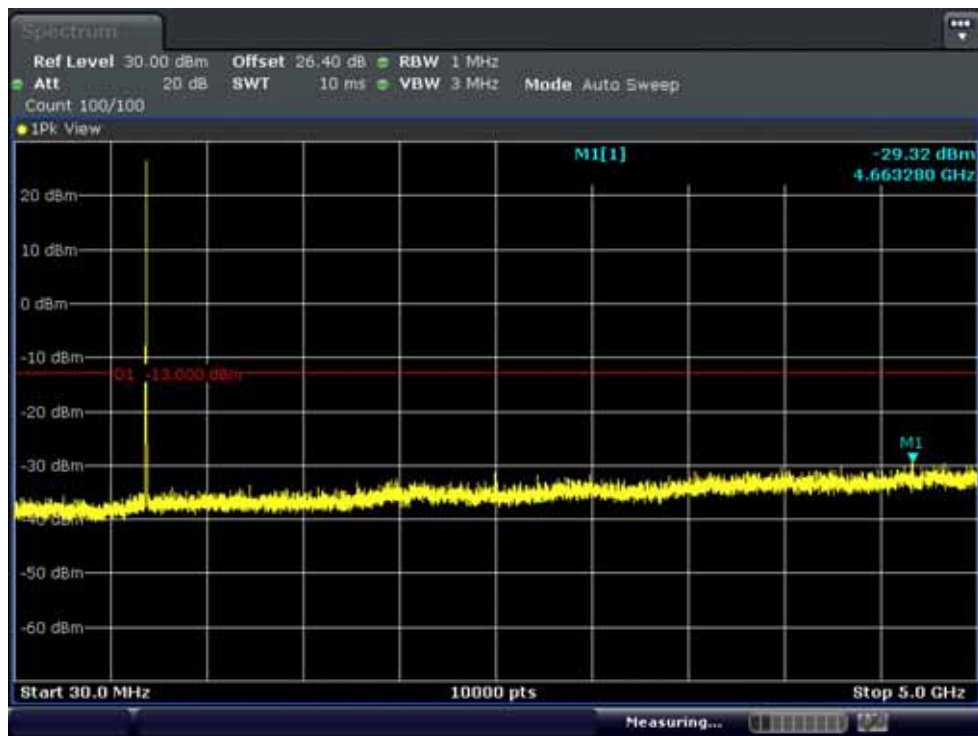


BAND 17. Conducted Spurious Plot_2 (23790ch_5MHz_QPSK_RB 1_0)

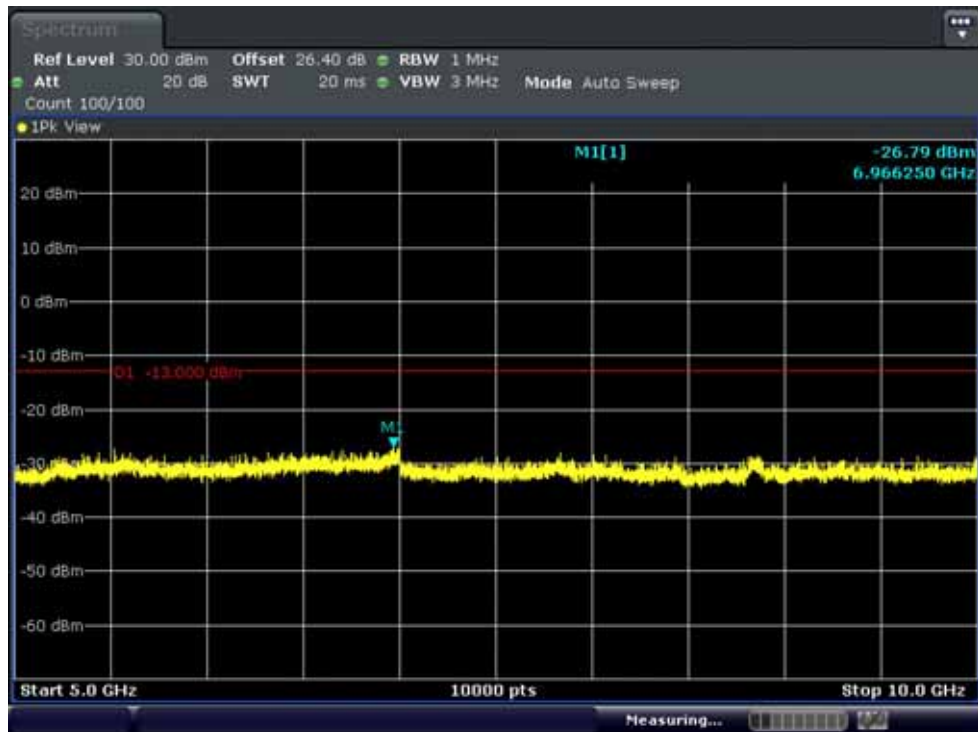


FCC CERTIFICATION REPORT

| | | | |
|------------------------------------|--------------------------------|---|---|
| Test Report No. HCT-R-1405-F037 | Date of Issue: May 27, 2014 | EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC | www.hct.co.kr FCC ID: ZNFLGL24 |
|------------------------------------|--------------------------------|---|---|

BAND 17. Conducted Spurious Plot_1 (23825ch_5MHz_QPSK_RB 1_0)

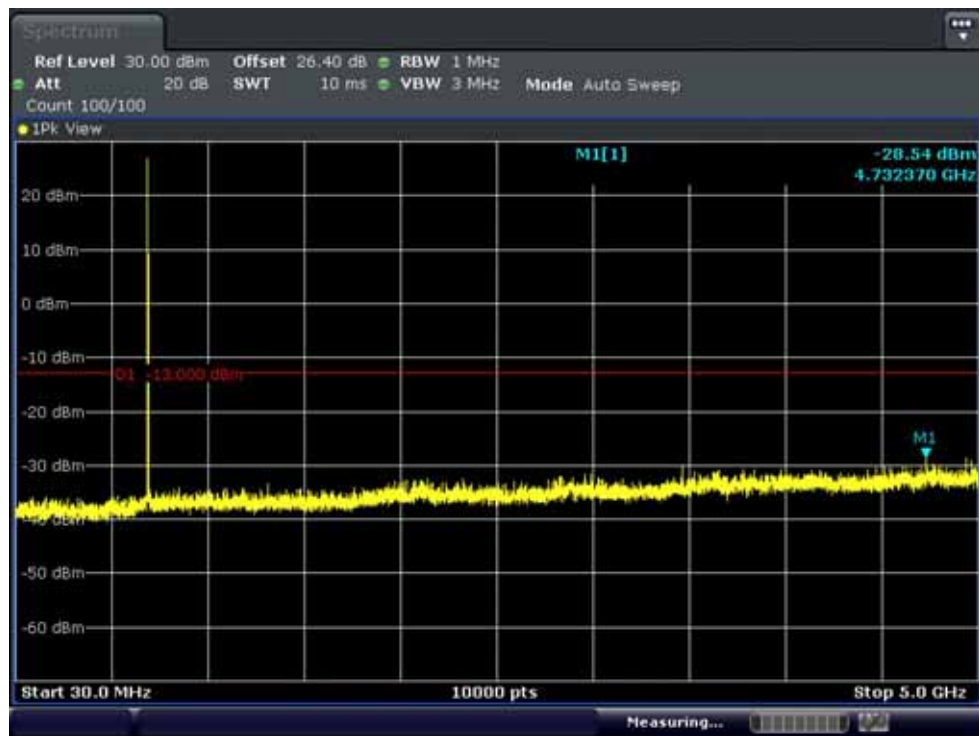

BAND 17. Conducted Spurious Plot_2 (23825ch_5MHz_QPSK_RB 1_0)

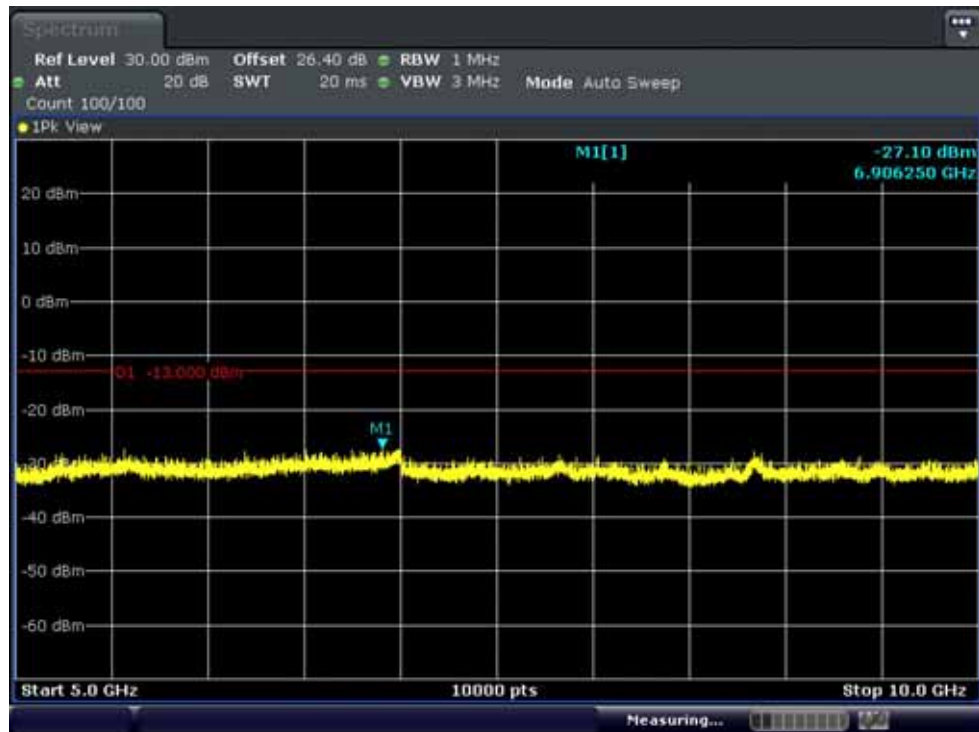

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Conducted Spurious Plot_1 (23780ch_10MHz_QPSK_RB 1_0)

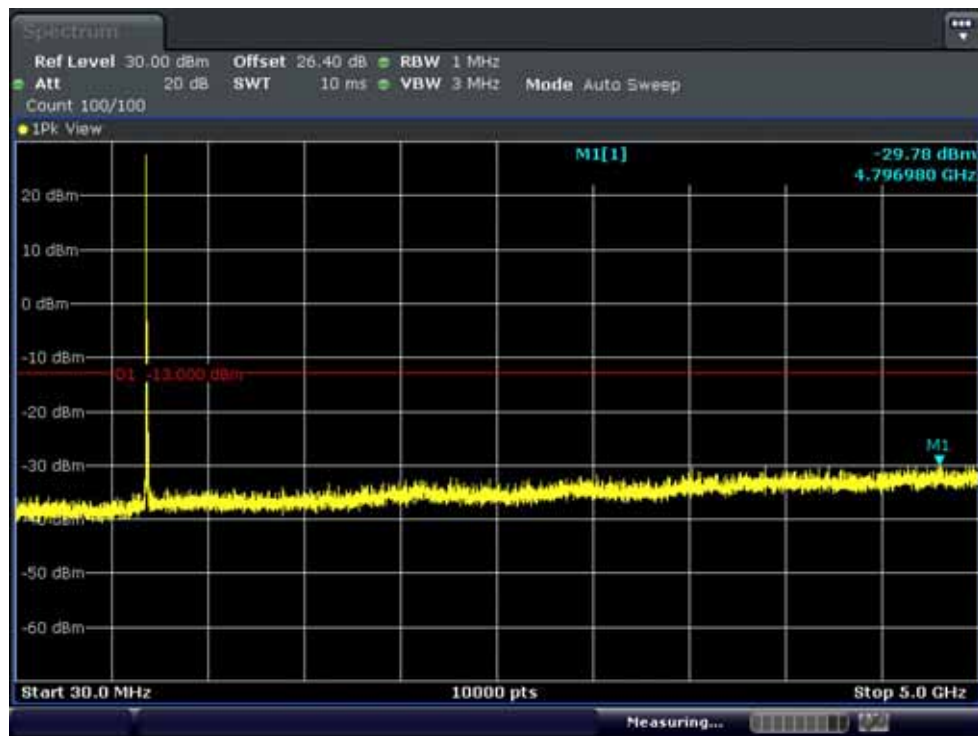

BAND 17. Conducted Spurious Plot_2 (23780ch_10MHz_QPSK_RB 1_0)

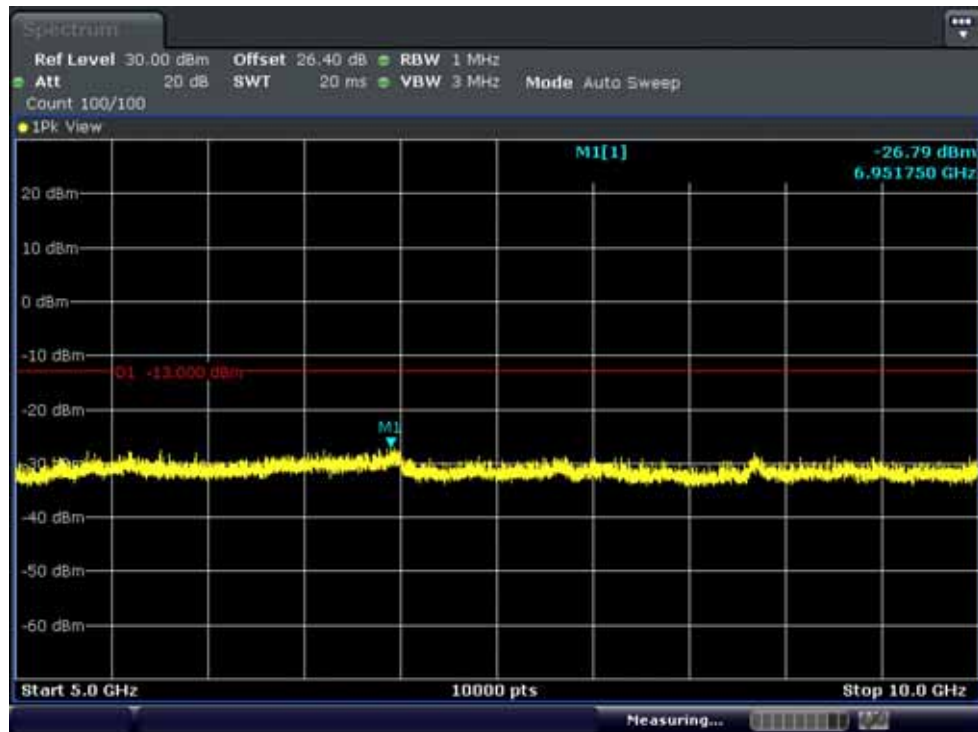

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Conducted Spurious Plot_1 (23790ch_10MHz_QPSK_RB 1_0)

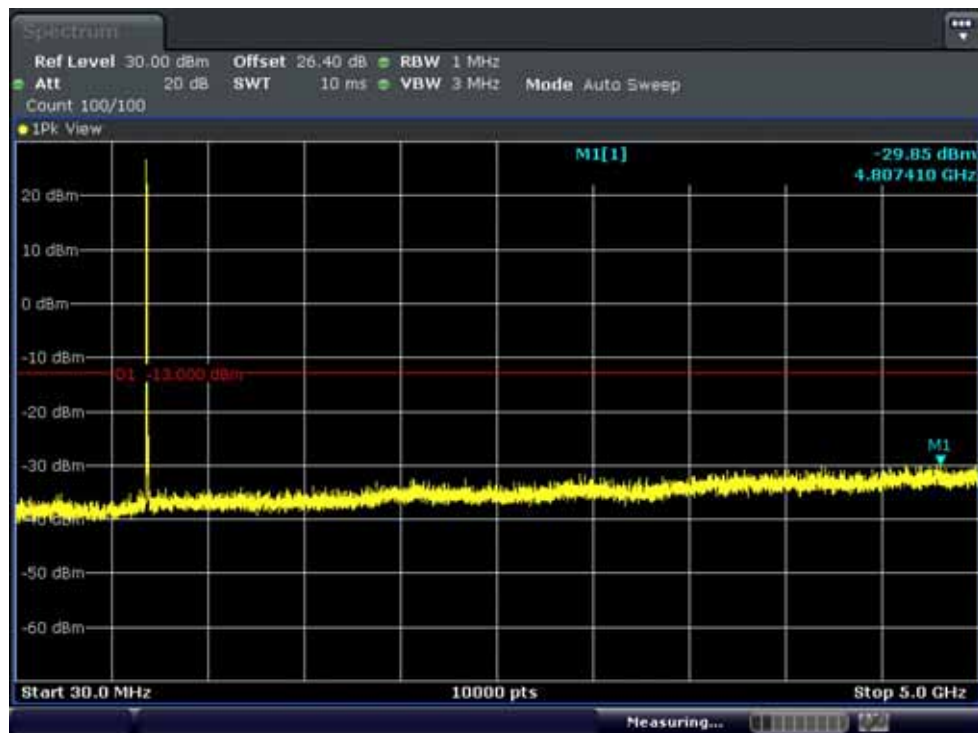

BAND 17. Conducted Spurious Plot_2 (23790ch_10MHz_QPSK_RB 1_0)

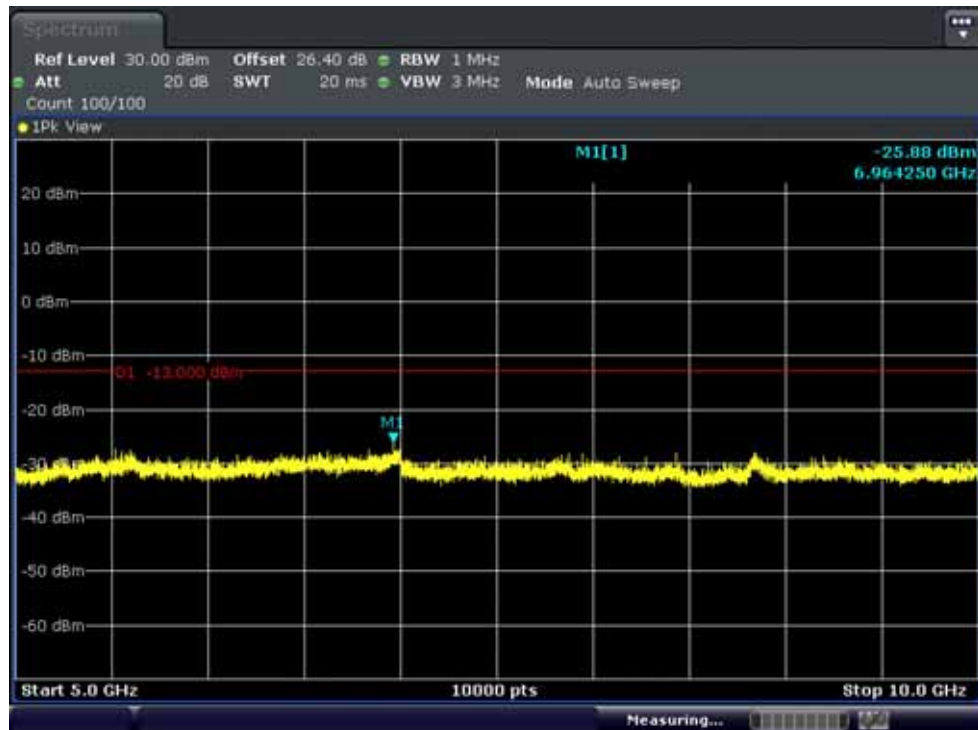

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037


Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC


www.hct.co.kr

FCC ID:
ZNFLGL24

BAND 17. Conducted Spurious Plot_1 (23800ch_10MHz_QPSK_RB 1_0)

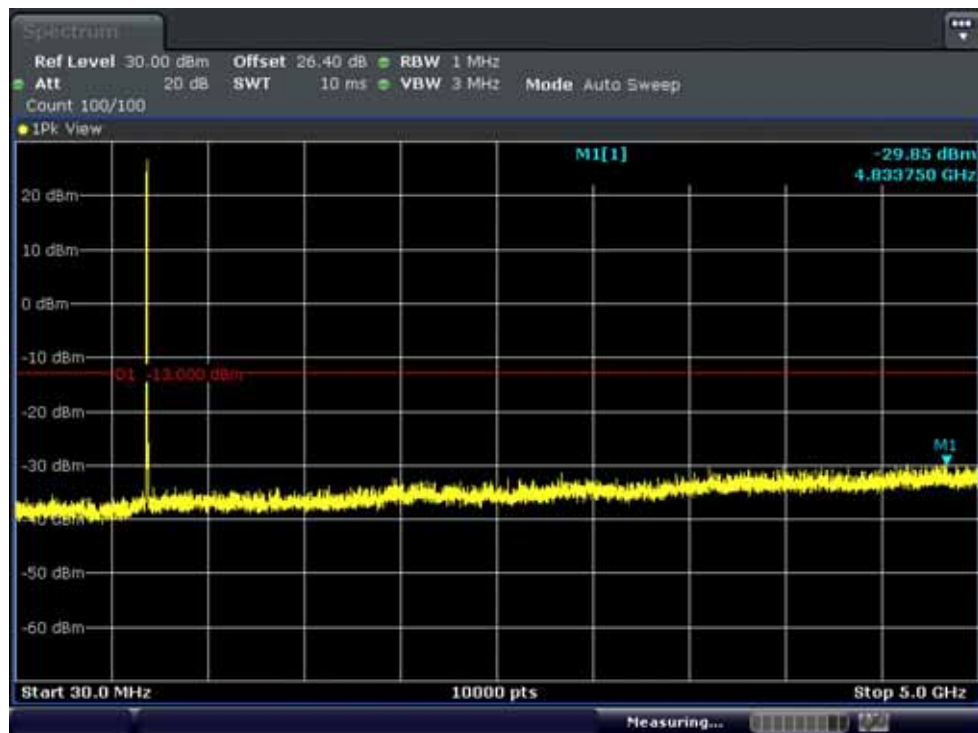

BAND 17. Conducted Spurious Plot_2 (23800ch_10MHz_QPSK_RB 1_0)

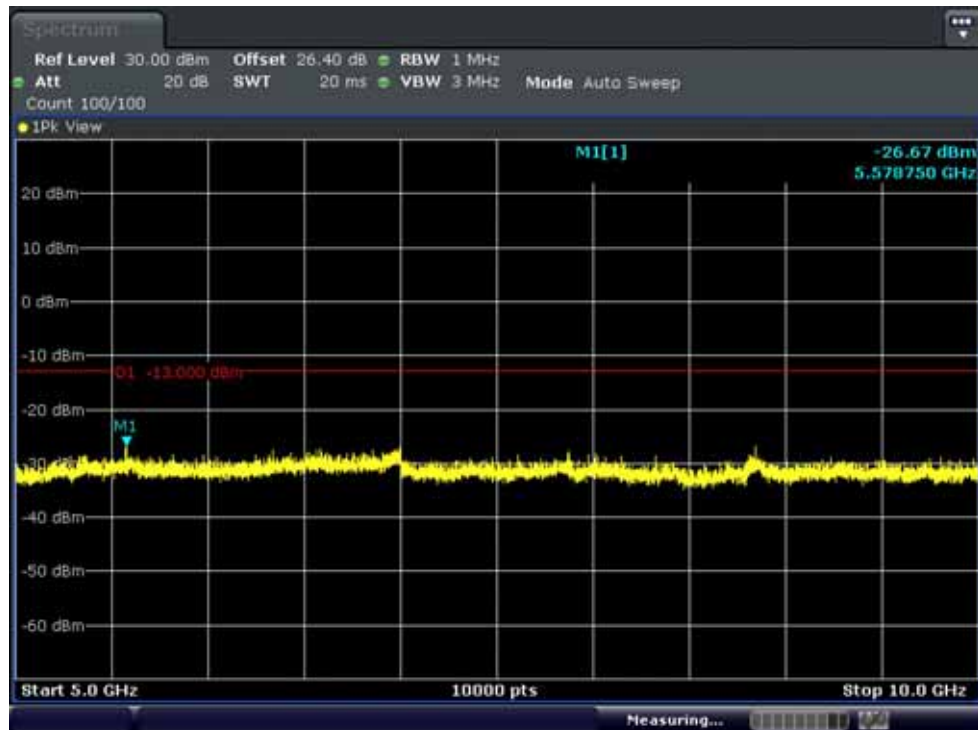

FCC CERTIFICATION REPORT

Test Report No.
HCT-R-1405-F037

Date of Issue:
May 27, 2014

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

www.hct.co.kr

FCC ID:
ZNFLGL24