

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:

June 02, 2014

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1406-F009

HCT FRN: 0005866421

FCC ID : ZNFLGL24

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LGL24

EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC

RF Output Field Strength 7.41 dBuV/m

Frequency of Operation: 13.560118 MHz

Modulation type ASK

FCC Classification: Low Power Communication Device – Transmitter

FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Kyoung Houn Seo
Test Engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1406-F009	June 02, 2014	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	10
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	13
9. EMISSION BANDWIDTH PLOT.....	14
10. FREQUENCY TOLERANCE	15
11. POWERLINE CONDUCTE EMISSIONS.....	16
12. LIST OF TEST EQUIPMENT	25
12.1 LIST OF TEST EQUIPMENT(Conducted Test)	25
12.2 LIST OF TEST EQUIPMENT(Radiated Test).....	26



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFLGL24
EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC
Model name(s): LGL24
Date(s) of Tests: May 02, 2014 ~ June 02, 2014
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

Product	Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC
FCC Model Name	LGL24
Power Supply	DC 3.8 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	13.560118 MHz
Transmit Power	7.41 dBuV/m
Modulation Type	ASK
Antenna Specification	Manufacturer: AT&C Co., LTD. Antenna type: FPCB Antenna

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009).

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With

FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2009	13.553MHz to 13.567MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2009	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	9kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	30MHz to 1GHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2009	150kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2009	0.01% of nominal
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2009	-

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~ 1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.


(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

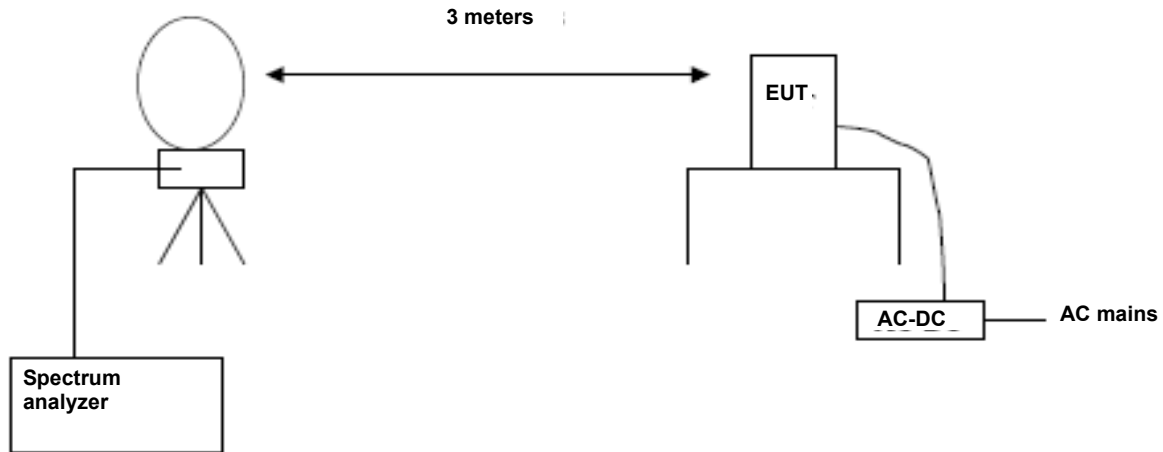

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

$$\text{Corrected Amplitude} = \text{Raw Amplitude(dB}\mu\text{V/m)} + \text{ACF(dB)} + \text{Cable Loss(dB)} - \text{Distance Correction Factor}$$

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.560118 (H)*	21.13	19.58	-40	0.71	84	83.29
13.560118 (V)*	27.83	19.58	-40	7.41	84	76.59

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5530	16.07	19.58	-40	-4.35	50.47	54.82
13.5670	16.87	19.58	-40	-3.55	50.47	54.02

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.1196	10.97	19.58	-40	-9.45	40.51	49.96
13.8576	11.04	19.58	-40	-9.38	40.51	49.89

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
10.4373	10.92	19.58	-40	-9.50	29.54	39.04
19.7024	10.49	18.58	-40	-10.93	29.54	40.47
27.1257	10.77	18.58	-40	-10.65	29.54	40.19
27.1274	10.90	18.58	-40	-10.52	29.54	40.06


Note :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = -40 \text{ dB}$
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. We have done x, y, z planes in EUT
6. Antenna rotated about its vertical/horizontal axis for maximum response at each azimuth position around the EUT.
7. Worst case of operating mode is type A, analog mode and 106 kbps.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

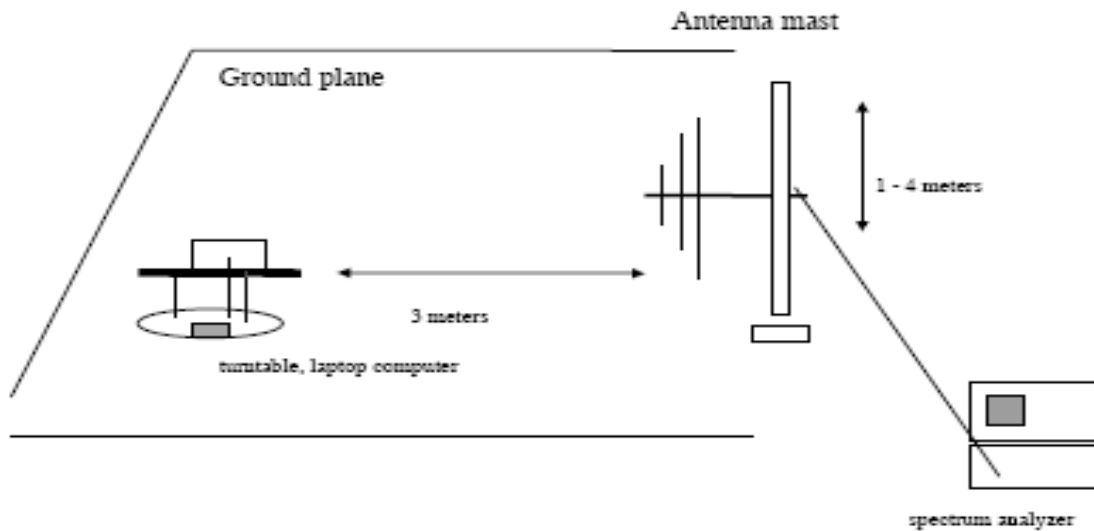

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
Mhz	dBμV	dB /m	dB	(H/V)	dBμV/m	dBμV/m	dB
38.67	21.27	12.01	0.97	H	34.25	40.0	5.75
48.28	18.96	12.79	1.08	H	32.83	40.0	7.17
52.71	20.49	13.25	1.17	V	34.91	40.0	5.09
76.23	23.18	9.16	1.46	H	33.8	40.0	6.2
138.49	22.28	12.01	1.89	H	36.18	43.5	7.32
157.28	20.55	13.26	2.12	V	35.93	43.5	7.57

Remark


1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

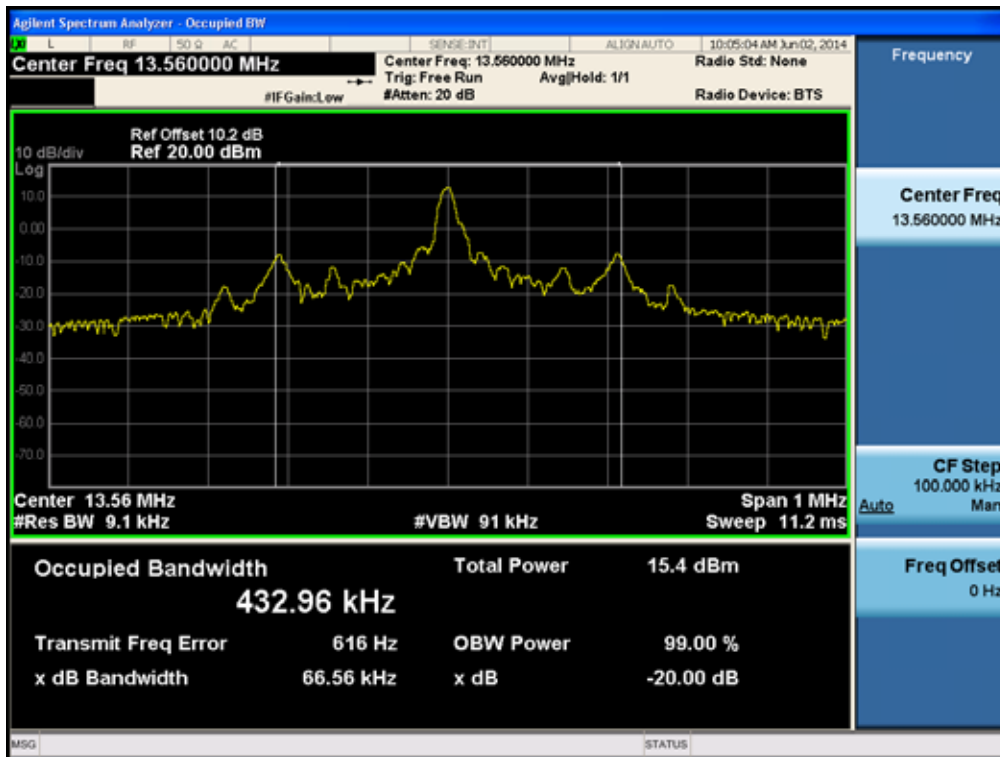

10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE	POWER	Temperature	Frequency	Frequency Error
(%)		(°C)	(MHz)	(Hz)
100%	3.8 V	-20	13.560179	61
100%		-10	13.560157	39
100%		0	13.560153	35
100%		10	13.560138	20
100%		20	13.560118	0
100%		30	13.560103	-15
100%		40	13.560096	-22
100%		50	13.560080	-38
115%	4.37	20	13.560136	18
Batt. Endpoint	3.23	20	13.560144	26

11. POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. The EUT is the device with a detachable antenna operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Test Plots

Untermine the Antenna

Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LGL24
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC(UNTERMINATED)
 Operator Name: KH-SEO

FCC CLASS B

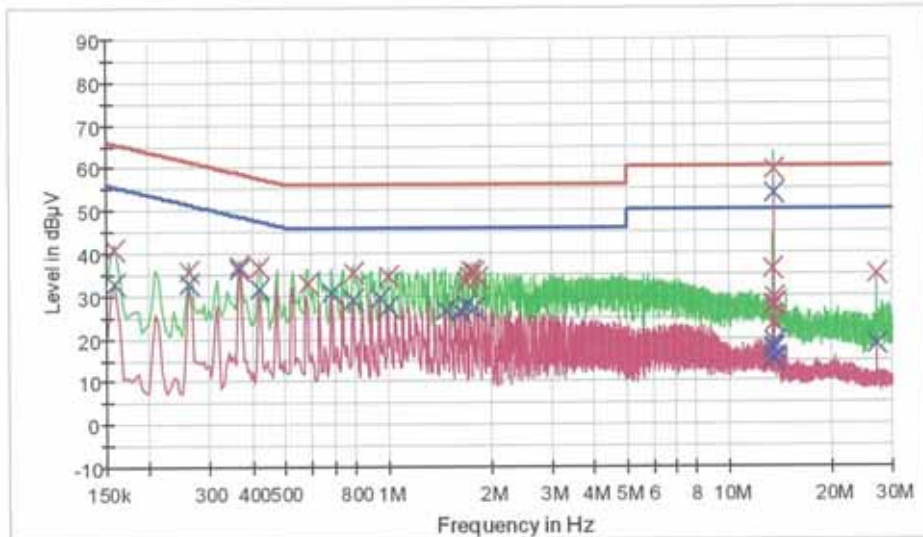

— FCC CLASS B_GP — FCC CLASS B_AV — Preview Result 1-PK
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	40.9	9.000	Off	L1	9.7	24.6	65.6
0.262500	35.9	9.000	Off	L1	9.7	25.5	61.4
0.366000	36.9	9.000	Off	L1	9.7	21.7	58.6
0.420000	36.8	9.000	Off	L1	9.7	20.6	57.4
0.581000	33.0	9.000	Off	L1	9.7	23.0	56.0
0.788000	35.4	9.000	Off	L1	9.7	20.6	56.0
0.999500	34.6	9.000	Off	L1	9.7	21.4	56.0
1.688000	33.5	9.000	Off	L1	9.8	22.5	56.0
1.737500	34.7	9.000	Off	L1	9.8	21.3	56.0
1.755500	35.9	9.000	Off	L1	9.8	20.1	56.0
1.787000	35.3	9.000	Off	L1	9.8	20.7	56.0
1.841000	34.1	9.000	Off	L1	9.8	21.9	56.0
13.473500	27.9	9.000	Off	L1	10.6	32.1	60.0
13.482500	36.2	9.000	Off	L1	10.6	23.8	60.0
13.505000	23.4	9.000	Off	L1	10.6	36.6	60.0
13.523000	28.0	9.000	Off	L1	10.6	32.0	60.0

5/26/2014

11:26:10

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.559000	59.4	9.000	Off	L1	10.6	0.6	60.0
13.622000	29.4	9.000	Off	L1	10.6	30.6	60.0
27.126500	34.8	9.000	Off	L1	11.3	25.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	32.9	9.000	Off	L1	9.7	22.6	55.5
0.262500	32.8	9.000	Off	L1	9.7	18.6	51.4
0.366000	36.4	9.000	Off	L1	9.7	12.2	48.6
0.420000	31.7	9.000	Off	L1	9.7	15.7	47.4
0.684500	30.6	9.000	Off	L1	9.7	15.4	46.0
0.788000	29.0	9.000	Off	L1	9.7	17.0	46.0
0.945500	29.3	9.000	Off	L1	9.7	16.7	46.0
0.999500	27.5	9.000	Off	L1	9.7	18.5	46.0
1.472000	26.8	9.000	Off	L1	9.8	19.2	46.0
1.629500	26.2	9.000	Off	L1	9.8	19.8	46.0
1.683500	27.7	9.000	Off	L1	9.8	18.3	46.0
1.787000	26.9	9.000	Off	L1	9.8	19.1	46.0
13.473500	17.7	9.000	Off	L1	10.6	32.3	50.0
13.482500	15.2	9.000	Off	L1	10.6	34.8	50.0
13.505000	17.9	9.000	Off	L1	10.6	32.1	50.0
13.559000	53.7	9.000	Off	L1	10.6	-3.7	50.0
13.568000	19.0	9.000	Off	L1	10.6	31.0	50.0
13.577000	15.2	9.000	Off	L1	10.6	34.8	50.0
27.126500	18.4	9.000	Off	L1	11.3	31.6	50.0

5/26/2014

11:26:10

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

Conducted Emissions (Line 2)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LGL24
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC(UNTERMINATED)
 Operator Name: KH-SEO

FCC CLASS B

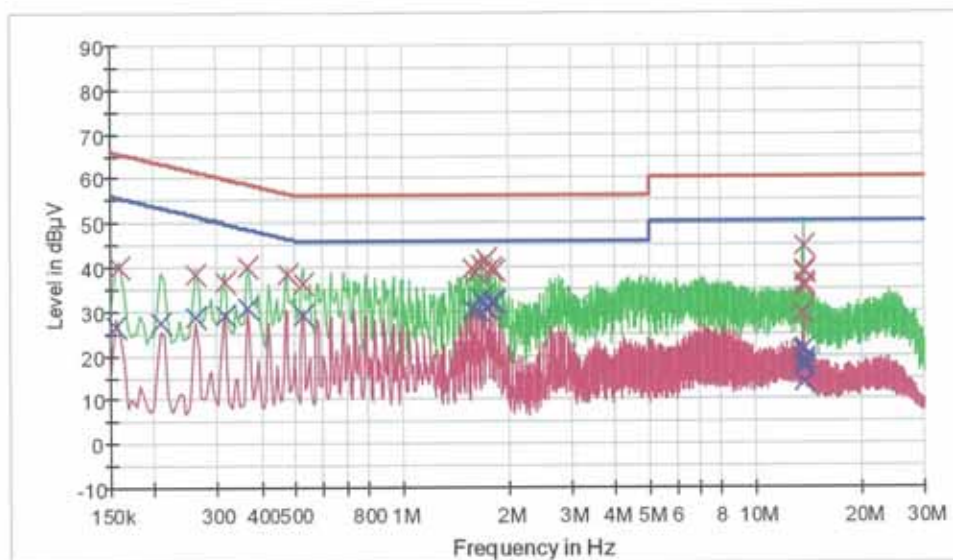

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK
 — Preview Result 2-AVG — Final Result 1-QPK — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	40.0	9.000	Off	N	9.7	25.5	65.5
0.262500	38.2	9.000	Off	N	9.7	23.2	61.4
0.316500	36.6	9.000	Off	N	9.7	23.2	59.8
0.366000	39.8	9.000	Off	N	9.7	18.8	58.6
0.474000	38.5	9.000	Off	N	9.7	18.0	56.4
0.527000	36.3	9.000	Off	N	9.7	19.7	56.0
1.575500	39.4	9.000	Off	N	9.8	16.6	56.0
1.625000	38.7	9.000	Off	N	9.8	17.4	56.0
1.679000	40.5	9.000	Off	N	9.8	15.5	56.0
1.733000	41.9	9.000	Off	N	9.8	14.1	56.0
1.782500	39.8	9.000	Off	N	9.8	16.2	56.0
1.836500	39.2	9.000	Off	N	9.8	16.8	56.0
13.658000	29.6	9.000	Off	N	10.5	30.4	60.0
13.671500	38.6	9.000	Off	N	10.5	21.4	60.0
13.680500	35.4	9.000	Off	N	10.5	24.6	60.0
13.689500	36.2	9.000	Off	N	10.5	23.8	60.0

5/26/2014

11:11:58

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.698500	39.2	9.000	Off	N	10.5	20.8	60.0
13.770500	44.6	9.000	Off	N	10.5	15.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	26.7	9.000	Off	N	9.7	29.1	55.8
0.208500	27.2	9.000	Off	N	9.7	26.1	53.3
0.262500	28.8	9.000	Off	N	9.7	22.6	51.4
0.316500	29.3	9.000	Off	N	9.7	20.5	49.8
0.366000	30.9	9.000	Off	N	9.7	17.7	48.6
0.527000	28.9	9.000	Off	N	9.7	17.1	46.0
1.575500	30.4	9.000	Off	N	9.8	15.6	46.0
1.629500	30.3	9.000	Off	N	9.8	15.7	46.0
1.679000	32.7	9.000	Off	N	9.8	13.3	46.0
1.728500	30.6	9.000	Off	N	9.8	15.4	46.0
1.782500	31.8	9.000	Off	N	9.8	14.2	46.0
1.836500	31.9	9.000	Off	N	9.8	14.1	46.0
13.658000	21.0	9.000	Off	N	10.5	29.0	50.0
13.671500	18.2	9.000	Off	N	10.5	31.8	50.0
13.680500	18.8	9.000	Off	N	10.5	31.2	50.0
13.689500	21.4	9.000	Off	N	10.5	28.6	50.0
13.698500	17.4	9.000	Off	N	10.5	32.6	50.0
13.770500	13.9	9.000	Off	N	10.5	36.1	50.0

5/26/2014

11:11:58

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

Terminate the Antenna Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LGL24
Manufacturer: LG
Test Site: SHIELD ROOM
Operating Conditions: NFC(TERMINATED)
Operator Name: KH-SEO

FCC CLASS B

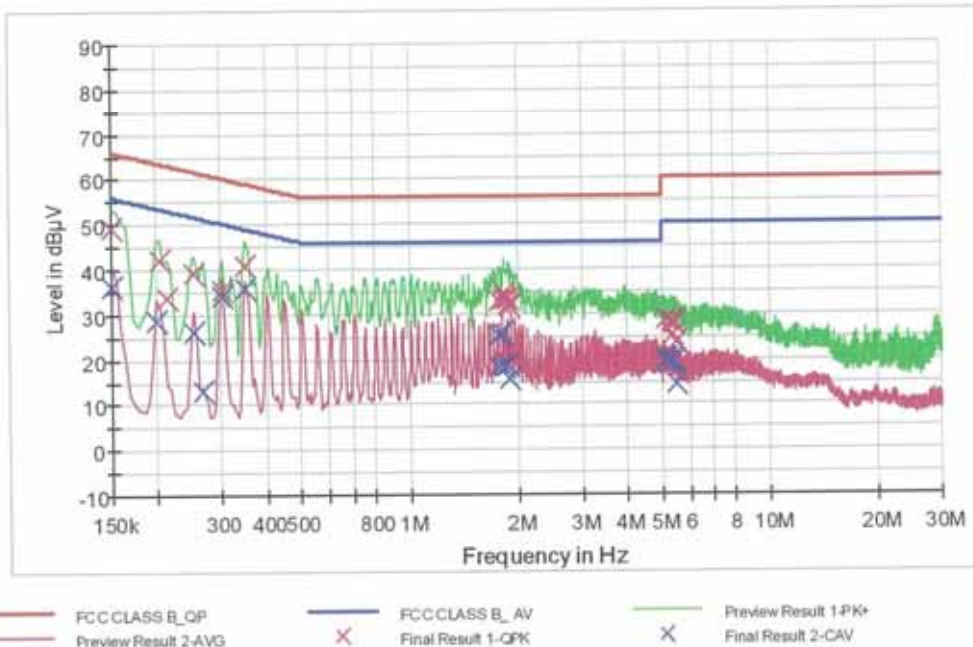

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.1	9.000	Off	L1	9.7	16.9	66.0
0.204000	42.0	9.000	Off	L1	9.7	21.4	63.4
0.213000	33.9	9.000	Off	L1	9.7	29.2	63.1
0.253500	39.2	9.000	Off	L1	9.7	22.4	61.6
0.303000	35.4	9.000	Off	L1	9.7	24.8	60.2
0.352500	40.6	9.000	Off	L1	9.7	18.3	58.9
1.778000	33.1	9.000	Off	L1	9.8	22.9	56.0
1.823000	33.2	9.000	Off	L1	9.8	22.8	56.0
1.832000	34.7	9.000	Off	L1	9.8	21.3	56.0
1.868000	32.2	9.000	Off	L1	9.8	23.8	56.0
1.877000	33.1	9.000	Off	L1	9.8	22.9	56.0
1.886000	31.6	9.000	Off	L1	9.8	24.4	56.0
5.139500	28.6	9.000	Off	L1	10.1	31.4	60.0
5.288000	28.4	9.000	Off	L1	10.1	31.6	60.0
5.351000	25.3	9.000	Off	L1	10.1	34.7	60.0
5.387000	27.8	9.000	Off	L1	10.1	32.2	60.0

5/26/2014

1:01:16

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
5.432000	27.8	9.000	Off	L1	10.1	32.2	60.0
5.468000	23.7	9.000	Off	L1	10.1	36.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	36.4	9.000	Off	L1	9.7	19.6	56.0
0.199500	28.9	9.000	Off	L1	9.7	24.7	53.6
0.253500	26.0	9.000	Off	L1	9.7	25.6	51.6
0.267000	13.0	9.000	Off	L1	9.7	38.2	51.2
0.303000	34.3	9.000	Off	L1	9.7	15.9	50.2
0.352500	36.0	9.000	Off	L1	9.7	12.9	48.9
1.764500	25.4	9.000	Off	L1	9.8	20.6	46.0
1.778000	18.0	9.000	Off	L1	9.8	28.0	46.0
1.814000	25.8	9.000	Off	L1	9.8	20.2	46.0
1.832000	18.1	9.000	Off	L1	9.8	27.9	46.0
1.877000	18.6	9.000	Off	L1	9.8	27.4	46.0
1.886000	15.7	9.000	Off	L1	9.8	30.3	46.0
5.139500	20.0	9.000	Off	L1	10.1	30.0	50.0
5.193500	19.1	9.000	Off	L1	10.1	30.9	50.0
5.243000	19.5	9.000	Off	L1	10.1	30.5	50.0
5.288000	19.6	9.000	Off	L1	10.1	30.4	50.0
5.445500	19.2	9.000	Off	L1	10.1	30.8	50.0
5.468000	14.5	9.000	Off	L1	10.1	35.5	50.0

Conducted Emissions (Line 2)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LGL24
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC(TERMINATED)
 Operator Name: KH-SEO

FCC CLASS B

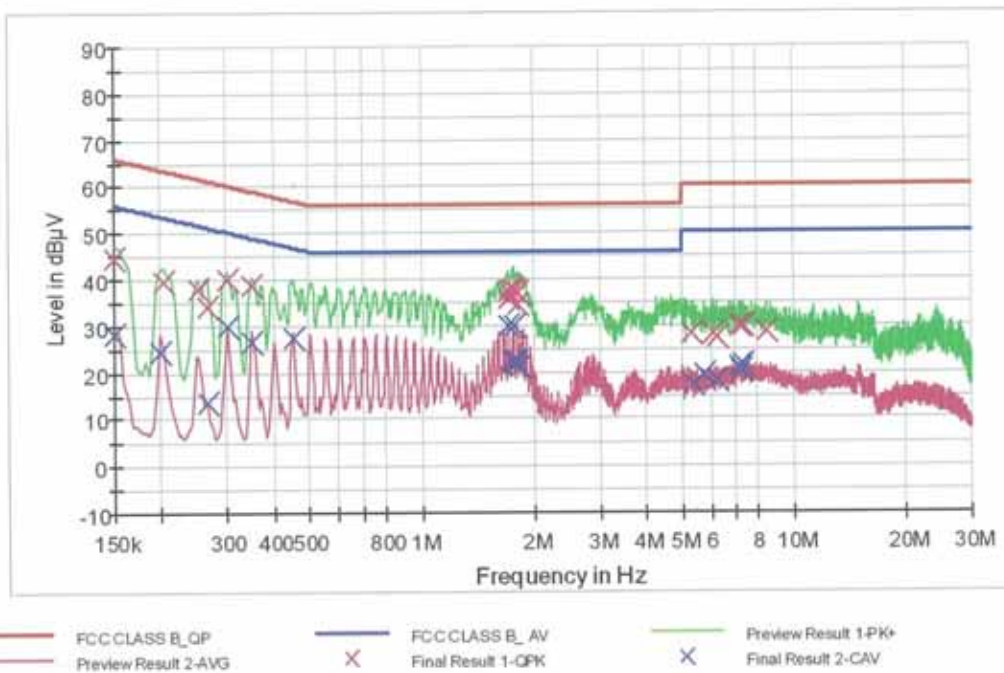

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	44.5	9.000	Off	N	9.7	21.5	66.0
0.204000	39.7	9.000	Off	N	9.7	23.7	63.4
0.253500	37.7	9.000	Off	N	9.7	23.9	61.6
0.267000	34.1	9.000	Off	N	9.7	27.1	61.2
0.303000	40.2	9.000	Off	N	9.7	20.0	60.2
0.352500	38.9	9.000	Off	N	9.7	20.0	58.9
1.706000	37.4	9.000	Off	N	9.8	18.6	56.0
1.719500	35.7	9.000	Off	N	9.8	20.3	56.0
1.751000	37.9	9.000	Off	N	9.8	18.1	56.0
1.760000	37.4	9.000	Off	N	9.8	18.6	56.0
1.800500	37.0	9.000	Off	N	9.8	19.0	56.0
1.818500	34.7	9.000	Off	N	9.8	21.3	56.0
5.306000	28.1	9.000	Off	N	10.1	31.9	60.0
6.102500	28.3	9.000	Off	N	10.2	31.7	60.0
6.215000	27.5	9.000	Off	N	10.2	32.5	60.0
7.146500	30.1	9.000	Off	N	10.3	29.9	60.0

5/26/2014

1:06:48

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.295000	30.1	9.000	Off	N	10.3	29.9	60.0
8.465000	28.7	9.000	Off	N	10.3	31.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	28.4	9.000	Off	N	9.7	27.6	56.0
0.199500	24.7	9.000	Off	N	9.7	28.9	53.6
0.267000	13.5	9.000	Off	N	9.7	37.7	51.2
0.303000	29.8	9.000	Off	N	9.7	20.4	50.2
0.352500	26.7	9.000	Off	N	9.7	22.2	48.9
0.456000	27.5	9.000	Off	N	9.7	19.3	46.8
1.710500	29.8	9.000	Off	N	9.8	16.2	46.0
1.742000	22.2	9.000	Off	N	9.8	23.8	46.0
1.760000	30.0	9.000	Off	N	9.8	16.0	46.0
1.787000	21.4	9.000	Off	N	9.8	24.6	46.0
1.796000	22.2	9.000	Off	N	9.8	23.8	46.0
1.841000	21.3	9.000	Off	N	9.8	24.7	46.0
5.355500	17.4	9.000	Off	N	10.1	32.6	50.0
5.747000	19.2	9.000	Off	N	10.2	30.8	50.0
6.215000	18.3	9.000	Off	N	10.2	31.7	50.0
7.146500	21.1	9.000	Off	N	10.3	28.9	50.0
7.227500	20.1	9.000	Off	N	10.3	29.9	50.0
7.295000	21.3	9.000	Off	N	10.3	28.7	50.0

5/26/2014

1:06:48

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1406-F009	Date of Issue: June 02, 2014	EUT Type: Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFLGL24

12. LIST OF TEST EQUIPMENT

12.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	01/29/2015	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	04/25/2014	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2013	Annual	05/23/2014	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	07/11/2013	Annual	07/11/2014	MY45241059
Hewlett Packard	11636B/Power Divider	10/22/2013	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	12/18/2013	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	01/27/2014	Annual	01/27/2015	10545
DIGITAL	EP-3010 /DC POWER SUPPLY	10/29/2013	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	11/05/2013	Annual	11/05/2014	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Agilent	8493C / Attenuator(10 dB)	07/24/2013	Annual	07/24/2014	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	10/28/2013	Annual	10/28/2014	BR0617
NAENG YEOL CO.LTD	NY-THR18750/ Temp & Humidity Chamber	10/30/2013	Annual	10/30/2014	NY-200912201A
<p>Note: This equipment (N9020A/ SIGNAL ANALYZER) is used after 05/23/2014 and actual calibration date is 05/23/2014</p> <p>This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014</p>					

12.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	07/24/2013	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS Band Reject Filter	06/24/2013	Annual	06/24/2014	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNEX	CBL06185030 / POWER AMP	07/24/2013	Annual	07/24/2014	22965
CERNEX	CBLU1183540 / POWER AMP	07/24/2013	Annual	07/24/2014	22964
Note: This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014					