HAC-RF Emission

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration:


- Probe: ER3DV6 SN2339; ConvF(1, 1, 1); Calibrated: 2/14/2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1359; Calibrated: 2/17/2014
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/835 MHz/Hearing Aid Compatibility Test at 15mm distance

(41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 121.4 V/m; Power Drift = 0.06 dB PMR not calibrated. PMF = 1.000 is applied. E-field emissions = 110.0 V/m Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4 106.8 V/m		
Grid 4 M4 61.19 V/m	Grid 5 M4	Grid 6 M4
Grid 7 M4 102.7 V/m	Grid 8 M4	Grid 9 M4

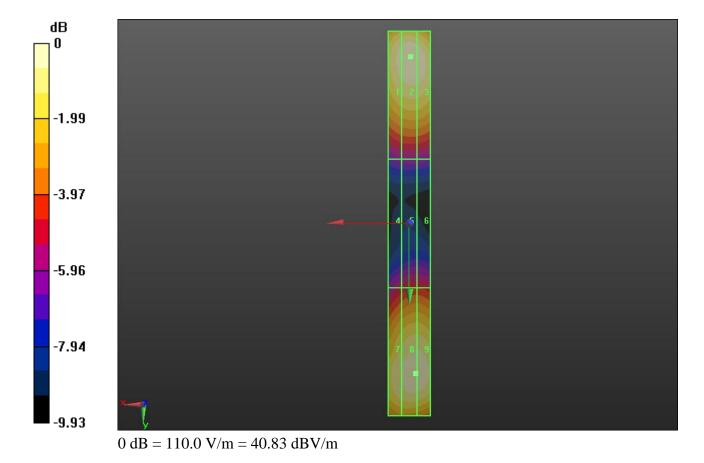

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1 Phantom section: RF Section DASY5 Configuration:

- Probe: ER3DV6 SN2339; ConvF(1, 1, 1); Calibrated: 2/14/2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1359; Calibrated: 2/17/2014
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement/1880 MHz/Hearing Aid Compatibility Test at 15mm

distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 139.8 V/m; Power Drift = -0.04 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 89.65 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
84.24 V/m	85.82 V/m	84.58 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
68.24 V/m	70.30 V/m	70.22 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
87.47 V/m	89.65 V/m	89.44 V/m

