



**SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

*For*  
**CDMA/LTE Phablet + Bluetooth, & DTS/UNII a/b/g/n**

**FCC ID: ZNFLS770  
Model Name: LG-LS770, LS770, LGLS770**

**Report Number: 15I19834-S1  
Issue Date: 2/18/2015**

*Prepared for*  
**LG ELECTRONICS MOBILECOMM U.S.A., INC.  
1000 SYLVAN AVE.  
ENGLEWOOD CLIFFS, NJ 07632**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
--	2/18/2015	Initial Issue	--

**Table of Contents**

**1. Attestation of Test Results ..... 5**

**2. Test Specification, Methods and Procedures..... 6**

**3. Facilities and Accreditation ..... 6**

**4. SAR Measurement System & Test Equipment ..... 7**

    4.1. SAR Measurement System..... 7

    4.2. SAR Scan Procedures..... 8

    4.3. Test Equipment..... 10

**5. Measurement Uncertainty..... 11**

**6. Device Under Test (DUT) Information ..... 12**

    6.1. DUT Description ..... 12

    6.2. Wireless Technologies..... 12

    6.3. Nominal and Maximum Output Power..... 14

    6.4. General LTE SAR Test and Reporting Considerations..... 15

    6.5. LTE (TDD) Considerations..... 17

**7. RF Exposure Conditions (Test Configurations) ..... 18**

**8. Dielectric Property Measurements & System Check ..... 19**

    8.1. Dielectric Property Measurements ..... 19

    8.2. System Check..... 23

**9. Conducted Output Power Measurements..... 27**

    9.1. CDMA..... 27

    9.2. LTE..... 29

    9.3. Wi-Fi DTS (2.4 GHz) Band..... 44

    9.4. Wi-Fi U-NII (5 GHz) Bands..... 44

    9.5. Bluetooth ..... 44

**10. Measured and Reported (Scaled) SAR Results..... 45**

    10.1. CDMA BC0..... 47

    10.2. CDMA BC1..... 48

    10.3. CDMA BC10..... 49

    10.4. LTE Band 2 (20MHz Bandwidth) ..... 50

    10.5. LTE Band 4 (20MHz Bandwidth) ..... 50

    10.6. LTE Band 5 (10MHz Bandwidth) ..... 51

    10.7. LTE Band 12 (10MHz Bandwidth) ..... 51

10.8. LTE Band 25 (20MHz Bandwidth) ..... 52

10.9. LTE Band 26 (15MHz Bandwidth) ..... 53

10.10. LTE Band 41 (20MHz Bandwidth) ..... 54

10.11. Wi-Fi (DTS Band) ..... 55

10.12. Wi-Fi (U-NII Band) ..... 56

10.13. Bluetooth ..... 57

**11. SAR Measurement Variability ..... 58**

**12. Simultaneous Transmission SAR Analysis ..... 59**

    12.1. Sum of the SAR for WWAN, Wi-Fi & BT ..... 59

**Appendixes ..... 60**

    A\_15119834v0 SAR Photos & Ant. Locations ..... 60

    B\_15119834v0 SAR Highest Test Plots ..... 60



    C\_15119834v0 SAR System Check Plots ..... 60

    D\_15119834v0 SAR Tissue Ingredients ..... 60

    E\_15119834v0 SAR Probe Cal. Certificates ..... 60

    F\_15119834v0 SAR Dipole Cal. Certificates ..... 60

# 1. Attestation of Test Results

Applicant Name	LG ELECTRONICS MOBILECOMM U.S.A., INC.			
FCC ID	ZNFLS770			
Model Name	LG-LS770, LS770, LGLS770			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
<b>SAR Limits (W/Kg)</b>				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
<b>The Highest Reported SAR (W/kg)</b>				
<b>RF Exposure Conditions</b>	<b>Equipment Class</b>			
	<b>Licensed</b>	<b>DTS</b>	<b>U-NII</b>	<b>DSS (BT)</b>
Head	1.000	0.428	0.387	N/A
Body-worn	1.054	0.250	0.190	
Hotspot/Wi-Fi Direct			0.126	
Simultaneous Tx	1.428	1.428	1.387	
Date Tested	1/20/2015 to 2/5/2015			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:		Prepared By:		
				
Devin Chang Senior Engineer UL Verification Services Inc.		Vinky Ip Laboratory Technician UL Verification Services Inc.		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 SAR meas for 802.11 v02
- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode v02

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

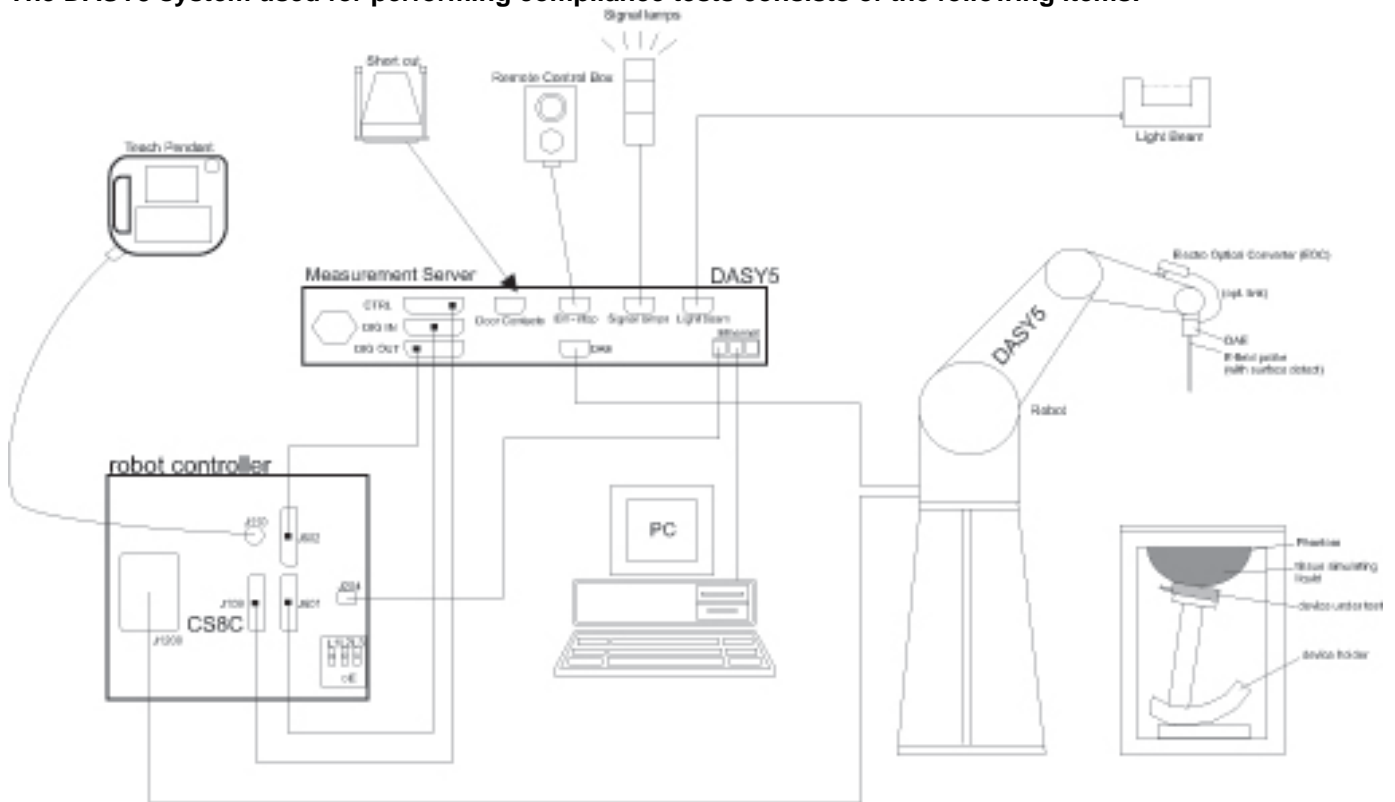

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/7/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U09516	10/6/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	E9323A	MY53070003	5/1/2015
Power Sensor	Agilent	8481A	3318A95392	10/6/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U11347	8/27/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	HP	8481A	2702A60780	6/16/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3991	5/16/2015
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3929	5/9/2015
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1359	2/17/2015
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1259	1/14/2016
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1380	7/23/2015
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D750V3	1019	3/17/2015
System Validation Dipole	SPEAG	D835V2	4d142	9/9/2015
System Validation Dipole	SPEAG	D1750V2	1050	4/22/2015
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2450V2	748	2/18/2015
System Validation Dipole	SPEAG	D2600V2	1036	8/11/2015
System Validation Dipole	SPEAG	D5GHzV2	1003	2/26/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/24/2015
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/28/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

#### Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	6/29/2015
Power Sensor	Agilent	N1921A	MY52020038	5/10/2015
Base Station Simulator	R & S	CMW500	135393-VQ	7/3/2015

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	Overall (Length x Width): 154.1 mm x 79.3 mm Overall Diagonal: 166 mm Display Diagonal: 147 mm
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input checked="" type="checkbox"/> Smart Cover <input type="checkbox"/> Normal Battery Cover with NFC <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover with NFC <input type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.85Vdc, 11.6Wh <input type="checkbox"/> Extended (large capacity) <input type="checkbox"/> The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz) (Wi-Fi 5.8 only)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz) (Wi-Fi 5.8 only)

### 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
CDMA2000	BC0 BC1 BC10	1xRTT (Voice & Data) 1xEV-DO Rel. 0 1xEV-DO Rev. A 1xAdvanced	100%
	Does this device SV-DO (1xRTT-1xEVDO)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
LTE (FDD)	Band 2 Band 4 Band 5 Band 12 Band 25 Band 26	QPSK 16QAM	100%
	Does this device SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
LTE (TDD)	Band 41	QPSK 16QAM	63.3%
	Does this device SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40)	100%
	TDWR (Terminal Doppler Weather Radar): Supported. Band gap channel : Not supported		
Bluetooth	2.4 GHz	Version 4.0 LE	77.5% (DH5)



### 6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
CDMA BC0	1xRTT	24.2	<b>24.7</b>
	1xAdvanced	24.2	<b>24.7</b>
	1xEVDO Rel. 0	24.2	<b>24.7</b>
	1xEVDO Rev. A	24.2	<b>24.7</b>
CDMA BC1	1xRTT	23.7	<b>24.2</b>
	1xAdvanced	23.7	<b>24.2</b>
	1xEVDO Rel. 0	23.7	<b>24.2</b>
	1xEVDO Rev. A	23.7	<b>24.2</b>
CDMA BC10	1xRTT	24.5	<b>25.0</b>
	1xAdvanced	24.5	<b>25.0</b>
	1xEVDO Rel. 0	24.5	<b>25.0</b>
	1xEVDO Rev. A	24.5	<b>25.0</b>
LTE Band 2	QPSK	23.2	<b>23.7</b>
LTE Band 4	QPSK	23.2	<b>23.7</b>
LTE Band 5	QPSK	23.5	<b>24.0</b>
LTE Band 12	QPSK	23.5	<b>24.0</b>
LTE Band 25	QPSK	23.2	<b>23.7</b>
LTE Band 26	QPSK	23.5	<b>24.0</b>
LTE Band 41	QPSK	23.9	<b>24.4</b>

Upper limit (dB): -1.0 ~ 1.0		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	15.0	<b>16.0</b>
	802.11g	14.0	<b>15.0</b>
	802.11n HT20	14.0	<b>15.0</b>
WiFi 5 GHz	802.11a	13.0	<b>14.0</b>
	802.11n HT20	13.0	<b>14.0</b>
	802.11n HT40	13.0	<b>14.0</b>
Bluetooth		8.5	<b>9.5</b>
Bluetooth LE		6.0	<b>7.0</b>

### 6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700/1860	18675/1857.5	18650/1855	18625/1852.5	18615/1851.5	18607/1850.7
	Mid	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880
	High	19100/1900	19125/1902.5	19150/1905	19175/1907.5	19185/1908.5	19193/1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5	19965/1711.5	19957/1710.7
	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5
	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5	20385/1753.5	20393/1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/829	20425/826.5	20415/825.5	20407/824.7
	Mid			20525/836.5	20525/836.5	20525/836.5	20525/836.5
	High			20600/844	20625/846.5	20635/847.5	20643/848.3
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/704	23035/701.5	23025/700.5	23017/699.7
	Mid			23095/707.5	23095/707.5	23095/707.5	23095/707.5
	High			23130/711	23155/713.5	23165/714.5	23173/715.3
	Band 25	Frequency range: 1850 - 1915 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	26140/1860	26115/1857.5	26090/1855	26065/1852.5	26055/1851.5	26047/1850.7
Mid	26365/1882.5	26365/1882.5	26365/1882.5	26365/1882.5	26365/1882.5	26365/1882.5	
High	26590/1905	26615/1907.5	26640/1910	26665/1912.5	26675/1913.5	26683/1914.3	
Band 26	Frequency range: 814 - 849 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low		26765/821.5	26740/819	26715/816.5	26705/815.5	26697/814.7	
Mid		26865/831.5	26865/831.5	26865/831.5	26865/831.5	26865/831.5	
High		26965/841.5	26990/844	27015/846.5	27025/847.5	27033/848.3	

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 41	Frequency range: 2496 - 2690 MHz																																										
		Channel Bandwidth																																										
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
Low	39750/ 2506.0	39725/ 2503.5	39700/ 2501	39675/ 2498.5																																								
Low-Mid	40185/ 2549.5	40173/ 2548.3	40160/ 2547.0	40148/ 2545.8																																								
Mid	40620/ 2593.0	40620/ 2593.0	40620/ 2593.0	40620/ 2593.0																																								
Mid-High	41055/ 2636.5	41068/ 2547.8	41080/ 2639.0	41093/ 2640.3																																								
High	41490/ 2680.0	41515/ 2682.5	41540/ 2685.0	41565/ 2687.5																																								
LTE transmitter and antenna implementation	LTE has one (1) Tx/Rx antenna for LTE Band 12/26/41 and one (1) Tx/Rx antenna for LTE Band 4/25 Refer to Appendix A.																																											
Maximum power reduction (MPR)	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design                      A-MPR (additional MPR) was disabled during SAR testing</p>						Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)							MPR (dB)																																				
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																						
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																					
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																					
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																					
Power reduction	No																																											
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																											



### 6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

#### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x ( $T_s$ ) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

## 7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Antenna 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
Edge 3 (Bottom)			< 25 mm	Yes		
Edge 4 (Left)			> 25 mm	No	1	
WWAN (Antenna 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
Edge 3 (Bottom)			< 25 mm	Yes		
Edge 4 (Left)			< 25 mm	Yes		
WLAN (Antenna 4)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	< 25 mm	Yes	
Edge 3 (Bottom)			> 25 mm	No	1	
Edge 4 (Left)			> 25 mm	No	1	

**Notes:**

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Standard 1528-2013

Refer to Table 3 within the IEEE Standard 1528-2013

**Dielectric Property Measurements Results:**

**SAR Lab 1**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/20/2015	Head 2450	e'	38.3100	Relative Permittivity ( $\epsilon_r$ ):	38.31	39.20	-2.27	5
		e"	13.8100	Conductivity ( $\sigma$ ):	1.88	1.80	4.52	5
	Head 2410	e'	38.5200	Relative Permittivity ( $\epsilon_r$ ):	38.52	39.28	-1.93	5
		e"	13.7200	Conductivity ( $\sigma$ ):	1.84	1.76	4.44	5
	Head 2475	e'	38.2200	Relative Permittivity ( $\epsilon_r$ ):	38.22	39.17	-2.42	5
		e"	13.9000	Conductivity ( $\sigma$ ):	1.91	1.83	4.70	5
1/20/2015	Body 2450	e'	50.3600	Relative Permittivity ( $\epsilon_r$ ):	50.36	52.70	-4.44	5
		e"	14.6600	Conductivity ( $\sigma$ ):	2.00	1.95	2.42	5
	Body 2410	e'	50.5200	Relative Permittivity ( $\epsilon_r$ ):	50.52	52.76	-4.24	5
		e"	14.5000	Conductivity ( $\sigma$ ):	1.94	1.91	1.87	5
	Body 2475	e'	50.2700	Relative Permittivity ( $\epsilon_r$ ):	50.27	52.67	-4.55	5
		e"	14.7500	Conductivity ( $\sigma$ ):	2.03	1.99	2.25	5
1/20/2014	Body 5180	e'	46.9500	Relative Permittivity ( $\epsilon_r$ ):	46.95	49.05	-4.27	5
		e"	18.9500	Conductivity ( $\sigma$ ):	5.46	5.27	3.54	5
	Body 5200	e'	46.9500	Relative Permittivity ( $\epsilon_r$ ):	46.95	49.02	-4.22	5
		e"	19.0000	Conductivity ( $\sigma$ ):	5.49	5.29	3.76	5
	Body 5600	e'	46.2200	Relative Permittivity ( $\epsilon_r$ ):	46.22	48.48	-4.66	5
		e"	19.1800	Conductivity ( $\sigma$ ):	5.97	5.76	3.67	5
	Body 5800	e'	45.9700	Relative Permittivity ( $\epsilon_r$ ):	45.97	48.20	-4.63	5
		e"	19.4200	Conductivity ( $\sigma$ ):	6.26	6.00	4.38	5
	Body 5825	e'	45.9700	Relative Permittivity ( $\epsilon_r$ ):	45.97	48.20	-4.63	5
		e"	19.3700	Conductivity ( $\sigma$ ):	6.27	6.00	4.56	5
1/23/2015	Head 5180	e'	37.4500	Relative Permittivity ( $\epsilon_r$ ):	37.45	36.01	3.99	5
		e"	15.4800	Conductivity ( $\sigma$ ):	4.46	4.63	-3.71	5
	Head 5200	e'	37.5000	Relative Permittivity ( $\epsilon_r$ ):	37.50	35.99	4.20	5
		e"	15.4400	Conductivity ( $\sigma$ ):	4.46	4.65	-4.01	5
	Head 5600	e'	37.0500	Relative Permittivity ( $\epsilon_r$ ):	37.05	35.53	4.27	5
		e"	15.5600	Conductivity ( $\sigma$ ):	4.85	5.06	-4.25	5
	Head 5800	e'	36.7400	Relative Permittivity ( $\epsilon_r$ ):	36.74	35.30	4.08	5
		e"	15.7500	Conductivity ( $\sigma$ ):	5.08	5.27	-3.62	5
	Head 5825	e'	36.7400	Relative Permittivity ( $\epsilon_r$ ):	36.74	35.30	4.08	5
		e"	15.7500	Conductivity ( $\sigma$ ):	5.10	5.27	-3.20	5
1/26/2015	Head 5180	e'	37.6700	Relative Permittivity ( $\epsilon_r$ ):	37.67	36.01	4.60	5
		e"	15.7400	Conductivity ( $\sigma$ ):	4.53	4.63	-2.10	5
	Head 5200	e'	37.6600	Relative Permittivity ( $\epsilon_r$ ):	37.66	35.99	4.64	5
		e"	15.7800	Conductivity ( $\sigma$ ):	4.56	4.65	-1.90	5
	Head 5600	e'	37.1000	Relative Permittivity ( $\epsilon_r$ ):	37.10	35.53	4.41	5
		e"	15.9200	Conductivity ( $\sigma$ ):	4.96	5.06	-2.04	5
	Head 5800	e'	36.7800	Relative Permittivity ( $\epsilon_r$ ):	36.78	35.30	4.19	5
		e"	16.1100	Conductivity ( $\sigma$ ):	5.20	5.27	-1.41	5
	Head 5825	e'	36.8000	Relative Permittivity ( $\epsilon_r$ ):	36.80	35.30	4.25	5
		e"	16.1500	Conductivity ( $\sigma$ ):	5.23	5.27	-0.74	5
1/26/2015	Body 5180	e'	47.2500	Relative Permittivity ( $\epsilon_r$ ):	47.25	49.05	-3.66	5
		e"	18.5100	Conductivity ( $\sigma$ ):	5.33	5.27	1.14	5
	Body 5200	e'	47.0400	Relative Permittivity ( $\epsilon_r$ ):	47.04	49.02	-4.04	5
		e"	18.6000	Conductivity ( $\sigma$ ):	5.38	5.29	1.57	5
	Body 5600	e'	46.4600	Relative Permittivity ( $\epsilon_r$ ):	46.46	48.48	-4.16	5
		e"	18.8000	Conductivity ( $\sigma$ ):	5.85	5.76	1.61	5
	Body 5800	e'	46.0200	Relative Permittivity ( $\epsilon_r$ ):	46.02	48.20	-4.52	5
		e"	19.1400	Conductivity ( $\sigma$ ):	6.17	6.00	2.88	5
	Body 5825	e'	46.0200	Relative Permittivity ( $\epsilon_r$ ):	46.02	48.20	-4.52	5
		e"	19.1300	Conductivity ( $\sigma$ ):	6.20	6.00	3.27	5
1/28/2015	Body 2450	e'	50.7600	Relative Permittivity ( $\epsilon_r$ ):	50.76	52.70	-3.68	5
		e"	14.3000	Conductivity ( $\sigma$ ):	1.95	1.95	-0.10	5
	Body 2410	e'	50.8400	Relative Permittivity ( $\epsilon_r$ ):	50.84	52.76	-3.64	5
		e"	14.1300	Conductivity ( $\sigma$ ):	1.89	1.91	-0.73	5
	Body 2475	e'	50.6100	Relative Permittivity ( $\epsilon_r$ ):	50.61	52.67	-3.91	5
		e"	14.3900	Conductivity ( $\sigma$ ):	1.98	1.99	-0.24	5

**SAR Lab 1 (continued)**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/30/2015	Head 2450	e'	37.8200	Relative Permittivity ( $\epsilon_r$ ):	37.82	39.20	-3.52	5
		e"	13.7600	Conductivity ( $\sigma$ ):	1.87	1.80	4.14	5
	Head 2410	e'	37.9600	Relative Permittivity ( $\epsilon_r$ ):	37.96	39.28	-3.36	5
		e"	13.6600	Conductivity ( $\sigma$ ):	1.83	1.76	3.98	5
	Head 2475	e'	37.6900	Relative Permittivity ( $\epsilon_r$ ):	37.69	39.17	-3.77	5
		e"	13.8400	Conductivity ( $\sigma$ ):	1.90	1.83	4.25	5
2/2/2015	Head 2450	e'	38.5000	Relative Permittivity ( $\epsilon_r$ ):	38.50	39.20	-1.79	5
		e"	13.5100	Conductivity ( $\sigma$ ):	1.84	1.80	2.25	5
	Head 2410	e'	38.7200	Relative Permittivity ( $\epsilon_r$ ):	38.72	39.28	-1.42	5
		e"	13.4600	Conductivity ( $\sigma$ ):	1.80	1.76	2.46	5
	Head 2475	e'	38.4200	Relative Permittivity ( $\epsilon_r$ ):	38.42	39.17	-1.91	5
		e"	13.5500	Conductivity ( $\sigma$ ):	1.86	1.83	2.06	5

**SAR Lab 2**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/26/2015	Head 1750	e'	38.4600	Relative Permittivity ( $\epsilon_r$ ):	38.46	40.08	-4.05	5
		e"	14.3400	Conductivity ( $\sigma$ ):	1.40	1.37	1.93	5
	Head 1710	e'	38.6500	Relative Permittivity ( $\epsilon_r$ ):	38.65	40.15	-3.73	5
		e"	14.2900	Conductivity ( $\sigma$ ):	1.36	1.35	0.91	5
	Head 1755	e'	38.4600	Relative Permittivity ( $\epsilon_r$ ):	38.46	40.08	-4.03	5
		e"	14.3200	Conductivity ( $\sigma$ ):	1.40	1.37	1.87	5
1/26/2015	Body 1750	e'	53.4200	Relative Permittivity ( $\epsilon_r$ ):	53.42	53.44	-0.04	5
		e"	15.9000	Conductivity ( $\sigma$ ):	1.55	1.49	4.10	5
	Body 1710	e'	53.4900	Relative Permittivity ( $\epsilon_r$ ):	53.49	53.54	-0.10	5
		e"	15.8000	Conductivity ( $\sigma$ ):	1.50	1.46	2.79	5
	Body 1755	e'	53.4000	Relative Permittivity ( $\epsilon_r$ ):	53.40	53.43	-0.05	5
		e"	15.8600	Conductivity ( $\sigma$ ):	1.55	1.49	3.92	5
1/28/2015	Head 750	e'	41.2400	Relative Permittivity ( $\epsilon_r$ ):	41.24	41.96	-1.72	5
		e"	21.9600	Conductivity ( $\sigma$ ):	0.92	0.89	2.54	5
	Head 700	e'	42.0100	Relative Permittivity ( $\epsilon_r$ ):	42.01	42.22	-0.49	5
		e"	22.4400	Conductivity ( $\sigma$ ):	0.87	0.89	-1.78	5
	Head 710	e'	40.8300	Relative Permittivity ( $\epsilon_r$ ):	40.83	42.17	-3.17	5
		e"	21.6300	Conductivity ( $\sigma$ ):	0.85	0.89	-4.05	5
1/28/2015	Body 750	e'	56.5700	Relative Permittivity ( $\epsilon_r$ ):	56.57	55.55	1.84	5
		e"	23.6200	Conductivity ( $\sigma$ ):	0.99	0.96	2.28	5
	Body 700	e'	57.1000	Relative Permittivity ( $\epsilon_r$ ):	57.10	55.74	2.44	5
		e"	24.2100	Conductivity ( $\sigma$ ):	0.94	0.96	-1.76	5
	Body 710	e'	56.9700	Relative Permittivity ( $\epsilon_r$ ):	56.97	55.70	2.28	5
		e"	24.0800	Conductivity ( $\sigma$ ):	0.95	0.96	-0.98	5

**SAR Lab 3**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/21/2015	Head 835	e'	40.7300	Relative Permittivity ( $\epsilon_r$ ):	40.73	41.50	-1.86	5
		e"	19.5700	Conductivity ( $\sigma$ ):	0.91	0.90	0.96	5
	Head 820	e'	40.9300	Relative Permittivity ( $\epsilon_r$ ):	40.93	41.60	-1.62	5
		e"	19.5800	Conductivity ( $\sigma$ ):	0.89	0.90	-0.64	5
	Head 850	e'	40.5500	Relative Permittivity ( $\epsilon_r$ ):	40.55	41.50	-2.29	5
		e"	19.6400	Conductivity ( $\sigma$ ):	0.93	0.92	1.45	5
1/21/2015	Body 835	e'	53.2700	Relative Permittivity ( $\epsilon_r$ ):	53.27	55.20	-3.50	5
		e"	21.9200	Conductivity ( $\sigma$ ):	1.02	0.97	4.92	5
	Body 820	e'	53.4000	Relative Permittivity ( $\epsilon_r$ ):	53.40	55.28	-3.40	5
		e"	22.0400	Conductivity ( $\sigma$ ):	1.00	0.97	3.76	5
	Body 850	e'	52.9900	Relative Permittivity ( $\epsilon_r$ ):	52.99	55.16	-3.93	5
		e"	21.8900	Conductivity ( $\sigma$ ):	1.03	0.99	4.81	5
1/26/2015	Head 835	e'	40.1900	Relative Permittivity ( $\epsilon_r$ ):	40.19	41.50	-3.16	5
		e"	19.3900	Conductivity ( $\sigma$ ):	0.90	0.90	0.03	5
	Head 820	e'	40.4200	Relative Permittivity ( $\epsilon_r$ ):	40.42	41.60	-2.84	5
		e"	19.4400	Conductivity ( $\sigma$ ):	0.89	0.90	-1.35	5
	Head 850	e'	39.9600	Relative Permittivity ( $\epsilon_r$ ):	39.96	41.50	-3.71	5
		e"	19.3300	Conductivity ( $\sigma$ ):	0.91	0.92	-0.15	5
1/26/2014	Body 835	e'	53.2900	Relative Permittivity ( $\epsilon_r$ ):	53.29	55.20	-3.46	5
		e"	21.7300	Conductivity ( $\sigma$ ):	1.01	0.97	4.01	5
	Body 820	e'	53.5000	Relative Permittivity ( $\epsilon_r$ ):	53.50	55.28	-3.21	5
		e"	21.8100	Conductivity ( $\sigma$ ):	0.99	0.97	2.68	5
	Body 850	e'	53.0900	Relative Permittivity ( $\epsilon_r$ ):	53.09	55.16	-3.75	5
		e"	21.6100	Conductivity ( $\sigma$ ):	1.02	0.99	3.46	5

**SAR Lab 4**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/21/2015	Head 1900	e'	39.9500	Relative Permittivity ( $\epsilon_r$ ):	39.95	40.00	-0.12	5
		e"	13.1400	Conductivity ( $\sigma$ ):	1.39	1.40	-0.84	5
	Head 1850	e'	39.9800	Relative Permittivity ( $\epsilon_r$ ):	39.98	40.00	-0.05	5
		e"	13.0500	Conductivity ( $\sigma$ ):	1.34	1.40	-4.11	5
	Head 1910	e'	39.7800	Relative Permittivity ( $\epsilon_r$ ):	39.78	40.00	-0.55	5
		e"	13.1300	Conductivity ( $\sigma$ ):	1.39	1.40	-0.40	5
1/21/2015	Body 1900	e'	54.8100	Relative Permittivity ( $\epsilon_r$ ):	54.81	53.30	2.83	5
		e"	14.6000	Conductivity ( $\sigma$ ):	1.54	1.52	1.48	5
	Body 1850	e'	55.0200	Relative Permittivity ( $\epsilon_r$ ):	55.02	53.30	3.23	5
		e"	14.4100	Conductivity ( $\sigma$ ):	1.48	1.52	-2.48	5
	Body 1910	e'	54.7800	Relative Permittivity ( $\epsilon_r$ ):	54.78	53.30	2.78	5
		e"	14.5300	Conductivity ( $\sigma$ ):	1.54	1.52	1.52	5
1/26/2015	Head 1900	e'	38.3100	Relative Permittivity ( $\epsilon_r$ ):	38.31	40.00	-4.22	5
		e"	13.6400	Conductivity ( $\sigma$ ):	1.44	1.40	2.93	5
	Head 1850	e'	38.5600	Relative Permittivity ( $\epsilon_r$ ):	38.56	40.00	-3.60	5
		e"	13.4700	Conductivity ( $\sigma$ ):	1.39	1.40	-1.03	5
	Head 1910	e'	38.2900	Relative Permittivity ( $\epsilon_r$ ):	38.29	40.00	-4.28	5
		e"	13.6400	Conductivity ( $\sigma$ ):	1.45	1.40	3.47	5
1/26/2015	Body 1900	e'	53.0700	Relative Permittivity ( $\epsilon_r$ ):	53.07	53.30	-0.43	5
		e"	14.5700	Conductivity ( $\sigma$ ):	1.54	1.52	1.27	5
	Body 1850	e'	53.3100	Relative Permittivity ( $\epsilon_r$ ):	53.31	53.30	0.02	5
		e"	14.3800	Conductivity ( $\sigma$ ):	1.48	1.52	-2.68	5
	Body 1910	e'	53.0100	Relative Permittivity ( $\epsilon_r$ ):	53.01	53.30	-0.54	5
		e"	14.5500	Conductivity ( $\sigma$ ):	1.55	1.52	1.66	5

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0  $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq$  15.0 cm for SAR measurements  $\leq$  3 GHz and  $\geq$  10.0 cm for measurements  $>$  3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

### Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1019	3/17/2014	750	1g	8.21	8.64
				10g	5.38	5.69
D835V2	4d142	9/9/2014	835	1g	8.91	9.22
				10g	5.77	6.05
D1750V2	1050	4/22/2014	1750	1g	36.6	37.2
				10g	19.4	20.0
D1900V2	5d163	9/11/2014	1900	1g	40.8	40.6
				10g	21.2	21.4
D2450V2	748	2/18/2014	2450	1g	51.6	50.7
				10g	24.0	23.7
D2600V2	1036	8/11/2014	2600	1g	57.5	57.3
				10g	25.7	25.4
D5GHzV2	1003	2/26/2014	5200	1g	77.7	73.5
				10g	22.2	20.5
			5600	1g	81.8	79.6
				10g	23.2	22.1
			5800	1g	78.3	73.8
				10g	22.1	20.4



**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR Lab 1**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/20/2015	D2450V2	748	Head	1g	5.27	52.7	51.6	2.13	
				10g	2.38	23.8	24.0	-0.83	
1/20/2015	D2450V2	748	Body	1g	5.03	50.3	50.7	-0.79	
				10g	2.31	23.1	23.7	-2.53	
1/20/2015	D5GHzV2 (5.2 GHz)	1003	Body	1g	7.40	74.0	73.5	0.68	
				10g	2.11	21.1	20.5	2.93	
1/23/2015	D5GHzV2 (5.2 GHz)	1003	Head	1g	7.38	73.8	77.7	-5.02	
				10g	2.12	21.2	22.2	-4.50	
1/26/2015	D5GHzV2 (5.2 GHz)	1003	Head	1g	7.27	72.7	77.7	-6.44	
				10g	2.08	20.8	22.2	-6.31	
1/26/2015	D5GHzV2 (5.2 GHz)	1003	Body	1g	7.78	77.8	73.5	5.85	
				10g	2.21	22.1	20.5	7.80	
1/20/2015	D5GHzV2 (5.6 GHz)	1003	Body	1g	7.71	77.1	79.6	-3.14	
				10g	2.17	21.7	22.1	-1.81	
1/23/2015	D5GHzV2 (5.6 GHz)	1003	Head	1g	8.13	81.3	81.8	-0.61	
				10g	2.29	22.9	23.2	-1.29	
1/26/2015	D5GHzV2 (5.6 GHz)	1003	Head	1g	7.57	75.7	81.8	-7.46	1,2
				10g	2.13	21.3	23.2	-8.19	
1/26/2015	D5GHzV2 (5.6 GHz)	1003	Body	1g	8.46	84.6	79.6	6.28	
				10g	2.38	23.8	22.1	7.69	
1/20/2015	D5GHzV2 (5.8 GHz)	1003	Body	1g	7.36	73.6	73.8	-0.27	
				10g	2.07	20.7	20.4	1.47	
1/23/2015	D5GHzV2 (5.8 GHz)	1003	Head	1g	8.05	80.5	78.30	2.81	
				10g	2.27	22.7	22.10	2.71	
1/26/2015	D5GHzV2 (5.8 GHz)	1003	Head	1g	7.58	75.8	78.30	-3.19	
				10g	2.13	21.3	22.10	-3.62	
1/26/2015	D5GHzV2 (5.8 GHz)	1003	Body	1g	7.47	74.7	73.8	1.22	
				10g	2.11	21.1	20.4	3.43	
1/28/2015	D2450V2	748	Body	1g	5.37	53.7	50.70	5.92	
				10g	2.47	24.7	23.70	4.22	
1/30/2015	D2450V2	748	Head	1g	5.49	54.9	51.6	6.40	3,4
				10g	2.50	25.0	24.0	4.17	
2/2/2015	D2450V2	748	Head	1g	5.35	53.5	51.6	3.68	
				10g	2.41	24.1	24	0.42	

**SAR Lab 2**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/26/2015	D1750V2	1050	Head	1g	3.37	33.7	36.6	-7.92	5,6
				10g	1.79	17.9	19.4	-7.73	
1/26/2015	D1750V2	1050	Body	1g	3.82	38.2	37.2	2.69	
				10g	2.03	20.3	20.0	1.50	
1/28/2015	D750V2	1019	Head	1g	0.812	8.1	8.21	-1.10	
				10g	0.530	5.3	5.38	-1.49	
1/28/2015	D750V2	1019	Body	1g	0.888	8.9	8.64	2.78	7,8
				10g	0.593	5.9	5.69	4.22	

**SAR Lab 3**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/21/2015	D835V2	4d142	Head	1g	0.85	8.5	8.91	-4.26	9,10
				10g	0.56	5.6	5.77	-3.12	
1/21/2015	D835V2	4d142	Body	1g	0.95	9.5	9.22	3.04	
				10g	0.63	6.3	6.05	4.13	
1/26/2015	D835V2	4d142	Head	1g	0.89	8.9	8.91	0.34	
				10g	0.59	5.9	5.77	1.73	
1/26/2015	D835V2	4d142	Body	1g	0.93	9.3	9.22	0.33	
				10g	0.61	6.1	6.05	0.83	

**SAR Lab 4**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/21/2015	1900	5d163	Head	1g	4.16	41.6	40.80	1.96	
				10g	2.15	21.5	21.20	1.42	
1/21/2015	1900	5d163	Body	1g	4.03	40.3	40.60	-0.74	
				10g	2.09	20.9	21.40	-2.34	
1/26/2015	1900	5d163	Head	1g	4.38	43.8	40.80	7.35	11,12
				10g	2.26	22.6	21.20	6.60	
1/26/2015	1900	5d163	Body	1g	4.11	41.1	40.60	1.23	
				10g	2.13	21.3	21.40	-0.47	

## 9. Conducted Output Power Measurements

### 9.1. CDMA

#### 1x Advanced Setup Procedures used to establish the test signals

Call box setup procedure

- Protocol Rev > 6 (IS-2000-0)
- System ID: 331; NID: 65535, Reg. Ch. #.:
- Radio Config (RC) > Fwd11,Rvs8
- Service Option (SO) Setup > SO75 (Loopback)
- Traffic Data Rate > Full
- Rvs Power Ctrl > All Up bits (Maximum TxPout)
- Reverse Power Control Mode: 00-200 to 400 bps
- Smart blanking was disabled.

#### Measured Results

Band	Mode	Ch No.	Freq. (MHz)	Avg Pwr (dBm)	
BC 0	1xRTT	RC1 SO55 (Loopback)	1013	824.70	24.6
			384	836.52	24.6
			777	848.31	24.6
		RC3 SO55 (Loopback)	1013	824.70	24.6
			384	836.52	24.6
			777	848.31	24.6
		RC3 SO32 (+F-SCH)	1013	824.70	24.6
			384	836.52	24.6
			777	848.31	24.6
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	1013	824.70	24.5
			384	836.52	24.6
			777	848.31	24.4
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	1013	824.70	24.5
			384	836.52	24.6
			777	848.31	24.4
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	1013	824.70	24.5
			384	836.52	24.5
			777	848.31	24.4

**Measured Results**

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)
BC 1	1xRTT	RC1 SO55 (Loopback)	25	1851.25	24.2
			600	1880.00	24.2
			1175	1908.75	24.2
		RC3 SO55 (Loopback)	25	1851.25	24.2
			600	1880.00	24.2
			1175	1908.75	24.2
		RC3 SO32 (+F-SCH)	25	1851.25	24.2
			600	1880.00	24.2
			1175	1908.75	24.2
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	25	1851.25	24.2
			600	1880.00	24.2
			1175	1908.75	24.2
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	25	1851.25	24.2
			600	1880.00	24.2
			1175	1908.75	24.2
1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	25	1851.25	24.2	
		600	1880.00	24.2	
		1175	1908.75	24.2	

Band	Mode		Ch No.	Freq. (MHz)	Avg Pwr (dBm)
BC 10	1xRTT	RC1 SO55 (Loopback)	476	817.9	24.7
			580	820.5	24.7
			684	823.1	24.7
		RC3 SO55 (Loopback)	476	817.9	24.7
			580	820.5	24.7
			684	823.1	24.7
		RC3 SO32 (+F-SCH)	476	817.9	24.7
			580	820.5	24.7
			684	823.1	24.7
	1xAdvanced	Fwd11/Rvs8 SO75 (Loopback)	476	817.9	25.0
			580	820.5	24.9
			684	823.1	25.0
	1xEVDO Rel. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	476	817.9	25.0
			580	820.5	24.9
			684	823.1	25.0
	1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	476	817.9	25.0
			580	820.5	25.0
			684	823.1	25.0

## 9.2. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
				> 40	≤ 1
NS_09	6.6.3.3.4	21	10, 15	> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

**LTE Band 2 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	0	23.7	23.6	23.7
			1	50	0	0	23.7	23.4	23.7
			1	99	0	0	23.6	23.3	23.7
			50	0	1	1	22.6	22.7	22.7
			50	25	1	1	22.5	22.5	22.6
			50	50	1	1	22.5	22.5	22.5
			100	0	1	1	22.6	22.5	22.6
		16QAM	1	0	1	1	22.6	22.7	22.7
			1	50	1	1	22.7	22.7	22.7
			1	99	1	1	22.7	22.7	22.2
			50	0	2	2	21.5	21.7	21.6
			50	25	2	2	21.4	21.5	21.6
			50	50	2	2	21.6	21.5	21.6
			100	0	2	2	21.7	21.4	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	0	23.4	23.6	23.3
			1	36	0	0	23.4	23.7	23.4
			1	74	0	0	23.5	23.3	23.4
			36	0	1	1	22.5	22.6	22.7
			36	18	1	1	22.5	22.5	22.6
			36	37	1	1	22.5	22.4	22.7
			75	0	1	1	22.6	22.4	22.6
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	36	1	1	22.7	22.7	22.7
			1	74	1	1	22.5	22.7	22.7
			36	0	2	2	21.6	21.6	21.7
			36	18	2	2	21.5	21.5	21.6
			36	37	2	2	21.3	21.5	21.6
			75	0	2	2	21.5	21.5	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	0	23.5	23.7	23.6
			1	25	0	0	23.5	23.5	23.5
			1	49	0	0	23.3	23.4	23.5
			25	0	1	1	22.5	22.6	22.6
			25	12	1	1	22.5	22.5	22.6
			25	25	1	1	22.5	22.5	22.5
			50	0	1	1	22.5	22.5	22.7
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	25	1	1	22.2	22.7	22.5
			1	49	1	1	22.5	22.7	22.4
			25	0	2	2	21.5	21.6	21.7
			25	12	2	2	21.5	21.5	21.7
			25	25	2	2	21.4	21.5	21.6
			50	0	2	2	21.4	21.4	21.6

**LTE Band 2 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	0	23.3	23.5	23.6
			1	12	0	0	23.6	23.7	23.7
			1	24	0	0	23.3	23.4	23.5
			12	0	1	1	22.5	22.4	22.7
			12	6	1	1	22.5	22.4	22.5
			12	11	1	1	22.5	22.4	22.5
			25	0	1	1	22.5	22.5	22.6
		16QAM	1	0	1	1	22.3	22.7	22.7
			1	12	1	1	22.6	22.7	22.7
			1	24	1	1	22.3	22.4	22.7
			12	0	2	2	21.4	21.5	21.7
			12	6	2	2	21.5	21.6	21.6
			12	11	2	2	21.5	21.5	21.6
			25	0	2	2	21.6	21.4	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	0	23.4	23.4	23.4
			1	7	0	0	23.7	23.4	23.6
			1	14	0	0	23.4	23.5	23.4
			8	0	1	1	22.5	22.4	22.5
			8	4	1	1	22.6	22.4	22.5
			8	7	1	1	22.5	22.4	22.5
			15	0	1	1	22.5	22.5	22.6
		16QAM	1	0	1	1	22.5	22.7	22.7
			1	7	1	1	22.6	22.7	22.7
			1	14	1	1	22.7	22.5	22.7
			8	0	2	2	21.5	21.3	21.2
			8	4	2	2	21.5	21.5	21.5
			8	7	2	2	21.6	21.3	21.7
			15	0	2	2	21.6	21.5	21.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	0	23.4	23.2	23.5
			1	2	0	0	23.5	23.5	23.3
			1	5	0	0	23.5	23.4	23.4
			3	0	0	0	23.4	23.4	23.5
			3	1	0	0	23.4	23.4	23.6
			3	2	0	0	23.4	23.4	23.5
			6	0	1	1	22.5	22.4	22.5
		16QAM	1	0	1	1	22.7	22.4	22.7
			1	2	1	1	22.7	22.0	22.7
			1	5	1	1	22.7	22.7	22.7
			3	0	1	1	22.3	22.6	22.5
			3	1	1	1	22.6	22.1	22.5
			3	2	1	1	22.7	22.1	21.7
			6	0	2	2	21.7	21.7	21.7

**LTE Band 4 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	0	23.7	23.7	23.7
			1	50	0	0	23.7	23.7	23.7
			1	99	0	0	23.7	23.5	23.7
			50	0	1	1	22.7	22.7	22.7
			50	25	1	1	22.7	22.7	22.7
			50	50	1	1	22.7	22.7	22.7
			100	0	1	1	22.7	22.7	22.7
		16QAM	1	0	1	1	22.7	22.6	22.7
			1	50	1	1	22.7	22.6	22.7
			1	99	1	1	22.7	22.4	22.7
			50	0	2	2	21.7	21.7	21.7
			50	25	2	2	21.7	21.7	21.7
			50	50	2	2	21.7	21.7	21.7
			100	0	2	2	21.7	21.7	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	0	23.6	23.6	23.7
			1	36	0	0	23.7	23.6	23.7
			1	74	0	0	23.7	23.5	23.4
			36	0	1	1	22.7	22.7	22.7
			36	18	1	1	22.7	22.7	22.7
			36	37	1	1	22.7	22.7	22.7
			75	0	1	1	22.7	22.7	22.7
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	36	1	1	22.7	22.7	22.7
			1	74	1	1	22.6	22.7	22.7
			36	0	2	2	21.7	21.7	21.7
			36	18	2	2	21.7	21.7	21.6
			36	37	2	2	21.7	21.7	21.7
			75	0	2	2	21.7	21.7	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	0	23.6	23.6	23.6
			1	25	0	0	23.6	23.7	23.7
			1	49	0	0	23.5	23.4	23.6
			25	0	1	1	22.7	22.7	22.7
			25	12	1	1	22.7	22.7	22.7
			25	25	1	1	22.7	22.7	22.7
			50	0	1	1	22.7	22.7	22.7
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	25	1	1	22.7	22.7	22.7
			1	49	1	1	22.7	22.7	22.7
			25	0	2	2	21.7	21.7	21.7
			25	12	2	2	21.7	21.7	21.7
			25	25	2	2	21.7	21.7	21.7
			50	0	2	2	21.7	21.7	21.7



**LTE Band 4 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	0	23.3	23.7	23.7
			1	12	0	0	23.4	23.7	23.7
			1	24	0	0	23.4	23.7	23.7
			12	0	1	1	22.6	22.7	22.7
			12	6	1	1	22.6	22.7	22.7
			12	11	1	1	22.6	22.7	22.7
			25	0	1	1	22.7	22.7	22.7
		16QAM	1	0	1	1	22.3	22.7	22.7
			1	12	1	1	22.7	22.7	22.7
			1	24	1	1	22.7	22.6	22.7
			12	0	2	2	21.6	21.7	21.7
			12	6	2	2	21.7	21.7	21.7
			12	11	2	2	21.7	21.7	21.7
			25	0	2	2	21.7	21.7	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	0	23.5	23.6	23.5
			1	7	0	0	23.5	23.7	23.7
			1	14	0	0	23.5	23.5	23.6
			8	0	1	1	22.6	22.7	22.7
			8	4	1	1	22.6	22.7	22.7
			8	7	1	1	22.6	22.7	22.7
			15	0	1	1	22.6	22.7	22.7
		16QAM	1	0	1	1	22.7	22.7	22.4
			1	7	1	1	22.7	22.7	22.7
			1	14	1	1	22.7	22.7	22.7
			8	0	2	2	21.7	21.5	21.7
			8	4	2	2	21.7	21.5	21.7
			8	7	2	2	21.7	21.3	21.7
			15	0	2	2	21.7	21.7	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	0	23.4	23.6	23.5
			1	2	0	0	23.4	23.6	23.7
			1	5	0	0	23.5	23.7	23.5
			3	0	0	0	23.6	23.6	23.5
			3	1	0	0	23.6	23.6	22.7
			3	2	0	0	23.5	23.6	22.7
			6	0	1	1	22.5	22.6	22.7
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	2	1	1	22.7	22.7	22.7
			1	5	1	1	22.7	22.7	22.7
			3	0	1	1	22.5	22.7	22.3
			3	1	1	1	22.7	21.7	22.7
			3	2	1	1	22.6	21.7	21.7
			6	0	2	2	21.5	21.7	21.5

**LTE Band 5 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	0	23.9	23.9	23.9
			1	25	0	0	23.9	23.9	24.0
			1	49	0	0	23.9	23.8	23.9
			25	0	1	1	23.0	22.9	22.7
			25	12	1	1	22.9	22.9	23.0
			25	25	1	1	23.0	23.0	22.9
			50	0	1	1	22.9	22.9	23.0
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	25	1	1	22.7	22.7	22.7
			1	49	1	1	22.7	22.7	22.7
			25	0	2	2	21.9	22.0	22.0
			25	12	2	2	22.0	22.0	22.0
			25	25	2	2	21.9	22.0	21.9
			50	0	2	2	21.9	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	0	23.7	23.8	23.9
			1	12	0	0	23.9	23.7	23.7
			1	24	0	0	23.8	23.9	23.8
			12	0	1	1	22.8	22.8	22.9
			12	6	1	1	22.9	22.9	22.9
			12	11	1	1	22.9	22.9	23.0
			25	0	1	1	22.9	22.9	22.8
		16QAM	1	0	1	1	22.6	23.0	22.7
			1	12	1	1	22.7	22.7	22.7
			1	24	1	1	22.7	22.9	22.7
			12	0	2	2	21.9	21.9	21.8
			12	6	2	2	21.8	22.0	22.0
			12	11	2	2	21.9	22.0	21.9
			25	0	2	2	22.0	21.9	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	0	23.8	24.0	23.8
			1	7	0	0	23.8	24.0	23.9
			1	14	0	0	23.8	23.9	23.9
			8	0	1	1	22.9	22.8	22.9
			8	4	1	1	22.9	22.9	22.9
			8	7	1	1	22.8	22.9	22.9
			15	0	1	1	22.9	23.0	22.9
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	7	1	1	22.7	22.7	22.9
			1	14	1	1	22.7	22.7	23.0
			8	0	2	2	21.7	21.5	22.0
			8	4	2	2	21.6	21.7	22.0
			8	7	2	2	22.0	21.8	22.0
			15	0	2	2	22.0	22.0	21.9

**LTE Band 5 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	0	23.7	23.9	23.9
			1	2	0	0	24.0	24.0	23.9
			1	5	0	0	23.9	23.9	23.8
			3	0	0	0	23.9	23.9	24.0
			3	1	0	0	24.0	23.9	23.9
			3	2	0	0	23.9	23.9	23.7
			6	0	1	1	22.9	22.9	22.7
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	2	1	1	22.7	23.0	22.9
			1	5	1	1	22.7	22.7	22.7
			3	0	1	1	22.6	22.7	22.7
			3	1	1	1	22.8	22.7	22.7
			3	2	1	1	22.9	22.7	22.7
			6	0	2	2	21.8	21.7	22.0

**LTE Band 12 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0	0	24.0	24.0	24.0
			1	25	0	0	24.0	24.0	24.0
			1	49	0	0	24.0	24.0	24.0
			25	0	1	1	22.9	23.0	23.0
			25	12	1	1	23.0	23.0	23.0
			25	25	1	1	23.0	22.9	23.0
			50	0	1	1	22.9	23.0	23.0
		16QAM	1	0	1	1	23.0	23.0	23.0
			1	25	1	1	23.0	23.0	23.0
			1	49	1	1	23.0	23.0	23.0
			25	0	2	2	21.9	22.0	22.0
			25	12	2	2	22.0	22.0	22.0
			25	25	2	2	22.0	21.9	22.0
			50	0	2	2	21.9	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	0	24.0	23.9	24.0
			1	12	0	0	24.0	23.9	24.0
			1	24	0	0	24.0	23.9	24.0
			12	0	1	1	23.0	23.0	23.0
			12	6	1	1	23.0	23.0	23.0
			12	11	1	1	23.0	23.0	23.0
			25	0	1	1	23.0	23.0	23.0
		16QAM	1	0	1	1	23.0	23.0	22.9
			1	12	1	1	23.0	23.0	23.0
			1	24	1	1	23.0	22.7	23.0
			12	0	2	2	22.0	21.9	21.7
			12	6	2	2	22.0	22.0	21.9
			12	11	2	2	21.9	22.0	22.0
			25	0	2	2	22.0	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	0	23.87	24.00	24.00
			1	7	0	0	24.00	23.92	24.00
			1	14	0	0	23.90	24.00	24.00
			8	0	1	1	23.00	23.00	23.00
			8	4	1	1	23.00	23.00	23.00
			8	7	1	1	22.98	23.00	23.00
			15	0	1	1	22.97	23.00	23.00
		16QAM	1	0	1	1	23.00	23.00	22.92
			1	7	1	1	23.00	23.00	23.00
			1	14	1	1	22.60	23.00	22.66
			8	0	2	2	22.00	21.91	22.00
			8	4	2	2	22.00	21.84	22.00
			8	7	2	2	22.00	21.93	22.00
			15	0	2	2	21.96	22.00	22.00

**LTE Band 12 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	0	23.9	23.9	24.0
			1	2	0	0	24.0	23.9	24.0
			1	5	0	0	24.0	24.0	24.0
			3	0	0	0	24.0	24.0	24.0
			3	1	0	0	24.0	24.0	24.0
			3	2	0	0	24.0	24.0	24.0
		16QAM	6	0	1	1	23.0	23.0	23.0
			1	0	1	1	23.0	22.7	23.0
			1	2	1	1	23.0	23.0	23.0
			1	5	1	1	23.0	23.0	23.0
			3	0	1	1	22.7	23.0	23.0
			3	1	1	1	22.7	22.8	23.0
			3	2	1	1	22.9	22.9	23.0
			6	0	2	2	22.0	21.9	22.0

**LTE Band 25 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1860 MHz	1882.5 MHz	1905 MHz
LTE Band 25	20	QPSK	1	0	0	0	23.7	23.6	23.7
			1	50	0	0	23.7	23.6	23.5
			1	99	0	0	23.7	23.6	23.4
			50	0	1	1	22.6	22.7	22.7
			50	25	1	1	22.7	22.7	22.7
			50	50	1	1	22.6	22.6	22.6
			100	0	1	1	22.7	22.7	22.7
		16QAM	1	0	1	1	22.5	22.7	22.7
			1	50	1	1	22.4	22.5	22.5
			1	99	1	1	22.3	22.7	22.6
			50	0	2	2	21.7	21.7	21.7
			50	25	2	2	21.7	21.7	21.6
			50	50	2	2	21.7	21.7	21.5
			100	0	2	2	21.6	21.6	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1857.5 MHz	1882.5 MHz	1907.5 MHz
LTE Band 25	15	QPSK	1	0	0	0	23.7	23.7	23.7
			1	36	0	0	23.7	23.7	23.6
			1	74	0	0	23.5	23.5	23.2
			36	0	1	1	22.6	22.7	22.7
			36	18	1	1	22.6	22.6	22.6
			36	37	1	1	22.6	22.7	22.7
			75	0	1	1	22.6	22.7	22.6
		16QAM	1	0	1	1	22.5	22.7	22.7
			1	36	1	1	22.4	22.5	22.5
			1	74	1	1	22.3	22.7	22.6
			36	0	2	2	21.5	21.7	21.7
			36	18	2	2	21.6	21.7	21.6
			36	37	2	2	21.6	21.6	21.7
			75	0	2	2	21.5	21.6	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1855 MHz	1882.5 MHz	1910 MHz
LTE Band 25	10	QPSK	1	0	0	0	23.7	23.7	23.5
			1	25	0	0	23.5	23.5	23.5
			1	49	0	0	23.5	23.6	23.4
			25	0	1	1	22.5	22.6	22.5
			25	12	1	1	22.5	22.6	22.5
			25	25	1	1	22.5	22.6	22.5
			50	0	1	1	22.5	22.6	22.6
		16QAM	1	0	1	1	22.5	22.7	22.7
			1	25	1	1	22.4	22.6	22.6
			1	49	1	1	22.3	22.7	22.6
			25	0	2	2	21.5	21.7	21.7
			25	12	2	2	21.5	21.6	21.7
			25	25	2	2	21.5	21.5	21.6
			50	0	2	2	21.5	21.6	21.6

**LTE Band 25 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1852.5 MHz	1882.5 MHz	1912.5 MHz
LTE Band 25	5	QPSK	1	0	0	0	23.4	23.7	23.6
			1	12	0	0	23.4	23.7	23.7
			1	24	0	0	23.1	23.5	23.5
			12	0	1	1	22.6	22.5	22.6
			12	6	1	1	22.4	22.6	22.6
			12	11	1	1	22.5	22.6	22.5
			25	0	1	1	22.5	22.6	22.6
		16QAM	1	0	1	1	22.5	22.7	22.7
			1	12	1	1	22.4	22.6	22.6
			1	24	1	1	22.3	22.7	22.6
			12	0	2	2	21.4	21.7	21.7
			12	6	2	2	21.5	21.6	21.6
			12	11	2	2	21.5	21.5	21.6
			25	0	2	2	21.6	21.6	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1851.5 MHz	1882.5 MHz	1913.5 MHz
LTE Band 25	3	QPSK	1	0	0	0	23.6	23.4	23.3
			1	7	0	0	23.5	23.7	23.4
			1	14	0	0	23.5	23.6	23.2
			8	0	1	1	22.6	22.5	22.4
			8	4	1	1	22.6	22.7	22.4
			8	7	1	1	22.5	22.6	22.5
			15	0	1	1	22.6	22.7	22.4
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	7	1	1	22.7	22.7	22.6
			1	14	1	1	22.7	22.7	22.6
			8	0	2	2	21.7	21.1	21.6
			8	4	2	2	21.5	21.4	21.6
			8	7	2	2	21.6	21.5	21.6
			15	0	2	2	21.6	21.6	21.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1850.7 MHz	1882.5 MHz	1914.3 MHz
LTE Band 25	1.4	QPSK	1	0	0	0	23.6	23.4	23.2
			1	2	0	0	23.7	23.4	23.3
			1	5	0	0	23.7	23.5	23.4
			3	0	0	0	23.7	23.5	23.4
			3	1	0	0	23.6	23.6	23.5
			3	2	0	0	23.7	23.6	23.5
			6	0	1	1	22.7	22.7	22.4
		16QAM	1	0	1	1	22.7	22.7	22.7
			1	2	1	1	22.7	22.7	22.6
			1	5	1	1	22.7	22.7	22.6
			3	0	1	1	22.5	22.7	22.1
			3	1	1	1	22.6	22.4	22.6
			3	2	1	1	22.6	22.7	22.6
			6	0	2	2	21.5	21.7	21.3

**LTE Band 26 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							823.5 MHz	831.5 MHz	841.5 MHz
LTE Band 26	15	QPSK	1	0	0	0	24.0	23.9	23.9
			1	36	0	0	24.0	24.0	24.0
			1	74	0	0	24.0	23.8	23.8
			36	0	1	1	22.9	22.9	22.8
			36	18	1	1	22.8	22.8	22.7
			36	37	1	1	22.8	22.8	22.8
			75	0	1	1	22.8	22.9	22.8
		16QAM	1	0	1	1	23.0	23.0	23.0
			1	36	1	1	23.0	23.0	23.0
			1	74	1	1	23.0	23.0	23.0
			36	0	2	2	21.8	22.0	21.7
			36	18	2	2	21.7	21.9	21.6
			36	37	2	2	21.7	21.9	21.7
			75	0	2	2	21.8	22.0	21.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							821 MHz	831.5 MHz	844 MHz
LTE Band 26	10	QPSK	1	0	0	0	23.7	24.0	23.8
			1	25	0	0	23.9	23.9	23.8
			1	49	0	0	23.7	23.9	23.8
			25	0	1	1	22.8	22.9	22.9
			25	12	1	1	22.8	22.8	22.9
			25	25	1	1	22.8	22.8	22.8
			50	0	1	1	22.9	22.9	22.9
		16QAM	1	0	1	1	23.0	23.0	23.0
			1	25	1	1	23.0	23.0	23.0
			1	49	1	1	23.0	23.0	22.8
			25	0	2	2	21.8	22.0	22.0
			25	12	2	2	21.8	21.9	22.0
			25	25	2	2	21.7	21.9	22.0
			50	0	2	2	21.8	21.9	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							818.5 MHz	831.5 MHz	846.5 MHz
LTE Band 26	5	QPSK	1	0	0	0	23.7	24.0	24.0
			1	12	0	0	24.0	24.0	24.0
			1	24	0	0	23.8	23.9	23.8
			12	0	1	1	22.8	22.9	22.8
			12	6	1	1	22.9	22.9	22.9
			12	11	1	1	22.8	22.8	22.8
			25	0	1	1	22.8	22.8	22.9
		16QAM	1	0	1	1	23.0	22.9	23.0
			1	12	1	1	23.0	23.0	23.0
			1	24	1	1	23.0	22.9	23.0
			12	0	2	2	21.8	22.0	22.0
			12	6	2	2	21.8	22.0	22.0
			12	11	2	2	21.7	21.9	22.0
			25	0	2	2	22.0	21.8	21.8



**LTE Band 26 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							817.5 MHz	831.5 MHz	847.5 MHz
LTE Band 26	3	QPSK	1	0	0	0	23.8	23.9	23.8
			1	7	0	0	24.0	24.0	24.0
			1	14	0	0	23.9	23.8	23.8
			8	0	1	1	22.7	22.9	22.8
			8	4	1	1	22.8	22.9	22.9
			8	7	1	1	22.8	22.9	22.8
			15	0	1	1	22.9	22.9	22.9
		16QAM	1	0	1	1	23.0	23.0	22.3
			1	7	1	1	23.0	23.0	23.0
			1	14	1	1	23.0	23.0	22.1
			8	0	2	2	21.8	21.6	22.0
			8	4	2	2	21.7	21.6	22.0
			8	7	2	2	21.8	21.5	22.0
			15	0	2	2	21.9	21.9	21.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							816.7 MHz	831.5 MHz	841.5 MHz
LTE Band 26	1.4	QPSK	1	0	0	0	23.8	24.0	23.8
			1	2	0	0	23.7	23.9	23.8
			1	5	0	0	23.9	23.8	23.8
			3	0	0	0	23.8	23.9	23.9
			3	1	0	0	23.8	23.9	23.9
			3	2	0	0	23.9	23.9	23.9
			6	0	1	1	22.9	22.8	22.9
		16QAM	1	0	1	1	23.0	23.0	22.7
			1	2	1	1	23.0	23.0	23.0
			1	5	1	1	23.0	23.0	22.7
			3	0	1	1	23.0	23.0	22.9
			3	1	1	1	22.7	22.9	22.7
			3	2	1	1	22.9	23.0	23.0
			6	0	2	2	21.7	21.6	21.9

**LTE Band 41 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	0	24.4	24.4	24.4	24.4	24.4
			1	50	0	0	24.4	24.4	24.4	24.3	24.4
			1	99	0	0	24.4	24.4	24.4	24.4	24.4
			50	0	1	1	23.4	23.4	23.4	23.4	23.4
			50	25	1	1	23.4	23.3	23.4	23.4	23.4
			50	50	1	1	23.4	23.2	23.4	23.4	23.4
		16QAM	100	0	1	1	23.4	23.4	23.4	23.4	23.4
			1	0	1	1	23.4	23.4	23.4	23.4	23.4
			1	50	1	1	23.3	23.0	22.6	23.4	23.4
			1	99	1	1	23.0	23.0	22.6	23.4	23.4
			50	0	2	2	22.4	22.4	22.4	22.4	22.4
			50	25	2	2	22.4	22.4	22.4	22.4	22.4
			50	50	2	2	22.4	22.3	22.4	22.2	22.4
			100	0	2	2	22.4	22.4	22.4	22.3	22.4

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2503.5 MHz	2548.3 MHz	2593 MHz	2637.8 MHz	2682.5 MHz
LTE Band 41	15	QPSK	1	0	0	0	24.4	24.4	24.4	24.4	24.4
			1	36	0	0	24.4	24.4	24.4	24.4	24.4
			1	74	0	0	24.4	24.4	24.4	24.3	24.4
			36	0	1	1	23.2	23.4	23.4	23.4	23.4
			36	18	1	1	23.3	23.4	23.4	23.4	23.4
			36	37	1	1	23.2	23.4	23.4	23.3	23.4
		16QAM	75	0	1	1	23.3	23.4	23.3	23.3	23.4
			1	0	1	1	23.4	23.3	23.1	23.4	23.4
			1	36	1	1	23.4	23.2	23.3	23.4	23.4
			1	74	1	1	23.4	23.1	22.9	23.4	23.4
			36	0	2	2	22.3	22.4	22.2	22.4	22.4
			36	18	2	2	22.4	22.4	22.1	22.3	22.4
			36	37	2	2	22.3	22.4	22.3	22.2	22.4
			75	0	2	2	22.4	22.4	22.3	22.4	22.4

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2501 MHz	2547 MHz	2593 MHz	2639 MHz	2685 MHz
LTE Band 41	10	QPSK	1	0	0	0	24.3	24.4	24.4	24.4	24.4
			1	25	0	0	24.1	24.2	24.3	24.2	24.3
			1	49	0	0	24.3	24.4	24.4	24.3	24.4
			25	0	1	1	23.2	23.4	23.4	23.3	23.4
			25	12	1	1	23.3	23.3	23.3	23.4	23.4
			25	25	1	1	23.4	23.4	23.3	23.3	23.4
		16QAM	50	0	1	1	23.3	23.4	23.2	23.4	23.4
			1	0	1	1	23.4	23.4	23.2	23.0	23.4
			1	25	1	1	23.4	23.4	23.2	23.1	23.4
			1	49	1	1	23.4	23.4	23.0	22.9	23.4
			25	0	2	2	22.4	22.4	22.4	22.3	22.4
			25	12	2	2	22.4	22.3	22.3	22.4	22.4
			25	25	2	2	22.4	22.3	22.3	22.3	22.4
			50	0	2	2	22.3	22.4	22.4	22.4	22.4

**LTE Band 41 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2498.5 MHz	2545.8 MHz	2593 MHz	2640.3 MHz	2687.5 MHz
LTE Band 41	5	QPSK	1	0	0	0	24.1	24.3	24.2	24.3	24.4
			1	12	0	0	24.4	24.3	24.4	24.4	24.4
			1	24	0	0	24.3	24.2	24.2	24.2	24.2
			12	0	1	1	23.3	23.4	23.2	23.4	23.4
			12	7	1	1	23.3	23.4	23.3	23.3	23.4
			12	13	1	1	23.3	23.3	23.4	23.4	23.4
			25	0	1	1	23.3	23.3	23.2	23.3	23.4
		16QAM	1	0	1	1	23.4	23.4	22.6	23.4	23.3
			1	12	1	1	23.0	23.4	22.9	22.7	22.9
			1	24	1	1	23.4	23.4	22.7	22.9	23.3
			12	0	2	2	22.2	22.4	22.4	22.4	22.4
			12	7	2	2	22.4	22.4	22.3	22.4	22.4
			12	13	2	2	22.4	22.4	22.4	22.4	22.4
			25	0	2	2	22.4	22.4	22.4	22.3	22.4

### 9.3. Wi-Fi DTS (2.4 GHz) Band

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
2.4	802.11b	1 Mbps	1	2412	15.9	16.0	Yes	
			6	2437	16.0			
			11	2462	16.0			
	802.11g	6 Mbps	1	2412	Not Required	15.0	No	1
			6	2437				
			11	2462				
	802.11n (HT20)	MCS0	1	2412	Not Required	15.0	No	1
			6	2437				
			11	2462				

**Note(s):**

- Output Power and SAR measurement is not required for 802.11g/n HT20 channels when the specified tune-up tolerances for 802.11g/n HT20 are lower than 802.11b by more than 1 dB and the measured SAR is  $\leq 1.2$  W/Kg.

### 9.4. Wi-Fi U-NII (5 GHz) Bands

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
5.2 (U-NII 1)	802.11a	6 Mbps	36 ~ 48	5180 ~ 5240	Not required	14.0	No	1
	802.11n (HT20)	6.5 Mbps	36 ~ 48	5180 ~ 5240		14.0	No	1
	802.11n (HT40)	13.5 Mbps	38	5190	14.0	14.0	Yes	
46			5230	13.8				
5.3 (U-NII 2A)	802.11a	6 Mbps	52 ~ 64	5260 ~ 5320	Not required	14.0	No	1
	802.11n (HT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		14.0	No	1
	802.11n (HT40)	13.5 Mbps	54	5270	14.0	14.0	Yes	
62			5310	13.8				
5.5 (U-NII 2C)	802.11a	6 Mbps	100 ~ 140	5500 ~ 5700	Not required	14.0	No	1
	802.11n (HT20)	6.5 Mbps	100 ~ 140	5500 ~ 5700		14.0	No	1
	802.11n (HT40)	13.5 Mbps	102	5510	12.4	14.0	Yes	
118			5590	13.4				
134			5630	13.1				
5.8 (UNII-3 or §15.247)	802.11a	6 Mbps	149 ~ 165	5745 ~ 5825	Not required	14.0	No	1
	802.11n (HT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		14.0	No	1
	802.11n (HT40)	13.5 Mbps	151	5755	12.9	14.0	Yes	
159			5795	12.8				

**Note(s):**

- Output Power and SAR measurement is not required for 802.11a and 802.11n HT20 channels because the specified tune-up tolerances for 802.11a and 802.11n HT20 are lower than or equal to 802.11n HT40 and the measured SAR is  $\leq 1.2$  W/Kg.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - $\leq 1.2$  W/kg, SAR is not required for UNII band I
  - $> 1.2$  W/kg, both bands should be tested independently for SAR.

### 9.5. Bluetooth

Maximum tune-up tolerance limit is 9.50 dBm. This power level qualifies for exclusion of SAR testing.

## 10. Measured and Reported (Scaled) SAR Results

**SAR Test Reduction criteria are as follows:**

### **KDB 447498 D01 General RF Exposure Guidance:**

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### **KDB 648474 D04 Handset SAR:**

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Additional 1-g SAR testing at 5 mm is not required. For hotspot mode, 10-g extremity SAR is not required for the surfaces and edges since all 1-g reported SAR  $< 1.2$  W/kg. **(for Phablet)**

### **KDB 941225 D01 SAR test for 3G devices:**

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode

### **KDB 941225 D05 SAR for LTE Devices:**

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

**KDB 248227 D01 SAR meas for 802.11 v02:**

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

### 10.1. CDMA BC0

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	384	836.5	24.7	24.6	0.453	0.464	
			Left Tilt	384	836.5	24.7	24.6	0.278	0.284	
			Right Touch	384	836.5	24.7	24.6	0.567	0.580	
			Right Tilt	384	836.5	24.7	24.6	0.342	0.350	
	1xEVDO (Rel. 0)	0	Left Touch	384	836.5	24.7	24.6	0.445	0.455	
			Left Tilt	384	836.5	24.7	24.6	0.203	0.208	
			Right Touch	384	836.5	24.7	24.6	0.625	<b>0.640</b>	1
			Right Tilt	384	836.5	24.7	24.6	0.356	0.364	
Body-worn & Hotspot	1xRTT (RC3 SO32)	10	Rear	1013	824.70	24.7	24.6	0.832	0.851	
				384	836.52	24.7	24.6	0.979	1.002	
				777	848.31	24.7	24.6	1.030	<b>1.054</b>	2
			Front	384	836.52	24.7	24.6	0.590	0.604	
Hotspot	1xRTT (RC3 SO32)	10	Edge 2	384	836.5	24.7	24.6	0.689	0.705	
			Edge 3	384	836.5	24.7	24.6	0.485	0.496	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	1xEVDO (Rel. 0)	0	Right Touch	384	836.52	24.7	24.6	0.619	0.633	
Head with Cover	1xEVDO (Rel. 0)		Right Touch	384	836.52	24.7	24.6	0.532	0.544	
Body-worn & Hotspot w/o Stylus	1xRTT (RC3 SO32)	10	Rear	1013	824.70	24.7	24.6	0.804	0.823	
				384	836.52	24.7	24.6	0.948	0.970	
				777	848.31	24.7	24.6	1.000	1.023	
Body-worn & Hotspot with Cover	1xRTT (RC3 SO32)	10	Rear	1013	824.70	24.7	24.6	0.883	0.904	
				384	836.52	24.7	24.6	0.913	0.934	
				777	848.31	24.7	24.6	0.822	0.841	

### 10.2. CDMA BC1

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	25	1851.25	24.2	24.2	1.000	<b>1.000</b>	3
				600	1880.00	24.2	24.2	0.952	0.952	
				1175	1908.75	24.2	24.2	0.852	0.852	
			Right Touch	600	1880.00	24.2	24.2	0.382	0.382	
				600	1880.00	24.2	24.2	0.245	0.245	
	1xEVDO (Rel. 0)	0	Left Touch	25	1851.25	24.2	24.2	0.941	0.941	
				600	1880.00	24.2	24.2	0.920	0.920	
				1175	1908.75	24.2	24.2	0.782	0.782	
			Right Touch	600	1880.00	24.2	24.2	0.428	0.428	
				600	1880.00	24.2	24.2	0.231	0.231	
Body-worn & Hotspot	1xRTT (RC3 SO32)	10	Rear	600	1880.0	24.2	24.2	0.656	0.656	
			Front	600	1880.0	24.2	24.2	0.782	<b>0.782</b>	4
Hotspot	1xRTT (RC3 SO32)	10	Edge 3	600	1880.0	24.2	24.2	0.357	0.357	
			Edge 4	600	1880.0	24.2	24.2	0.627	0.627	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	1xRTT (RC3 SO55)	0	Left Touch	25	1851.25	24.2	24.2	0.951	0.951	
Head with Cover	1xRTT (RC3 SO55)		Left Touch	25	1851.25	24.2	24.2	0.805	0.805	
Body-worn & Hotspot w/o Stylus	1xRTT (RC3 SO32)	10	Front	600	1880.00	24.2	24.2	0.679	0.679	
Body-worn & Hotspot with Cover	1xRTT (RC3 SO32)		Front	600	1880.00	24.2	24.2	0.647	0.647	



### 10.3. CDMA BC10

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	1xRTT (RC3 SO55)	0	Left Touch	580	820.5	25.0	24.7	0.404	0.433	
			Left Tilt	580	820.5	25.0	24.7	0.246	0.264	
			Right Touch	580	820.5	25.0	24.7	0.464	0.497	
			Right Tilt	580	820.5	25.0	24.7	0.258	0.276	
	1xEVDO (Rel. 0)	0	Left Touch	580	820.5	25.0	24.9	0.400	0.409	
			Left Tilt	580	820.5	25.0	24.9	0.251	0.257	
			Right Touch	580	820.5	25.0	24.9	0.528	0.540	
			Right Tilt	580	820.5	25.0	24.9	0.290	0.297	
Body-worn & Hotspot	1xRTT (RC3 SO32)	10	Rear	476	817.90	25.0	24.7	0.859	0.920	
				580	820.50	25.0	24.7	0.857	0.918	
				684	823.10	25.0	24.7	0.907	0.972	
			Front	580	820.50	25.0	24.7	0.629	0.674	
	1xEVDO (Rel. 0)	10	Rear	476	817.90	25.0	25.0	0.941	0.941	
				580	820.50	25.0	24.9	0.930	0.952	
				684	823.10	25.0	25.0	0.986	<b>0.986</b>	6
			Front	580	820.50	25.0	24.9	0.666	0.682	
Hotspot	1xRTT (RC3 SO32)	10	Edge 2	580	820.50	25.0	24.7	0.619	0.663	
			Edge 3	580	820.50	25.0	24.7	0.424	0.454	
	1xEVDO (Rel. 0)	10	Edge 2	580	820.50	25.0	24.9	0.628	0.643	
			Edge 3	580	820.50	25.0	24.9	0.464	0.475	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	1xEVDO (Rel. 0)	0	Right Touch	580	820.50	25.0	24.9	0.472	0.483	
Head with Cover	1xEVDO (Rel. 0)		Right Touch	580	820.50	25.0	24.9	0.555	<b>0.568</b>	5
Body-worn & Hotspot w/o Stylus	1xEVDO (Rel. 0)	10	Rear	476	817.90	25.0	25.0	0.920	0.920	
				580	820.50	25.0	24.9	0.908	0.929	
				684	823.10	25.0	25.0	0.966	0.966	
Body-worn & Hotspot with Cover	1xEVDO (Rel. 0)	10	Rear	476	817.90	25.0	25.0	0.876	0.876	
				580	820.50	25.0	24.9	0.873	0.893	
				684	823.10	25.0	25.0	0.908	0.908	

### 10.4. LTE Band 2 (20MHz Bandwidth)

SAR for LTE Band 2 is covered by LTE Band 25 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

### 10.5. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
								Tune-up limit	Meas.	Meas.	Scaled			
Head	QPSK	0	Left Touch	20175	1732.5	1	0	23.7	23.7	0.573	<b>0.573</b>			
						50	0	22.7	22.7	0.469	0.469			
			Left Tilt	20175	1732.5	1	0	23.7	23.7	0.310	0.310			
						50	0	22.7	22.7	0.262	0.262			
			Right Touch	20175	1732.5	1	0	23.7	23.7	0.320	0.320			
						50	0	22.7	22.7	0.255	0.255			
		Right Tilt	20175	1732.5	1	0	23.7	23.7	0.296	0.296				
					50	0	22.7	22.7	0.221	0.221				
		Body-worn & Hotspot	QPSK	10	Rear	20175	1732.5	1	0	23.7	23.7	0.726	<b>0.726</b>	8
								50	0	22.7	22.7	0.577	0.577	
					Front	20175	1732.5	1	0	23.7	23.7	0.647	0.647	
								50	0	22.7	22.7	0.503	0.503	
Hotspot	QPSK	10	Edge 3	20175	1732.5	1	0	23.7	23.7	0.389	0.389			
						50	0	22.7	22.7	0.288	0.288			
			Edge 4	20175	1732.5	1	0	23.7	23.7	0.460	0.460			
						50	0	22.7	22.7	0.381	0.381			

### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	QPSK	0	Left Touch	20175	1732.5	1	0	23.7	23.7	0.587	0.587	
Head with Cover	QPSK	0	Left Touch	20175	1732.5	1	0	23.7	23.7	0.777	<b>0.777</b>	
Body-worn & Hotspot w/o Stylus	QPSK	10	Rear	20175	1732.5	1	0	23.7	23.7	0.672	0.672	
Body-worn & Hotspot with Cover	QPSK	10	Rear	20175	1732.5	1	0	23.7	23.7	0.692	0.692	

### Worst-case Tests with Cover

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0	23.7	23.7	0.777	<b>0.777</b>	7
						50	0	22.7	22.7	0.543	0.543	
			Left Tilt	20175	1732.5	1	0	23.7	23.7	0.353	0.353	
						50	0	22.7	22.7	0.287	0.287	
			Right Touch	20175	1732.5	1	0	23.7	23.7	0.316	0.316	
						50	0	22.7	22.7	0.246	0.246	
		Right Tilt	20175	1732.5	1	0	23.7	23.7	0.336	0.336		
					50	0	22.7	22.7	0.249	0.249		

### 10.6. LTE Band 5 (10MHz Bandwidth)

SAR for LTE Band 5 is covered by LTE Band 26 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

### 10.7. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	0	24.0	24.0	0.155	0.155	
						25	0	23.0	23.0	0.118	0.118	
			Left Tilt	23095	707.5	1	0	24.0	24.0	0.097	0.097	
						25	0	23.0	23.0	0.067	0.067	
			Right Touch	23095	707.5	1	0	24.0	24.0	0.171	<b>0.171</b>	
						25	0	23.0	23.0	0.129	0.129	
Right Tilt	23095	707.5	1	0	24.0	24.0	0.090	0.090				
			25	0	23.0	23.0	0.067	0.067				
Body-worn & Hotspot	QPSK	10	Rear	23095	707.5	1	0	24.0	24.0	0.430	<b>0.430</b>	10
						25	0	23.0	23.0	0.298	0.298	
			Front	23095	707.5	1	0	24.0	24.0	0.215	0.215	
						25	0	23.0	23.0	0.176	0.176	
Hotspot	QPSK	10	Edge 2	23095	707.5	1	0	24.0	24.0	0.414	0.414	
						25	0	23.0	23.0	0.297	0.297	
			Edge 3	23095	707.5	1	0	24.0	24.0	0.133	0.133	
						25	0	23.0	23.0	0.096	0.096	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	QPSK	0	Right Touch	23095	707.5	1	0	24.0	24.0	0.176	0.176	
Head with Cover	QPSK	0	Right Touch	23095	707.5	1	0	24.0	24.0	0.193	<b>0.193</b>	9
Body-worn & Hotspot w/o Stylus	QPSK	10	Rear	23095	707.5	1	0	24.0	24.0	0.375	0.375	
Body-worn & Hotspot with Cover	QPSK	10	Rear	23095	707.5	1	0	24.0	24.0	0.355	0.355	

### 10.8. LTE Band 25 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	26365	1882.5	1	49	23.7	23.6	0.783	<b>0.801</b>	
						50	0	22.7	22.7	0.635	0.635	
			Left Tilt	26365	1882.5	1	49	23.7	23.6	0.273	0.279	
						50	0	22.7	22.7	0.236	0.236	
			Right Touch	26365	1882.5	1	49	23.7	23.6	0.371	0.380	
						50	0	22.7	22.7	0.305	0.305	
Right Tilt	26365	1882.5	1	49	23.7	23.6	0.219	0.224				
			50	0	22.7	22.7	0.164	0.164				
Body-worn & Hotspot	QPSK	10	Rear	26365	1882.5	1	49	23.7	23.6	0.540	0.553	
						50	0	22.7	22.7	0.464	0.464	
			Front	26090	1855.0	1	0	23.7	23.7	0.964	<b>0.964</b>	12
						50	0	22.7	22.7	0.669	0.669	
				26365	1882.5	1	49	23.7	23.6	0.827	0.846	
						50	0	22.7	22.7	0.669	0.669	
26640	1910.0	1	0	23.7	23.7	0.796	0.796					
Hotspot	QPSK	10	Edge 3	26365	1882.5	1	49	23.7	23.6	0.330	0.338	
						50	0	22.7	22.7	0.275	0.275	
			Edge 4	26365	1882.5	1	49	23.7	23.6	0.632	0.647	
						50	0	22.7	22.7	0.503	0.503	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	QPSK	0	Left Touch	26365	1882.5	1	49	23.7	23.6	0.798	<b>0.817</b>	11
Head with Cover	QPSK	0	Left Touch	26365	1882.5	1	49	23.7	23.6	0.763	0.781	
Body-worn & Hotspot w/o Stylus	QPSK	10	Front	26090	1855.0	1	0	23.7	23.7	0.825	0.825	
Body-worn & Hotspot with Cover	QPSK	10	Front	26090	1855.0	1	0	23.7	23.7	0.629	0.629	

### 10.9. LTE Band 26 (15MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	37	24.0	24.0	0.336	0.336	
						36	0	23.0	22.9	0.259	0.265	
			Left Tilt	26865	831.5	1	37	24.0	24.0	0.200	0.200	
						36	0	23.0	22.9	0.144	0.147	
			Right Touch	26865	831.5	1	37	24.0	24.0	0.434	<b>0.434</b>	
						36	0	23.0	22.9	0.286	0.293	
Right Tilt	26865	831.5	1	37	24.0	24.0	0.261	0.261				
			36	0	23.0	22.9	0.177	0.181				
Body-worn & Hotspot	QPSK	10	Rear	26740	819.0	1	0	24.0	24.0	0.589	0.589	
				26865	831.5	1	37	24.0	24.0	0.801	0.801	
				36	0	23.0	22.9	0.555	0.568			
			Front	26990	844.0	1	37	24.0	24.0	0.865	<b>0.865</b>	14
				26865	831.5	1	37	24.0	24.0	0.534	0.534	
						36	0	23.0	22.9	0.426	0.436	
Hotspot	QPSK	10	Edge 2	26865	831.5	1	37	24.0	24.0	0.397	0.397	
						36	0	23.0	22.9	0.314	0.321	
			Edge 3	26865	831.5	1	37	24.0	24.0	0.360	0.360	
						36	0	23.0	22.9	0.284	0.291	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	QPSK	0	Right Touch	26865	831.5	1	37	24.0	24.0	0.515	0.515	
Head with Cover	QPSK	0	Right Touch	26865	831.5	1	37	24.0	24.0	0.515	<b>0.515</b>	13
Body-worn & Hotspot w/o Stylus	QPSK	10	Rear	26990	844.0	1	37	24.0	24.0	0.810	0.810	
Body-worn & Hotspot with Cover	QPSK	10	Rear	26990	844.0	1	37	24.0	24.0	0.842	0.842	

### 10.10. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	0	24.4	24.4	0.075	<b>0.075</b>	
						50	0	23.4	23.4	0.051	0.051	
			Left Tilt	40620	2593.0	1	0	24.4	24.4	0.036	0.036	
						50	0	23.4	23.4	0.030	0.030	
			Right Touch	40620	2593.0	1	0	24.4	24.4	0.055	0.055	
						50	0	23.4	23.4	0.044	0.044	
Right Tilt	40620	2593.0	1	0	24.4	24.4	0.026	0.026				
			50	0	23.4	23.4	0.021	0.021				
Body-worn & Hotspot	QPSK	10	Rear	40620	2593.0	1	0	24.4	24.4	0.468	<b>0.468</b>	
						50	0	23.4	23.4	0.388	0.388	
			Front	40620	2593.0	1	0	24.4	24.4	0.417	0.417	
						50	0	23.4	23.4	0.318	0.318	
Hotspot	QPSK	10	Edge 2	40620	2593.0	1	0	24.4	24.4	0.160	0.160	
						50	0	23.4	23.4	0.128	0.128	
			Edge 3	40620	2593.0	1	0	24.4	24.4	0.620	0.620	
						50	0	23.4	23.4	0.447	0.447	

#### Additional Tests

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head w/o Stylus	QPSK	0	Left Touch	40620	2593.0	1	0	24.4	24.4	0.084	<b>0.084</b>	15
Head with Cover	QPSK	0	Left Touch	40620	2593.0	1	0	24.4	24.4	0.069	0.069	
Hotspot w/o Stylus	QPSK	10	Edge 3	40620	2593.0	1	0	24.4	24.4	0.645	0.645	
Hotspot with Cover	QPSK	10	Edge 3	40620	2593.0	1	0	24.4	24.4	0.837	<b>0.837</b>	

#### Worst-case Tests with Cover

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Body-worn & Hotspot	QPSK	10	Rear	40620	2593.0	1	0	24.4	24.4	0.659	<b>0.659</b>	16
						50	0	23.4	23.4	0.511	0.511	
			Front	40620	2593.0	1	0	24.4	24.4	0.387	0.387	
						50	0	23.4	23.4	0.284	0.284	
Hotspot	QPSK	10	Edge 2	40620	2593.0	1	0	24.4	24.4	0.166	0.166	
						50	0	23.4	23.4	0.116	0.116	
			Edge 3	39790	2510.0	1	0	24.4	24.4	0.383	0.383	
				40185	2549.5	1	0	24.4	24.4	0.464	0.464	
				40620	2593.0	1	0	24.4	24.4	0.837	<b>0.837</b>	17
						50	0	23.4	23.4	0.601	0.601	
				41055	2636.5	1	0	24.4	24.4	0.628	0.628	
41490	2680.0	1	0	24.4	24.4	0.574	0.574					

### 10.11. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.425	16.0	16.0	0.428	<b>0.428</b>	1	18
				Left Tilt	6	2437.0	0.306	16.0	16.0	0.324	0.324	3	
				Right Touch	6	2437.0	0.132						
				Right Tilt	6	2437.0	0.136						
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.268	16.0	16.0	0.194	0.194	2	
				Front	6	2437.0	0.095						
				Edge 1	6	2437.0	0.081						
				Edge 2	6	2437.0	0.037						

**Note(s):**

- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Additional testing required in order to satisfy FCC simultaneous transmission limit criteria.

**Additional Tests**

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head w/o Stylus	0	Left Touch	6	2437.0	16.0	16.0	0.379	<b>0.379</b>	
		Head with Cover	0	Left Touch	6	2437.0	16.0	16.0	0.164	0.164	
		Body-worn & Hotspot w/o Stylus	10	Rear	6	2437.0	16.0	16.0	0.250	<b>0.250</b>	19
		Body-worn & Hotspot with Cover	10	Rear	6	2437.0	16	16.0	0.194	0.194	

### 10.12. Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11n HT40	Head	0	Left Touch	54	5270.0	0.584	14.0	14.0	0.349	0.349	1	
				Left Tilt	54	5270.0	0.285						
				Right Touch	54	5270.0	0.272						
				Right Tilt	54	5270.0	0.207						
		Body-worn	10	Rear	54	5270.0	0.355	14.0	14.0	0.190	<b>0.190</b>	1	21
				Front	54	5270.0	0.167						
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Tune-up limit	Meas.	Meas.	Scaled	Notes	Plot No.
5.5 GHz U-NII 2C	802.11n HT40	Head	0	Left Touch	110	5550.0	0.365	14.0	13.4	0.211	<b>0.242</b>	1	
				Left Tilt	110	5550.0	0.206						
				Right Touch	110	5550.0	0.178						
				Right Tilt	110	5550.0	0.138						
		Body-worn	10	Rear	110	5550.0	0.240	14.0	13.4	0.122	<b>0.140</b>	1	
				Front	110	5550.0	0.141						
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Tune-up limit	Meas.	Meas.	Scaled	Notes	Plot No.
5.8 GHz U-NII 3	802.11n HT40	Head	0	Left Touch	151	5755.0	0.444	14.0	12.9	0.235	<b>0.303</b>	1	24
				Left Tilt	151	5755.0	0.207						
				Right Touch	151	5755.0	0.173						
				Right Tilt	151	5755.0	0.131						
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	151	5755.0	0.165	14.0	12.9	0.075	0.097	1	
		Front		151	5755.0	0.108							
		Edge 1		151	5755.0	0.08							
				Edge 2	151	5755.0	0.162						

**Note(s):**

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

**Additional Tests**

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n HT40	Head w/o Stylus	0	Left Touch	54	5270.0	14.0	14.0	0.387	<b>0.387</b>	20
		Head with Cover	0	Left Touch	54	5270.0	14.0	14.0	0.267	0.267	
		Body-worn w/o Stylus	10	Rear	54	5270.0	14.0	14.0	0.173	0.173	
		Body-worn with Cover	10	Rear	54	5270.0	14	14.0	0.171	0.171	
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Tune-up limit	Meas.	Meas.	Scaled	Plot No.
5.5 GHz U-NII 2C	802.11n HT40	Head w/o Stylus	0	Left Touch	110	5550.0	14.0	13.4	0.285	<b>0.327</b>	22
		Head with Cover	0	Left Touch	110	5550.0	14.0	13.4	0.149	0.171	
		Body-worn w/o Stylus	10	Rear	110	5550.0	14.0	13.4	0.152	<b>0.175</b>	23
		Body-worn with Cover	10	Rear	110	5550.0	14	13.4	0.102	0.117	
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Tune-up limit	Meas.	Meas.	Scaled	Plot No.
5.3 GHz U-NII 2A	802.11n HT40	Head w/o Stylus	0	Left Touch	151	5755.0	14.0	12.9	0.223	0.287	
		Head with Cover	0	Left Touch	151	5755.0	14.0	12.9	0.131	0.169	
		Body-worn & Hotspot w/o Stylus	10	Rear	151	5755.0	14.0	12.9	0.098	<b>0.126</b>	25
		Body-worn & Hotspot with Cover	10	Rear	151	5755.0	14	12.9	0.048	0.062	



### 10.13. Bluetooth

#### Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$  for test separation distances ≤ 50 mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

#### Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
9.5	9	10	2.480	1.4	Rear/Front	0.187

#### Conclusion:

\*: The computed value is < 3; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Body-worn & Hotspot	Rear	No	0.430	N/A	N/A
850	CDMA BC0	Body-worn & Hotspot	Rear	Yes	1.030	1.020	1.01
	CDMA BC10	Body-worn & Hotspot	Rear	No	0.986	N/A	N/A
	LTE Band 26	Body-worn & Hotspot	Rear	No	0.865	N/A	N/A
1900	CDMA BC1	Head	Left Touch	Yes	1.000	0.975	1.03
	LTE Band 25	Body-worn & Hotspot	Front	No	0.964	N/A	N/A
1700	LTE Band 4	Body-worn & Hotspot	Rear	No	0.777	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Left Touch	No	0.428	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	Yes	0.837	0.790	1.06
5300	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.387	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.285	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.235	N/A	N/A

**Note(s):**

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

## 12. Simultaneous Transmission SAR Analysis

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	CDMA	+	Wi-Fi 2.4 GHz
	2	CDMA	+	Wi-Fi 5 GHz
	3	LTE	+	Wi-Fi 2.4 GHz
	4	LTE	+	Wi-Fi 5 GHz
Body-w orn	1	CDMA	+	Wi-Fi 2.4 GHz
	2	CDMA	+	Wi-Fi 5 GHz
	3	CDMA	+	BT
	4	LTE	+	Wi-Fi 2.4 GHz
	5	LTE	+	Wi-Fi 5 GHz
	6	LTE	+	BT
Hotspot & Wi-Fi Direct	1	CDMA	+	Wi-Fi 2.4 GHz
	2	CDMA	+	Wi-Fi 5.8 GHz
	3	LTE	+	Wi-Fi 2.4 GHz
	4	LTE	+	Wi-Fi 5.8 GHz

**Notes:**

- WiFi 2.4Ghz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5Ghz 802.11a/n #149,#153,#157,#161,#151,#159 are supported WiFi-Direct(GO/GC) and Hotspot
- EVDO, LTE is supported Hotspot.
- VoIP is supported in EVDO, LTE (e.g. 3rd part VoIP)
- Bluetooth and WiFi can not transmit simultaneously since they share the same chip.
- CDMA and LTE can not transmit simultaneously since they share the same chip.

### 12.1. Sum of the SAR for WWAN, Wi-Fi & BT

RF Exposure conditions	① WWAN	② DTS	③ U-NII	④ BT	①+② WWAN +DTS		①+③ WWAN + U-NII		①+④ WWAN +BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
					Head	1000	0.428	0.387		1.428
Body-worn	1054	0.250	0.190	0.187	1304	No	1244	No	1241	No
Hotspot	1054	0.250	0.126		1304	No	1180	No		

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**A\_15I19834v0 SAR Photos & Ant. Locations**

**B\_15I19834v0 SAR Highest Test Plots**

**C\_15I19834v0 SAR System Check Plots**

**D\_15I19834v0 SAR Tissue Ingredients**

**E\_15I19834v0 SAR Probe Cal. Certificates**

**F\_15I19834v0 SAR Dipole Cal. Certificates**

**END OF REPORT**