



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22 & 24 / IC RSS-132/RSS-133

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
May 29 - June 22, 2012  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1205290745.ZNF

<b>FCC ID:</b>	<b>ZNFLS860</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A</b>


**Application Type:** Certification  
**Model(s):** LS860, LG-LS860, LGLS860  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §22(H), §24(E)  
**IC Specification(s):** RSS-132 Issue 2; RSS-133 Issue 5  
**Test Procedure(s):** ANSI/TIA-603-C-2004, KDB 971168  
**Test Device Serial No.:** *identical prototype* [S/N: LS860\_RF\_C, LS860\_RF\_R]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
CDMA850	824.70 - 848.31	1M27F9W	0.106	20.24
CDMA1900	1851.25 - 1908.75	1M27F9W	0.198	22.96



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



  
 Randy Ortanez  
 President




<b>FCC ID:</b> ZNFLS860		<b>FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1205290745.ZNF	<b>Test Dates:</b> May 29 - June 22, 2012	<b>EUT Type:</b> Portable Handset		Page 1 of 36

# T A B L E O F C O N T E N T S

FCC PART 22 & 24 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 EVALUATION PROCEDURE .....		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.4 PCS - BASE FREQUENCY BLOCKS.....		6
3.5 PCS - MOBILE FREQUENCY BLOCKS.....		7
3.6 OCCUPIED BANDWIDTH .....		7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		8
3.9 PEAK-AVERAGE RATIO .....		9
3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION .....		9
4.0 TEST EQUIPMENT CALIBRATION DATA .....		10
5.0 SAMPLE CALCULATIONS .....		11
6.0 TEST RESULTS.....		12
6.1 SUMMARY.....		12
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA .....		13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....		13
6.4 CELLULAR CDMA RADIATED MEASUREMENTS.....		14
6.5 PCS CDMA RADIATED MEASUREMENTS.....		17
6.6 CELLULAR CDMA FREQUENCY STABILITY MEASUREMENTS .....		20
6.7 PCS CDMA FREQUENCY STABILITY MEASUREMENTS.....		22
7.0 PLOT(S) OF EMISSIONS .....		24
8.0 CONCLUSION.....		36

<b>FCC ID:</b> ZNFLS860		<b>FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1205290745.ZNF	<b>Test Dates:</b> May 29 - June 22, 2012	<b>EUT Type:</b> Portable Handset	Page 2 of 36	



# MEASUREMENT REPORT

## FCC Part 22 & 24




### §2.1033 General Information



**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2; §22(H), §24(E)  
**IC SPECIFICATION(S):** RSS-132 Issue 2; RSS-133 Issue 5  
**BASE MODEL:** LS860  
**FCC ID:** ZNFLS860  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** CDMA / EvDO  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** LS860\_RF\_C,  Production  Pre-Production  Engineering  
 LS860\_RF\_R  
**DATE(S) OF TEST:** May 29 - June 22, 2012  
**TEST REPORT S/N:** 0Y1205290745.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> ZNFLS860	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1205290745.ZNF	<b>Test Dates:</b> May 29 - June 22, 2012	<b>EUT Type:</b> Portable Handset	Page 3 of 36	

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

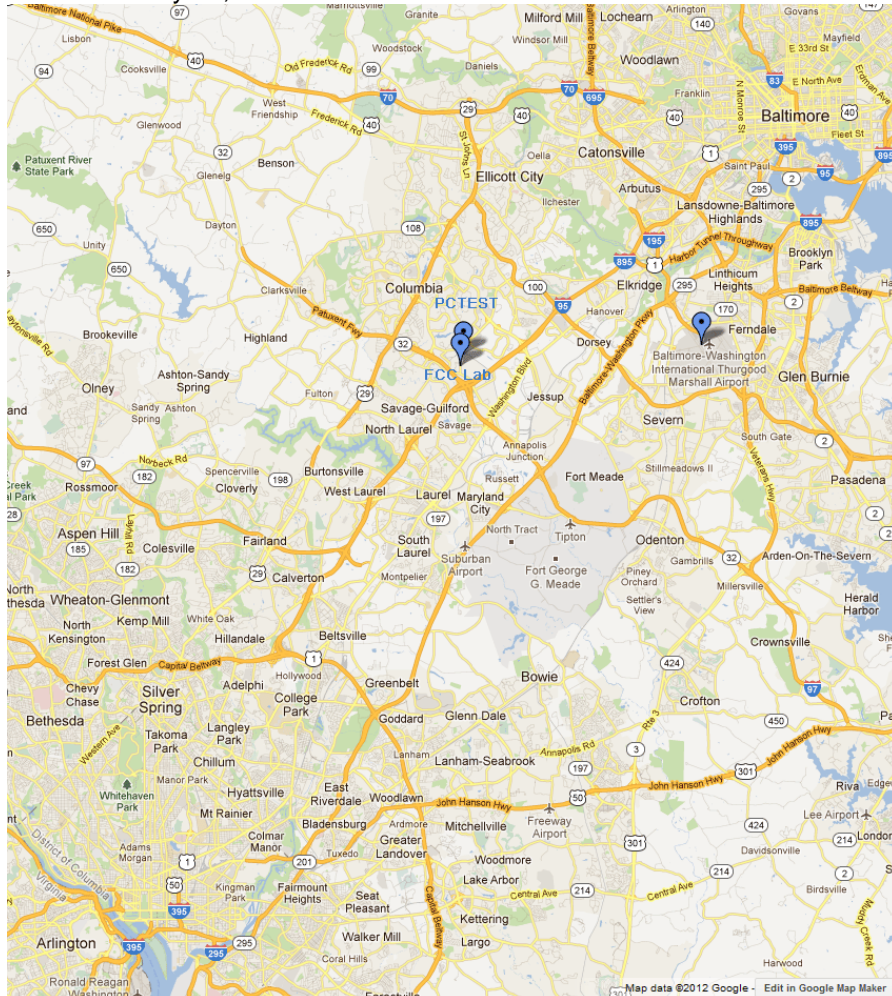




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / E/DO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 4 of 36

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Handset FCC ID: ZNFLS860**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev 0/A (BC0, BC1, BC10), Band 25 (5/10 MHz) LTE, 802.11b/g/n WLAN, Bluetooth (1x,EDR, LE), NFC

### 2.3 Test Configuration

The LGE Portable Handset FCC ID: ZNFLS860 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 5 of 36	


### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” were used in the measurement of the measurement of the **LGE Portable Handset FCC ID: ZNFLS860**.

Deviation from Measurement Procedure.....None

#### 3.2 Cellular - Base Frequency Blocks

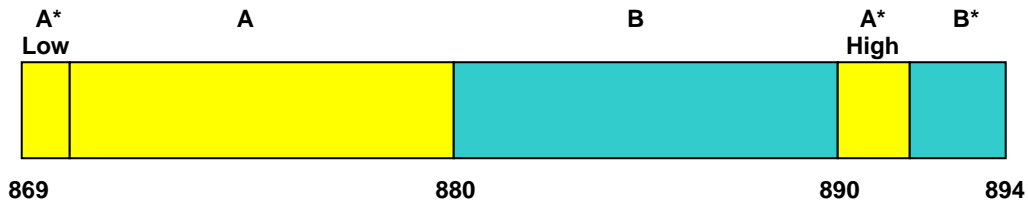


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

#### 3.3 Cellular - Mobile Frequency Blocks

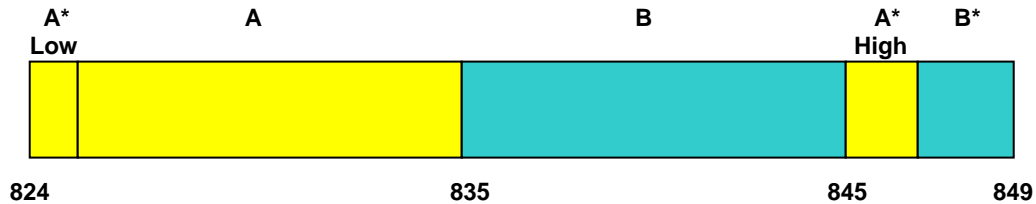


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

#### 3.4 PCS - Base Frequency Blocks

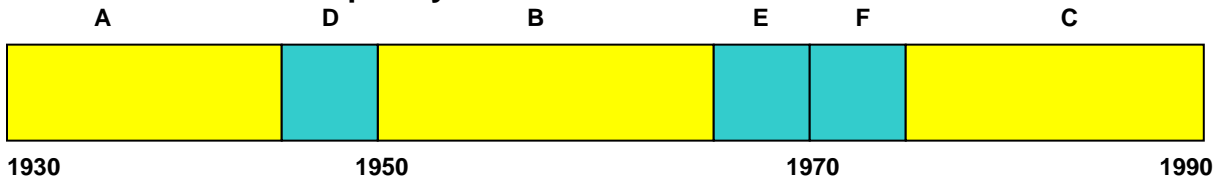

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFLS860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 6 of 36

### 3.5 PCS - Mobile Frequency Blocks

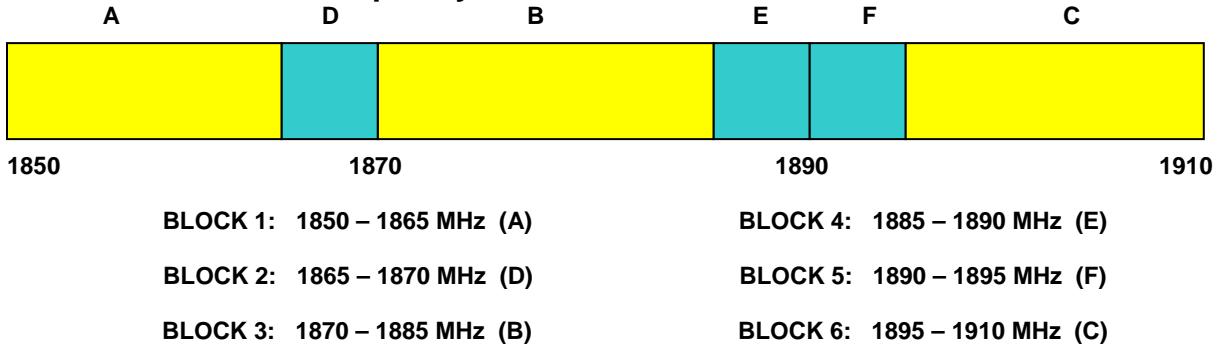

### 3.6 Occupied Bandwidth



#### §2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

### 3.7 Spurious and Harmonic Emissions at Antenna Terminal

#### §2.1051, 22.917(a), 24.238(a)(b); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater for the PCS Band. However, for the cellular band, a resolution bandwidth of 100kHz or greater is employed. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFLS860	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 7 of 36	

### 3.8 Radiated Power and Radiated Spurious Emissions

§22.913(a)(2), 22.917(a), 24.232(c), 24.238(a), RSS-132 (4.5.1.2), RSS-133 (6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$  specified in 22.917(a) and 24.238(a).

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 8 of 36	



### 3.9 Peak-Average Ratio

§24.232(d), RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### 3.10 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235, RSS-132 (4.3), RSS-133 (6.3)



Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

**Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 9 of 36	



## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTx2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	E8267C	Vector Signal Generator	10/10/2011	Biennial	10/10/2013	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	6/21/2011	Annual	6/21/2012	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Annual	7/22/2012	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		N/A	836072/0063
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/9/2011	Annual	7/9/2012	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	102060
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 4-1. Test Equipment**

**Note: R&S CMU200 and CMW500 with 'N/A' calibration dates were used for signaling purposes only and not for calibrated measurements. Care was taken to ensure that all testing occurred while test equipment was in calibration.**

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 10 of 36	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

**Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz

F = Frequency Modulation



9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission - PCS Band

**Example: Channel 25 PCS Mode 2<sup>nd</sup> Harmonic (3702.50 MHz)**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3702.50$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 11 of 36	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFLS860  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): CDMA / EvDO

FCC Part Section(s)	RSS Sections	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049, 22.917(a), 24.238(a)	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	RSS-132 (4.5.1.2) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	RSS-133 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
22.913(a)(2)	RSS-132 (4.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1.2) RSS-133 (6.5.1)	Undesirable Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5
2.1055, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		PASS	Sections 6.6, 6.7

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ZNFLS860	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 12 of 36	

## 6.2 Effective Radiated Power Output Data

§22.913(a)(2), RSS-132 (4.4)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	Standard	12.43	4.66	H	17.09	0.051	38.45	-21.36
836.52	CDMA850	Standard	14.56	4.80	H	19.36	0.086	38.45	-19.09
848.31	CDMA850	Standard	15.29	4.95	H	20.24	0.106	38.45	-18.21

**Table 6-2. Effective Radiated Power Output Data**

## 6.3 Equivalent Isotropic Radiated Power Output Data



§24.232(c), RSS-133 (6.4) [SRSP-510 (5.1.2)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	PoI [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	Standard	12.15	8.56	H	20.71	0.118	33.01	-12.30
1880.00	CDMA1900	Standard	14.41	8.55	H	22.96	0.198	33.01	-10.05
1908.75	CDMA1900	Standard	13.05	8.53	H	21.58	0.144	33.01	-11.43

**Table 6-3. Equivalent Isotropic Radiated Power Output Data**

### NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 13 of 36	

## 6.4 Cellular CDMA Radiated Measurements

### §2.1053, 22.917(a), RSS-132 (4.5.1.2)

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 824.70 MHz  
 CHANNEL: 1013  
 MEASURED OUTPUT POWER: 17.09 dBm = 0.051 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.09 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-44.16	2.59	-41.57	H	58.7
2474.10	-55.66	2.89	-52.77	H	69.9
3298.80	-61.11	5.45	-55.66	H	72.8
4123.50	-93.73	7.05	-86.68	H	103.8
4948.20	-92.75	7.87	-84.89	H	102.0

**Table 6-4. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)**

#### NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 14 of 36	

**Cellular CDMA Radiated Measurements (Cont'd)**  
§2.1053, 22.917(a), RSS-132 (4.5.1.2)

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 836.52 MHz  
 CHANNEL: 384  
 MEASURED OUTPUT POWER: 19.36 dBm = 0.086 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.36 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-44.45	2.34	-42.11	H	61.5
2509.56	-55.55	2.84	-52.72	H	72.1
3346.08	-63.42	5.64	-57.77	H	77.1
4182.60	-93.77	7.14	-86.63	H	106.0
5019.12	-92.74	7.97	-84.77	H	104.1

**Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)**

**NOTES:**

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 15 of 36	

**Cellular CDMA Radiated Measurements (Cont'd)**  
§2.1053, 22.917(a), RSS-132 (4.5.1.2)

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 848.31 MHz  
 CHANNEL: 777  
 MEASURED OUTPUT POWER: 20.24 dBm = 0.106 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  33.24 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-43.45	2.09	-41.36	H	61.6
2544.93	-59.67	3.16	-56.51	H	76.7
3393.24	-59.70	5.83	-53.87	H	74.1
4241.55	-93.79	7.24	-86.55	H	106.8
5089.86	-92.59	8.02	-84.57	H	104.8

**Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)**

**NOTES:**

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 16 of 36	



**6.5 PCS CDMA Radiated Measurements**  
**§2.1053, 24.238(a), RSS-133 (6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1851.25 MHz  
 CHANNEL: 25  
 MEASURED OUTPUT POWER: 20.71 dBm = 0.118 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  33.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-45.99	8.40	-37.59	H	58.3
5553.75	-51.94	10.62	-41.32	H	62.0
7405.00	-58.11	11.82	-46.29	H	67.0
9256.25	-55.53	13.30	-42.23	H	62.9
11107.50	-89.16	13.50	-75.66	H	96.4

**Table 6-7. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)**

**NOTES:**

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 17 of 36	

**PCS CDMA Radiated Measurements (Cont'd)**  
**§2.1053, 24.238(a), RSS-133 (6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 600  
 MEASURED OUTPUT POWER: 22.96 dBm = 0.198 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.96 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-47.04	8.42	-38.62	H	61.6
5640.00	-51.27	10.66	-40.61	H	63.6
7520.00	-58.93	11.92	-47.00	H	70.0
9400.00	-57.26	13.24	-44.02	H	67.0
11280.00	-88.58	13.49	-75.09	H	98.1

**Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)**

**NOTES:**

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 18 of 36	

**PCS CDMA Radiated Measurements (Cont'd)**  
**§2.1053, 24.238(a), RSS-133 (6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1908.75 MHz  
 CHANNEL: 1175  
 MEASURED OUTPUT POWER: 21.58 dBm = 0.144 W  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.58 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-45.05	8.57	-36.49	H	58.1
5726.25	-52.60	10.69	-41.91	H	63.5
7635.00	-57.93	12.06	-45.87	H	67.4
9543.75	-56.42	13.20	-43.22	H	64.8
11452.50	-87.92	13.42	-74.50	H	96.1

**Table 6-9. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)**

**NOTES:**

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 19 of 36	

## 6.6 Cellular CDMA Frequency Stability Measurements

§2.1055, 22.355, RSS-132 (4.3)

OPERATING FREQUENCY: 836,520,000 Hz



CHANNEL: 384

REFERENCE VOLTAGE: 3.8 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,519,980	-20	-0.000002
100 %		- 30	836,520,022	22	0.000003
100 %		- 20	836,520,021	21	0.000003
100 %		- 10	836,520,023	23	0.000003
100 %		0	836,519,971	-29	-0.000003
100 %		+ 10	836,519,970	-30	-0.000004
100 %		+ 20	836,520,021	21	0.000003
100 %		+ 30	836,519,978	-22	-0.000003
100 %		+ 40	836,520,020	20	0.000002
100 %		+ 50	836,519,982	-18	-0.000002
115 %		4.37	+ 20	836,520,020	20
BATT. ENDPOINT	3.40	+ 20	836,520,021	21	0.000003

**Table 6-10. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)**

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 20 of 36	

**Cellular CDMA Frequency Stability Measurements (Cont'd)**  
**§2.1055, 22.355, RSS-132 (4.3)**

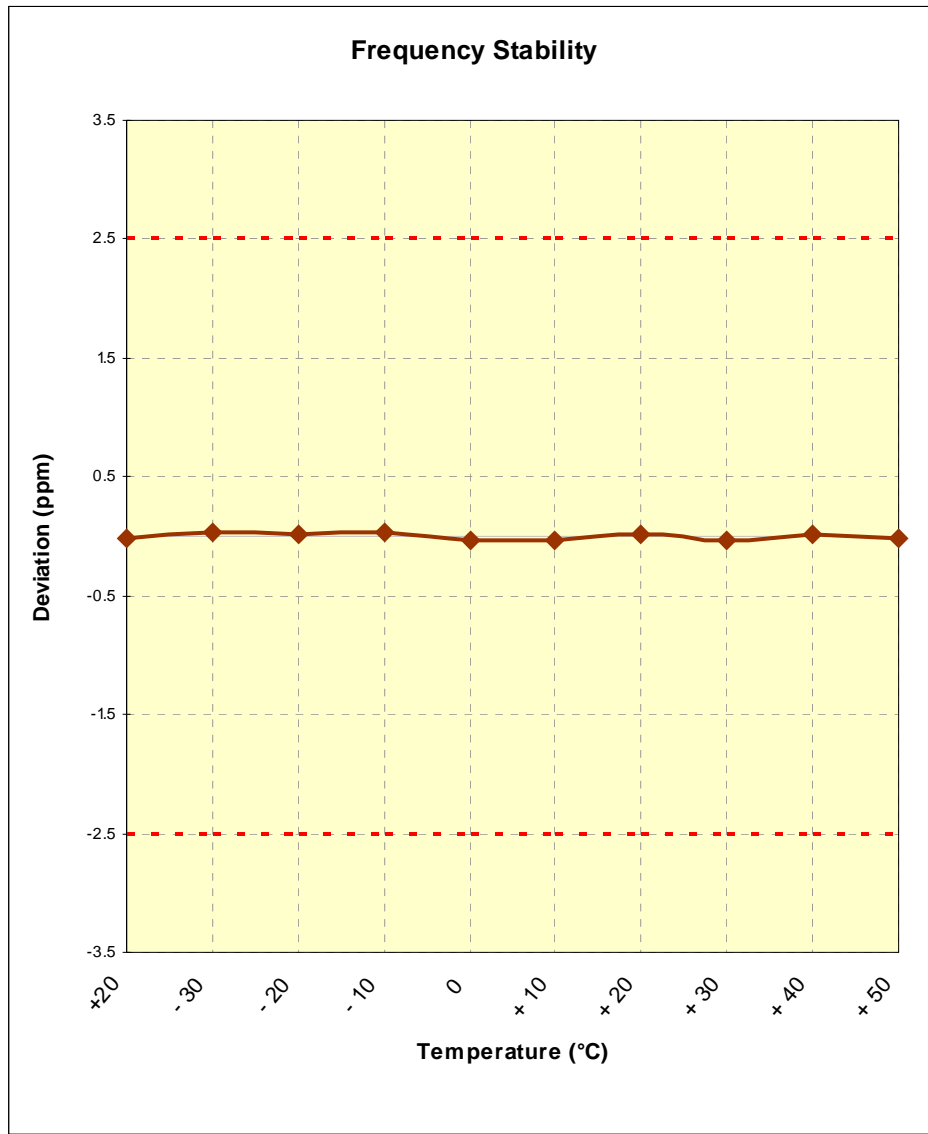

**Figure 6-1. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)**

FCC ID: ZNFLS860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 21 of 36

## 6.7 PCS CDMA Frequency Stability Measurements

§2.1055, 24.235, RSS-133 (6.3)



OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 600


REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,978	-22	-0.000001
100 %		- 30	1,880,000,020	20	0.000001
100 %		- 20	1,880,000,019	19	0.000001
100 %		- 10	1,879,999,982	-18	-0.000001
100 %		0	1,880,000,029	29	0.000002
100 %		+ 10	1,880,000,020	20	0.000001
100 %		+ 20	1,879,999,981	-19	-0.000001
100 %		+ 30	1,880,000,021	21	0.000001
100 %		+ 40	1,879,999,978	-22	-0.000001
100 %		+ 50	1,879,999,977	-23	-0.000001
115 %	4.37	+ 20	1,880,000,020	20	0.000001
BATT. ENDPOINT	3.40	+ 20	1,879,999,982	-18	-0.000001

**Table 6-11. Frequency Stability Data (PCS CDMA Mode – Ch. 600)**

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset	Page 22 of 36	


**PCS CDMA Frequency Stability Measurements (Cont'd)**  
§2.1055, 24.235, RSS-133 (6.3)

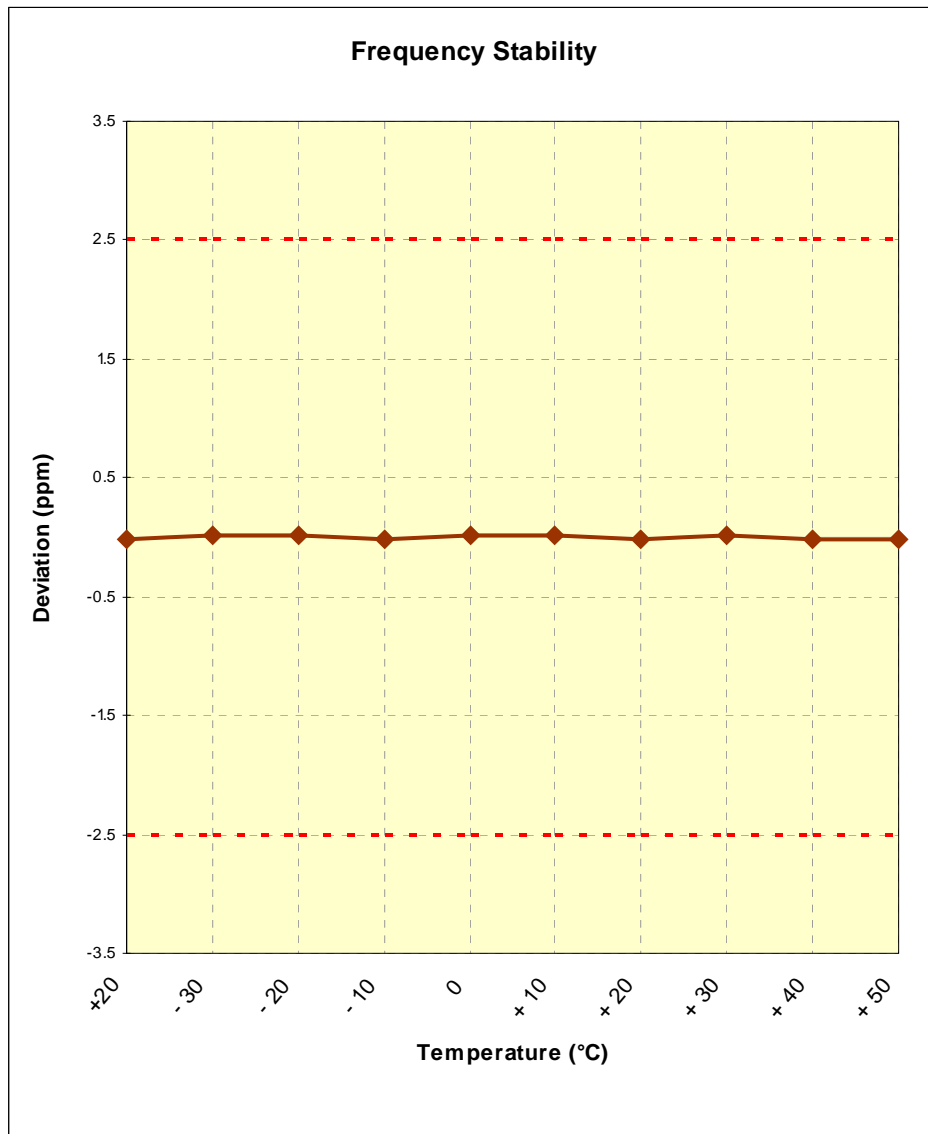


**Figure 6-2. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)**

FCC ID: ZNFLS860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 23 of 36

## 7.0 PLOT(S) OF EMISSIONS

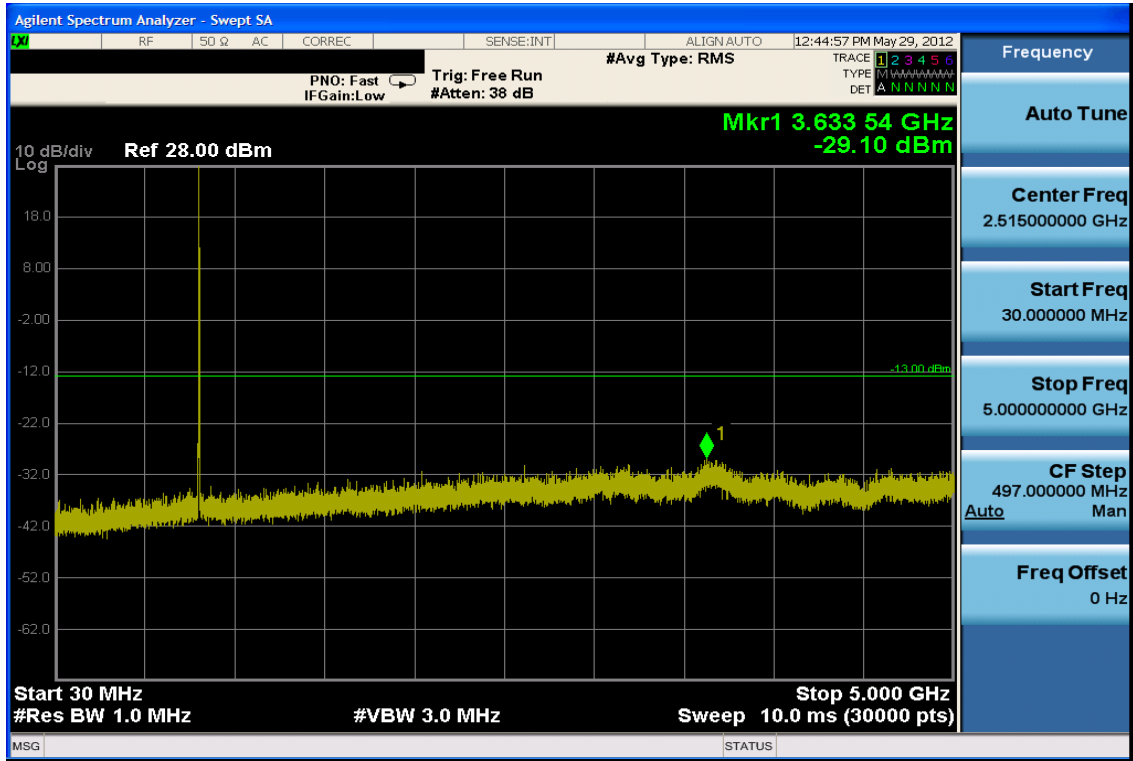


**Plot 7-1. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)**

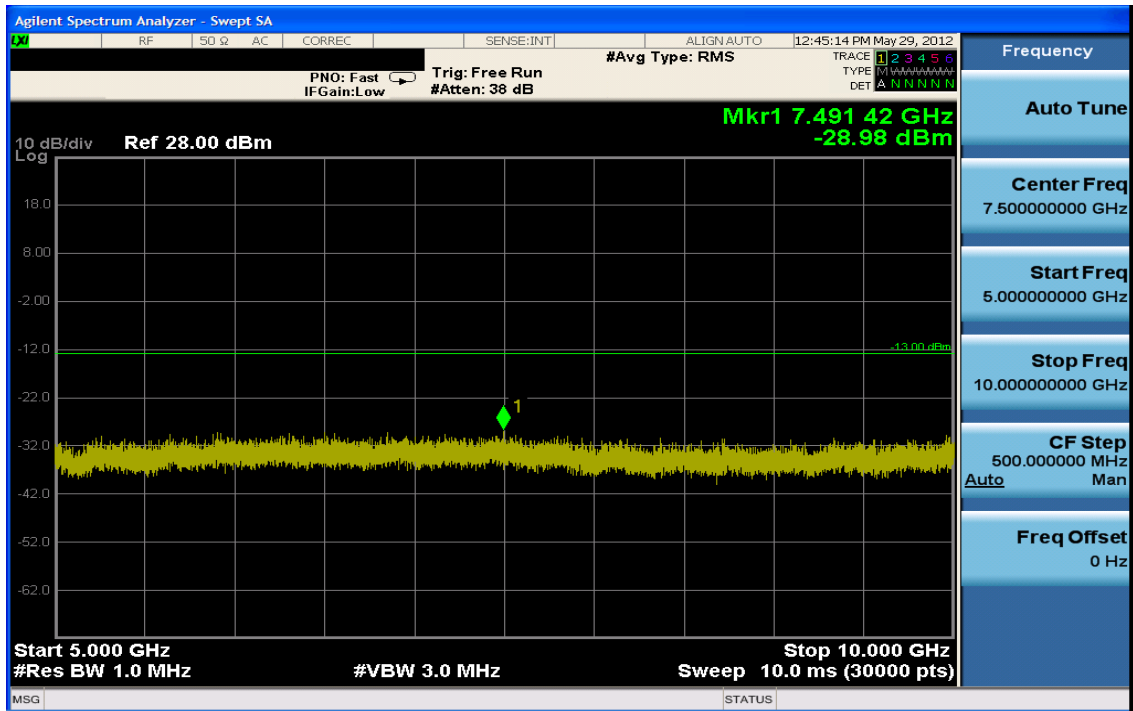

**Plot 7-2. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)**

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 24 of 36



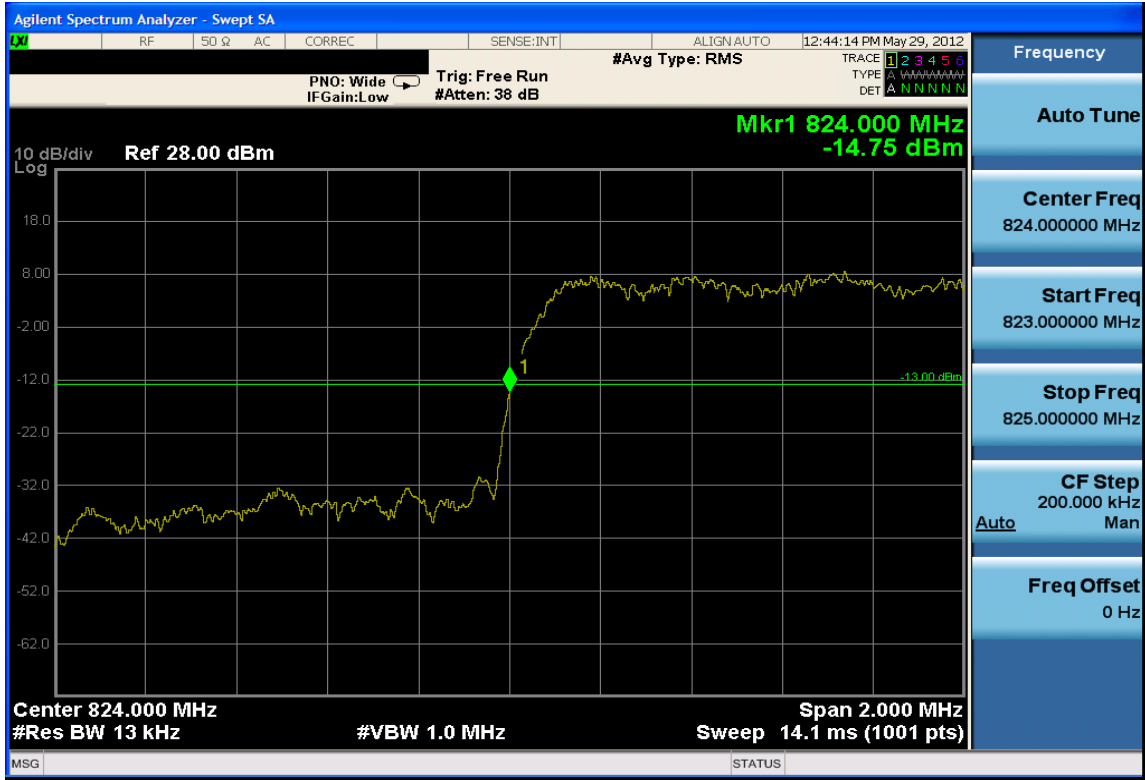


Plot 7-3. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)




Plot 7-4. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 25 of 36

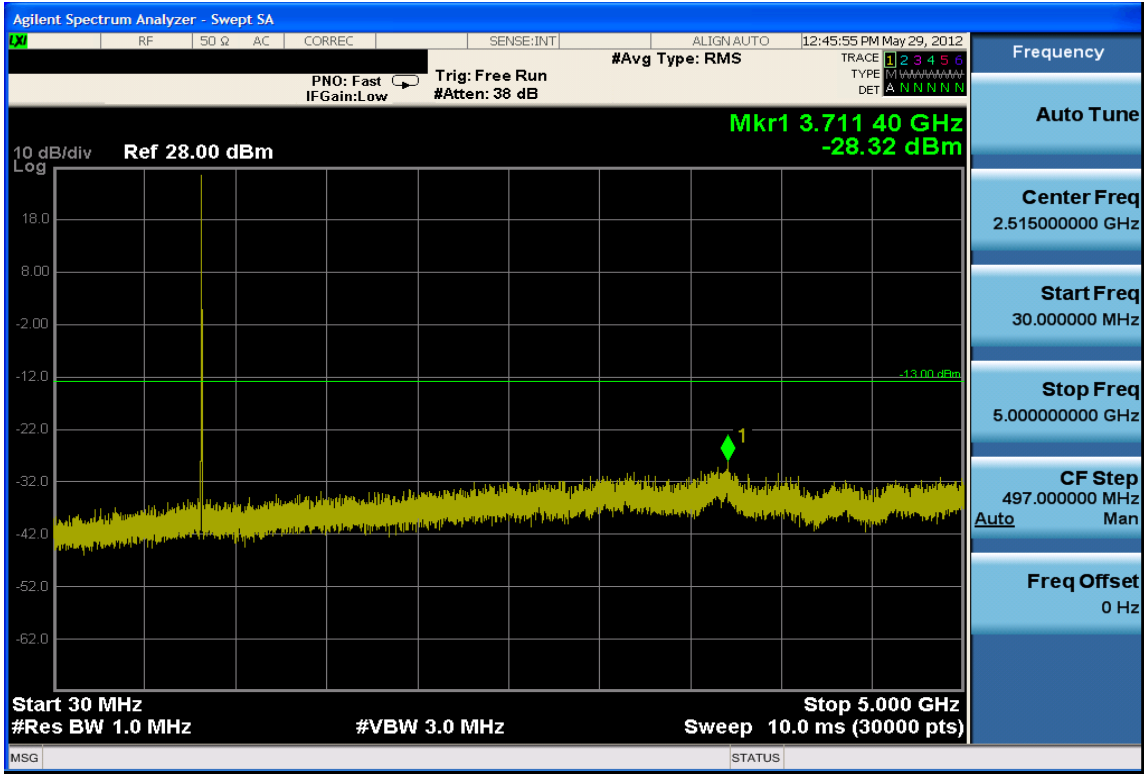


Plot 7-5. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

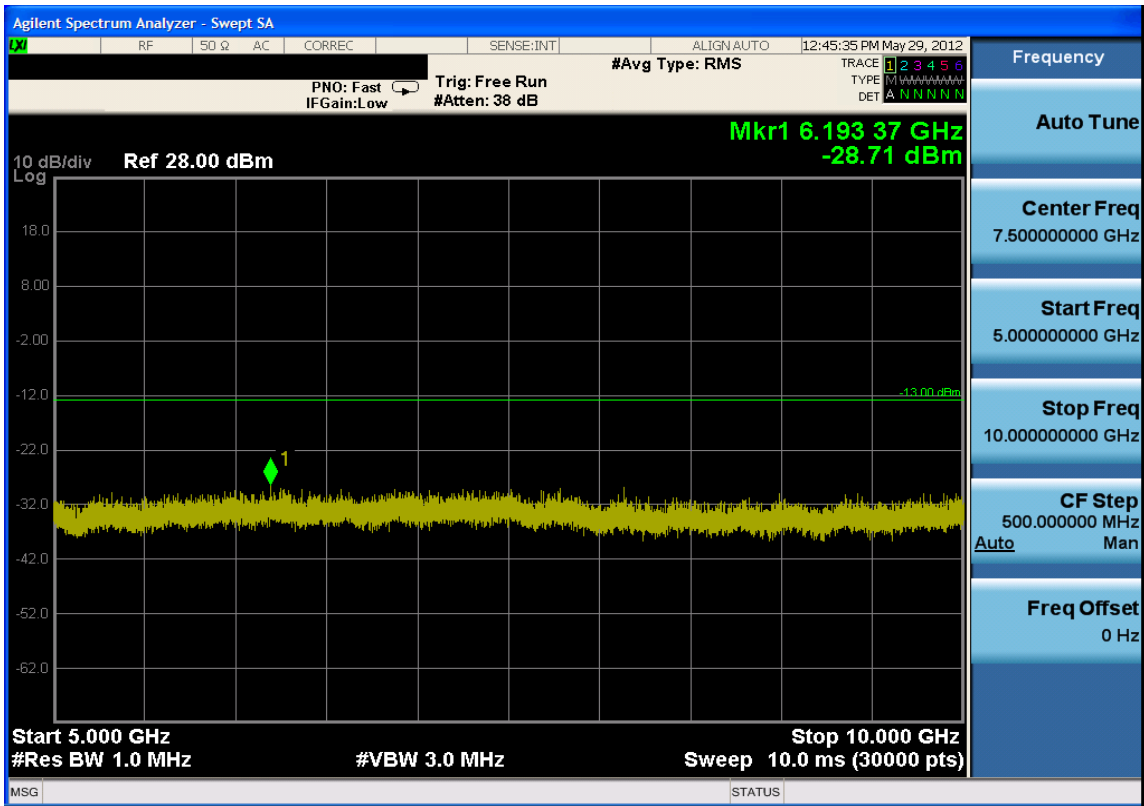


Plot 7-6. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 26 of 36

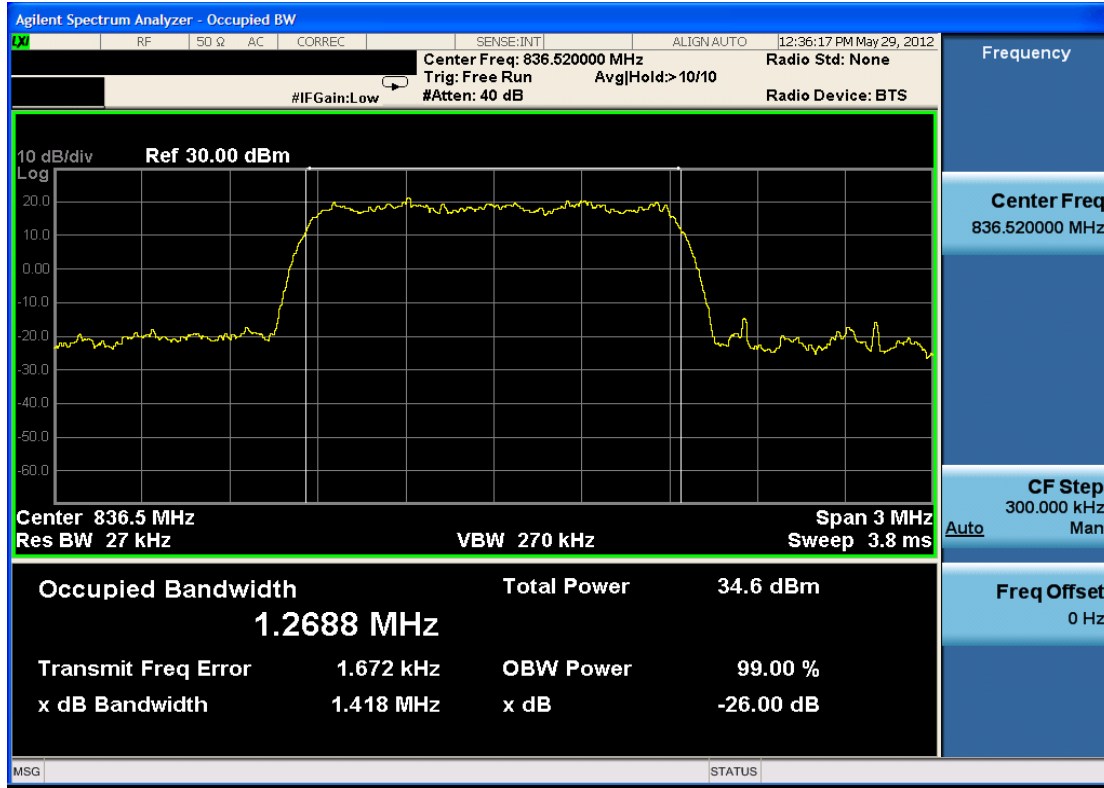


Plot 7-7. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

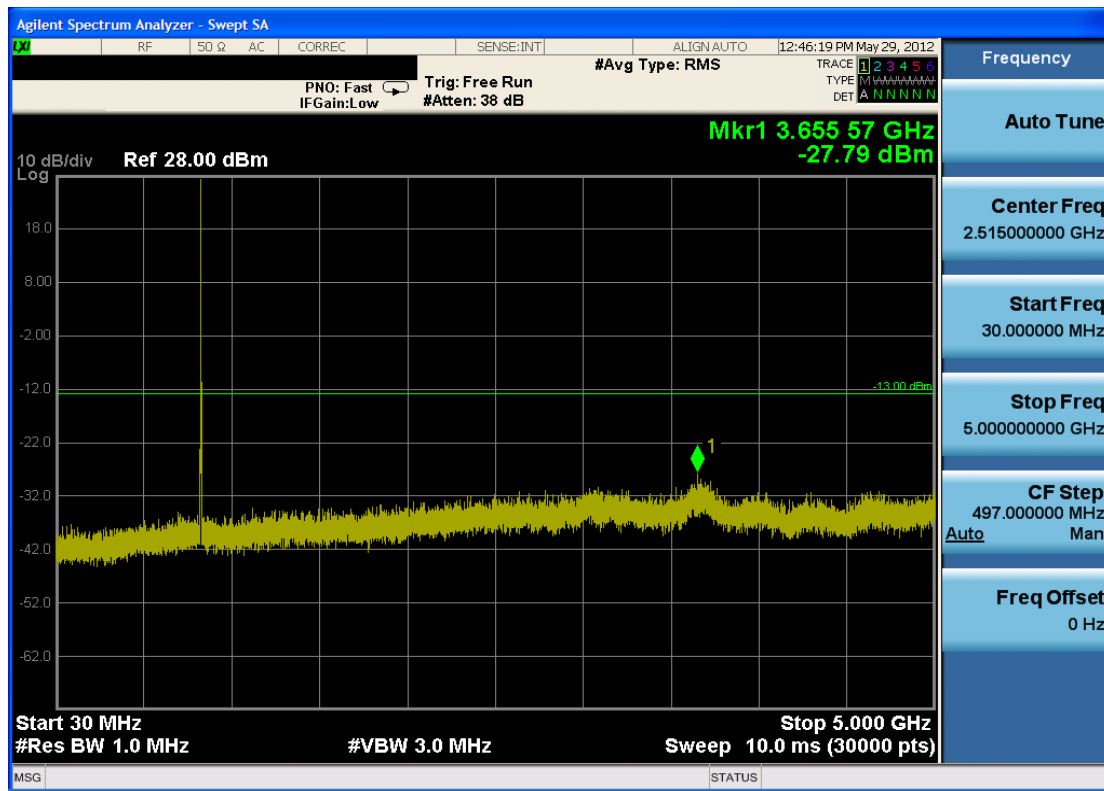

Plot 7-8. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

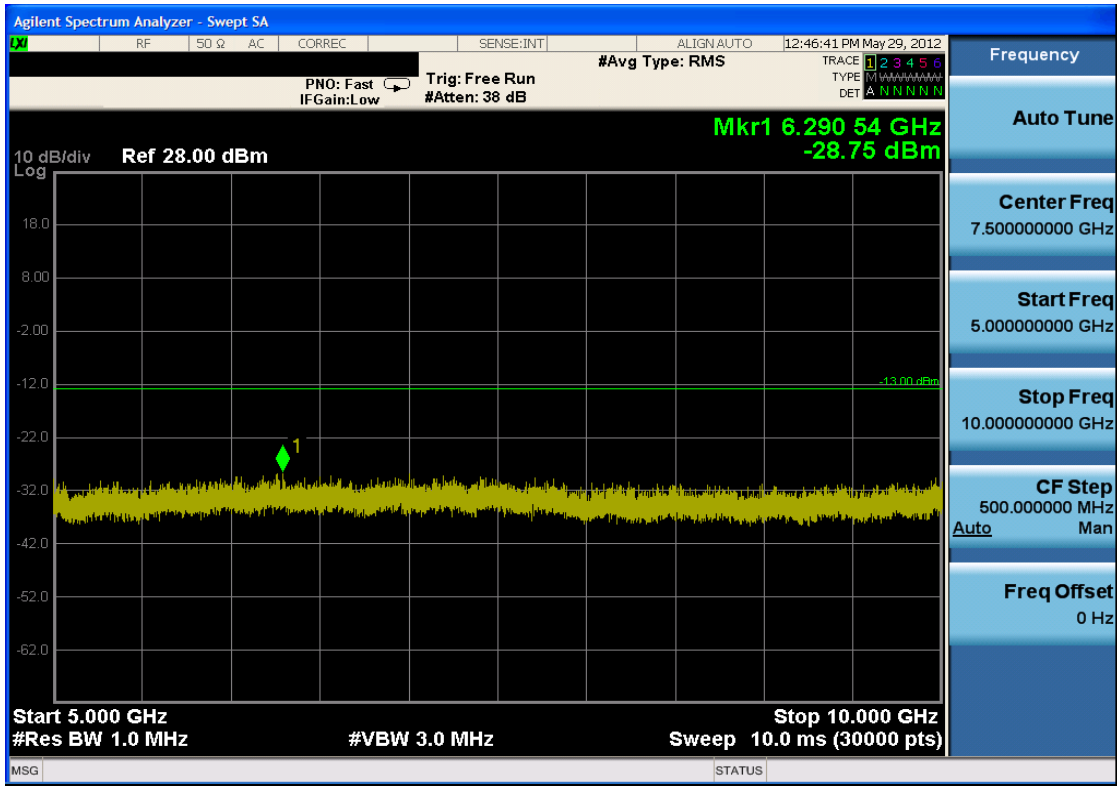

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 27 of 36



Plot 7-9. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)




Plot 7-10. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 28 of 36




Plot 7-11. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

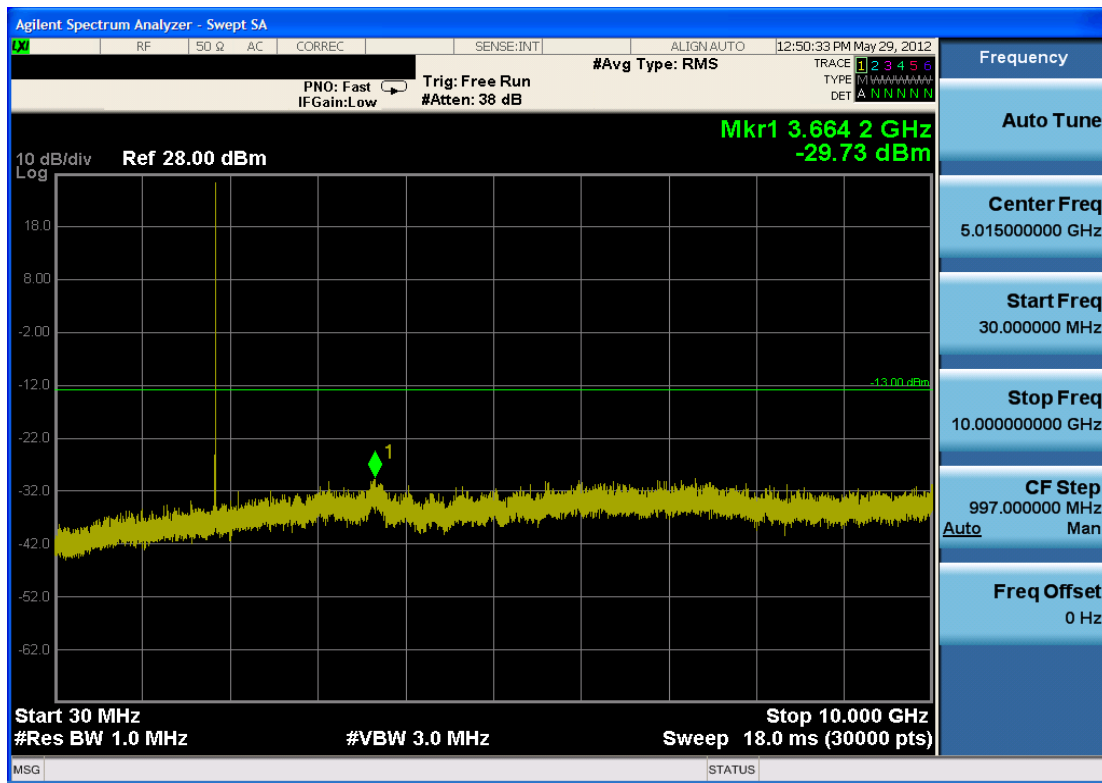


Plot 7-12. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFLS860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 29 of 36

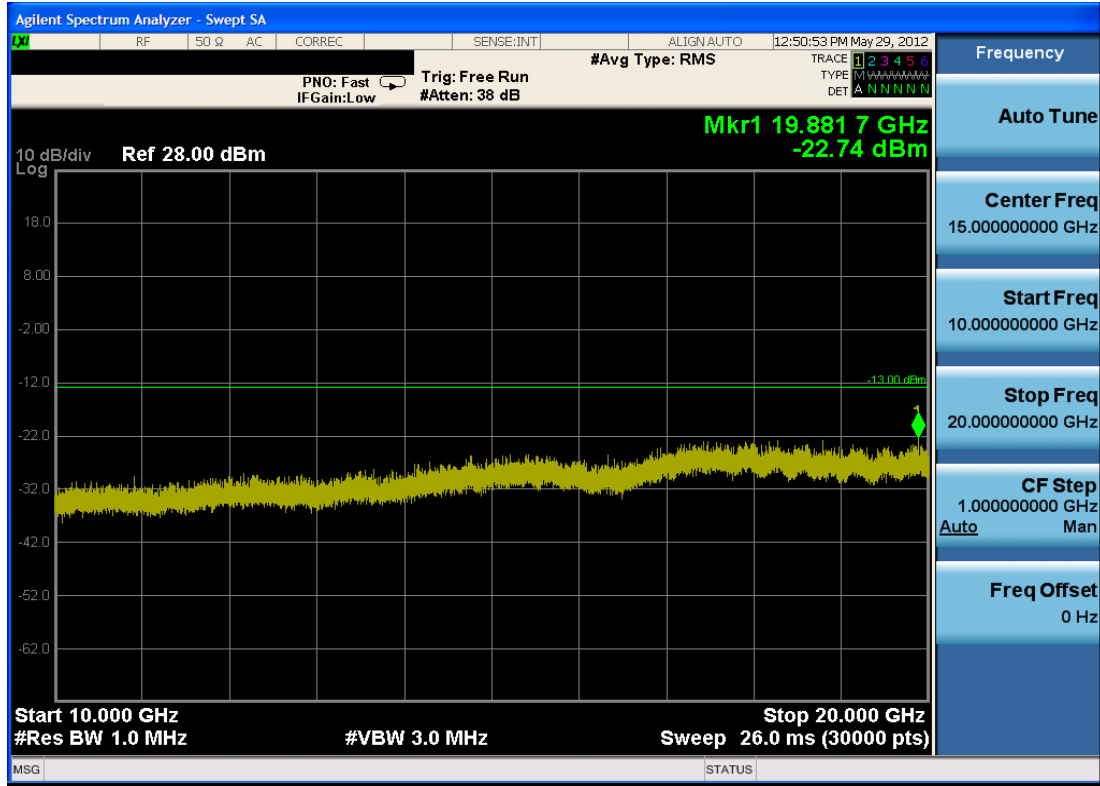


Plot 7-13. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

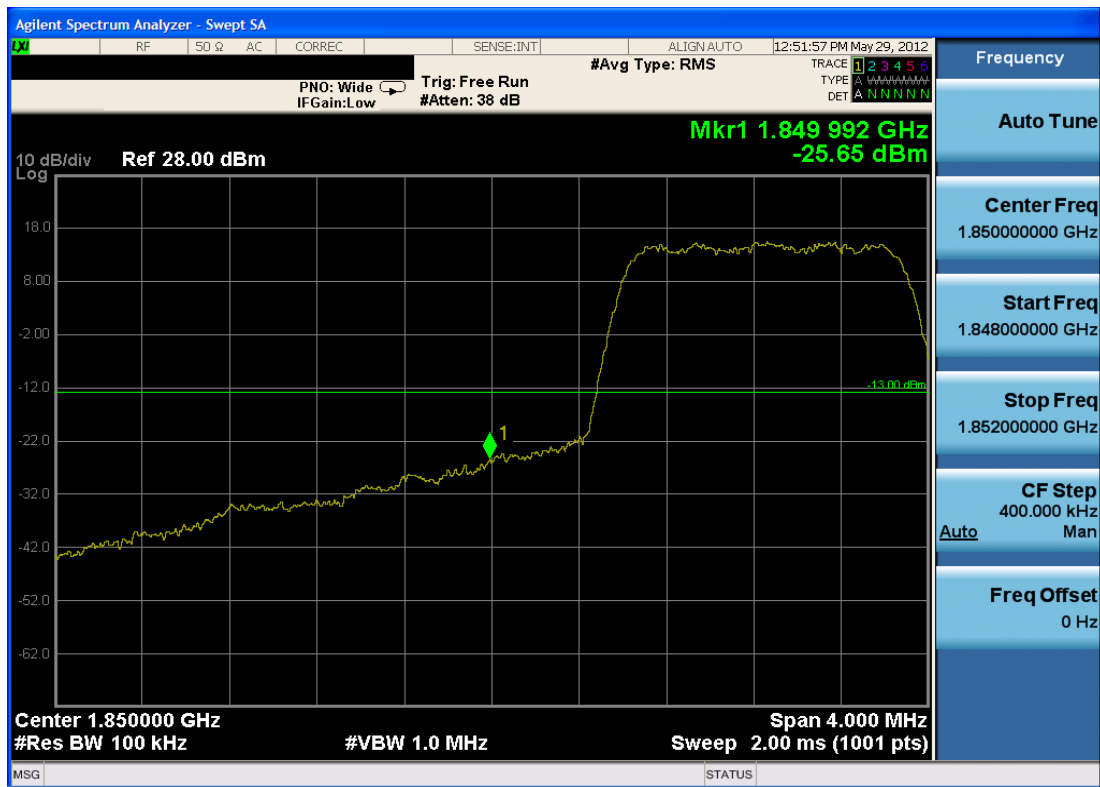


Plot 7-14. Band Edge Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 30 of 36

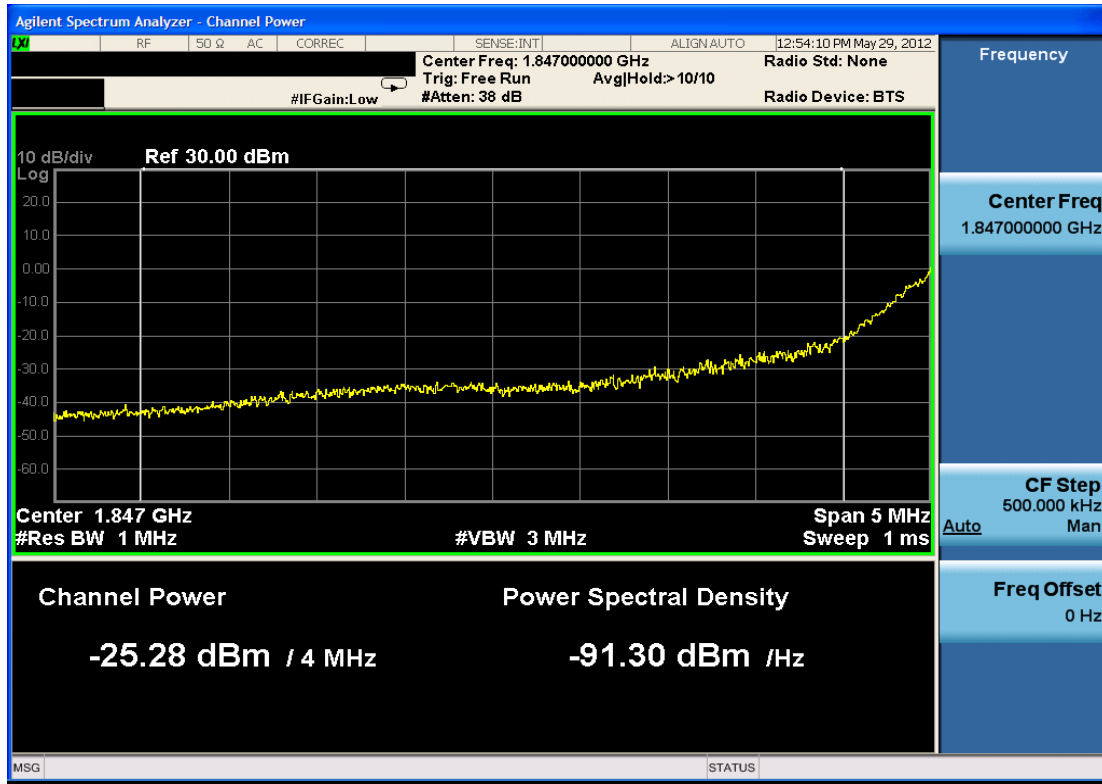


Plot 7-15. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

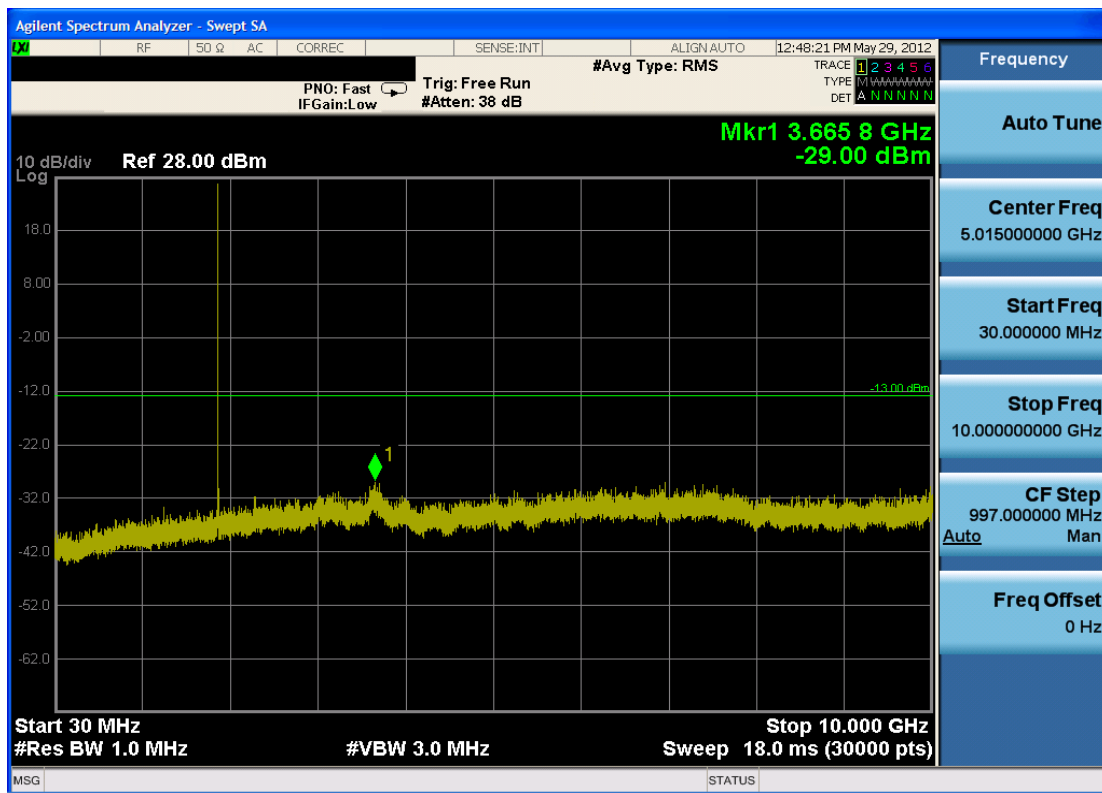


Plot 7-16. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EVDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 31 of 36

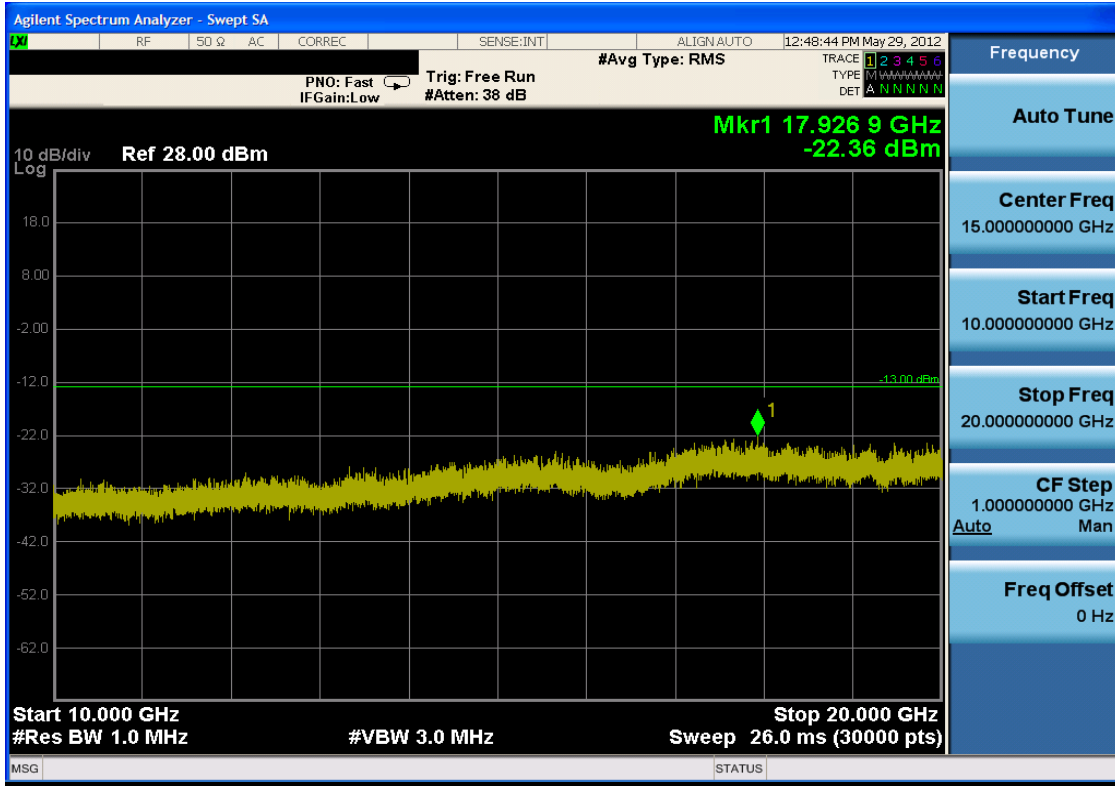


Plot 7-17. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

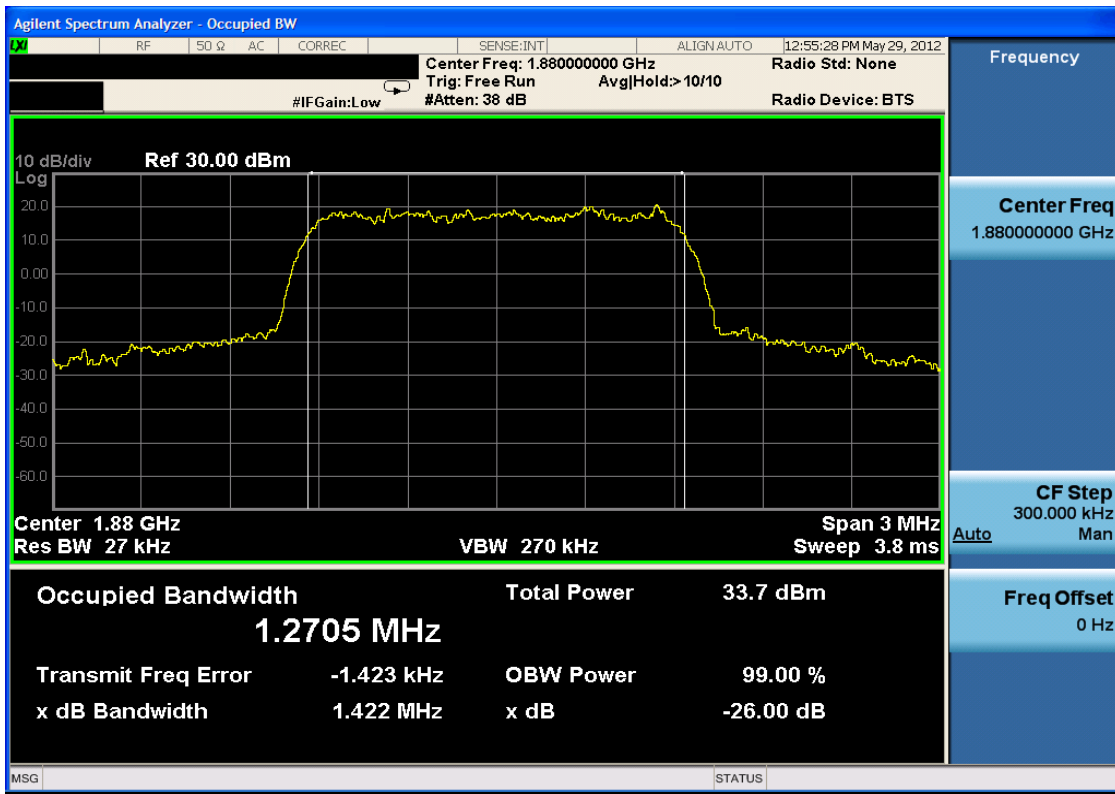


Plot 7-18. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 32 of 36



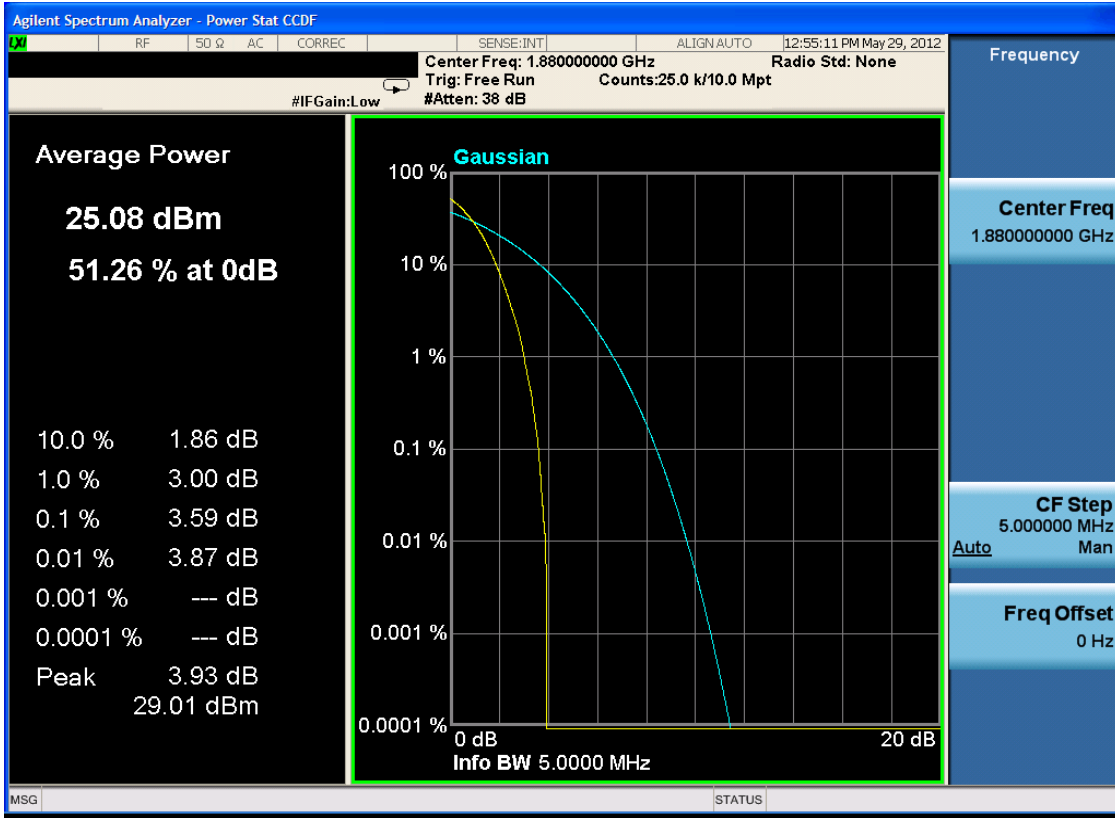


Plot 7-19. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

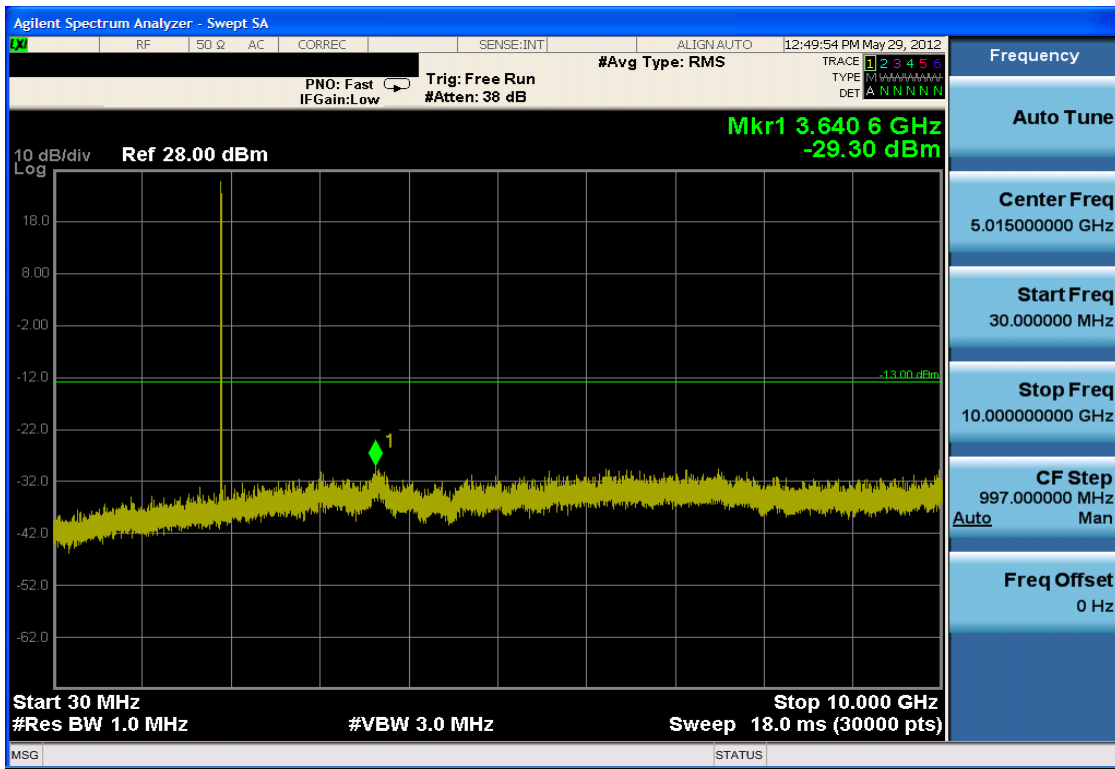

Plot 7-20. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 33 of 36

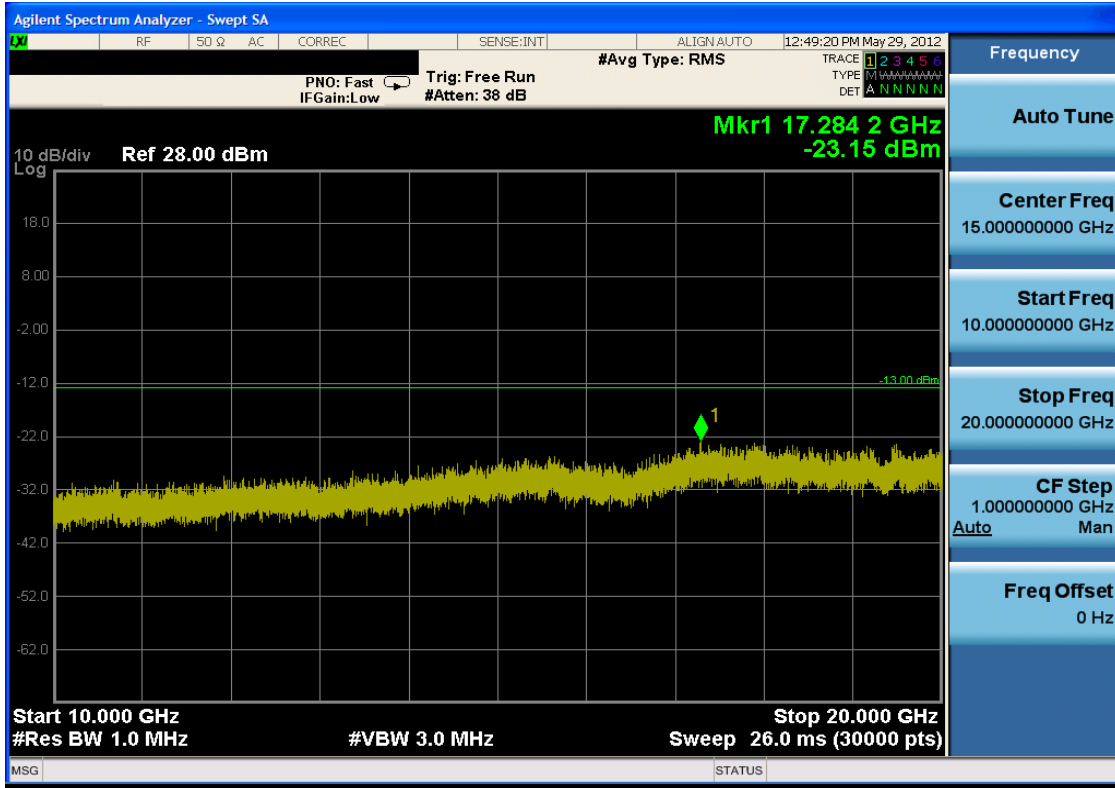


Plot 7-21. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)



Plot 7-22. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 34 of 36

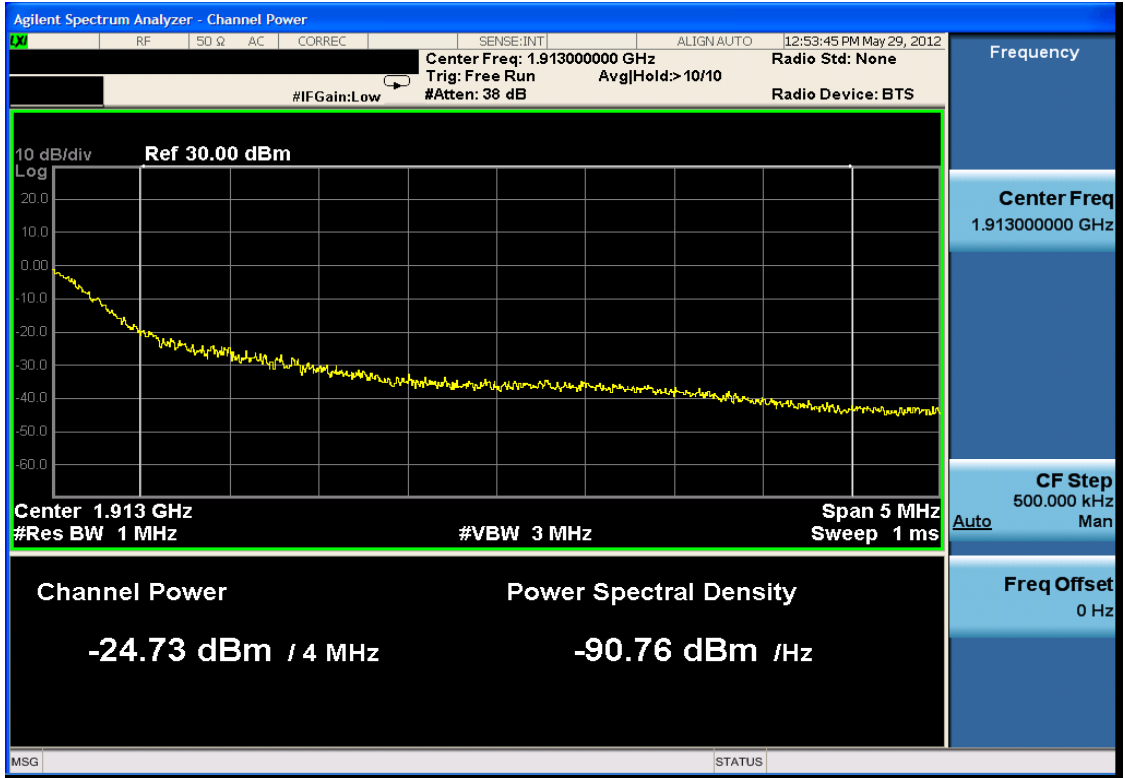



Plot 7-23. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFLS860	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 35 of 36

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Handset FCC ID: ZNFLS860** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules and RSS-132 and RSS-133 of the Industry Canada rules.

FCC ID: ZNFLS860		FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290745.ZNF	Test Dates: May 29 - June 22, 2012	EUT Type: Portable Handset		Page 36 of 36