



MEASUREMENT REPORT FCC Part 24 & 27 LTE

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
7/14-7/22/2014
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1407141387.ZNF

FCC ID : ZNFMS395
APPLICANT: LG ELECTRONICS MOBILECOMM U.S.A

Application Type: Certification
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §24; §27
Test Procedure(s): ANSI/TIA-603-C-2004, KDB 971168 v02r01
EUT Type: Portable Handset
Model(s): MS395, LGMS395, LG-MS395
Test Device Serial No.: identical prototype [S/N: 14JULY-25]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M51G7D	QPSK	0.050	17.00
LTE Band 17	706.5 - 713.5	4M50W7D	16QAM	0.035	15.48
LTE Band 17	709 - 711	9M00G7D	QPSK	0.050	17.01
LTE Band 17	709 - 711	8M96W7D	16QAM	0.036	15.54
LTE Band 4	1712.5 - 1752.5	4M50G7D	QPSK	0.230	23.62
LTE Band 4	1712.5 - 1752.5	4M51W7D	16QAM	0.162	22.11
LTE Band 4	1715 - 1750	8M99G7D	QPSK	0.229	23.61
LTE Band 4	1715 - 1750	8M95W7D	16QAM	0.180	22.54
LTE Band 4	1717.5 - 1747.5	13M5G7D	QPSK	0.233	23.68
LTE Band 4	1717.5 - 1747.5	13M4W7D	16QAM	0.164	22.15
LTE Band 4	1720 - 1745	17M9G7D	QPSK	0.232	23.65
LTE Band 4	1720 - 1745	18M0W7D	16QAM	0.162	22.10
LTE Band 2	1852.5 - 1907.5	4M50G7D	QPSK	0.262	24.19
LTE Band 2	1852.5 - 1907.5	4M49W7D	16QAM	0.179	22.53
LTE Band 2	1855 - 1905	8M96G7D	QPSK	0.267	24.26
LTE Band 2	1855 - 1905	8M92W7D	16QAM	0.185	22.66
LTE Band 2	1857.5 - 1902.5	13M4G7D	QPSK	0.274	24.37
LTE Band 2	1857.5 - 1902.5	13M4W7D	16QAM	0.195	22.90
LTE Band 2	1860 - 1900	17M8G7D	QPSK	0.269	24.30
LTE Band 2	1860 - 1900	17M8W7D	16QAM	0.180	22.55
LTE Band 7	2502.5 - 2565.5	4M51G7D	QPSK	0.043	16.34
LTE Band 7	2502.5 - 2565.5	4M50W7D	16QAM	0.031	14.90
LTE Band 7	2505 - 2565	8M98G7D	QPSK	0.050	17.00
LTE Band 7	2506 - 2565	8M95W7D	16QAM	0.036	15.55
LTE Band 7	2507.5 - 2562.5	13M5G7D	QPSK	0.053	17.23
LTE Band 7	2507.5 - 2562.5	13M4W7D	16QAM	0.037	15.73
LTE Band 7	2510 - 2560	17M9G7D	QPSK	0.046	16.63
LTE Band 7	2510 - 2560	17M9W7D	16QAM	0.033	15.18

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 1 of 103	

T A B L E O F C O N T E N T S

FCC PART 24 & 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.4 LABELING REQUIREMENTS		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.2 BLOCK A FREQUENCY RANGE		6
3.3 PCS - BASE FREQUENCY BLOCKS		6
3.4 PCS - MOBILE FREQUENCY BLOCKS		6
3.5 AWS - BASE FREQUENCY BLOCKS		7
3.6 AWS - MOBILE FREQUENCY BLOCKS		7
3.7 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		8
4.0 TEST EQUIPMENT CALIBRATION DATA		9
5.0 SAMPLE CALCULATIONS		10
6.0 TEST RESULTS		11
6.1 SUMMARY		11
6.2 OCCUPIED BANDWIDTH		12
6.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL		27
6.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL		40
6.5 PEAK-AVERAGE RATIO		67
6.6 RADIATED POWER (ERP/EIRP)		80
6.7 RADIATED SPURIOUS EMISSIONS MEASUREMENTS		86
6.8 FREQUENCY STABILITY / TEMPERATURE VARIATION		94
7.0 CONCLUSION		103

FCC ID: ZNFMS395	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	
			Page 2 of 103



MEASUREMENT REPORT

FCC Part 24 & 27




§2.1033 General Information


APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §24; §27
BASE MODEL: MS395
FCC ID: ZNFMS395
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: 14JULY-25 Production Pre-Production Engineering
DATE(S) OF TEST: 7/14-7/22/2014
TEST REPORT S/N: 0Y1407141387.ZNF

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 3 of 103	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

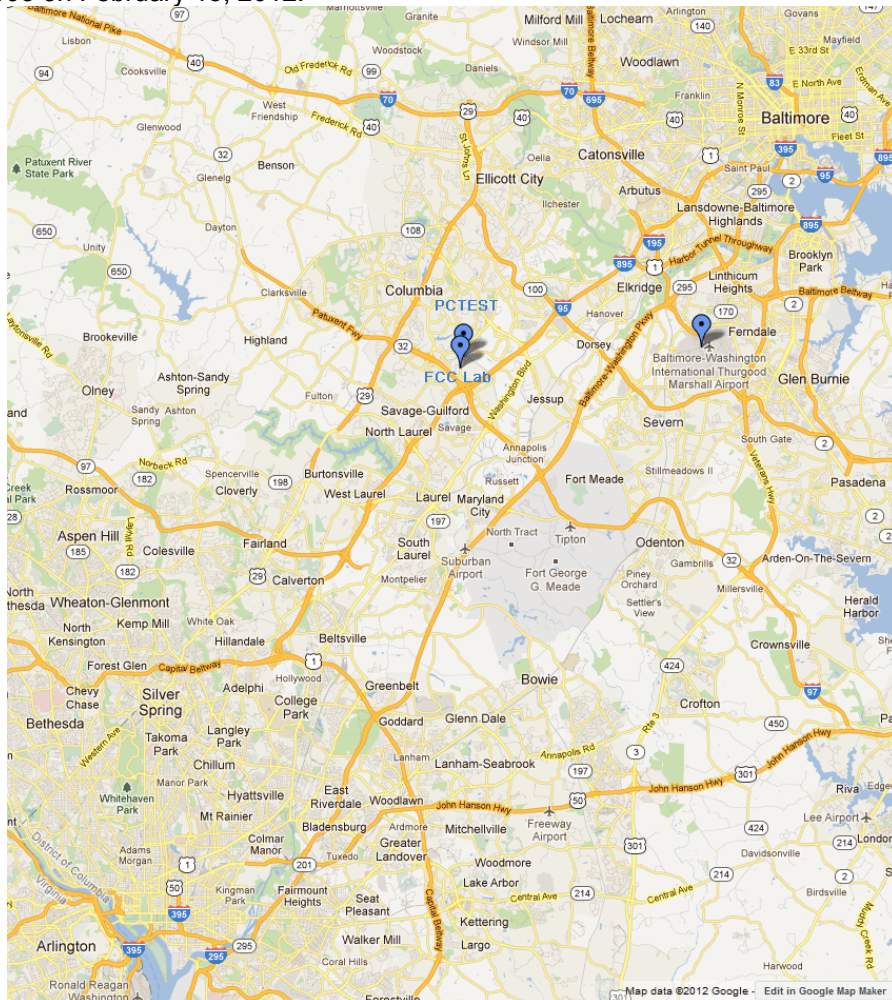




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 4 of 103

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFMS395**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)



2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 5 of 103

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **LG Portable Handset FCC ID: ZNFMS395**.

3.2 Block A Frequency Range

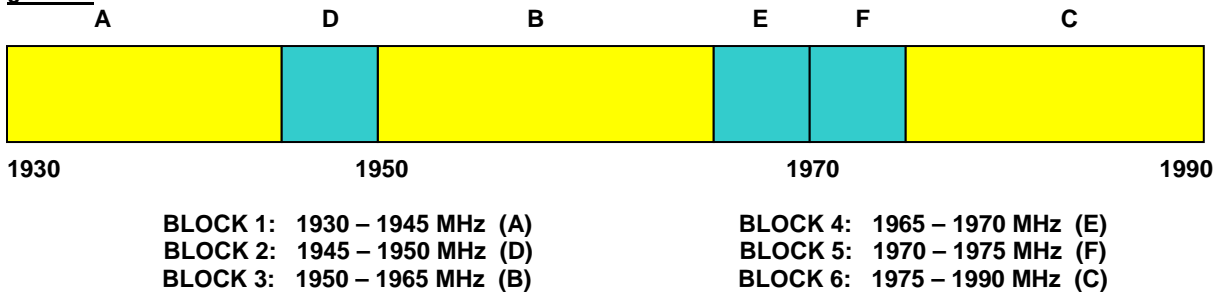
§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

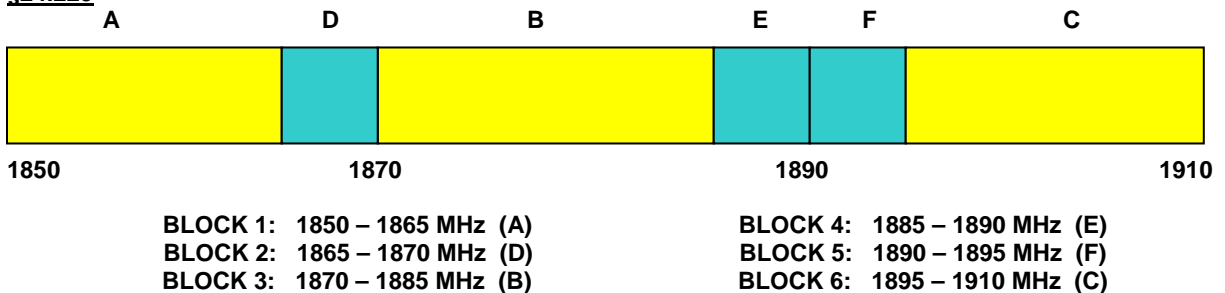
3.3 PCS - Base Frequency Blocks



§24.229



3.4 PCS - Mobile Frequency Blocks

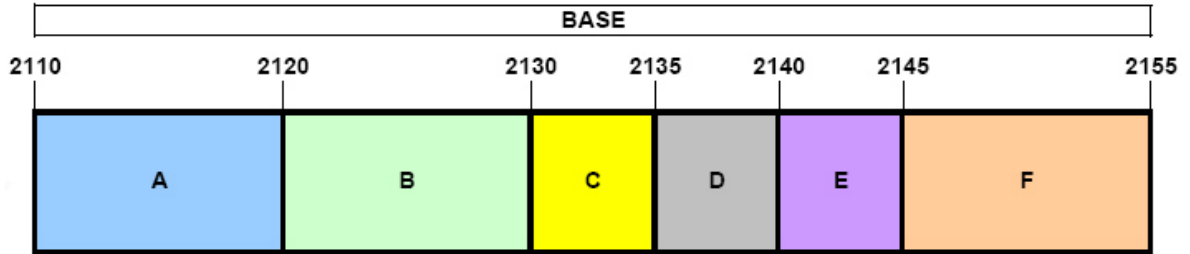
§24.229



FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 6 of 103	

3.5 AWS - Base Frequency Blocks

§27.5(h)

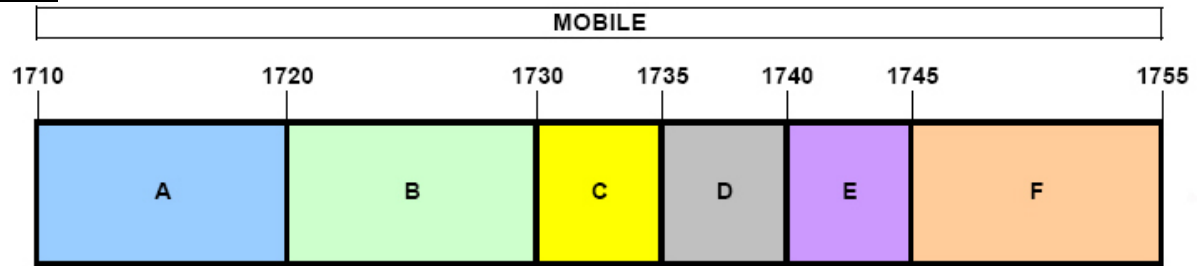


BLOCK 1: 2110 – 2120 MHz (A)
 BLOCK 2: 2120 – 2130 MHz (B)
 BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 4: 2135 – 2140 MHz (D)
 BLOCK 5: 2140 – 2145 MHz (E)
 BLOCK 6: 2145 – 2155 MHz (F)



3.6 AWS - Mobile Frequency Blocks

§27.5(h)



BLOCK 1: 1710 – 1720 MHz (A)
 BLOCK 2: 1720 – 1730 MHz (B)
 BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 4: 1735 – 1740 MHz (D)
 BLOCK 5: 1740 – 1745 MHz (E)
 BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 7 of 103	

3.7 Radiated Power and Radiated Spurious Emissions

§2.1053 §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(e) §27.53(f) §27.53(g)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.


The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$.

FCC ID: ZNFMS395	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 8 of 103	

4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/29/2014	Annual	1/29/2015	N/A
-	LTx3	Licensed Transmitter Cable Set	1/30/2014	Annual	1/30/2015	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
-	RE3	Radiated Emissions Cable Set	7/7/2014	Annual	7/7/2015	N/A
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Anritsu	MT8820C	Radio Communication Analyzer	12/12/2013	Annual	12/12/2014	6200901190
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
K & L	11SH10-3075/U18000	High Pass Filter	5/2/2014	Annual	5/2/2015	2
K & L	11SH10-3075/U18000	High Pass Filter	5/2/2014	Annual	5/2/2015	4
K & L	13SH10-1000/U1000	N Type High Pass Filter	5/22/2014	Annual	5/22/2015	1
K & L	13SH10-1000/U1000	N Type High Pass Filter	5/22/2014	Annual	5/22/2015	2
K & L	13SH10-1000/U1000	N Type High Pass Filter	5/22/2014	Annual	5/22/2015	4
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	4/9/2014	Annual	4/9/2015	11401010036
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2014	Annual	4/17/2015	11210140001
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Rhode & Schwarz	TS-PR18	Pre-Amplifier	6/12/2014	Annual	6/12/2015	101622
Rohde & Schwarz	CMW500	Radio Communication Tester	10/18/2013	Annual	10/18/2014	100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/21/2014	Annual	5/21/2015	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 4-1. Test Equipment

Note:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 9 of 103	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation


Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 10 of 103	

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFMS395
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 24.238(a) 27.53(e) 27.53(f) 27.53(g)	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of- band emissions		PASS	Section 6.3, 6.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 6.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
2.1055. 24.235 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.8
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP	RADIATED	PASS	Section 6.6
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.6
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.6
2.1053 24.238(a) 27.53(e) 27.53(f) 27.53(g)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.7

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 6.2, 6.3, 6.4, 6.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation", Version 2.4.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 11 of 103	

6.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 v02r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

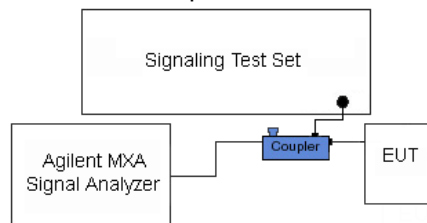

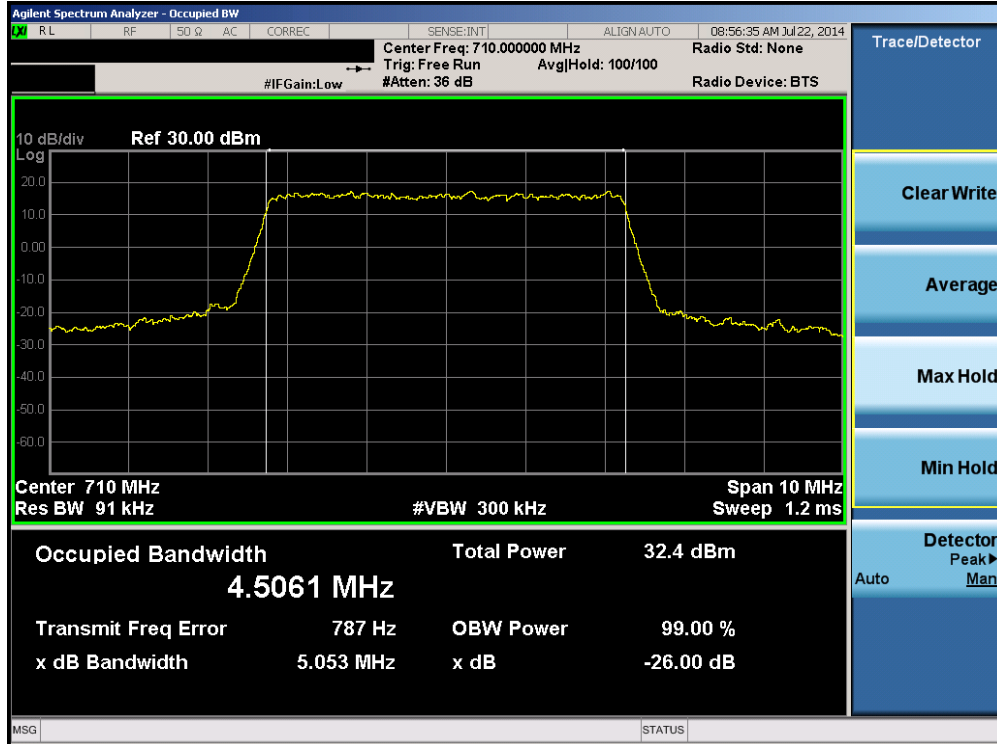


Figure 6-1. Test Instrument & Measurement Setup

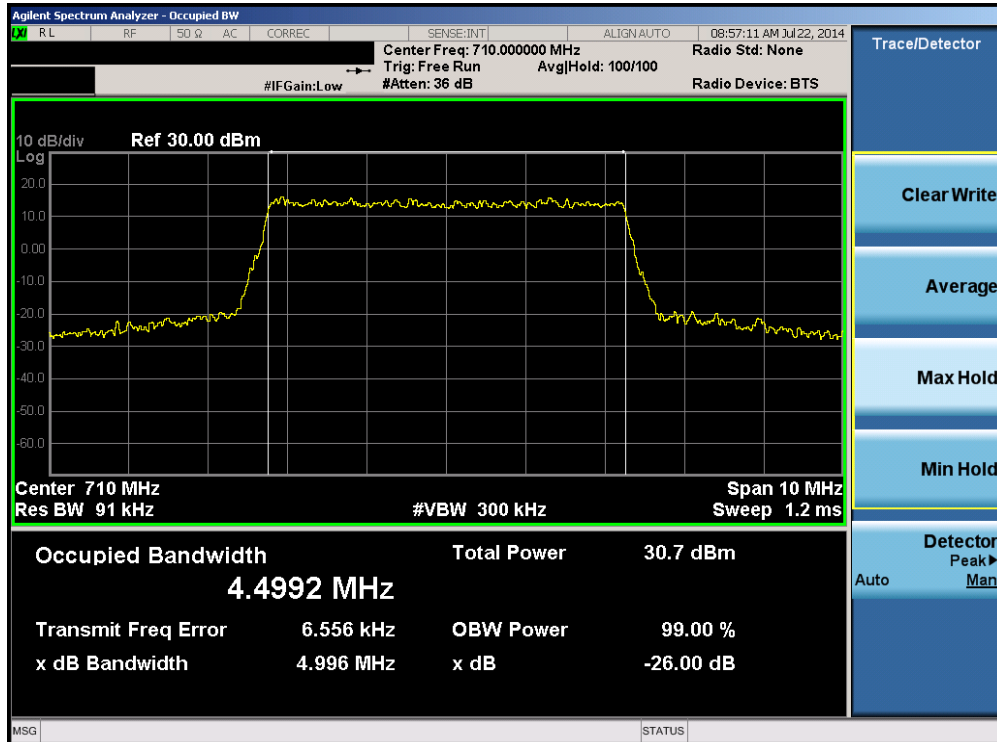
Test Notes

None.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 12 of 103	

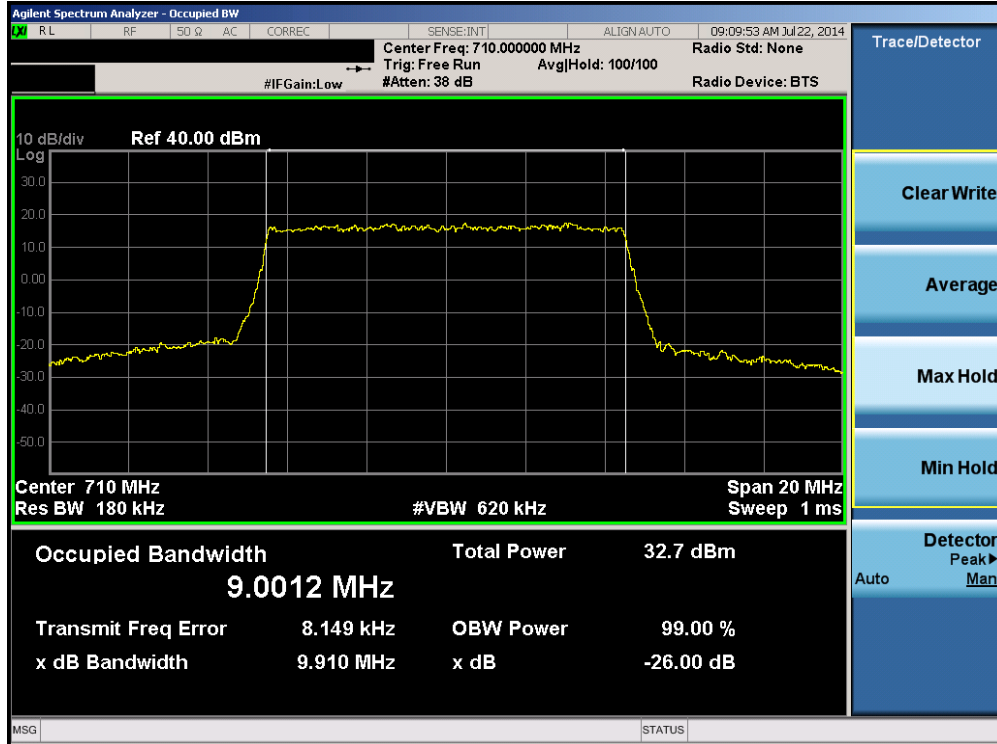


Plot 6-1. Occupied Bandwidth Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

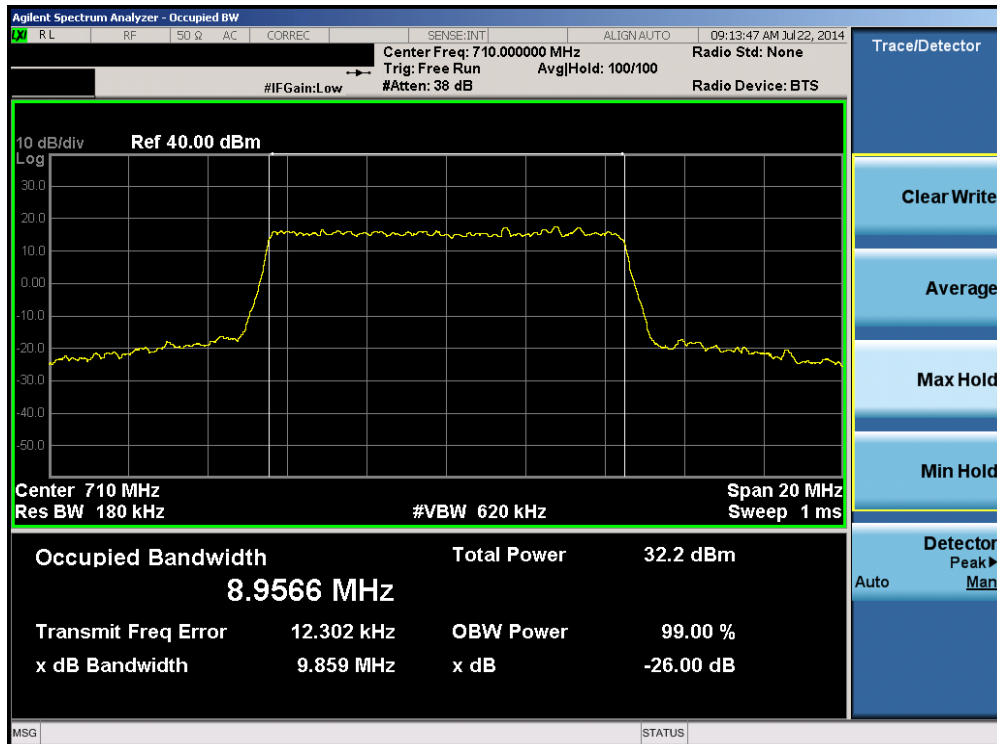


Plot 6-2. Occupied Bandwidth Plot (Band 17 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 13 of 103

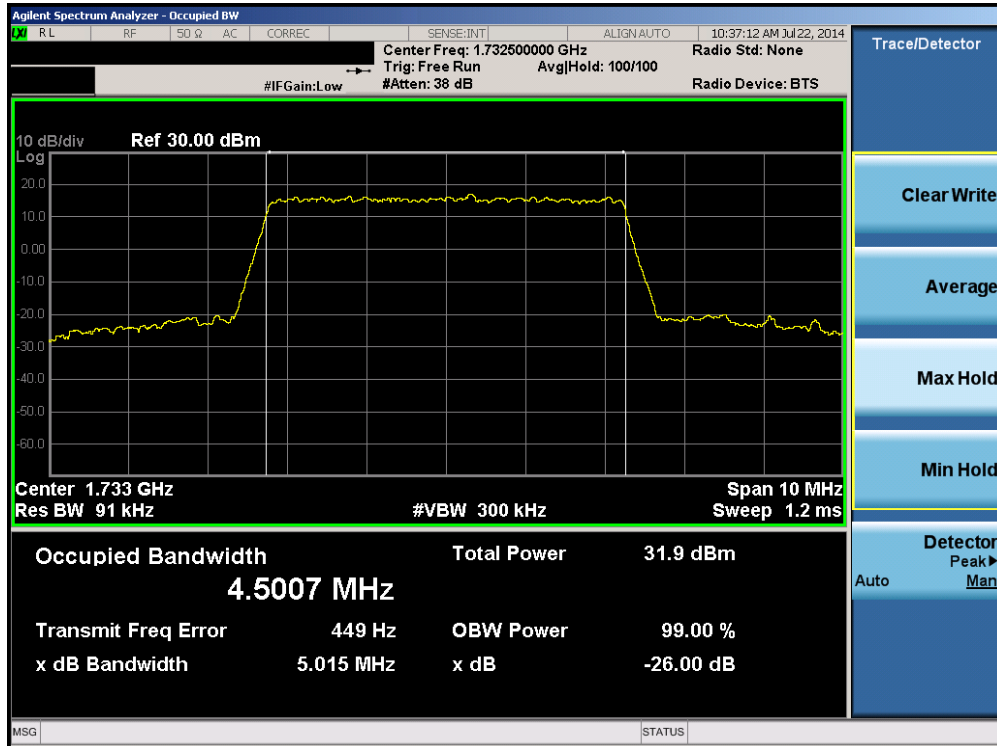


Plot 6-3. Occupied Bandwidth Plot (Band 17 – 10.0MHz QPSK – RB Size 50)

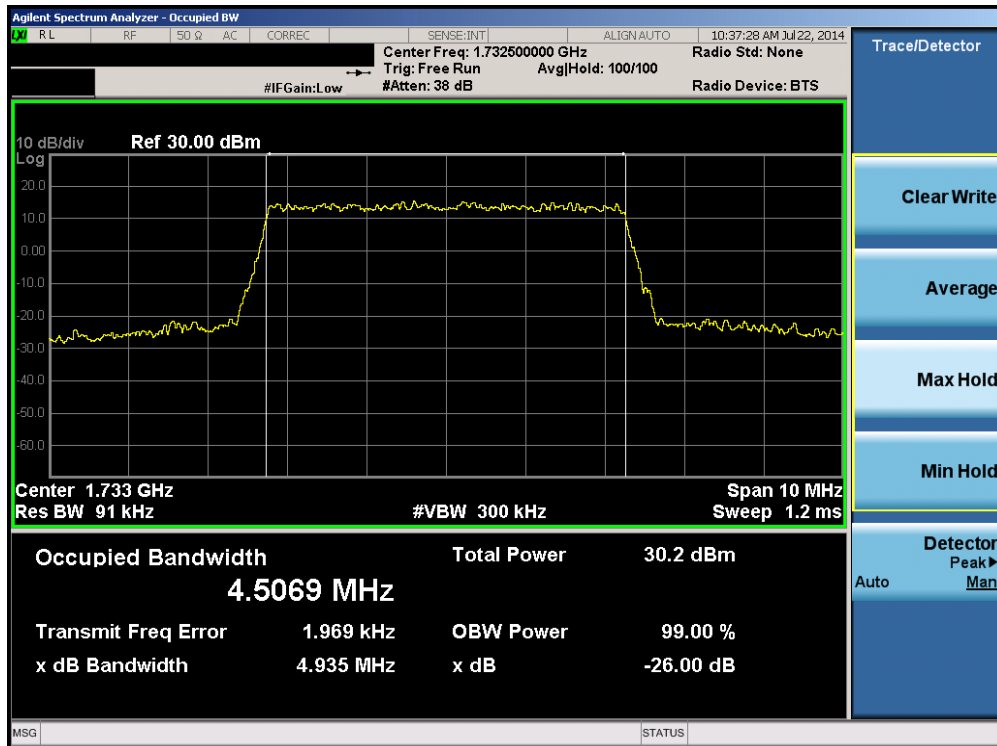


Plot 6-4. Occupied Bandwidth Plot (Band 17 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 14 of 103

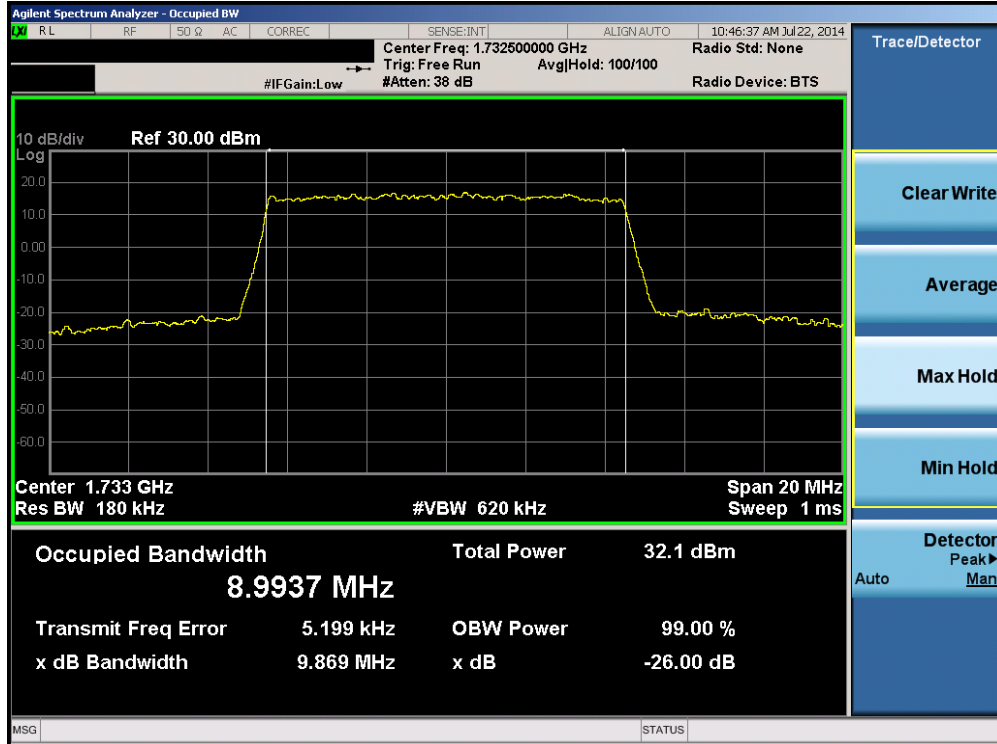


Plot 6-5. Occupied Bandwidth Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

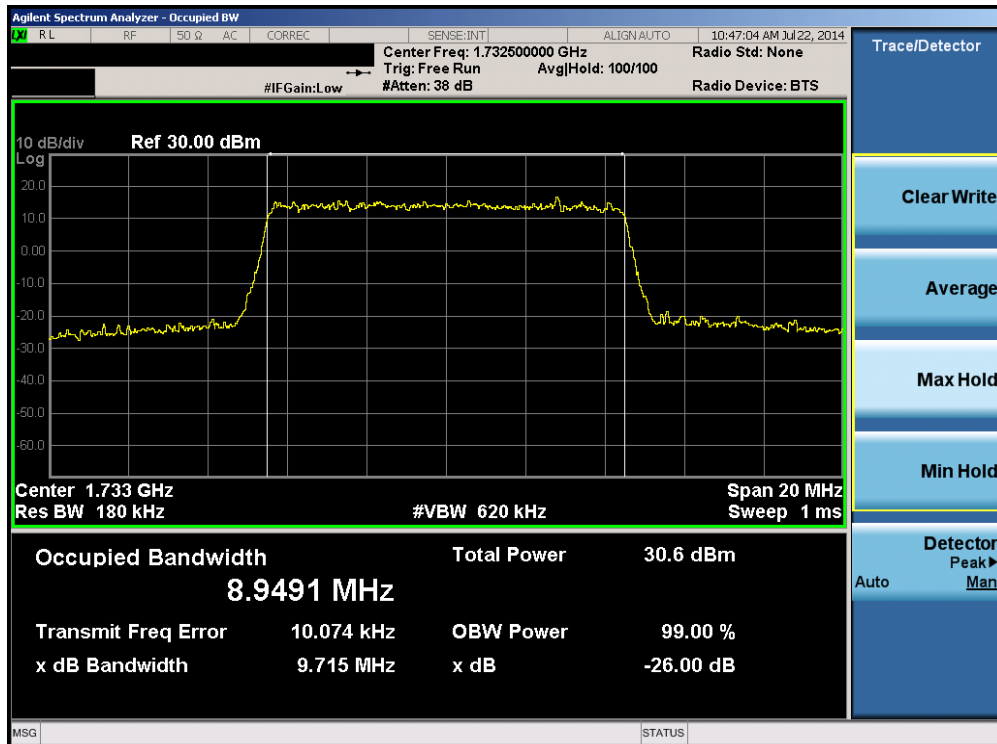


Plot 6-6. Occupied Bandwidth Plot (Band 4 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 15 of 103

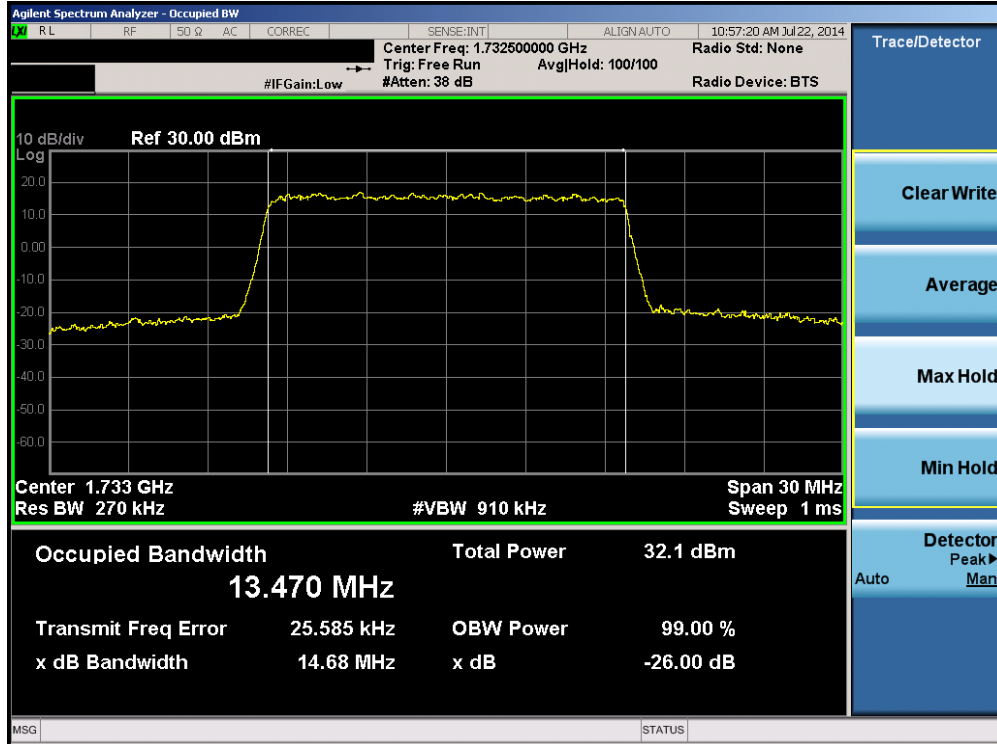


Plot 6-7. Occupied Bandwidth Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

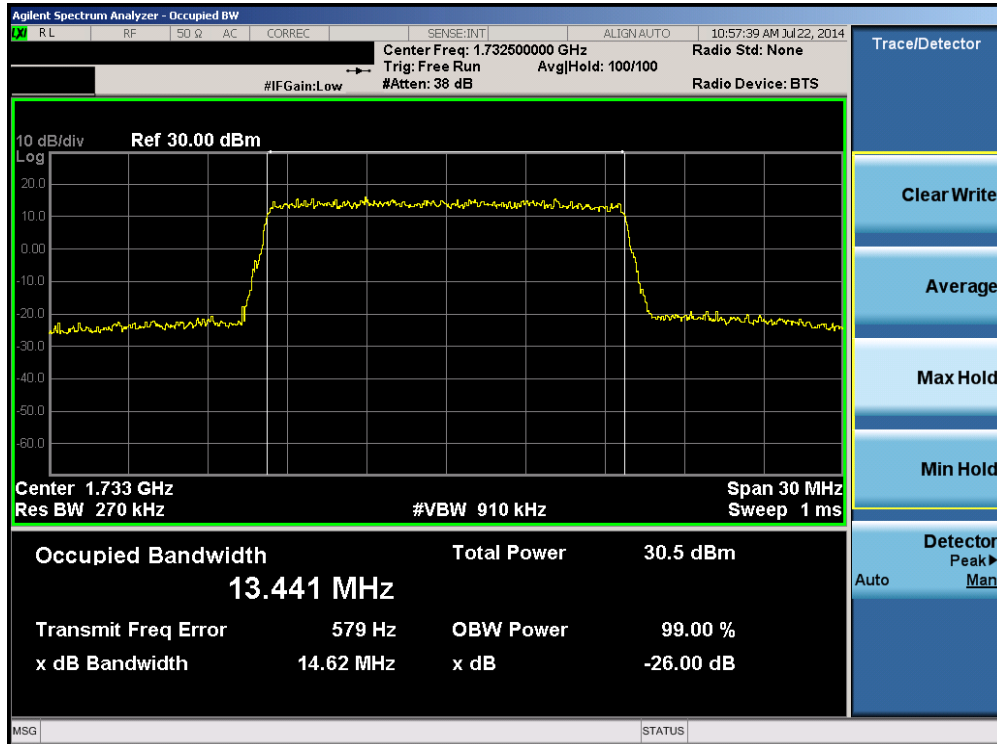


Plot 6-8. Occupied Bandwidth Plot (Band 4 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 16 of 103

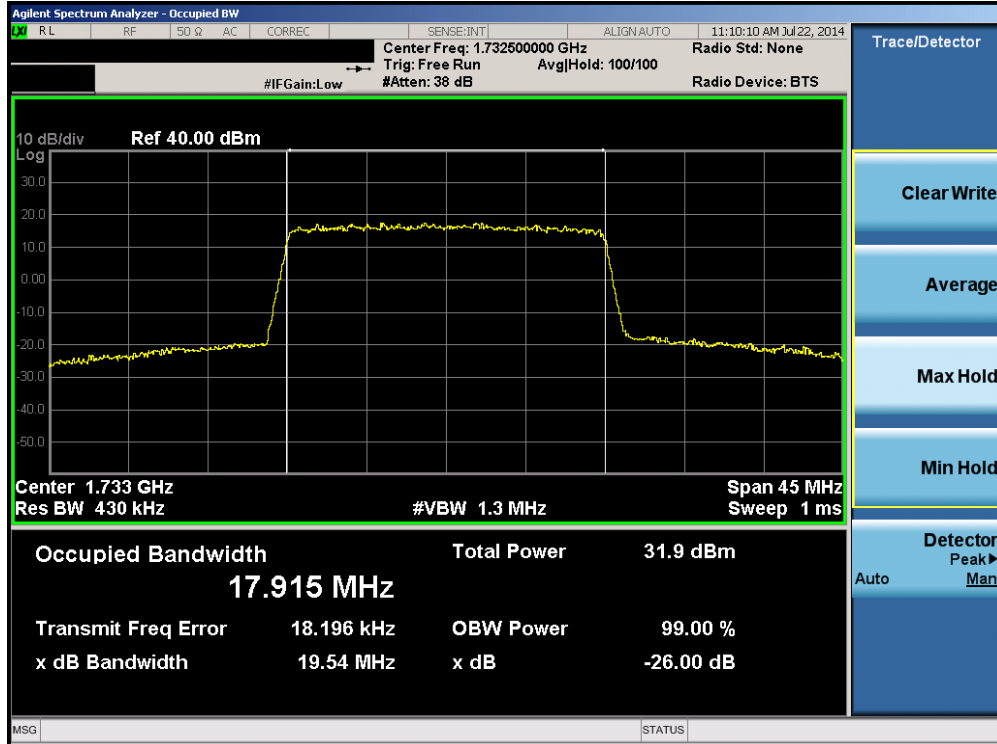


Plot 6-9. Occupied Bandwidth Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

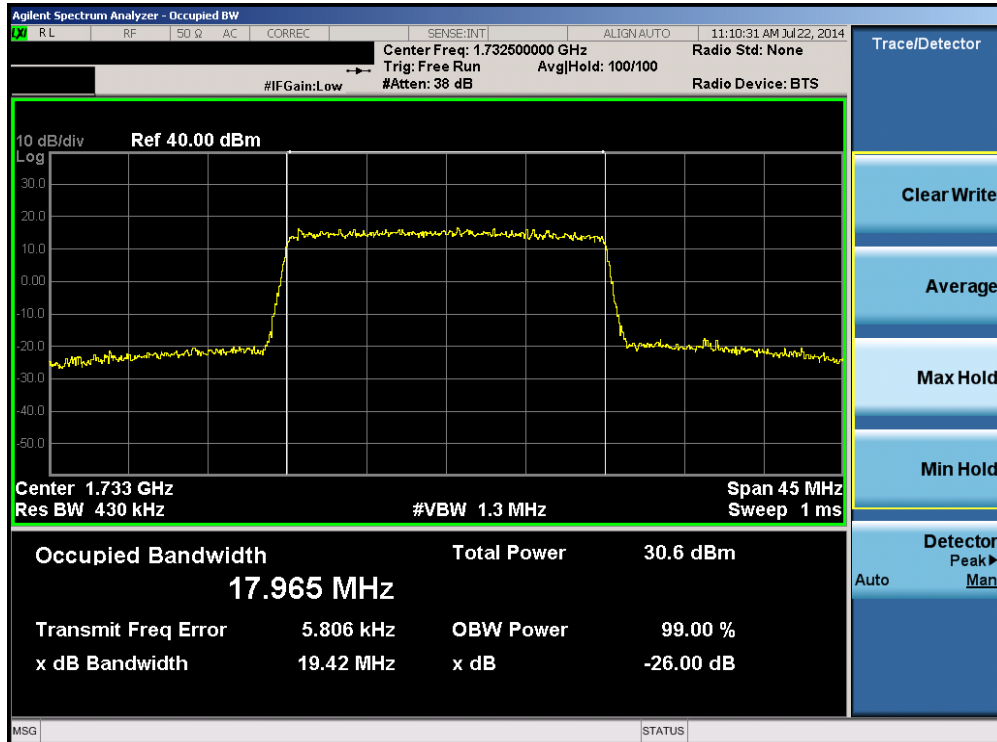


Plot 6-10. Occupied Bandwidth Plot (Band 4 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 17 of 103

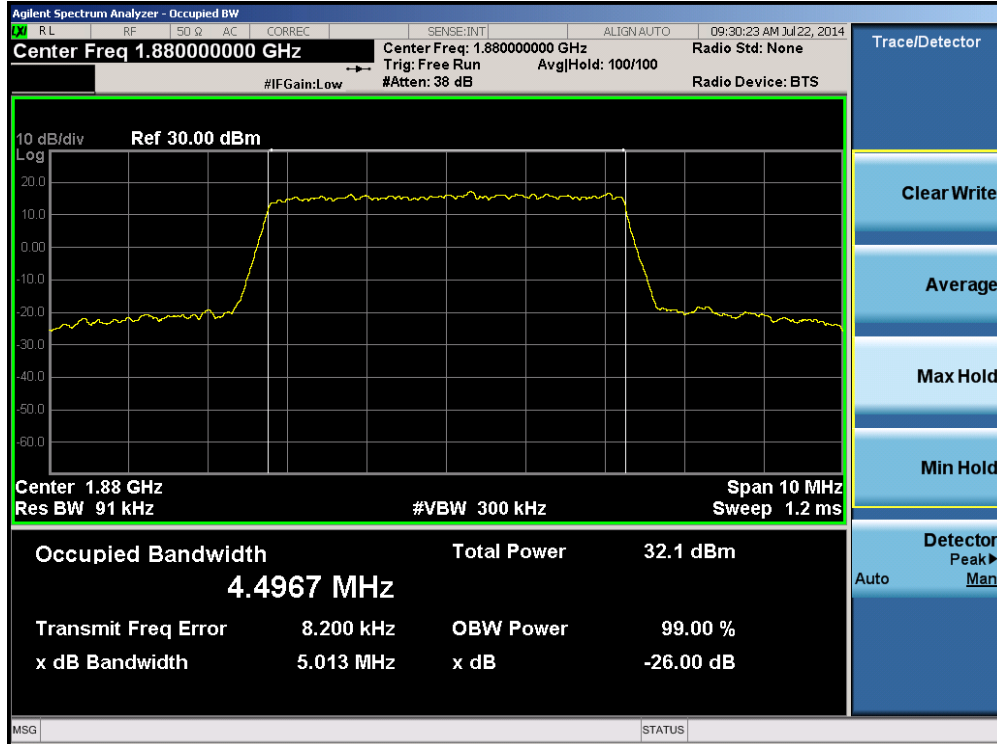


Plot 6-11. Occupied Bandwidth Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

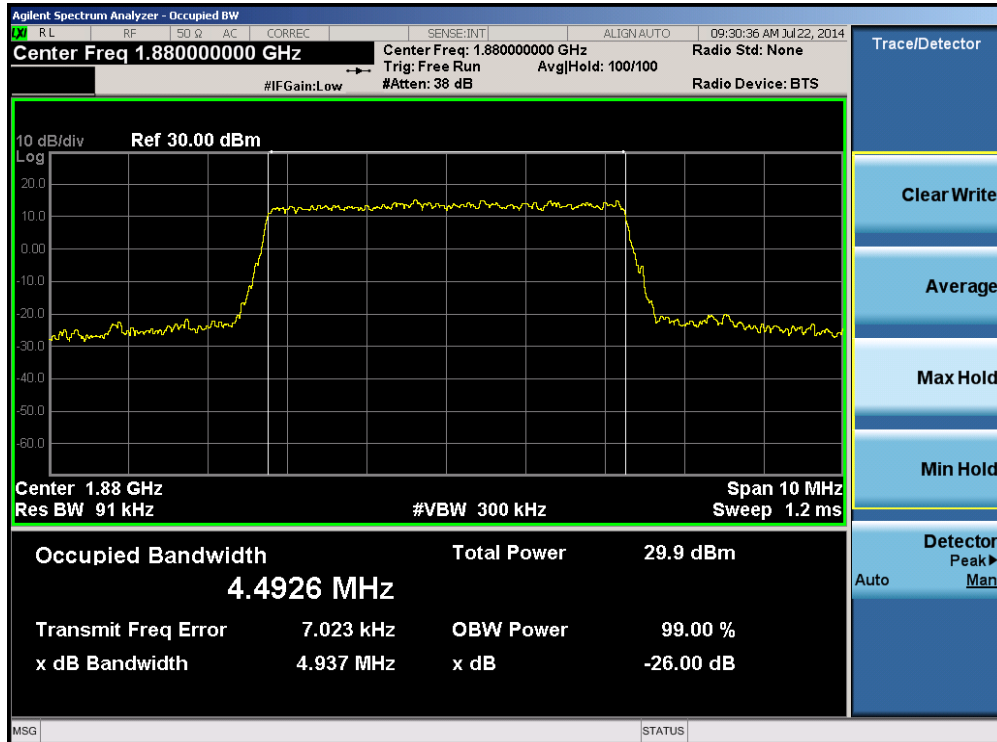


Plot 6-12. Occupied Bandwidth Plot (Band 4 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 18 of 103

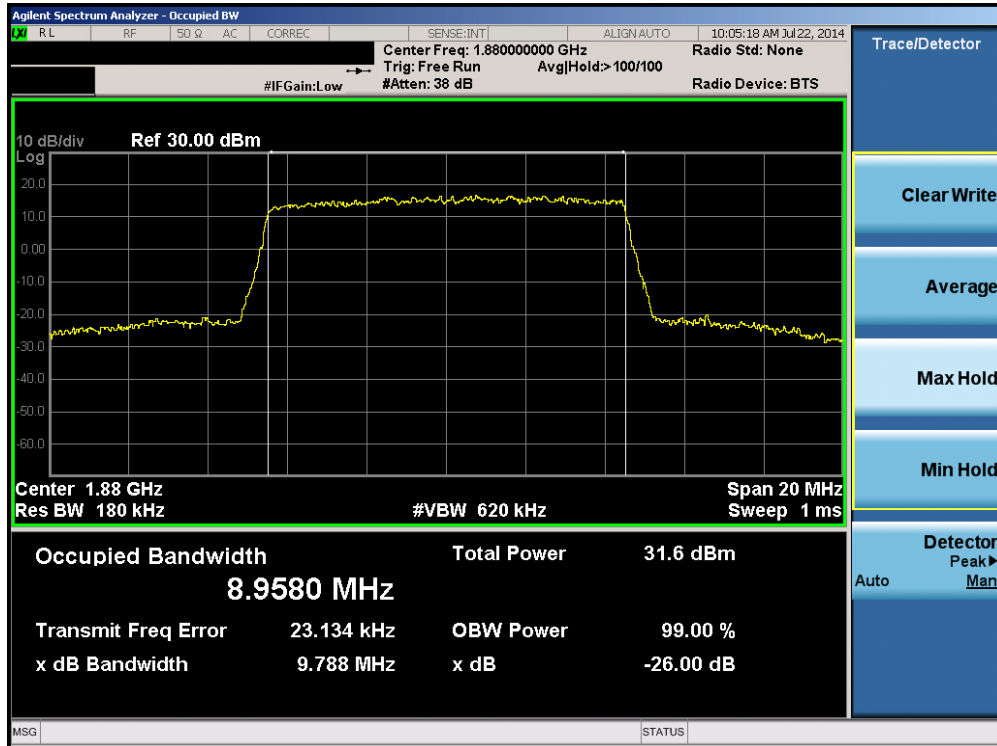


Plot 6-13. Occupied Bandwidth Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

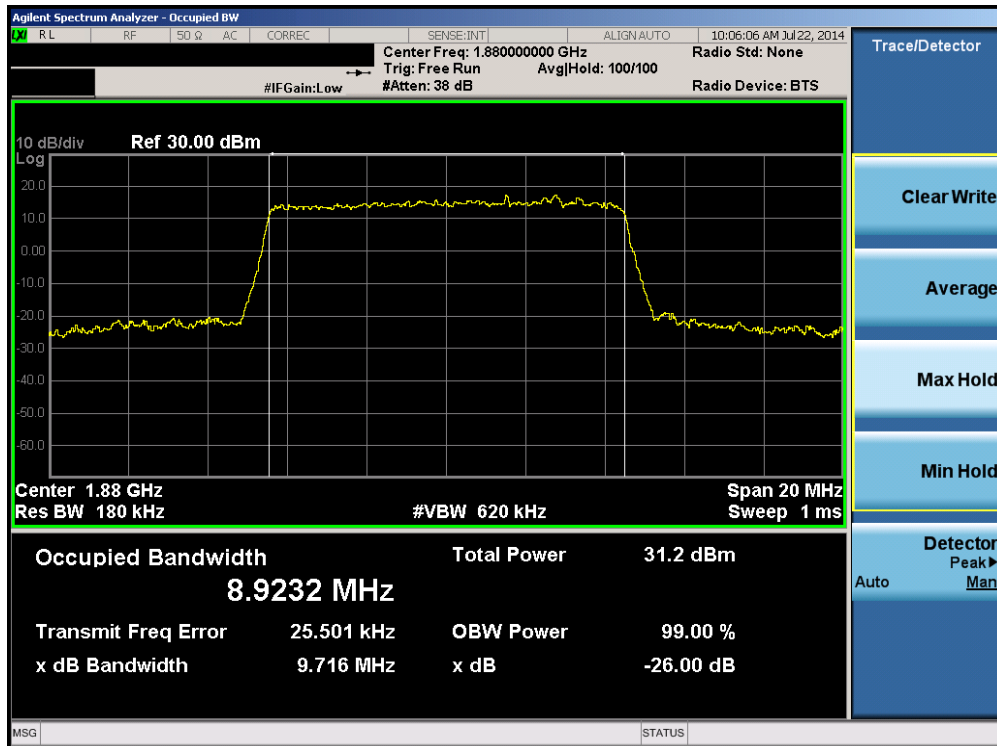


Plot 6-14. Occupied Bandwidth Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 19 of 103

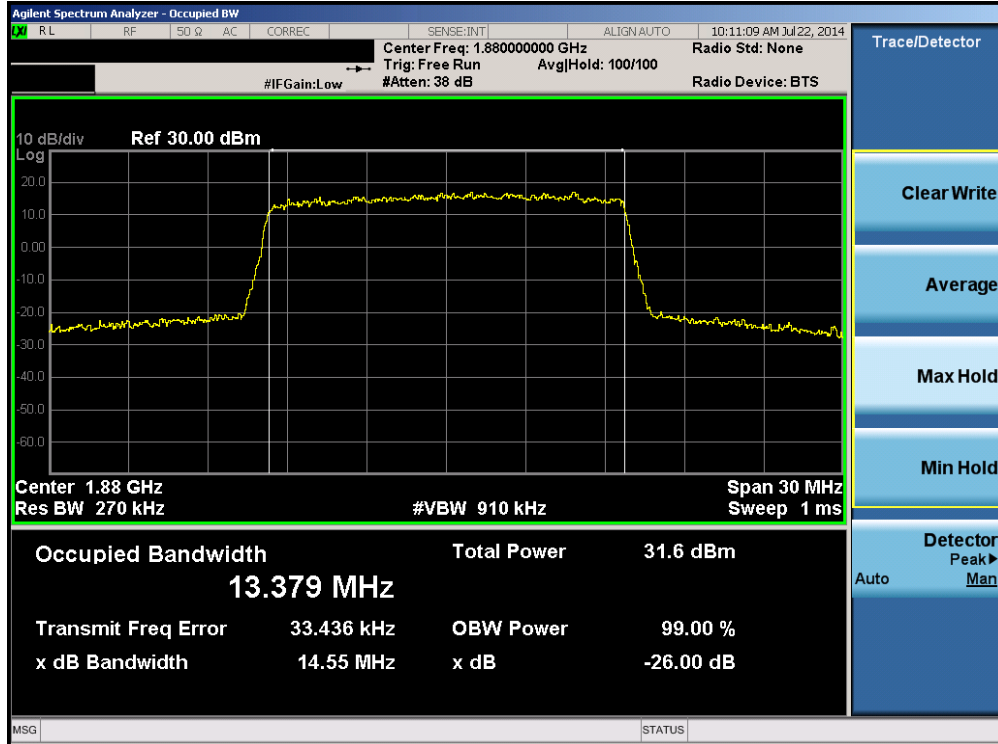


Plot 6-15. Occupied Bandwidth Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

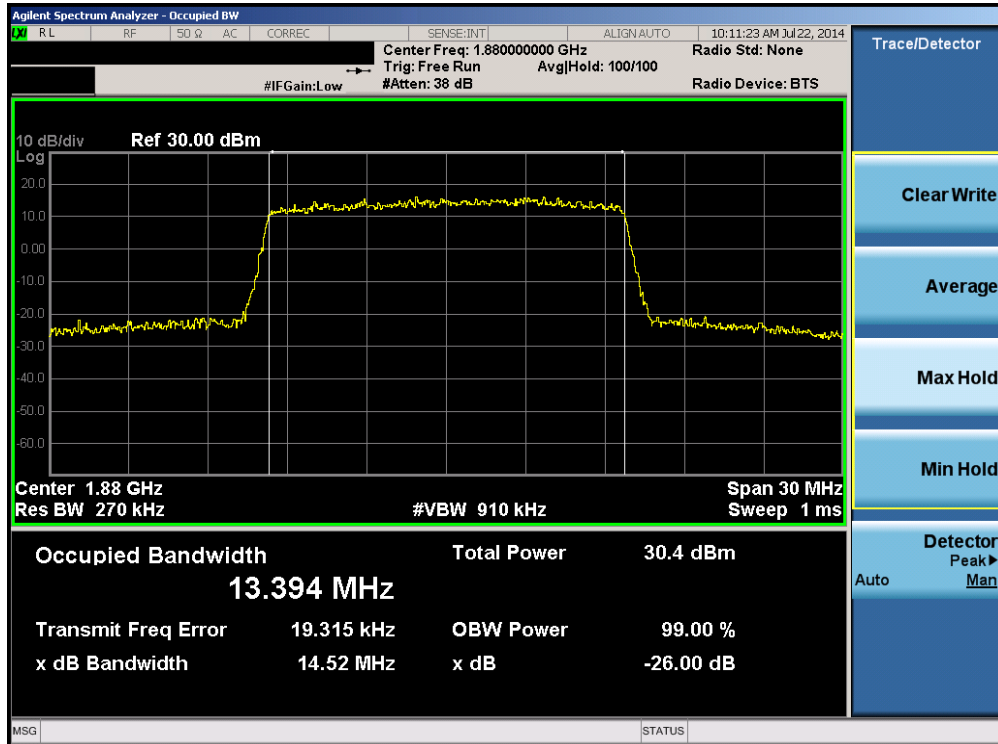


Plot 6-16. Occupied Bandwidth Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 20 of 103

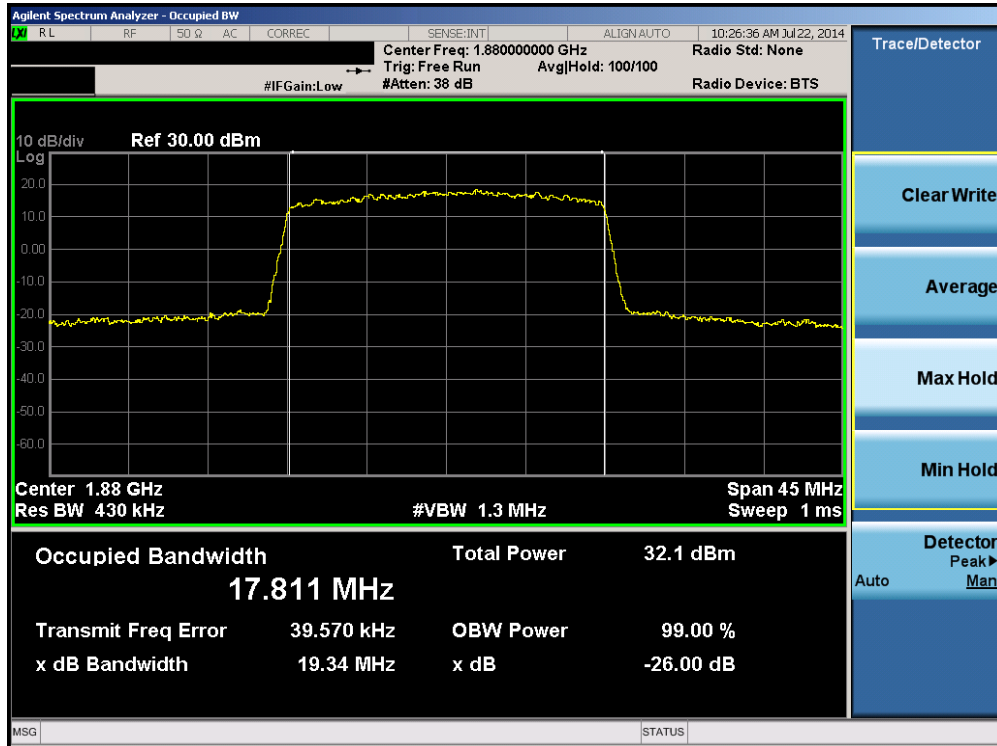


Plot 6-17. Occupied Bandwidth Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

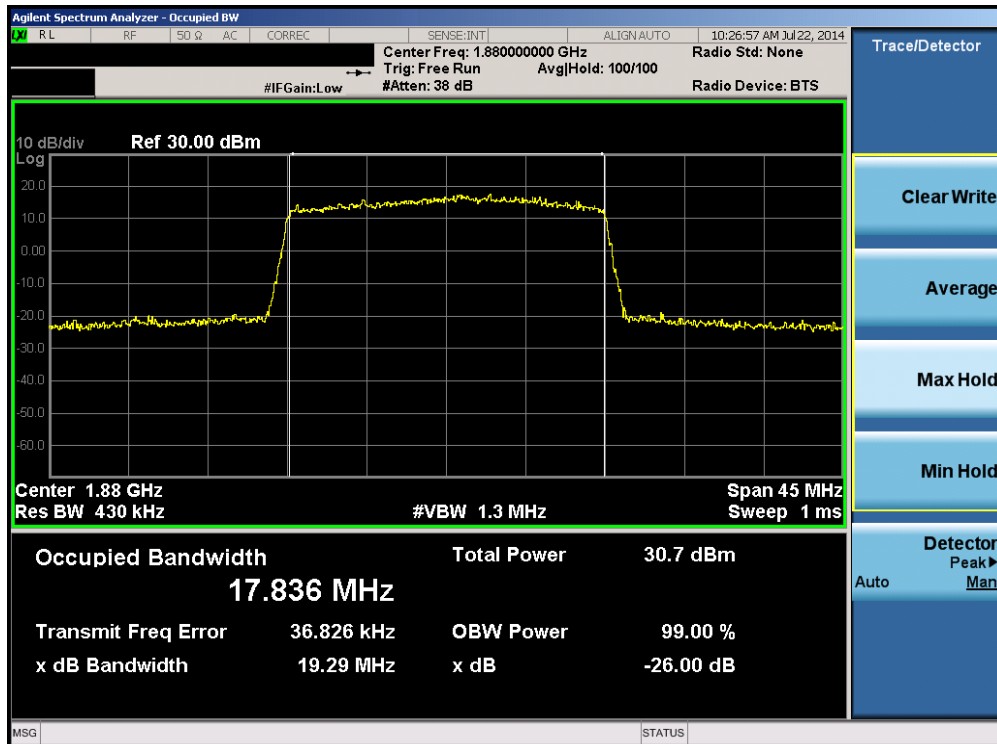


Plot 6-18. Occupied Bandwidth Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 21 of 103

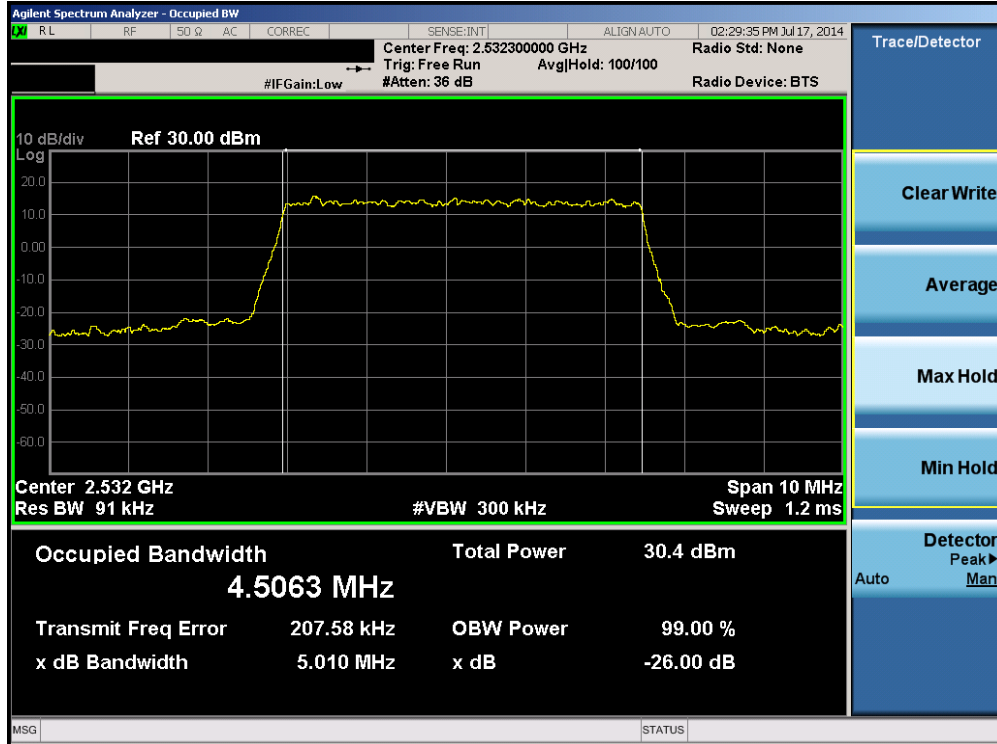


Plot 6-19. Occupied Bandwidth Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

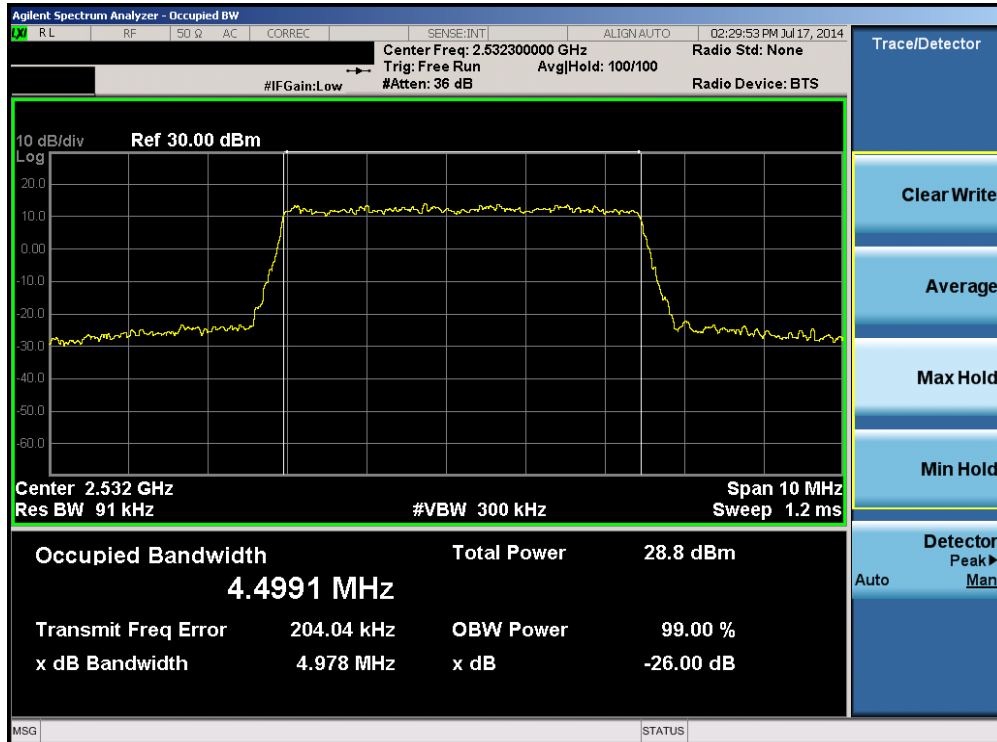


Plot 6-20. Occupied Bandwidth Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 22 of 103

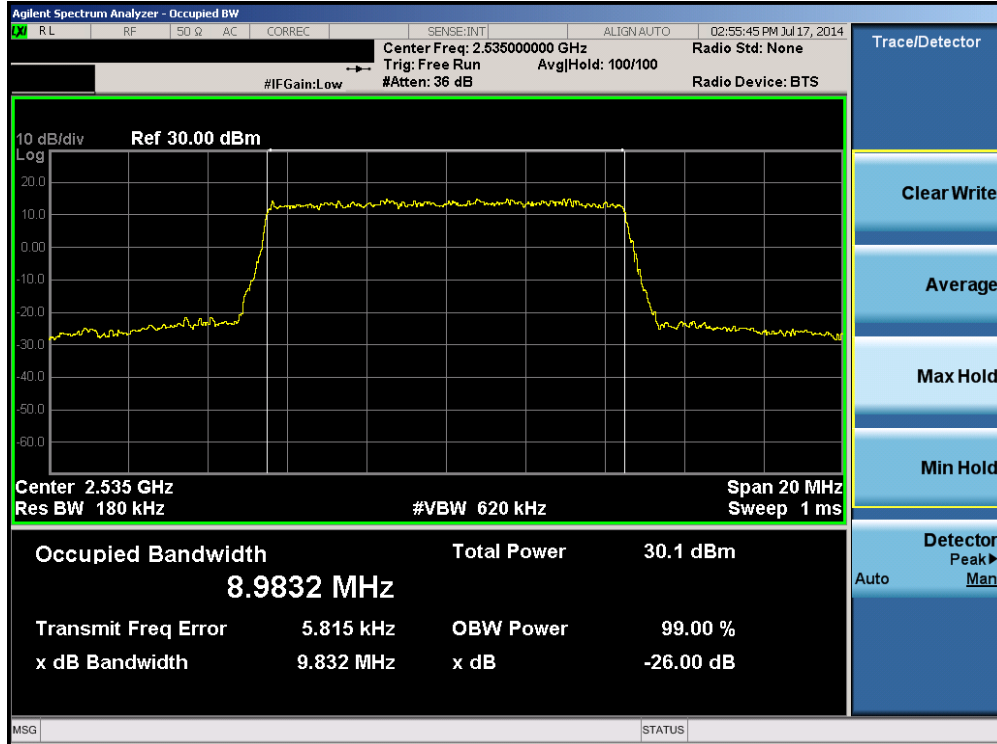


Plot 6-21. Occupied Bandwidth Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

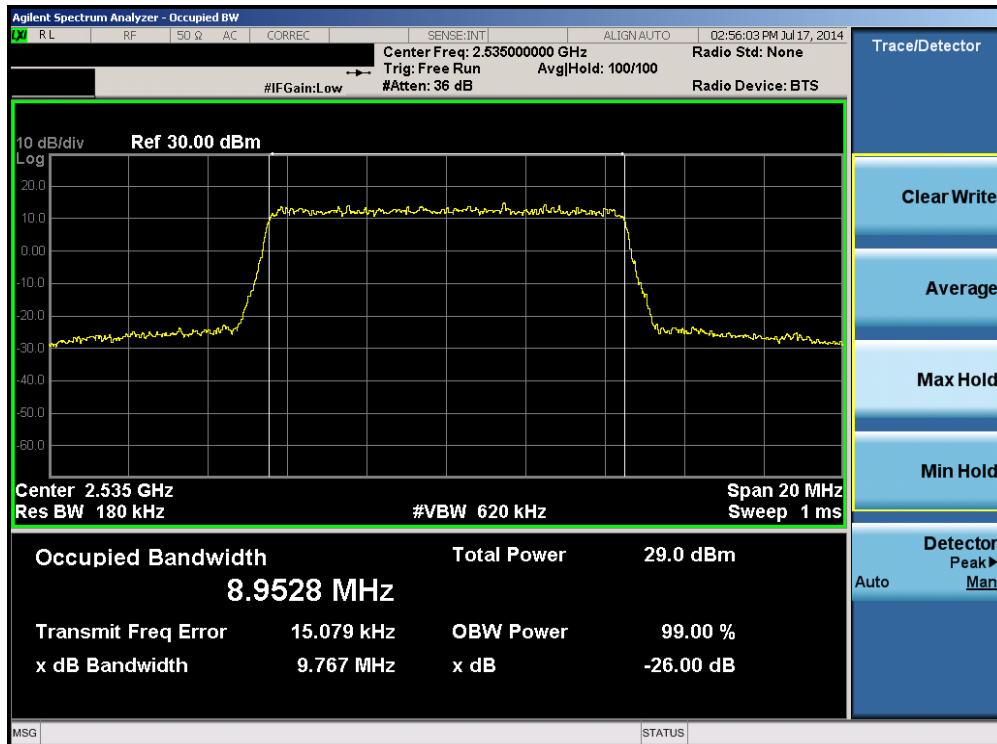


Plot 6-22. Occupied Bandwidth Plot (Band 7 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 23 of 103

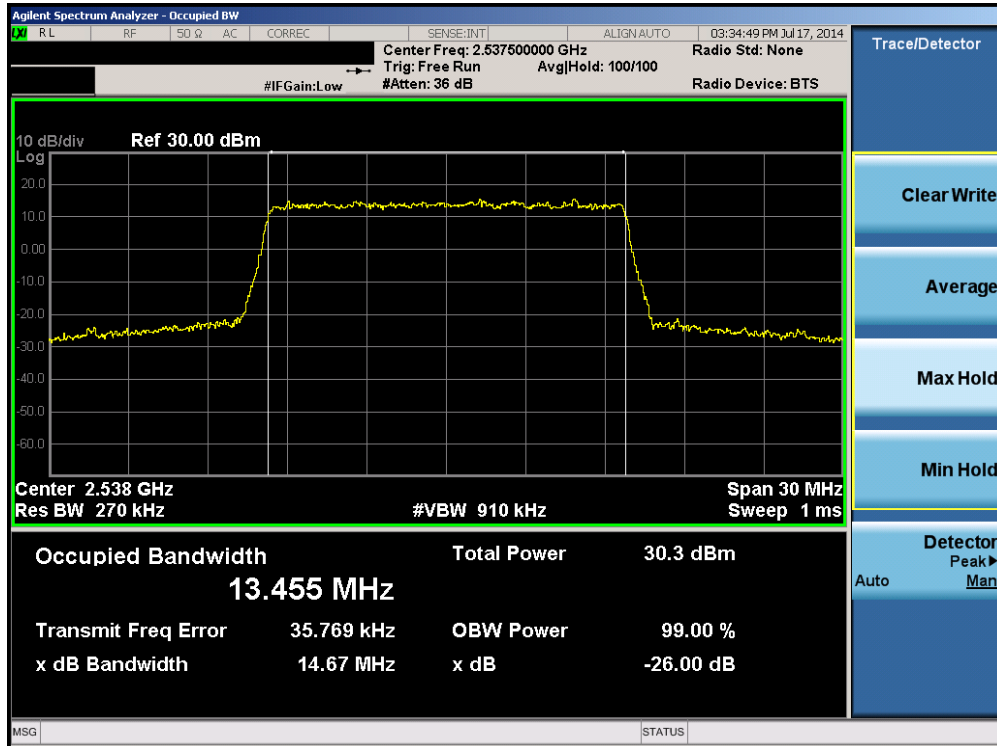


Plot 6-23. Occupied Bandwidth Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

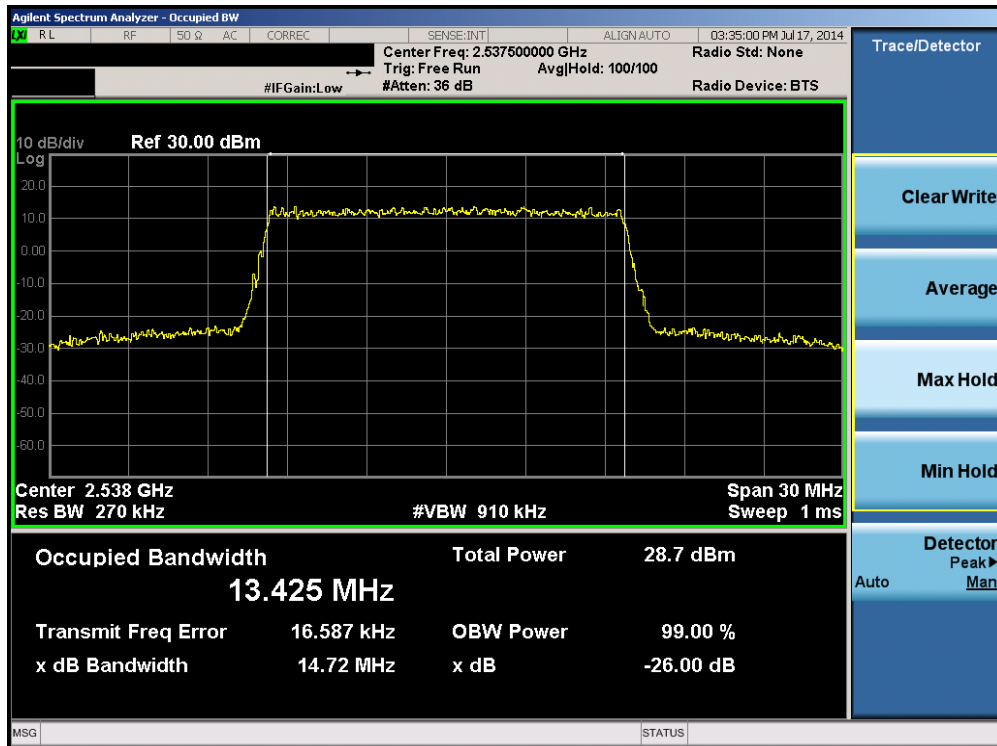


Plot 6-24. Occupied Bandwidth Plot (Band 7 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 24 of 103

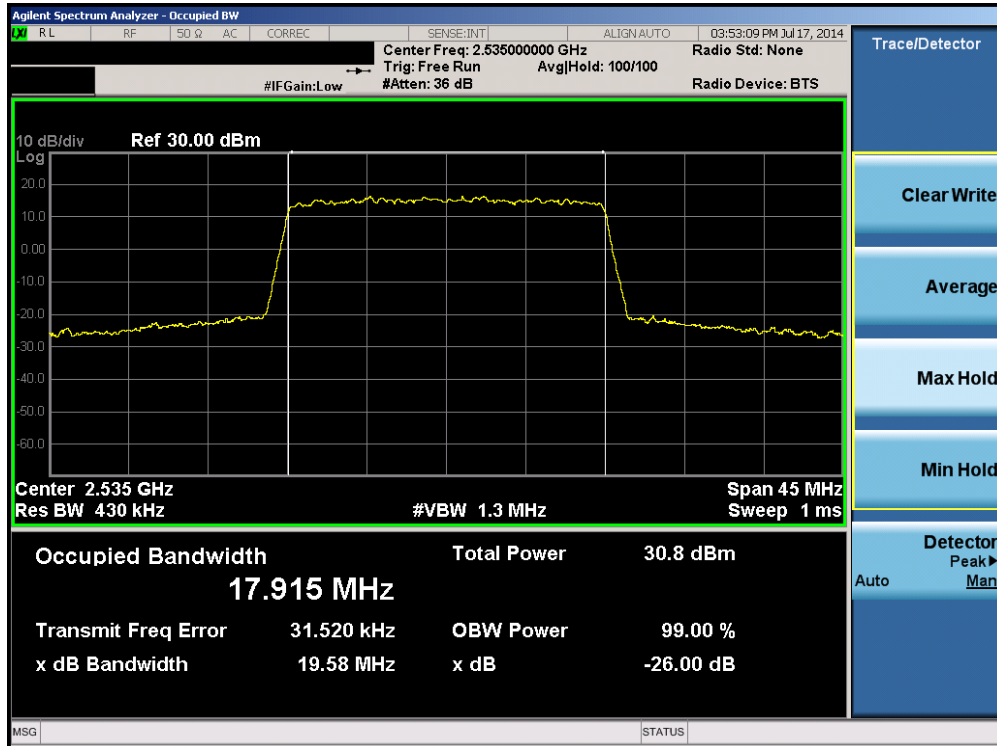


Plot 6-25. Occupied Bandwidth Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

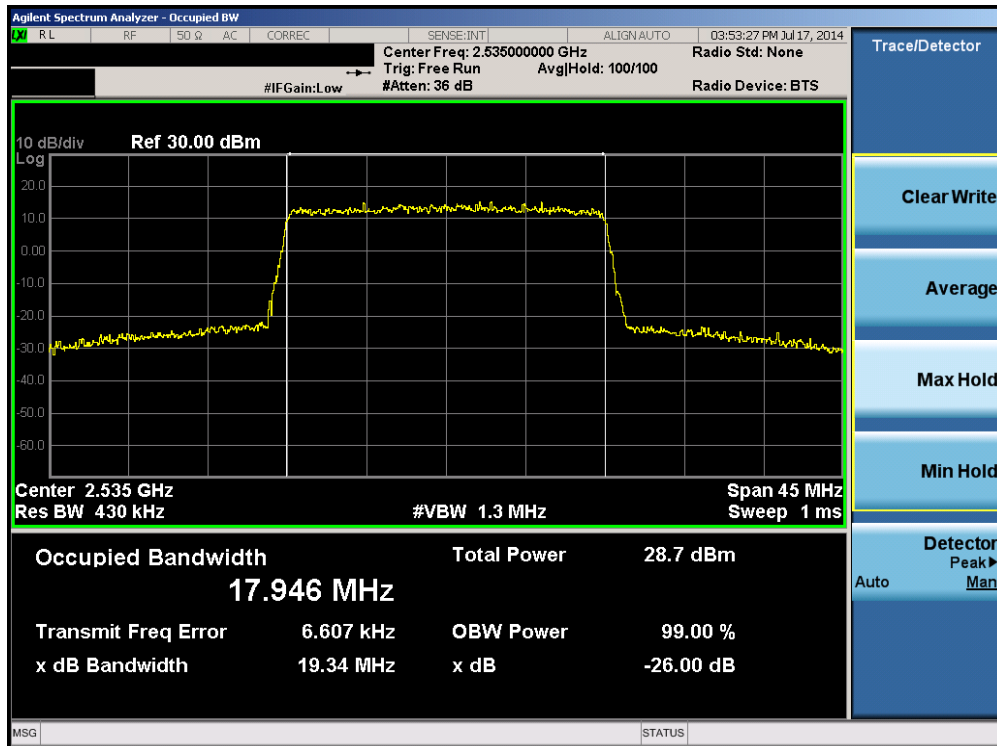


Plot 6-26. Occupied Bandwidth Plot (Band 7 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 25 of 103



Plot 6-27. Occupied Bandwidth Plot (Band 7 – 20.0MHz QPSK – RB Size 100)



Plot 6-28. Occupied Bandwidth Plot (Band 7 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 26 of 103

6.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §24.238(a) §27.53(e) §27.53(f) §27.53(g)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

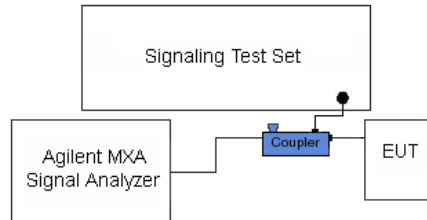


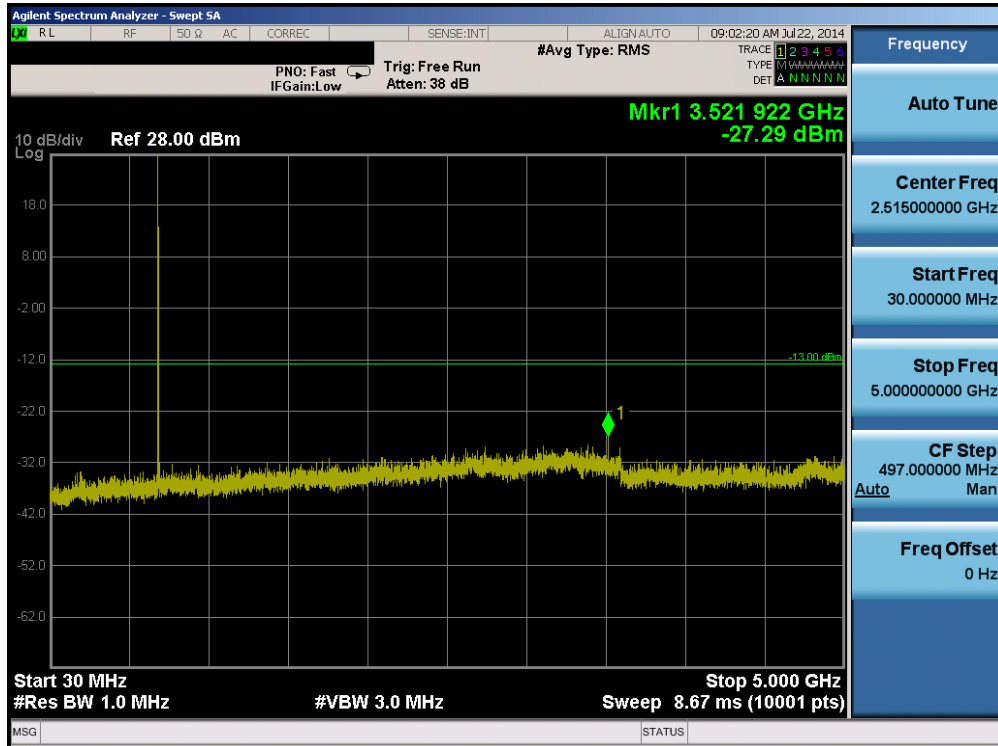


Figure 6-2. Test Instrument & Measurement Setup

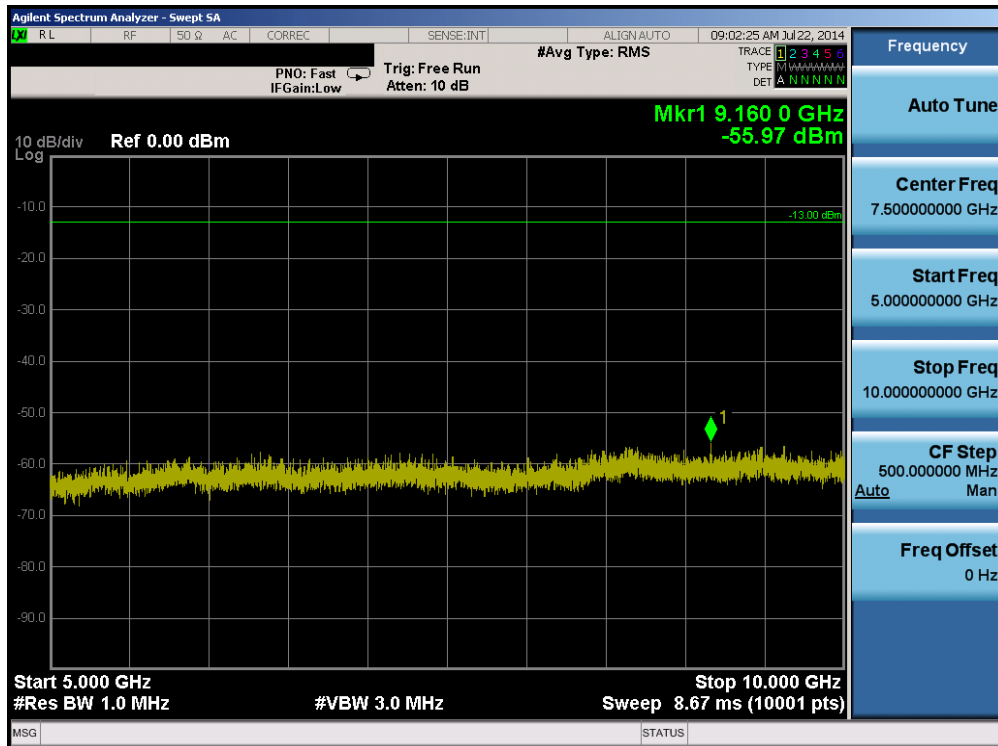
Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 27 of 103

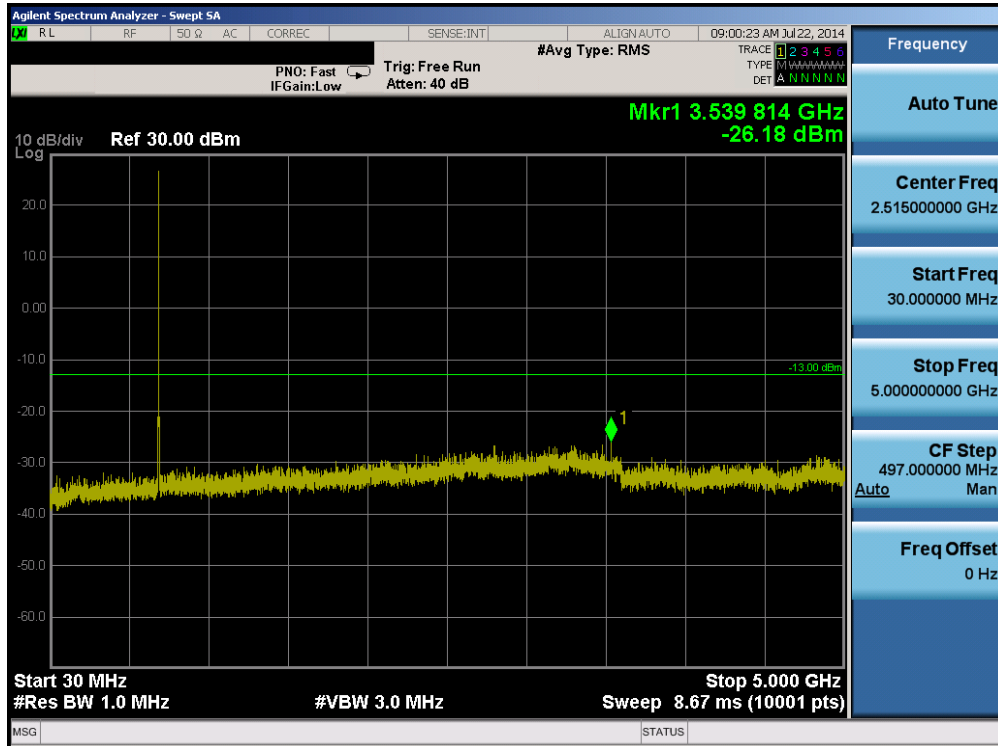


Plot 6-29. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

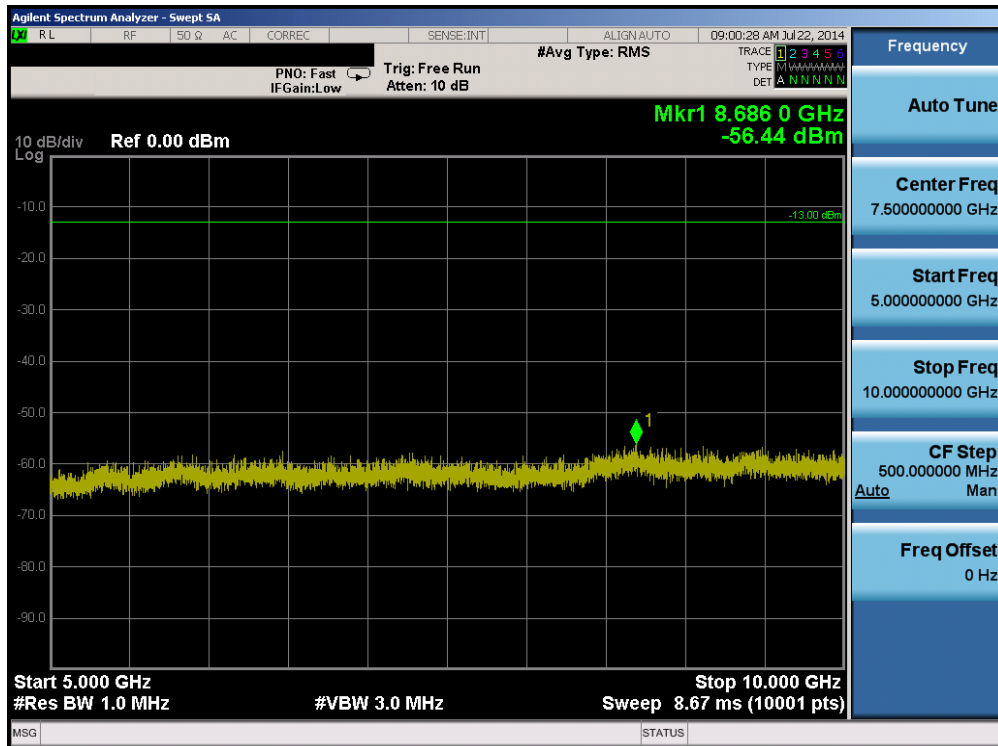


Plot 6-30. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 28 of 103

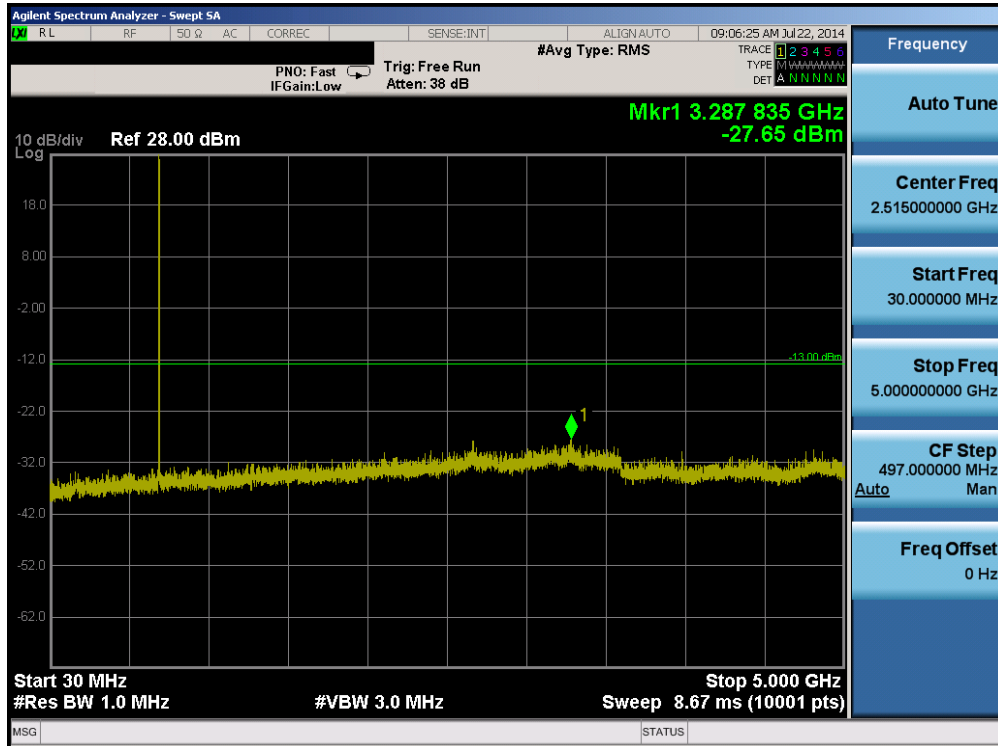


Plot 6-31. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

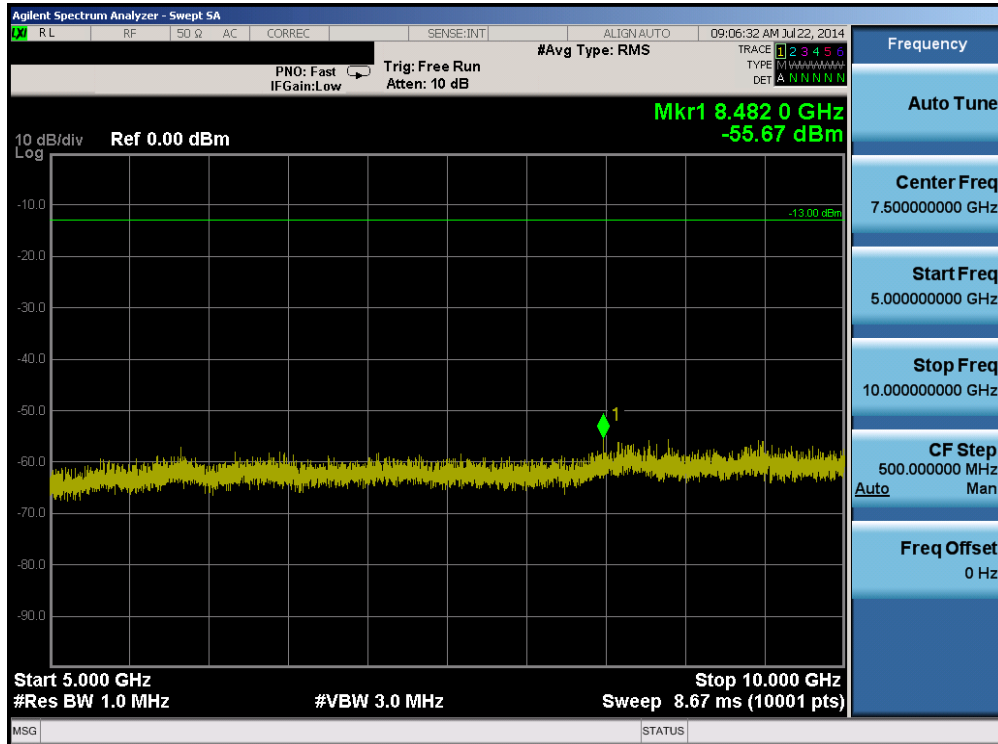


Plot 6-32. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 29 of 103

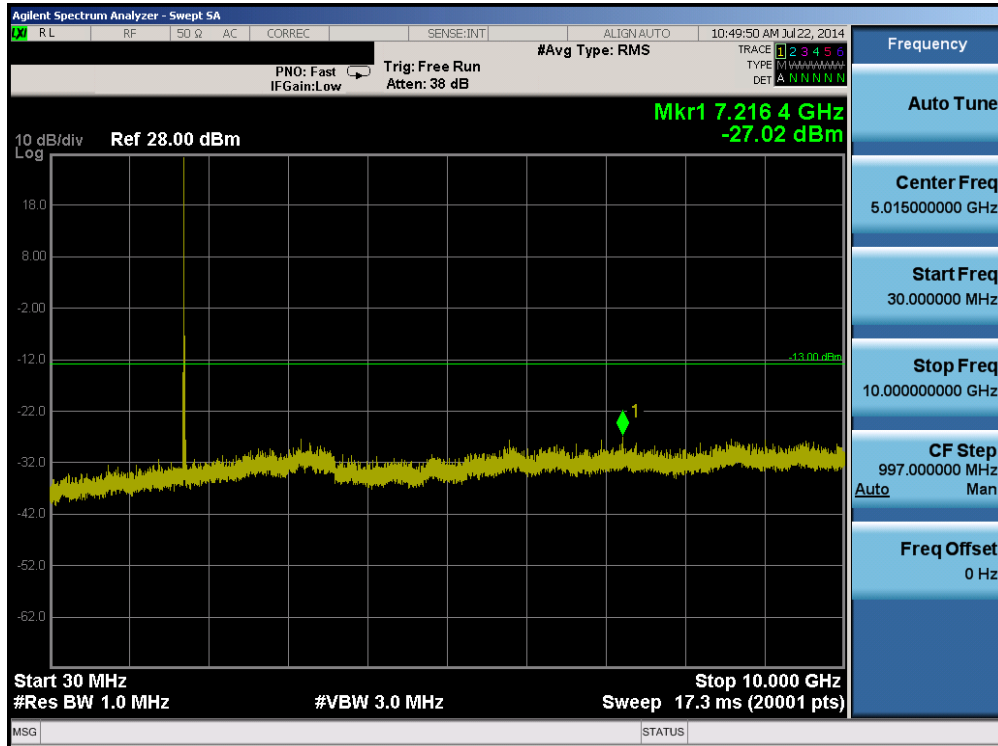


Plot 6-33. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

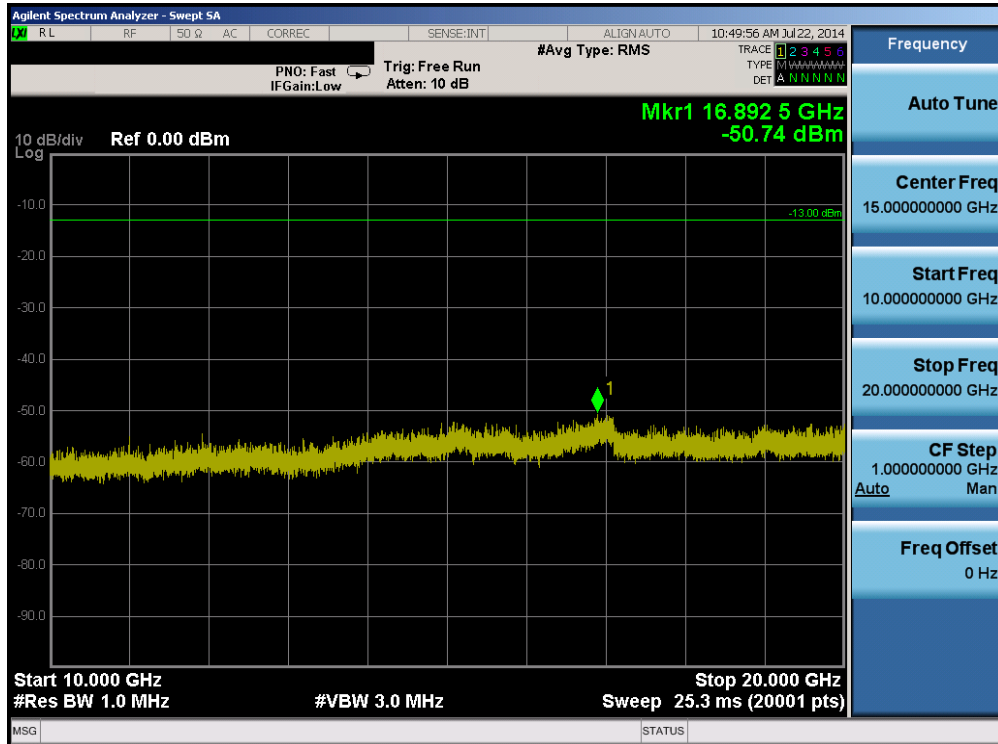


Plot 6-34. Conducted Spurious Plot (Band 17 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 30 of 103

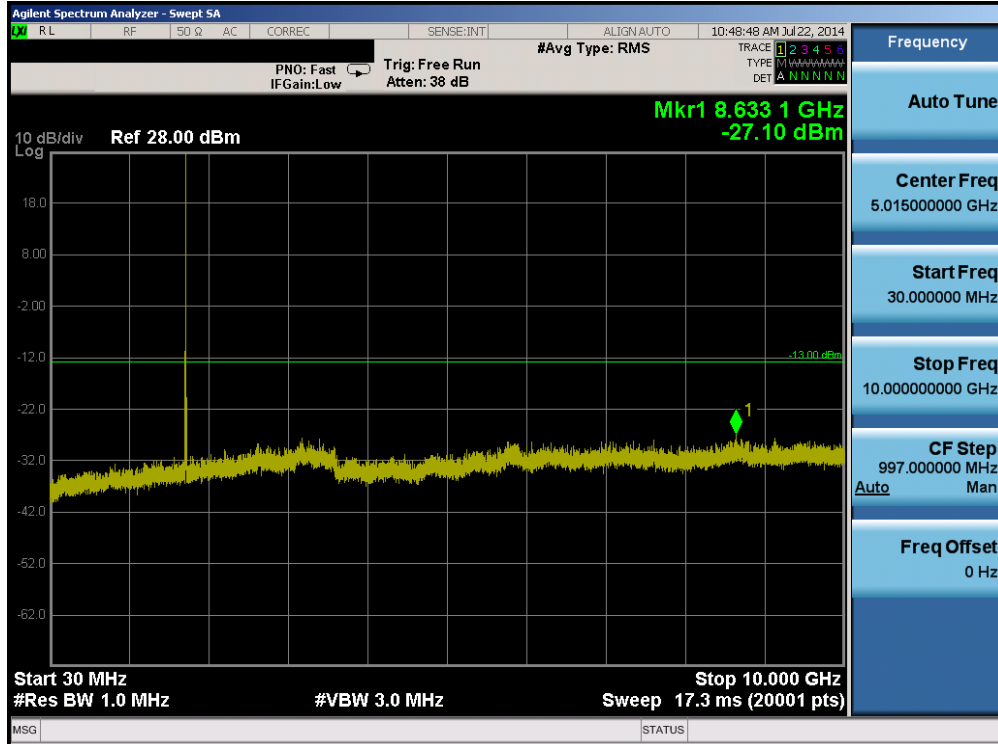


Plot 6-35. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

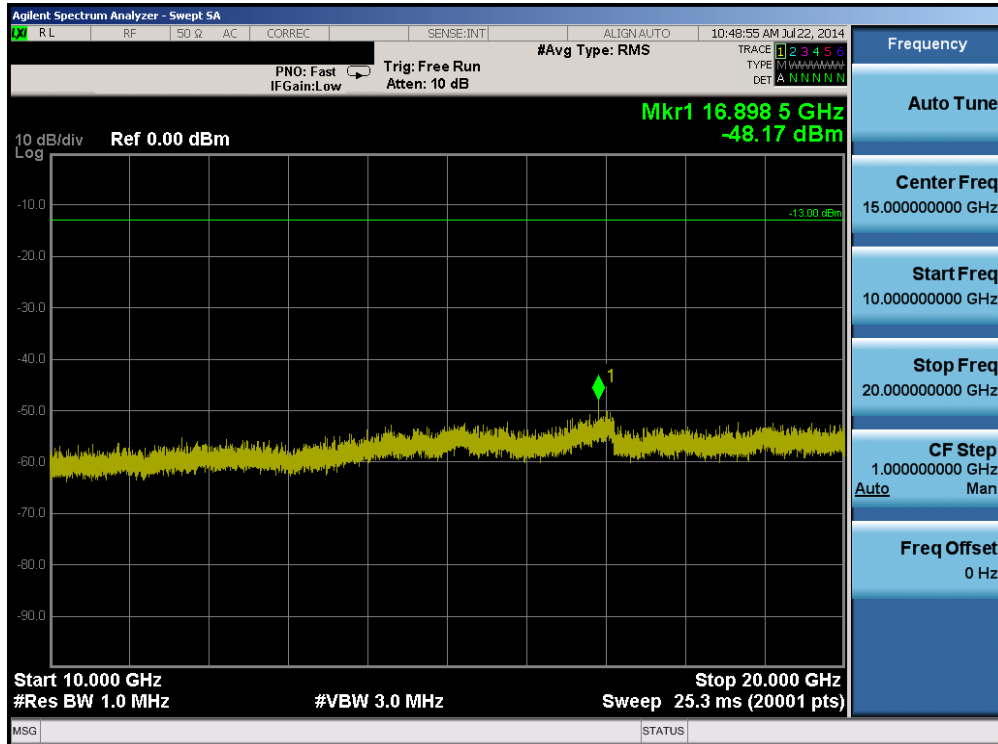


Plot 6-36. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 31 of 103

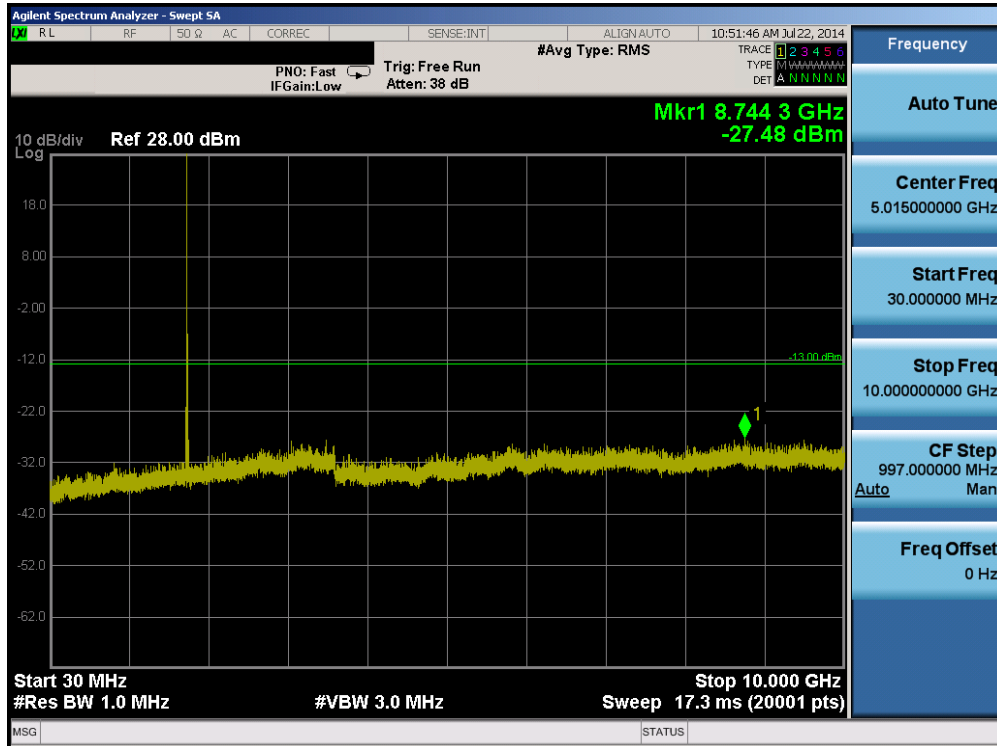


Plot 6-37. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

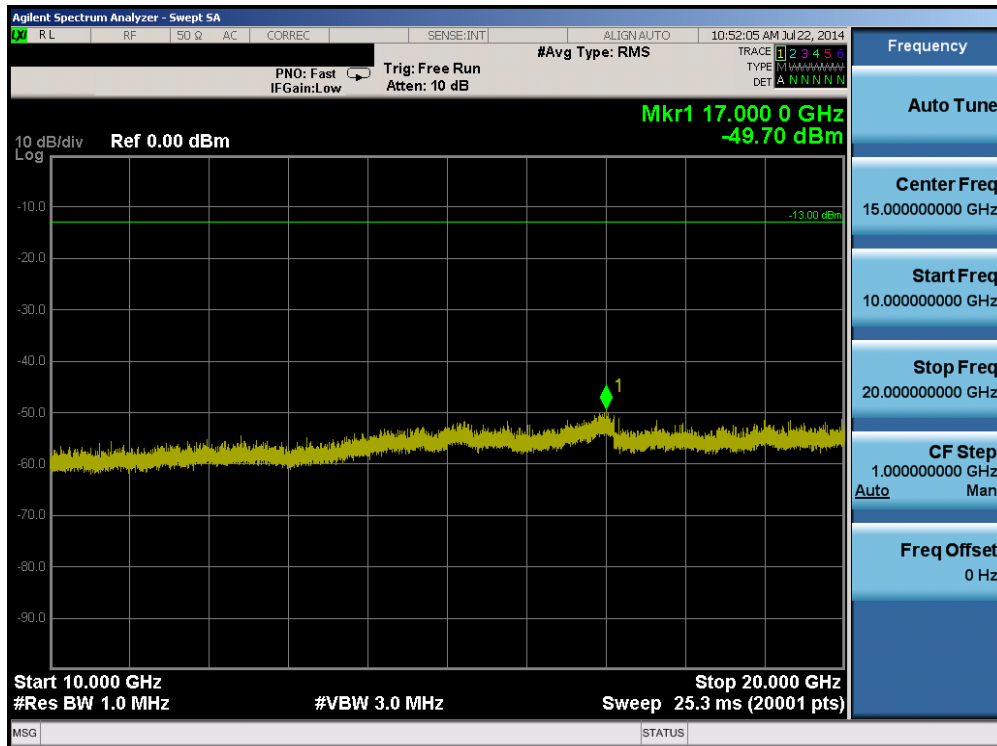


Plot 6-38. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 32 of 103

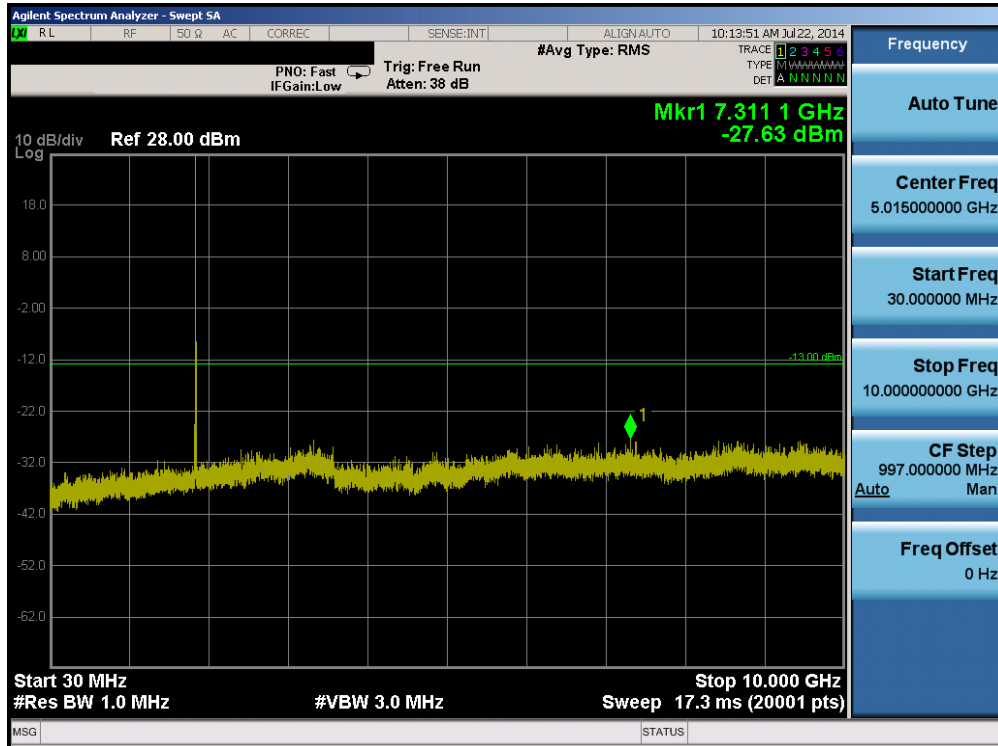


Plot 6-39. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

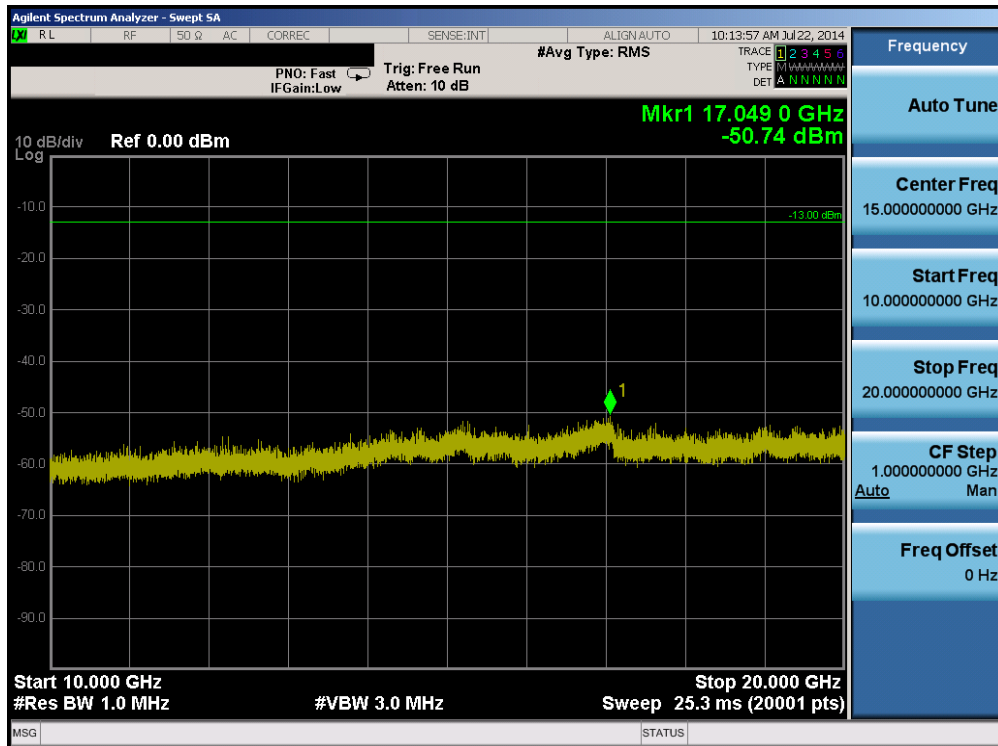


Plot 6-40. Conducted Spurious Plot (Band 4 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 33 of 103

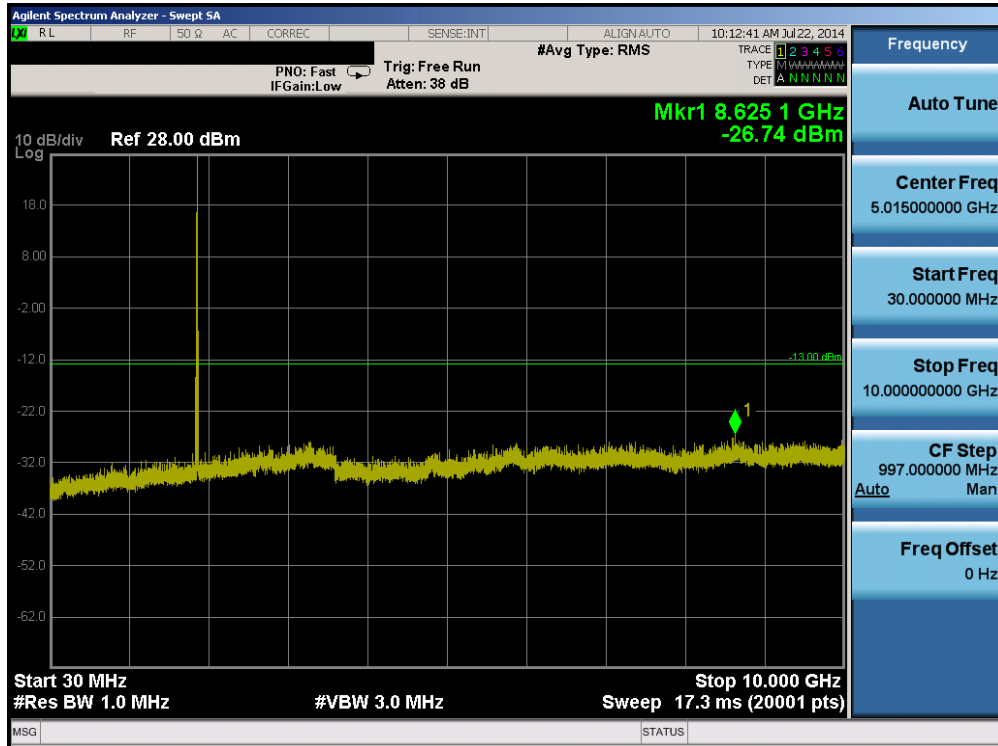


Plot 6-41. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

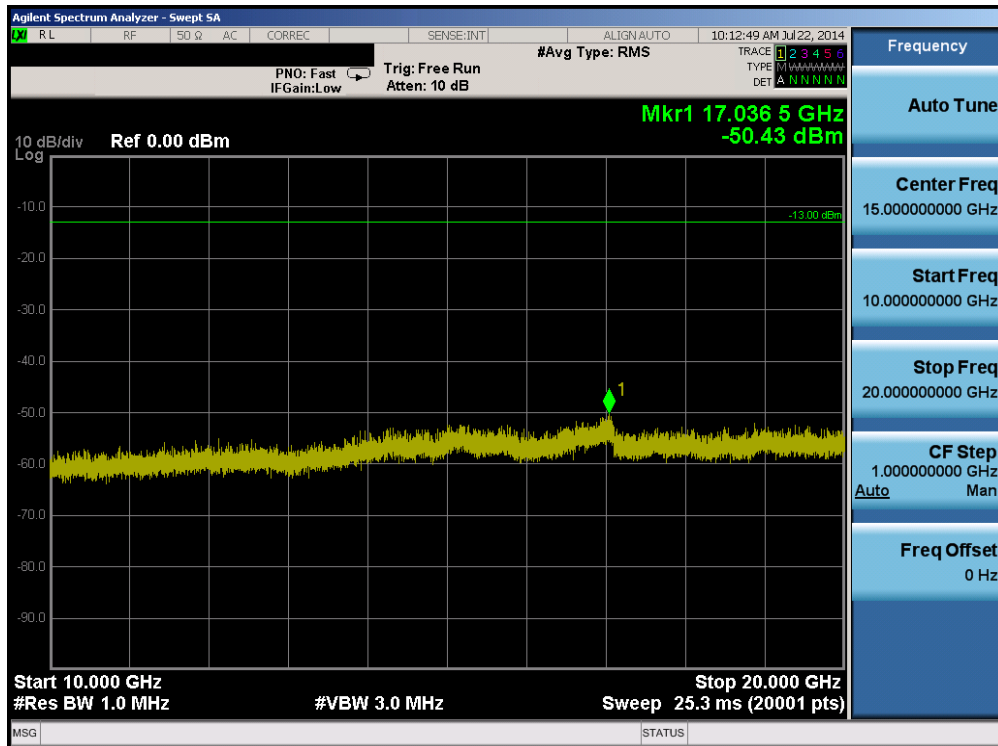


Plot 6-42. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)



FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 34 of 103

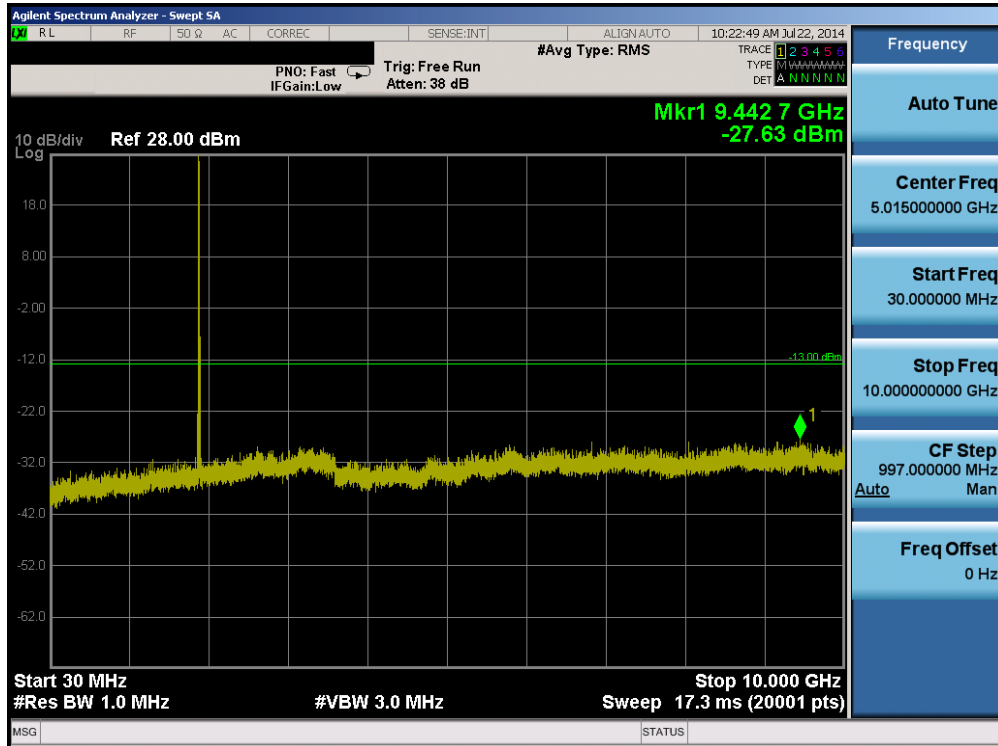


Plot 6-43. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

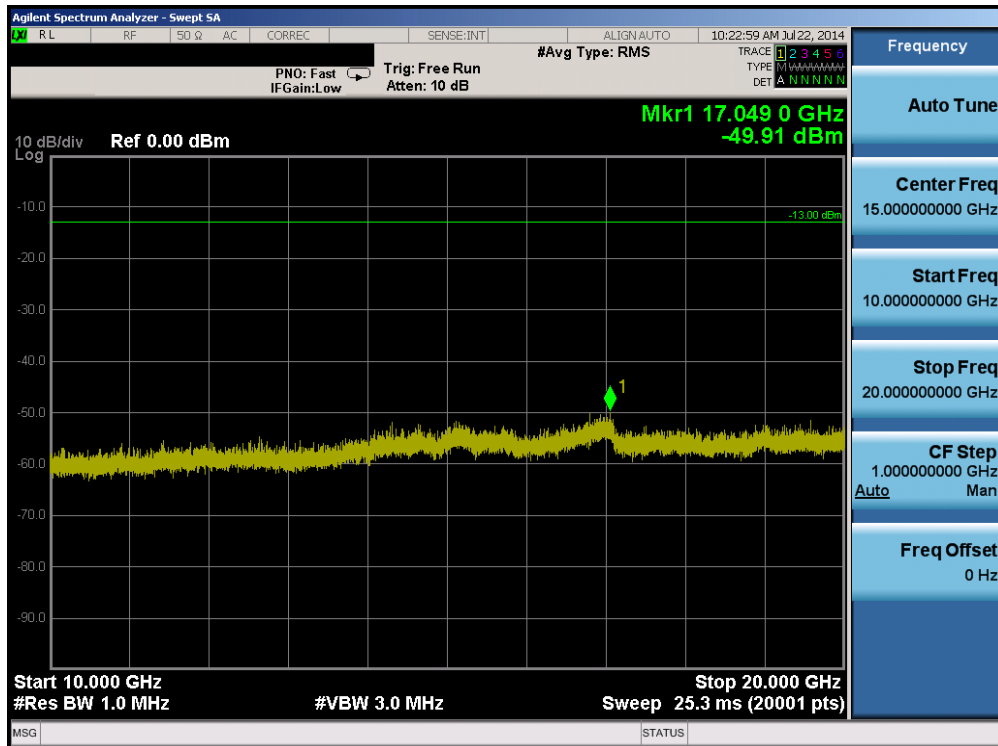


Plot 6-44. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 35 of 103

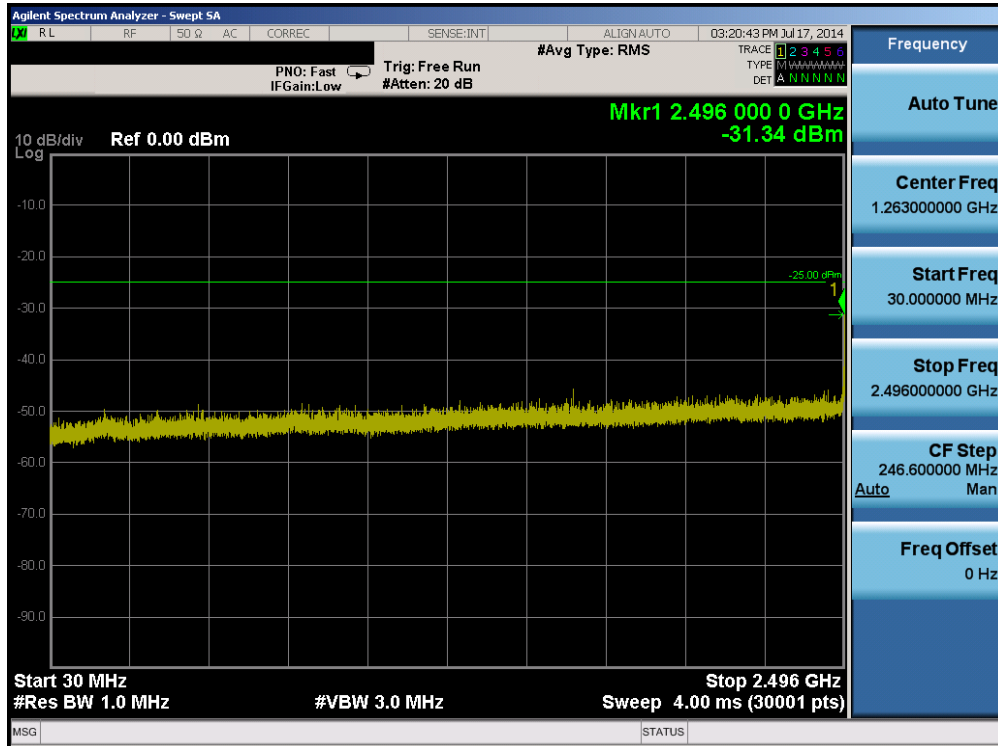


Plot 6-45. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

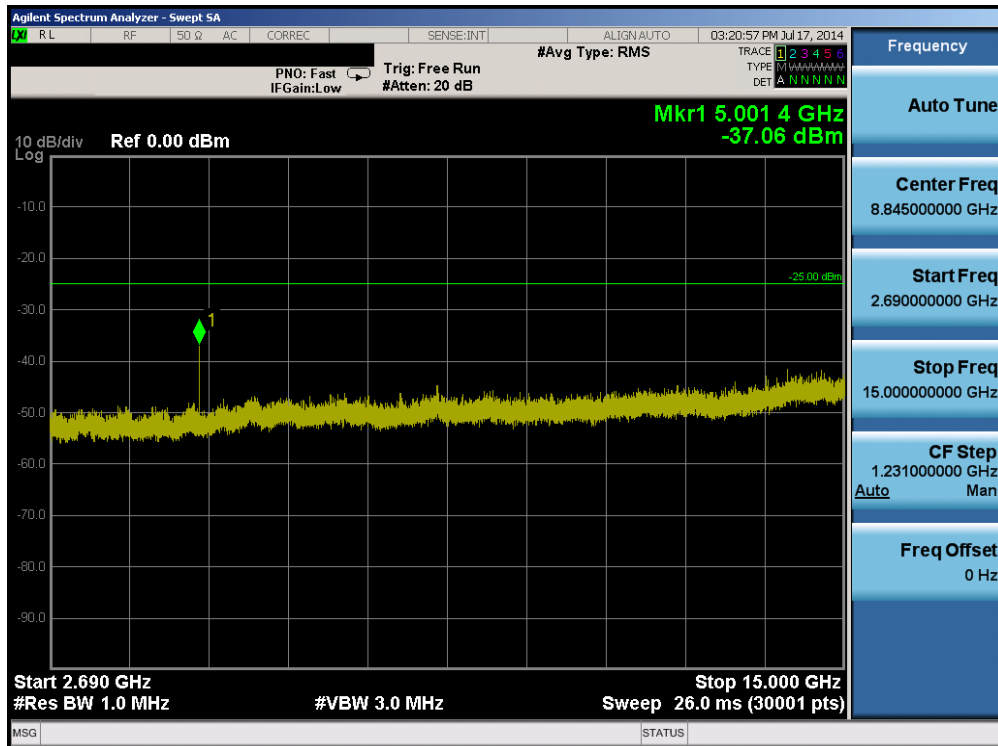


Plot 6-46. Conducted Spurious Plot (Band 2 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 36 of 103

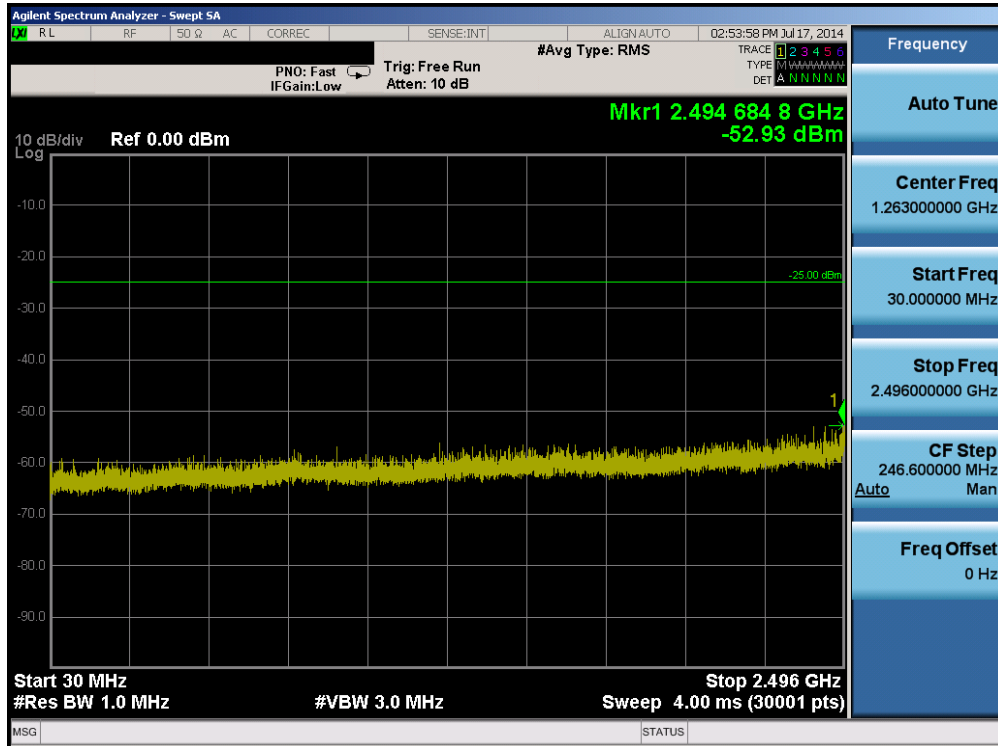


Plot 6-47. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

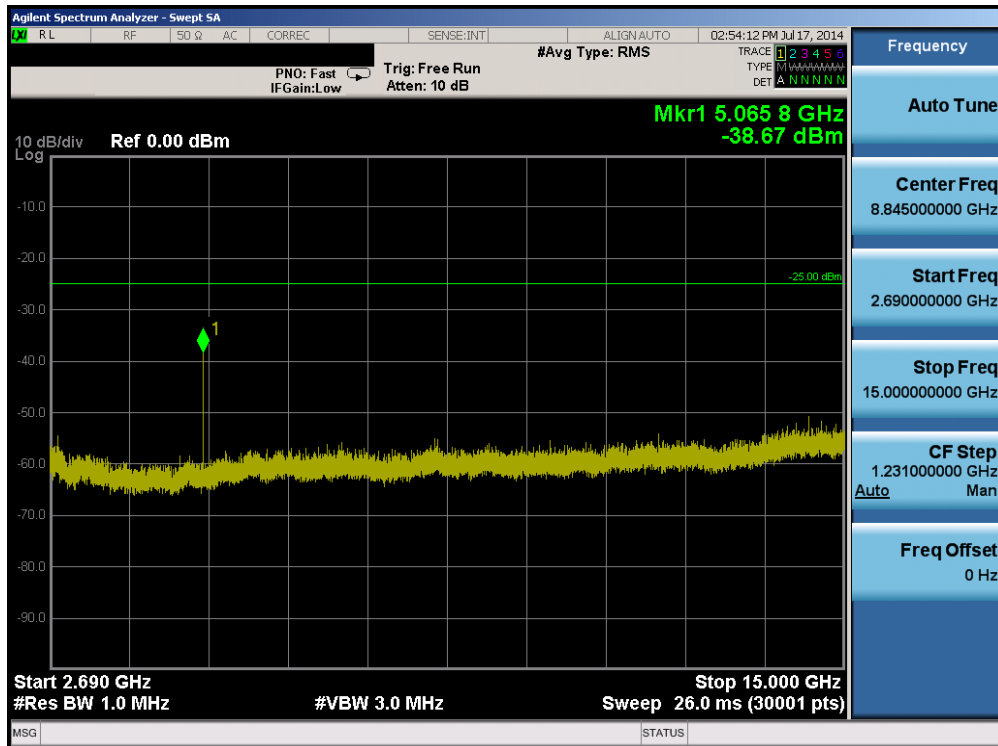


Plot 6-48. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 37 of 103

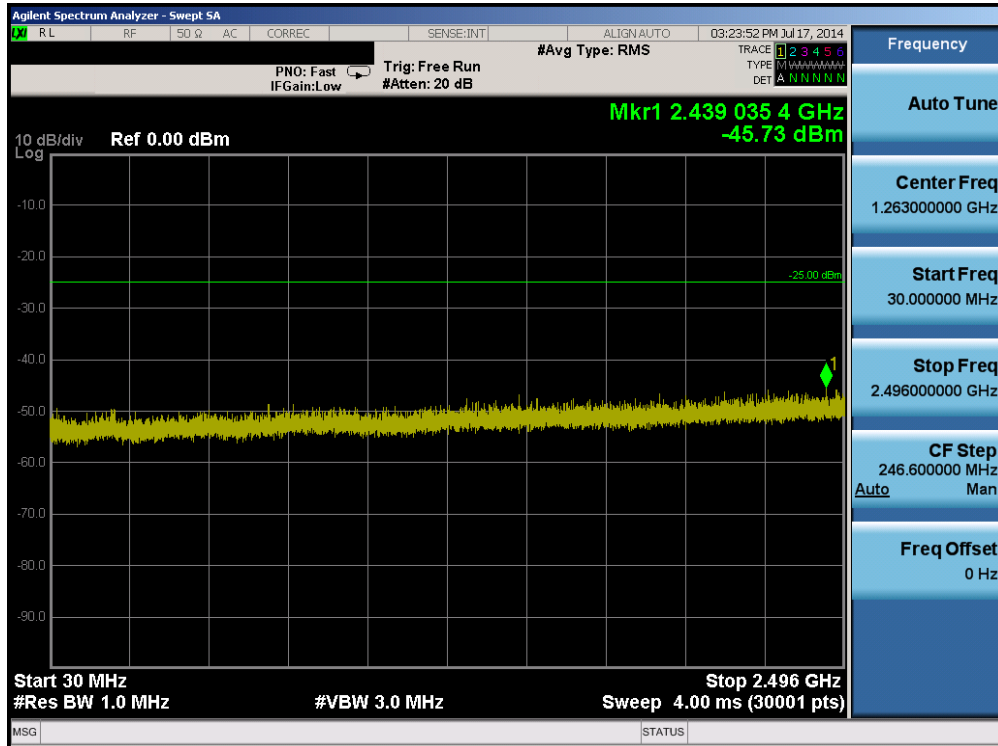


Plot 6-49. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

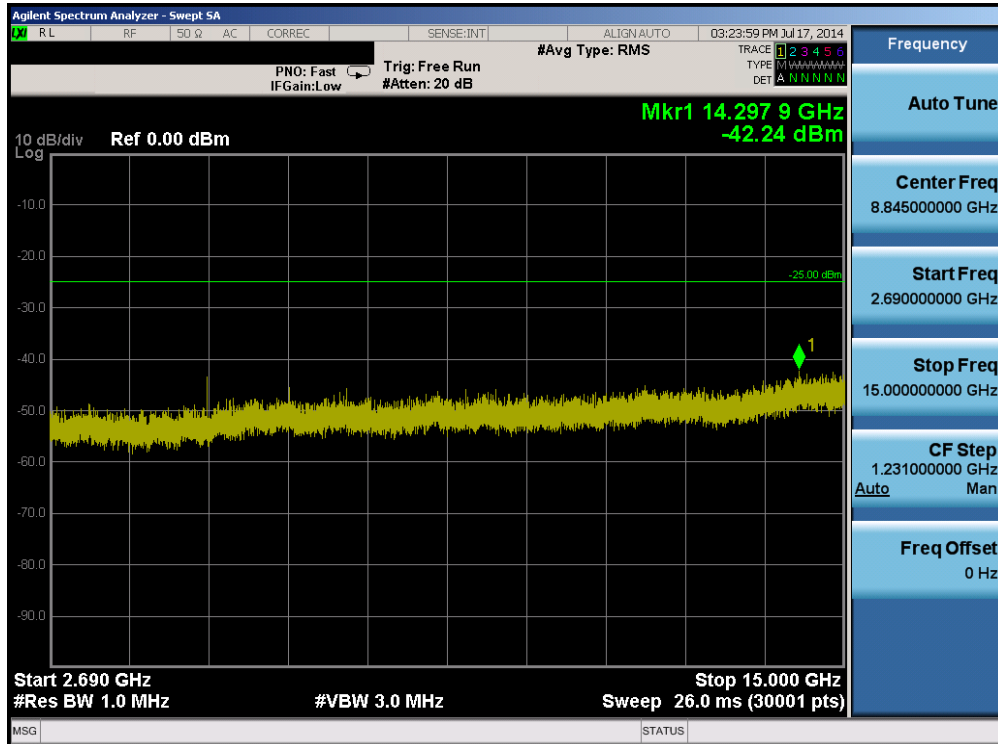


Plot 6-50. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 38 of 103



Plot 6-51. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)



Plot 6-52. Conducted Spurious Plot (Band 7 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 39 of 103

6.4 Band Edge Emissions at Antenna Terminal

§2.1051 §24.238(a) §27.53(e) §27.53(f) §27.53(g)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

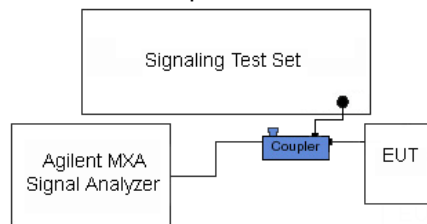


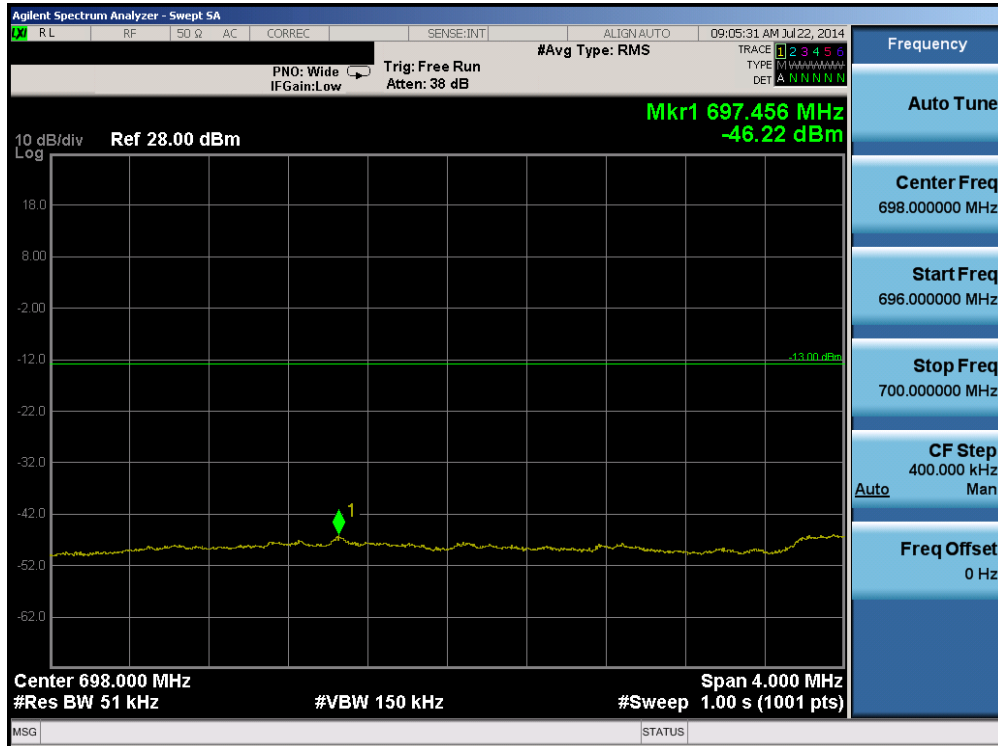


Figure 6-3. Test Instrument & Measurement Setup

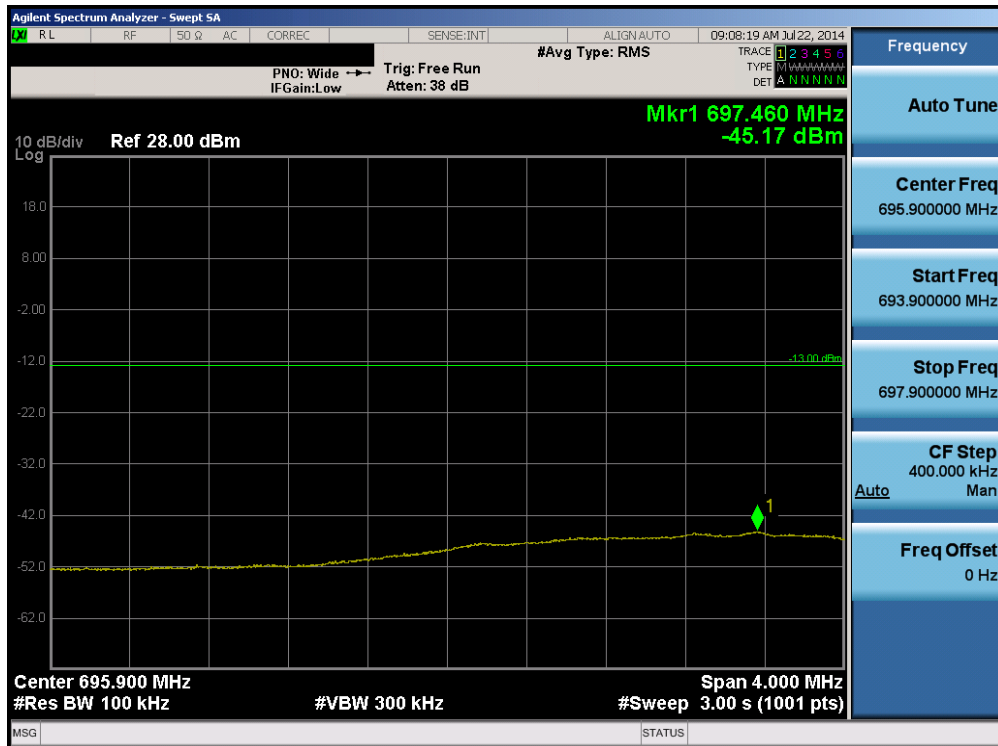
Test Notes

Per 22.917(b) 24.238(a) 27.53(g) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 40 of 103

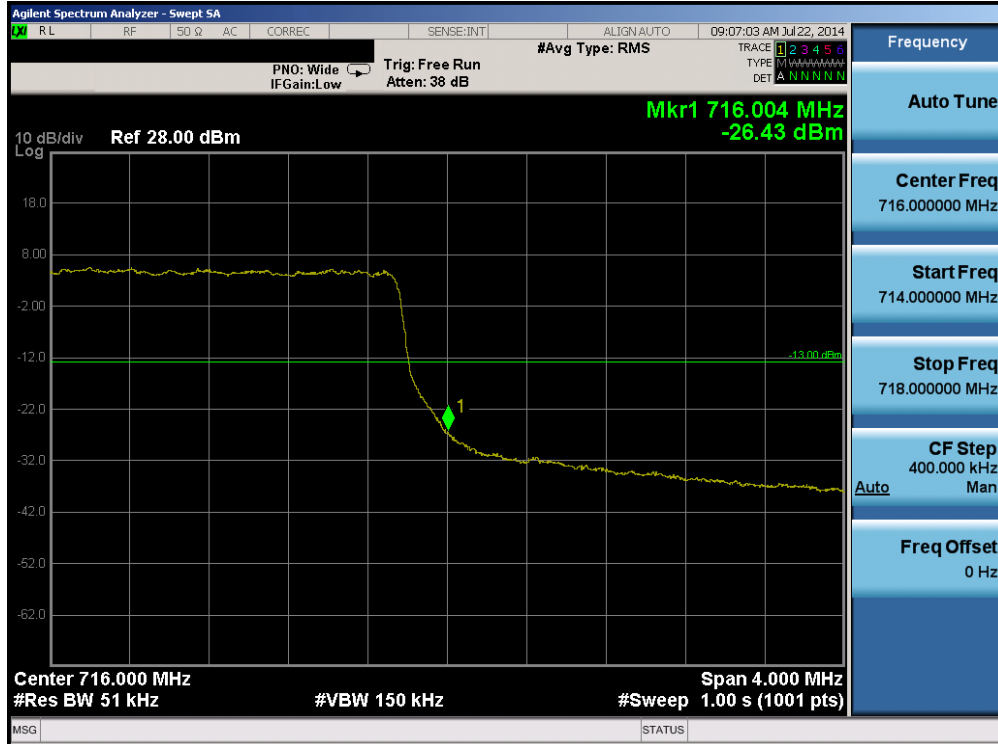


Plot 6-53. Lower Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

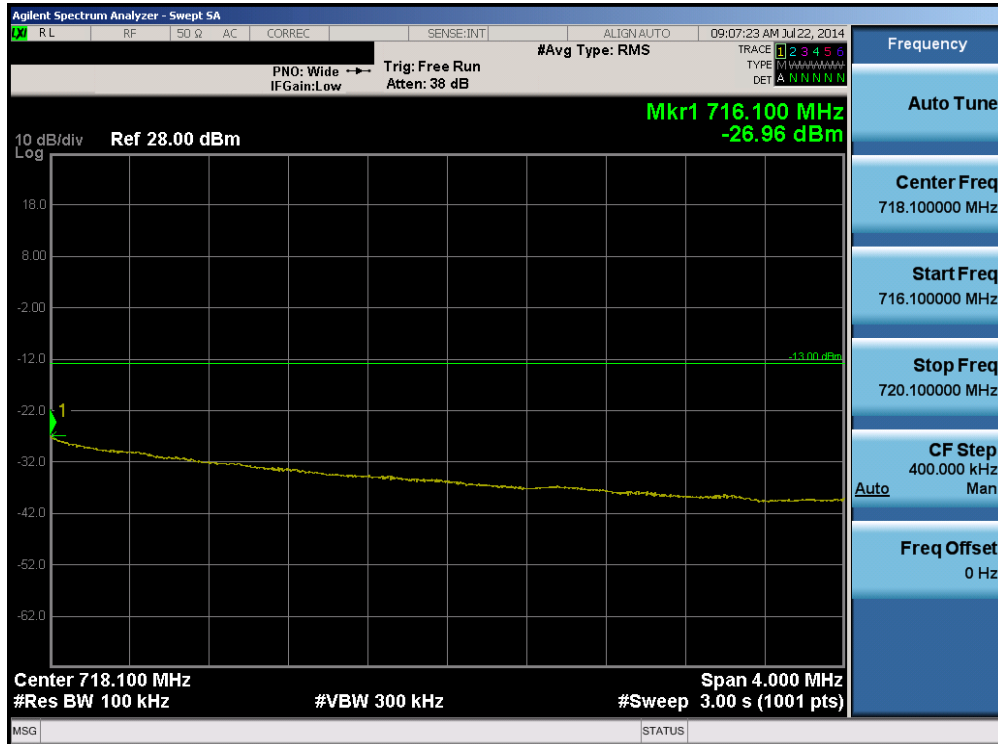


Plot 6-54. Lower Extended Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 41 of 103

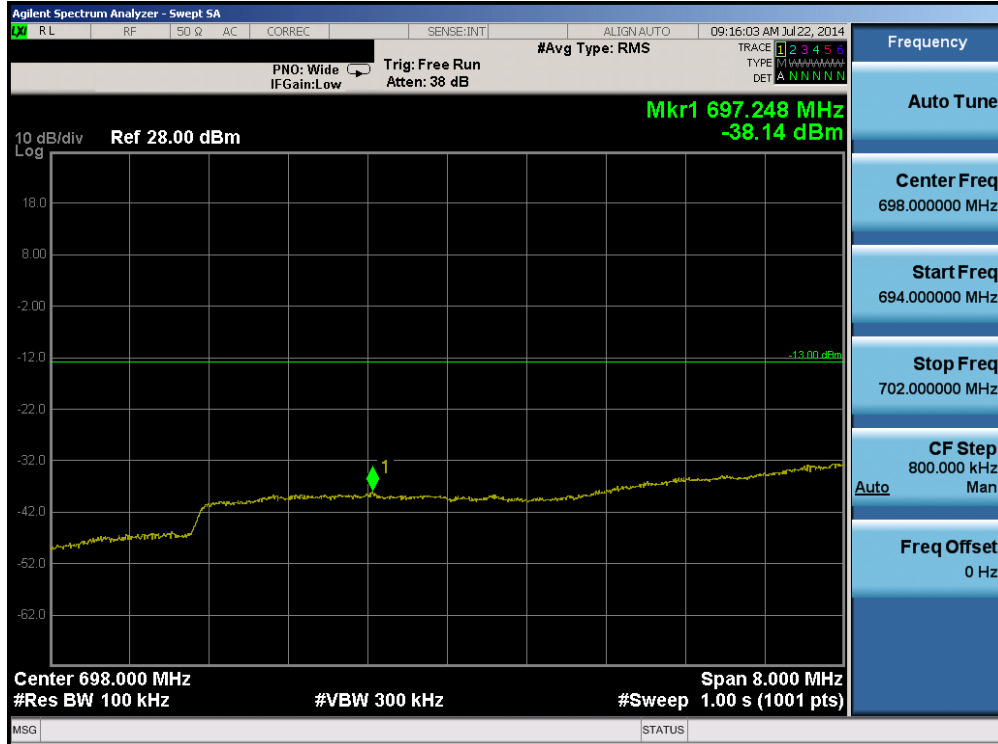


Plot 6-55. Upper Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

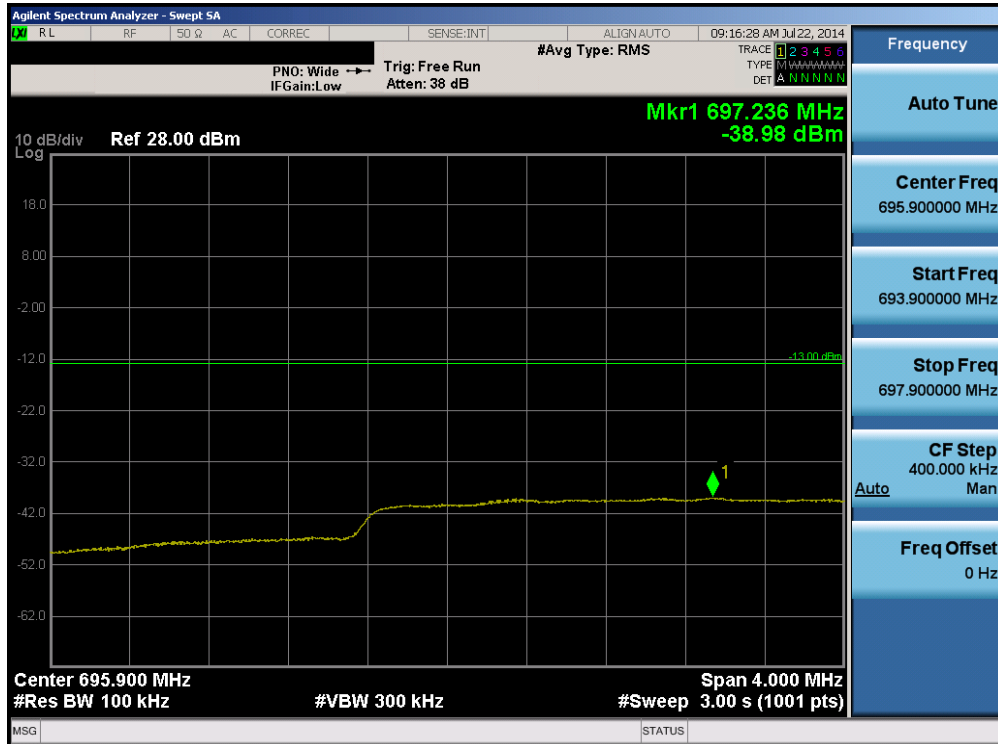


Plot 6-56. Upper Extended Band Edge Plot (Band 17 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 42 of 103



Plot 6-57. Lower Band Edge Plot (Band 17 – 10.0MHz QPSK – RB Size 50)

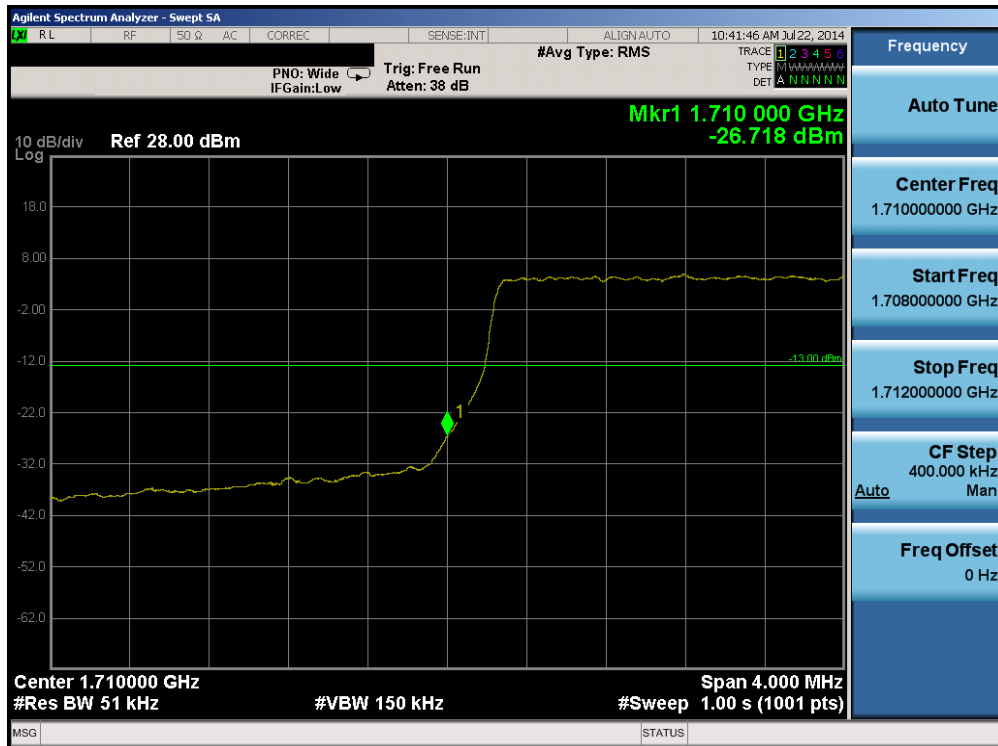


Plot 6-58. Lower Extended Band Edge Plot (Band 17 – 10.0MHz QPSK – RB Size 50)



FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 43 of 103

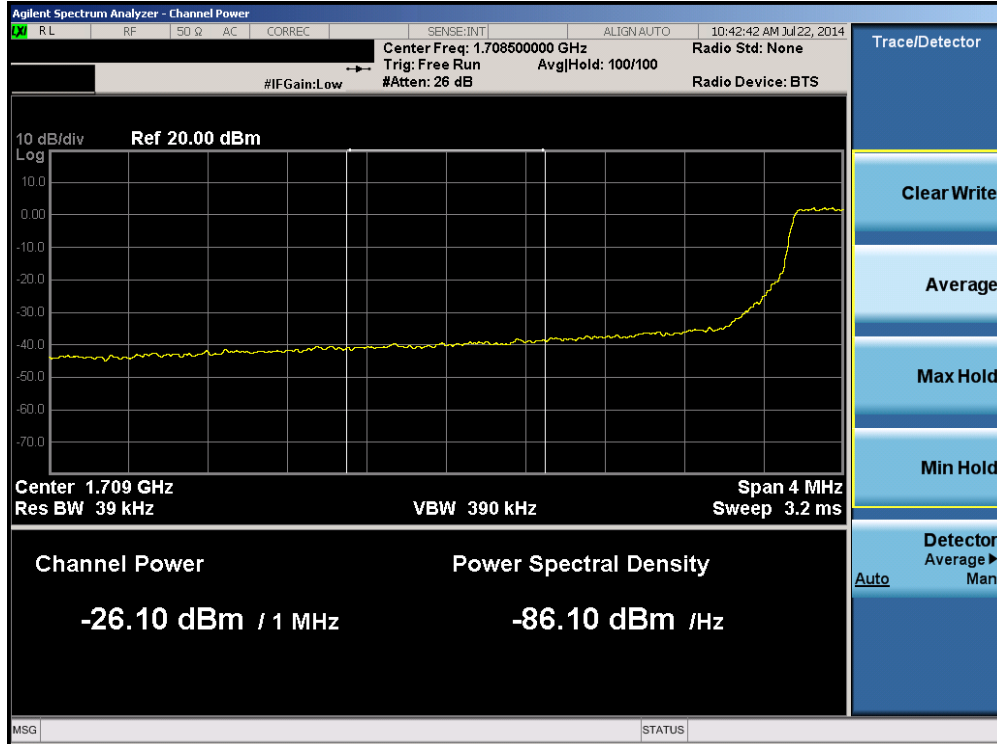


Plot 6-59. Upper Band Edge Plot (Band 17 – 10.0MHz QPSK – RB Size 50)

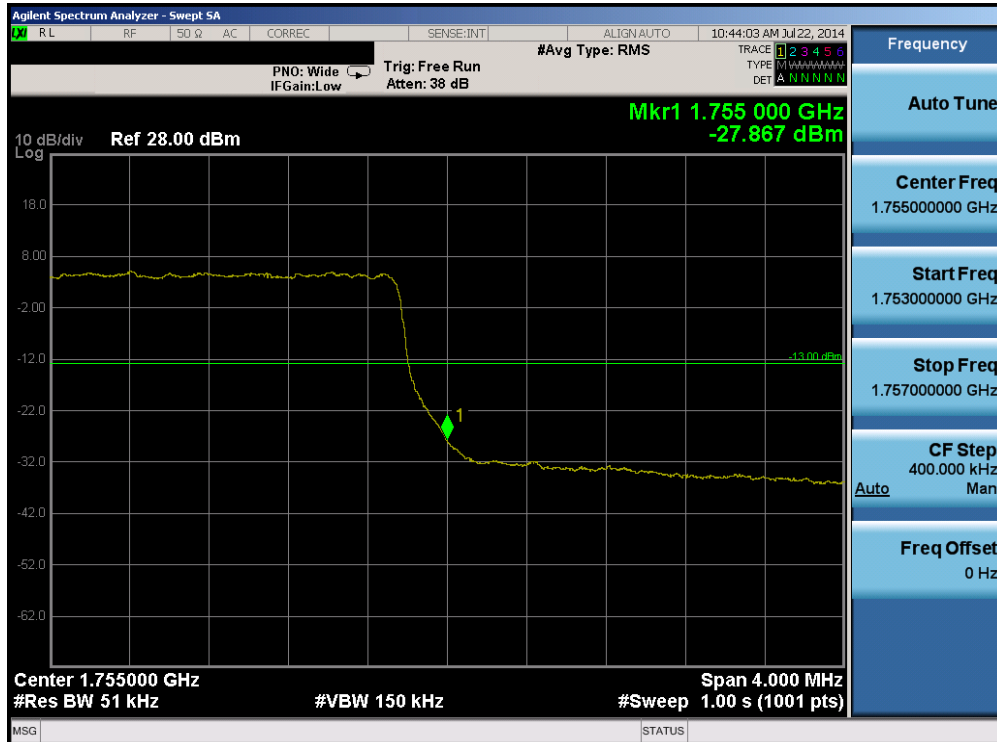


Plot 6-60. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 44 of 103

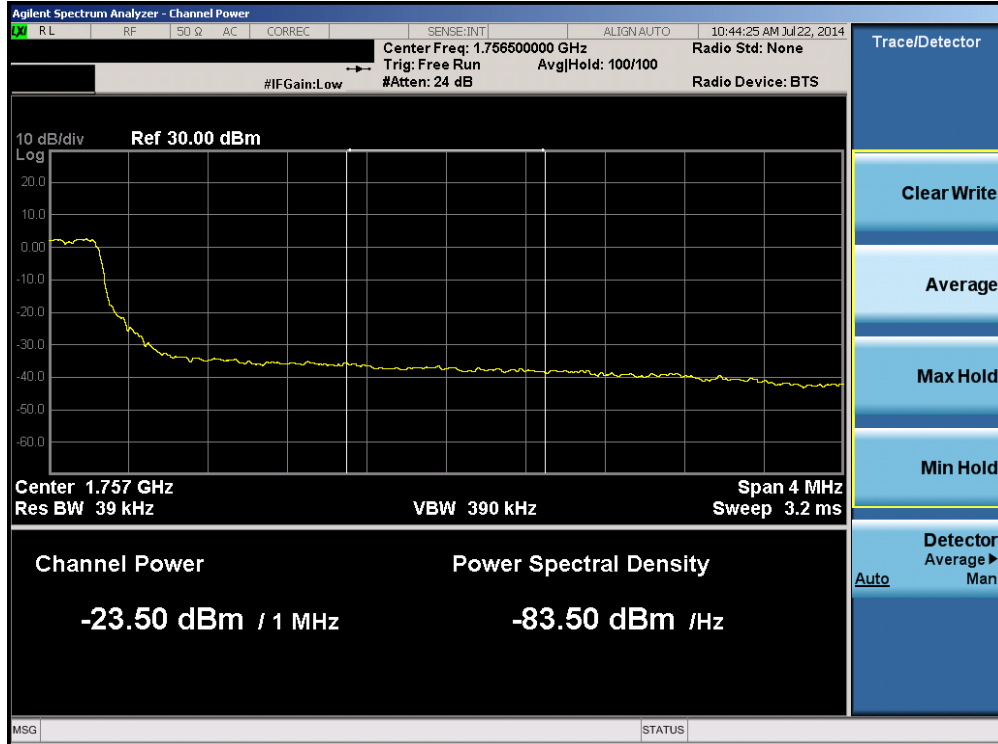


Plot 6-61. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

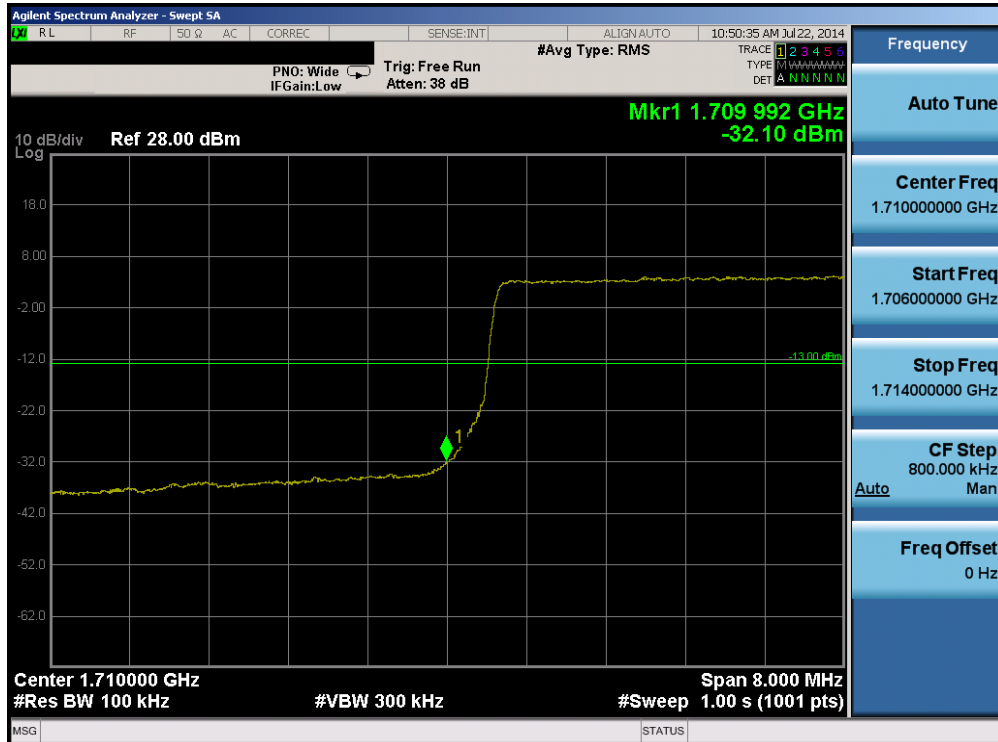


Plot 6-62. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 45 of 103

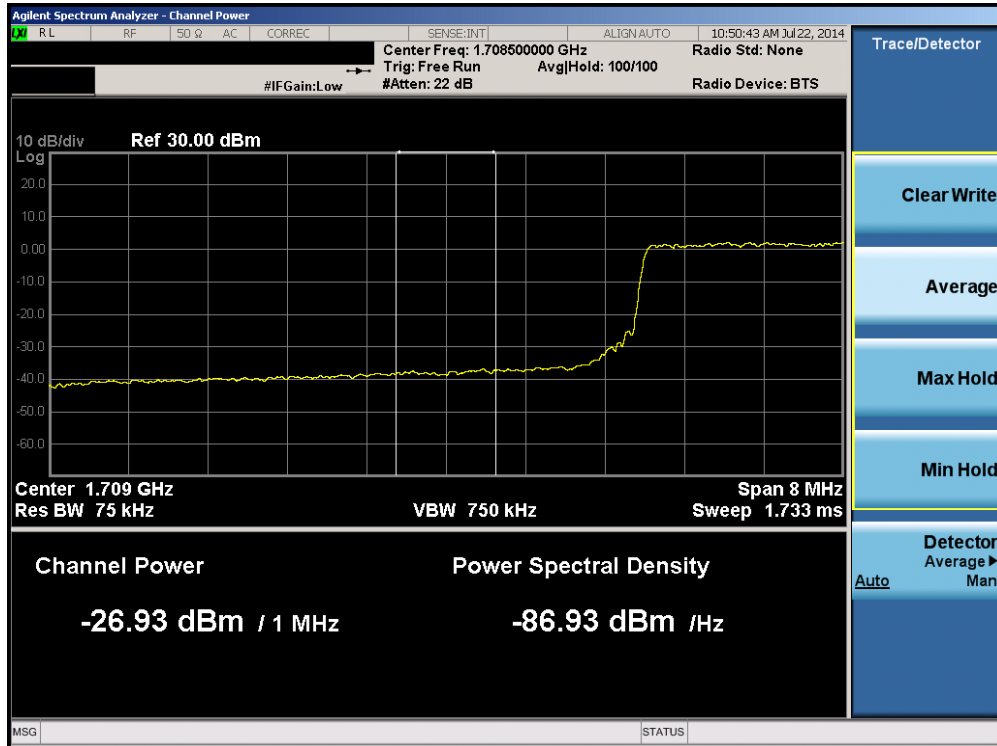


Plot 6-63. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

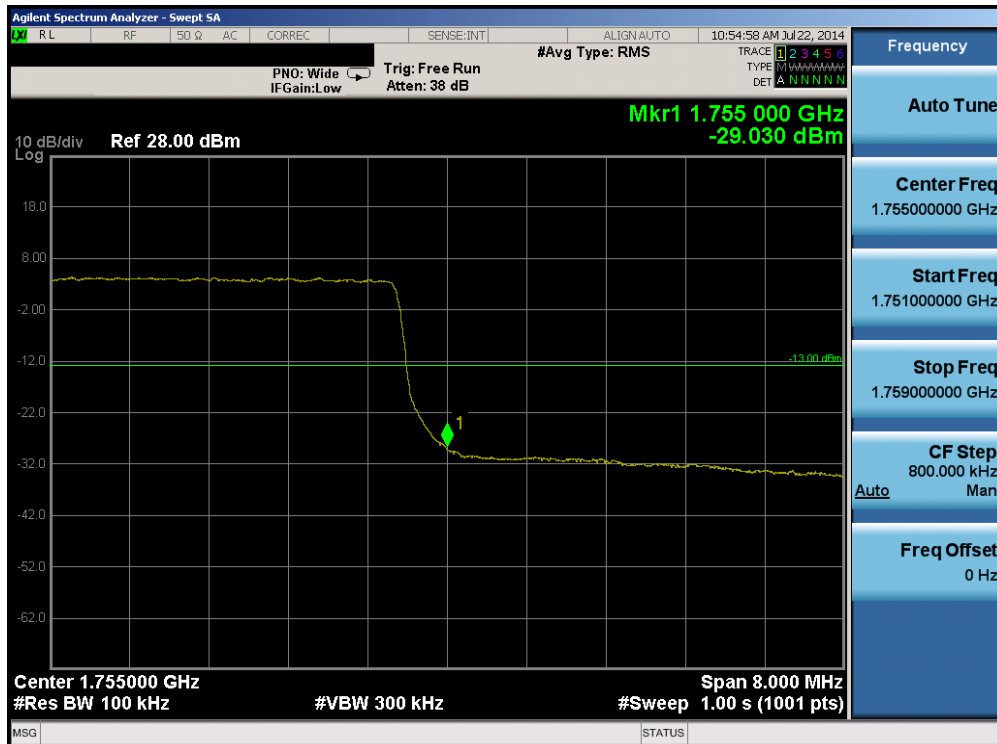


Plot 6-64. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 46 of 103

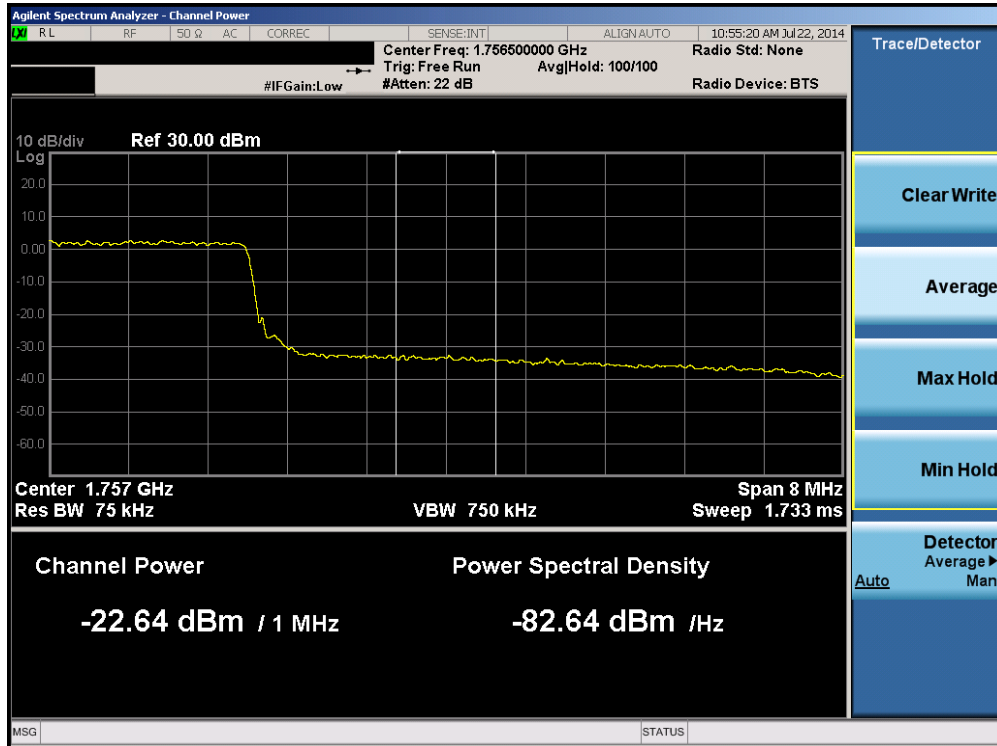


Plot 6-65. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

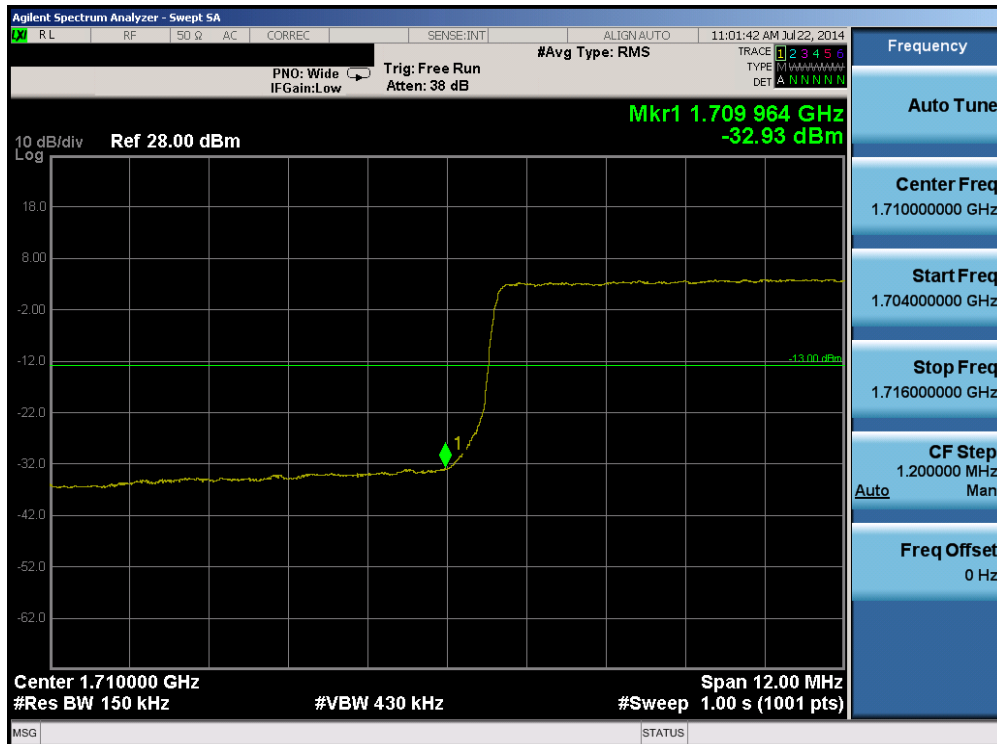


Plot 6-66. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 47 of 103

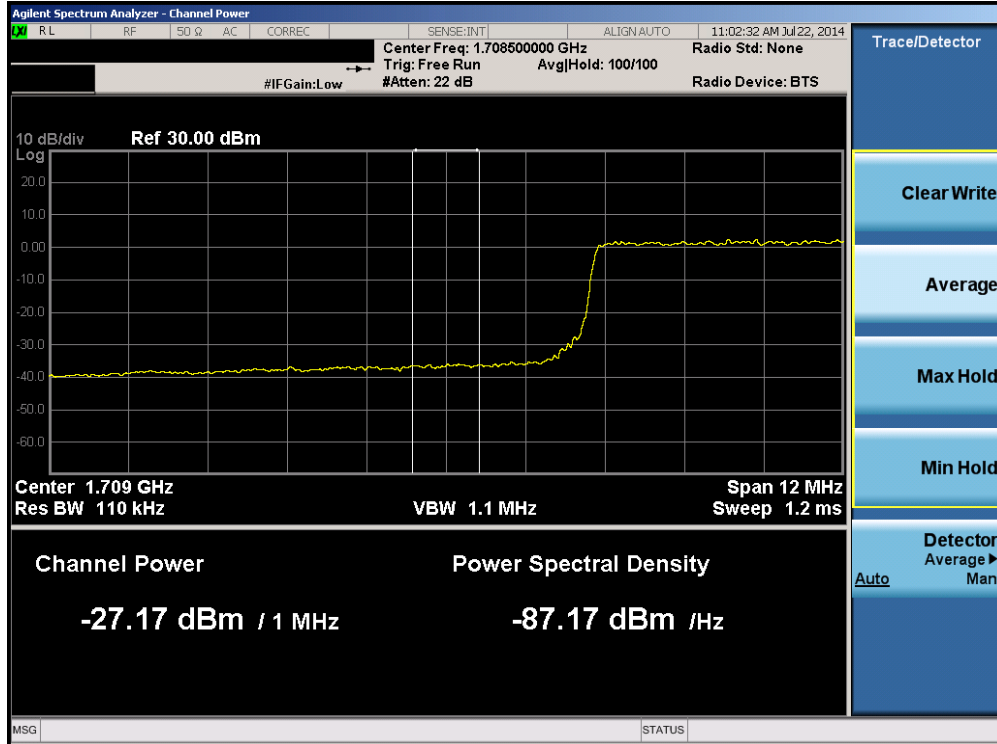


Plot 6-67. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

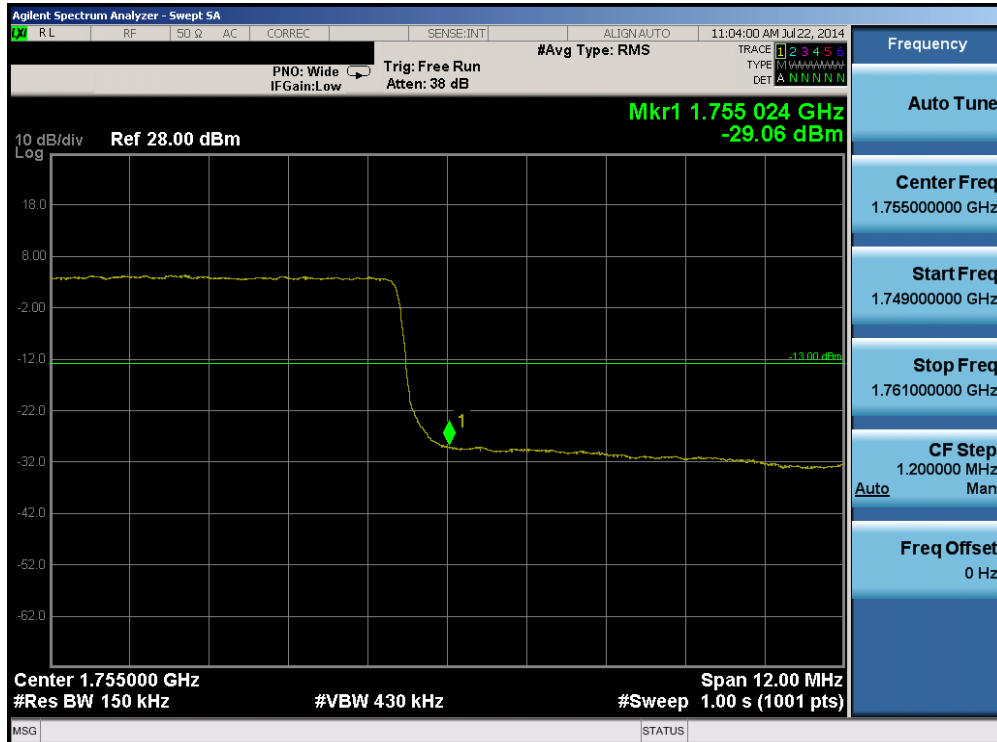


Plot 6-68. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 48 of 103

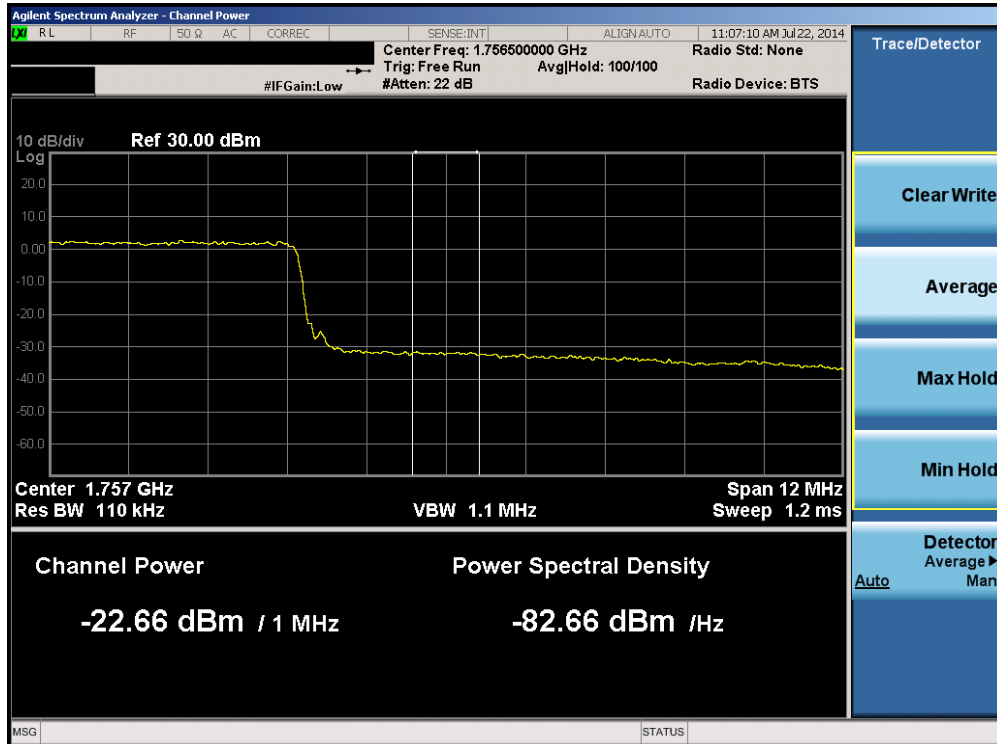


Plot 6-69. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

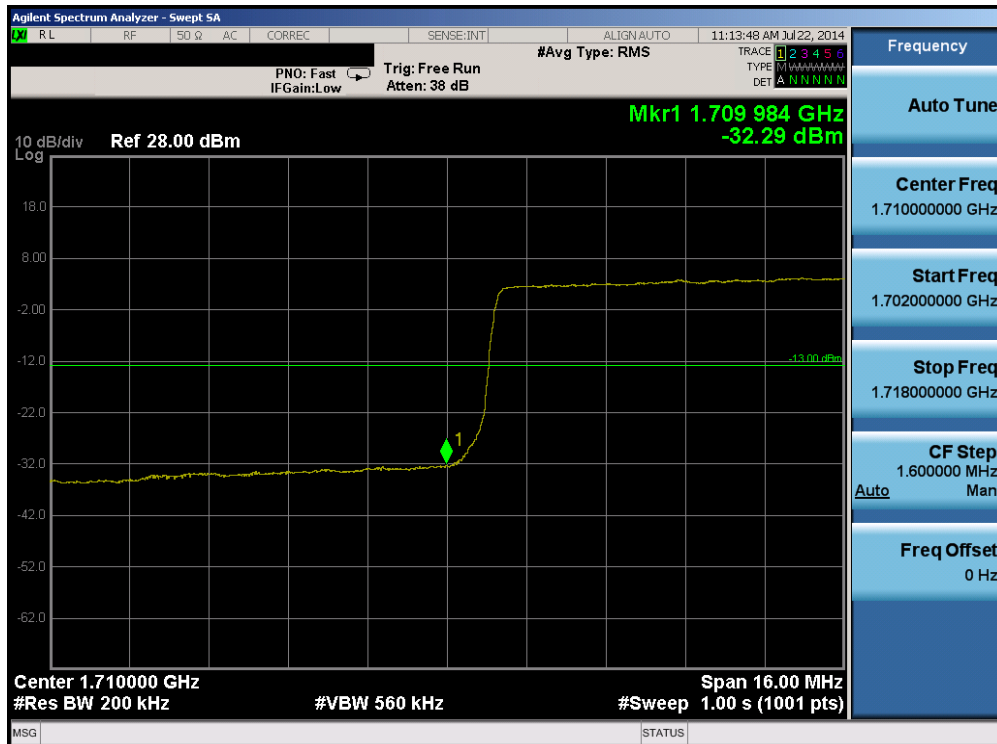


Plot 6-70. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 49 of 103

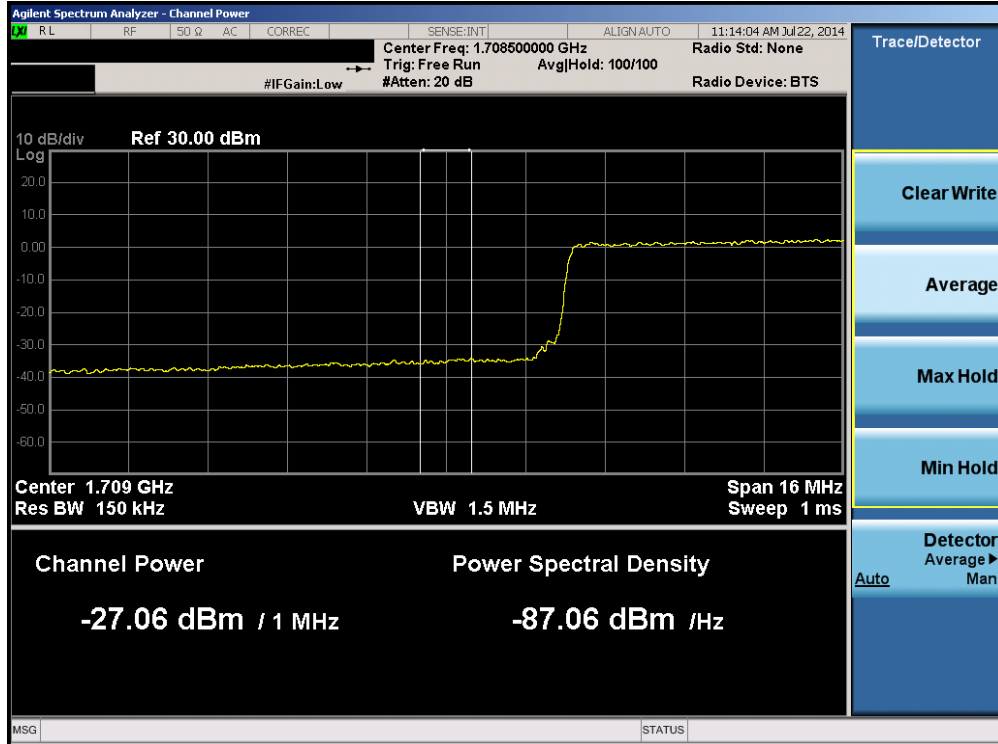


Plot 6-71. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

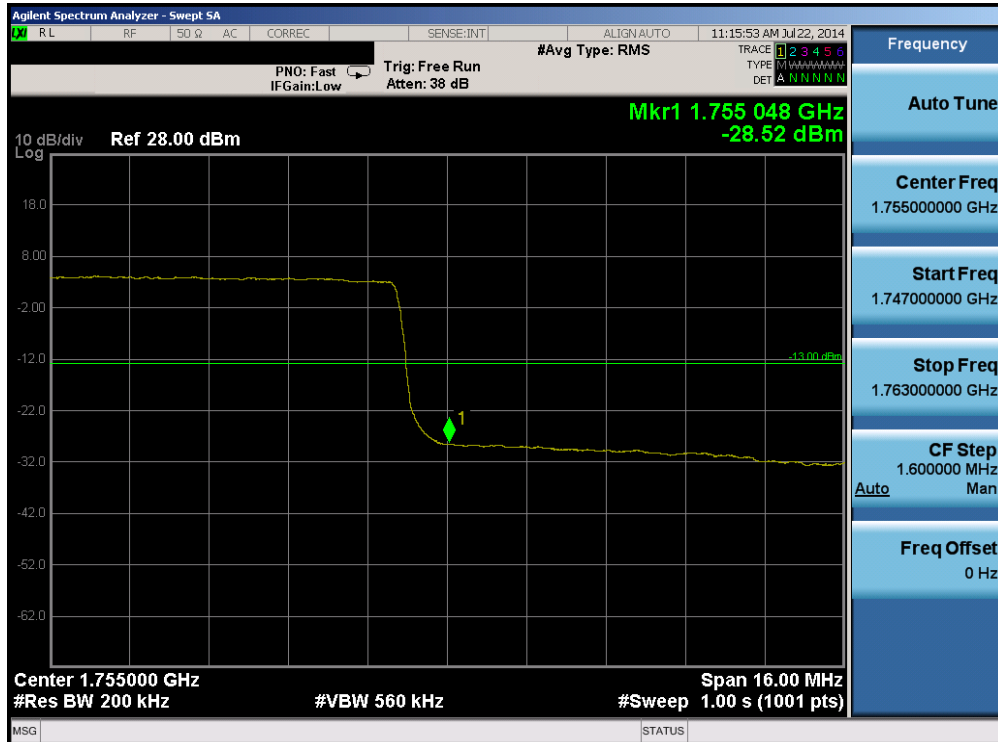


Plot 6-72. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 50 of 103

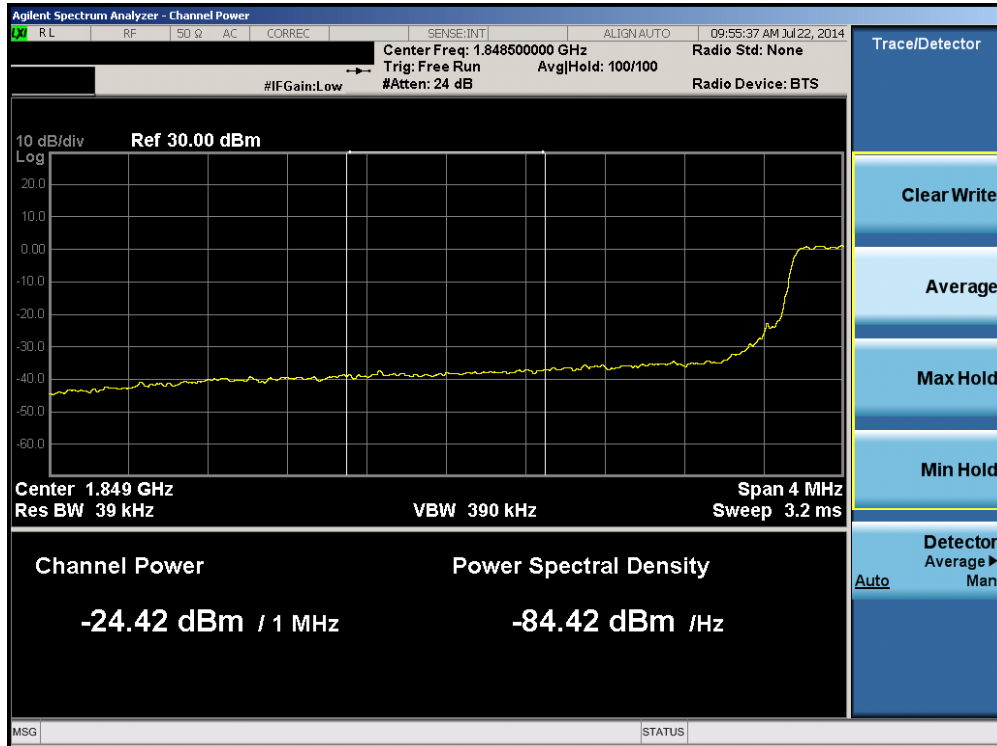


Plot 6-73. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

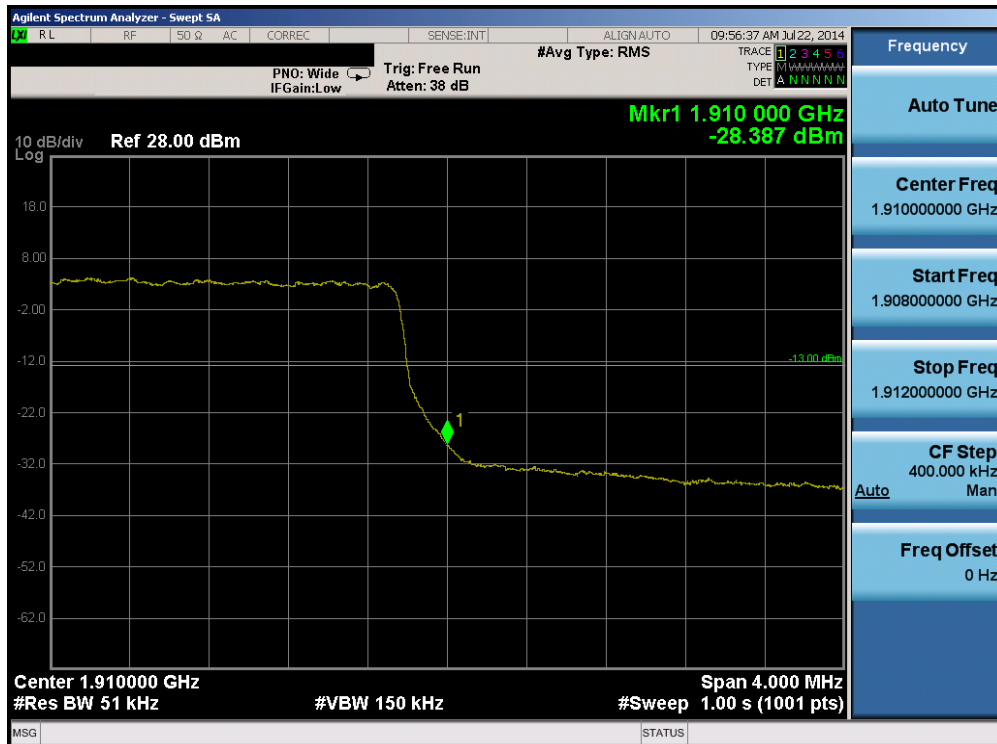


Plot 6-74. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 51 of 103

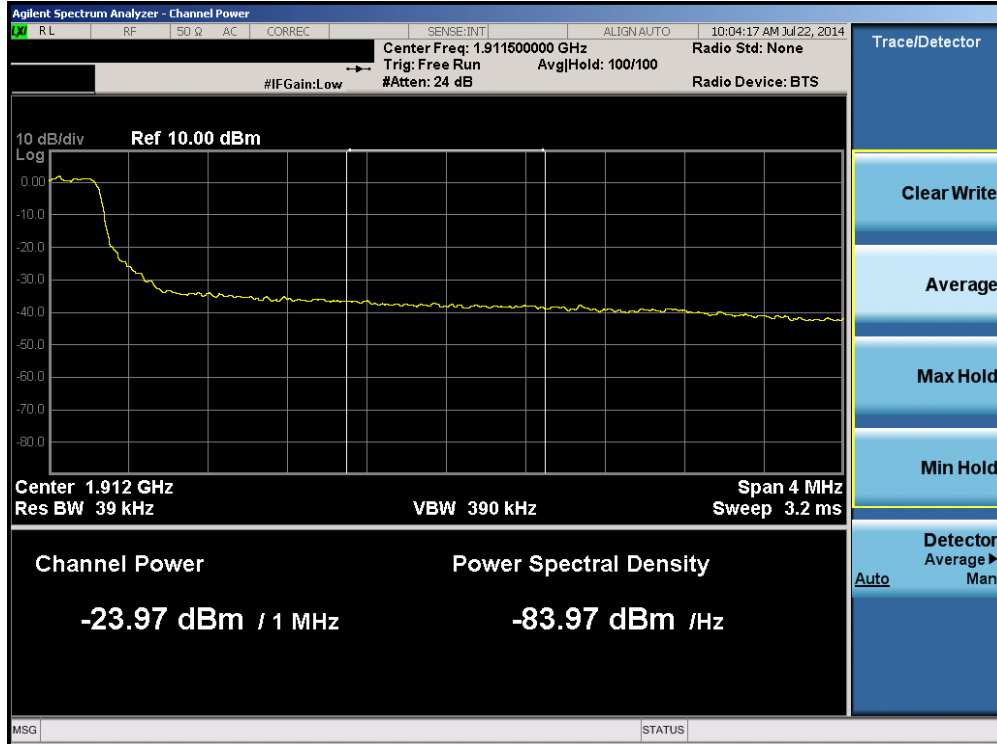


Plot 6-77. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

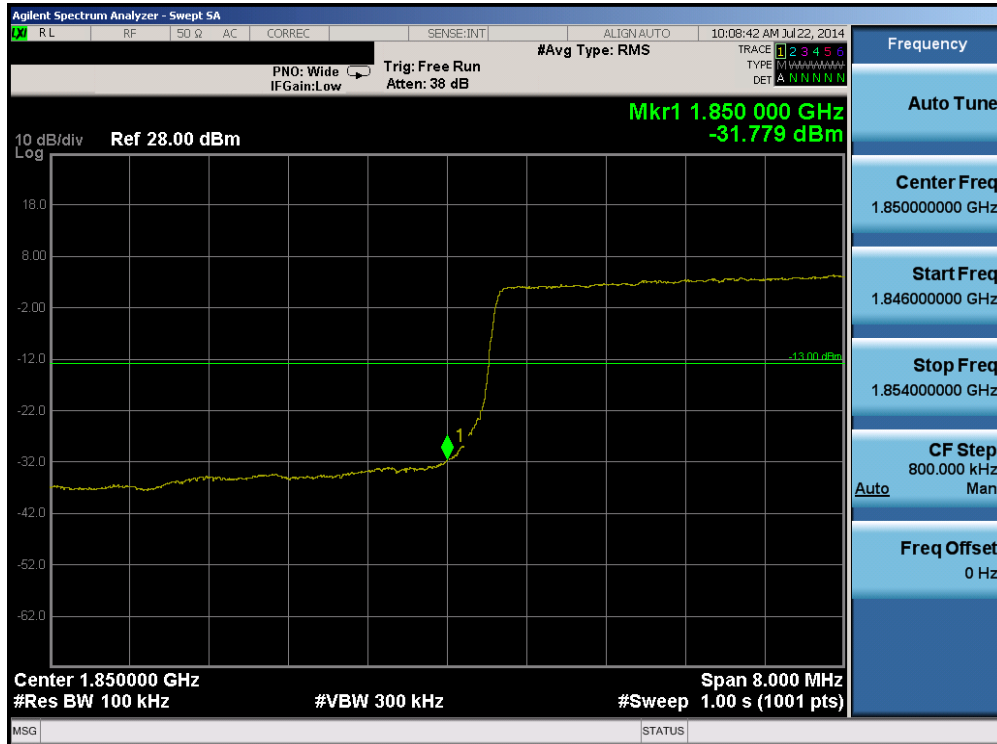


Plot 6-78. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 53 of 103

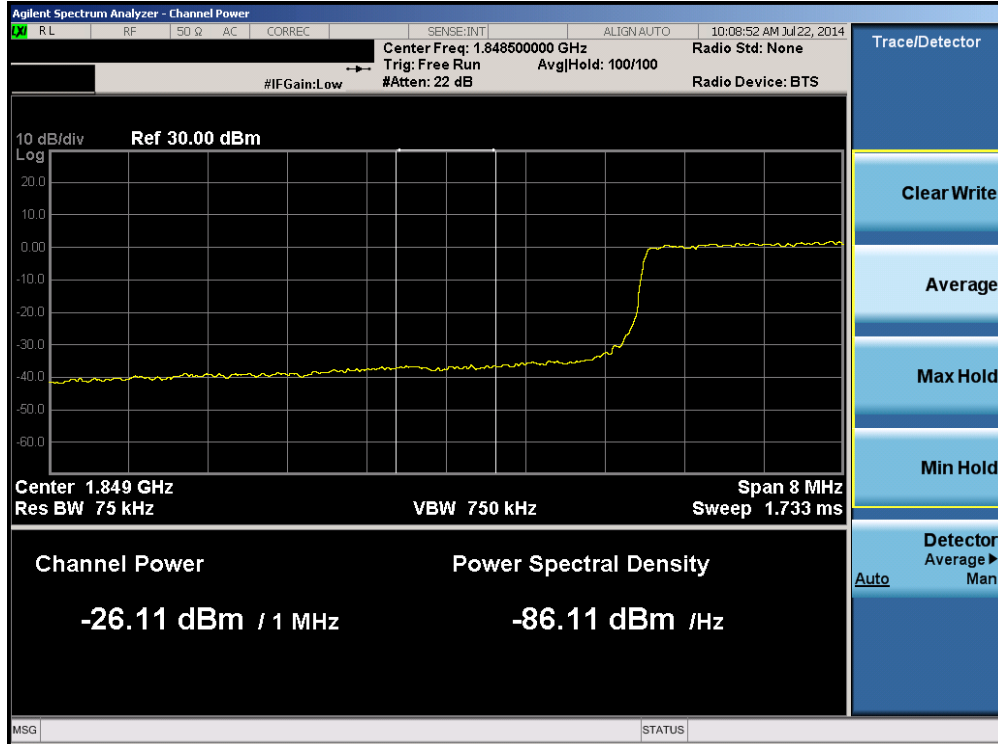


Plot 6-79. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

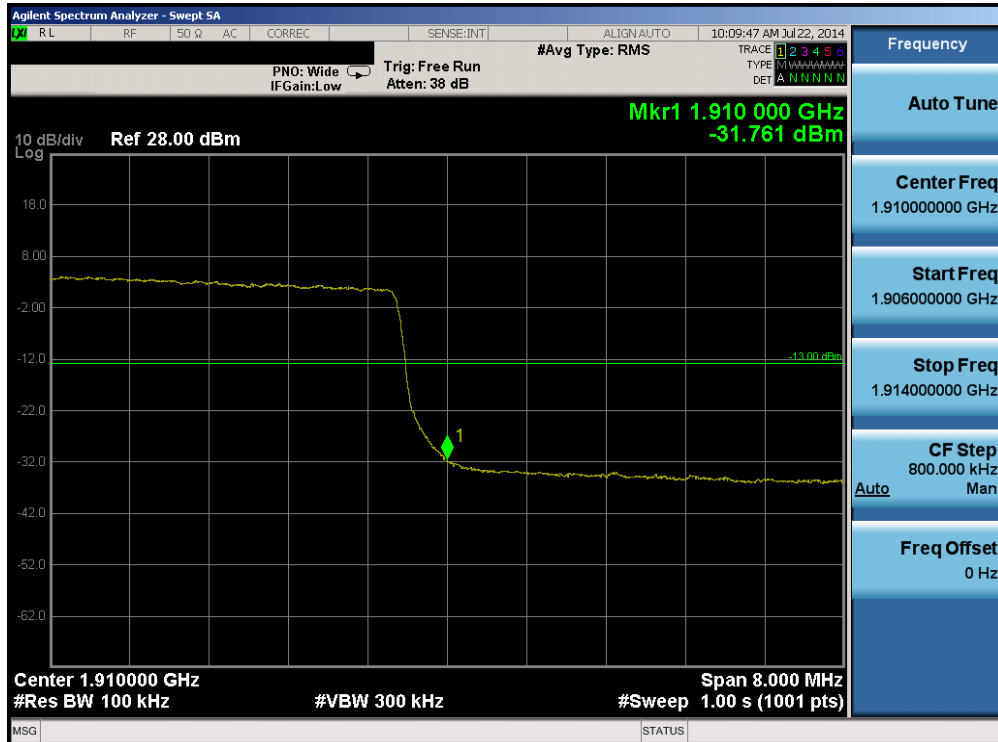


Plot 6-80. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 54 of 103

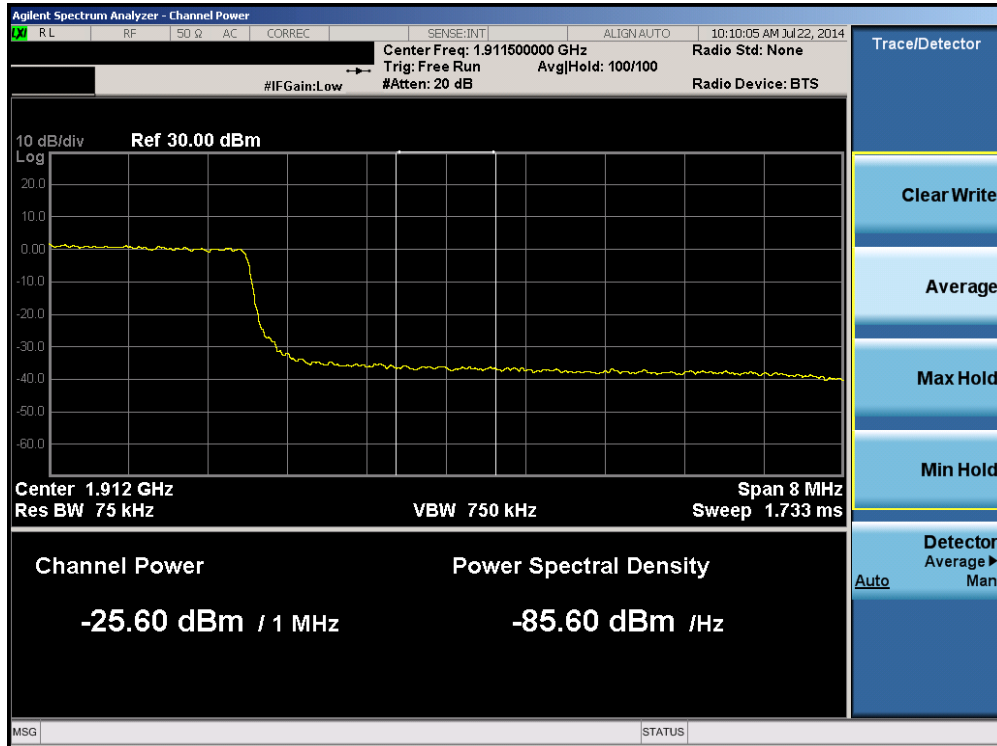


Plot 6-81. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

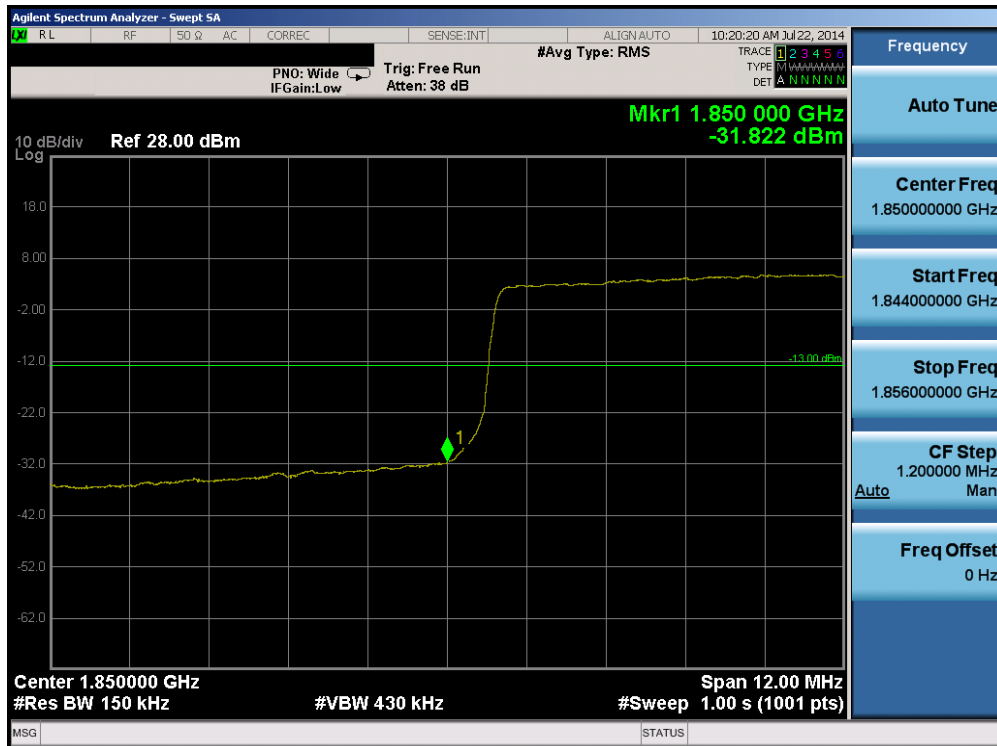


Plot 6-82. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 55 of 103

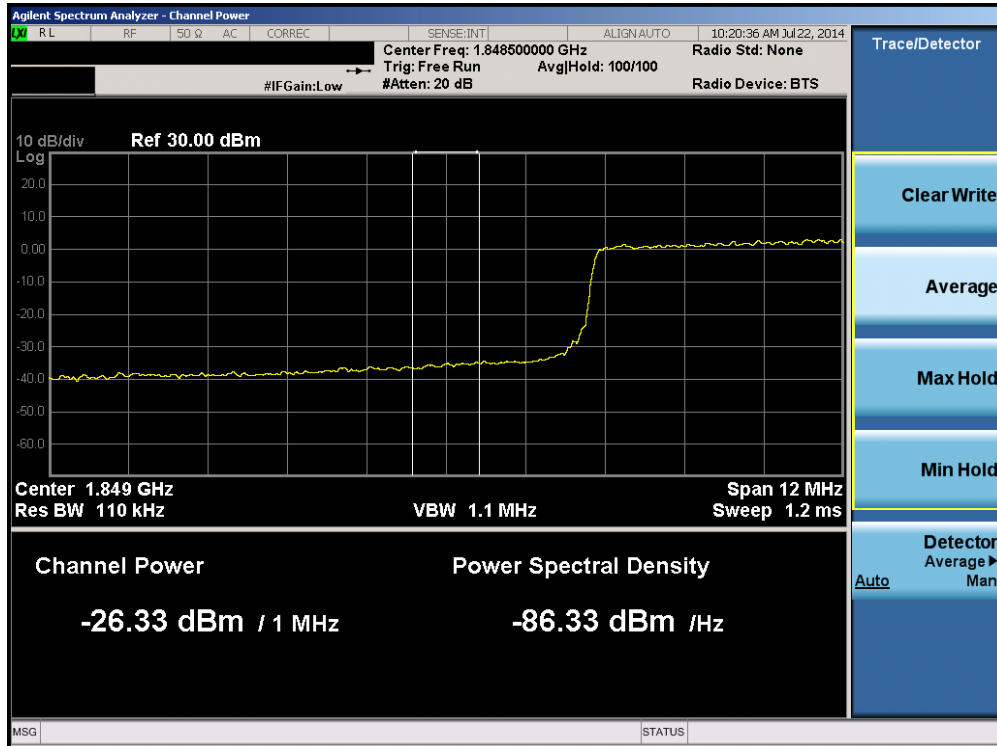


Plot 6-83. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

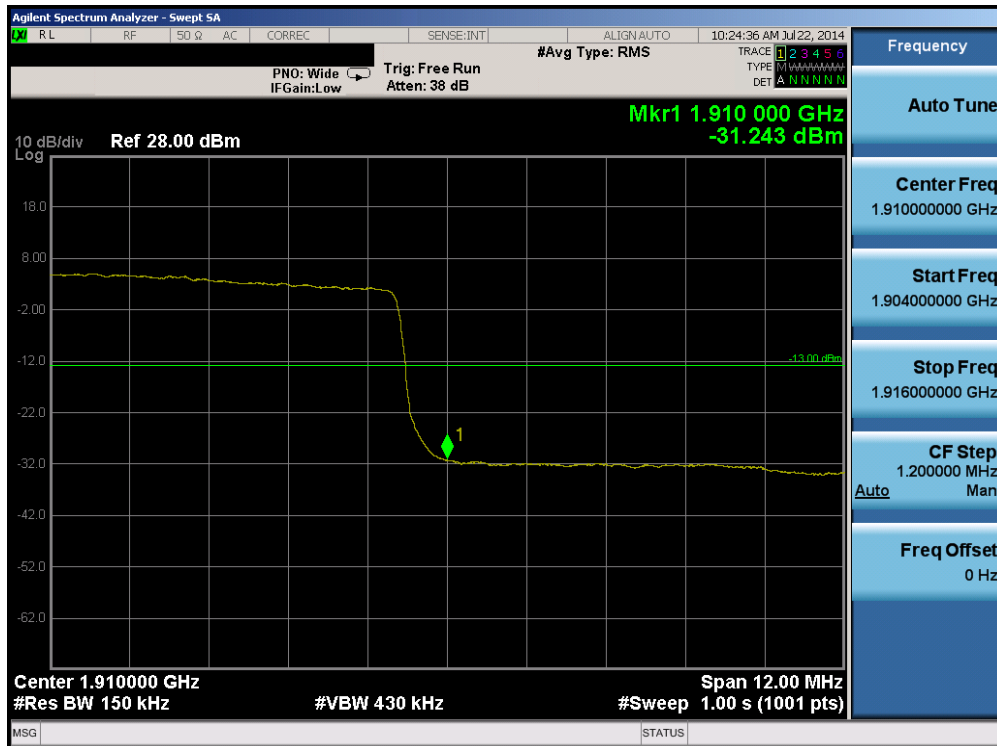


Plot 6-84. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 56 of 103

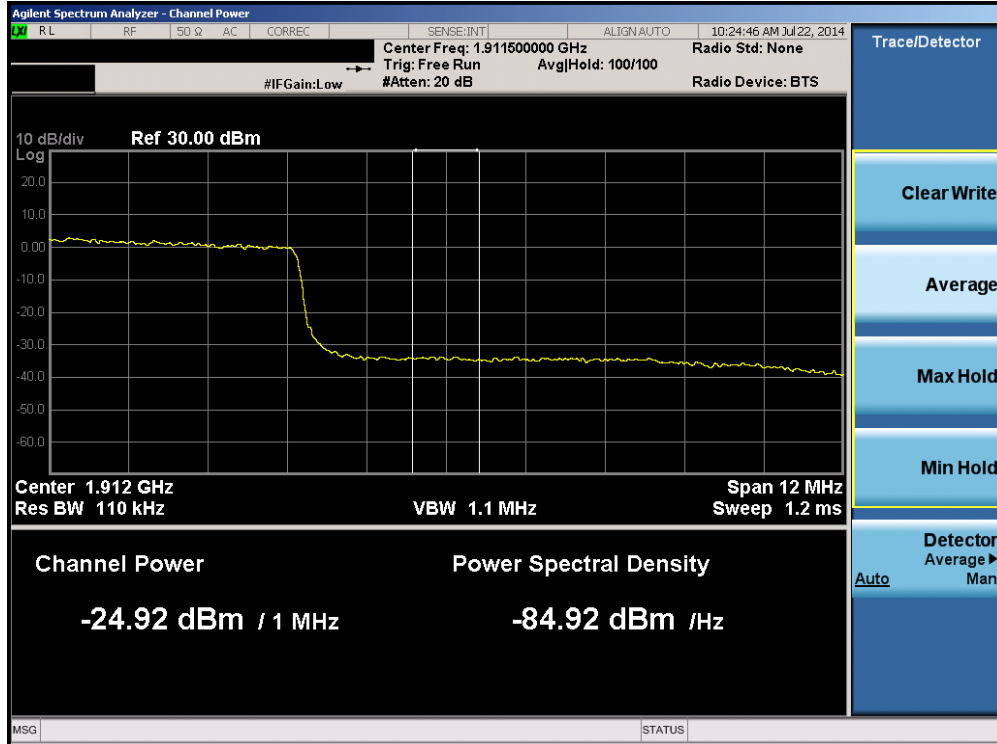


Plot 6-85. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

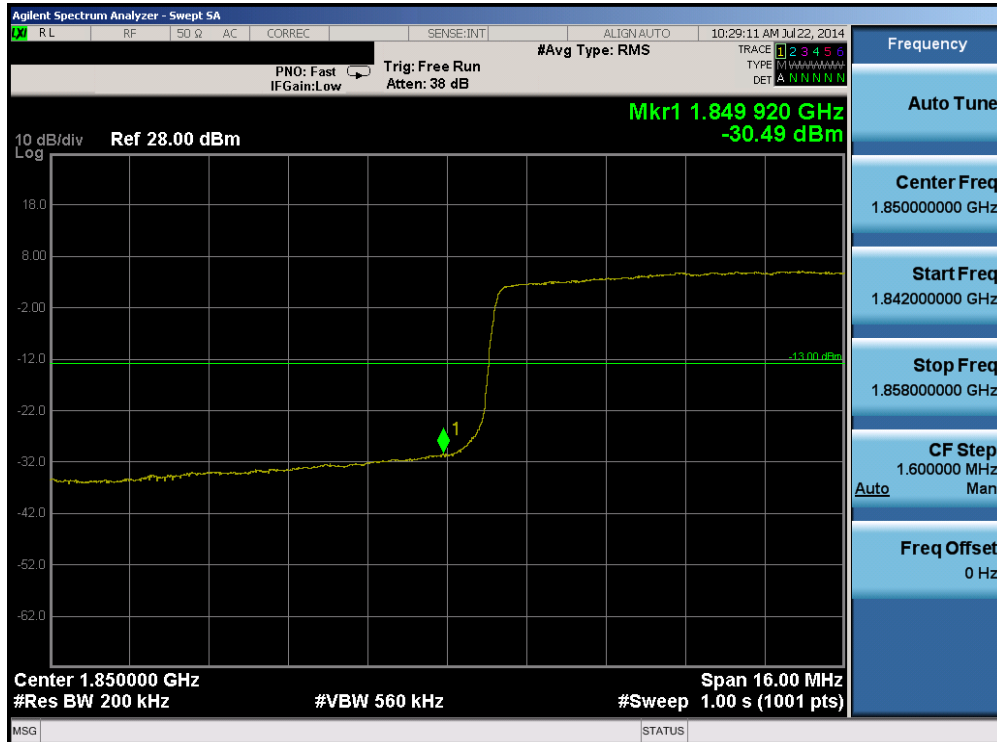


Plot 6-86. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 57 of 103

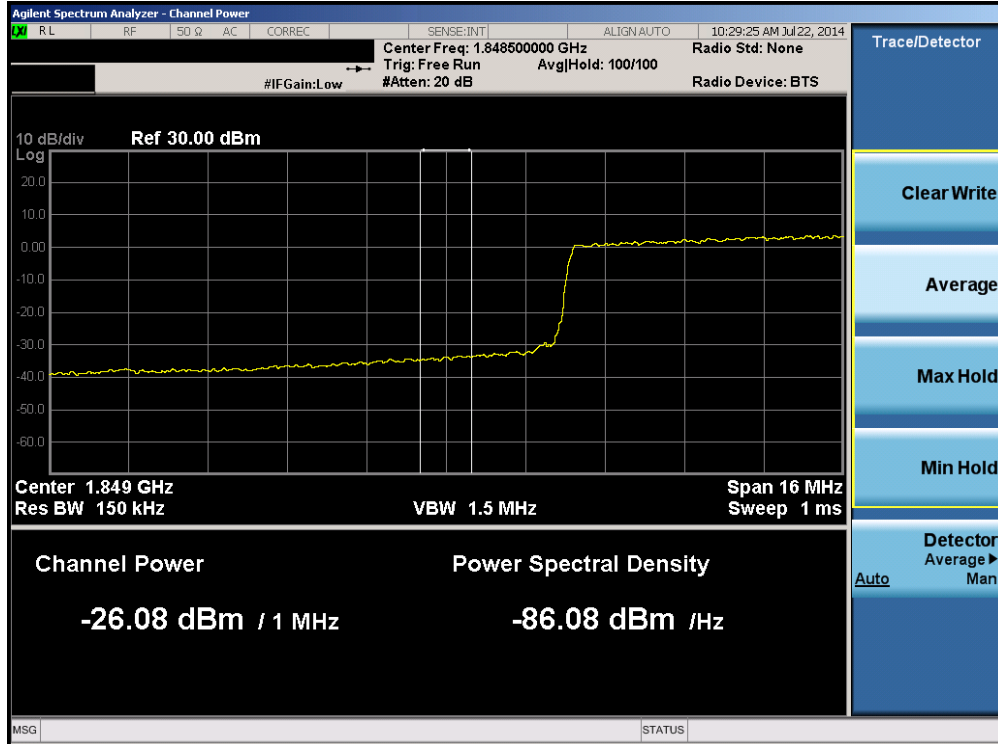


Plot 6-87. Upper Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

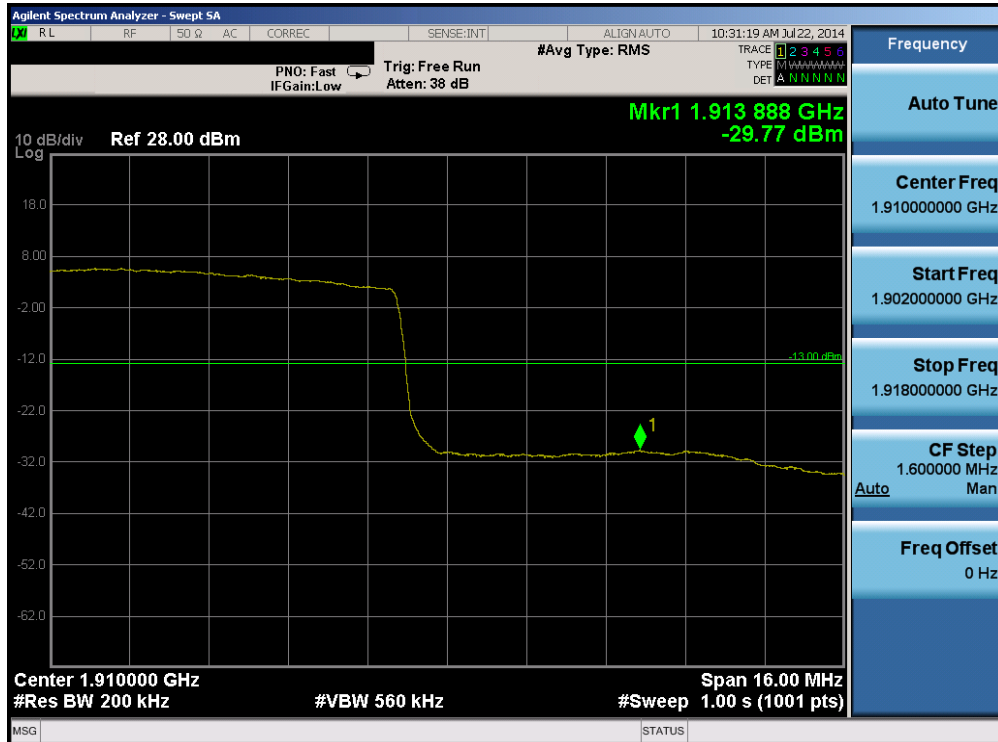


Plot 6-88. Lower Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 58 of 103

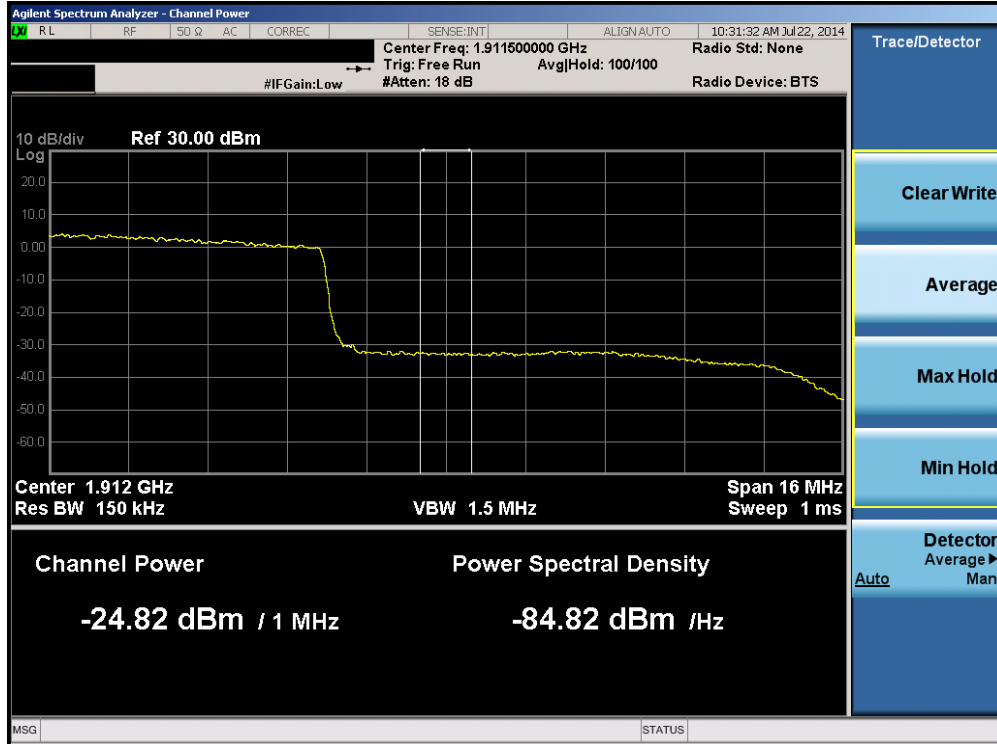


Plot 6-89. Lower Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

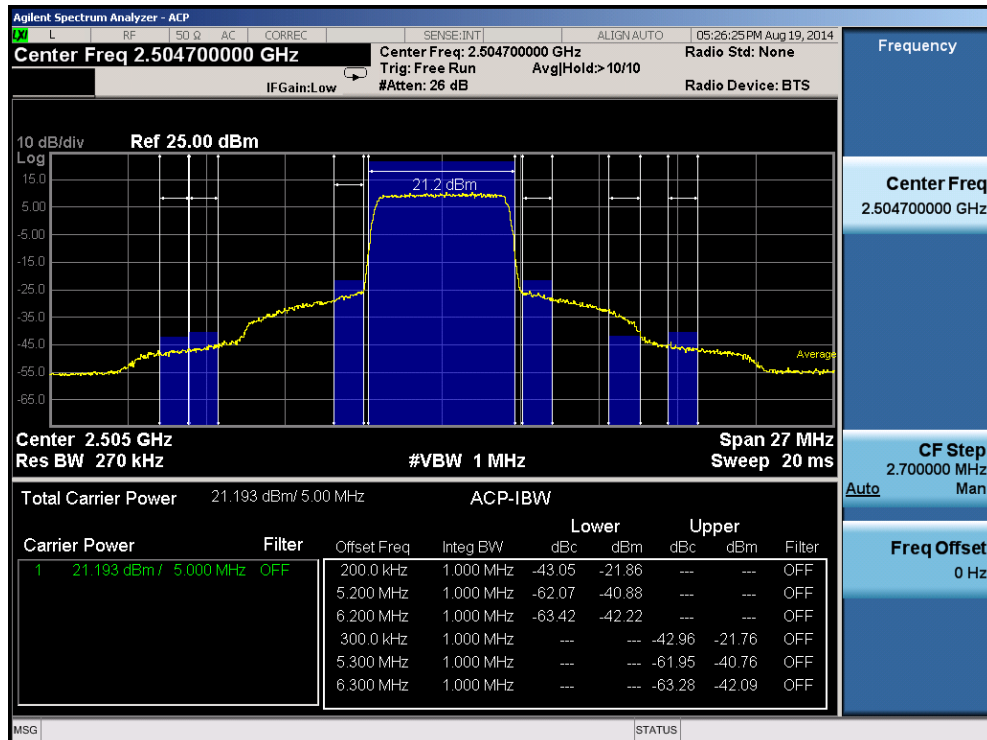


Plot 6-90. Upper Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 59 of 103



Plot 6-91. Upper Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

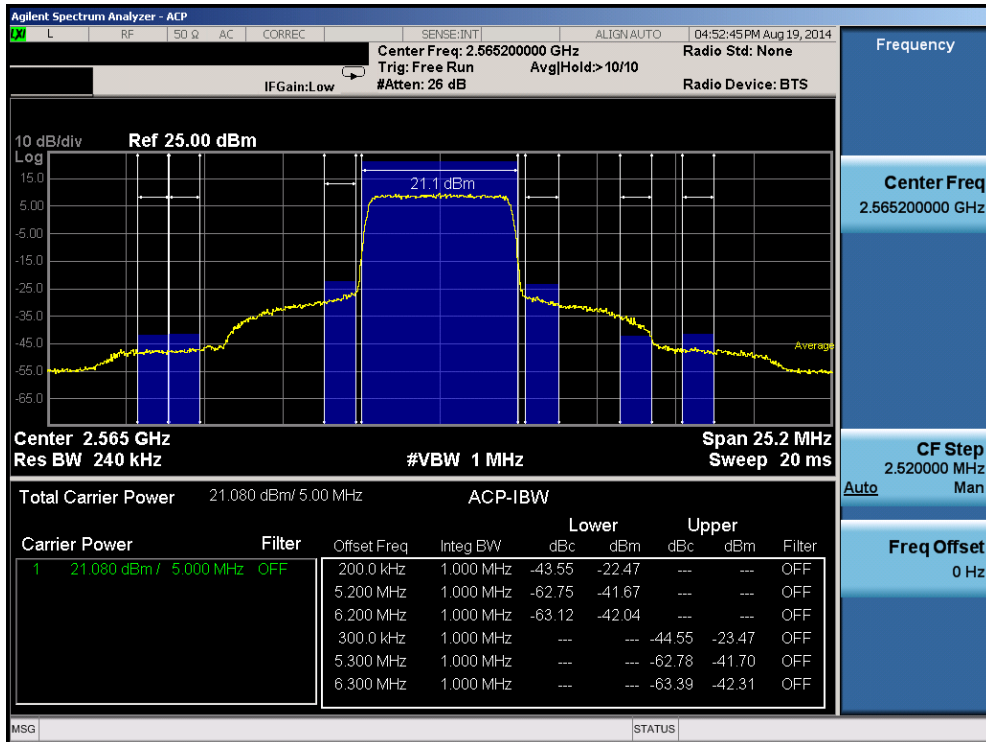


Plot 6-92. Lower ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 60 of 103

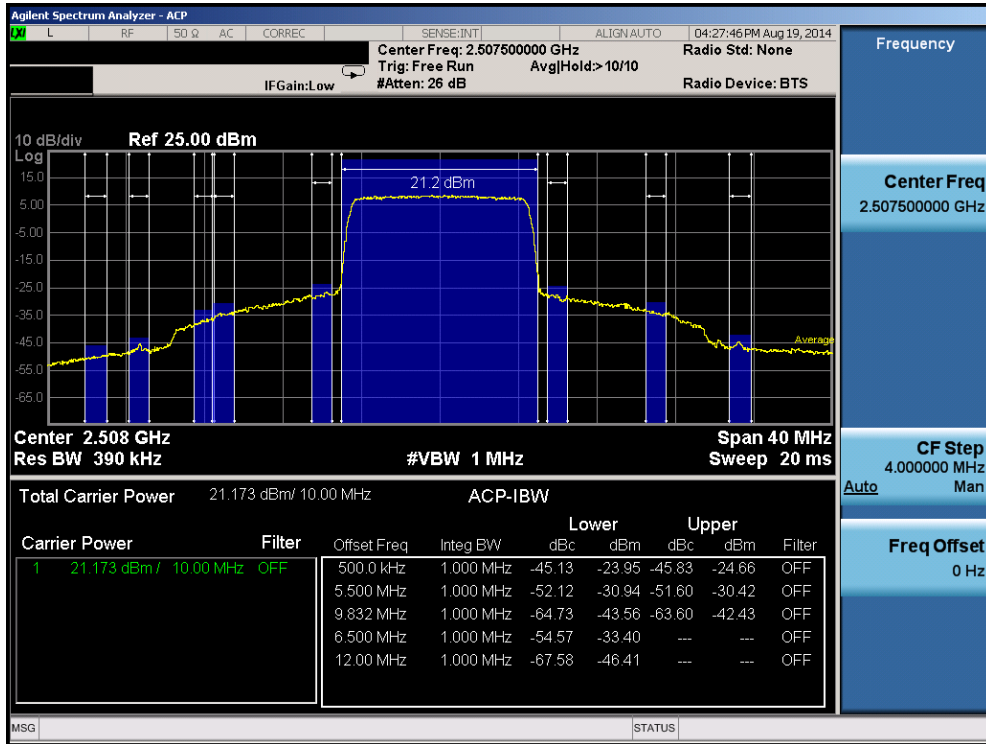


Plot 6-93. Mid ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

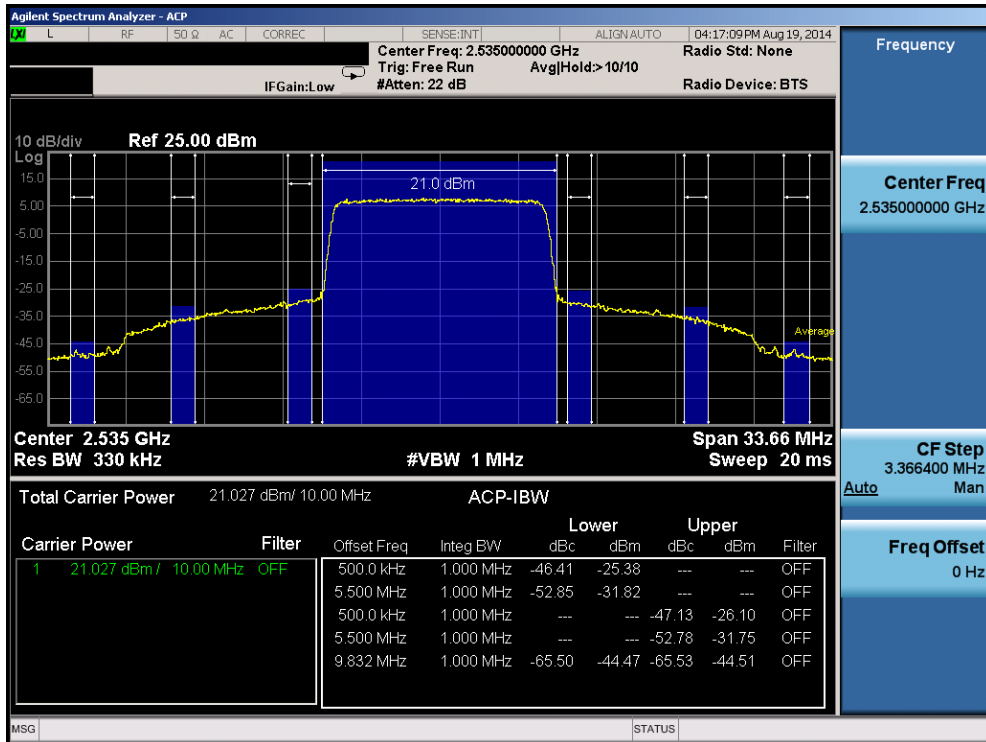


Plot 6-94. Upper ACP Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 61 of 103

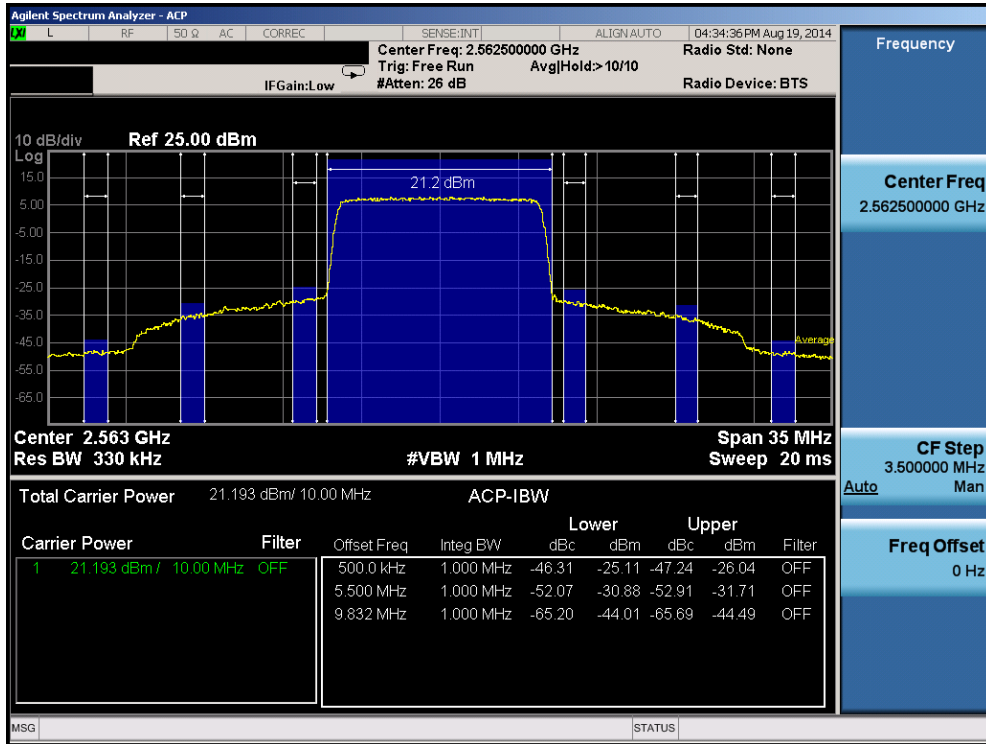


Plot 6-95. Lower ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

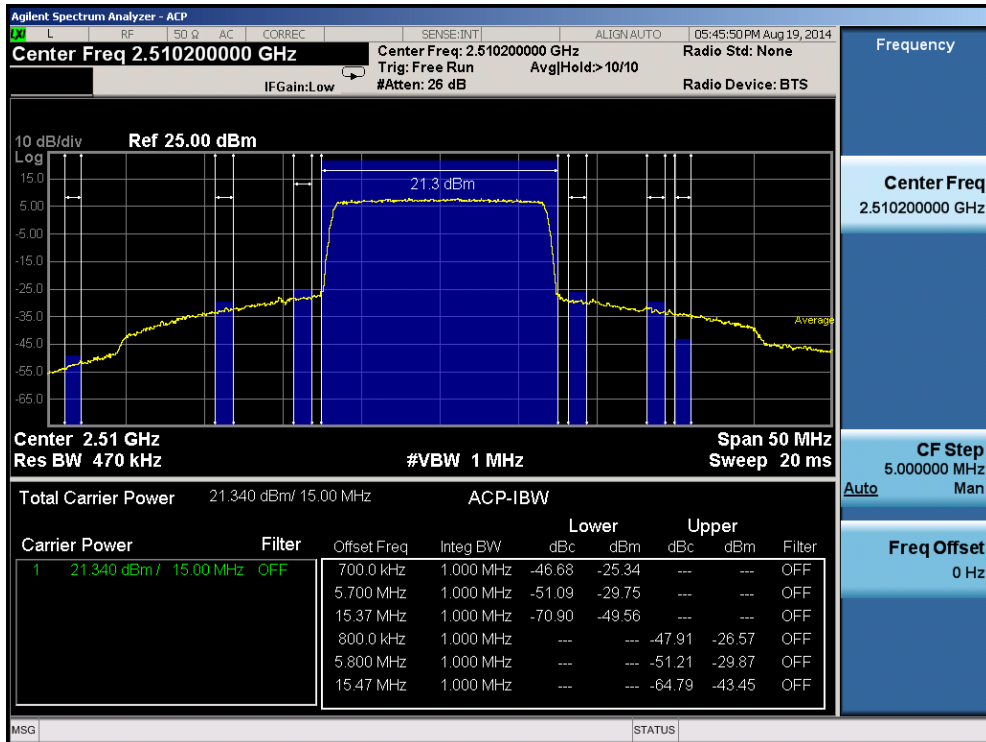


Plot 6-96. Mid ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 62 of 103

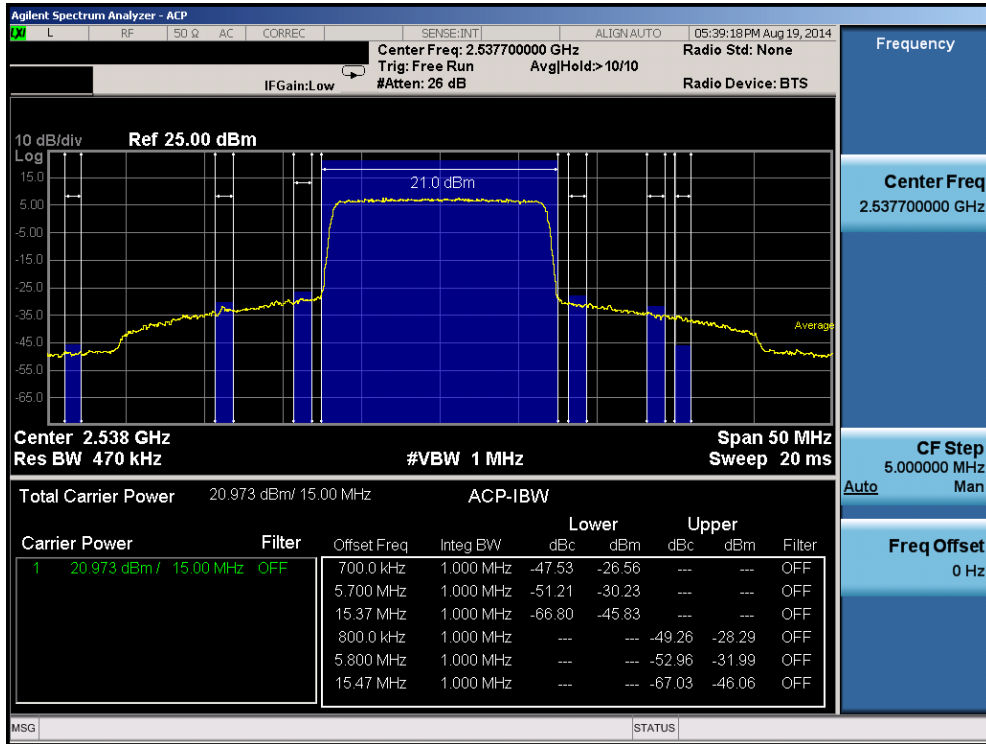


Plot 6-97. Upper ACP Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

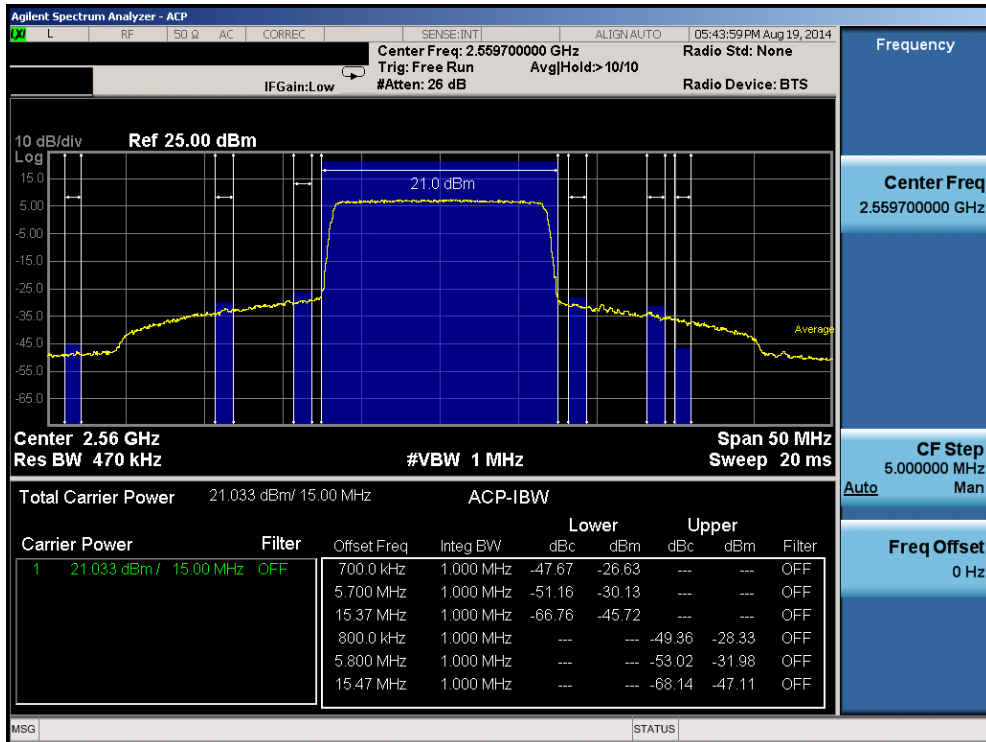


Plot 6-98. Lower ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 63 of 103

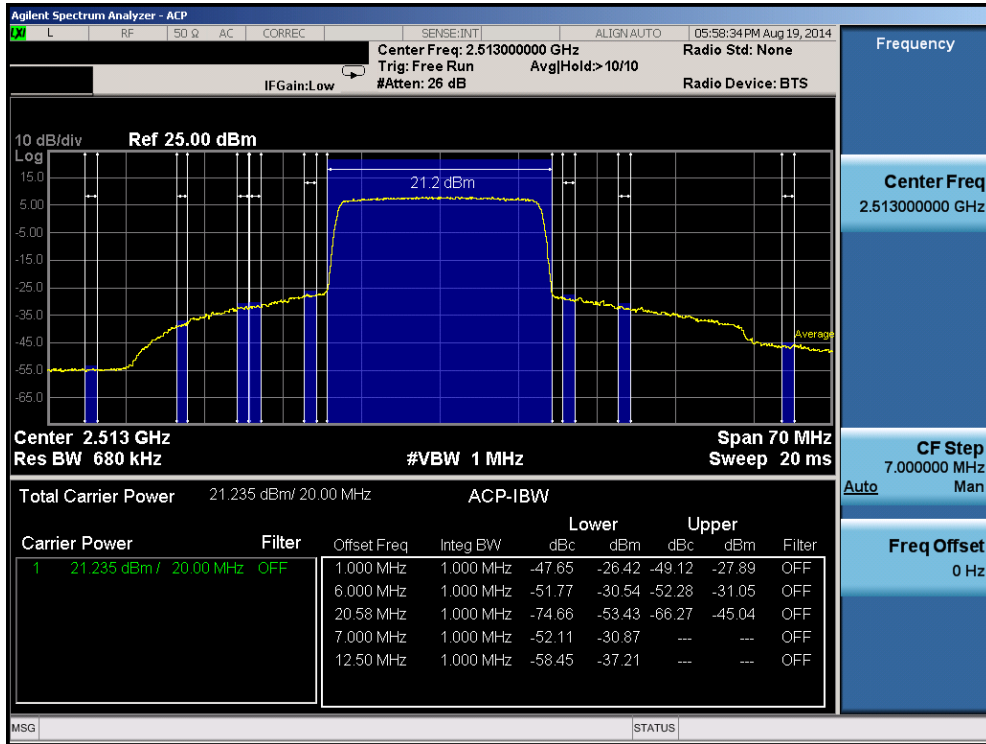


Plot 6-99. Mid ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

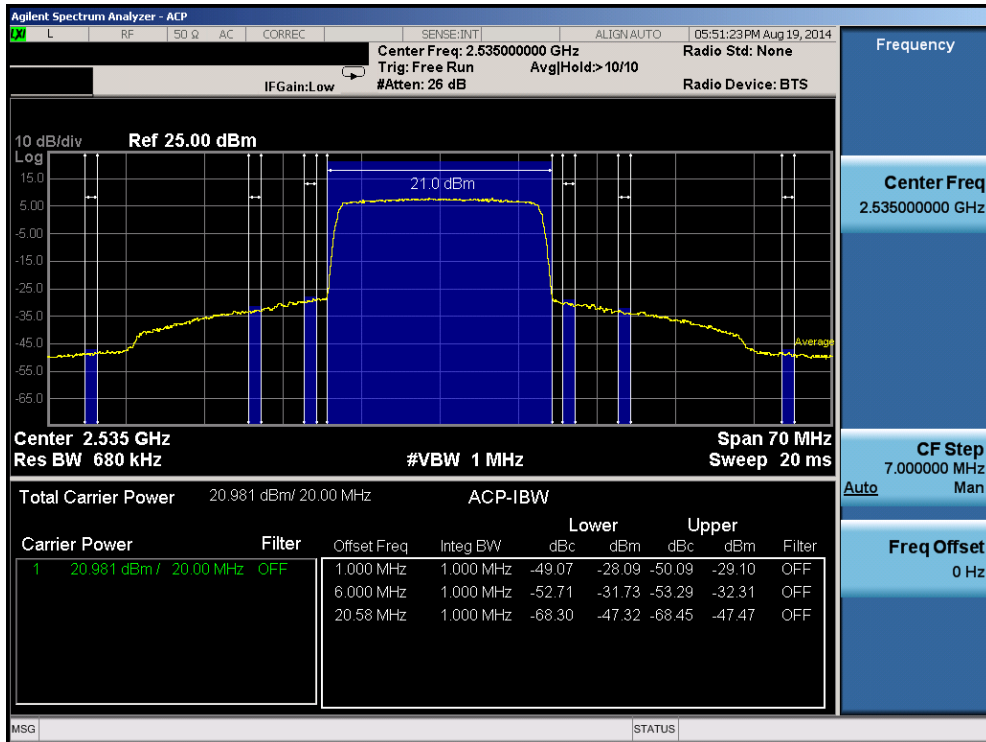


Plot 6-100. Upper ACP Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 64 of 103

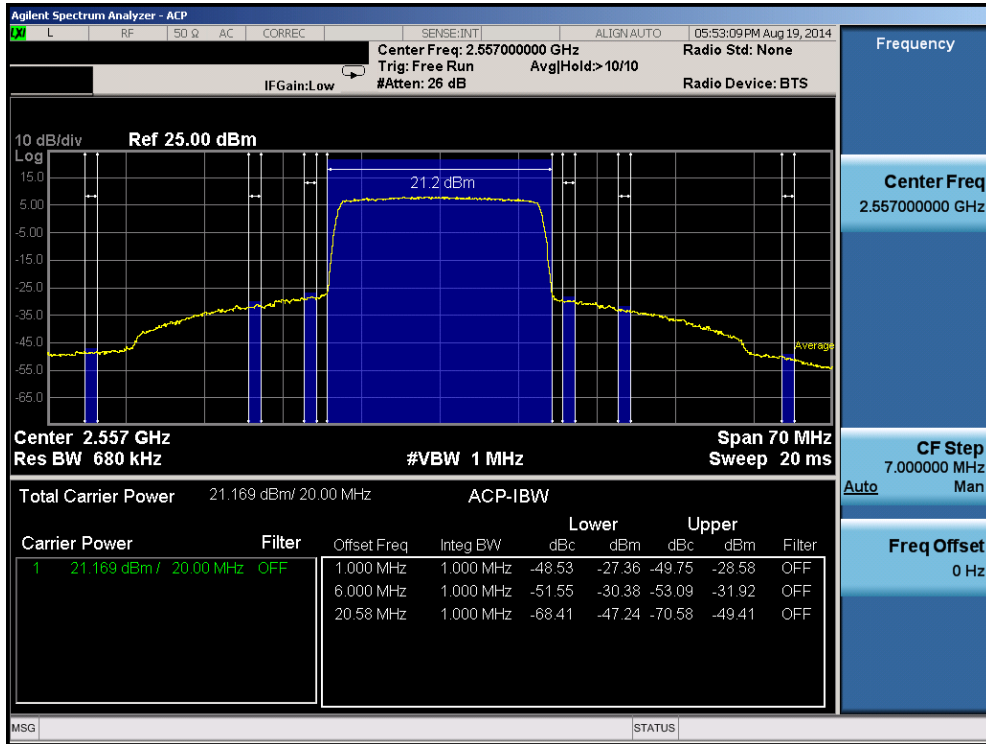


Plot 6-101. Lower ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)



Plot 6-102. Mid ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 65 of 103



Plot 6-103. Upper ACP Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 66 of 103

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

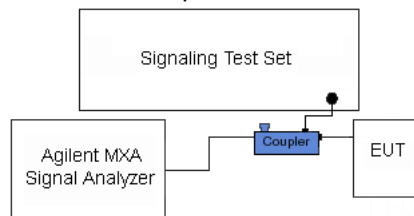

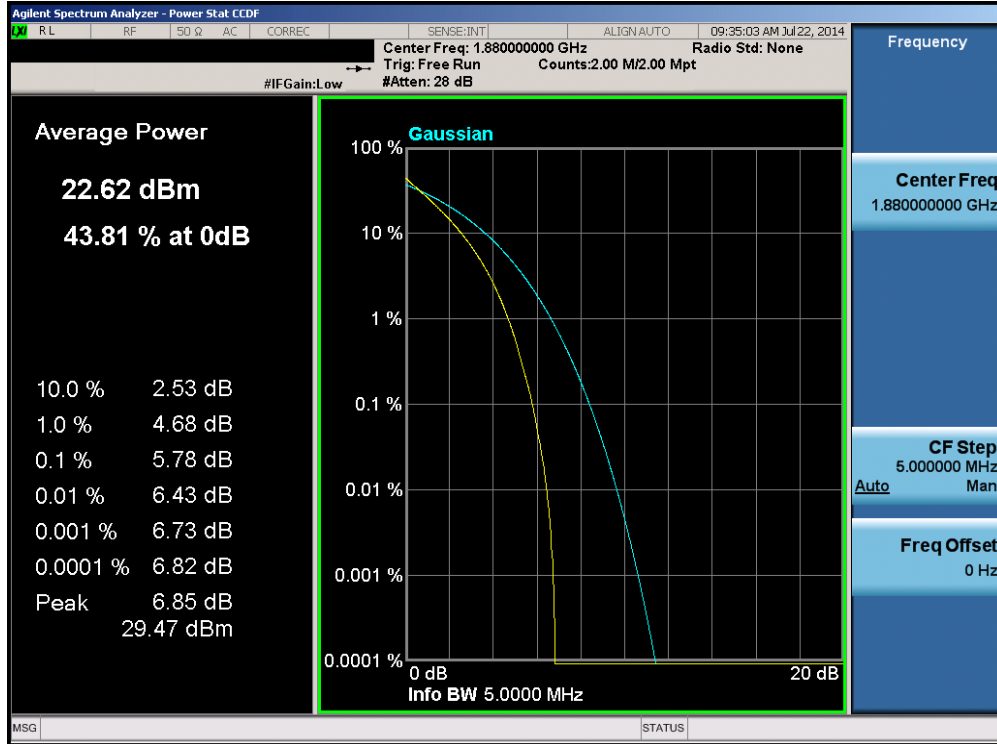


Figure 6-4. Test Instrument & Measurement Setup

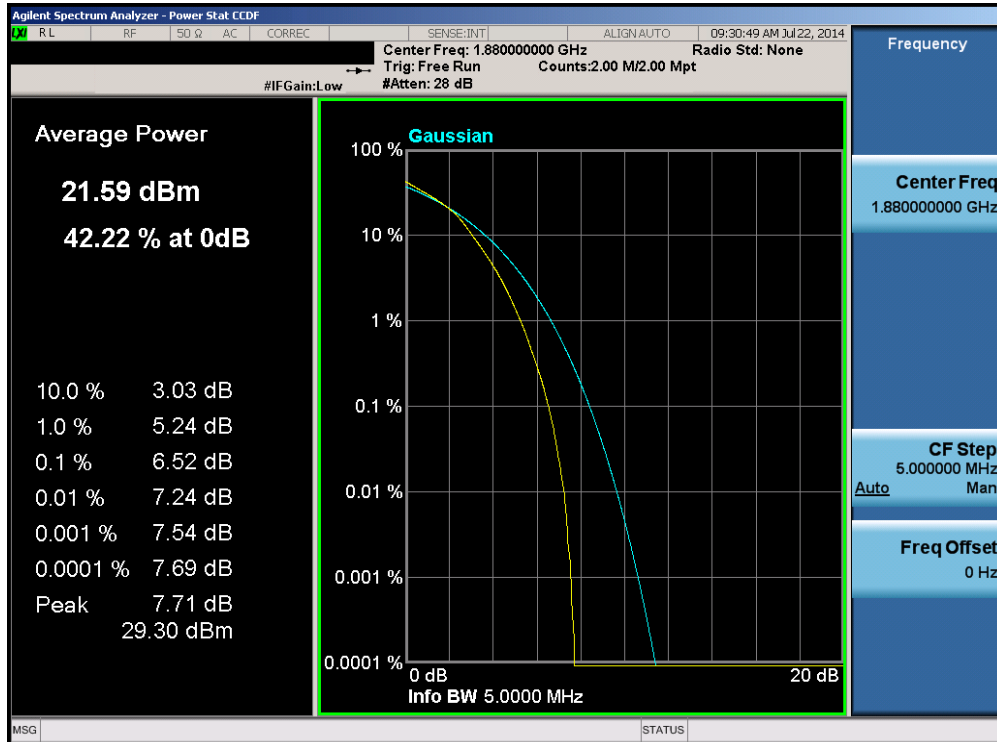
Test Notes

None.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 67 of 103	

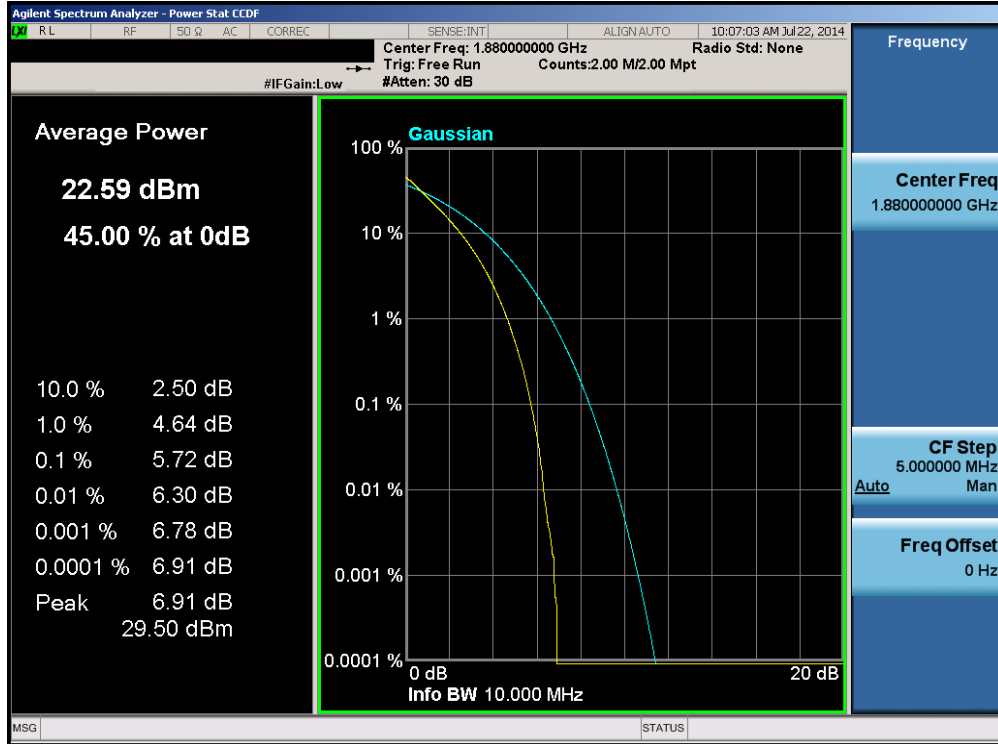


Plot 6-104. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

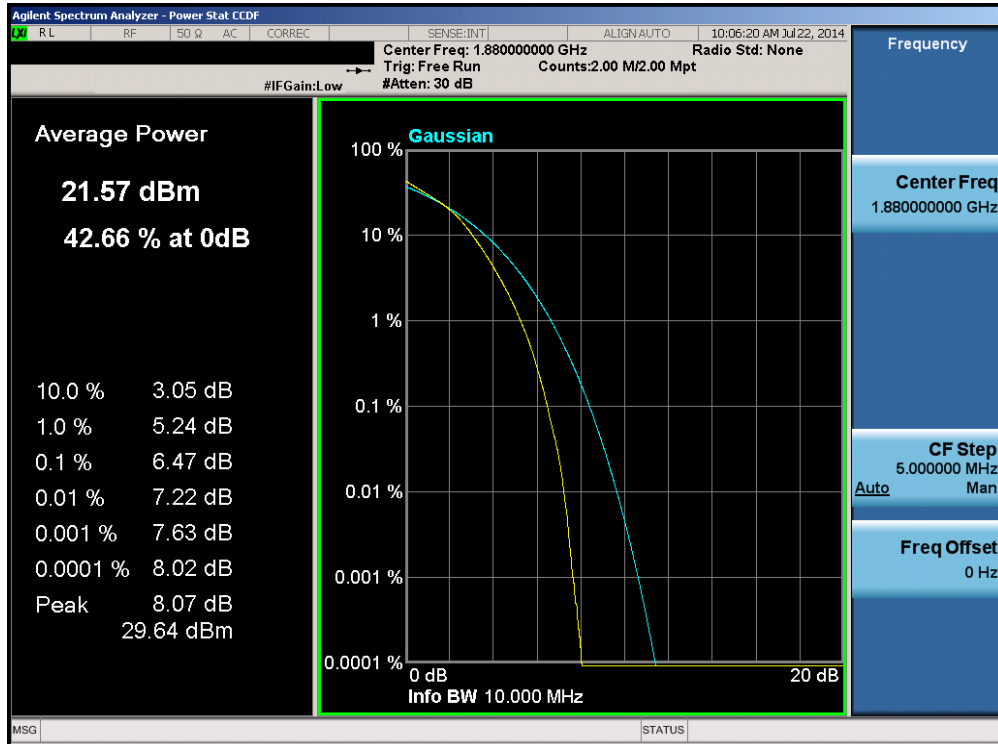


Plot 6-105. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 68 of 103

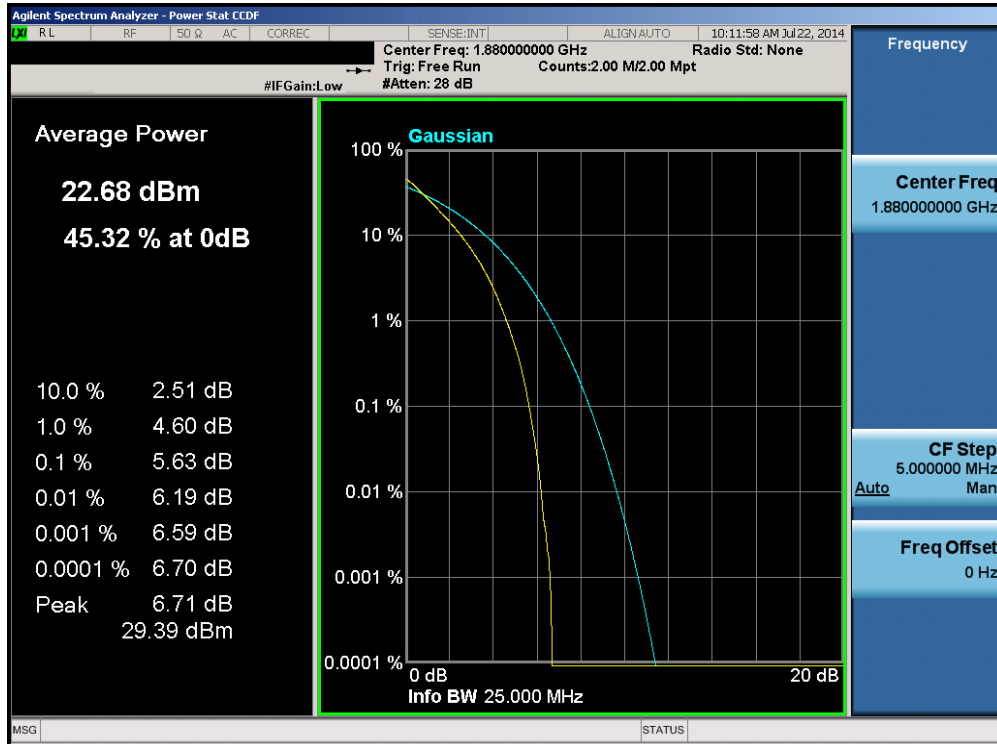


Plot 6-106. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

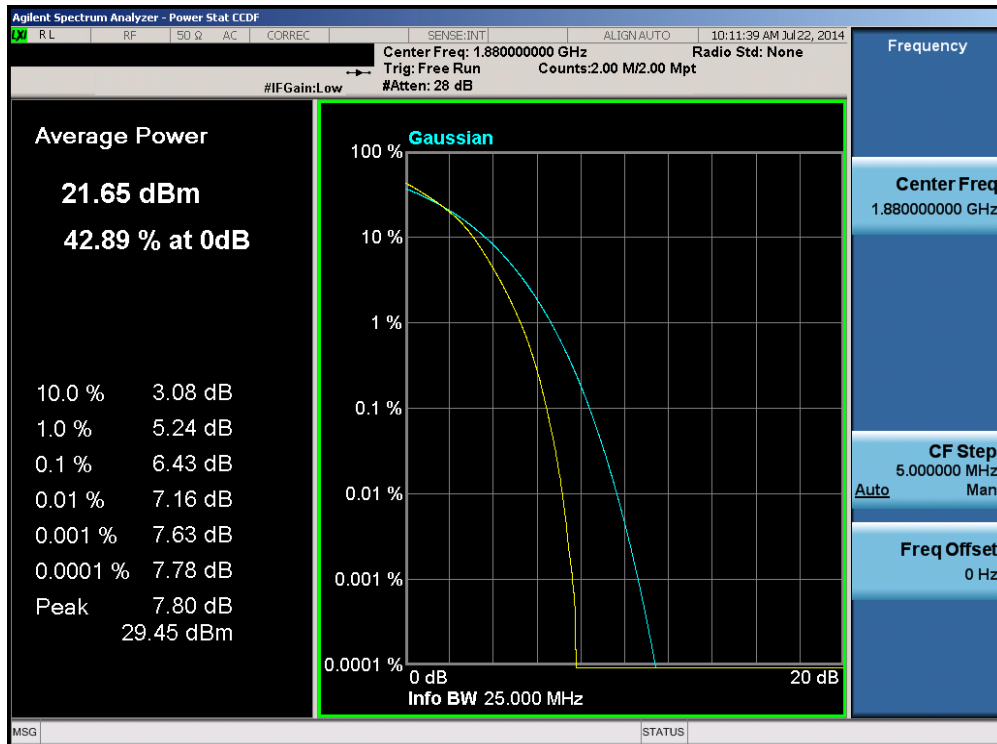


Plot 6-107. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 69 of 103

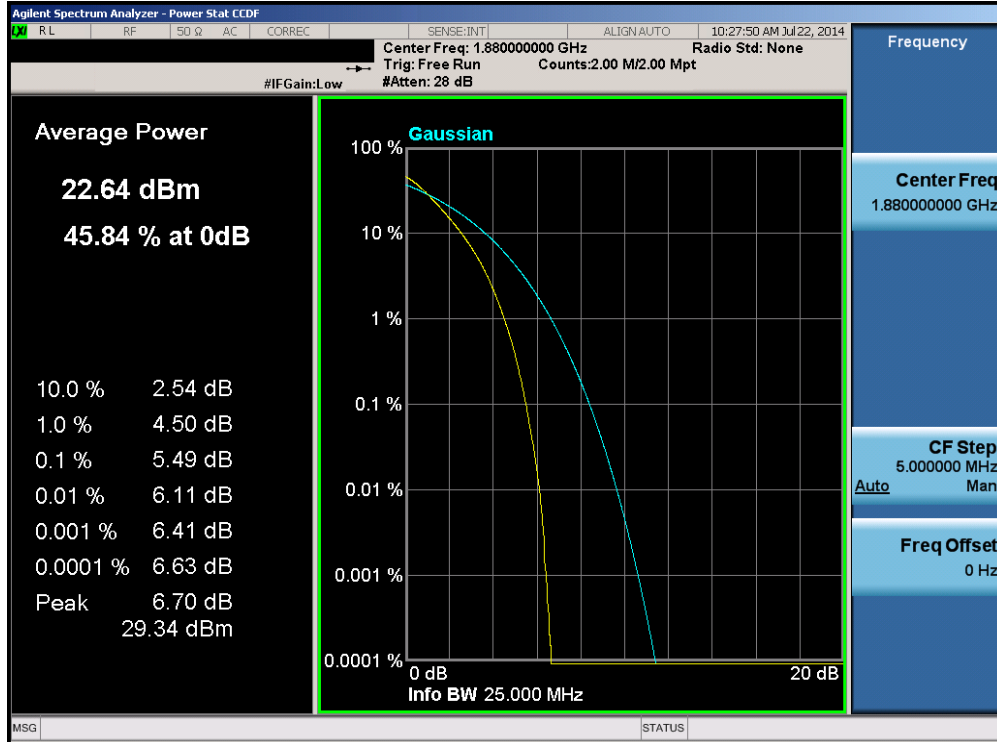


Plot 6-108. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

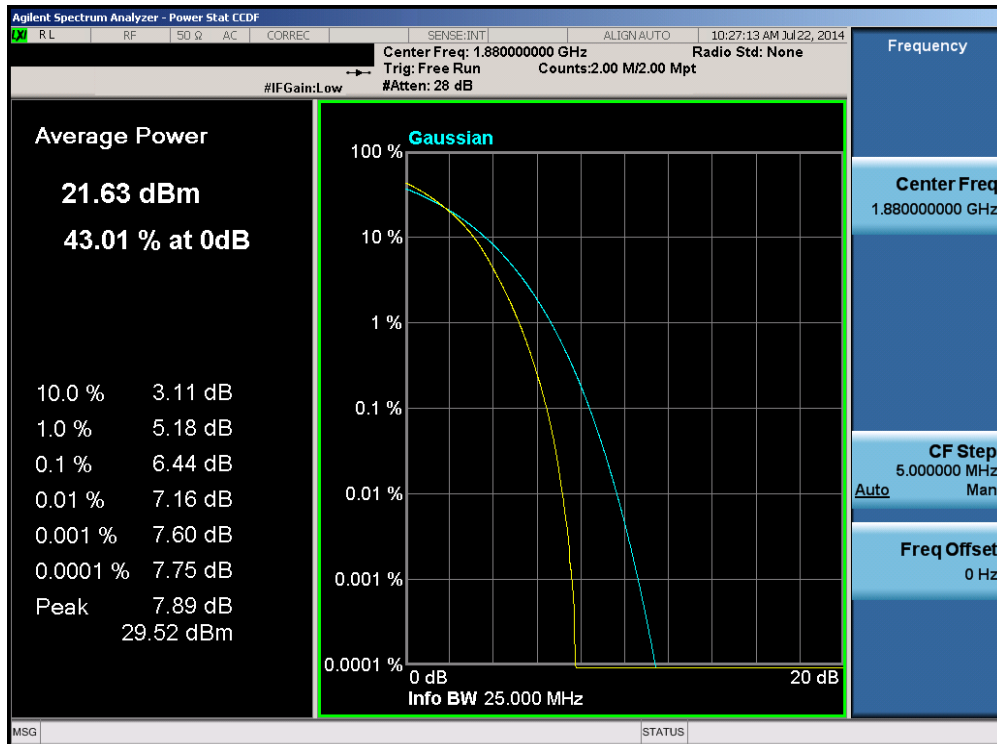


Plot 6-109. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 70 of 103

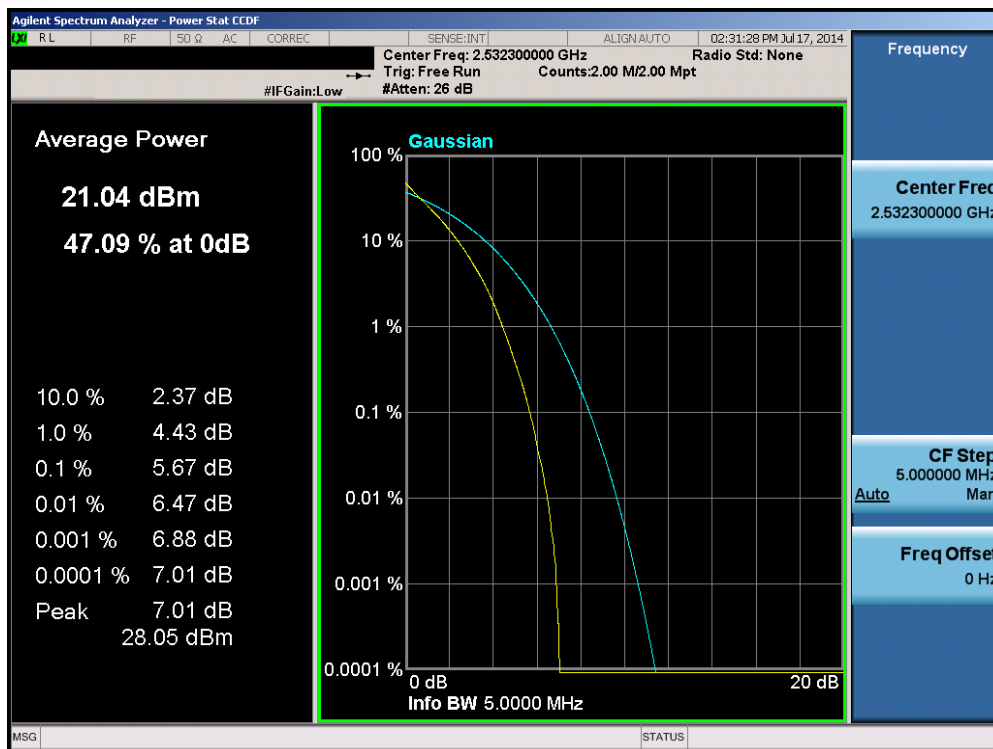


Plot 6-110. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

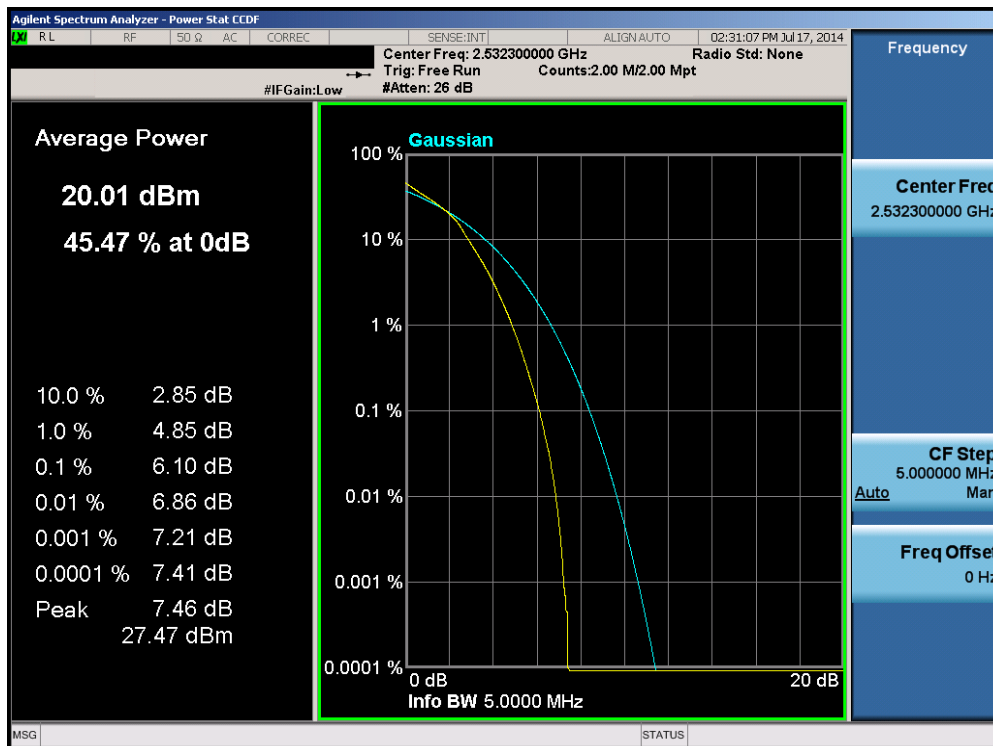


Plot 6-111. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 71 of 103

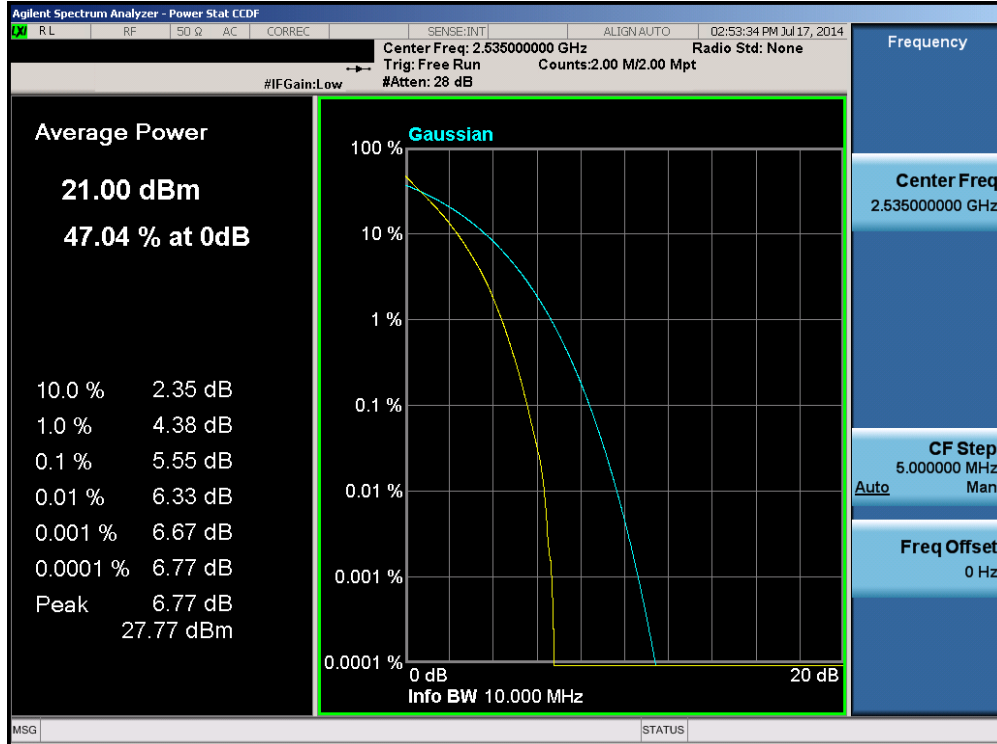


Plot 6-112. PAR Plot (Band 7 – 5.0MHz QPSK – RB Size 25)

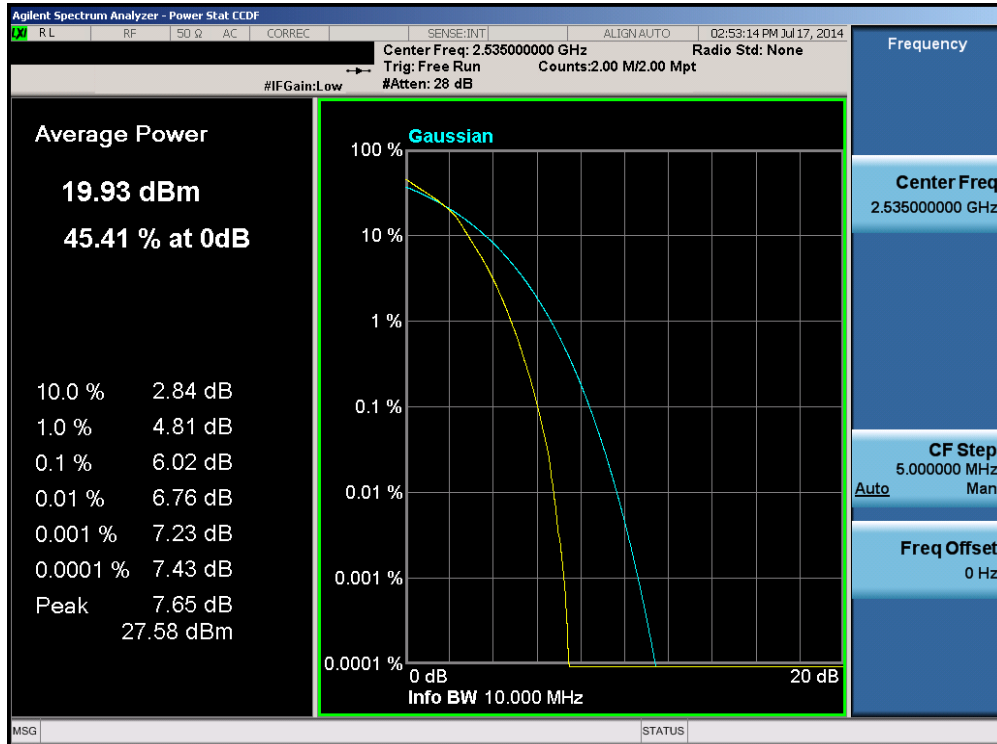


Plot 6-113. PAR Plot (Band 7 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 72 of 103

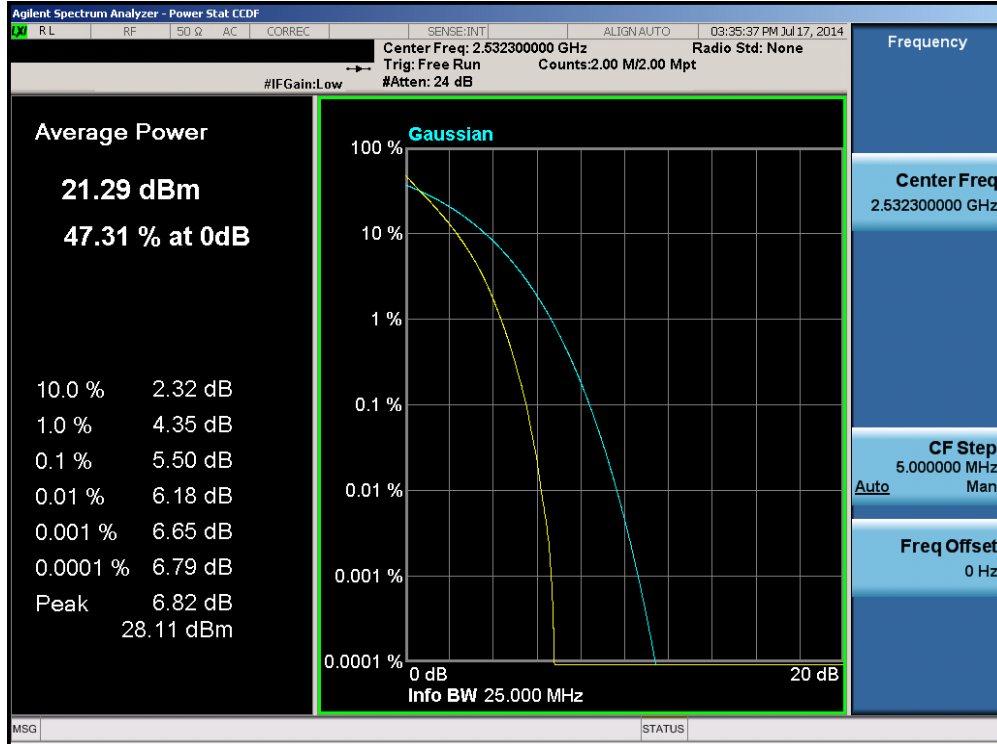


Plot 6-114. PAR Plot (Band 7 – 10.0MHz QPSK – RB Size 50)

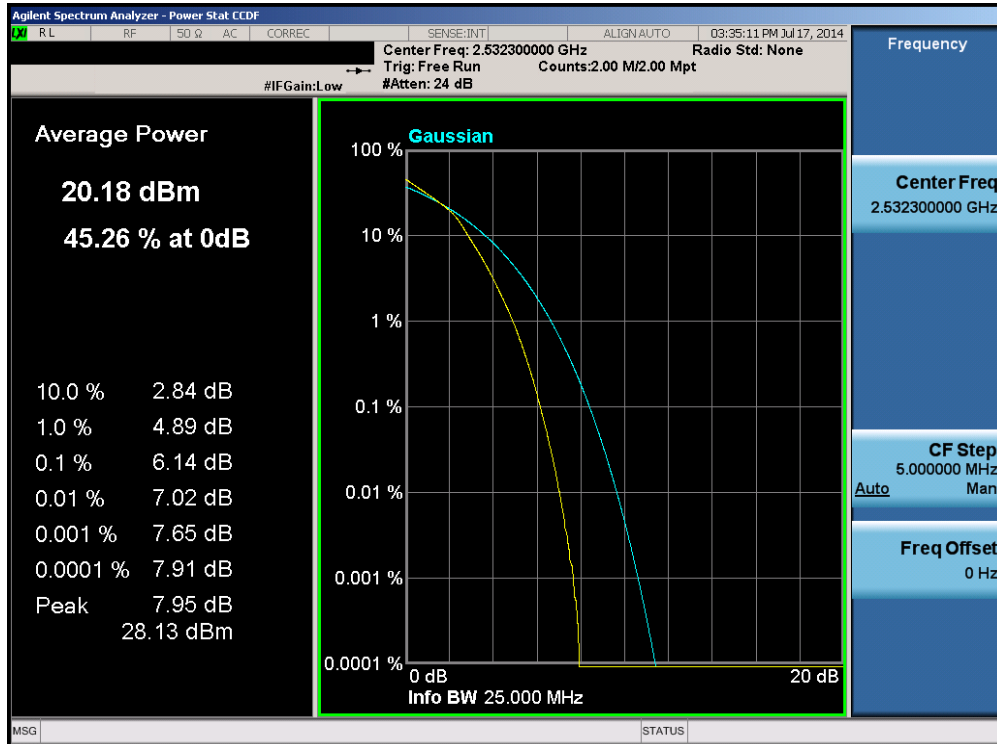


Plot 6-115. PAR Plot (Band 7 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 73 of 103

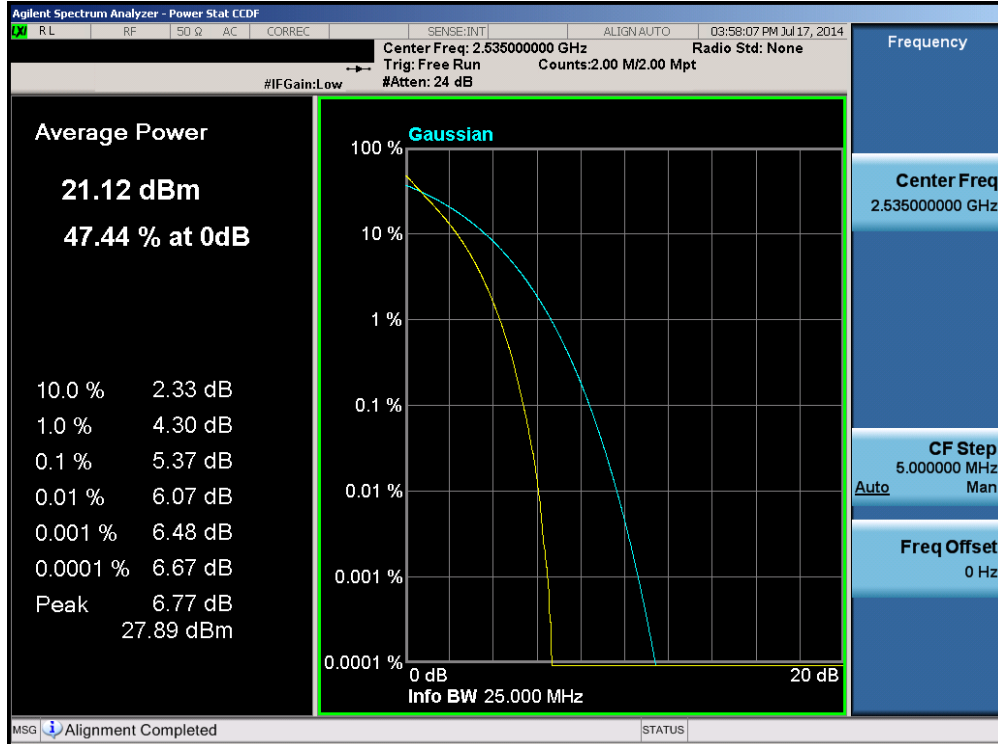


Plot 6-116. PAR Plot (Band 7 – 15.0MHz QPSK – RB Size 75)

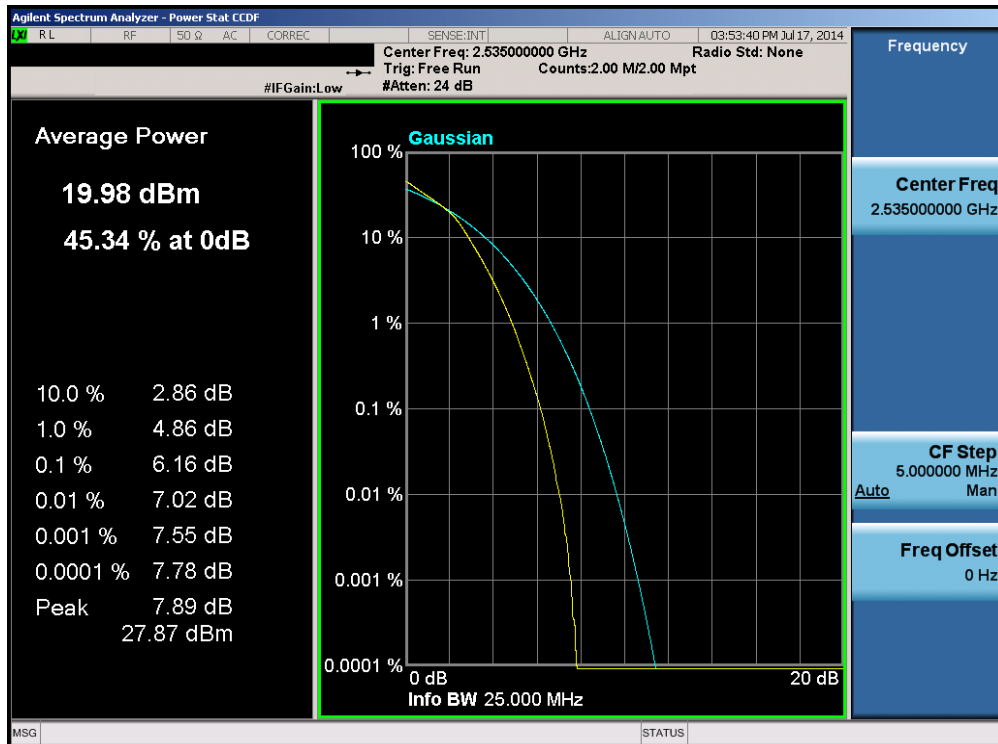


Plot 6-117. PAR Plot (Band 7 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 74 of 103

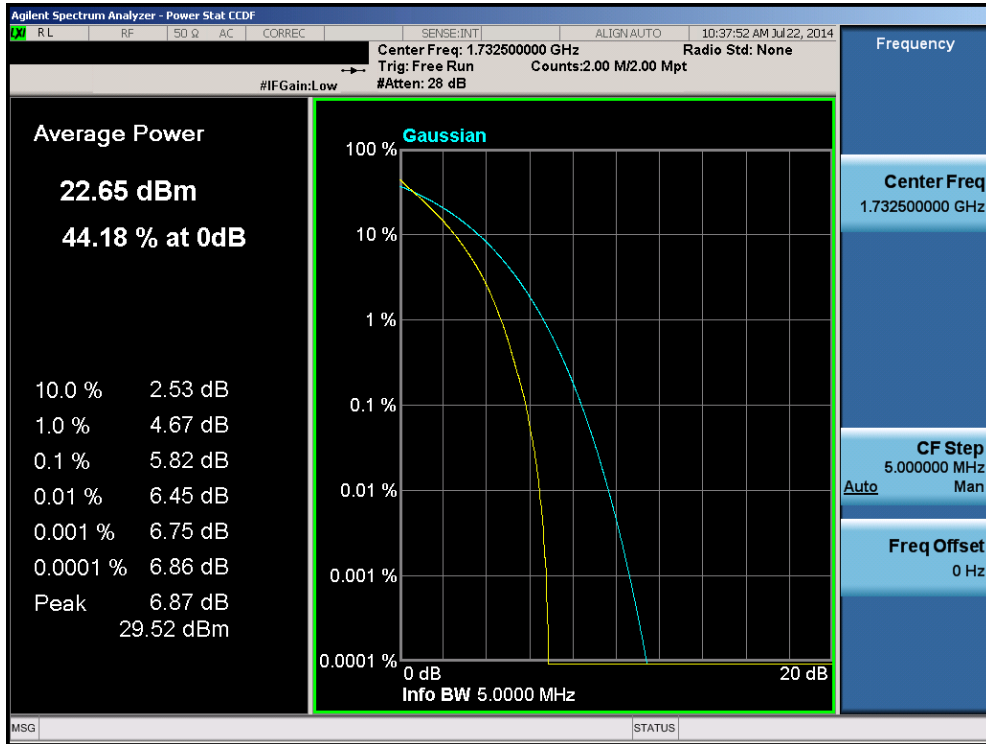


Plot 6-118. PAR Plot (Band 7 – 20.0MHz QPSK – RB Size 100)

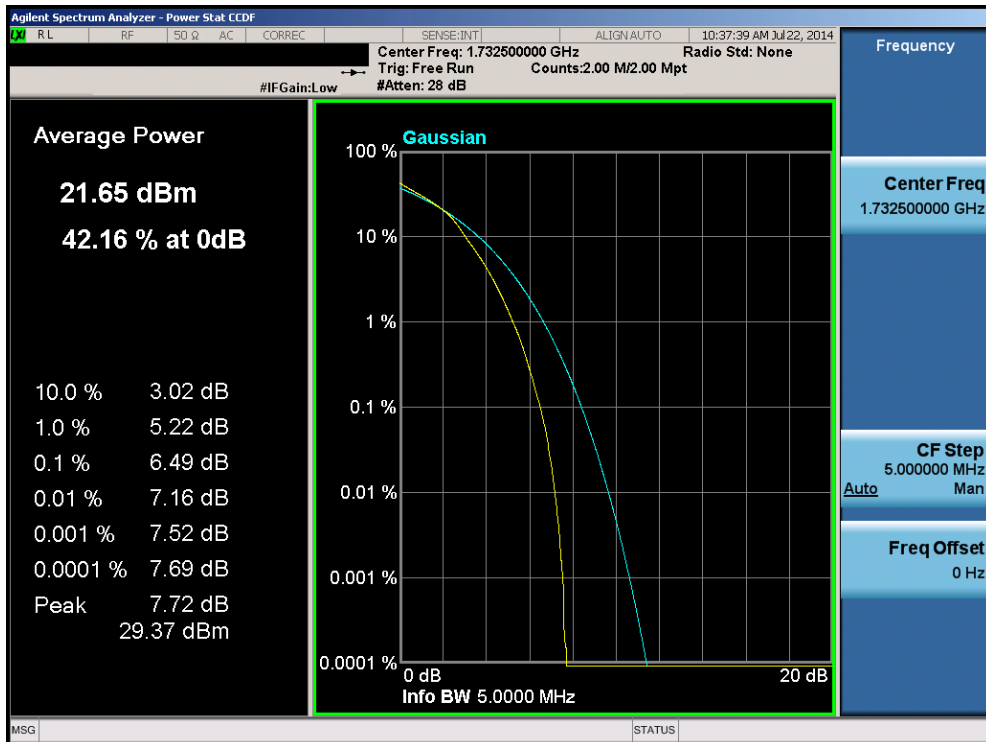


Plot 6-119. PAR Plot (Band 7 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFMS395	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 75 of 103

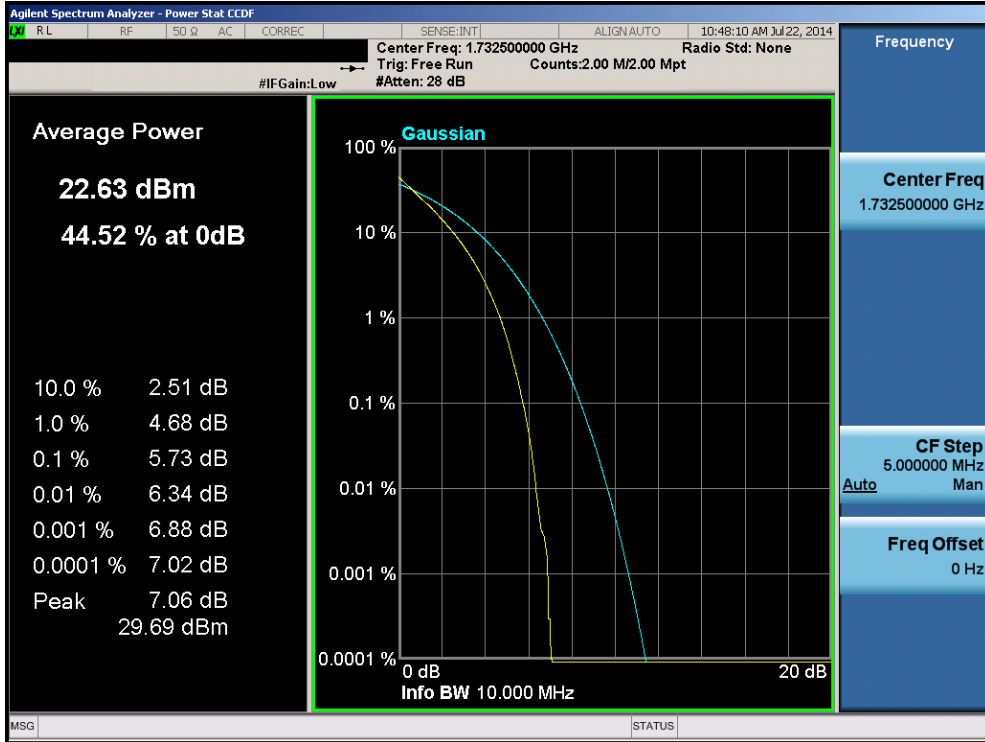


Plot 6-120. PAR Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

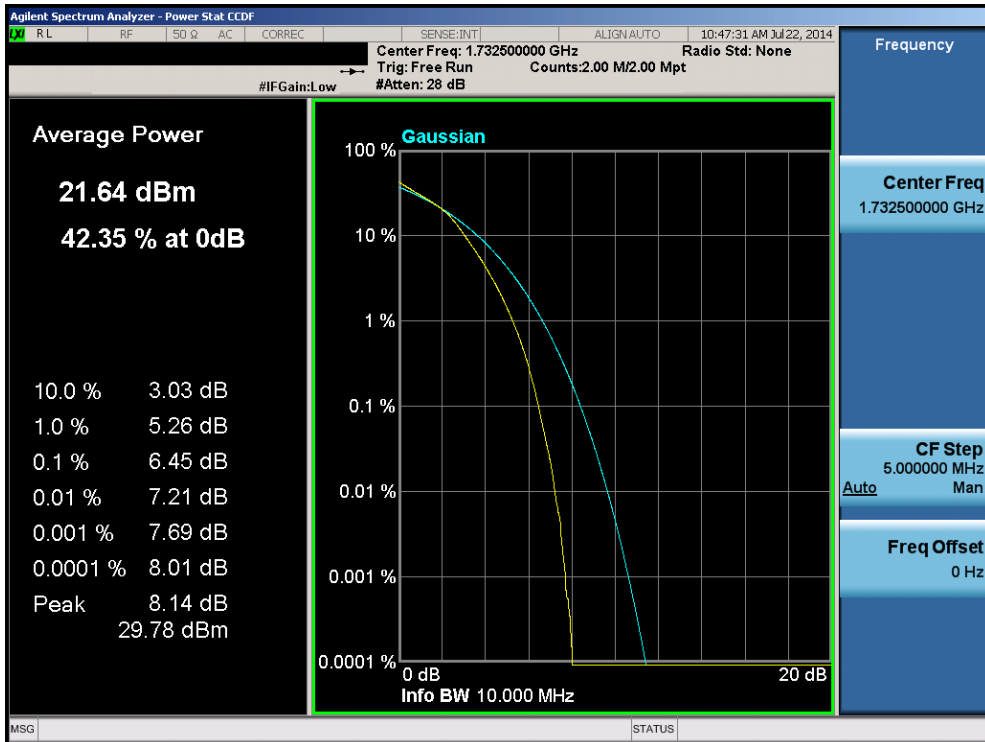


Plot 6-121. PAR Plot (Band 4 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 76 of 103

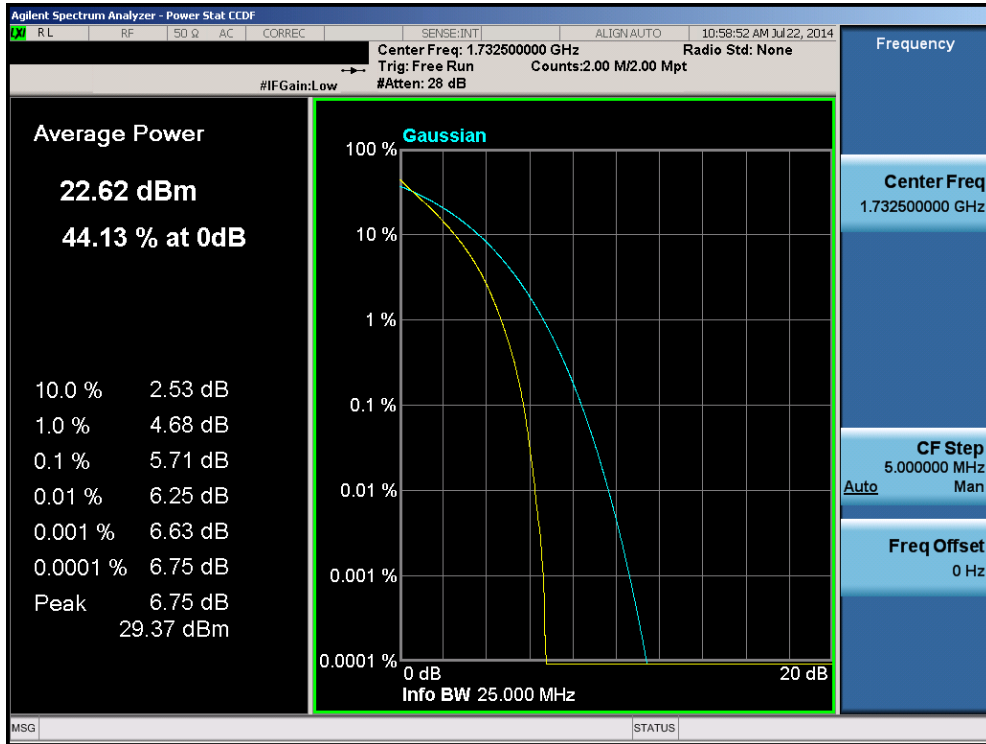


Plot 6-122. PAR Plot (Band 4 – 10.0MHz – QPSK – RB Size 50)

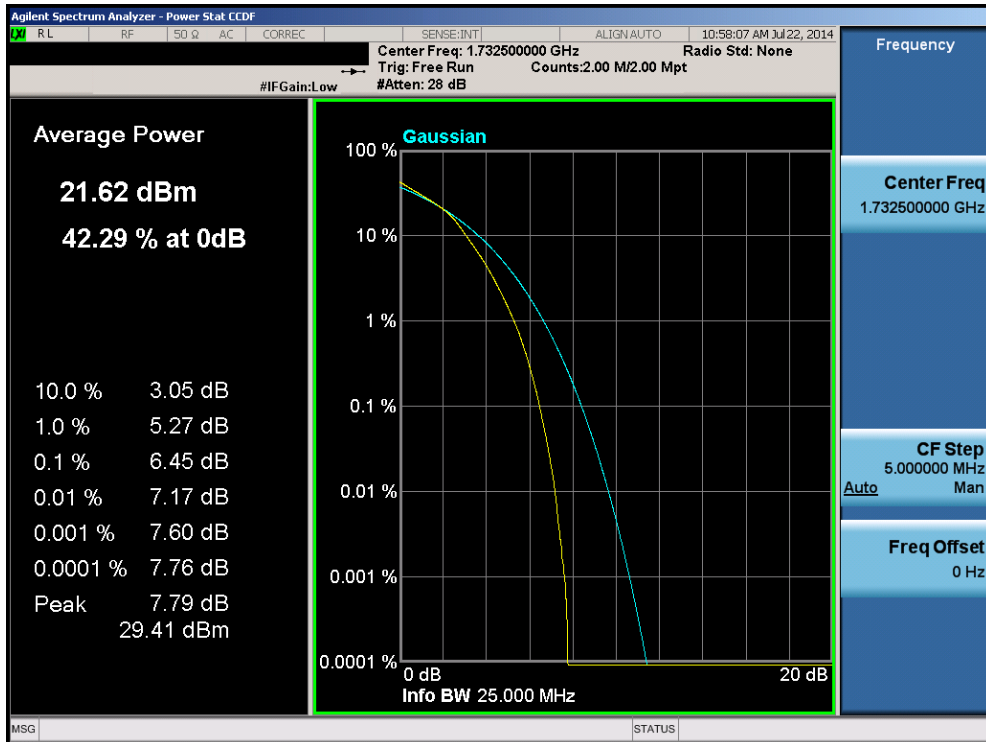


Plot 6-123. PAR Plot (Band 4 – 10.0MHz – 16-QAM – RB Size 50)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 77 of 103

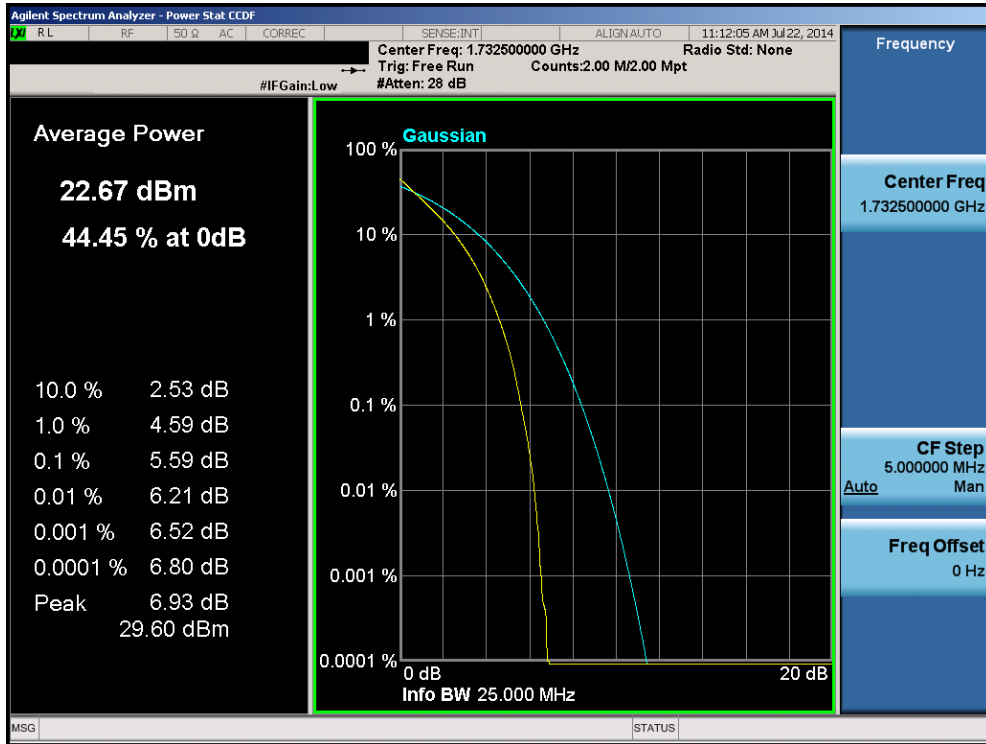


Plot 6-124. PAR Plot (Band 4 – 15.0MHz – QPSK – RB Size 75)

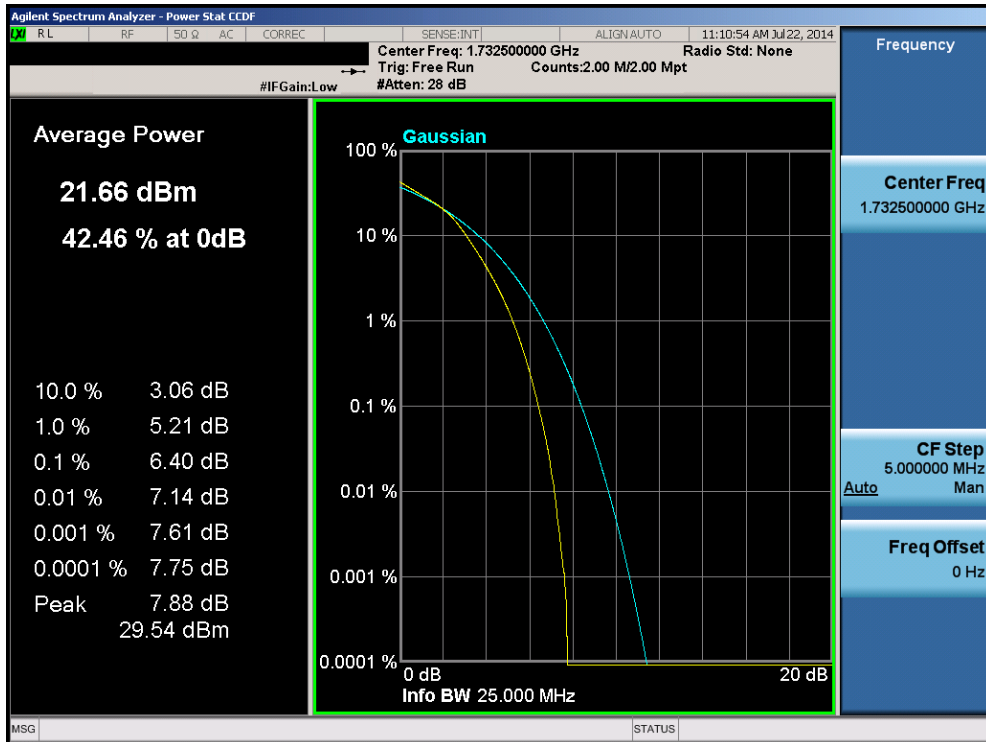


Plot 6-125. PAR Plot (Band 4 – 15.0MHz – 16-QAM – RB Size 75)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 78 of 103



Plot 6-126. PAR Plot (Band 4 – 20.0MHz – QPSK – RB Size 100)



Plot 6-127. PAR Plot (Band 4 – 20.0MHz – 16-QAM – RB Size 100)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 79 of 103

6.6 Radiated Power (ERP/EIRP)

§24.232(c) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 80 of 103

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

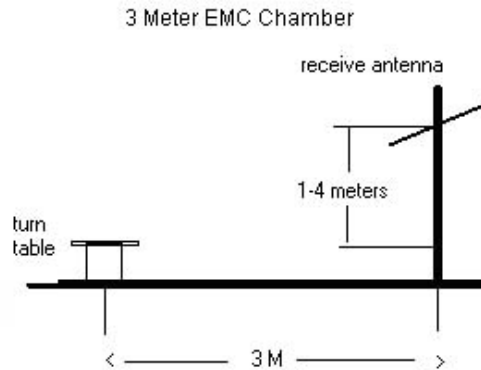




Figure 6-5. Test Instrument & Measurement Setup



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 81 of 103	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1 / 12	13.11	3.62	V	V	16.73	0.047	-18.04
710.00	5	QPSK	Standard	1 / 12	13.35	3.65	V	V	17.00	0.050	-17.77
713.50	5	QPSK	Standard	1 / 12	13.33	3.67	V	V	17.00	0.050	-17.77
706.50	5	16-QAM	Standard	1 / 12	11.60	3.62	V	V	15.22	0.033	-19.55
710.00	5	16-QAM	Standard	1 / 12	11.80	3.65	V	V	15.45	0.035	-19.32
713.50	5	16-QAM	Standard	1 / 12	11.81	3.67	V	V	15.48	0.035	-19.29
709.00	10	QPSK	Standard	1 / 25	13.30	3.62	V	V	16.92	0.049	-17.85
710.00	10	QPSK	Standard	1 / 25	13.30	3.65	V	V	16.95	0.050	-17.82
711.00	10	QPSK	Standard	1 / 25	13.34	3.67	V	V	17.01	0.050	-17.76
709.00	10	16-QAM	Standard	1 / 25	11.78	3.62	V	V	15.40	0.035	-19.37
710.00	10	16-QAM	Standard	1 / 25	11.83	3.65	V	V	15.48	0.035	-19.29
711.00	10	16-QAM	Standard	1 / 25	11.87	3.67	V	V	15.54	0.036	-19.23

Table 6-2. ERP Data (Band 17)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 82 of 103	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 12	13.45	9.67	V	H2	23.12	0.205	-6.88
1732.50	5	QPSK	Standard	1 / 12	13.97	9.65	V	H2	23.62	0.230	-6.38
1752.50	5	QPSK	Standard	1 / 12	12.13	9.62	V	H2	21.75	0.150	-8.25
1712.50	5	16-QAM	Standard	1 / 12	11.87	9.67	V	H2	21.54	0.142	-8.46
1732.50	5	16-QAM	Standard	1 / 12	12.46	9.65	V	H2	22.11	0.162	-7.89
1752.50	5	16-QAM	Standard	1 / 12	10.48	9.62	V	H2	20.10	0.102	-9.90
1715.00	10	QPSK	Standard	1 / 49	13.53	9.67	V	H2	23.20	0.209	-6.80
1732.50	10	QPSK	Standard	1 / 0	13.96	9.65	V	H2	23.61	0.229	-6.39
1750.00	10	QPSK	Standard	1 / 0	12.95	9.62	V	H2	22.57	0.181	-7.43
1715.00	10	16-QAM	Standard	1 / 49	12.02	9.67	V	H2	21.69	0.147	-8.31
1732.50	10	16-QAM	Standard	1 / 0	12.38	9.65	V	H2	22.03	0.159	-7.97
1750.00	10	16-QAM	Standard	1 / 0	12.92	9.62	V	H2	22.54	0.180	-7.46
1717.50	15	QPSK	Standard	1 / 74	13.93	9.67	V	H2	23.60	0.229	-6.40
1732.50	15	QPSK	Standard	1 / 0	14.03	9.65	V	H2	23.68	0.233	-6.32
1747.50	15	QPSK	Standard	1 / 0	13.56	9.62	V	H2	23.18	0.208	-6.82
1717.50	15	16-QAM	Standard	1 / 74	12.41	9.67	V	H2	22.08	0.161	-7.92
1732.50	15	16-QAM	Standard	1 / 0	12.50	9.65	V	H2	22.15	0.164	-7.85
1747.50	15	16-QAM	Standard	1 / 0	12.06	9.62	V	H2	21.68	0.147	-8.32
1720.00	20	QPSK	Standard	1 / 99	13.98	9.67	V	H2	23.65	0.232	-6.35
1732.50	20	QPSK	Standard	1 / 0	13.91	9.65	V	H2	23.56	0.227	-6.44
1745.00	20	QPSK	Standard	1 / 0	13.13	9.62	V	H2	22.75	0.189	-7.25
1720.00	20	16-QAM	Standard	1 / 99	12.36	9.67	V	H2	22.03	0.159	-7.97
1732.50	20	16-QAM	Standard	1 / 0	12.45	9.65	V	H2	22.10	0.162	-7.90
1745.00	20	16-QAM	Standard	1 / 0	11.75	9.62	V	H2	21.37	0.137	-8.63

Table 6-3. EIRP Data (Band 4)

FCC ID: ZNFMS395	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 83 of 103	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1 / 12	14.70	9.49	V	H2	24.19	0.262	-8.82
1880.00	5	QPSK	Standard	1 / 12	14.58	9.44	V	H2	24.02	0.252	-8.99
1907.50	5	QPSK	Standard	1 / 12	12.55	9.41	V	H2	21.96	0.157	-11.05
1852.50	5	16-QAM	Standard	1 / 12	13.04	9.49	V	H2	22.53	0.179	-10.48
1880.00	5	16-QAM	Standard	1 / 12	12.99	9.44	V	H2	22.43	0.175	-10.58
1907.50	5	16-QAM	Standard	1 / 12	10.76	9.41	V	H2	20.17	0.104	-12.84
1855.00	10	QPSK	Standard	1 / 0	14.37	9.49	V	H2	23.86	0.243	-9.15
1880.00	10	QPSK	Standard	1 / 49	14.82	9.44	V	H2	24.26	0.267	-8.75
1905.00	10	QPSK	Standard	1 / 0	12.61	9.41	V	H2	22.02	0.159	-10.99
1855.00	10	16-QAM	Standard	1 / 0	12.76	9.49	V	H2	22.25	0.168	-10.76
1880.00	10	16-QAM	Standard	1 / 49	13.22	9.44	V	H2	22.66	0.185	-10.35
1905.00	10	16-QAM	Standard	1 / 0	11.08	9.41	V	H2	20.49	0.112	-12.52
1857.50	15	QPSK	Standard	1 / 0	14.33	9.49	V	H2	23.82	0.241	-9.19
1880.00	15	QPSK	Standard	1 / 74	14.93	9.44	V	H2	24.37	0.274	-8.64
1902.50	15	QPSK	Standard	1 / 0	13.67	9.41	V	H2	23.08	0.203	-9.93
1857.50	15	16-QAM	Standard	1 / 0	12.73	9.49	V	H2	22.22	0.167	-10.79
1880.00	15	16-QAM	Standard	1 / 74	13.46	9.44	V	H2	22.90	0.195	-10.11
1902.50	15	16-QAM	Standard	1 / 0	11.97	9.41	V	H2	21.38	0.137	-11.63
1860.00	20	QPSK	Standard	1 / 0	14.33	9.49	V	H2	23.82	0.241	-9.19
1880.00	20	QPSK	Standard	1 / 99	14.86	9.44	V	H2	24.30	0.269	-8.71
1900.00	20	QPSK	Standard	1 / 0	14.62	9.41	V	H2	24.03	0.253	-8.98
1860.00	20	16-QAM	Standard	1 / 0	12.76	9.49	V	H2	22.25	0.168	-10.76
1880.00	20	16-QAM	Standard	1 / 99	13.11	9.44	V	H2	22.55	0.180	-10.46
1900.00	20	16-QAM	Standard	1 / 0	12.99	9.41	V	H2	22.40	0.174	-10.61

Table 6-4. EIRP Data (Band 2)

FCC ID: ZNFMS395	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 84 of 103	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
2502.50	5	QPSK	Standard	1 / 12	5.60	8.38	V	H2	13.98	0.025	-19.03
2532.30	5	QPSK	Standard	1 / 12	7.46	8.56	V	H2	16.02	0.040	-16.99
2567.50	5	QPSK	Standard	1 / 0	7.61	8.73	V	H2	16.34	0.043	-16.67
2502.50	5	16-QAM	Standard	1 / 12	4.05	8.38	V	H2	12.43	0.017	-20.58
2532.30	5	16-QAM	Standard	1 / 12	6.21	8.56	V	H2	14.77	0.030	-18.24
2567.50	5	16-QAM	Standard	1 / 0	6.17	8.73	V	H2	14.90	0.031	-18.11
2505.00	10	QPSK	Standard	1 / 49	6.70	8.38	V	H2	15.08	0.032	-17.93
2535.00	10	QPSK	Standard	1 / 49	7.50	8.56	V	H2	16.06	0.040	-16.95
2565.00	10	QPSK	Standard	1 / 0	8.27	8.73	V	H2	17.00	0.050	-16.01
2505.00	10	16-QAM	Standard	1 / 49	5.11	8.38	V	H2	13.49	0.022	-19.52
2535.00	10	16-QAM	Standard	1 / 49	6.07	8.56	V	H2	14.63	0.029	-18.38
2565.00	10	16-QAM	Standard	1 / 0	6.82	8.73	V	H2	15.55	0.036	-17.46
2507.50	15	QPSK	Standard	1 / 0	6.61	8.38	V	H2	14.99	0.032	-18.02
2532.30	15	QPSK	Standard	1 / 74	7.44	8.56	V	H2	16.00	0.040	-17.01
2562.50	15	QPSK	Standard	1 / 0	8.50	8.73	V	H2	17.23	0.053	-15.78
2507.50	15	16-QAM	Standard	1 / 0	5.14	8.38	V	H2	13.52	0.022	-19.49
2532.30	15	16-QAM	Standard	1 / 74	6.03	8.56	V	H2	14.59	0.029	-18.42
2562.50	15	16-QAM	Standard	1 / 0	7.00	8.73	V	H2	15.73	0.037	-17.28
2510.00	20	QPSK	Standard	1 / 0	6.58	8.38	V	H2	14.96	0.031	-18.05
2535.00	20	QPSK	Standard	1 / 99	7.67	8.56	V	H2	16.23	0.042	-16.78
2560.00	20	QPSK	Standard	1 / 0	7.90	8.73	V	H2	16.63	0.046	-16.38
2510.00	20	16-QAM	Standard	1 / 0	5.11	8.38	V	H2	13.49	0.022	-19.52
2535.00	20	16-QAM	Standard	1 / 99	6.18	8.56	V	H2	14.74	0.030	-18.27
2560.00	20	16-QAM	Standard	1 / 0	6.45	8.73	V	H2	15.18	0.033	-17.83

Table 6-5. EIRP Data (Band 7)

FCC ID: ZNFMS395	 FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 85 of 103	

6.7 Radiated Spurious Emissions Measurements

§2.1053 §24.238(a) §27.53(e) §27.53(f) §27.53(g)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

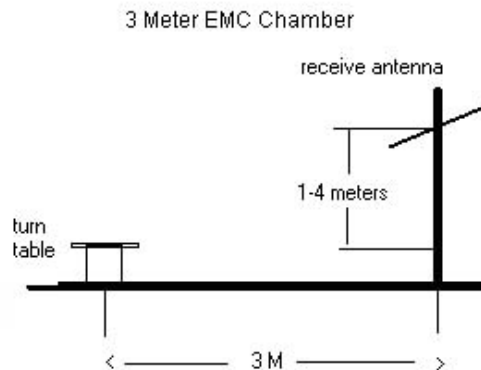



Figure 6-6. Test Instrument & Measurement Setup

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 86 of 103



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 709.00 MHz
 CHANNEL: 23780
 MEASURED OUTPUT POWER: 16.92 dBm = 0.049 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.92 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1418.00	-52.17	2.61	-49.56	V	V	66.5
2127.00	-60.21	3.03	-57.18	V	V	74.1
2836.00	-61.40	4.72	-56.68	V	V	73.6
3545.00	-60.98	6.29	-54.69	V	V	71.6
4254.00	-60.61	7.15	-53.46	V	V	70.4
4963.00	-60.21	7.92	-52.29	V	V	69.2

Table 6-6. Radiated Spurious Data (Band 17 – Low Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 87 of 103

OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MEASURED OUTPUT POWER: 16.95 dBm = 0.050 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 29.95 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1420.00	-51.98	2.63	-49.35	V	V	66.3
2130.00	-59.85	3.04	-56.81	V	V	73.8
2840.00	-61.50	4.71	-56.78	V	V	73.7
3550.00	-60.19	6.30	-53.89	V	V	70.8
4260.00	-60.80	7.16	-53.65	V	V	70.6
4970.00	-61.19	7.93	-53.26	V	V	70.2

Table 6-7. Radiated Spurious Data (Band 17 – Mid Channel)

OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23800
 MEASURED OUTPUT POWER: 17.01 dBm = 0.050 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.01 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1422.00	-52.31	2.65	-49.66	V	V	66.7
2133.00	-59.87	3.05	-56.82	V	V	73.8
2844.00	-61.90	4.71	-57.19	V	V	74.2
3555.00	-59.79	6.30	-53.49	V	V	70.5
4266.00	-59.99	7.16	-52.82	V	V	69.8
4977.00	-60.70	7.95	-52.76	V	V	69.8

Table 6-8. Radiated Spurious Data (Band 17 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 88 of 103

OPERATING FREQUENCY: 1717.50 MHz
 CHANNEL: 20025
 MEASURED OUTPUT POWER: 23.60 dBm = 0.229 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.60 dBc


Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3435.00	-46.29	8.19	-38.11	H	H2	61.7
5152.50	-54.76	10.29	-44.48	H	H2	68.1
6870.00	-58.63	11.42	-47.21	H	H2	70.8
8587.50	-60.00	13.03	-46.97	H	H2	70.6
10305.00	-67.16	13.25	-53.91	H	H2	77.5

Table 6-9. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 23.68 dBm = 0.233 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.68 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3465.00	-46.24	8.29	-37.95	H	H2	61.6
5197.50	-54.85	10.35	-44.51	H	H2	68.2
6930.00	-58.40	11.49	-46.92	H	H2	70.6
8662.50	-70.02	13.02	-57.00	H	H2	80.7

Table 6-10. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 89 of 103	

OPERATING FREQUENCY: 1747.50 MHz
 CHANNEL: 20325
 MEASURED OUTPUT POWER: 23.18 dBm = 0.208 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.18 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3495.00	-46.80	8.38	-38.42	H	H2	61.6
5242.50	-57.85	10.36	-47.49	H	H2	70.7
6990.00	-57.21	11.54	-45.67	H	H2	68.9
8737.50	-65.92	13.02	-52.90	H	H2	76.1

Table 6-11. Radiated Spurious Data (Band 4 – High Channel)

OPERATING FREQUENCY: 1857.50 MHz
 CHANNEL: 18675
 MEASURED OUTPUT POWER: 23.82 dBm = 0.241 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.82 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3715.00	-51.14	8.39	-42.76	V	H2	66.6
5572.50	-58.71	10.60	-48.11	V	H2	71.9
7430.00	-55.45	12.05	-43.40	V	H2	67.2
9287.50	-58.97	13.21	-45.75	V	H2	69.6

Table 6-12. Radiated Spurious Data (Band 2 – Low Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 90 of 103	

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 24.37 dBm = 0.274 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.37 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3760.00	-52.95	8.38	-44.57	V	H2	68.9
5640.00	-57.19	10.70	-46.49	V	H2	70.9
7520.00	-56.37	12.09	-44.28	V	H2	68.7
9400.00	-58.76	13.20	-45.56	V	H2	69.9

Table 6-13. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY: 1902.50 MHz
 CHANNEL: 19125
 MEASURED OUTPUT POWER: 23.08 dBm = 0.203 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.08 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3805.00	-51.21	8.38	-42.84	V	H2	65.9
5707.50	-56.65	10.75	-45.90	V	H2	69.0
7610.00	-56.42	12.17	-44.25	V	H2	67.3
9512.50	-58.83	13.19	-45.64	V	H2	68.7

Table 6-14. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 91 of 103	

OPERATING FREQUENCY: 2507.50 MHz
 CHANNEL: 20825
 MEASURED OUTPUT POWER: 14.99 dBm = 0.032 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 39.99 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5015.00	-42.79	10.15	-32.64	H	H	47.6

Table 6-15. Radiated Spurious Data (Band 7 – Low Channel)

OPERATING FREQUENCY: 2532.30 MHz
 CHANNEL: 21075
 MEASURED OUTPUT POWER: 16.00 dBm = 0.040 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 41.00 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5064.60	-42.94	10.19	-32.75	H	H	48.8



Table 6-16. Radiated Spurious Data (Band 7 – Mid Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 92 of 103	

OPERATING FREQUENCY: 2562.50 MHz
 CHANNEL: 21375
 MEASURED OUTPUT POWER: 17.23 dBm = 0.053 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 42.23 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5125.00	-42.84	10.25	-32.59	H	H	49.8

Table 6-17. Radiated Spurious Data (Band 7 – High Channel)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 93 of 103	

6.8 Frequency Stability / Temperature Variation

\$2.1055 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 94 of 103	

Band 17 Frequency Stability Measurements
§2.1055 §27.54



OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23090
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	709,999,999	-1	-0.0000001
100 %		- 30	709,999,986	-14	-0.0000019
100 %		- 20	709,999,995	-5	-0.0000007
100 %		- 10	709,999,984	-16	-0.0000022
100 %		0	709,999,986	-14	-0.0000020
100 %		+ 10	709,999,987	-13	-0.0000019
100 %		+ 20	709,999,982	-18	-0.0000025
100 %		+ 30	709,999,991	-9	-0.0000012
100 %		+ 40	709,999,990	-10	-0.0000015
100 %		+ 50	709,999,989	-11	-0.0000015
115 %	4.37	+ 20	709,999,992	-8	-0.0000011
BATT. ENDPOINT	3.45	+ 20	709,999,997	-3	-0.0000005

Table 6-18. Frequency Stability Data (Band 17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 95 of 103	

Band 17 Frequency Stability Measurements
§2.1055 §27.54

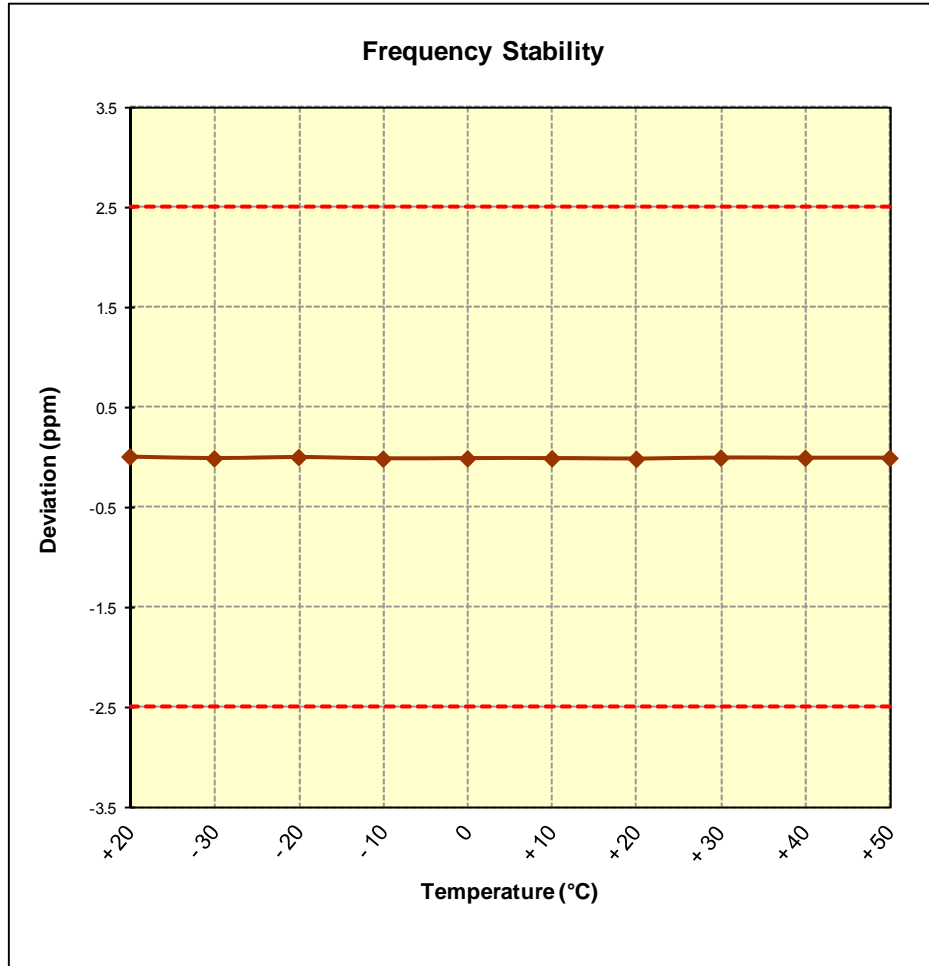




Figure 6-7. Frequency Stability Graph (Band 17)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 96 of 103

Band 4 Frequency Stability Measurements

§2.1055 §§27.54



OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,999	-1	-0.0000001
100 %		- 30	1,732,499,996	-4	-0.0000002
100 %		- 20	1,732,499,980	-20	-0.0000011
100 %		- 10	1,732,499,982	-18	-0.0000010
100 %		0	1,732,499,990	-10	-0.0000006
100 %		+ 10	1,732,499,980	-20	-0.0000011
100 %		+ 20	1,732,499,981	-19	-0.0000011
100 %		+ 30	1,732,499,986	-14	-0.0000008
100 %		+ 40	1,732,499,996	-4	-0.0000002
100 %		+ 50	1,732,499,993	-7	-0.0000004
115 %	4.37	+ 20	1,732,499,989	-11	-0.0000007
BATT. ENDPOINT	3.45	+ 20	1,732,499,986	-14	-0.0000008

Table 6-19. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 97 of 103	

Band 4 Frequency Stability Measurements
§2.1055 §§27.54

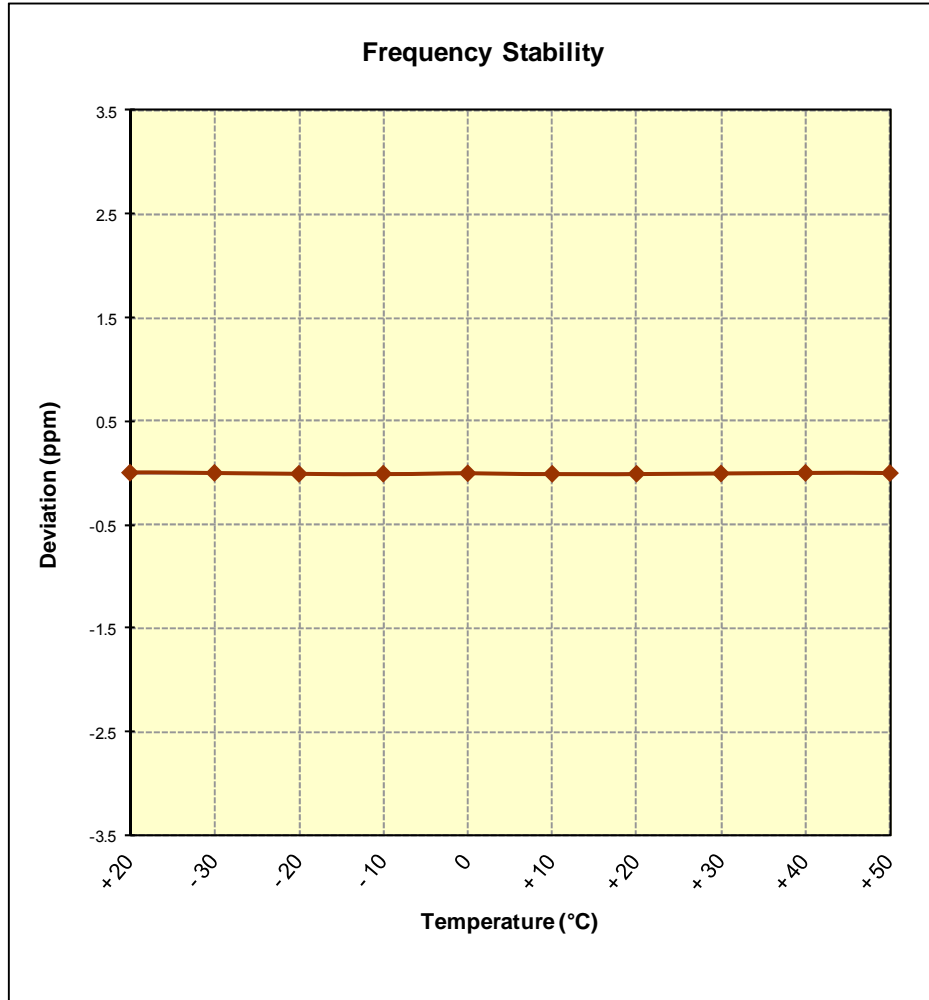




Figure 6-8. Frequency Stability Graph (Band 4)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset		Page 98 of 103

Band 2 Frequency Stability Measurements

§2.1055 §24.235


OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,998	-2	-0.0000001
100 %		- 30	1,879,999,994	-6	-0.0000003
100 %		- 20	1,879,999,982	-18	-0.0000009
100 %		- 10	1,879,999,996	-4	-0.0000002
100 %		0	1,879,999,994	-6	-0.0000003
100 %		+ 10	1,879,999,987	-13	-0.0000007
100 %		+ 20	1,879,999,988	-12	-0.0000006
100 %		+ 30	1,879,999,999	-1	-0.0000001
100 %		+ 40	1,879,999,992	-8	-0.0000004
100 %		+ 50	1,879,999,981	-19	-0.0000010
115 %		4.37	+ 20	1,879,999,992	-8
BATT. ENDPOINT	3.45	+ 20	1,879,999,985	-15	-0.0000008

Table 6-20. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 99 of 103	

Band 2 Frequency Stability Measurements
§2.1055 §24.235

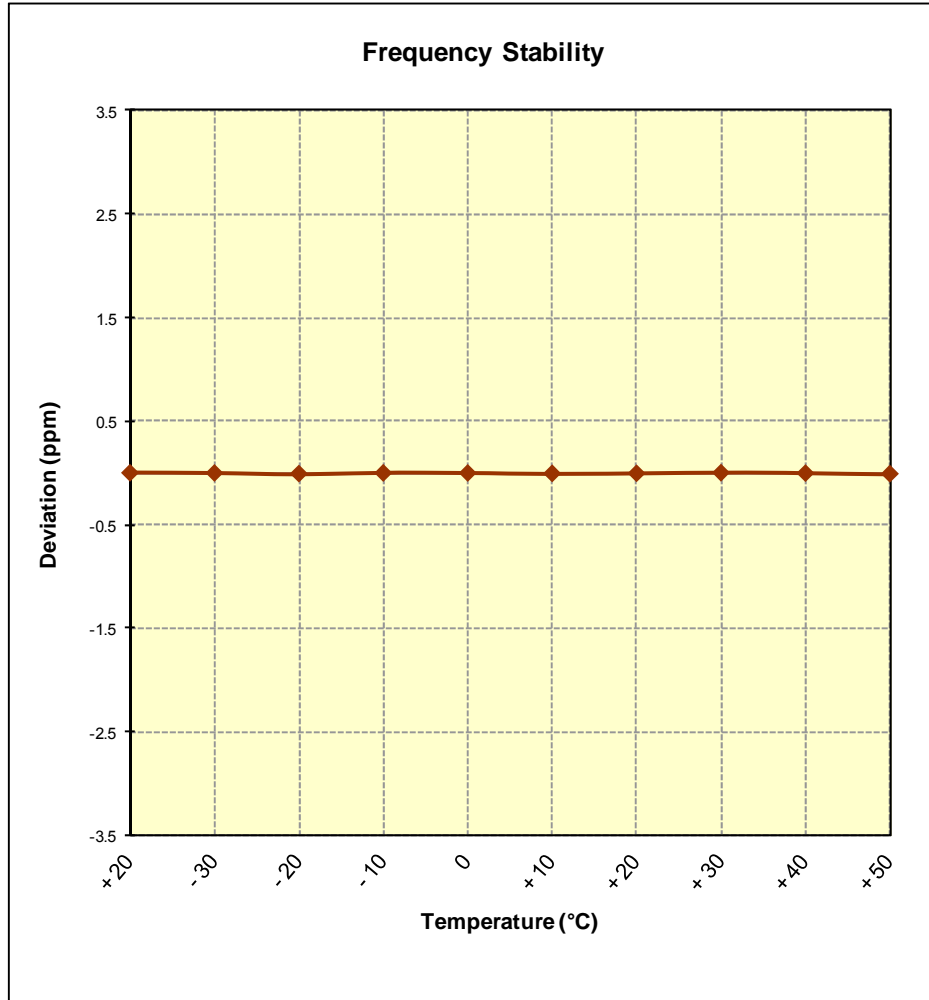




Figure 6-9. Frequency Stability Graph (Band 2)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 100 of 103	

Band 7 Frequency Stability Measurements

§2.1055 §27.5(i) §27.54


OPERATING FREQUENCY: 2,535,000,000 Hz
 CHANNEL: 2655
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	2,534,999,981	-19	-0.0000007
100 %		- 30	2,534,999,985	-15	-0.0000006
100 %		- 20	2,534,999,988	-12	-0.0000005
100 %		- 10	2,534,999,981	-19	-0.0000007
100 %		0	2,534,999,986	-14	-0.0000005
100 %		+ 10	2,534,999,981	-19	-0.0000008
100 %		+ 20	2,534,999,997	-3	-0.0000001
100 %		+ 30	2,534,999,995	-5	-0.0000002
100 %		+ 40	2,534,999,988	-12	-0.0000005
100 %		+ 50	2,534,999,986	-14	-0.0000006
115 %	4.37	+ 20	2,534,999,995	-5	-0.0000002
BATT. ENDPOINT	3.45	+ 20	2,534,999,986	-14	-0.0000005

Table 6-21. Frequency Stability Data (Band 7)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 101 of 103	

Band 7 Frequency Stability Measurements
RSS-199(4.3)

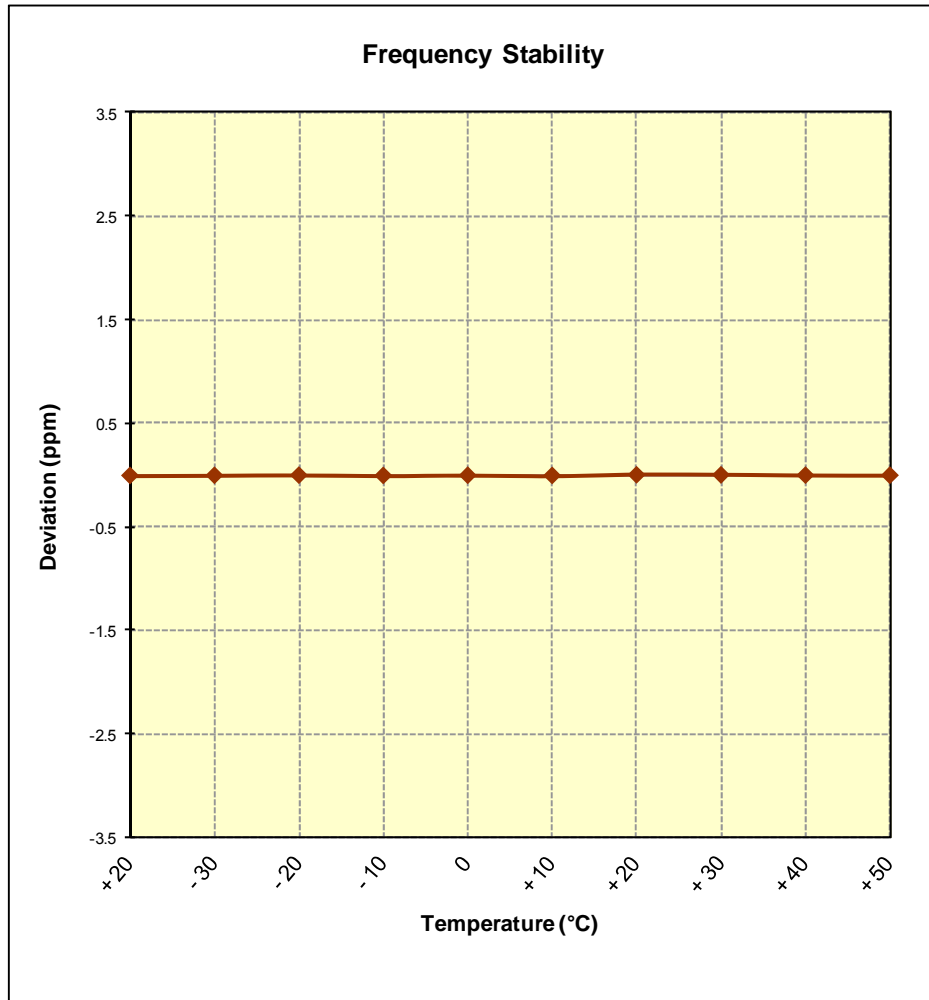






Figure 6-10. Frequency Stability Graph (Band 7)

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 102 of 103	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFMS395** complies with all the requirements of Parts 2, 24, 27 of the FCC rules for LTE operation only.

FCC ID: ZNFMS395		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407141387.ZNF	Test Dates: 7/14-7/22/2014	EUT Type: Portable Handset	Page 103 of 103	