

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 42.246$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.79, 8.79, 8.79); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left Touch/1xRTT_RC3 SO55/Ch 384/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.510 mW/g

Left Touch/1xRTT_RC3 SO55/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.266 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.5990

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.348 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.527 mW/g

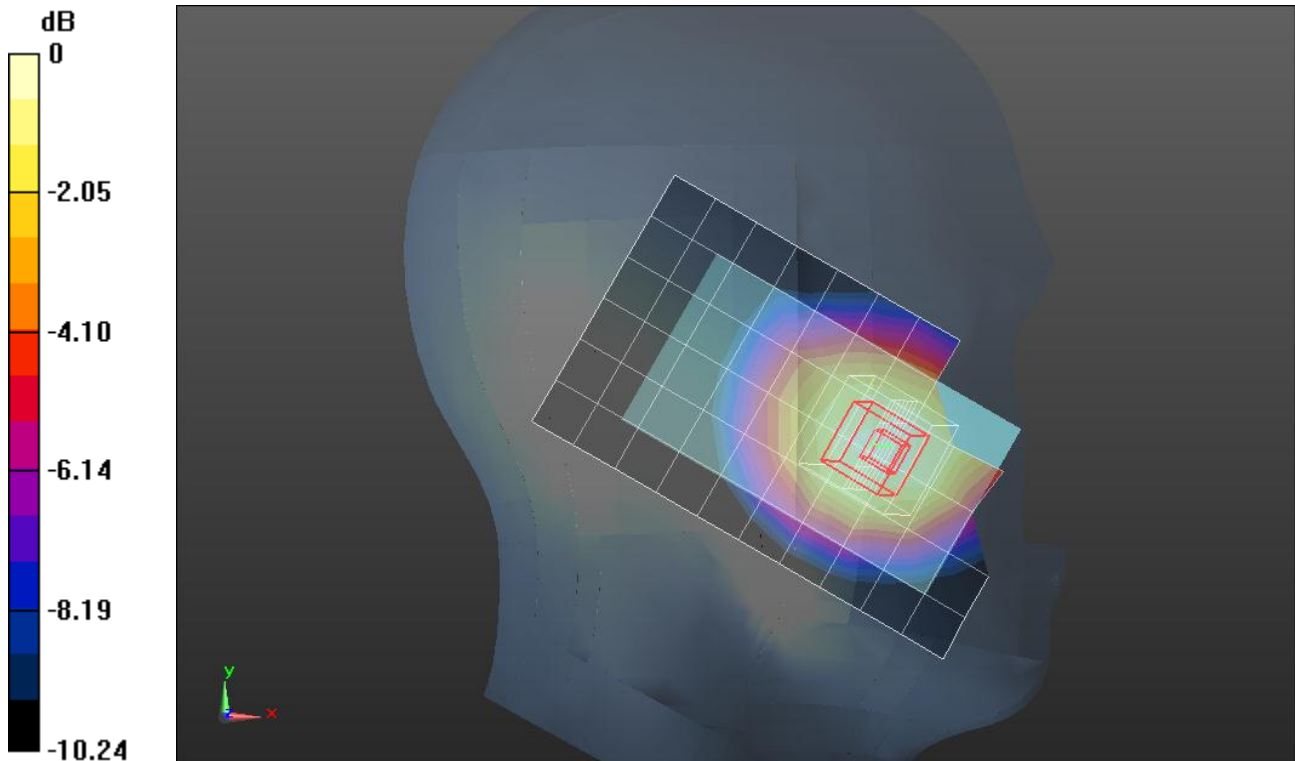

0 dB = 0.530mW/g = -5.51 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 42.246$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.79, 8.79, 8.79); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left Tilt/1xRTT_RC3 SO55/Ch 384/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.307 mW/g

Left Tilt/1xRTT_RC3 SO55/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.736 V/m; Power Drift = 0.0046 dB

Peak SAR (extrapolated) = 0.3480

SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.215 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.312 mW/g

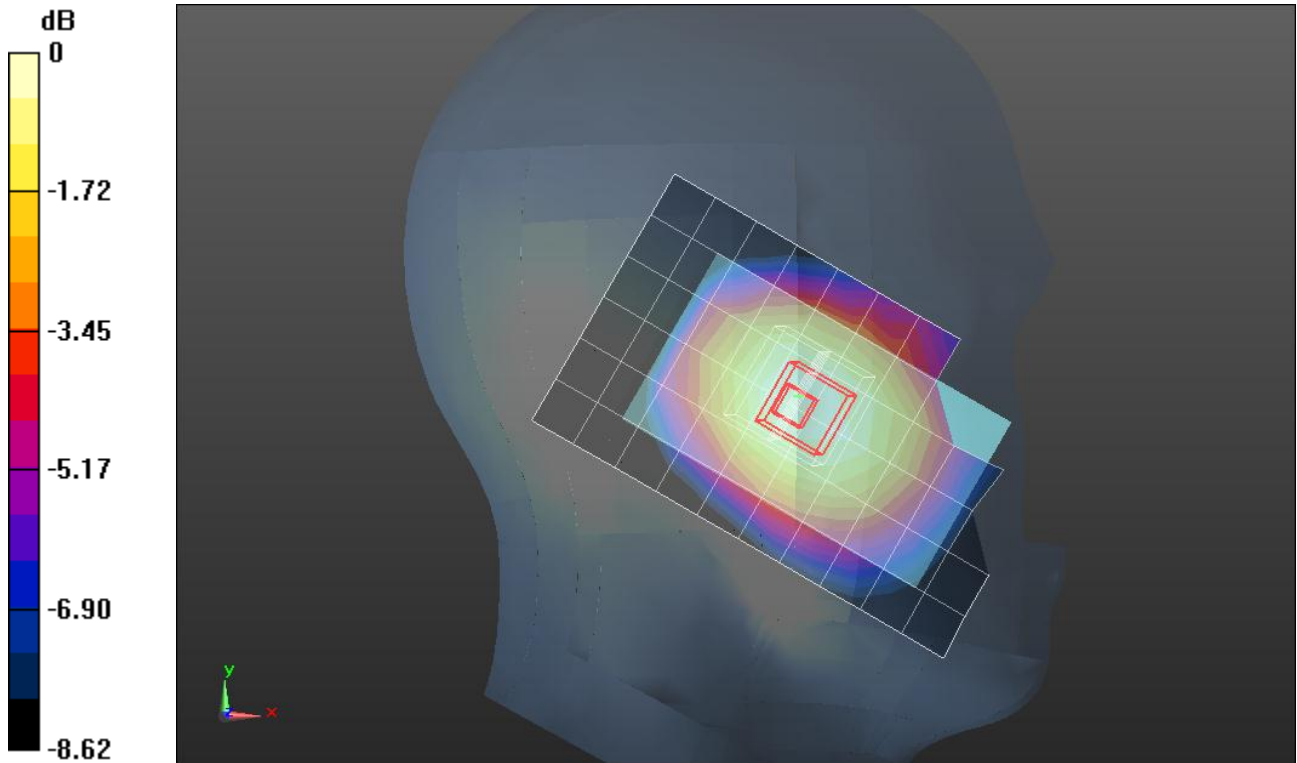

0 dB = 0.310mW/g = -10.17 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 42.246$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.79, 8.79, 8.79); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right Touch/1xRTT_RC3 SO55/Ch 384/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.591 mW/g

Right Touch/1xRTT_RC3 SO55/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.110 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.7250

SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.374 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.611 mW/g

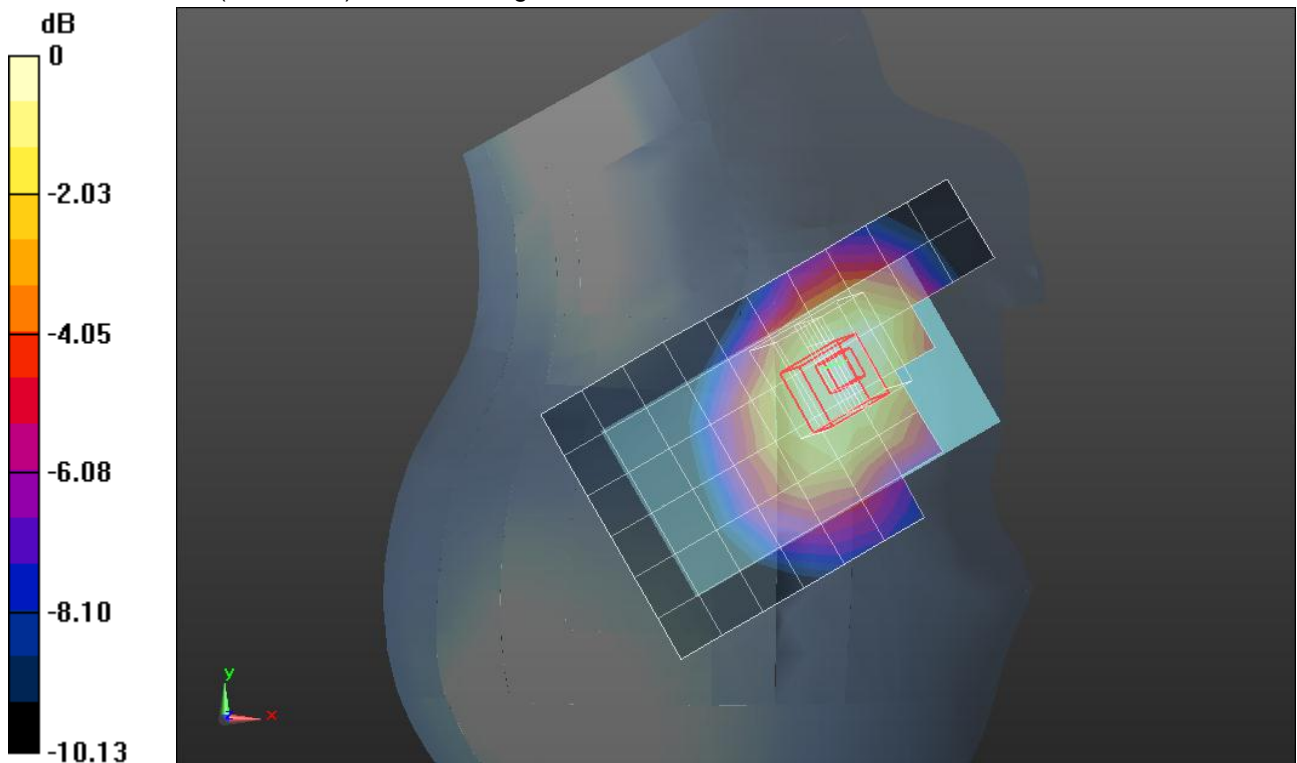

0 dB = 0.610mW/g = -4.29 dB mW/g


CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Right Touch/1xRTT_RC3 SO55/Ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.602 mW/g

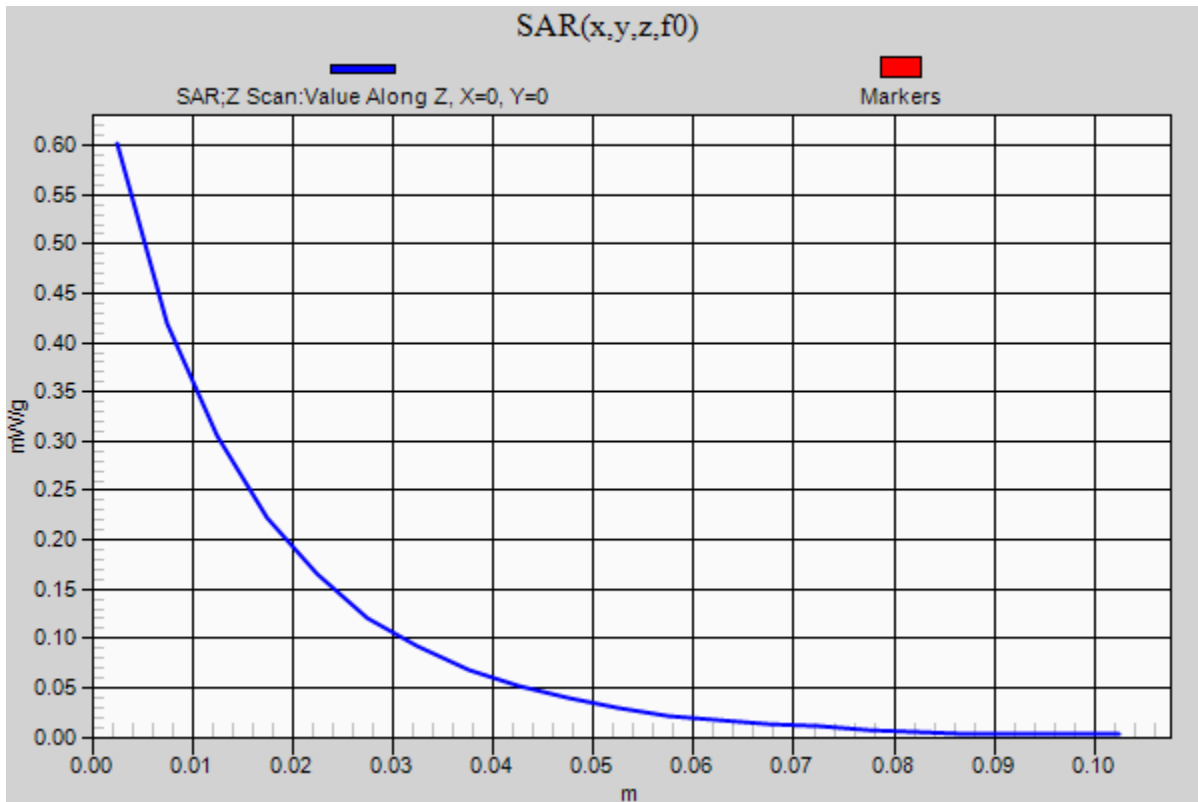

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 42.246$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.79, 8.79, 8.79); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right Tilt/1xRTT_RC3 SO55/Ch 384/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.483 mW/g

Right Tilt/1xRTT_RC3 SO55/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.488 V/m; Power Drift = -0.0013 dB

Peak SAR (extrapolated) = 0.4820

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.234 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.412 mW/g

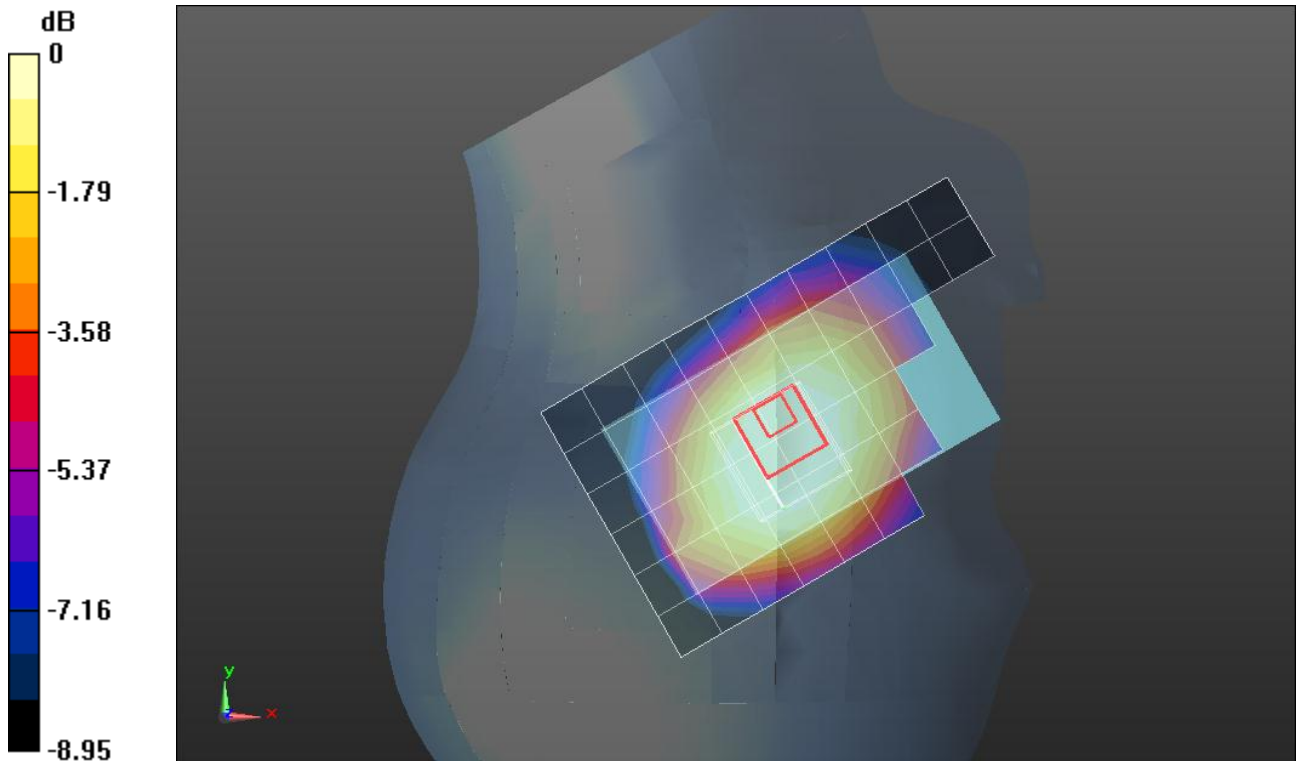

0 dB = 0.410mW/g = -7.74 dB mW/g

CDMA2000-BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 54.705$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32/Ch 1013/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 1.168 mW/g


Rear/1xRTT_RC3 SO32/Ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.389 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.4980

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.657 mW/g

Maximum value of SAR (measured) = 1.254 mW/g

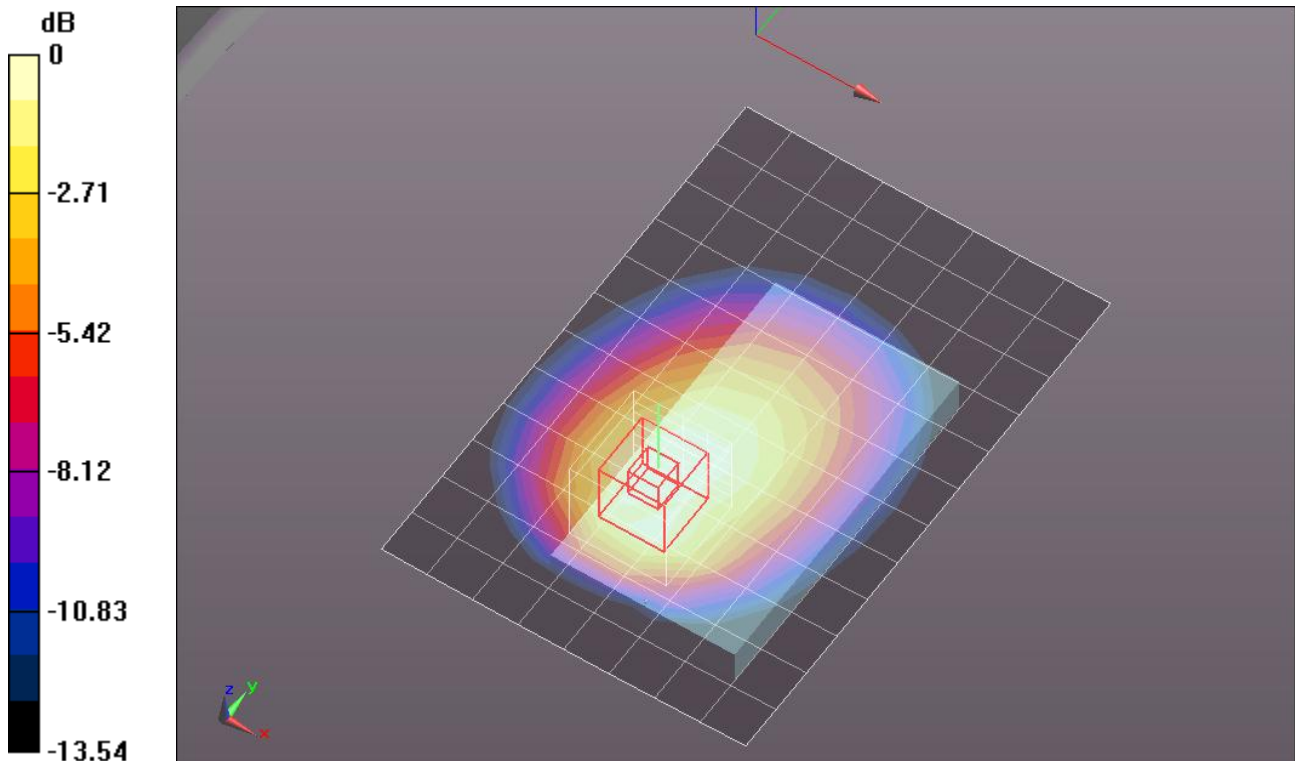


0 dB = 1.250mW/g = 1.94 dB mW/g

CDMA2000-BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3 SO32/Ch 1013/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.187 mW/g

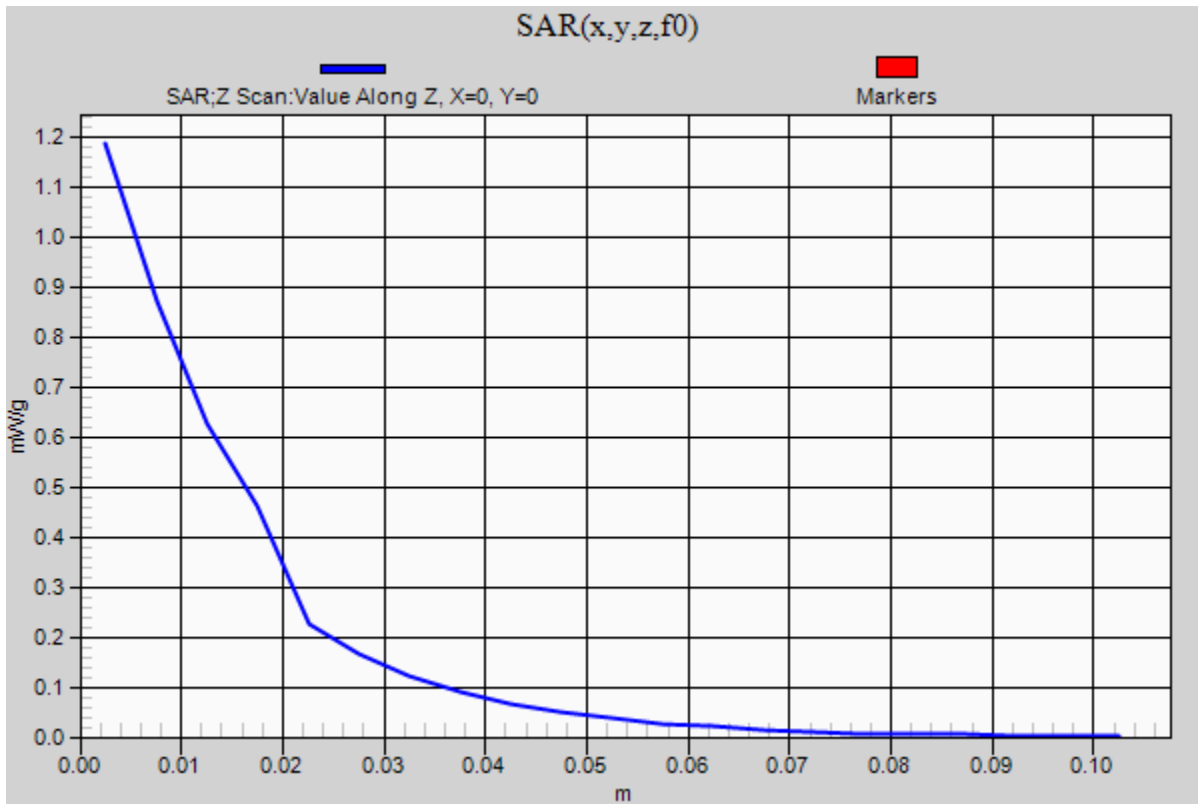

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32/Ch 384/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.962 mW/g

Rear/1xRTT_RC3 SO32/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.321 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.2240

SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.531 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.004 mW/g

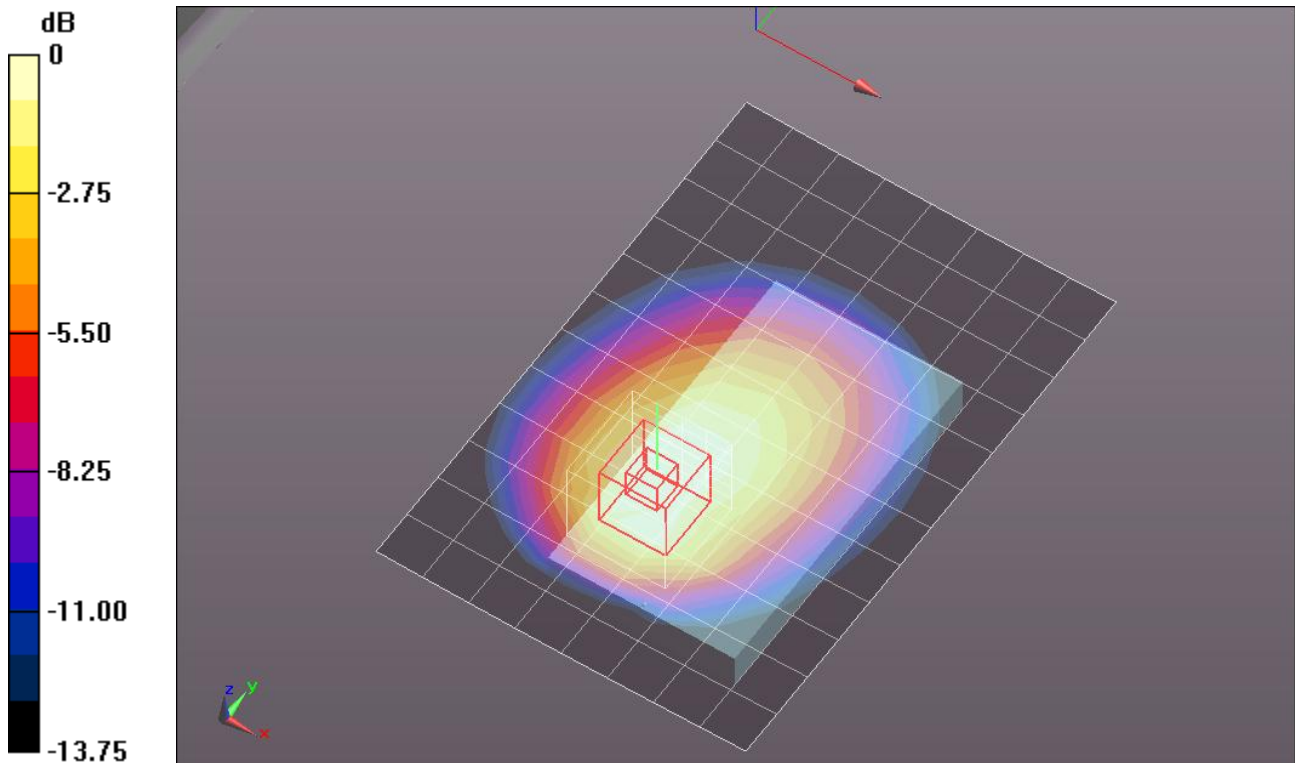

0 dB = 1.000mW/g = 0 dB mW/g

CDMA2000-BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.401$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32/Ch 777/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.830 mW/g

Rear/1xRTT_RC3 SO32/Ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.798 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.0950

SAR(1 g) = 0.692 mW/g; SAR(10 g) = 0.472 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.889 mW/g

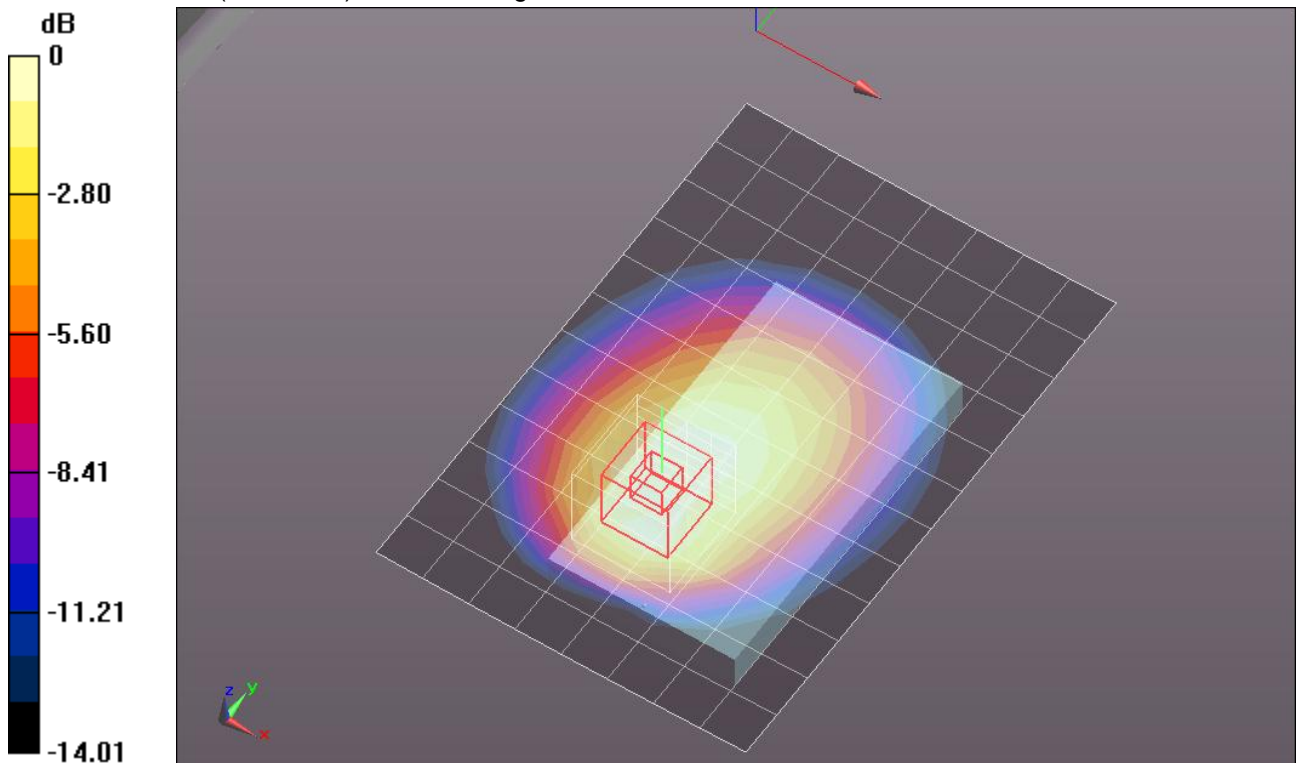

0 dB = 0.890mW/g = -1.01 dB mW/g

CDMA2000-BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 54.705$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32/Ch 1013 w/Headset/Area Scan (9x13x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.084 mW/g

Rear/1xRTT_RC3 SO32/Ch 1013 w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.460 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.5170

SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.604 mW/g

Maximum value of SAR (measured) = 1.199 mW/g

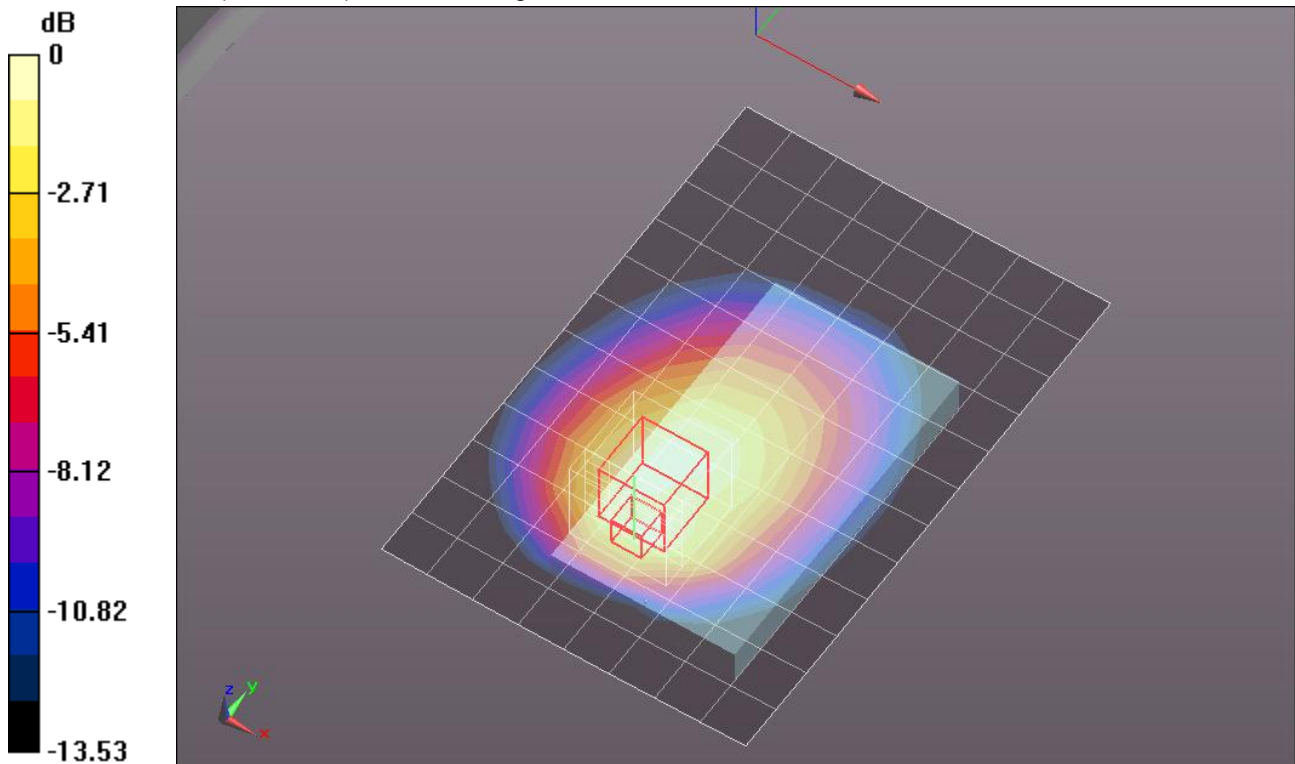

0 dB = 1.200mW/g = 1.58 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Front/1xRTT_RC3 SO32/Ch 384/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.617 mW/g

Front/1xRTT_RC3 SO32/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.313 V/m; Power Drift = 0.0031 dB

Peak SAR (extrapolated) = 0.7570

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.395 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.645 mW/g

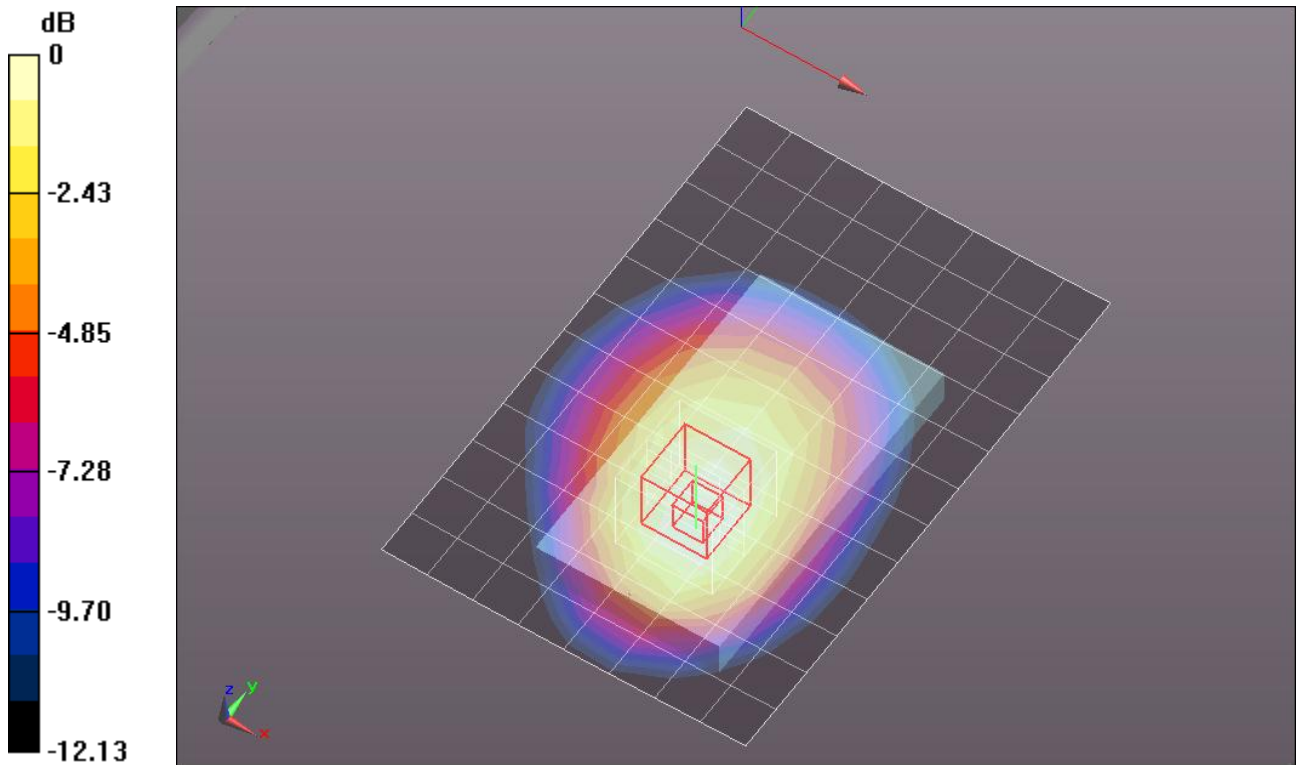

0 dB = 0.640mW/g = -3.88 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 2/1xRTT_RC3 SO32/Ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.531 mW/g

Edge 2/1xRTT_RC3 SO32/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.415 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.6540

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.318 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.551 mW/g

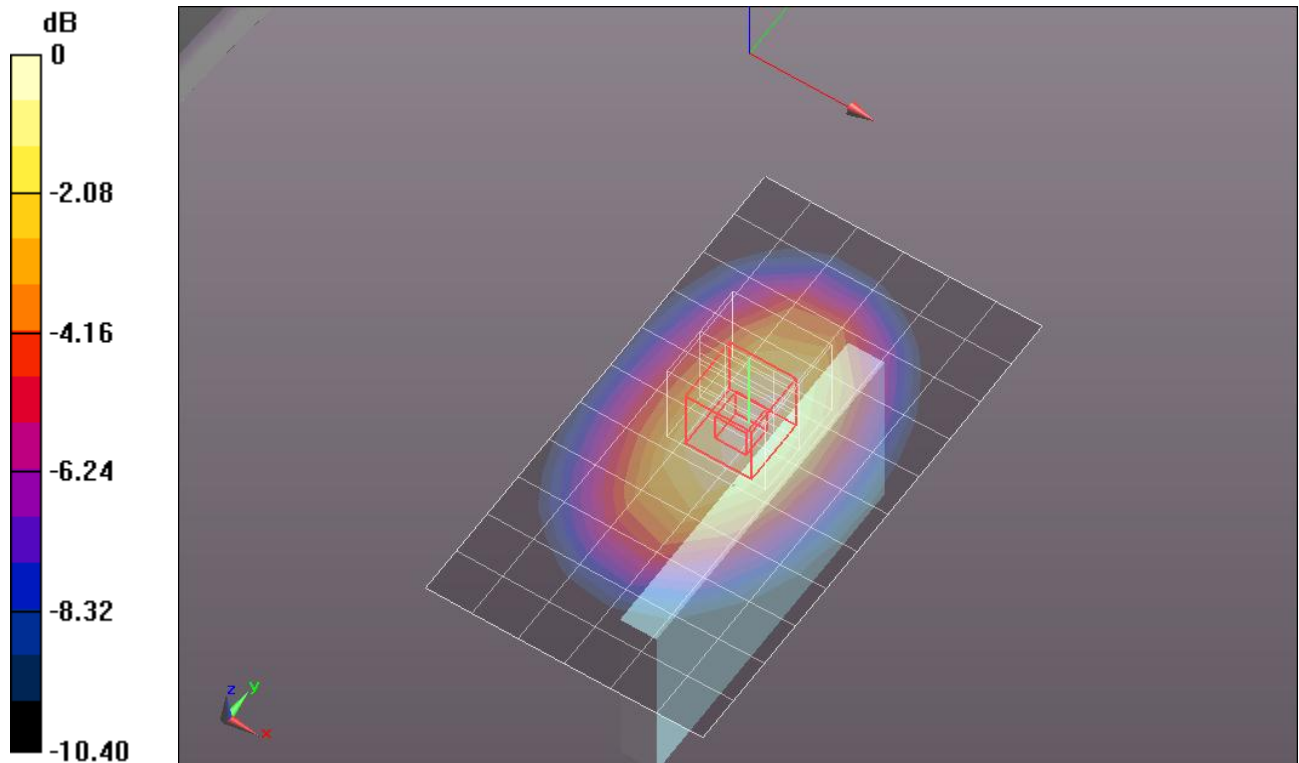

0 dB = 0.550mW/g = -5.19 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 3/1xRTT_RC3 SO32/Ch384/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.205 mW/g

Edge 3/1xRTT_RC3 SO32/Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.671 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.3270

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.099 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.235 mW/g

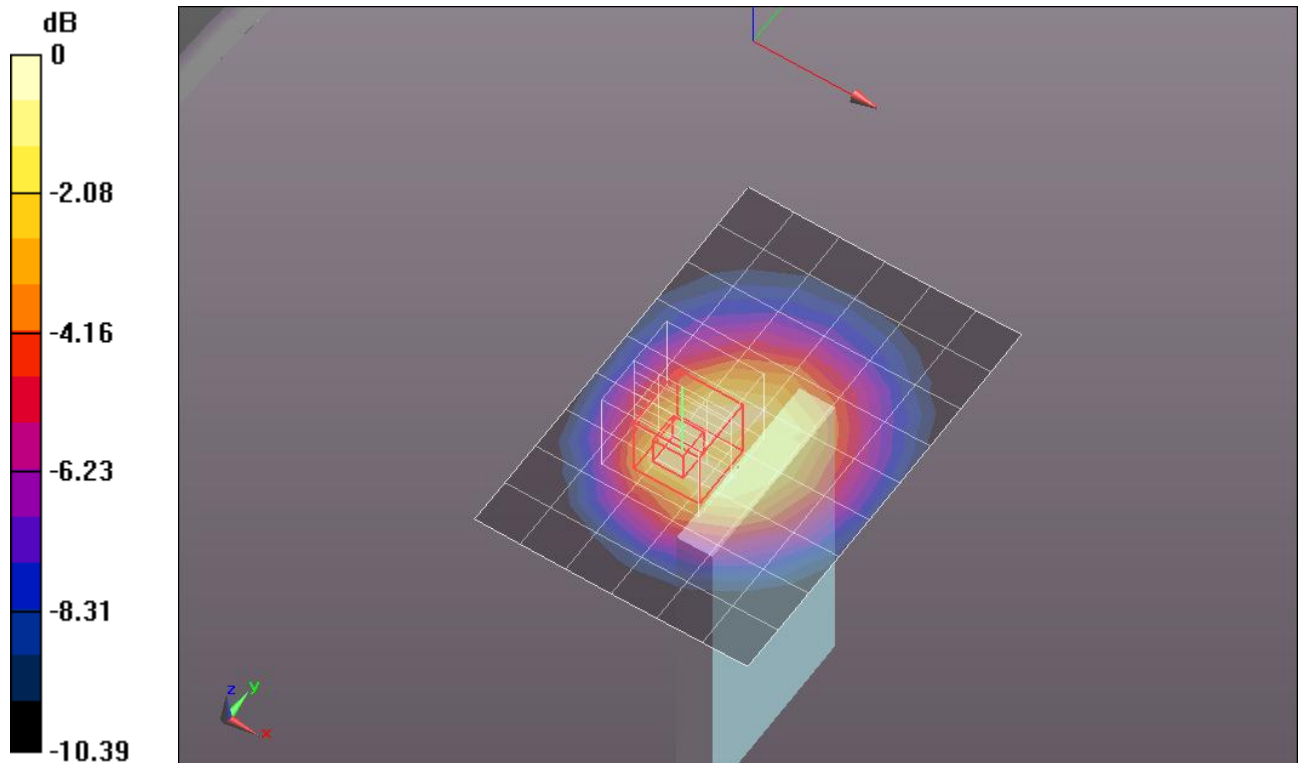

0 dB = 0.240mW/g = -12.40 dB mW/g

CDMA2000-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(8.74, 8.74, 8.74); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 4/1xRTT_RC3 SO32/Ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.263 mW/g

Edge 4/1xRTT_RC3 SO32/Ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.510 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.3380

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.170 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.290 mW/g

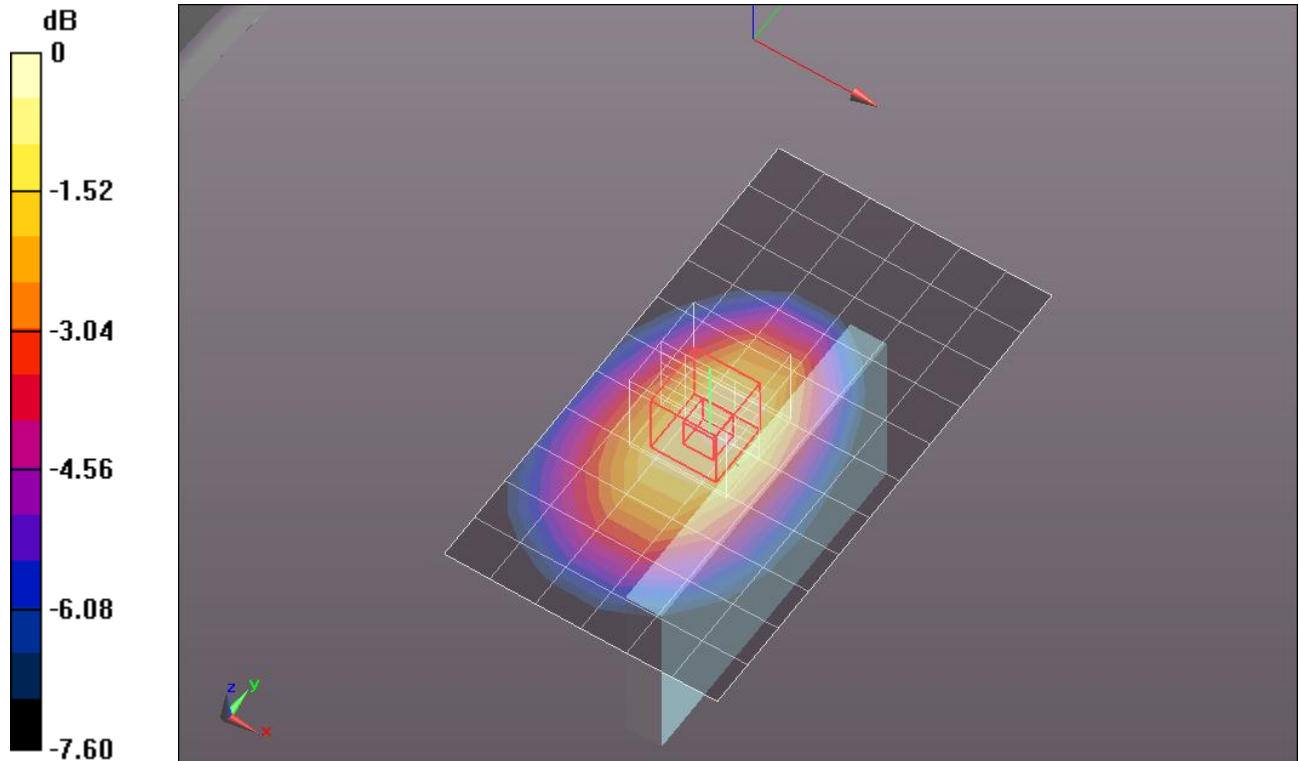

0 dB = 0.290mW/g = -10.75 dB mW/g