

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear Vol/1xRTT M-Ch/Volume Scan:

Date/Time: 8/25/2011 6:34:14 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001 Rear CDMA AWS 1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear Vol/1xEVDO_M-Ch 2-RETEST/Volume Scan:

Date/Time: 8/25/2011 7:25:43 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [001 Rear CDMA AWS 1xEVDO.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.446$ mho/m; $\epsilon_r = 53.835$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

Multi Band Result:

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.807 mW/g

Maximum value of SAR (interpolated) = 1.949 mW/g

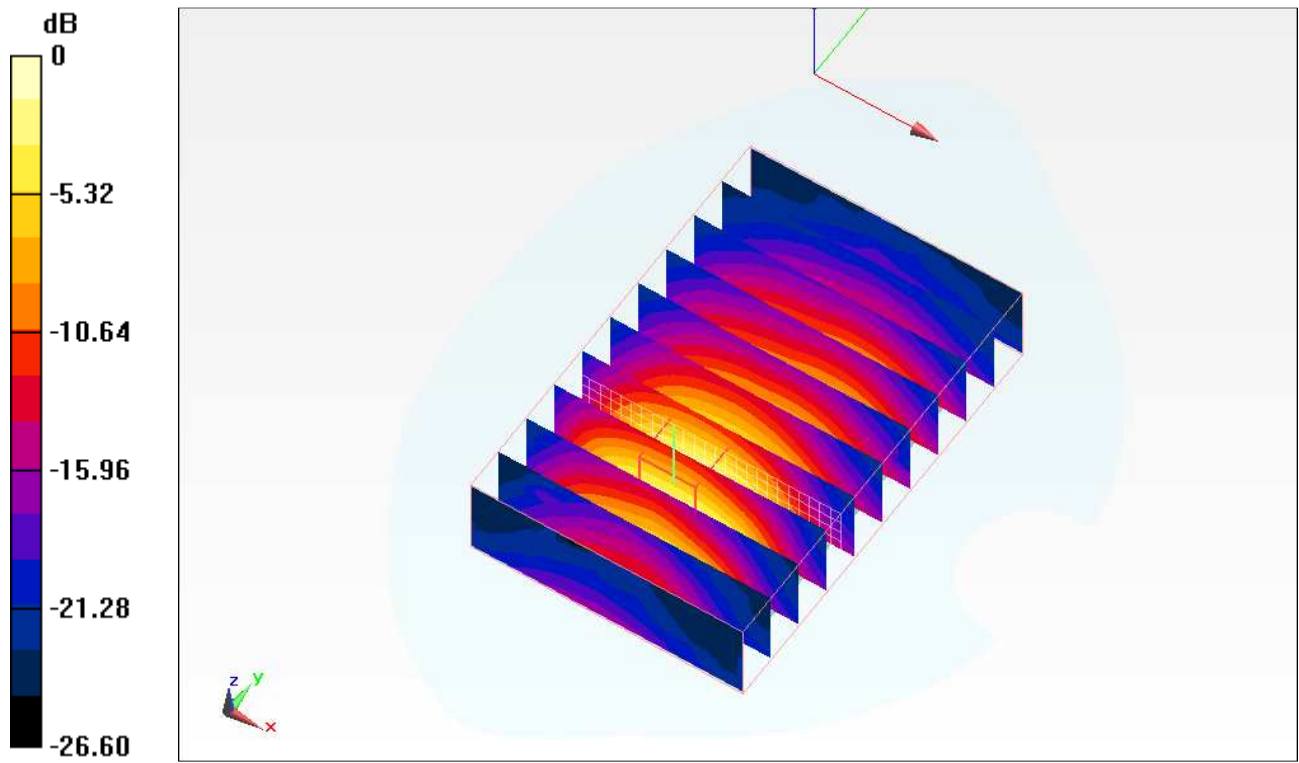

0 dB = 1.950mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear Vol/1xRTT M-Ch/Volume Scan:

Date/Time: 8/25/2011 6:34:14 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear Vol/1xEVDO_M-Ch 2-RETEST/Volume Scan:

Date/Time: 8/25/2011 10:20:41 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xEVDO.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/802.11b M-ch/Volume Scan:

Date/Time: 9/15/2011 9:46:33 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [Rear_WiFi_802.11b.da52:0](#)

Communication System: IEEE 802.11b WiFi 2.4GHz ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2)

Multi Band Result:

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.818 mW/g

Maximum value of SAR (interpolated) = 1.969 mW/g

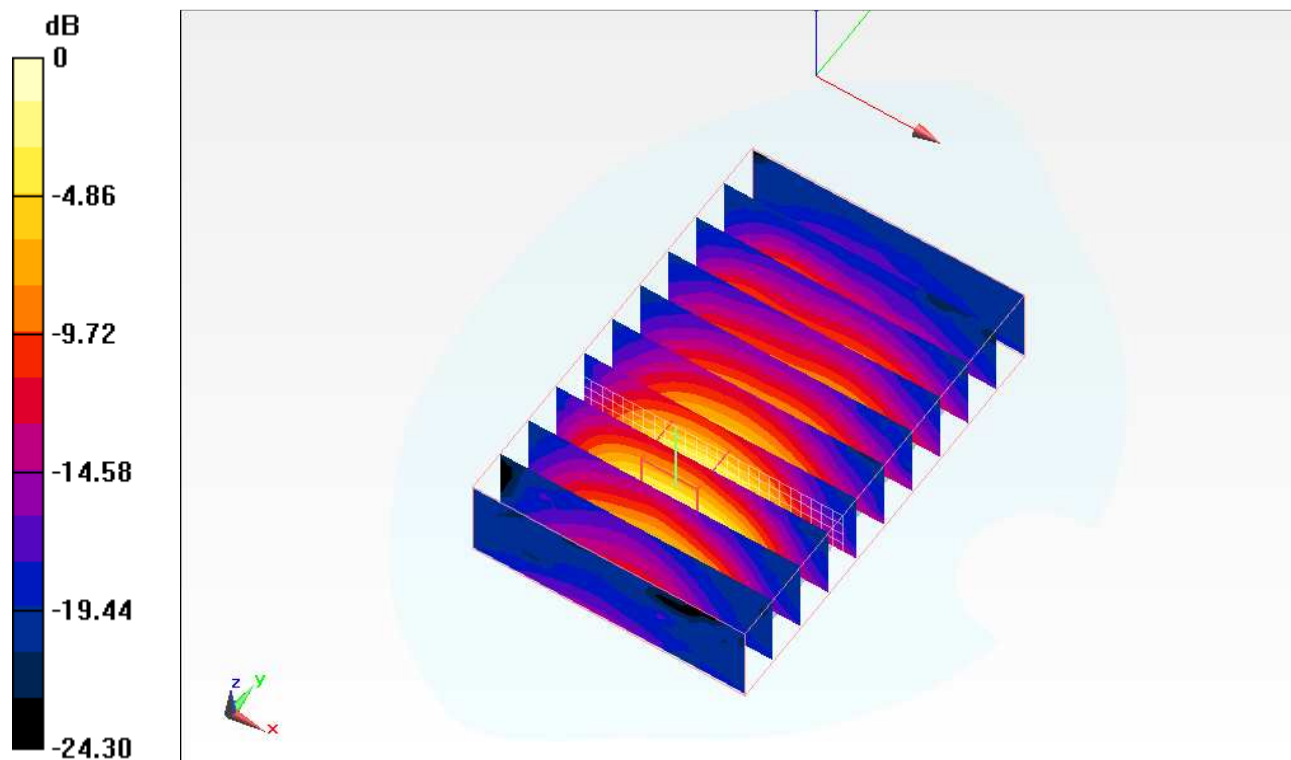

0 dB = 1.970mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear Vol/1xRTT (RC3, SO32)_M-ch/Volume Scan:

Date/Time: 8/25/2011 6:34:14 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/1xEvDo M-ch/Volume Scan:

Date/Time: 8/24/2011 7:09:13 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [002_Rear_CDMA_PCS_Band_1xEvDo.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

Multi Band Result:

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.739 mW/g

Maximum value of SAR (interpolated) = 1.784 mW/g

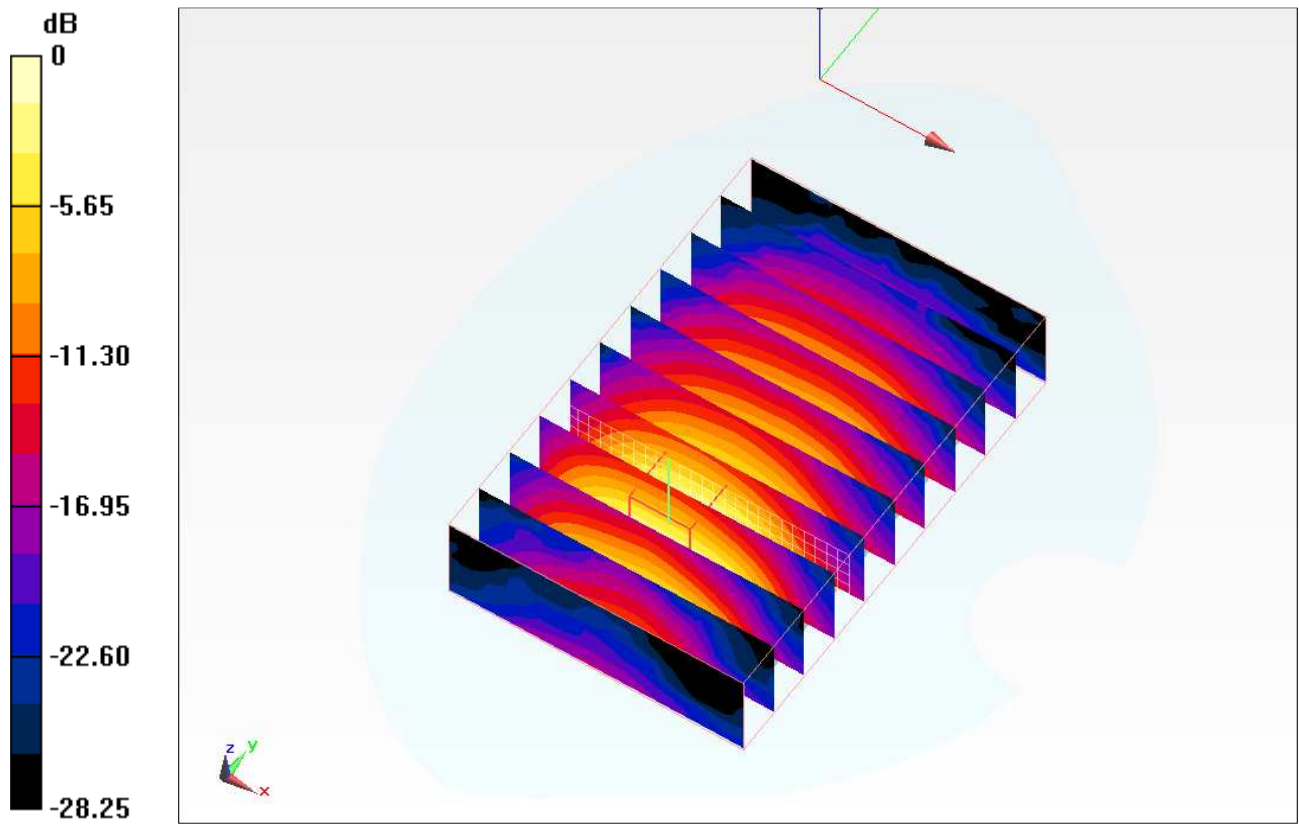

0 dB = 1.780mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear Vol/1xRTT M-Ch/Volume Scan:

Date/Time: 8/25/2011 6:34:14 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/1xEvDo M-ch/Volume Scan:

Date/Time: 8/24/2011 7:09:13 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [002_Rear_CDMA_PCS_Band_1xEvDo.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/802.11b M-ch/Volume Scan:

Date/Time: 9/15/2011 9:46:33 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [Rear_WiFi_802.11b.da52:0](#)

Communication System: IEEE 802.11b WiFi 2.4GHz ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2)

Multi Band Result:

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.758 mW/g

Maximum value of SAR (interpolated) = 1.825 mW/g

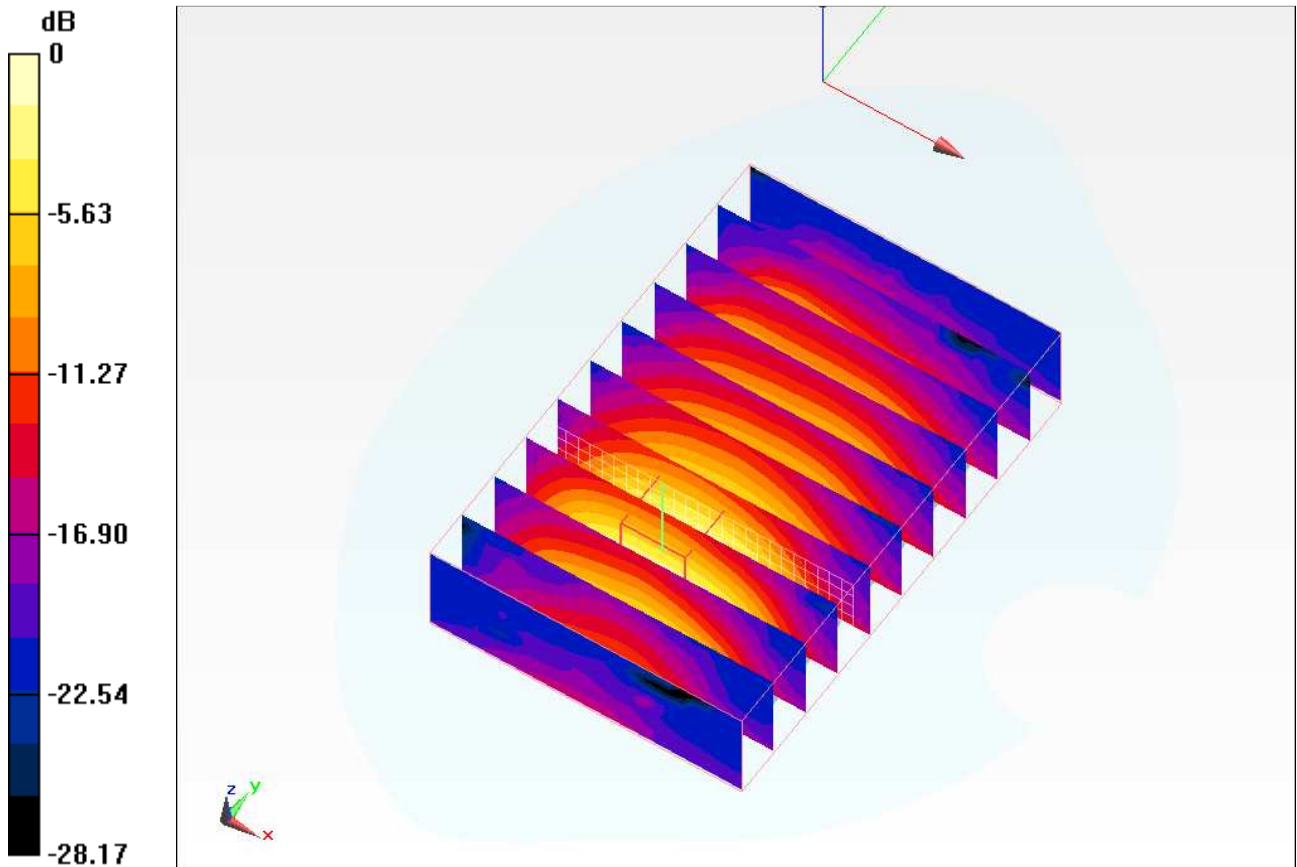

0 dB = 1.830mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear/1xRTT (RC3, SO32)_M-ch/Volume Scan:

Date/Time: 8/24/2011 3:32:16 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_PCS_Band_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT,RC3); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear Vol/1xEVDO_M-Ch 2-RETEST/Volume Scan:

Date/Time: 8/25/2011 7:25:43 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xEVDO.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

Multi Band Result:

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.794 mW/g

Maximum value of SAR (interpolated) = 1.860 mW/g

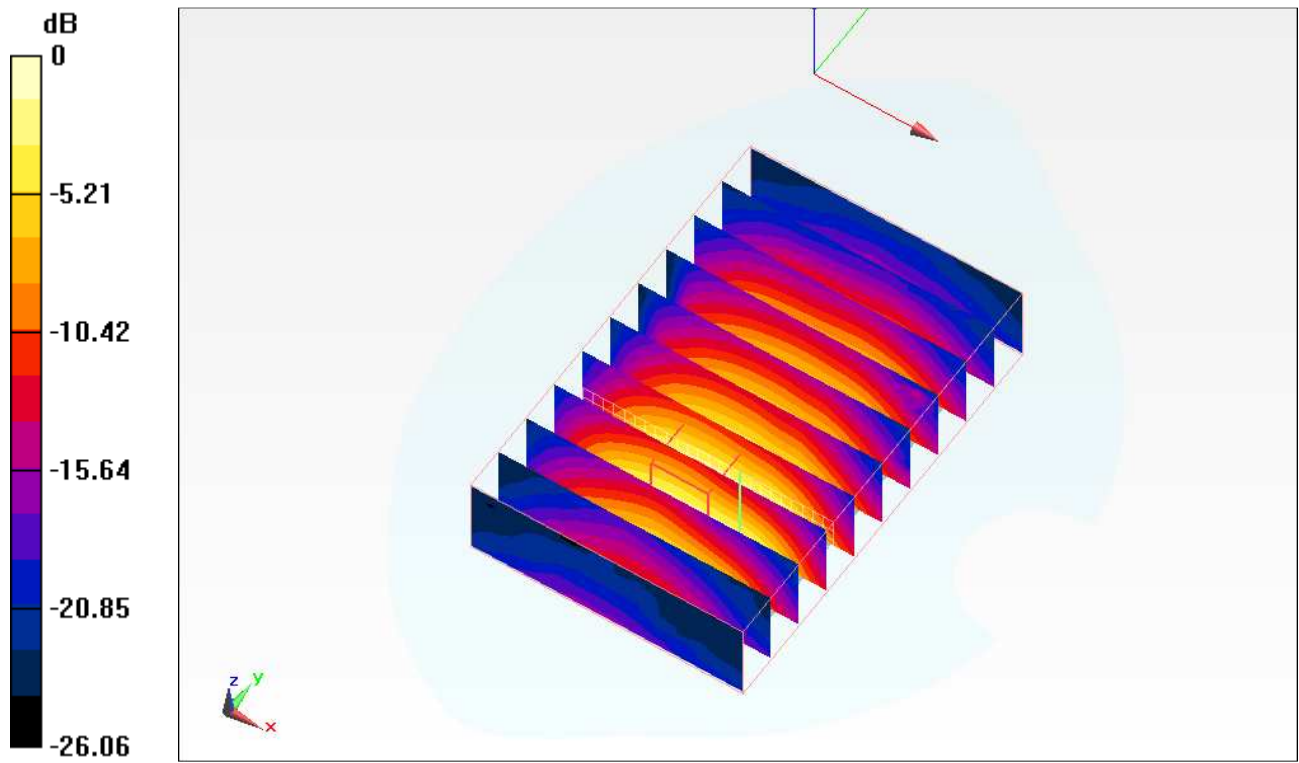

0 dB = 1.860mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear/1xRTT (RC3, SO32)_M-ch/Volume Scan:

Date/Time: 8/24/2011 3:32:16 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_PCS_Band_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT,RC3); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear Vol/1xEVDO_M-Ch 2-RETEST/Volume Scan:

Date/Time: 8/25/2011 7:25:43 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_AWS_1xEVDO.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.411$ mho/m; $\epsilon_r = 53.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(7.28, 7.28, 7.28); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/802.11b M-ch/Volume Scan:

Date/Time: 9/15/2011 9:46:33 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [Rear_WiFi_802.11b.da52:0](#)

Communication System: IEEE 802.11b WiFi 2.4GHz ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2)

Multi Band Result:

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.812 mW/g

Maximum value of SAR (interpolated) = 1.893 mW/g

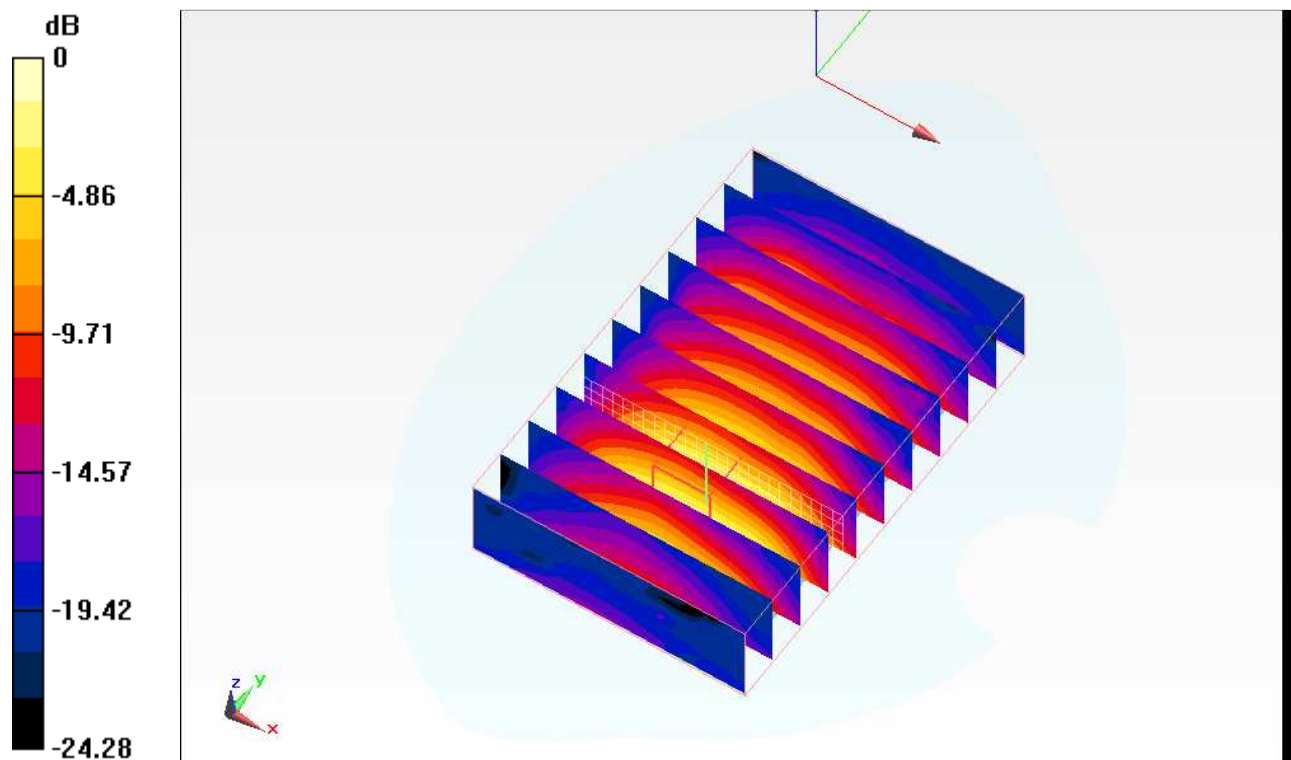

0 dB = 1.890mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear/1xEvDo M-ch/Volume Scan:

Date/Time: 8/24/2011 7:09:13 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [002_Rear_CDMA_PCS_Band_1xEvDo.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/1xRTT (RC3, SO32)_M-ch/Volume Scan:

Date/Time: 8/24/2011 3:32:16 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_PCS_Band_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT,RC3); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

Multi Band Result:

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.735 mW/g

Maximum value of SAR (interpolated) = 1.820 mW/g

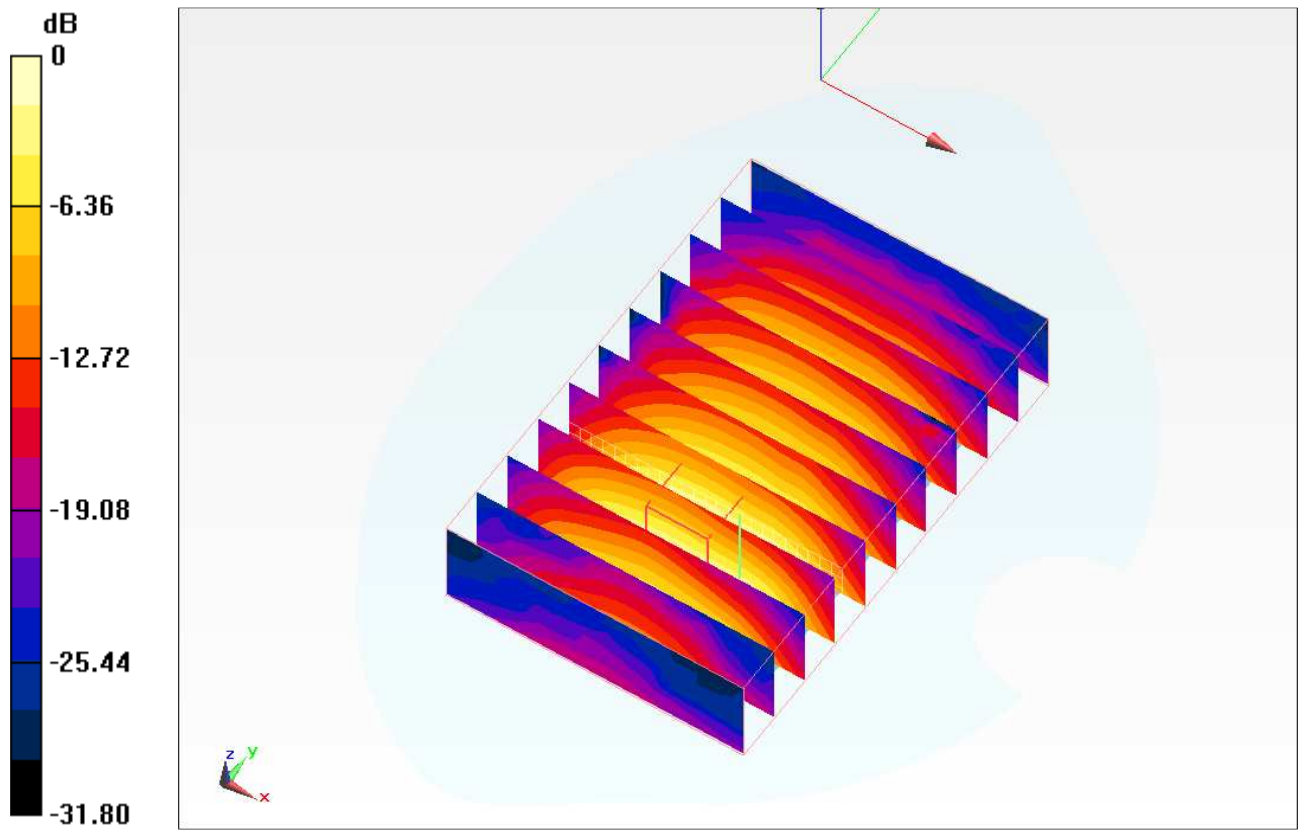

0 dB = 1.820mW/g

Multi-Band Average SAR

Multi-Band Configurations:

DASY Configuration for Rear/1xRTT (RC3, SO32)_M-ch/Volume Scan:

Date/Time: 8/24/2011 3:32:16 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [001_Rear_CDMA_PCS_Band_1xRTT.da52:0](#)

Communication System: CDMA2000 (1xRTT,RC3); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/1xEvDo M-ch/Volume Scan:

Date/Time: 8/24/2011 7:09:13 AM

Test Laboratory: UL CCS SAR Lab A

File Name: [002_Rear_CDMA_PCS_Band_1xEvDo.da52:0](#)

Communication System: CDMA2000 (1xEV-DO); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.479$ mho/m; $\epsilon_r = 53.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
 - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
 - Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
 - Measurement SW: DASY52, Version 52.6 (2)
-

DASY Configuration for Rear/802.11b M-ch/Volume Scan:

Date/Time: 9/15/2011 9:46:33 PM

Test Laboratory: UL CCS SAR Lab A

File Name: [Rear_WiFi_802.11b.da52:0](#)

Communication System: IEEE 802.11b WiFi 2.4GHz ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 1/24/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP v5.0 (A); Type: QD000P40CD; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (2)

Multi Band Result:

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.752 mW/g

Maximum value of SAR (interpolated) = 1.843 mW/g

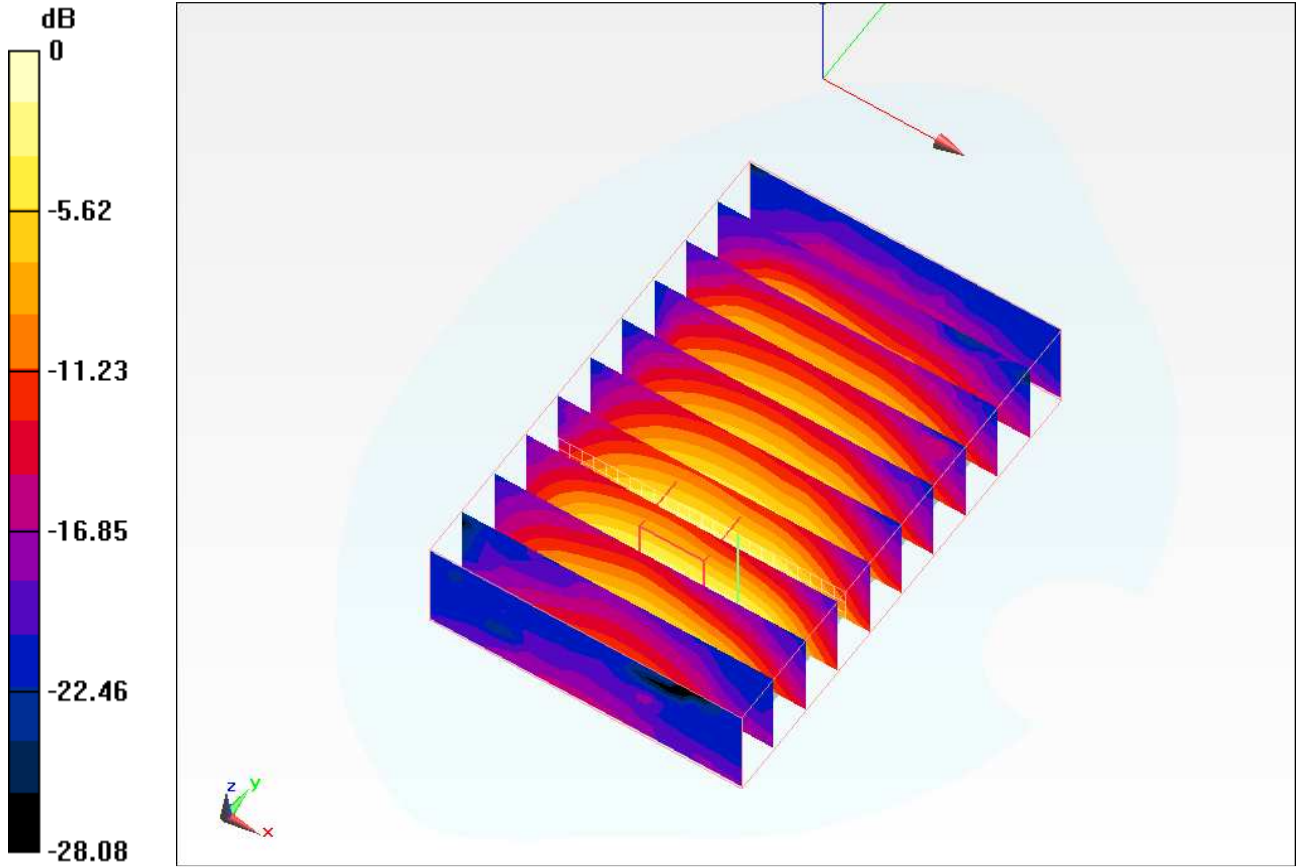

0 dB = 1.840mW/g