

TEST REPORT





DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2009-0289(1)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / OA2007
FCC ID : ZNFOA2007
5. FCC Regulation(s) : FCC Part 15.225
Test Method Used : ANSI C63.10-2013
6. Date of Test : 2020.08.07 ~ 2020.09.01, 2020.09.25
7. Location of Test : Permanent Testing Lab On Site Testing
8. Testing Environment : Refer to appended test report.
9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Reviewed by
	Name: JaeHyeok Bang 	Name: JaeJin Lee  (signature)

2020. 09. 25.

DT&C Co., Ltd.

Unconnected with KS Q ISO / IEC 17025 and KOLAS accreditation

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2009-0289	Sep. 17, 2020	Initial issue	JaeHyeok Bang	JaeJin Lee
DRTFCC2009-0289(1)	Sep. 25, 2020	Revised the section 4.2.1	JaeHyeok Bang	JaeJin Lee

-

CONTENTS

1. General Information.....	4
1.1. Testing Laboratory.....	4
1.2. Testing Environment.....	4
1.3. Measurement Uncertainty	4
1.4. Details of Applicant.....	5
1.5. Description of EUT	5
1.6. EUT CAPABILITIES	5
2. Information about test items.....	6
2.1 Test mode.....	6
2.2 Tested frequency	6
2.3 EMI Suppression Device(s)/Modifications	6
3. Antenna requirements.....	6
4. Test report.....	7
4.1 Summary of tests	7
4.2 Transmitter requirements.....	8
4.2.1 20 dB bandwidth	8
4.2.2 In-band emissions	9
4.2.3 Out-of-band emissions	11
4.2.4 Frequency Stability.....	13
4.2.5 AC Line Conducted Emissions	14
APPENDIX	17

1. General Information

1.1. Testing Laboratory

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.		
- FCC & IC MRA Accredited Test Firm No. : KR0034		
- ISED #: 5740A		
www.dtnet.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2. Testing Environment

Ambient Condition	
▪ Temperature	+22 °C ~ +23 °C
▪ Relative Humidity	35 % ~ 40 %

1.3. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
AC conducted emission	3.6 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Below 1 GHz)	4.9 dB (The confidence level is about 95 %, $k = 2$)

1.4. Details of Applicant

Applicant : LG Electronics USA, Inc.
 Address : 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
 Contact person : Kyung-Su Han

1.5. Description of EUT

FCC Equipment Class	Low Power Communications Device Transmitter(DXX)
EUT	Mobile Phone
Model Name	OA2007
Add Model Name	NA
Serial Number	Identical prototype
Power Supply	DC 3.87 V
Frequency Band	13.56 MHz
Modulation Type	ASK
Channel(s)	1
Antenna type	Loop Antenna

1.6. EUT CAPABILITIES

This EUT contains the following capabilities:

GSM 850/1900, WCDMA/HSUPA 850, Multi-band LTE, 802.11b/g/n/ac WLAN(2.4 GHz) 802.11a/n/ac WLAN(5 GHz), Bluetooth(BDR, EDR, LE), NFC, WPC, Dual Display.

2. Information about test items

2.1 Test mode

Test mode1	Continuous transmitting mode
Test mode2	Continuous transmitting mode(With Dual Display ^{Note1})

Note 1: The dual display cover is provided to the users as an accessory.

So, the radiated test items were performed at standalone configuration and condition of equipped with dual display.
(The dual screen communicates with the main unit via USB connection.)

Note 2: This model supports data rates up to 424 kbps.

Note 3: The worst case data rate was determined according to the measured all of the fundamental emission level.
And data rate was tested at the worst case(106 kbps).

2.2 Tested frequency

Channel	TX Frequency(MHz)
Lowest	13.56
Middle	-
Highest	-

2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. Antenna requirements

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna is attached on the device by means of unique coupling method (Spring Tension).
Therefore this E.U.T Complies with the requirement of §15.203**

4. Test report

4.1 Summary of tests

FCC part section(s)	Parameter	Limit	Test condition	Status Note 1
2.1049	20 dB Bandwidth	-	Radiated	C
15.225 (a)	In-Band Emissions	15,848 $\mu\text{V}/\text{m}$ @ 30 m 13.553 MHz – 13.567 MHz		C Note 3
15.225 (b)	In-Band Emissions	334 $\mu\text{V}/\text{m}$ @ 30 m 13.410 MHz – 13.553 MHz 13.567 MHz – 13.710 MHz		C Note 3
15.225 (c)	In-Band Emissions	106 $\mu\text{V}/\text{m}$ @ 30 m 13.110 MHz – 13.410 MHz 13.710 MHz – 14.010 MHz		C Note 3
15.225 (d) 15.209	Out-of Band Emissions	Emissions outside of the specified band (13.110 MHz - 14.010 MHz) must meet the radiated limits detailed in 15.209		C Note 3
15.225 (e)	Frequency Stability	± 0.01 % of operating frequency	Temp & Humid Test Chamber	C
15.207	AC Conducted Emissions	FCC Part 15.207	AC Line Conducted	C
15.203	Antenna Requirements	FCC Part 15.203	-	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.</p> <p>Note 3: This test items were performed both Normal and SWIVEL capability conditions.</p>				

4.2 Transmitter requirements

4.2.1 20 dB bandwidth


- Procedure:

The 20 dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

And spectrum analyzer setting use following test procedure of **ANCSI C63.10-2013 – Section 6.9.2.**

1. Center frequency = EUT channel center frequency
2. Span = 2 ~ 5 times the OBW
3. RBW = 1 % ~ 5 % of the OBW
4. VBW ≥ 3 x RBW
5. Detector = Peak
6. Trace = Max hold
7. The trace was allowed to stabilize
8. Determine the reference value = Set the spectrum analyzer marker to the highest level of the displayed trace
9. Using the marker-delta function of the instrument, determine the “-xx dB down amplitude” using [(reference value) - xx].
10. Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

- Measurement Data: Comply

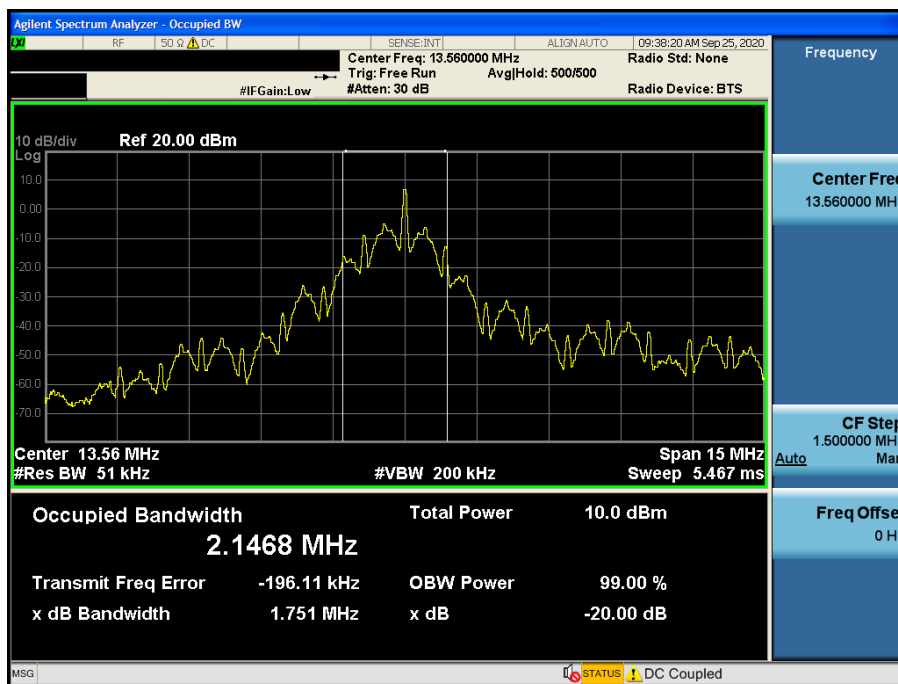


Note1: The 20 dB bandwidth was measured at all data rate and the worst case data was reported (This test item was tested at 424 kbps.)

- Minimum Standard: NA

4.2.2 In-band emissions

- Test Configuration

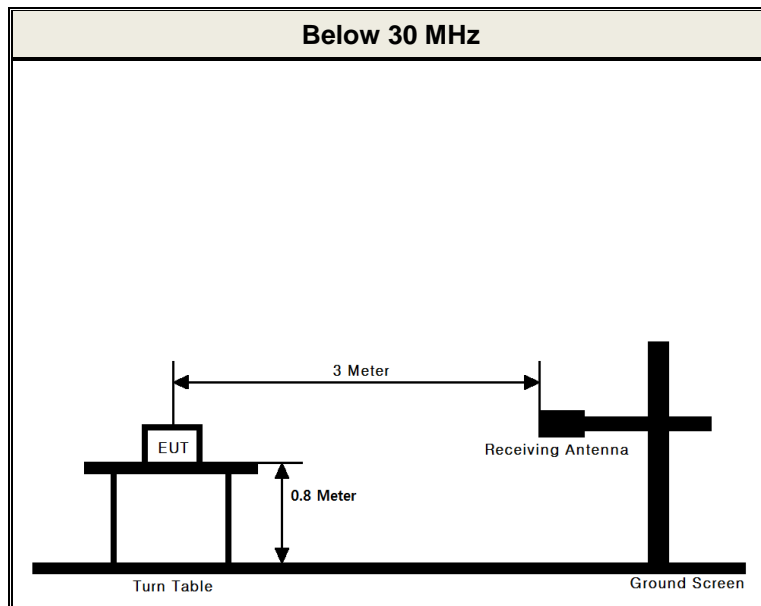

- Procedure: The radiated emission was tested according to the **section 6.4 of the ANSI C63.10-2013**.

The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. Measurements were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel)

Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9 kHz – 150 kHz	200 Hz – 300 Hz
0.15 MHz – 30 MHz	9 kHz – 10 kHz
30 MHz – 1 000 MHz	100 kHz – 120 kHz
> 1 000 MHz	1 MHz

- Minimum Standard: Part 15.225(a), (b), (c) & RSS-210 [B6(a), (b), (c)]

Frequency Band [MHz]	Limit at 30 m measurement distance	
	[uV/m]	[dBuV/m]
13.553 - 13.567	15,848	84.00
13.410 - 13.553 13.567 - 13.710	334	50.47
13.110 - 13.410 13.710 - 14.010	106	40.51

- Measurement Data: Test mode 1

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.349	Y	P	24.30	10.80	35.10	-4.90	40.51	45.41
13.410 ~ 13.553	13.553	Y	P	34.10	10.70	44.80	4.80	50.47	45.67
13.553 ~ 13.567	13.560	Y	P	39.00	10.70	49.70	9.70	84.00	74.30
13.567 ~ 13.710	13.568	Y	P	33.80	10.70	44.50	4.50	50.47	45.97
13.710 ~ 14.010	13.773	Y	P	24.20	10.70	34.90	-5.10	40.51	45.61

- Measurement Data: Test mode 2

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.350	Y	P	26.80	10.80	37.60	-2.40	40.51	42.91
13.410 ~ 13.553	13.553	Y	P	35.20	10.70	45.90	5.90	50.47	44.57
13.553 ~ 13.567	13.560	Y	P	40.10	10.70	50.80	10.80	84.00	73.20
13.567 ~ 13.710	13.568	Y	P	34.70	10.70	45.40	5.40	50.47	45.07
13.710 ~ 14.010	13.777	Y	P	27.20	10.70	37.90	-2.10	40.51	42.61

Note 1. Loop antenna orientation

"P": Parallel, "V": perpendicular, "G": ground-parallel

Note 2. This test item was performed at 3 m and the data were extrapolated to the specified measurement distance of 30 m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

 ▪ Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40 \text{ dB}$
Note 3. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4. Sample Calculation.


$$\text{Margin} = \text{Limit} - \text{Field Strength @ 30 m} \quad / \quad \text{Field Strength @ 30 m} = \text{Field Strength @ 3 m} - 40 \text{ dB}$$

$$\text{Field Strength @ 3 m} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss

4.2.3 Out-of-band emissions

- Test configuration

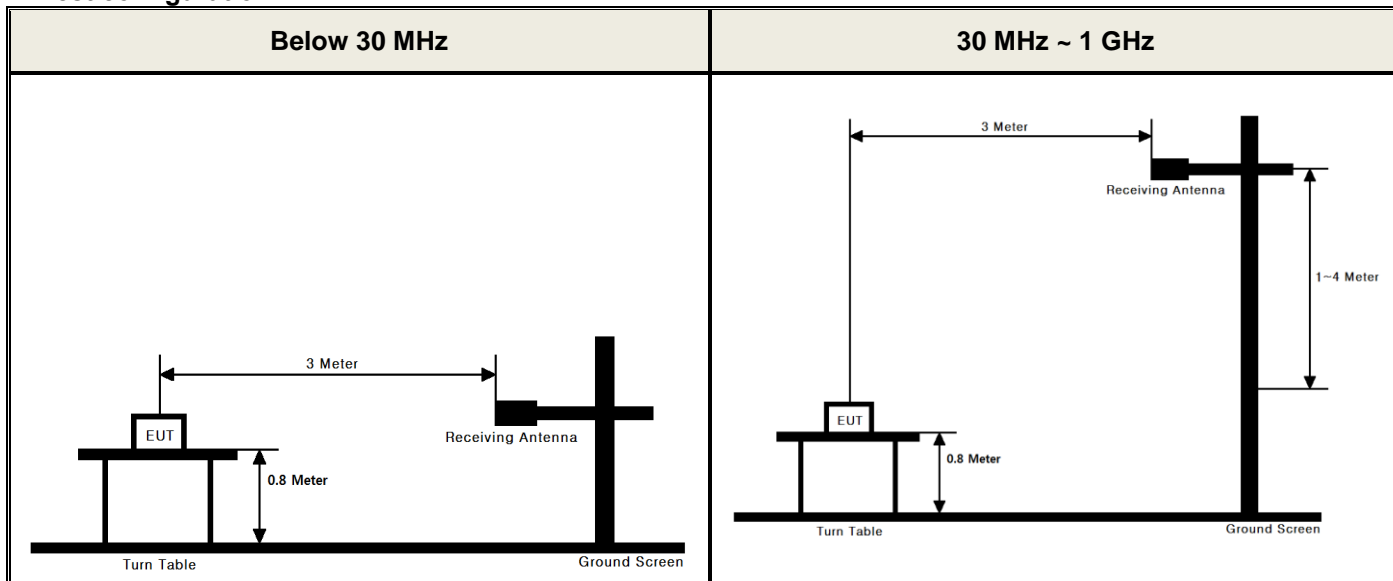

- Procedure: The radiated emission was tested according to the section 6.4, 6.5 of the ANSI C63.10-2013.

The EUT was tested from 9 kHz up to the 1 GHz excluding the band 13.110 MHz - 14.010 MHz. The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. For measurements below 30 MHz were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel) For measurements above 30MHz were performed for each of the both horizontal and vertical polarizations. Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9 kHz – 150 kHz	200 Hz – 300 Hz
0.15 MHz – 30 MHz	9 kHz – 10 kHz
30 MHz – 1 000 MHz	100 kHz – 120 kHz
> 1 000 MHz	1 MHz

- Minimum Standard: Part 15.209, 225(d) & RSS-210[B6(d)], RSS-GEN[8.9]

- FCC Part 15.209(a):

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2 400 / F (kHz)	300
0.490 ~ 1.705	24 000 / F (kHz)	30
1.705 ~ 30.000	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

- FCC Part 15.209(b):

In the emission table above, the tighter limit applies at the band edges.

- Measurement Data: Test mode 1

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBuV]	T.F [dB/m]	Distance factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.044	Y	P	52.8	12.8	80	-14.4	34.7	49.1
0.121	Y	P	38	11.9	80	-30.1	25.9	56
2.759	Y	P	24	12	40	-4	29.5	33.5
6.780	Y	P	15.6	11.4	40	-13	29.5	42.5
12.280	Y	P	17.8	10.9	40	-11.3	29.5	40.8
27.120	Y	P	14.7	9.3	40	-16	29.5	45.5
36.790	Y	V	40.1	-9.7	0	30.4	40	9.6
75.590	Y	V	39.8	-11.7	0	28.1	40	11.9
148.340	Y	V	31.1	-7.2	0	23.9	43.5	19.6
588.718	Y	V	31.7	0.7	0	32.4	46	13.6
951.487	Y	H	25.5	7	0	32.5	46	13.5

- Measurement Data: Test mode 2

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBuV]	T.F [dB/m]	Distance factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.044	Y	P	53.2	12.8	80	-14	34.7	48.7
0.121	Y	P	39.3	11.9	80	-28.8	25.9	54.7
2.274	Y	P	25.1	12.1	40	-2.8	29.9	32.7
6.780	Y	P	17.1	11.4	40	-11.5	29.5	41.0
12.720	Y	P	17.5	10.8	40	-11.7	29.5	41.2
23.100	Y	P	23.9	9.9	40	-6.2	29.5	35.7
27.120	Y	P	13.8	9.3	40	-16.9	29.5	46.4
75.590	Y	V	41.9	-11.7	0	30.2	40	9.8
84.320	Y	V	37.7	-13	0	24.7	40	15.3
231.830	Y	H	26.7	-7.8	0	18.9	46	27.1
674.076	Y	V	27.2	1.9	0	29.1	46	16.9
940.818	Y	V	26.4	6.8	0	33.2	46	12.8

Note 1. Loop antenna orientation (30 MHz Below)

"P"= Parallel, "V"= perpendicular, "G"= ground-parallel

Bilog antenna polarization (30 MHz above)

"H"= Horizontal, "V"= Vertical

Note 2. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Sample calculation

Margin = Limit – Field Strength

Field Strength = Reading + T.F – Distance factor

T.F = AF + CL – AG

 Distance factor = $20\log(\text{Measurement distance} / \text{The measured distance})^2$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

4.2.4 Frequency Stability

- Procedure:

Part 15.225 requires that devices operating in the 13.553 MHz – 13.567 MHz shall maintain the carrier frequency within 0.01 % of the operating frequency over the temperature variation of -20 degrees to +50 degrees C at normal supply voltage.

- Measurement Data: Comply

Operating Frequency : 13,560,000 Hz

VOLTAGE (%)	POWER (V _{DC})	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.87	+20(ref)	13,560,186	+186	0.001 372
100 %		-20	13,560,112	+112	0.000 826
100 %		-10	13,560,174	+174	0.001 283
100 %		0	13,560,122	+122	0.000 900
100 %		+10	13,560,159	+159	0.001 173
100 %		+20	13,560,186	+186	0.001 372
100 %		+30	13,560,192	+192	0.001 416
100 %		+40	13,560,198	+198	0.001 460
100 %		+50	13,560,177	+177	0.001 305
115 %		4.45	+20	13,560,146	+146
BATT.ENDPOINT	3.00	+20	13,560,110	+110	0.000 811

- Minimum Standard: Part 15. 225(e) & RSS-210 [B6]

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.

4.2.5 AC Line Conducted Emissions

- Test Requirements and limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

- Test Configuration

See test photographs for the actual connections between EUT and support equipment.

- Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

- **Measurement Data:** **Comply** (refer to the next page)

Test mode 1

Measurement Data

Results of Conducted Emission

DTNC



Date 2020-08-07

Order No.
Model No. OA2007
Serial No.
Test Condition NFC

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 35 %
Operator J.H.Bang

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

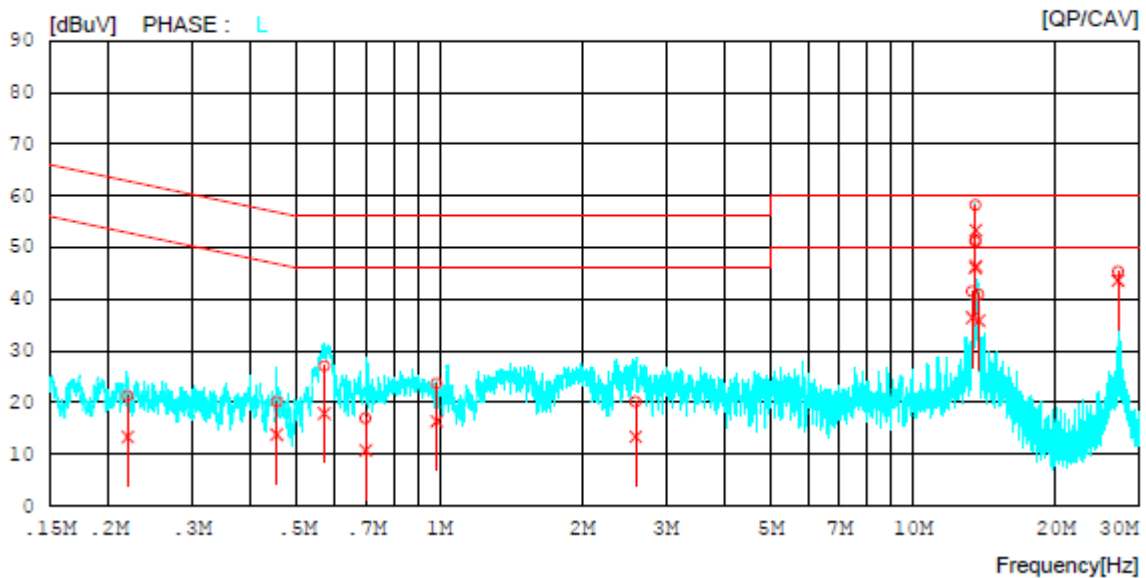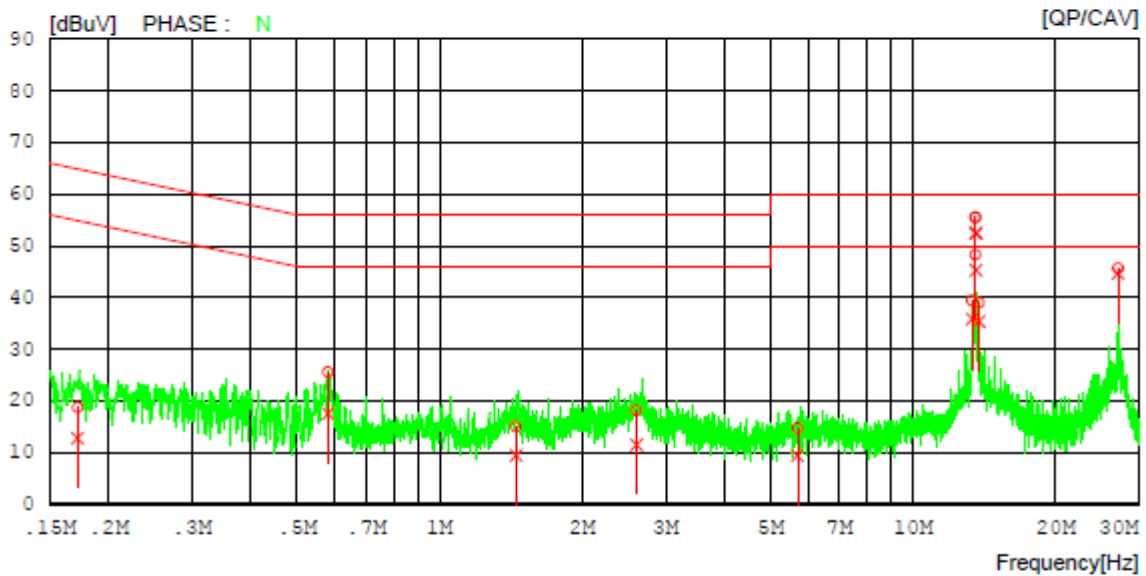

Measurement Data

Results of Conducted Emission

DTNC

Date 2020-08-07

Order No.		Reference No.	
Model No.	OA2007	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 'C / 35 %
Test Condition	NFC	Operator	J.H.Bang

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.17185	8.84	2.79	9.96	18.80	12.75	64.87	54.87	46.07	42.12	N
2	0.58066	15.57	7.57	9.96	25.53	17.53	56.00	46.00	30.47	28.47	N
3	1.44917	4.99	-0.52	9.99	14.98	9.47	56.00	46.00	41.02	36.53	N
4	2.60364	8.08	1.45	10.06	18.14	11.51	56.00	46.00	37.86	34.49	N
5	5.70392	4.55	-0.71	10.18	14.73	9.47	60.00	50.00	45.27	40.53	N
6	13.34776	29.04	25.48	10.41	39.45	35.89	60.00	50.00	20.55	14.11	N
7	13.56000	45.18	42.10	10.41	55.59	52.51	60.00	50.00	4.41	-2.51	N
8	13.56064	45.07	41.99	10.41	55.48	52.40	60.00	50.00	4.52	-2.40	N
9	13.56500	37.95	34.86	10.41	48.36	45.27	60.00	50.00	11.64	4.73	N
10	13.77308	28.55	24.95	10.42	38.97	35.37	60.00	50.00	21.03	14.63	N
11	27.11947	35.04	34.05	10.62	45.66	44.67	60.00	50.00	14.34	5.33	N
12	0.21921	11.30	3.35	9.95	21.25	13.30	62.85	52.85	41.60	39.55	L
13	0.45255	10.12	3.82	9.96	20.08	13.78	56.83	46.83	36.75	33.05	L
14	0.57050	17.03	7.83	9.97	27.00	17.80	56.00	46.00	29.00	28.20	L
15	0.69761	6.88	0.73	9.96	16.84	10.69	56.00	46.00	39.16	35.31	L
16	0.98508	13.62	6.33	9.98	23.60	16.31	56.00	46.00	32.40	29.69	L
17	2.59317	10.05	3.30	10.05	20.10	13.35	56.00	46.00	35.90	32.65	L
18	13.34968	31.03	25.98	10.40	41.43	36.38	60.00	50.00	18.57	13.62	L
19	13.56500	40.70	35.70	10.40	51.10	46.10	60.00	50.00	8.90	3.90	L
20	13.56096	47.79	42.91	10.40	58.19	53.31	60.00	50.00	1.81	-3.31	L
21	13.56500	40.96	35.96	10.40	51.36	46.36	60.00	50.00	8.64	3.64	L
22	13.77019	30.49	25.40	10.41	40.90	35.81	60.00	50.00	19.10	14.19	L
23	27.12044	34.74	32.95	10.57	45.31	43.52	60.00	50.00	14.69	6.48	L

APPENDIX

TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	19/12/16	20/12/16	MY50410357
Spectrum Analyzer	Agilent Technologies	N9020A	20/06/24	21/06/24	US47360812
Multimeter	FLUKE	17B	19/12/16	20/12/16	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	19/12/16	20/12/16	255571
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-1
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-2
Loop Antenna	ETS-Lindgren	6502	19/09/18	21/09/18	00226186
BILOG ANTENNA	Schwarzbeck	VULB 9160	19/04/23	21/04/23	9160-3362
PreAmplifier	H.P	8447D	19/12/16	20/12/16	2944A07774
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	20/06/24	21/06/24	SJ-TH-S50-130930
Cable	Radiall	TESTPRO3	20/01/16	21/01/16	M-01
Cable	Junkosha	MWX315	20/01/16	21/01/16	M-05
Cable	Junkosha	MWX221	20/01/16	21/01/16	M-06
Thermohygrometer	TESTO	608-H1	20/01/21	21/01/21	34862883
EMI Test Receiver	ROHDE&SCHWARZ	ESR	19/12/17	20/12/17	101767
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	19/09/17	20/09/17	101333
LISN	SCHWARZBECK	NNLK 8121	20/03/13	21/03/13	6183
Cable	DT&C	Cable	20/01/16	21/01/16	RF-82

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.