



HCT CO., LTD.

CERTIFICATION DIVISION
74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: June 28, 2013

Test Report No.: HCTE1306FE26

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:


ZNFP655H


Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE
Phone with Bluetooth and WLAN
Model Name : LG-P655h
Additional Model Name : LG-P655H, P655h, P655H, LG-P655K, LG-P655k, P655k, P655K
Port / Connector(s) : USB / Earphone Port
Date of Test : June 19, 2013 - June 25, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862


Report prepared by
: Gu-Cheol Yoon
Test Engineer of EMC Team


Approved by
: Sang-Jun Lee
Manager of EMC Team

DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCTE1306FE26	June 28, 2013	Initial Release

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System.....	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3. 2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	11
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is **EUT type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE Phone with Bluetooth and WLAN, Model: LG-P655h** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

Model	LG-P655h
FCC ID	ZNFP655H
Additional Model	LG-P655H, P655h, P655H, LG-P655K, LG-P655k, P655k, P655K
EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE Phone with Bluetooth and WLAN
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900) 2 500 MHz to 2 570 MHz (LTE B7)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900) 2 620 MHz to 2 690 MHz (LTE B7)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
EUT	LG	LG-P655h	ZNFP655H	Notebook PC Ear-phone
USB cable	NINGBO	EAD62150402	-	E.U.T Notebook PC
Ear-phone	I-SOUND	EAB62209201	-	E.U.T
Notebook PC	H.P	ProBook6560b	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	CHICONY POWER TECHNOLOGY	Series PPP012H-S	-	Notebook PC
Mouse	Radio shack	Series 2-button mouse	FSUGMZE3	Notebook PC
Adaptor	Yang Ming Industrial	DA-60M12	-	Gateway
Gateway	Axesstel	MV440R	-	Notebook PC, Adaptor
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	SanDisk	8 GB	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Ear-phone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m

1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661(Mar. 02, 2011)
Radiated Field strength measurement facility (10m)	90661 (Sep. 03, 2010)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System


2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

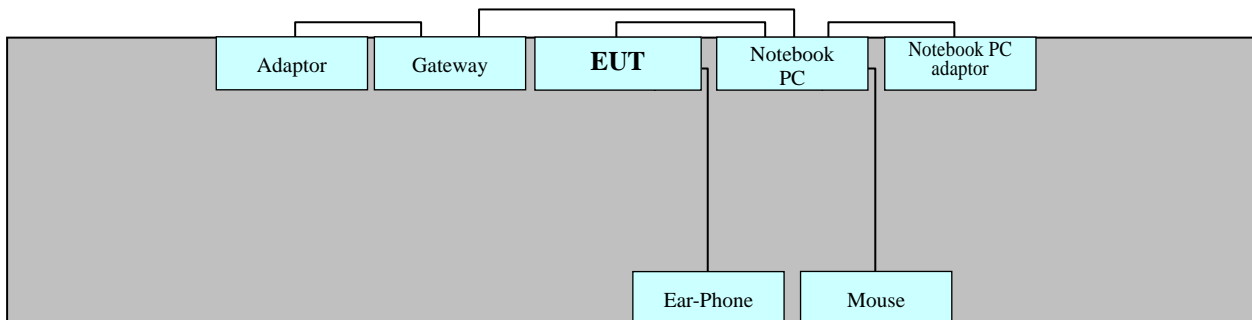

Non-Conductive Table
Power Line: 120 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
Temperature	: 24.9 °C
Humidity Level	: 48.2 %
Test Date	: June 19, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.500	9.8	H	56	24.9	34.7	46	-	-
0.596	9.8	H	56	24.8	34.6	46	-	-
1.428	9.9	H	56	-	-	46	15.2	25.1
1.788	10.1	N	56	-	-	46	15.3	25.4
16.144	11.1	N	60	-	-	50	15.9	27.0
16.512	11.1	N	60	-	-	50	15.1	26.2

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


HCT

EMC

EUT:
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: GC YOON
 Test Specification: FCC PART15 B
 Comment: H

SCAN TABLE: "FCC CLASS B(H)"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	KN22 CLASS B	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

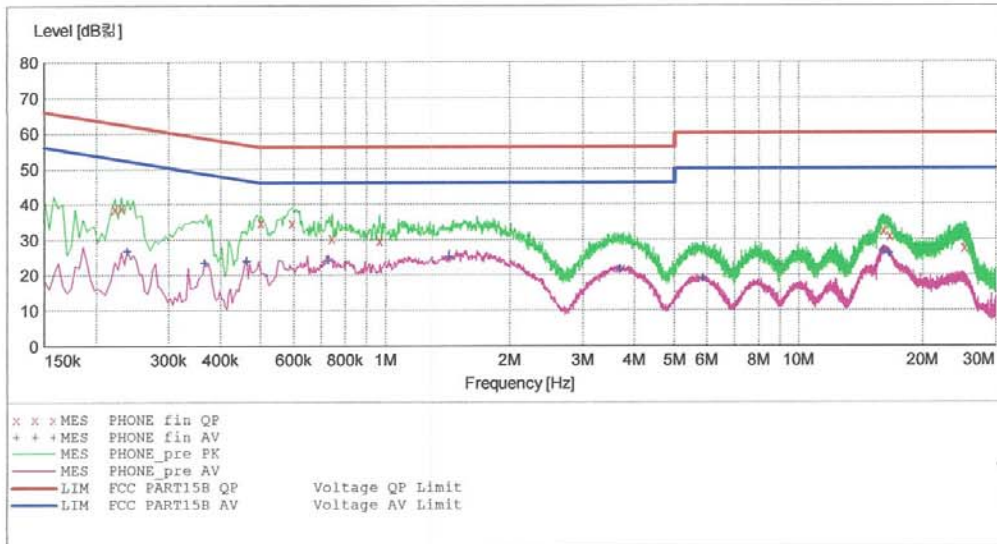

MEASUREMENT RESULT: "PHONE_fin_QP"

2013-06-19 2:03오 후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.222001	38.70	9.8	63	24.0	---	---
0.230001	39.00	9.8	62	23.5	---	---
0.500000	34.70	9.8	56	21.3	---	---
0.596000	34.60	9.8	56	21.4	---	---
0.744000	30.50	9.8	56	25.5	---	---
0.968000	29.60	9.8	56	26.4	---	---
16.032000	32.40	10.8	60	27.6	---	---
16.640000	31.00	10.8	60	29.0	---	---
25.180000	27.60	11.2	60	32.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-06-19 2:03오후

Frequency MHz	Level dB _{μV}	Transd dB	Limit dB _{μV}	Margin dB	Line	PE
0.238001	26.70	9.8	52	25.5	---	---
0.366001	23.40	9.8	49	25.1	---	---
0.462001	23.90	9.8	47	22.8	---	---
0.728000	24.00	9.8	46	22.0	---	---
1.428000	25.10	9.9	46	20.9	---	---
3.704000	21.60	10.1	46	24.4	---	---
5.876000	18.90	10.2	50	31.1	---	---
16.000000	26.70	10.8	50	23.3	---	---
16.592000	26.00	10.8	50	24.0	---	---


HCT

EMC

EUT:
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: GC YOON
 Test Specification: FCC PART15 B
 Comment: N

SCAN TABLE: "FCC CLASS B(N)"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	KN22 CLASS B	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

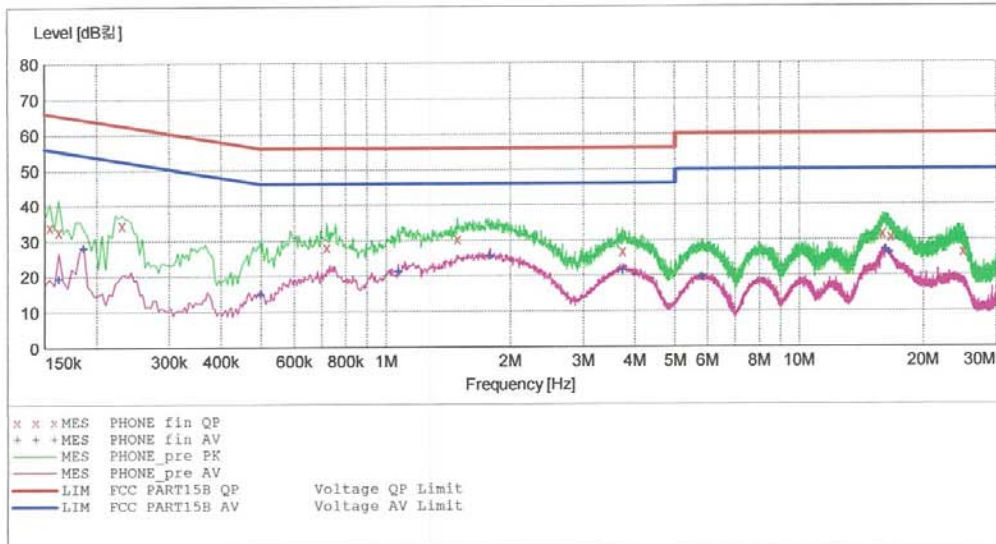

MEASUREMENT RESULT: "PHONE_fin QP"

2013-06-19 2:06 오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154001	34.10	10.0	66	31.7	---	---
0.162001	32.80	10.0	65	32.5	---	---
0.230001	34.40	10.0	62	28.1	---	---
0.720000	28.10	10.0	56	27.9	---	---
1.492000	30.40	10.1	56	25.6	---	---
3.740000	26.80	10.3	56	29.2	---	---
15.920000	31.70	11.1	60	28.3	---	---
16.680000	30.80	11.1	60	29.2	---	---
24.912000	26.50	11.5	60	33.5	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-06-19 2:06오 후

Frequency MHz	Level dB _{μV}	Transd dB	Limit dB _{μV}	Margin dB	Line	PE
0.162001	19.30	10.0	55	36.1	---	---
0.186001	28.00	10.0	54	26.2	---	---
0.498001	14.80	10.0	46	31.3	---	---
1.072000	21.30	10.1	46	24.7	---	---
1.788000	25.40	10.1	46	20.6	---	---
3.740000	21.40	10.3	46	24.6	---	---
5.808000	19.50	10.4	50	30.5	---	---
16.144000	27.00	11.1	50	23.0	---	---
16.512000	26.20	11.1	50	23.8	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 24.1 °C

Humidity Level : 53.4 %

Test Date : June 21, 2013

Frequency (MHz)	Reading (dBuV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
42.000	9.83	V	1.0	12.17	3.50	40.0	25.5	14.5
42.800	10.85	V	1.2	12.24	3.51	40.0	26.6	13.4
86.300	16.24	V	1.0	7.68	3.79	40.0	27.7	12.3
125.000	11.07	H	1.0	12.01	4.02	43.5	27.1	16.4
199.500	15.03	H	1.7	9.83	4.34	43.5	29.2	14.3
320.100	9.53	H	1.0	13.86	4.71	46.0	28.1	17.9

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 24.2 °C

Humidity Level : 55.8 %

Test Date : June 25, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)		Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2.0021	48.70	74	25.3	V	29.00	54	25.0

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. Test was measured by 12 GHz.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
 The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V}/\text{m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03

Radiated Emission

-For measurement below 1 GHz

<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-

-For measurement above 1 GHz

<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	Rohde & Schwarz	SCU-18	10094	1 year	2013.09.11
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13

7. CONCLUSION

The data collected shows that the **EUT type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA /HSUPA and LTE Phone with Bluetooth and WLAN, FCC ID: ZNFP655H, Model: LG-P655h** complies with §15.107 and §15.109 of the FCC rules.