

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 190, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.037 dB
 Peak SAR (extrapolated) = 1.42 W/kg
 SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.774 W/kg

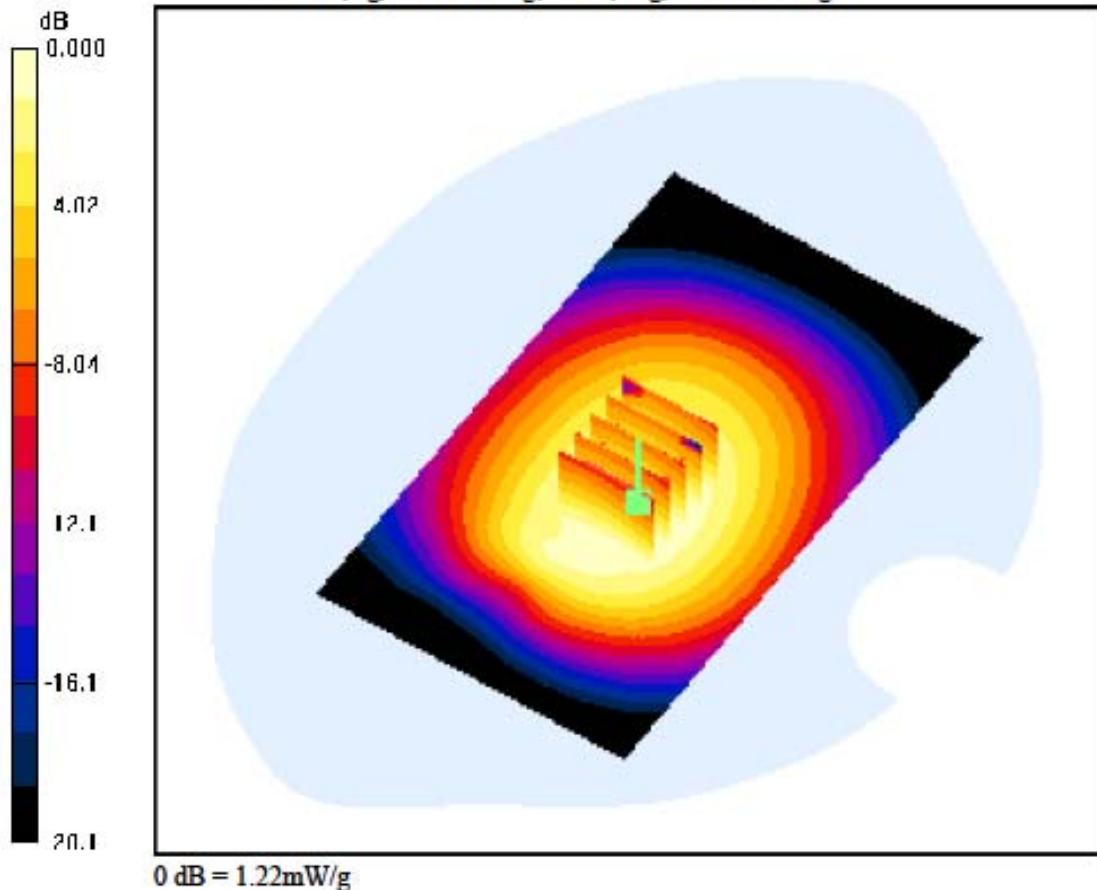

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77
 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 251, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = 0.054 dB
 Peak SAR (extrapolated) = 1.66 W/kg
 SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.632 W/kg

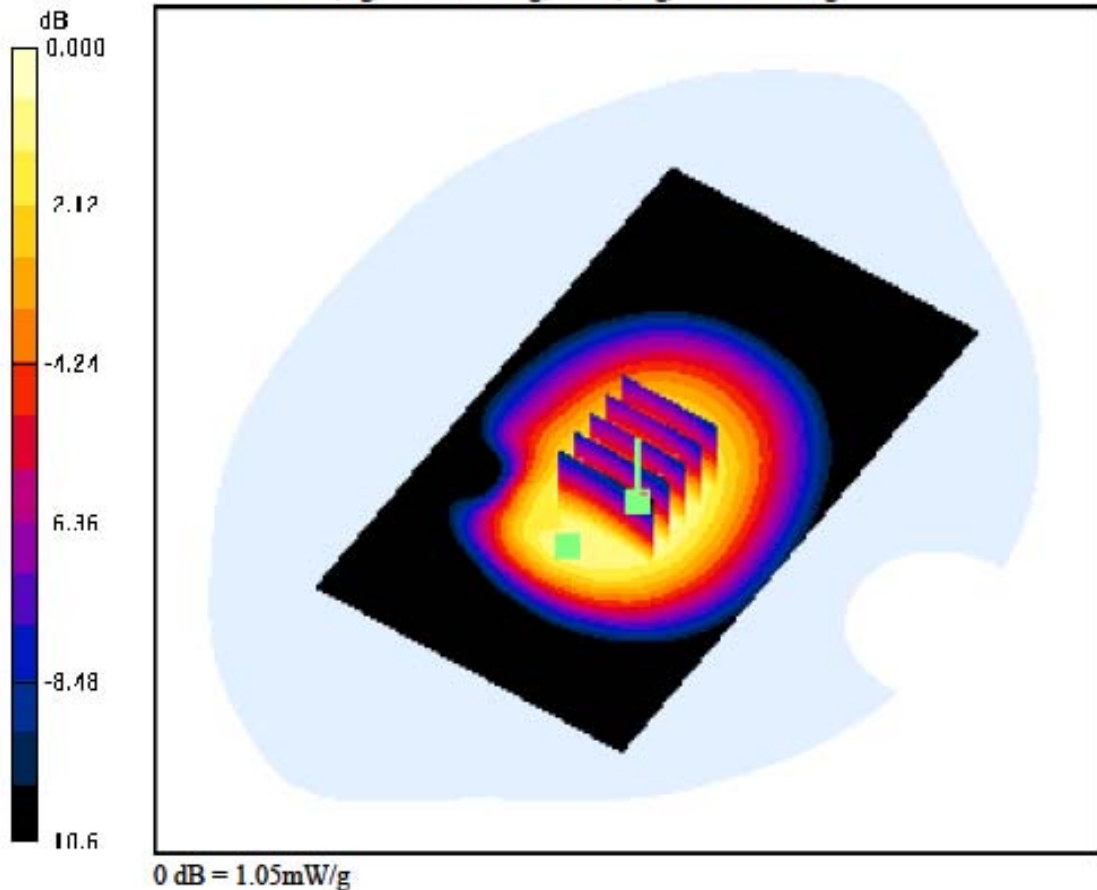

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 251, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.054 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.521 W/kg

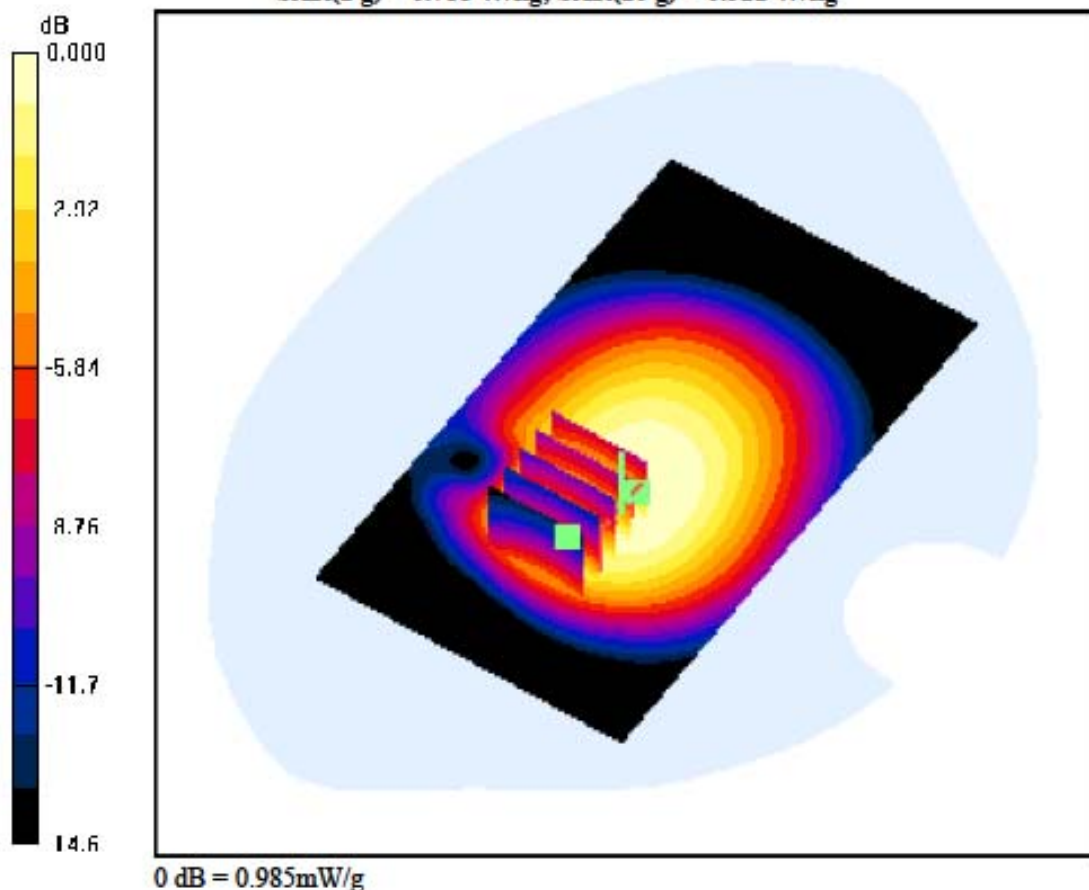

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 12 Ch. 128, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.036 dB
 Peak SAR (extrapolated) = 1.56 W/kg
 SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.843 W/kg

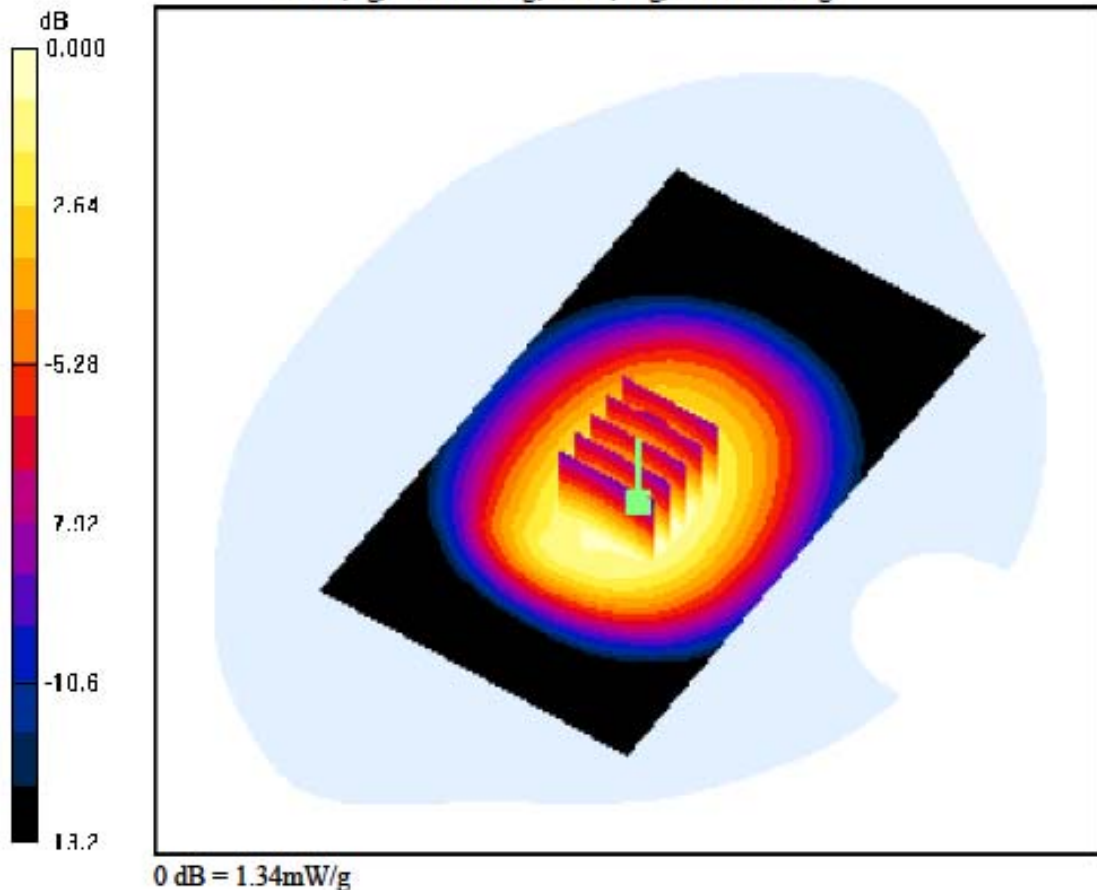

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 12 Ch. 190, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.136 dB
 Peak SAR (extrapolated) = 1.69 W/kg
 SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.817 W/kg

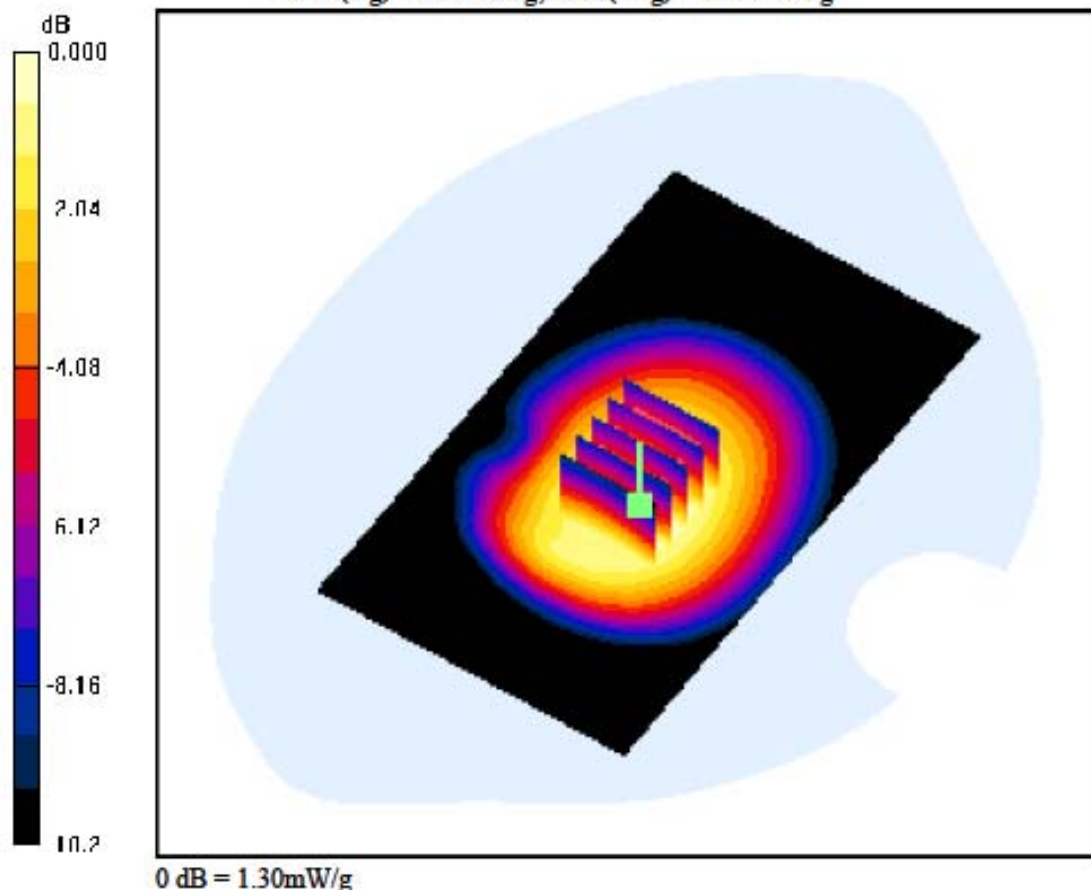

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 12 Ch. 251, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = 0.042 dB
 Peak SAR (extrapolated) = 1.42 W/kg
 SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.717 mW/g

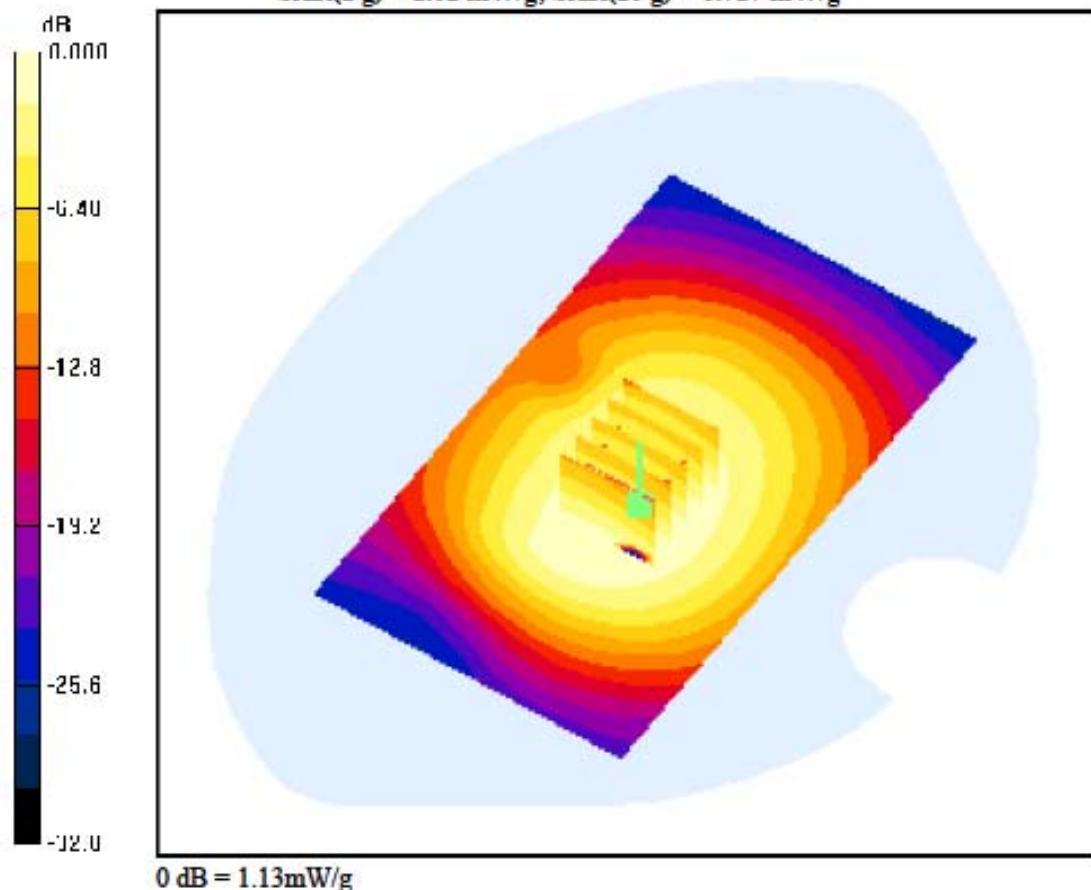

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Right, GSM850 GPRS Class 12 Ch. 190, Ant Internal

Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = 0.122 dB
 Peak SAR (extrapolated) = 1.01 W/kg
 SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.504 W/kg

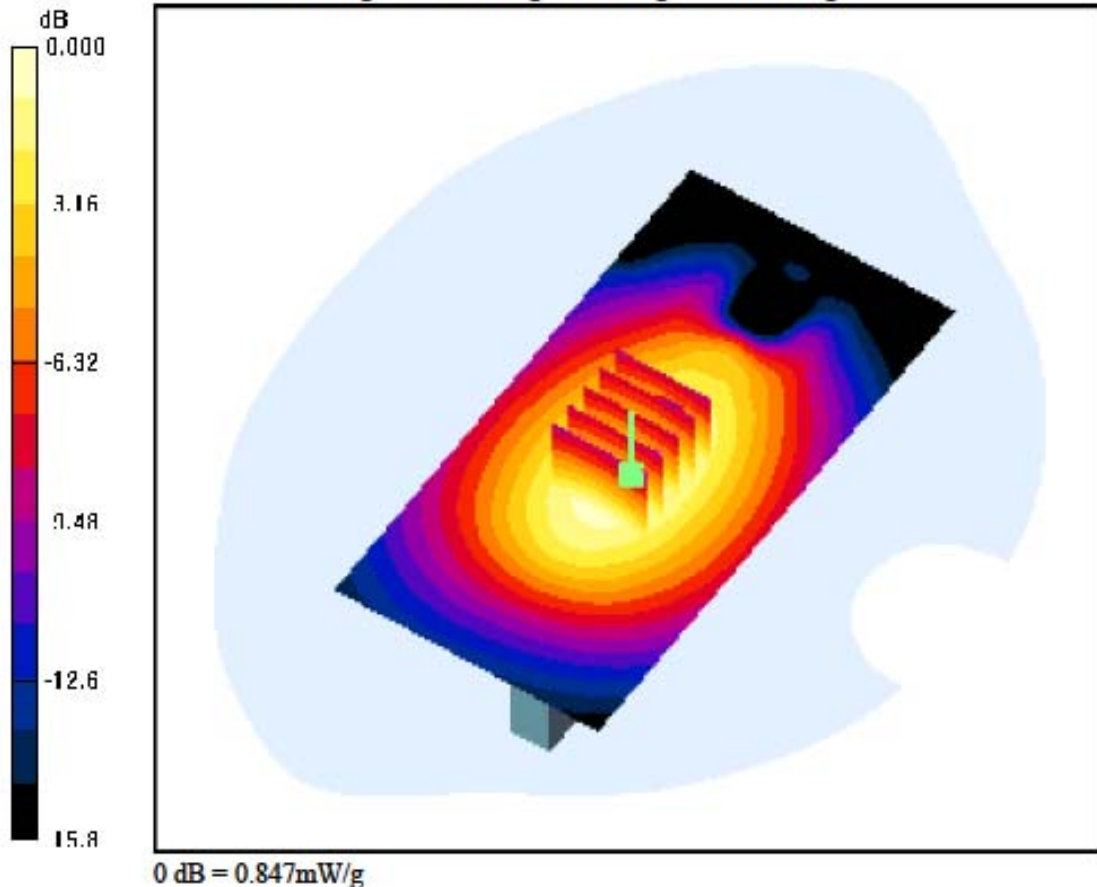

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Left, GSM850 GPRS Class 12 Ch. 190, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.894 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.437 W/kg

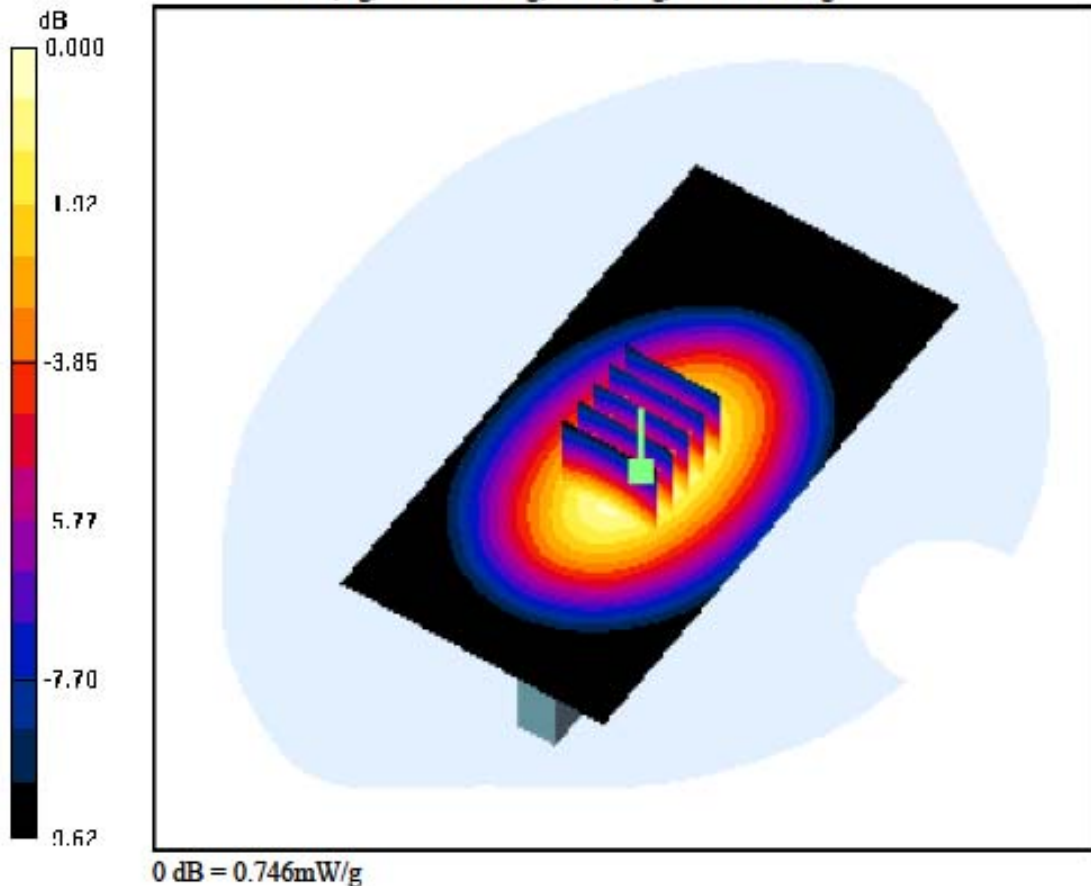

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Bottom, PCS1900 GPRS Class 12 Ch. 661, Ant Internal

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.029 dB
 Peak SAR (extrapolated) = 0.473 W/kg
 SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.187 W/kg

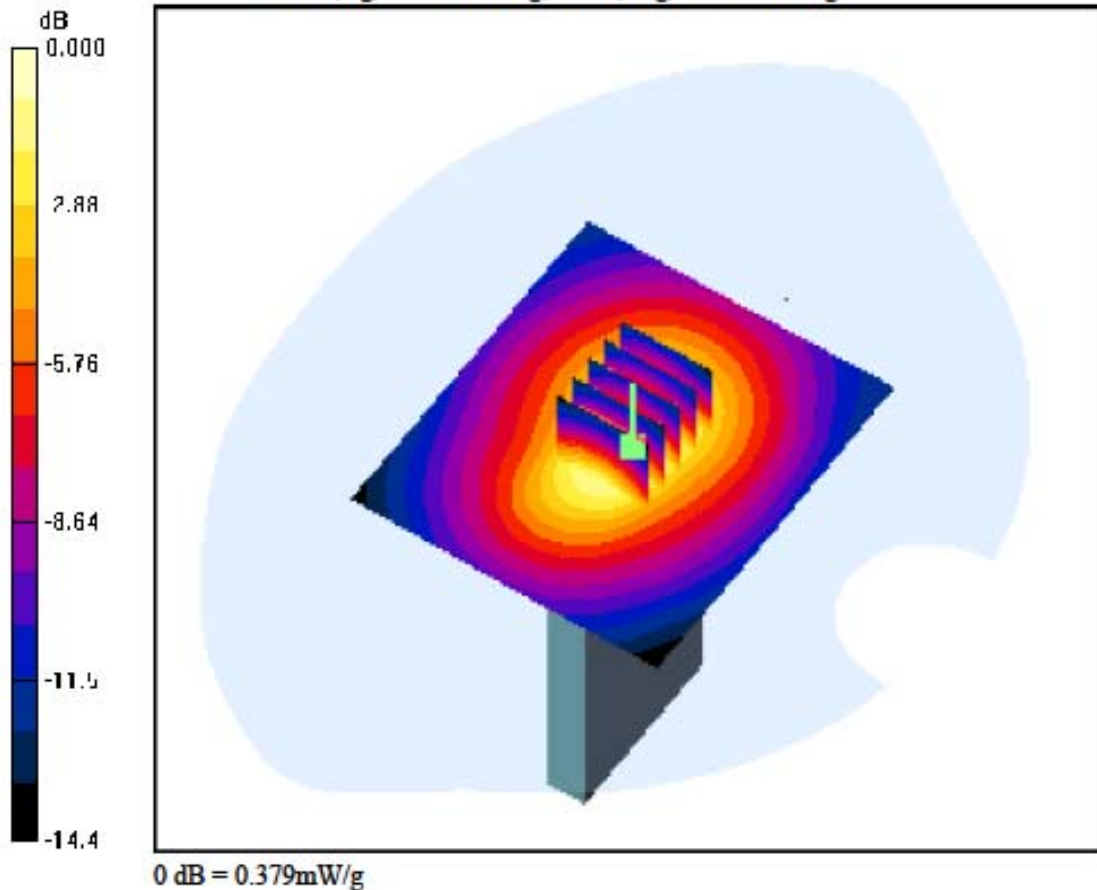

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.034 dB
Peak SAR (extrapolated) = 0.907 W/kg
SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.307 W/kg

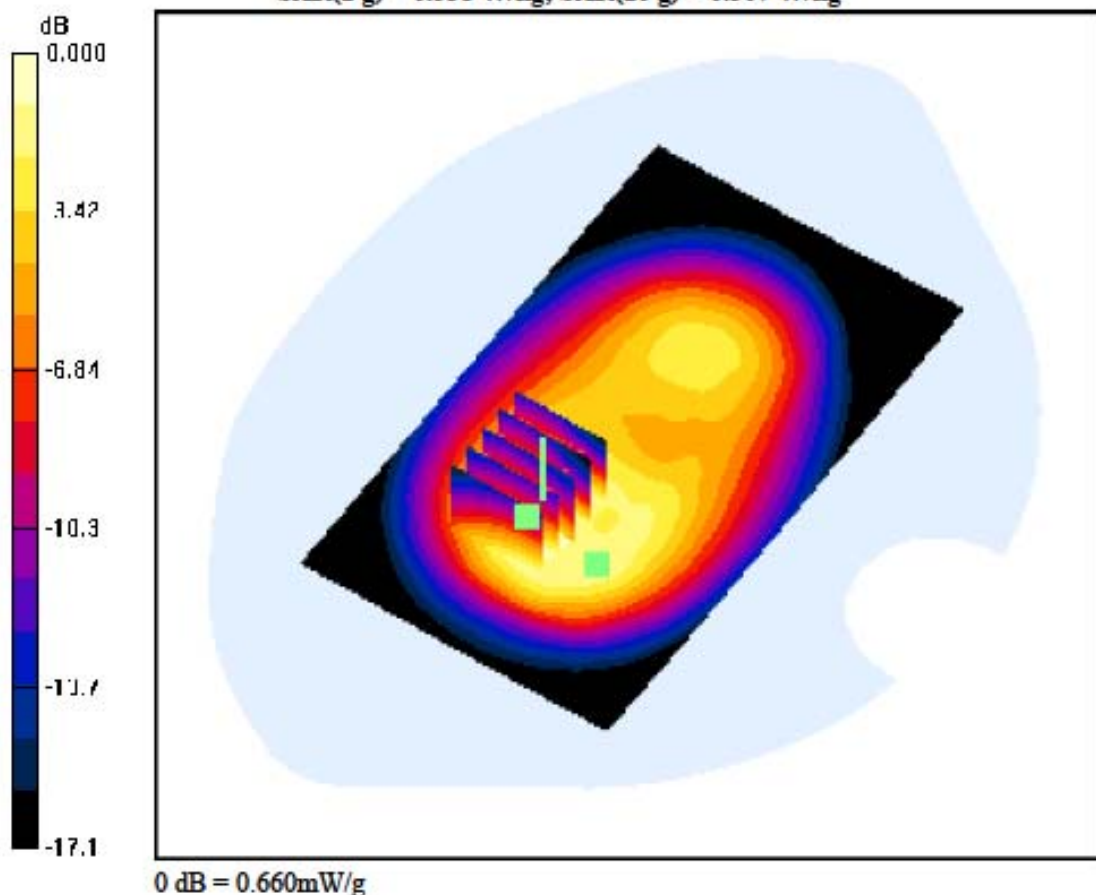

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = -0.034 dB
 Peak SAR (extrapolated) = 0.787 W/kg
 SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.241 W/kg

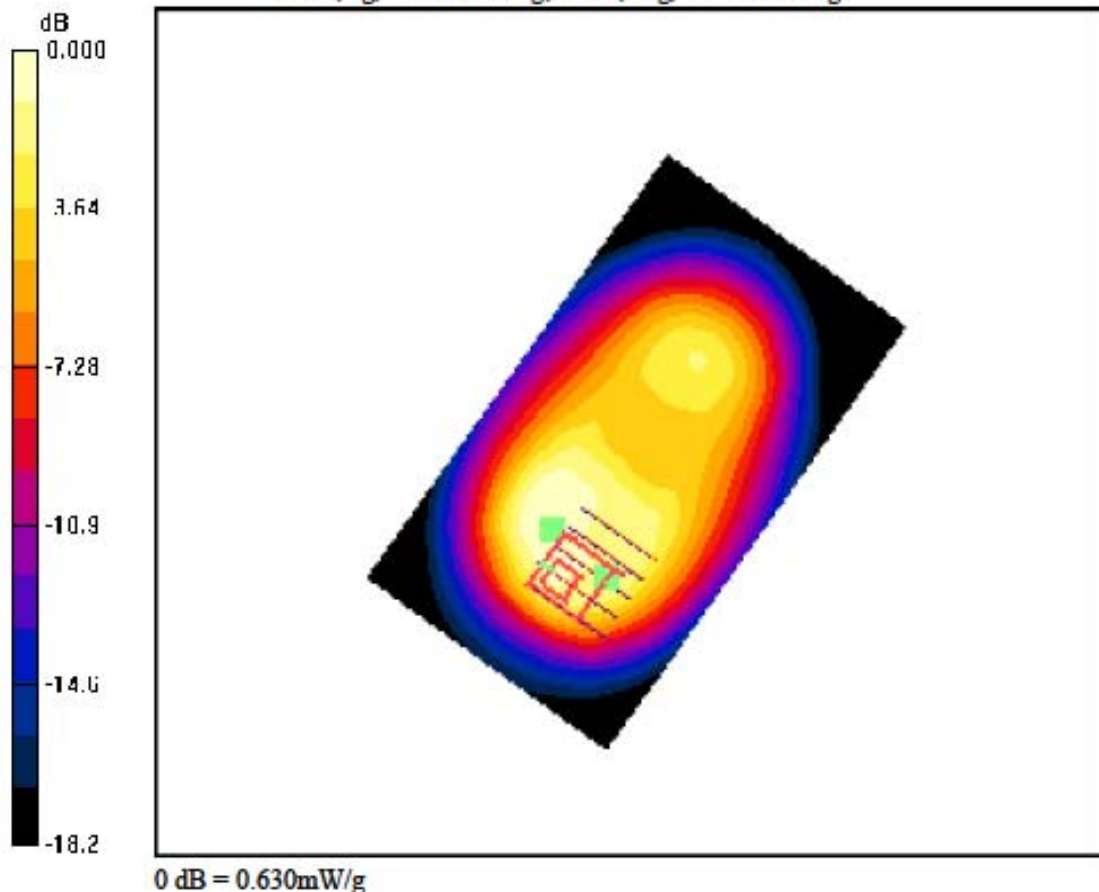

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.298 W/kg

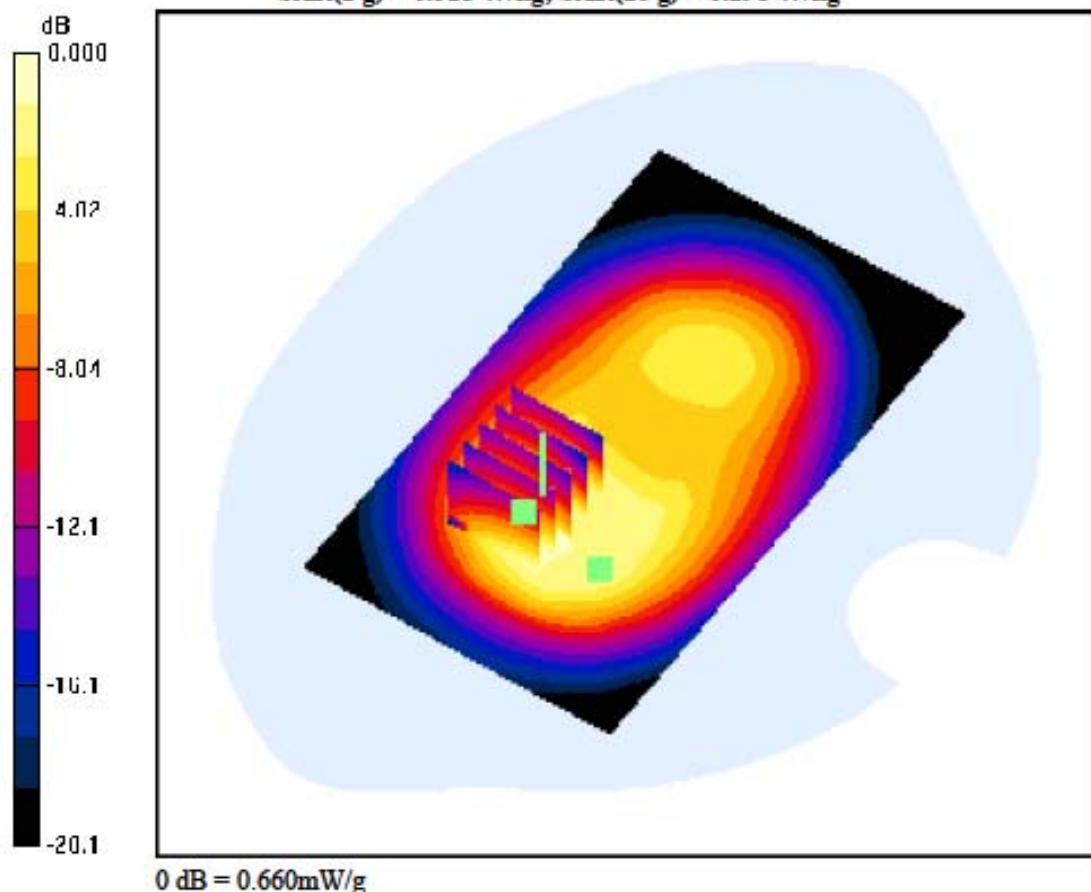

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 8 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.017 dB
Peak SAR (extrapolated) = 0.765 W/kg
SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.231 W/kg

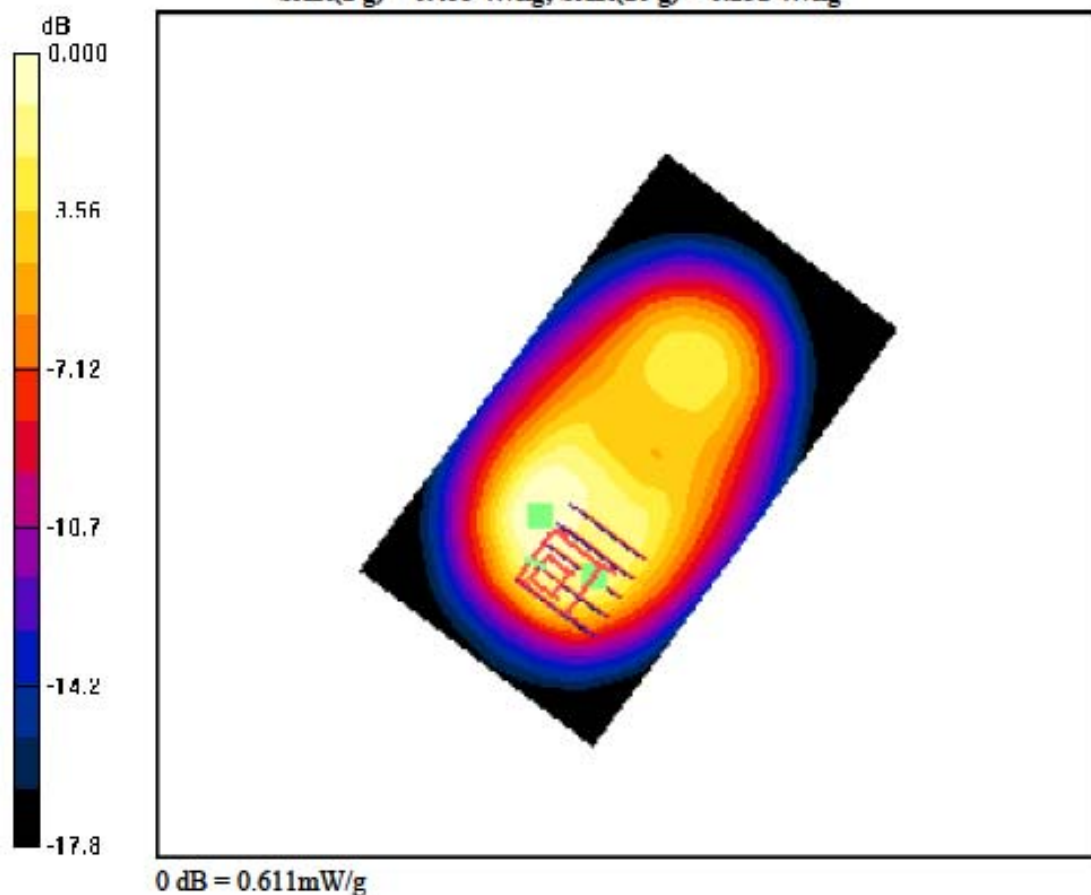

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 10 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.020 dB
 Peak SAR (extrapolated) = 1.12 W/kg
 SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.372 W/kg

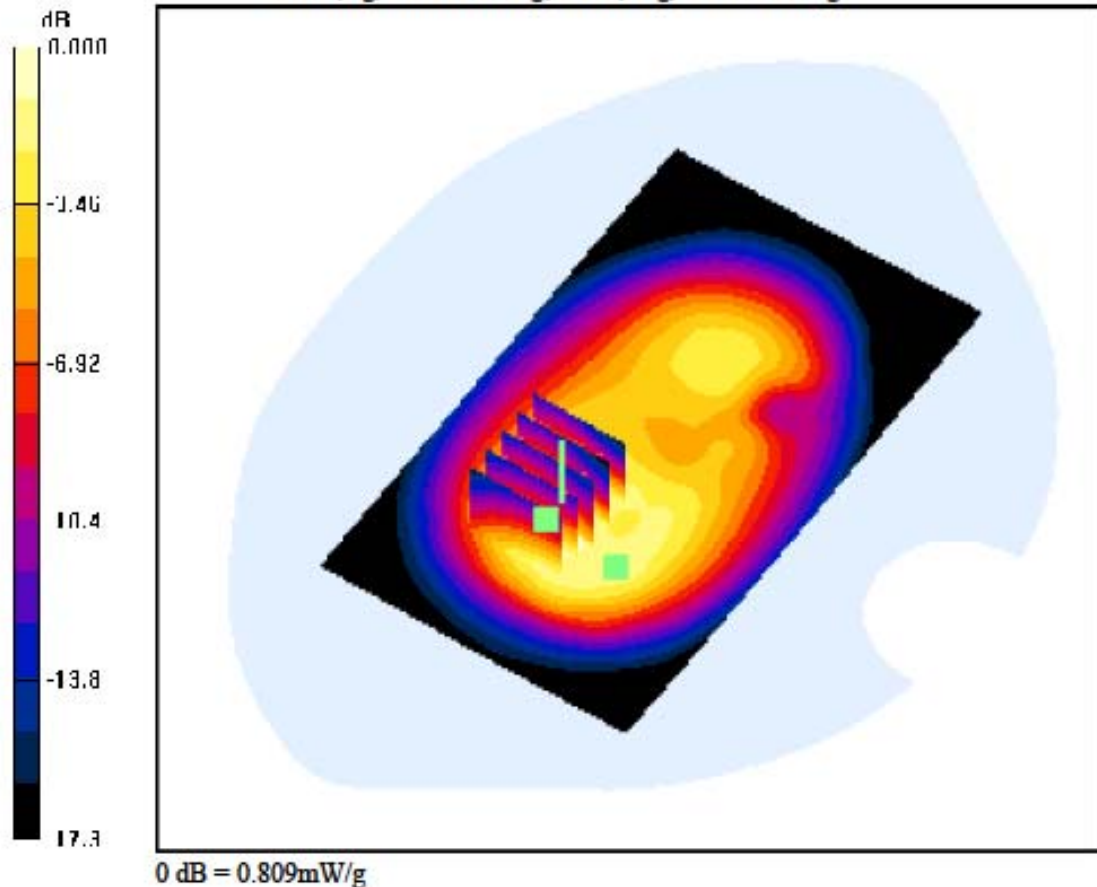

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 10 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.252 W/kg

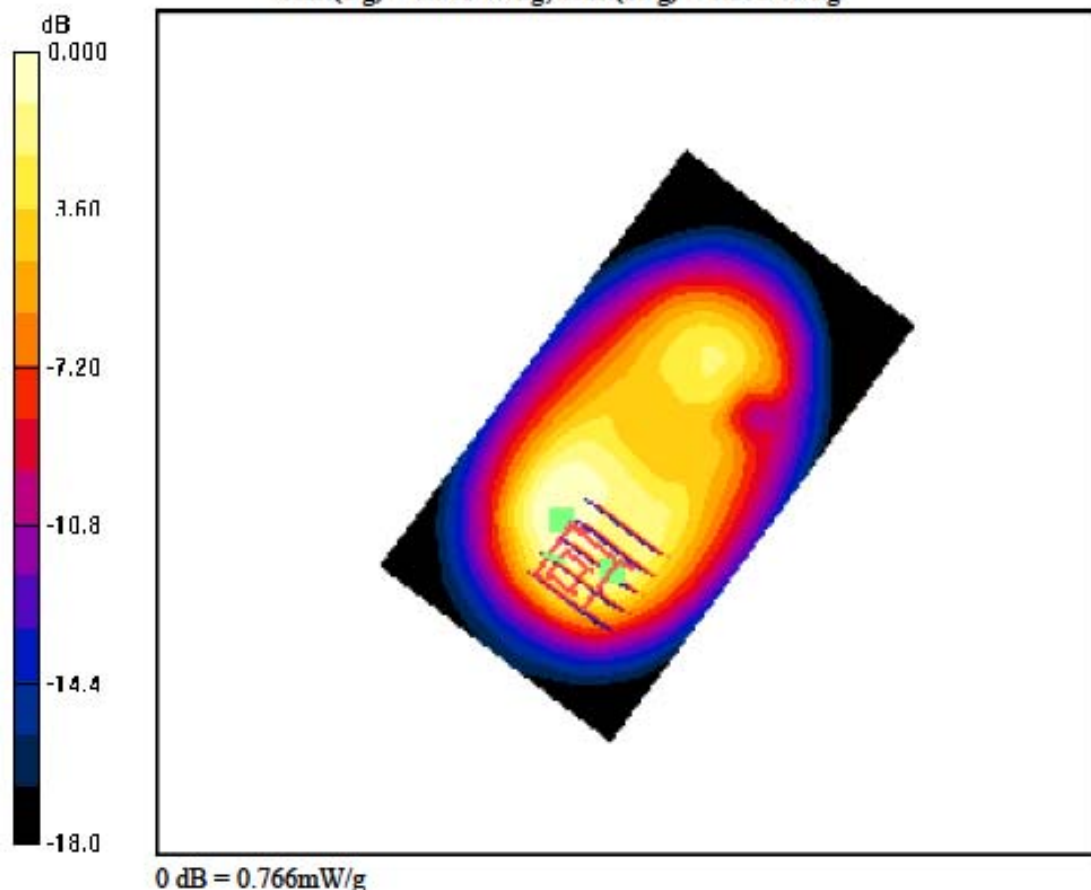

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 11 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.012 dB
 Peak SAR (extrapolated) = 1.04 W/kg
 SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.358 W/kg

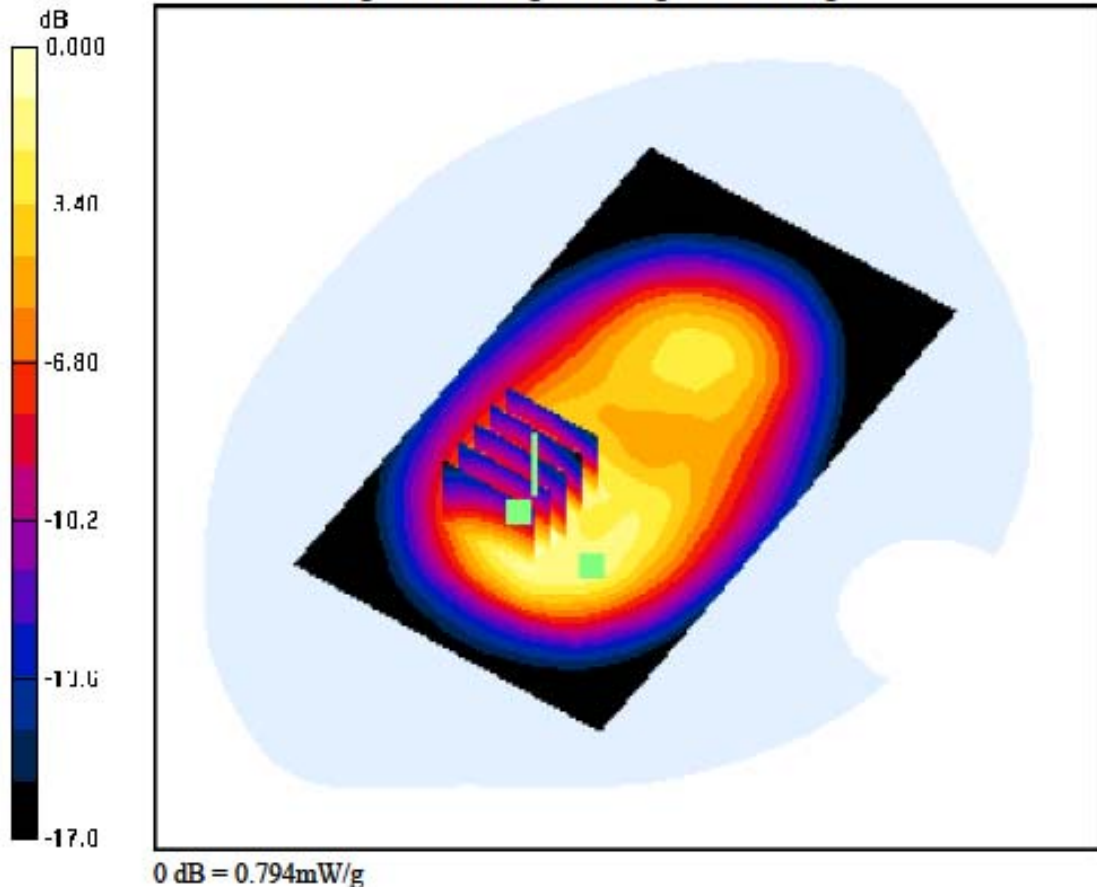

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class II Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.279 W/kg

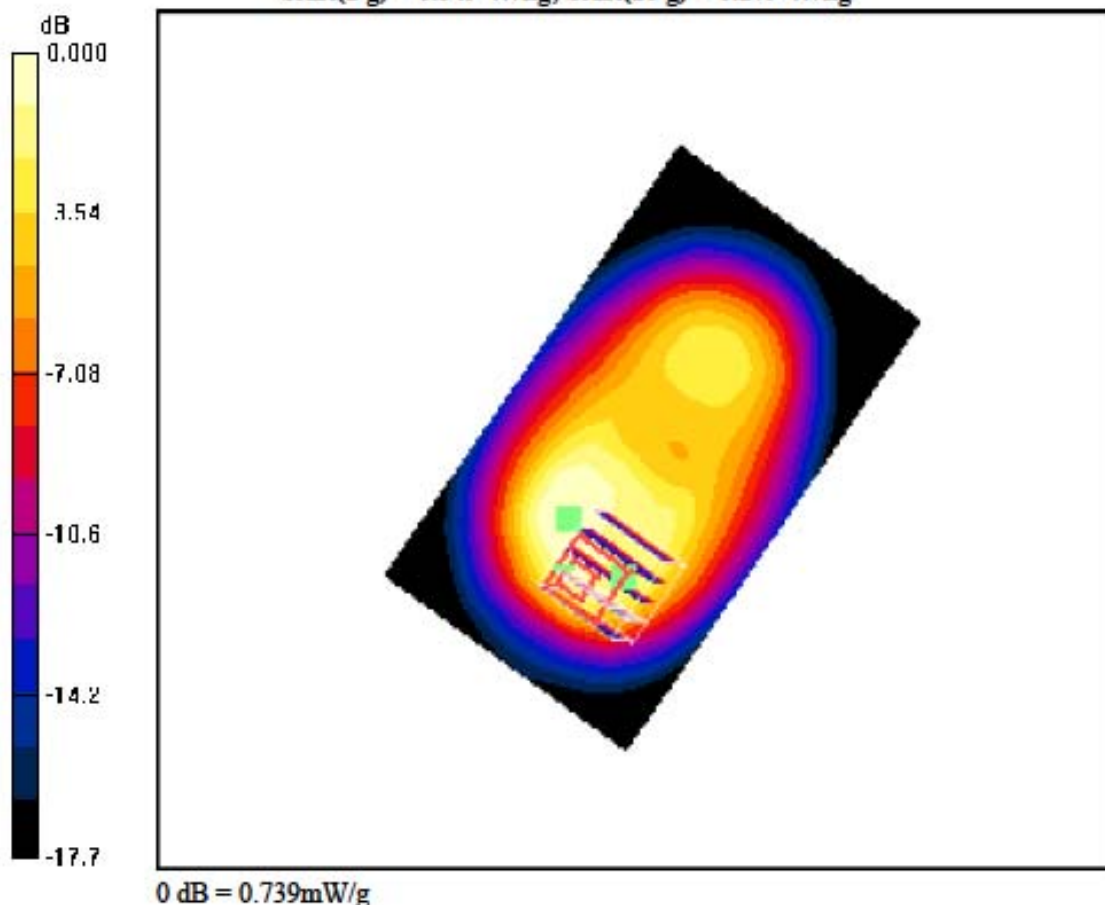

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 12 Ch. 512, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.038 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.437 W/kg

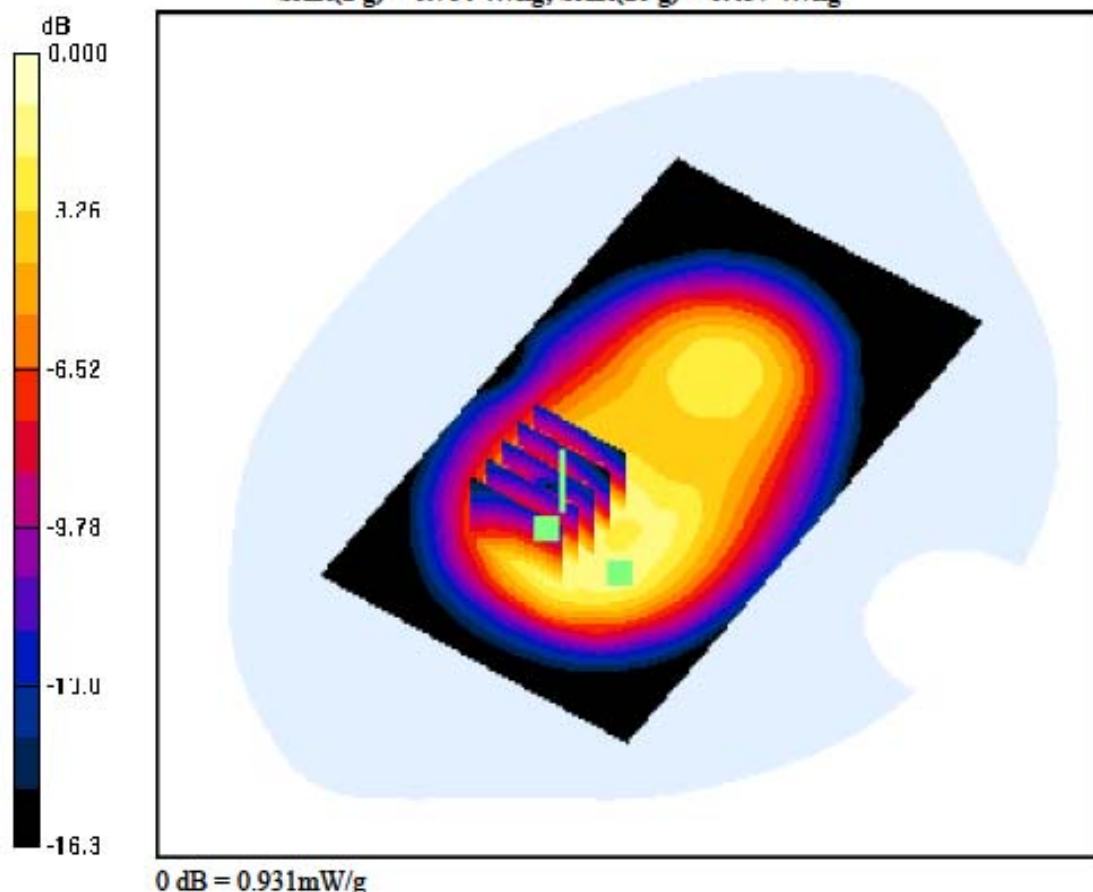

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 12 Ch. 512, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.038 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.309 W/kg

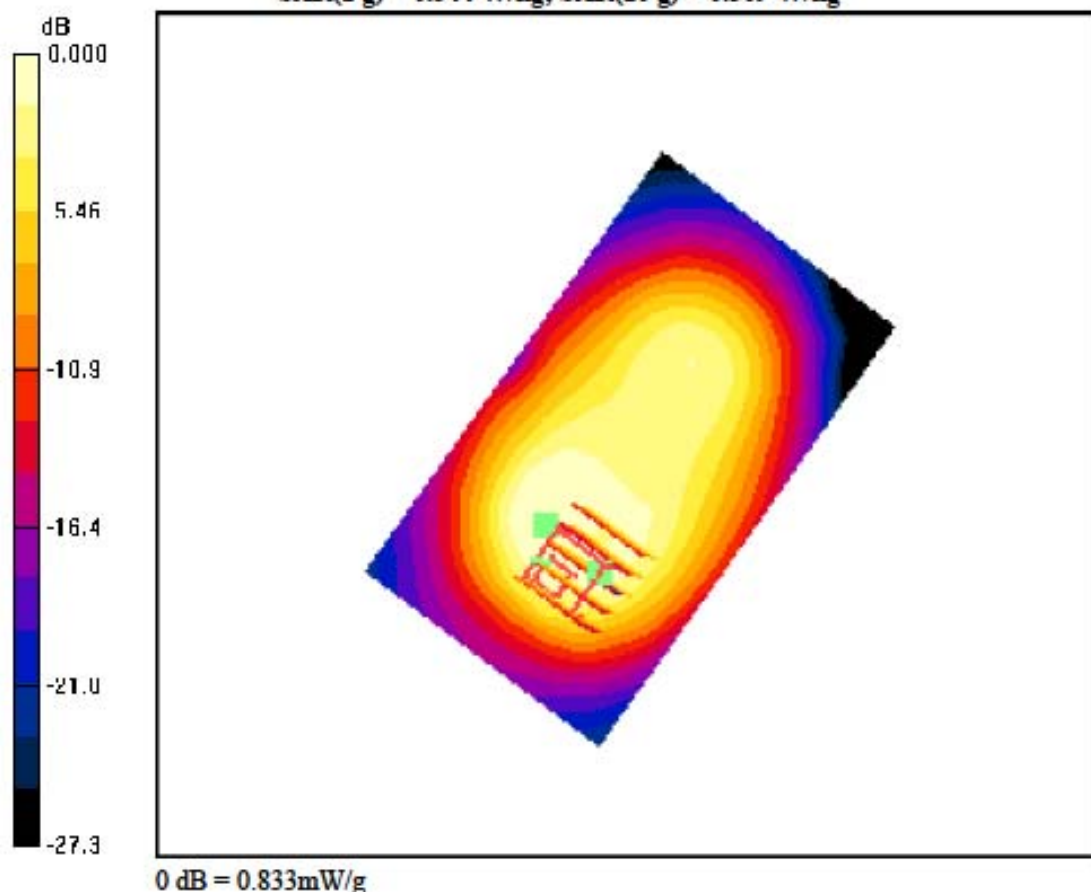

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 12 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.077 dB
 Peak SAR (extrapolated) = 1.20 W/kg
 SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.403 W/kg

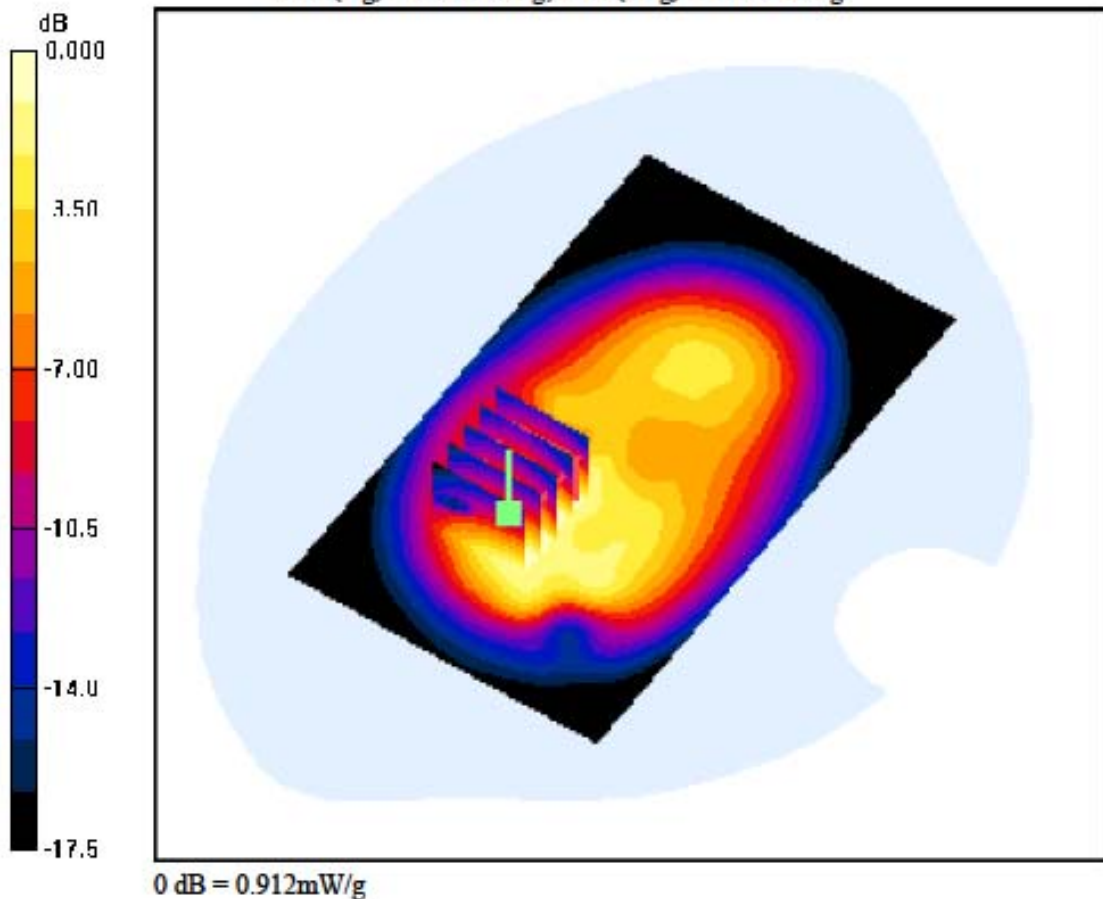

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 12 Ch. 810, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.053 dB
 Peak SAR (extrapolated) = 1.08 W/kg
 SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.369 W/kg

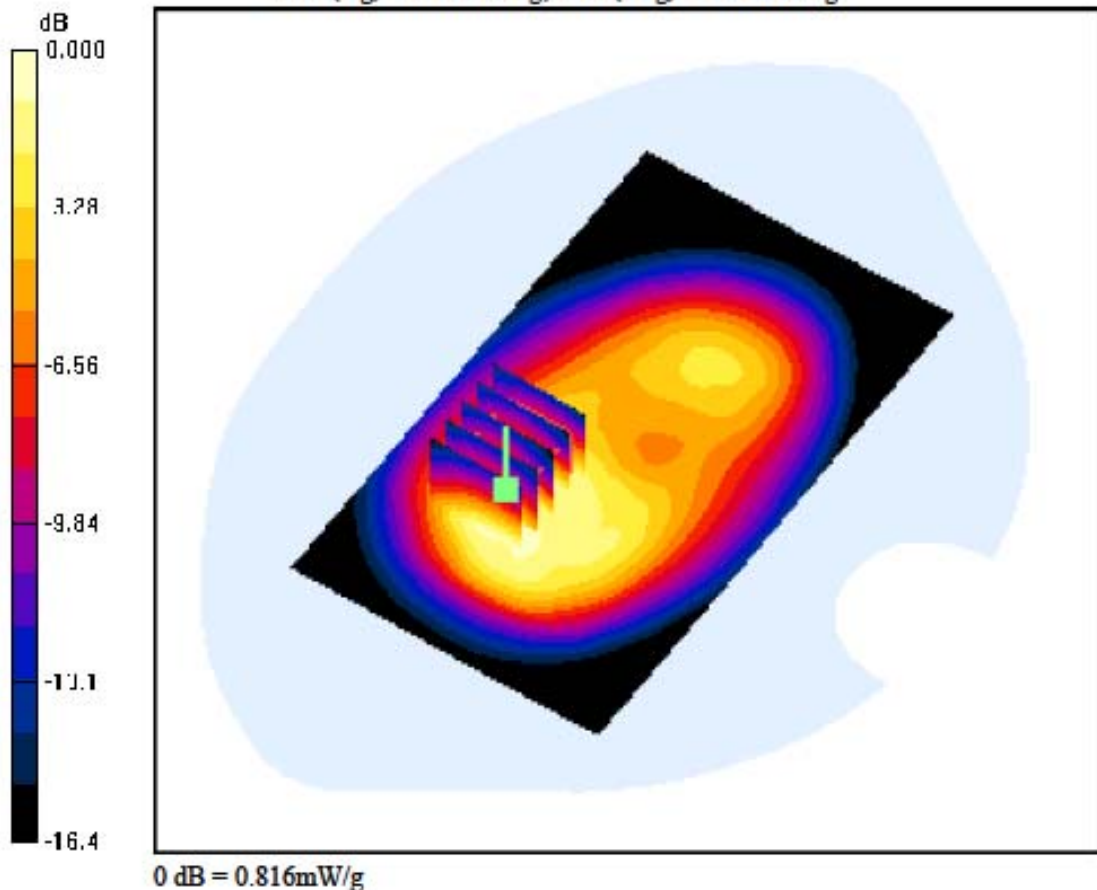

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, PCS1900 GPRS Class 12 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.058 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.367 W/kg

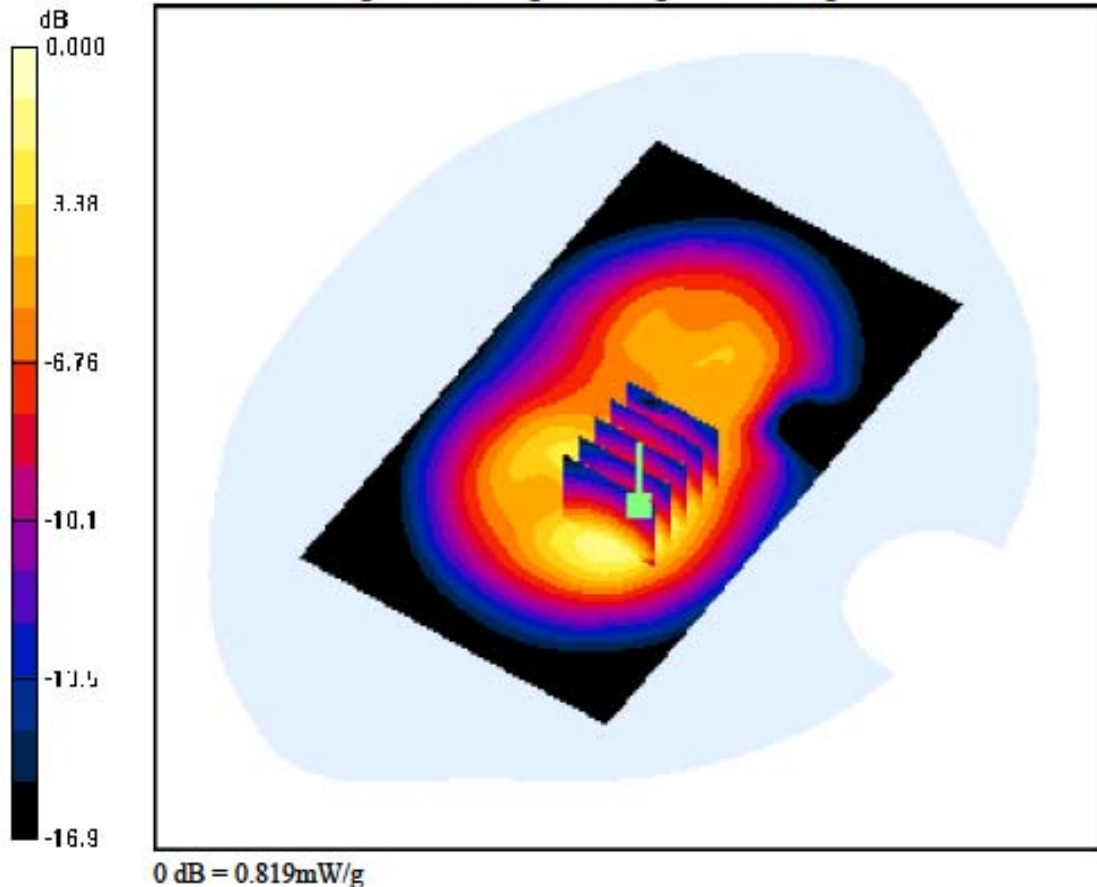

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Right, PCS1900 GPRS Class 12 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.063 W/kg

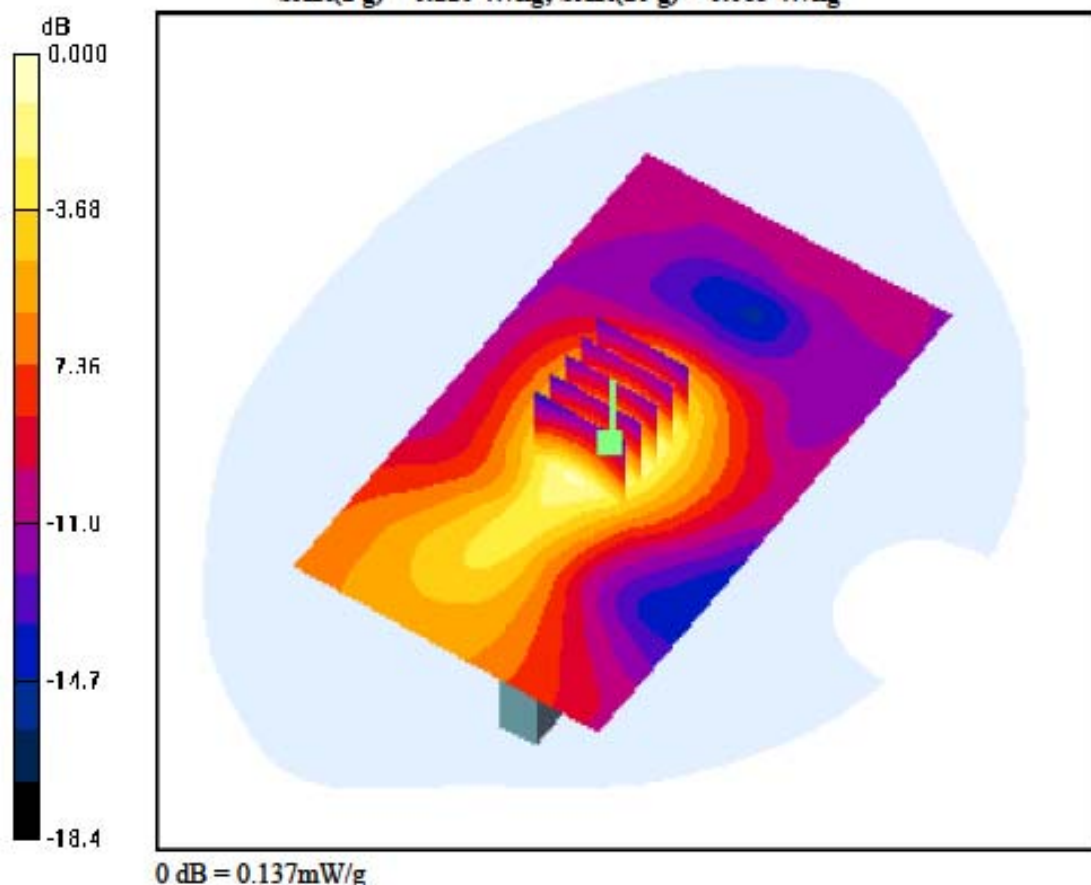

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Left, PCS1900 GPRS Class 12 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = -0.002 dB
 Peak SAR (extrapolated) = 0.372 W/kg
 SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.144 W/kg

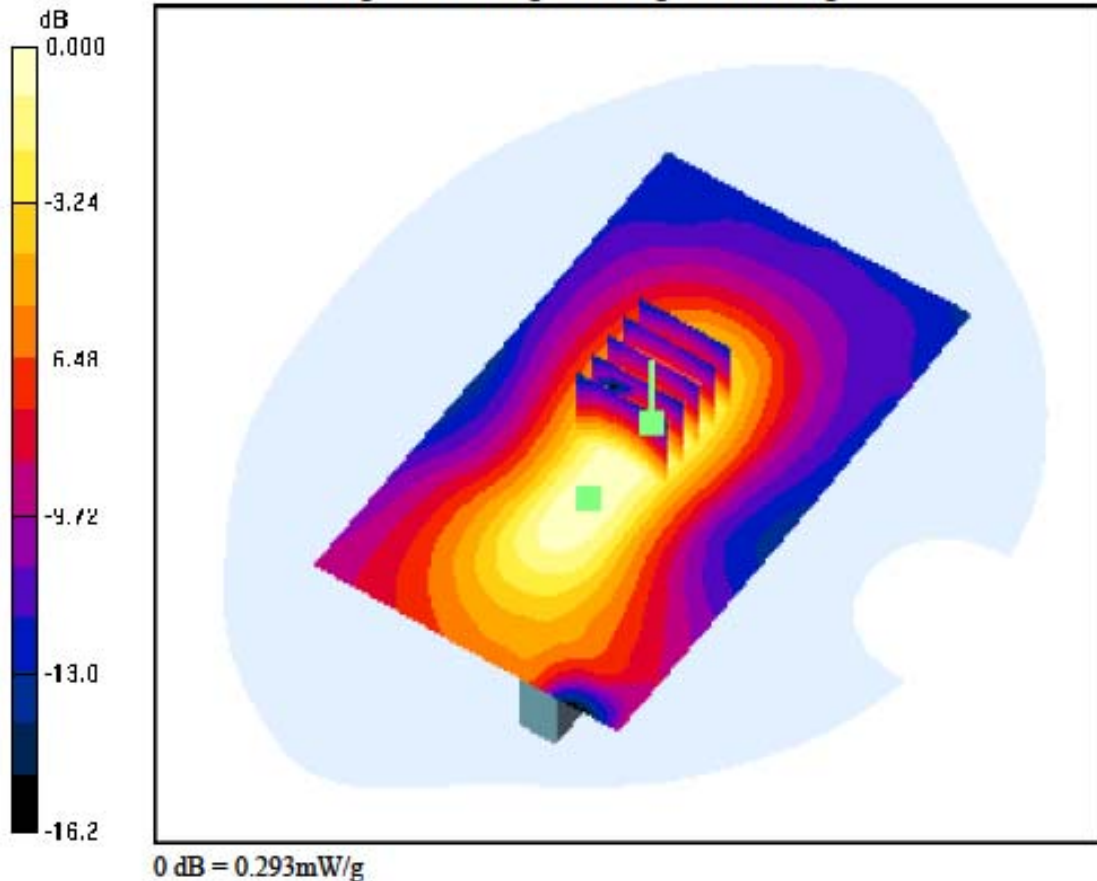

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Left, PCS1900 GPRS Class 12 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.136 W/kg

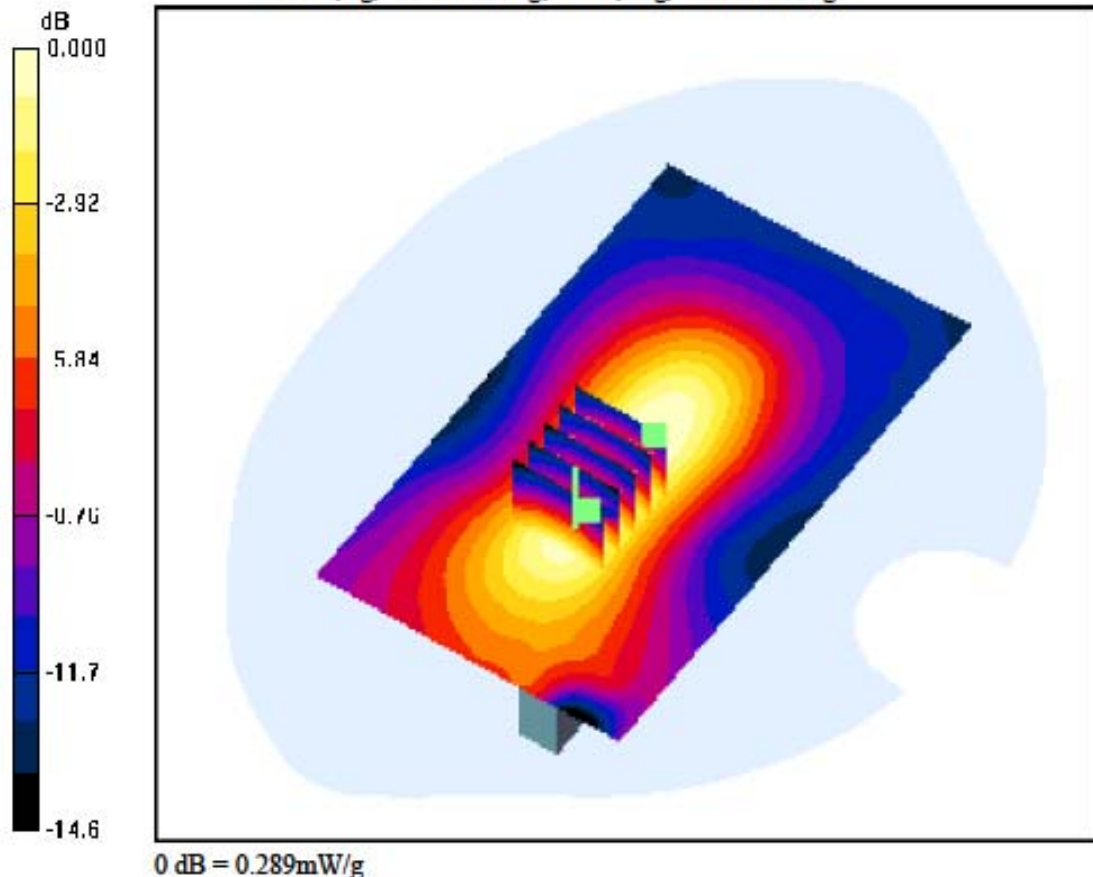

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Top, W-LAN(802.11b) Ch. 6, Ant Internal

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.281 dB
Peak SAR (extrapolated) = 0.040 W/kg
SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.011 W/kg

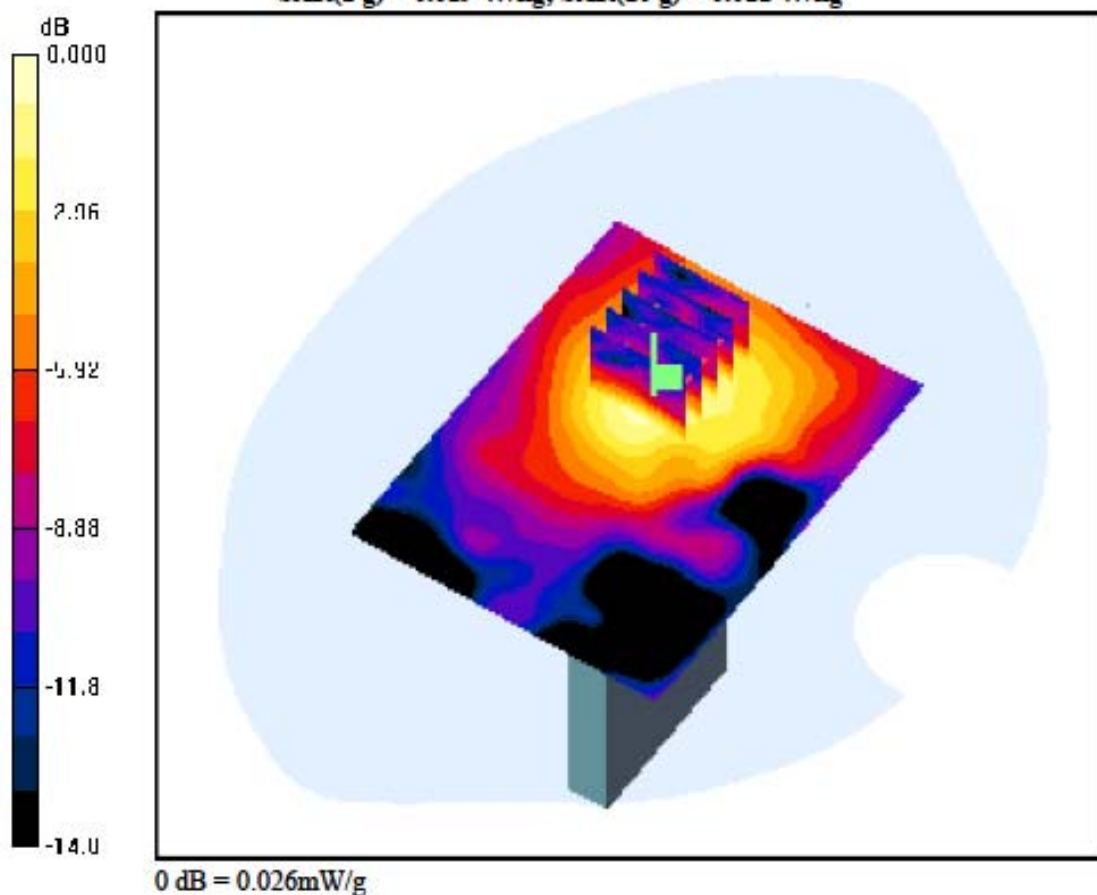

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Front, W-LAN(802.11b) Ch. 6, Ant Internal

Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.131 W/kg
SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.035 W/kg

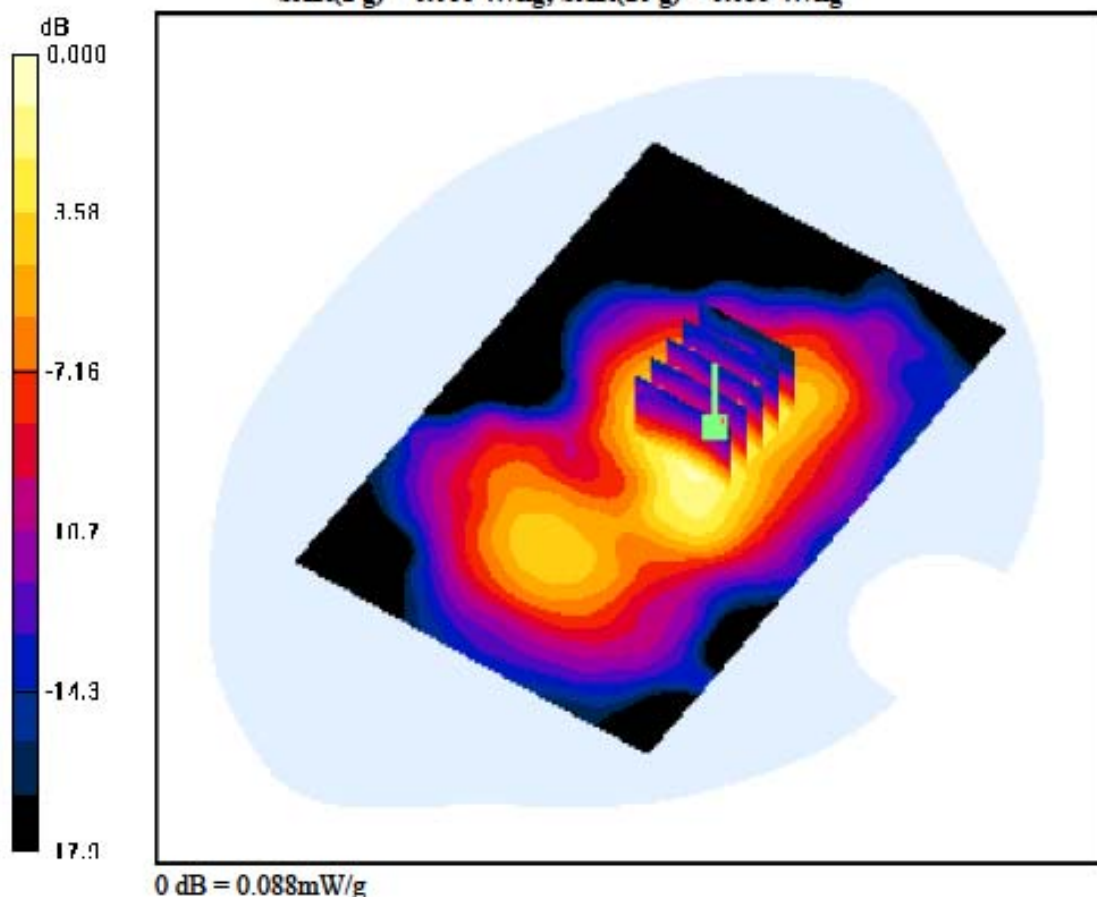

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal


Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.039 W/kg

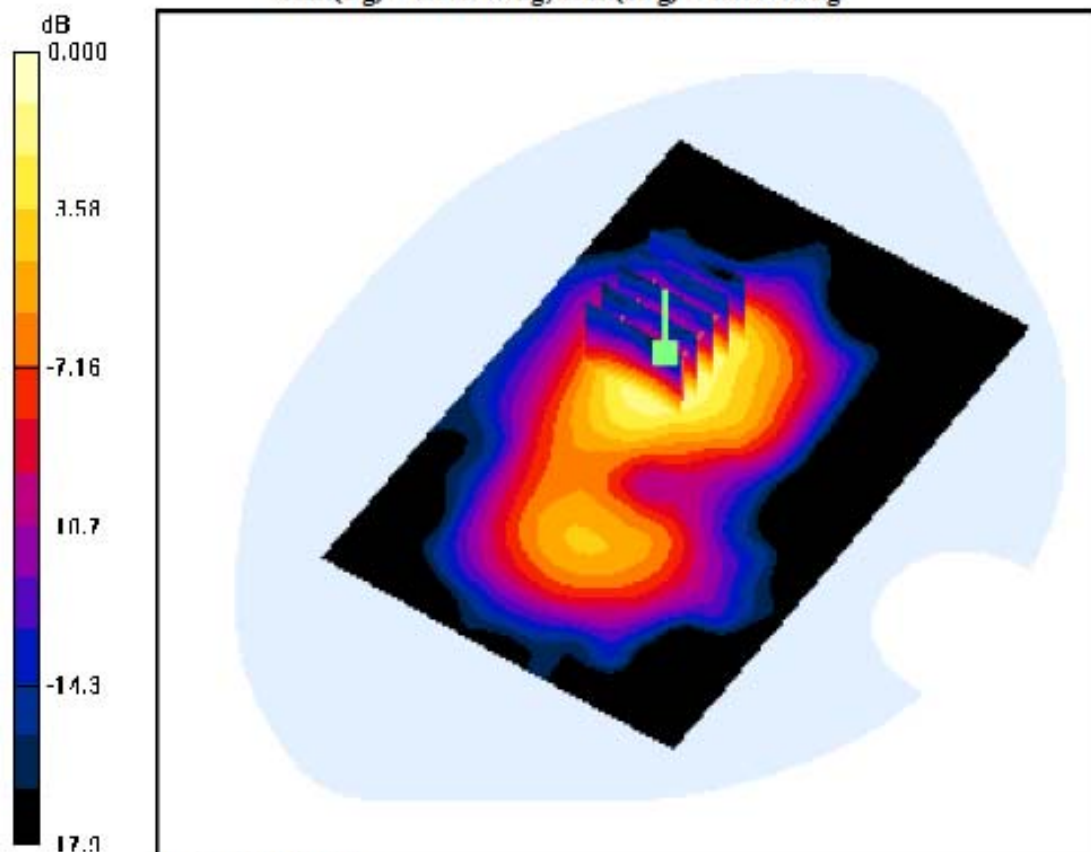

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal

Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.270 dB
 Peak SAR (extrapolated) = 0.202 W/kg
 SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.046 W/kg

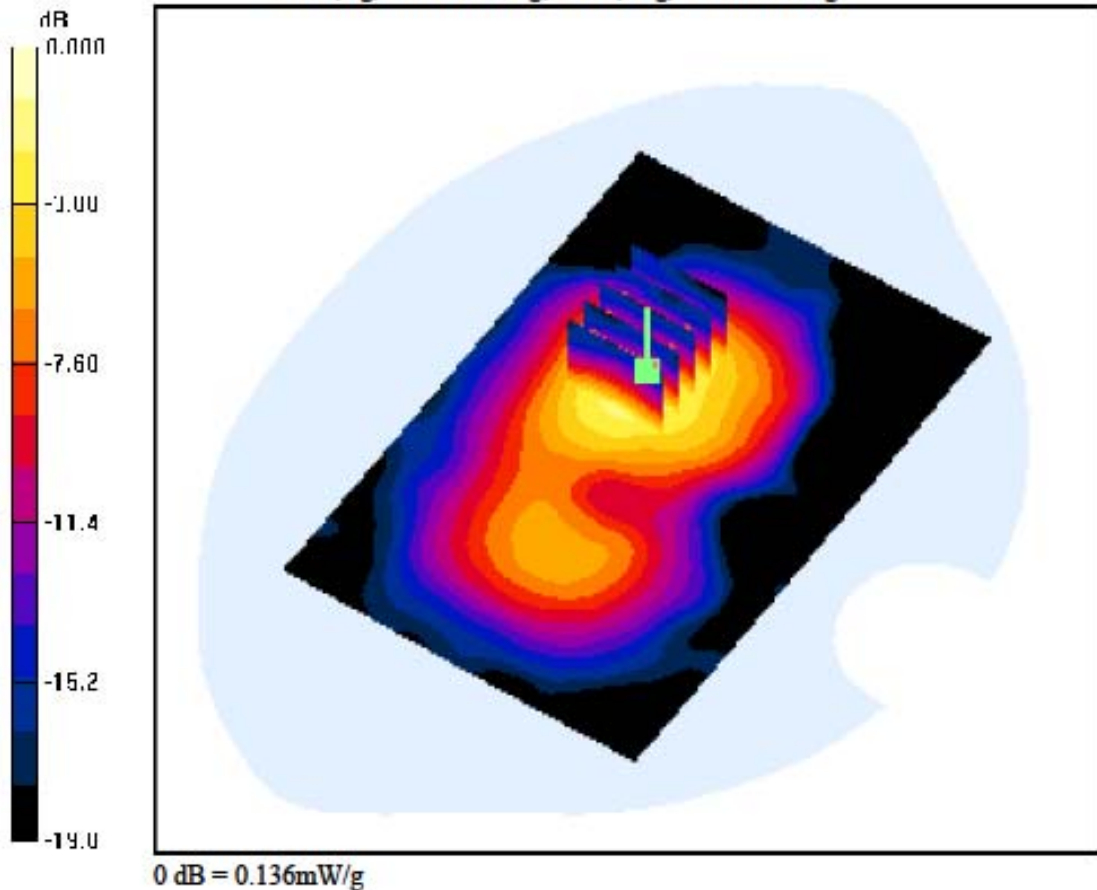

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Rear, W-LAN(802.11b) Ch. 11, Ant Internal

Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.366 dB
 Peak SAR (extrapolated) = 0.251 W/kg
 SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.059 W/kg

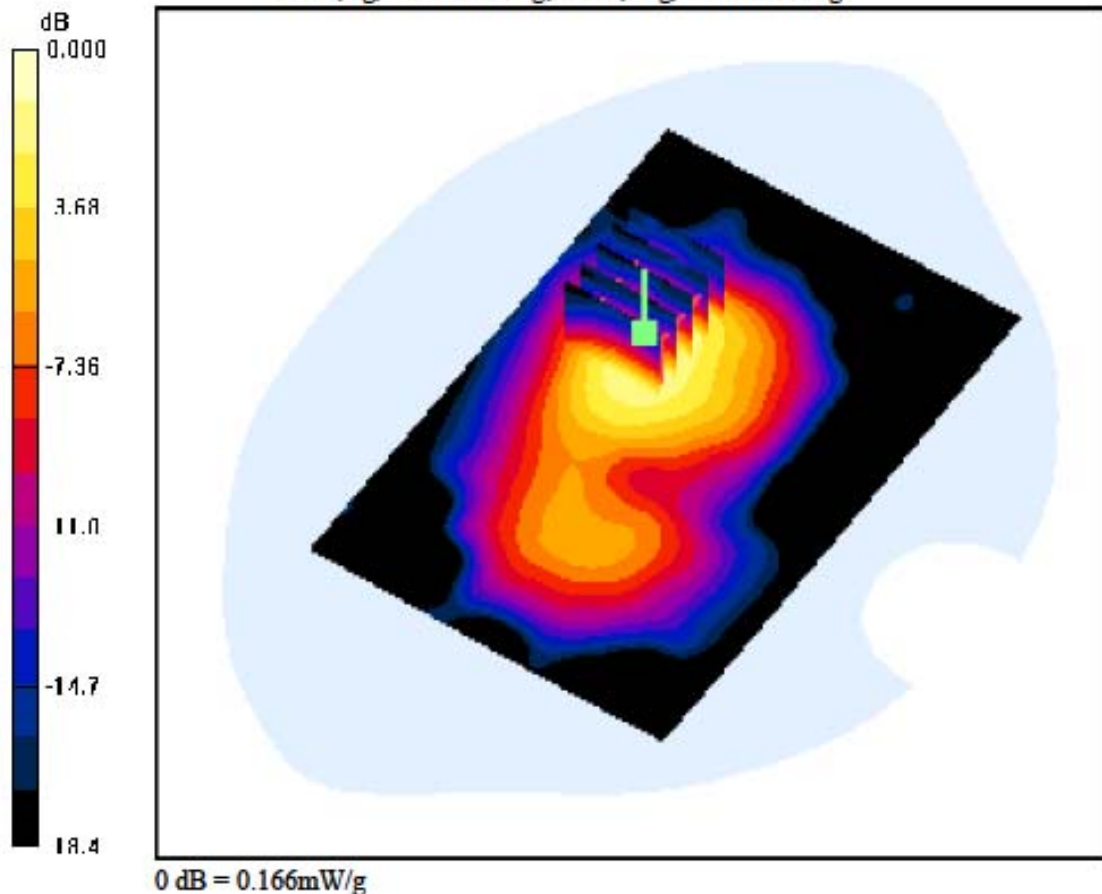

DIGITAL EMC CO., LTD

DUT: LG-P692; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Right, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.039 W/kg

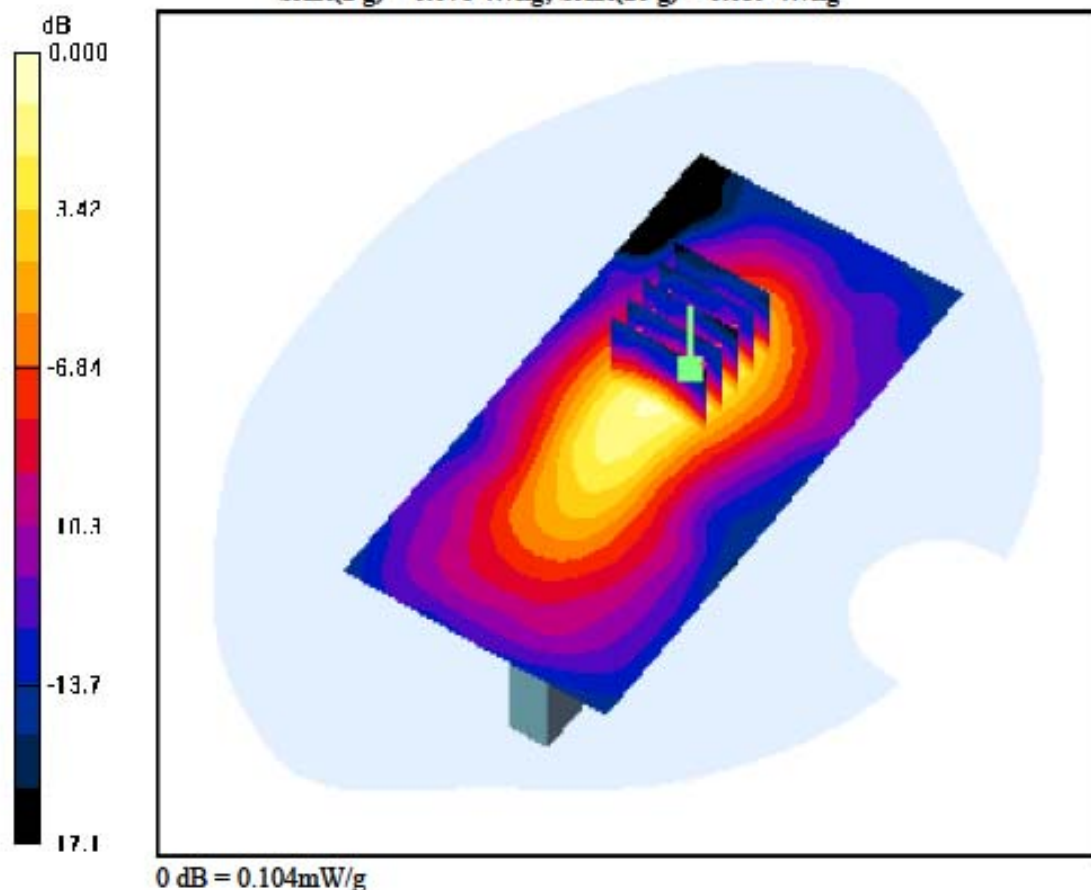

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-06; Ambient Temp: 22.3; Tissue Temp: 22.6

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery


Area Scan (81x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.363 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.516 W/kg

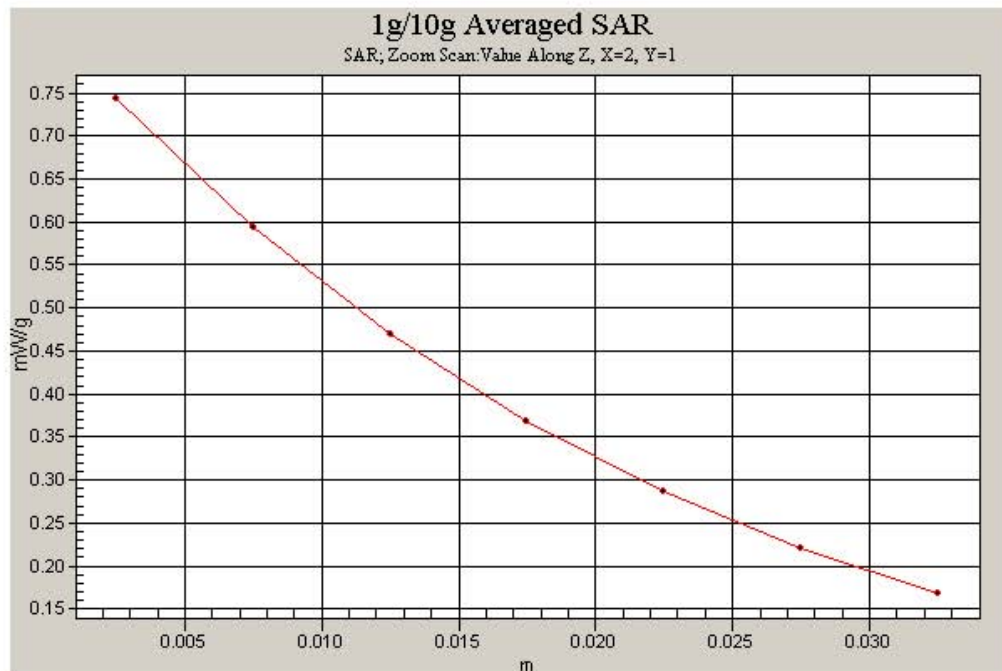

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-06 Ambient Temp: 22.3; Tissue Temp: 22.6

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.866 W/kg

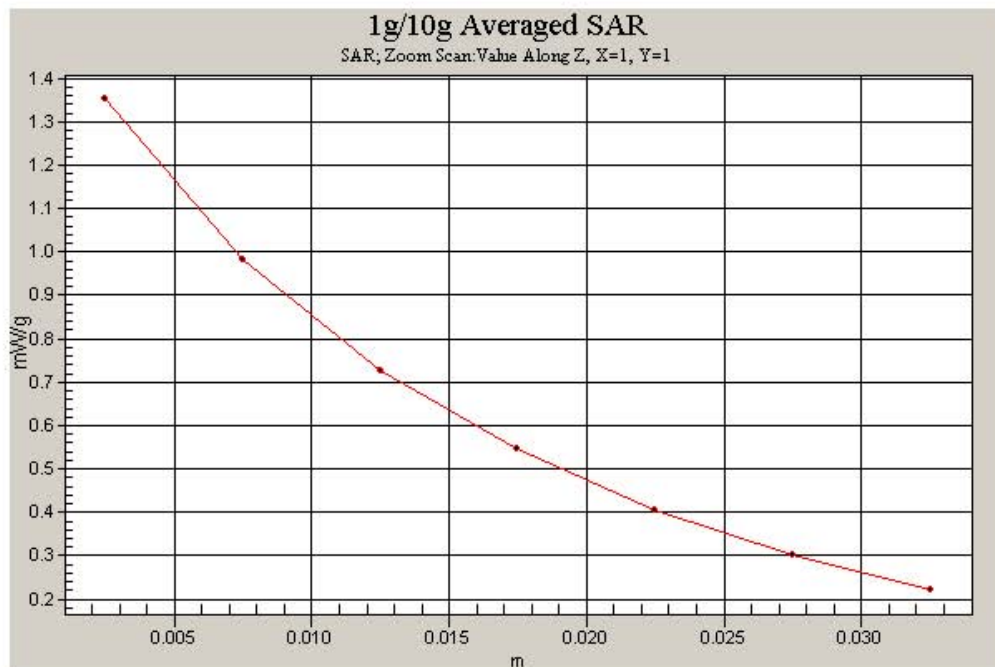

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-07; Ambient Temp: 22.5; Tissue Temp: 22.7

Left Touch, PCS1900 Ch. 810, Ant Internal, Standard Battery

Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = -0.030 dB
 Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.562 W/kg

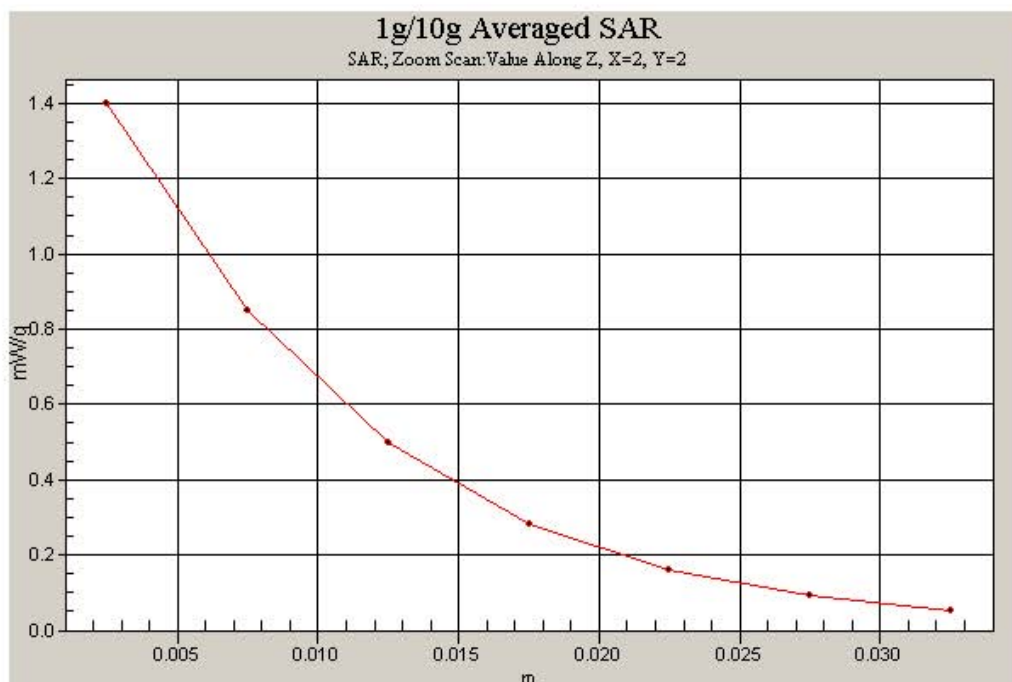

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-07 Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Front, PCS1900 GPRS Class 12 Ch. 512, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.437 W/kg

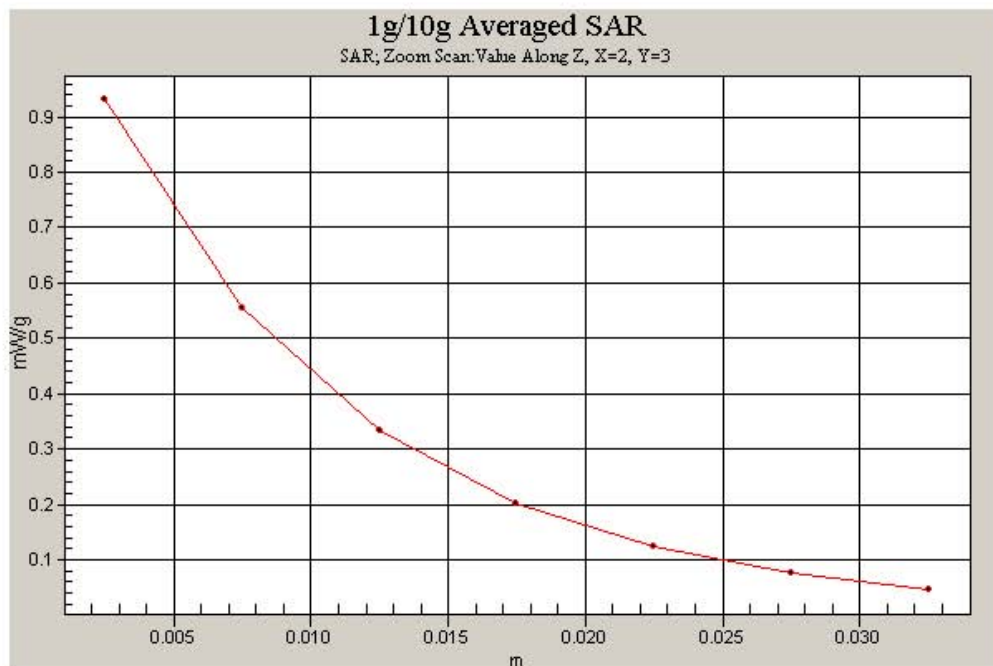

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-08; Ambient Temp: 22.1; Tissue Temp: 22.3

Left Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery


Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.193 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.209 W/kg

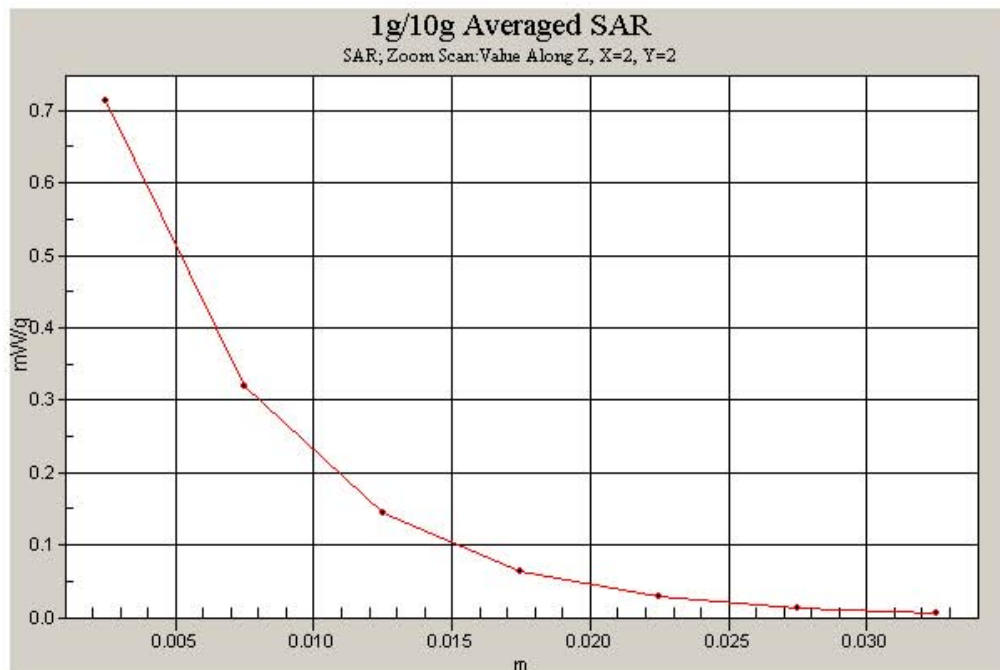

DIGITAL EMC CO., LTD**DUT: LG-P692; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-07-08 Ambient Temp: 22.1; Tissue Temp: 22.3

1cm space from Body, Rear, W-LAN(802.11b) Ch. 11, Ant Internal

Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.366 dB
 Peak SAR (extrapolated) = 0.251 W/kg
SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.059 W/kg

