

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: January 30, 2013
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Report No.: HCTR1301FR24
	HCT FRN: 0005866421

FCC ID : ZNFP710

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-P710
Additional FCC Model(s):	P710, LGP710
EUT Type:	Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
RF Output Field Strength	10.23 dBuV/m
Frequency of Operation:	13.560200 MHz
Modulation type	ASK
FCC Classification:	Low Power Communication Device – Transmitter
FCC Rule Part(s):	FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710	



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1301FR24	January 30, 2013	- First Approval Report

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710



Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	10
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	13
9. EMISSION BANDWIDTH PLOT.....	14
10. FREQUENCY TOLERANCE.....	15
11. POWERLINE CONDUCTE EMISSIONS.....	16
12. LIST OF TEST EQUIPMENT	25

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNFP710



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFP710
EUT: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
Model name(s): LG-P710
Additional FCC ID: P710, LGP710
Date of Test: December 15, 2012 ~ December 21, 2012
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

Product	Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC
FCC Model Name	LG-P710
Additional FCC Model Name	P710, LGP710
Power Supply	DC 3.7 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	10.23 dBuV/m
Transmit Power	13.560200 MHz
Modulation Type	ASK
Antenna Specification	Manufacturer: Komatech Co., Ltd. Antenna type: Internal Antenna

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710	



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009).

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNFP710



3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With
FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2009	13.553MHz to 13.567MHz
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2009	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	9kHz to 30MHz
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	30MHz to 1GHz
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2009	150kHz to 30MHz
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2009	0.01% of nominal
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2009	-

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyoungki-Do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNFP710

7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass



8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.


(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNFP710

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

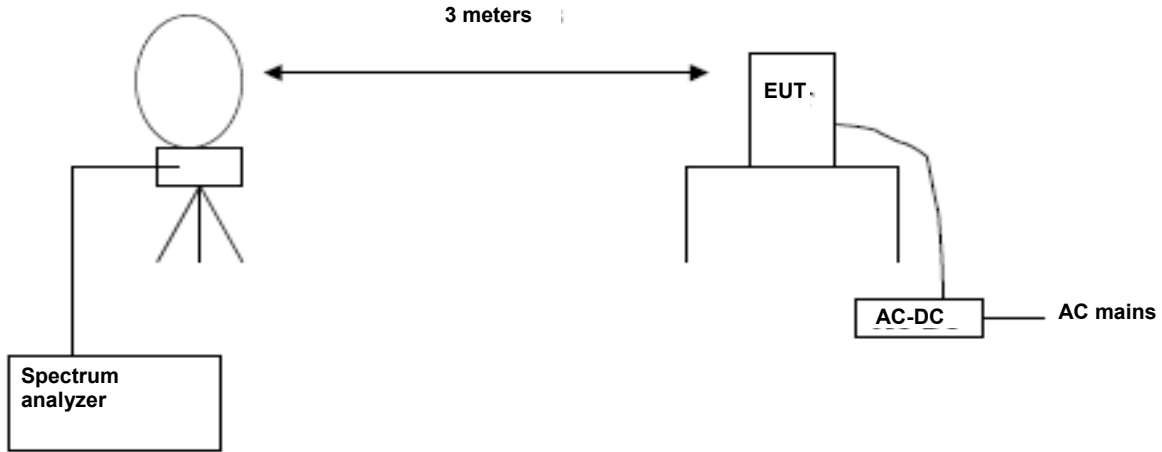

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dB μ V/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNFP710



Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5602	40.42(H)*	9.81	-40	10.23	84	73.77
13.5602	34.45(V)*	9.81	-40	4.26	84	79.74

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.553	15.43	9.81	-40	-14.76	50.47	65.23
13.567	14.21	9.81	-40	-15.98	50.47	66.45

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3480	22.84	9.81	-40	-7.35	40.51	47.86
13.7730	21.79	9.81	-40	-8.40	40.51	48.91

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.045	14.01	9.81	-40	-16.18	29.54	45.72
14.087	13.55	9.81	-40	-16.64	29.54	46.18

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNFP710




Note :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = -40$ dB
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. (H)* and (V)* mean antenna polarization.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFP710

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

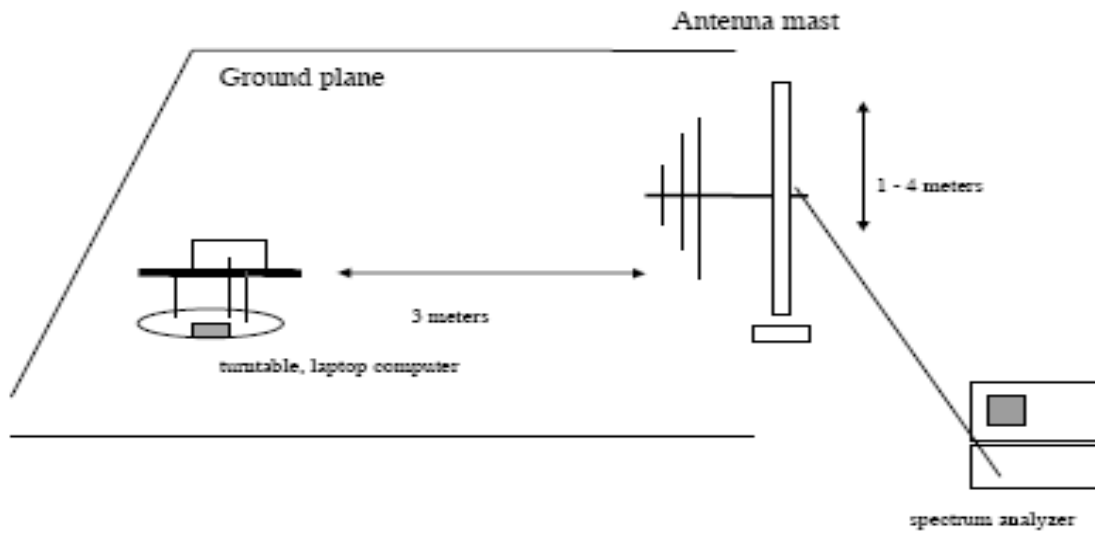

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Remark


1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

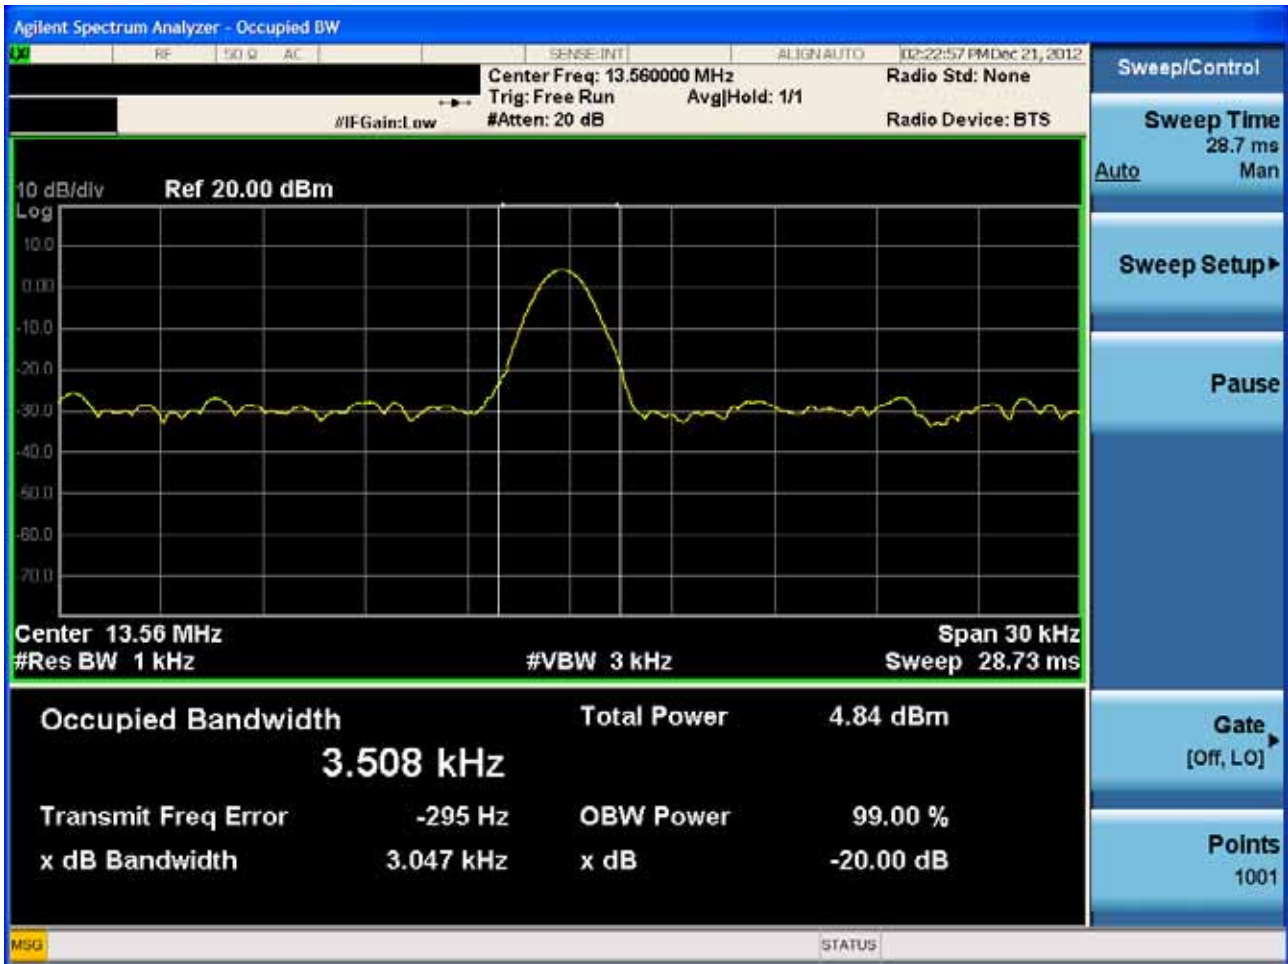

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNF710

10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE (%)	POWER	Temperature (°C)	Frequency (MHz)	Frequency Error (Hz)
100%	3.7 V	-20	13.560546	346
100%		-10	13.560020	-180
100%		0	13.560041	-159
100%		10	13.560460	260
100%		20	13.560200	0
100%		30	13.560441	241
100%		40	13.560554	354
100%		50	13.560463	263

Notes:

- 1. The EUT is supplied with the fully re-charged battery.



11. POWERLINE CONDUCTE EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC		FCC ID: ZNFP710



Test Plots

Unterminate the Antenna

Conducted Emissions (Line 1)


HCT

EMC

EUT: LG-P710
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART 15 B
 Comment: H(Underminated)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:		FCC PART 15 CLASS B				
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

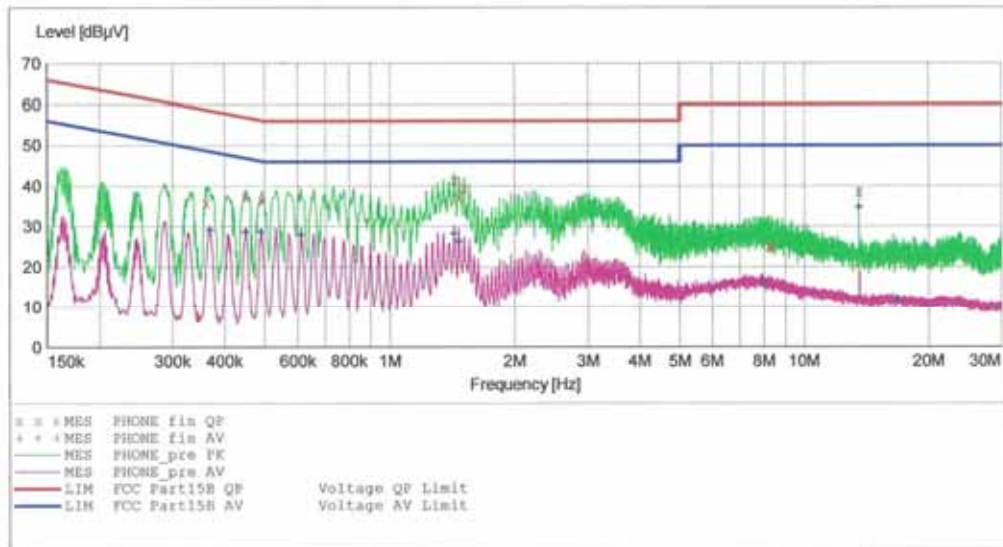

MEASUREMENT RESULT: "PHONE_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.360010	35.90	9.8	59	22.8	---	---
0.449010	37.40	9.8	57	19.5	---	---
0.493010	36.60	9.8	56	19.5	---	---
1.432000	41.40	9.9	56	14.6	---	---
1.468000	37.10	9.9	56	18.9	---	---
1.512000	39.40	9.9	56	16.6	---	---
8.232000	25.10	10.4	60	34.9	---	---
8.336000	24.80	10.4	60	35.2	---	---
13.560000	38.60	10.8	60	21.4	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNFP710



MEASUREMENT RESULT: "PHONE_fin AV"

12/17/2012 3:29PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.369010	29.10	9.8	49	19.5	---	---
0.449010	28.70	9.8	47	18.2	---	---
0.490010	28.70	9.8	46	17.4	---	---
0.612000	27.90	9.8	46	18.1	---	---
1.432000	28.20	9.9	46	17.8	---	---
1.468000	26.20	9.9	46	19.8	---	---
7.948000	16.10	10.3	50	33.9	---	---
13.560000	34.70	10.8	50	15.3	---	---
16.848000	11.70	11.3	50	38.3	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC			FCC ID: ZNF710	



Conducted Emissions (Line 2)


HCT

EMC

EUT: LG-P710
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART 15 CLASS B
 Comment: N(Unterminated)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:		FCC PART 15 CLASS B					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

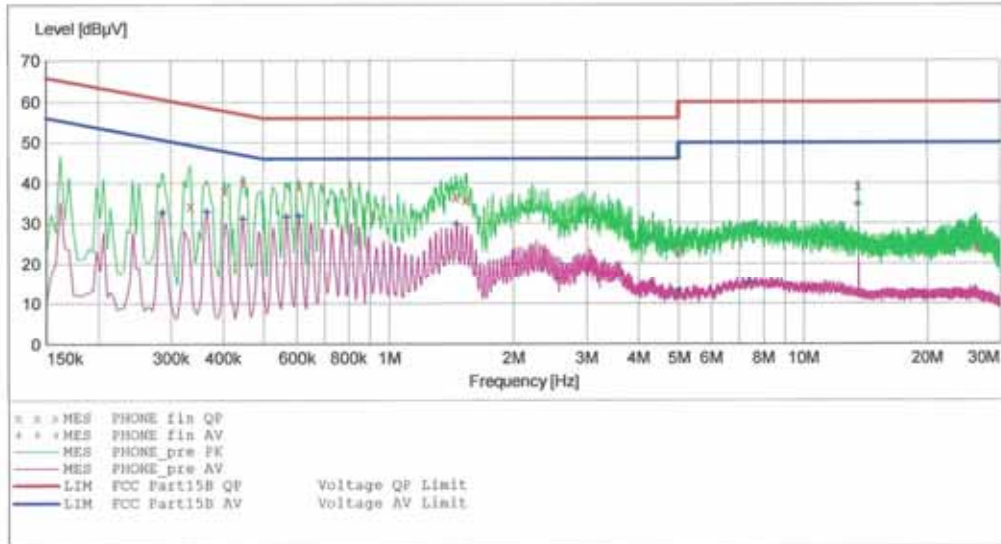

MEASUREMENT RESULT: "PHONE_fin QP"

12/17/2012 3:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.334010	34.40	9.9	59	24.9	---	---
0.402010	38.20	10.0	58	19.6	---	---
0.446010	40.10	10.0	57	16.8	---	---
0.608000	39.20	10.0	56	16.8	---	---
1.452000	36.50	10.0	56	19.5	---	---
1.532000	35.90	10.1	56	20.1	---	---
5.000000	22.60	10.4	56	33.4	---	---
13.560000	39.20	11.1	60	20.8	---	---
26.284000	24.00	12.5	60	36.0	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710	



MEASUREMENT RESULT: "PHONE_fin AV"

12/17/2012 3:23PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.286010	32.80	10.0	51	17.9	---	---
0.366010	32.90	10.0	49	15.7	---	---
0.446010	31.00	10.0	47	15.9	---	---
0.568000	31.60	10.0	46	14.4	---	---
0.608000	31.80	10.0	46	14.2	---	---
1.460000	29.80	10.0	46	16.2	---	---
5.000000	13.10	10.4	46	32.9	---	---
7.372000	15.10	10.5	50	34.9	---	---
13.560000	34.70	11.1	50	15.3	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNF710



**Terminate the Antenna
Conducted Emissions (Line 1)**


HCT

EMC

EUT: LG-P710
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART 15 B
 Comment: H(Terminated)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:		FCC PART 15 CLASS B					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

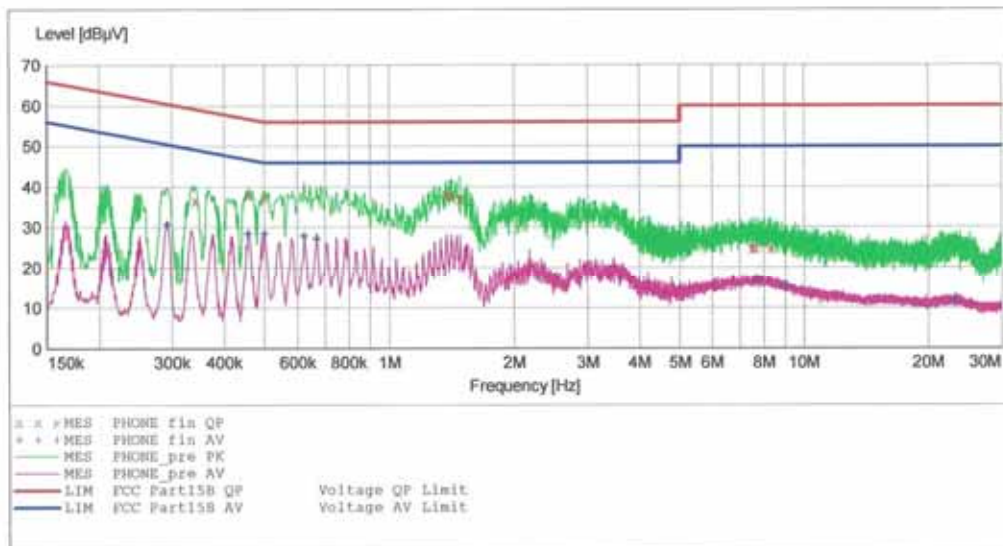

MEASUREMENT RESULT: "PHONE_fin_QP"

12/17/2012 3:33PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.341010	36.50	9.7	59	22.6	---	---
0.458010	38.10	9.8	57	18.7	---	---
0.500000	37.50	9.8	56	18.5	---	---
1.376000	38.10	9.8	56	17.9	---	---
1.420000	37.50	9.9	56	18.5	---	---
1.484000	36.90	9.9	56	19.1	---	---
7.484000	24.70	10.3	60	35.3	---	---
7.664000	24.80	10.3	60	35.2	---	---
8.324000	24.60	10.4	60	35.4	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNFP710



MEASUREMENT RESULT: "PHONE_fin AV"

12/17/2012 3:33PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.292010	30.70	9.8	51	19.7	---	---
0.458010	28.40	9.8	47	18.3	---	---
0.500000	28.40	9.8	46	17.6	---	---
0.500000	28.40	9.8	46	17.6	---	---
0.624000	27.70	9.8	46	18.3	---	---
0.668000	27.10	9.8	46	18.9	---	---
7.712000	16.50	10.3	50	33.5	---	---
9.104000	15.40	10.4	50	34.6	---	---
23.248000	11.70	11.9	50	38.3	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNF710



Conducted Emissions (Line 2)


HCT

EMC

EUT: LG-P710
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART 15 CLASS B
 Comment: N(Terminated)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

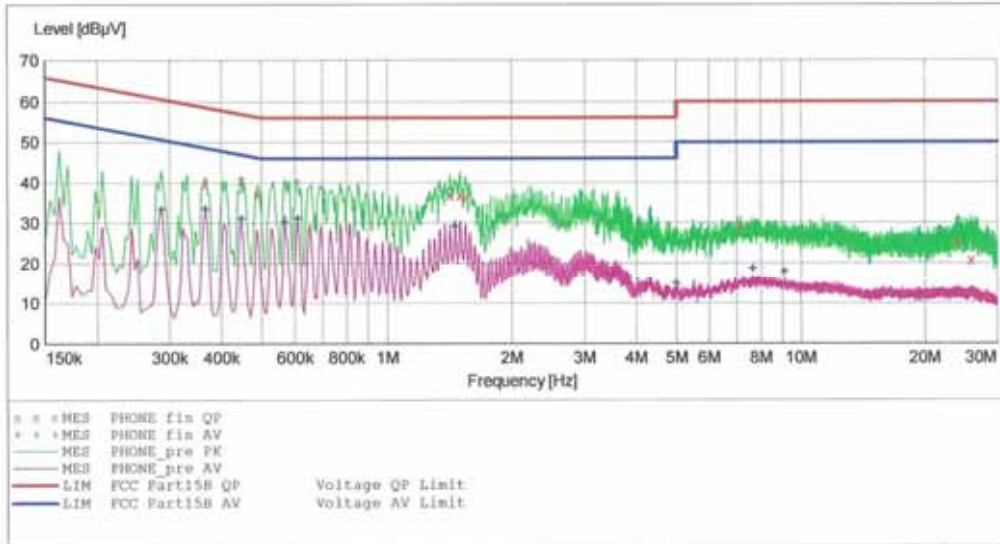

MEASUREMENT RESULT: "PHONE_fin_QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.366010	39.90	10.0	59	18.7	---	---
0.446010	40.40	10.0	57	16.5	---	---
0.490010	37.10	10.0	56	19.1	---	---
1.420000	37.00	10.0	56	19.0	---	---
1.500000	37.00	10.0	56	19.0	---	---
1.540000	36.40	10.1	56	19.6	---	---
7.144000	29.30	10.5	60	30.7	---	---
23.896000	25.60	12.3	60	34.4	---	---
25.932000	20.80	12.4	60	39.2	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFP710	



MEASUREMENT RESULT: "PHONE_fin AV"

12/17/2012 3:16PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.286010	33.40	10.0	51	17.3	---	---
0.366010	33.50	10.0	49	15.1	---	---
0.446010	31.10	10.0	47	15.8	---	---
0.568000	30.20	10.0	46	15.8	---	---
0.612000	31.10	10.0	46	14.9	---	---
1.464000	29.10	10.0	46	16.9	---	---
5.000000	15.00	10.4	46	31.0	---	---
7.664000	18.60	10.5	50	31.4	---	---
9.136000	17.90	10.6	50	32.1	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1301FR24	Date of Issue: January 30, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE Rx only/PCS WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC				FCC ID: ZNF710

12. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/09/2013	100073
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/03/2013	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2013	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	07/31/2013	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/11/2013	10094
MITEQ	AMF-6B-180265-35-10P / POWER AMP	Annual	04/16/2013	667624
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2013	19660
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4416A /Power Meter	Annual	11/07/2013	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2013	MY4442009
Hewlett Packard	11636B/Power Divider	Annual	11/07/2013	11377
Hewlett Packard	11667B / Power Splitter	Annual	06/05/2013	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2013	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2013	010002156287001199
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536