

## Attachment 1. – Dipole Validation Plots

## DIGITAL EMC CO., LTD

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.904 \text{ mho/m}$ ;  $\epsilon_r = 42.063$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


### DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-24; Ambient Temp: 22.1; Tissue Temp: 22.2

### Dipole Validation

**Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.718 mW/g  
SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

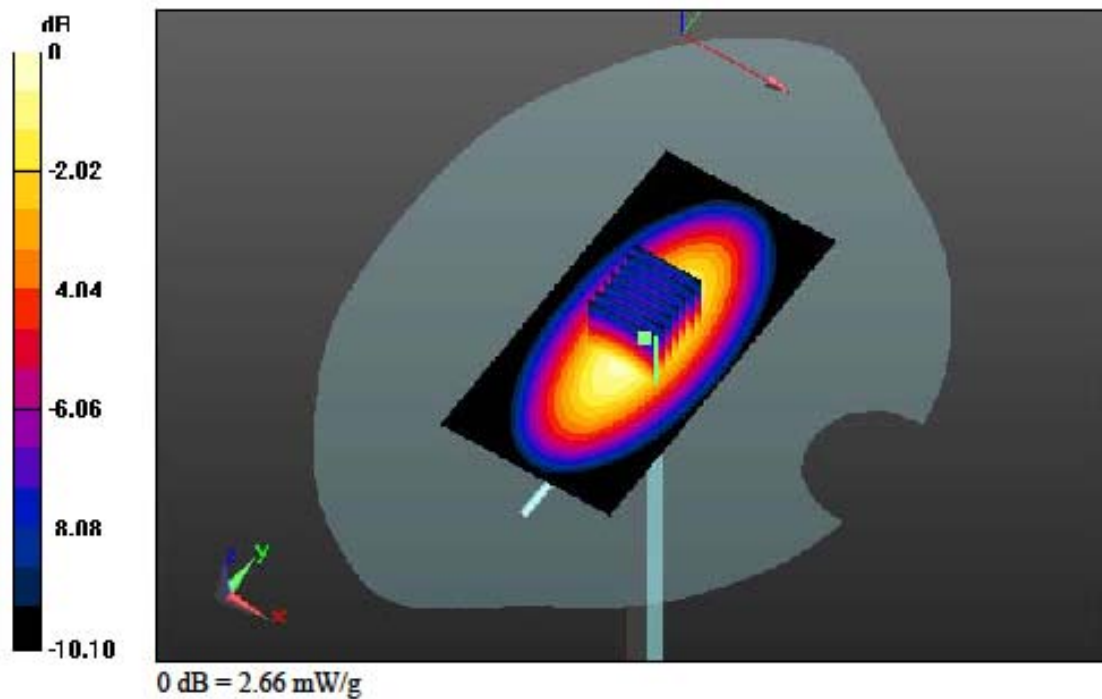

## DIGITAL EMC CO., LTD

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.904 \text{ mho/m}$ ;  $\epsilon_r = 42.063$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-24; Ambient Temp: 22.1; Tissue Temp: 22.2

### Dipole Validation

**Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 3.718 mW/g  
 SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

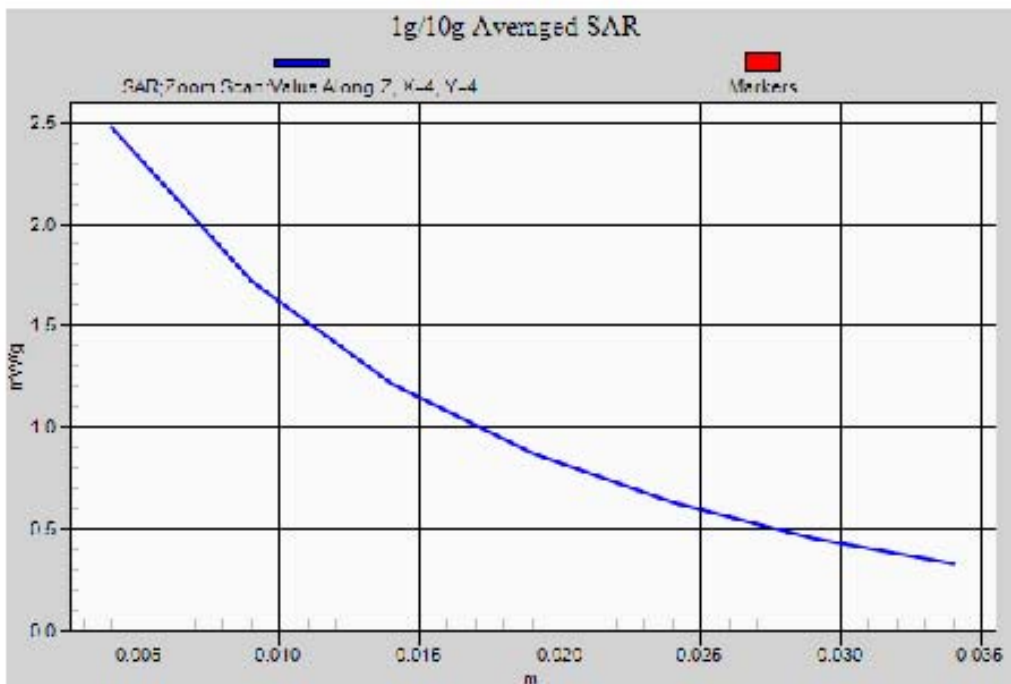

## DIGITAL EMC CO., LTD

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.977 \text{ mho/m}$ ;  $\epsilon_r = 53.891$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


### DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.03, 9.03, 9.03); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-24; Ambient Temp: 22.1; Tissue Temp: 22.2

### Dipole Validation

**Area Scan (61x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 3.726 mW/g  
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg

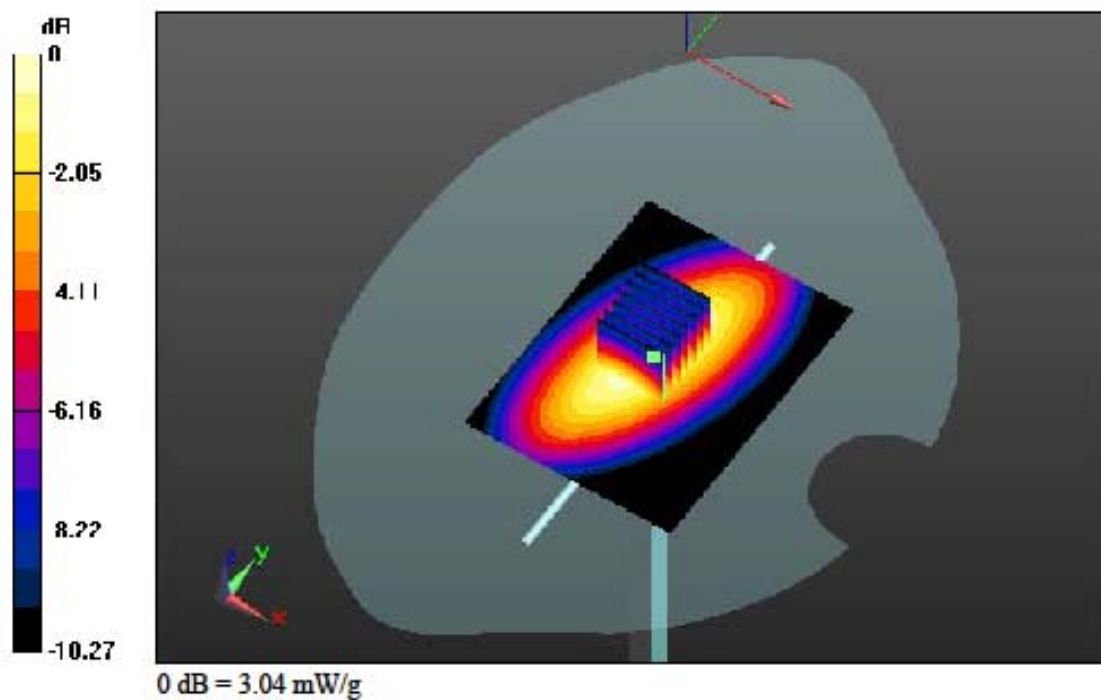

## DIGITAL EMC CO., LTD

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.977 \text{ mho/m}$ ;  $\epsilon_r = 53.891$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(9.03, 9.03, 9.03); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-24; Ambient Temp: 22.1; Tissue Temp: 22.2

### Dipole Validation

**Area Scan (61x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 3.726 mW/g  
 SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg

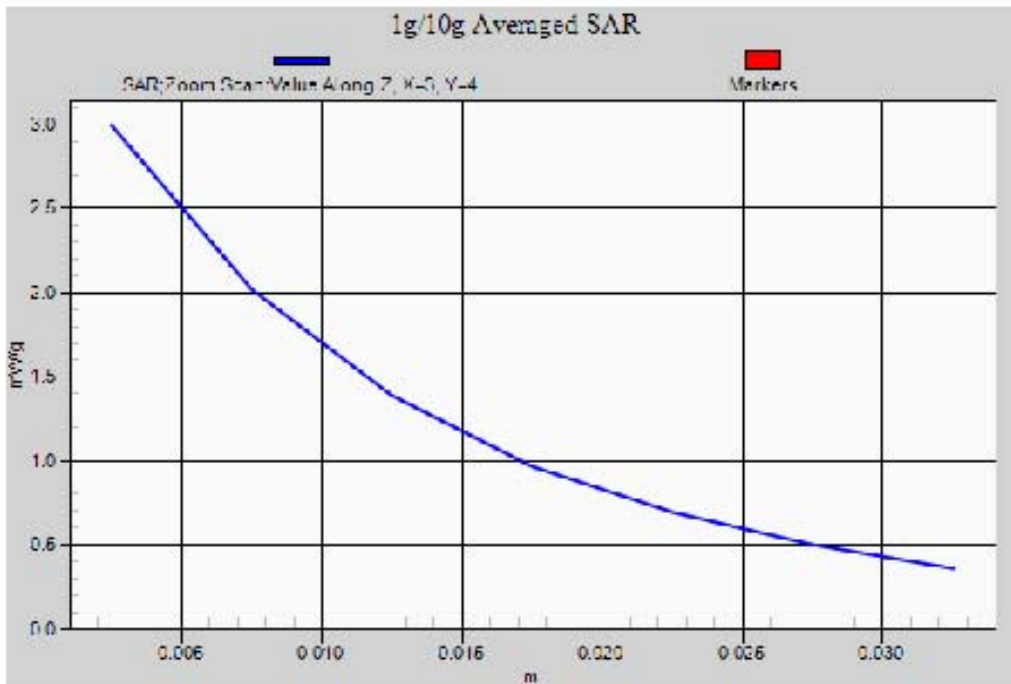

## DIGITAL EMC CO., LTD

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.423$  mho/m;  $\epsilon_r = 39.991$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### **DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(7.76, 7.76, 7.76); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-25; Ambient Temp: 22.4; Tissue Temp: 22.5

### **Dipole Validation**


**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.05 dB

Peak SAR (extrapolated) = 17.441 mW/g

SAR(1 g) = 9.23 W/kg; SAR(10 g) = 4.75 W/kg

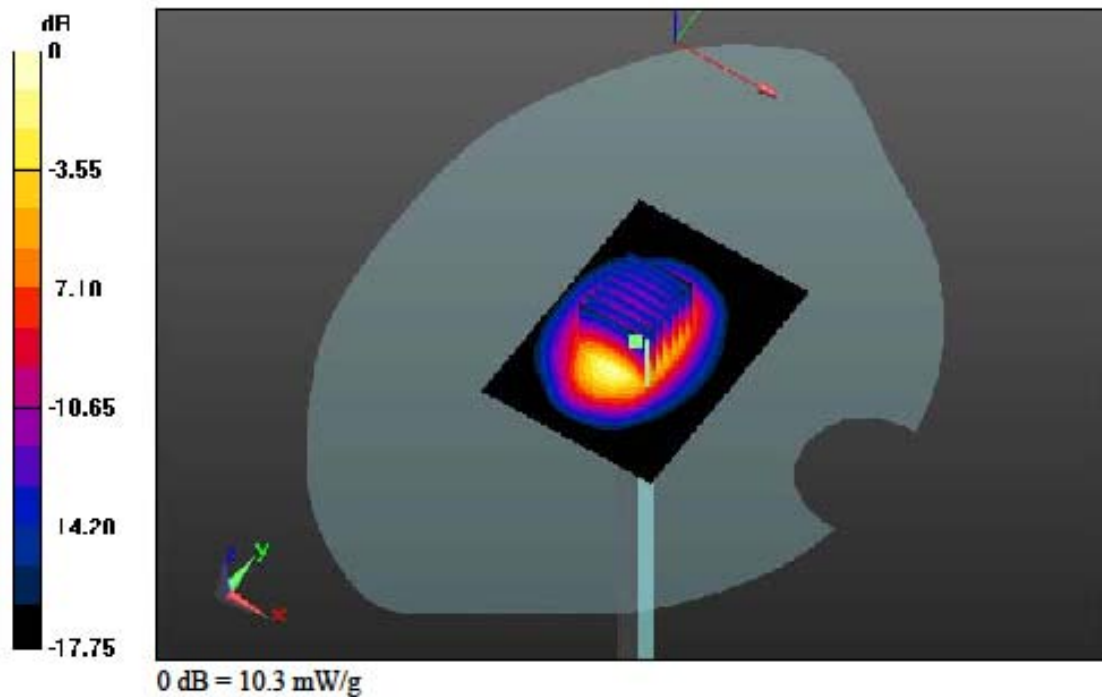

## DIGITAL EMC CO., LTD

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.423$  mho/m;  $\epsilon_r = 39.991$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(7.76, 7.76, 7.76); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-25; Ambient Temp: 22.4; Tissue Temp: 22.5

### Dipole Validation

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 17.441 mW/g  
 SAR(1 g) = 9.23 W/kg; SAR(10 g) = 4.75 W/kg

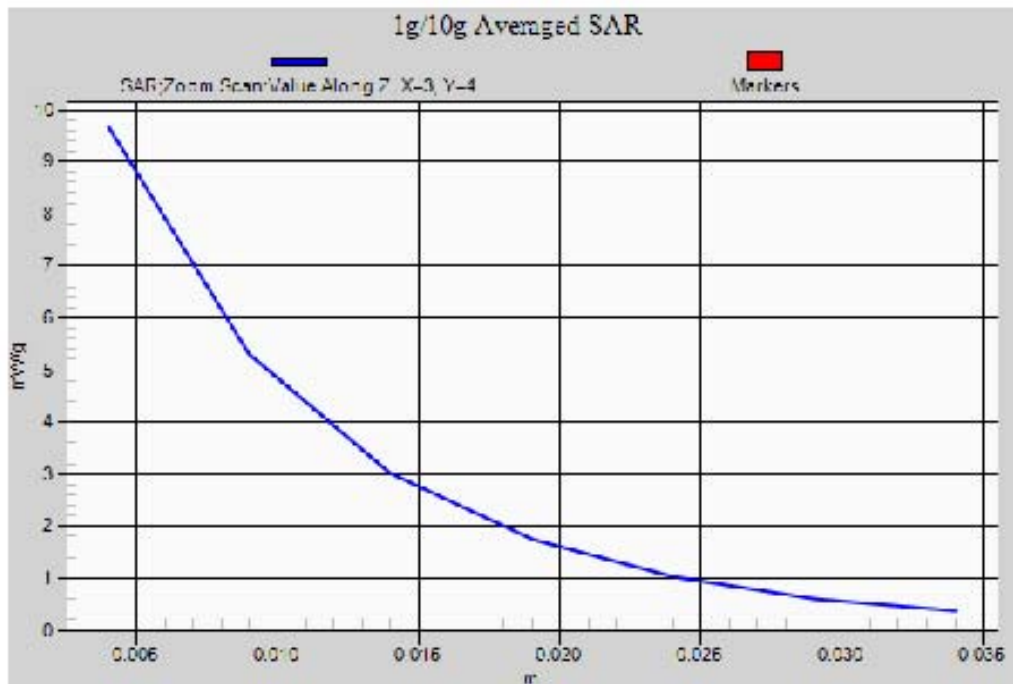

## DIGITAL EMC CO., LTD

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.527$  mho/m;  $\epsilon_r = 52.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-25; Ambient Temp: 22.4; Tissue Temp: 22.5

### Dipole Validation


**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.05 dB

Peak SAR (extrapolated) = 19.579 mW/g

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.28 W/kg

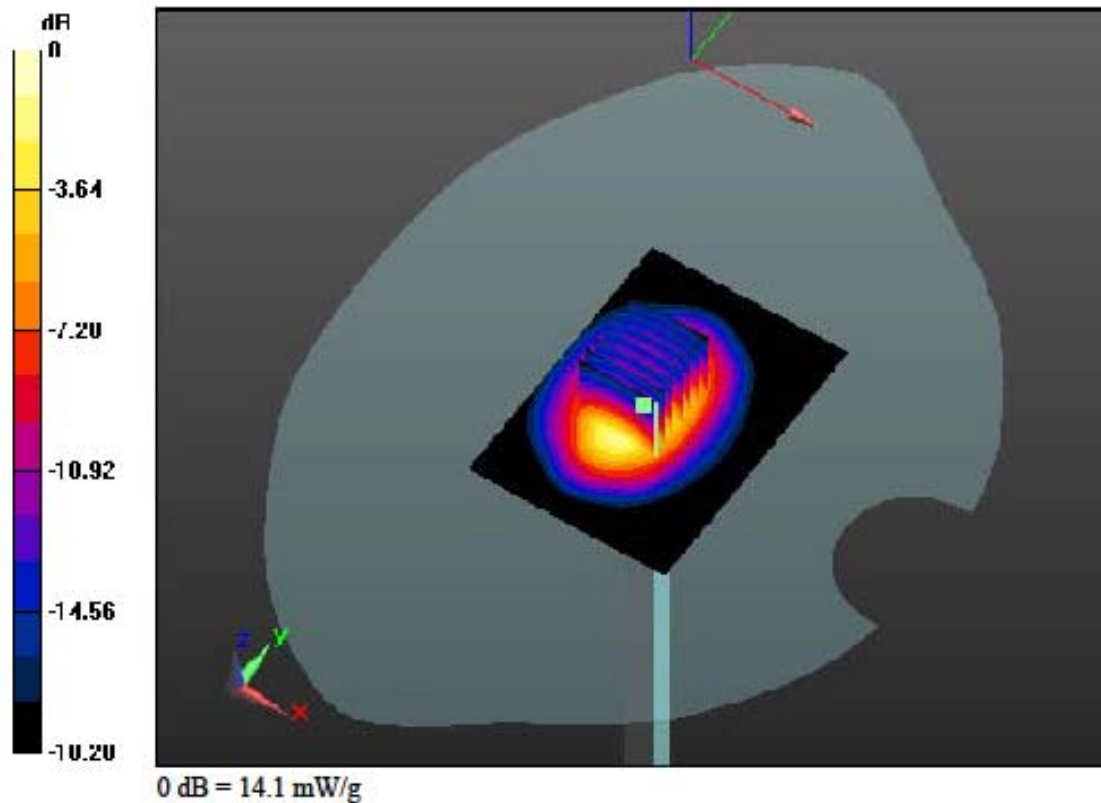



## DIGITAL EMC CO., LTD

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.527$  mho/m;  $\epsilon_r = 52.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


### DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(7.34, 7.34, 7.34); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-25; Ambient Temp: 22.4; Tissue Temp: 22.5

### Dipole Validation

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 19.579 mW/g  
 SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.28 W/kg

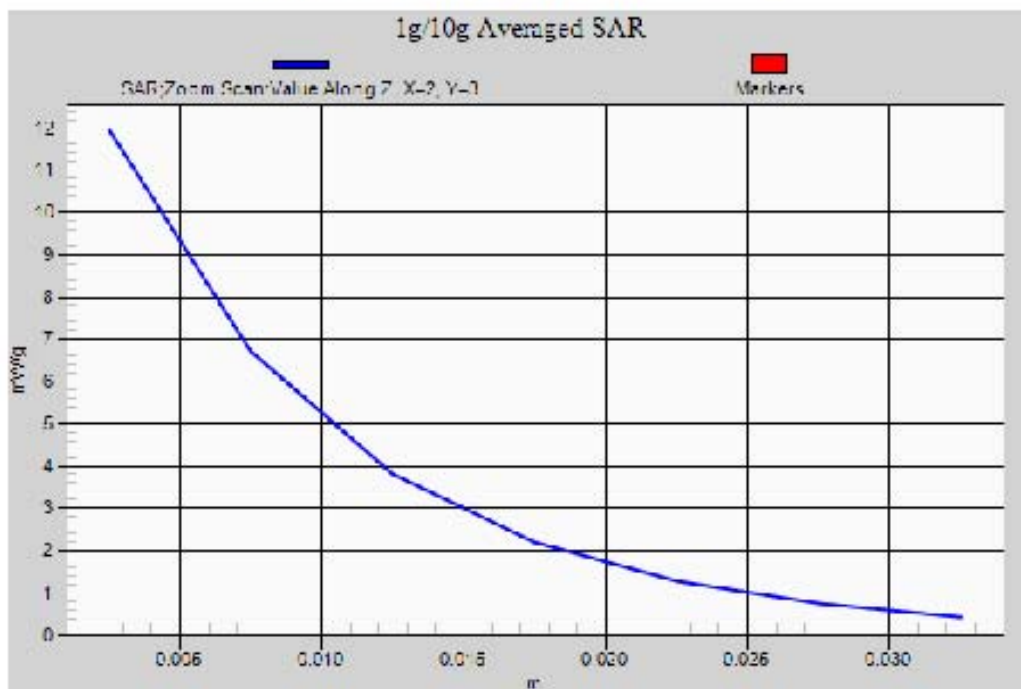

## DIGITAL EMC CO., LTD

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.869$  mho/m;  $\epsilon_r = 37.869$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### **DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(6.98, 6.98, 6.98); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-26; Ambient Temp: 22.2; Tissue Temp: 22.4

### **Dipole Validation**


**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.885 mW/g

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.24 W/kg

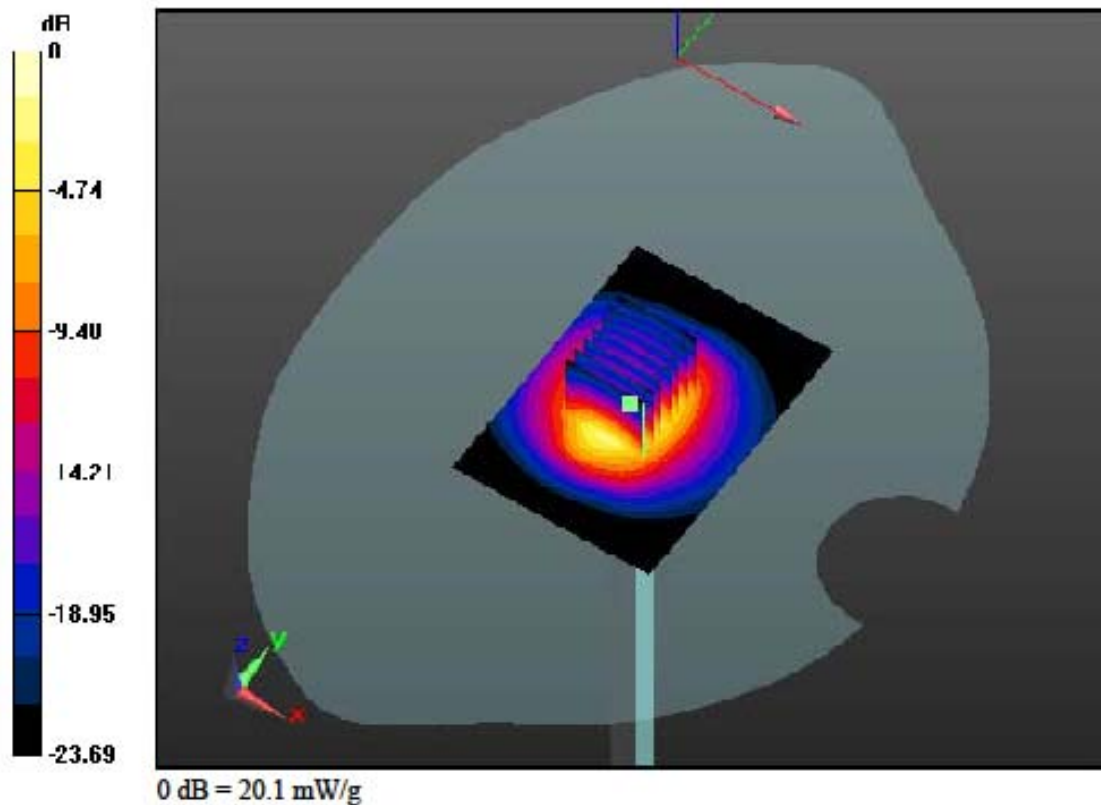

## DIGITAL EMC CO., LTD

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.869$  mho/m;  $\epsilon_r = 37.869$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(6.98, 6.98, 6.98); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-26; Ambient Temp: 22.2; Tissue Temp: 22.4

### Dipole Validation

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 30.885 mW/g  
 SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.24 W/kg

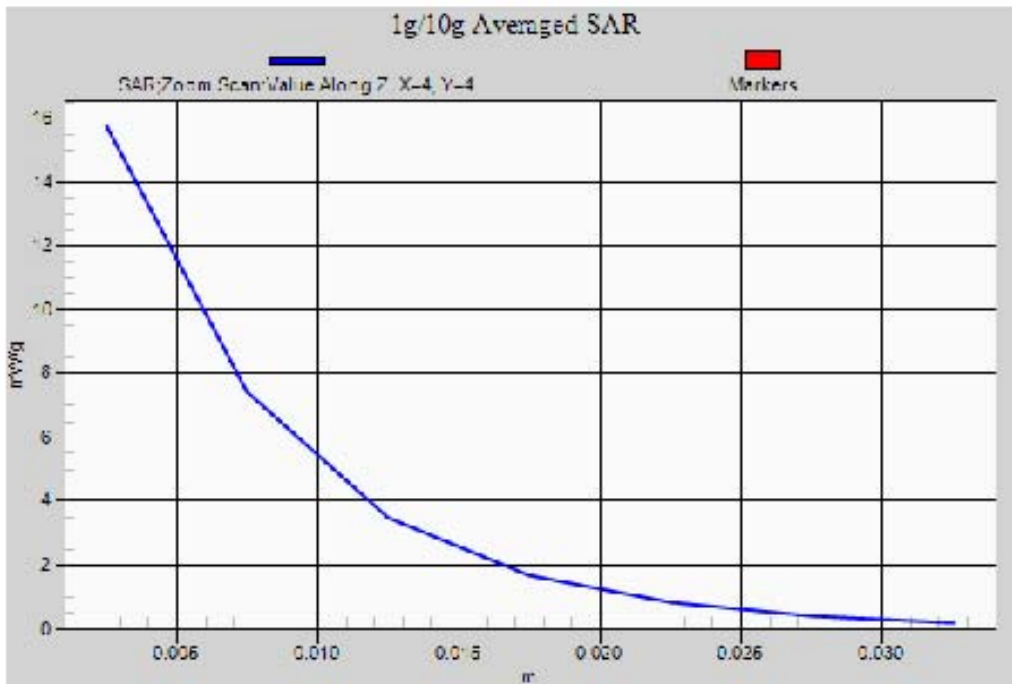

## DIGITAL EMC CO., LTD

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.954$  mho/m;  $\epsilon_r = 51.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### **DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(6.97, 6.97, 6.97); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-26; Ambient Temp: 22.2; Tissue Temp: 22.4

### **Dipole Validation**


**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.557 mW/g

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.16 W/kg

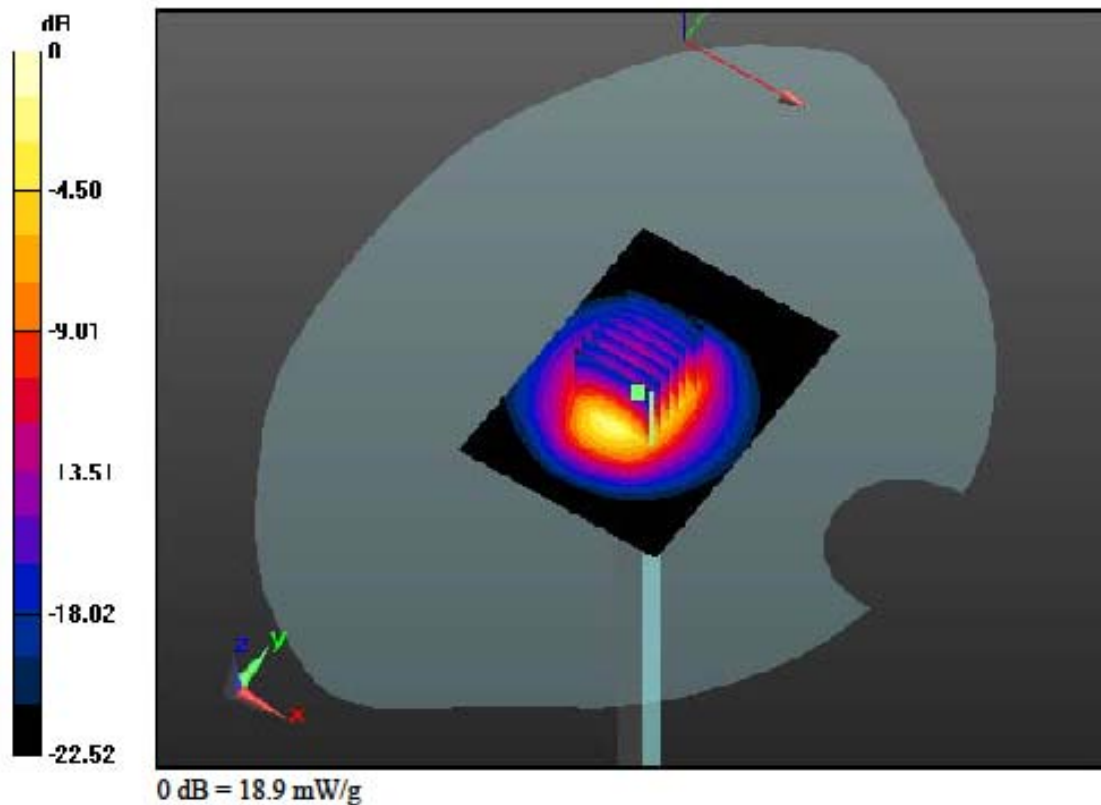

**DIGITAL EMC CO., LTD**

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.954$  mho/m;  $\epsilon_r = 51.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(6.97, 6.97, 6.97); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-26; Ambient Temp: 22.2; Tissue Temp:22.4

**Dipole Validation**

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 28.557 mW/g  
 SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.16 W/kg

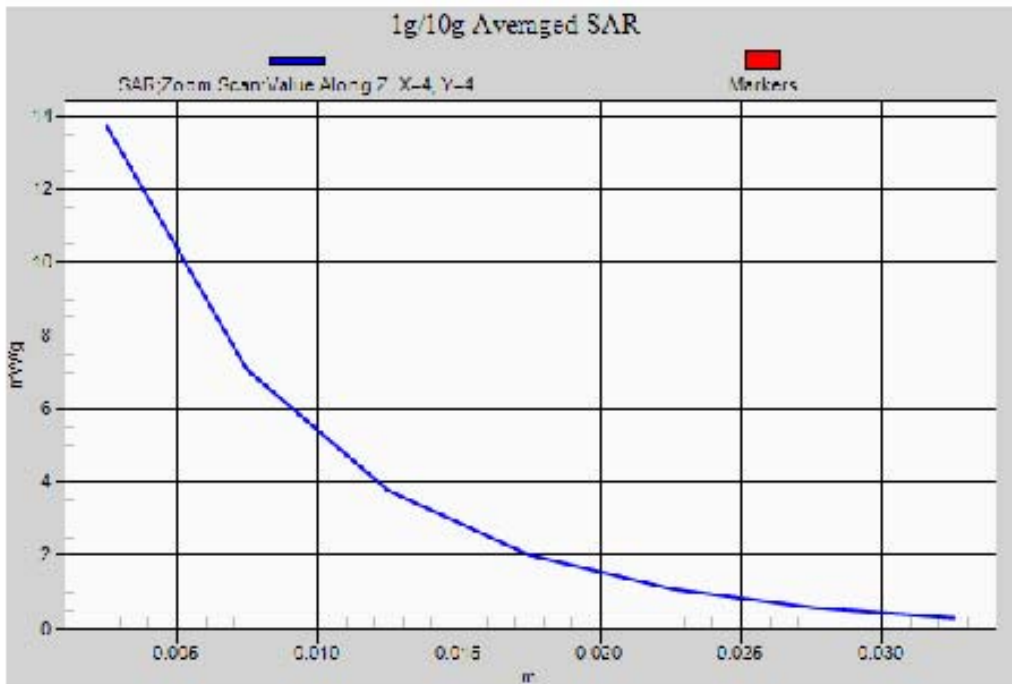

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  mho/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


### **DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(4.94, 4.94, 4.94); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335  
Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp: 22.4

### **Dipole Validation**

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 31.848 mW/g  
SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.43 W/kg

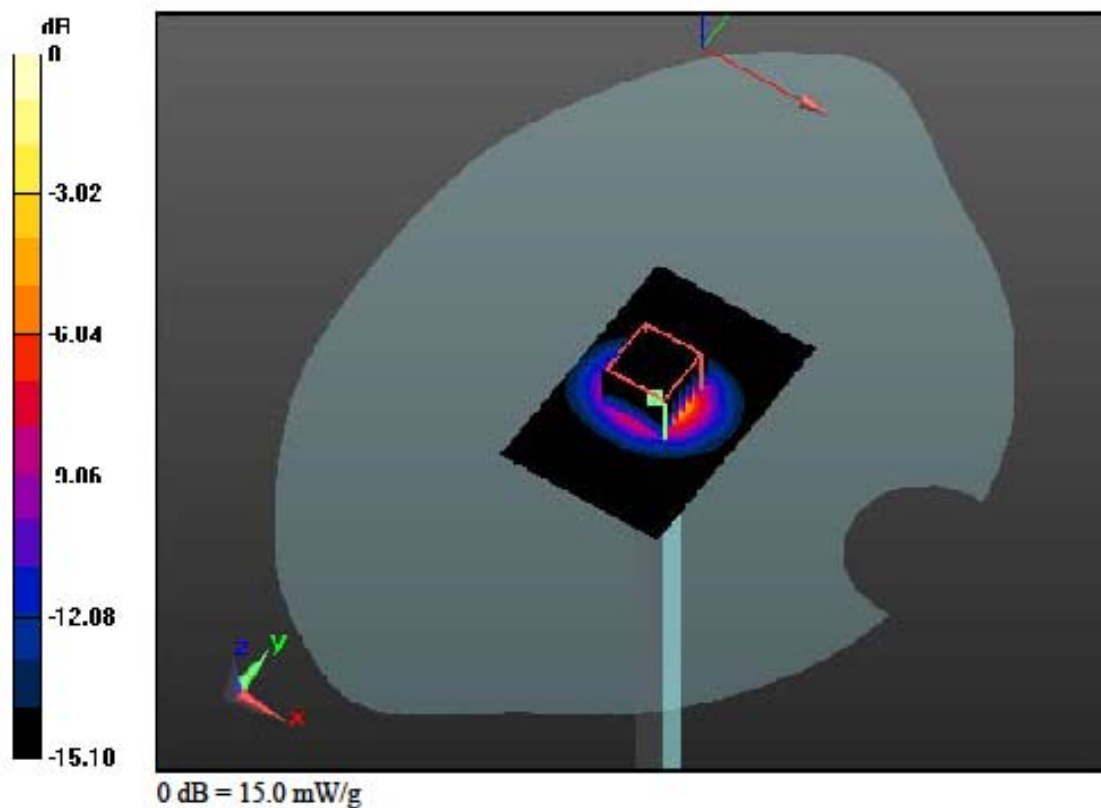

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  mho/m;  $\epsilon_r = 35.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(4.94, 4.94, 4.94); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp: 22.4

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 31.848 mW/g  
 SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.43 W/kg

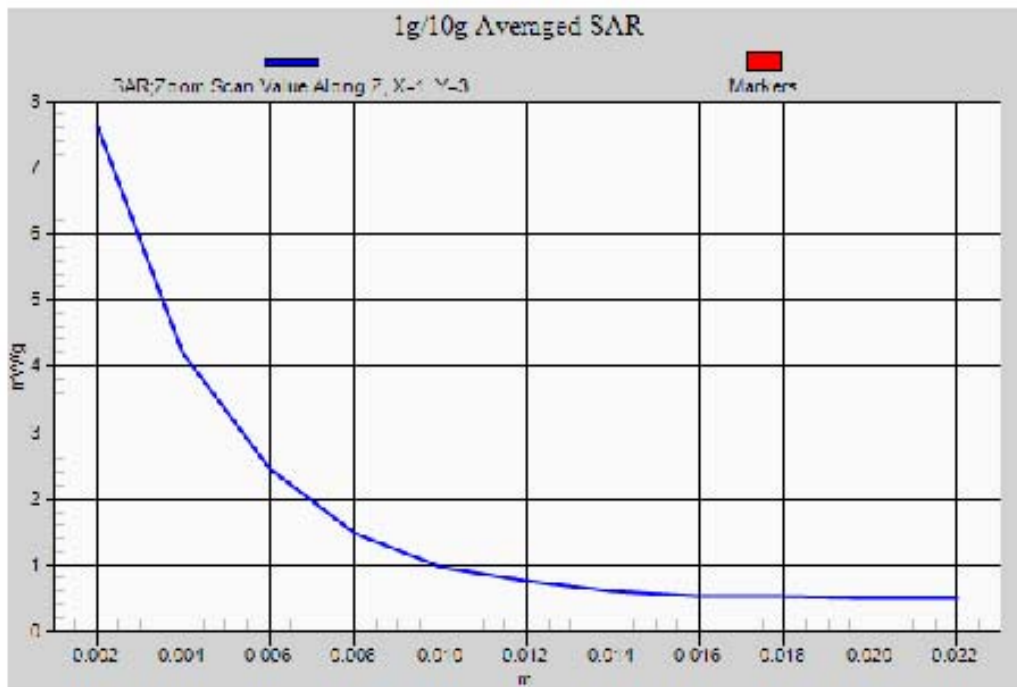

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.157$  mho/m;  $\epsilon_r = 48.106$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### DASY5 Configuration:

Probe: EX3DV4 - SN3643; ConvF(4.23, 4.23, 4.23); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp: 22.7

### Dipole Validation


**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 29.094 mW/g

SAR(1 g) = 6.71 W/kg; SAR(10 g) = 2.03 W/kg

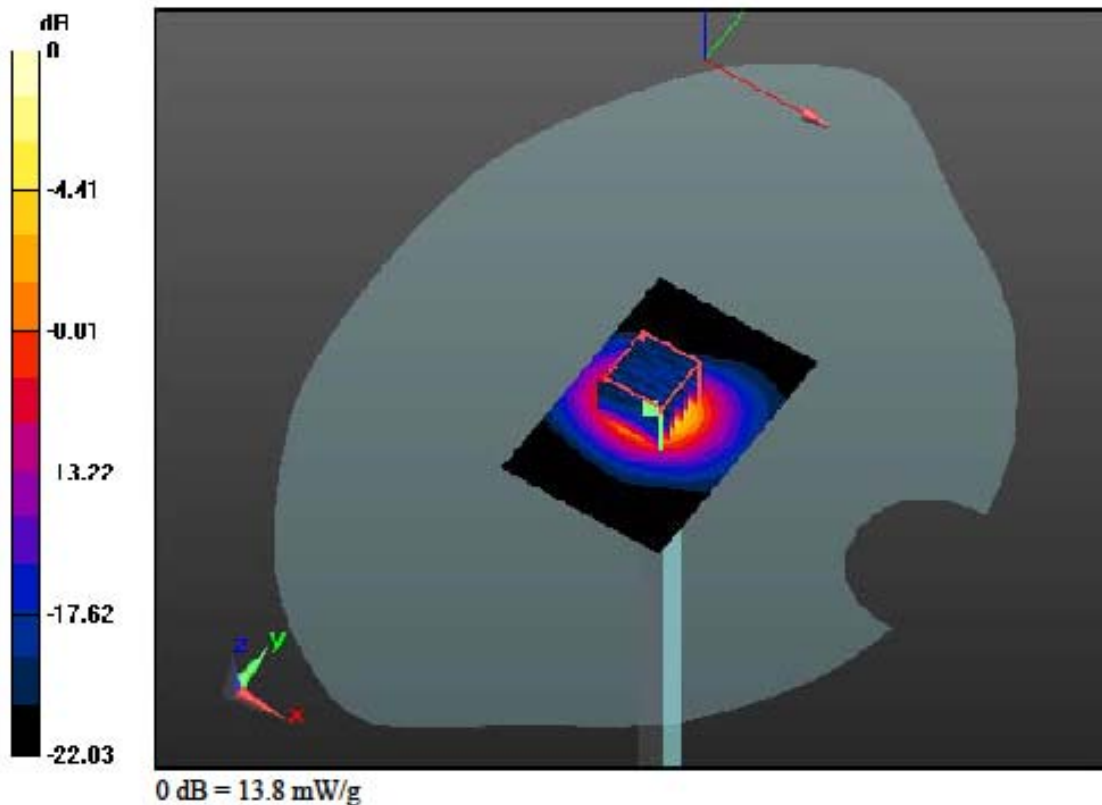



## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.157$  mho/m;  $\epsilon_r = 48.106$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(4.23, 4.23, 4.23); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp: 22.7

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 29.094 mW/g  
 SAR(1 g) = 6.71 W/kg; SAR(10 g) = 2.03 W/kg

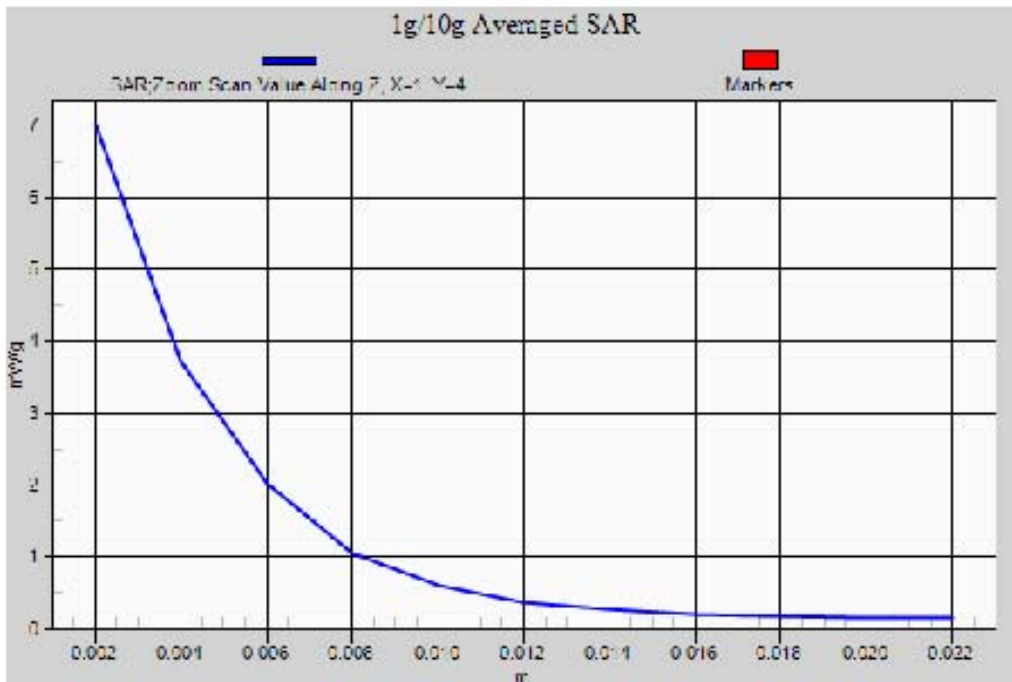

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.032$  mho/m;  $\epsilon_r = 35.662$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


### **DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(4.45, 4.45, 4.45); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp: 22.4

### **Dipole Validation**

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 36.859 mW/g  
SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.51 W/kg

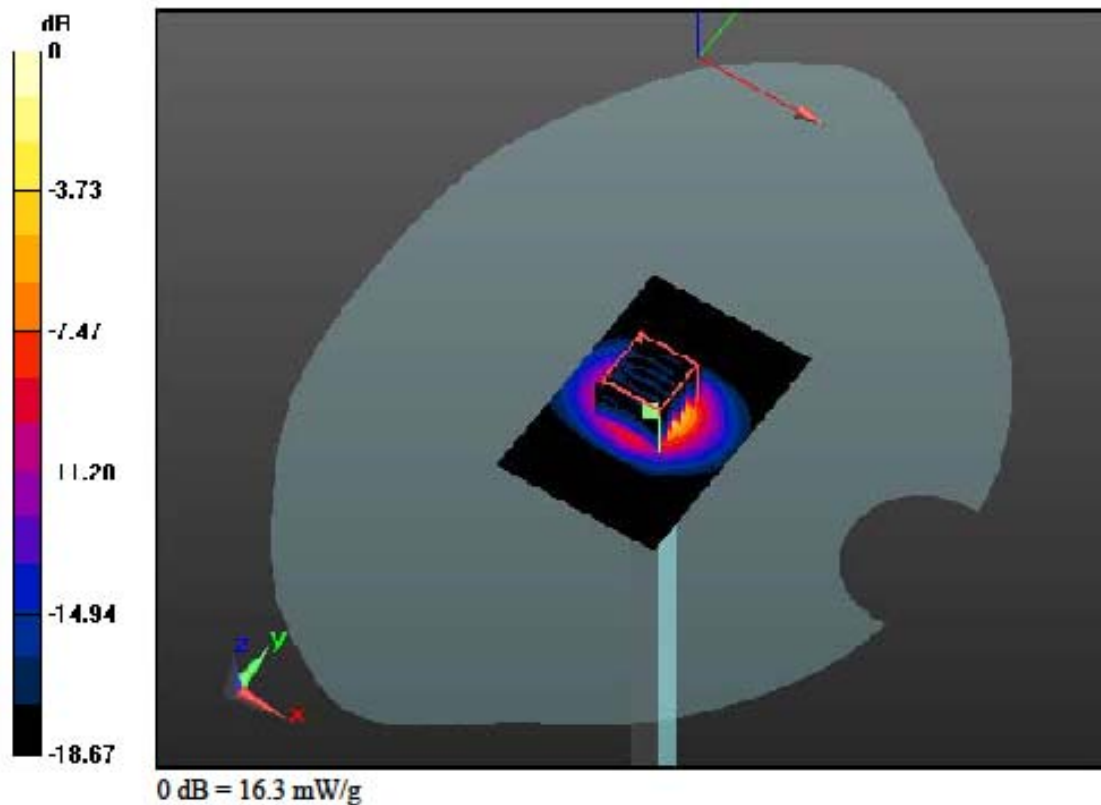

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.032$  mho/m;  $\epsilon_r = 35.662$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(4.45, 4.45, 4.45); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp: 22.4

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 36.859 mW/g  
 SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.51 W/kg

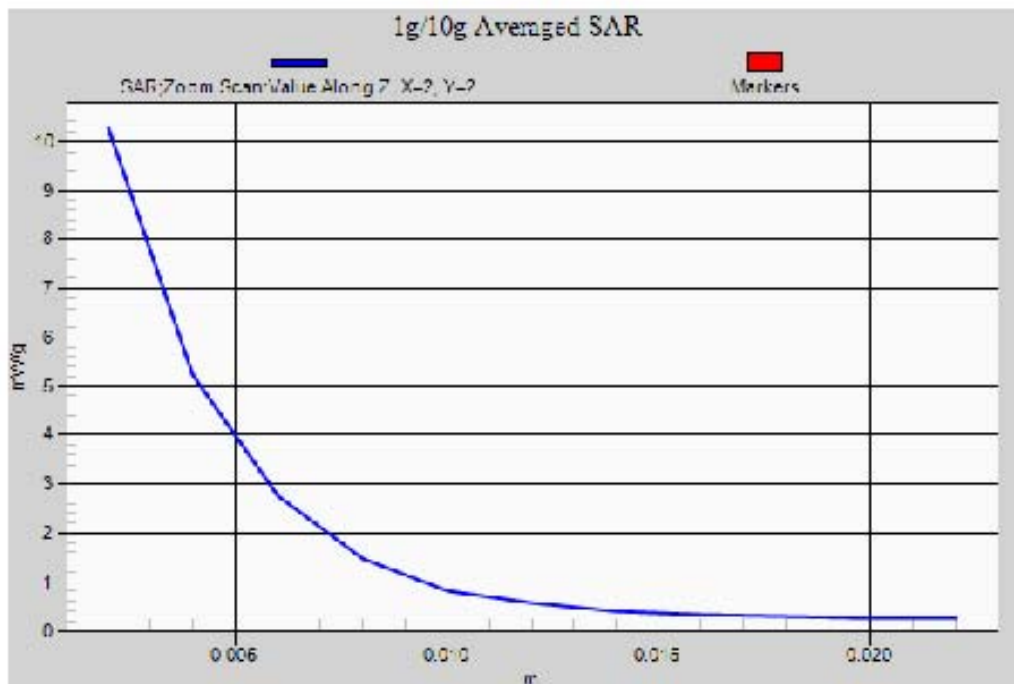

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.578$  mho/m;  $\epsilon_r = 47.514$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


### **DASY5 Configuration:**

Probe: EX3DV4 - SN3866; ConvF(3.86, 3.86, 3.86); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp: 22.7

### **Dipole Validation**

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 33.476 mW/g  
SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.28 W/kg

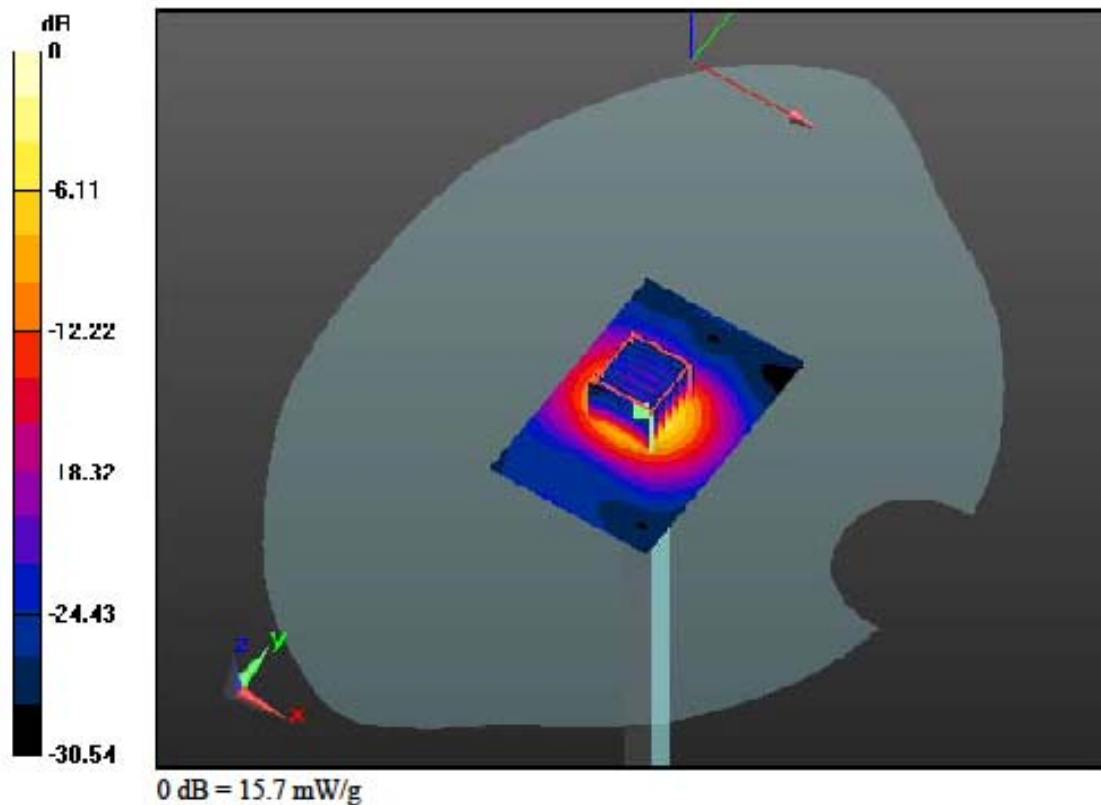

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.578$  mho/m;  $\epsilon_r = 47.514$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


### DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(3.86, 3.86, 3.86); Calibrated: 2012-06-20; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp: 22.7

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 33.476 mW/g  
 SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.28 W/kg

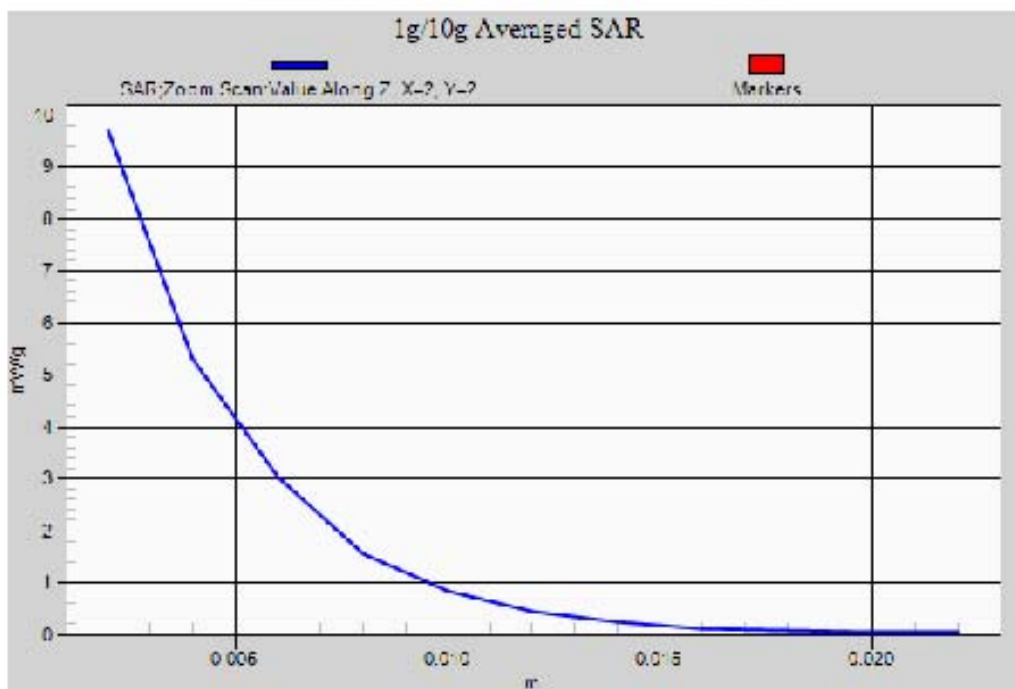

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.392$  mho/m;  $\epsilon_r = 35.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### **DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(4.16, 4.16, 4.16); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp: 22.4

### **Dipole Validation**


**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 37.596 mW/g

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.44 W/kg

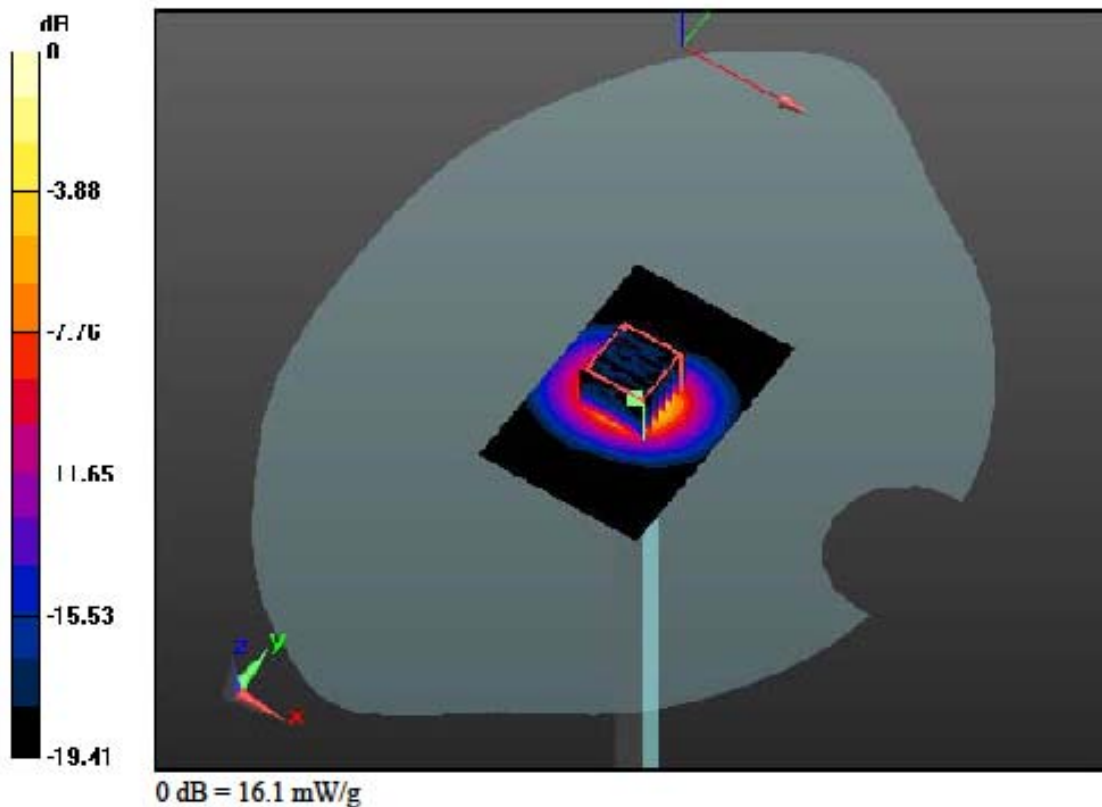

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.392$  mho/m;  $\epsilon_r = 35.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section


**DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(4.16, 4.16, 4.16); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-27; Ambient Temp: 22.3; Tissue Temp:22.4

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 37.596 mW/g  
 SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.44 W/kg

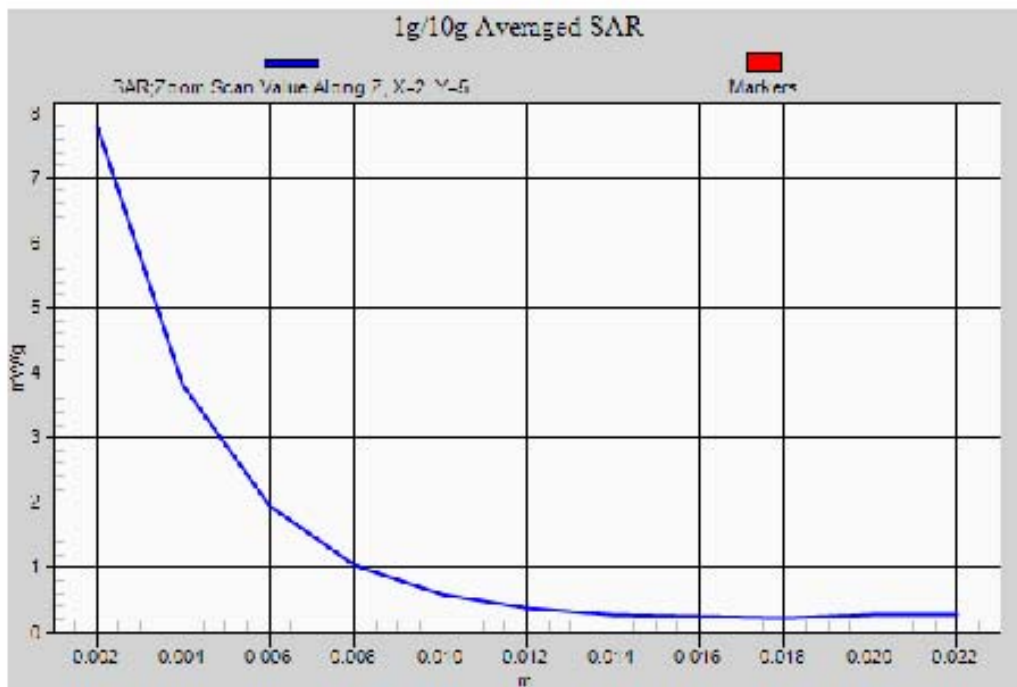

## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.008$  mho/m;  $\epsilon_r = 46.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### **DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(3.8, 3.8, 3.8); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335

Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp: 22.7

### **Dipole Validation**


**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 33.492 mW/g

SAR(1 g) = 6.95 W/kg; SAR(10 g) = 2.1 W/kg

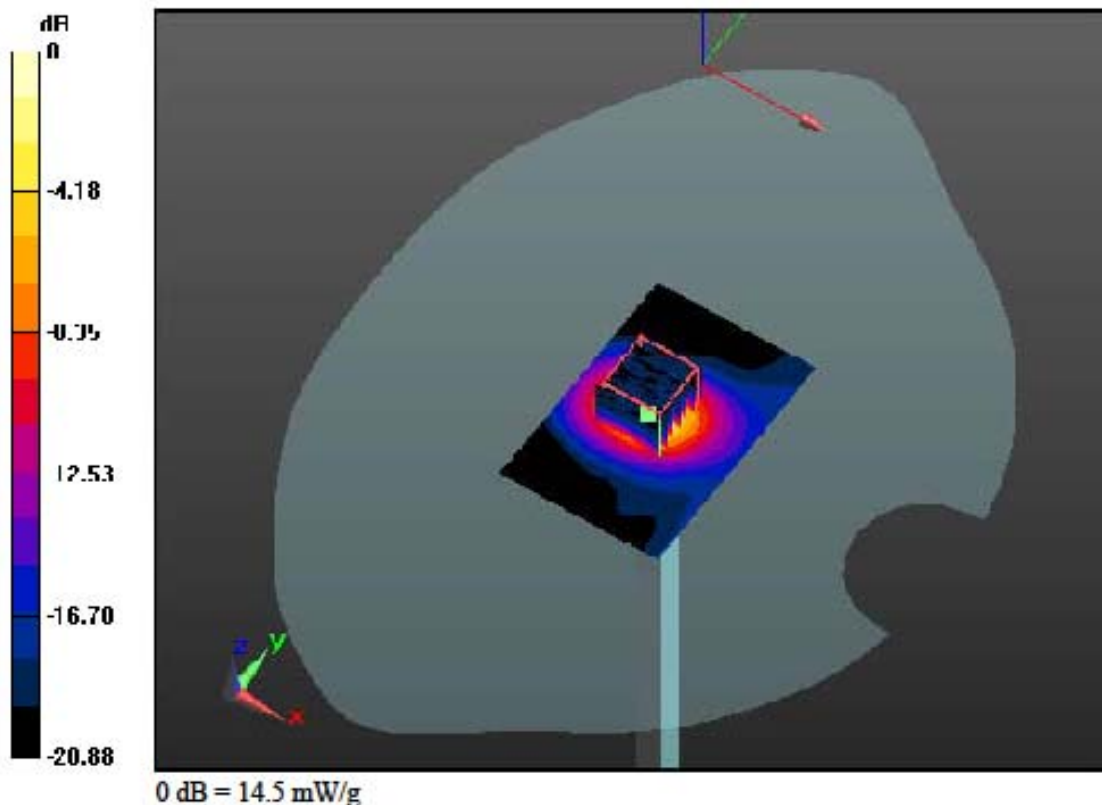



## DIGITAL EMC CO., LTD

**DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.008$  mho/m;  $\epsilon_r = 46.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY5 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(3.8, 3.8, 3.8); Calibrated: 2012-01-27; ; Electronics: DAE4 Sn1335  
 Phantom: SAM with CRP\_20120521; Type: SAM; Serial: 1679  
 Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Test Date: 2012-08-28; Ambient Temp: 22.5; Tissue Temp:22.7

### Dipole Validation

**Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm  
**Zoom Scan (7x7x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 33.492 mW/g  
 SAR(1 g) = 6.95 W/kg; SAR(10 g) = 2.1 W/kg

