HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
March 11, 2013

Test Site/Location:
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1303FR17

HCT FRN: 0005866421

FCC ID	**: ZNFP875H**
APPLICANT	**: LG Electronics MobileComm U.S.A., Inc.**

FCC Model(s):	LG-P875h
Additional FCC Model(s):	P875h, LGP875h
EUT Type:	Cellular/PCS GSM/GPRS/EDGE, WCDMA/HSDPA/HSUPA, LTE Phone with Bluetooth/WLAN/NFC
Max. RF Output Power:	Wi-Fi 802.11b(21.66 dBm) / Wi-Fi 802.11g (22.29 dBm) / Wi-Fi 802.11n (20.35 dBm)
Frequency Range:	2412 MHz -2462 MHz
Modulation type	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Jong Seok Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1303FR17	March 11, 2013	- First Approval Report

Table of Contents

1. GENERAL INFORMATION

Applicant:	LG Electronics MobileComm U.S.A., Inc.
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFP875H
EUT Type:	Cellular/PCS GSM/GPRS/EDGE, WCDMA/HSDPA/HSUPA, LTE Phone with Bluetooth/WLAN/NFC
Model name(s):	LG-P875h
Additional Model name(s):	P875h, LGP875h
Date(s) of Tests:	February 26, 2013 ~ March 08, 2013
Place of Tests:	HCT Co., Ltd. 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA. (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE, WCDMA/HSDPA/HSUPA, LTE Phone with Bluetooth/WLAN/NFC	
FCC Model Name	LG-P875h	
Additional FCC Model Name	P875h, LGP875h	
Power Supply	DC 3.7 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2412 MHz ~ 2462 MHz RX: 2412 MHz ~ 2462 MHz	
Max. RF Output Power	Peak	Wi-Fi 802.11b(21.66 dBm) / Wi-Fi 802.11g (22.29 dBm) / Wi-Fi 802.11n (20.35 dBm)
	Average	Wi-Fi 802.11b(16.66 dBm) / Wi-Fi 802.11g (12.76 dBm) / Wi-Fi 802.11n (11.58 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: acetechnology A Antenna type: Internal Antenna Peak Gain : -4.06 dBi	

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) Operating Under §15.247" were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, “Radio Interference Measuring Apparatus and Measurement Methods.”

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

8. TEST RESULT

8.1 6dB BANDWIDTH (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

▣ TEST CONFIGURATION

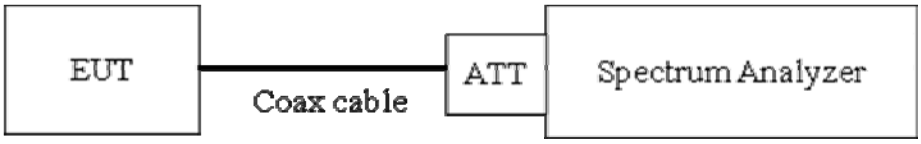

▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW = 1 – 5 % of DTS BW

VBW = 3 * RBW

SPAN = The span range for the SA display shall be between two times and five times the OBW.

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

▣ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	8.095	0.500	Pass
2437	6	8.557	0.500	Pass
2462	11	8.549	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.370	0.500	Pass
2437	6	16.390	0.500	Pass
2462	11	16.400	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.370	0.500	Pass
2437	6	17.610	0.500	Pass
2462	11	17.620	0.500	Pass

▣ RESULT PLOTS

6dB Bandwidth plot (802.11b-CH 1)

6dB Bandwidth plot (802.11b-CH 6)

6dB Bandwidth plot (802.11b-CH 11)

6dB Bandwidth plot (802.11g-CH 1)

6dB Bandwidth plot (802.11g-CH 6)

6dB Bandwidth plot (802.11g-CH 11)

6dB Bandwidth plot (802.11n-CH 1)

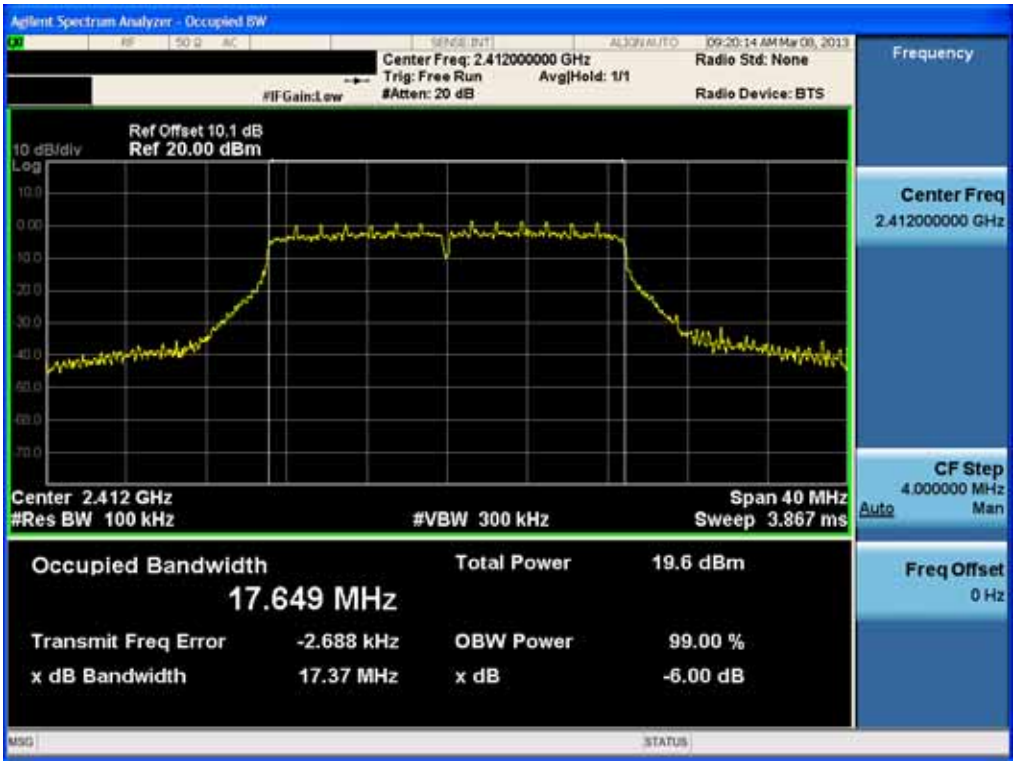

6dB Bandwidth plot (802.11n-CH 6)

6dB Bandwidth plot (802.11n-CH 11)

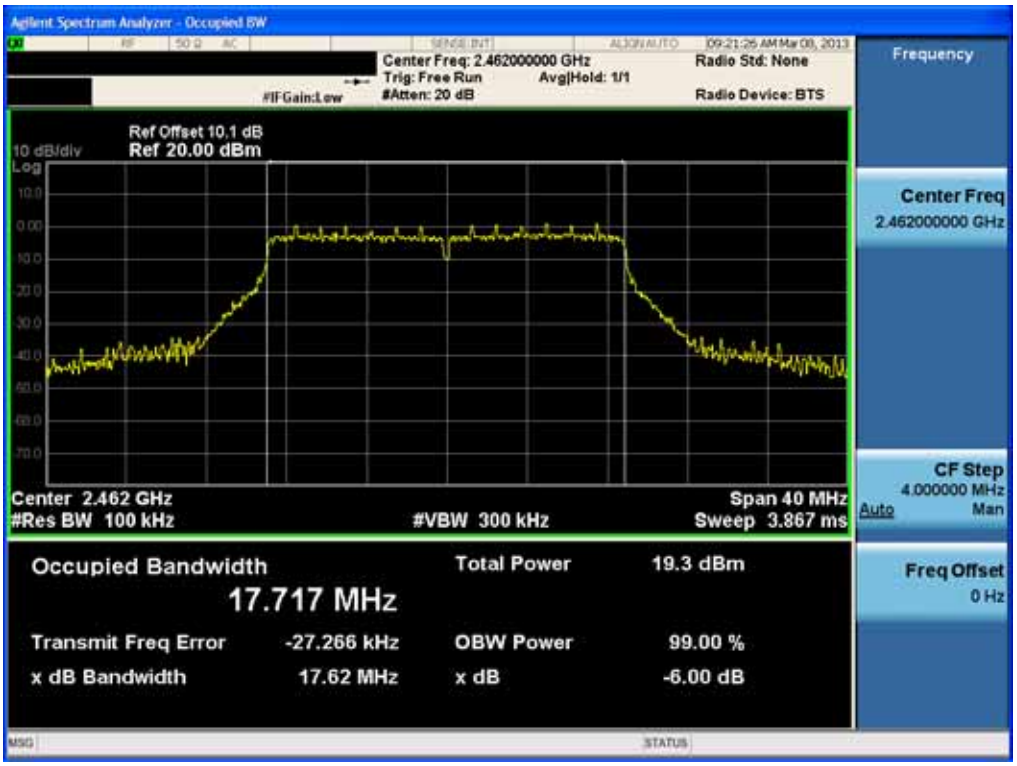

8.2 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

▣ TEST CONFIGURATION

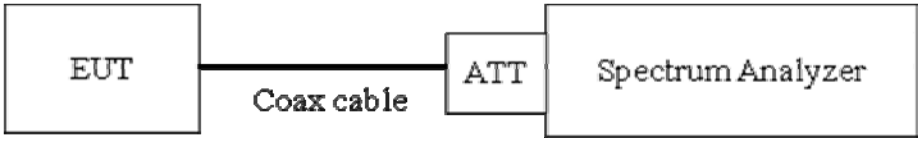

▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to ANSI 63.10.

This EUT TX condition is actual operating mode(duty cycle ≥ 98%) by WLAN test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 6.10.2.1 in ANCI 63.10)

  RBW = 1 MHz

  VBW = 3 MHz

  SPAN = Set the span just large enough to capture the emission

  Detector Mode = Peak

  Integrated bandwidth = EBW

  Sweep = auto couple

  Trace Mode = max hold

  Turn averaging off

- Average Power (Procedure 6.10.3.1 in ANSI 63.10)

  RBW = 1 MHz

  VBW = 3 MHz

  SPAN = Set span to encompass the entire EBW of the signal.

  Detector Mode = Use sample detector if bin width

  (i.e., span/number of points in spectrum display) < 0.5 RBW.

  Integrated bandwidth = EBW

  Sweep = auto couple

  Sweep Point = 1001

  Trace average across 100 traces in power averaging mode.

▣ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea)

= 10 dBm + 10 dB + 0.8 dB = 20.8 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.
   So, 10.1 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.11
	2437	10.10
	2462	10.12

(Actual value of loss for the attenuator and cable combination)

▣ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	1 Mbps	20.80	30
		2 Mbps	21.07	30
		5.5 Mbps	21.04	30
		11 Mbps	21.66	30
2437	6	1 Mbps	20.10	30
		2 Mbps	20.39	30
		5.5 Mbps	21.14	30
		11 Mbps	20.66	30
2462	11	1 Mbps	20.53	30
		2 Mbps	20.74	30
		5.5 Mbps	21.43	30
		11 Mbps	21.06	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	6 Mbps	21.43	30
		9 Mbps	21.36	30
		12 Mbps	21.66	30
		18 Mbps	21.64	30
		24 Mbps	22.02	30
		36 Mbps	22.08	30
		48 Mbps	22.24	30
		54 Mbps	22.29	30
2437	6	6 Mbps	20.63	30
		9 Mbps	21.30	30
		12 Mbps	21.15	30
		18 Mbps	21.61	30
		24 Mbps	21.25	30
		36 Mbps	21.73	30
		48 Mbps	21.65	30
		54 Mbps	21.93	30
2462	11	6 Mbps	21.12	30
		9 Mbps	21.20	30
		12 Mbps	21.29	30
		18 Mbps	21.53	30
		24 Mbps	21.46	30
		36 Mbps	21.52	30
		48 Mbps	21.76	30
		54 Mbps	21.91	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	6.5 Mbps	20.35	30
		13 Mbps	19.68	30
		19.5 Mbps	19.60	30
		26 Mbps	20.04	30
		39 Mbps	20.10	30
		52 Mbps	20.15	30
		58.5 Mbps	20.21	30
		65 Mbps	20.25	30
2437	6	6.5 Mbps	19.65	30
		13 Mbps	19.36	30
		19.5 Mbps	18.78	30
		26 Mbps	19.32	30
		39 Mbps	19.02	30
		52 Mbps	19.11	30
		58.5 Mbps	19.34	30
		65 Mbps	19.29	30
2462	11	6.5 Mbps	19.99	30
		13 Mbps	19.49	30
		19.5 Mbps	19.67	30
		26 Mbps	19.87	30
		39 Mbps	19.74	30
		52 Mbps	19.61	30
		58.5 Mbps	19.42	30
		65 Mbps	19.82	30

▣ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	1 Mbps	16.66	30
		2 Mbps	16.36	30
		5.5 Mbps	15.41	30
		11 Mbps	13.67	30
2437	6	1 Mbps	16.11	30
		2 Mbps	16.15	30
		5.5 Mbps	15.61	30
		11 Mbps	12.57	30
2462	11	1 Mbps	16.63	30
		2 Mbps	16.57	30
		5.5 Mbps	15.52	30
		11 Mbps	13.35	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	6 Mbps	12.63	30
		9 Mbps	12.46	30
		12 Mbps	12.42	30
		18 Mbps	12.22	30
		24 Mbps	12.05	30
		36 Mbps	11.73	30
		48 Mbps	11.30	30
		54 Mbps	11.31	30
2437	6	6 Mbps	12.30	30
		9 Mbps	12.16	30
		12 Mbps	11.53	30
		18 Mbps	12.09	30
		24 Mbps	11.86	30
		36 Mbps	11.32	30
		48 Mbps	10.67	30
		54 Mbps	10.97	30
2462	11	6 Mbps	12.76	30
		9 Mbps	12.20	30
		12 Mbps	12.45	30
		18 Mbps	11.77	30
		24 Mbps	11.81	30
		36 Mbps	11.55	30
		48 Mbps	10.72	30
		54 Mbps	11.07	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
2412	1	6.5 Mbps	11.58	30
		13 Mbps	10.38	30
		19.5 Mbps	10.22	30
		26 Mbps	9.76	30
		39 Mbps	9.70	30
		52 Mbps	9.29	30
		58.5 Mbps	9.19	30
		65 Mbps	9.29	30
2437	6	6.5 Mbps	10.83	30
		13 Mbps	9.81	30
		19.5 Mbps	9.33	30
		26 Mbps	9.26	30
		39 Mbps	8.41	30
		52 Mbps	8.14	30
		58.5 Mbps	8.09	30
		65 Mbps	8.34	30
2462	11	6.5 Mbps	11.37	30
		13 Mbps	10.03	30
		19.5 Mbps	10.19	30
		26 Mbps	10.00	30
		39 Mbps	8.88	30
		52 Mbps	8.63	30
		58.5 Mbps	9.20	30
		65 Mbps	8.85	30

▣ RESULT PLOTS-Peak

Conducted Output Power (802.11b-CH 1) 1Mbps

Conducted Output Power (802.11b-CH 1) 2Mbps

Conducted Output Power (802.11b-CH 1) 5.5Mbps

Conducted Output Power (802.11b-CH 1) 11Mbps

Conducted Output Power (802.11b-CH 6) 1Mbps

Conducted Output Power (802.11b-CH 6) 2Mbps

Conducted Output Power (802.11b-CH 6) 5.5Mbps

Conducted Output Power (802.11b-CH 6) 11Mbps

Conducted Output Power (802.11b-CH 11) 1Mbps

Conducted Output Power (802.11b-CH 11) 2Mbps

Conducted Output Power (802.11b-CH 11) 5.5Mbps

Conducted Output Power (802.11b-CH 11) 11Mbps

Conducted Output Power (802.11g-CH 1) 6Mbps

Conducted Output Power (802.11g-CH 1) 9Mbps

Conducted Output Power (802.11g-CH 1) 12Mbps

Conducted Output Power (802.11g-CH 1) 18Mbps

Conducted Output Power (802.11g-CH 1) 24Mbps

Conducted Output Power (802.11g-CH 1) 36Mbps

Conducted Output Power (802.11g-CH 1) 48Mbps

Conducted Output Power (802.11g-CH 1) 54Mbps

Conducted Output Power (802.11g-CH 6) 6Mbps

Conducted Output Power (802.11g-CH 6) 9Mbps

Conducted Output Power (802.11g-CH 6) 12Mbps

Conducted Output Power (802.11g-CH 6) 18Mbps

Conducted Output Power (802.11g-CH 6) 24Mbps

Conducted Output Power (802.11g-CH 6) 36Mbps

Conducted Output Power (802.11g-CH 6) 48Mbps

Conducted Output Power (802.11g-CH 6) 54Mbps

Conducted Output Power (802.11g-CH 11) 6Mbps

Conducted Output Power (802.11g-CH 11) 9Mbps

Conducted Output Power (802.11g-CH 11) 12Mbps

Conducted Output Power (802.11g-CH 11) 18Mbps

Conducted Output Power (802.11g-CH 11) 24Mbps

Conducted Output Power (802.11g-CH 11) 36Mbps

Conducted Output Power (802.11g-CH 11) 48Mbps

Conducted Output Power (802.11g-CH 11) 54Mbps

Conducted Output Power (802.11n-CH 1) 6.5Mbps

Conducted Output Power (802.11n-CH 1) 13Mbps

Conducted Output Power (802.11n-CH 1) 19.5Mbps

Conducted Output Power (802.11n-CH 1) 26Mbps